




Tx. Spurious NVNT ac40 5590MHz Ant2 Emission

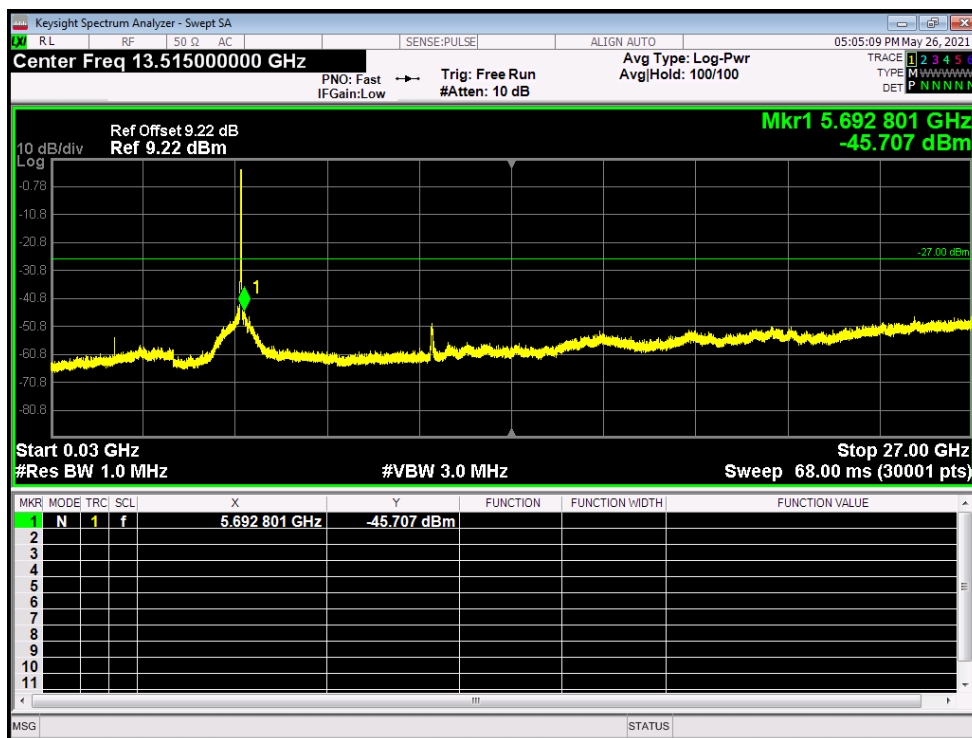


Tx. Spurious NVNT ac40 5670MHz Ant2 Emission

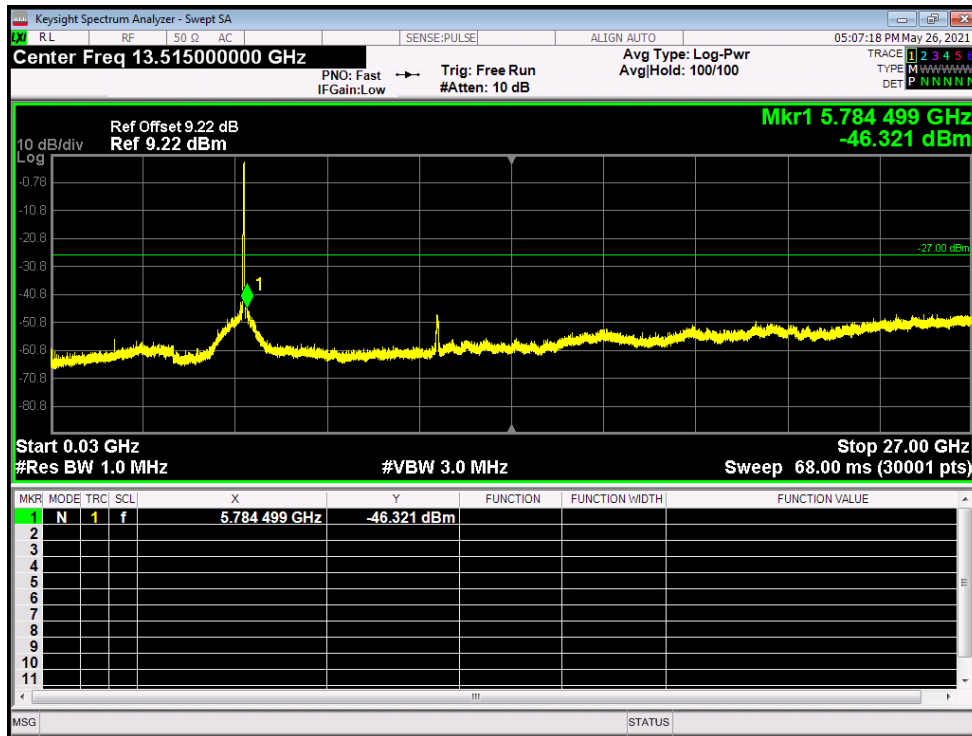


Tx. Spurious NVNT ac80 5530MHz Ant1 Emission

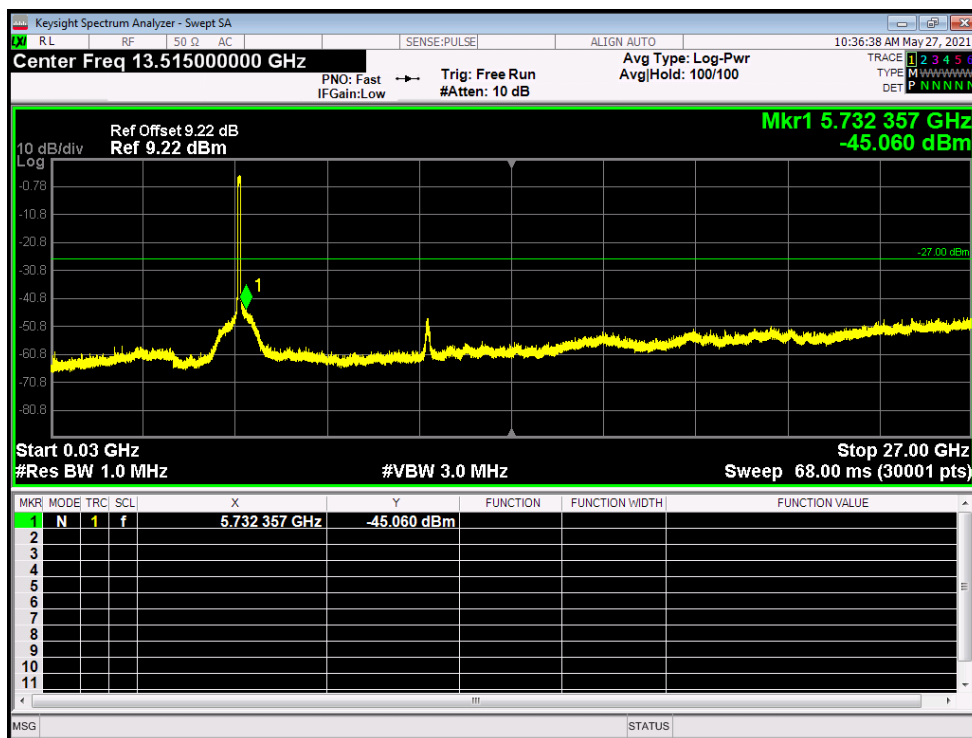


Tx. Spurious NVNT ac80 5610MHz Ant1 Emission

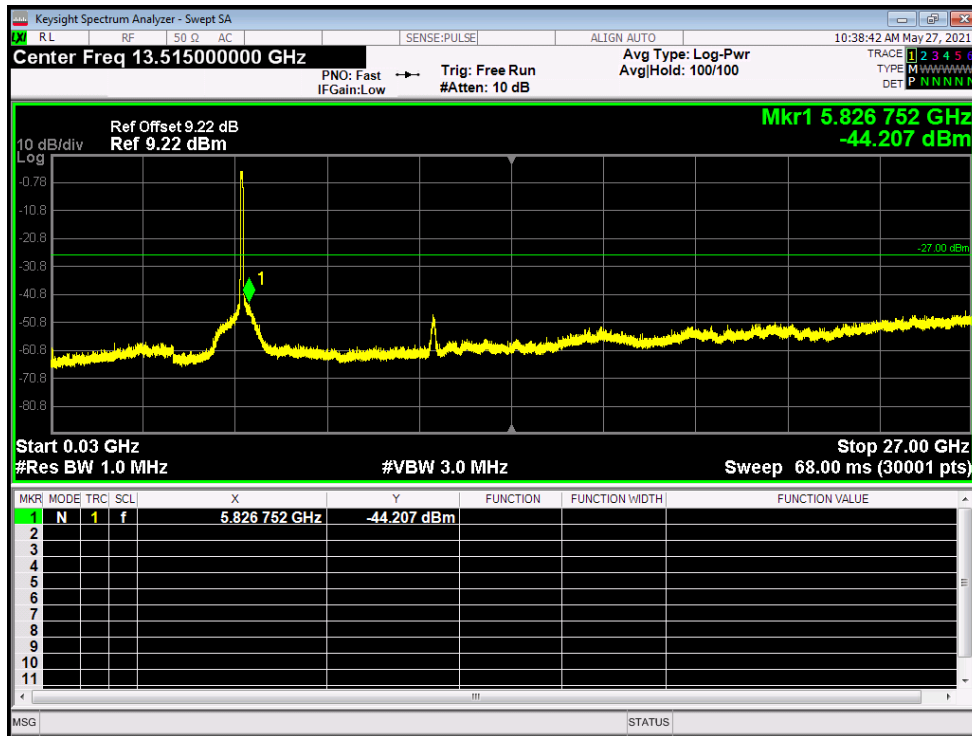

Tx. Spurious NVNT ac80 5530MHz Ant2 Emission

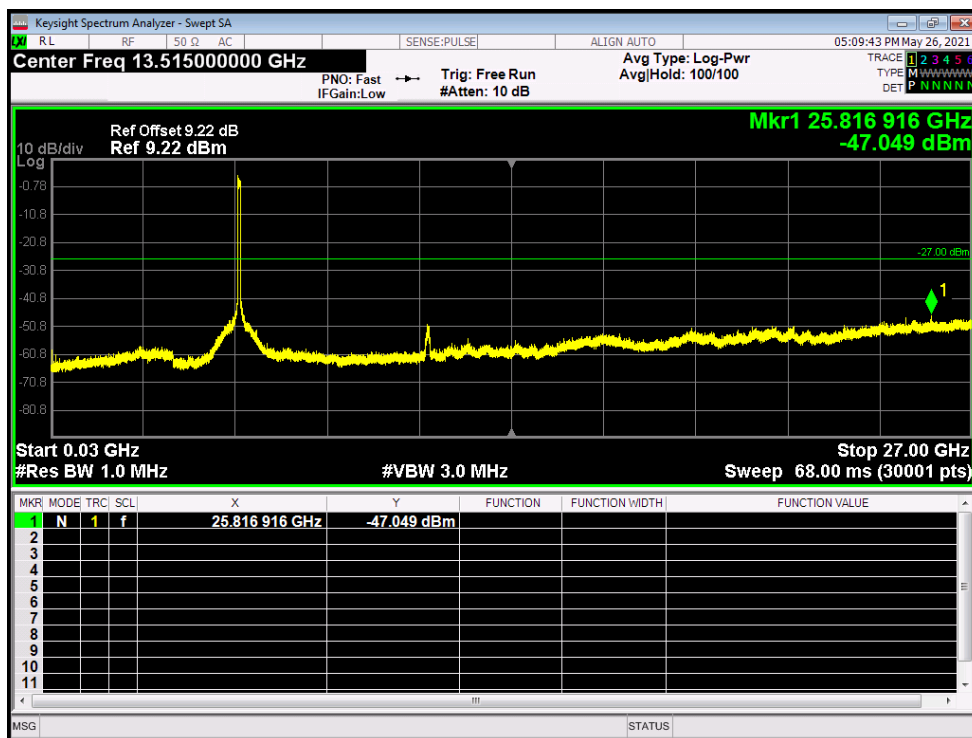

Tx. Spurious NVNT ac80 5610MHz Ant2 Emission

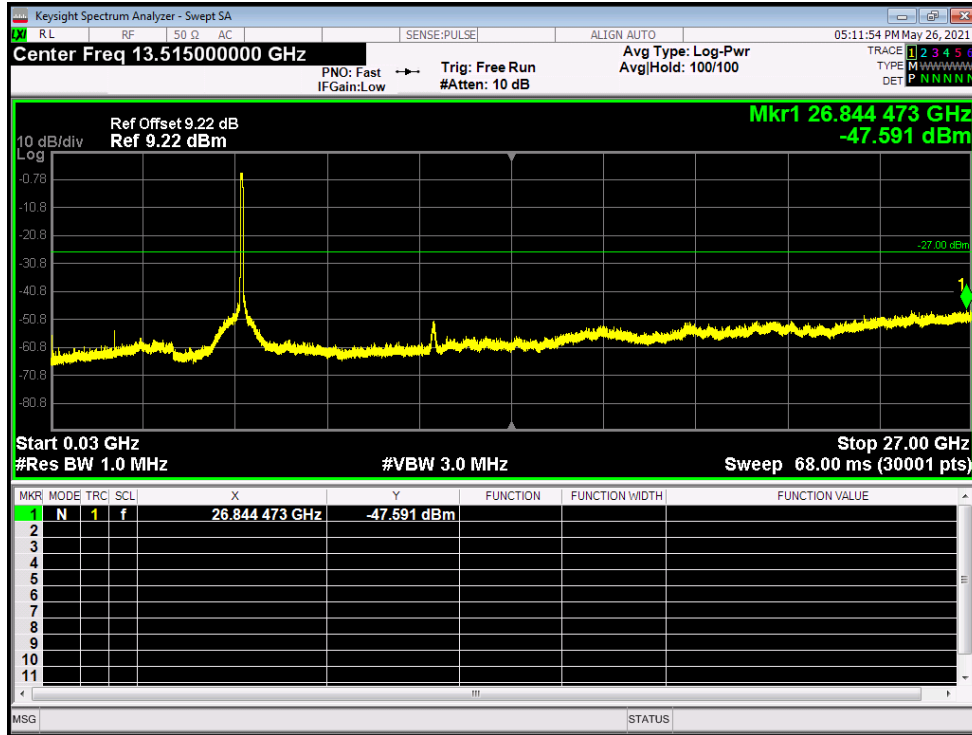


WLAN 5.6G 25dBi Antenna


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	ac20	5500	Ant1	99.72	0.01
NVNT	ac20	5600	Ant1	99.77	0.01
NVNT	ac20	5700	Ant1	99.72	0.01
NVNT	ac20	5500	Ant2	99.75	0.01
NVNT	ac20	5600	Ant2	99.81	0.01
NVNT	ac20	5700	Ant2	99.8	0.01
NVNT	ac40	5510	Ant1	99.48	0.02
NVNT	ac40	5590	Ant1	99.53	0.02
NVNT	ac40	5670	Ant1	99.47	0.02
NVNT	ac40	5510	Ant2	99.48	0.02
NVNT	ac40	5590	Ant2	99.47	0.02
NVNT	ac40	5670	Ant2	99.49	0.02
NVHT	ac80	5530	Ant1	98.9	0.05
NVNT	ac80	5610	Ant1	98.93	0.05
NVNT	ac80	5530	Ant2	98.83	0.05
NVNT	ac80	5610	Ant2	98.82	0.05


Duty Cycle NVNT ac20 5500MHz Ant1

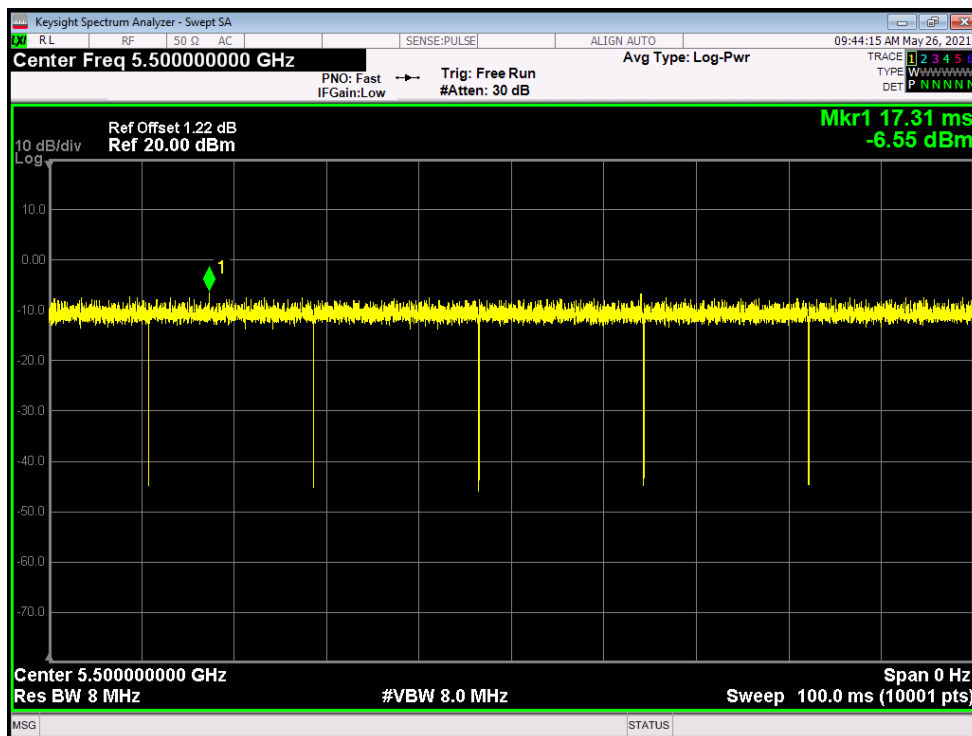


Duty Cycle NVNT ac20 5600MHz Ant1

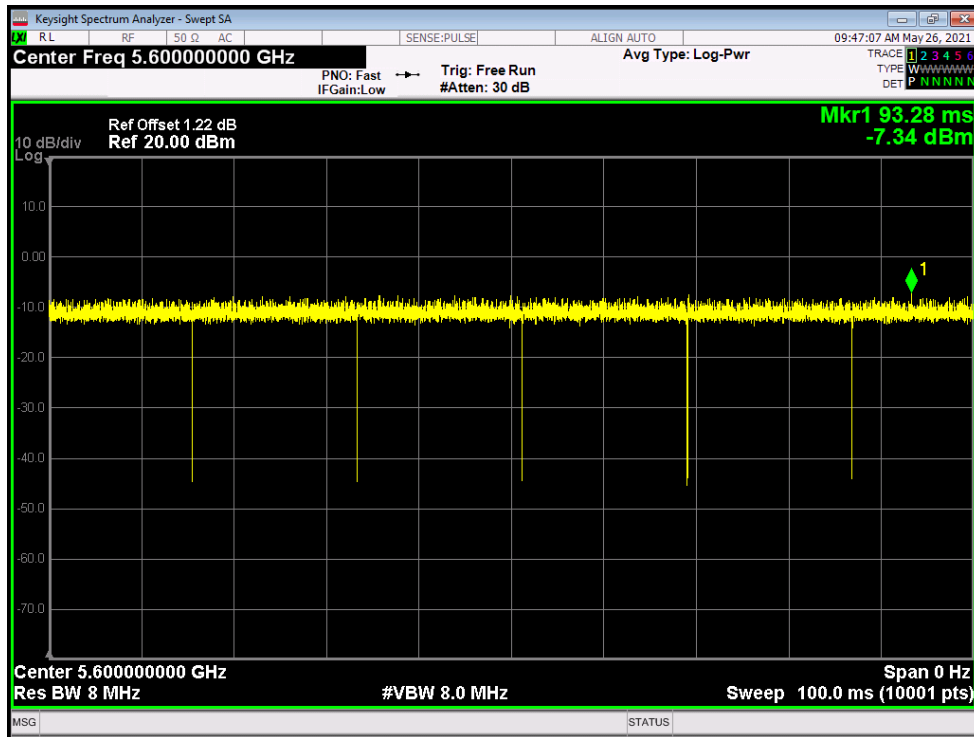


Duty Cycle NVNT ac20 5700MHz Ant1

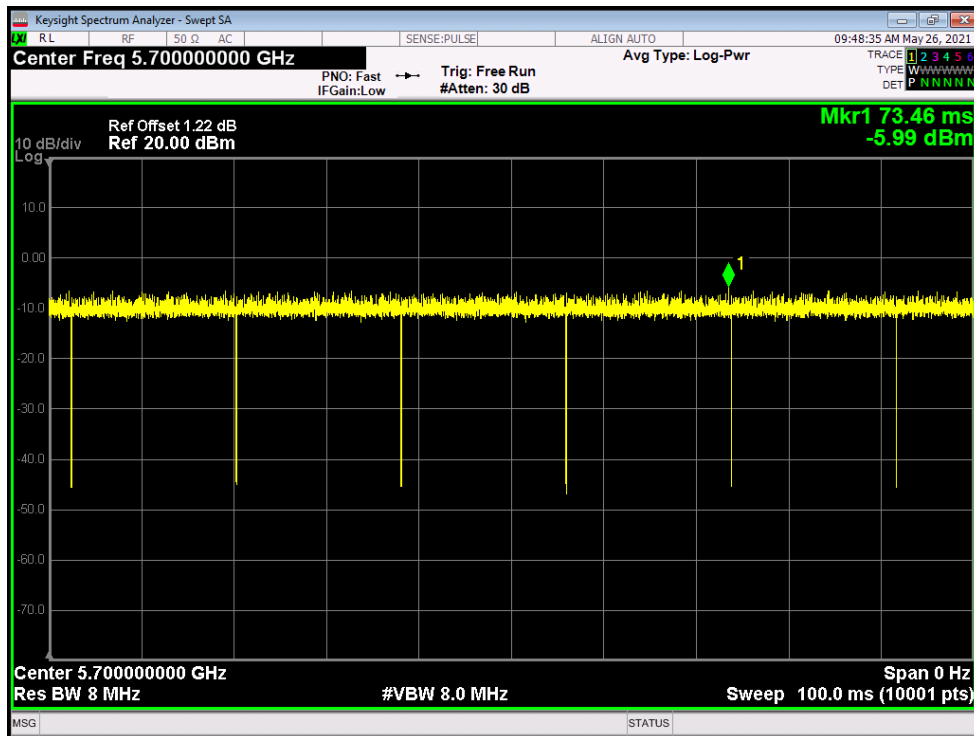


Duty Cycle NVNT ac20 5500MHz Ant2

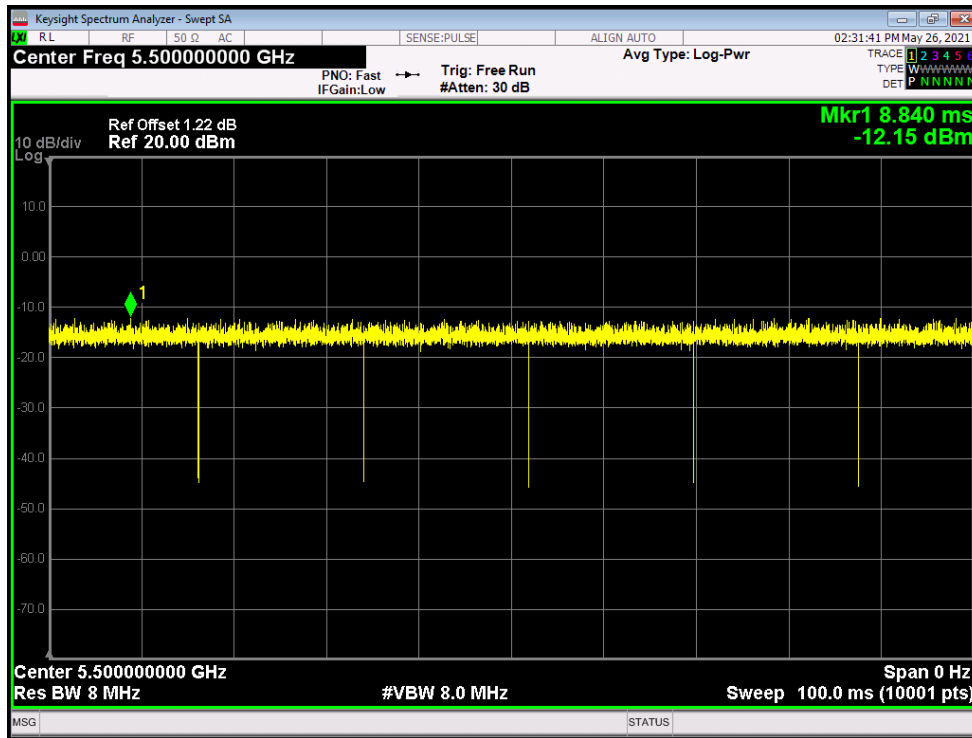


Duty Cycle NVNT ac20 5600MHz Ant2

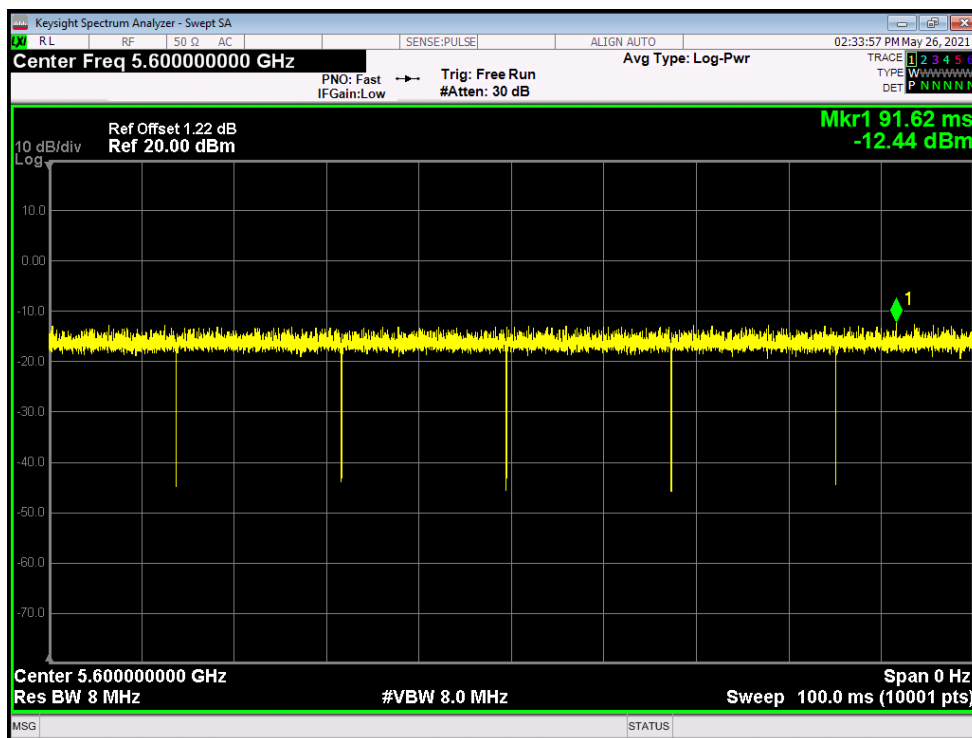

Duty Cycle NVNT ac20 5700MHz Ant2

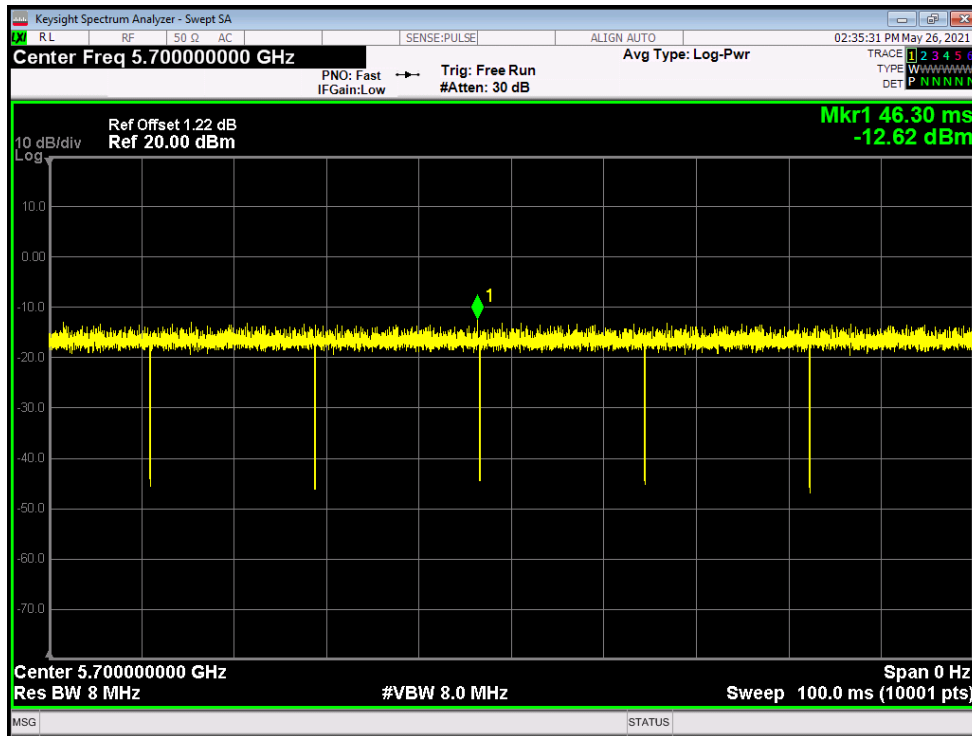


Duty Cycle NVNT ac40 5510MHz Ant1

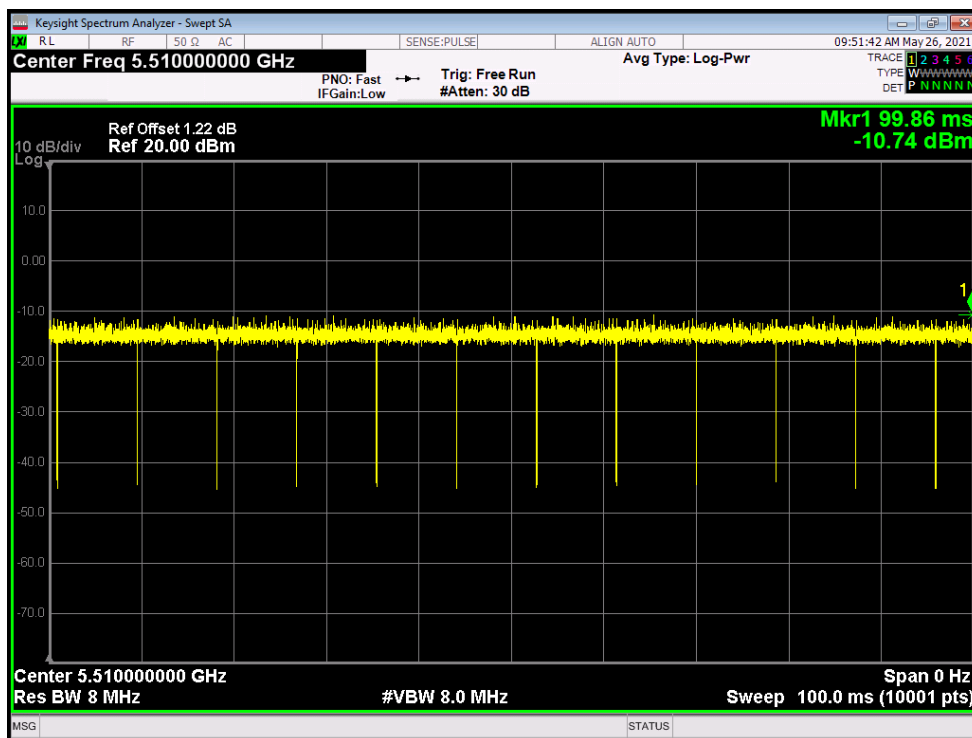


Duty Cycle NVNT ac40 5590MHz Ant1




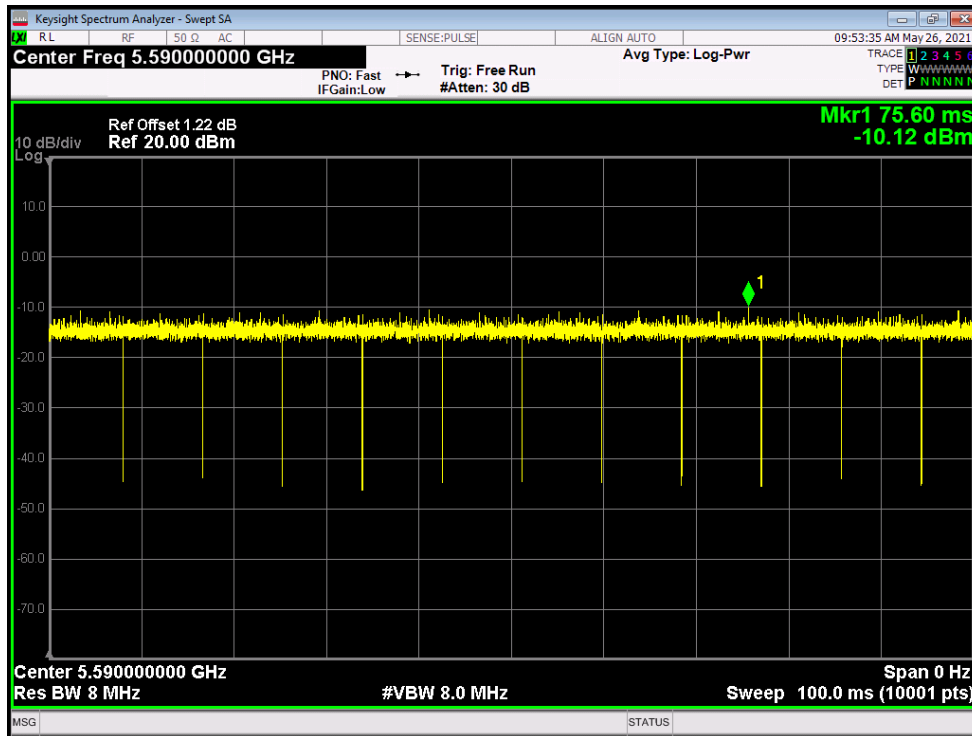


Duty Cycle NVNT ac40 5670MHz Ant1

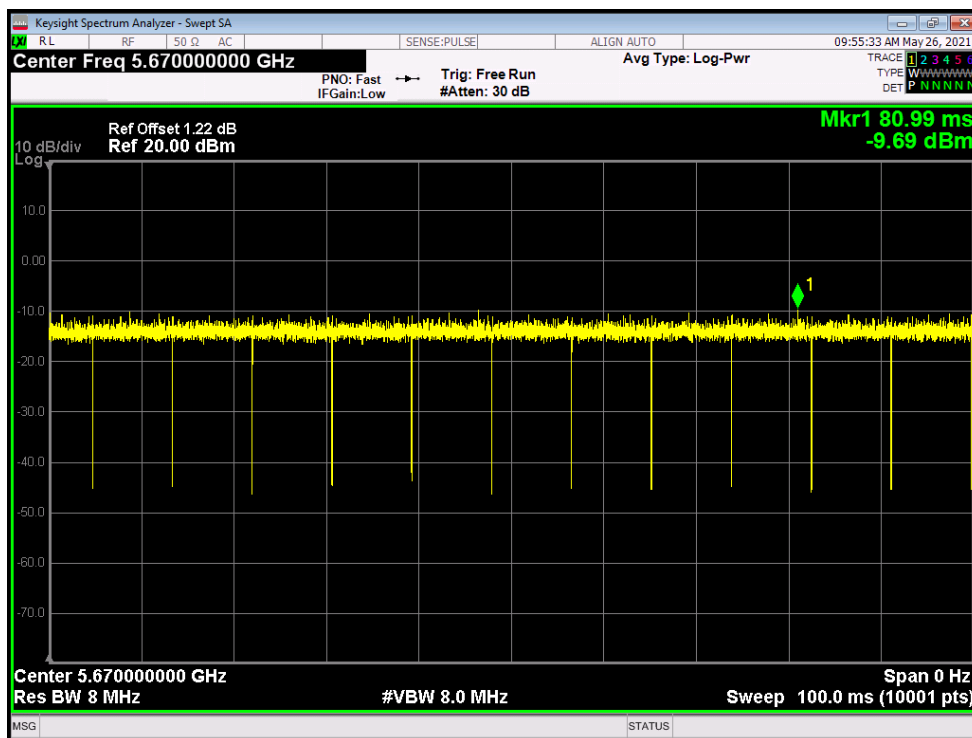


Duty Cycle NVNT ac40 5510MHz Ant2

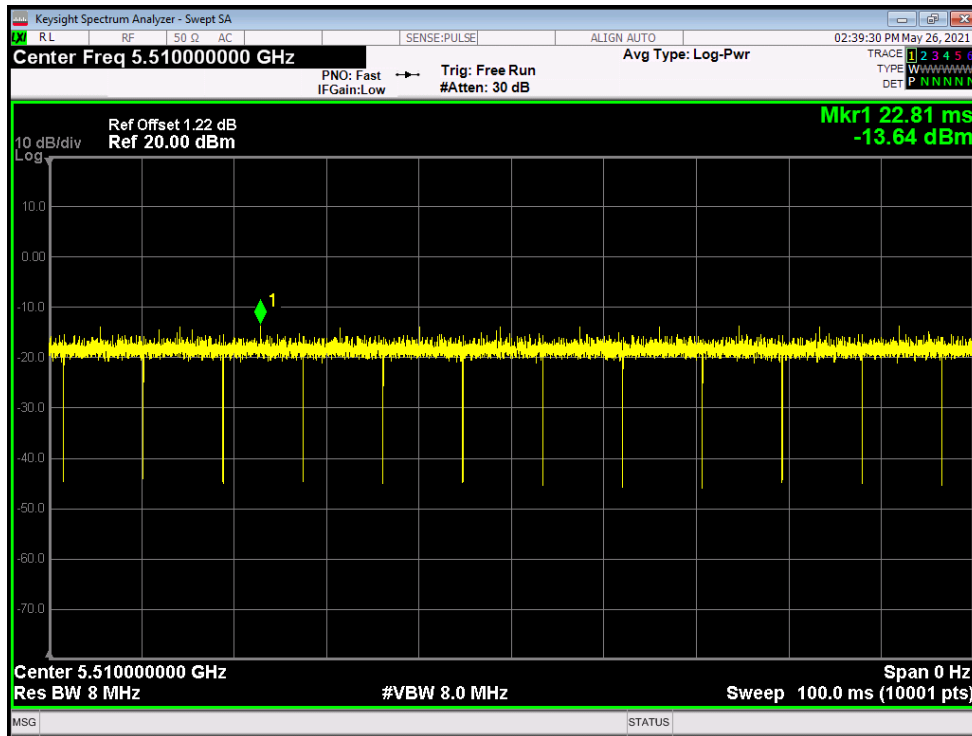


Duty Cycle NVNT ac40 5590MHz Ant2

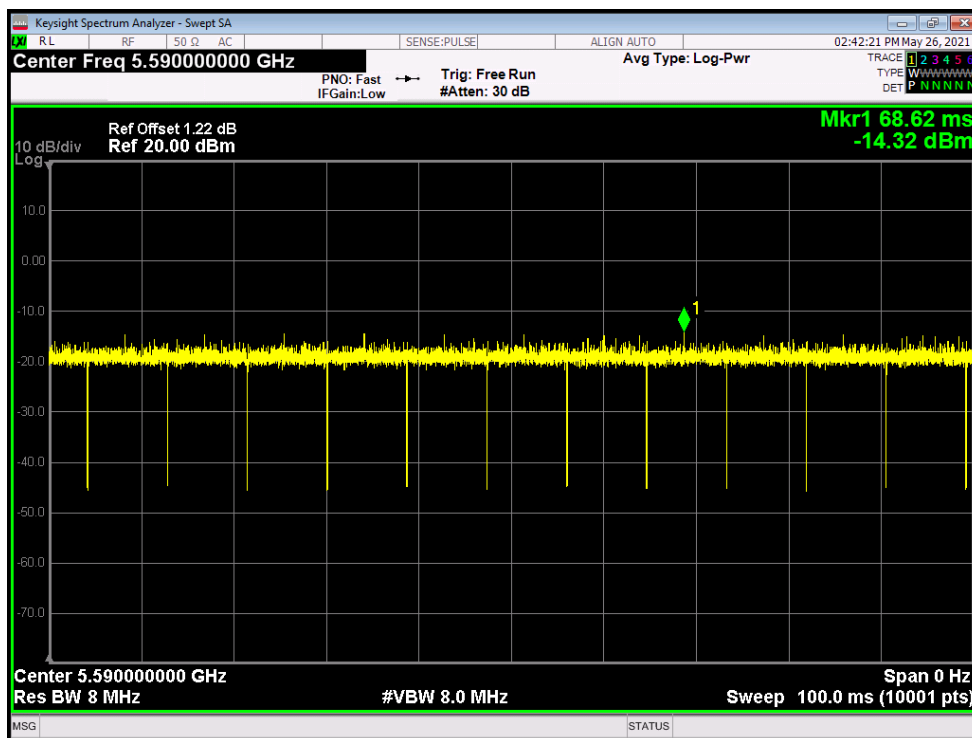


Duty Cycle NVNT ac40 5670MHz Ant2

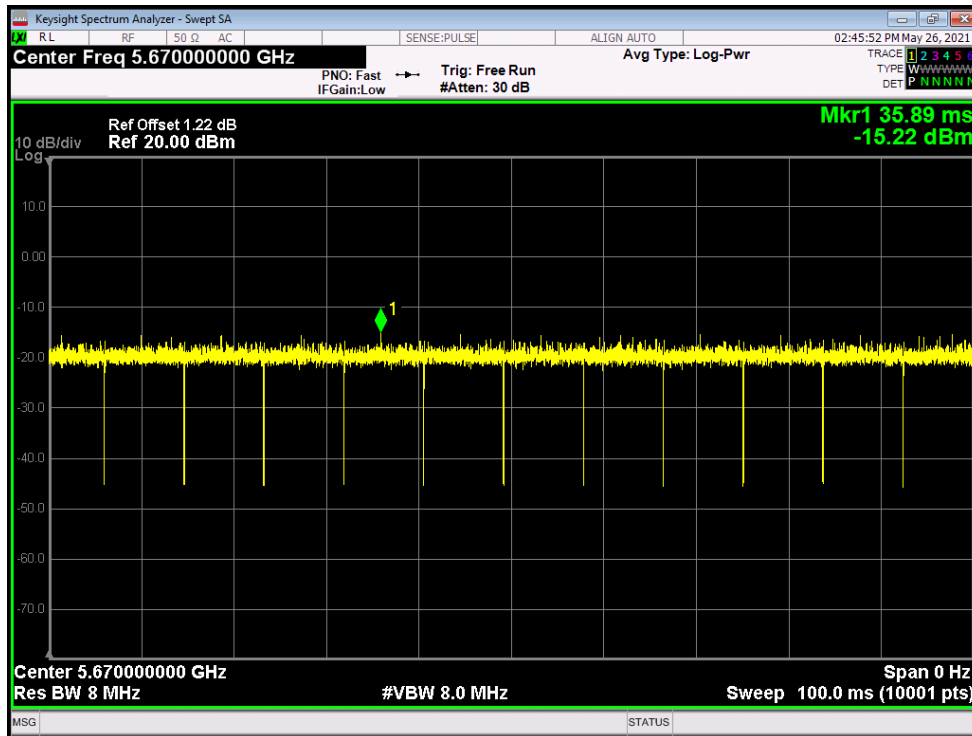


Duty Cycle NVHT ac80 5530MHz Ant1

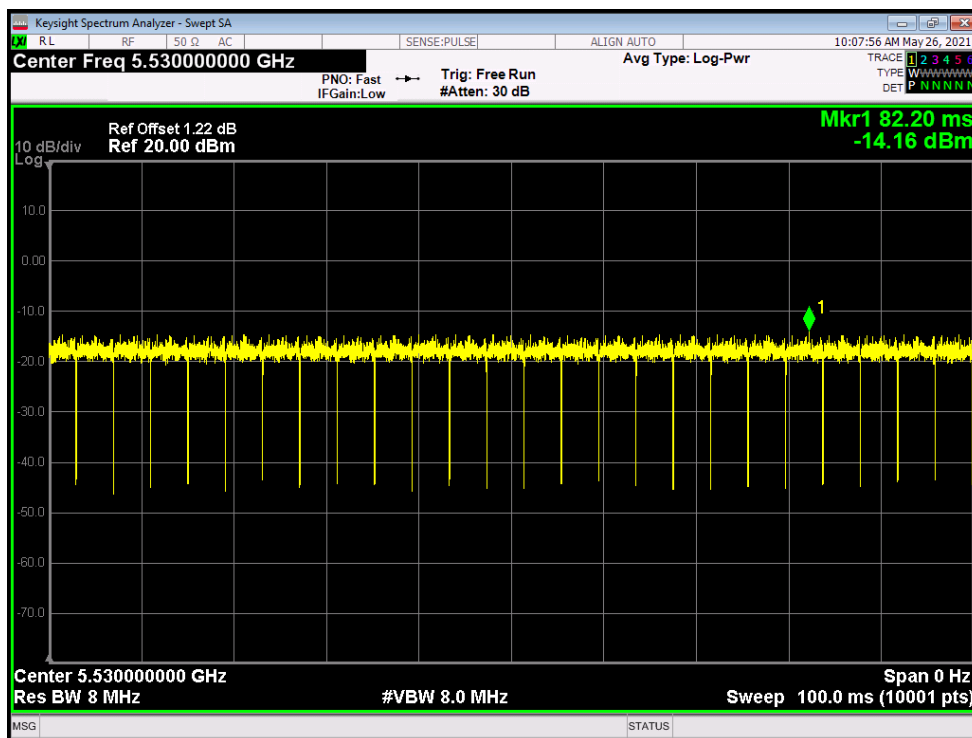


Duty Cycle NVNT ac80 5610MHz Ant1

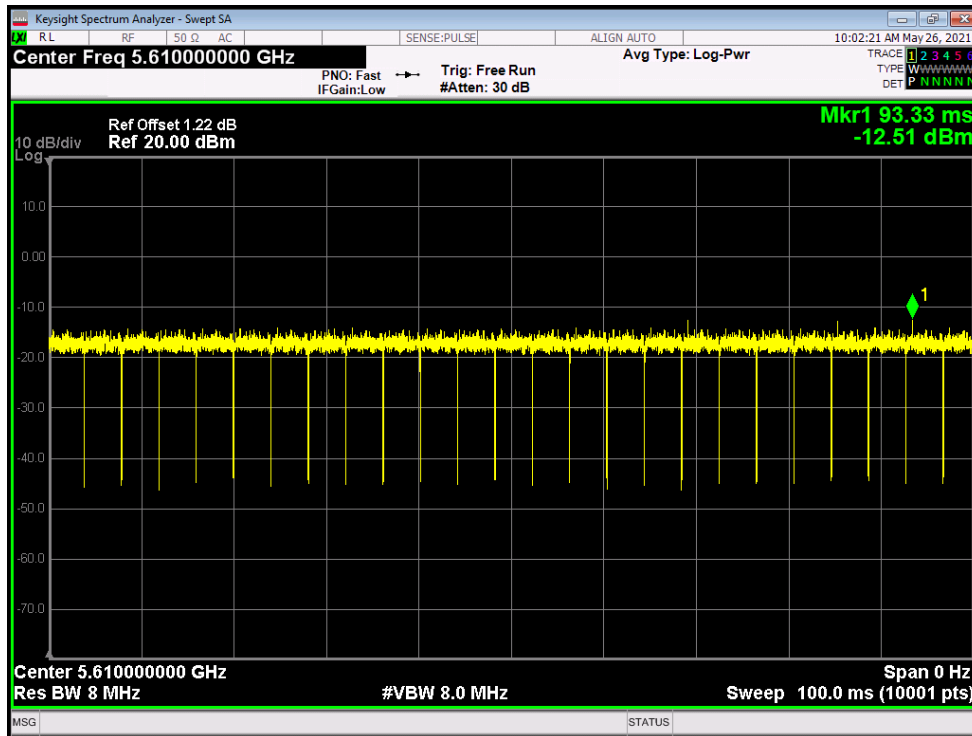

Duty Cycle NVNT ac80 5530MHz Ant2

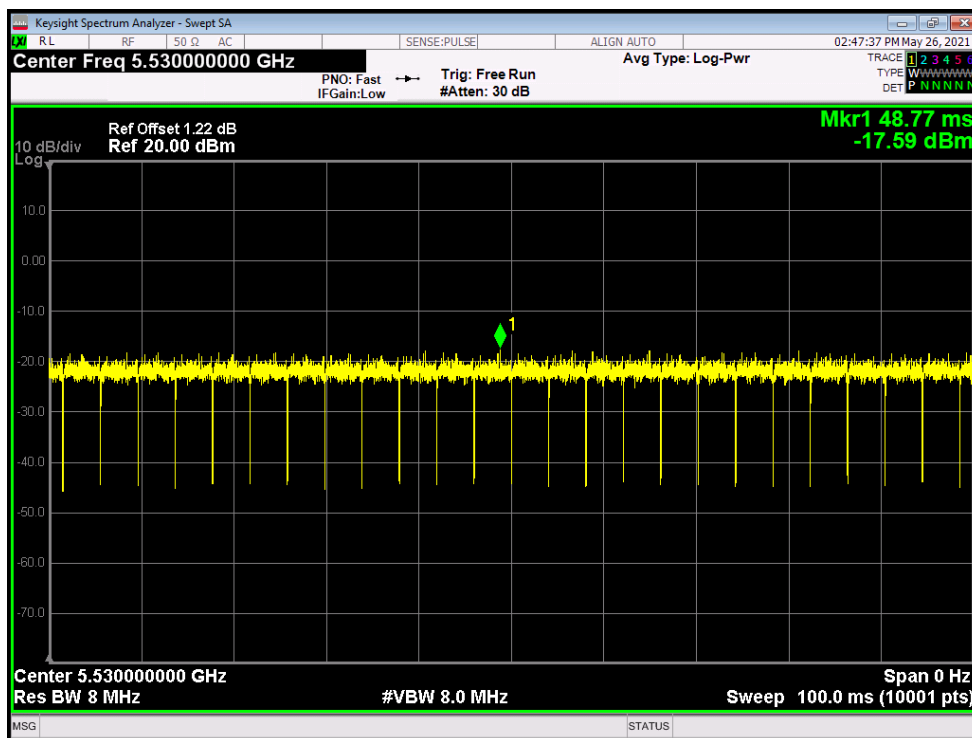

Duty Cycle NVNT ac80 5610MHz Ant2

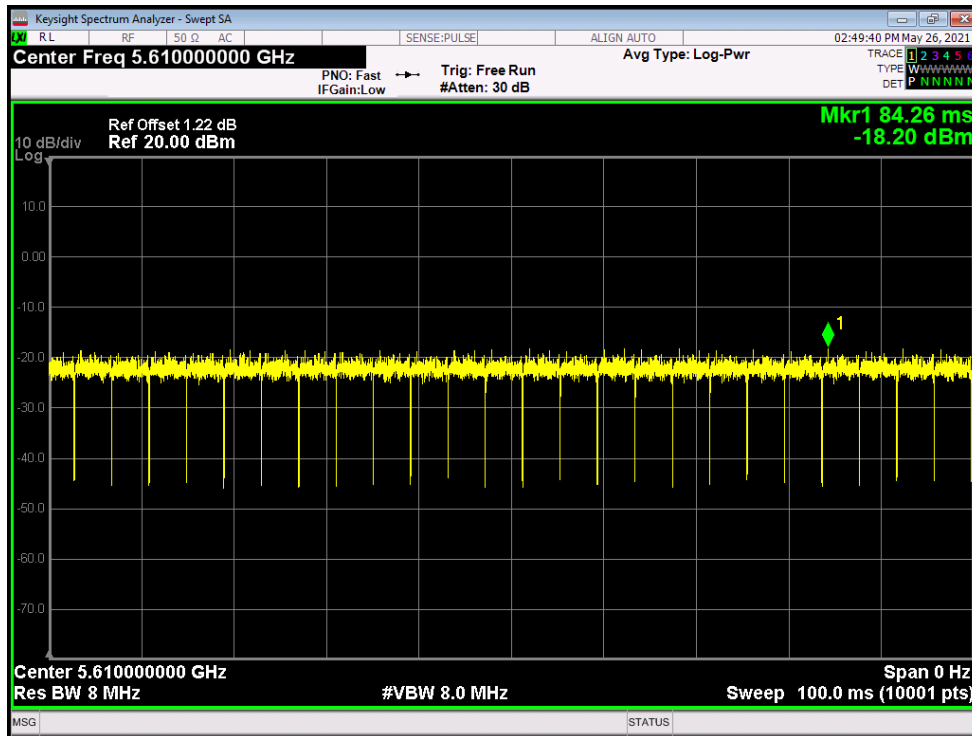

**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	SISO Total Power (dBm)	SISO Limit (dBm)	MIMO Total Power (dBm)	MIMO Limit (dBm)	Verdict
NVNT	802.11ac20	5500	Ant1	-14.076	0.01	-14.066	5	-12.837	5	Pass
NVNT	802.11ac20	5500	Ant2	-18.929	0.01	-18.919	5	-13.193	5	Pass
NVNT	802.11ac20	5600	Ant1	-14.38	0.01	-14.37	5	-12.624	5	Pass
NVNT	802.11ac20	5600	Ant2	-19.447	0.01	-19.437	5	-13.097	5	Pass
NVNT	802.11ac20	5700	Ant1	-13.537	0.01	-13.527	5	-13.228	5	Pass
NVNT	802.11ac20	5700	Ant2	-19.897	0.01	-19.887	5	-13.166	5	Pass
NVNT	802.11ac40	5510	Ant1	-14.747	0.02	-14.727	5	-13.603	5	Pass
NVNT	802.11ac40	5510	Ant2	-18.161	0.02	-18.141	5	-13.42	5	Pass
NVNT	802.11ac40	5590	Ant1	-14.604	0.02	-14.584	5			Pass
NVNT	802.11ac40	5590	Ant2	-18.964	0.02	-18.944	5			Pass
NVNT	802.11ac40	5670	Ant1	-14.328	0.02	-14.308	5			Pass
NVNT	802.11ac40	5670	Ant2	-19.545	0.02	-19.525	5			Pass
NVNT	802.11ac80	5530	Ant1	-15.151	0.05	-15.101	5			Pass
NVNT	802.11ac80	5530	Ant2	-19.004	0.05	-18.954	5			Pass
NVNT	802.11ac80	5610	Ant1	-14.778	0.05	-14.728	5			Pass
NVNT	802.11ac80	5610	Ant2	-19.32	0.05	-19.27	5			Pass

**-26dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	ac20	5500	Ant1	24.535
NVNT	ac20	5600	Ant1	24.135

NVNT	ac20	5700	Ant1	24.2
NVNT	ac20	5500	Ant2	23.637
NVNT	ac20	5600	Ant2	23.975
NVNT	ac20	5700	Ant2	23.832
NVNT	ac40	5510	Ant1	42.956
NVNT	ac40	5590	Ant1	43.338
NVNT	ac40	5670	Ant1	42.875
NVNT	ac40	5510	Ant2	41.869
NVNT	ac40	5590	Ant2	41.367
NVNT	ac40	5670	Ant2	41.95
NVHT	ac80	5530	Ant1	119.587
NVNT	ac80	5610	Ant1	114.461
NVNT	ac80	5530	Ant2	82.194
NVNT	ac80	5610	Ant2	83.251


-26dB Bandwidth NVNT ac20 5500MHz Ant1

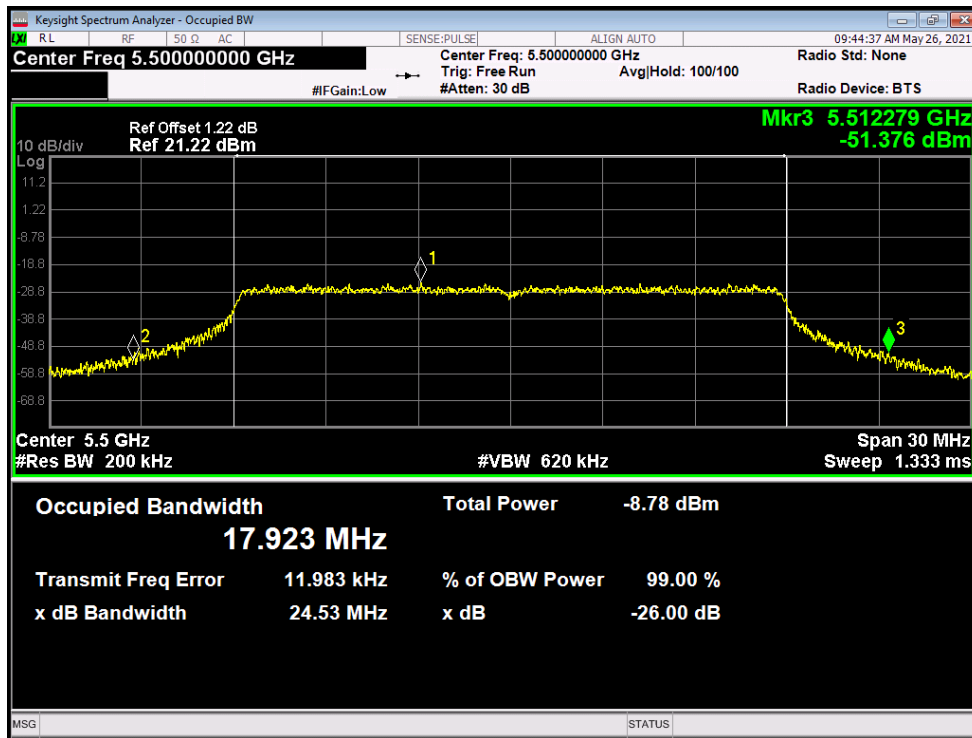


-26dB Bandwidth NVNT ac20 5600MHz Ant1

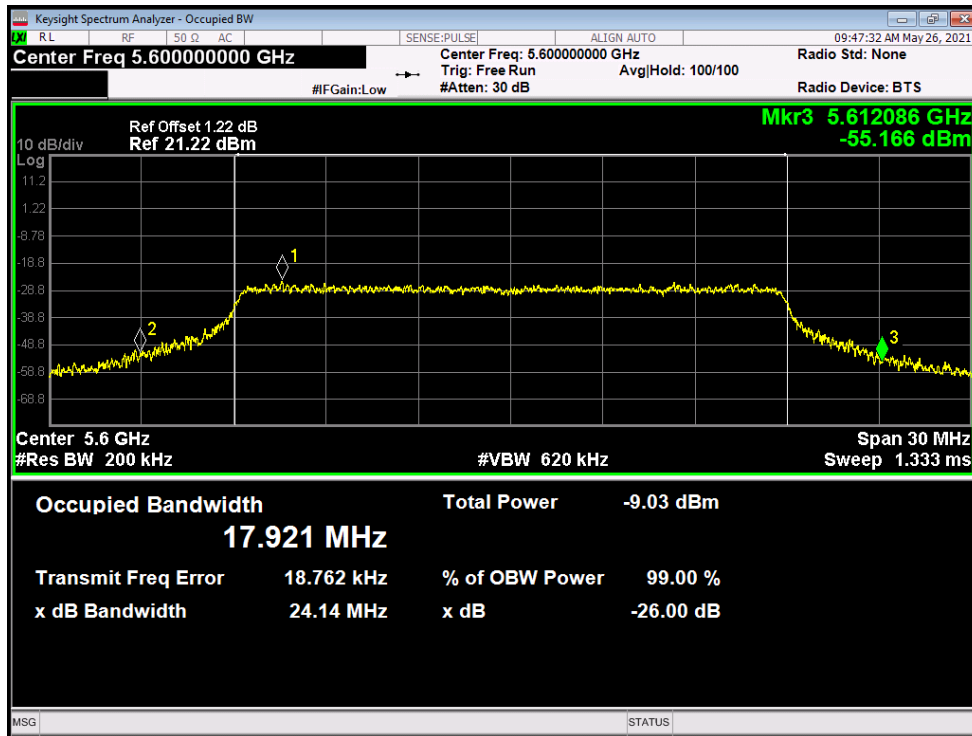


-26dB Bandwidth NVNT ac20 5700MHz Ant1

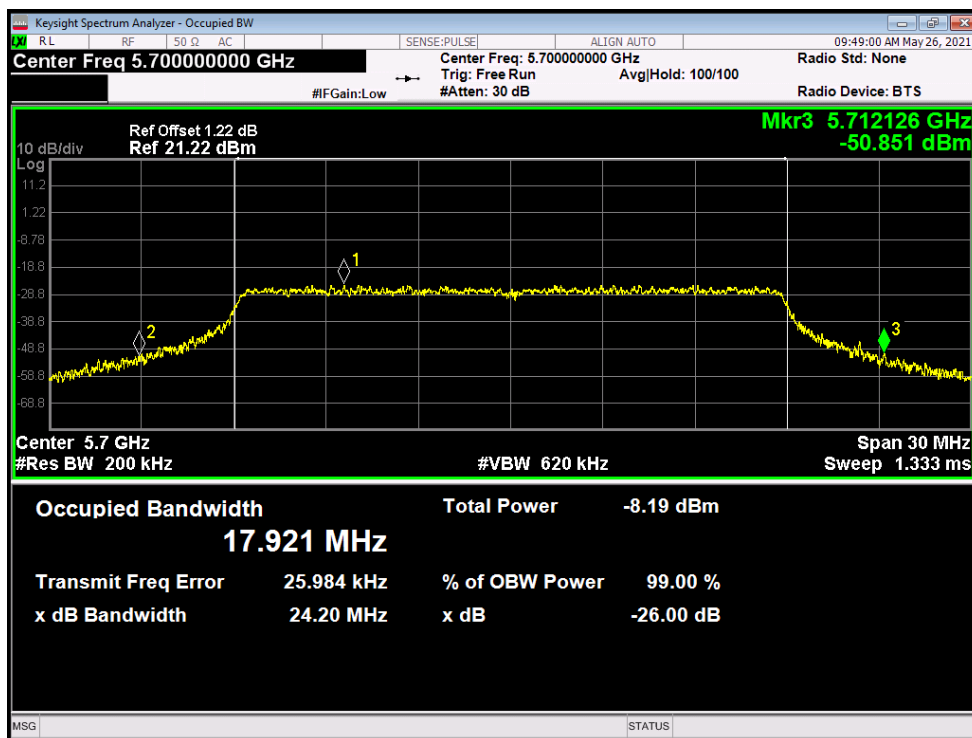

-26dB Bandwidth NVNT ac20 5500MHz Ant2

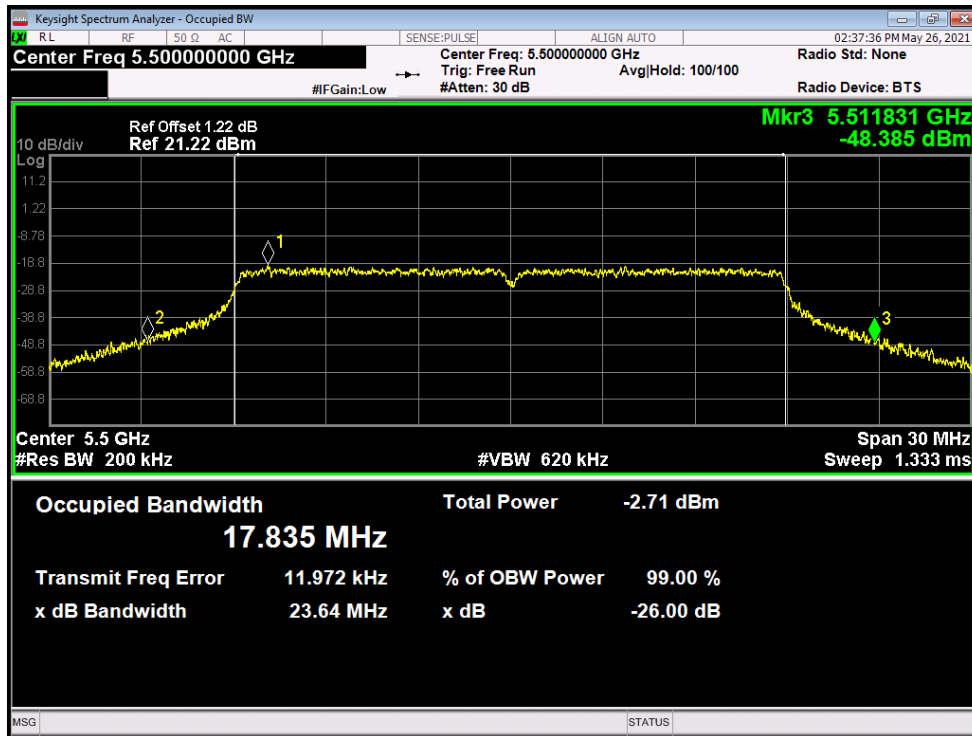


-26dB Bandwidth NVNT ac20 5600MHz Ant2

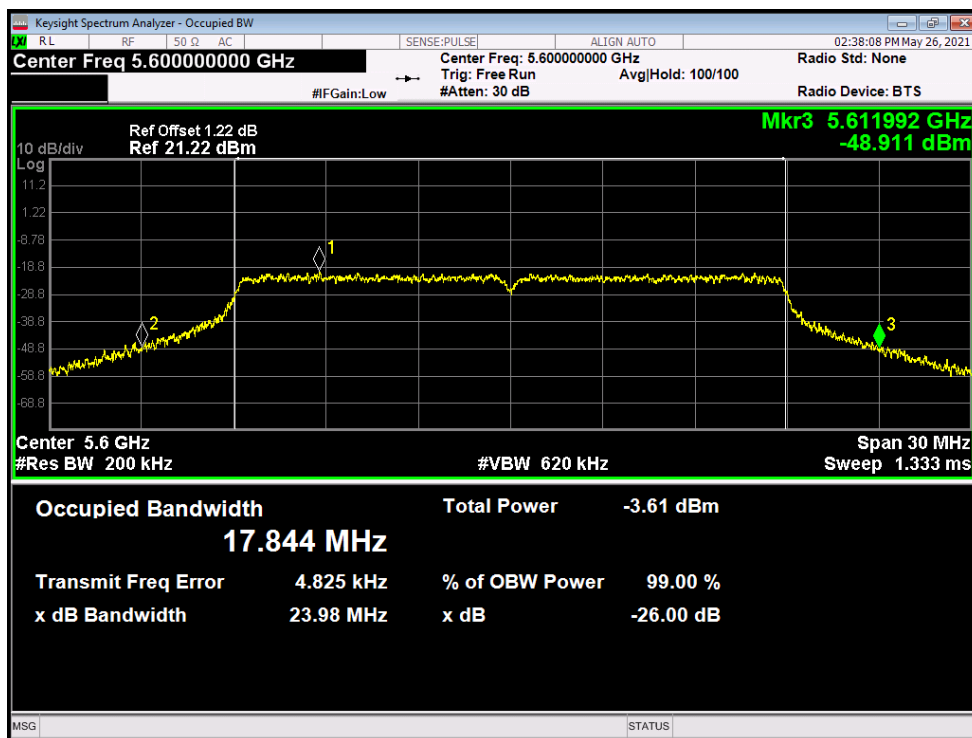


-26dB Bandwidth NVNT ac20 5700MHz Ant2




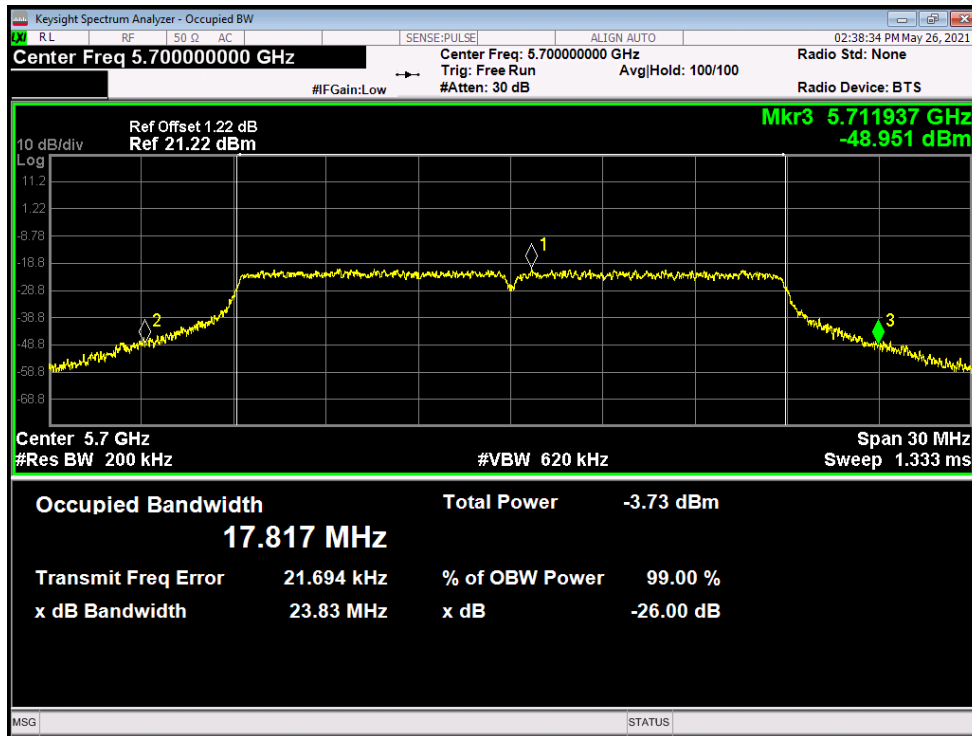


-26dB Bandwidth NVNT ac40 5510MHz Ant1

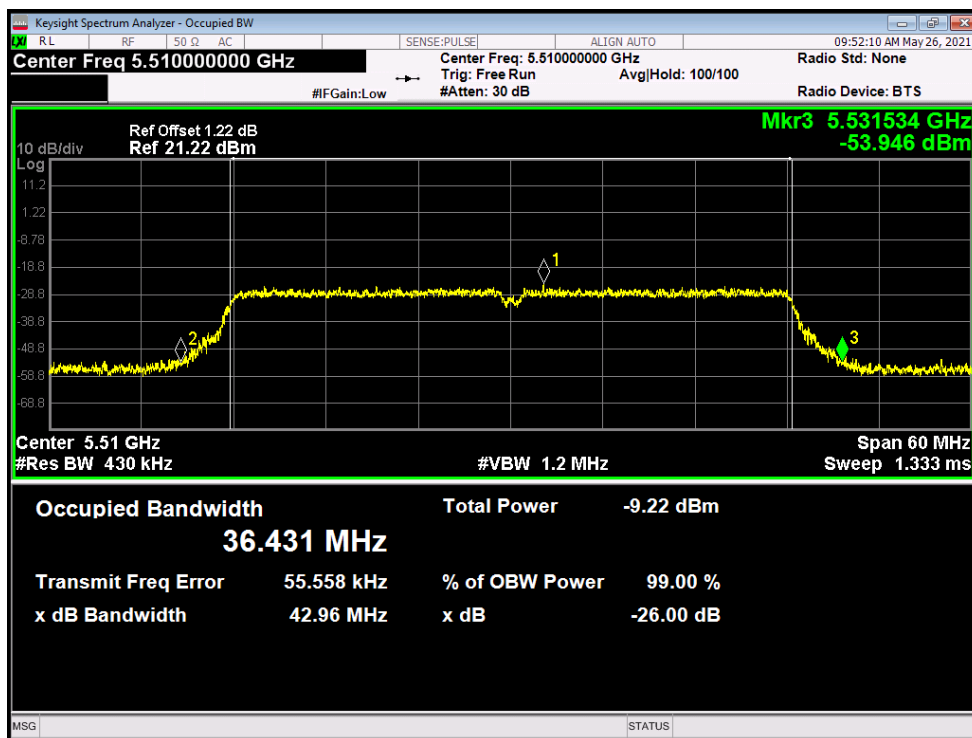


-26dB Bandwidth NVNT ac40 5590MHz Ant1

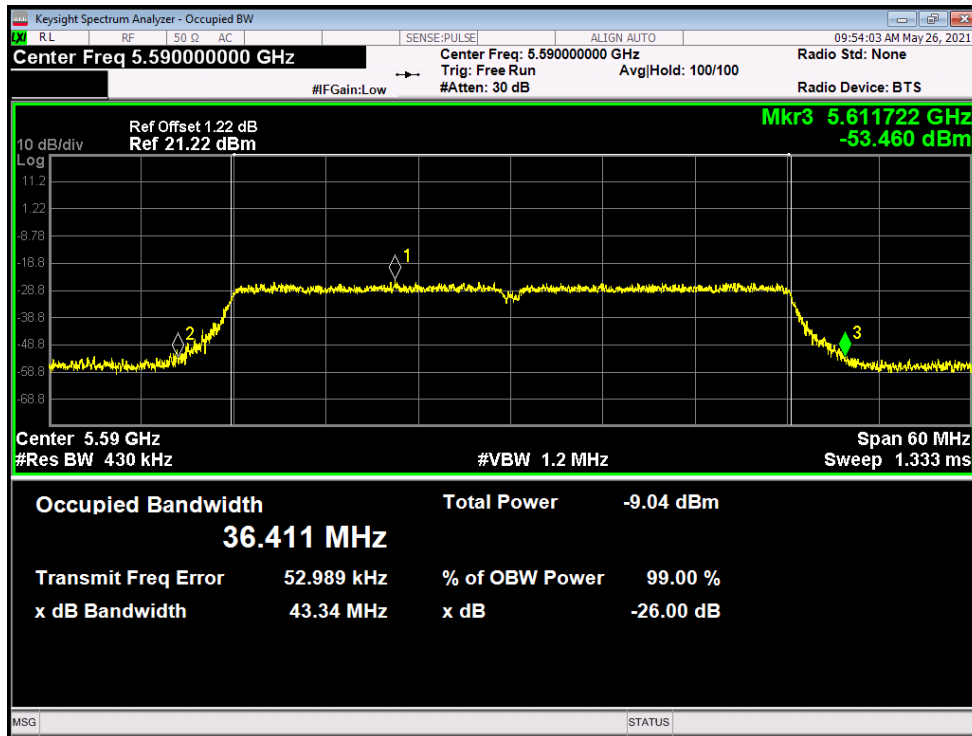


-26dB Bandwidth NVNT ac40 5670MHz Ant1

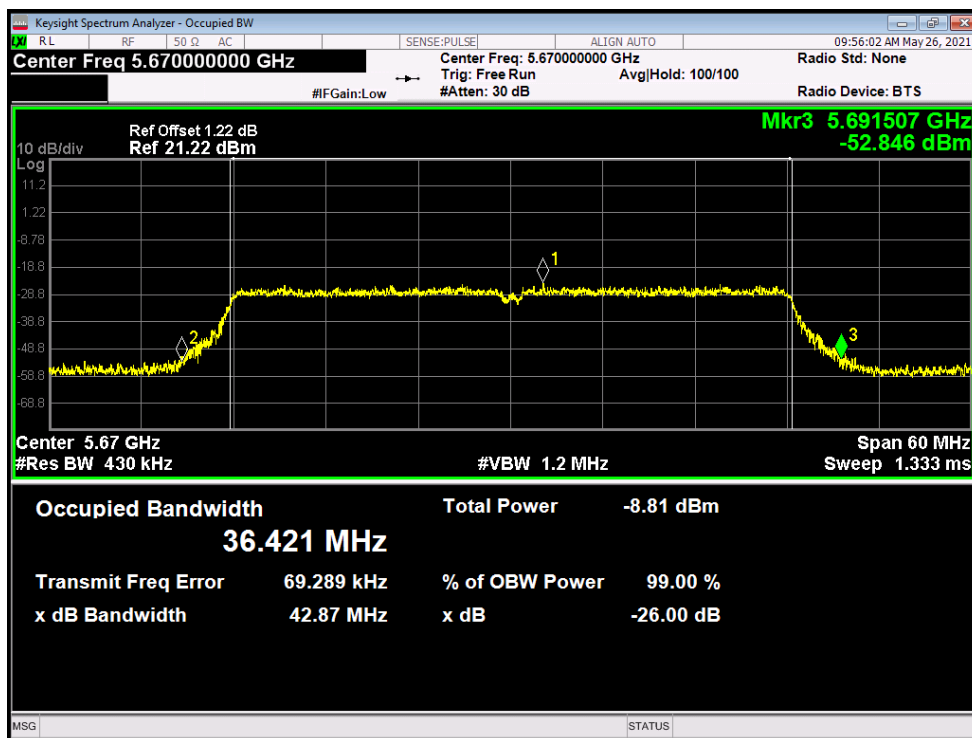


-26dB Bandwidth NVNT ac40 5510MHz Ant2

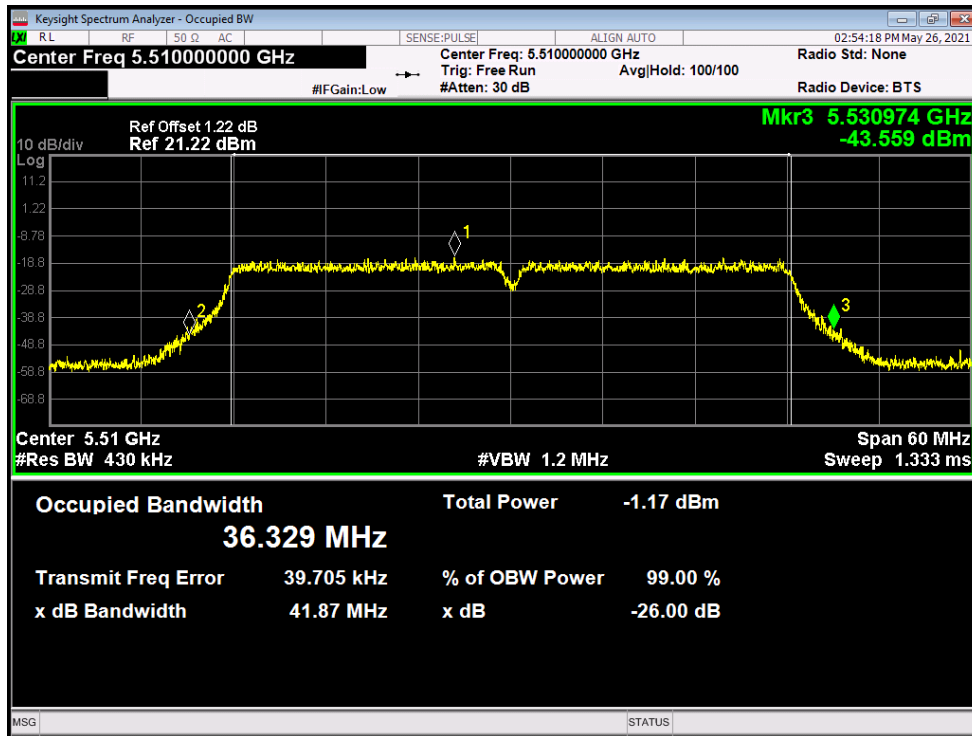


-26dB Bandwidth NVNT ac40 5590MHz Ant2

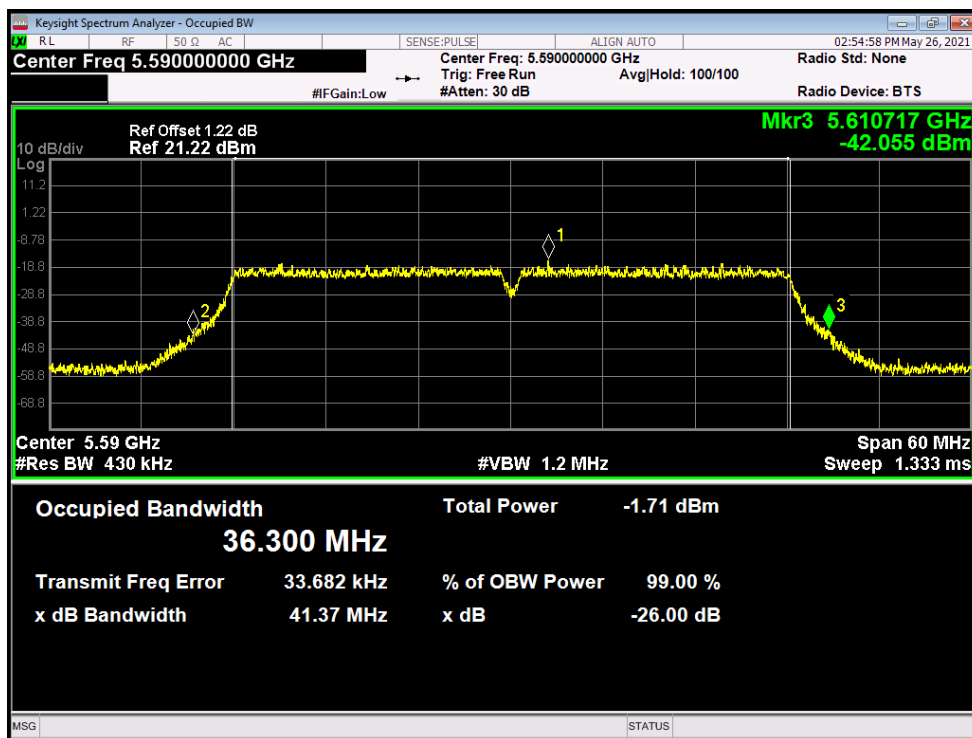


-26dB Bandwidth NVNT ac40 5670MHz Ant2

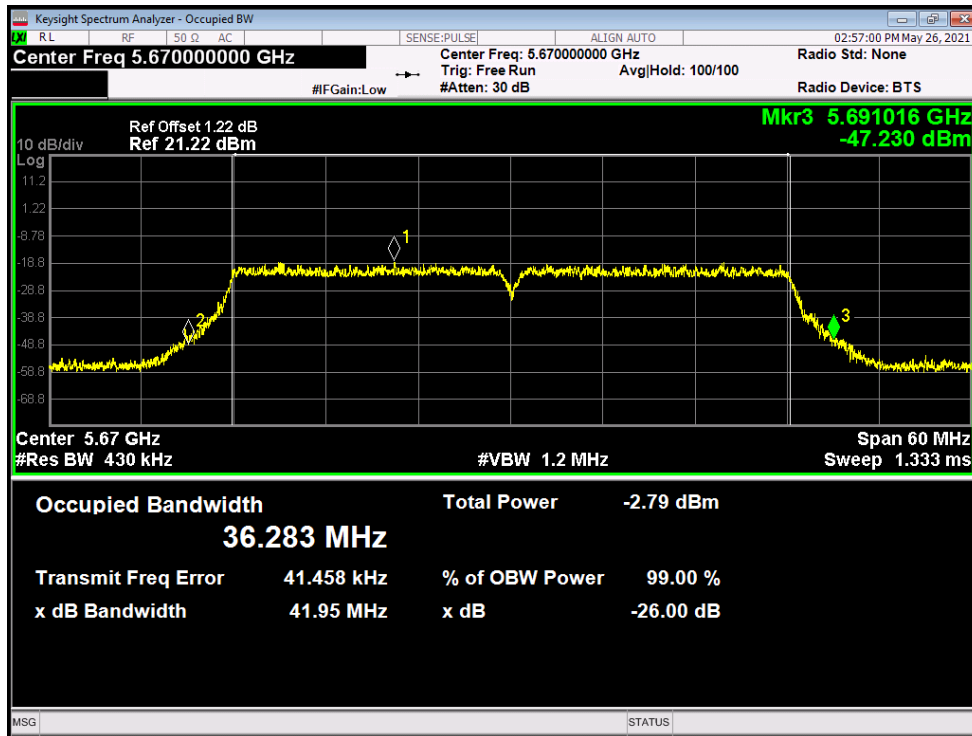


-26dB Bandwidth NVHT ac80 5530MHz Ant1

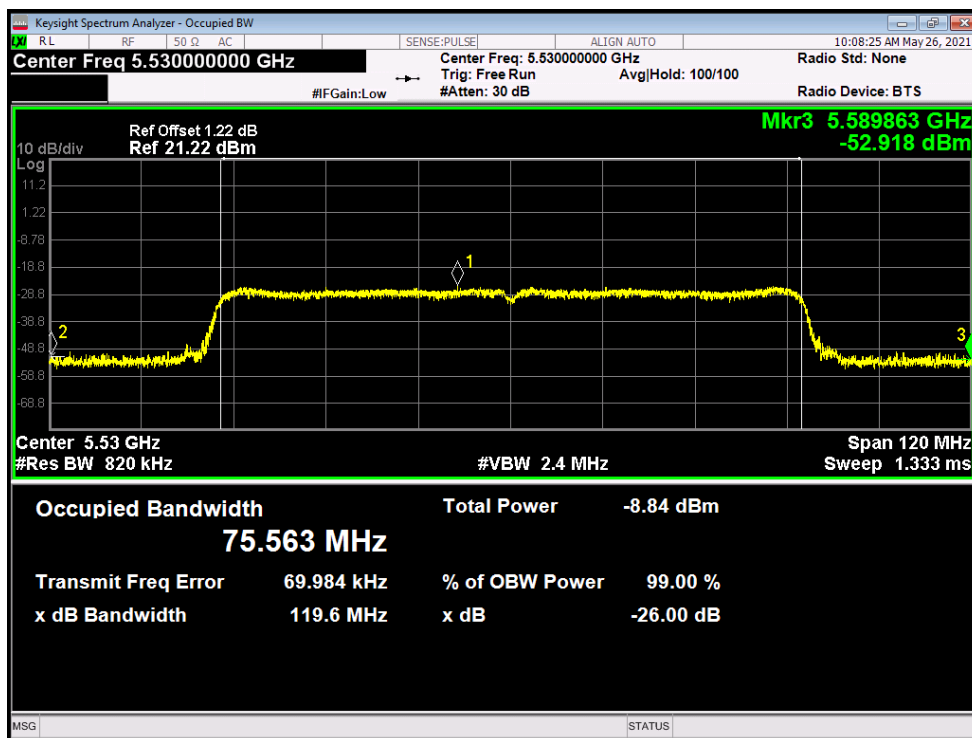


-26dB Bandwidth NVNT ac80 5610MHz Ant1

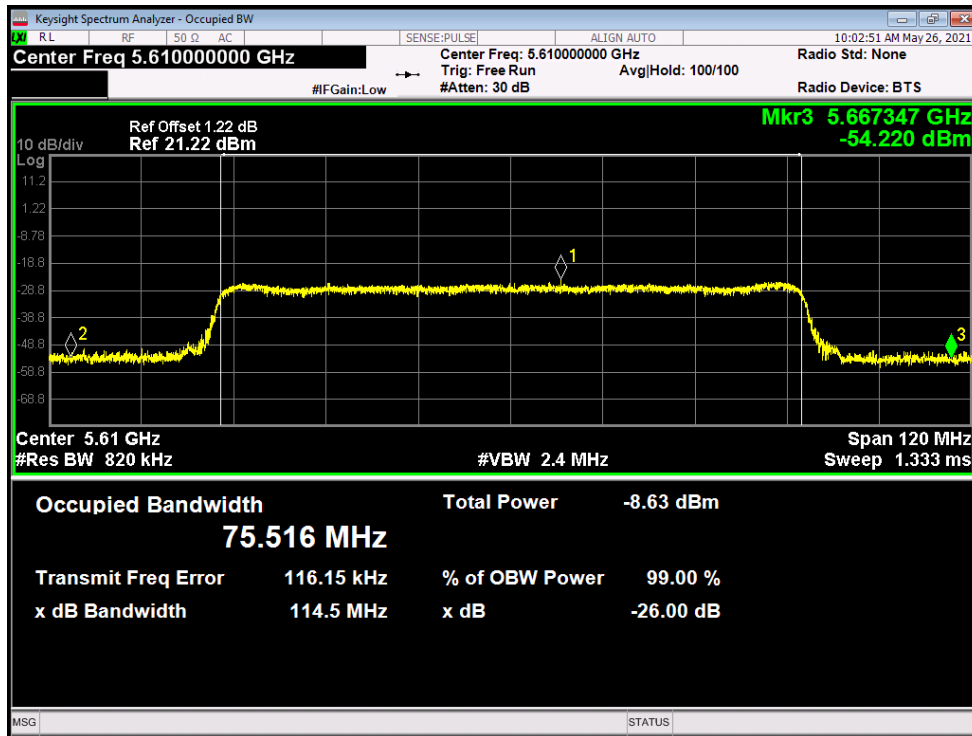

-26dB Bandwidth NVNT ac80 5530MHz Ant2

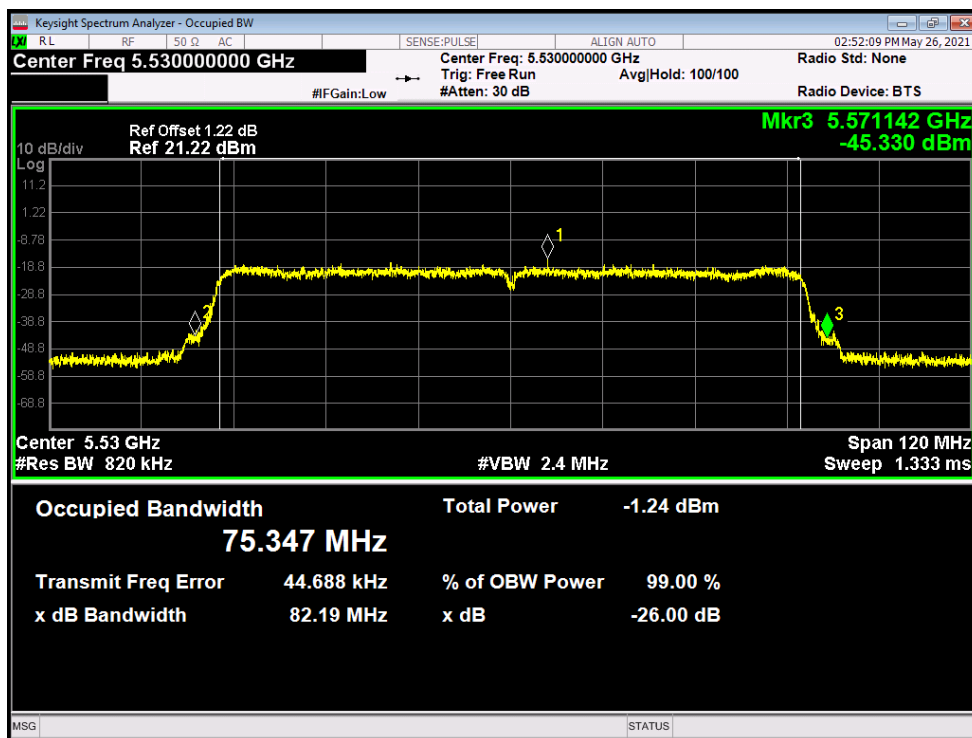


-26dB Bandwidth NVNT ac80 5610MHz Ant2

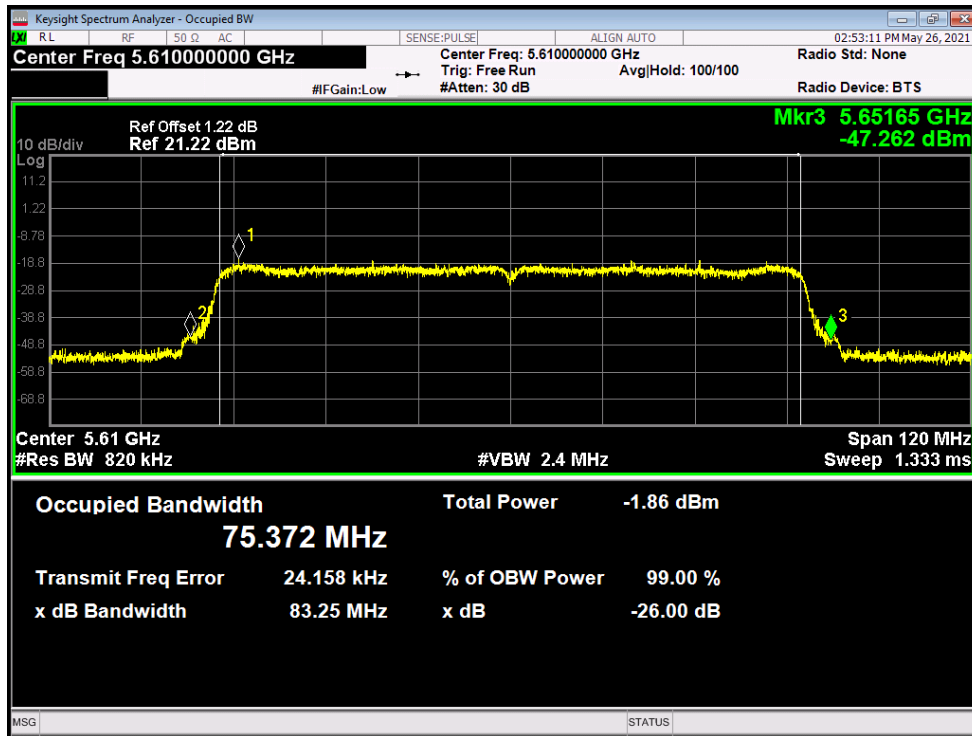


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac20	5500	Ant1	17.925
NVNT	ac20	5600	Ant1	17.934
NVNT	ac20	5700	Ant1	17.895
NVNT	ac20	5500	Ant2	17.861
NVNT	ac20	5600	Ant2	17.913
NVNT	ac20	5700	Ant2	17.923
NVNT	ac40	5510	Ant1	36.45
NVNT	ac40	5590	Ant1	36.44
NVNT	ac40	5670	Ant1	36.472
NVNT	ac40	5510	Ant2	36.352
NVNT	ac40	5590	Ant2	36.315
NVNT	ac40	5670	Ant2	36.384
NVHT	ac80	5530	Ant1	75.565
NVNT	ac80	5610	Ant1	75.504
NVNT	ac80	5530	Ant2	75.396
NVNT	ac80	5610	Ant2	75.311


OBW NVNT ac20 5500MHz Ant1

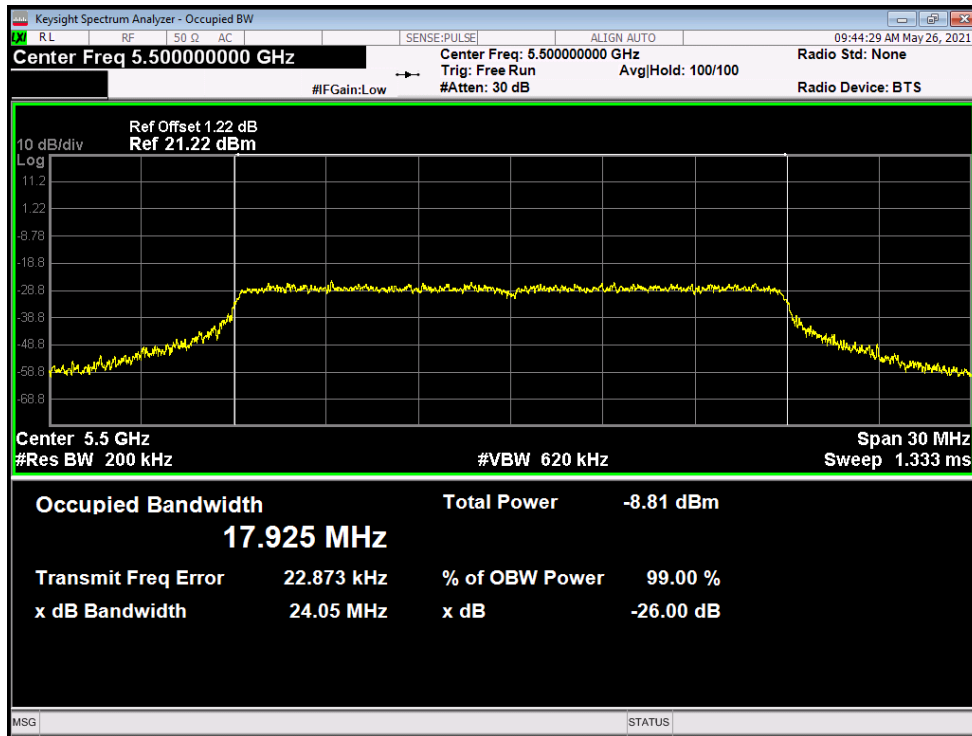


OBW NVNT ac20 5600MHz Ant1

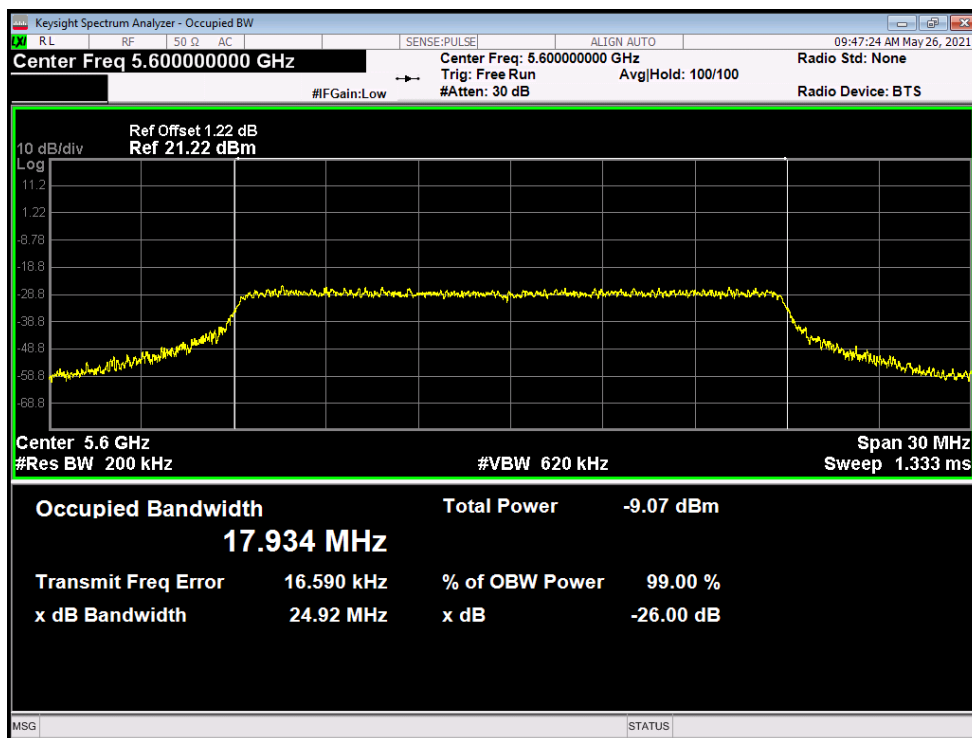

OBW NVNT ac20 5700MHz Ant1

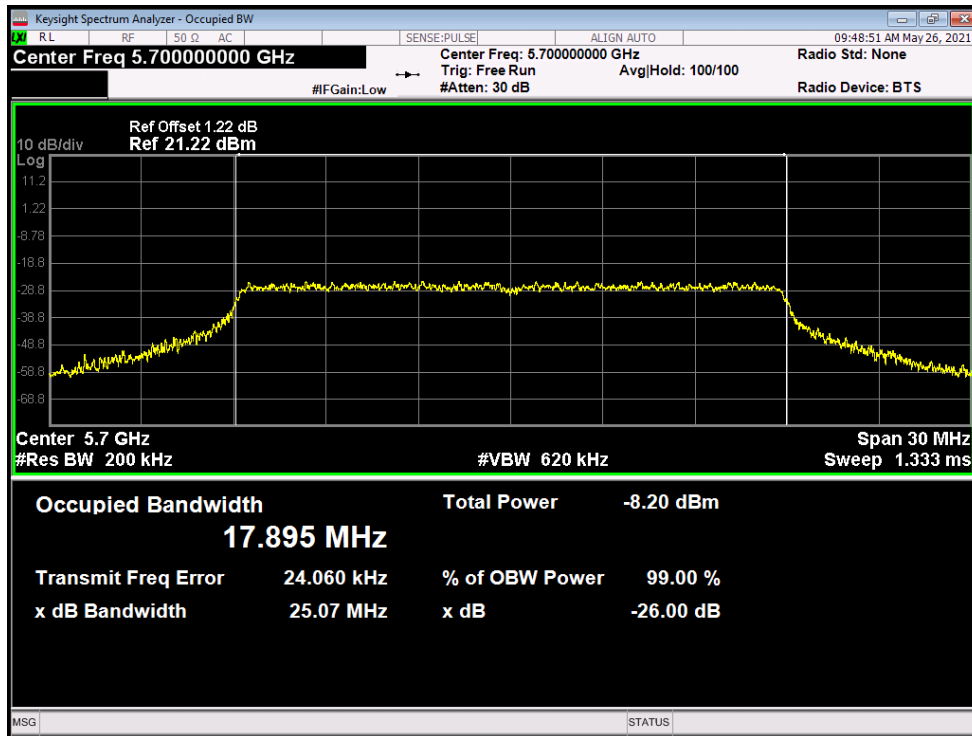


OBW NVNT ac20 5500MHz Ant2

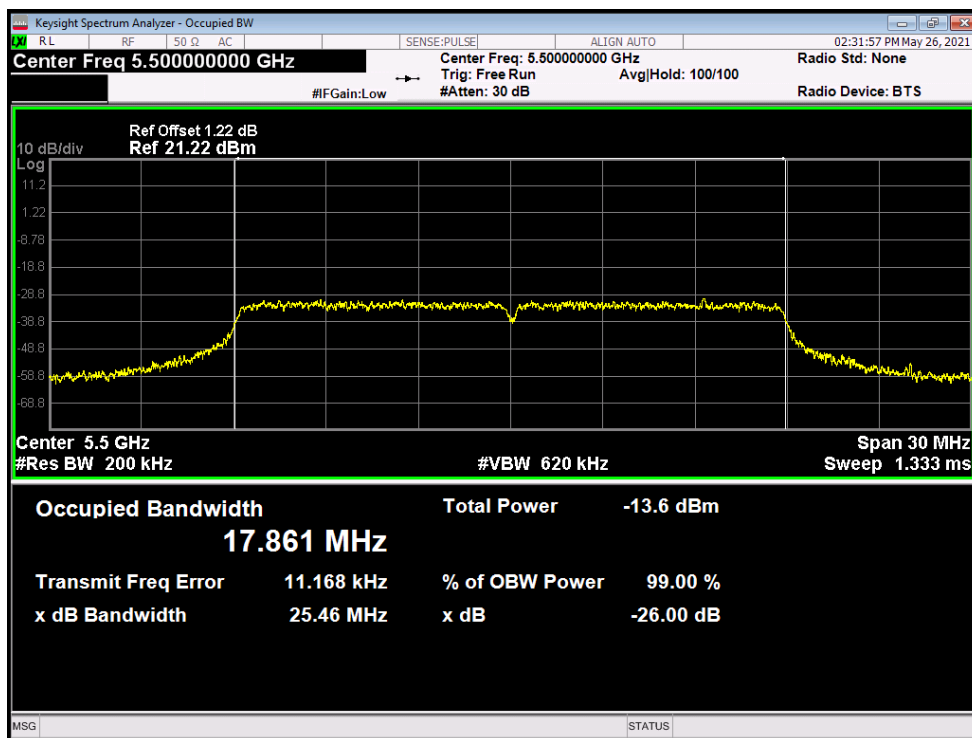


OBW NVNT ac20 5600MHz Ant2




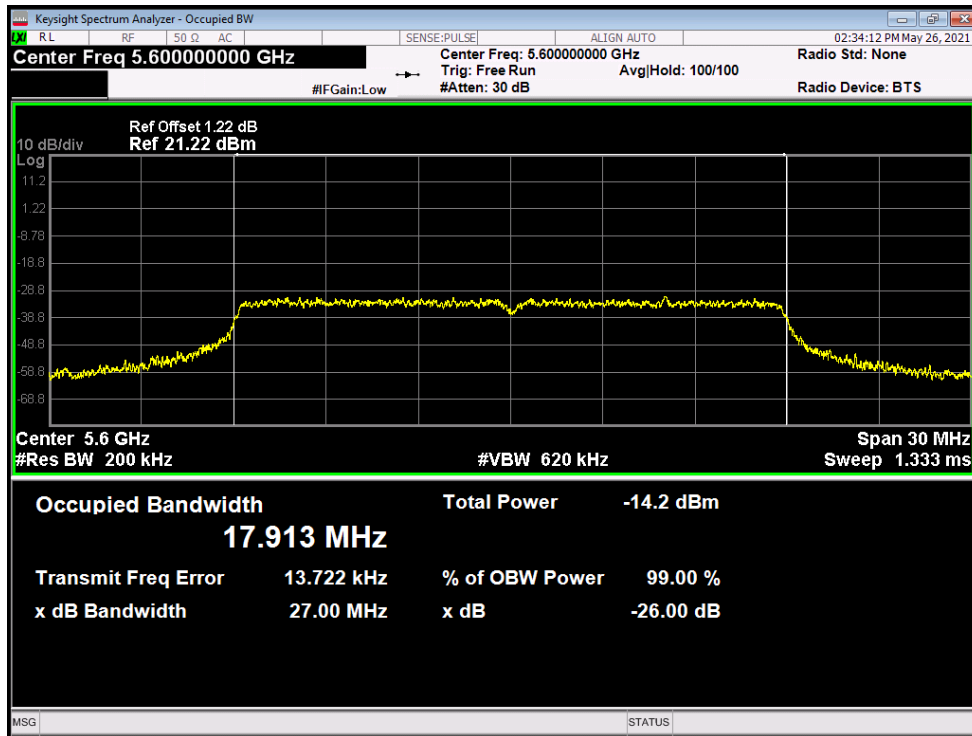


OBW NVNT ac20 5700MHz Ant2

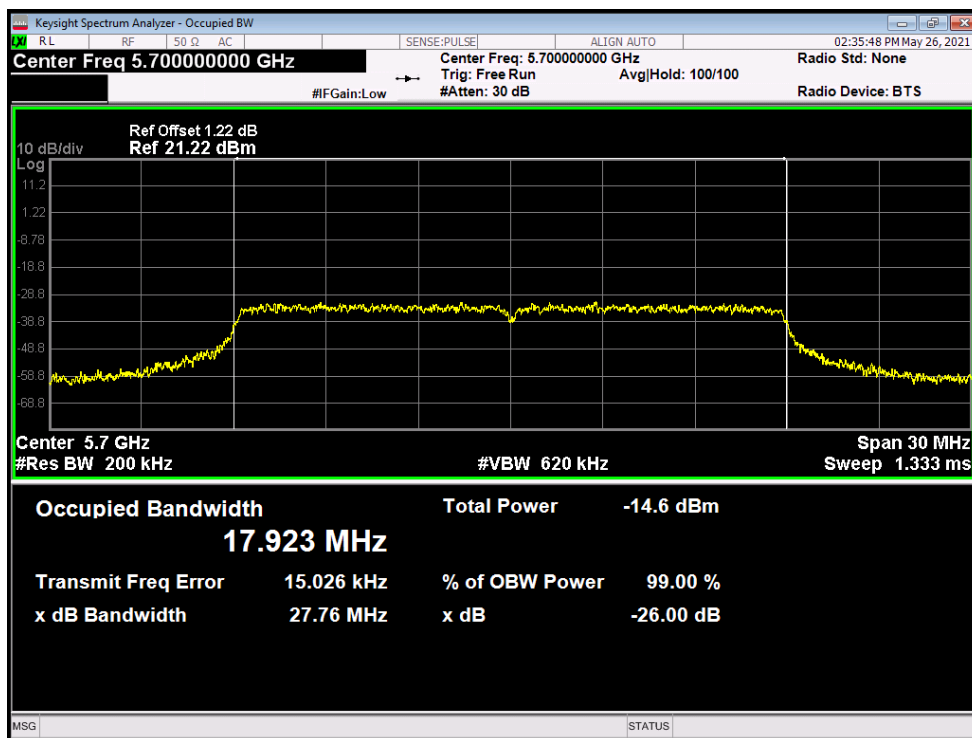


OBW NVNT ac40 5510MHz Ant1

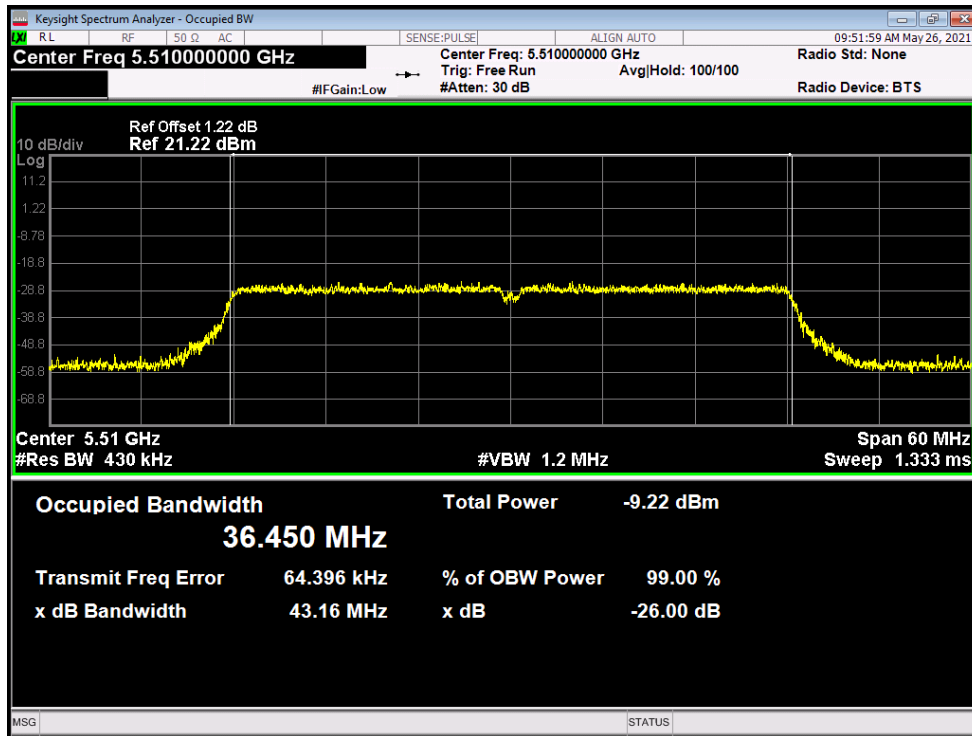


OBW NVNT ac40 5590MHz Ant1

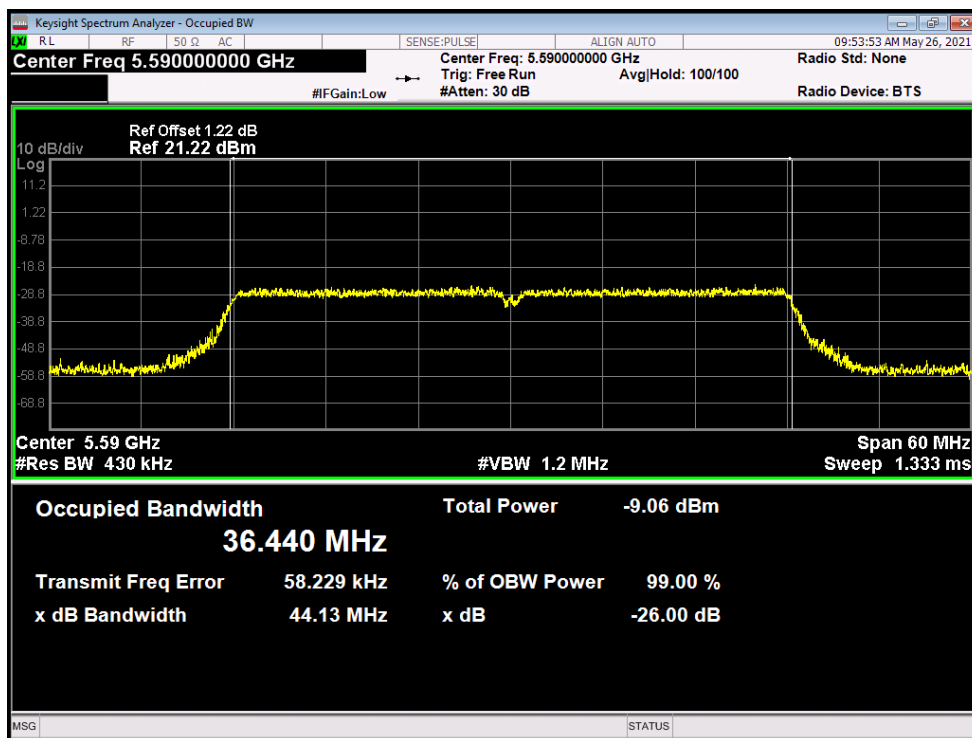


OBW NVNT ac40 5670MHz Ant1

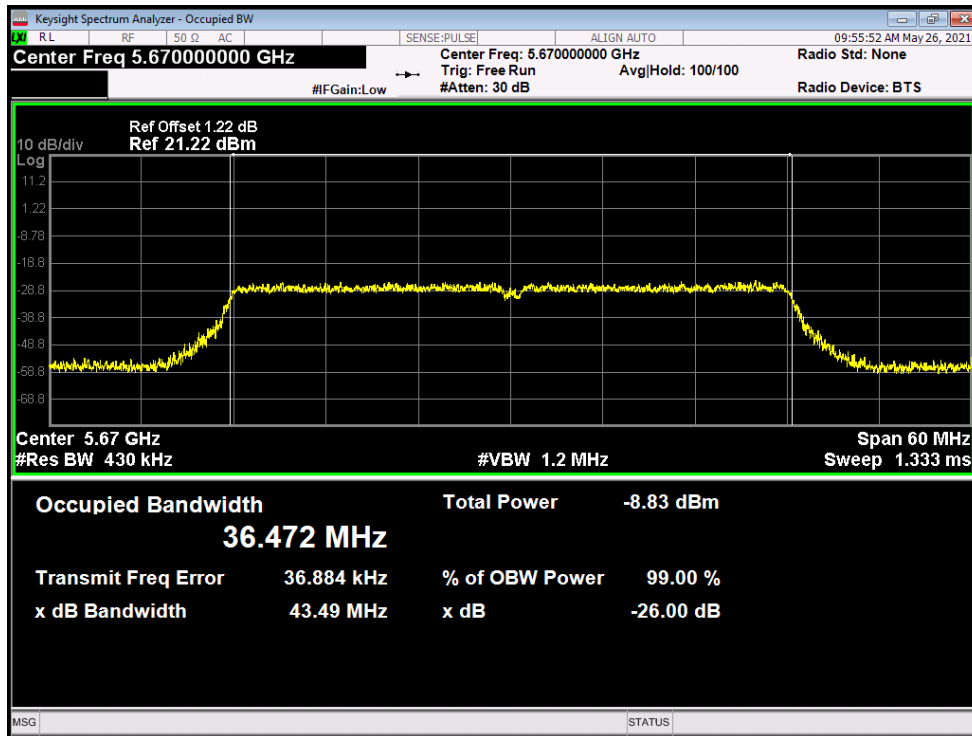


OBW NVNT ac40 5510MHz Ant2

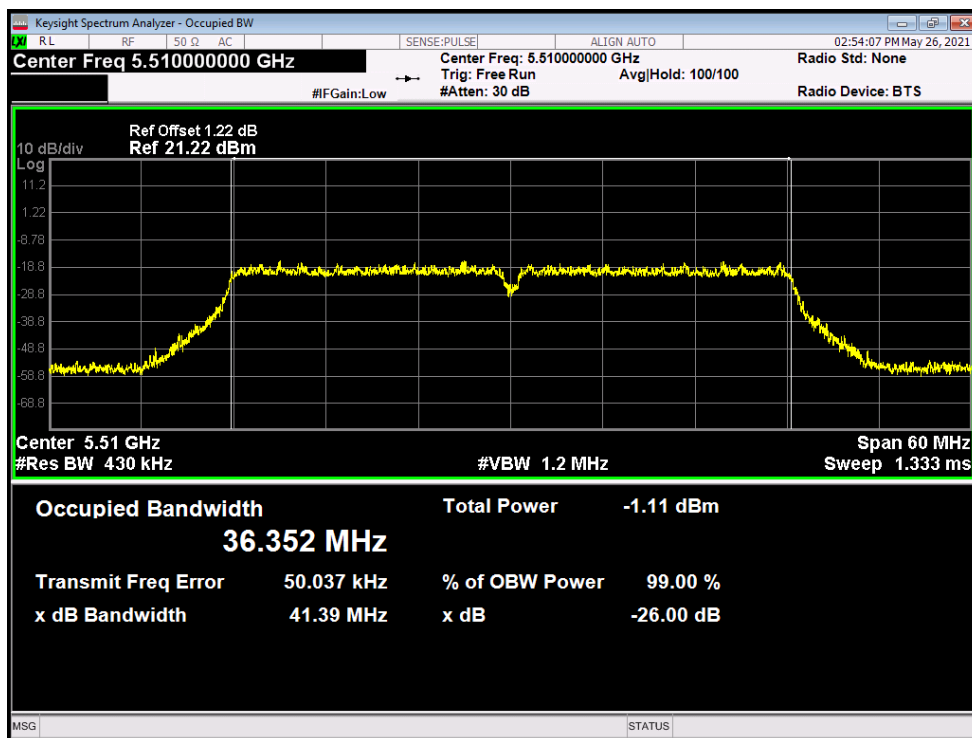


OBW NVNT ac40 5590MHz Ant2

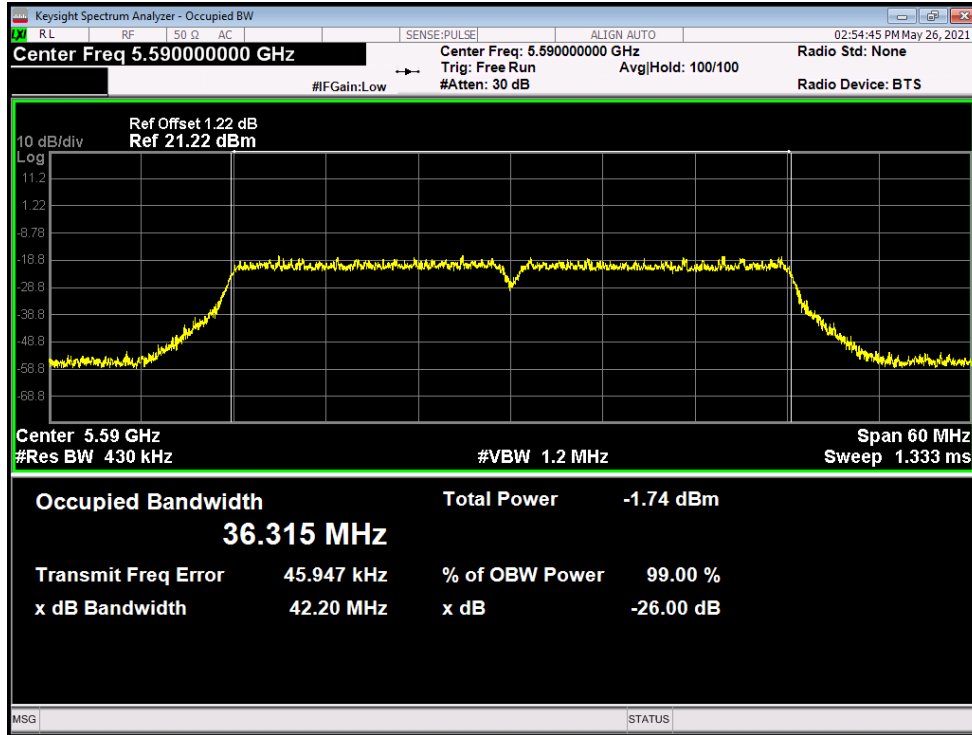


OBW NVNT ac40 5670MHz Ant2

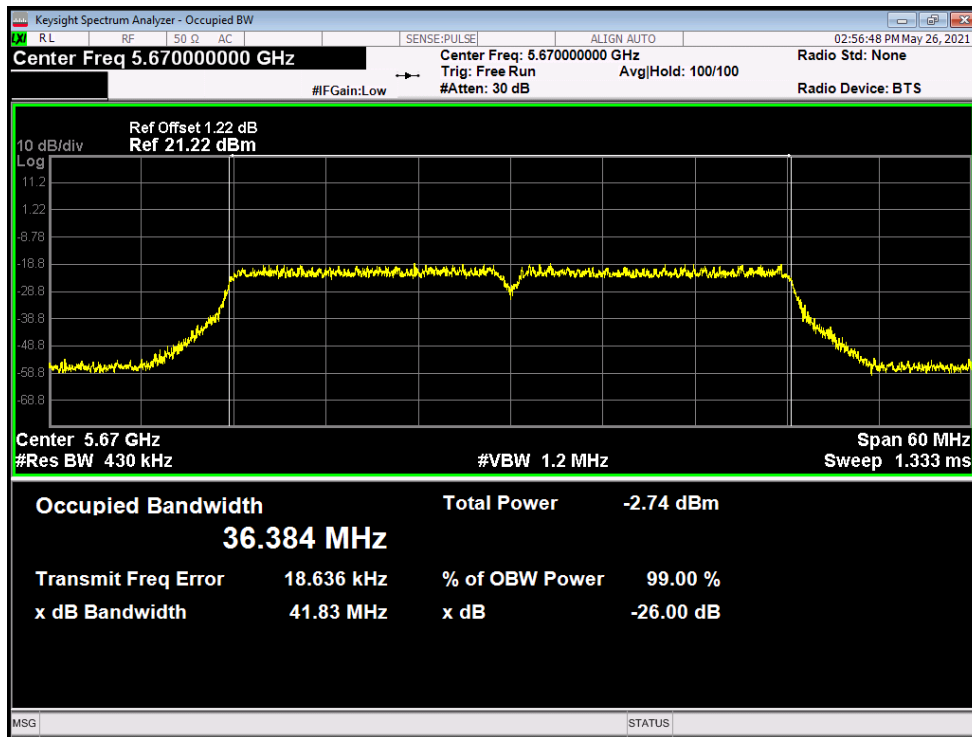


OBW NVHT ac80 5530MHz Ant1

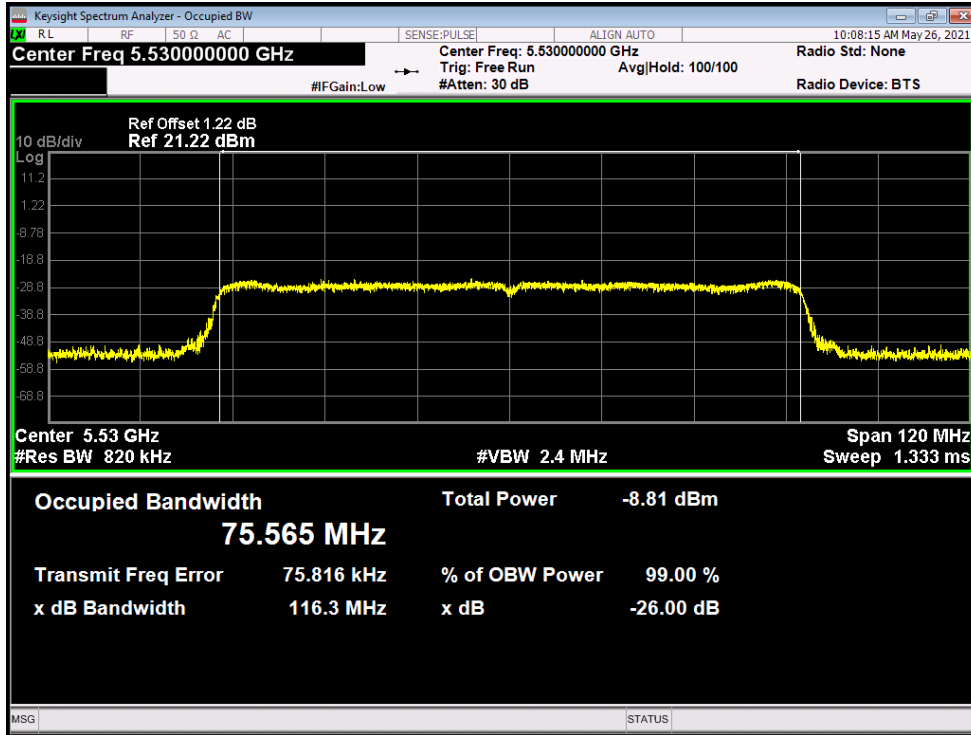


OBW NVNT ac80 5610MHz Ant1

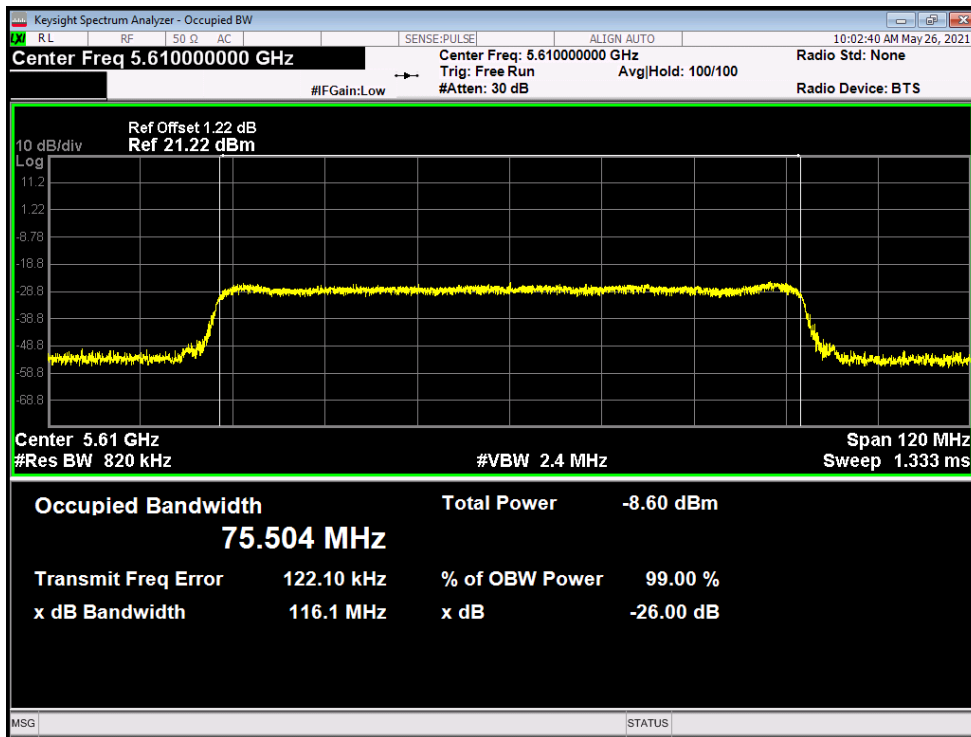

OBW NVNT ac80 5530MHz Ant2

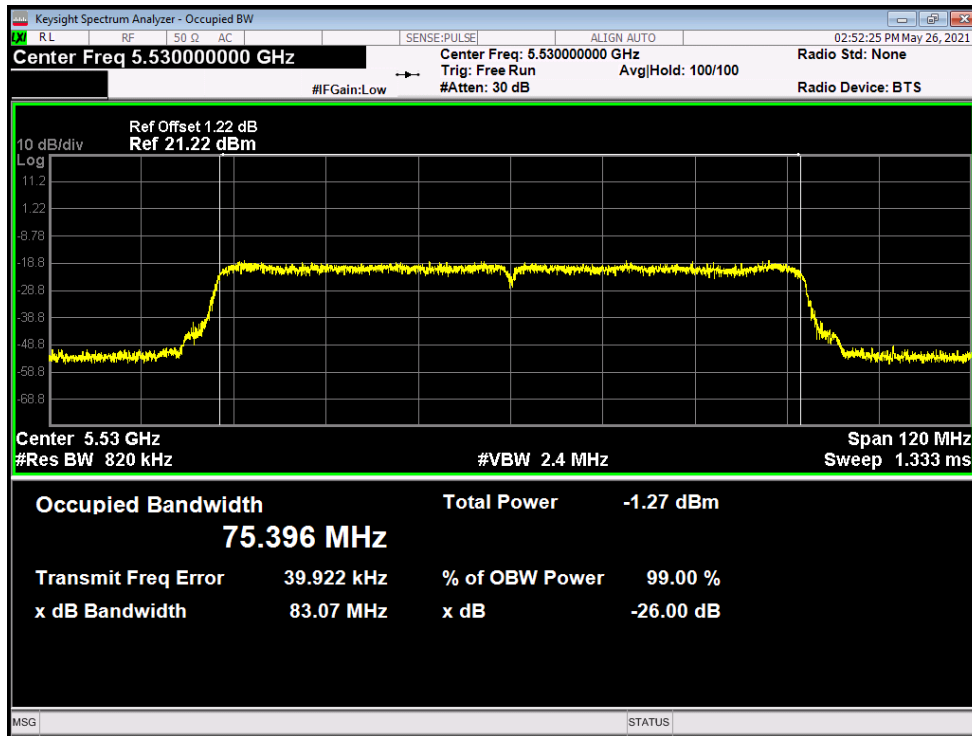

OBW NVNT ac80 5610MHz Ant2

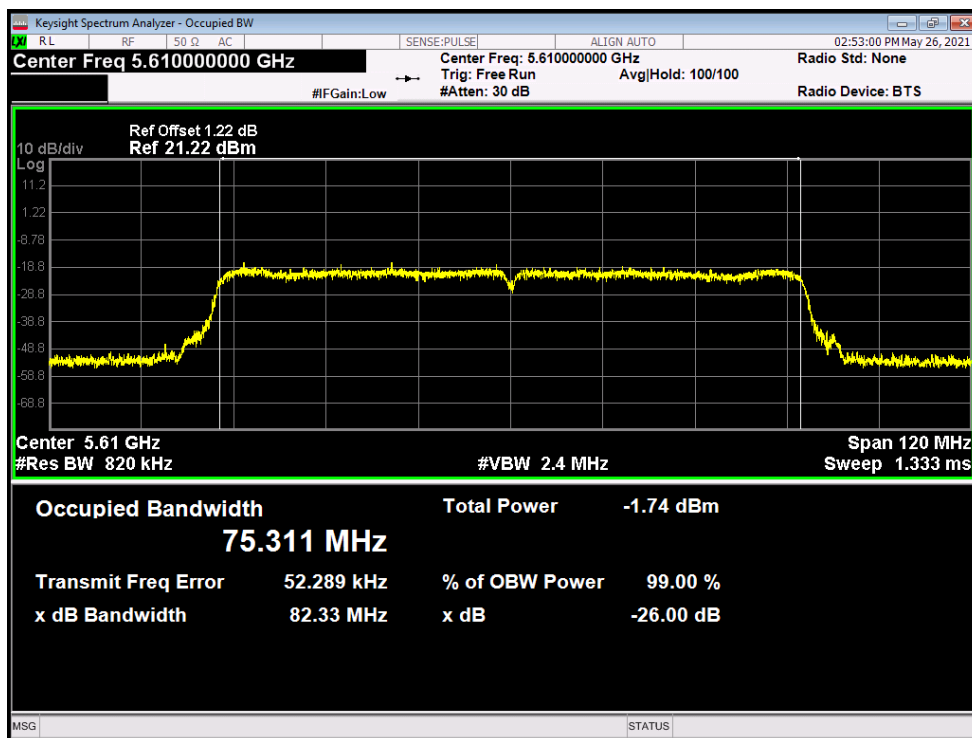


**Maximum Power Spectral Density Level**


Condition	Mode	Frequency (MHz)	Antenna	SISO Max PSD (dBm)	SISO Limit (dBm)	MIMO Max PSD (dBm)	MIMO Limit (dBm)	Verdict
NVNT	802.11ac20	5500	Ant1	-17.959	-11	-16.416	-11	Pass
NVNT	802.11ac20	5500	Ant2	-21.66	-11			
NVNT	802.11ac20	5600	Ant1	-17.879	-11	-16.5	-11	Pass
NVNT	802.11ac20	5600	Ant2	-22.155	-11			

NVNT	802.11ac20	5700	Ant1	-17.222	-11	-16.1	-11	Pass
NVNT	802.11ac20	5700	Ant2	-22.525	-11			
NVNT	802.11ac40	5510	Ant1	-21.78	-11	-19.725	-11	Pass
NVNT	802.11ac40	5510	Ant2	-23.961	-11			
NVNT	802.11ac40	5590	Ant1	-21.168	-11	-19.628	-11	Pass
NVNT	802.11ac40	5590	Ant2	-24.877	-11			
NVNT	802.11ac40	5670	Ant1	-20.818	-11	-19.27	-11	Pass
NVNT	802.11ac40	5670	Ant2	-24.5	-11			
NVNT	802.11ac80	5530	Ant1	-24.394	-11	-22.773	-11	Pass
NVNT	802.11ac80	5530	Ant2	-27.839	-11			
NVNT	802.11ac80	5610	Ant1	-23.641	-11	-22.253	-11	Pass
NVNT	802.11ac80	5610	Ant2	-27.883	-11			


PSD NVNT ac20 5500MHz Ant1

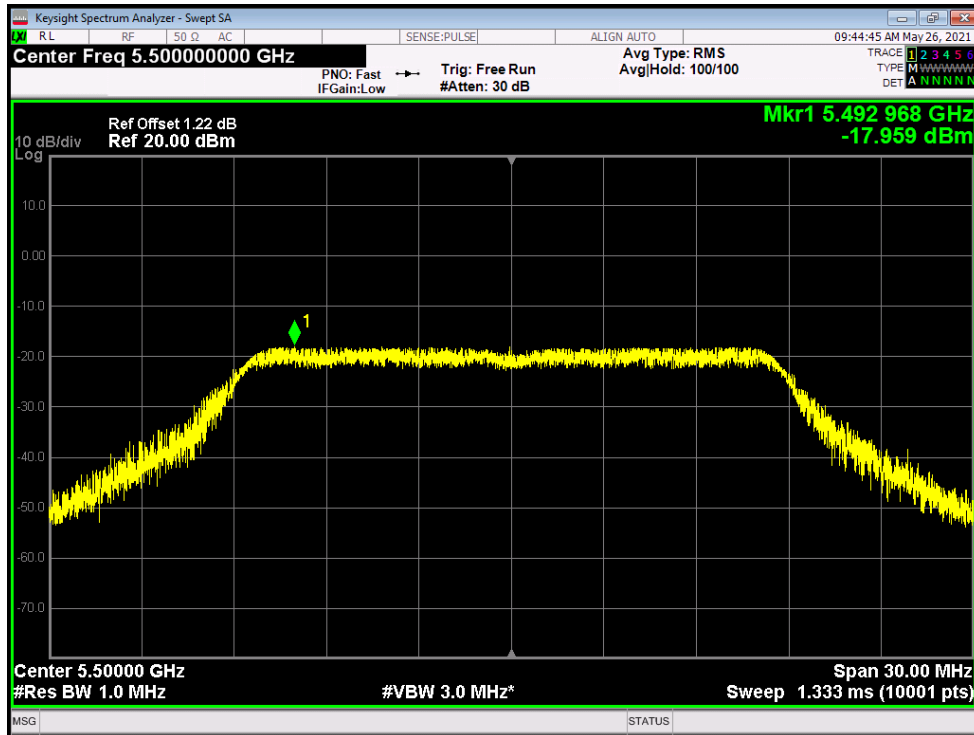

PSD NVNT ac20 5600MHz Ant1

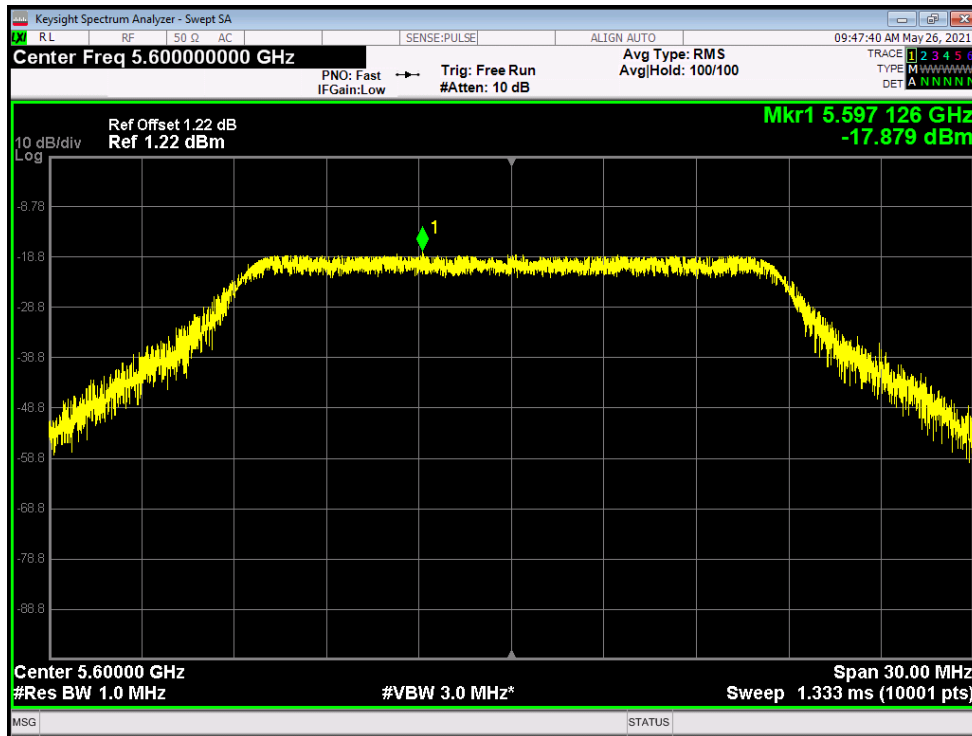


PSD NVNT ac20 5700MHz Ant1

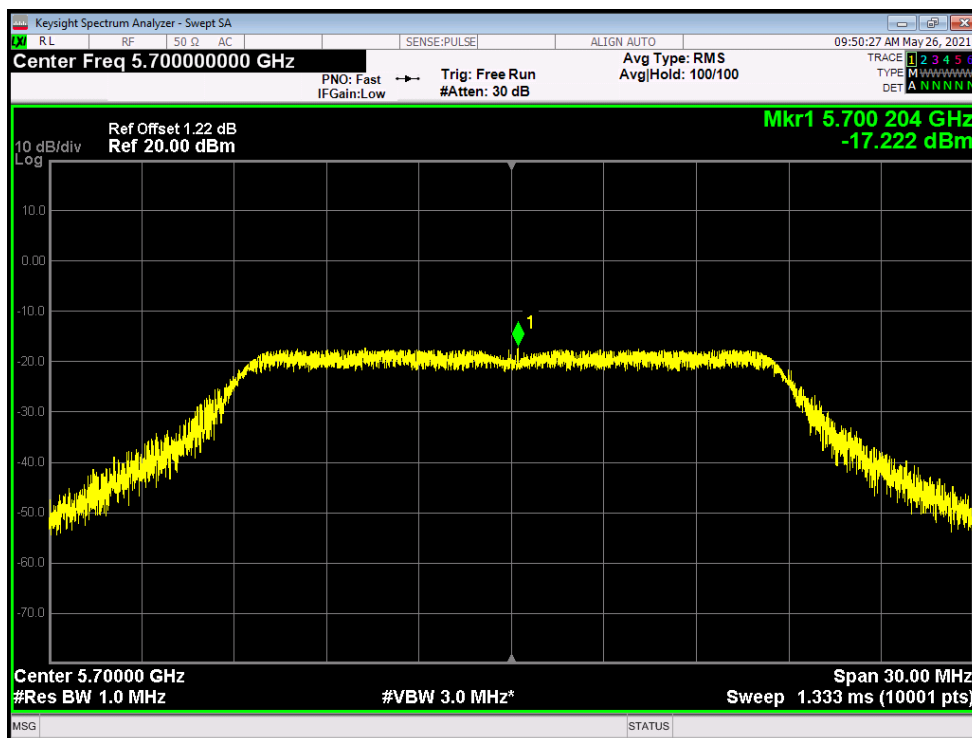


PSD NVNT ac20 5500MHz Ant2




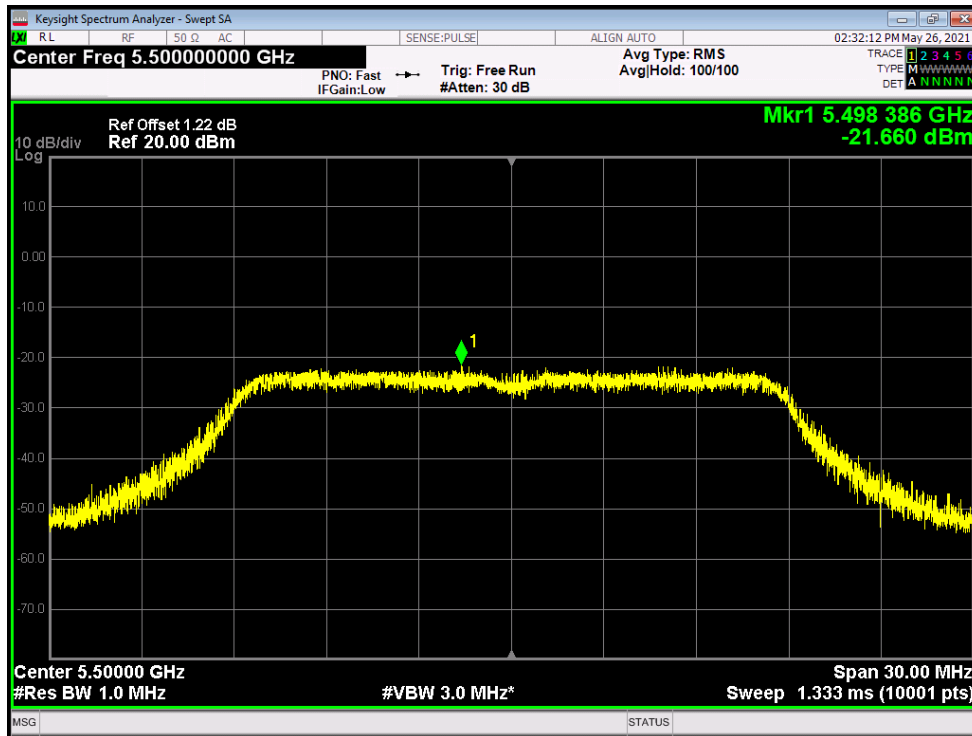


PSD NVNT ac20 5600MHz Ant2

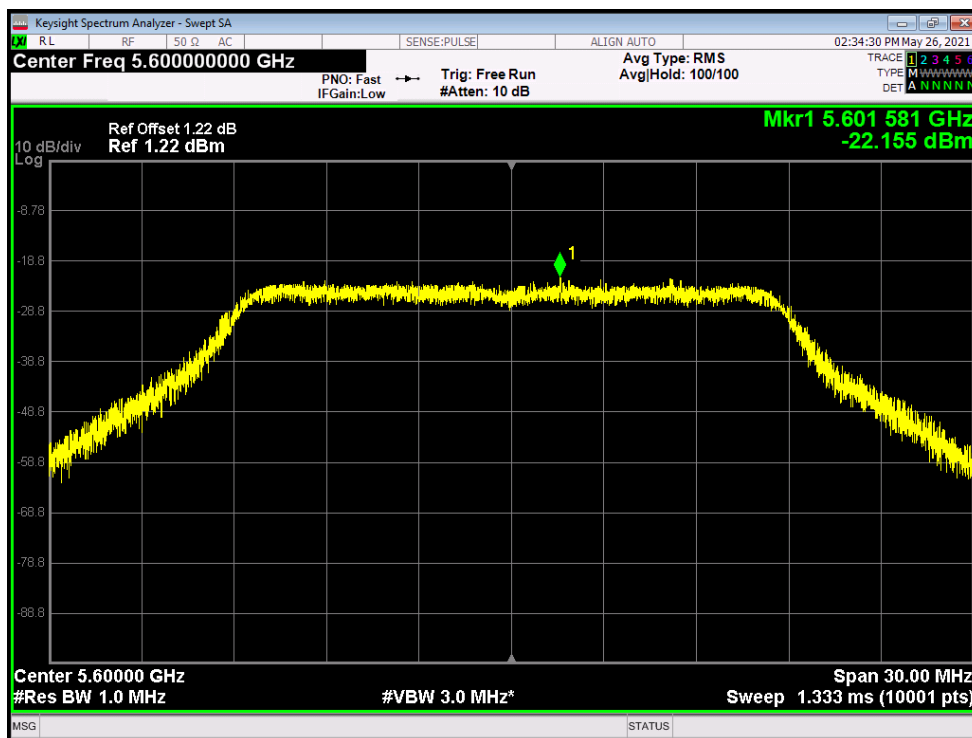


PSD NVNT ac20 5700MHz Ant2

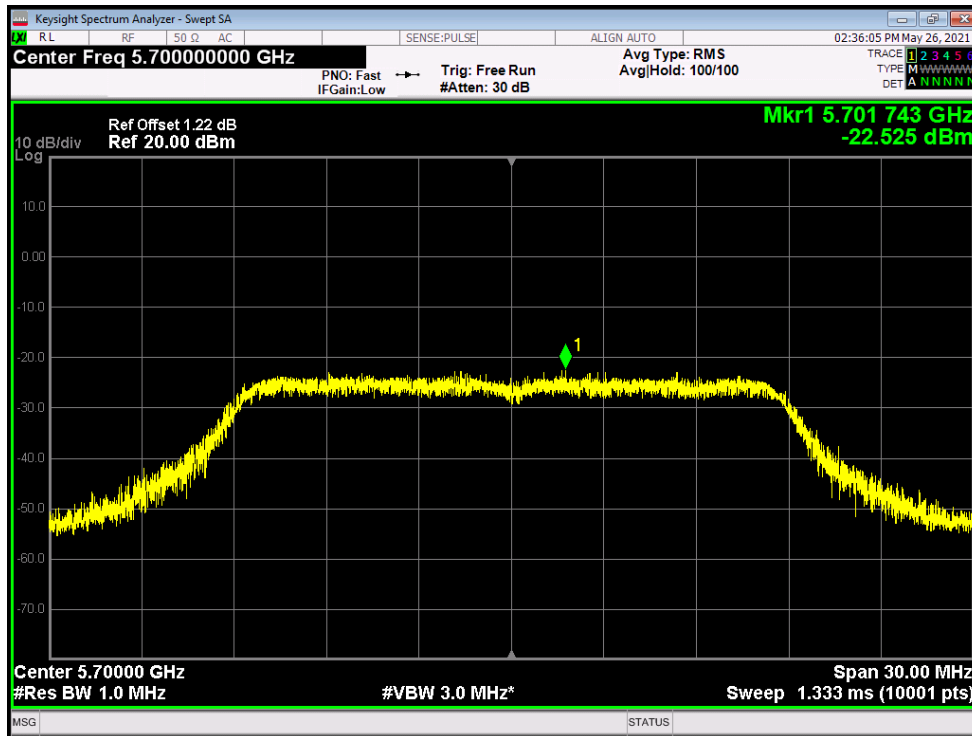


PSD NVNT ac40 5510MHz Ant1

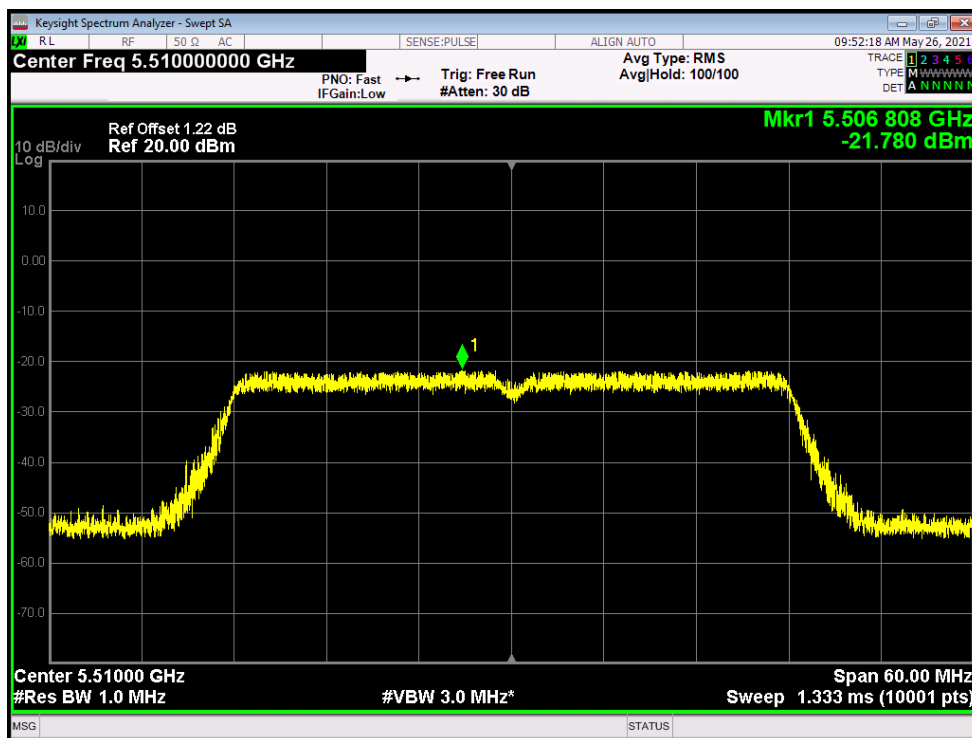


PSD NVNT ac40 5590MHz Ant1

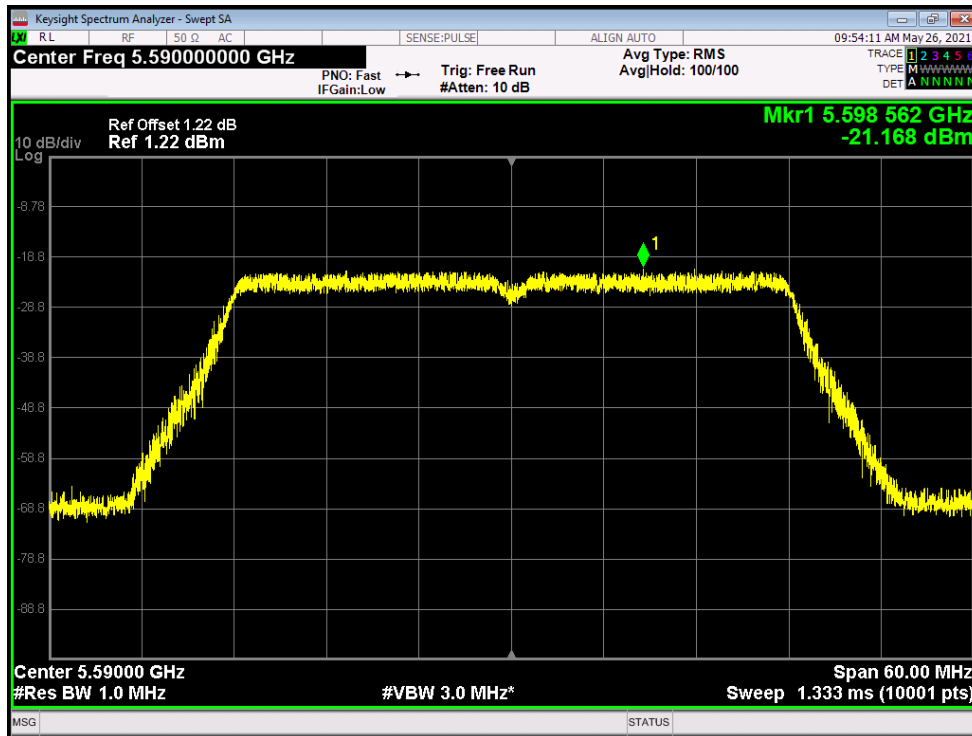


PSD NVNT ac40 5670MHz Ant1

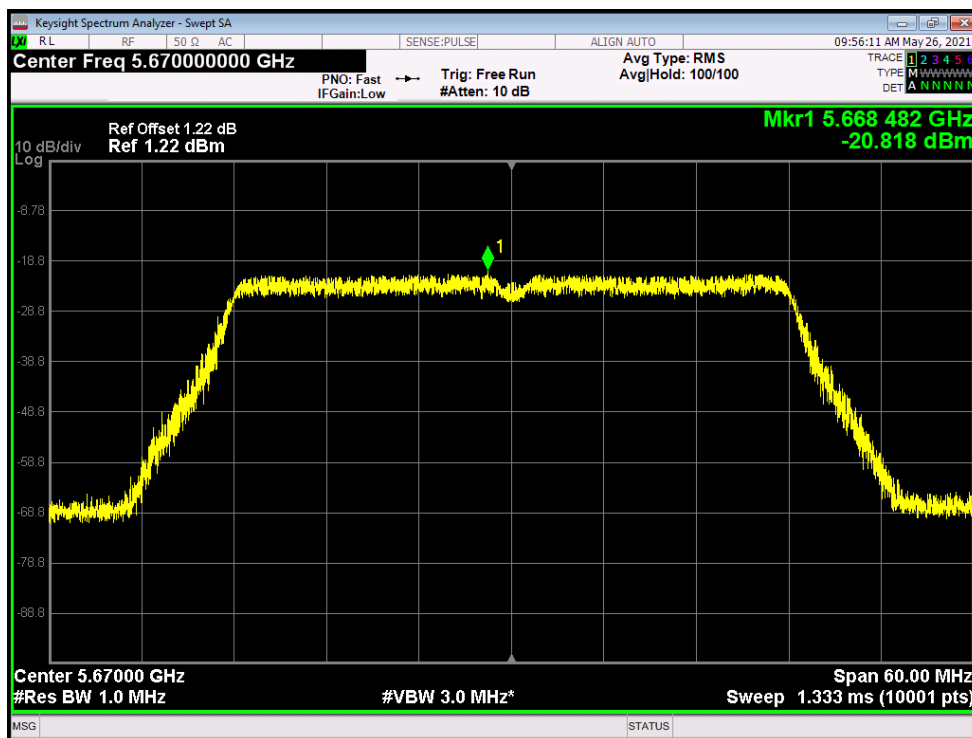


PSD NVNT ac40 5510MHz Ant2

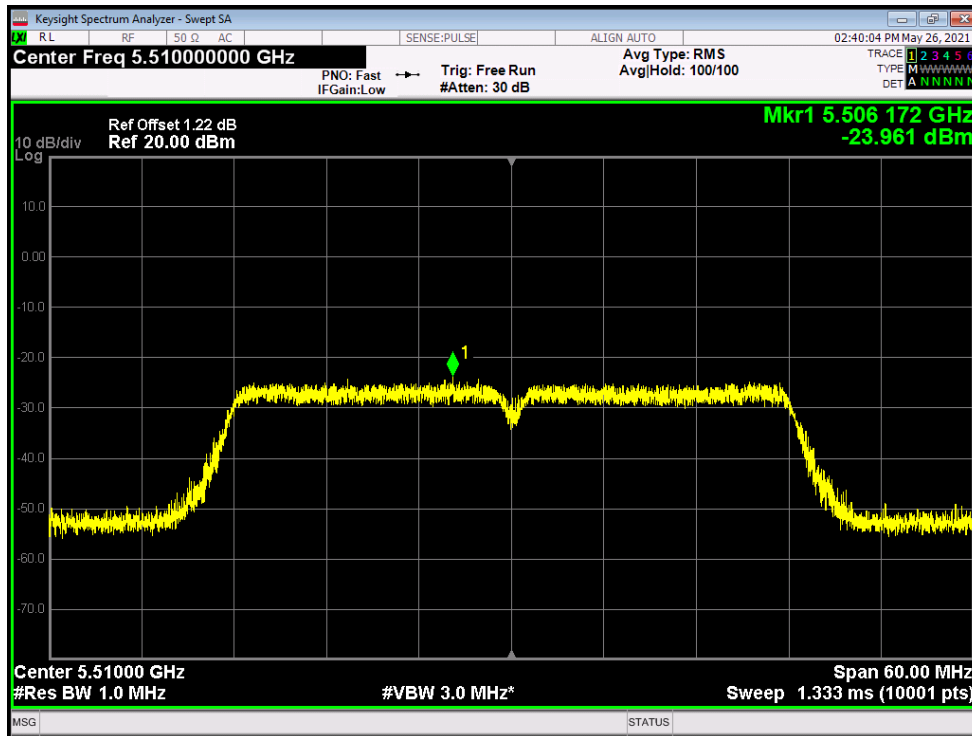


PSD NVNT ac40 5590MHz Ant2

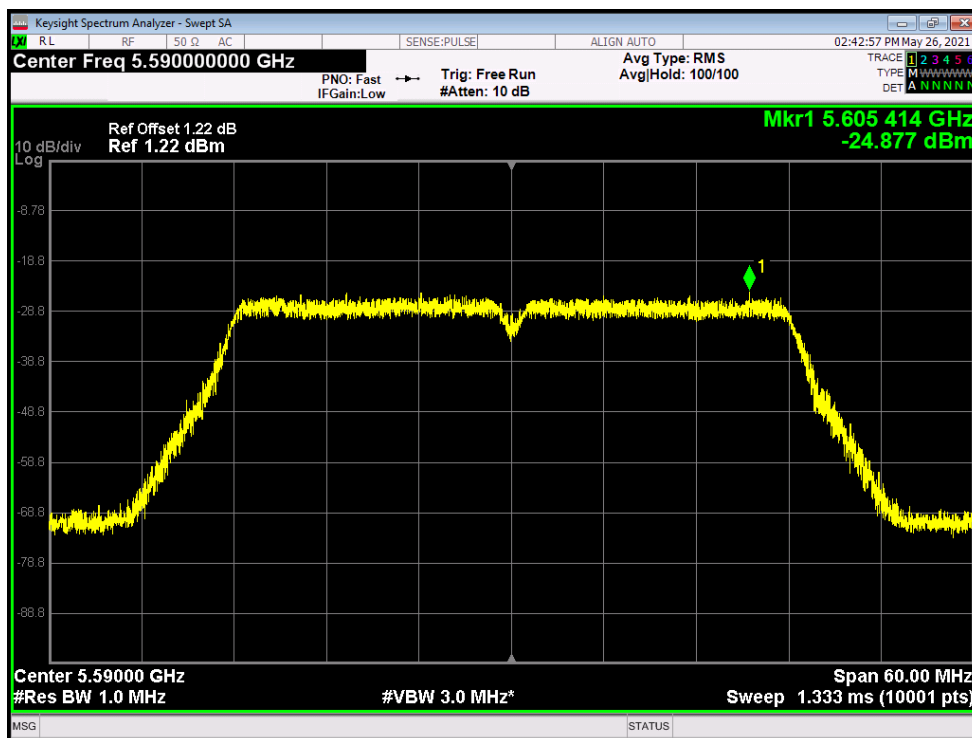


PSD NVNT ac40 5670MHz Ant2

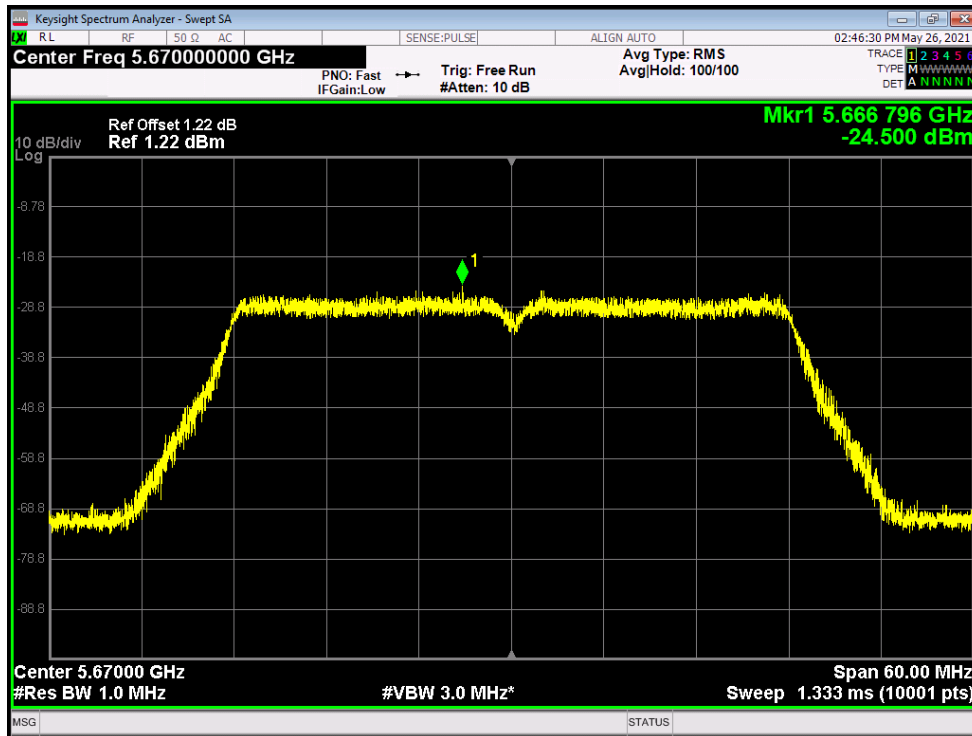


PSD NVHT ac80 5530MHz Ant1

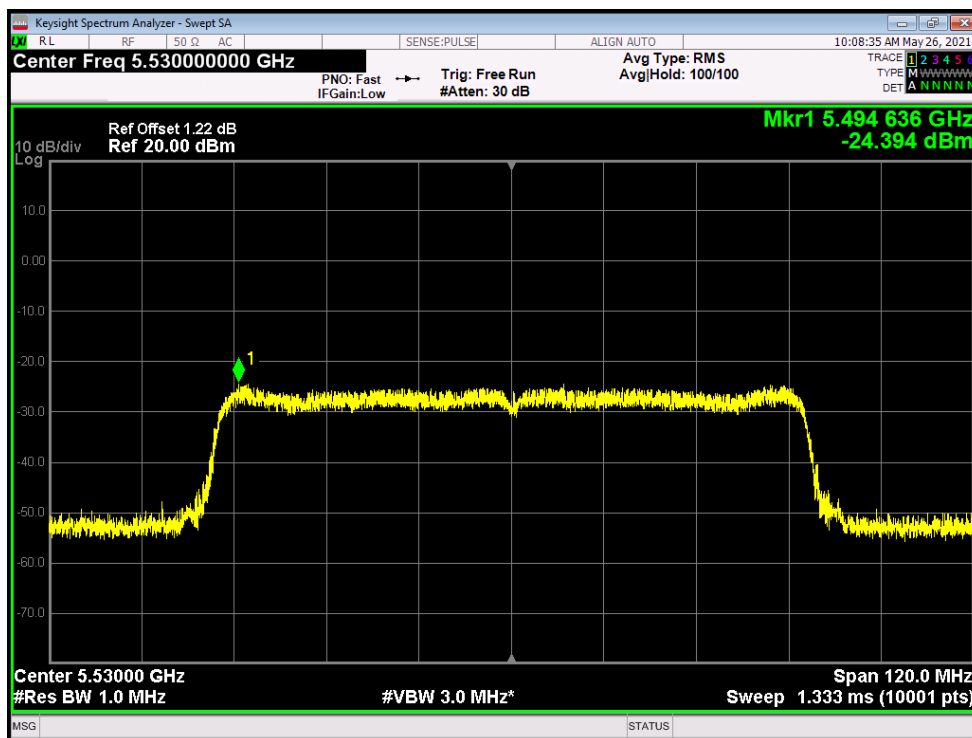


PSD NVNT ac80 5610MHz Ant1

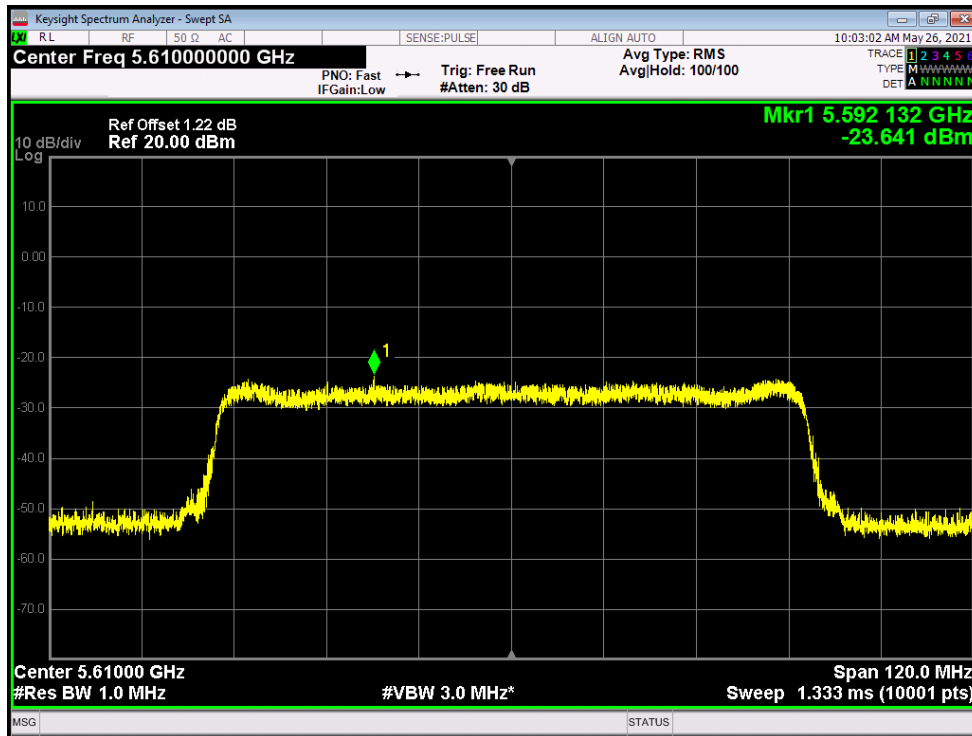

PSD NVNT ac80 5530MHz Ant2

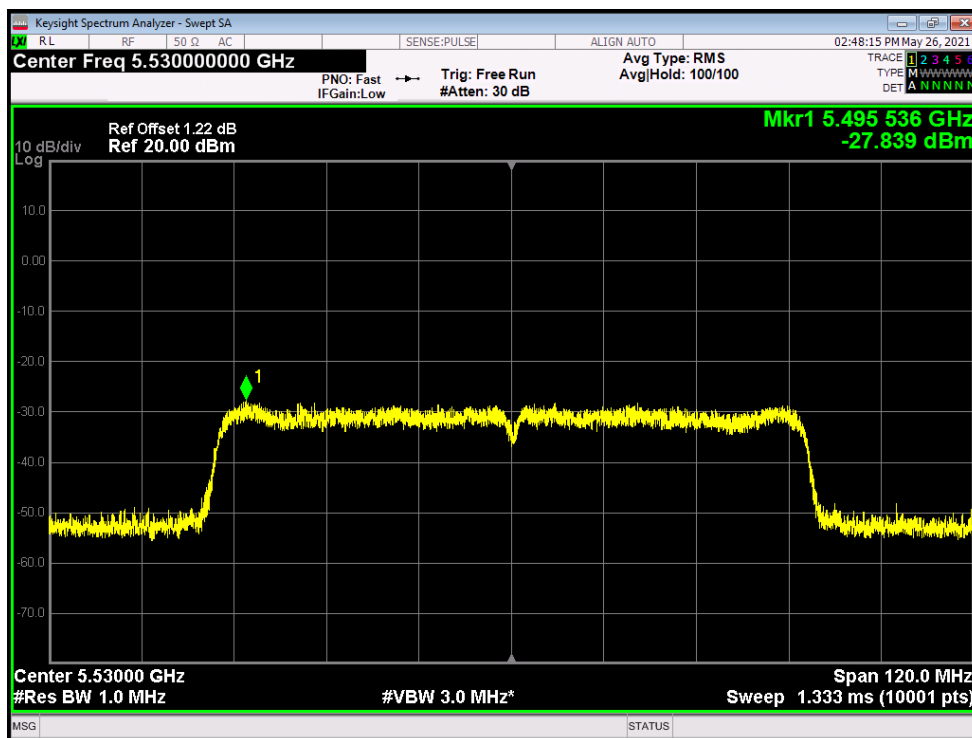

PSD NVNT ac80 5610MHz Ant2

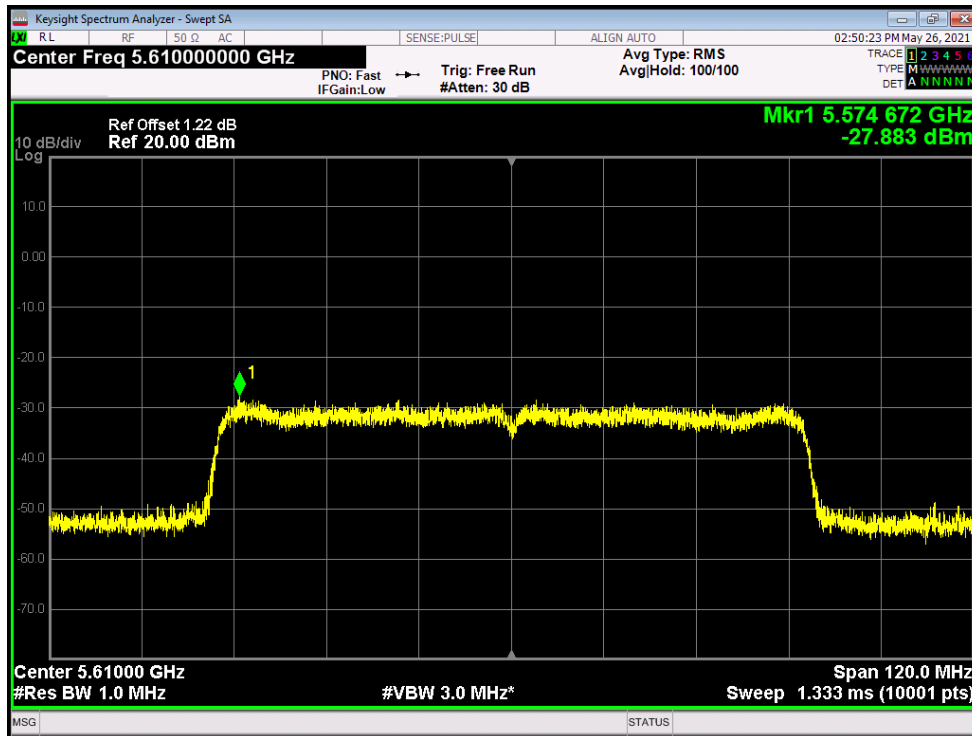


**Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ac20	5500	Ant1	-40.86	-27	Pass
NVNT	ac20	5700	Ant1	-39.48	-27	Pass
NVNT	ac20	5500	Ant2	-41.05	-27	Pass
NVNT	ac20	5700	Ant2	-43.09	-27	Pass
NVNT	ac40	5510	Ant1	-39.73	-27	Pass
NVNT	ac40	5670	Ant1	-39.8	-27	Pass
NVNT	ac40	5510	Ant2	-40.23	-27	Pass
NVNT	ac40	5670	Ant2	-42.81	-27	Pass
NVHT	ac80	5530	Ant1	-41.65	-27	Pass
NVNT	ac80	5610	Ant1	-41.54	-27	Pass
NVNT	ac80	5530	Ant2	-41.87	-27	Pass
NVNT	ac80	5610	Ant2	-43.68	-27	Pass

Note: The SISO margin is greater than 3db, the MIMO mode is meets the requirements. The offset contain the antenna gain.

Band Edge NVNT ac20 5500MHz Low Ant1

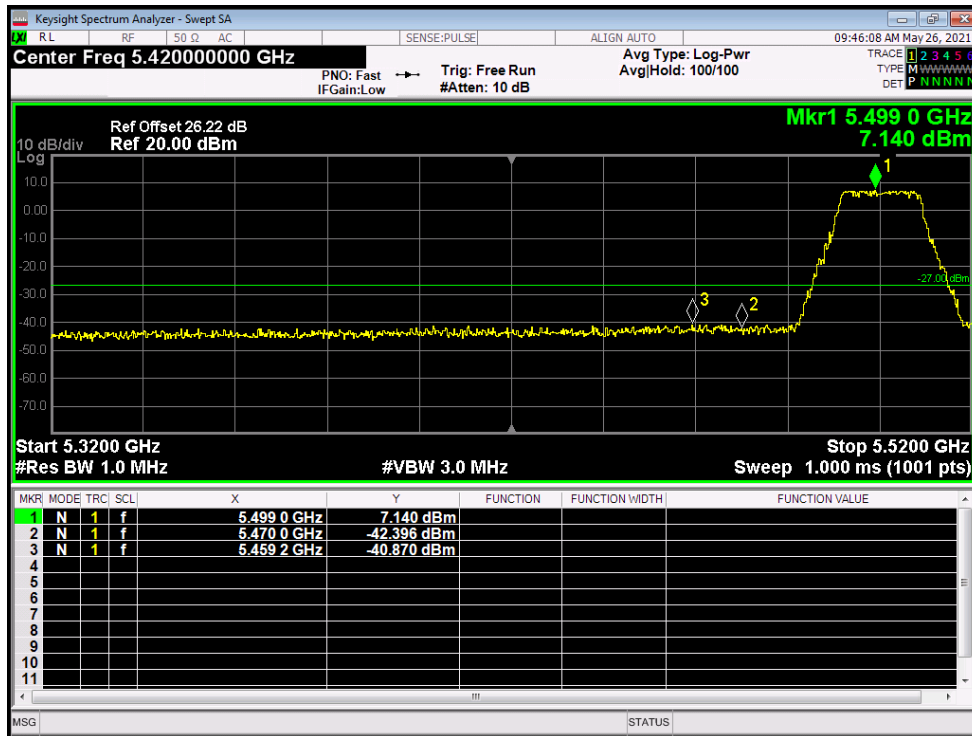


Band Edge NVNT ac20 5700MHz High Ant1

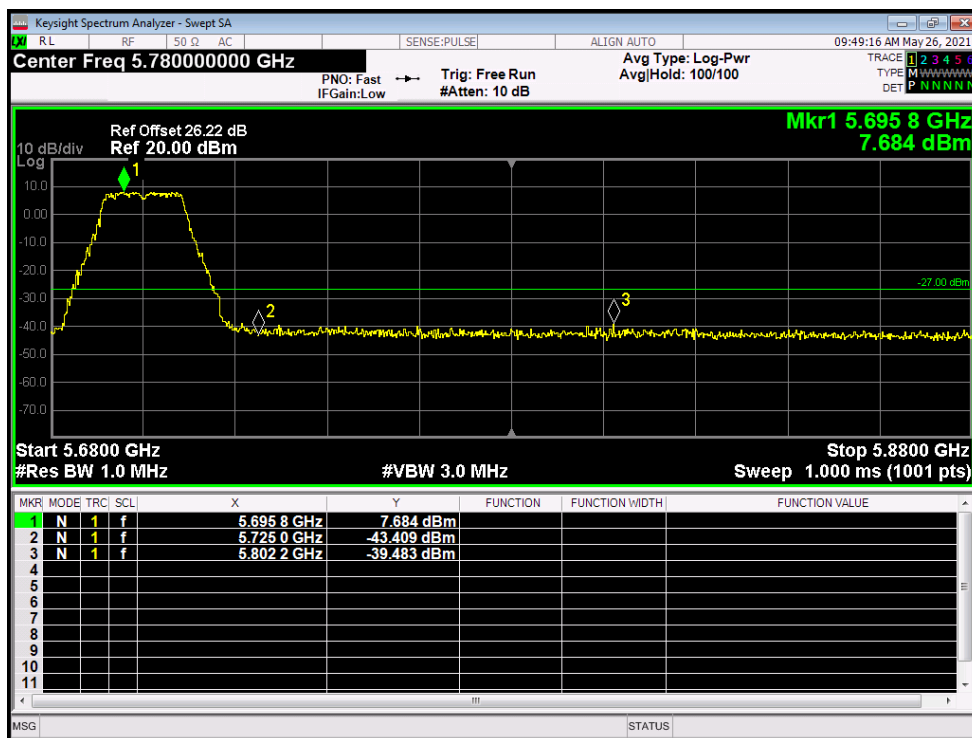


Band Edge NVNT ac20 5500MHz Low Ant2




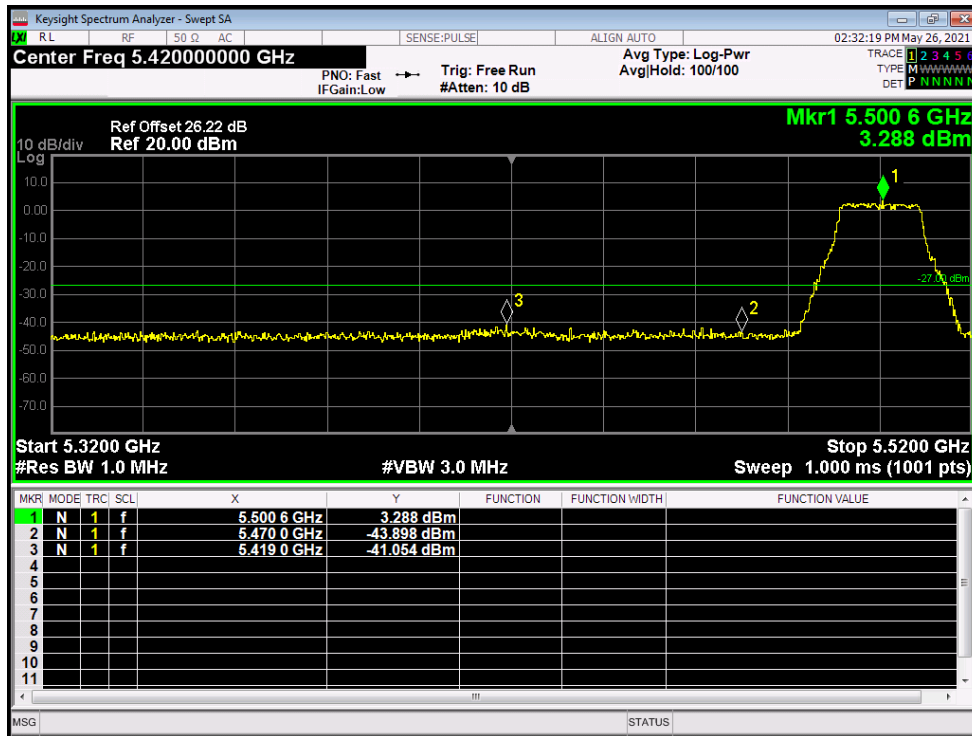


Band Edge NVNT ac20 5700MHz High Ant2

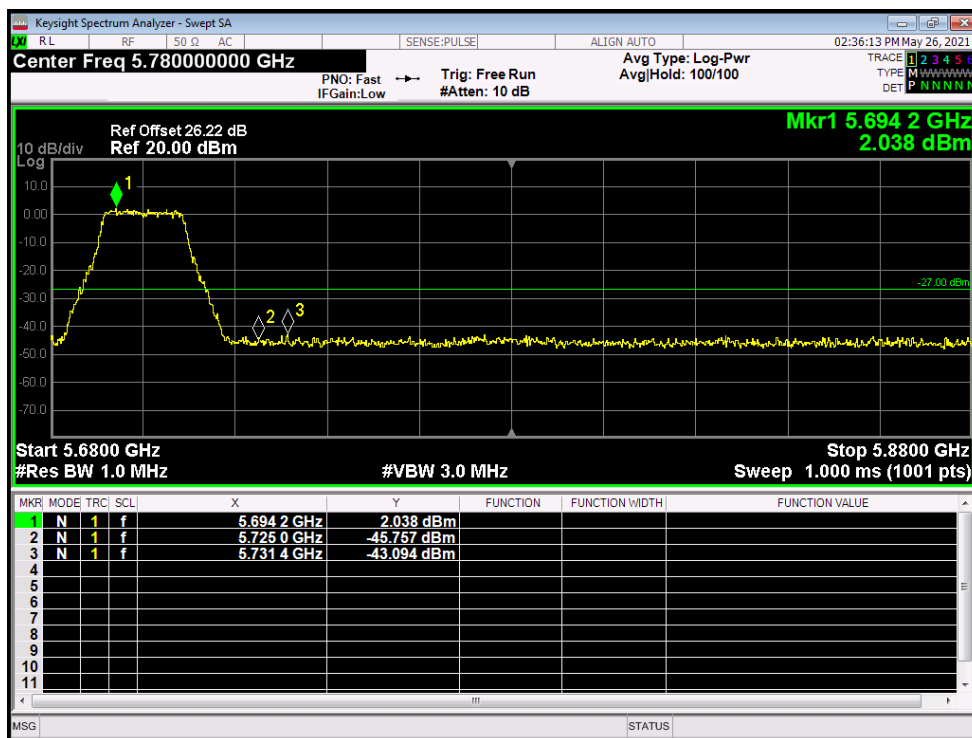


Band Edge NVNT ac40 5510MHz Low Ant1

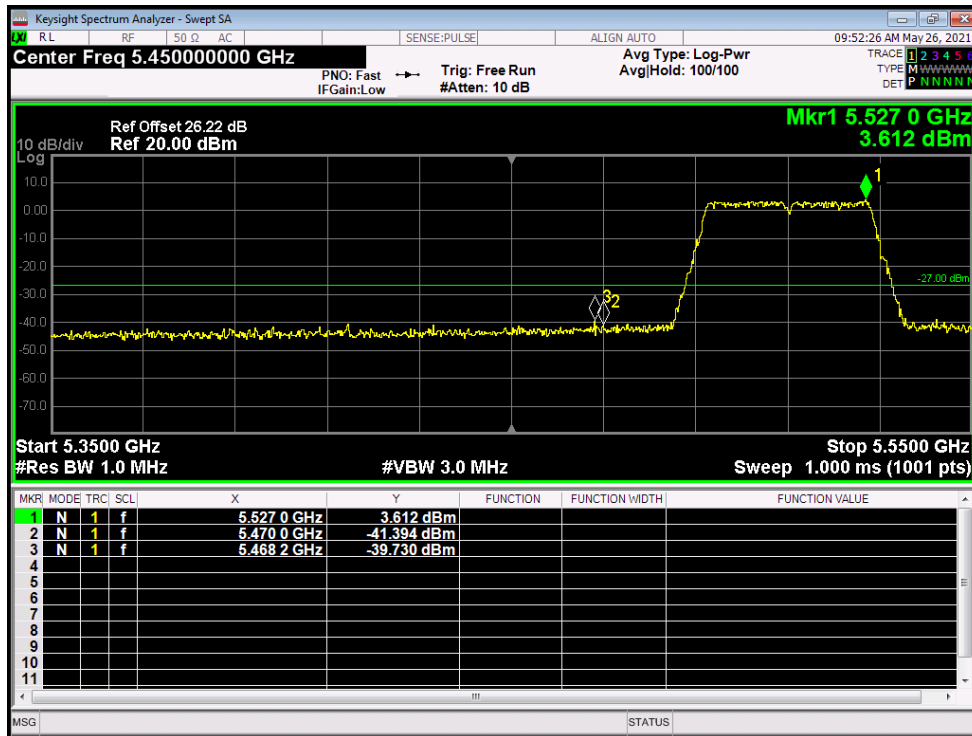


Band Edge NVNT ac40 5670MHz High Ant1

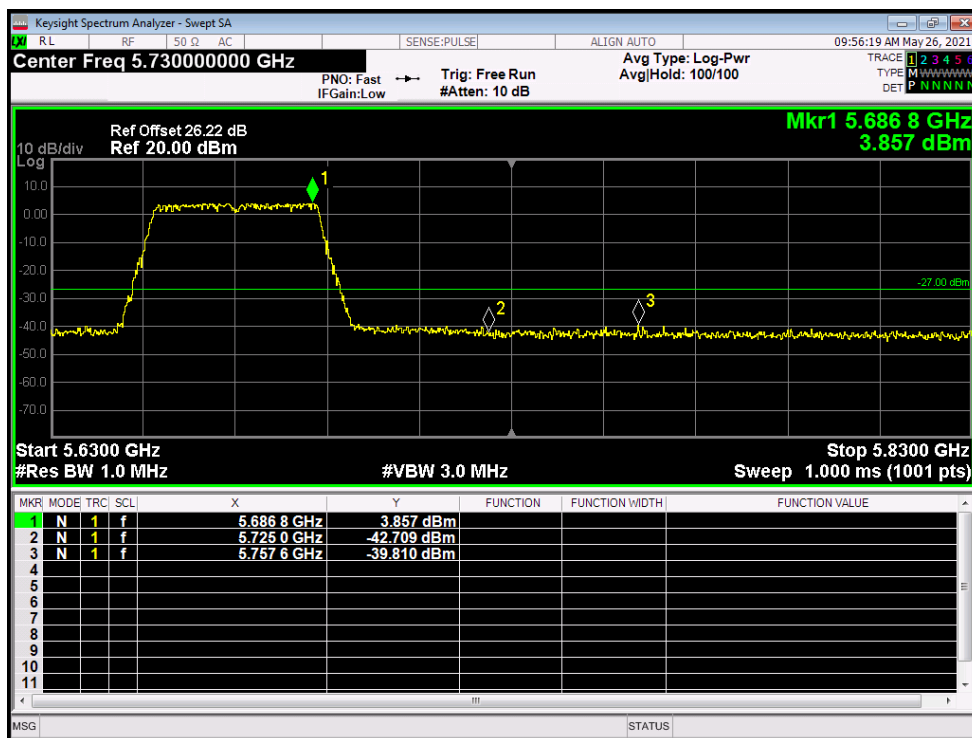


Band Edge NVNT ac40 5510MHz Low Ant2

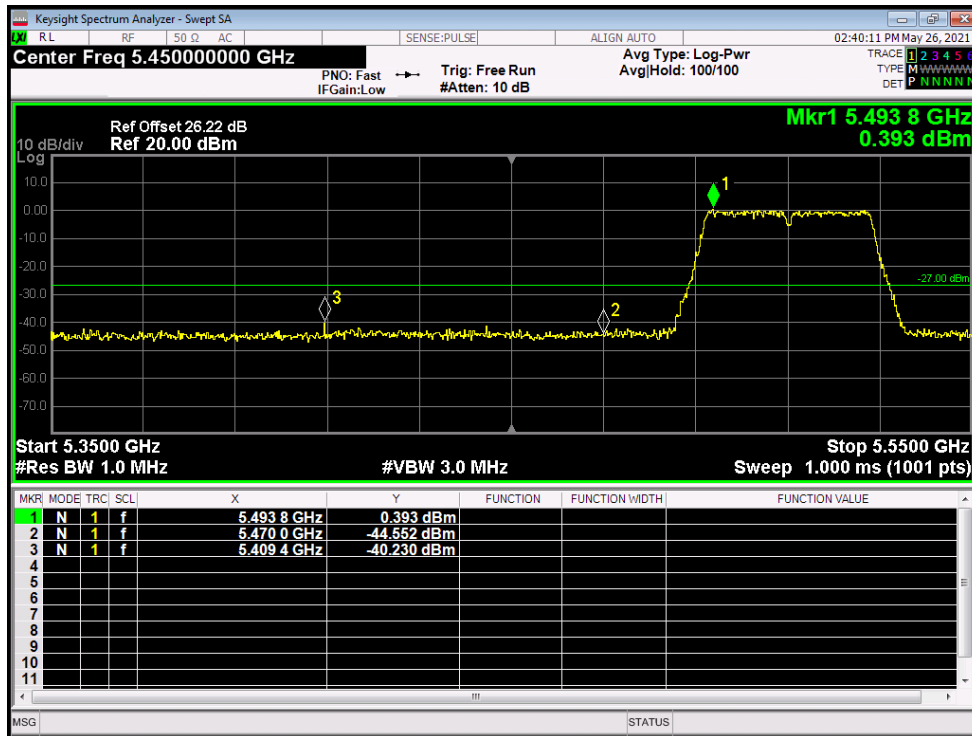


Band Edge NVNT ac40 5670MHz High Ant2

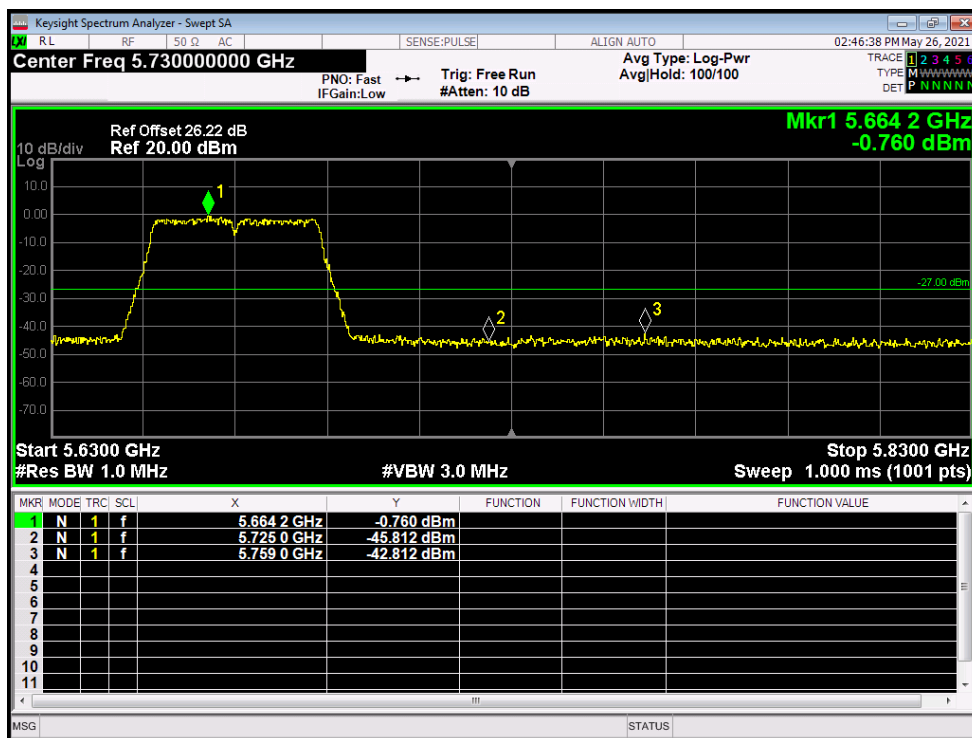


Band Edge NVHT ac80 5530MHz Low Ant1

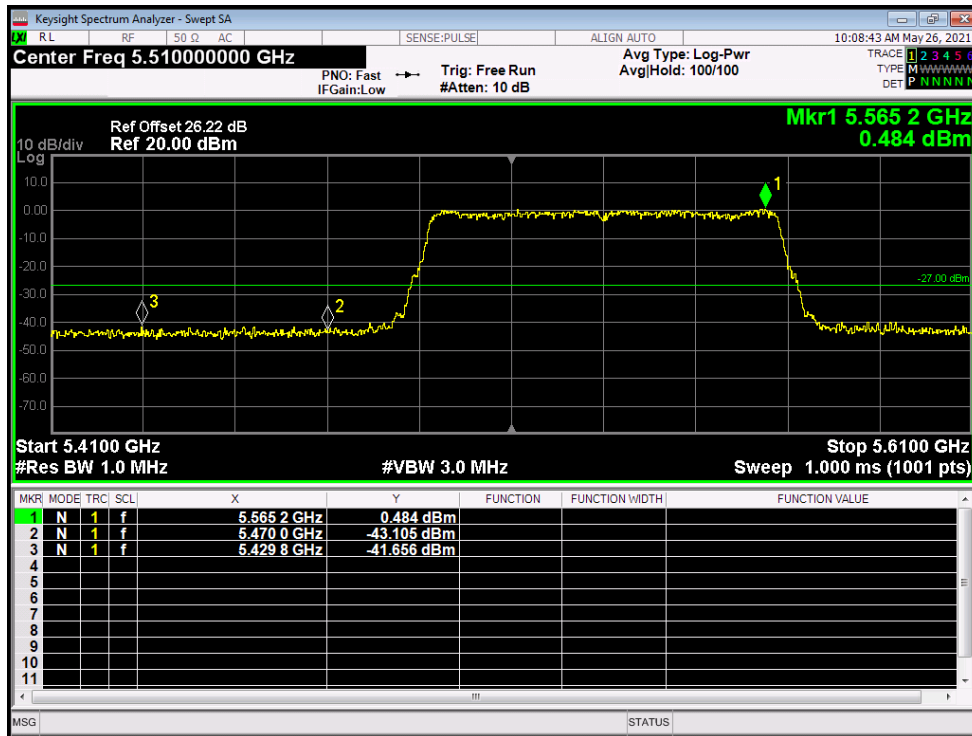


Band Edge NVNT ac80 5610MHz High Ant1

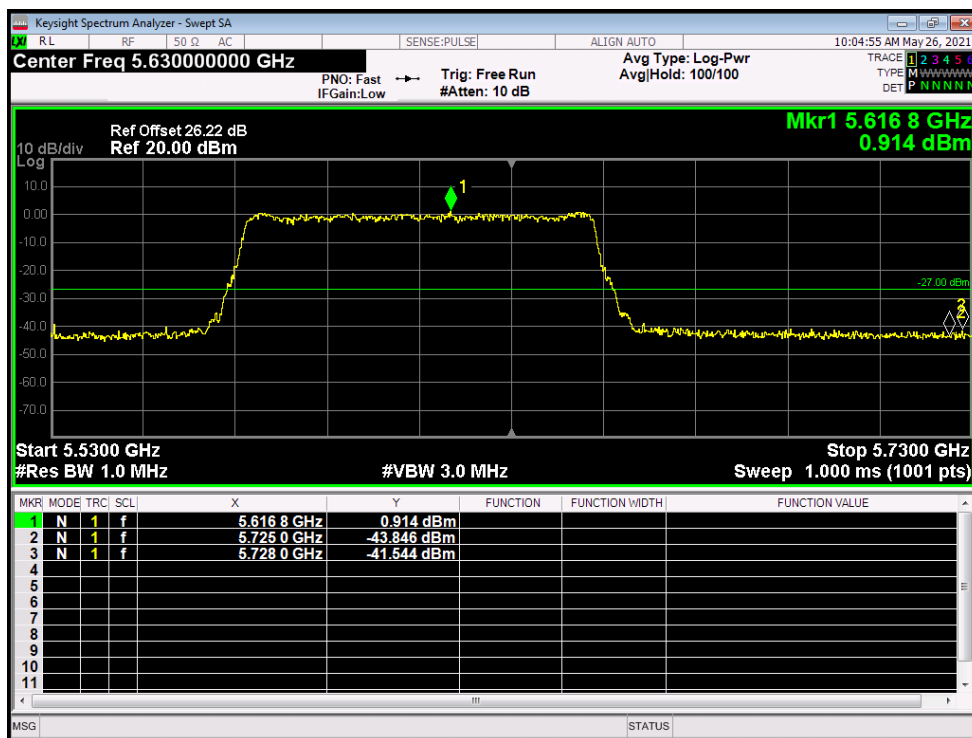

Band Edge NVNT ac80 5530MHz Low Ant2

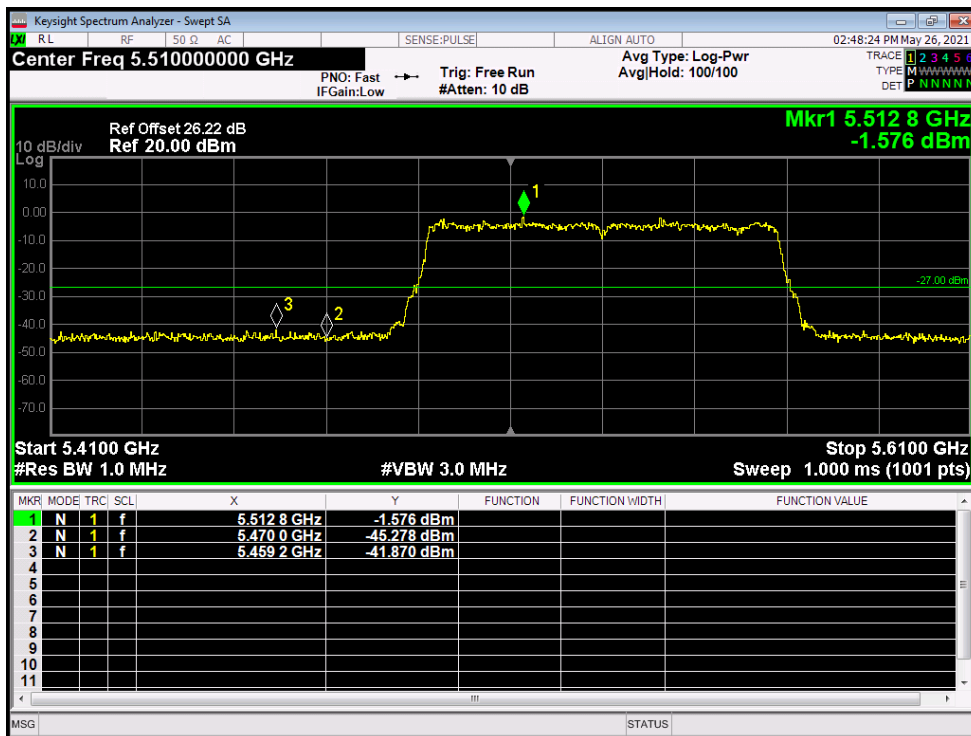

Band Edge NVNT ac80 5610MHz High Ant2

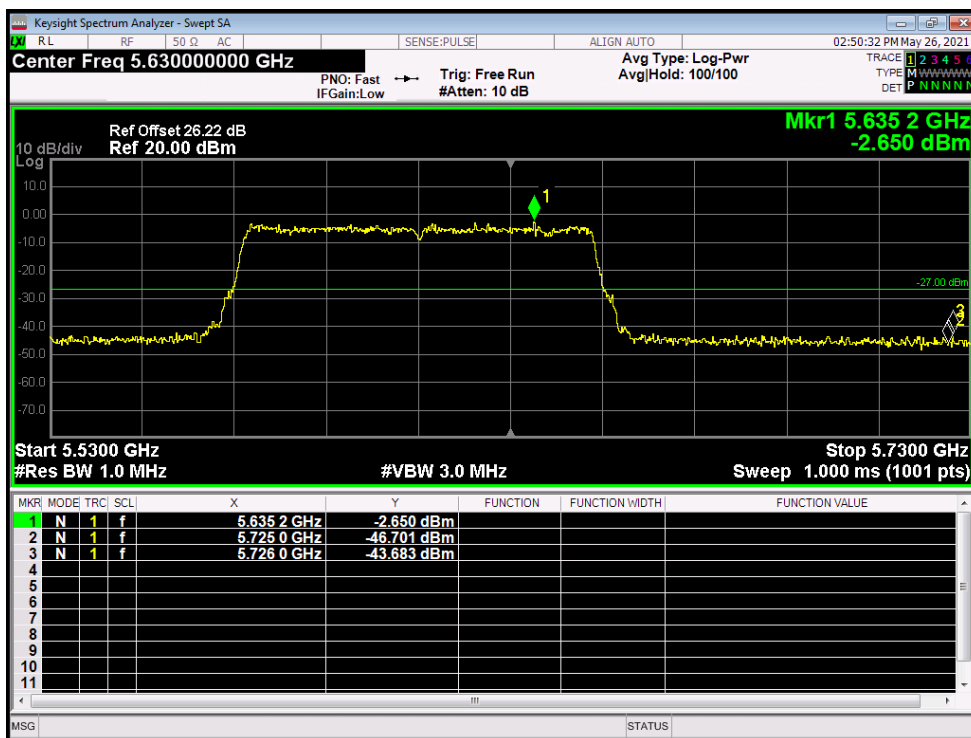


**Conducted RF Spurious Emission**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ac20	5500	Ant1	-30.83	-27	Pass
NVNT	ac20	5600	Ant1	-31.15	-27	Pass
NVNT	ac20	5700	Ant1	-30.82	-27	Pass
NVNT	ac20	5500	Ant2	-29.72	-27	Pass
NVNT	ac20	5600	Ant2	-30.6	-27	Pass


NVNT	ac20	5700	Ant2	-31.03	-27	Pass
NVNT	ac40	5510	Ant1	-30.39	-27	Pass
NVNT	ac40	5590	Ant1	-30.57	-27	Pass
NVNT	ac40	5670	Ant1	-31.01	-27	Pass
NVNT	ac40	5510	Ant2	-30.49	-27	Pass
NVNT	ac40	5590	Ant2	-30.63	-27	Pass
NVNT	ac40	5670	Ant2	-30.01	-27	Pass
NVHT	ac80	5530	Ant1	-30.6	-27	Pass
NVNT	ac80	5610	Ant1	-30.68	-27	Pass
NVNT	ac80	5530	Ant2	-30.48	-27	Pass
NVNT	ac80	5610	Ant2	-30.64	-27	Pass

Note: The SISO margin is greater than 3db, the MIMO mode is meets the requirements. The offset contain the antenna gain.


Tx. Spurious NVNT ac20 5500MHz Ant1 Emission

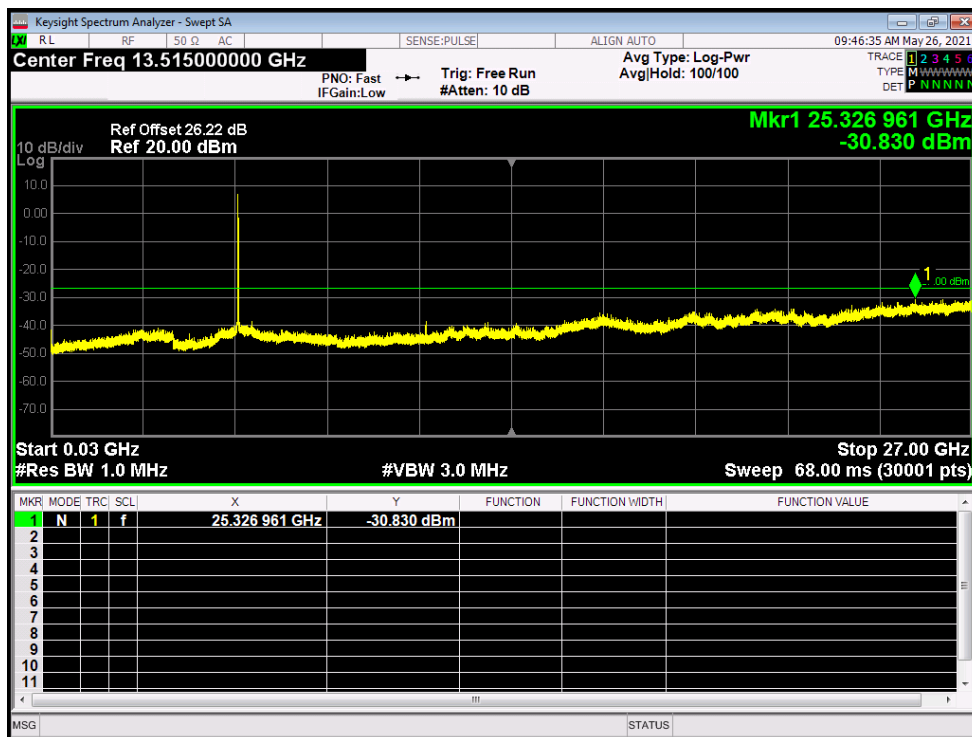


Tx. Spurious NVNT ac20 5600MHz Ant1 Emission

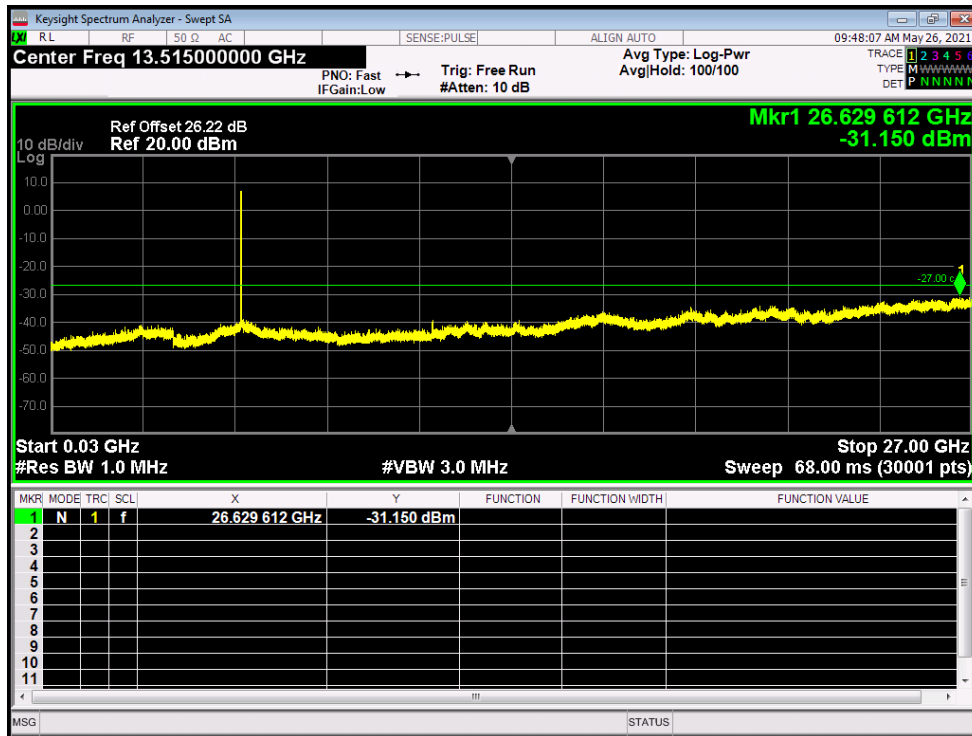


Tx. Spurious NVNT ac20 5700MHz Ant1 Emission

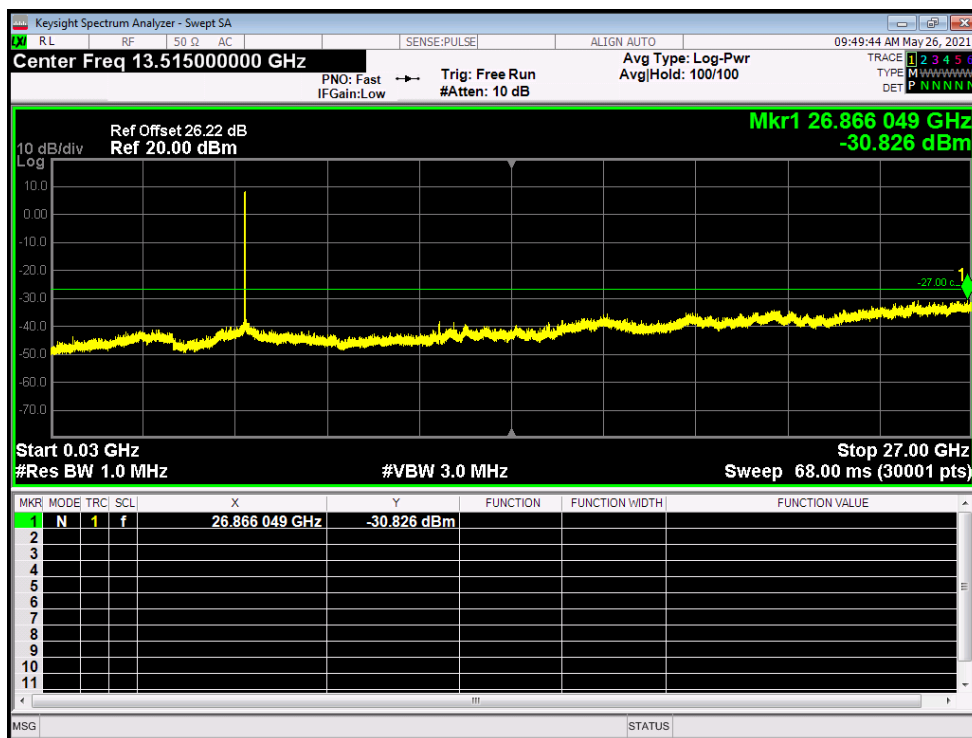

Tx. Spurious NVNT ac20 5500MHz Ant2 Emission

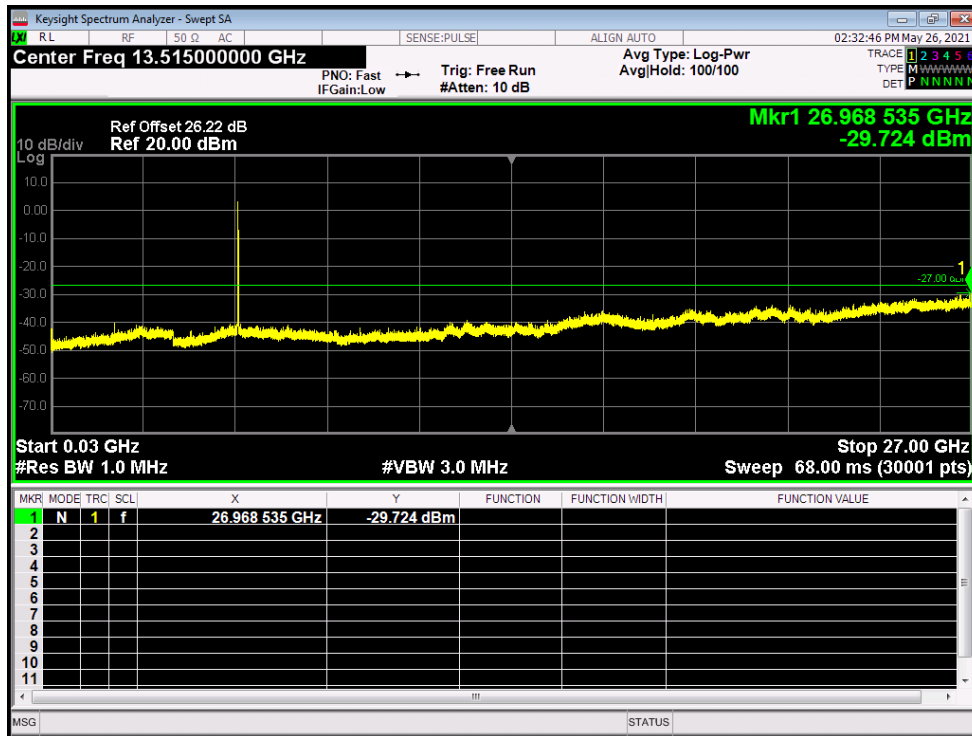


Tx. Spurious NVNT ac20 5600MHz Ant2 Emission

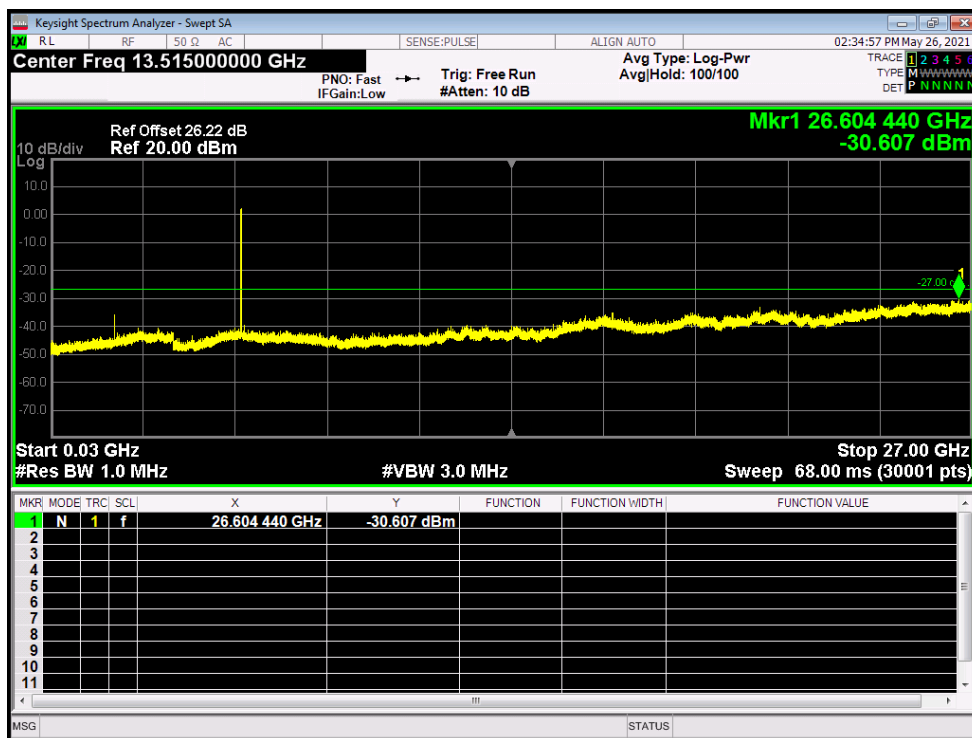


Tx. Spurious NVNT ac20 5700MHz Ant2 Emission




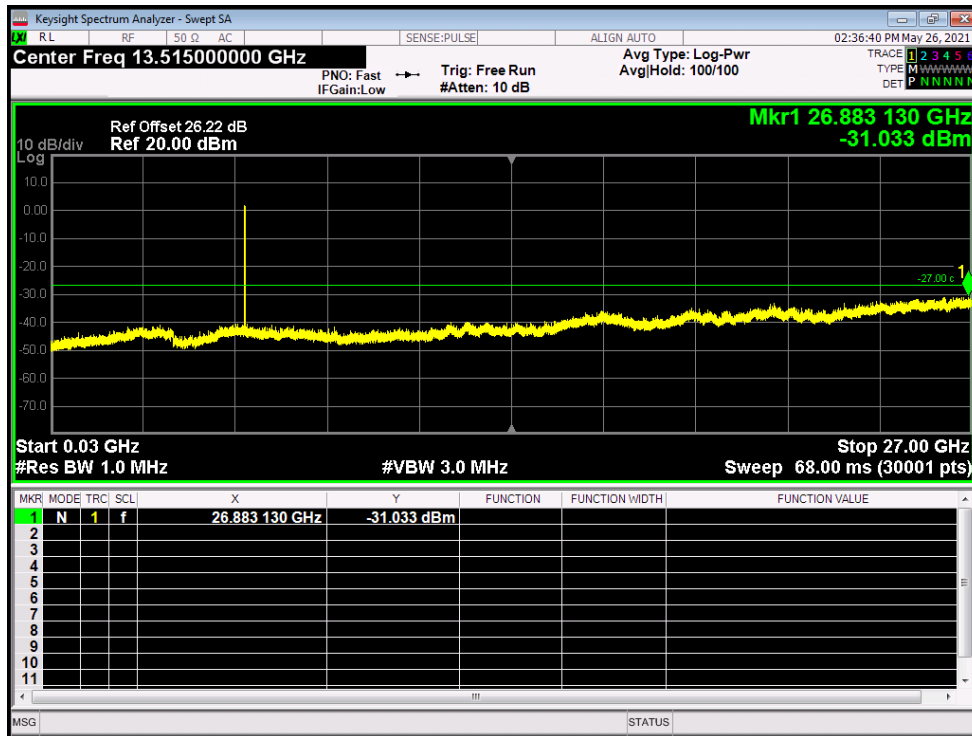


Tx. Spurious NVNT ac40 5510MHz Ant1 Emission

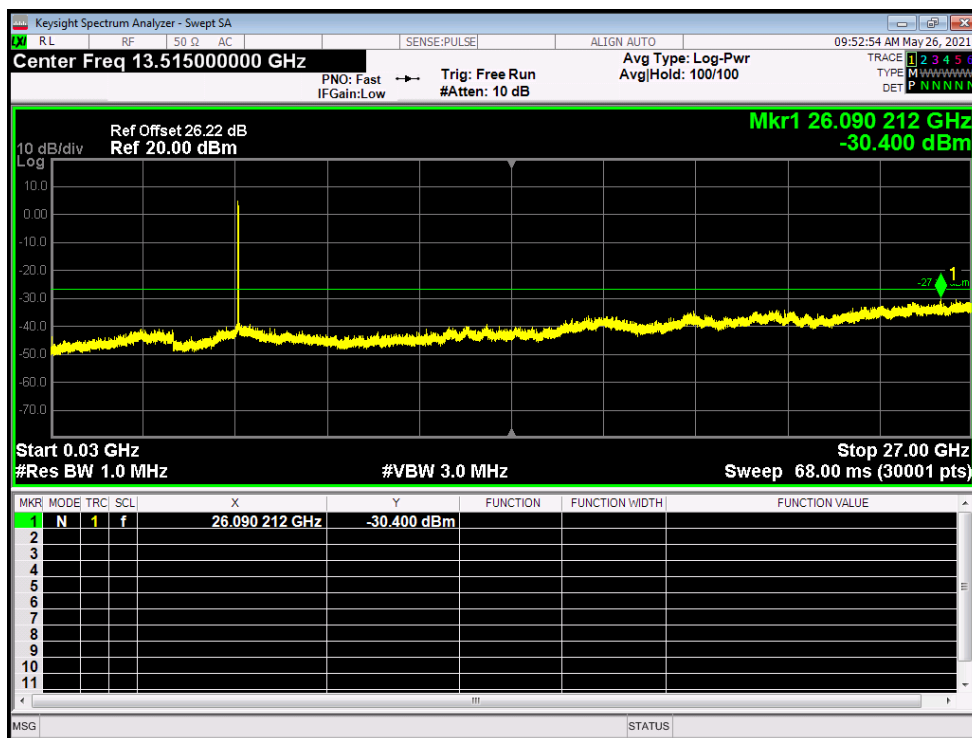


Tx. Spurious NVNT ac40 5590MHz Ant1 Emission

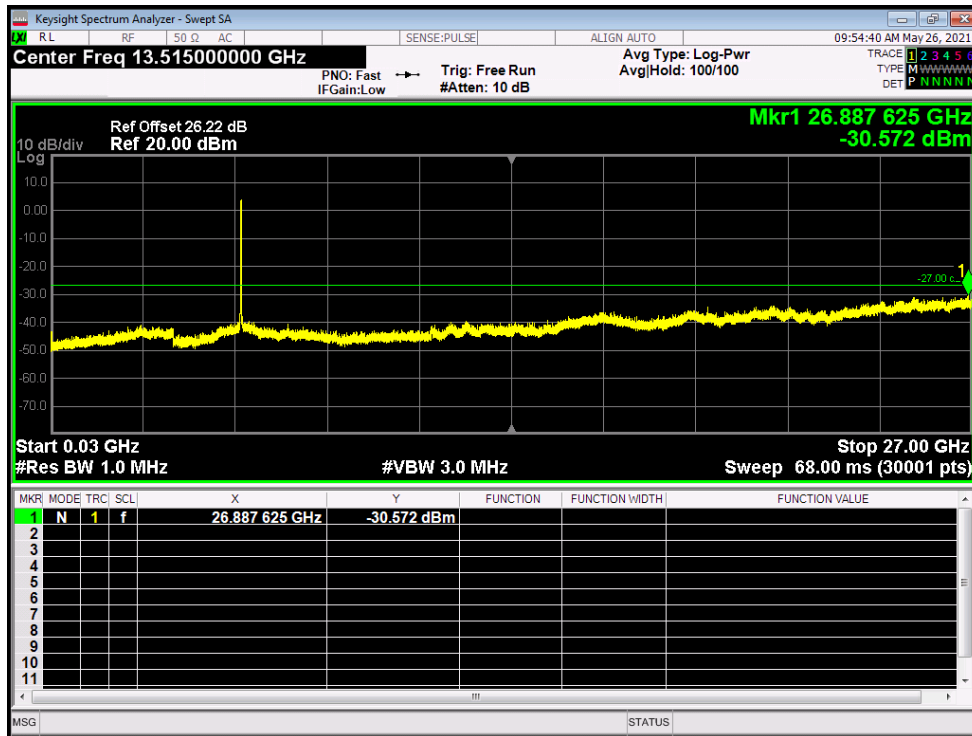


Tx. Spurious NVNT ac40 5670MHz Ant1 Emission

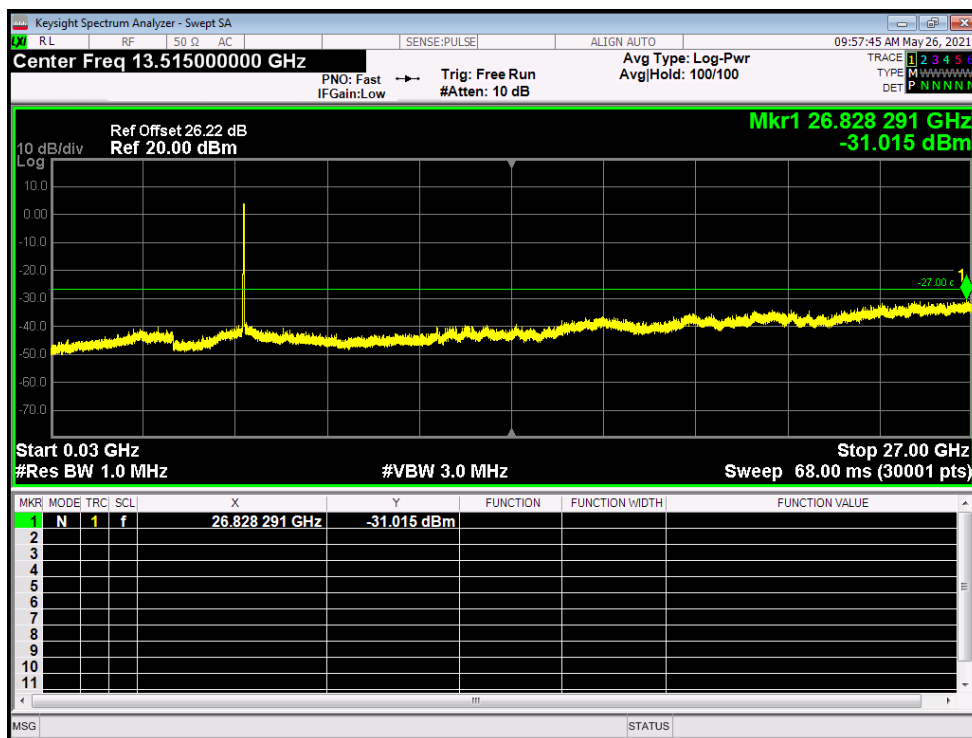


Tx. Spurious NVNT ac40 5510MHz Ant2 Emission

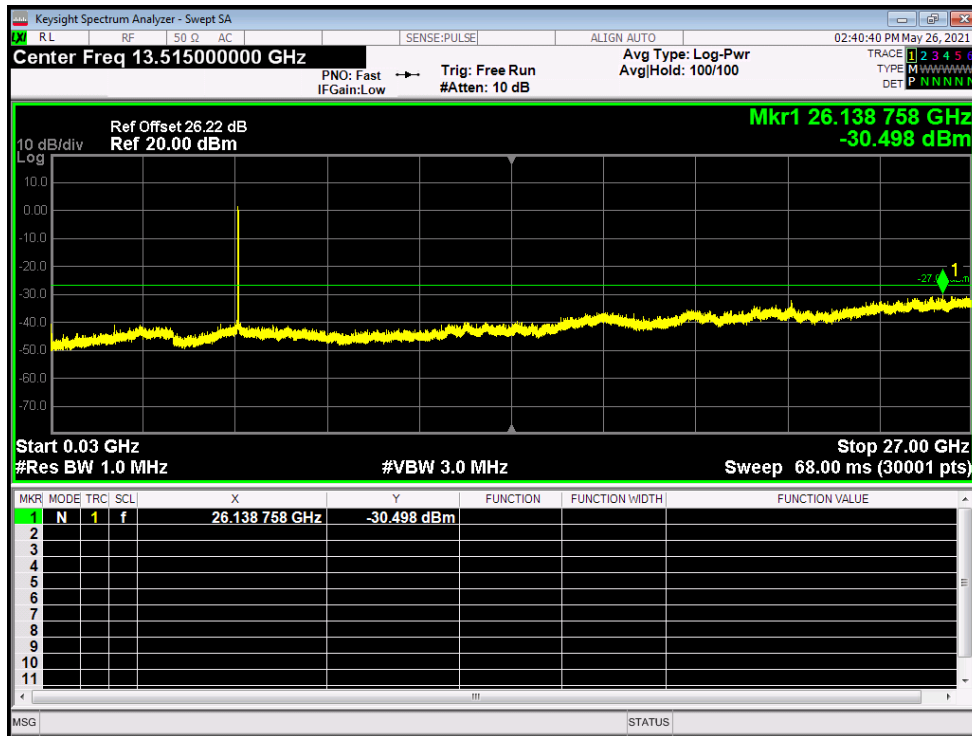


Tx. Spurious NVNT ac40 5590MHz Ant2 Emission

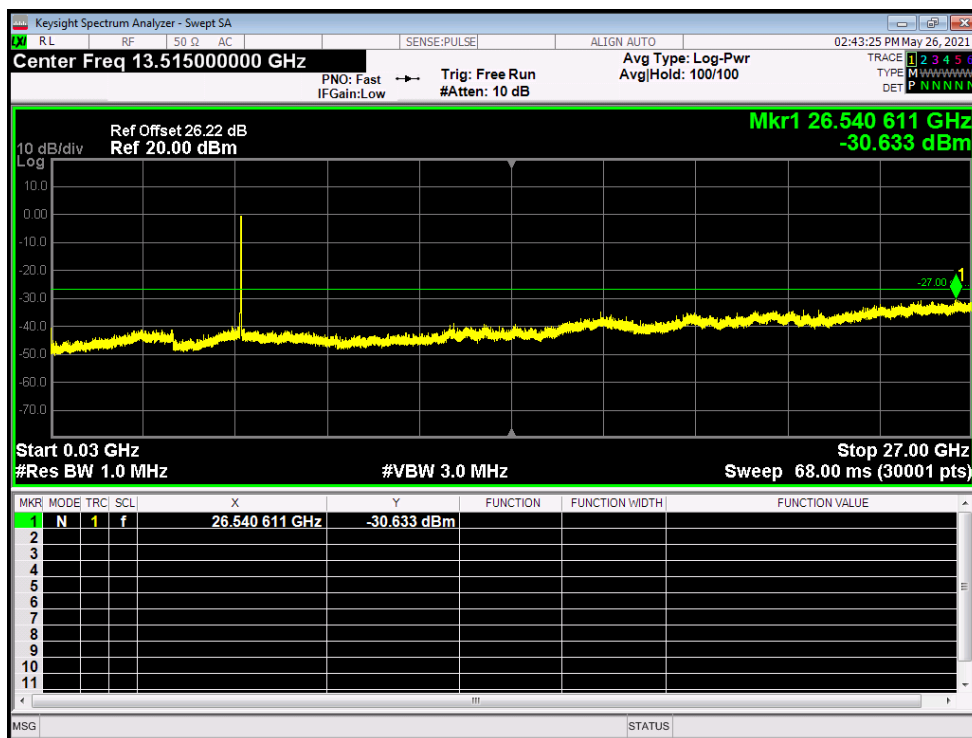


Tx. Spurious NVNT ac40 5670MHz Ant2 Emission

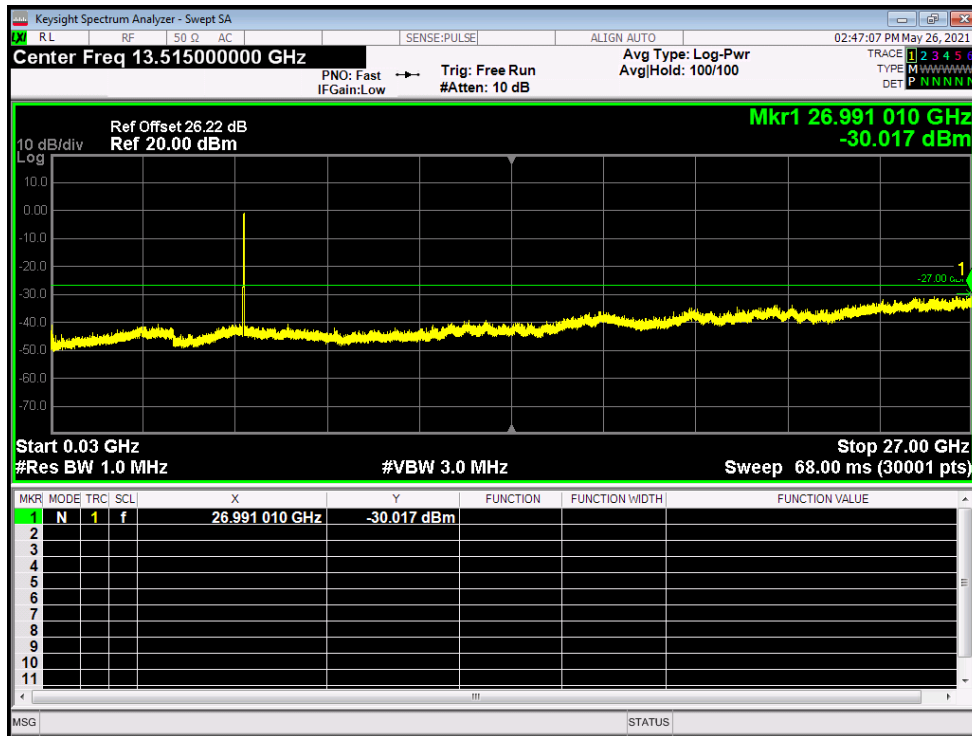


Tx. Spurious NVHT ac80 5530MHz Ant1 Emission

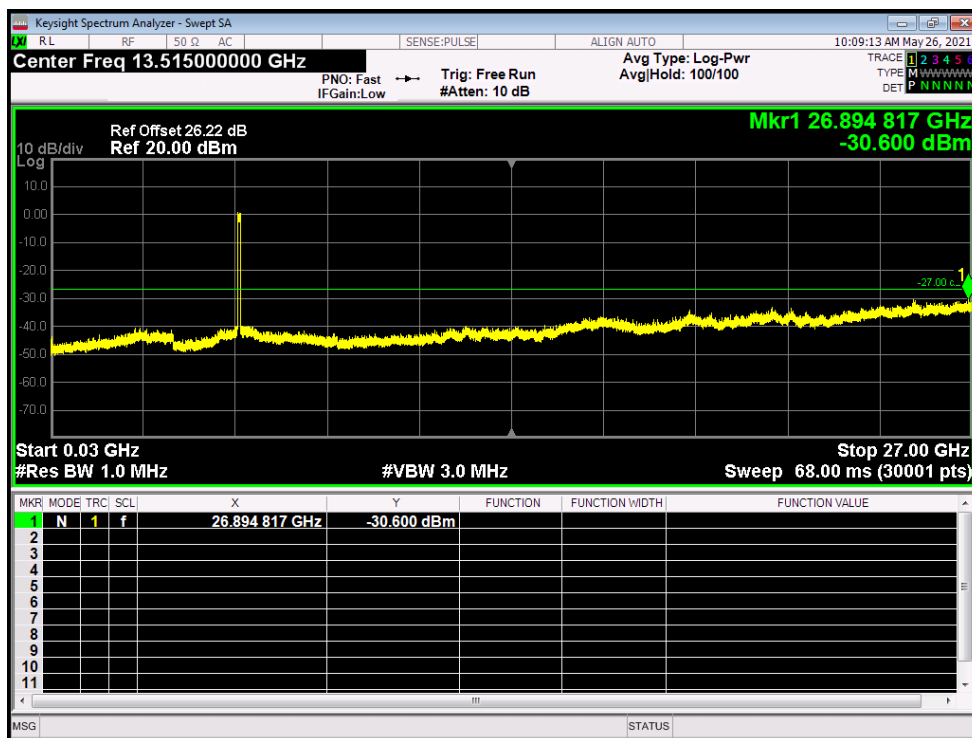


Tx. Spurious NVNT ac80 5610MHz Ant1 Emission

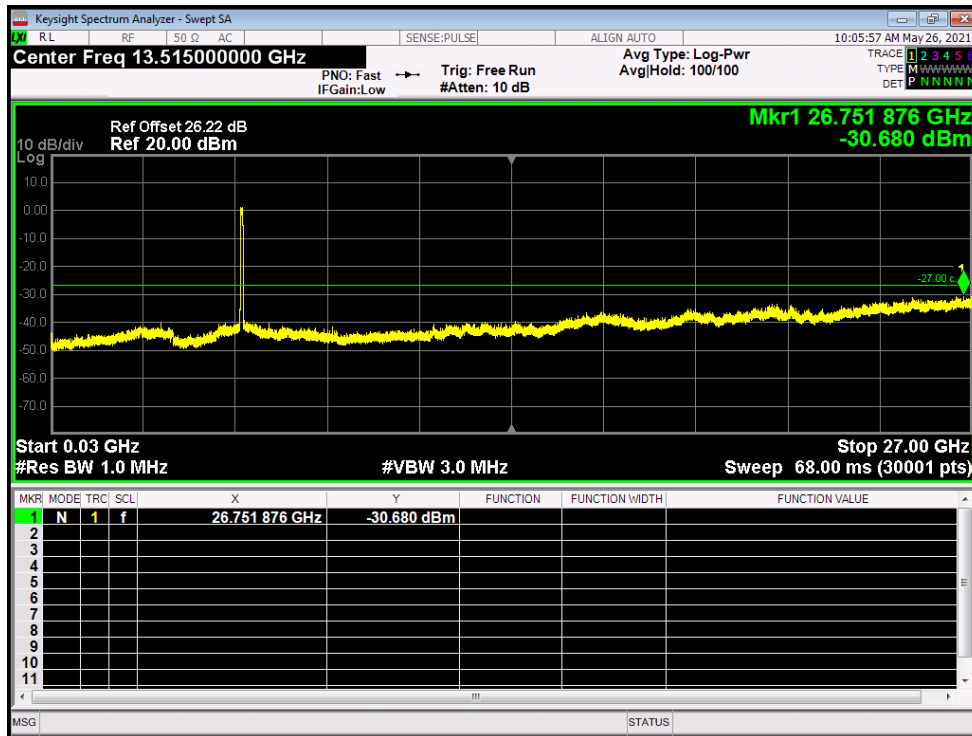

Tx. Spurious NVNT ac80 5530MHz Ant2 Emission

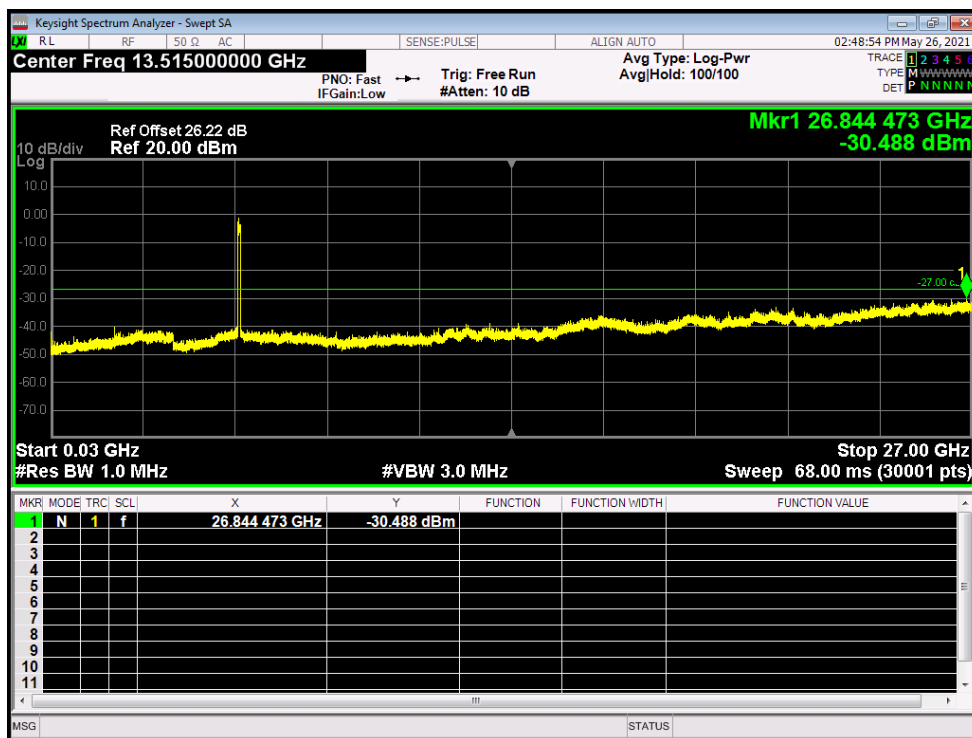

Tx. Spurious NVNT ac80 5610MHz Ant2 Emission

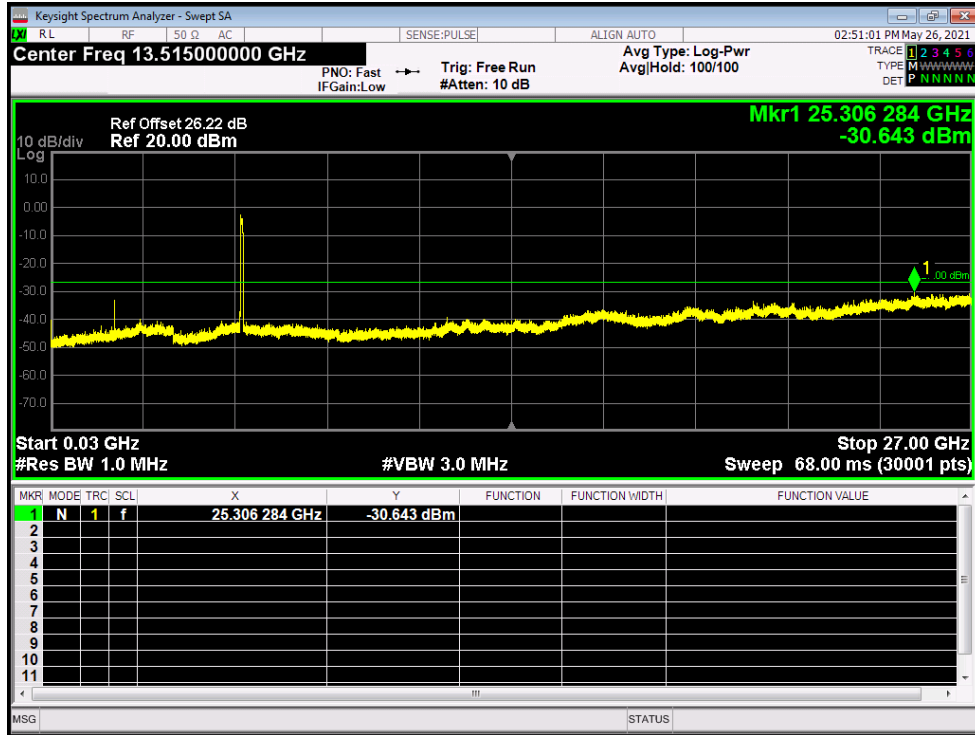


WLAN 5.8G 8dBi Antenna


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	ac20	5745	Ant1	100	0
NVNT	ac20	5785	Ant1	100	0
NVNT	ac20	5825	Ant1	100	0
NVNT	ac20	5745	Ant2	100	0
NVNT	ac20	5785	Ant2	100	0
NVNT	ac20	5825	Ant2	100	0
NVNT	ac40	5755	Ant1	100	0
NVNT	ac40	5795	Ant1	100	0
NVNT	ac40	5755	Ant2	100	0
NVNT	ac40	5795	Ant2	100	0
NVNT	ac80	5775	Ant1	98.88	0.05
NVNT	ac80	5775	Ant2	98.86	0.05


Duty Cycle NVNT ac20 5745MHz Ant1

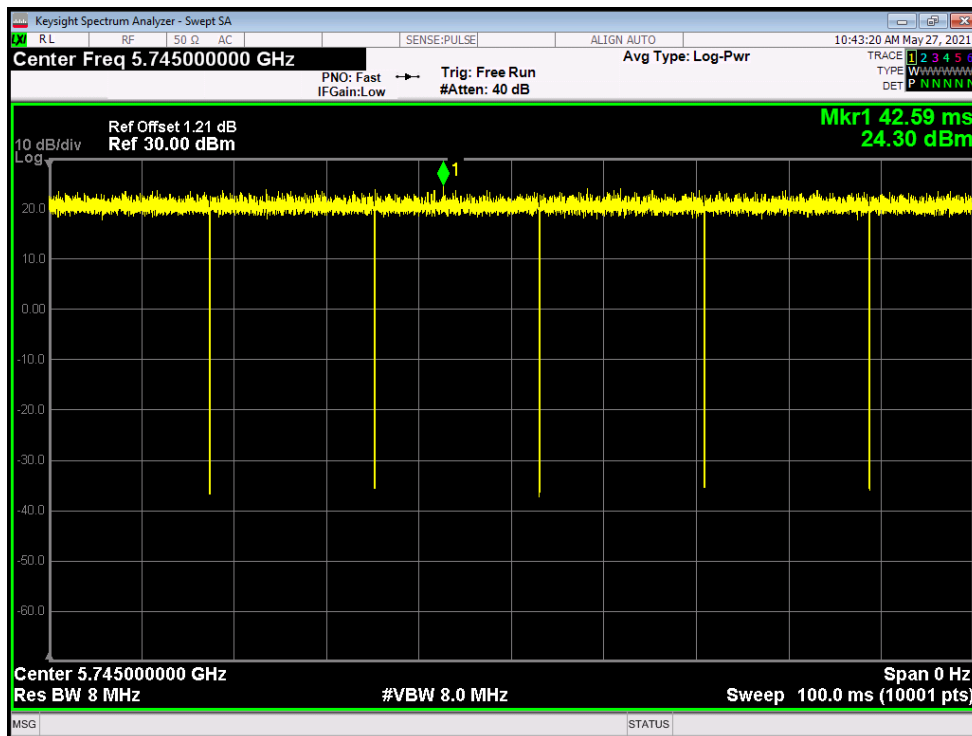

Duty Cycle NVNT ac20 5785MHz Ant1

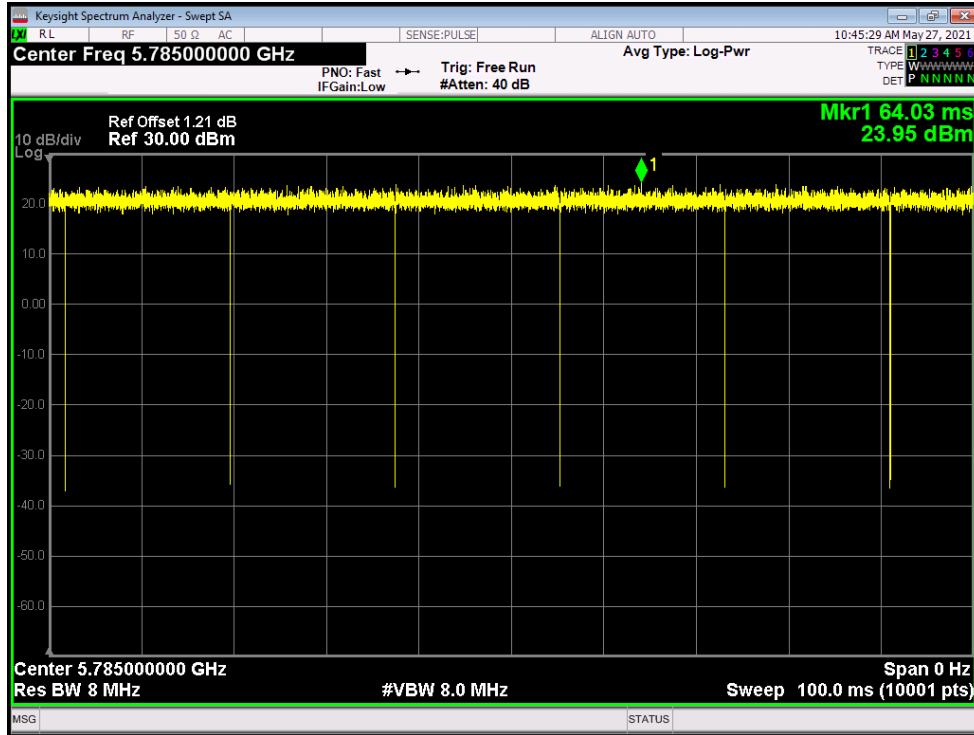


Duty Cycle NVNT ac20 5825MHz Ant1

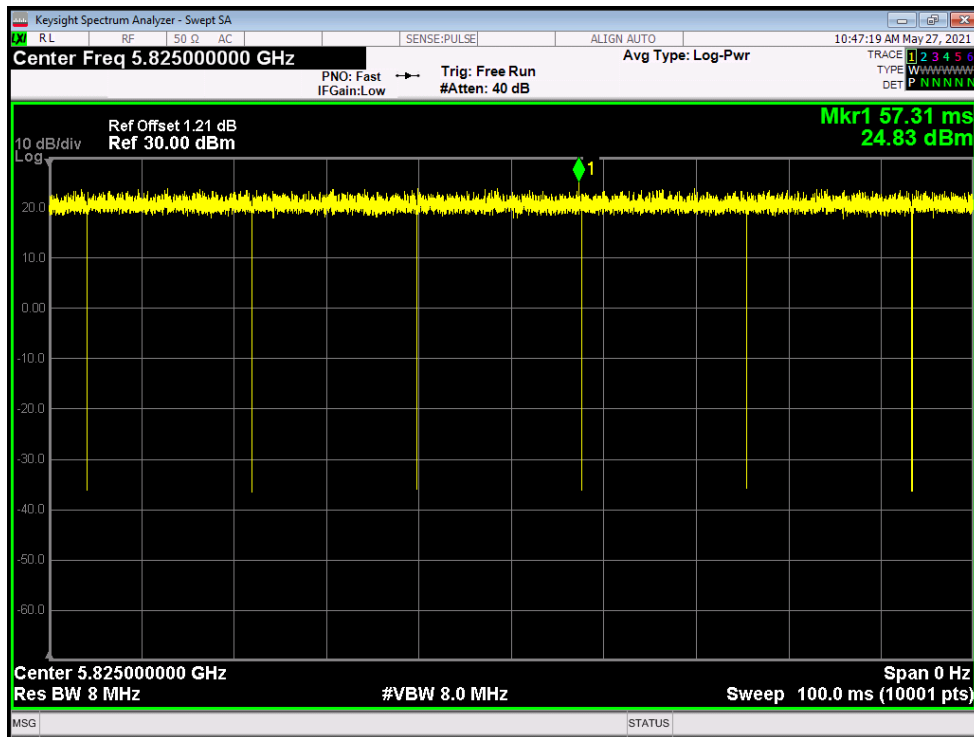


Duty Cycle NVNT ac20 5745MHz Ant2




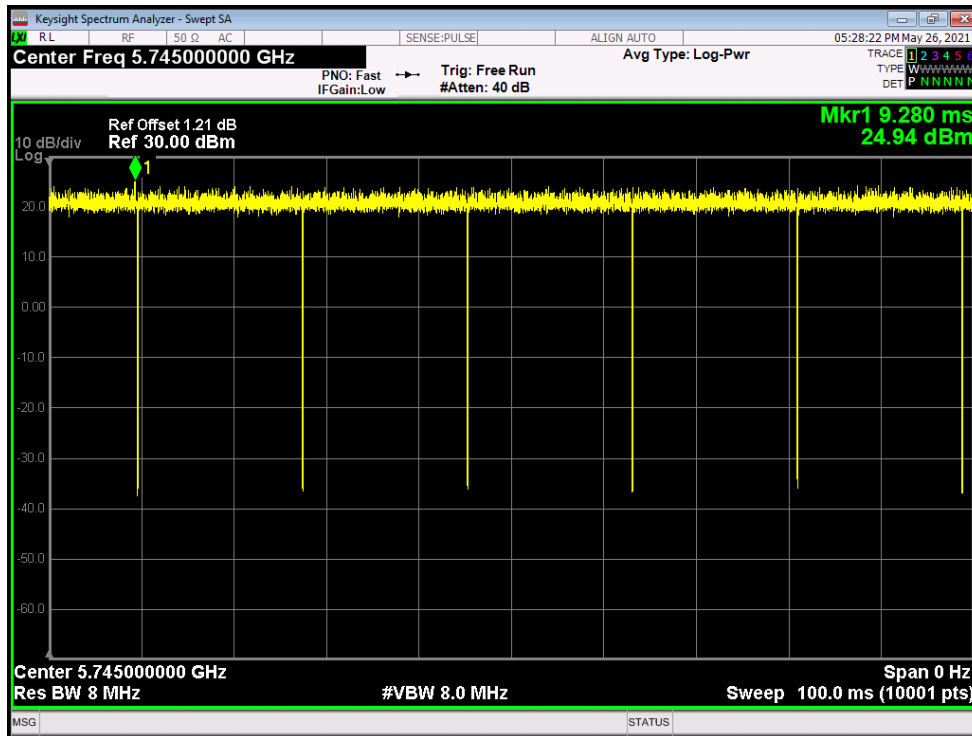


Duty Cycle NVNT ac20 5785MHz Ant2

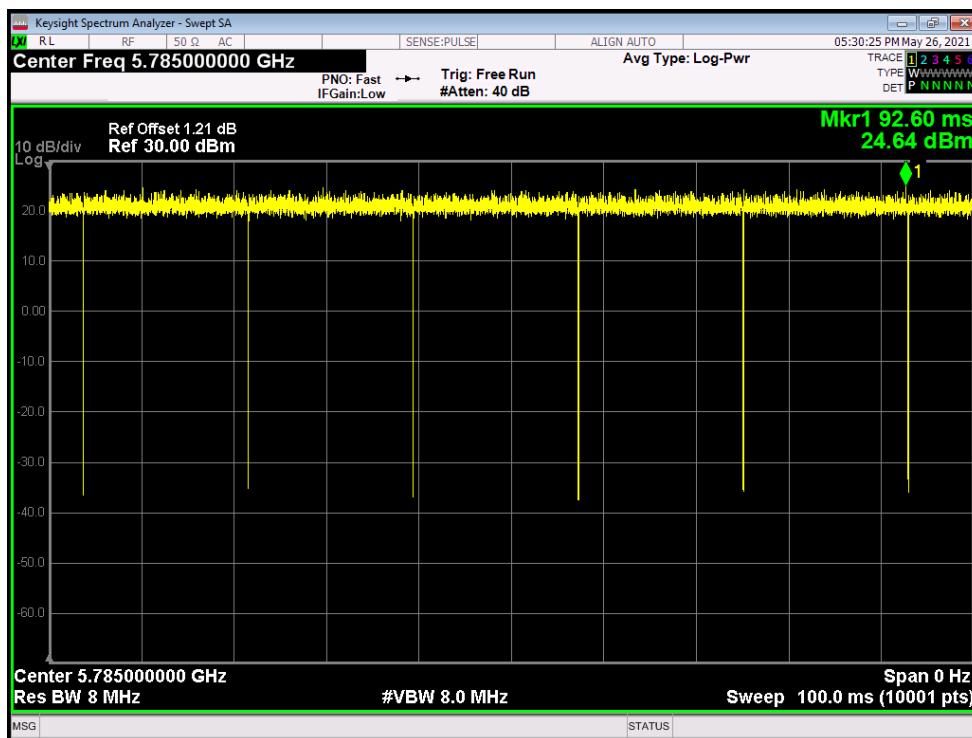


Duty Cycle NVNT ac20 5825MHz Ant2

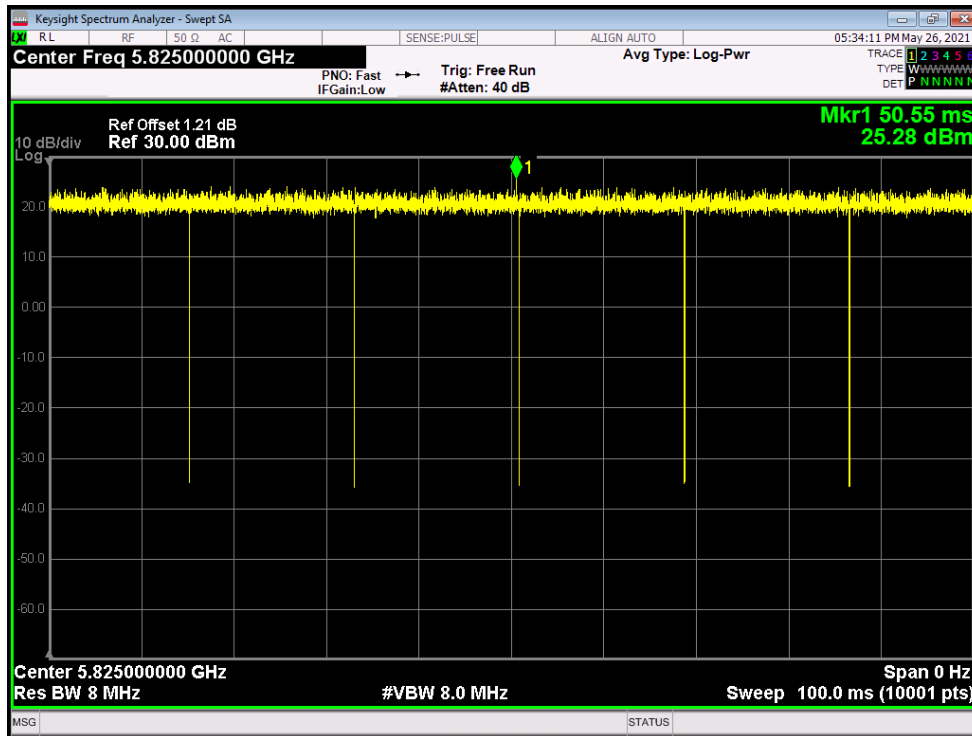


Duty Cycle NVNT ac40 5755MHz Ant1

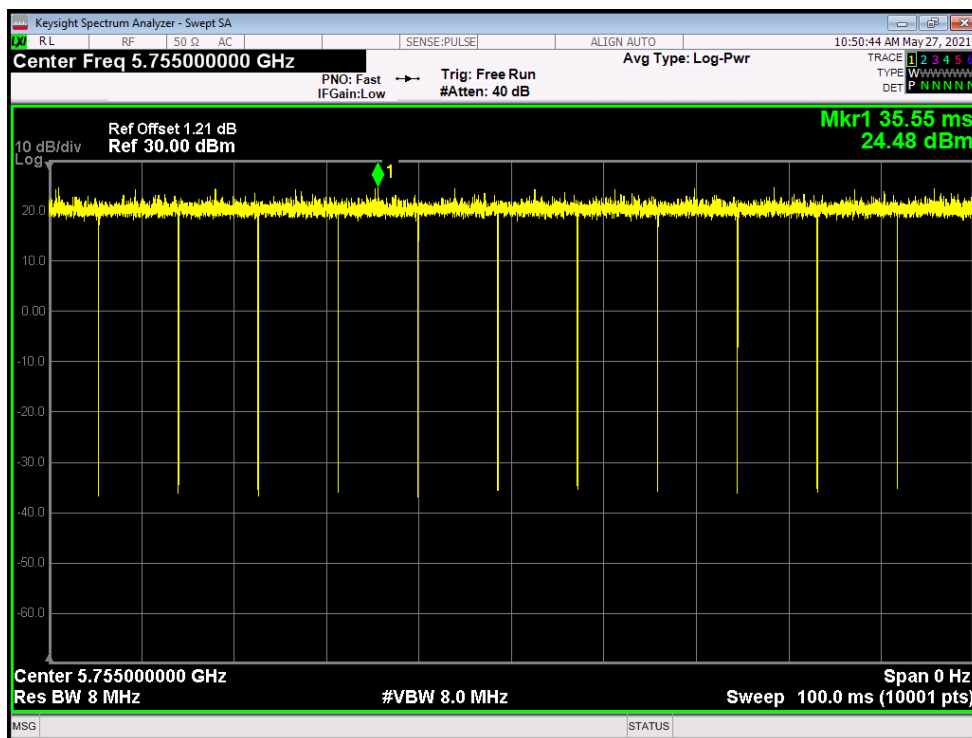


Duty Cycle NVNT ac40 5795MHz Ant1

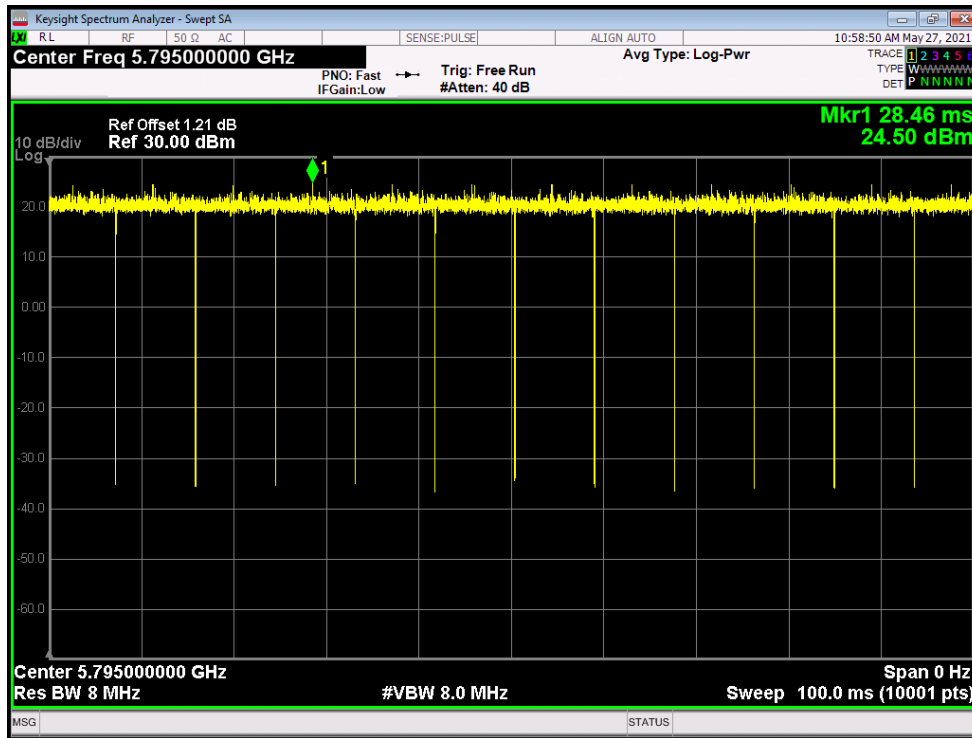


Duty Cycle NVNT ac40 5755MHz Ant2

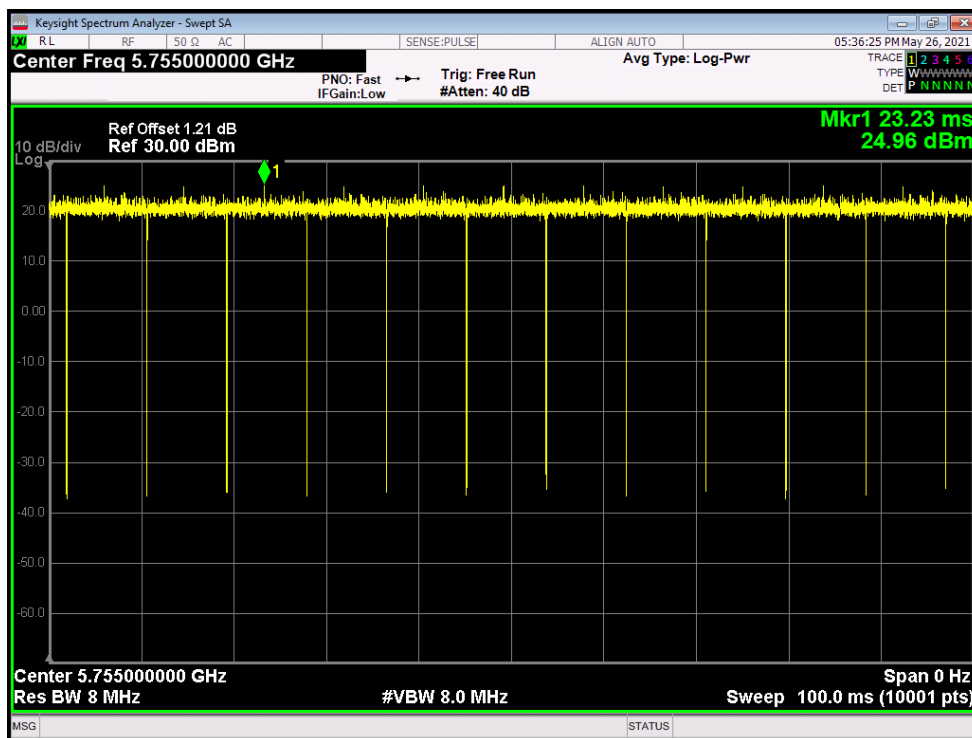


Duty Cycle NVNT ac40 5795MHz Ant2

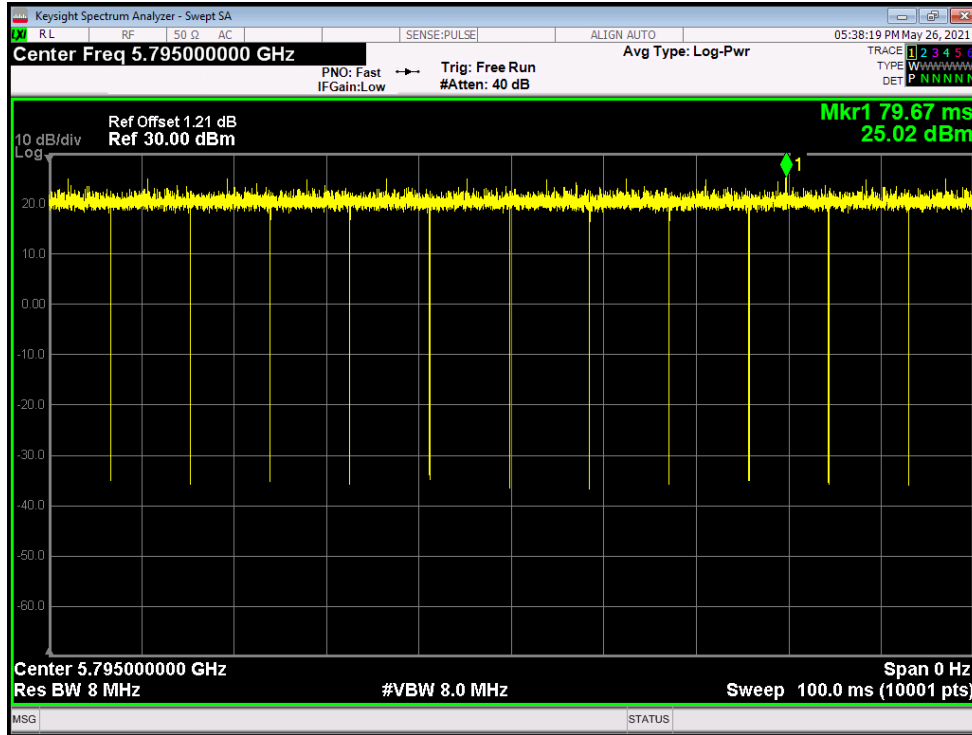

Duty Cycle NVNT ac80 5775MHz Ant1

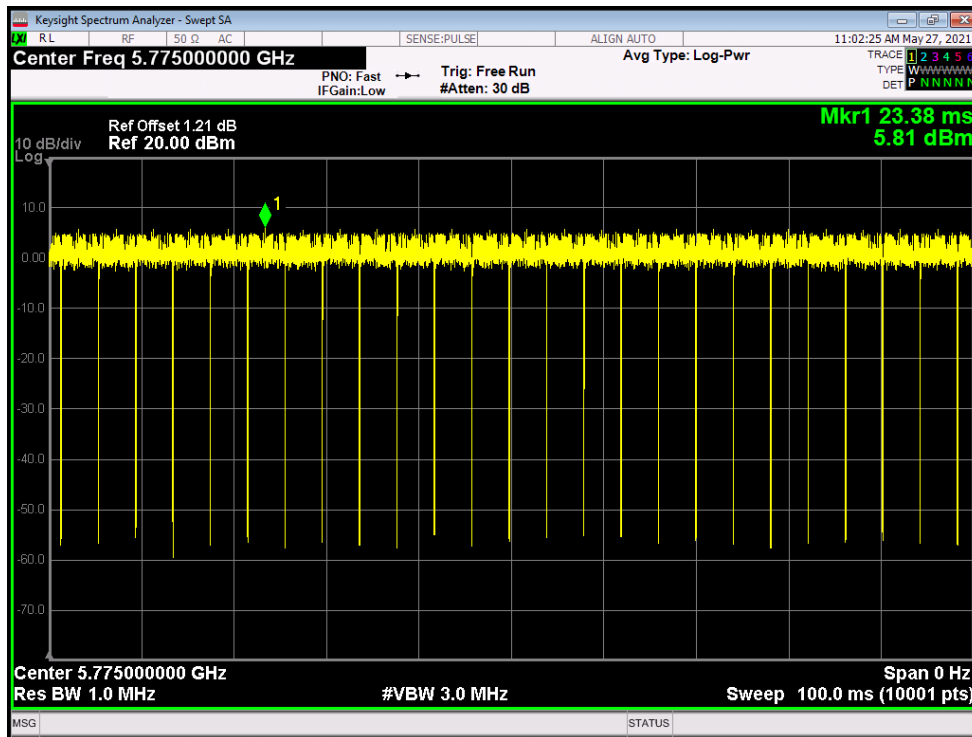

Duty Cycle NVNT ac80 5775MHz Ant2

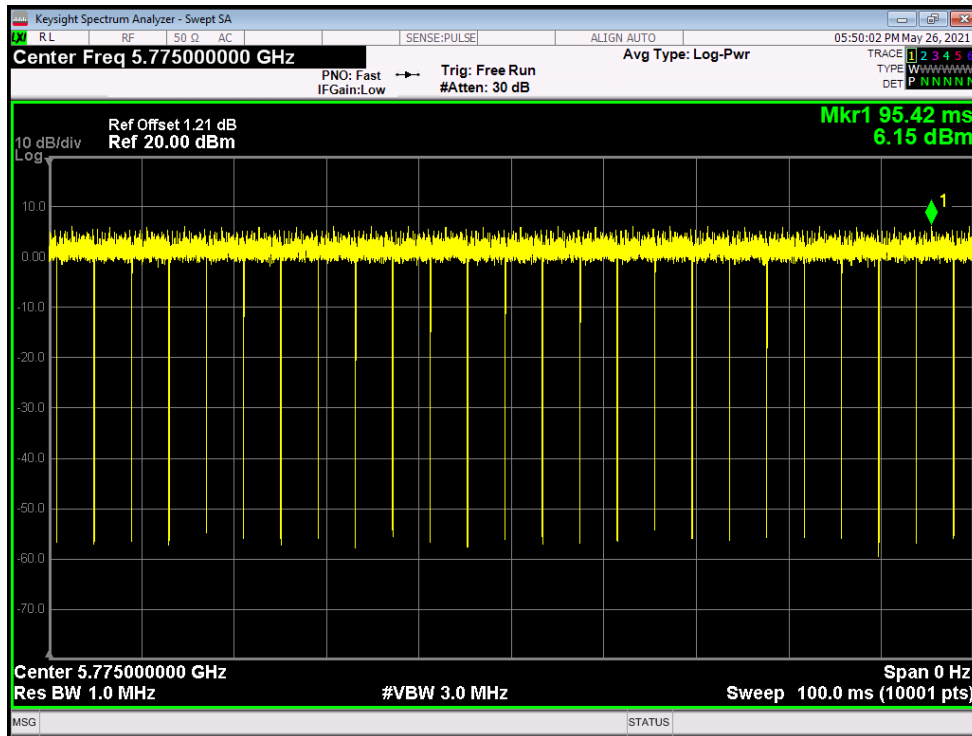

**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	SISO Total Power (dBm)	SISO Limit (dBm)	MIMO Total Power (dBm)	MIMO Limit (dBm)	Verdict
NVNT	802.11ac20	5745	Ant 1	17.247	0	17.247	28	20.486	28	Pass
NVNT	802.11ac20	5745	Ant 2	17.693	0	17.693	28			
NVNT	802.11ac20	5785	Ant 1	17.183	0	17.183	28	20.405	28	Pass
NVNT	802.11ac20	5785	Ant 2	17.596	0	17.596	28			
NVNT	802.11ac20	5825	Ant 1	17.265	0	17.265	28	20.358	28	Pass
NVNT	802.11ac20	5825	Ant 2	17.428	0	17.428	28			
NVNT	802.11ac40	5755	Ant 1	20.734	0	20.734	28	23.719	28	Pass
NVNT	802.11ac40	5755	Ant 2	20.684	0	20.684	28			
NVNT	802.11ac40	5795	Ant 1	20.758	0	20.758	28	23.675	28	Pass
NVNT	802.11ac40	5795	Ant 2	20.57	0	20.57	28			
NVNT	802.11ac80	5775	Ant 1	18.302	0.05	18.352	28	21.379	28	Pass
NVNT	802.11ac80	5775	Ant 2	18.335	0.05	18.385	28			

**-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	ac20	5745	Ant1	17.703	0.5	Pass
NVNT	ac20	5785	Ant1	17.641	0.5	Pass
NVNT	ac20	5825	Ant1	17.628	0.5	Pass
NVNT	ac20	5745	Ant2	17.735	0.5	Pass
NVNT	ac20	5785	Ant2	17.77	0.5	Pass
NVNT	ac20	5825	Ant2	17.775	0.5	Pass

NVNT	ac40	5755	Ant1	36.354	0.5	Pass
NVNT	ac40	5795	Ant1	36.334	0.5	Pass
NVNT	ac40	5755	Ant2	36.373	0.5	Pass
NVNT	ac40	5795	Ant2	36.373	0.5	Pass
NVNT	ac80	5775	Ant1	75.704	0.5	Pass
NVNT	ac80	5775	Ant2	75.11	0.5	Pass


-6dB Bandwidth NVNT ac20 5745MHz Ant1

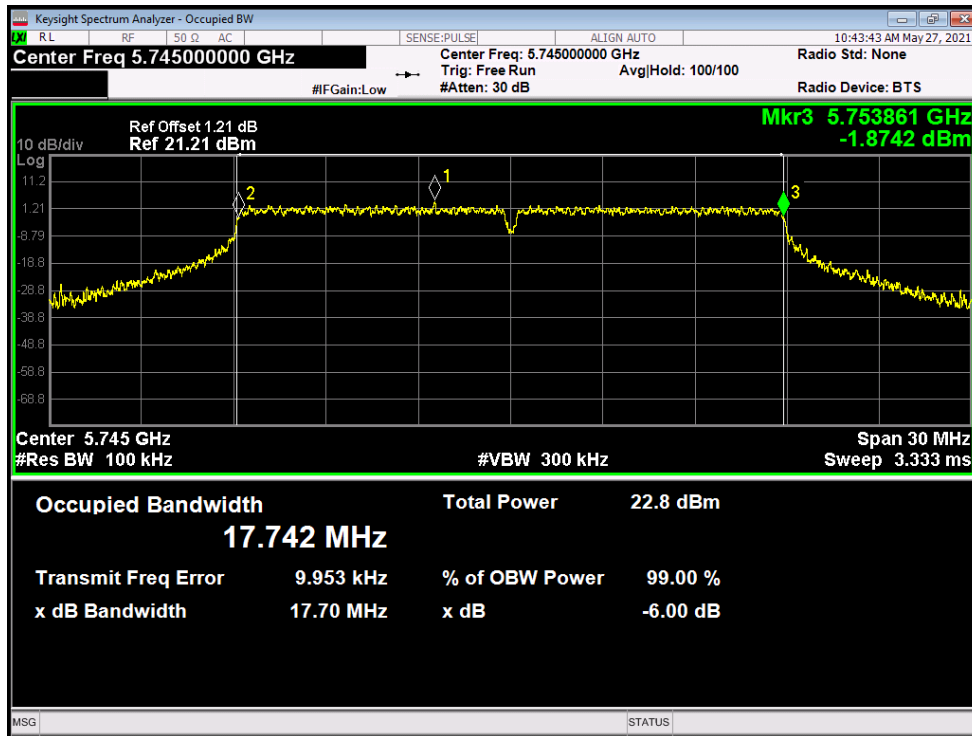


-6dB Bandwidth NVNT ac20 5785MHz Ant1

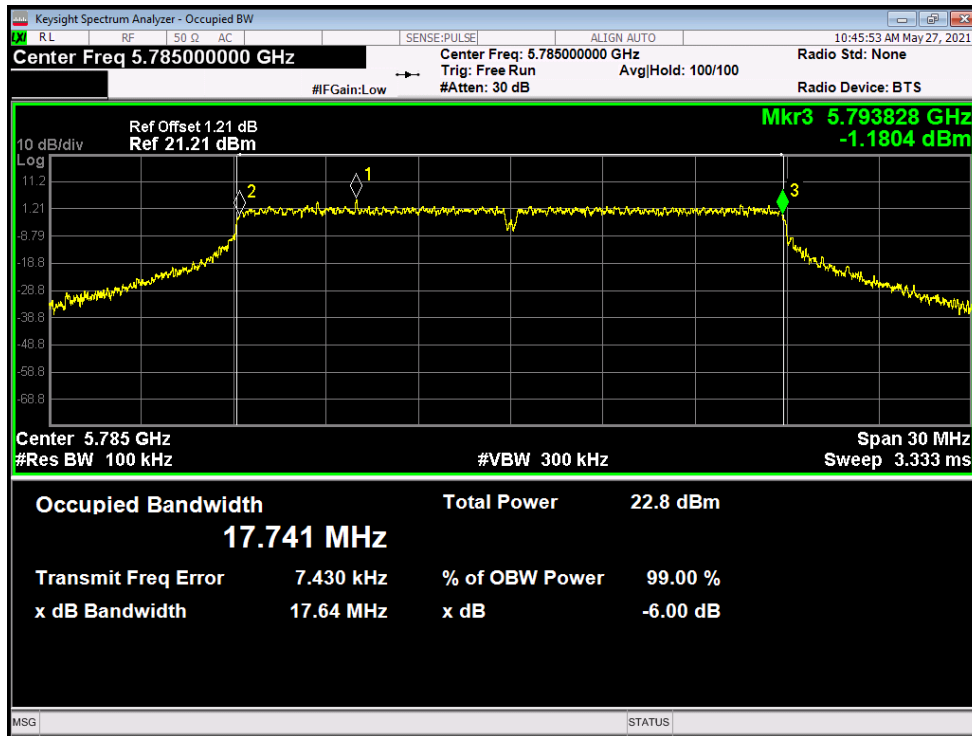


-6dB Bandwidth NVNT ac20 5825MHz Ant1

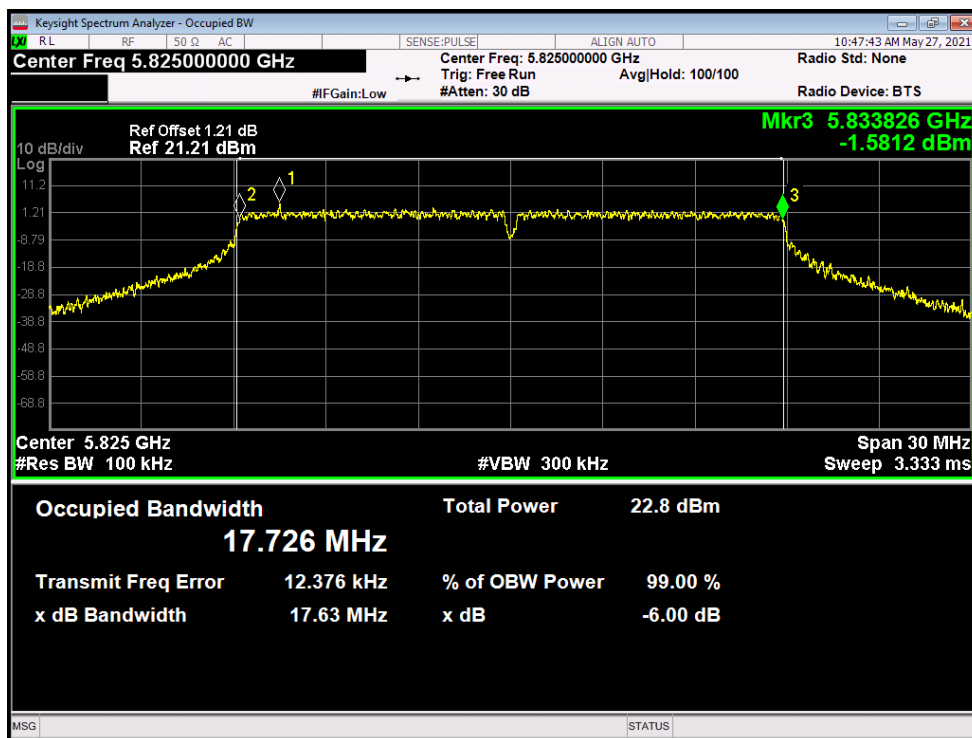

-6dB Bandwidth NVNT ac20 5745MHz Ant2

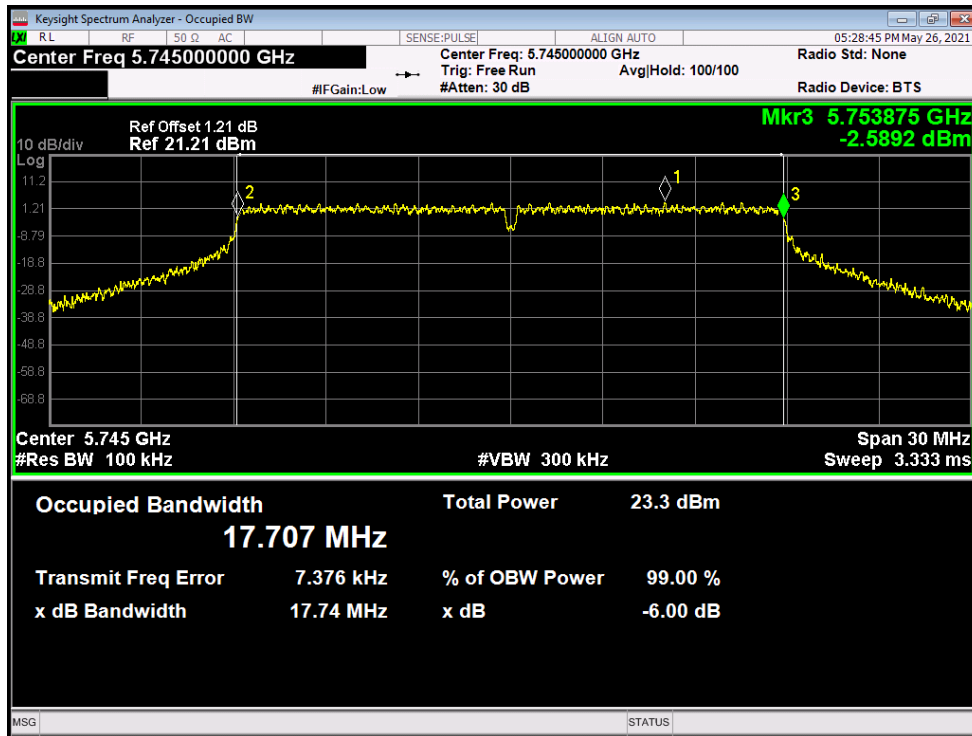


-6dB Bandwidth NVNT ac20 5785MHz Ant2

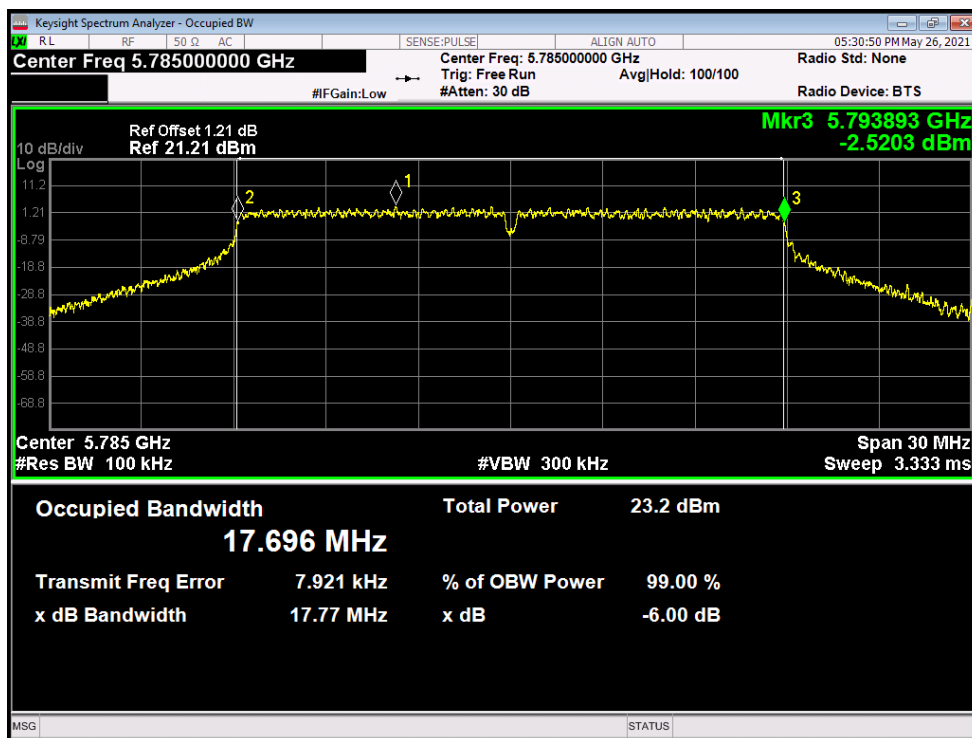


-6dB Bandwidth NVNT ac20 5825MHz Ant2




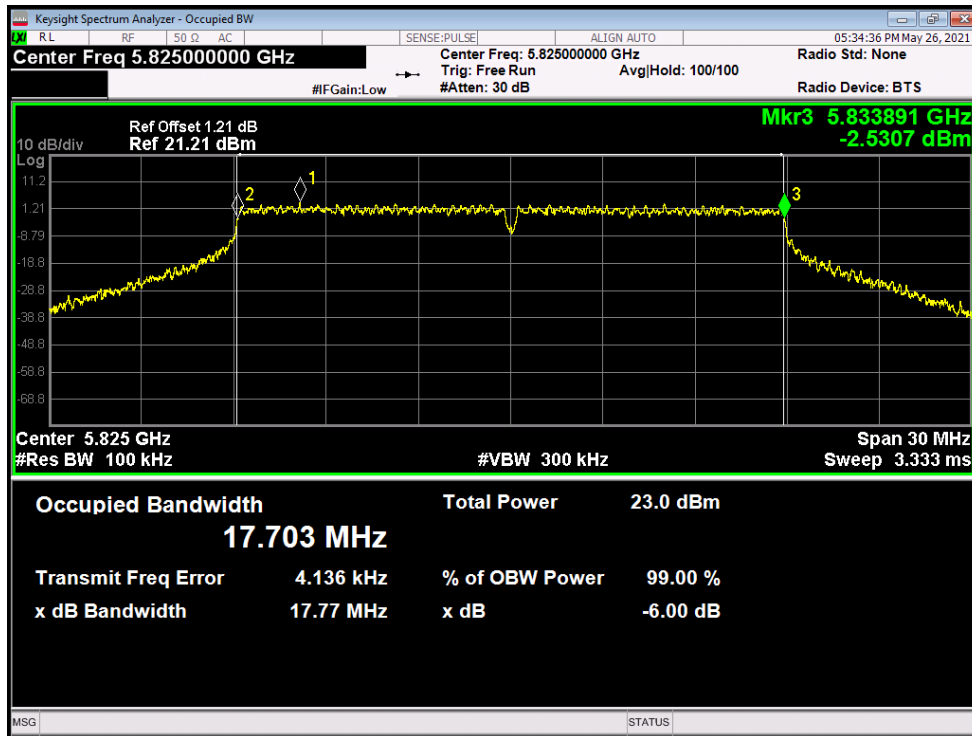


-6dB Bandwidth NVNT ac40 5755MHz Ant1

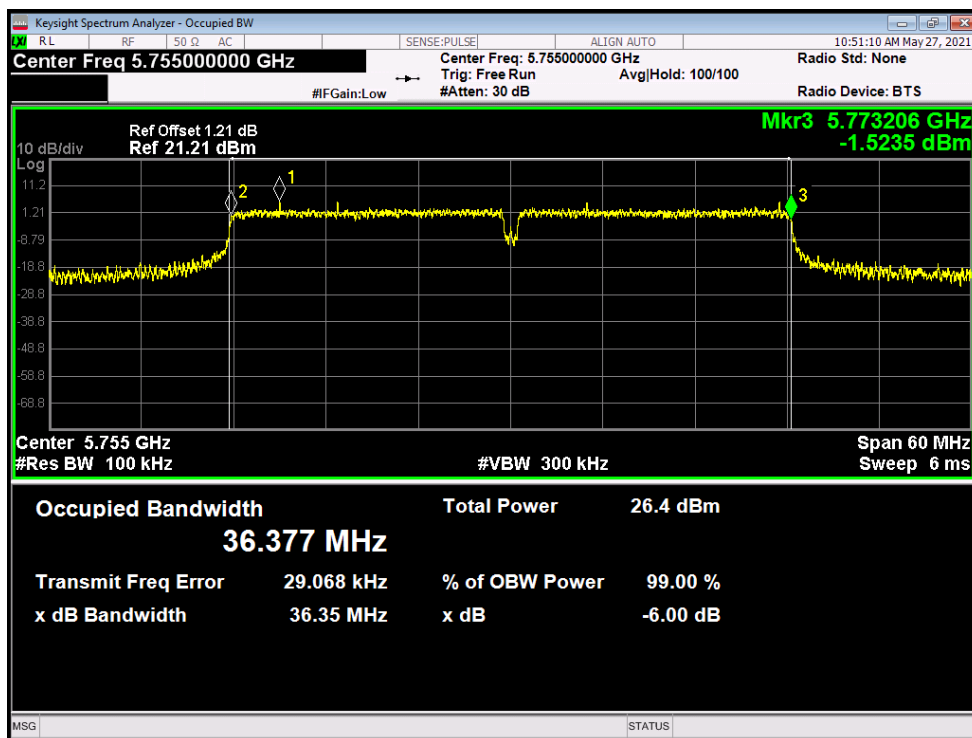


-6dB Bandwidth NVNT ac40 5795MHz Ant1

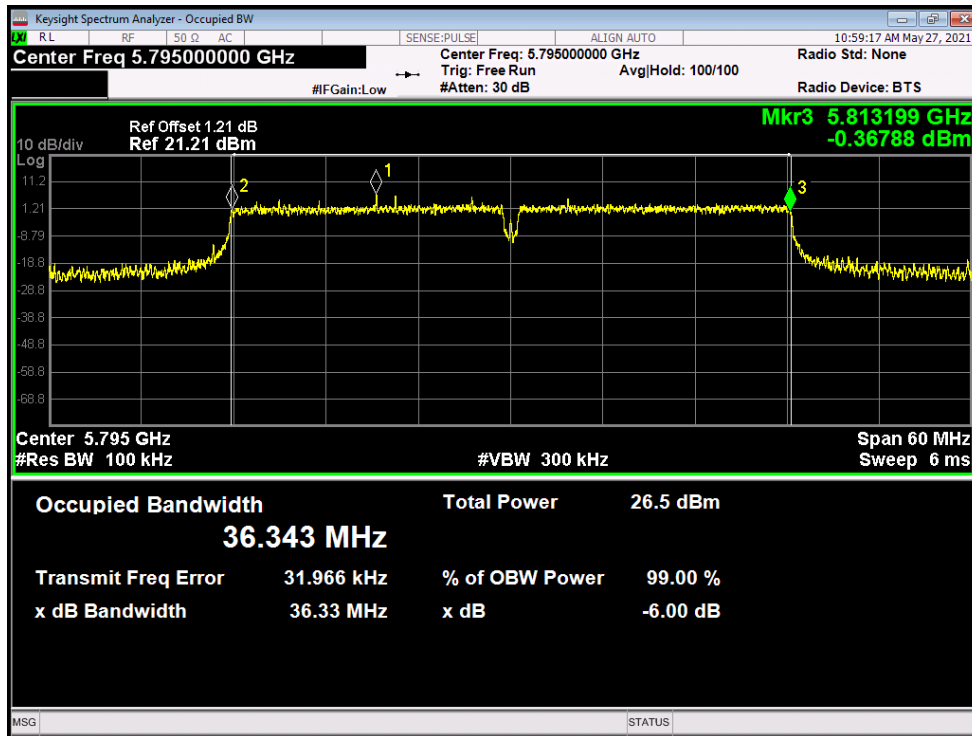


-6dB Bandwidth NVNT ac40 5755MHz Ant2

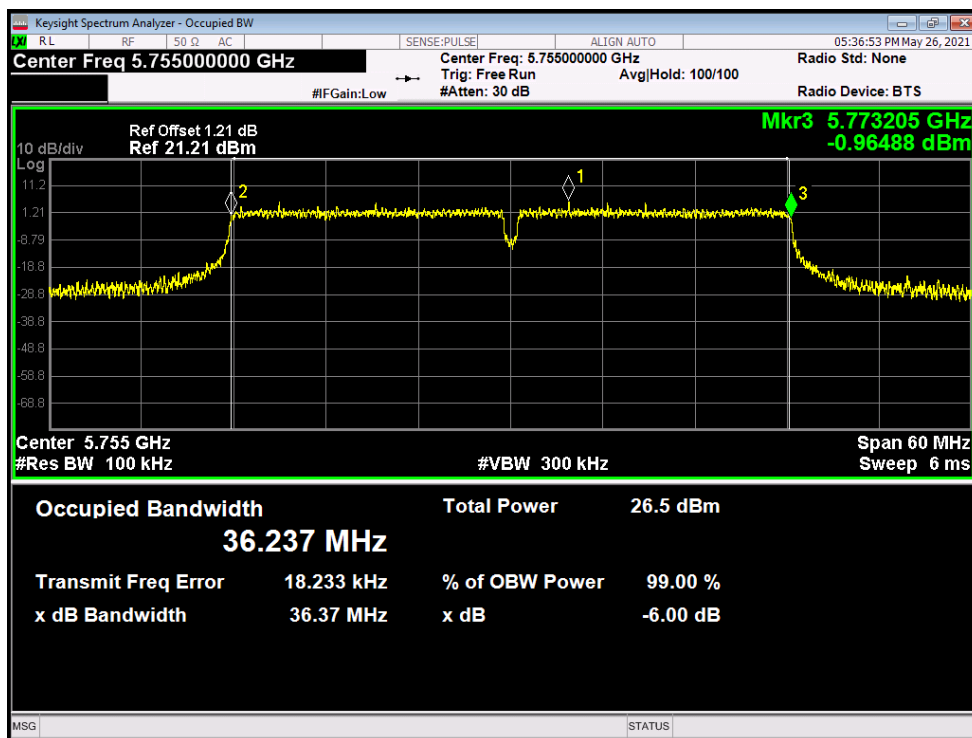


-6dB Bandwidth NVNT ac40 5795MHz Ant2

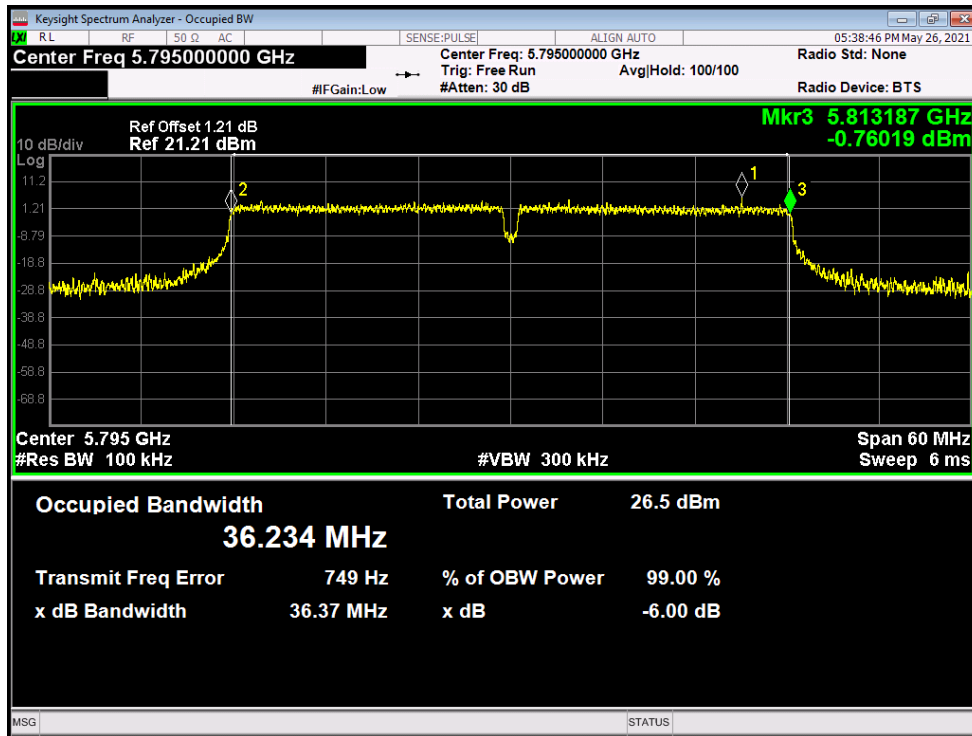

-6dB Bandwidth NVNT ac80 5775MHz Ant1

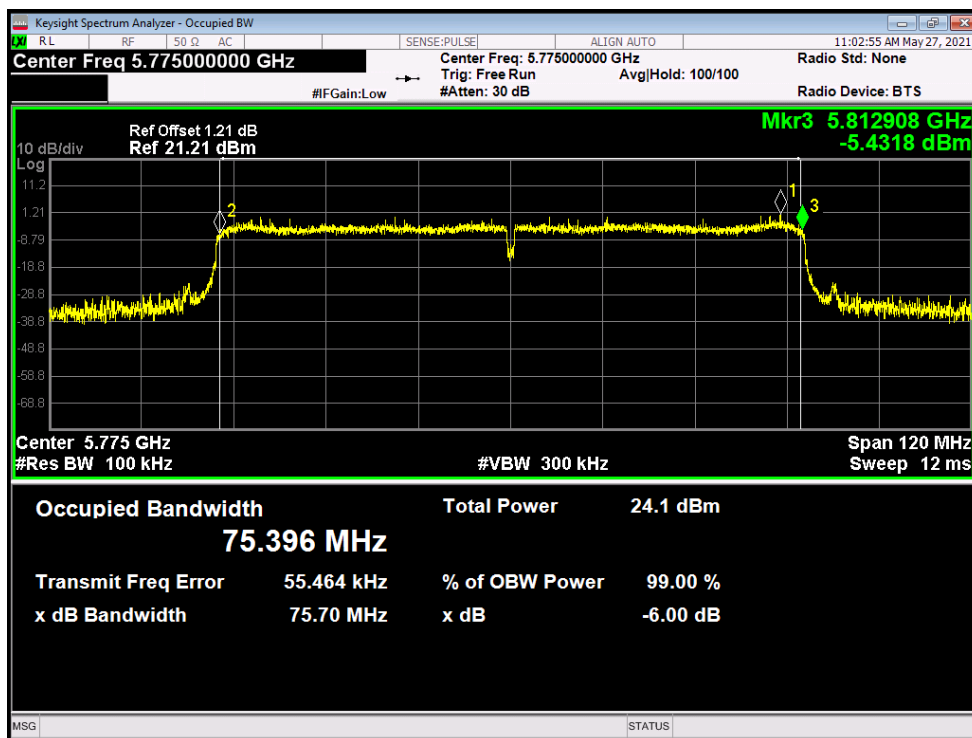


-6dB Bandwidth NVNT ac80 5775MHz Ant2

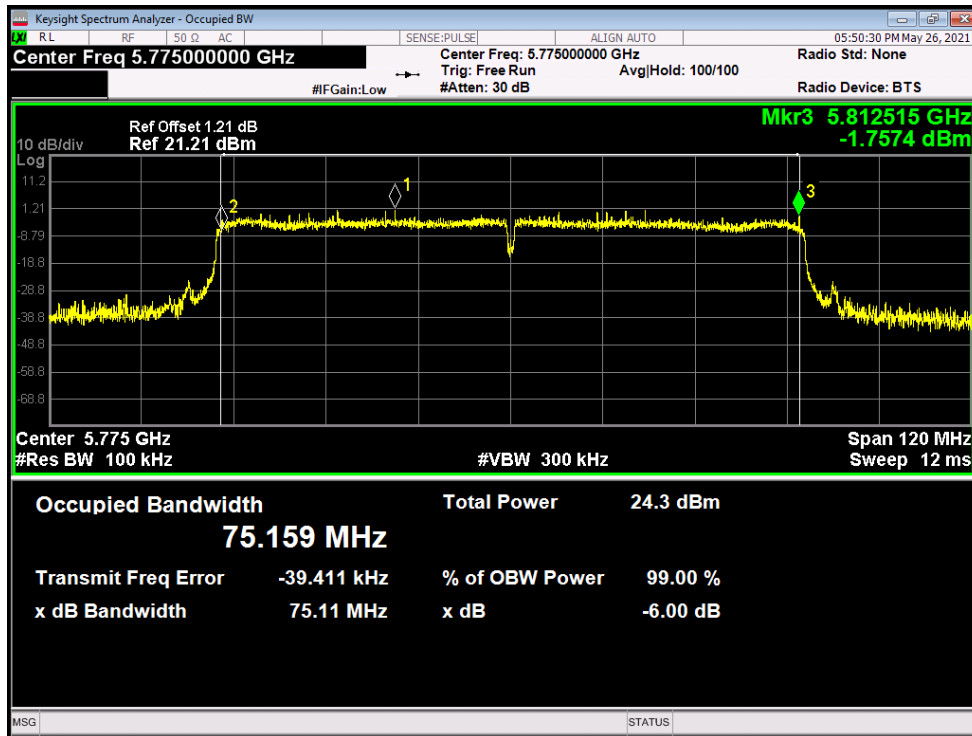


**Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac20	5745	Ant1	17.906
NVNT	ac20	5785	Ant1	17.921
NVNT	ac20	5825	Ant1	17.888
NVNT	ac20	5745	Ant2	17.836
NVNT	ac20	5785	Ant2	17.817
NVNT	ac20	5825	Ant2	17.834
NVNT	ac40	5755	Ant1	36.745
NVNT	ac40	5795	Ant1	36.635
NVNT	ac40	5755	Ant2	36.372
NVNT	ac40	5795	Ant2	36.382
NVNT	ac80	5775	Ant1	75.429
NVNT	ac80	5775	Ant2	75.247


OBW NVNT ac20 5745MHz Ant1

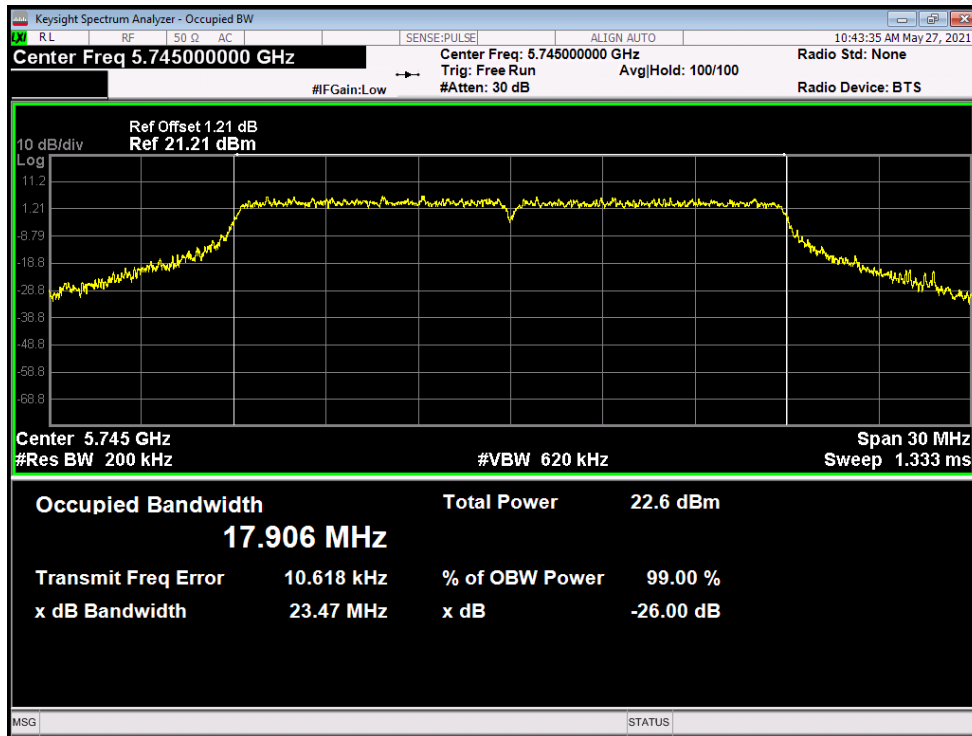


OBW NVNT ac20 5785MHz Ant1

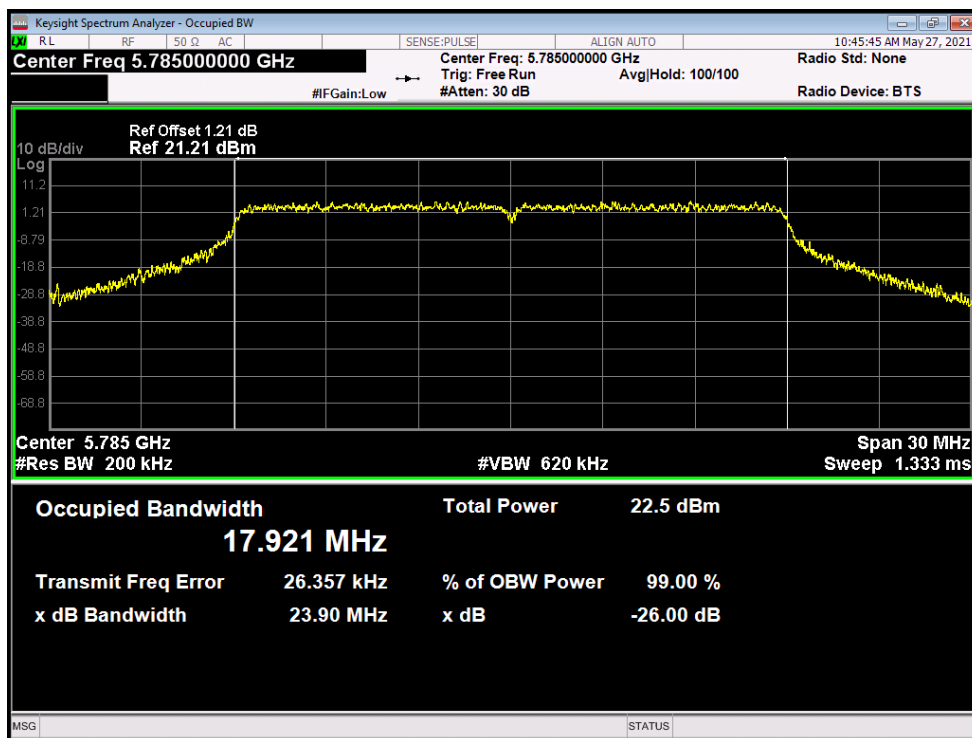

OBW NVNT ac20 5825MHz Ant1

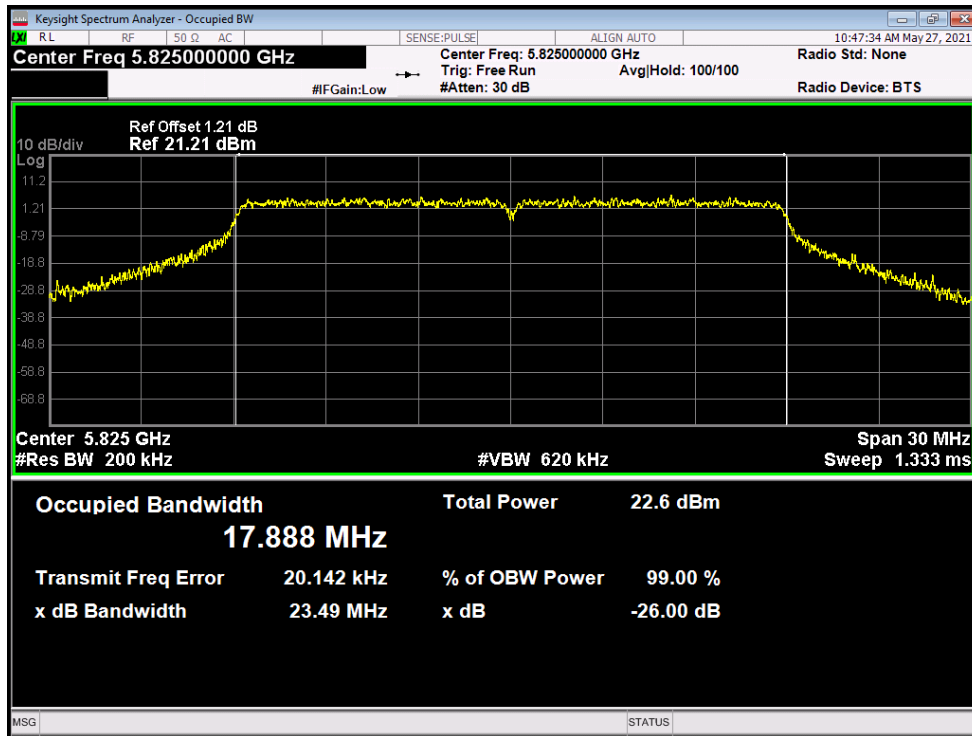

OBW NVNT ac20 5745MHz Ant2

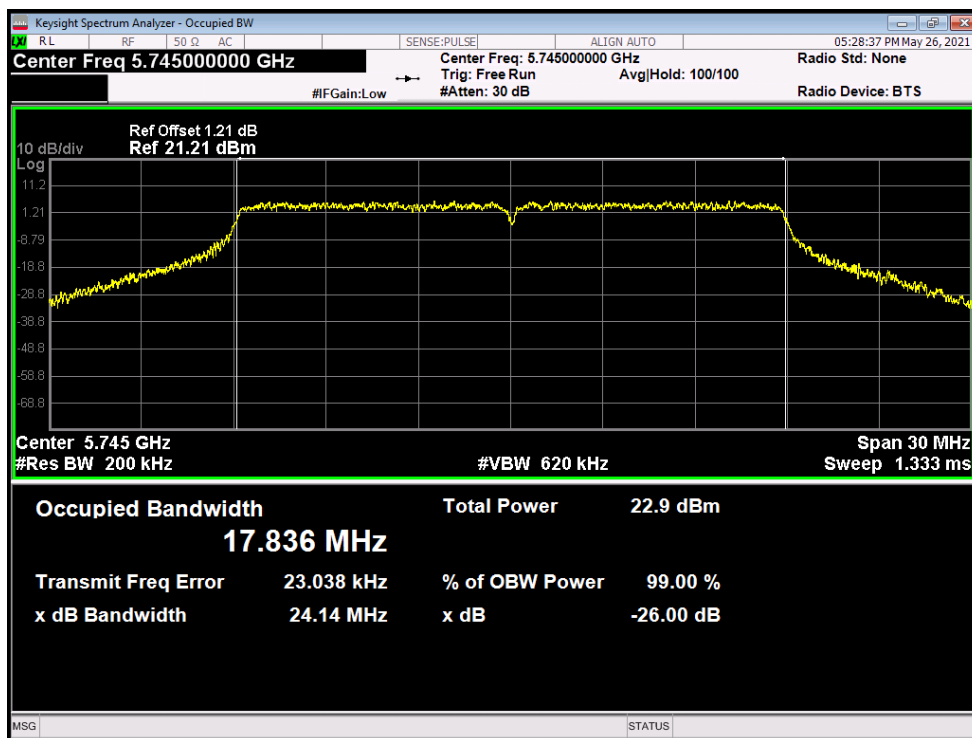

OBW NVNT ac20 5785MHz Ant2