

## TEST REPORT

**Product** : WIFI+BT Module  
**Trade mark** : GSD  
**Model/Type reference** : WCT0SR2311  
**Serial Number** : N/A  
**Report Number** : EED32L00189802  
**FCC ID** : 2AC23-WCT0S  
**Date of Issue** : Feb. 27, 2020  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Hui Zhou Gaoshengda Technology Co.,LTD**  
**NO.75 Zhongkai Development Area,Huizhou,Guangdong, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*mark.chen.*

Mark Chen

Compiled by:

*Smile Zhong*

Smile Zhong

Reviewed by:

*Ware Xin*

Ware Xin

Approved by:

*Sam Chuang*

Sam Chuang

Date:

Feb. 27, 2020

Check No.: 3096370616



## 2 Version

Version No.	Date	Description
00	Feb. 27, 2020	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.




## 4 Content

<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 TEST SUMMARY</b> .....	<b>3</b>
<b>4 CONTENT</b> .....	<b>4</b>
<b>5 TEST REQUIREMENT</b> .....	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	<b>7</b>
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
<b>7 EQUIPMENT LIST</b> .....	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>14</b>
Appendix A): 20dB Occupied Bandwidth.....	16
Appendix B): Carrier Frequency Separation.....	20
Appendix C): Dwell Time.....	24
Appendix D): Hopping Channel Number.....	28
Appendix E): Conducted Peak Output Power.....	30
Appendix F): Band-edge for RF Conducted Emissions.....	34
Appendix G): RF Conducted Spurious Emissions.....	39
Appendix H): Pseudorandom Frequency Hopping Sequence.....	49
Appendix I): Antenna Requirement.....	50
Appendix J): AC Power Line Conducted Emission.....	51
Appendix K): Restricted bands around fundamental frequency (Radiated).....	54
Appendix L): Radiated Spurious Emissions.....	79
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>90</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>93</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

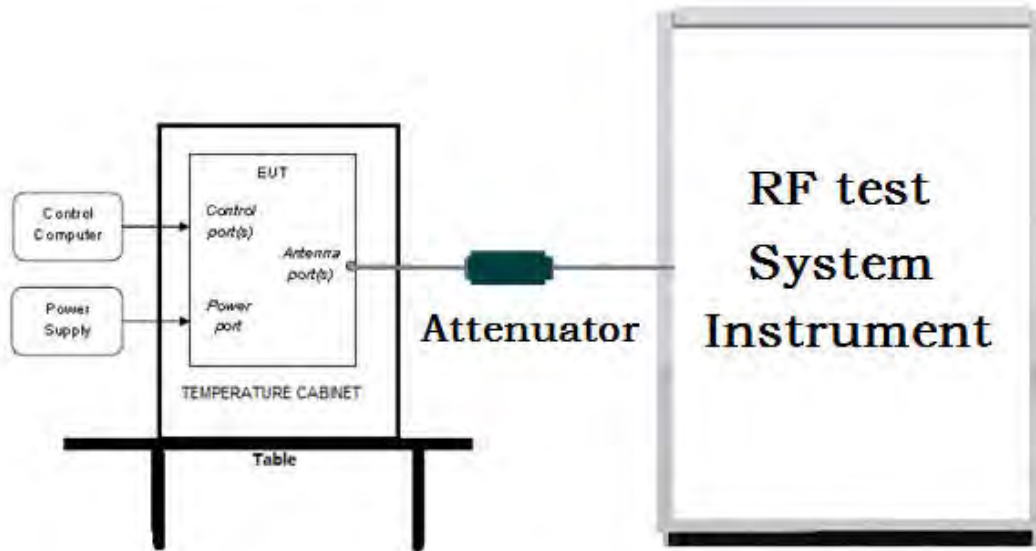

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

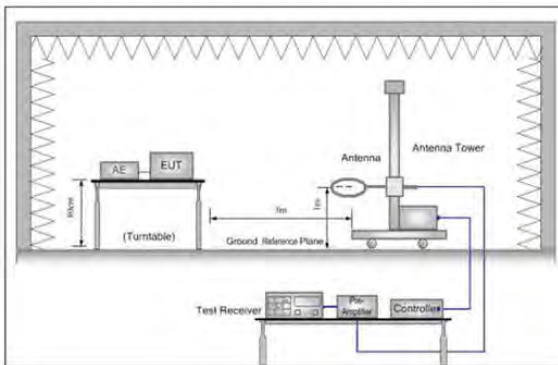


Figure 1. Below 30MHz

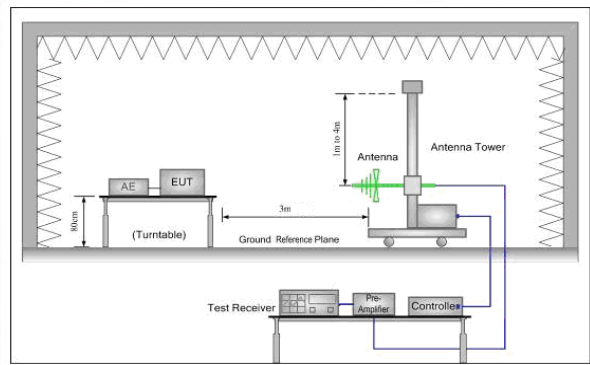


Figure 2. 30MHz to 1GHz


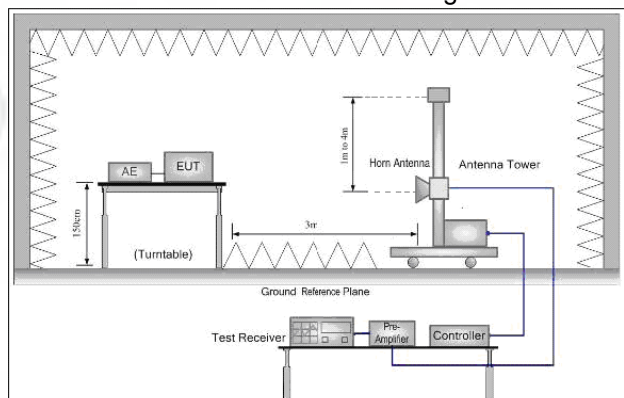


Figure 3. Above 1GHz

**5.1.3 For Conducted Emissions test setup**  
**Conducted Emissions setup**

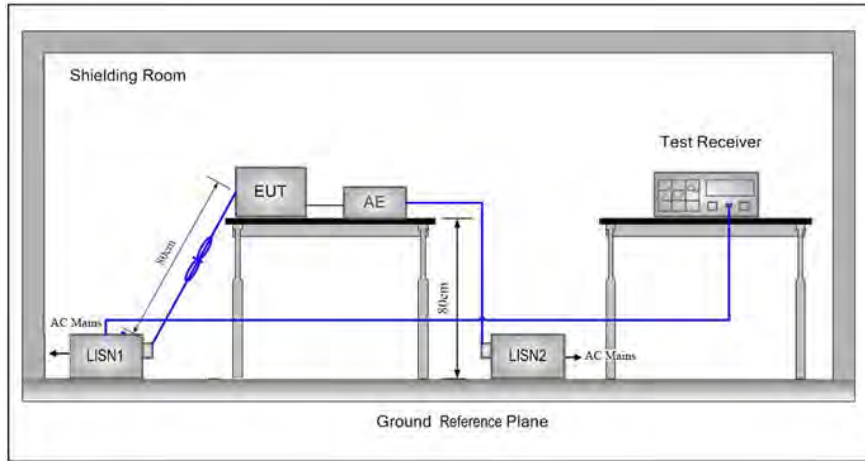

**5.2 Test Environment**

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1010mbar

**5.3 Test Condition**

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).



## 6 General Information

### 6.1 Client Information

Applicant:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Applicant:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China
Manufacturer:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Manufacturer:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China
Factory:	Hui Zhou Gaoshengda Technology Co.,LTD
Address of Factory:	NO.75 Zhongkai Development Area,Huizhou,Guangdong, China

### 6.2 General Description of EUT

Product Name:	WIFI+BT Module
Model No.(EUT):	WCT0SR2311
Trade mark:	GSD
EUT Supports Radios application:	BT4.1 Dual mode 2402MHz to 2480MHz
Power Supply:	DC 5V
Sample Received Date:	Jul. 17, 2019
Sample tested Date:	Jul. 17, 2019 to Sep. 09, 2019

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Hardware Version:	N/A
Software Version:	N/A
Test Power Grade:	(manufacturer declare )
Test Software of EUT:	Bluetooth RF Test Tool V5.1.1.1
Antenna Type:	PIFA antenna
Antenna Gain:	2dBi
Test Voltage:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### 6.4 Description of Support Units

The EUT has been tested independently.

#### 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

#### 6.6 Deviation from Standards

None.

#### 6.7 Abnormalities from Standard Conditions

None.

#### 6.8 Other Information Requested by the Customer

None.



### 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-29-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Attenuator	HuaXiang	SHX370	15040701	03-01-2019	02-29-2020
Signal Generator	Keysight	N5181A	MY46240094	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozi	HM10	1804186	10-12-2018	10-11-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	107929	04-28-2019	04-27-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	03-01-2019	02-29-2020
high-low temperature test chamber	DongGuangQinZhuo	LK-80GA	QZ20150611879	03-01-2019	02-29-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2022
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-07-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-12-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-19-2020
ISN	TESEQ	ISN T800	30297	01-16-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020



3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Microwave Preamplifier	Agilent	8449B	3008A024 25	07-12-2019	07-11-2020
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 1869	04-25-2018	04-24-2021
Horn Antenna	ETS- LINDGREN	3117	00057410	06-05-2018	06-04-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.604 2	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B- 076	04-25-2018	04-24-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-27-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Receiver	R&S	ESCI7	100938- 003	11-23-2018	11-22-2019
Multi device Controller	maturio	NCD/070/107 11112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095 744	03-01-2019	02-29-2020
Signal Generator	Keysight	E8257D	MY53401 106	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2022
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO- TRONICS	SPA-F- 63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 9CL12-0395- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 8CL12-0393- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 4CL12-0396- 002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 3CL12-0394- 001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-24-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-24-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)



Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
GFSK	2.866	2.961	96.79%
8DPSK	2.880	2.987	96.42%

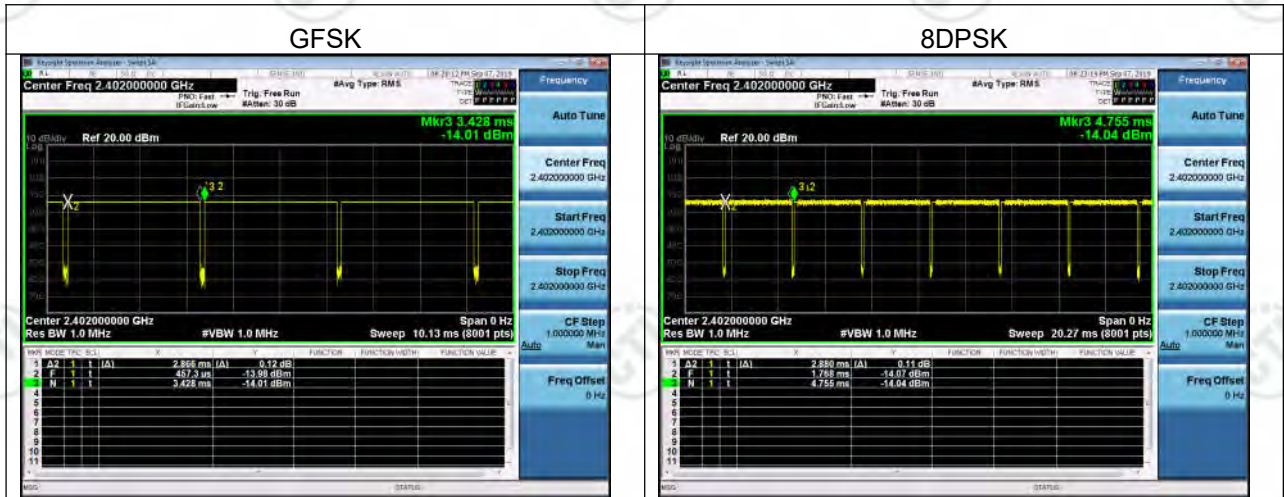

## Appendix A): 20dB Occupied Bandwidth Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9442	0.83954	PASS
GFSK	MCH	0.9452	0.84016	PASS
GFSK	HCH	0.9446	0.84520	PASS
$\pi/4$ DQPSK	LCH	1.284	1.1780	PASS
$\pi/4$ DQPSK	MCH	1.283	1.1754	PASS
$\pi/4$ DQPSK	HCH	1.285	1.1750	PASS
8DPSK	LCH	1.294	1.1657	PASS
8DPSK	MCH	1.294	1.1653	PASS
8DPSK	HCH	1.294	1.1650	PASS

**Test Graph**





<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.0 dBm</td> </tr> <tr> <td colspan="3"><b>1.780 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-3.395 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.284 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	14.0 dBm	<b>1.780 MHz</b>			Transmit Freq Error	-3.395 kHz	OBW Power 99.00 %	x dB Bandwidth	1.284 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	14.0 dBm											
<b>1.780 MHz</b>													
Transmit Freq Error	-3.395 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.284 MHz	x dB -20.00 dB											
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.2 dBm</td> </tr> <tr> <td colspan="3"><b>1.754 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-3.211 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.283 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	14.2 dBm	<b>1.754 MHz</b>			Transmit Freq Error	-3.211 kHz	OBW Power 99.00 %	x dB Bandwidth	1.283 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	14.2 dBm											
<b>1.754 MHz</b>													
Transmit Freq Error	-3.211 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.283 MHz	x dB -20.00 dB											
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.6 dBm</td> </tr> <tr> <td colspan="3"><b>1.750 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-4.595 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.285 MHz</td> <td>x dB -20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	14.6 dBm	<b>1.750 MHz</b>			Transmit Freq Error	-4.595 kHz	OBW Power 99.00 %	x dB Bandwidth	1.285 MHz	x dB -20.00 dB
Occupied Bandwidth	Total Power	14.6 dBm											
<b>1.750 MHz</b>													
Transmit Freq Error	-4.595 kHz	OBW Power 99.00 %											
x dB Bandwidth	1.285 MHz	x dB -20.00 dB											

<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	

## Appendix B): Carrier Frequency Separation




**Result Table**

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.998	PASS
GFSK	MCH	1.114	PASS
GFSK	HCH	1.008	PASS
$\pi/4$ DQPSK	LCH	1.092	PASS
$\pi/4$ DQPSK	MCH	1.052	PASS
$\pi/4$ DQPSK	HCH	0.866	PASS
8DPSK	LCH	0.872	PASS
8DPSK	MCH	1.122	PASS
8DPSK	HCH	1.012	PASS






**Test Graph**

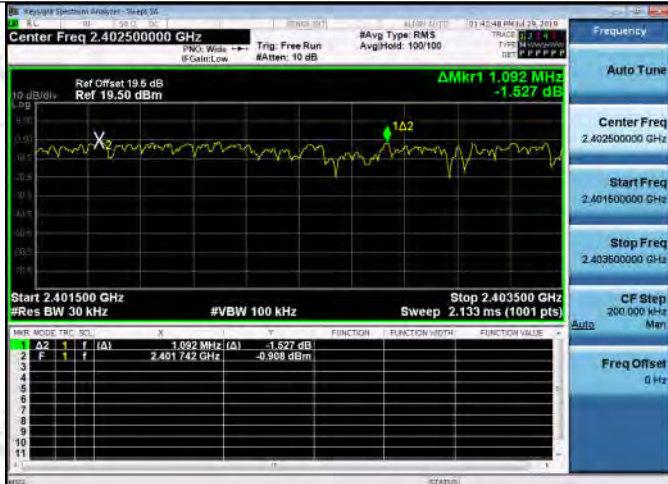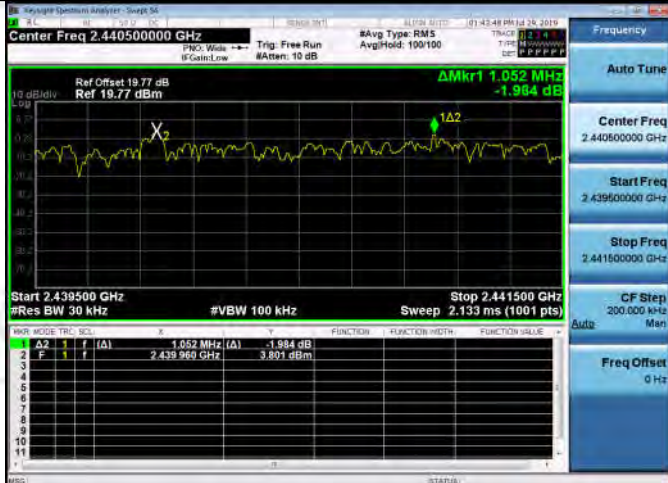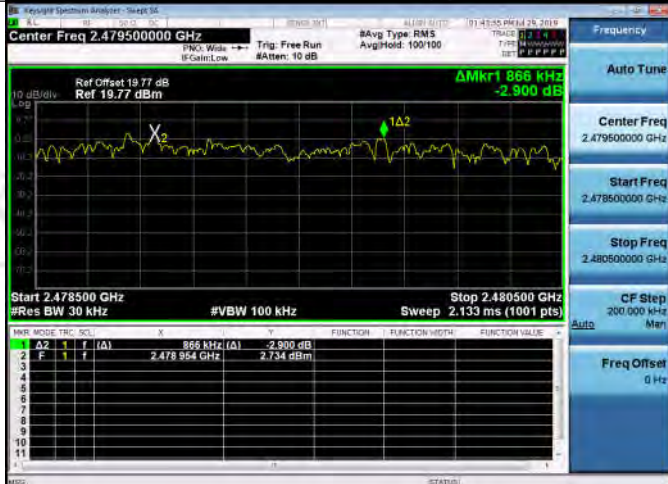

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

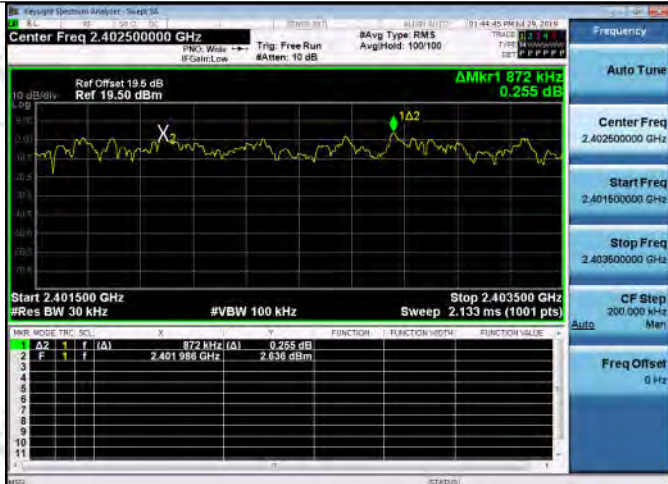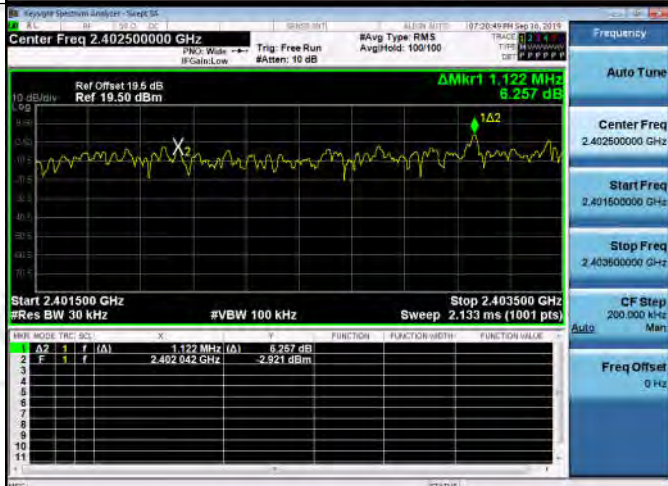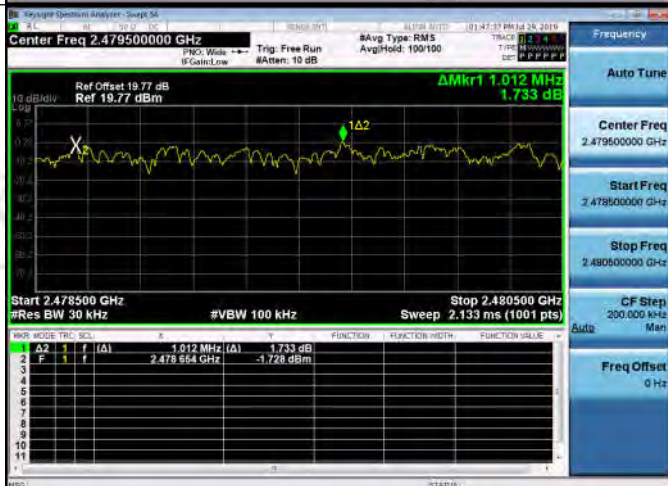

<p>8DPSK/LCH</p>	 <table border="1" data-bbox="638 604 1197 761"> <thead> <tr> <th>PKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>F</th> <th>A</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>f</td> <td>872 MHz (Δ)</td> <td>0.255 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.401988 GHz</td> <td>2.636 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	f	f	872 MHz (Δ)	0.255 dB				2	F	f	f	2.401988 GHz	2.636 dBm			
PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	f	f	872 MHz (Δ)	0.255 dB																							
2	F	f	f	2.401988 GHz	2.636 dBm																							
<p>8DPSK/MCH</p>	 <table border="1" data-bbox="638 1097 1197 1254"> <thead> <tr> <th>PKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>F</th> <th>A</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>f</td> <td>1.122 MHz (Δ)</td> <td>6.257 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.402042 GHz</td> <td>2.921 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	f	f	1.122 MHz (Δ)	6.257 dB				2	F	f	f	2.402042 GHz	2.921 dBm			
PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	f	f	1.122 MHz (Δ)	6.257 dB																							
2	F	f	f	2.402042 GHz	2.921 dBm																							
<p>8DPSK/HCH</p>	 <table border="1" data-bbox="638 1590 1197 1747"> <thead> <tr> <th>PKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>F</th> <th>A</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>f</td> <td>1.012 MHz (Δ)</td> <td>1.733 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td>f</td> <td>2.478564 GHz</td> <td>-1.728 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	f	f	1.012 MHz (Δ)	1.733 dB				2	F	f	f	2.478564 GHz	-1.728 dBm			
PKR	MODE	TRC	SCN	F	A	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	f	f	1.012 MHz (Δ)	1.733 dB																							
2	F	f	f	2.478564 GHz	-1.728 dBm																							




## Appendix C): Dwell Time


### Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.362267	320	0.116	0.78	PASS
GFSK	DH1	MCH	0.362267	320	0.116	0.78	PASS
GFSK	DH1	HCH	0.362266	320	0.116	0.78	PASS
GFSK	DH3	LCH	1.61753	160	0.259	0.94	PASS
GFSK	DH3	MCH	1.6188	160	0.259	0.94	PASS
GFSK	DH3	HCH	1.6188	160	0.259	0.94	PASS
GFSK	DH5	LCH	2.852	106.7	0.304	0.96	PASS
GFSK	DH5	MCH	2.852	106.7	0.304	0.96	PASS
GFSK	DH5	HCH	2.8428	106.7	0.303	0.96	PASS


**Test Graph**

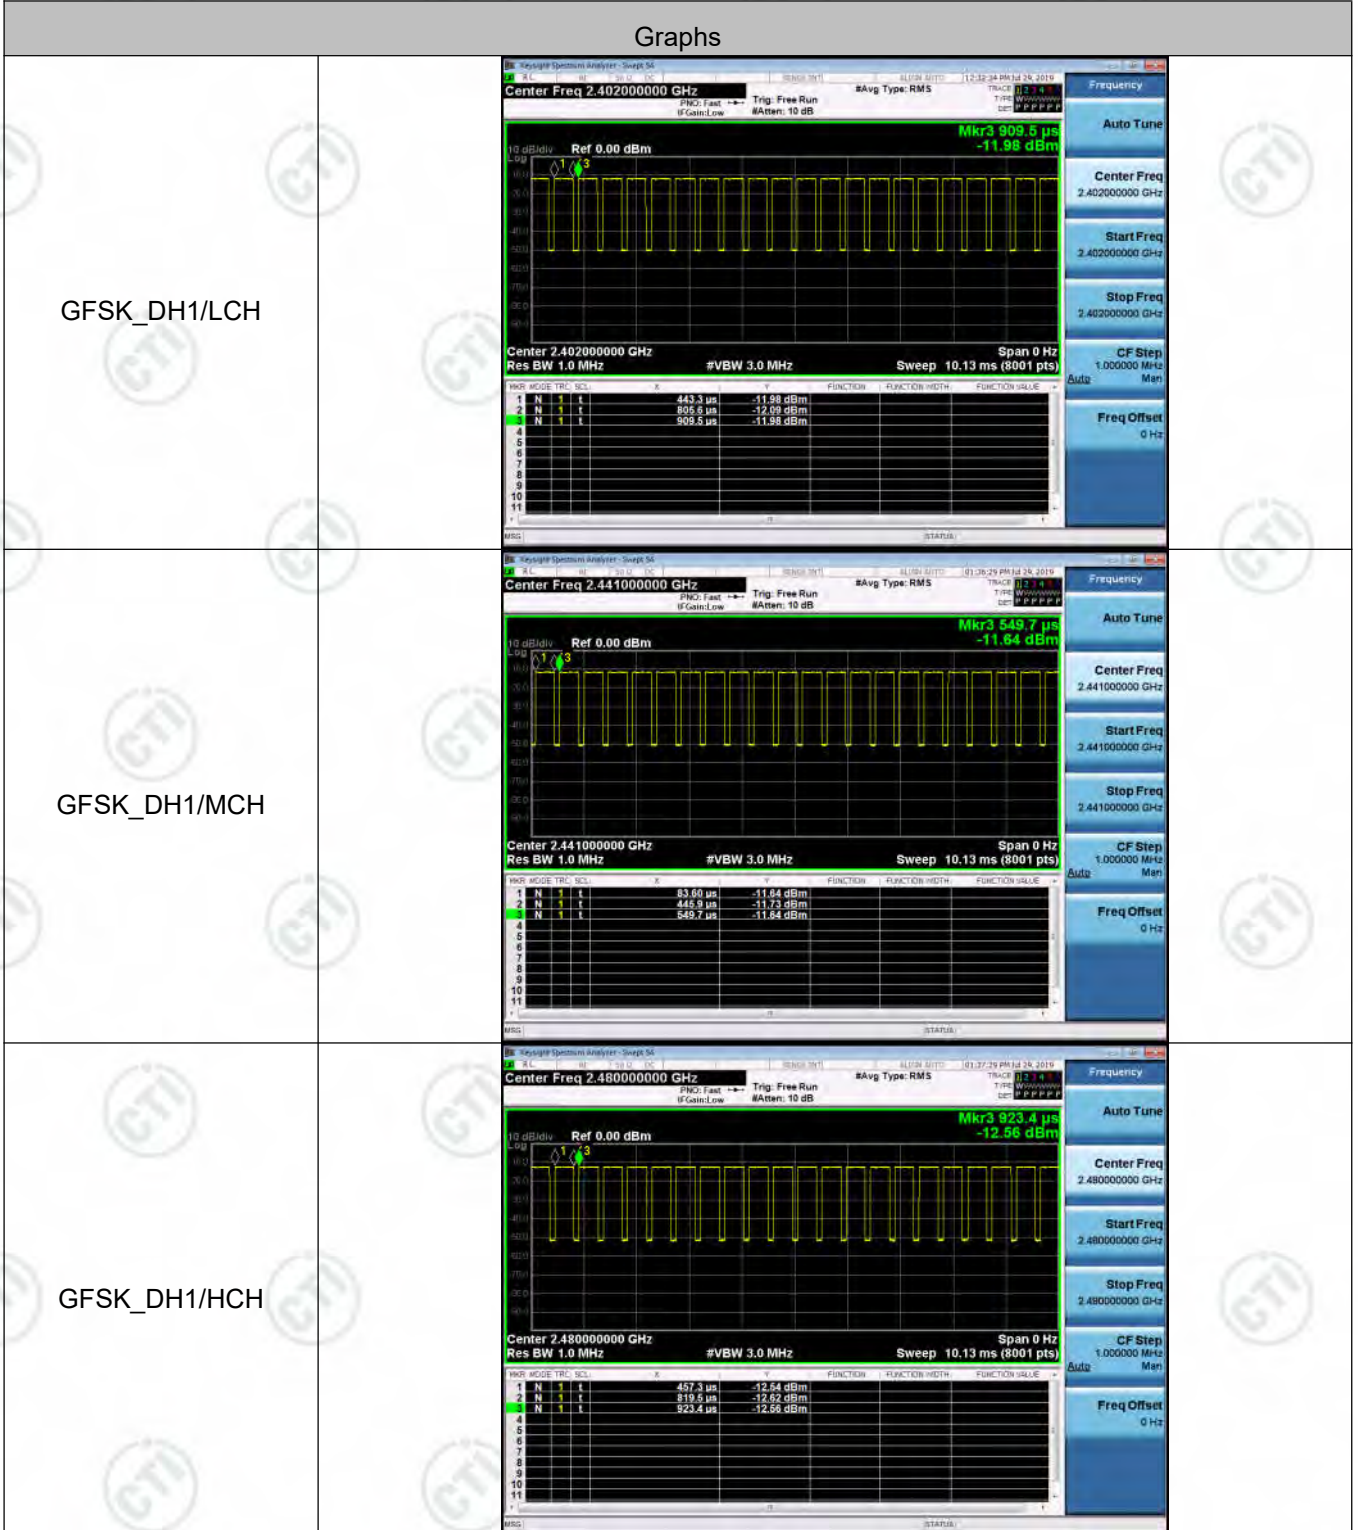



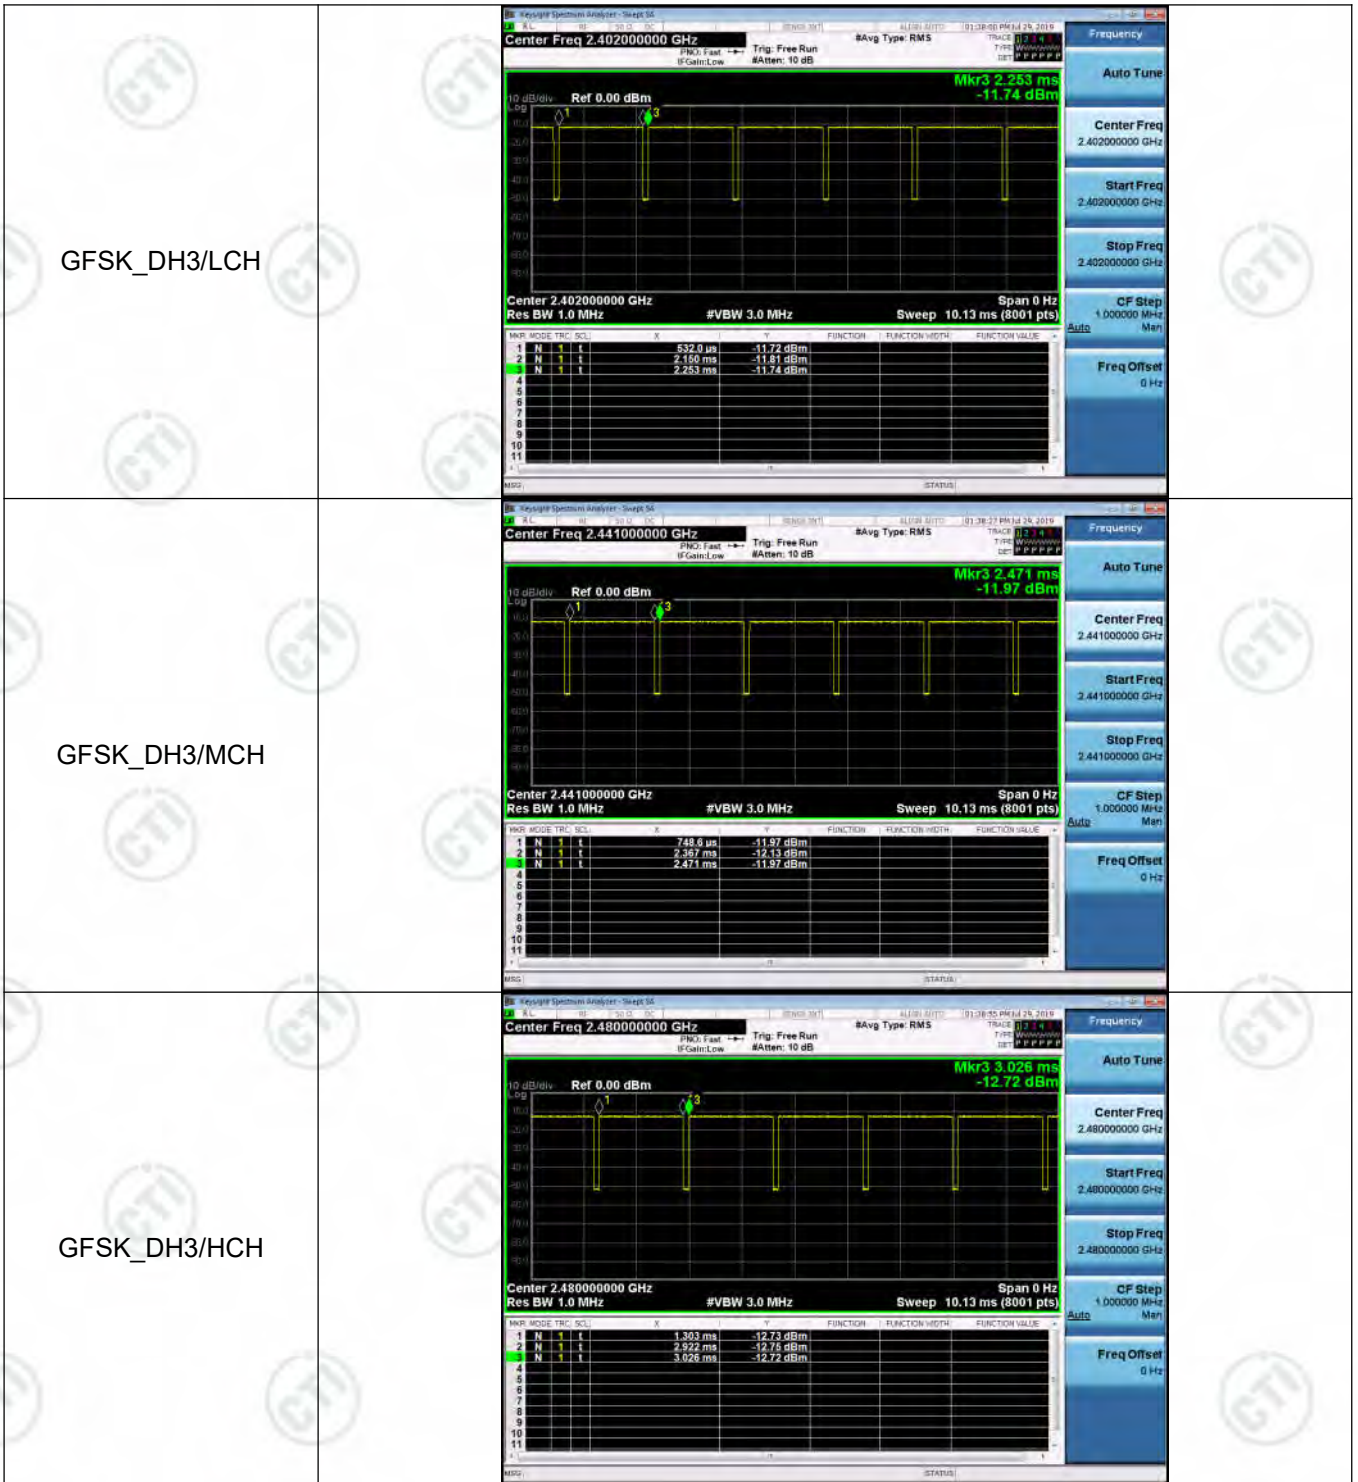



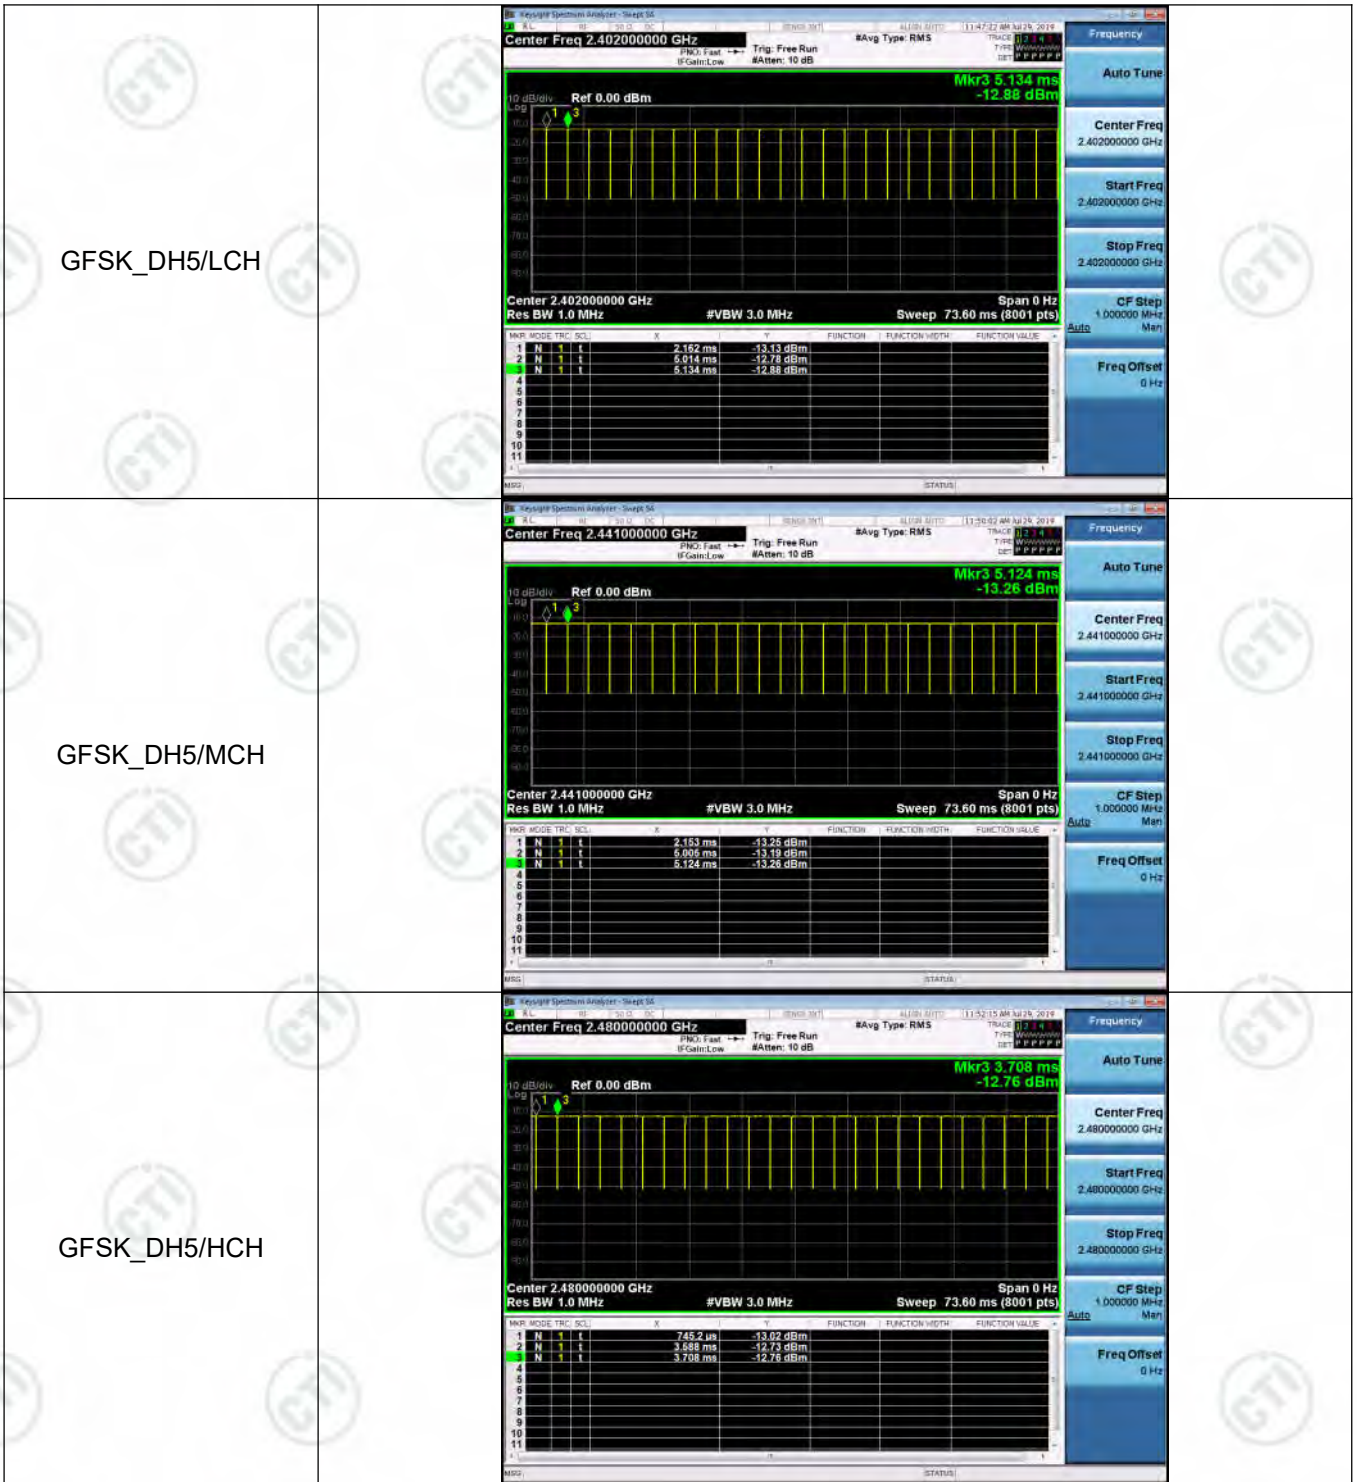


## Appendix D): Hopping Channel Number

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

**Test Graph**

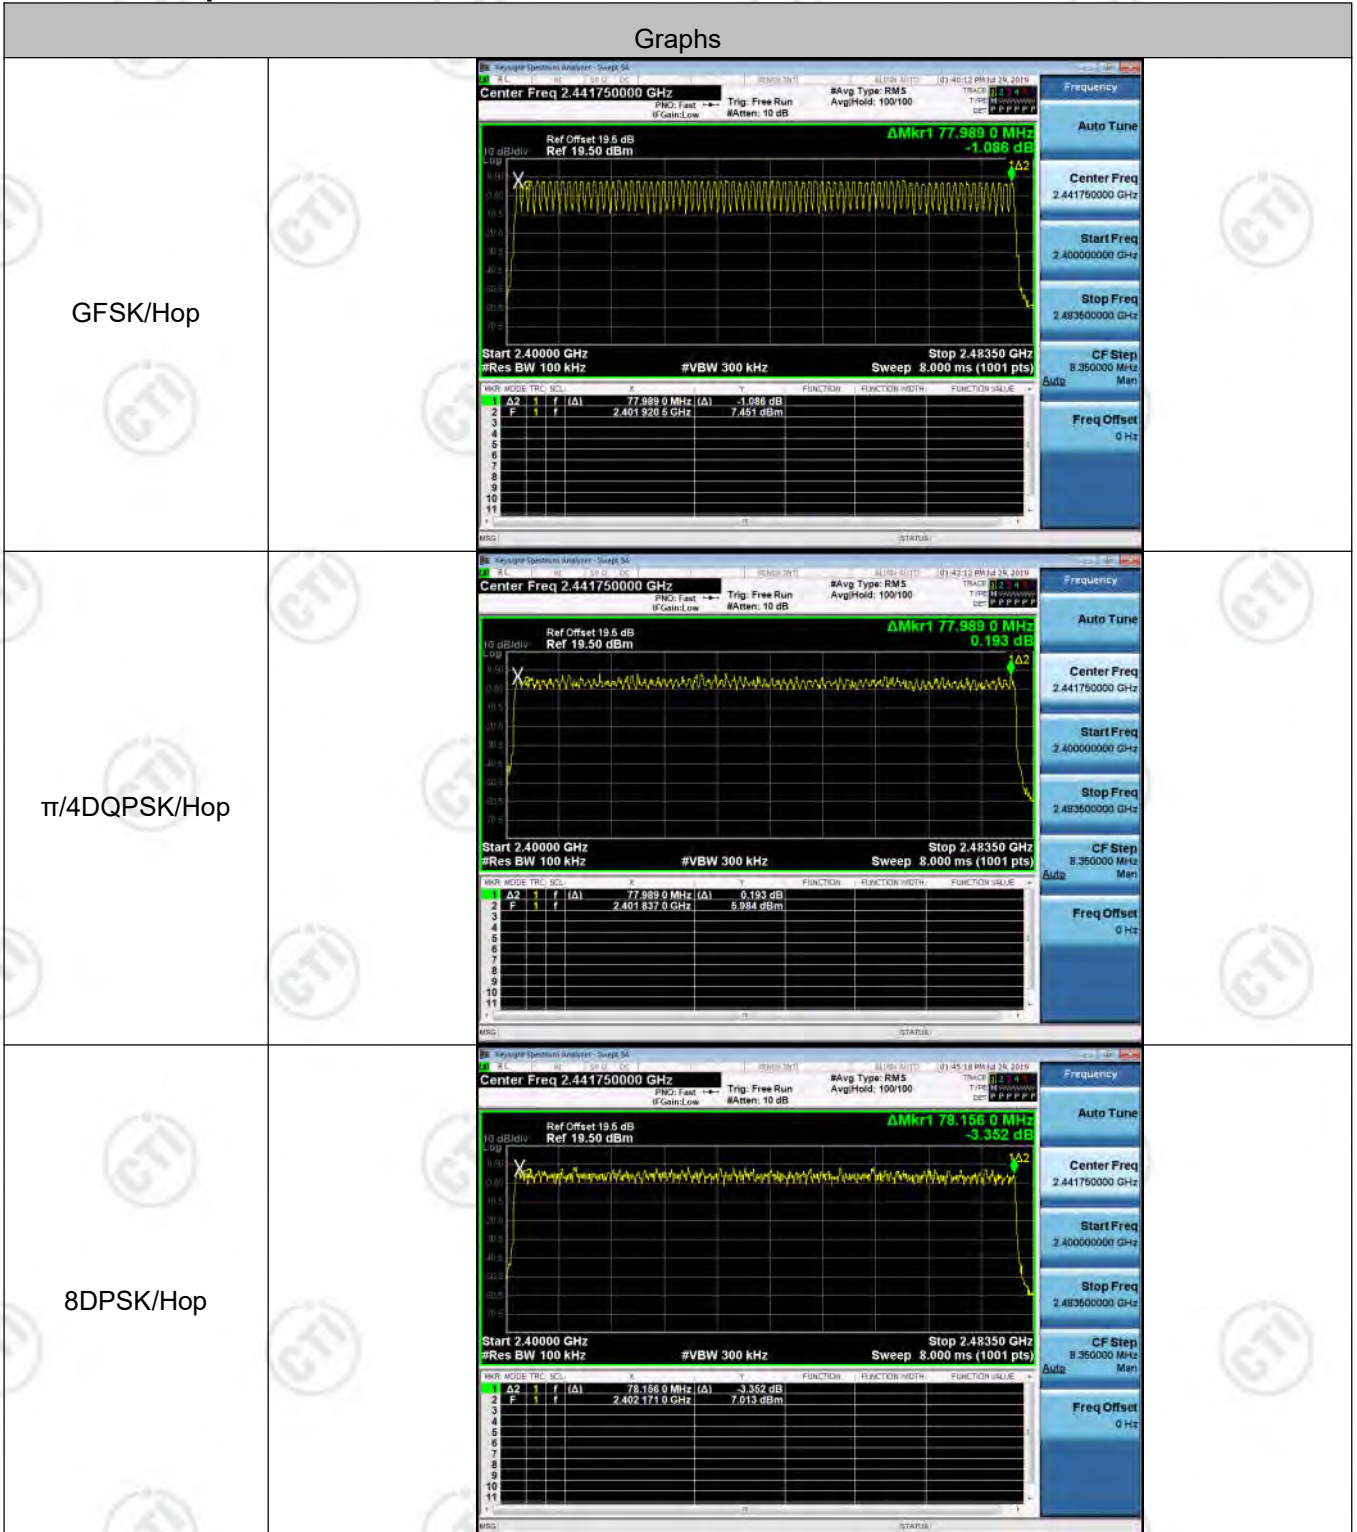




## Appendix E): Conducted Peak Output Power

### Result Table



Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	6.874	PASS
GFSK	MCH	6.880	PASS
GFSK	HCH	6.090	PASS
$\pi/4$ DQPSK	LCH	8.134	PASS
$\pi/4$ DQPSK	MCH	8.308	PASS
$\pi/4$ DQPSK	HCH	8.686	PASS
8DPSK	LCH	9.462	PASS
8DPSK	MCH	9.398	PASS
8DPSK	HCH	8.725	PASS

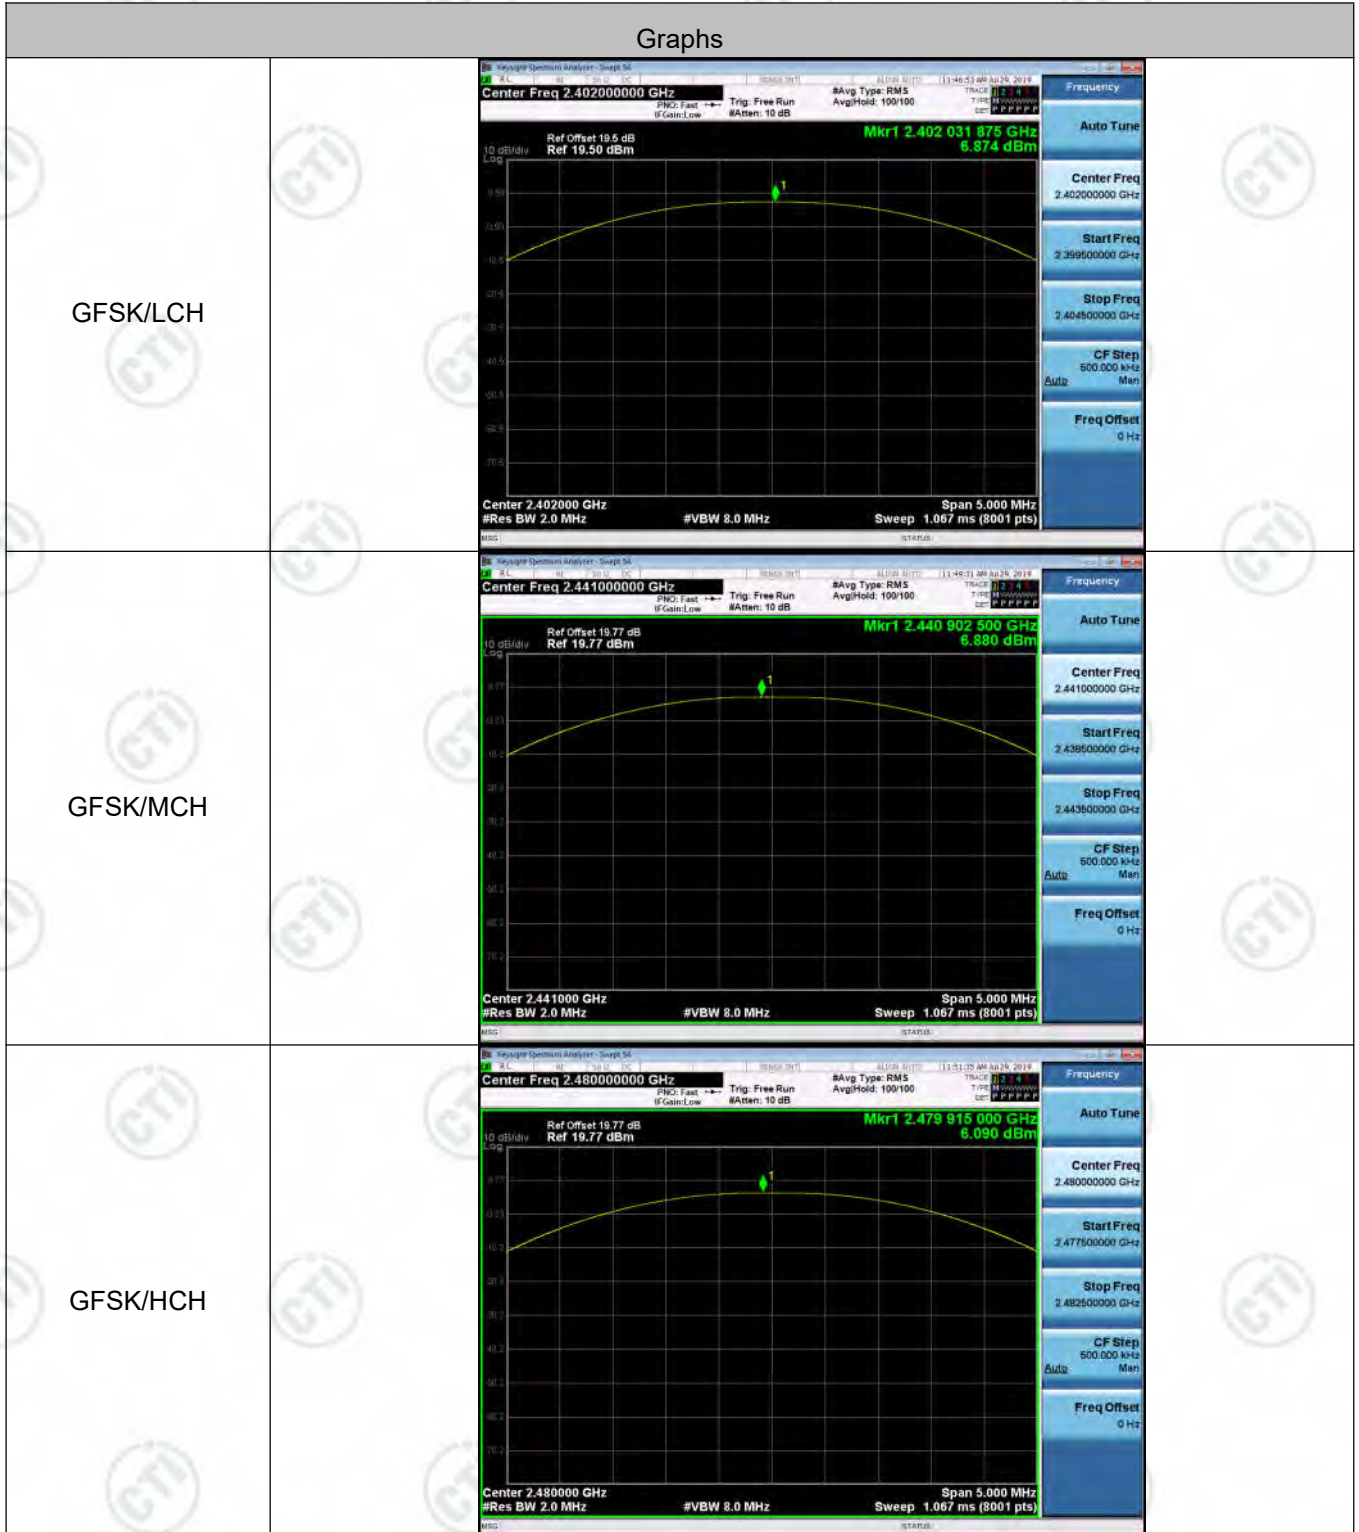**Test Graph**



<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr1 2.401 881 250 GHz 8.134 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.440 893 750 GHz 8.308 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.479 900 625 GHz 8.686 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>




<p>8DPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Mkr1 2.402 039 375 GHz 9.462 dBm Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p>8DPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Mkr1 2.440 963 125 GHz 9.398 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
<p>8DPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Mkr1 2.479 982 500 GHz 8.725 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>

## Appendix F): Band-edge for RF Conducted Emissions

**Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	6.619	Off	-59.366	-13.38	PASS
			7.762	On	-57.296	-12.24	PASS
GFSK	HCH	2480	6.928	Off	-56.583	-13.07	PASS
			7.079	On	-56.732	-12.92	PASS
$\pi/4$ DQPSK	LCH	2402	7.645	Off	-59.585	-12.36	PASS
			7.711	On	-57.948	-12.29	PASS
$\pi/4$ DQPSK	HCH	2480	6.979	Off	-57.085	-13.02	PASS
			6.957	On	-58.282	-13.04	PASS
8DPSK	LCH	2402	7.503	Off	-58.839	-12.5	PASS
			7.710	On	-57.270	-12.29	PASS
8DPSK	HCH	2480	6.775	Off	-57.625	-13.23	PASS
			7.010	On	-57.228	-12.99	PASS

**Test Graph**

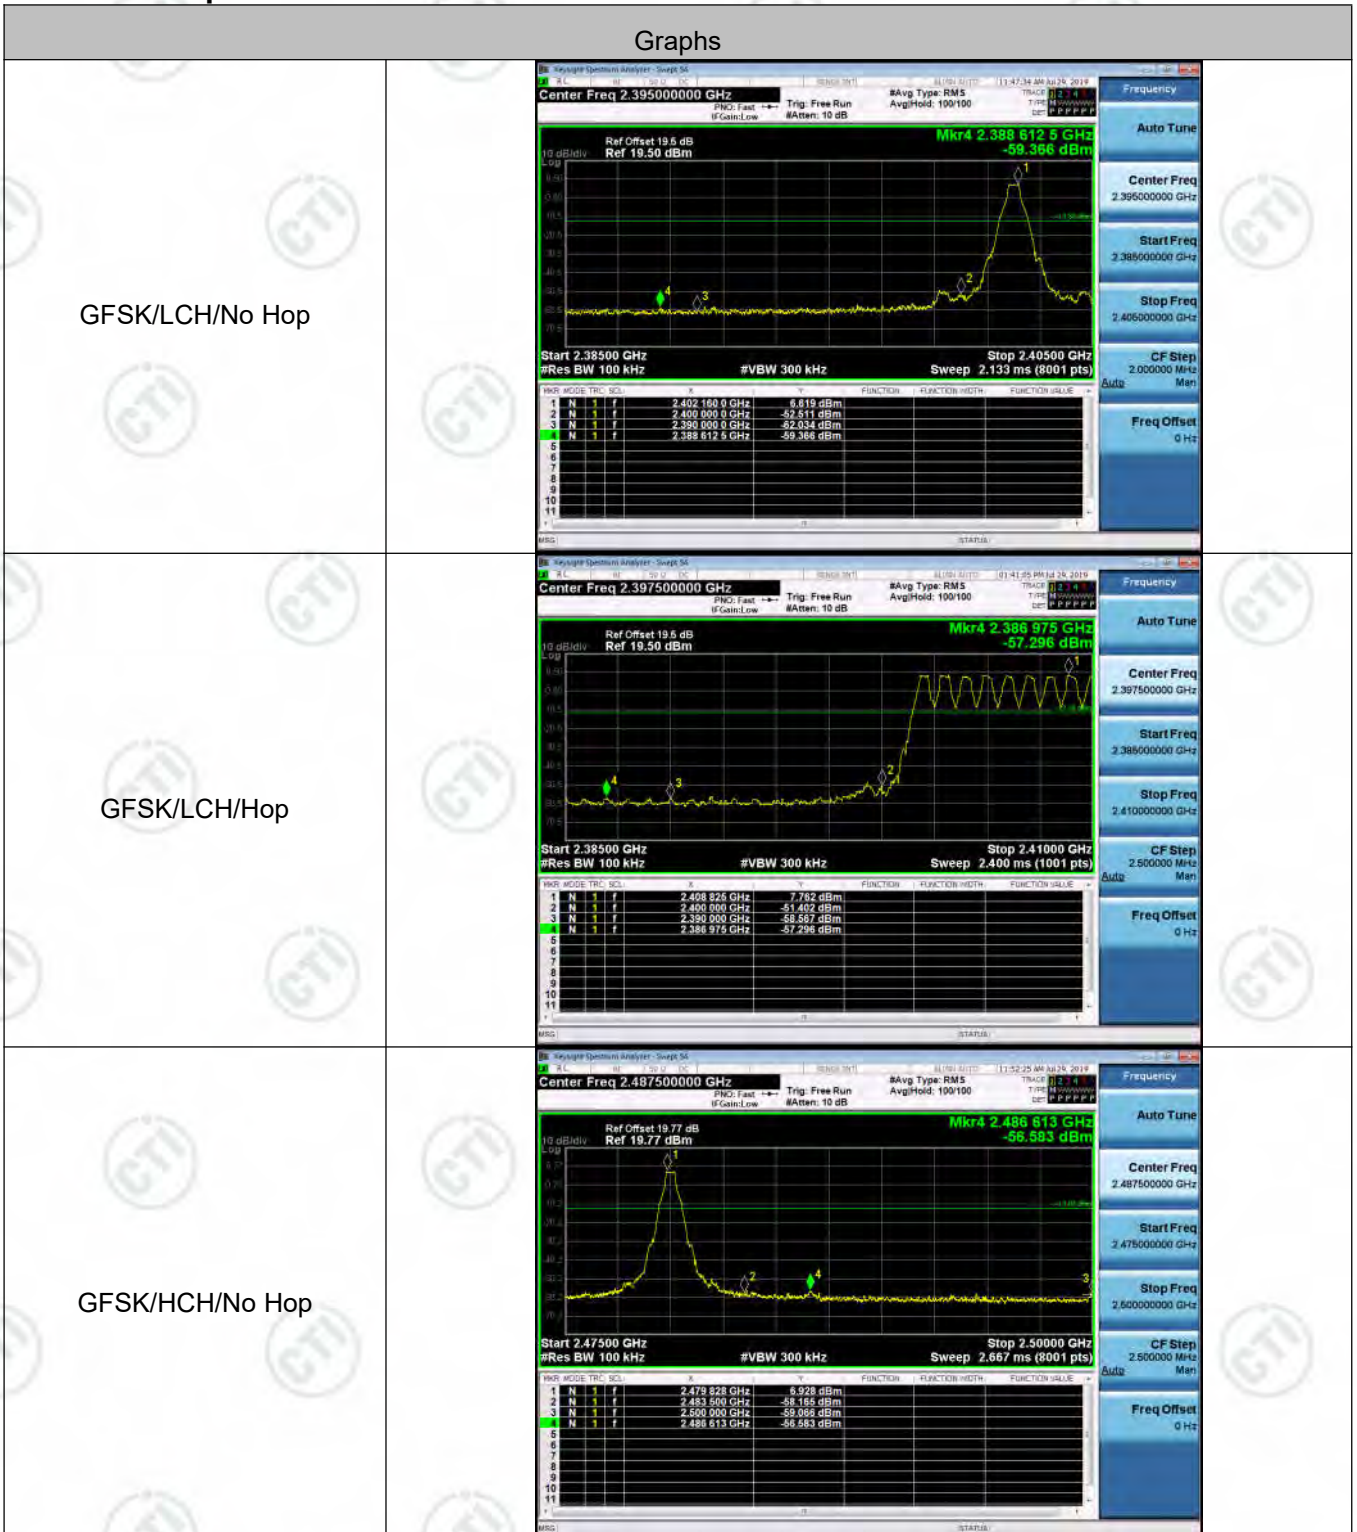










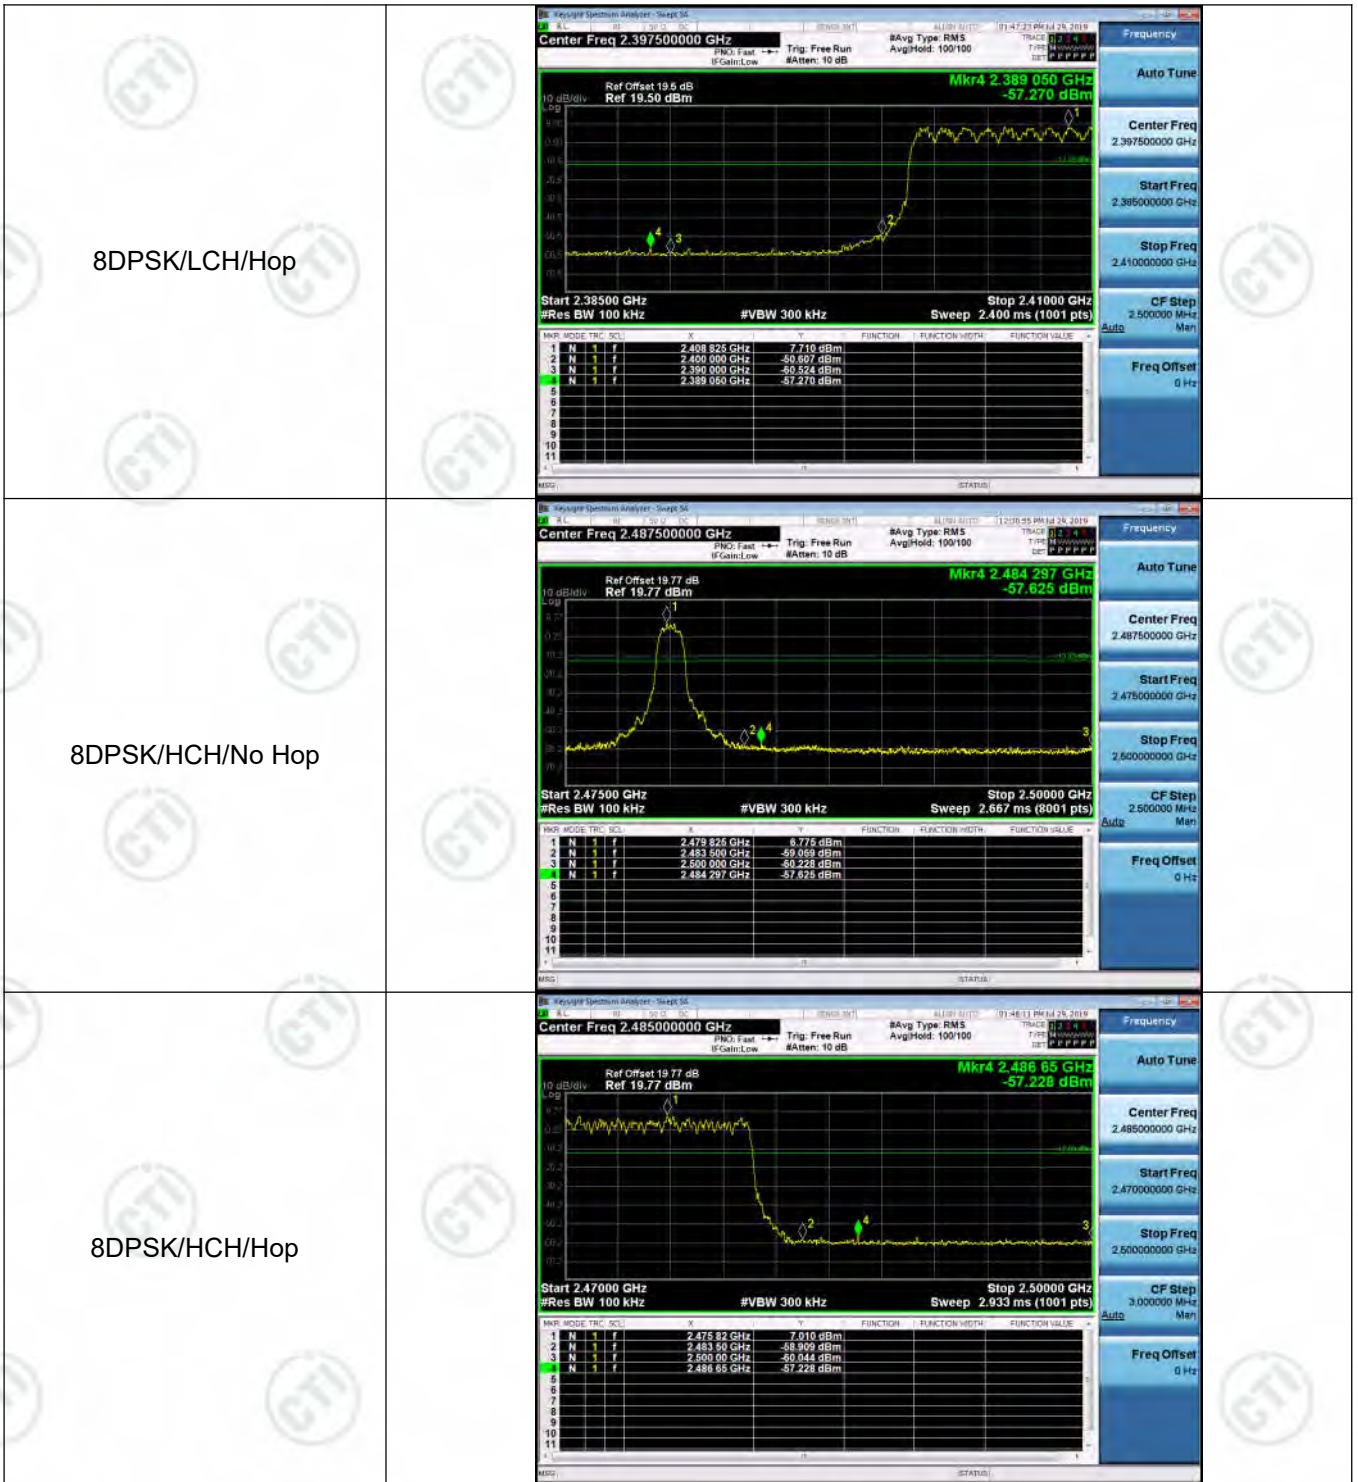



## Appendix G): RF Conducted Spurious Emissions

### Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	6.624	<Limit	PASS
GFSK	MCH	6.598	<Limit	PASS
GFSK	HCH	6.908	<Limit	PASS
$\pi/4$ DQPSK	LCH	7.618	<Limit	PASS
$\pi/4$ DQPSK	MCH	6.671	<Limit	PASS
$\pi/4$ DQPSK	HCH	6.933	<Limit	PASS
8DPSK	LCH	7.48	<Limit	PASS
8DPSK	MCH	7.49	<Limit	PASS
8DPSK	HCH	6.601	<Limit	PASS

**Test Graph**







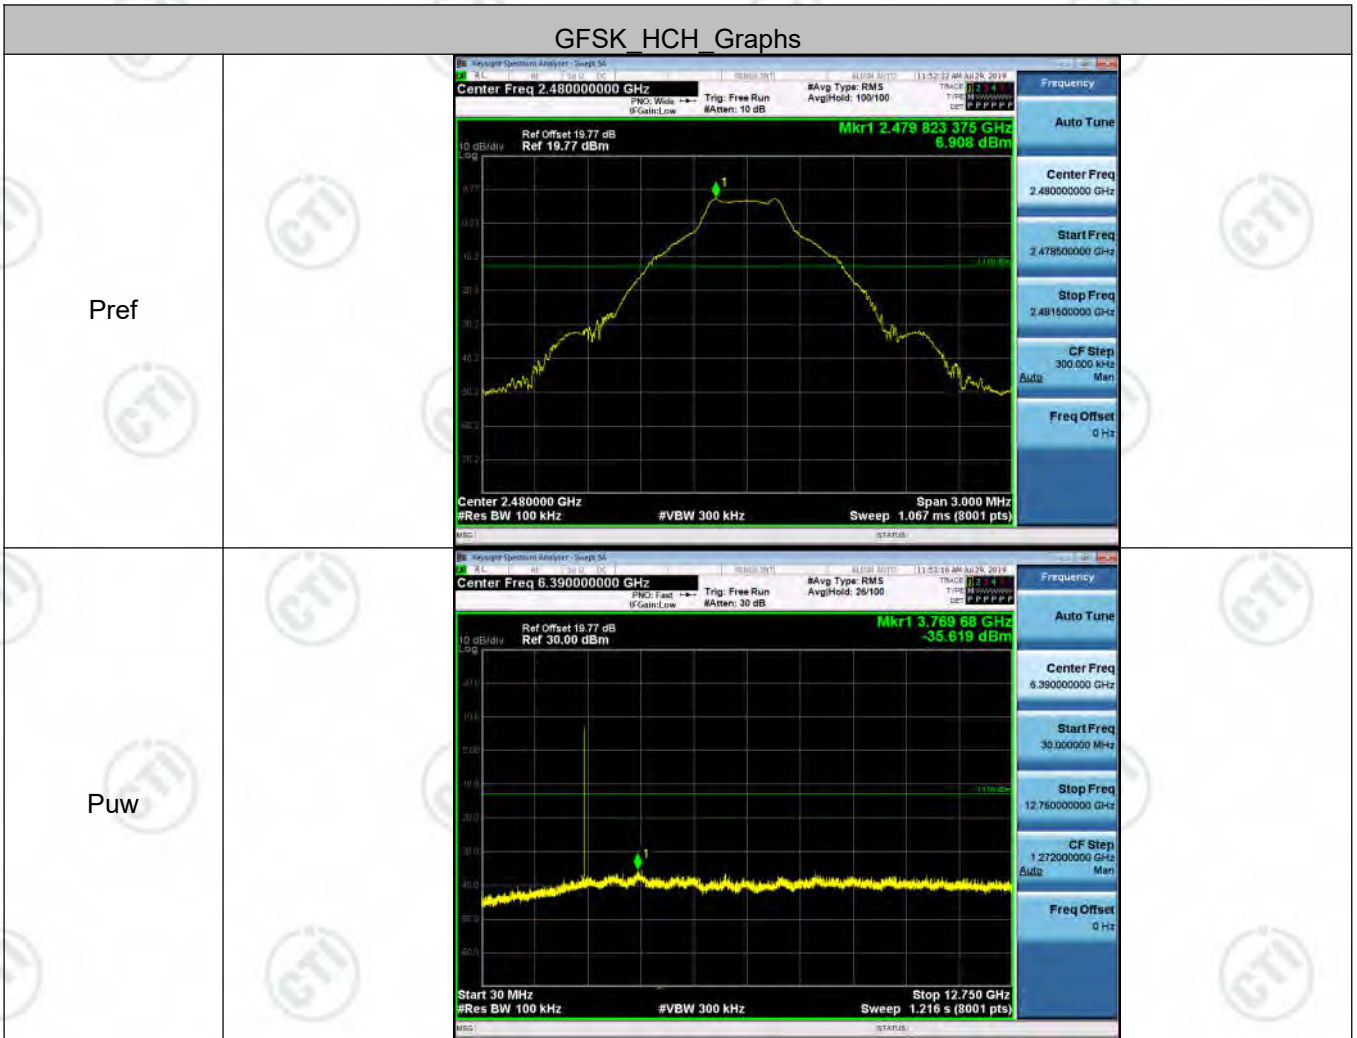

















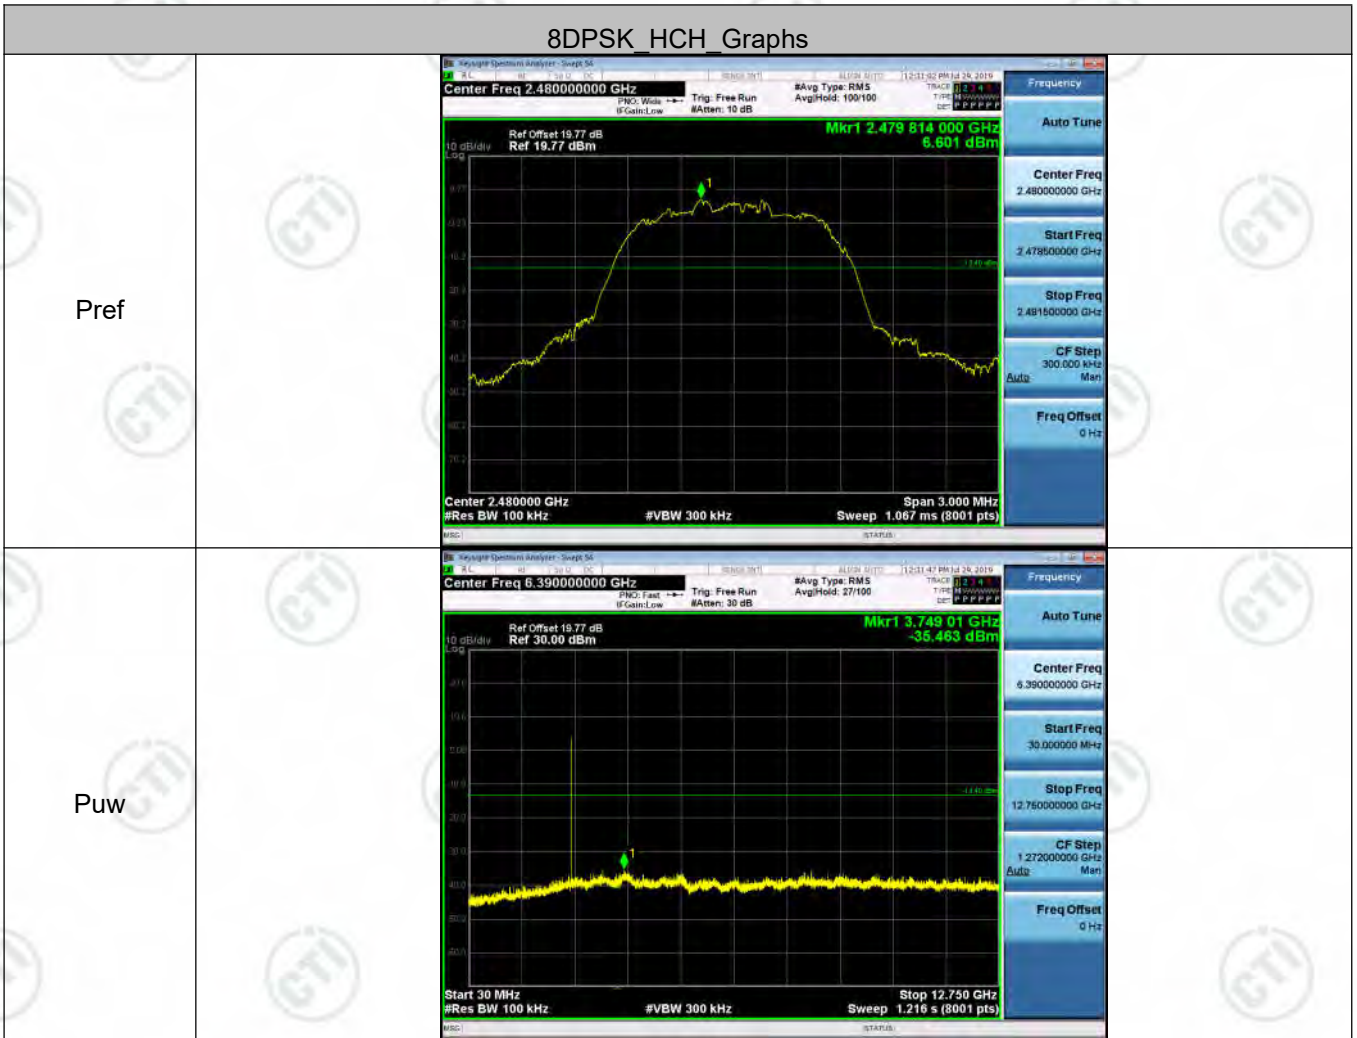


## Appendix H): Pseudorandom Frequency Hopping Sequence
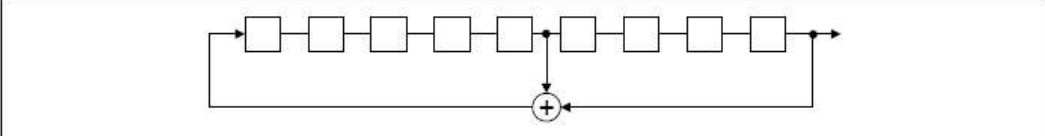
<b>Test Requirement:</b>	<b>47 CFR Part 15C Section 15.247 (a)(1) requirement:</b>
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
<p><b>EUT Pseudorandom Frequency Hopping Sequence</b></p>	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	



## Appendix I): Antenna Requirement

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:




The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 2dBi.






Live line:

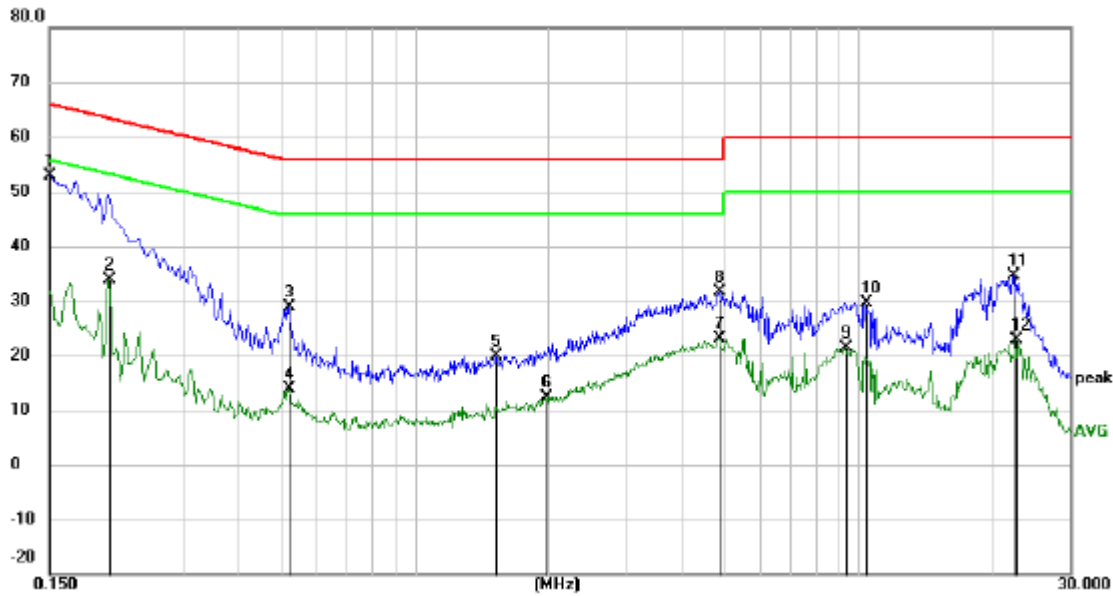

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	43.02	9.97	52.99	66.00	-13.01	peak	
2		0.2040	23.95	10.02	33.97	53.45	-19.48	AVG	
3		0.5190	18.82	10.02	28.84	56.00	-27.16	peak	
4		0.5190	3.89	10.02	13.91	46.00	-32.09	AVG	
5		1.5270	10.07	9.87	19.94	56.00	-36.06	peak	
6		1.9725	2.48	9.83	12.31	46.00	-33.69	AVG	
7		4.8345	13.34	9.83	23.17	46.00	-22.83	AVG	
8		4.8705	21.68	9.83	31.51	56.00	-24.49	peak	
9		9.3075	11.35	9.93	21.28	50.00	-28.72	AVG	
10		10.3425	19.63	9.96	29.59	60.00	-30.41	peak	
11		22.2314	24.64	9.94	34.58	60.00	-25.42	peak	
12		22.5960	12.83	9.94	22.77	50.00	-27.23	AVG	

Neutral line:

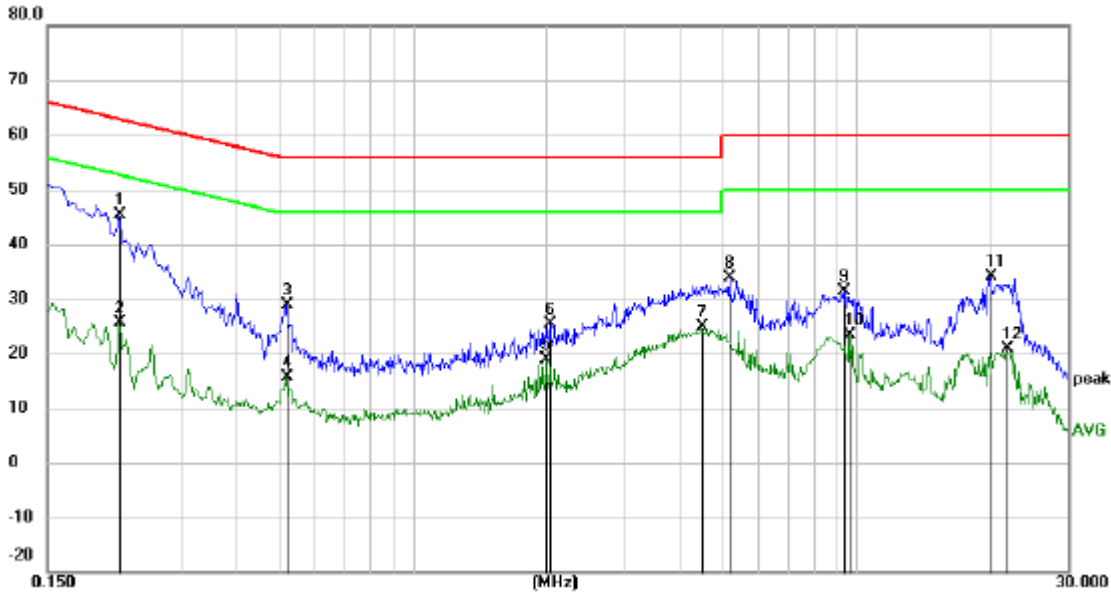

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.2175	35.30	10.03	45.33	62.91	-17.58	peak	
2		0.2175	15.61	10.03	25.64	52.91	-27.27	AVG	
3		0.5190	18.74	10.02	28.76	56.00	-27.24	peak	
4		0.5190	5.64	10.02	15.66	46.00	-30.34	AVG	
5		1.9995	8.98	9.83	18.81	46.00	-27.19	AVG	
6		2.0400	15.52	9.83	25.35	56.00	-30.65	peak	
7		4.4880	14.96	9.83	24.79	46.00	-21.21	AVG	
8		5.1765	23.96	9.83	33.79	60.00	-26.21	peak	
9		9.3569	21.43	9.94	31.37	60.00	-28.63	peak	
10		9.6090	13.45	9.95	23.40	50.00	-26.60	AVG	
11		19.9500	24.12	9.93	34.05	60.00	-25.95	peak	
12		21.8265	10.95	9.94	20.89	50.00	-29.11	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.




## Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

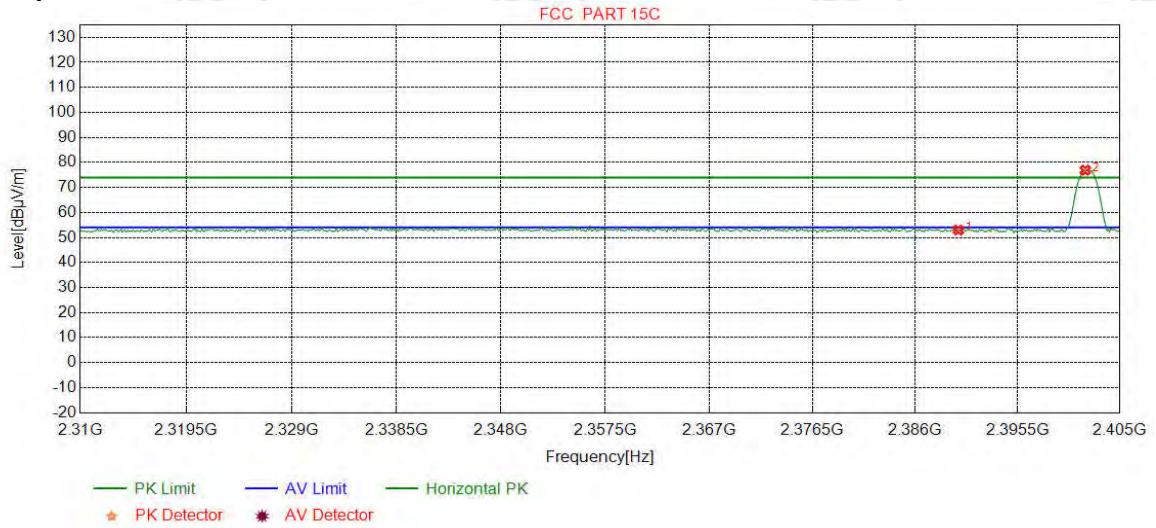

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.80	52.98	74.00	21.02	Pass	Horizontal
2	2401.7897	32.26	13.31	-42.43	73.76	76.90	74.00	-2.90	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		

**Test Graph**

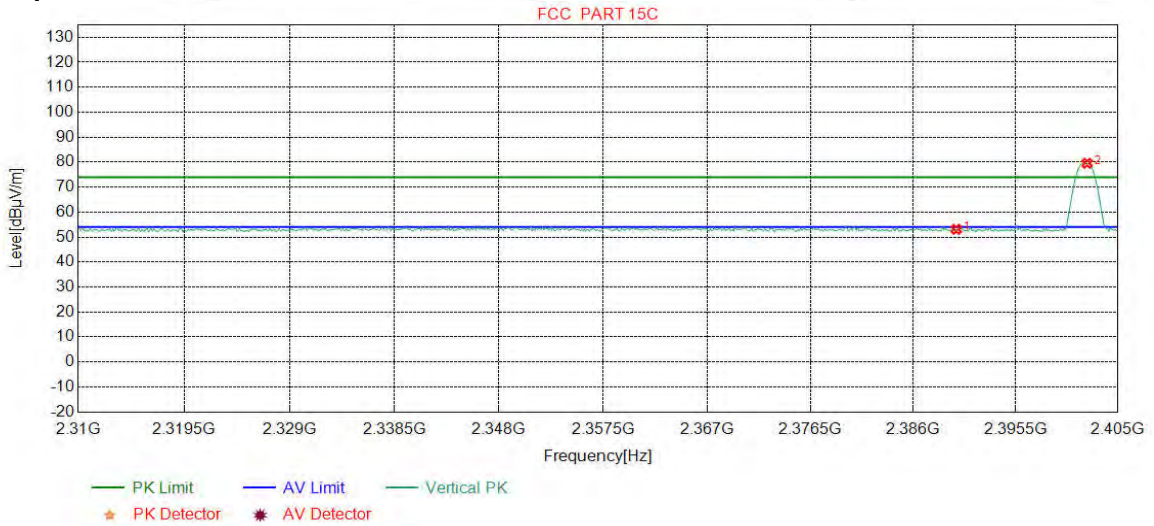


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.91	53.09	74.00	20.91	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	76.41	79.55	74.00	-5.55	Pass	Vertical



Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

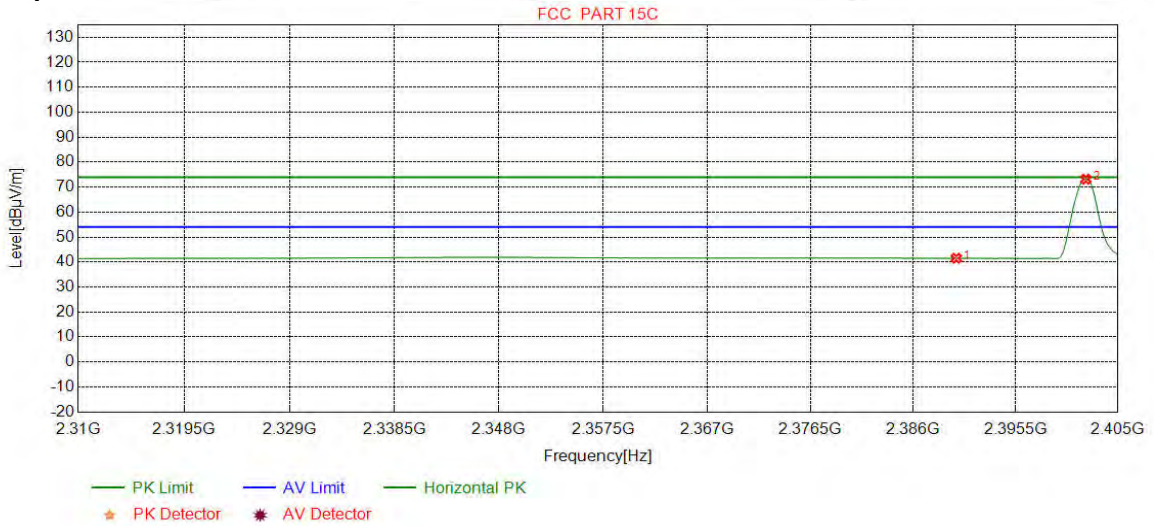

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.34	41.52	54.00	12.48	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	70.01	73.15	54.00	-19.15	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

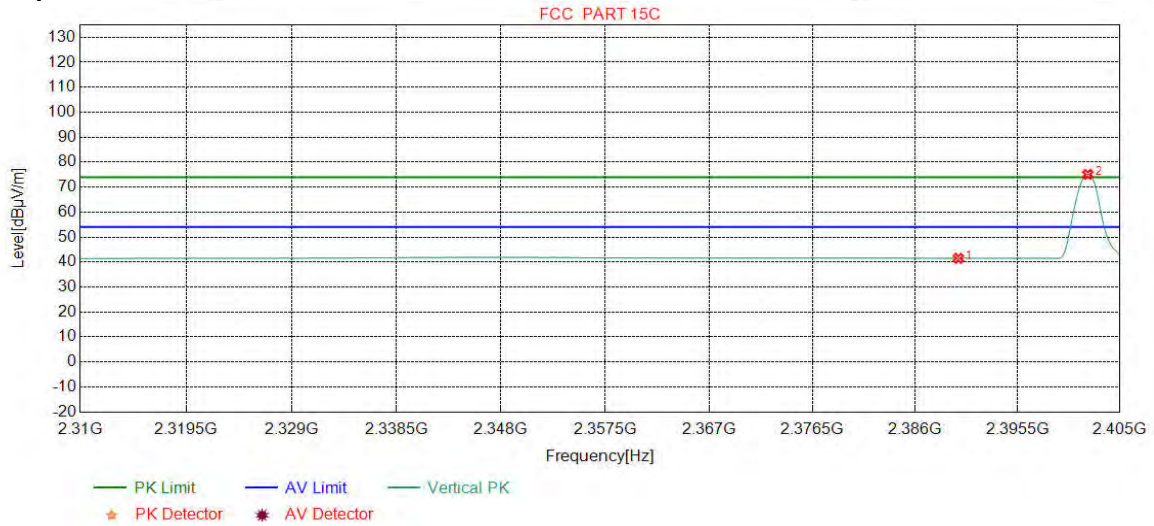

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.31	41.49	54.00	12.51	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	71.96	75.10	54.00	-21.10	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		

**Test Graph**

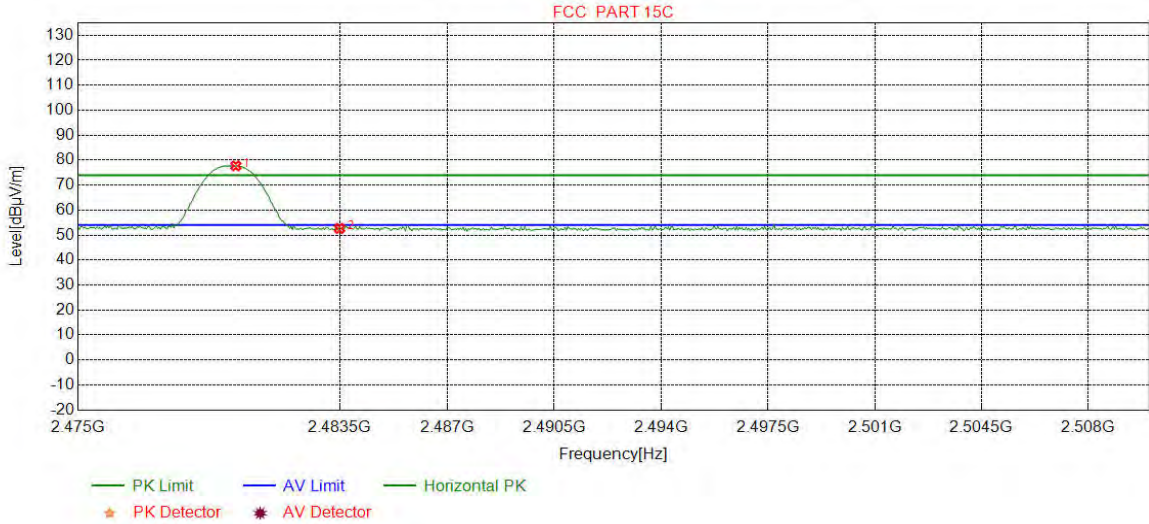


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.1252	32.37	13.39	-42.40	74.36	77.72	74.00	-3.72	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.29	52.65	74.00	21.35	Pass	Horizontal



Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

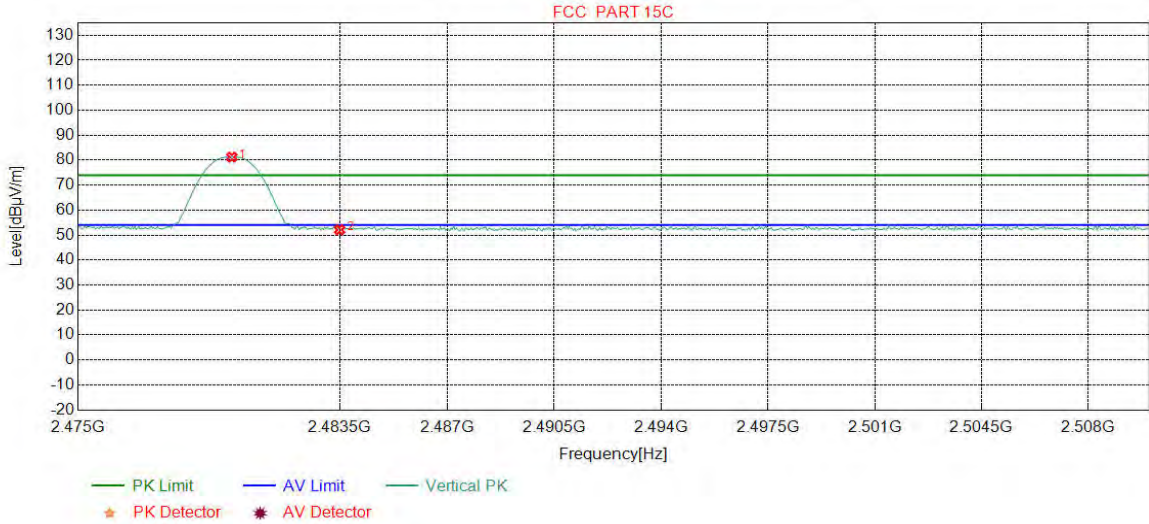

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	77.83	81.20	74.00	-7.20	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	48.74	52.10	74.00	21.90	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


**Test Graph**

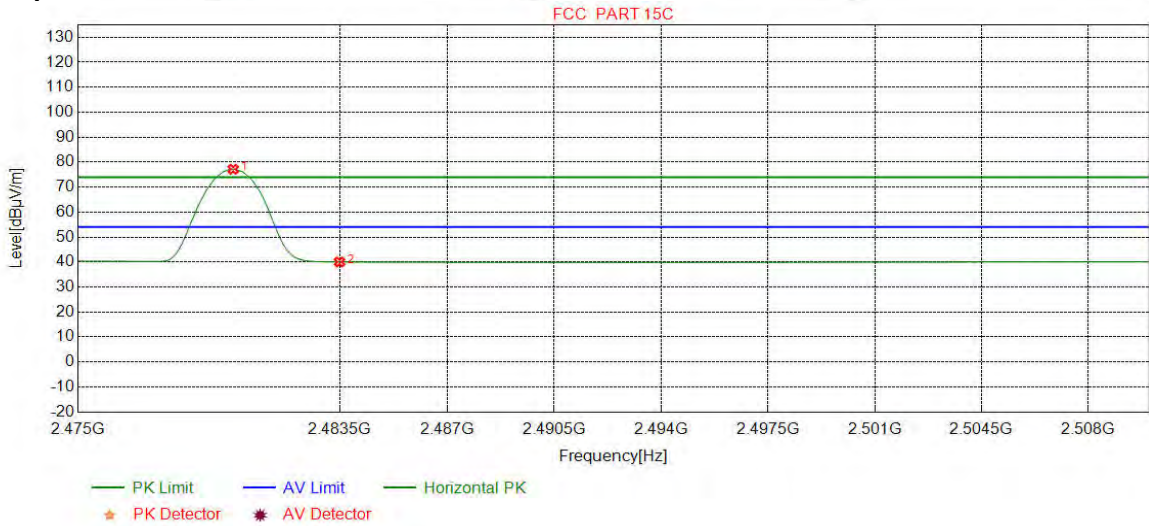

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	73.78	77.15	54.00	-23.15	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.66	40.02	54.00	13.98	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		

**Test Graph**

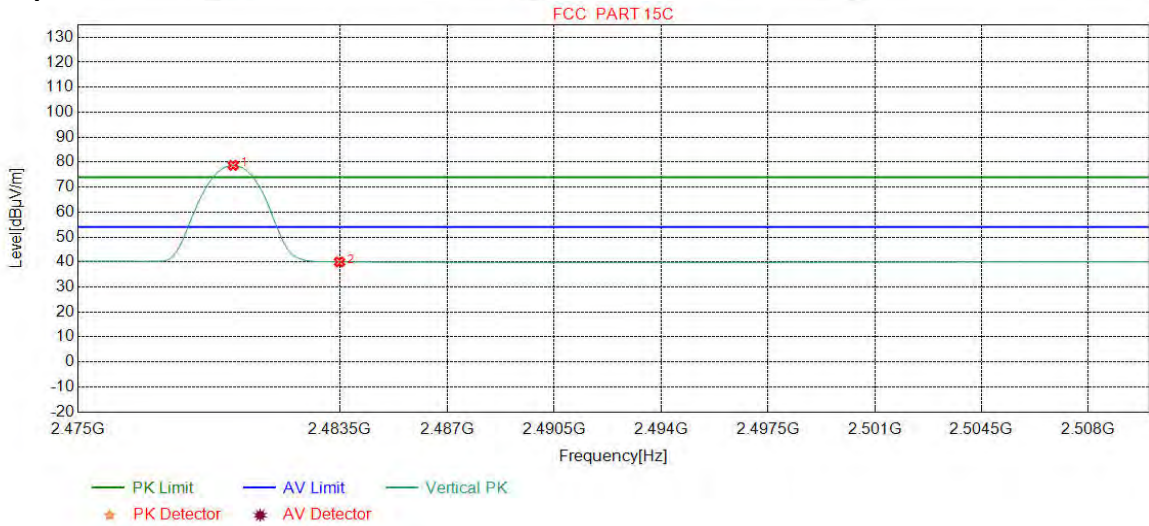


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	75.36	78.73	54.00	-24.73	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.67	40.03	54.00	13.97	Pass	Vertical



Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

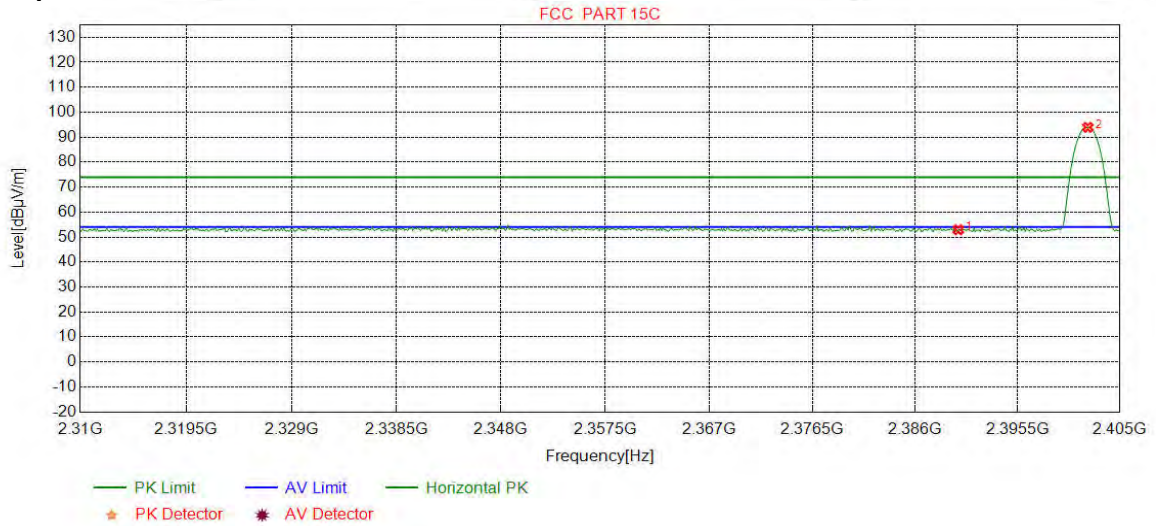

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.75	52.93	74.00	21.07	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	90.80	93.94	74.00	-19.94	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

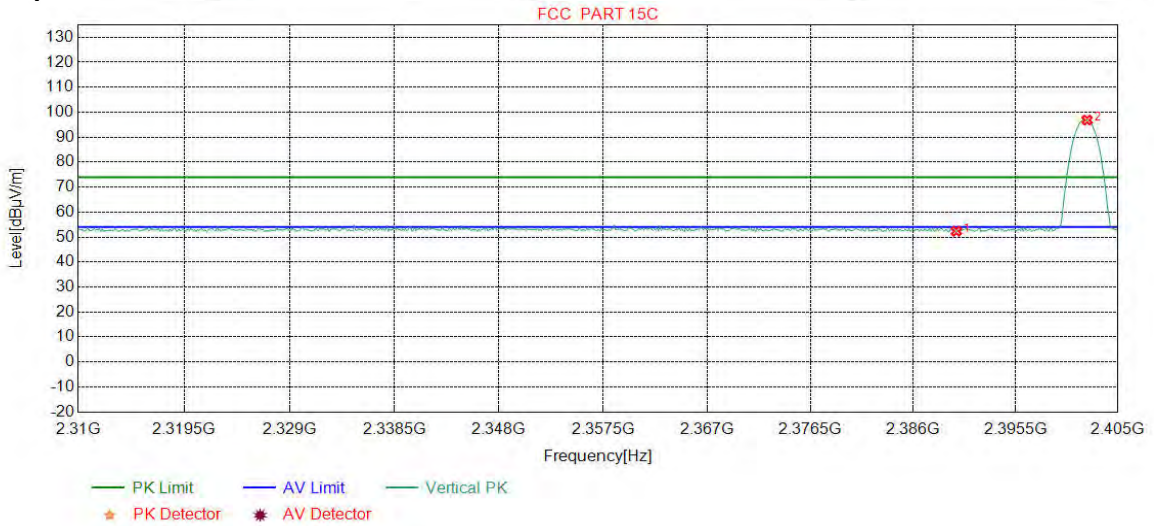

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.16	52.34	74.00	21.66	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	93.70	96.84	74.00	-22.84	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		

**Test Graph**

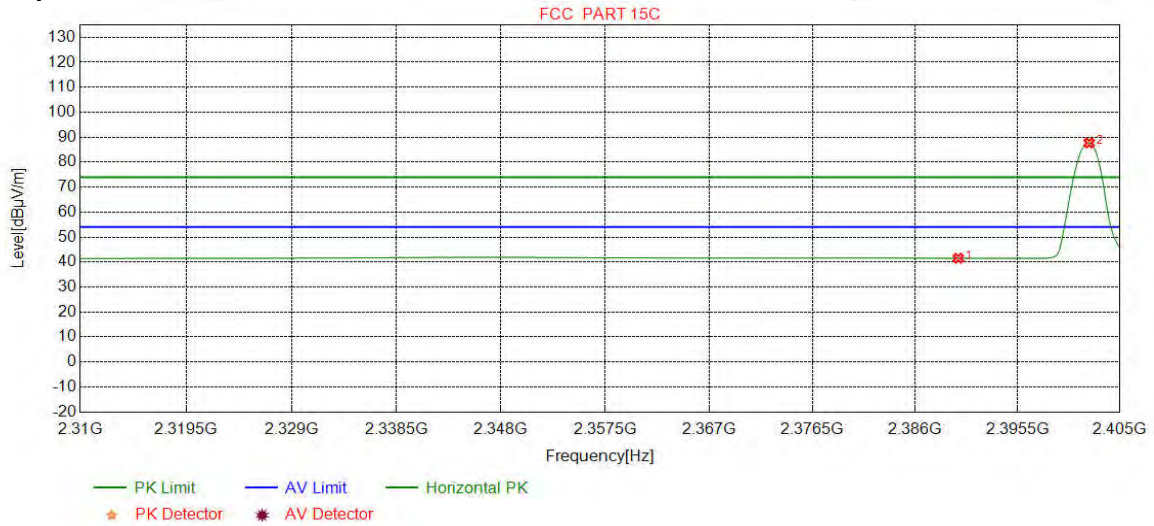


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.33	41.51	54.00	12.49	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	84.55	87.69	54.00	-33.69	Pass	Horizontal



Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

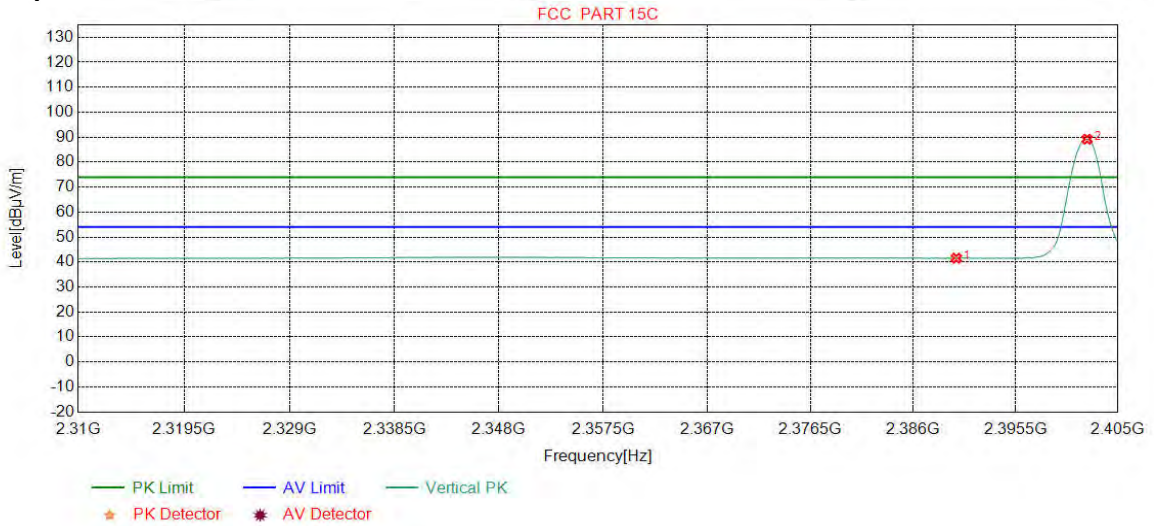

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.36	41.54	54.00	12.46	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	86.03	89.17	54.00	-35.17	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

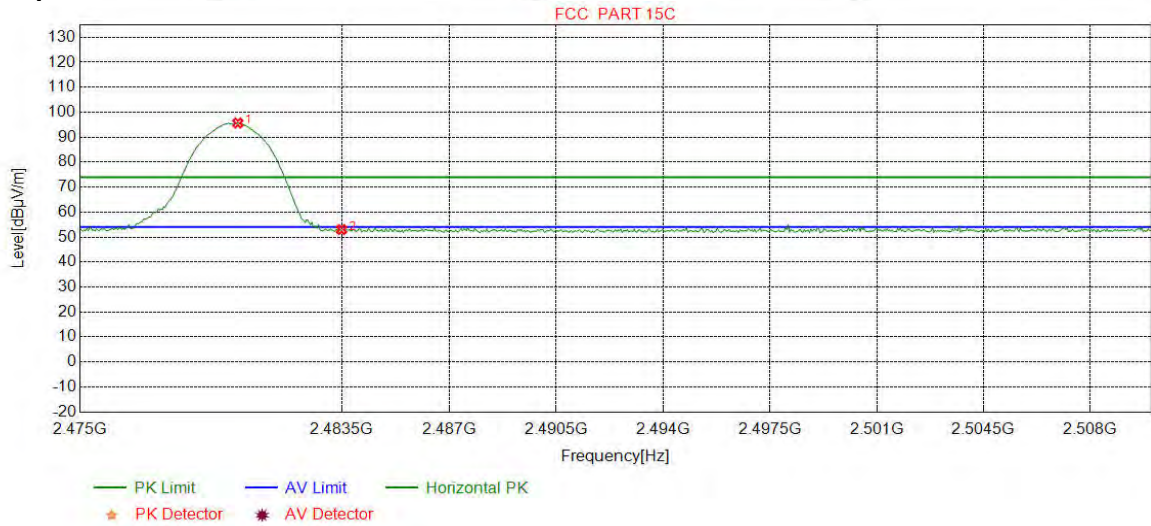

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1252	32.37	13.39	-42.40	92.30	95.66	74.00	-21.66	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.64	53.00	74.00	21.00	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		

**Test Graph**

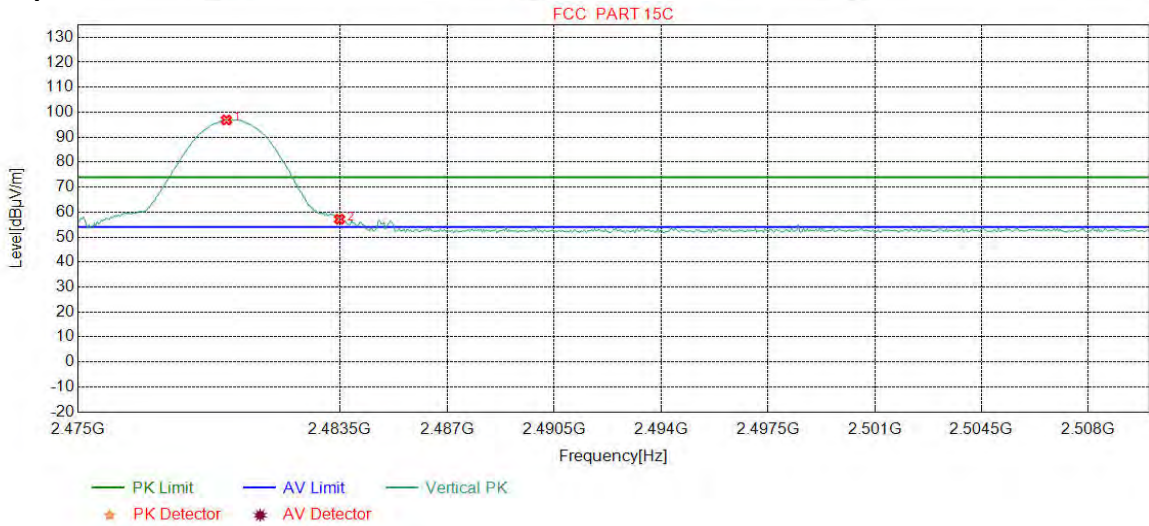


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	93.50	96.87	74.00	-22.87	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	53.78	57.14	74.00	16.86	Pass	Vertical



Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


**Test Graph**

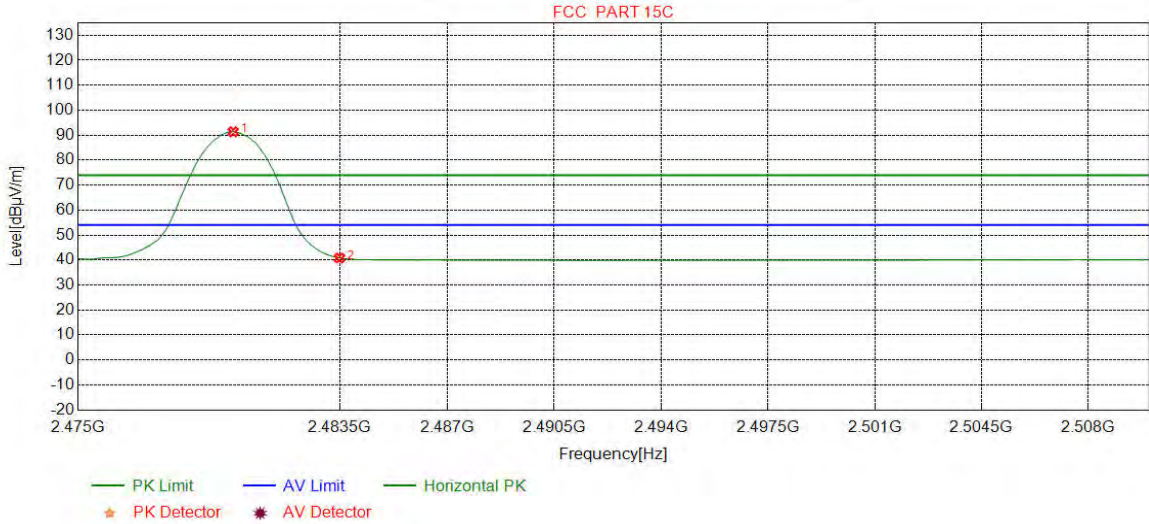

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	87.99	91.36	54.00	-37.36	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.43	40.79	54.00	13.21	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


**Test Graph**

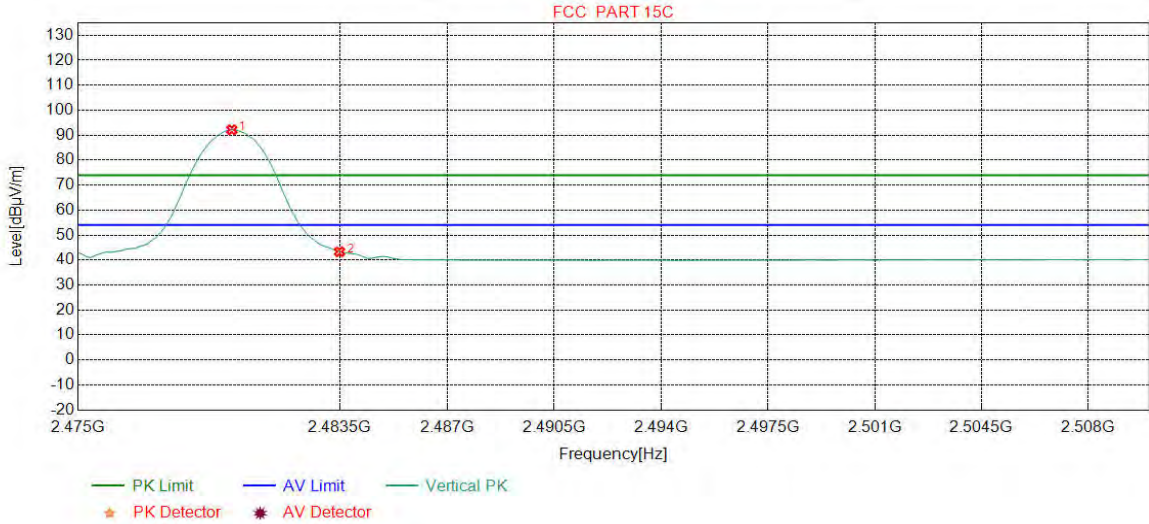

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	88.79	92.16	54.00	-38.16	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	39.95	43.31	54.00	10.69	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		

**Test Graph**

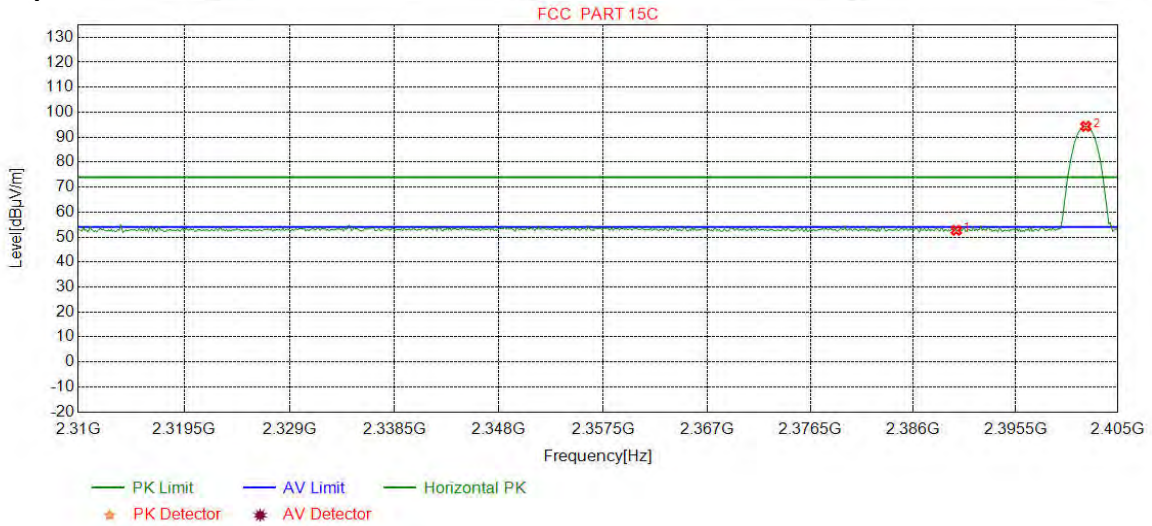


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.50	52.68	74.00	21.32	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	91.15	94.29	74.00	-20.29	Pass	Horizontal



Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

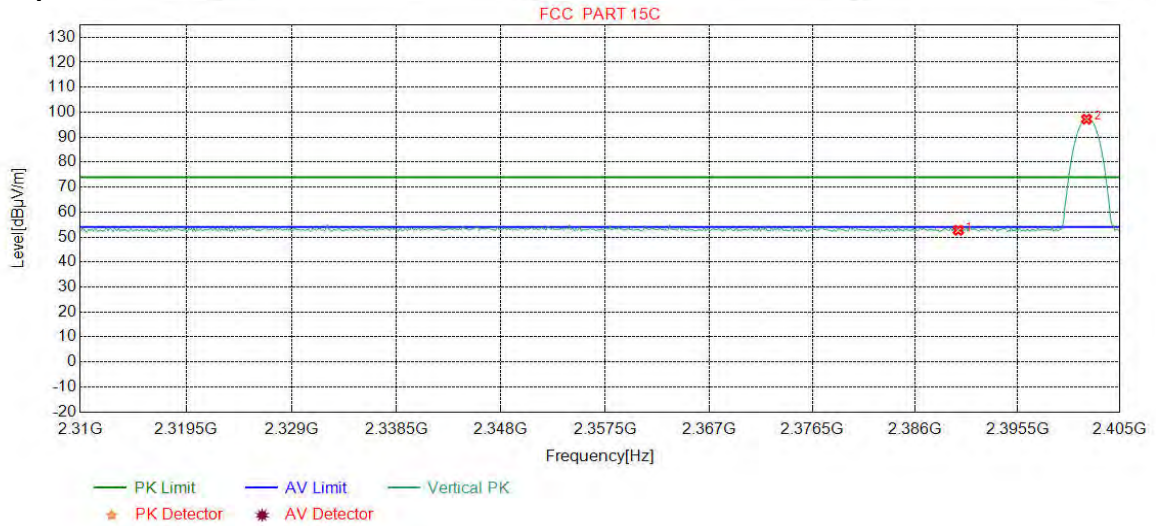

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.54	52.72	74.00	21.28	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	94.06	97.20	74.00	-23.20	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

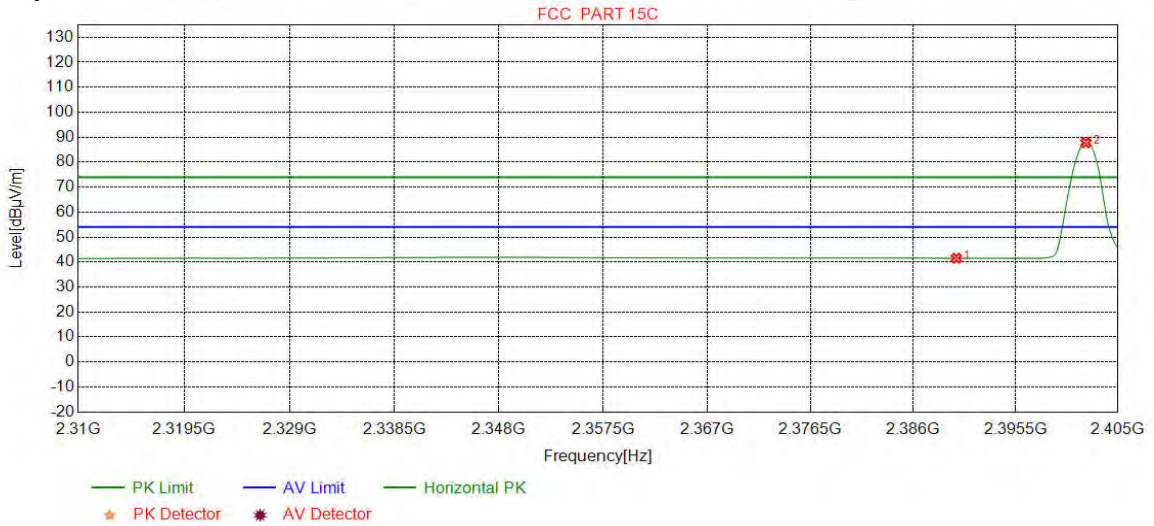

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.35	41.53	54.00	12.47	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	84.61	87.75	54.00	-33.75	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		

**Test Graph**

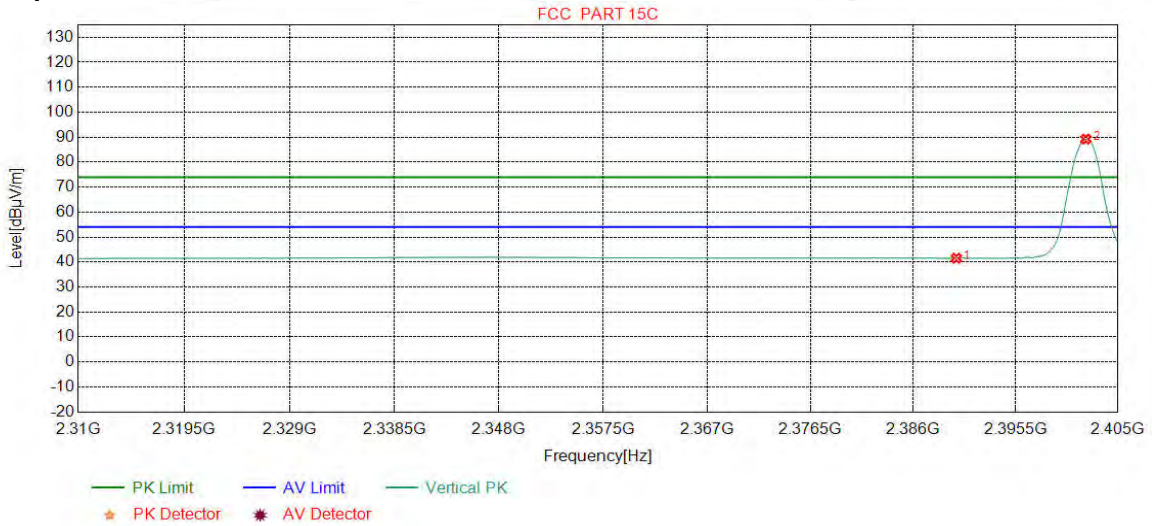


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.36	41.54	54.00	12.46	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	86.10	89.24	54.00	-35.24	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

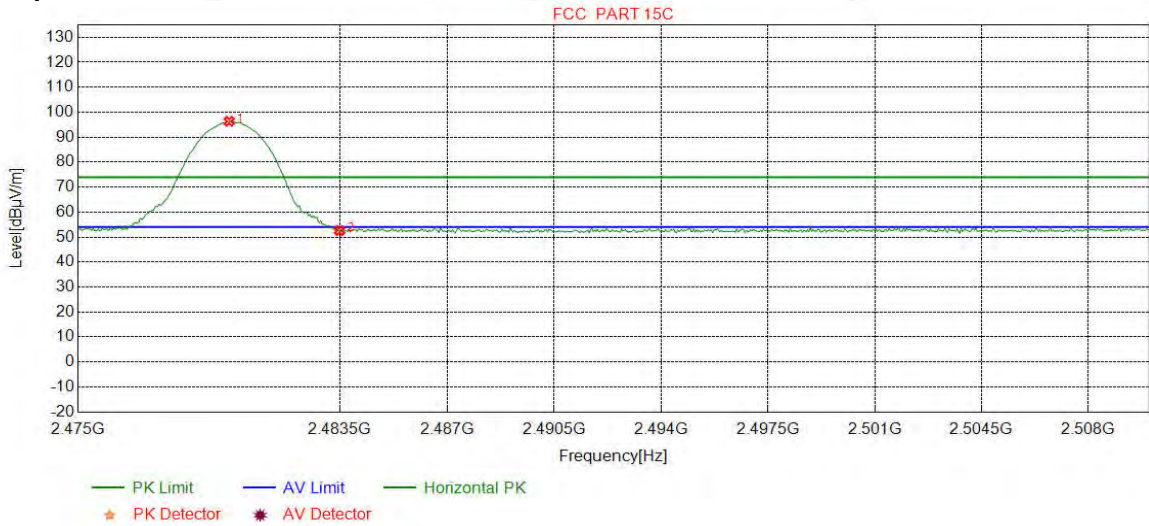

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9061	32.37	13.39	-42.39	93.00	96.37	74.00	-22.37	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.25	52.61	74.00	21.39	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

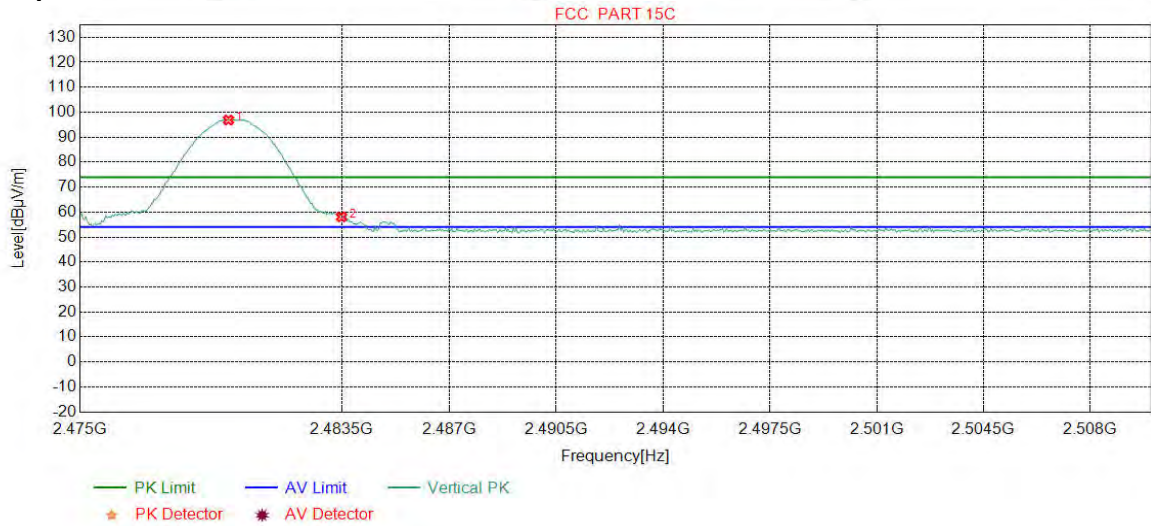

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8185	32.37	13.39	-42.39	93.49	96.86	74.00	-22.86	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	54.72	58.08	74.00	15.92	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

**Test Graph**

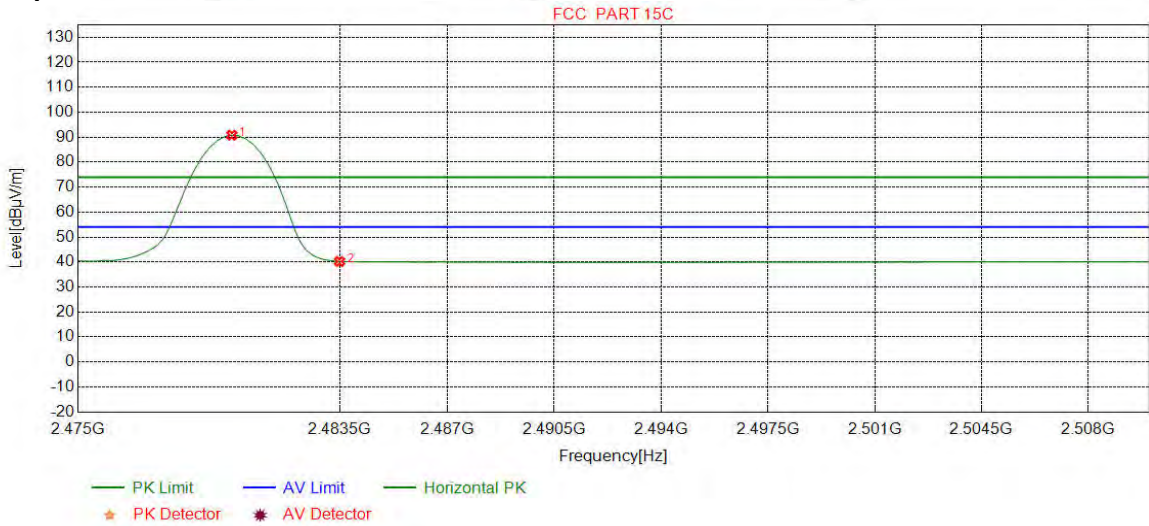


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	87.42	90.79	54.00	-36.79	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.86	40.22	54.00	13.78	Pass	Horizontal



Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

**Test Graph**

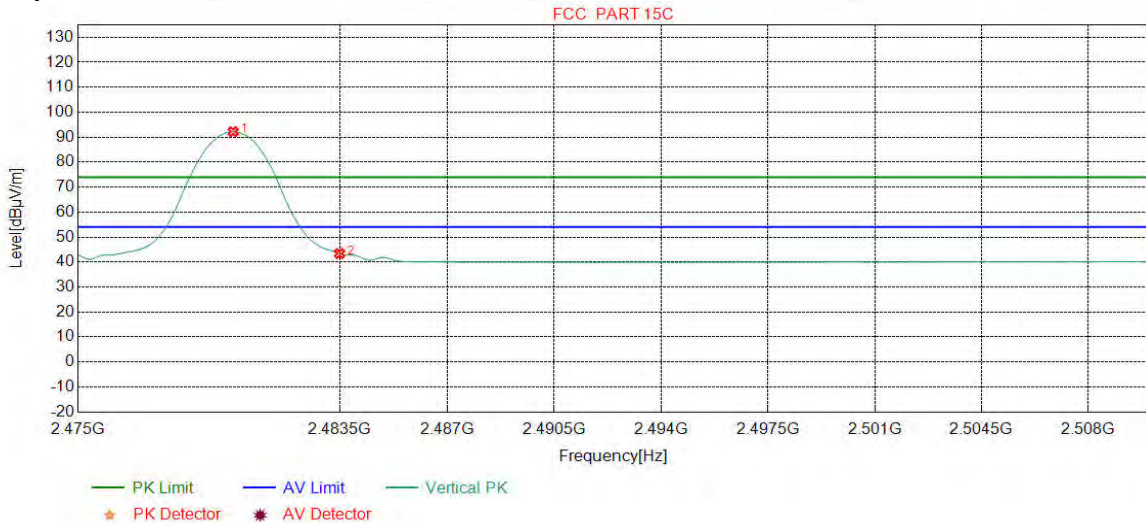

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	88.82	92.19	54.00	-38.19	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	40.01	43.37	54.00	10.63	Pass	Vertical

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix L): Radiated Spurious Emissions

<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<p><b>Below 1GHz test procedure as below:</b></p> <p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p><b>Above 1GHz test procedure as below:</b></p> <p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
<b>Limit:</b>	Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

### Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	37.11	16.91	40.00	23.09	Pass	H	PK
2	88.7879	9.12	1.09	-32.09	40.32	18.44	43.50	25.06	Pass	H	PK
3	138.2628	7.29	1.38	-32.00	49.92	26.59	43.50	16.91	Pass	H	PK
4	257.0997	12.34	1.91	-31.88	48.65	31.02	46.00	14.98	Pass	H	PK
5	345.7666	14.21	2.22	-31.86	50.03	34.60	46.00	11.40	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	38.34	33.69	54.00	20.31	Pass	H	PK
7	56.3866	12.18	0.86	-32.07	40.60	21.57	40.00	18.43	Pass	V	PK
8	138.2628	7.29	1.38	-32.00	48.87	25.54	43.50	17.96	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	47.61	28.51	43.50	14.99	Pass	V	PK
10	345.7666	14.21	2.22	-31.86	51.01	35.58	46.00	10.42	Pass	V	PK
11	484.0054	16.74	2.63	-31.90	48.21	35.68	46.00	10.32	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	39.03	33.15	46.00	12.85	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	36.78	16.58	40.00	23.42	Pass	H	PK
2	88.3028	9.01	1.09	-32.09	39.42	17.43	43.50	26.07	Pass	H	PK
3	138.2628	7.29	1.38	-32.00	52.16	28.83	43.50	14.67	Pass	H	PK
4	172.8953	8.61	1.54	-31.96	51.16	29.35	43.50	14.15	Pass	H	PK
5	345.7666	14.21	2.22	-31.86	52.96	37.53	46.00	8.47	Pass	H	PK
6	899.9830	22.10	3.60	-31.58	37.34	31.46	46.00	14.54	Pass	H	PK
7	54.9315	12.41	0.84	-32.08	40.09	21.26	40.00	18.74	Pass	V	PK
8	138.2628	7.29	1.38	-32.00	49.92	26.59	43.50	16.91	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	47.85	28.75	43.50	14.75	Pass	V	PK
10	345.6696	14.20	2.22	-31.85	54.52	39.09	46.00	6.91	Pass	V	PK
11	484.0054	16.74	2.63	-31.90	49.07	36.54	46.00	9.46	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	37.34	31.46	46.00	14.54	Pass	V	PK



Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	87.8178	8.90	1.08	-32.09	41.24	19.13	40.00	20.87	Pass	H	PK
2	138.2628	7.29	1.38	-32.00	51.00	27.67	43.50	15.83	Pass	H	PK
3	207.4307	11.09	1.71	-31.95	49.29	30.14	43.50	13.36	Pass	H	PK
4	345.7666	14.21	2.22	-31.86	52.53	37.10	46.00	8.90	Pass	H	PK
5	553.1733	18.06	2.80	-31.96	43.40	32.30	46.00	13.70	Pass	H	PK
6	899.9830	22.10	3.60	-31.58	38.70	32.82	46.00	13.18	Pass	H	PK
7	55.0285	12.40	0.84	-32.08	40.27	21.43	40.00	18.57	Pass	V	PK
8	208.8859	11.13	1.71	-31.94	47.23	28.13	43.50	15.37	Pass	V	PK
9	264.6665	12.49	1.94	-31.87	47.91	30.47	46.00	15.53	Pass	V	PK
10	527.4657	17.55	2.75	-31.91	41.28	29.67	46.00	16.33	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	37.33	27.76	46.00	18.24	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	37.43	31.55	46.00	14.45	Pass	V	PK

Mode:			$\pi$ /4DQPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	36.91	16.71	40.00	23.29	Pass	H	PK
2	88.7879	9.12	1.09	-32.09	38.04	16.16	43.50	27.34	Pass	H	PK
3	143.9864	7.34	1.41	-31.99	43.43	20.19	43.50	23.31	Pass	H	PK
4	252.0552	12.24	1.89	-31.89	50.17	32.41	46.00	13.59	Pass	H	PK
5	443.8434	16.10	2.49	-31.88	40.99	27.70	46.00	18.30	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	36.70	32.05	54.00	21.95	Pass	H	PK
7	53.8644	12.58	0.83	-32.09	41.81	23.13	40.00	16.87	Pass	V	PK
8	143.9864	7.34	1.41	-31.99	42.63	19.39	43.50	24.11	Pass	V	PK
9	199.7670	10.88	1.67	-31.94	49.44	30.05	43.50	13.45	Pass	V	PK
10	258.5549	12.37	1.91	-31.87	52.22	34.63	46.00	11.37	Pass	V	PK
11	597.5068	18.95	2.94	-31.97	43.69	33.61	46.00	12.39	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	39.61	33.73	46.00	12.27	Pass	V	PK

Mode:			π/4DQPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.5967	11.21	0.67	-32.11	37.92	17.69	40.00	22.31	Pass	H	PK
2	88.3028	9.01	1.09	-32.09	38.95	16.96	43.50	26.54	Pass	H	PK
3	166.5897	8.26	1.51	-31.96	46.29	24.10	43.50	19.40	Pass	H	PK
4	250.8911	12.22	1.88	-31.90	53.01	35.21	46.00	10.79	Pass	H	PK
5	443.8434	16.10	2.49	-31.88	41.82	28.53	46.00	17.47	Pass	H	PK
6	899.9830	22.10	3.60	-31.58	39.74	33.86	46.00	12.14	Pass	H	PK
7	54.0584	12.55	0.83	-32.08	41.16	22.46	40.00	17.54	Pass	V	PK
8	88.1088	8.97	1.08	-32.09	37.80	15.76	43.50	27.74	Pass	V	PK
9	168.0448	8.34	1.52	-31.96	42.49	20.39	43.50	23.11	Pass	V	PK
10	239.9290	11.94	1.84	-31.90	48.59	30.47	46.00	15.53	Pass	V	PK
11	600.0290	19.00	2.96	-31.99	43.60	33.57	46.00	12.43	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	46.59	40.71	46.00	5.29	Pass	V	PK

Mode:			π/4DQPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	39.20	19.00	40.00	21.00	Pass	H	PK
2	88.9819	9.17	1.09	-32.09	37.55	15.72	43.50	27.78	Pass	H	PK
3	166.0076	8.23	1.51	-31.97	44.88	22.65	43.50	20.85	Pass	H	PK
4	259.4279	12.39	1.92	-31.88	48.38	30.81	46.00	15.19	Pass	H	PK
5	443.8434	16.10	2.49	-31.88	41.08	27.79	46.00	18.21	Pass	H	PK
6	615.6476	19.13	2.96	-32.01	39.24	29.32	46.00	16.68	Pass	H	PK
7	54.3494	12.50	0.83	-32.08	40.61	21.86	40.00	18.14	Pass	V	PK
8	143.9864	7.34	1.41	-31.99	42.10	18.86	43.50	24.64	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	47.82	28.72	43.50	14.78	Pass	V	PK
10	253.5104	12.27	1.89	-31.89	49.45	31.72	46.00	14.28	Pass	V	PK
11	443.8434	16.10	2.49	-31.88	39.72	26.43	46.00	19.57	Pass	V	PK
12	831.3971	21.28	3.47	-31.96	38.39	31.18	46.00	14.82	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	88.6909	9.10	1.09	-32.09	38.53	16.63	43.50	26.87	Pass	H	PK
2	143.9864	7.34	1.41	-31.99	43.28	20.04	43.50	23.46	Pass	H	PK
3	248.6599	12.17	1.87	-31.90	47.90	30.04	46.00	15.96	Pass	H	PK
4	443.8434	16.10	2.49	-31.88	41.19	27.90	46.00	18.10	Pass	H	PK
5	615.6476	19.13	2.96	-32.01	38.67	28.75	46.00	17.25	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	36.33	31.68	54.00	22.32	Pass	H	PK
7	54.8345	12.43	0.84	-32.09	40.23	21.41	40.00	18.59	Pass	V	PK
8	208.8859	11.13	1.71	-31.94	47.84	28.74	43.50	14.76	Pass	V	PK
9	260.1070	12.40	1.92	-31.87	50.16	32.61	46.00	13.39	Pass	V	PK
10	472.4612	16.56	2.59	-31.88	38.94	26.21	46.00	19.79	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	37.18	27.61	46.00	18.39	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	38.25	32.37	46.00	13.63	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	88.2058	8.99	1.09	-32.09	39.89	17.88	43.50	25.62	Pass	H	PK
2	168.0448	8.34	1.52	-31.96	46.04	23.94	43.50	19.56	Pass	H	PK
3	258.5549	12.37	1.91	-31.87	49.04	31.45	46.00	14.55	Pass	H	PK
4	443.8434	16.10	2.49	-31.88	41.05	27.76	46.00	18.24	Pass	H	PK
5	615.6476	19.13	2.96	-32.01	39.14	29.22	46.00	16.78	Pass	H	PK
6	897.9458	22.08	3.60	-31.60	38.14	32.22	46.00	13.78	Pass	H	PK
7	55.7076	12.29	0.85	-32.08	39.85	20.91	40.00	19.09	Pass	V	PK
8	143.9864	7.34	1.41	-31.99	41.81	18.57	43.50	24.93	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	47.55	28.45	43.50	15.05	Pass	V	PK
10	259.3309	12.39	1.92	-31.88	49.58	32.01	46.00	13.99	Pass	V	PK
11	466.0586	16.46	2.58	-31.87	45.91	33.08	46.00	12.92	Pass	V	PK
12	892.9983	22.02	3.59	-31.62	38.56	32.55	46.00	13.45	Pass	V	PK



Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	37.17	16.97	40.00	23.03	Pass	H	PK
2	88.7879	9.12	1.09	-32.09	40.47	18.59	43.50	24.91	Pass	H	PK
3	143.9864	7.34	1.41	-31.99	43.19	19.95	43.50	23.55	Pass	H	PK
4	240.4140	11.95	1.84	-31.90	49.24	31.13	46.00	14.87	Pass	H	PK
5	443.8434	16.10	2.49	-31.88	41.05	27.76	46.00	18.24	Pass	H	PK
6	906.2886	22.14	3.60	-31.52	41.27	35.49	46.00	10.51	Pass	H	PK
7	54.6405	12.46	0.84	-32.09	39.71	20.92	40.00	19.08	Pass	V	PK
8	143.9864	7.34	1.41	-31.99	41.49	18.25	43.50	25.25	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	47.72	28.62	43.50	14.88	Pass	V	PK
10	246.9137	12.12	1.87	-31.90	49.19	31.28	46.00	14.72	Pass	V	PK
11	443.8434	16.10	2.49	-31.88	39.77	26.48	46.00	19.52	Pass	V	PK
12	899.9830	22.10	3.60	-31.58	40.13	34.25	46.00	11.75	Pass	V	PK

**Transmitter Emission above 1GHz**

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1199.6200	28.10	2.66	-42.89	58.43	46.30	74.00	27.70	Pass	H	PK
2	1681.8682	29.60	3.18	-42.70	55.71	45.79	74.00	28.21	Pass	H	PK
3	3272.0181	33.31	4.51	-41.96	50.45	46.31	74.00	27.69	Pass	H	PK
4	5938.1959	35.70	5.26	-41.03	46.98	46.91	74.00	27.09	Pass	H	PK
5	11009.5340	38.61	7.58	-41.12	45.79	50.86	74.00	23.14	Pass	H	PK
6	14299.7533	40.00	8.62	-41.87	47.46	54.21	74.00	19.79	Pass	H	PK
7	1199.8200	28.10	2.66	-42.89	59.84	47.71	74.00	26.29	Pass	V	PK
8	1679.4679	29.58	3.18	-42.71	56.50	46.55	74.00	27.45	Pass	V	PK
9	3483.0322	33.39	4.47	-41.83	49.24	45.27	74.00	28.73	Pass	V	PK
10	5667.1778	35.27	4.99	-40.80	46.05	45.51	74.00	28.49	Pass	V	PK
11	8981.3988	37.66	6.34	-40.67	46.17	49.50	74.00	24.50	Pass	V	PK
12	13604.7070	39.46	8.16	-41.19	47.38	53.81	74.00	20.19	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1200.4200	28.10	2.66	-42.89	57.64	45.51	74.00	28.49	Pass	H	PK
2	1678.2678	29.58	3.17	-42.71	55.26	45.30	74.00	28.70	Pass	H	PK
3	2590.3590	32.54	4.10	-42.34	55.06	49.36	74.00	24.64	Pass	H	PK
4	6376.2251	35.88	5.38	-41.17	46.17	46.26	74.00	27.74	Pass	H	PK
5	8121.3414	36.45	6.27	-40.89	46.47	48.30	74.00	25.70	Pass	H	PK
6	12247.6165	39.45	7.71	-41.16	46.37	52.37	74.00	21.63	Pass	H	PK
7	1200.0200	28.10	2.66	-42.89	59.11	46.98	74.00	27.02	Pass	V	PK
8	1682.2682	29.60	3.18	-42.70	57.31	47.39	74.00	26.61	Pass	V	PK
9	2793.7794	32.87	4.23	-42.23	54.57	49.44	74.00	24.56	Pass	V	PK
10	5211.1474	34.71	4.90	-40.56	45.81	44.86	74.00	29.14	Pass	V	PK
11	10251.4834	38.15	6.82	-40.79	45.80	49.98	74.00	24.02	Pass	V	PK
12	14891.7928	40.36	9.18	-42.31	47.03	54.26	74.00	19.74	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1199.8200	28.10	2.66	-42.89	57.45	45.32	74.00	28.68	Pass	H	PK
2	1679.6680	29.59	3.18	-42.72	55.61	45.66	74.00	28.34	Pass	H	PK
3	2785.3785	32.86	4.21	-42.24	50.41	45.24	74.00	28.76	Pass	H	PK
4	4960.1307	34.50	4.82	-40.53	47.34	46.13	74.00	27.87	Pass	H	PK
5	7636.3091	36.55	6.14	-40.84	46.99	48.84	74.00	25.16	Pass	H	PK
6	13012.6675	39.59	8.31	-41.72	47.63	53.81	74.00	20.19	Pass	H	PK
7	1200.0200	28.10	2.66	-42.89	61.37	49.24	74.00	24.76	Pass	V	PK
8	1676.4676	29.56	3.17	-42.71	56.40	46.42	74.00	27.58	Pass	V	PK
9	3192.0128	33.28	4.64	-42.01	50.95	46.86	74.00	27.14	Pass	V	PK
10	5180.1453	34.68	4.91	-40.55	47.13	46.17	74.00	27.83	Pass	V	PK
11	7486.2991	36.59	5.93	-40.79	47.43	49.16	74.00	24.84	Pass	V	PK
12	12336.6224	39.50	7.67	-41.13	46.61	52.65	74.00	21.35	Pass	V	PK

Mode:			$\pi$ /4DQPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1200.4200	28.10	2.66	-42.89	59.35	47.22	74.00	26.78	Pass	H	PK
2	1677.2677	29.57	3.17	-42.71	55.51	45.54	74.00	28.46	Pass	H	PK
3	3483.0322	33.39	4.47	-41.83	48.87	44.90	74.00	29.10	Pass	H	PK
4	5438.1625	34.94	4.91	-40.62	46.58	45.81	74.00	28.19	Pass	H	PK
5	7214.2810	36.31	5.81	-41.01	46.20	47.31	74.00	26.69	Pass	H	PK
6	13723.7149	39.53	8.33	-41.21	46.63	53.28	74.00	20.72	Pass	H	PK
7	1200.4200	28.10	2.66	-42.89	59.55	47.42	74.00	26.58	Pass	V	PK
8	1854.8855	30.74	3.38	-42.68	56.31	47.75	74.00	26.25	Pass	V	PK
9	3199.0133	33.28	4.65	-42.00	50.14	46.07	74.00	27.93	Pass	V	PK
10	4792.1195	34.50	4.55	-40.67	45.89	44.27	74.00	29.73	Pass	V	PK
11	8161.3441	36.46	6.41	-40.86	47.25	49.26	74.00	24.74	Pass	V	PK
12	12288.6192	39.47	7.73	-41.15	46.44	52.49	74.00	21.51	Pass	V	PK



Mode:			π/4DQPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1200.6201	28.10	2.66	-42.89	57.23	45.10	74.00	28.90	Pass	H	PK
2	1679.0679	29.58	3.17	-42.70	56.00	46.05	74.00	27.95	Pass	H	PK
3	3203.0135	33.28	4.64	-42.00	50.55	46.47	74.00	27.53	Pass	H	PK
4	5967.1978	35.75	5.33	-41.07	45.74	45.75	74.00	28.25	Pass	H	PK
5	9061.4041	37.69	6.47	-40.70	45.18	48.64	74.00	25.36	Pass	H	PK
6	12529.6353	39.60	7.71	-41.13	46.59	52.77	74.00	21.23	Pass	H	PK
7	1200.0200	28.10	2.66	-42.89	59.38	47.25	74.00	26.75	Pass	V	PK
8	1678.8679	29.58	3.17	-42.71	56.62	46.66	74.00	27.34	Pass	V	PK
9	3291.0194	33.32	4.56	-41.95	49.95	45.88	74.00	28.12	Pass	V	PK
10	5033.1355	34.53	4.86	-40.51	45.61	44.49	74.00	29.51	Pass	V	PK
11	8183.3456	36.47	6.38	-40.84	46.71	48.72	74.00	25.28	Pass	V	PK
12	12586.6391	39.60	8.17	-41.21	46.01	52.57	74.00	21.43	Pass	V	PK

Mode:			π/4DQPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1200.4200	28.10	2.66	-42.89	58.55	46.42	74.00	27.58	Pass	H	PK
2	1680.2680	29.59	3.18	-42.71	55.20	45.26	74.00	28.74	Pass	H	PK
3	3364.0243	33.35	4.53	-41.90	49.51	45.49	74.00	28.51	Pass	H	PK
4	7242.2828	36.34	5.79	-40.99	45.95	47.09	74.00	26.91	Pass	H	PK
5	12346.6231	39.51	7.66	-41.14	46.14	52.17	74.00	21.83	Pass	H	PK
6	15923.8616	41.75	10.11	-43.31	46.30	54.85	74.00	19.15	Pass	H	PK
7	1200.4200	28.10	2.66	-42.89	59.33	47.20	74.00	26.80	Pass	V	PK
8	1682.2682	29.60	3.18	-42.70	56.44	46.52	74.00	27.48	Pass	V	PK
9	4960.1307	34.50	4.82	-40.53	47.88	46.67	74.00	27.33	Pass	V	PK
10	7447.2965	36.55	5.85	-40.82	45.83	47.41	74.00	26.59	Pass	V	PK
11	10502.5002	38.50	7.07	-41.18	46.62	51.01	74.00	22.99	Pass	V	PK
12	14556.7705	40.22	9.29	-42.27	46.20	53.44	74.00	20.56	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1200.2200	28.10	2.66	-42.89	58.21	46.08	74.00	27.92	Pass	H	PK
2	1679.4679	29.58	3.18	-42.71	55.38	45.43	74.00	28.57	Pass	H	PK
3	3196.0131	33.28	4.64	-42.00	51.63	47.55	74.00	26.45	Pass	H	PK
4	4804.1203	34.50	4.55	-40.66	46.93	45.32	74.00	28.68	Pass	H	PK
5	8173.3449	36.47	6.39	-40.85	46.08	48.09	74.00	25.91	Pass	H	PK
6	13047.6698	39.58	8.18	-41.68	46.39	52.47	74.00	21.53	Pass	H	PK
7	1199.8200	28.10	2.66	-42.89	59.73	47.60	74.00	26.40	Pass	V	PK
8	1858.0858	30.76	3.39	-42.68	56.34	47.81	74.00	26.19	Pass	V	PK
9	3203.0135	33.28	4.64	-42.00	50.71	46.63	74.00	27.37	Pass	V	PK
10	5568.1712	35.11	5.13	-40.70	46.24	45.78	74.00	28.22	Pass	V	PK
11	8186.3458	36.47	6.38	-40.84	46.20	48.21	74.00	25.79	Pass	V	PK
12	11730.5820	39.08	7.48	-41.30	45.97	51.23	74.00	22.77	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1200.4200	28.10	2.66	-42.89	58.53	46.40	74.00	27.60	Pass	H	PK
2	1680.6681	29.59	3.18	-42.71	55.34	45.40	74.00	28.60	Pass	H	PK
3	3203.0135	33.28	4.64	-42.00	50.17	46.09	74.00	27.91	Pass	H	PK
4	5915.1943	35.66	5.14	-41.01	45.70	45.49	74.00	28.51	Pass	H	PK
5	10089.4726	37.93	6.89	-40.55	45.49	49.76	74.00	24.24	Pass	H	PK
6	13633.7089	39.48	8.14	-41.19	47.27	53.70	74.00	20.30	Pass	H	PK
7	1200.2200	28.10	2.66	-42.89	60.32	48.19	74.00	25.81	Pass	V	PK
8	1677.8678	29.57	3.17	-42.71	56.42	46.45	74.00	27.55	Pass	V	PK
9	3186.0124	33.27	4.63	-42.01	49.90	45.79	74.00	28.21	Pass	V	PK
10	5431.1621	34.93	4.90	-40.62	46.51	45.72	74.00	28.28	Pass	V	PK
11	7472.2982	36.57	5.90	-40.79	50.82	52.50	74.00	21.50	Pass	V	PK
12	14999.8000	40.40	9.01	-42.32	46.62	53.71	74.00	20.29	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1199.6200	28.10	2.66	-42.89	59.27	47.14	74.00	26.86	Pass	H	PK
2	1678.6679	29.58	3.17	-42.71	55.23	45.27	74.00	28.73	Pass	H	PK
3	3476.0317	33.39	4.46	-41.83	49.86	45.88	74.00	28.12	Pass	H	PK
4	6360.2240	35.87	5.43	-41.16	46.25	46.39	74.00	27.61	Pass	H	PK
5	9005.4004	37.70	6.35	-40.69	46.38	49.74	74.00	24.26	Pass	H	PK
6	12618.6412	39.60	8.26	-41.25	46.49	53.10	74.00	20.90	Pass	H	PK
7	1200.0200	28.10	2.66	-42.89	58.35	46.22	74.00	27.78	Pass	V	PK
8	1681.6682	29.60	3.18	-42.71	56.89	46.96	74.00	27.04	Pass	V	PK
9	3566.0377	33.45	4.41	-41.68	49.57	45.75	74.00	28.25	Pass	V	PK
10	6852.2568	36.04	5.51	-41.19	46.71	47.07	74.00	26.93	Pass	V	PK
11	10539.5026	38.51	7.01	-41.18	46.83	51.17	74.00	22.83	Pass	V	PK
12	13825.7217	39.60	8.40	-41.24	46.69	53.45	74.00	20.55	Pass	V	PK

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



## PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32L00189801 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.