


Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel	2462
Remark:	AV		


**Test Graph**

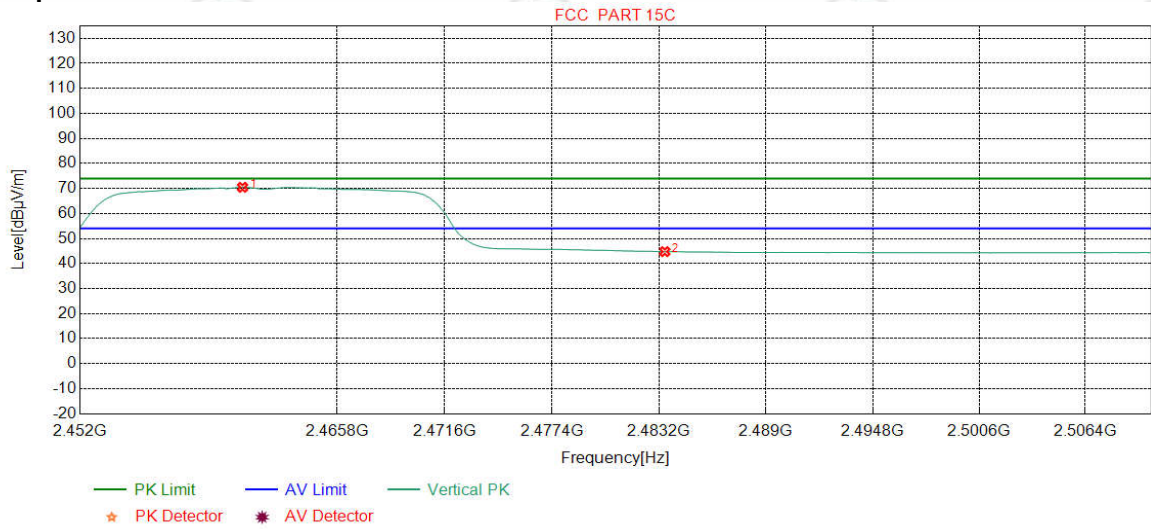

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.7109	32.34	13.48	-42.40	67.04	70.46	54.00	-16.46	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	41.39	44.75	54.00	9.25	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	PK		


**Test Graph**

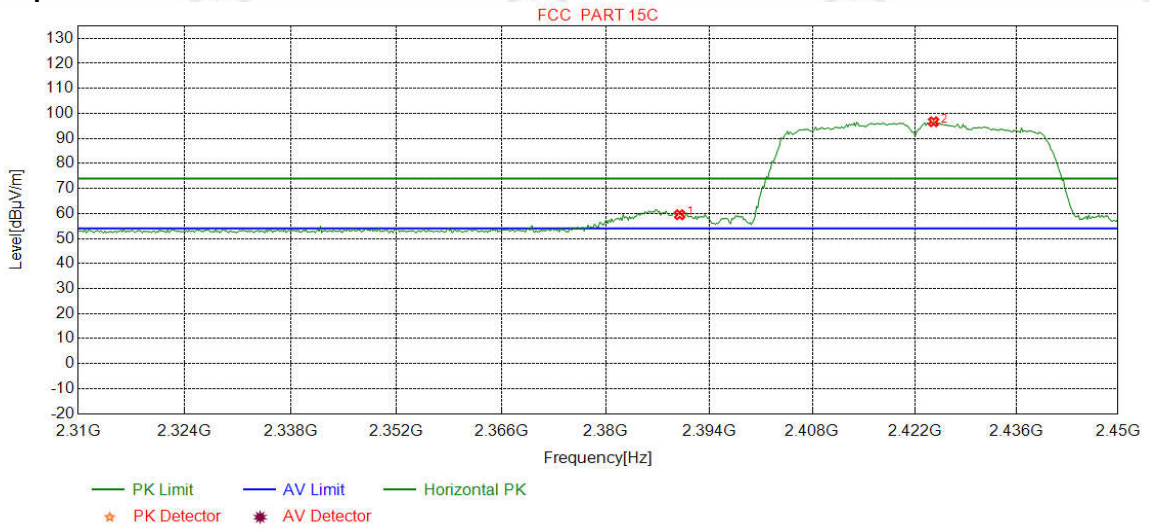

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	56.32	59.50	74.00	14.50	Pass	Horizontal
2	2424.5932	32.29	13.41	-42.42	93.38	96.66	74.00	-22.66	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	PK		


**Test Graph**

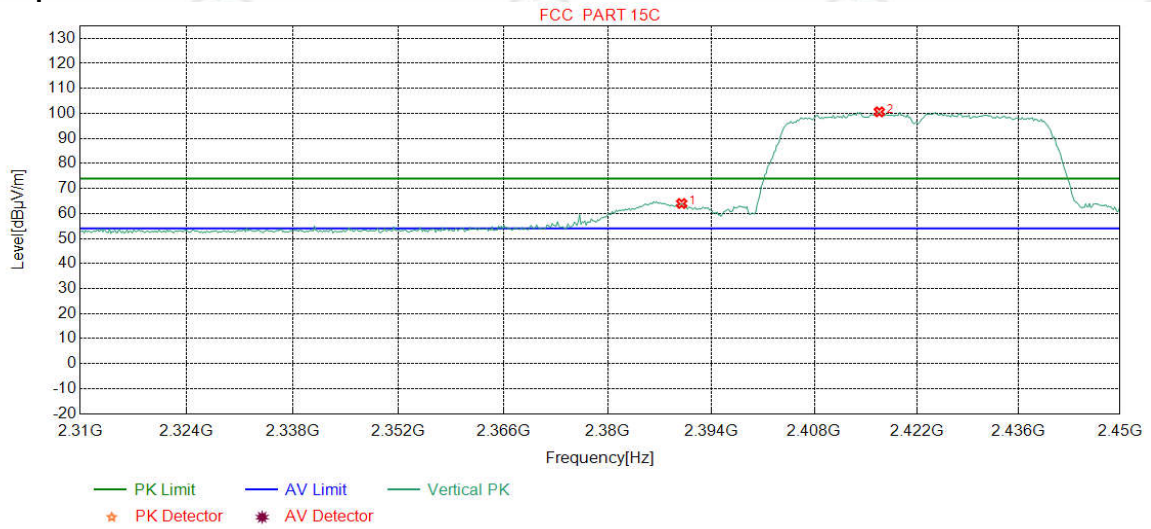

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	60.79	63.97	74.00	10.03	Pass	Vertical
2	2416.8836	32.28	13.38	-42.43	97.38	100.61	74.00	-26.61	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	AV		


**Test Graph**

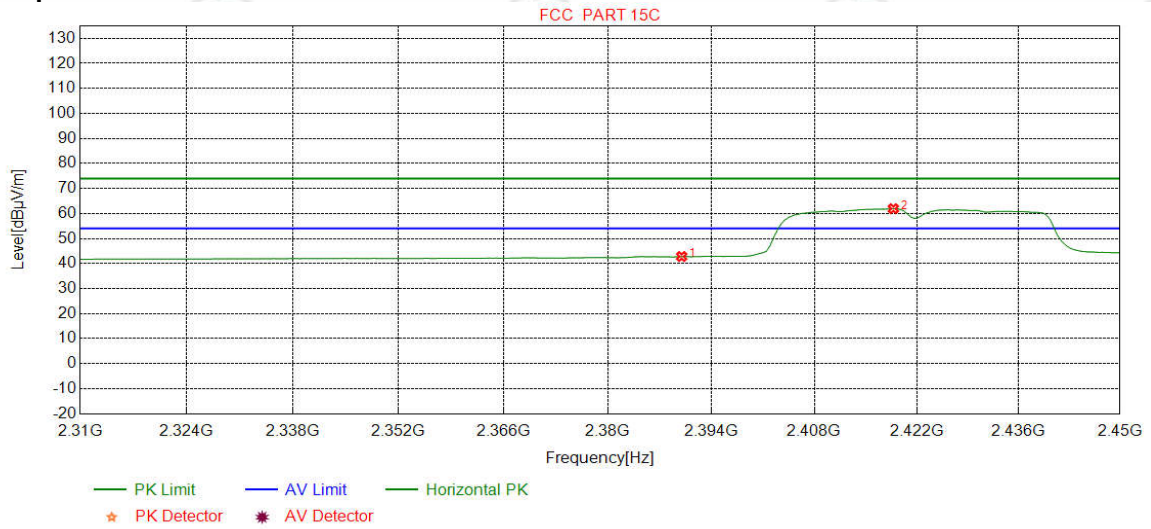

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.62	42.80	54.00	11.20	Pass	Horizontal
2	2418.8110	32.29	13.39	-42.43	58.67	61.92	54.00	-7.92	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	AV		


**Test Graph**

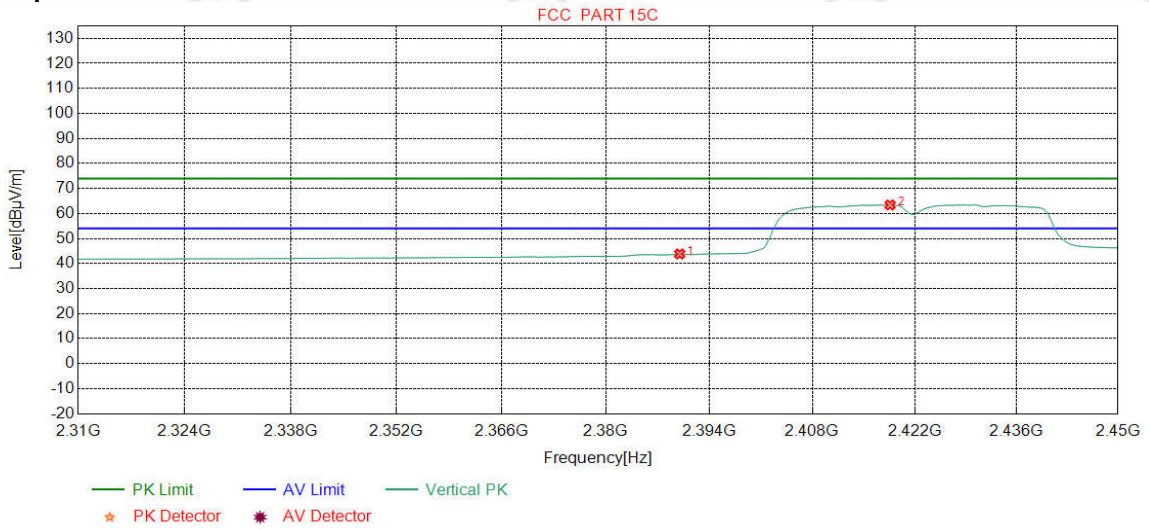

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	40.64	43.82	54.00	10.18	Pass	Vertical
2	2418.6358	32.29	13.39	-42.43	60.16	63.41	54.00	-9.41	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	PK		


**Test Graph**

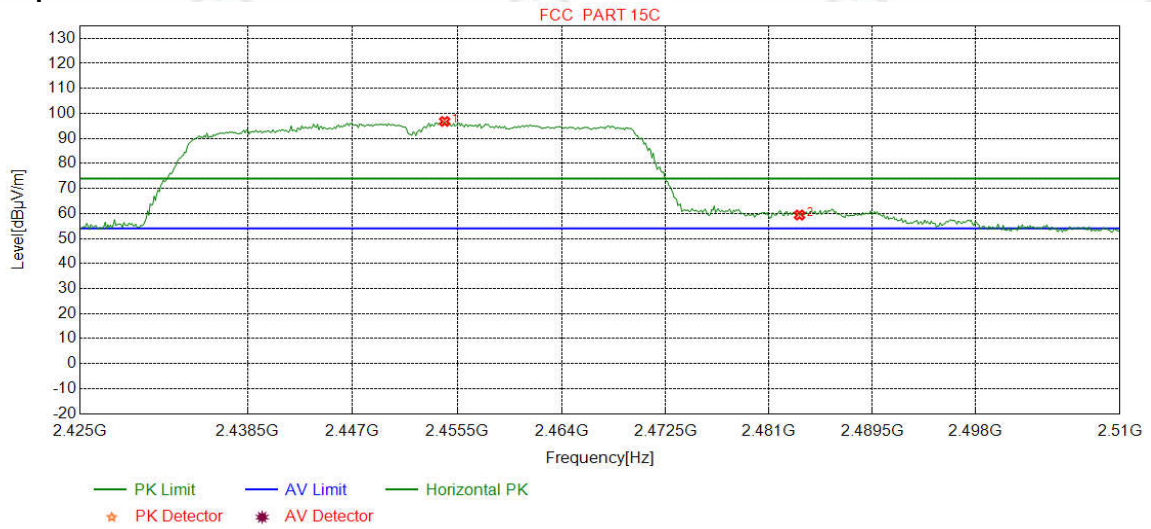

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2454.4681	32.34	13.51	-42.41	93.35	96.79	74.00	-22.79	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	56.01	59.37	74.00	14.63	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	PK		


**Test Graph**

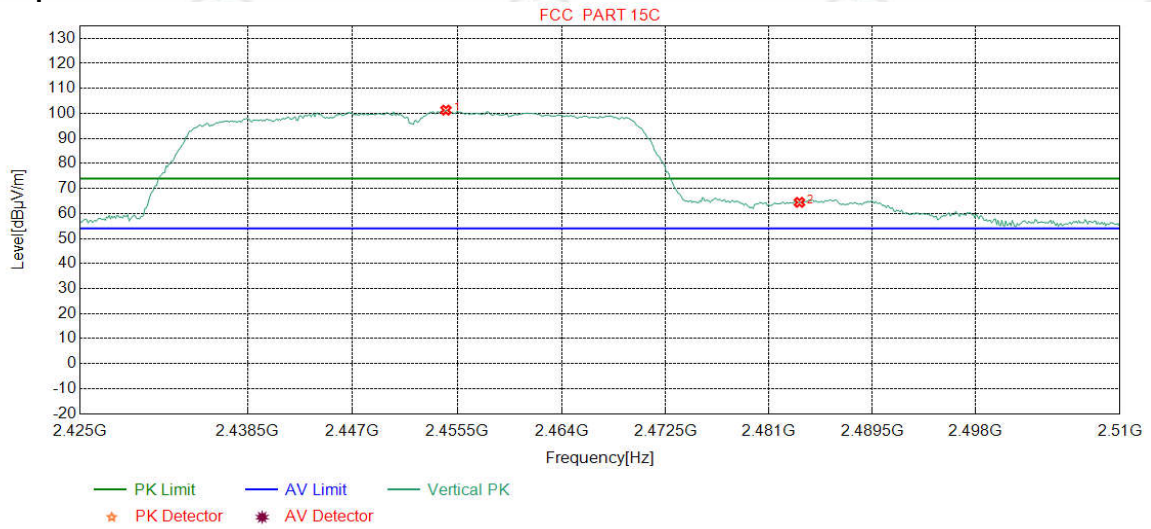

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2454.5745	32.34	13.51	-42.41	97.88	101.32	74.00	-27.32	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	61.10	64.46	74.00	9.54	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	AV		

**Test Graph**

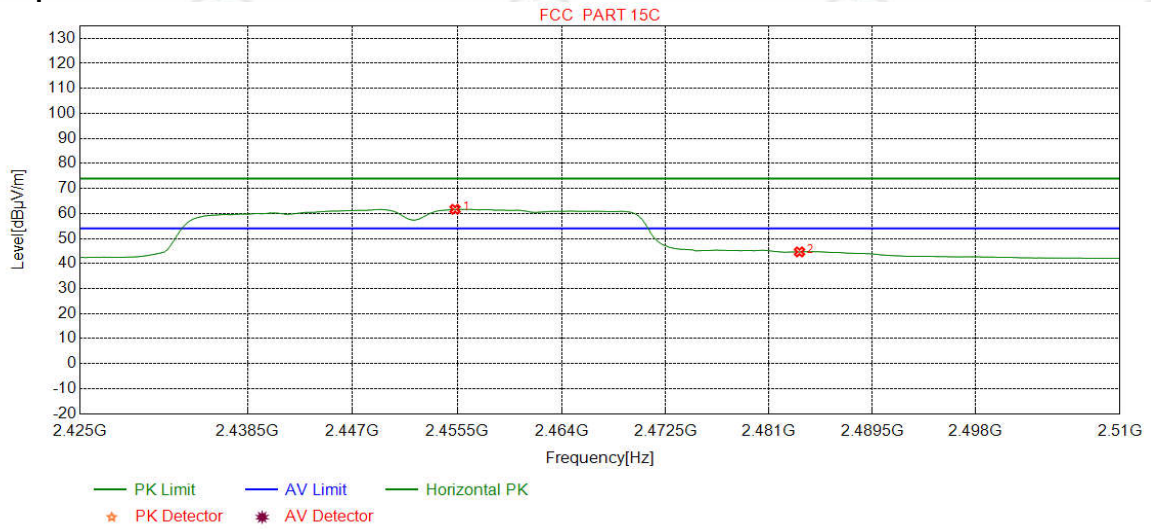


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2455.3191	32.34	13.51	-42.42	58.23	61.66	54.00	-7.66	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	41.29	44.65	54.00	9.35	Pass	Horizontal



Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	AV		

**Test Graph**

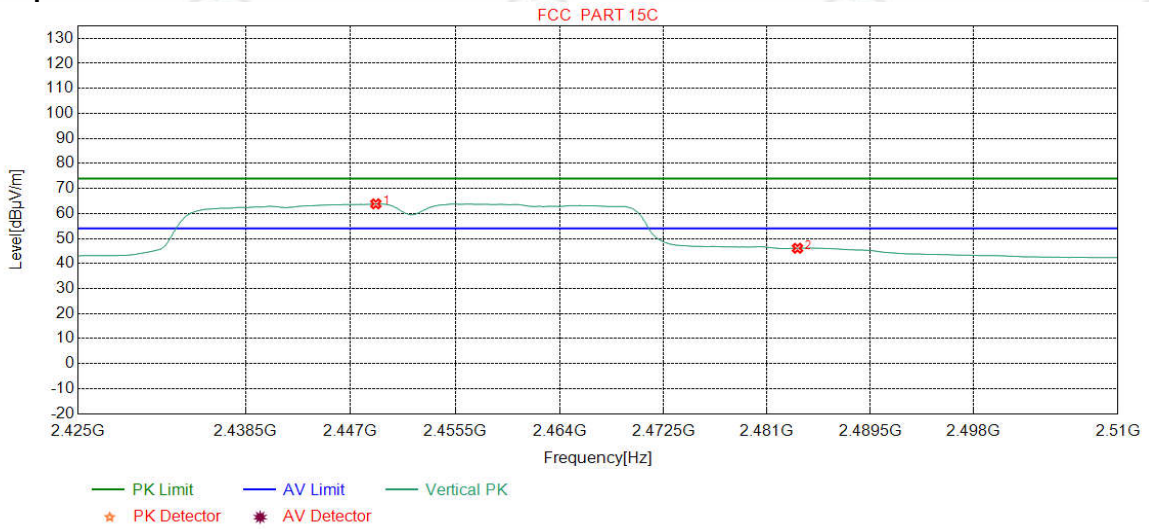


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2449.0426	32.33	13.53	-42.42	60.41	63.85	54.00	-9.85	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	42.74	46.10	54.00	7.90	Pass	Vertical

**Ant 2:**

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

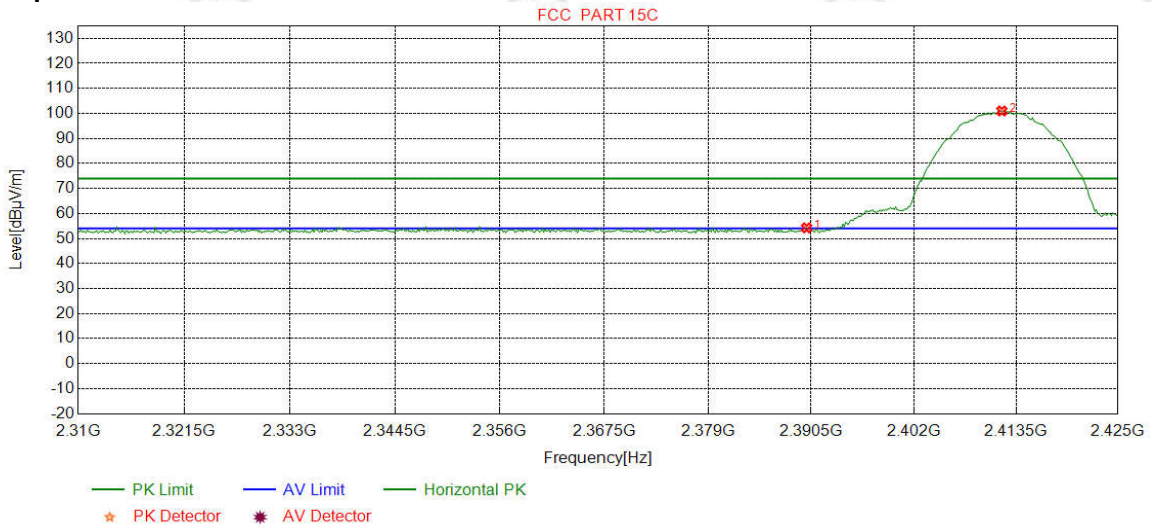

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	51.08	54.26	74.00	19.74	Pass	Horizontal
2	2411.9024	32.28	13.35	-42.43	97.76	100.96	74.00	-26.96	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

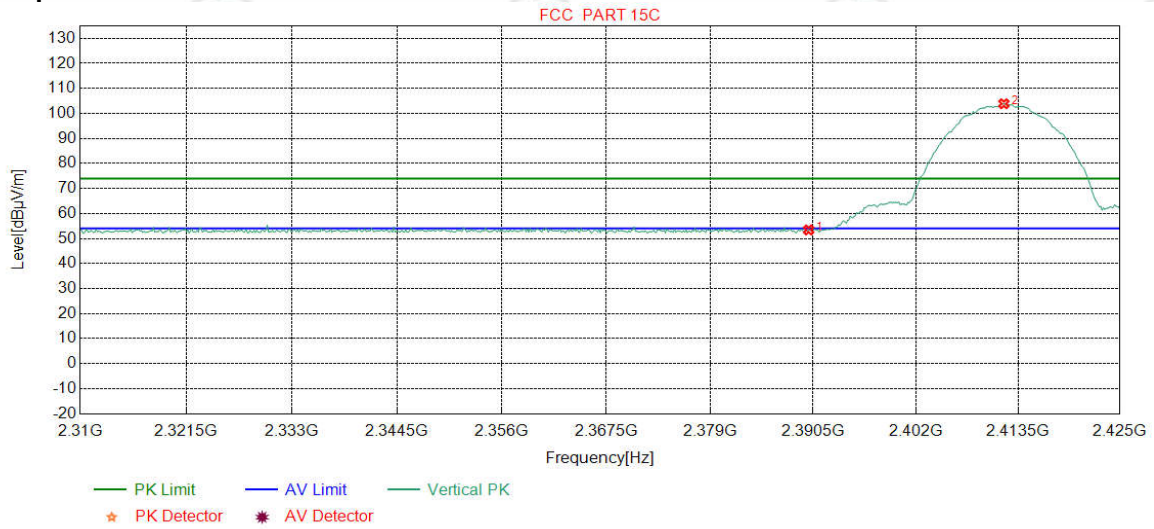

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.25	53.43	74.00	20.57	Pass	Vertical
2	2411.9024	32.28	13.35	-42.43	100.66	103.86	74.00	-29.86	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

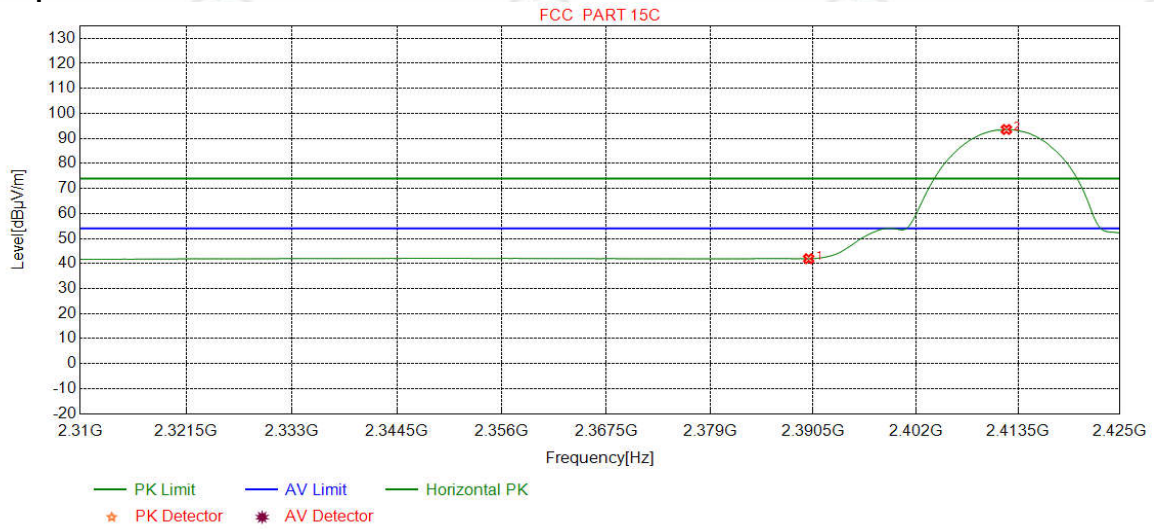

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.75	41.93	54.00	12.07	Pass	Horizontal
2	2412.1902	32.28	13.36	-42.44	90.37	93.57	54.00	-39.57	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

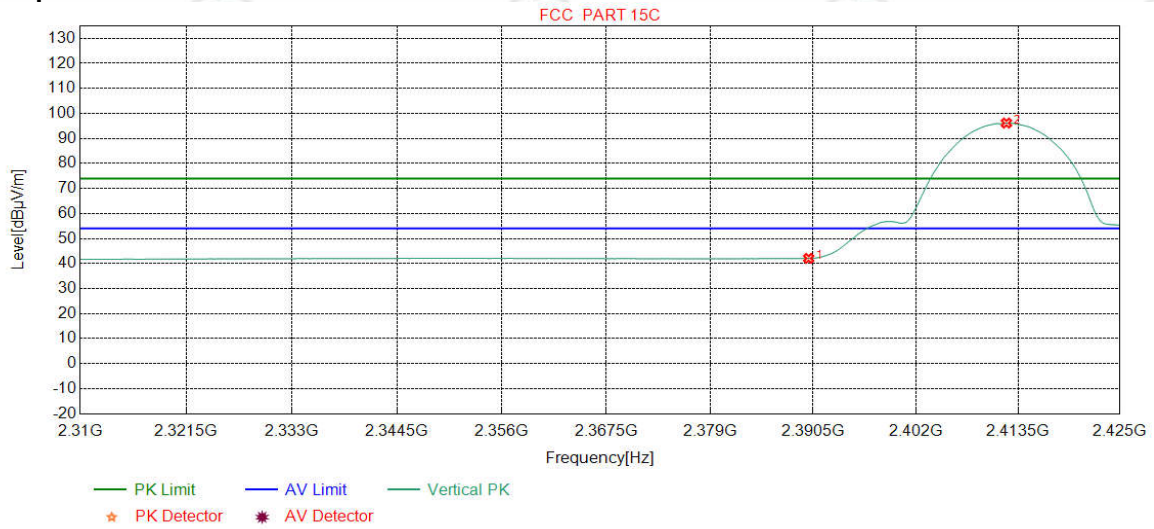

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.88	42.06	54.00	11.94	Pass	Vertical
2	2412.1902	32.28	13.36	-42.44	92.94	96.14	54.00	-42.14	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

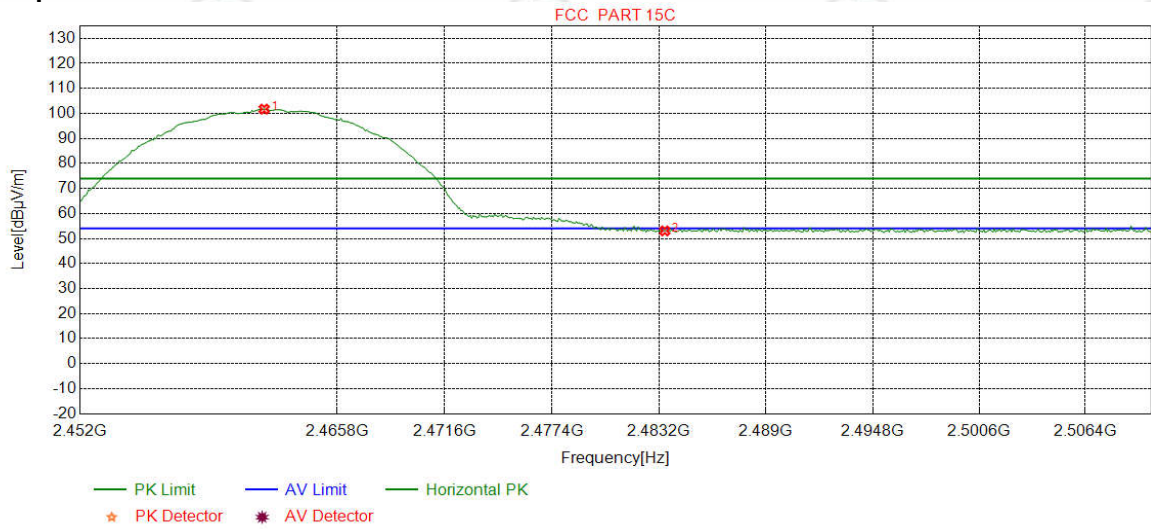

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2461.8723	32.35	13.48	-42.41	98.28	101.70	74.00	-27.70	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.67	53.03	74.00	20.97	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

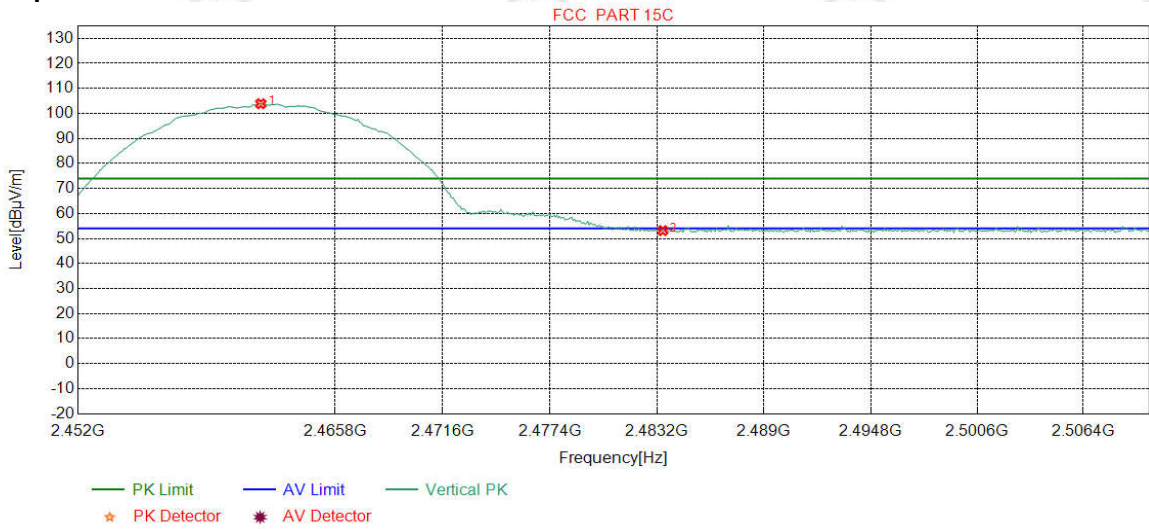

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2461.7998	32.35	13.48	-42.41	100.44	103.86	74.00	-29.86	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.79	53.15	74.00	20.85	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	AV		

**Test Graph**

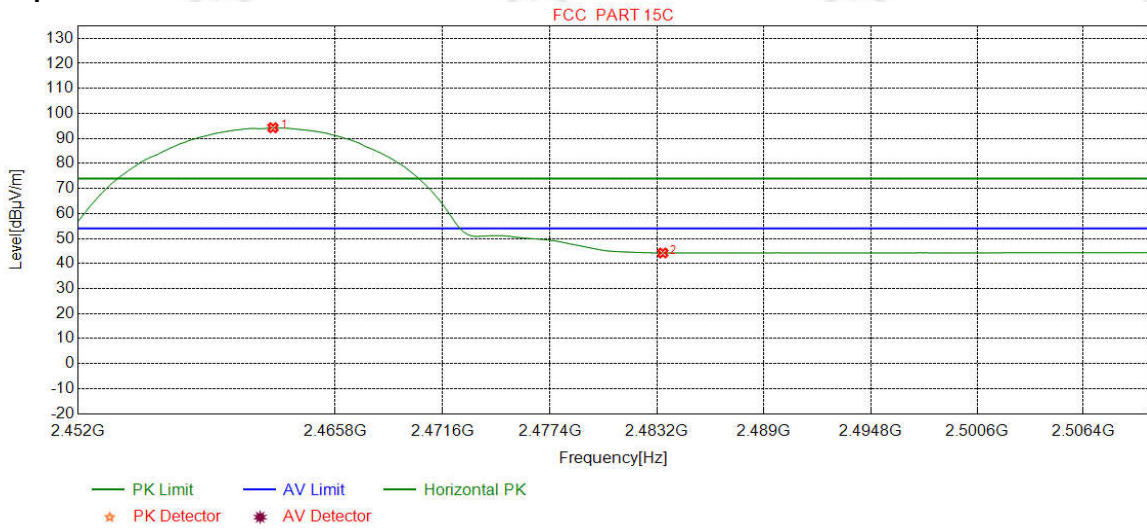


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.4531	32.35	13.47	-42.41	90.86	94.27	54.00	-40.27	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	40.86	44.22	54.00	9.78	Pass	Horizontal



Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	AV		


**Test Graph**

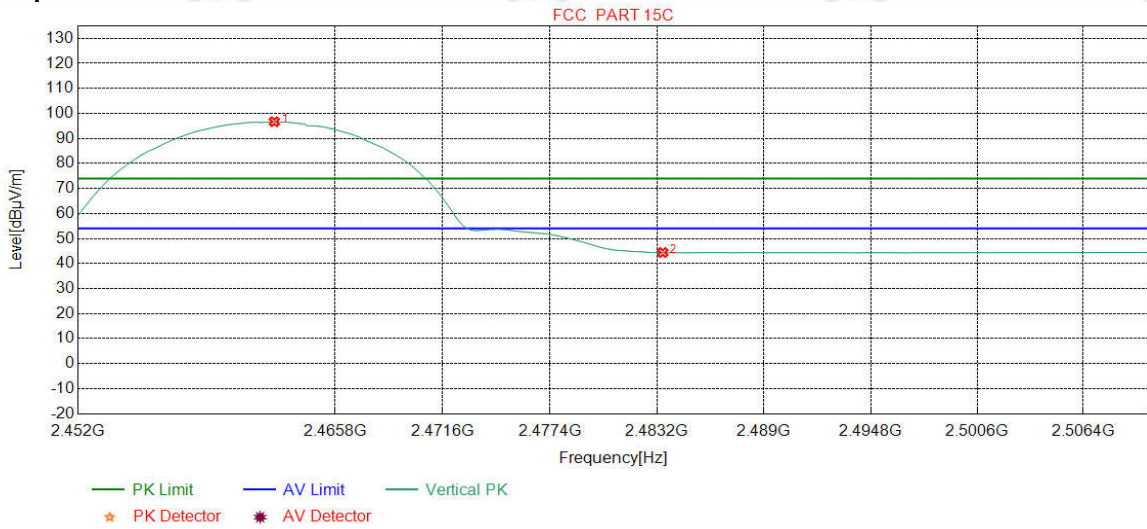

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.5257	32.35	13.47	-42.41	93.26	96.67	54.00	-42.67	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	41.03	44.39	54.00	9.61	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

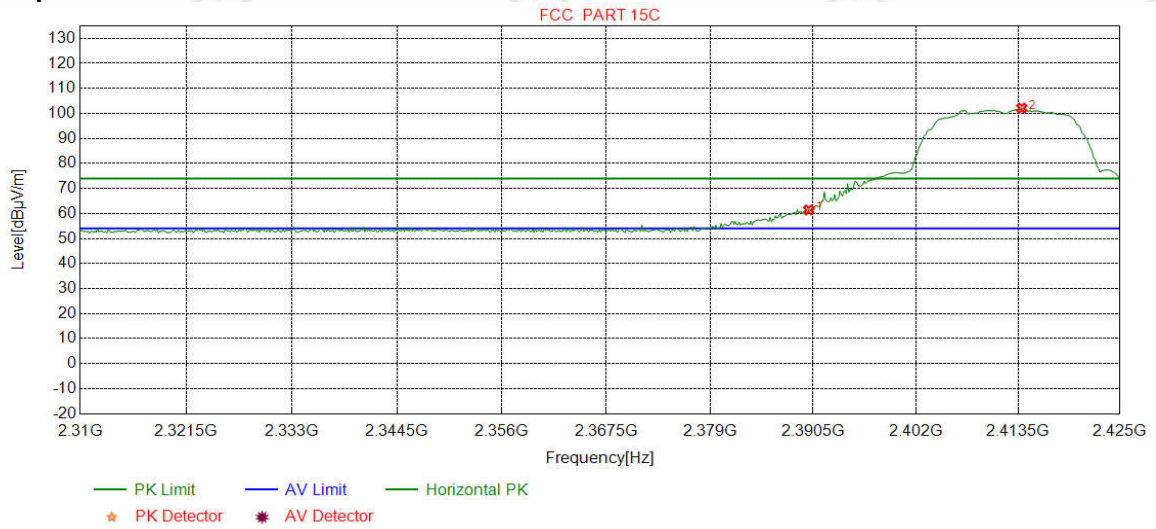

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	58.25	61.43	74.00	12.57	Pass	Horizontal
2	2413.9174	32.28	13.36	-42.42	98.91	102.13	74.00	-28.13	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

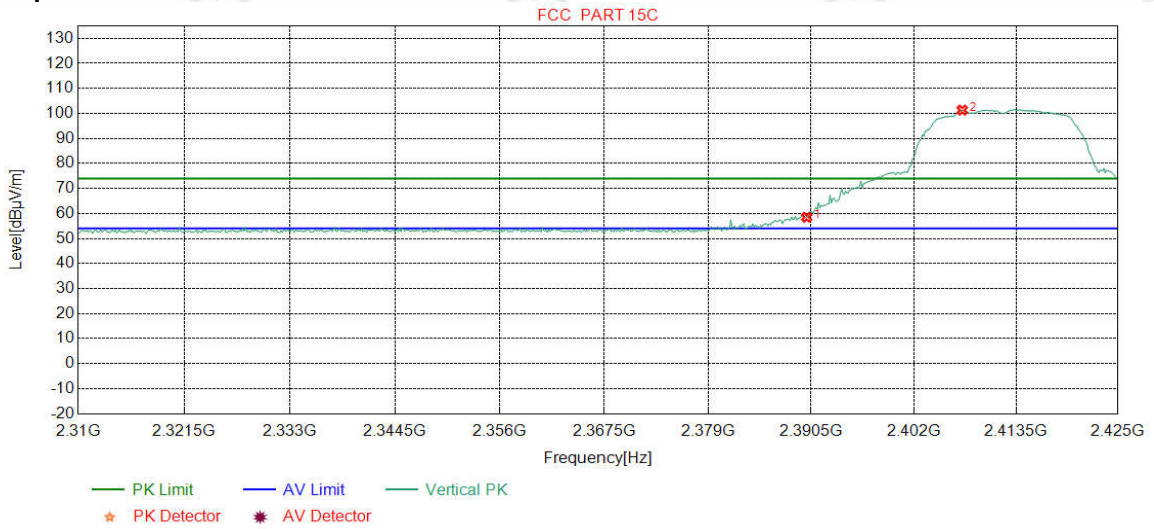

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	55.31	58.49	74.00	15.51	Pass	Vertical
2	2407.4406	32.27	13.33	-42.43	98.12	101.29	74.00	-27.29	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

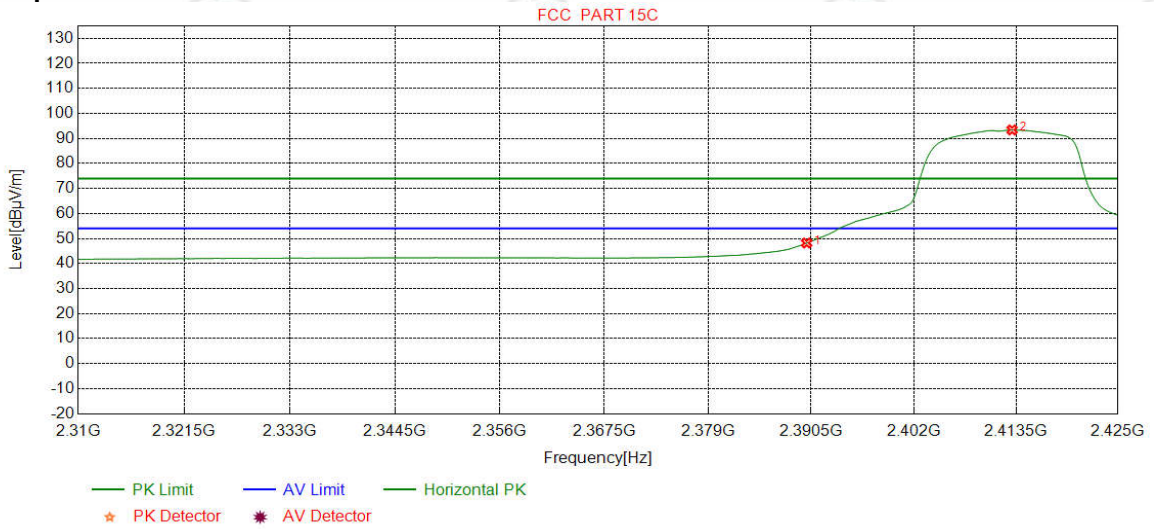

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	45.02	48.20	54.00	5.80	Pass	Horizontal
2	2413.0538	32.28	13.36	-42.43	90.19	93.40	54.00	-39.40	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	AV		

**Test Graph**

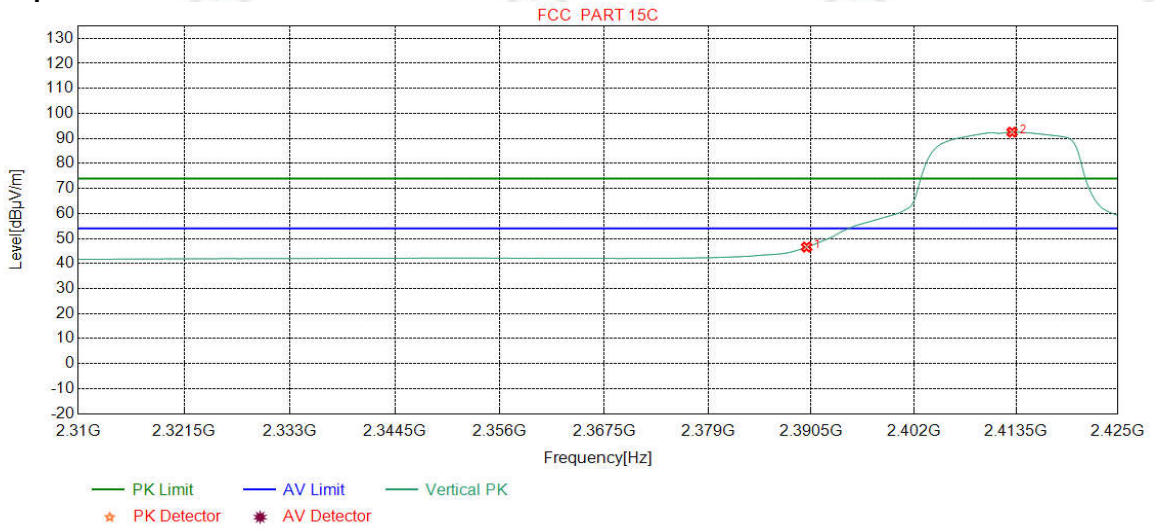

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	43.39	46.57	54.00	7.43	Pass	Vertical
2	2413.0538	32.28	13.36	-42.43	89.30	92.51	54.00	-38.51	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**



NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.0175	32.35	13.47	-42.41	99.27	102.68	74.00	-28.68	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	57.93	61.29	74.00	12.71	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

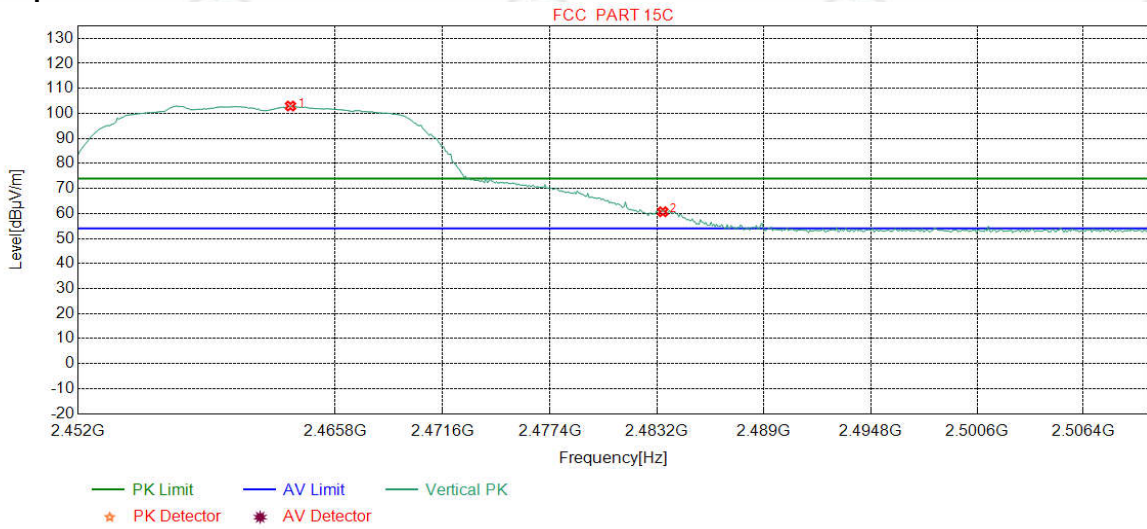

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.3967	32.35	13.47	-42.41	99.52	102.93	74.00	-28.93	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	57.33	60.69	74.00	13.31	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	AV		

**Test Graph**

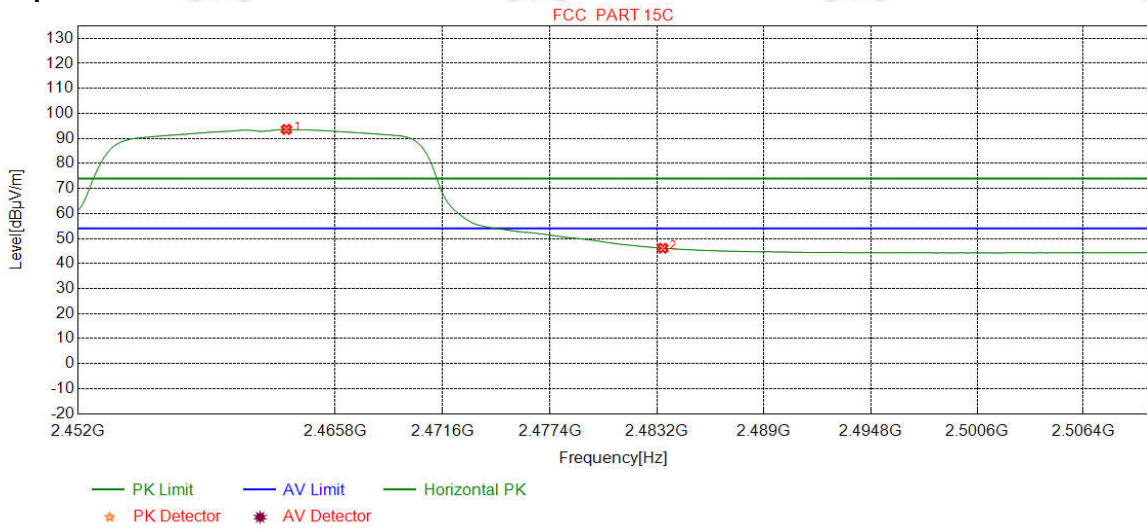


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.1790	32.35	13.47	-42.41	90.19	93.60	54.00	-39.60	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	42.77	46.13	54.00	7.87	Pass	Horizontal



Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	AV		


**Test Graph**

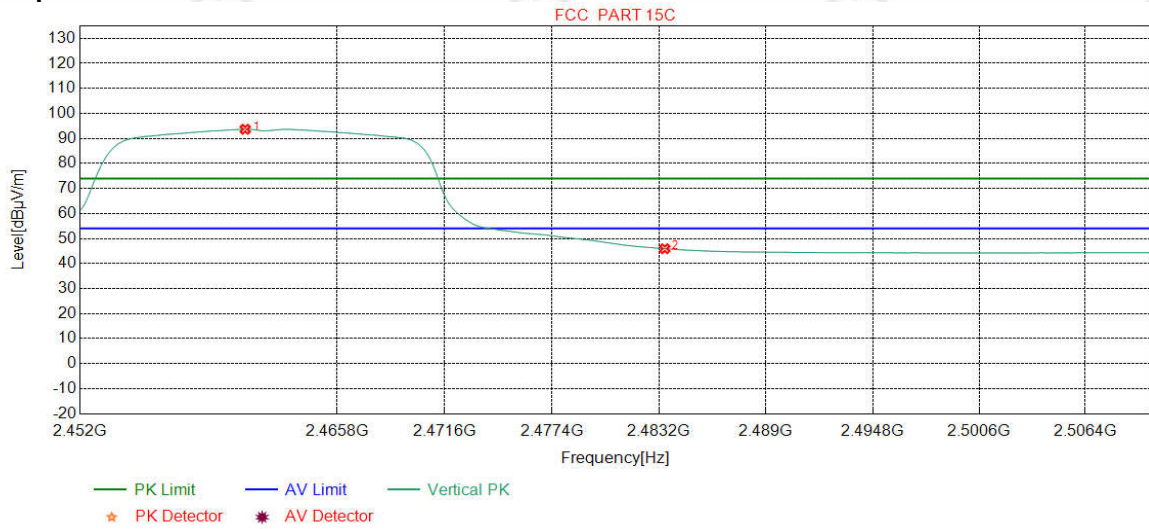

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.8561	32.35	13.48	-42.41	90.25	93.67	54.00	-39.67	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	42.56	45.92	54.00	8.08	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

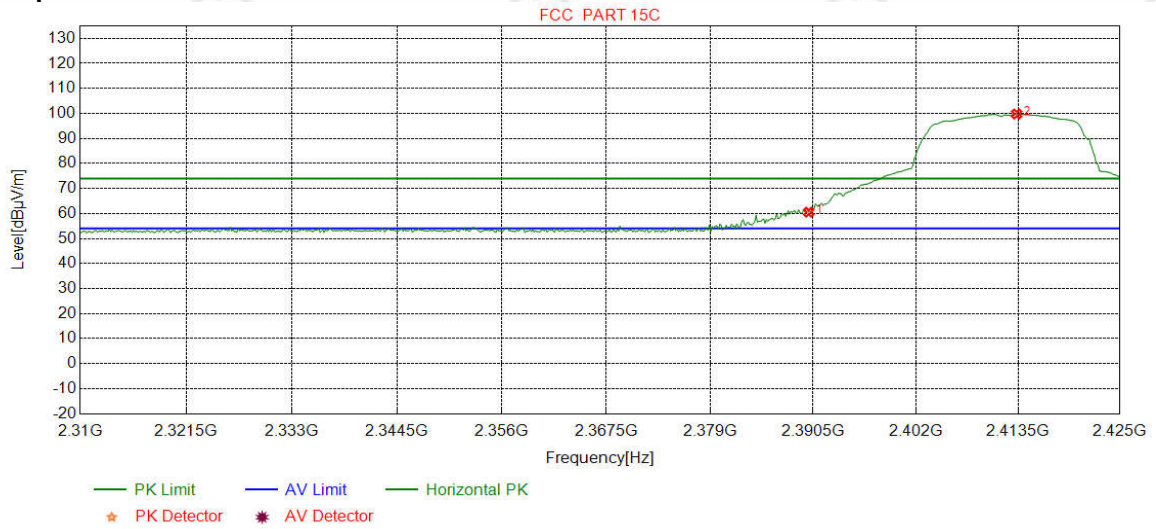

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	57.36	60.54	74.00	13.46	Pass	Horizontal
2	2413.3417	32.28	13.36	-42.43	96.55	99.76	74.00	-25.76	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

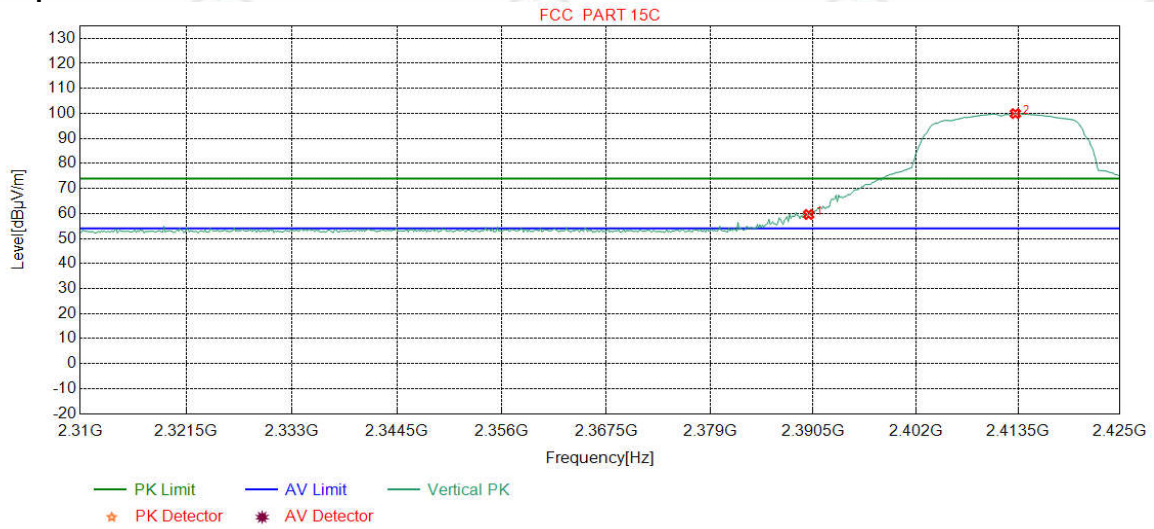

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	56.41	59.59	74.00	14.41	Pass	Vertical
2	2413.1977	32.28	13.36	-42.43	96.71	99.92	74.00	-25.92	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

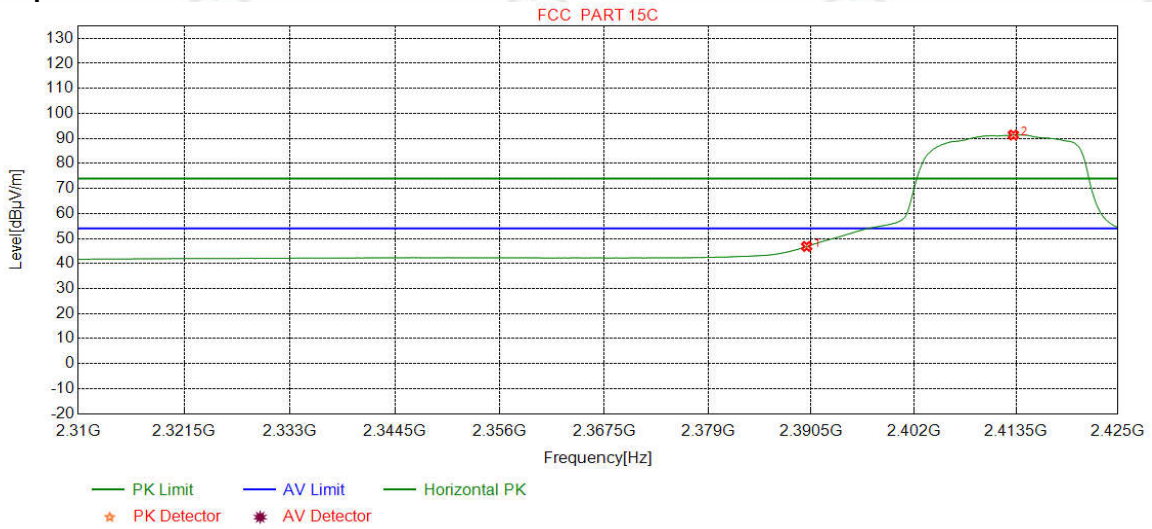

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	43.65	46.83	54.00	7.17	Pass	Horizontal
2	2413.1977	32.28	13.36	-42.43	88.15	91.36	54.00	-37.36	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

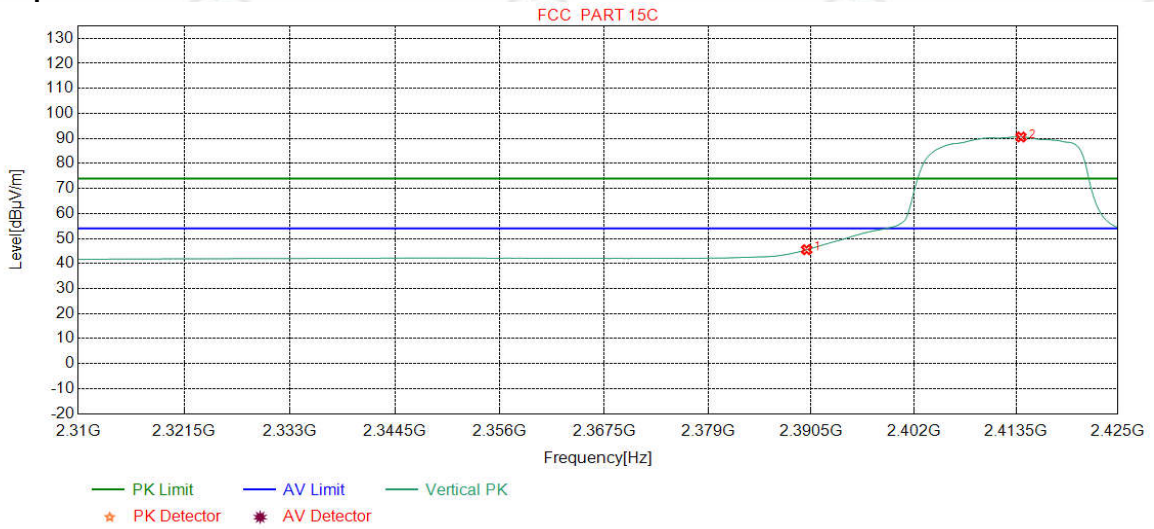

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	42.35	45.53	54.00	8.47	Pass	Vertical
2	2414.0613	32.28	13.36	-42.42	87.36	90.58	54.00	-36.58	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

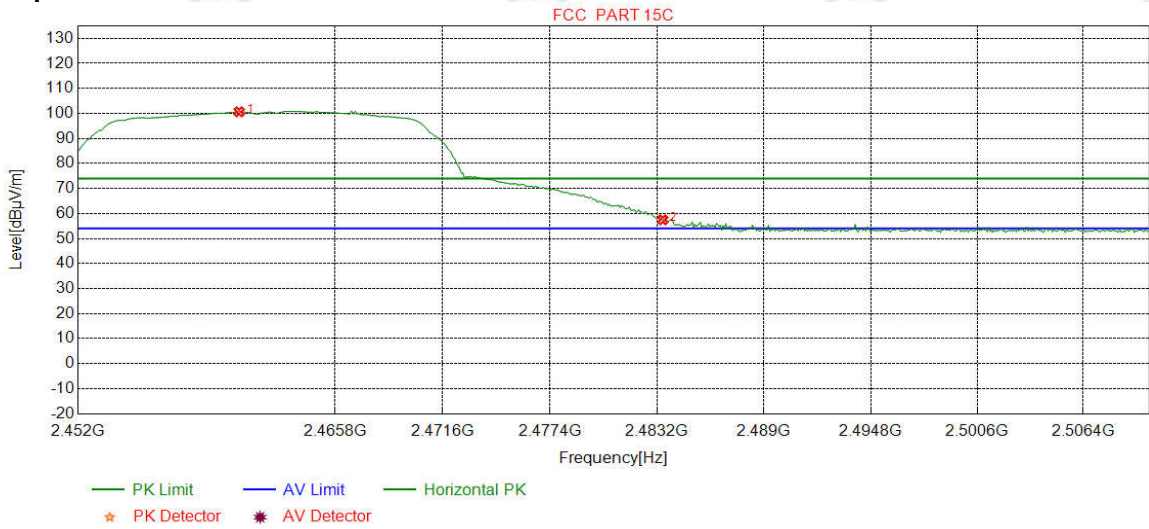

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2460.6383	32.34	13.48	-42.40	97.23	100.65	74.00	-26.65	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	54.11	57.47	74.00	16.53	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

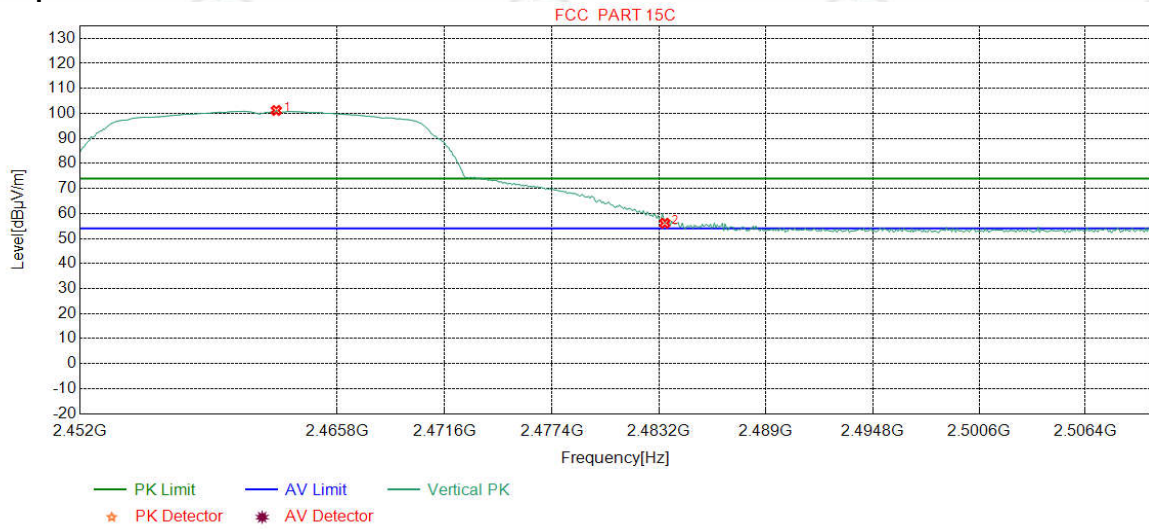

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2462.5257	32.35	13.47	-42.41	97.77	101.18	74.00	-27.18	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	52.77	56.13	74.00	17.87	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	AV		

**Test Graph**

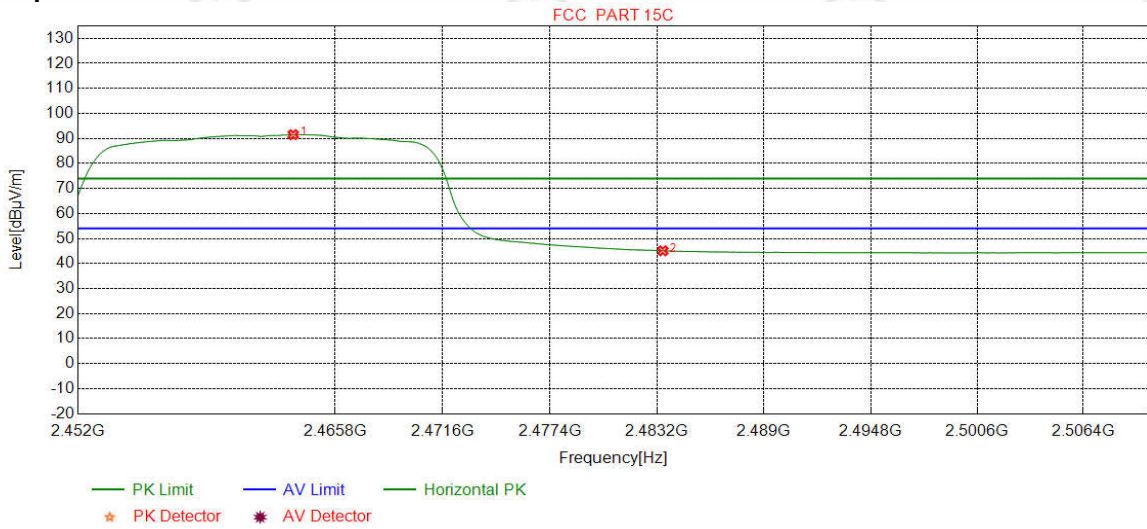


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.5419	32.35	13.47	-42.41	88.09	91.50	54.00	-37.50	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	41.72	45.08	54.00	8.92	Pass	Horizontal



Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	AV		


**Test Graph**

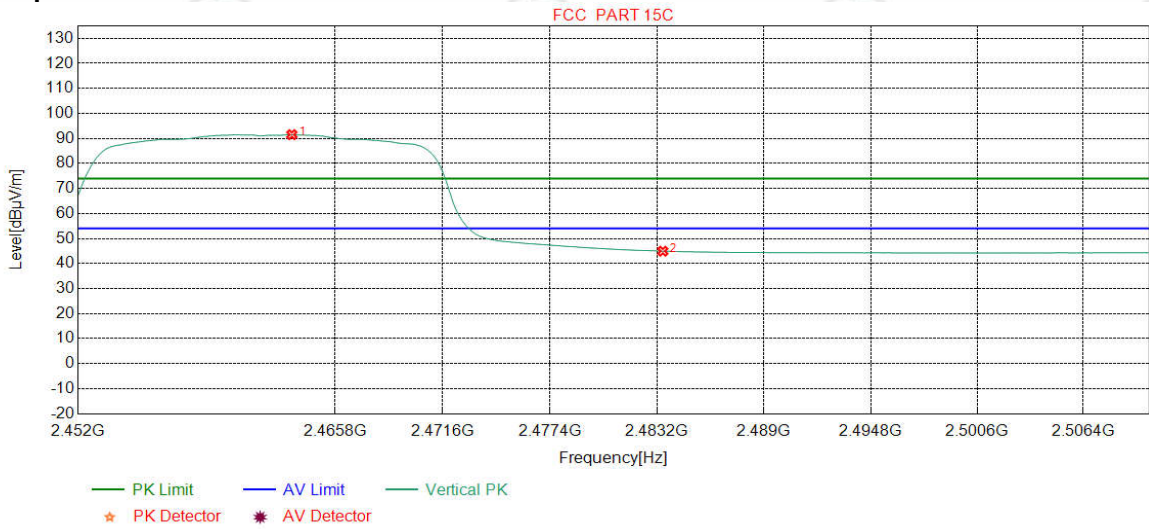

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.4693	32.35	13.47	-42.41	88.11	91.52	54.00	-37.52	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	41.57	44.93	54.00	9.07	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	PK		


**Test Graph**

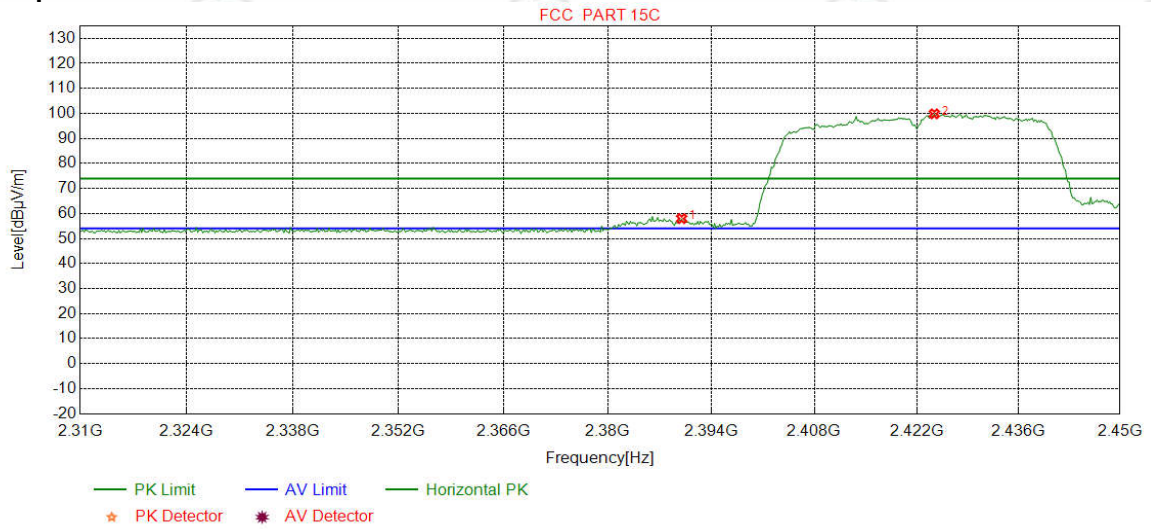

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	54.76	57.94	74.00	16.06	Pass	Horizontal
2	2424.4180	32.29	13.41	-42.42	96.54	99.82	74.00	-25.82	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	PK		


**Test Graph**

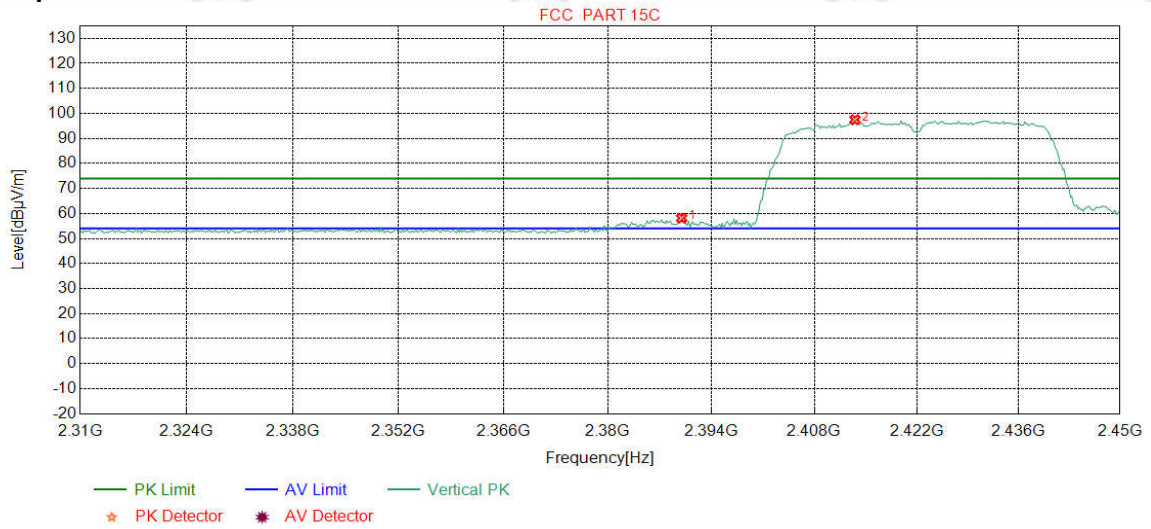

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	54.96	58.14	74.00	15.86	Pass	Vertical
2	2413.5544	32.28	13.36	-42.43	94.28	97.49	74.00	-23.49	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	AV		


**Test Graph**

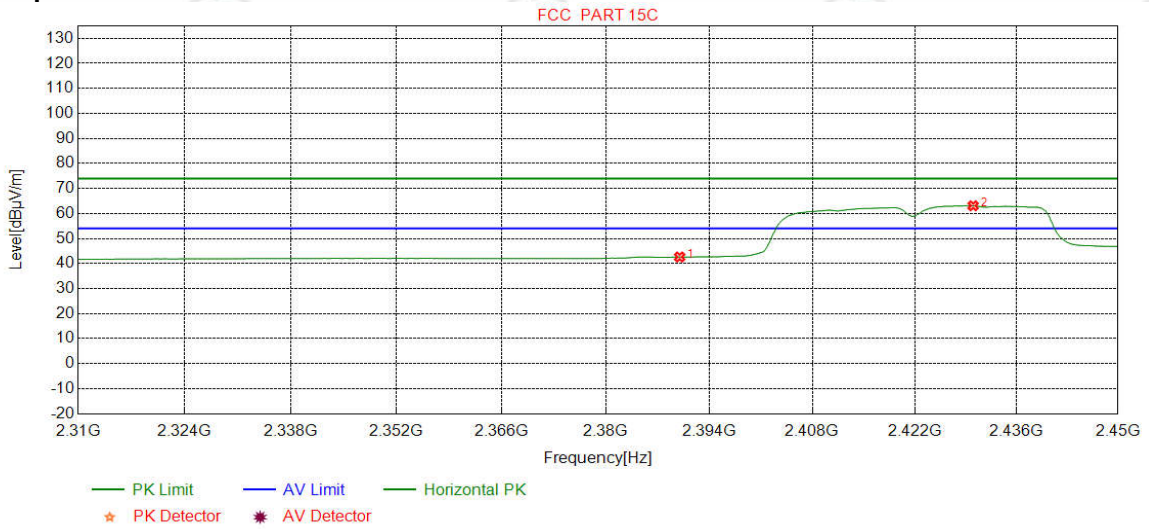

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.43	42.61	54.00	11.39	Pass	Horizontal
2	2430.0250	32.30	13.44	-42.42	59.76	63.08	54.00	-9.08	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2422
Remark:	AV		


**Test Graph**

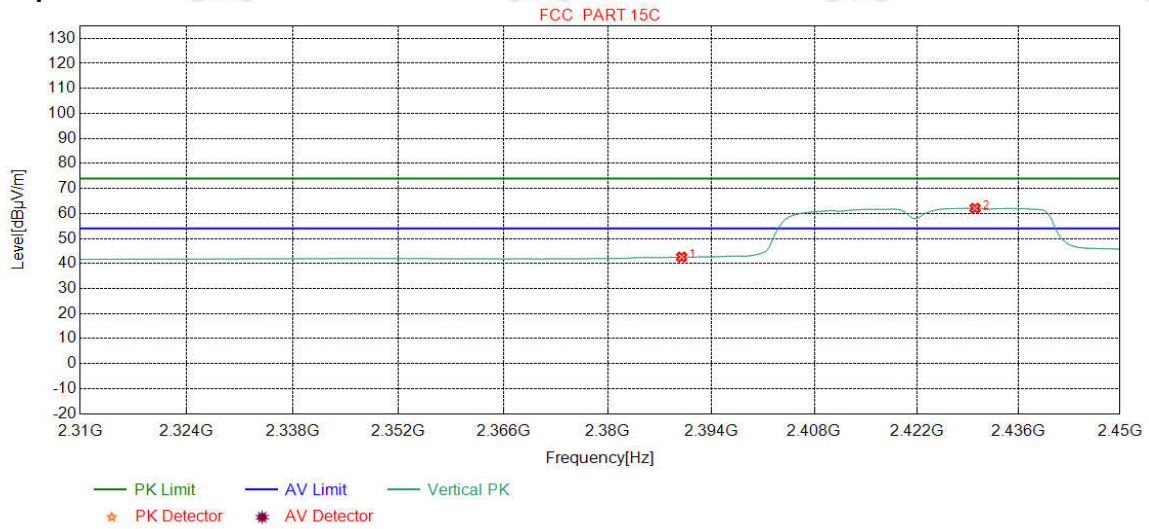

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.44	42.62	54.00	11.38	Pass	Vertical
2	2430.0250	32.30	13.44	-42.42	58.79	62.11	54.00	-8.11	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	PK		


**Test Graph**

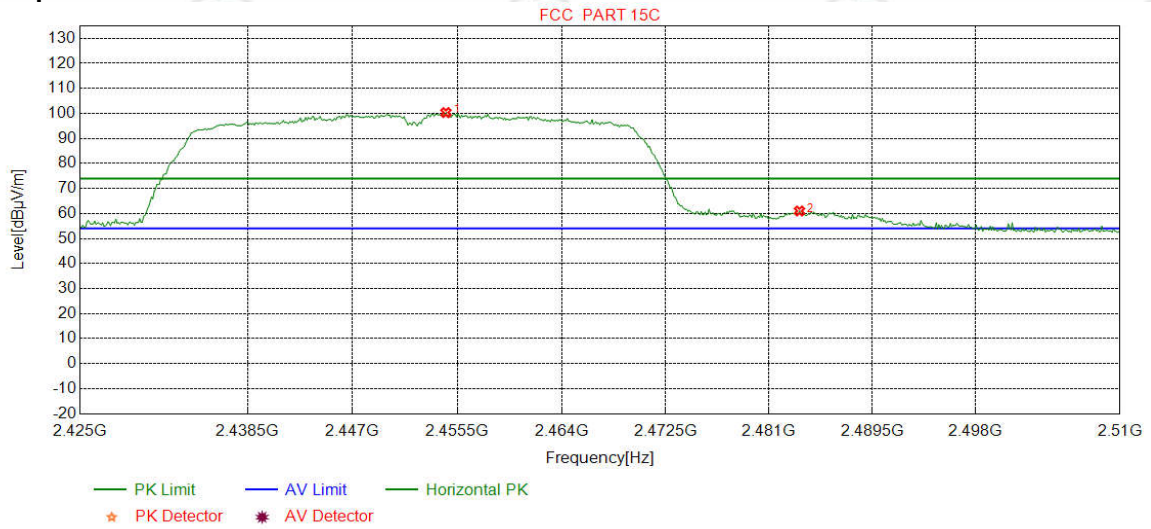

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2454.5745	32.34	13.51	-42.41	96.88	100.32	74.00	-26.32	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	57.63	60.99	74.00	13.01	Pass	Horizontal

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	PK		


**Test Graph**

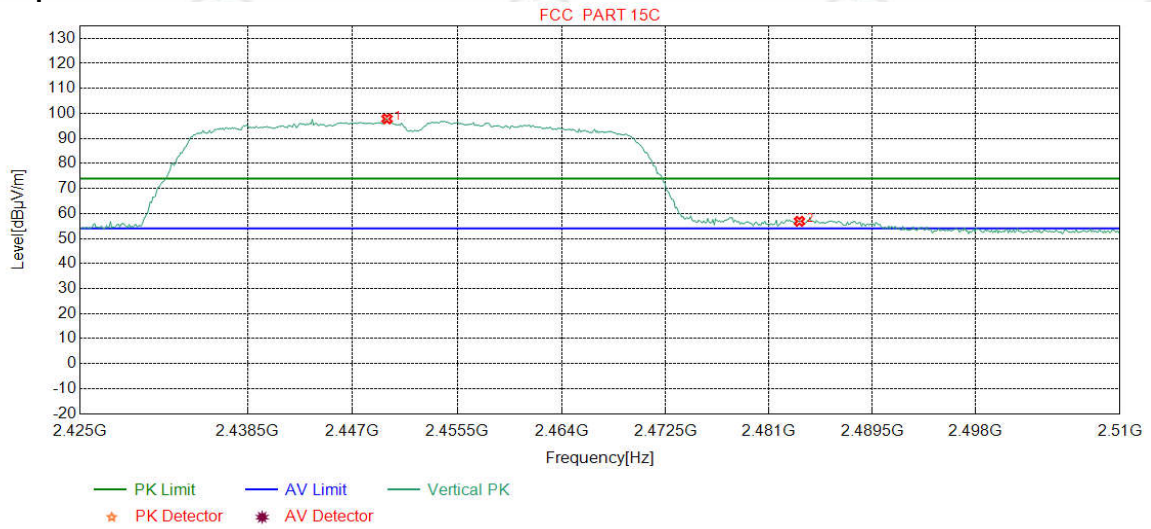

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2449.7872	32.33	13.53	-42.41	94.38	97.83	74.00	-23.83	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	53.52	56.88	74.00	17.12	Pass	Vertical

Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	AV		

**Test Graph**

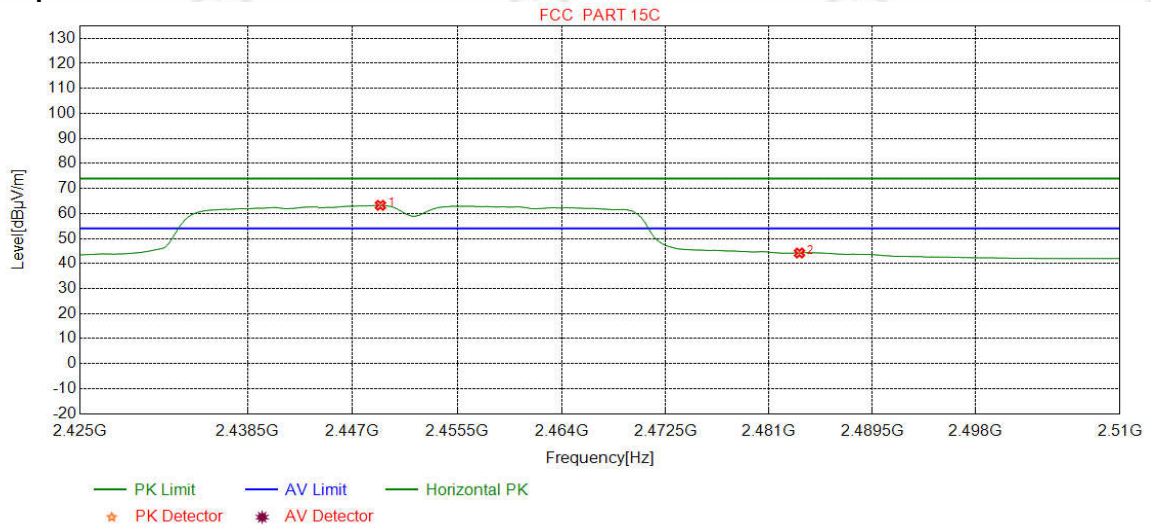


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2449.2553	32.33	13.53	-42.42	59.82	63.26	54.00	-9.26	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	40.85	44.21	54.00	9.79	Pass	Horizontal



Mode:	802.11 n(HT40) (13.5Mbps) Transmitting	Channel:	2452
Remark:	AV		

**Test Graph**

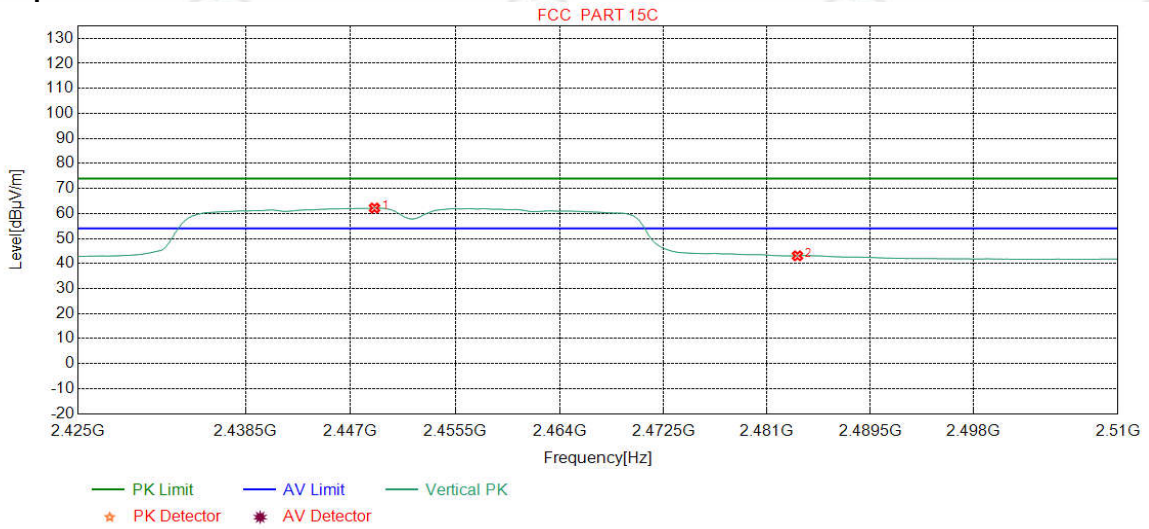


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2448.9362	32.33	13.53	-42.42	58.74	62.18	54.00	-8.18	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	39.72	43.08	54.00	10.92	Pass	Vertical

**MIMO:**

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

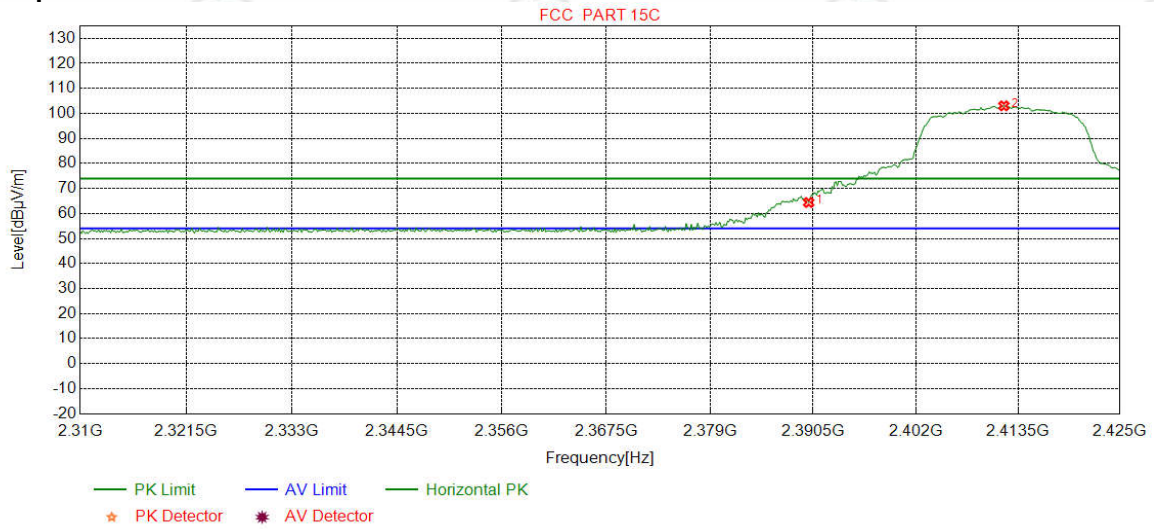

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	61.21	64.39	74.00	9.61	Pass	Horizontal
2	2411.9024	32.28	13.35	-42.43	99.81	103.01	74.00	-29.01	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	PK		


**Test Graph**

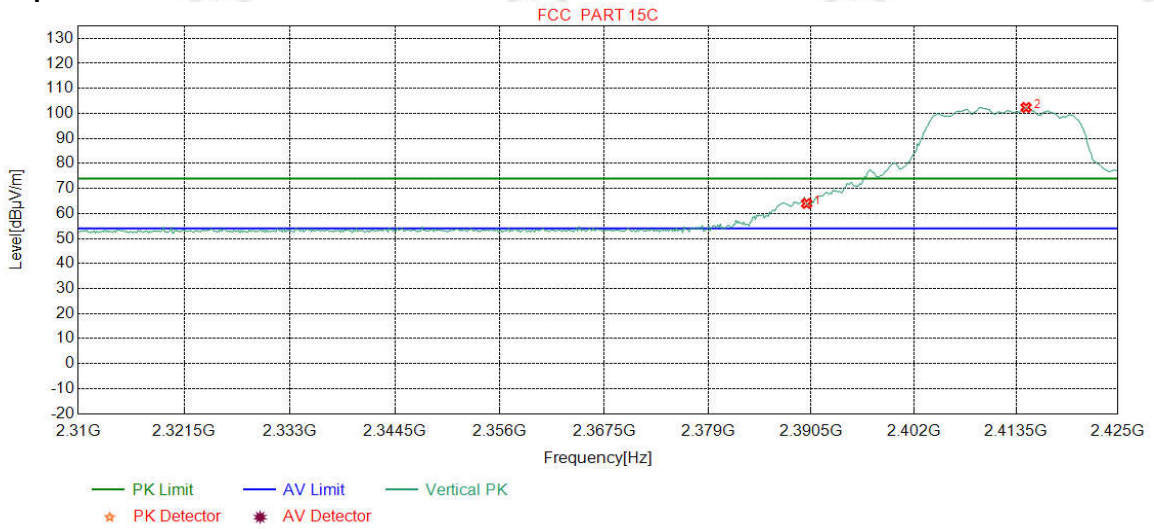

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	60.83	64.01	74.00	9.99	Pass	Vertical
2	2414.6370	32.28	13.37	-42.43	99.16	102.38	74.00	-28.38	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

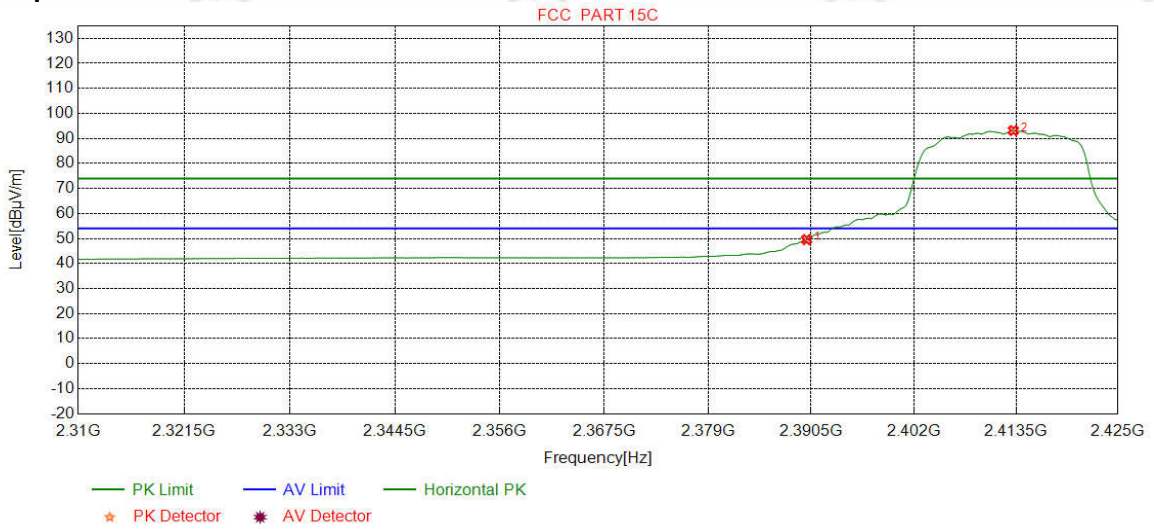

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	46.38	49.56	54.00	4.44	Pass	Horizontal
2	2413.1977	32.28	13.36	-42.43	89.93	93.14	54.00	-39.14	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2412
Remark:	AV		


**Test Graph**

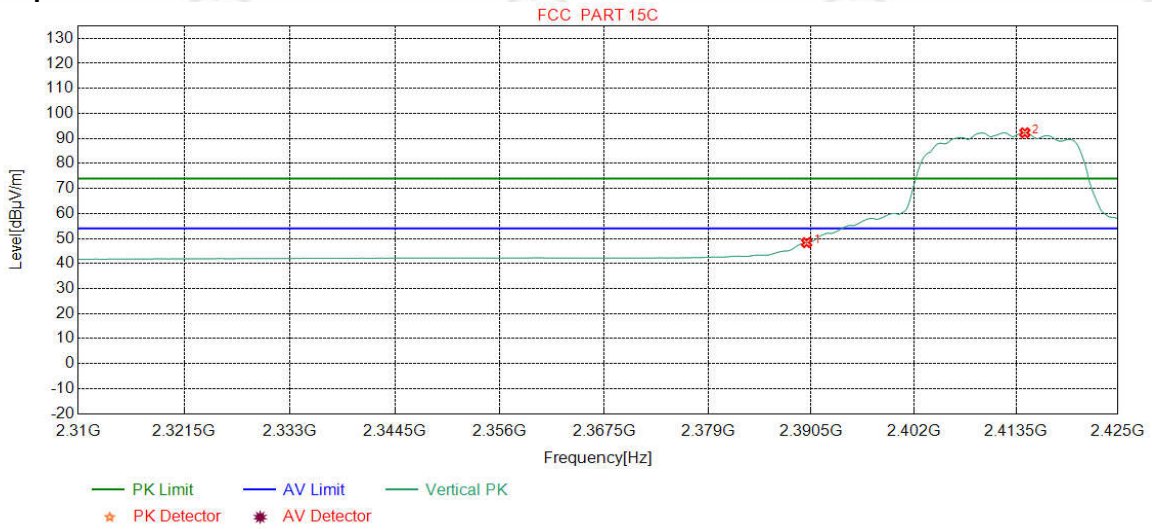

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	45.17	48.35	54.00	5.65	Pass	Vertical
2	2414.4931	32.28	13.37	-42.43	89.04	92.26	54.00	-38.26	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

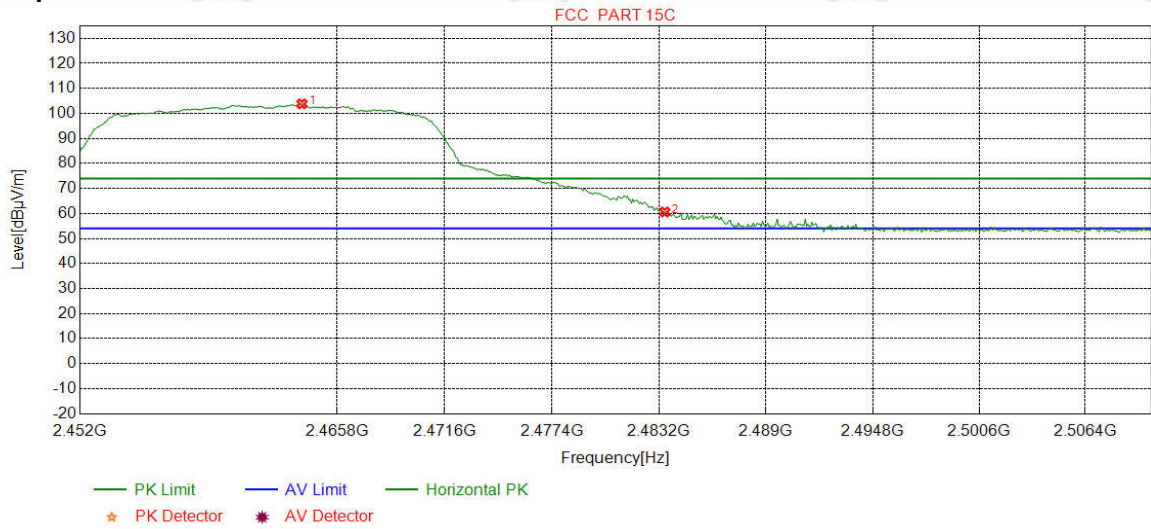

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.9049	32.35	13.47	-42.41	100.42	103.83	74.00	-29.83	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	57.26	60.62	74.00	13.38	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	PK		


**Test Graph**

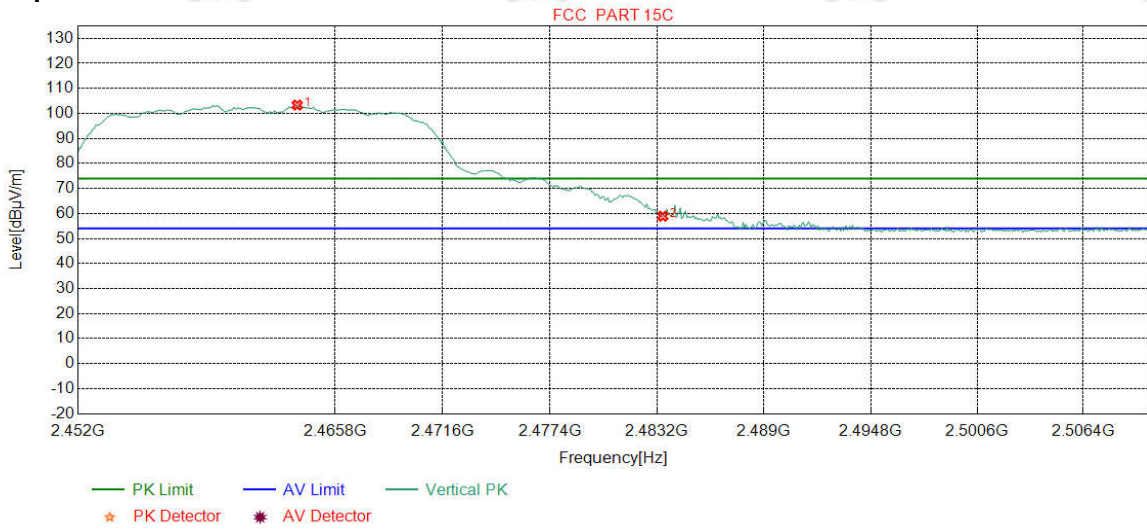

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.7597	32.35	13.47	-42.41	99.91	103.32	74.00	-29.32	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	55.54	58.90	74.00	15.10	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	AV		

**Test Graph**

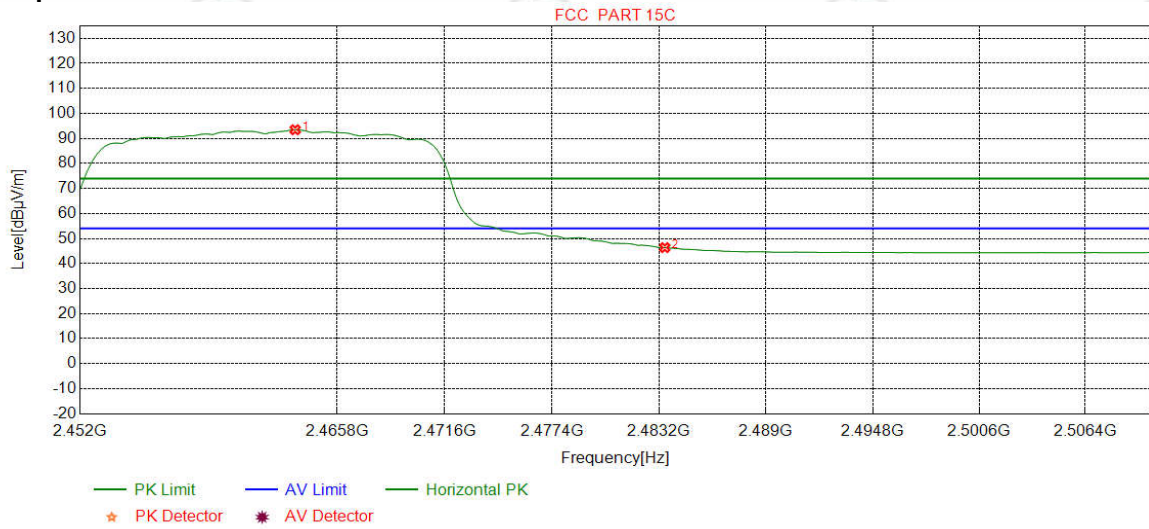


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2463.5419	32.35	13.47	-42.41	90.06	93.47	54.00	-39.47	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	43.00	46.36	54.00	7.64	Pass	Horizontal



Mode:	802.11 n(HT20) (6.5Mbps) Transmitting	Channel:	2462
Remark:	AV		

**Test Graph**

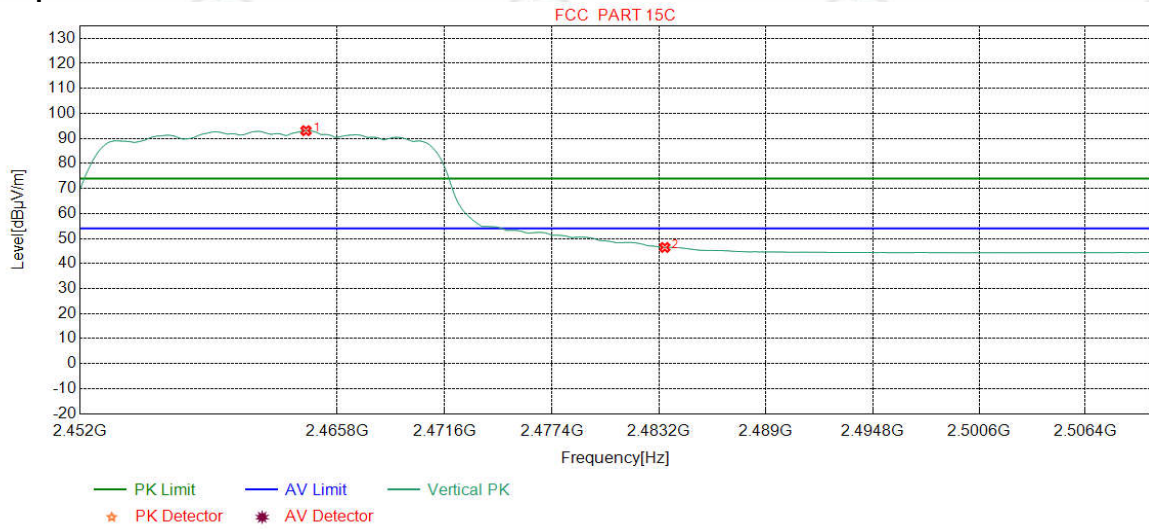

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2464.1227	32.35	13.47	-42.41	89.68	93.09	54.00	-39.09	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	43.06	46.42	54.00	7.58	Pass	Vertical