

# 9605E BT Duo



**User Manual**

1. WELCOME.....	4
2. 9605E BT Duo OVERVIEW.....	5
2.1 HEADSET OVERVIEW	
2.2 OPTIONAL ACCESSORIES	
3. HOW TO WEAR.....	7
3.1 STEREO	
3.2 ADJUST THE HEADBAND	
3.3 POSITION THE MICROPHONE	
3.4 STORING THE MICROPHONE	
4. HOW TO CHARGE THE BATTERY.....	10
5. HOW TO CONNECT.....	11
5.1 CONNECT TO PC (USING BT 100U)	
5.2 CONNECT TO PC/MOBILE DEVICE (USING BLUETOOTH)	
6. HOW TO USE.....	13
6.1 CALLS	
6.2 MULTIPLE CALL HANDLING WITH MOBILE PHONE	
7. SUPPORT.....	16
7.1 FAQ	
7.2 HOW TO CARE FOR YOUR HEADSET	
8. TECHNICAL SPECIFICATION.....	17

# 1. WELCOME


Thank you for using the 9605E BT Headset. We hope you will enjoy it!

## 9605E BT Duo HEADSET FEATURES

- Connects to PC via Bluetooth
- Connects to mobile devices via Bluetooth
- Integrated Busylight
- Rotate the microphone boom-arm back to vertical position when not on calls
- Superior music and voice capabilities
- Hi-Fi Sound

# 2. 9605E BT Duo OVERVIEW


## 2.1 HEADSET

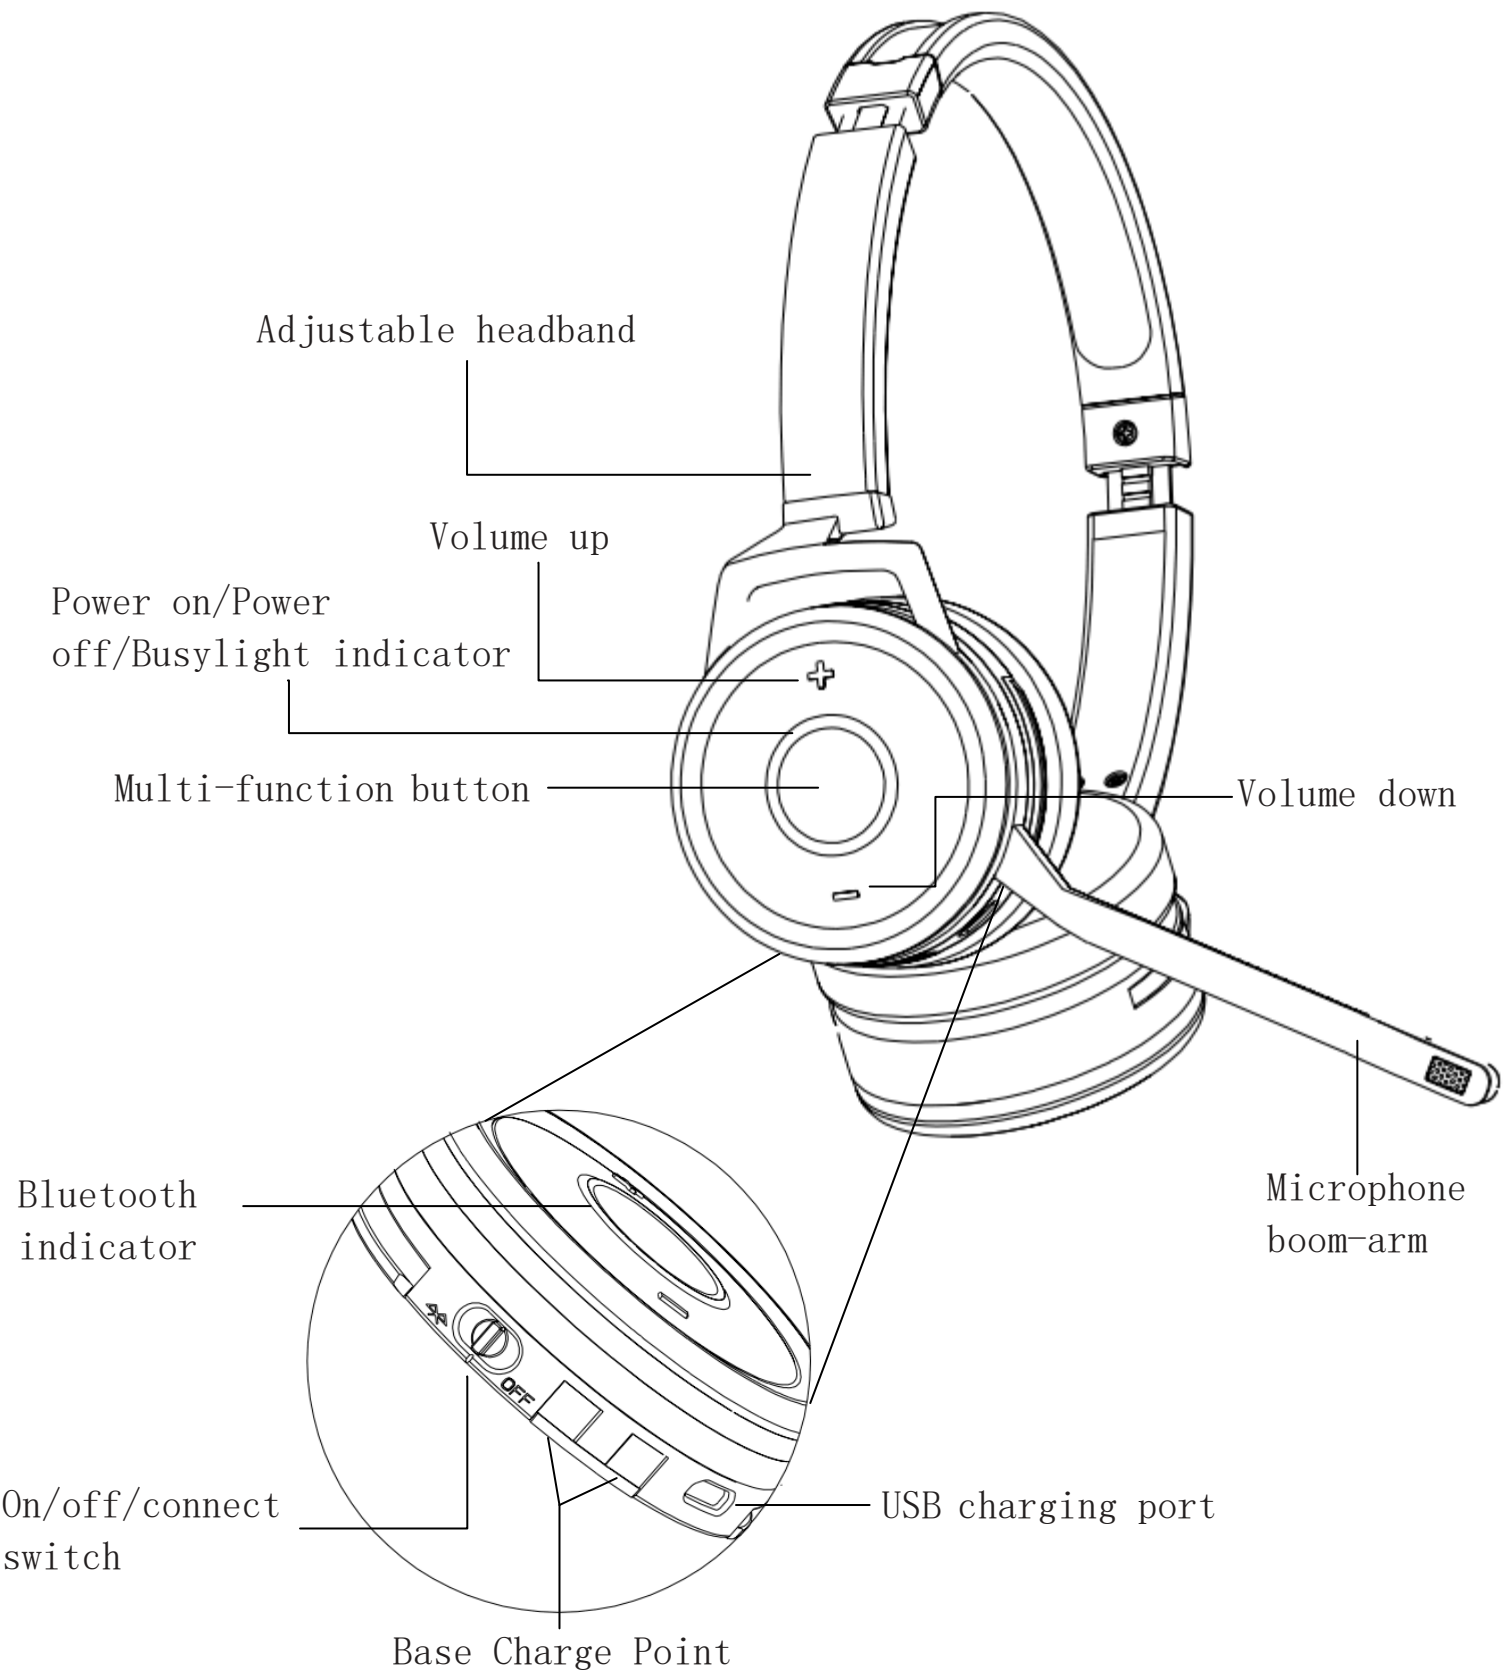

## 2.2 INCLUDED ACCESSORIES




USB cable

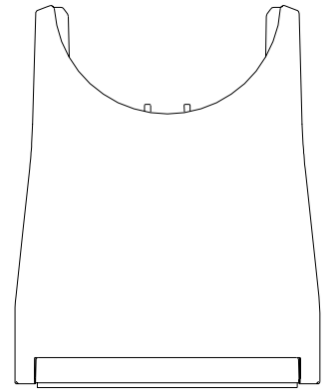

Charging Base (Optional)

## 3. HOW TO WEAR

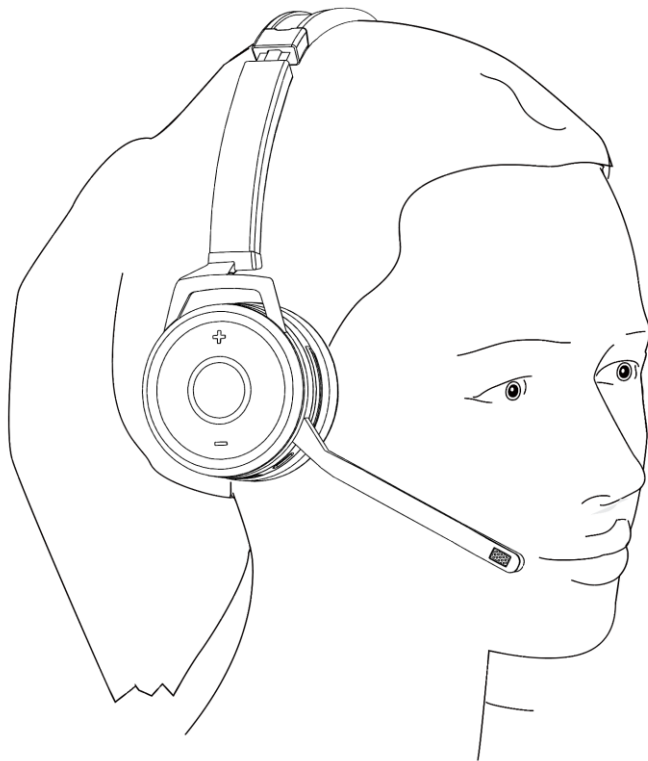


### 3.1 RIGHT WEARING STYLE

The 9605E BT DU0 can be worn only on the right.


## 3.2 ADJUST THE HEADBAND

Adjust the headband to find the most comfortable fit.

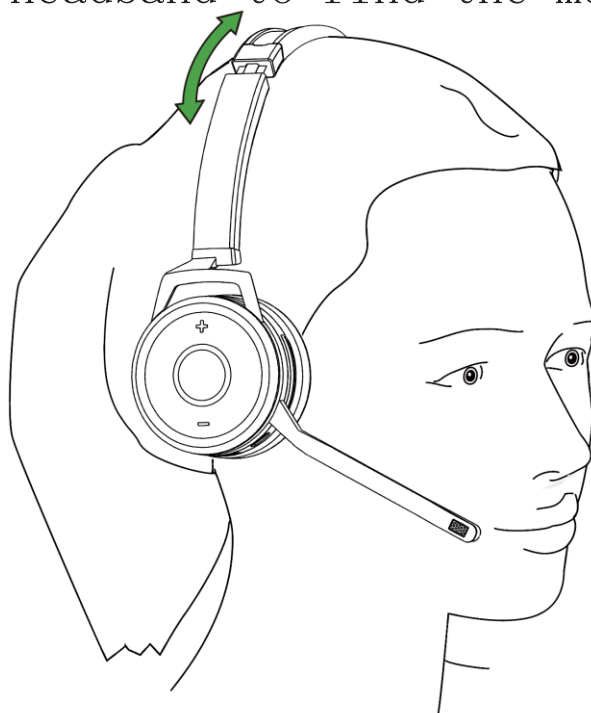


## 3.3 POSITION THE MICROPHONE

It is recommended to position the microphone close to your mouth .

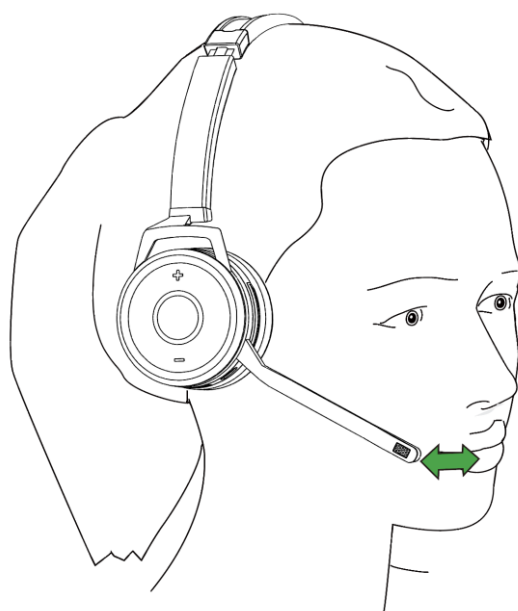


The microphone is bendable for personal preference.

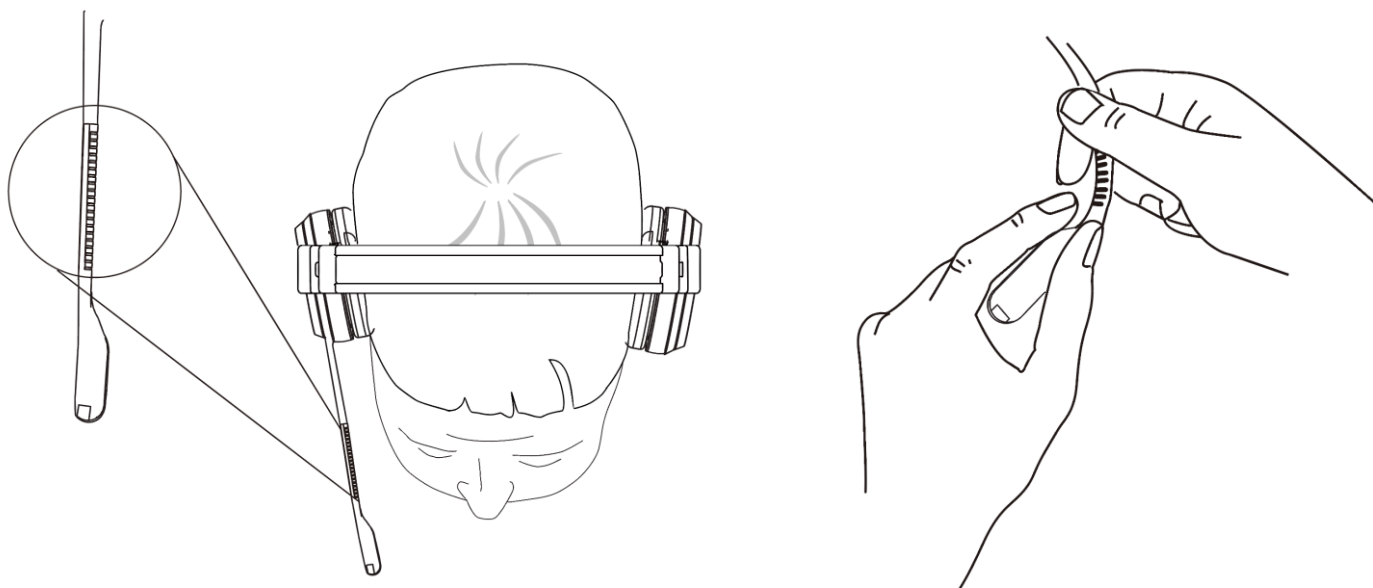

### 3.4 STORING THE MICROPHONE

When listening to music or outdoors, the microphone boom-arm can be rotated back to the vertical position near the headband.

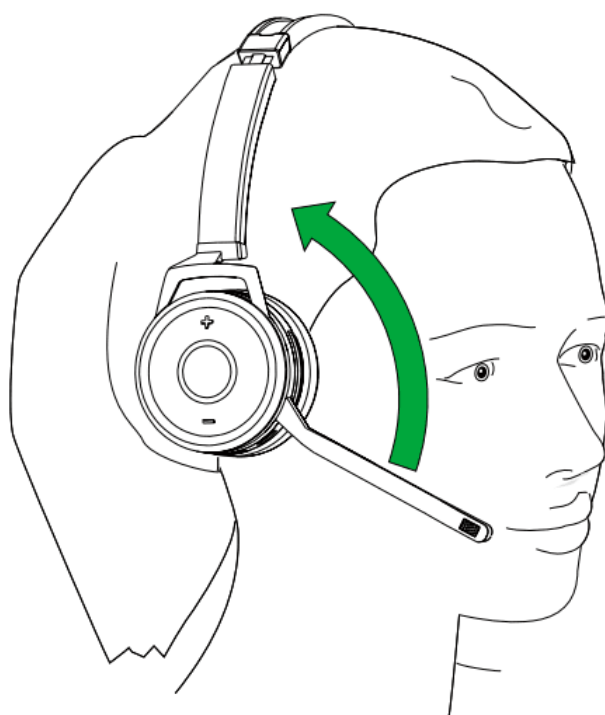




## 4. HOW TO CHARGE THE BATTERY

Option 1: The headset battery will charge when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.

Option 2: If you have a charging base, you could plug the charging base into a powered USB port and then dock the headset.


It takes approx. 3 hours to charge the battery.

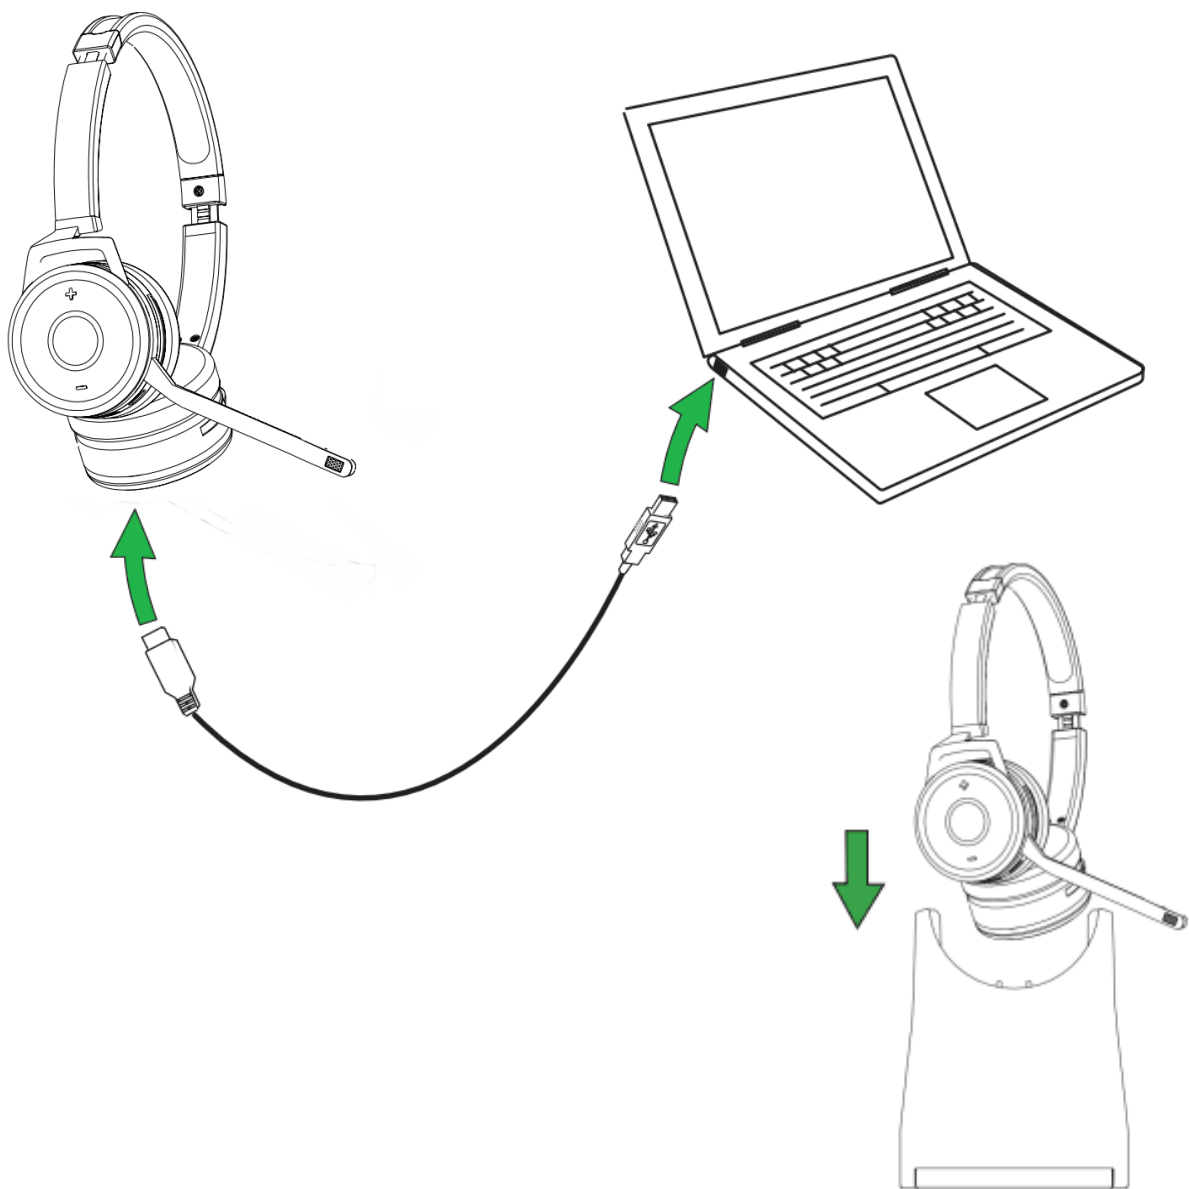

# 5. HOW TO CONNECT


## 5.1 CONNECT TO PC (USING BT 100U)

1. Ensure the headset is switched on.
2. Plug the BT 100U dongle into a USB port on your PC. The headset and BT 100U are already pre-connected.

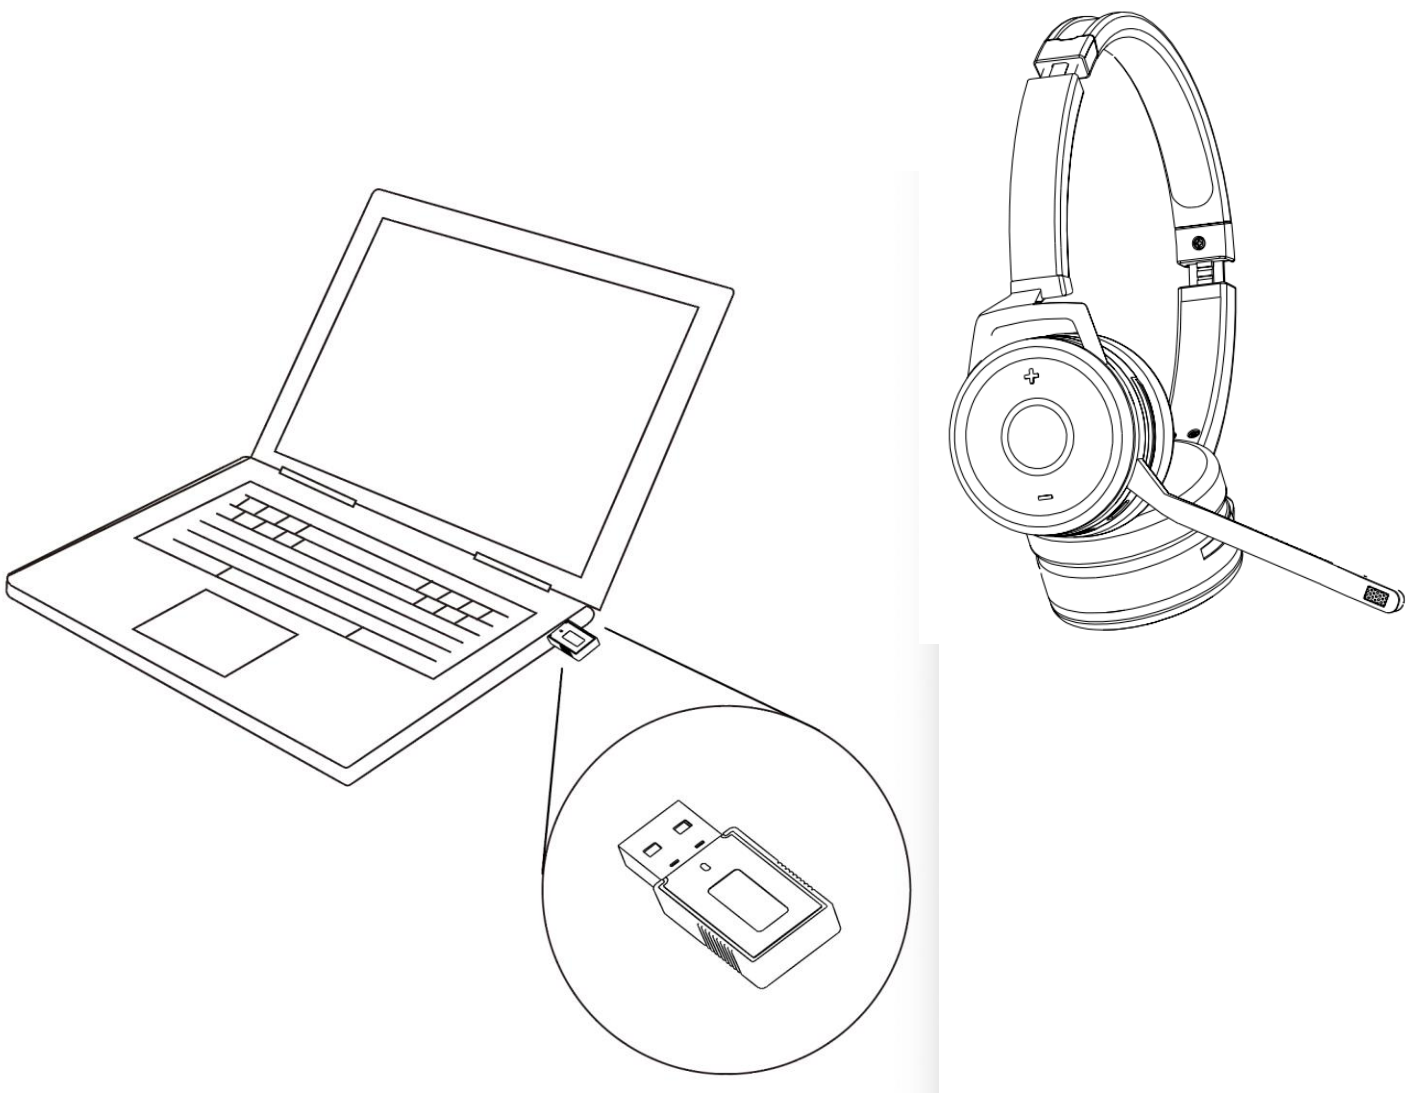


## 5.2 CONNECT TO PC/MOBILE DEVICE (USING BLUETOOTH)







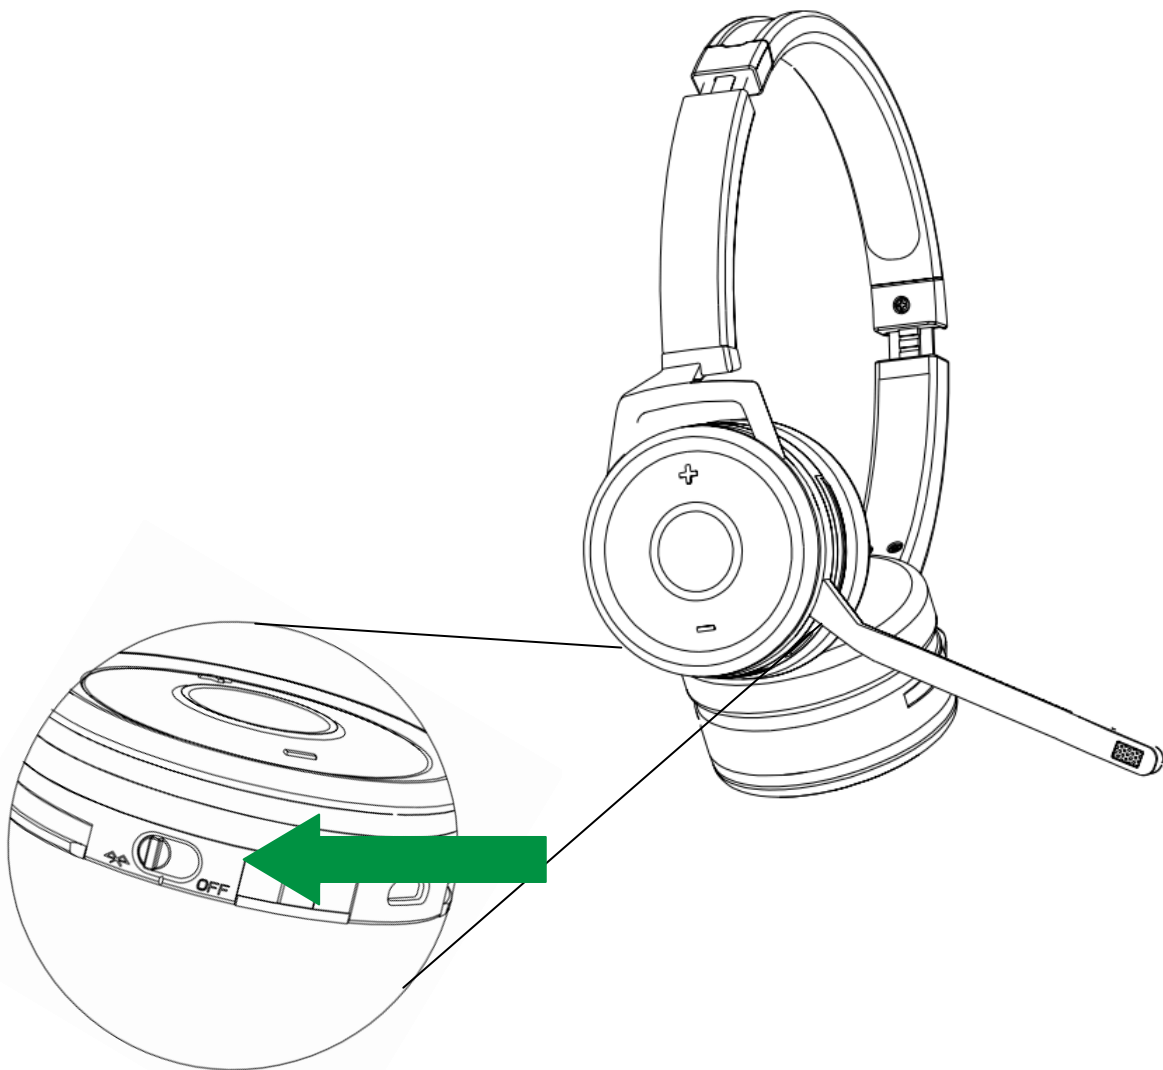


1. Wear the headset.
2. Hold (2 secs) the On/off/connect switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will flash blue.
3. Follow the voice guided instructions to connect.

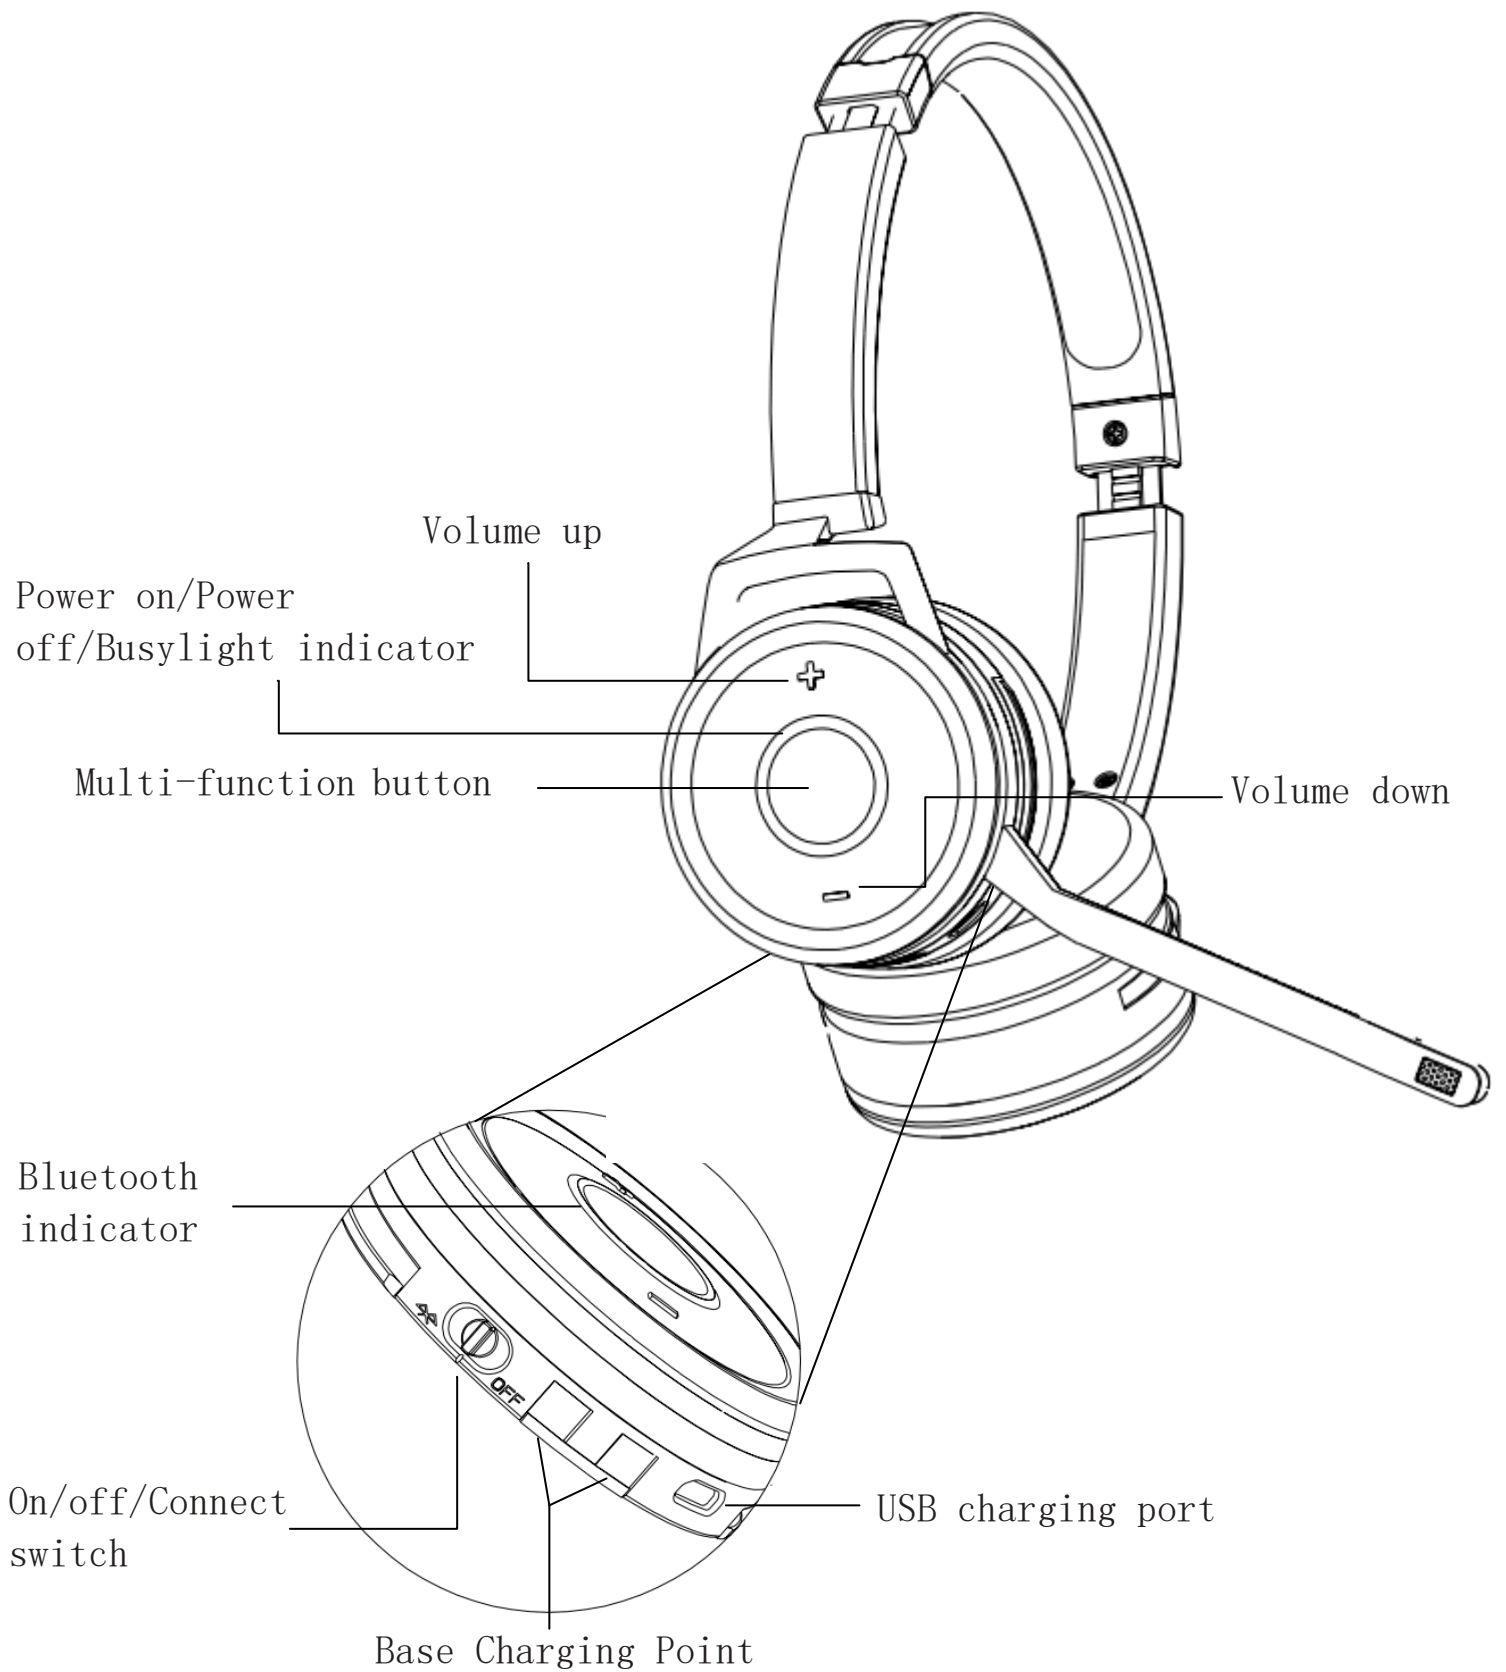

# 6. HOW TO USE




## 6.1 EVERYDAY USE

	FUNCTION	ACTION	LED STATUS
	Headset on	Slide the On switch	Green Light flash twice in succession
	Headset off	Slide the off switch	Red Light flash once in succession
	Pairing	Slide the Pair Button	Blue Light flash
	Pairing Successfully		Green Light flash twice and blue light flash once in succession
	Standby		Blue Light flash 1 time per 8 secs
	Answer/End Call	Tap the Multi-function button	
	Reject call	Double-tap the Multi-function button	
	Adjust volume	Tap the Volume up or Volume down button	
	Mute/unmute microphone	Press and hold (2 secs) the Volume down button	

## 6.2 MULTIPLE CALL HANDLING with Mobile Phone

The headset can accept and handle multiple calls at the same time.

FUNCTION	ACTION
End current call and answer incoming call	Tap the Multi-function button
Put current call on hold and answer incoming call	Press and hold (2 secs) the Multi-function button
Switch between held call and active call	Press and hold (2 secs) the Multi-function button
Reject incoming call, when on a call	Double-tap the Multi-function button



# 7. SUPPORT

## 7.1 FAQ

---

View the FAQs on [www.Vbet.cn](http://www.Vbet.cn)

## 7.2 HOW TO CARE FOR YOUR HEADSET

---

Always store the headset with the power off and safely protected.

Avoid storage at extreme temperatures (above 50° C or below -20° ). This can shorten battery life and may adversely affect the headset.

# 8. TECHNICAL SPECIFICATIONS

## 9605E BT Duo HEADSET

---

Headset weight: 158 g

---

Headset dimensions: Stereo headset: L 155 mm x  
W 36 mm x H 180 mm

---

Wear Style: Headband

---

Talk Time: 10 hours

---

Charging Time: 3 hours

---

Charging Base: Optional

---

Microphones: Noise cancelling microphone

---

Speaker Size: 40 mm

---

Speaker frequency range: 20Hz - 20 kHz

---

Cable length: Connect to PC for charge: 1500 mm

---

Operating temperature: -10° C to 40° C

---

Storage temperature: -20° C to 50° C

---



BLUETOOTH ADAPTER  
(BT 100U)

SPECIFICATION

---

PC connection:	USB 2.0
Bluetooth version:	4.2
Bluetooth range:	Up to 30m (100 feet), Class 1
Simultaneous Bluetooth connection:	1
Support Soft Phone:	Skype for Business/3CX Phone
Bluetooth audio bandwidth:	HD voice (wideband), A2DP
Visual indicators:	Multicolor LED

---

## 9. Product Disposal Treatment and FCC statement

1. Dispose of in accordance with local regulations as headphones and recycling regulations. Never treated headset as household waste. Do not dispose of the headset in a fire, this battery may explode. If damaged, the battery may explode.

2. FCC statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

### **RF Warning Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

**Made in China**

**MODEL: 9605E BT Duo**

**FCC ID: 2AC67-9605EBT**



Xiamen VbeT Electronics Co.,Ltd

URL : <http://www.vbet.cn>

Mail : [vt@vbet.cn](mailto:vt@vbet.cn)

Tel : 0086-592-5778728

Fax : 0086-592-5778708

Add: N403, Weiye Building, Xiamen Pioneering Park for Overseas Chinese Scholars, PRC

Declaration of Conformity can be found on [www.vbet.cn](http://www.vbet.cn)