



A Voice Technologist

VT B320 BT Headset



User Manual

User Manual

1. WELCOME	3
2. VT B320 BT OVERVIEW	4
2.1 HEADSET	4
2.2 INCLUDED ACCESSORIES	5
3. HOW TO WEAR	5
3.1 LEFT OR RIGHT WEARING STYLE	6
3.2 ADJUST THE HEADBAND	6
3.3 POSITION THE MICROPHONE	7
3.4 STORING THE MICROPHONE	7
4. BASE CHARGING	8
4.1 CHARGE THE HEADSET	8
4.2 SUPPORT WIRELESS CHARGING FOR MOBILE PHONE	8
5. HOW TO CONNECT	9
5.1 CONNECT TO PC (USING BT 100U)	9
5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)	9
6. HOW TO USE	10
6.1 EVERYDAY USE	11
6.2 MULTIPLE CALL HANDLING	12
7. SUPPORT	12
7.1 FAQ	12
7.2 HOW TO CARE FOR YOUR HEADSET	12
8. TECHNICAL SPECIFICATION	13

1. WELCOME


Thank you for using the VT B320 BT Headset. We hope you will enjoy it !

VT B320 BT FEATURES


- Comfortable noise-isolating design
- 2-microphone call technology makes voice clear
- Hybrid Active Noise Cancelling
- Superior music and voice capabilities
- Hi-Fi Sound
- Integrated Busylight
- Discreet boom arm can be neatly folded away into the headband when not on a call
- Compatible with Microsoft Teams/Skype for Business/3CX, Cisco Jabber,Avaya workplace, and Counterpath Bria, etc via BT100U

2. VT B320 BT OVERVIEW

2.1 HEADSET

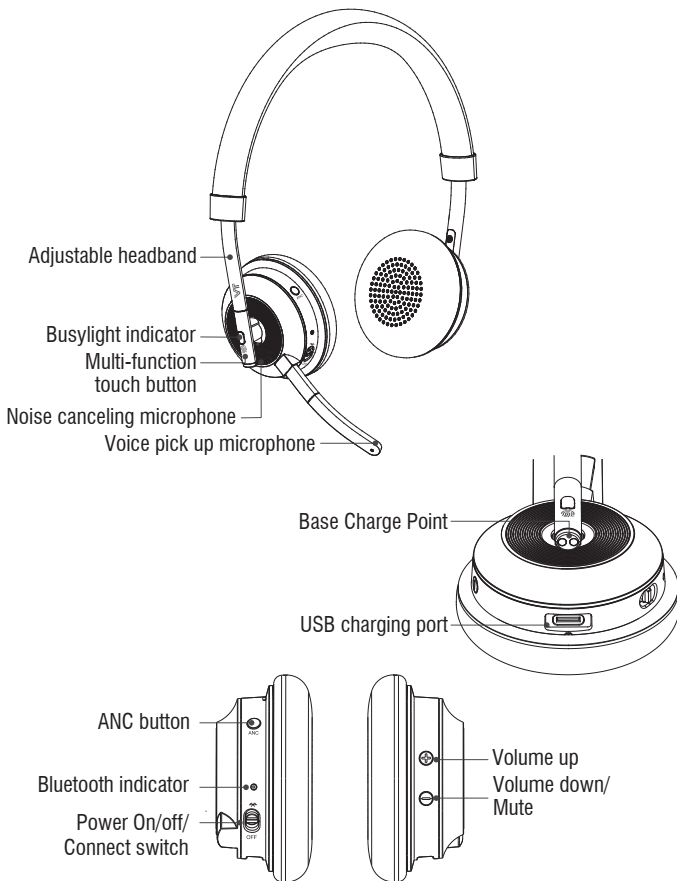


2.2 INCLUDED ACCESSORIES




Carry pouch



USB-C cable



Charging Base
(Optional)




BT 100U
(Optional)

3. HOW TO WEAR



3.1 LEFT OR RIGHT WEARING STYLE

The VT B320 BT can be worn on the right or left which you want.

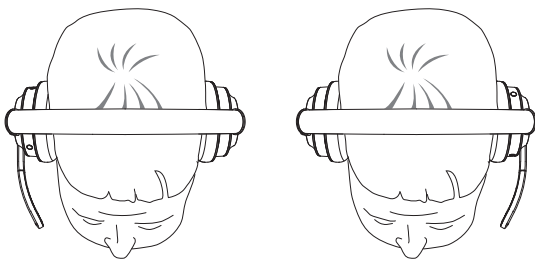


3.2 ADJUST THE HEADBAND

Adjust the headband to find the most comfortable fit.




3.3 POSITION THE MICROPHONE

It is recommended to position the microphone close to your mouth.

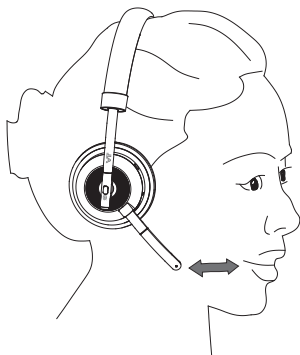

3.4 STORING THE MICROPHONE

Discreet boom arm can be neatly folded away into the headband when not on a call.

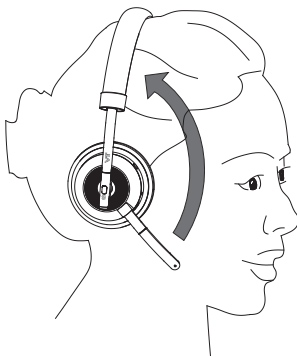


4. BASE CHARGING

4.1 CHARGE THE HEADSET

Option 1: The headset battery will be charged when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.


Option 2: If you have a charging base, you could plug the charging base into a powered USB port and then dock the headset.

- Busylight indicator will turn red during charging, and it will turn green when headset is fully charged.
- It takes approx.3 hours to fully charge the battery.

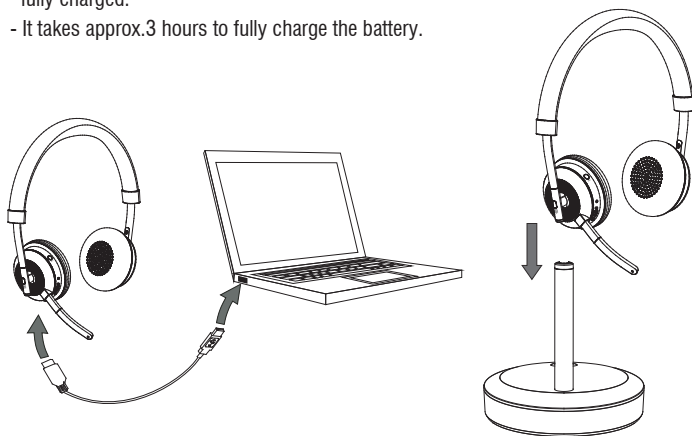

4.2 SUPPORT WIRELESS CHARGING FOR MOBILE PHONE


Base connects Power Adapter by USB cable, and put the mobile phone on the Base, then the charging indicator green light on.

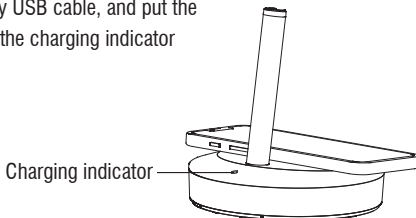

5. HOW TO CONNECT

5.1 CONNECT TO PC (USING BT 100U)

1. Ensure the headset is switched on.
2. Plug the BT 100U dongle into a USB port on your PC. The headset and BT 100U are already pre-connected.

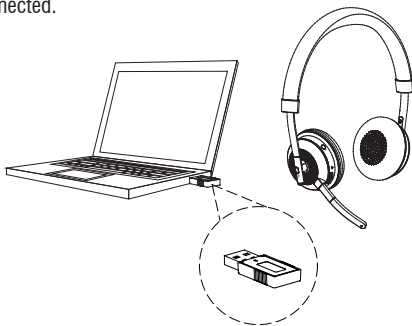


5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)








1. Wear the headset.
2. Hold (2 secs) the On/off/connect switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will turn blue.
3. Follow the voice guided instructions to connect.

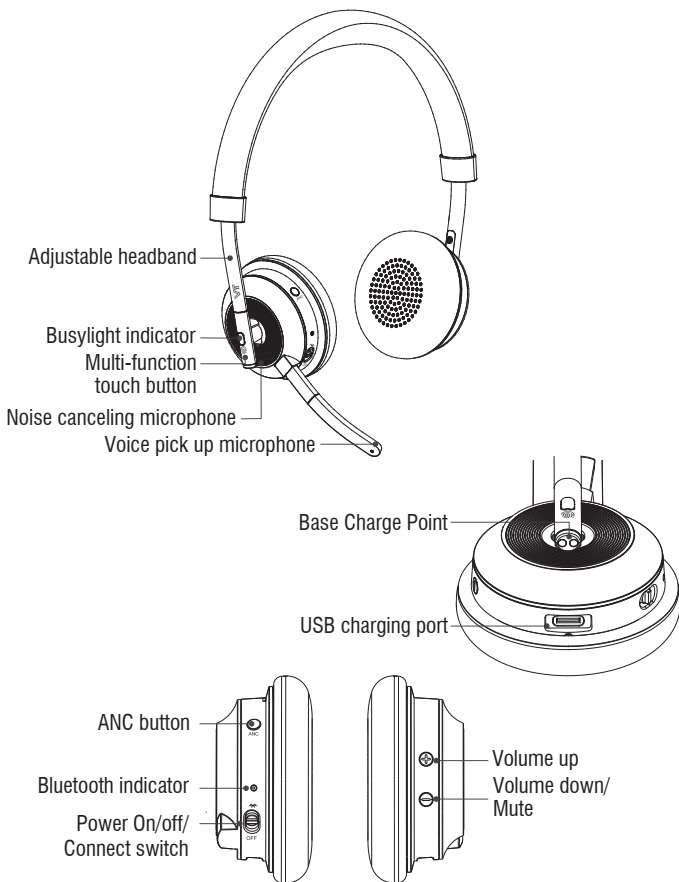

6. HOW TO USE




6.1 EVERYDAY USE

	FUNCTION	ACTION	LED STATUS
	Headset on	Slide the On switch	Blue Light flashes twice in succession
	Headset off	Slide the off switch	Red Light flashes once
	Pairing	Slide the Pair Button	Blue Light flashes
	Pairing Successfully		The blue light stays on for 3 seconds
	Standby		Blue Light flashes 1 time per 8 secs
	Answer/ End Call	Tap the Multi-function button	When there's an incoming call, the busylight flashes red, and the busylight stays red when on a call.
	Reject call	Double-tap the Multi-function button	
	Adjust volume and mute	Tap the Volume up or Volume down button, when on a call,hold the volume down button 2s, it will be muted, and Hold 2s again it will be unmuted	
	ANC on/off	Tap the ANC button once to turn on the ANC function(There are 3 modes for your option, and the switching order is Basic Mode-Transparent Mode-ANC Mode).	

6.2 MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls at the same time.

	FUNCTION	ACTION
	End current call and answer incoming call	Tap the Multi-function button
	Put current call on hold and answer incoming call	Press and hold (2 secs) the Multi-function button
	Switch between held call and active call	Press and hold (2 secs) the Multi-function button
	Reject incoming call, when on a call	Double-tap the Multi-function button

7. SUPPORT

7.1 FAQ

View the FAQs on [www.Vbet.cn/VT B320 BT](http://www.Vbet.cn/VT_B320_BT).

7.2 HOW TO CARE FOR YOUR HEADSET

- Always store the headset with the power off and safely protected.
- Avoid storage at extreme temperatures (above 55°C or below -10°). This can shorten battery life and may adversely affect the headset.

8. TECHNICAL SPECIFICATIONS

VT B320 BT HEADSET	SPECIFICATION
Bluetooth Version:	V5.0(Without BLE)
Headset weight:	Mono headset 106g Stereo headset 146g
Headset dimensions:	Mono headset L196.3mm x W72.5mm x H189.1mm Stereo headset L196.3mm x W72.5mm x H191.1mm
Wear Style:	Headband
Talk Time:	17 hours (Basic mode), 15 hours (ANC mode)
Music time:	19 hours (Basic mode), 13 hours (ANC mode)
Charging Time:	3 hours
Charging Base:	Optional
Microphones:	Noise cancelling microphone
Speaker Size:	40 mm
Speaker frequency range:	20hz - 20 kHz
Cable length:	Connect to PC for charging: 1500 mm
Operating temperature:	-10°C to 55°C
Storage temperature:	-20°C to 25°C
Frequency Range:	2402~2480MHz
Transmit power:	6.0dBm

BLUETOOTH ADAPTER(BT 100U)	SPECIFICATION
PC connection:	USB 2.0
Bluetooth version:	V5.0(Without BLE)
Bluetooth range:	Up to 30m (100 feet), Class 1
Bluetooth profiles:	A2DP (V1.2), Hands free profile (V1.6)
Simultaneous Bluetooth Connection:	1
Support Softphones:	Microsoft Teams/Skype for Business/3CX, Cisco Jabber, Avaya, and Counterpath Bria, etc.
Bluetooth audio bandwidth:	HD voice (wideband), A2DP
Visual indicators:	Multicolor LED



Important Safety Instructions

To prevent possible hearing damage, do not listen at high volume levels for long periods.

9. Product Disposal Treatment and FCC statement

1. Dispose of in accordance with local regulations as headphones and recycling regulations.

Never treated headset as household waste. Do not dispose of the headset in a fire, this battery may explode. If damaged, the battery may explode.

2. FCC statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF Warning Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Xiamen VBeT Electronics Co., Ltd.

HQ Add: N403, Weiye Building, Xiamen Pioneering Park for Overseas Chinese Scholars, PRC

Factory Add: 5th Floor Keji Building#2, No.32 Huoju East Road, Huli District Xiamen China P.C.361009

Tel : +86-592-5778728

Fax: +86-592-5778708

E-mail: vt@vbet.cn

Web: www.vbetglobal.com

