

# **FCC Test Report**

Report No.: AGC13454220904FE03

FCC ID	:	2A2R7AF-BH007
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	WIRELESS STEREO EARPHONES
BRAND NAME	:	evatronic, ALFOX
MODEL NAME	:	ET-BH032, AF-BH007
APPLICANT	:	Shenzhen Danya Technology Co., Ltd.
DATE OF ISSUE	:	Oct. 09, 2022
STANDARD(S)	:	FCC Part 15.247
<b>REPORT VERSION</b>	:	V1.0







#### **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 09, 2022	Valid	Initial Release



## TABLE OF CONTENTS

1.	VERIFICATION OF CONFORMITY	. 5
2.	GENERAL INFORMATION	. 6
	2.1. PRODUCT DESCRIPTION	. 6
	2.2. TABLE OF CARRIER FREQUENCYS	. 6
	2.3. RECEIVER INPUT BANDWIDTH	. 7
	2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	. 7
	2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	. 7
	2.6. RELATED SUBMITTAL(S) / GRANT (S)	. 8
	2.7. TEST METHODOLOGY	. 8
	2.8. SPECIAL ACCESSORIES	. 8
	2.9. EQUIPMENT MODIFICATIONS	. 8
	2.10. ANTENNA REQUIREMENT	. 8
3.	MEASUREMENT UNCERTAINTY	. 9
4.	DESCRIPTION OF TEST MODES 1	10
5.	SYSTEM TEST CONFIGURATION1	11
	5.1. CONFIGURATION OF EUT SYSTEM1	11
	5.2. EQUIPMENT USED IN TESTED SYSTEM1	11
	5.3. SUMMARY OF TEST RESULTS1	11
6.	TEST FACILITY 1	12
7.	PEAK OUTPUT POWER 1	13
	7.1. MEASUREMENT PROCEDURE	13
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 1	13
	7.3. LIMITS AND MEASUREMENT RESULT 1	14
8.	20DB BANDWIDTH 1	19
	8.1. MEASUREMENT PROCEDURE	19
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 1	19
	8.3. LIMITS AND MEASUREMENT RESULTS	20
9.	CONDUCTED SPURIOUS EMISSION	25
	9.1. MEASUREMENT PROCEDURE	25



APPENDIX B: PHOTOGRAPHS OF EUT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	78
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	77
14. LINE CONDUCTED EMISSION TEST	
13.4. LIMITS AND MEASUREMENT RESULT	
13.3. MEASUREMENT EQUIPMENT USED	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.1. MEASUREMENT PROCEDURE	
13. FREQUENCY SEPARATION	76
12.4. LIMITS AND MEASUREMENT RESULT	
12.3. MEASUREMENT EQUIPMENT USED	
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.1. MEASUREMENT PROCEDURE	
12. TIME OF OCCUPANCY (DWELL TIME)	72
11.4. LIMITS AND MEASUREMENT RESULT	71
11.3. MEASUREMENT EQUIPMENT USED	
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
11.1. MEASUREMENT PROCEDURE	
11. NUMBER OF HOPPING FREQUENCY	71
10.4. TEST RESULT	
10.3. LIMITS AND MEASUREMENT RESULT	
10.2. TEST SETUP	
10.1. MEASUREMENT PROCEDURE	
10. RADIATED EMISSION	46
9.4. LIMITS AND MEASUREMENT RESULT	
9.3. MEASUREMENT EQUIPMENT USED	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	



## **1. VERIFICATION OF CONFORMITY**

Applicant	Shenzhen Danya Technology Co., Ltd.	
Address	Room 3323, Building C, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China	
Manufacturer	Shenzhen Danya Technology Co., Ltd.	
Address	Room 3323, Building C, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China	
Factory	SHENZHEN JIA HUA LI DIAN ZI YOU XIAN GONG SI	
Address	No. 101, 201 Building E, New Industrial Zone, Shenzhu Road, Liuyue Shenkeng Village, Henggang, Longgang District, Shenzhen, Guangdong, China	
Product Designation	WIRELESS STEREO EARPHONES	
Brand Name	evatronic,ALFOX	
Test Model	ET-BH032	
Series Model	AF-BH007	
Declaration of Difference	All the same except for the model name and brand name	
Date of test	Sep. 17, 2022 to Oct. 08, 2022	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BR/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By

Cod ches

Cool Cheng (Project Engineer)

Oct. 09, 2022

**Reviewed By** 

Calvin Liu (Reviewer)

Oct. 09, 2022

Approved By

Max Zhang (Authorized Officer)

Oct. 09, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "WIRELESS STEREO EARPHONES". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402GHz to 2.480GHz	
RF Output Power	-1.491dBm (Max)	
Bluetooth Version	V5.2	
Modulation	BR⊠GFSK, EDR⊠π /4-DQPSK, ⊠8DPSK BLE⊡GFSK 1Mbps □GFSK 2Mbps	
Number of channels	79 Channels	
Hardware Version	REV:2.0	
Software Version	V1.0	
Antenna Designation	FPC Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	2.89dBi	
Power Supply	DC 3.7V by battery	

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
		:
	77	2479 MHz
	78	2480 MHz



## 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39

## 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A2R7AF-BH007** filing to comply with the FCC PART 15.247 requirements.

### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



## 4. DESCRIPTION OF TEST MODES


NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

#### Software Setting

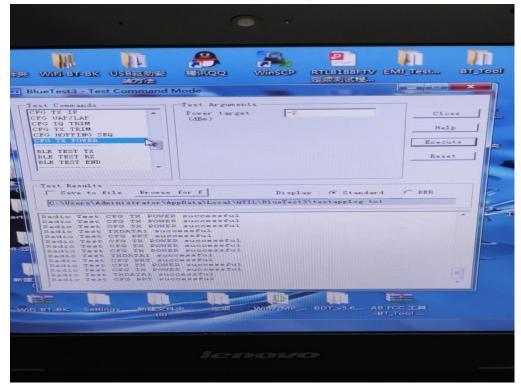



# **5. SYSTEM TEST CONFIGURATION**

### 5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT		AE
-----	--	----

## 5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	WIRELESS STEREO EARPHONES	ET-BH032	2A2R7AF-BH007	EUT
2	Control Box	USB-TTL	N/A	AE

## **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	n 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

### TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-49 4	Jan. 08, 2021	Jan. 07, 2023
Test Software	FARA	EZ-EMC(Ver.RA-0 3A)	N/A	N/A	N/A



# 7. PEAK OUTPUT POWER

## 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

## PEAK POWER TEST SETUP

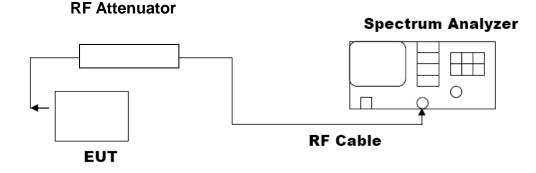




#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power				
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
GFSK	2402	-4.226	≪21	Pass
	2441	-4.407	≪21	Pass
	2480	-4.755	≪21	Pass
π /4-DQPSK	2402	-2.119	≤21	Pass
	2441	-2.229	≪21	Pass
	2480	-2.499	≤21	Pass
8DPSK	2402	-1.491	≪21	Pass
	2441	-1.682	≤21	Pass
	2480	-1.984	≤21	Pass


#### **Test Graphs of Conducted Output Power**






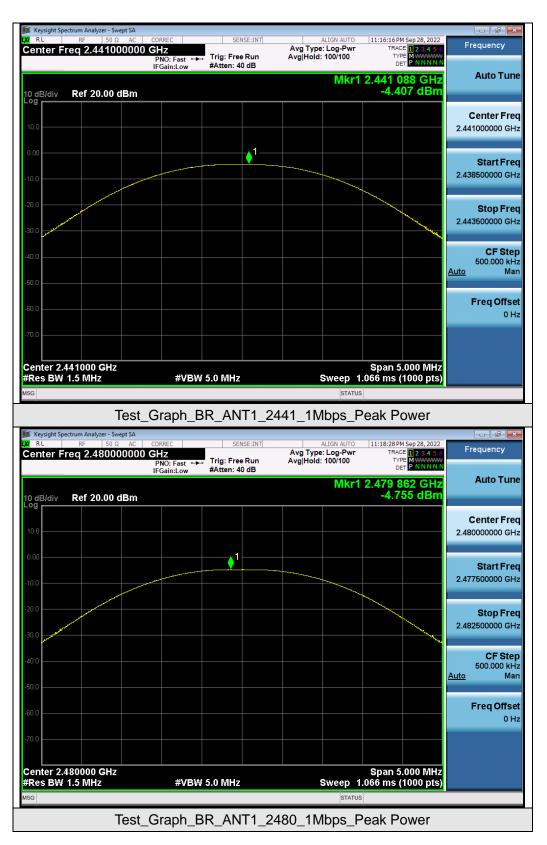




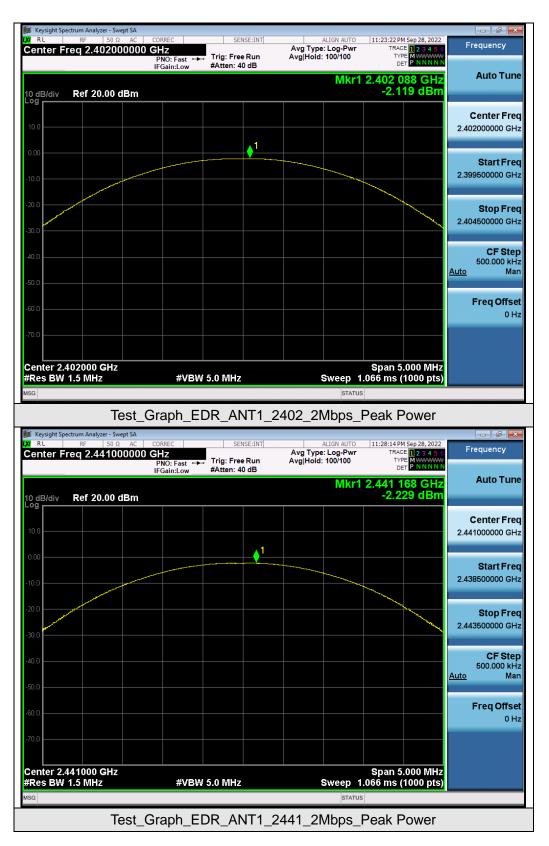



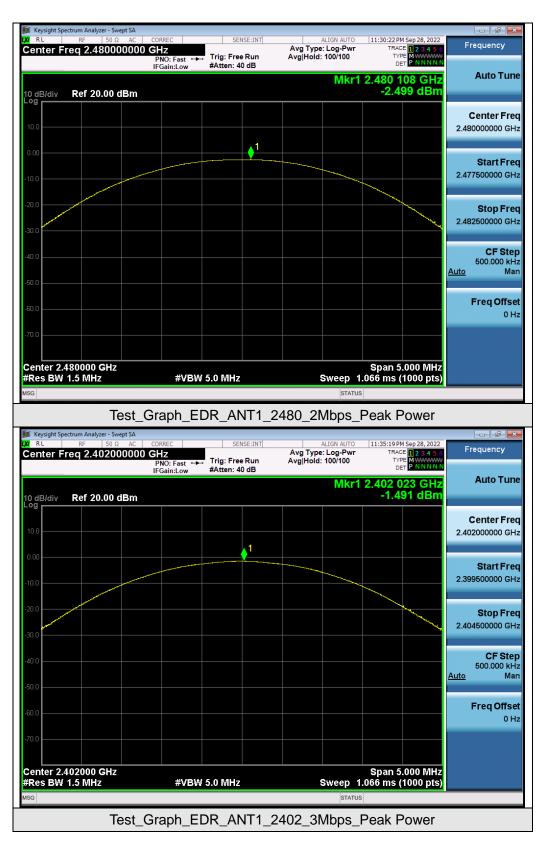



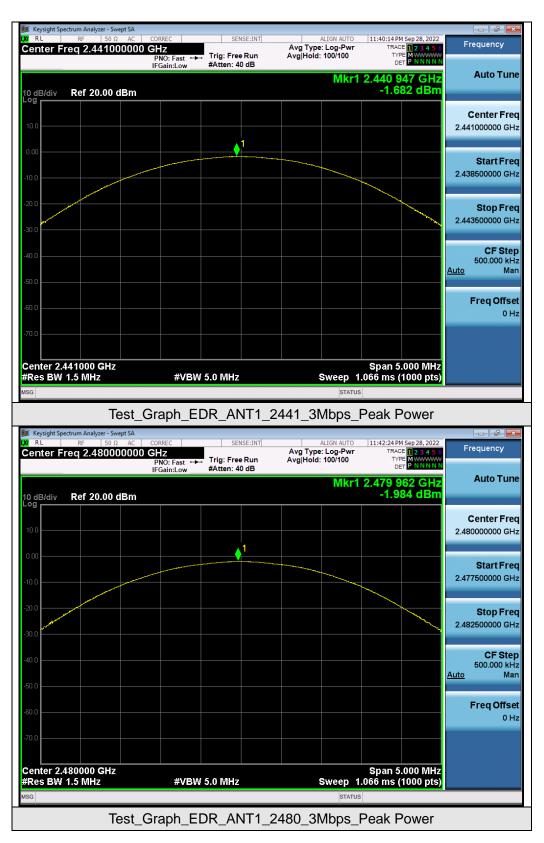




## 8. 20DB BANDWIDTH

### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

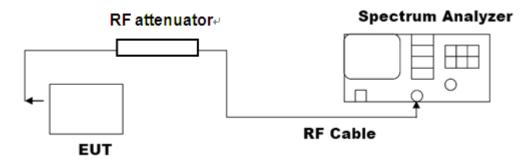





Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
GFSK	2402	0.864	0.958	N/A	Pass
	2441	0.863	0.957	N/A	Pass
	2480	0.860	0.958	N/A	Pass
π /4-DQPSK	2402	1.187	1.331	N/A	Pass
	2441	1.188	1.332	N/A	Pass
	2480	1.188	1.333	N/A	Pass
8DPSK	2402	1.179	1.305	N/A	Pass
	2441	1.180	1.306	N/A	Pass
	2480	1.179	1.304	N/A	Pass

#### **8.3. LIMITS AND MEASUREMENT RESULTS**

#### Test Graphs of Occupied Bandwidth and -20 Bandwidth

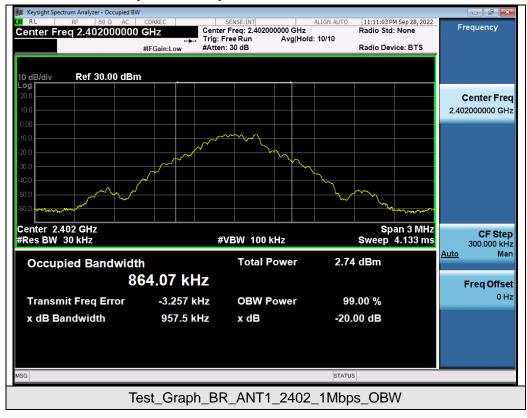



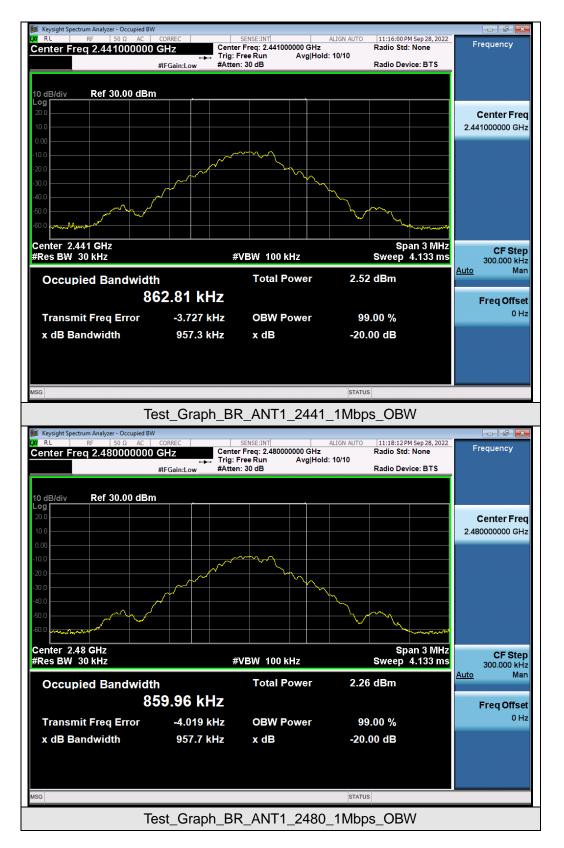















# 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2


### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

## 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT			
Angliaghta Limite	Measurement Result		
Applicable Limits	Test Data	Criteria	
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit		
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS	
intentional radiator is operating, the radio frequency	Channel		
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS	



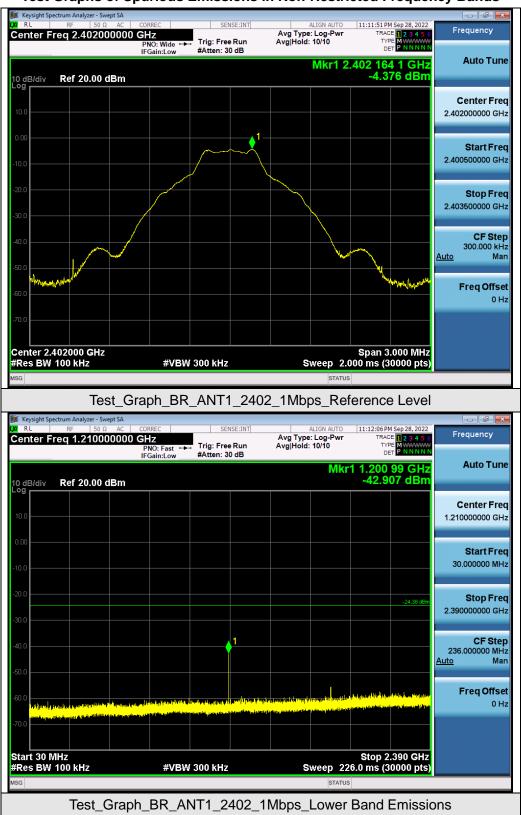


#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



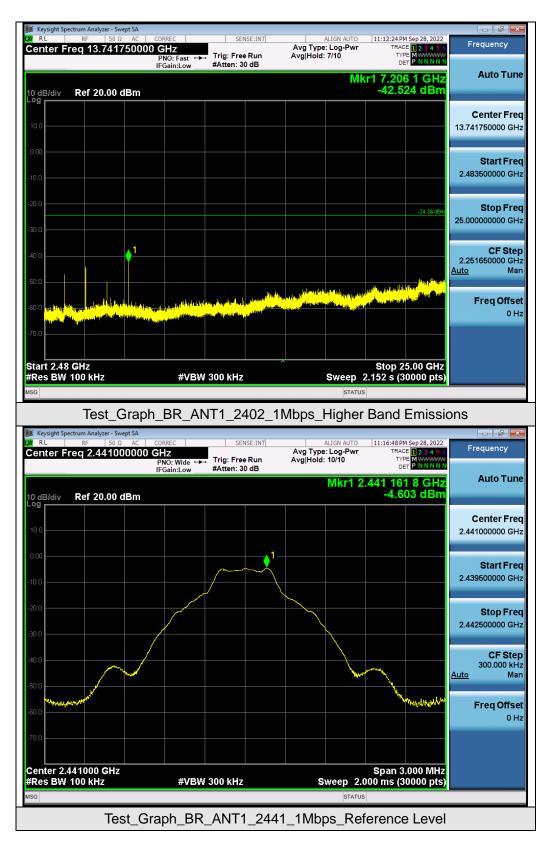




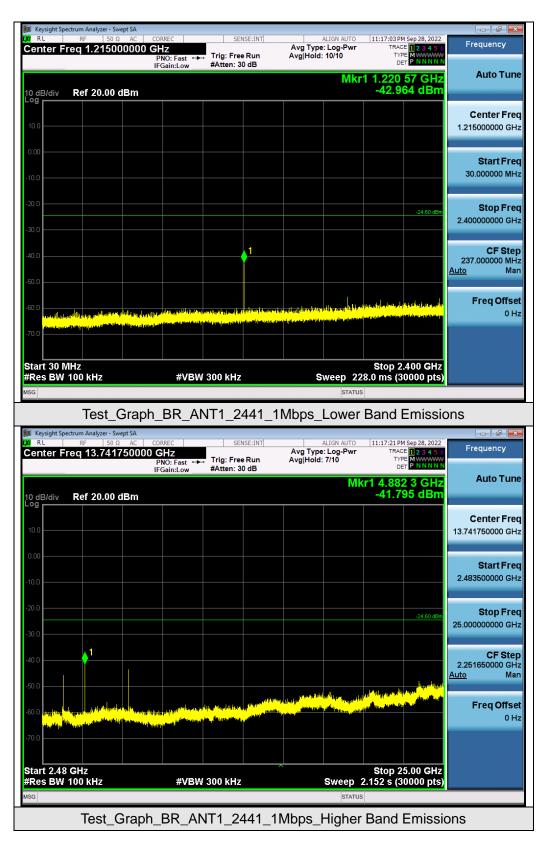








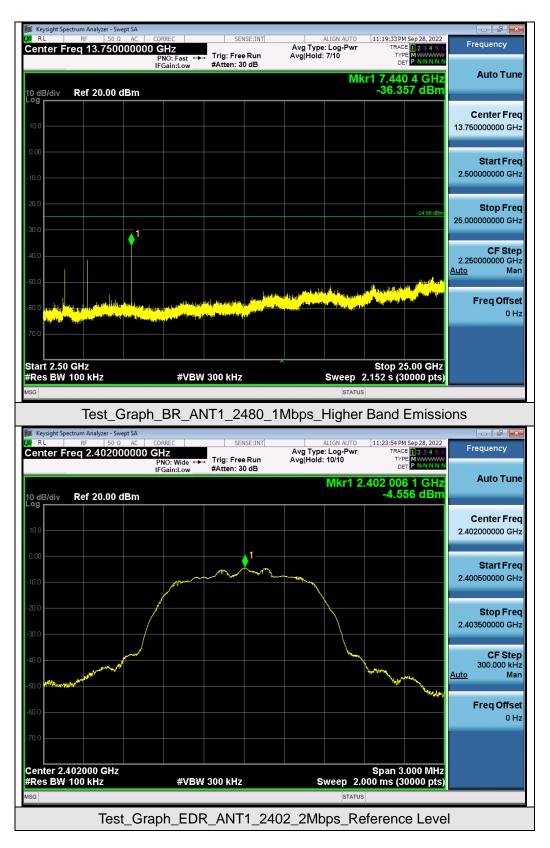




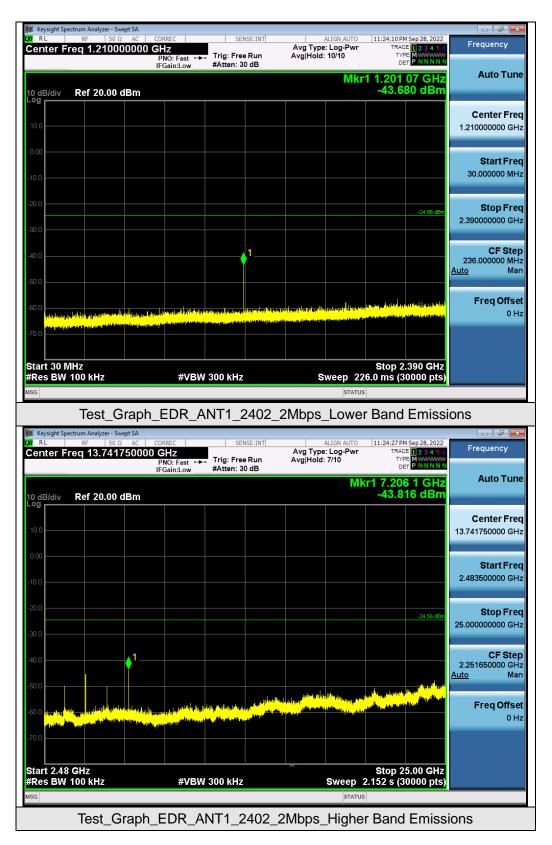









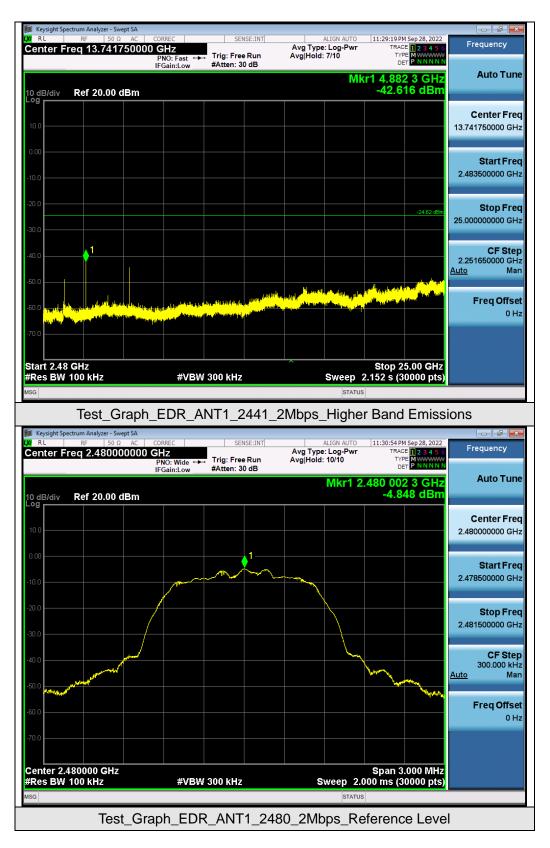




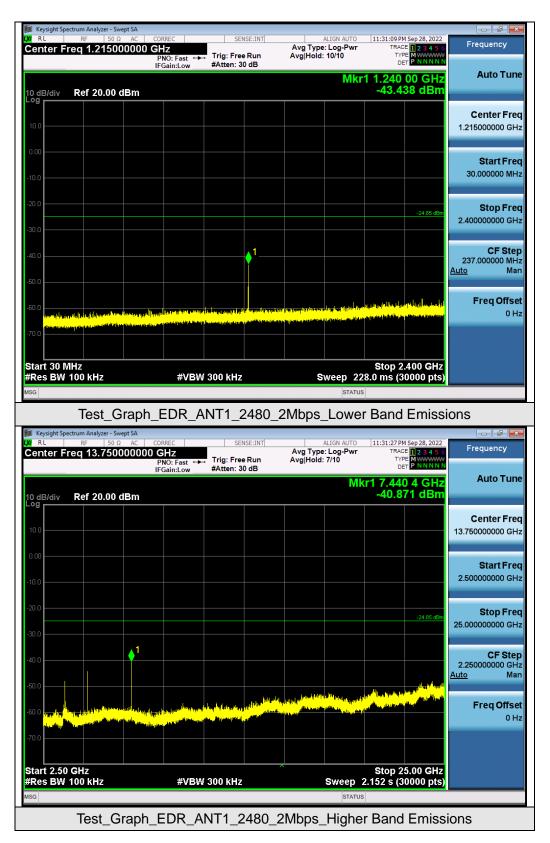




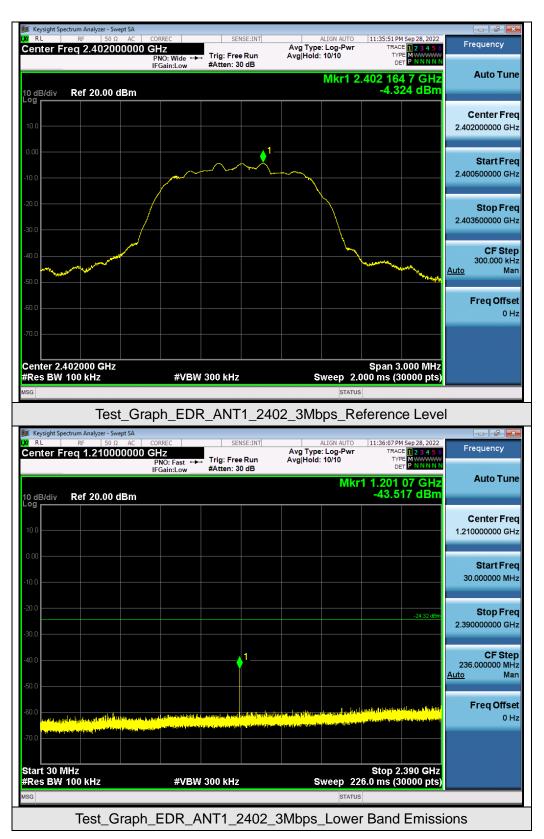




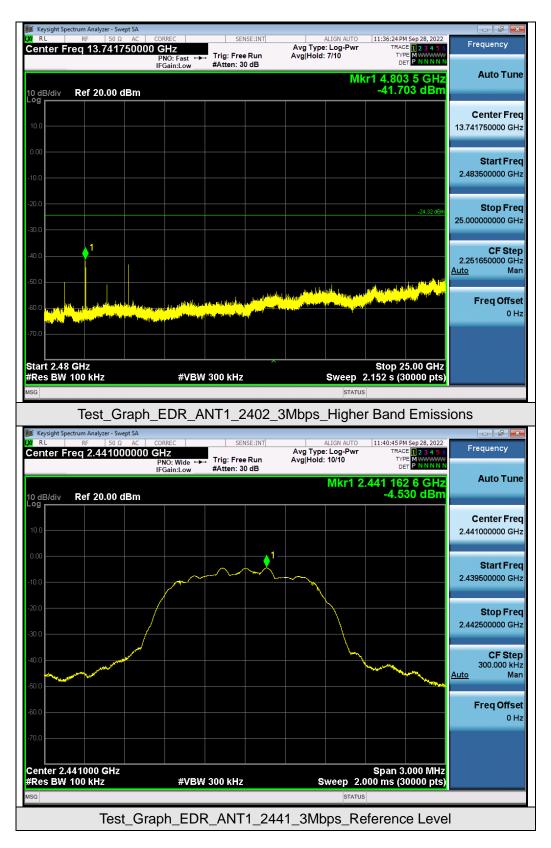




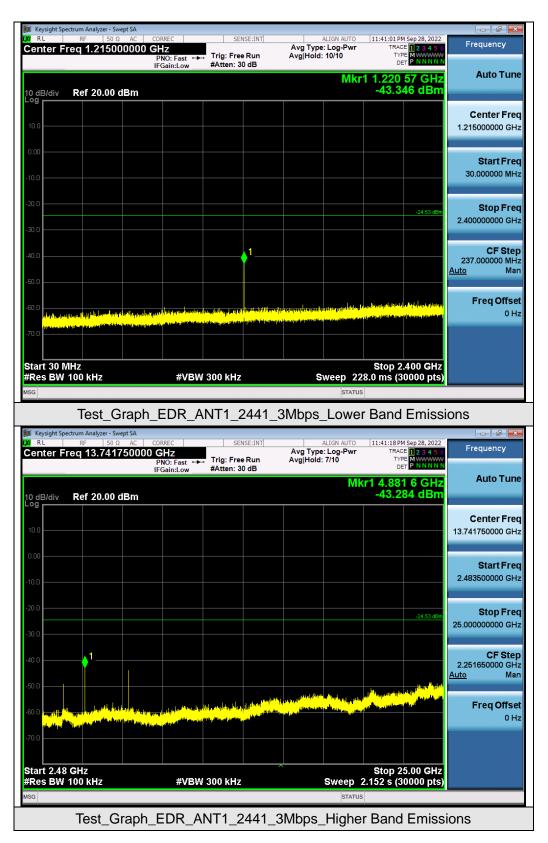




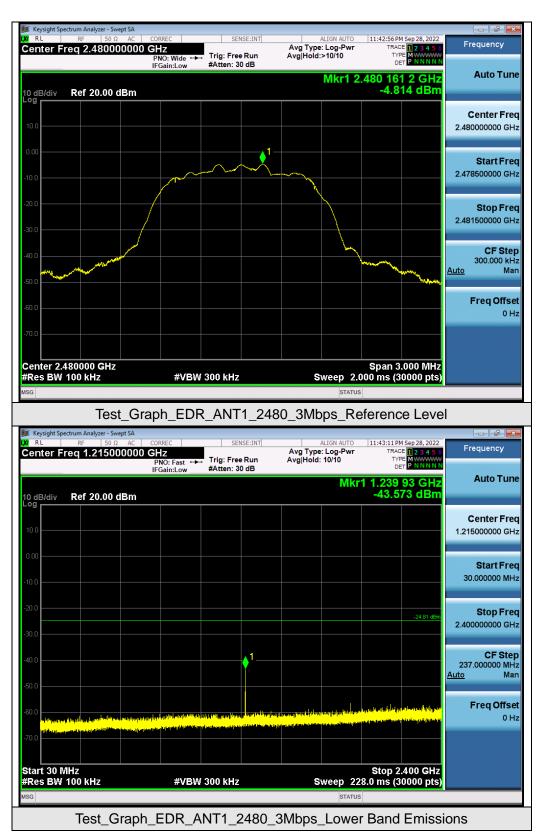



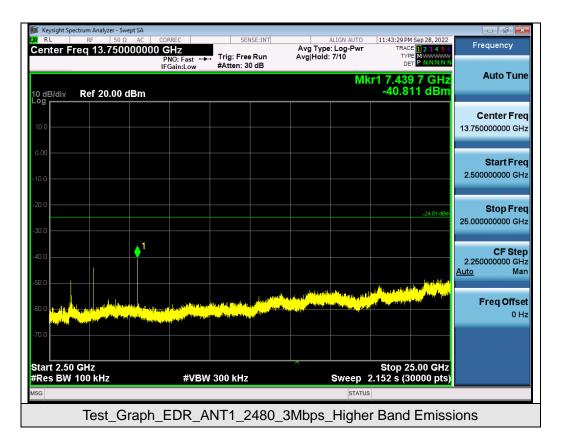




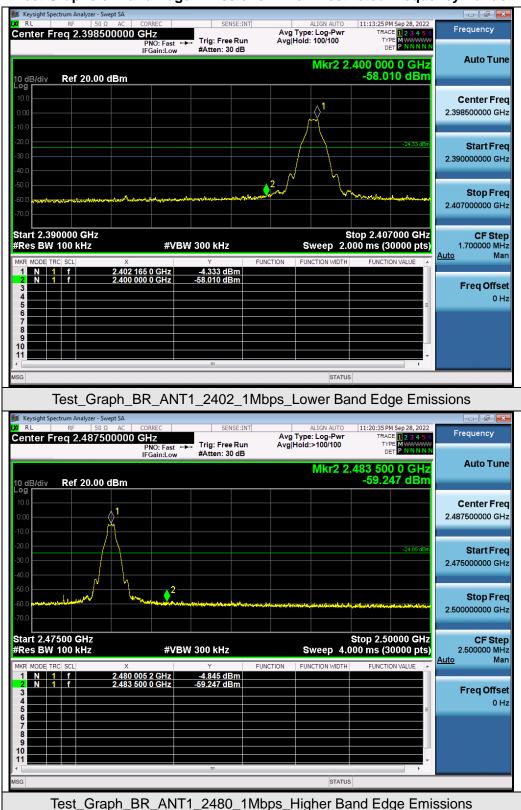


## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




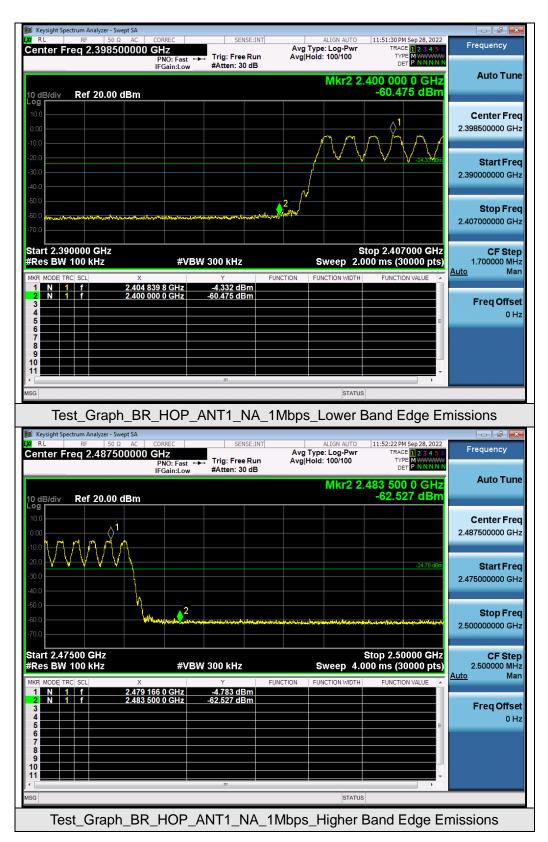




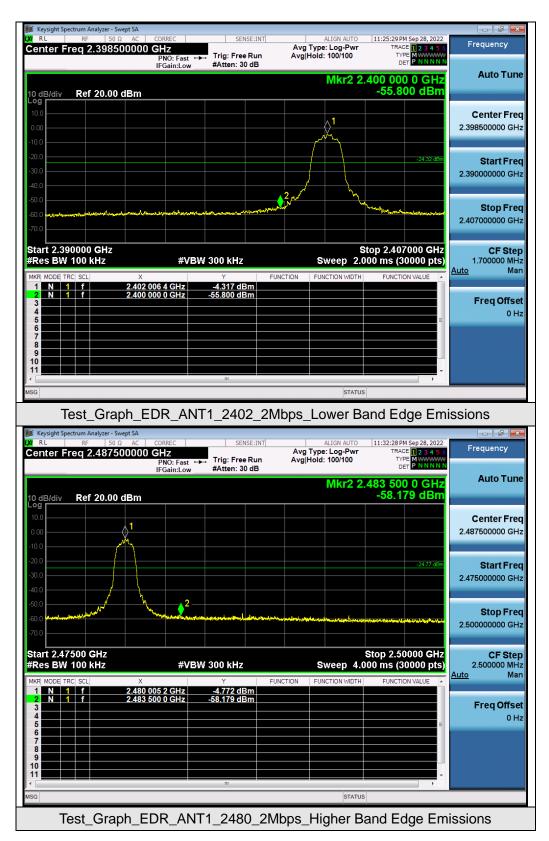




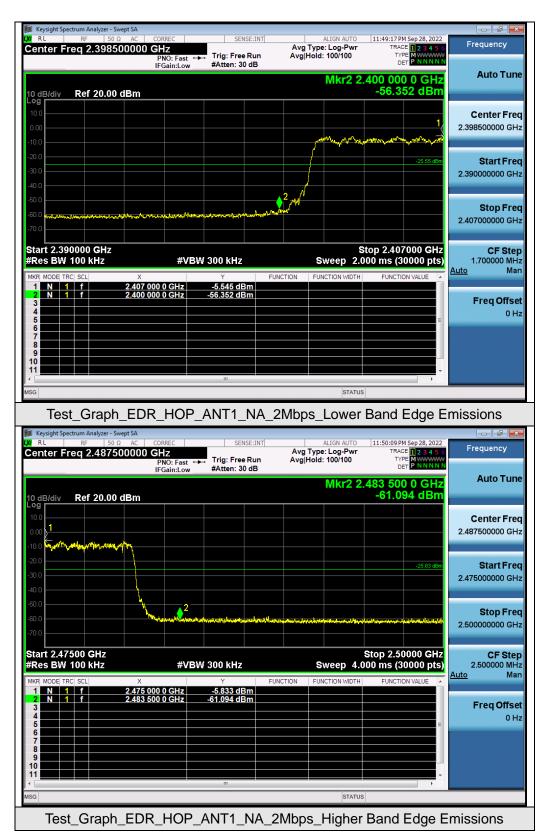



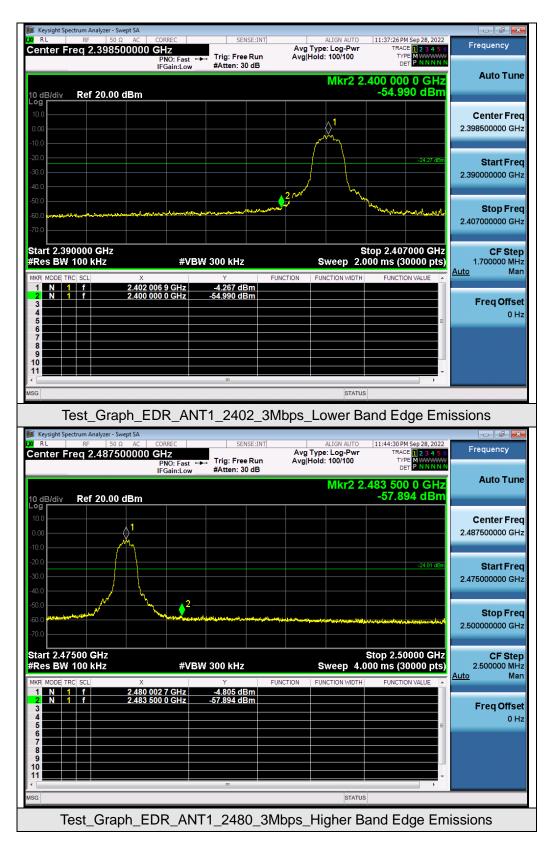



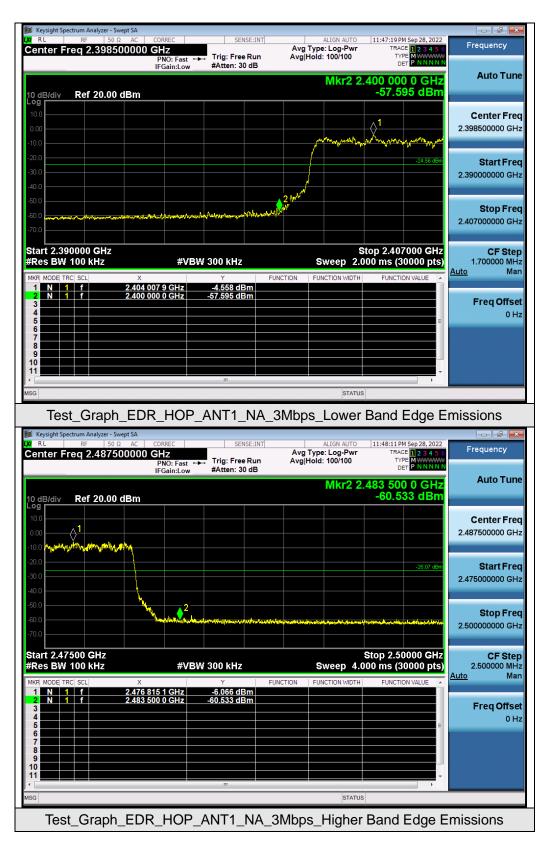



# **10. RADIATED EMISSION**

## **10.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		




## **10.2. TEST SETUP**


Radiated Emission Test-Setup Frequency Below 30MHz

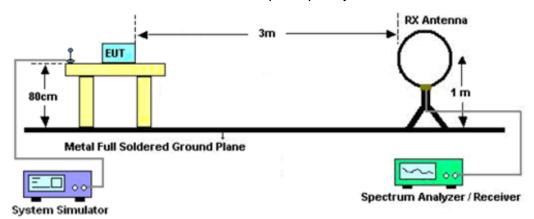

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

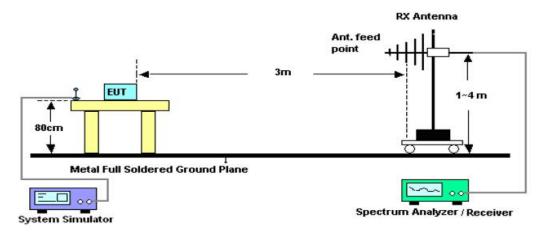

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

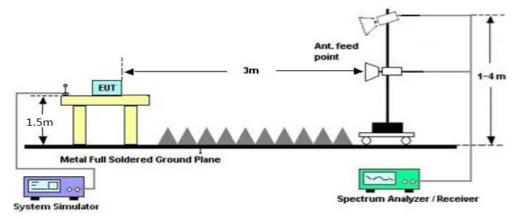



## **10.3. LIMITS AND MEASUREMENT RESULT**

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 10.4. TEST RESULT


## Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

#### Radiated emission from 30MHz to 1000MHz

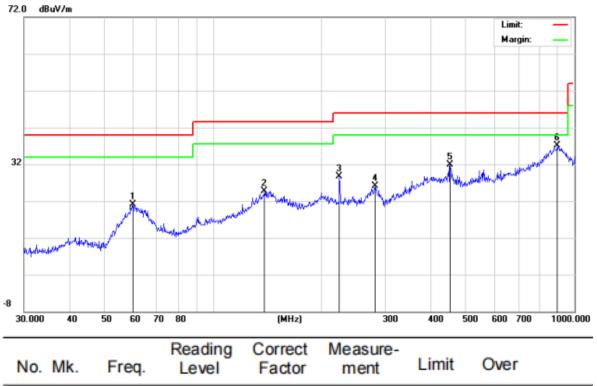


	NO.	IVIK	. Freq.	Level	Factor	ment	LIIIII	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
-	1		60.0690	4.61	16.44	21.05	40.00	-18.95	peak
	2		138.8735	5.42	19.38	24.80	43.50	-18.70	peak
	3		223.7333	10.47	18.32	28.79	46.00	-17.21	peak
	4		281.0074	4.48	21.71	26.19	46.00	-19.81	peak
	5		452.7196	9.11	22.80	31.91	46.00	-14.09	peak
-	6	*	896.9964	5.35	31.74	37.09	46.00	-8.91	peak

## **RESULT: PASS**



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

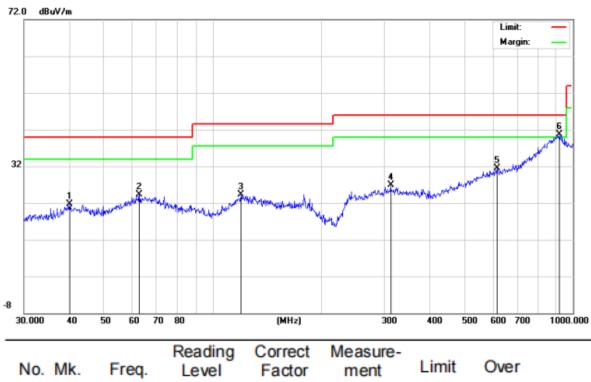


No.	Mk.	Freq.	Level	Factor	ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		40.1347	5.62	16.07	21.69	40.00	-18.31	peak
2		62.6507	6.46	17.93	24.39	40.00	-15.61	peak
3		119.8555	5.31	18.93	24.24	43.50	-19.26	peak
4		312.1792	6.52	20.29	26.81	46.00	-19.19	peak
5		616.3718	6.27	25.15	31.42	46.00	-14.58	peak
6	*	916.0687	6.48	34.15	40.63	46.00	-5.37	peak



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal




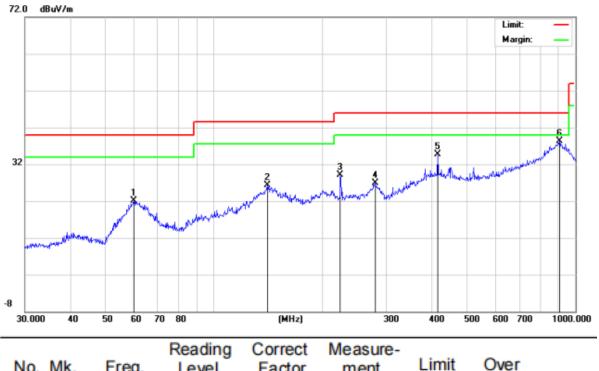

No.	Mk	. Freq.	Level	Factor	ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		60.0691	5.60	16.44	22.04	40.00	-17.96	peak
2		140.3421	6.64	19.62	26.26	43.50	-17.24	peak
3		223.7334	10.80	18.32	29.12	46.00	-16.88	peak
4		279.0436	5.16	21.77	26.93	46.00	-19.07	peak
5		416.1791	11.35	23.41	34.76	46.00	-11.24	peak
6	*	903.3094	6.52	31.71	38.23	46.00	-7.77	peak



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

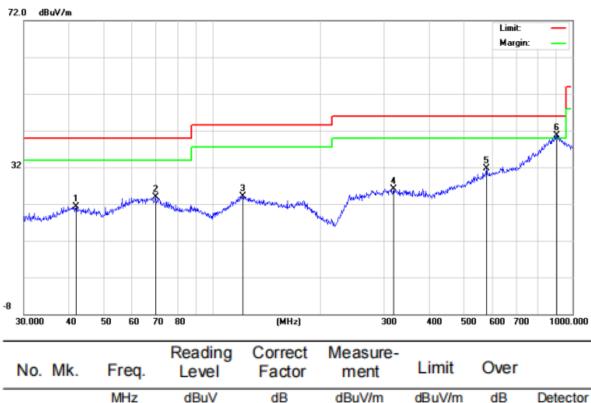


	NO.	IVIN	. rieq.	Level	Factor	meni	2	0.01	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		41.8596	5.51	15.77	21.28	40.00	-18.72	peak
	2		69.6004	5.78	18.10	23.88	40.00	-16.12	peak
	3		121.5485	5.27	18.84	24.11	43.50	-19.39	peak
	4		318.8170	5.97	20.19	26.16	46.00	-19.84	peak
_	5		576.6443	7.54	24.26	31.80	46.00	-14.20	peak
	6	*	903.3093	6.09	34.54	40.63	46.00	-5.37	peak



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

#### Radiated emission from 30MHz to 1000MHz

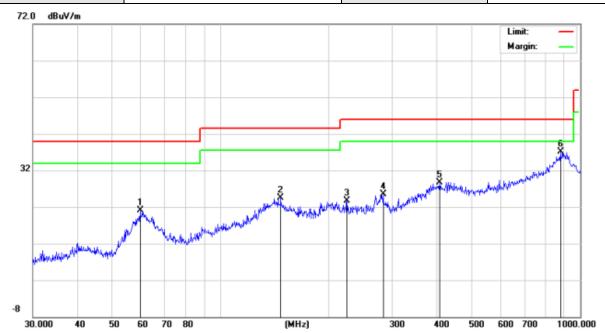


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		59.6492	5.05	16.10	21.15	40.00	-18.85	peak
2		146.8876	5.28	19.14	24.42	43.50	-19.08	peak
3		224.5192	5.35	18.33	23.68	46.00	-22.32	peak
4		282.9852	4.23	21.27	25.50	46.00	-20.50	peak
5		406.0880	5.06	23.58	28.64	46.00	-17.36	peak
6	*	881.4067	6.09	31.04	37.13	46.00	-8.87	peak

## **RESULT: PASS**



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

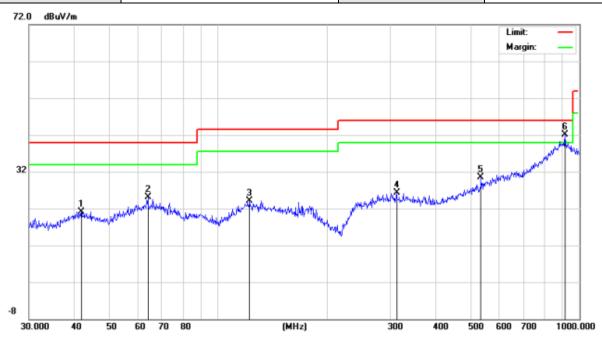

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		41.8596	5.40	15.77	21.17	40.00	-18.83	peak
2		63.9827	7.15	17.97	25.12	40.00	-14.88	peak
3		122.4039	5.38	18.76	24.14	43.50	-19.36	peak
4		312.1792	6.02	20.29	26.31	46.00	-19.69	peak
5		533.8320	7.60	22.99	30.59	46.00	-15.41	peak
6	*	912.8619	7.77	34.24	42.01	46.00	-3.99	peak

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been pre-tested. The 8DPSK is the worst case and recorded in the report.



## **Radiated emission above 1GHz**

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	48.67	0.08	48.75	74	-25.25	peak
4804.000	38.74	0.08	38.82	54	-15.18	AVG
7206.000	41.06	2.21	43.27	74	-30.73	peak
7206.000	32.67	2.21	34.88	54	-19.12	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier			

racio AILEINA FACIOI + CADIE LUSS rie-ampliner.

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4804.000	50.34	0.08	50.42	74	-23.58	peak
4804.000	39.78	0.08	39.86	54	-14.14	AVG
7206.000	42.17	2.21	44.38	74	-29.62	peak
7206.000	33.66	2.21	35.87	54	-18.13	AVG
lemark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4882.000	49.37	0.14	49.51	74	-24.49	peak		
4882.000	37.54	0.14	37.68	54	-16.32	AVG		
7323.000	42.08	2.36	44.44	74	-29.56	peak		
7323.000	31.75	2.36	34.11	54	-19.89	AVG		
Remark:	* *				*			
actor - Anter	na Factor + Cabl	e Loss – Pre-	amplifier					

Factor = Antenna Factor + Cable Loss -<u>- Pre-amplifier.</u>

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	51.32	0.14	51.46	74	-22.54	peak
4882.000	39.87	0.14	40.01	54	-13.99	AVG
7323.000	44.45	2.36	46.81	74	-27.19	peak
7323.000	33.53	2.36	35.89	54	-18.11	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	47.61	0.22	47.83	74	-26.17	peak
4960.000	38.61	0.22	38.83	54	-15.17	AVG
7440.000	40.72	2.64	43.36	74	-30.64	peak
7440.000	31.82	2.64	34.46	54	-19.54	AVG
Remark:						
Factor = Antenna Factor + Cable   oss – Pre-amplifier						

Factor = Antenna Factor + Cable Loss Pre-amplifier.

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	22°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	50.37	0.22	50.59	74	-23.41	peak
4960.000	38.63	0.22	38.85	54	-15.15	AVG
7440.000	43.75	2.64	46.39	74	-27.61	peak
7440.000	31.28	2.64	33.92	54	-20.08	AVG
emark:						

<u> Factor = Antenna Factor + Cable Loss – Pre-amplifier</u>

## **RESULT: PASS**

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been tested. The 8DPSK modulation is the worst case and recorded in the report.




restricturior band cuge childsion at restricted bands			
EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	26°C	Relative Humidity	59%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

## Test result for band edge emission at restricted bands

## Test Graph for Peak Measurement

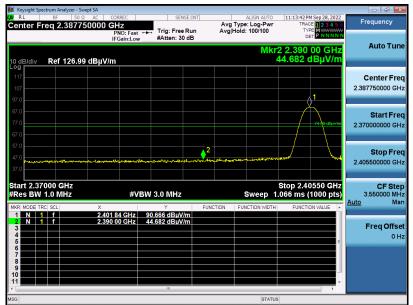

## Test Graph for Average Measurement

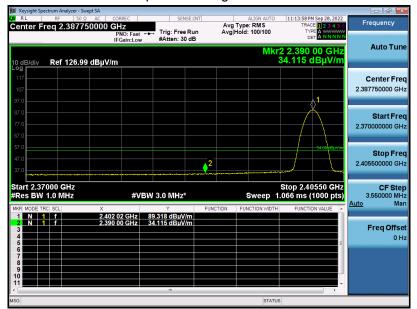

## **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


#### Attestation of Global Compliance(Shenzhen)Co., Ltd




#### Report No.: AGC13454220904FE03 Page 60 of 79

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	26°C	Relative Humidity	59%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

## Test Graph for Peak Measurement

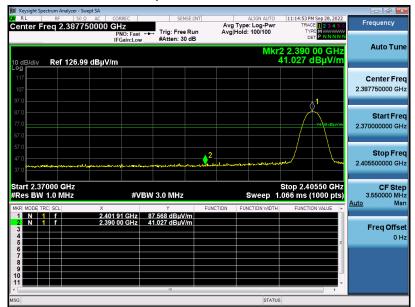

Test Graph for Average Measurement

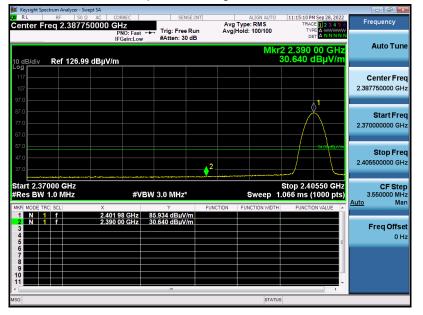

## **RESULT: PASS**




#### Report No.: AGC13454220904FE03 Page 61 of 79

EUT	WIRELESS STEREO EARPHONES	Model Name	ET-BH032
Temperature	26°C	Relative Humidity	59%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

#### Sep 28, 202 Center Freq 2.488250000 GHz Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB PNO: Fa IFGain:L Auto Tune Ref 126.99 dBµV/m 45 99 **Center Freq** 2.488250000 GHz $\Diamond^1$ Start Fred 2.476500000 GHz **Stop Freq** 2.500000000 GHz Start 2.47650 GHz #Res BW 1.0 MHz Stop 2.50000 GHz 1.066 ms (1000 pts CF Step 2.350000 MHz Man #VBW 3.0 MHz Sweep uto 2.479 817 GHz 90.211 dBµV/r 2.483 500 GHz 45.989 dBµV/r Freq Offset 0 H;

Test Graph for Peak Measurement

Test Graph for Average Measurement

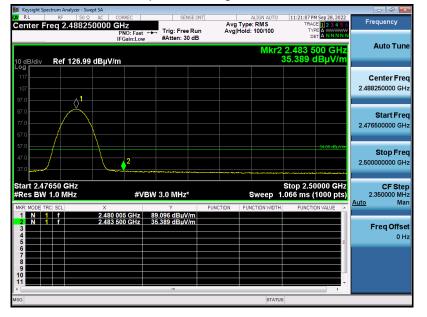

## **RESULT: PASS**