



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: **CTC20212153E04**

FCC ID.....: **2AC88-GLMU21A01**

IC.....: **24230-GLMU21A01**

Applicant.....: **HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED**

Address.....: Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong

Manufacturer.....: **HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED**

Address.....: Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong

Product Name.....: **5G Wireless Data Terminal**

Trade Mark.....: GlocalMe

Model/Type reference.....: GLMU21A01

Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS 247 Issue 2**

Date of receipt of test sample...: Jan. 25, 2022

Date of testing.....: Jan. 26, 2022 ~ Apr. 4, 2022

Date of issue.....: Apr. 6, 2022

Result.....: **PASS**

Compiled by: (Printed name+signature)	Zaki Zhang	
Supervised by: (Printed name+signature)	Miller Ma	
Approved by: (Printed name+signature)	Totti Zhao	

Testing Laboratory Name.....: **CTC Laboratories, Inc.**

Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY 3

1.1. TEST STANDARDS 3

1.2. REPORT VERSION 3

1.3. TEST DESCRIPTION 4

1.4. TEST FACILITY 5

1.5. MEASUREMENT UNCERTAINTY 5

1.6. ENVIRONMENTAL CONDITIONS 6

2. GENERAL INFORMATION 7

2.1. CLIENT INFORMATION 7

2.2. GENERAL DESCRIPTION OF EUT 8

2.3. ACCESSORY EQUIPMENT INFORMATION 9

2.4. OPERATION STATE 10

2.5. MEASUREMENT INSTRUMENTS LIST 11

3. TEST ITEM AND RESULTS 12

3.1. CONDUCTED EMISSION 12

3.2. RADIATED EMISSION 15

3.3. BAND EDGE EMISSIONS (RADIATED) 37

3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) 62

3.5. DTS BANDWIDTH 63

3.6. PEAK OUTPUT POWER 65

3.7. POWER SPECTRAL DENSITY 66

3.8. DUTY CYCLE 68

3.9. ANTENNA REQUIREMENT 69



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Apr. 6, 2022	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Eva Feng
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Alicia Liu
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Alicia Liu
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Alicia Liu
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation .Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01” Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.08 dB	(1)
Radiated Emissions 30~1000MHz	4.51 dB	(1)
Radiated Emissions 1~18GHz	5.84 dB	(1)
Radiated Emissions 18~40GHz	6.12 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	HONGKONG U-CLOUDLINK NETWORK TECHNOLOGY LIMITED
Address:	Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong
Manufacturer:	HONGKONG U-CLOUDLINK NETWORK TECHNOLOGY LIMITED
Address:	Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong
Factory:	Shenzhen uCloudlink Network Technology Co., Ltd.
Address:	3rd Floor, A part of Building 1, Shenzhen Software Industry Base, Nanshan District Xuefu Road, 518057 Shenzhen City, Guangdong, China



2.2. General Description of EUT

Product Name:	5G Wireless Data Terminal
Trade Mark:	GlocalMe
Model/Type reference:	GLMU21A01
Power supply:	DC 9V 2A
Hardware version:	U50_M_PCB_VB
Software version:	U50_TV51.0.100.004.211210
WIFI 802.11b/ g/ n(HT20)/ n(HT40)	
Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK, QPSK, 16QAM, 64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel number:	802.11b/g/n(HT20):11channels 802.11n(HT40):7channels
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	4.25dBi Max



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
Type-C Cable	With	Without	1M
Test Software Information			
Name	Versions	/	/
sscom5.13.1.exe	V5.13.1	/	/



2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40)

Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	HT-MCS0
802.11n(HT40)	HT-MCS0

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	KEYSIGHT	N9020A	100231	Dec. 23, 2022
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 14, 2023
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 23, 2022
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 23, 2022
5	Power Sensor	Agilent	U2021XA	MY5365004	Mar. 14, 2023
6	Power Sensor	Agilent	U2021XA	MY5365006	Mar. 14, 2023
7	High and low temperature box	ESPEC	MT3035	N/A	Mar. 24, 2022
8	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	102414	Dec. 23, 2022
9	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated emission(3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Jan. 12, 2023
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 23, 2022
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 15, 2022 Mar. 14, 2023
5	Pre-Amplifier	SONOMA	310	186194	Dec. 23, 2022
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 23, 2022
7	Test Receiver	R&S	ESCI7	100967	Dec. 23, 2022

Radiated emission(3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Nov. 09, 2022
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 23, 2022
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 23, 2022
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 23, 2022

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 23, 2022
2	LISN	R&S	ENV216	101113	Dec. 23, 2022
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 23, 2022

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

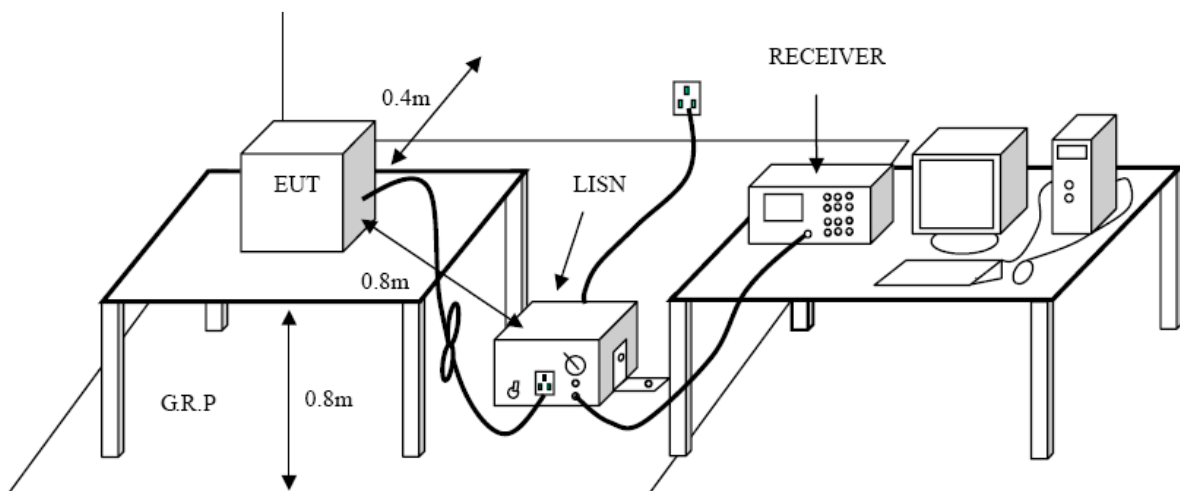

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.



Test Mode:


Please refer to the clause 2.4.

Test Results

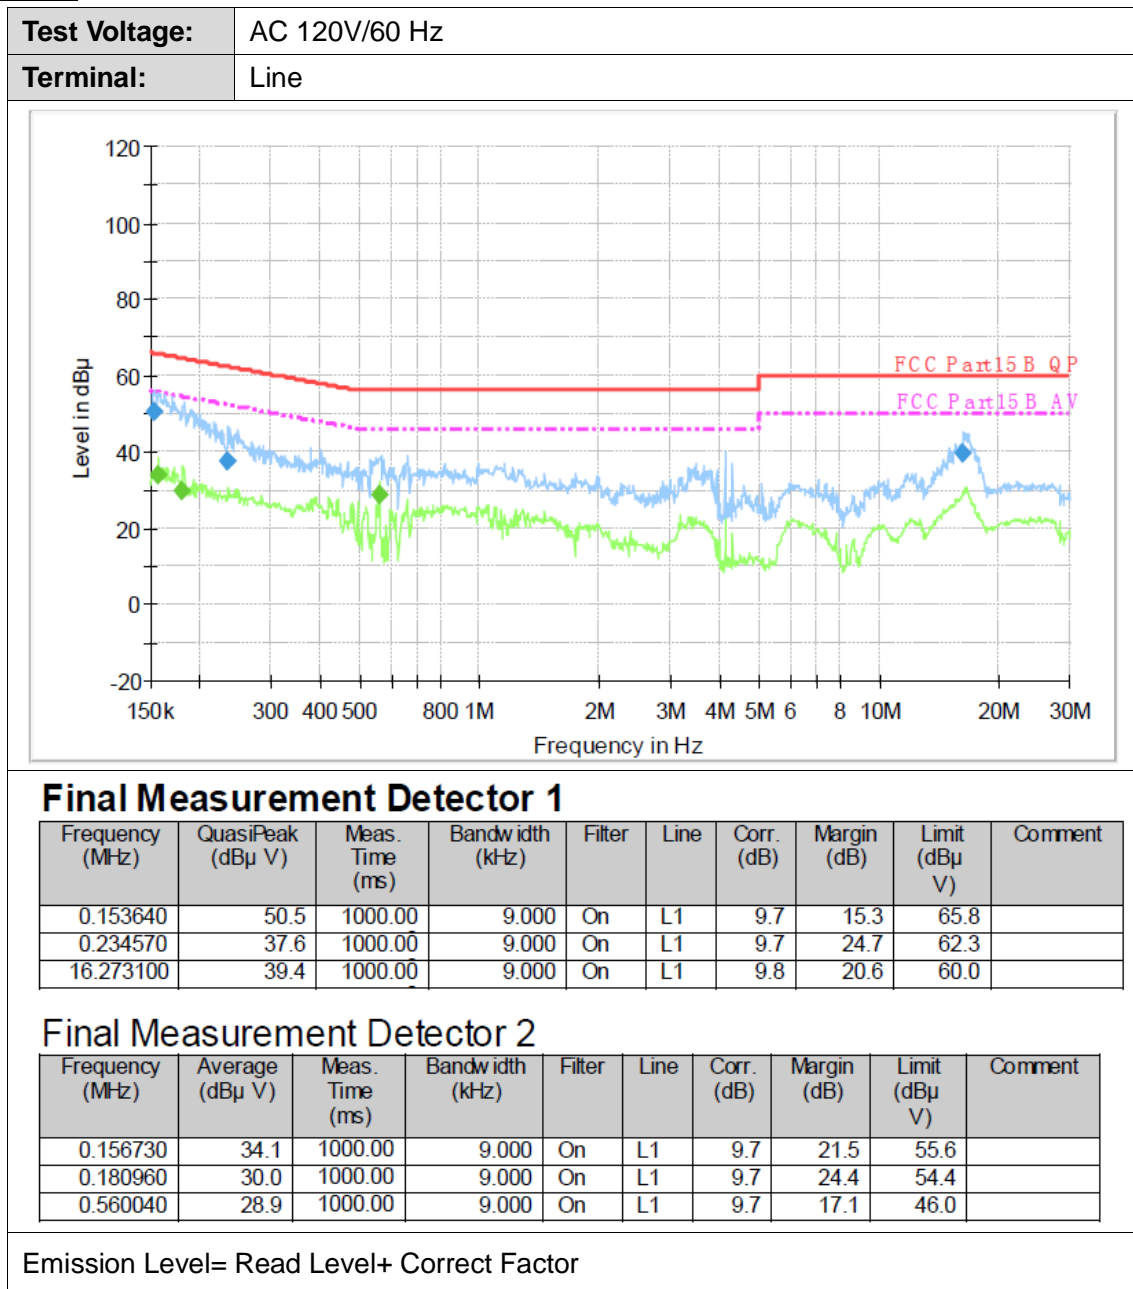



Test Voltage:	AC 120V/60 Hz
Terminal:	Neutral

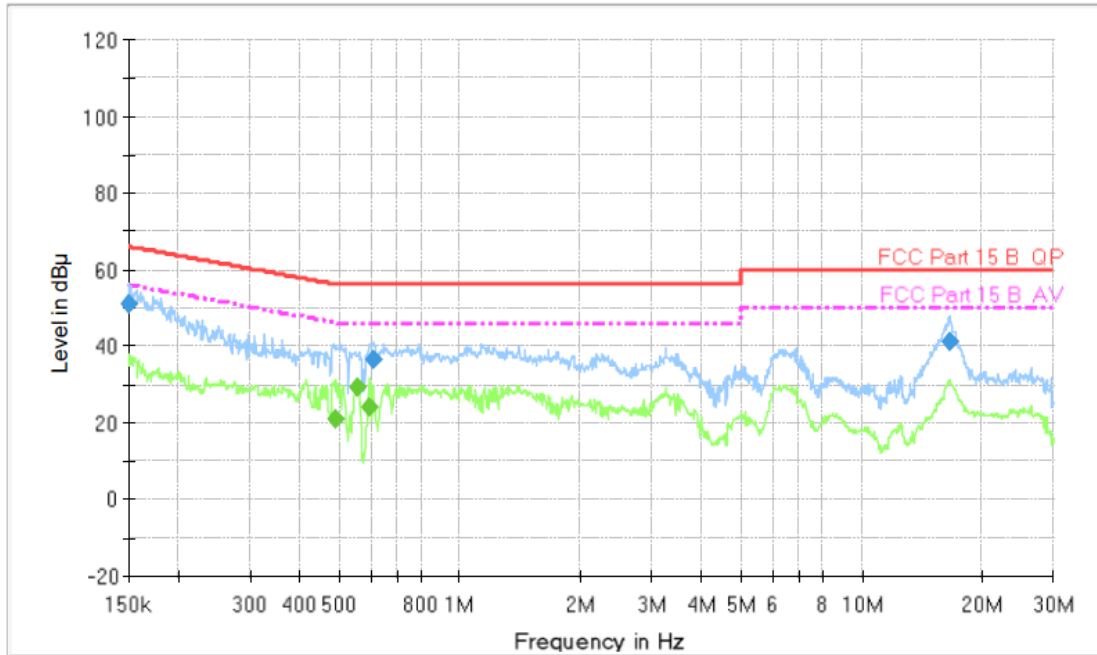

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.150000	51.0	1000.00	9.000	On	N	10.0	15.0	66.0	
0.609010	36.7	1000.00	9.000	On	N	10.0	19.3	56.0	
16.535040	41.4	1000.00	9.000	On	N	10.0	18.6	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.492880	21.2	1000.00	9.000	On	N	10.0	24.9	46.1	
0.555580	29.1	1000.00	9.000	On	N	10.0	16.9	46.0	
0.592230	24.2	1000.00	9.000	On	N	10.0	21.8	46.0	

Emission Level= Read Level+ Correct Factor

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9:

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

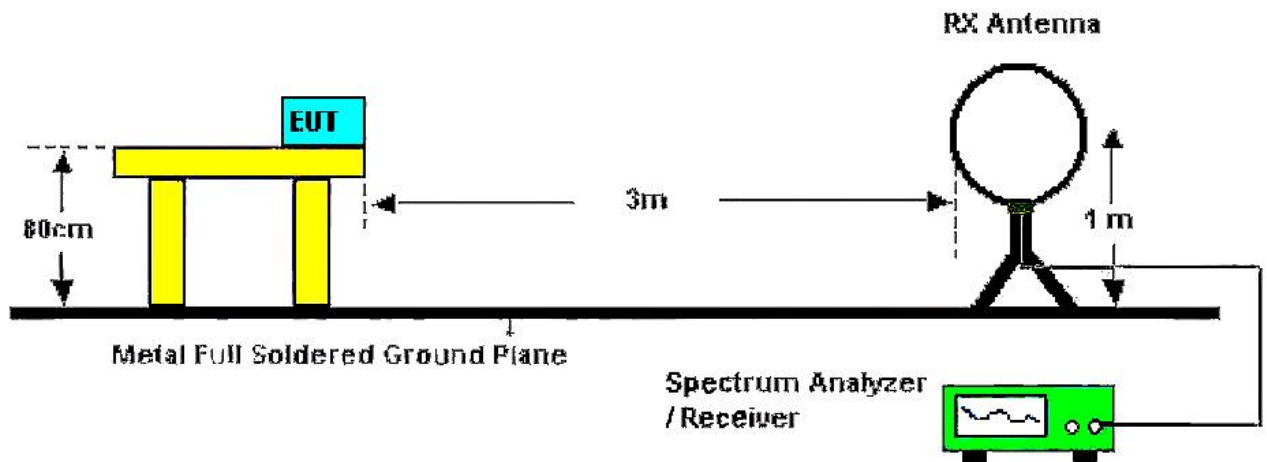

Below 30MHz Test Setup

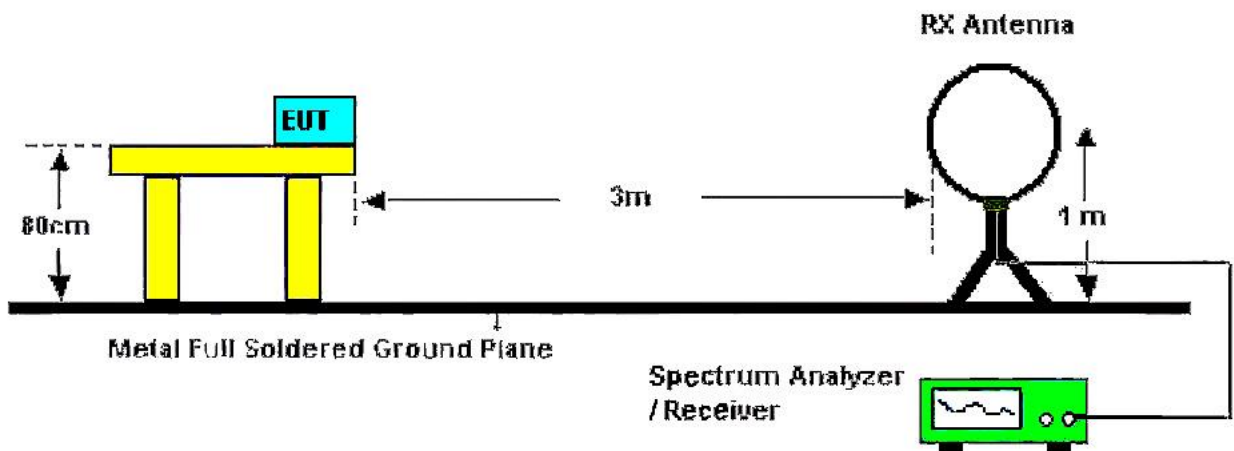

Below 1000MHz Test Setup

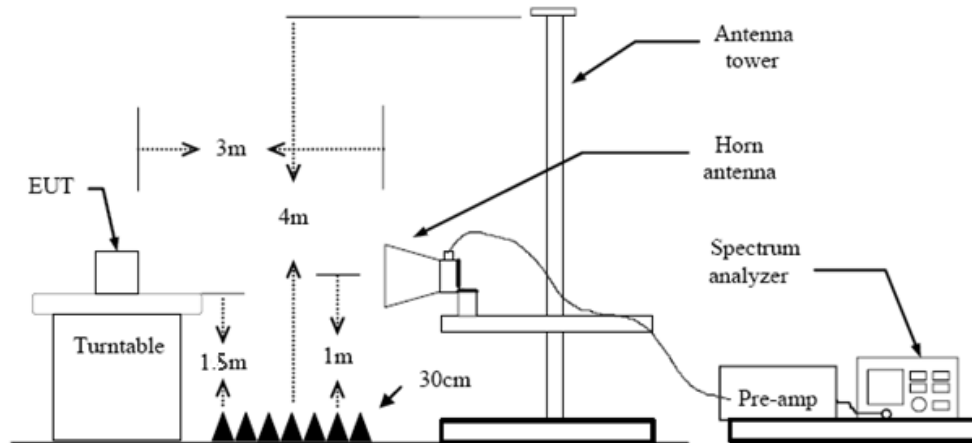

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2412MHz
Remark:	Only worse case is reported

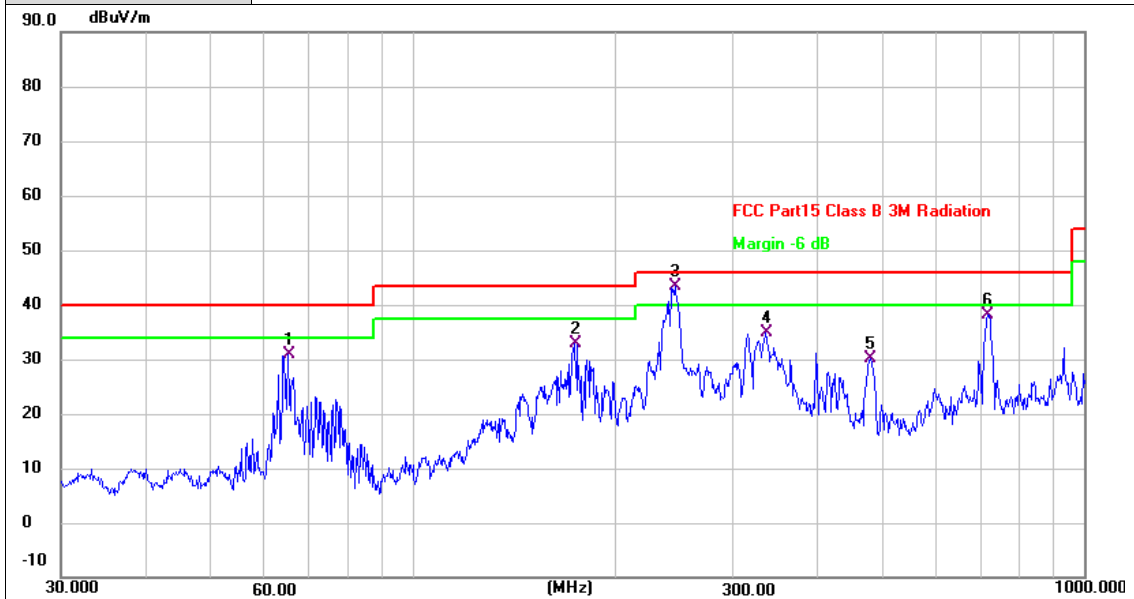


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.3432	50.60	-19.60	31.00	40.00	-9.00	QP
2	174.4241	51.68	-18.81	32.87	43.50	-10.63	QP
3 *	245.9509	62.61	-19.25	43.36	46.00	-2.64	QP
4	336.0352	51.84	-16.96	34.88	46.00	-11.12	QP
5	480.5276	44.04	-14.02	30.02	46.00	-15.98	QP
6	719.1995	48.31	-10.21	38.10	46.00	-7.90	QP

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2412MHz
Remark:	Only worse case is reported

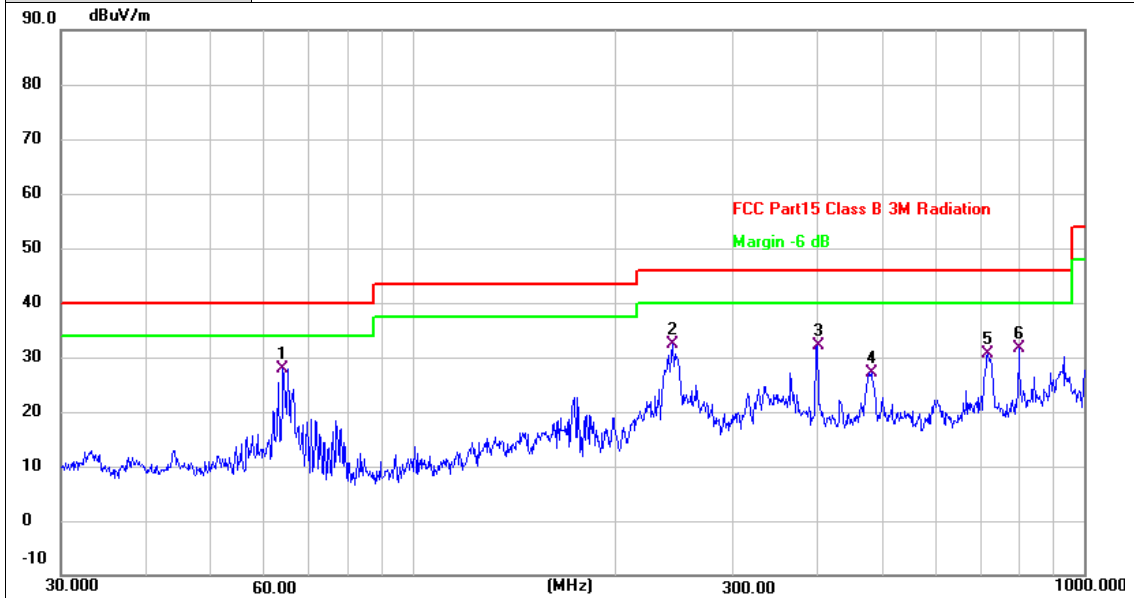

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	64.2074	47.20	-19.38	27.82	40.00	-12.18	QP
2	244.2321	51.67	-19.31	32.36	46.00	-13.64	QP
3	400.4319	47.72	-15.69	32.03	46.00	-13.97	QP
4	482.2156	41.20	-14.00	27.20	46.00	-18.80	QP
5	719.1995	40.87	-10.21	30.66	46.00	-15.34	QP
6	798.9797	40.87	-9.33	31.54	46.00	-14.46	QP

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Adobe 1GHz

Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4823.940</td> <td>32.02</td> <td>3.17</td> <td>35.19</td> <td>54.00</td> <td>-18.81</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4823.942</td> <td>42.93</td> <td>3.17</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.940	32.02	3.17	35.19	54.00	-18.81	AVG	2	4823.942	42.93	3.17	46.10	74.00	-27.90	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4823.940	32.02	3.17	35.19	54.00	-18.81	AVG																								
2	4823.942	42.93	3.17	46.10	74.00	-27.90	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.856</td> <td>40.94</td> <td>3.17</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4823.916</td> <td>29.52</td> <td>3.17</td> <td>32.69</td> <td>54.00</td> <td>-21.31</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4823.856	40.94	3.17	44.11	74.00	-29.89	peak	2 *	4823.916	29.52	3.17	32.69	54.00	-21.31	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4823.856	40.94	3.17	44.11	74.00	-29.89	peak																								
2 *	4823.916	29.52	3.17	32.69	54.00	-21.31	AVG																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4873.960</td> <td>36.05</td> <td>3.32</td> <td>39.37</td> <td>54.00</td> <td>-14.63</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4874.062</td> <td>44.13</td> <td>3.32</td> <td>47.45</td> <td>74.00</td> <td>-26.55</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4873.960	36.05	3.32	39.37	54.00	-14.63	AVG	2	4874.062	44.13	3.32	47.45	74.00	-26.55	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4873.960	36.05	3.32	39.37	54.00	-14.63	AVG																								
2	4874.062	44.13	3.32	47.45	74.00	-26.55	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4873.762</td> <td>42.31</td> <td>3.32</td> <td>45.63</td> <td>74.00</td> <td>-28.37</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.092</td> <td>29.71</td> <td>3.32</td> <td>33.03</td> <td>54.00</td> <td>-20.97</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.762	42.31	3.32	45.63	74.00	-28.37	peak	2 *	4874.092	29.71	3.32	33.03	54.00	-20.97	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.762	42.31	3.32	45.63	74.00	-28.37	peak																								
2 *	4874.092	29.71	3.32	33.03	54.00	-20.97	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4923.914</td> <td>39.08</td> <td>3.47</td> <td>42.55</td> <td>54.00</td> <td>-11.45</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4924.020</td> <td>45.30</td> <td>3.47</td> <td>48.77</td> <td>74.00</td> <td>-25.23</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.914	39.08	3.47	42.55	54.00	-11.45	AVG	2	4924.020	45.30	3.47	48.77	74.00	-25.23	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4923.914	39.08	3.47	42.55	54.00	-11.45	AVG																								
2	4924.020	45.30	3.47	48.77	74.00	-25.23	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4923.886</td> <td>28.86</td> <td>3.47</td> <td>32.33</td> <td>54.00</td> <td>-21.67</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4924.064</td> <td>40.63</td> <td>3.47</td> <td>44.10</td> <td>74.00</td> <td>-29.90</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.886	28.86	3.47	32.33	54.00	-21.67	AVG	2	4924.064	40.63	3.47	44.10	74.00	-29.90	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4923.886	28.86	3.47	32.33	54.00	-21.67	AVG																								
2	4924.064	40.63	3.47	44.10	74.00	-29.90	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4823.968</td> <td>27.43</td> <td>3.17</td> <td>30.60</td> <td>54.00</td> <td>-23.40</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4824.102</td> <td>41.52</td> <td>3.17</td> <td>44.69</td> <td>74.00</td> <td>-29.31</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.968	27.43	3.17	30.60	54.00	-23.40	AVG	2	4824.102	41.52	3.17	44.69	74.00	-29.31	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4823.968	27.43	3.17	30.60	54.00	-23.40	AVG																								
2	4824.102	41.52	3.17	44.69	74.00	-29.31	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.242</td> <td>40.33</td> <td>3.17</td> <td>43.50</td> <td>74.00</td> <td>-30.50</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4824.452</td> <td>28.21</td> <td>3.17</td> <td>31.38</td> <td>54.00</td> <td>-22.62</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4823.242	40.33	3.17	43.50	74.00	-30.50	peak	2 *	4824.452	28.21	3.17	31.38	54.00	-22.62	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4823.242	40.33	3.17	43.50	74.00	-30.50	peak																								
2 *	4824.452	28.21	3.17	31.38	54.00	-22.62	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4873.966</td> <td>41.22</td> <td>3.32</td> <td>44.54</td> <td>74.00</td> <td>-29.46</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.292</td> <td>27.91</td> <td>3.32</td> <td>31.23</td> <td>54.00</td> <td>-22.77</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.966	41.22	3.32	44.54	74.00	-29.46	peak	2 *	4874.292	27.91	3.32	31.23	54.00	-22.77	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.966	41.22	3.32	44.54	74.00	-29.46	peak																								
2 *	4874.292	27.91	3.32	31.23	54.00	-22.77	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.532</td> <td>40.53</td> <td>3.32</td> <td>43.85</td> <td>74.00</td> <td>-30.15</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.792</td> <td>28.96</td> <td>3.32</td> <td>32.28</td> <td>54.00</td> <td>-21.72</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4874.532	40.53	3.32	43.85	74.00	-30.15	peak	2 *	4874.792	28.96	3.32	32.28	54.00	-21.72	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4874.532	40.53	3.32	43.85	74.00	-30.15	peak																								
2 *	4874.792	28.96	3.32	32.28	54.00	-21.72	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.096</td> <td>42.05</td> <td>3.47</td> <td>45.52</td> <td>74.00</td> <td>-28.48</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4924.440</td> <td>28.18</td> <td>3.47</td> <td>31.65</td> <td>54.00</td> <td>-22.35</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4924.096	42.05	3.47	45.52	74.00	-28.48	peak	2 *	4924.440	28.18	3.47	31.65	54.00	-22.35	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4924.096	42.05	3.47	45.52	74.00	-28.48	peak																								
2 *	4924.440	28.18	3.47	31.65	54.00	-22.35	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4924.226</td> <td>27.94</td> <td>3.47</td> <td>31.41</td> <td>54.00</td> <td>-22.59</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4924.432</td> <td>40.24</td> <td>3.47</td> <td>43.71</td> <td>74.00</td> <td>-30.29</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4924.226	27.94	3.47	31.41	54.00	-22.59	AVG	2	4924.432	40.24	3.47	43.71	74.00	-30.29	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4924.226	27.94	3.47	31.41	54.00	-22.59	AVG																								
2	4924.432	40.24	3.47	43.71	74.00	-30.29	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.894</td> <td>47.33</td> <td>3.17</td> <td>50.50</td> <td>74.00</td> <td>-23.50</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4823.980</td> <td>42.72</td> <td>3.17</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	4823.894	47.33	3.17	50.50	74.00	-23.50	peak	2 *	4823.980	42.72	3.17	45.89	54.00	-8.11	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	4823.894	47.33	3.17	50.50	74.00	-23.50	peak																								
2 *	4823.980	42.72	3.17	45.89	54.00	-8.11	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.844</td> <td>44.57</td> <td>3.17</td> <td>47.74</td> <td>74.00</td> <td>-26.26</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4823.956</td> <td>37.90</td> <td>3.17</td> <td>41.07</td> <td>54.00</td> <td>-12.93</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	4823.844	44.57	3.17	47.74	74.00	-26.26	peak	2 *	4823.956	37.90	3.17	41.07	54.00	-12.93	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	4823.844	44.57	3.17	47.74	74.00	-26.26	peak																								
2 *	4823.956	37.90	3.17	41.07	54.00	-12.93	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4873.904</td> <td>48.77</td> <td>3.32</td> <td>52.09</td> <td>74.00</td> <td>-21.91</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4873.964</td> <td>44.78</td> <td>3.32</td> <td>48.10</td> <td>54.00</td> <td>-5.90</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.904	48.77	3.32	52.09	74.00	-21.91	peak	2 *	4873.964	44.78	3.32	48.10	54.00	-5.90	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.904	48.77	3.32	52.09	74.00	-21.91	peak																								
2 *	4873.964	44.78	3.32	48.10	54.00	-5.90	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4874.002</td> <td>40.08</td> <td>3.32</td> <td>43.40</td> <td>54.00</td> <td>-10.60</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4874.044</td> <td>45.21</td> <td>3.32</td> <td>48.53</td> <td>74.00</td> <td>-25.47</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4874.002	40.08	3.32	43.40	54.00	-10.60	AVG	2	4874.044	45.21	3.32	48.53	74.00	-25.47	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4874.002	40.08	3.32	43.40	54.00	-10.60	AVG																								
2	4874.044	45.21	3.32	48.53	74.00	-25.47	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4923.976</td> <td>44.97</td> <td>3.47</td> <td>48.44</td> <td>54.00</td> <td>-5.56</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4924.006</td> <td>49.26</td> <td>3.47</td> <td>52.73</td> <td>74.00</td> <td>-21.27</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.976	44.97	3.47	48.44	54.00	-5.56	AVG	2	4924.006	49.26	3.47	52.73	74.00	-21.27	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4923.976	44.97	3.47	48.44	54.00	-5.56	AVG																								
2	4924.006	49.26	3.47	52.73	74.00	-21.27	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4923.866</td> <td>45.46</td> <td>3.47</td> <td>48.93</td> <td>74.00</td> <td>-25.07</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4923.964</td> <td>40.66</td> <td>3.47</td> <td>44.13</td> <td>54.00</td> <td>-9.87</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4923.866	45.46	3.47	48.93	74.00	-25.07	peak	2 *	4923.964	40.66	3.47	44.13	54.00	-9.87	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4923.866	45.46	3.47	48.93	74.00	-25.07	peak																								
2 *	4923.964	40.66	3.47	44.13	54.00	-9.87	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.124</td> <td>42.78</td> <td>3.17</td> <td>45.95</td> <td>74.00</td> <td>-28.05</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4824.296</td> <td>28.76</td> <td>3.17</td> <td>31.93</td> <td>54.00</td> <td>-22.07</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4824.124	42.78	3.17	45.95	74.00	-28.05	peak	2 *	4824.296	28.76	3.17	31.93	54.00	-22.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4824.124	42.78	3.17	45.95	74.00	-28.05	peak																								
2 *	4824.296	28.76	3.17	31.93	54.00	-22.07	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.672</td> <td>41.07</td> <td>3.17</td> <td>44.24</td> <td>74.00</td> <td>-29.76</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4824.334</td> <td>28.61</td> <td>3.17</td> <td>31.78</td> <td>54.00</td> <td>-22.22</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4823.672	41.07	3.17	44.24	74.00	-29.76	peak	2 *	4824.334	28.61	3.17	31.78	54.00	-22.22	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4823.672	41.07	3.17	44.24	74.00	-29.76	peak																								
2 *	4824.334	28.61	3.17	31.78	54.00	-22.22	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4873.344</td> <td>41.12</td> <td>3.32</td> <td>44.44</td> <td>74.00</td> <td>-29.56</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.572</td> <td>27.18</td> <td>3.32</td> <td>30.50</td> <td>54.00</td> <td>-23.50</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.344	41.12	3.32	44.44	74.00	-29.56	peak	2 *	4874.572	27.18	3.32	30.50	54.00	-23.50	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.344	41.12	3.32	44.44	74.00	-29.56	peak																								
2 *	4874.572	27.18	3.32	30.50	54.00	-23.50	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.714</td> <td>40.60</td> <td>3.32</td> <td>43.92</td> <td>74.00</td> <td>-30.08</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.974</td> <td>29.17</td> <td>3.32</td> <td>32.49</td> <td>54.00</td> <td>-21.51</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4874.714	40.60	3.32	43.92	74.00	-30.08	peak	2 *	4874.974	29.17	3.32	32.49	54.00	-21.51	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4874.714	40.60	3.32	43.92	74.00	-30.08	peak																								
2 *	4874.974	29.17	3.32	32.49	54.00	-21.51	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4923.720</td> <td>40.30</td> <td>3.47</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4923.722</td> <td>26.53</td> <td>3.47</td> <td>30.00</td> <td>54.00</td> <td>-24.00</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4923.720	40.30	3.47	43.77	74.00	-30.23	peak	2 *	4923.722	26.53	3.47	30.00	54.00	-24.00	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4923.720	40.30	3.47	43.77	74.00	-30.23	peak																								
2 *	4923.722	26.53	3.47	30.00	54.00	-24.00	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4923.610</td> <td>39.42</td> <td>3.47</td> <td>42.89</td> <td>74.00</td> <td>-31.11</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4924.258</td> <td>28.08</td> <td>3.47</td> <td>31.55</td> <td>54.00</td> <td>-22.45</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4923.610	39.42	3.47	42.89	74.00	-31.11	peak	2 *	4924.258	28.08	3.47	31.55	54.00	-22.45	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4923.610	39.42	3.47	42.89	74.00	-31.11	peak																								
2 *	4924.258	28.08	3.47	31.55	54.00	-22.45	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4824.138</td> <td>28.26</td> <td>3.17</td> <td>31.43</td> <td>54.00</td> <td>-22.57</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4824.524</td> <td>41.47</td> <td>3.17</td> <td>44.64</td> <td>74.00</td> <td>-29.36</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4824.138	28.26	3.17	31.43	54.00	-22.57	AVG	2	4824.524	41.47	3.17	44.64	74.00	-29.36	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4824.138	28.26	3.17	31.43	54.00	-22.57	AVG																								
2	4824.524	41.47	3.17	44.64	74.00	-29.36	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT20) Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4823.224</td> <td>28.83</td> <td>3.17</td> <td>32.00</td> <td>54.00</td> <td>-22.00</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4824.116</td> <td>40.65</td> <td>3.17</td> <td>43.82</td> <td>74.00</td> <td>-30.18</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.224	28.83	3.17	32.00	54.00	-22.00	AVG	2	4824.116	40.65	3.17	43.82	74.00	-30.18	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4823.224	28.83	3.17	32.00	54.00	-22.00	AVG																								
2	4824.116	40.65	3.17	43.82	74.00	-30.18	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.050</td> <td>40.91</td> <td>3.32</td> <td>44.23</td> <td>74.00</td> <td>-29.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.428</td> <td>27.04</td> <td>3.32</td> <td>30.36</td> <td>54.00</td> <td>-23.64</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4874.050	40.91	3.32	44.23	74.00	-29.77	peak	2 *	4874.428	27.04	3.32	30.36	54.00	-23.64	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4874.050	40.91	3.32	44.23	74.00	-29.77	peak																								
2 *	4874.428	27.04	3.32	30.36	54.00	-23.64	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT20) Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4874.814</td> <td>29.12</td> <td>3.32</td> <td>32.44</td> <td>54.00</td> <td>-21.56</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4874.938</td> <td>41.35</td> <td>3.32</td> <td>44.67</td> <td>74.00</td> <td>-29.33</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4874.814	29.12	3.32	32.44	54.00	-21.56	AVG	2	4874.938	41.35	3.32	44.67	74.00	-29.33	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4874.814	29.12	3.32	32.44	54.00	-21.56	AVG																								
2	4874.938	41.35	3.32	44.67	74.00	-29.33	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4923.950</td> <td>41.75</td> <td>3.47</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4924.302</td> <td>26.73</td> <td>3.47</td> <td>30.20</td> <td>54.00</td> <td>-23.80</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4923.950	41.75	3.47	45.22	74.00	-28.78	peak	2 *	4924.302	26.73	3.47	30.20	54.00	-23.80	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4923.950	41.75	3.47	45.22	74.00	-28.78	peak																								
2 *	4924.302	26.73	3.47	30.20	54.00	-23.80	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT20) Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4924.326</td> <td>28.07</td> <td>3.47</td> <td>31.54</td> <td>54.00</td> <td>-22.46</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4924.798</td> <td>40.04</td> <td>3.47</td> <td>43.51</td> <td>74.00</td> <td>-30.49</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4924.326	28.07	3.47	31.54	54.00	-22.46	AVG	2	4924.798	40.04	3.47	43.51	74.00	-30.49	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4924.326	28.07	3.47	31.54	54.00	-22.46	AVG																								
2	4924.798	40.04	3.47	43.51	74.00	-30.49	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT40) Mode 2422MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4843.770</td> <td>27.54</td> <td>3.23</td> <td>30.77</td> <td>54.00</td> <td>-23.23</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4844.520</td> <td>40.80</td> <td>3.23</td> <td>44.03</td> <td>74.00</td> <td>-29.97</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4843.770	27.54	3.23	30.77	54.00	-23.23	AVG	2	4844.520	40.80	3.23	44.03	74.00	-29.97	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4843.770	27.54	3.23	30.77	54.00	-23.23	AVG																								
2	4844.520	40.80	3.23	44.03	74.00	-29.97	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT40) Mode 2422MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4843.700</td> <td>27.92</td> <td>3.23</td> <td>31.15</td> <td>54.00</td> <td>-22.85</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4844.976</td> <td>40.23</td> <td>3.23</td> <td>43.46</td> <td>74.00</td> <td>-30.54</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4843.700	27.92	3.23	31.15	54.00	-22.85	AVG	2	4844.976	40.23	3.23	43.46	74.00	-30.54	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4843.700	27.92	3.23	31.15	54.00	-22.85	AVG																								
2	4844.976	40.23	3.23	43.46	74.00	-30.54	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT40) Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4873.638</td> <td>42.16</td> <td>3.32</td> <td>45.48</td> <td>74.00</td> <td>-28.52</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.140</td> <td>26.99</td> <td>3.32</td> <td>30.31</td> <td>54.00</td> <td>-23.69</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.638	42.16	3.32	45.48	74.00	-28.52	peak	2 *	4874.140	26.99	3.32	30.31	54.00	-23.69	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.638	42.16	3.32	45.48	74.00	-28.52	peak																								
2 *	4874.140	26.99	3.32	30.31	54.00	-23.69	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT40) Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.316</td> <td>39.01</td> <td>3.32</td> <td>42.33</td> <td>74.00</td> <td>-31.67</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4874.852</td> <td>29.02</td> <td>3.32</td> <td>32.34</td> <td>54.00</td> <td>-21.66</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4874.316	39.01	3.32	42.33	74.00	-31.67	peak	2 *	4874.852	29.02	3.32	32.34	54.00	-21.66	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4874.316	39.01	3.32	42.33	74.00	-31.67	peak																								
2 *	4874.852	29.02	3.32	32.34	54.00	-21.66	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant NO.	ANT8+ANT9																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT40) Mode 2452MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4903.800</td> <td>26.58</td> <td>3.40</td> <td>29.98</td> <td>54.00</td> <td>-24.02</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4904.546</td> <td>40.71</td> <td>3.40</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4903.800	26.58	3.40	29.98	54.00	-24.02	AVG	2	4904.546	40.71	3.40	44.11	74.00	-29.89	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4903.800	26.58	3.40	29.98	54.00	-24.02	AVG																								
2	4904.546	40.71	3.40	44.11	74.00	-29.89	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant NO.	ANT8+ANT9																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT40) Mode 2452MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.136</td> <td>39.51</td> <td>3.40</td> <td>42.91</td> <td>74.00</td> <td>-31.09</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4904.372</td> <td>27.34</td> <td>3.40</td> <td>30.74</td> <td>54.00</td> <td>-23.26</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4904.136	39.51	3.40	42.91	74.00	-31.09	peak	2 *	4904.372	27.34	3.40	30.74	54.00	-23.26	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4904.136	39.51	3.40	42.91	74.00	-31.09	peak																								
2 *	4904.372	27.34	3.40	30.74	54.00	-23.26	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Test Configuration

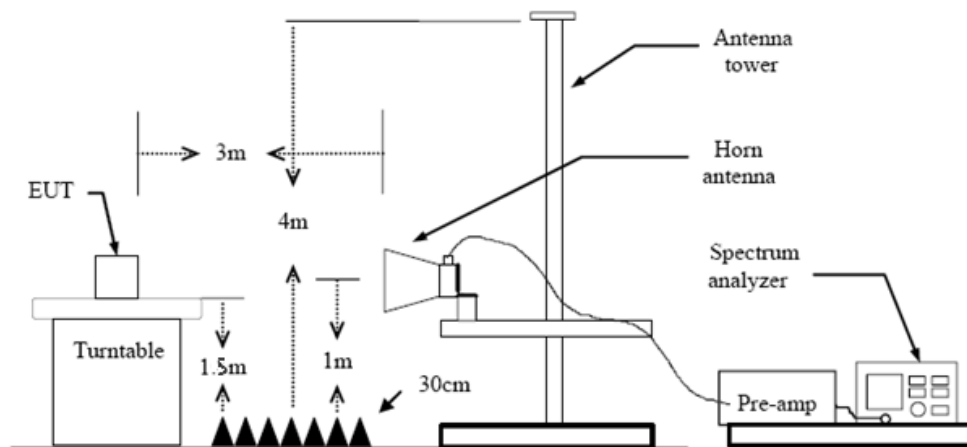

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.7 Duty Cycle.

2: Duty Cycle > 98%, VBW=10Hz.


Test Mode

Please refer to the clause 2.4.

Test Results



Ant NO.	ANT8
Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2412MHz

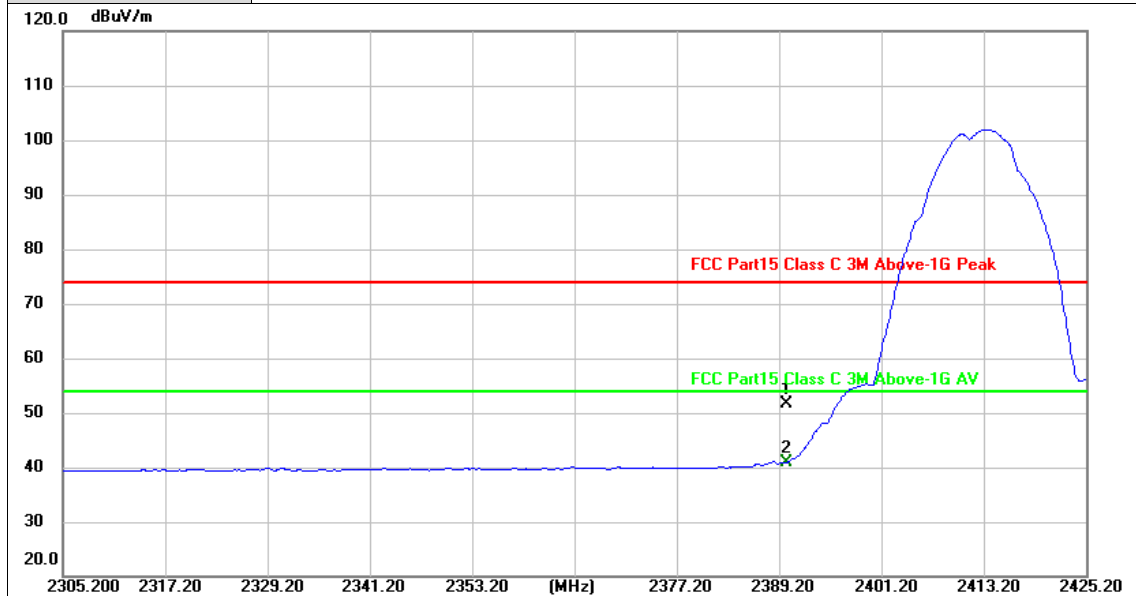


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.42	31.10	51.52	74.00	-22.48	peak
2 *	2390.000	9.87	31.10	40.97	54.00	-13.03	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2412MHz

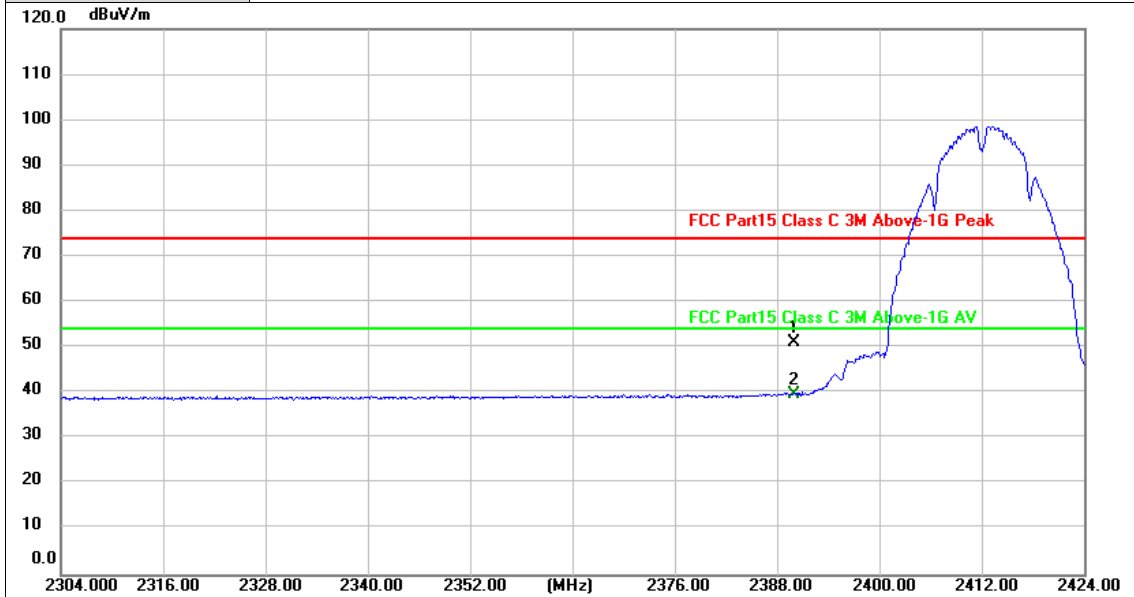


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.02	31.10	51.12	74.00	-22.88	peak
2 *	2390.000	8.80	31.10	39.90	54.00	-14.10	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2462 MHz

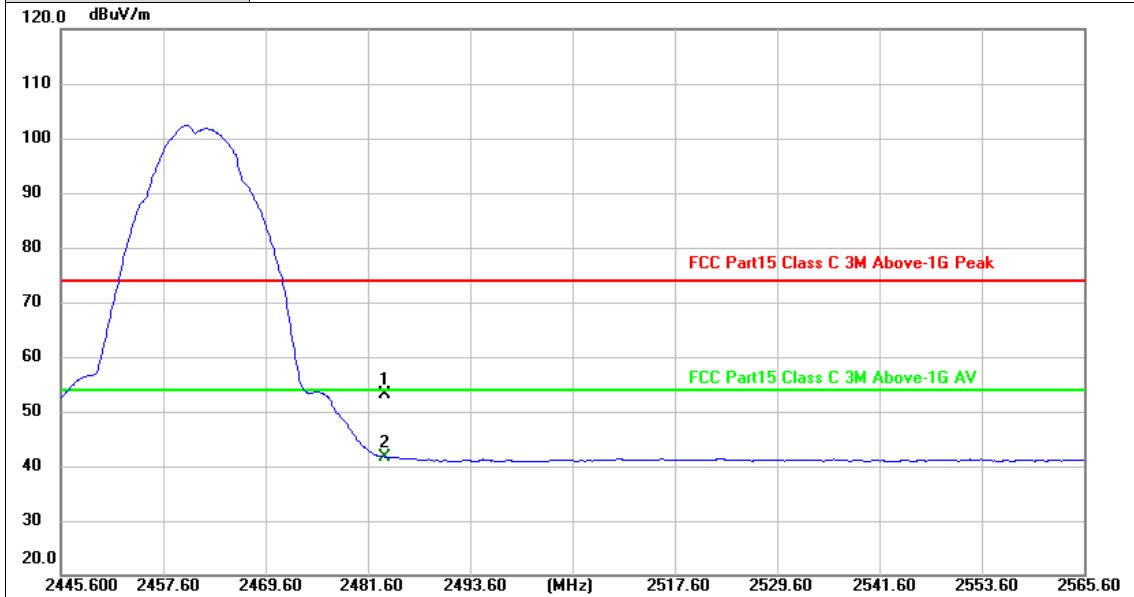


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.64	31.50	53.14	74.00	-20.86	peak
2 *	2483.500	10.22	31.50	41.72	54.00	-12.28	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2462 MHz

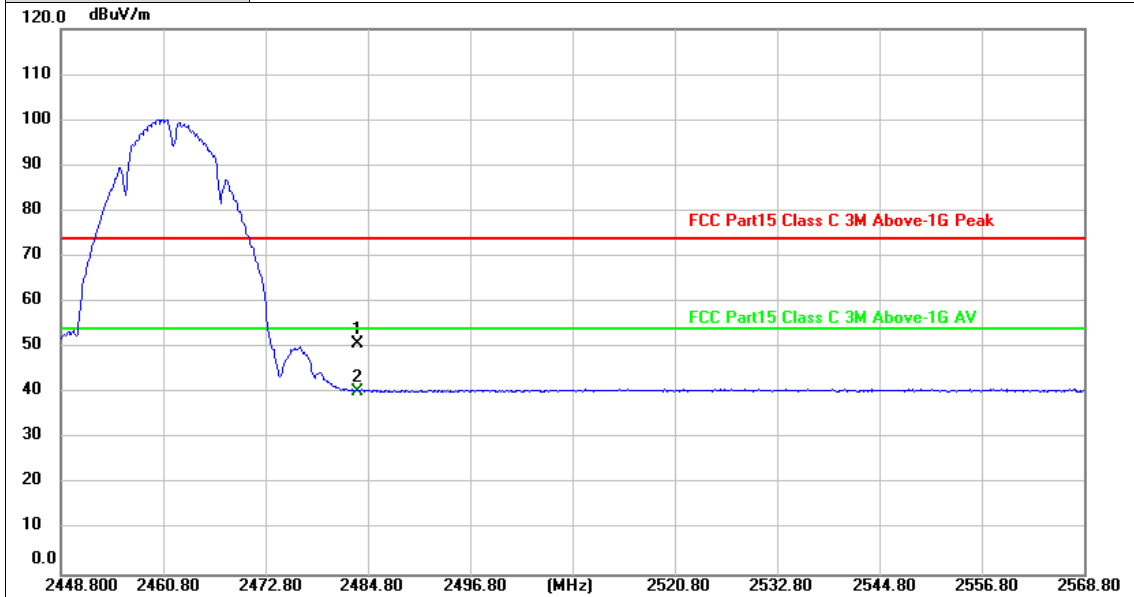


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	19.40	31.50	50.90	74.00	-23.10	peak
2 *	2483.500	9.00	31.50	40.50	54.00	-13.50	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Horizontal
Test Mode:	802.11g Mode 2412MHz

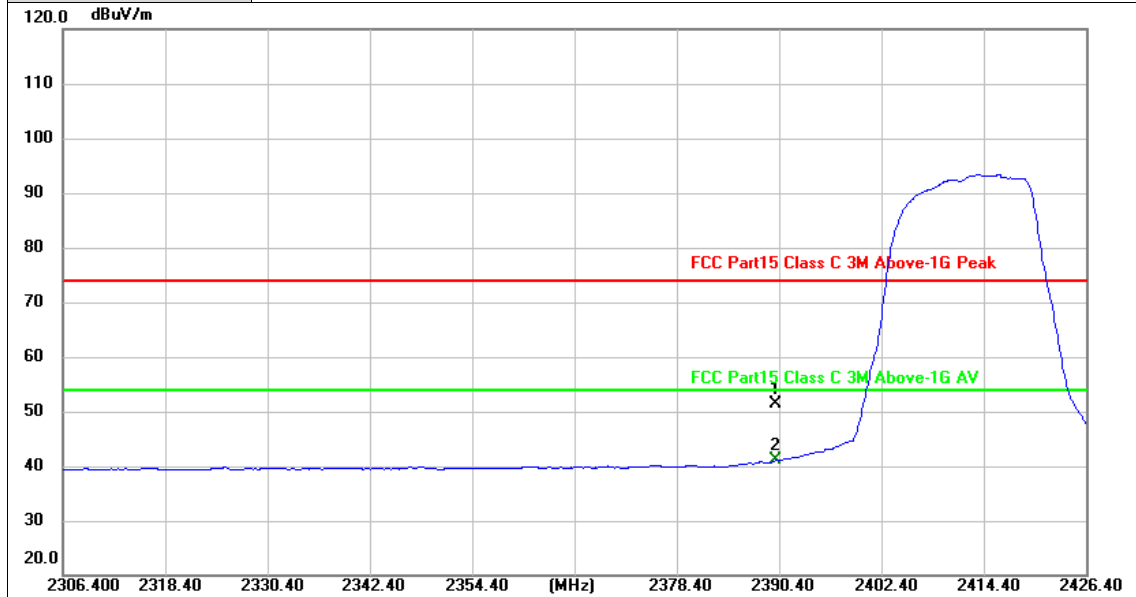


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.32	31.10	51.42	74.00	-22.58	peak
2 *	2390.000	9.95	31.10	41.05	54.00	-12.95	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Vertical
Test Mode:	802.11g Mode 2412MHz

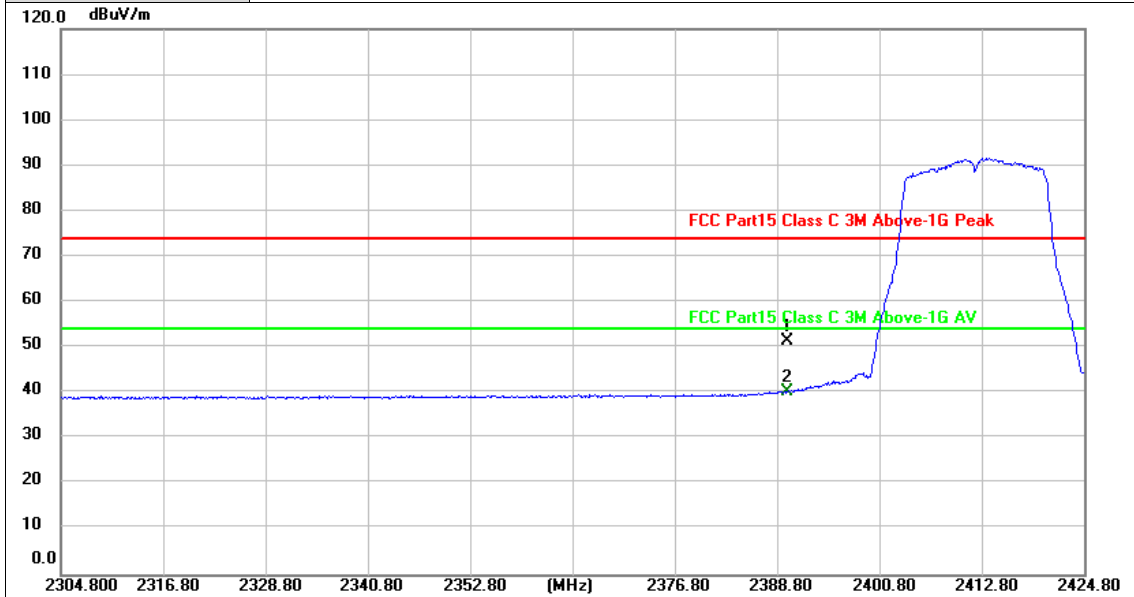


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.50	31.10	51.60	74.00	-22.40	peak
2 *	2390.000	9.23	31.10	40.33	54.00	-13.67	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Horizontal
Test Mode:	802.11g Mode 2462MHz

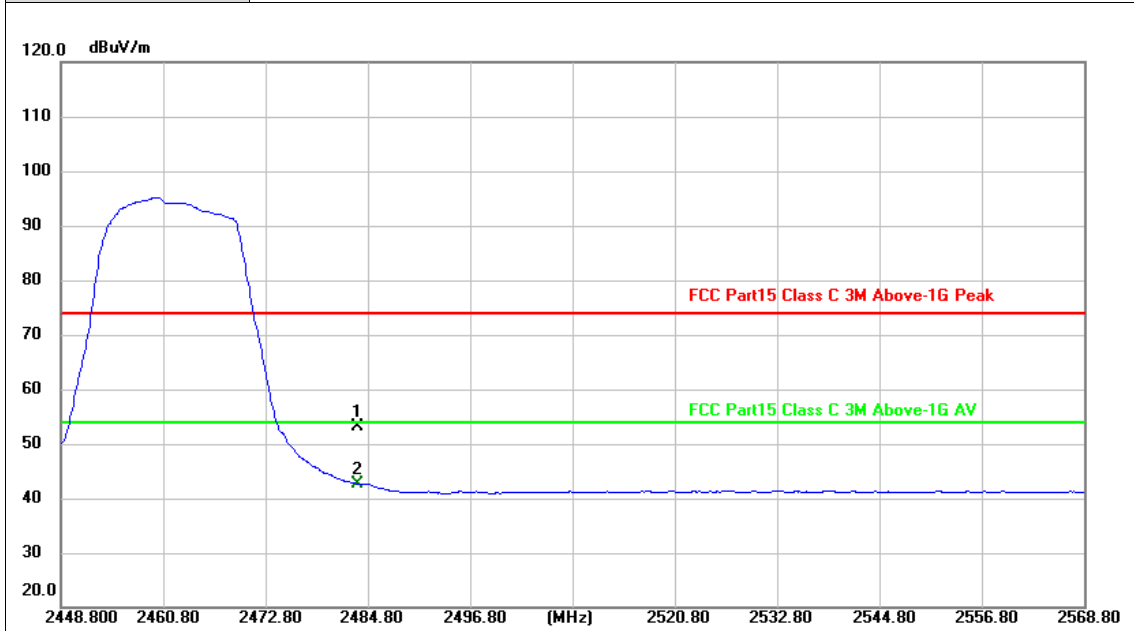


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.51	31.50	53.01	74.00	-20.99	peak
2 *	2483.500	11.17	31.50	42.67	54.00	-11.33	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant NO.	ANT8
Ant. Pol.	Vertical
Test Mode:	802.11g Mode 2462MHz

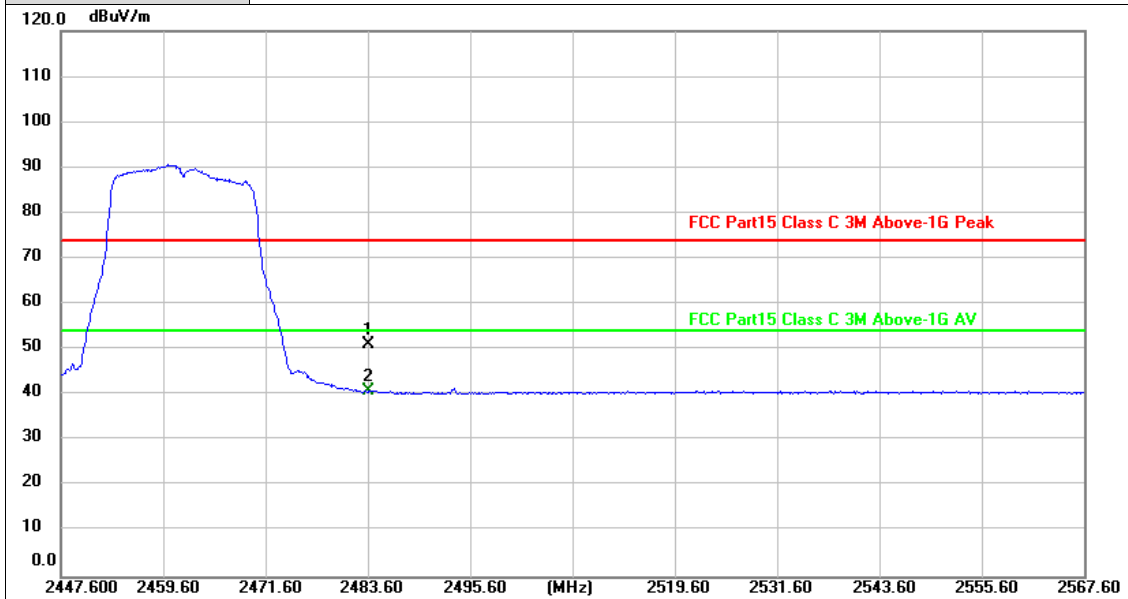


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	19.70	31.50	51.20	74.00	-22.80	peak
2 *	2483.500	9.36	31.50	40.86	54.00	-13.14	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2412MHz

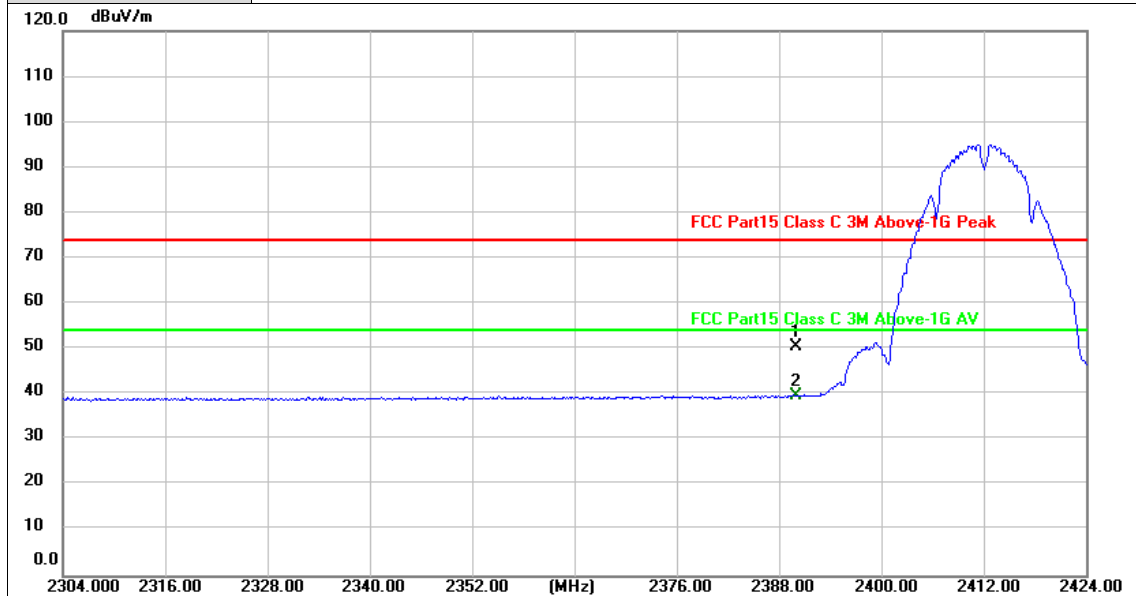


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	19.49	31.10	50.59	74.00	-23.41	peak
2 *	2390.000	8.69	31.10	39.79	54.00	-14.21	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2412MHz

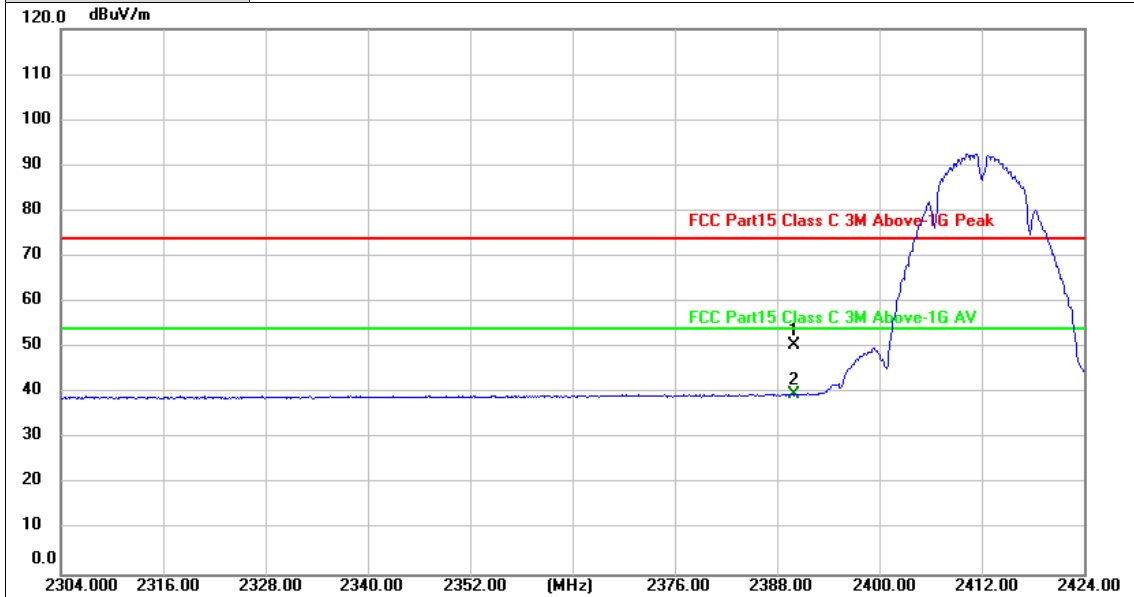


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	19.50	31.10	50.60	74.00	-23.40	peak
2 *	2390.000	8.53	31.10	39.63	54.00	-14.37	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2462 MHz

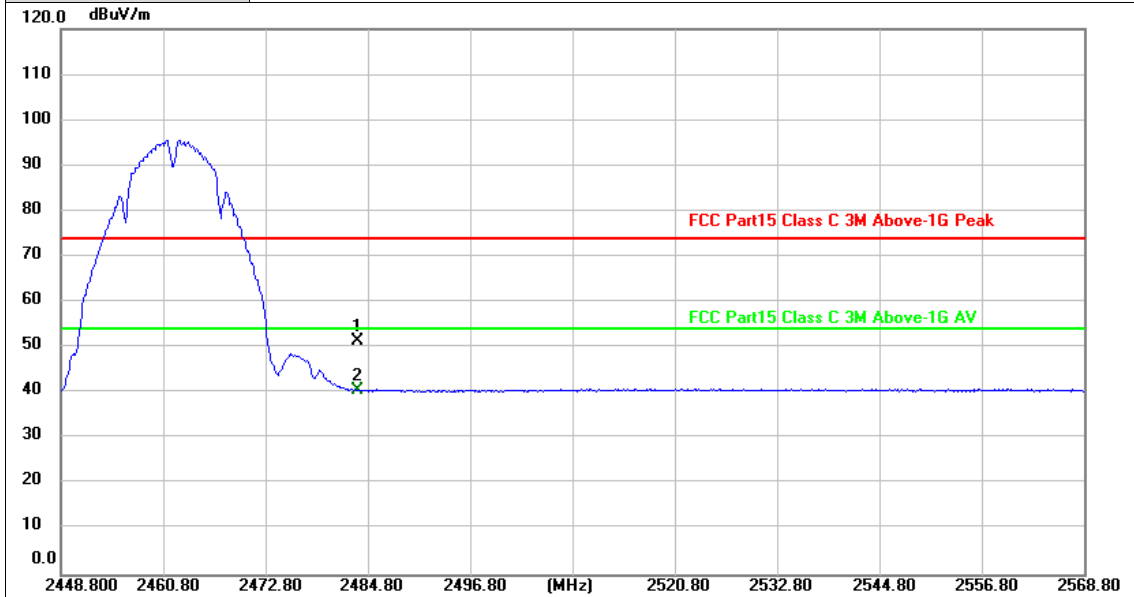


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	19.83	31.50	51.33	74.00	-22.67	peak
2 *	2483.500	9.05	31.50	40.55	54.00	-13.45	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2462 MHz

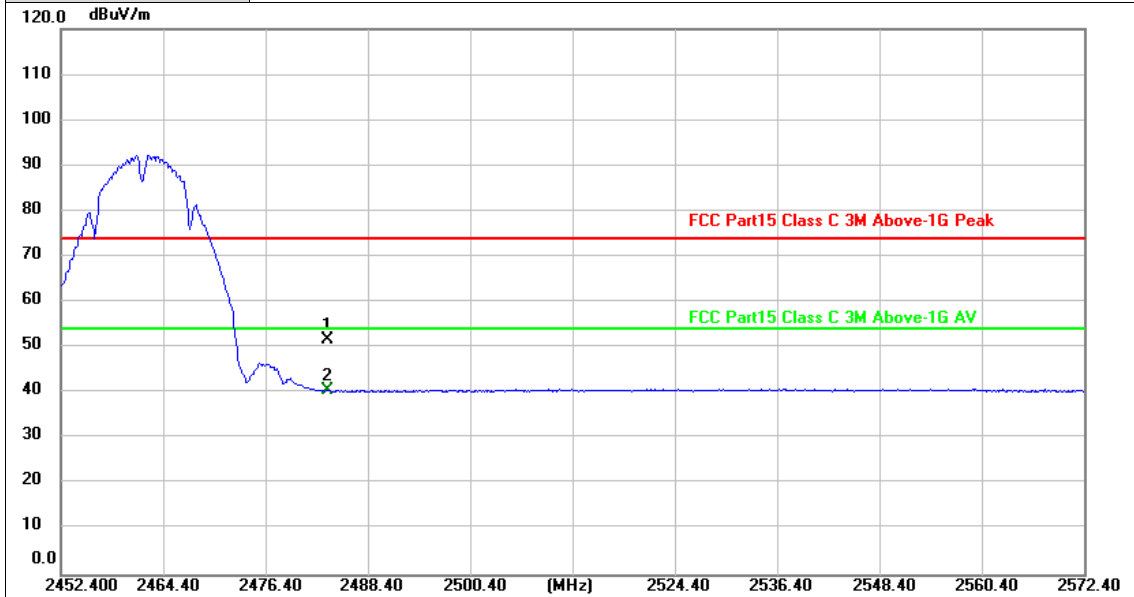


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	20.38	31.50	51.88	74.00	-22.12	peak
2 *	2483.500	9.09	31.50	40.59	54.00	-13.41	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
- 2. Margin value = Level - Limit value



Ant NO.	ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11g Mode 2412MHz

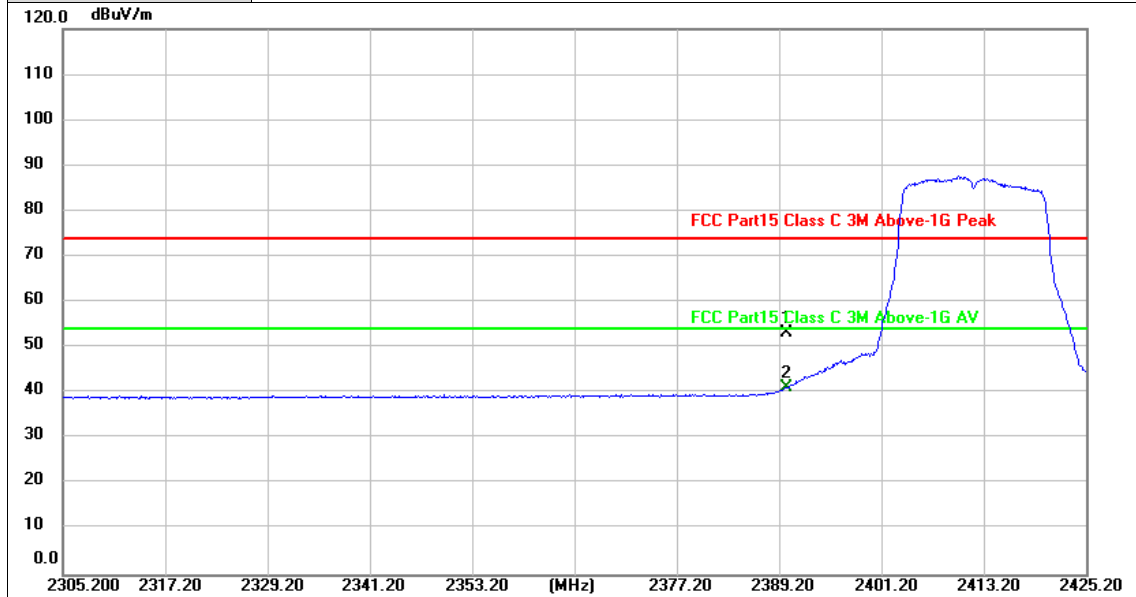


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	22.18	31.10	53.28	74.00	-20.72	peak
2 *	2390.000	10.12	31.10	41.22	54.00	-12.78	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Vertical
Test Mode:	802.11g Mode 2412MHz

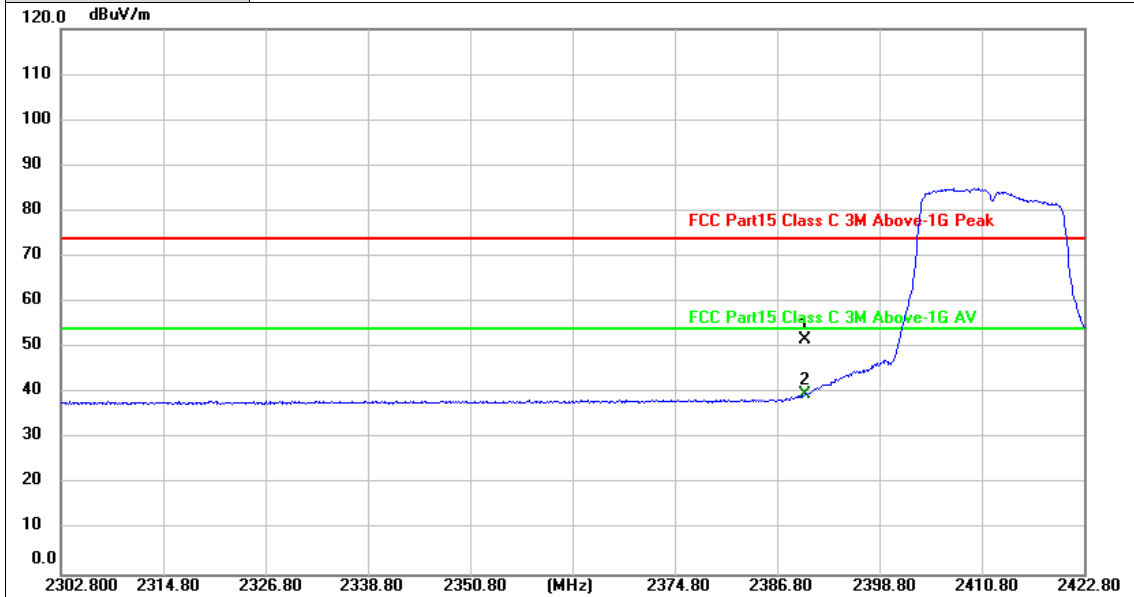


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.78	31.10	51.88	74.00	-22.12	peak
2 *	2390.000	8.69	31.10	39.79	54.00	-14.21	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11g Mode 2462MHz

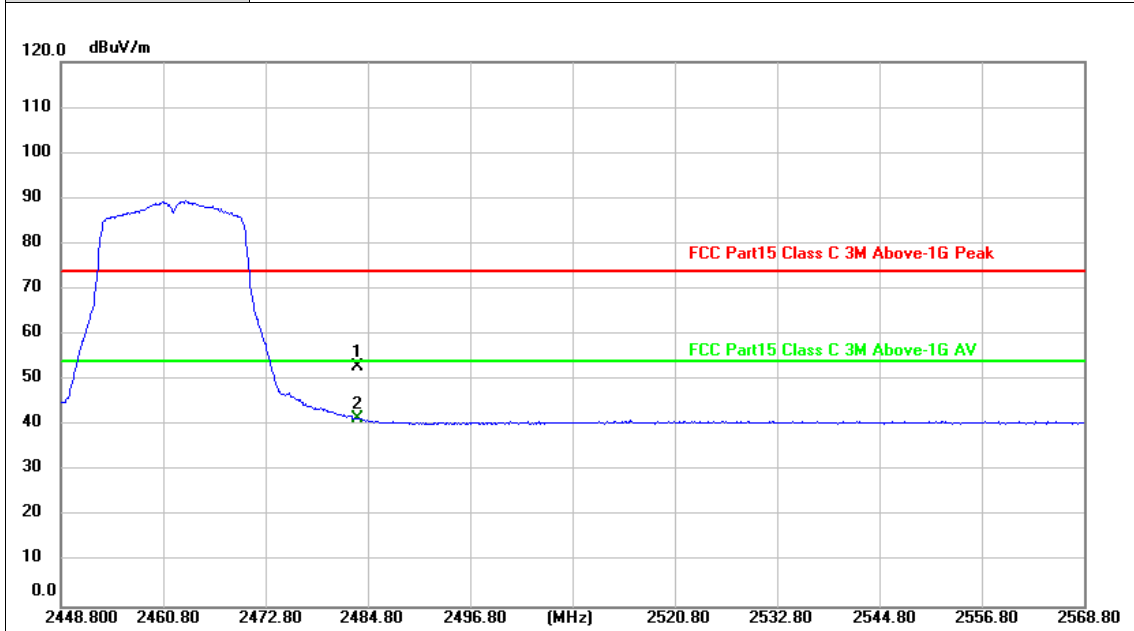


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.55	31.50	53.05	74.00	-20.95	peak
2 *	2483.500	10.18	31.50	41.68	54.00	-12.32	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT9
Ant. Pol.	Vertical
Test Mode:	802.11g Mode 2462MHz

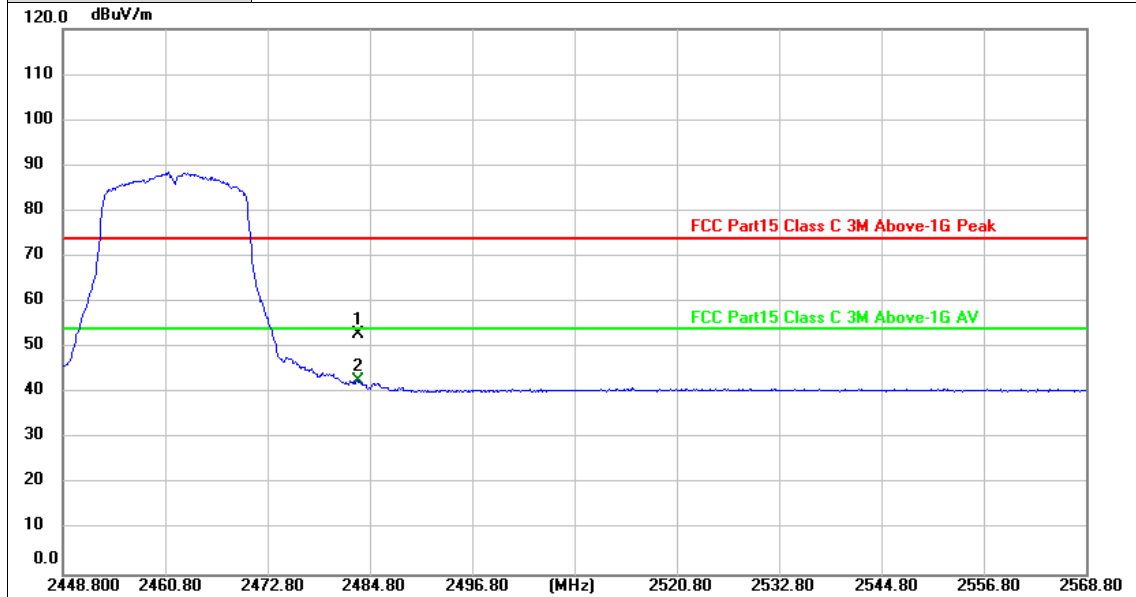


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.55	31.50	53.05	74.00	-20.95	peak
2 *	2483.500	11.18	31.50	42.68	54.00	-11.32	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11n(HT20) Mode 2412MHz

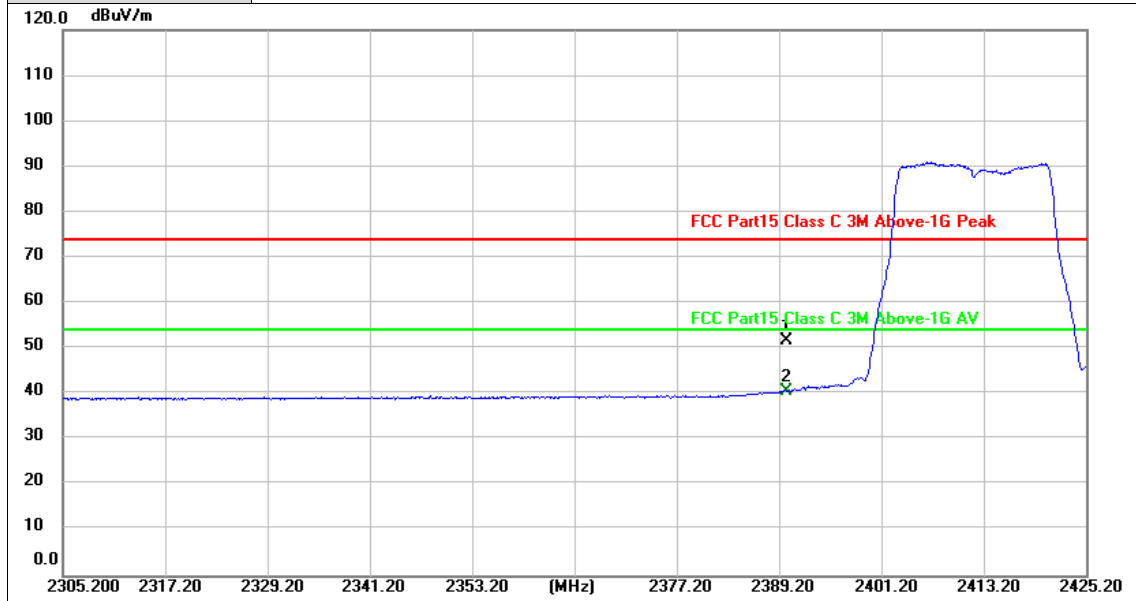


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.79	31.10	51.89	74.00	-22.11	peak
2 *	2390.000	9.70	31.10	40.80	54.00	-13.20	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Vertical
Test Mode:	802.11n(HT20) Mode 2412MHz

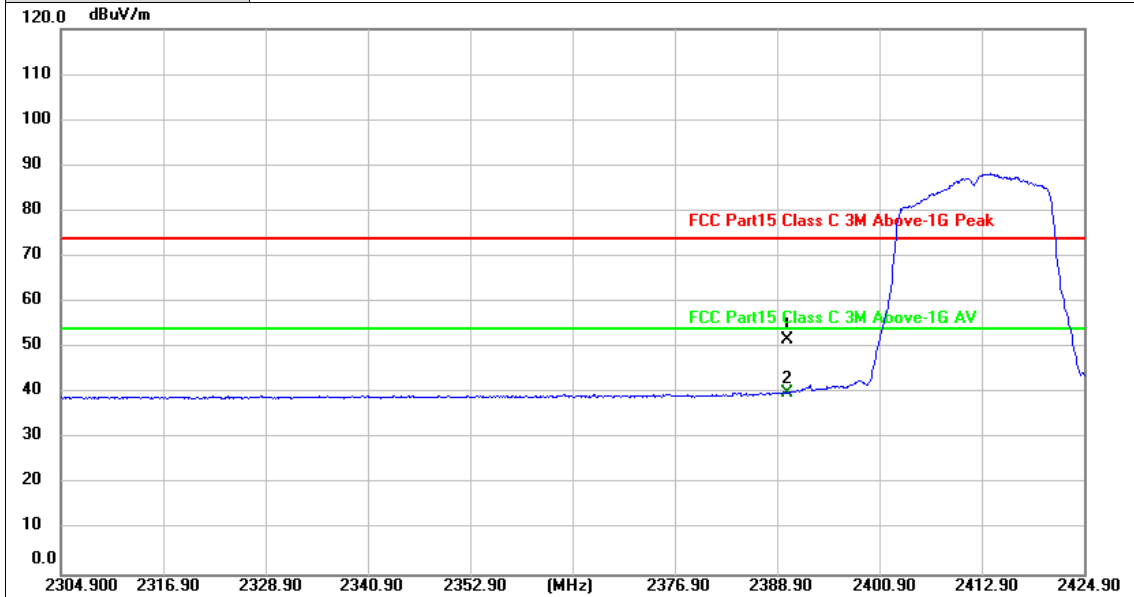


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	20.77	31.10	51.87	74.00	-22.13	peak
2 *	2390.000	9.09	31.10	40.19	54.00	-13.81	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11n(HT20) Mode 2462MHz

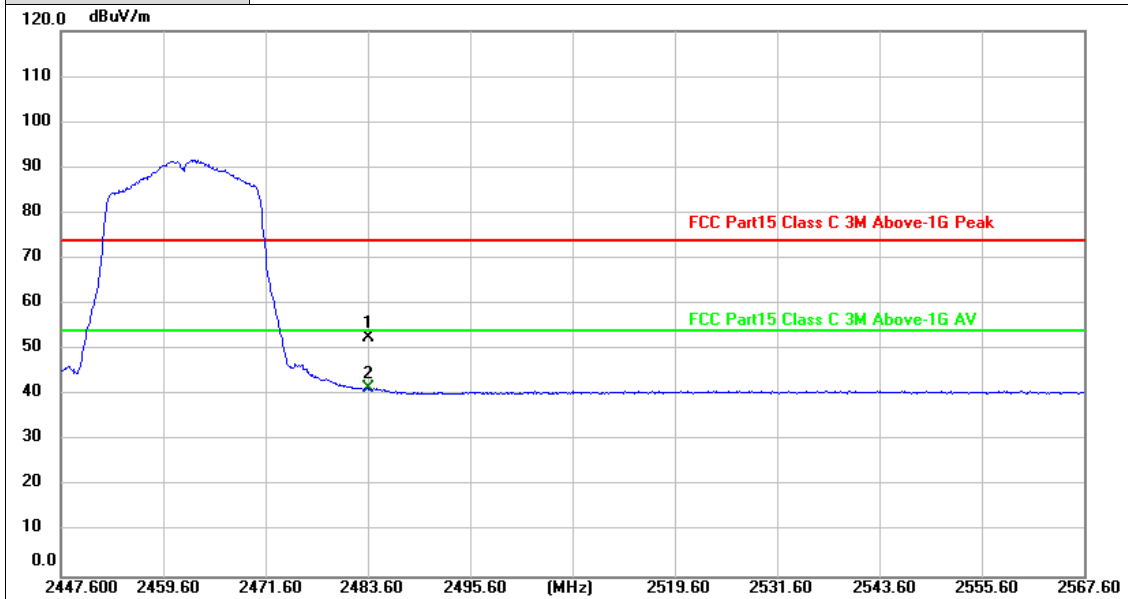


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.29	31.50	52.79	74.00	-21.21	peak
2 *	2483.500	9.94	31.50	41.44	54.00	-12.56	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Vertical
Test Mode:	802.11n(HT20) Mode 2462MHz

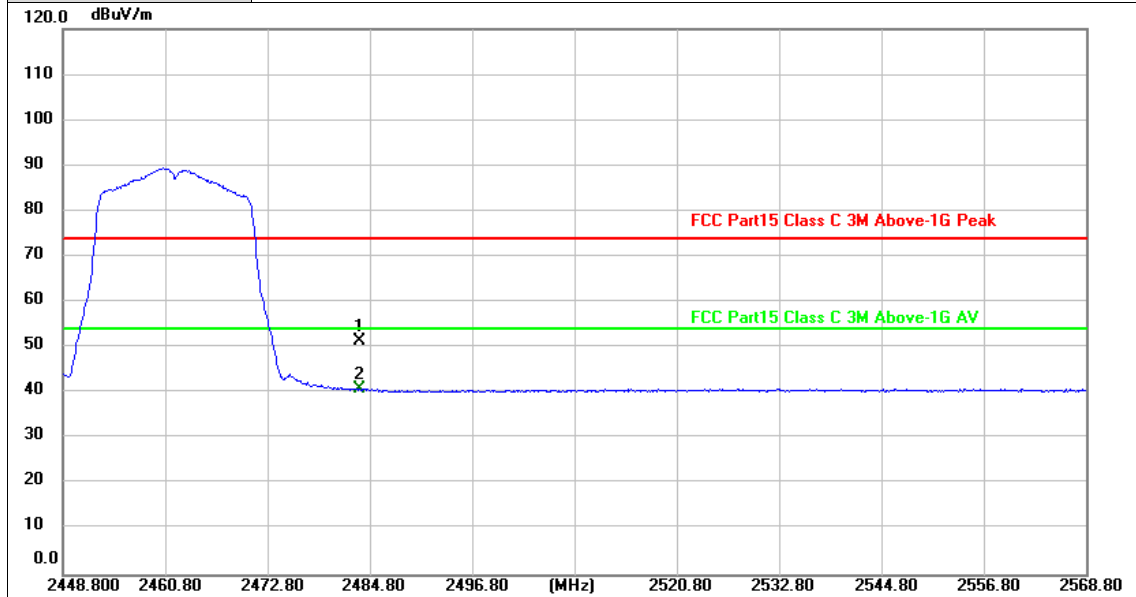


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	20.04	31.50	51.54	74.00	-22.46	peak
2 *	2483.500	9.32	31.50	40.82	54.00	-13.18	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11n(HT40) Mode 2422MHz

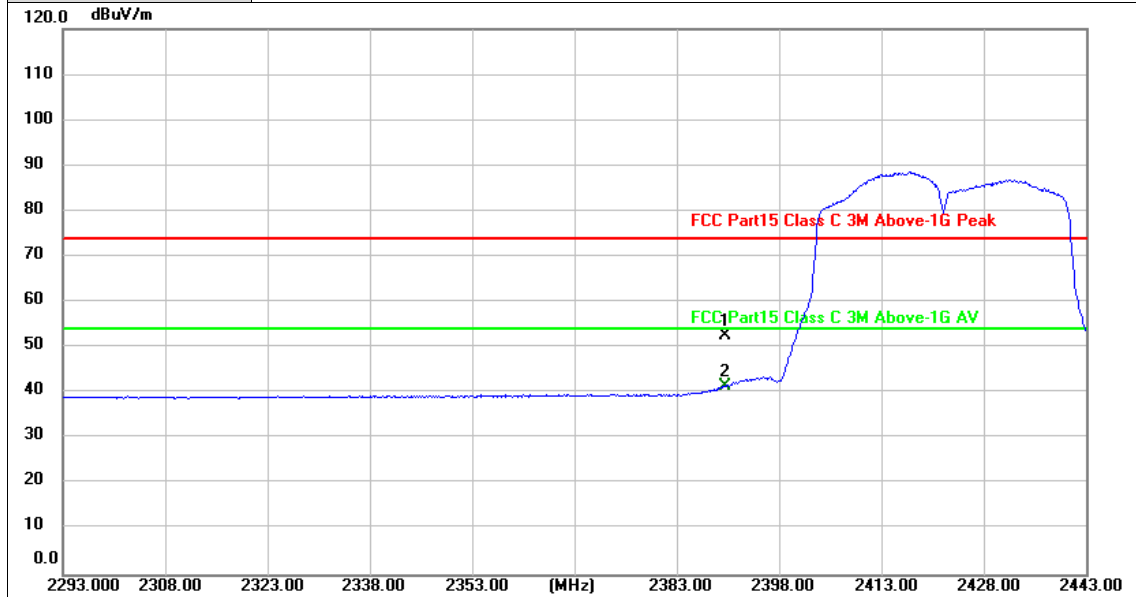


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	21.44	31.10	52.54	74.00	-21.46	peak
2 *	2390.000	10.34	31.10	41.44	54.00	-12.56	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Vertical
Test Mode:	802.11n(HT40) Mode 2422MHz

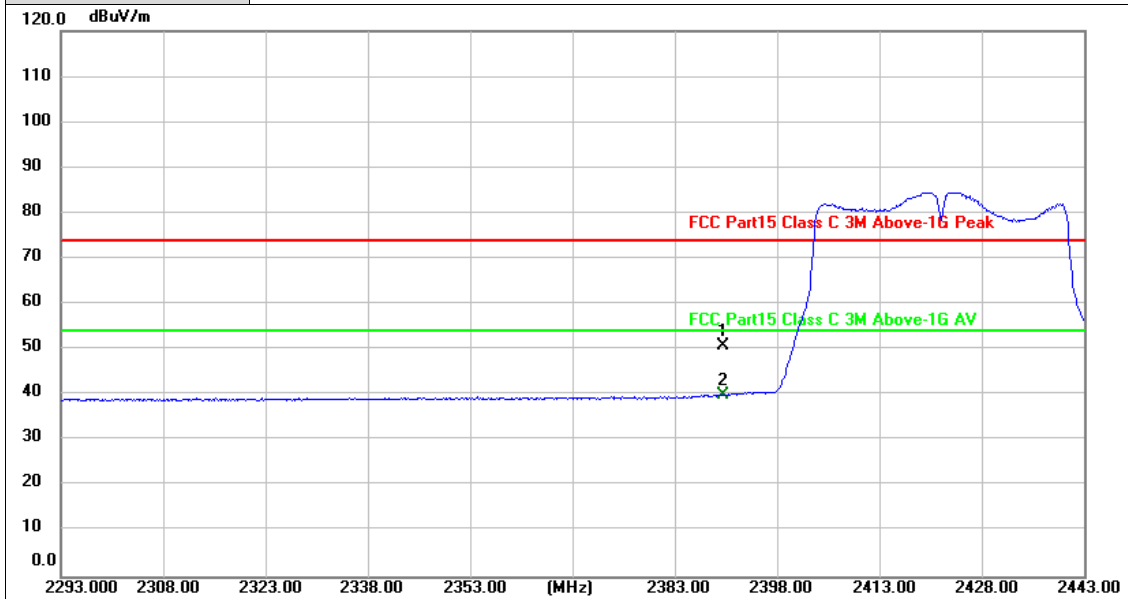


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	19.74	31.10	50.84	74.00	-23.16	peak
2 *	2390.000	9.03	31.10	40.13	54.00	-13.87	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Horizontal
Test Mode:	802.11n(HT40) Mode 2452MHz

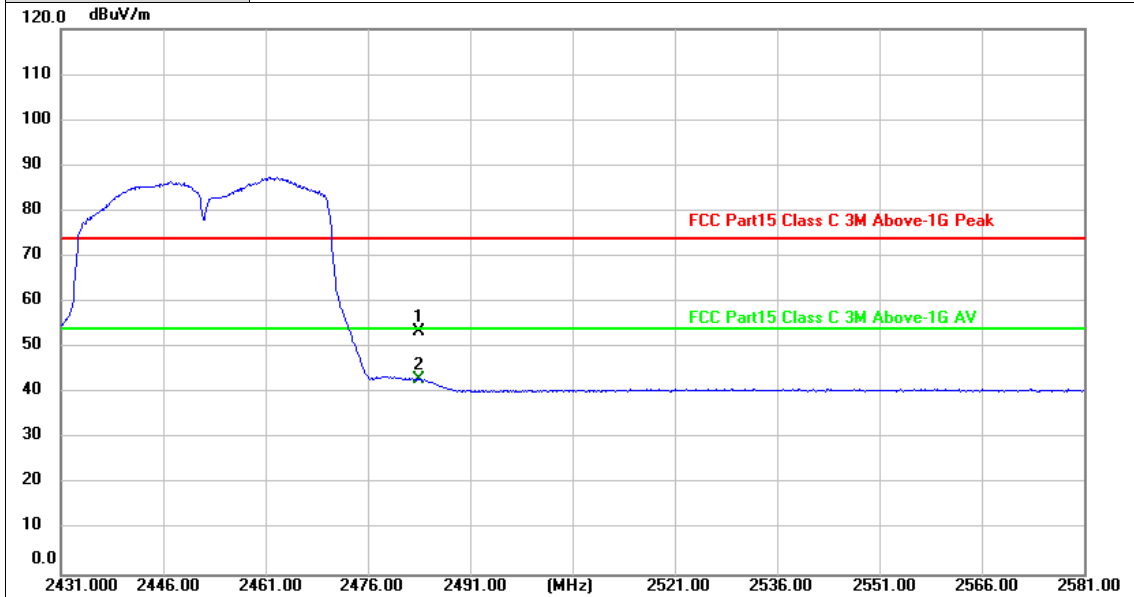


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	22.01	31.50	53.51	74.00	-20.49	peak
2 *	2483.500	11.49	31.50	42.99	54.00	-11.01	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant NO.	ANT8+ANT9
Ant. Pol.	Vertical
Test Mode:	802.11n(HT40) Mode 2452MHz

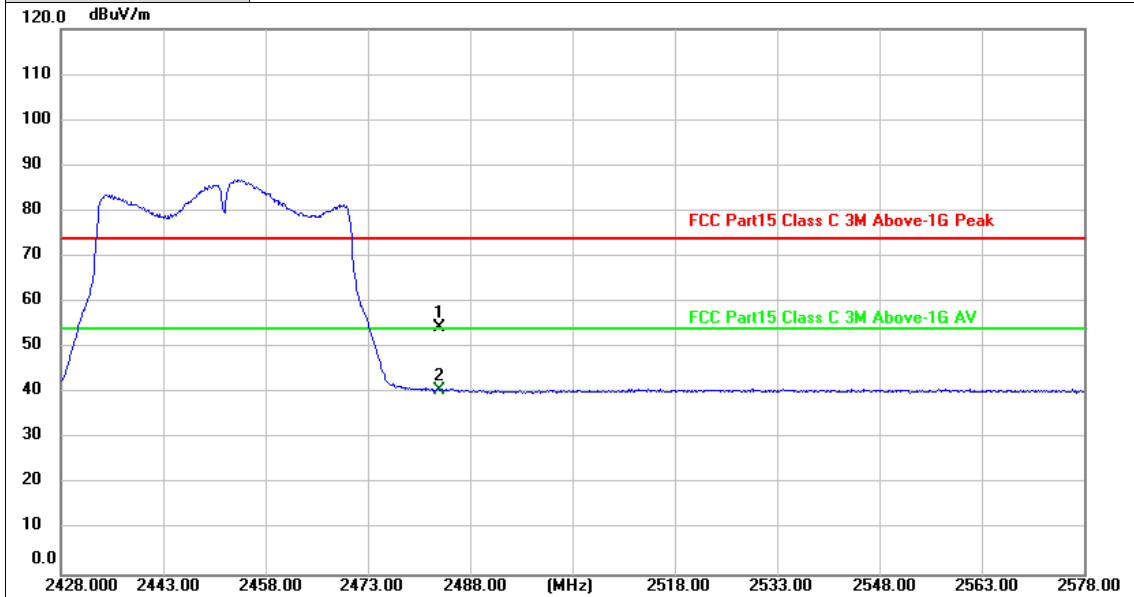

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	22.93	31.50	54.43	74.00	-19.57	peak
2 *	2483.500	9.05	31.50	40.55	54.00	-13.45	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value

3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

Test Results

Please see the Appendix.




3.5. DTS Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 5.2 a:

Test Item	Limit	Frequency Range(MHz)
DTS Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration

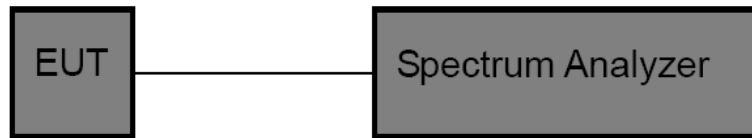

Test Procedure

5. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
6. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
- OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.



Test Results

Please see the Appendix.


3.6. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

Section	Test Item	Limit	Frequency Range(MHz)
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5
ISED RSS-247 5.4 d	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration

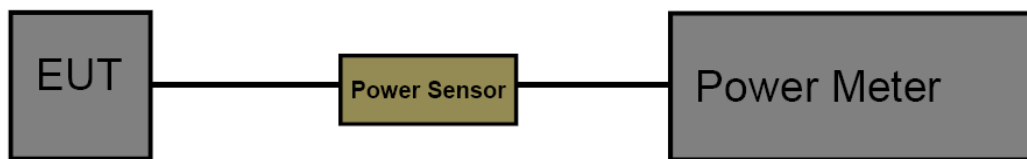

Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
4. Record the measurement data.

Test Mode

Please refer to the clause 2.3

Test Result

Please see the Appendix.




3.7. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration

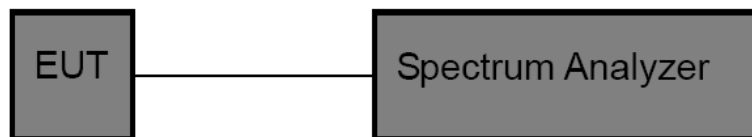

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
 Set analyzer center frequency to DTS channel center frequency.
 Set the span to 1.5 times the DTS bandwidth.
 Set the RBW to: 3 kHz
 Set the VBW to: 10 kHz
 Detector: PK
 Sweep time: Auto
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3



Test Result


Please see the Appendix.

3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration

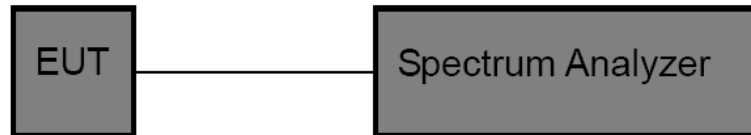

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to DTS channel center frequency.
Set the span to 0Hz
Set the RBW to 10MHz
Set the VBW to 10MHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3

Test Result

Please see the Appendix.



3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****