


SBO Hearing A/S

Radio Model - Quick Installation Guide

Radio Model Name: AM-AU5-KIT312

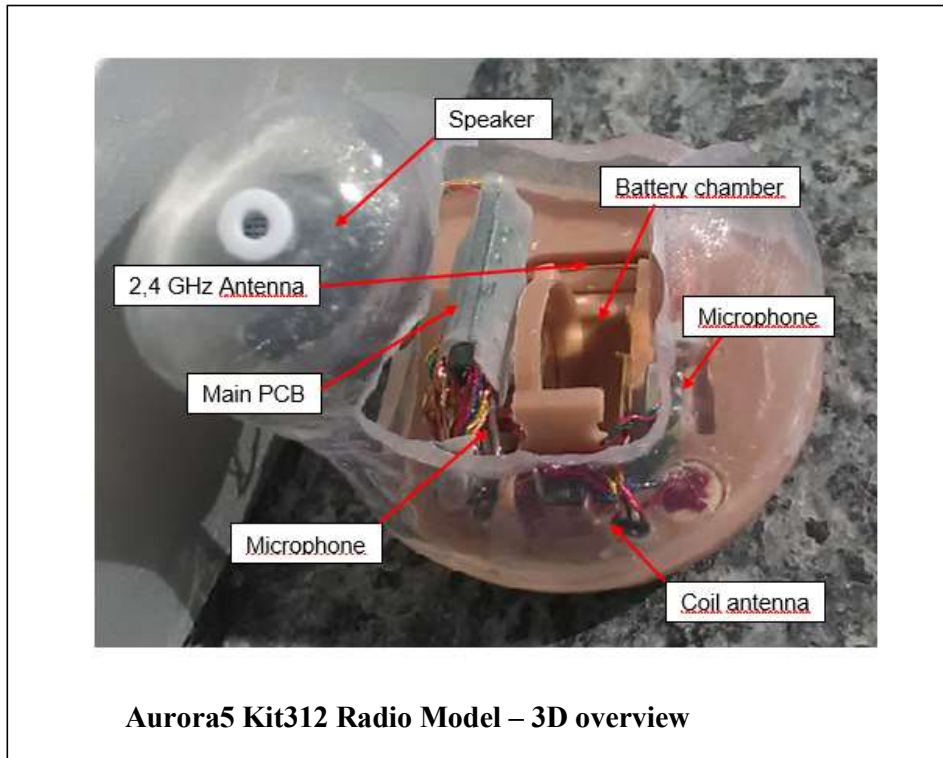

The Aurora5 Kit312 radio model (AM_AU5_KIT312) contains two radio transceivers running at 3.84 MHz and 2.4 GHz and both implemented on a single hardware platform.

The radio model is implemented in the main PCB with connection to the antennas, telecoil, the microphones, the speaker and the battery terminals. The radio model (main PCB) can be seen in the mounted 3D overview to the left.

The 3.84 MHz radio is a low power, short range inductive radio transceiver (NFMI – Near Field magnetic Induction) working at a single channel at 3.84 MHz using MSK modulation with 320 kbit/s data rate and connected to a small coil antenna.

The 2.4 GHz radio is a Bluetooth Low Energy (BLE core 5.1) transceiver using GFSK/2FSK modulation with 1 Mbit/s, 2 Mbit/s data rate also capable of proprietary reception modes (xBLE) with higher data rates (2 Mbit/s, 4 Mbit/s) using 2FSK/4FSK modulation. The 2.4 GHz radio is connected to a short internal wire antenna with a maximum gain of -3.1 dBi (Typically -8.7 dBi).

The telecoil is optional mounting.

The Aurora5 KIT312 requires only a single cell Zinc-air 312 battery, a battery door, customized plastic shell in order to be an operational hearing aid. The AM-AU5-KIT312 stack up can create an ITC host or an ITE HS/FS custom hearing aid host.

The AM-AU5-KIT312 module is tested in a reference host as all I/O, sensors, acoustic interfaces and antennas are externally mounted around the module. The reference host represent the worst-case configuration and conditions for the AM-AU5-KIT312 module. The worst-case host configuration is tested in all operating modes and an FCC part 15B and ICES-003 is demonstrating the compliance of the custom host type ITC, ITE FS or ITE HS. The production performs full operational tests on all manufactured custom products.

Radio Model - Quick Installation Guide

Radio Model Name: **AM-AU5-KIT312**

The Aurora5 KIT312 radio model is intended to be installed in Oticon, Bernafon, Sonic, Philips and affiliated private labels wireless hearing aid devices of the KIT312 (Custom designed ITC - **In The Canal** or ITE – **In The Ear**) wearing style.

The antenna has a 5 mm distance to the skin around the ear. The antenna is always fixed around the battery door and facing away from the ear. The antenna cannot be removed or placed differently when building the ITC or ITE HS/FS custom host product.

The custom hearing aids are all label exempted and thus the product label is placed on the packaging label and the IFU.

SBO Hearing A/S

Radio Model - Regulatory Label Information for USA & Canada

Radio Model Name: AM_AU5_KIT312

Contains: **FCC ID:** 2ACAHAU5ITE
 IC: 11936A-AU5ITE

NOTICE:

This device complies with Part 15.223, Part 15.247 of the FCC rules and with RSS-210 and RSS-247 of Industry Canada rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications made to this equipment not expressly approved by SBO Hearing A/S may void the FCC authorization to operate this equipment.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de

licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et*
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*


SBO Hearing A/S

Radio Model - Regulatory Label Information for Japan

Radio Model Name: AM_AU5_KIT312

Description: Radio module with 2.4 GHz low power transceiver to be integrated into various hearing instruments and associated devices.

Regulatory label:

	NB: The regulatory label for Japan is included in the IFU for Japan.
---	--

This equipment contains specified radio equipment that has been certified to the Technical Regulation Conformity Certification under the Radio Law (電波法) under the grant ID n° 認証番号: 202- SMK023
当該機器には電波法に基づく、技術基準適合証明等を受けた特定無線設備を装着している。

This device should not be modified (otherwise the granted designation number will become invalid)
本製品の改造は禁止されています。(適合証明番号などが無効となります。)

NB: The regulatory label is not shown on the radio module itself or any end products with it, since they are too small for the label to be readable without any optical aids or magnification. Below the radio module is shown, ready for an in the ear and canal shaped product max. size 25.3 x 26.0 x 19.0 mm (ITE FS) to min. size 24.0 x 15.0 x 18.0 mm (ITC).

