

FCC TEST REPORT

(PART 22)


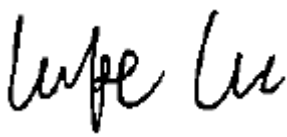
Applicant:	TCL Communication Ltd.
Address:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052

Manufacturer or Supplier:	TCL Communication Ltd.
Address:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Product:	LTE/UMTS/GSM Smartphone
Brand Name:	Alcatel/TCL
Model Name:	5001A/5001J/5101A
FCC ID:	2ACCJB108
Date of tests:	Apr. 12, 2019 ~ Jun. 20, 2019

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H**
- ANSI/TIA/EIA-603-D**
- ANSI/TIA/EIA-603-E**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Alex Chen Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jun. 20, 2019	 Date: Jun. 20, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	9
2.3 DESCRIPTION OF SUPPORT UNITS	10
2.4 TEST ITEM AND TEST CONFIGURATION.....	10
2.5 EUT OPERATING CONDITIONS.....	13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3 TEST TYPES AND RESULTS.....	14
3.1 OUTPUT POWER MEASUREMENT	14
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
3.1.2 TEST PROCEDURES	14
3.1.3 TEST SETUP	15
3.1.4 TEST RESULTS	16
3.2 FREQUENCY STABILITY MEASUREMENT	23
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	23
3.2.2 TEST PROCEDURE	23
3.2.3 TEST SETUP	23
3.2.4 TEST RESULTS	24
3.3 OCCUPIED BANDWIDTH MEASUREMENT	31
3.3.1 TEST PROCEDURES	31
3.3.2 TEST SETUP	31
3.3.3 TEST RESULTS	32
3.4 BAND EDGE MEASUREMENT	38
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	38
3.4.2 TEST SETUP	38
3.4.3 TEST PROCEDURES	39
3.4.4 TEST RESULTS	40
3.5 CONDUCTED SPURIOUS EMISSIONS.....	49
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	49
3.5.2 TEST PROCEDURE	49
3.5.3 TEST SETUP	49
3.5.4 TEST RESULTS	50
3.6 RADIATED EMISSION MEASUREMENT.....	57
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	57
3.6.2 TEST PROCEDURES	57
3.6.3 DEVIATION FROM TEST STANDARD	57
3.6.4 TEST SETUP	58



**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

3.6.5	TEST RESULTS	60
3.7	PEAK TO AVERAGE RATIO	92
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	92
3.7.2	TEST SETUP	92
3.7.3	TEST PROCEDURES	92
3.7.4	TEST RESULTS	93
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	104
5	INFORMATION ON THE TESTING LABORATORIES	105
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	106



BUREAU
VERITAS

Test Report No.: RF190411W001-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190411W001-3	Original release	Jun. 20, 2019

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective Radiated Power	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 22.917b	Occupied Bandwidth	PASS	Meet the requirement of limit.
--	Peak to average ratio*	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -10.73dB at 105.66MHz.

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Effective Radiated Power	±4.48dB
Frequency Stability	±39.27Hz
Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Band Edge Measurements	±4.48dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 26,19	Feb. 25,20
Bilog Antenna 1	ETS-LINDGREN	3143B	00161964	Feb. 26,19	Feb. 25,20
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna 1	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Nov. 30, 18	Nov. 29, 19
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Nov. 21, 18	Nov. 20, 19
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	Feb. 26,19	Feb. 25,20
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 09,18	Jul. 08,19
Power Meter	Anritsu	ML2495A	1506002	Feb. 26,19	Feb. 25,20
Power Sensor	Anritsu	MA2411B	1339352	Feb. 26,19	Feb. 25,20
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jul. 09,18	Jul. 08,19
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 26,19	Feb. 25,20

NOTE: 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	LTE/UMTS/GSM Smartphone	
BRAND NAME	Alcatel/TCL	
MODEL NAME	5001A/5001J/5101A	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-ion, battery)	
MODULATION TYPE	GSM/GPRS/EDGE	GMSK/8PSK
	WCDMA	BPSK, QPSK
	LTE	QPSK, 16QAM
FREQUENCY RANGE	GSM/GPRS/EDGE	824.2MHz ~ 848.8MHz
	WCDMA	826.4MHz ~ 846.6MHz
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
MAX. ERP POWER	GSM	548mW
	EDGE	358mW
	WCDMA	67mW
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	70mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	72mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	71mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	62mW
EMISSION DESIGNATOR	GSM	244KGXW
	EDGE	248KG7W
	WCDMA	4M16F9W
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M69G7D
		16QAM: 2M69W7D
LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M49G7D	
	16QAM: 4M48W7D	



	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 8M96G7D 16QAM: 8M94W7D
ANTENNA TYPE	Fixed Internal Antenna with -2dBi gain	
HW VERSION	PIO	
SW VERSION	V1.0	
I/O PORTS	Refer to user's manual	
DATA CABLE	USB cable: non-shielded, detachable, 1.0meter Earphone cable: non-shielded, detachable, 1.2meter	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The above models are identical except the model name, SIM card and EUT logo for marketing purpose.

Model	SIM card	Logo
5001A	Single SIM	Alcatel Logo
5001J	Dual SIM	Alcatel Logo
5101A	Single SIM	TCL Logo

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


List of Accessory:

Accessories	Brand	Model	Manufacturer	Specification
AC Adapter 1	alcatel	UC11US	PUAN	I/P: 100-240Vac, 200mA O/P: 5Vdc, 1000mA
AC Adapter 2	alcatel	UC11US	Chenyang	I/P: 100-240Vac, 200mA O/P: 5Vdc, 1000mA
Battery 1	alcatel	TLp024C7	Veken	Rating: 3.85Vdc, 2400mAh
Battery 2	alcatel	TLp024C1	BYD	Rating: 3.85Vdc, 2400mAh
Battery 3	alcatel	TLp024CA	TIANMAO	Rating: 3.85Vdc, 2400mAh
Earphone 1	alcatel	WH15	JUWEI	1.2m shielded cable w/o core
Earphone 2	alcatel	WH15	MEIHAO	1.2m shielded cable w/o core
Earphone 3	alcatel	WH15+	MEIHAO	1.2m shielded cable w/o core
USB Cable 1	alcatel	Data Cable	SHENGHUA	1.0m non-shielded cable w/o core
USB Cable 2	alcatel	Data Cable	JUWEI	1.0m non-shielded cable w/o core




2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION

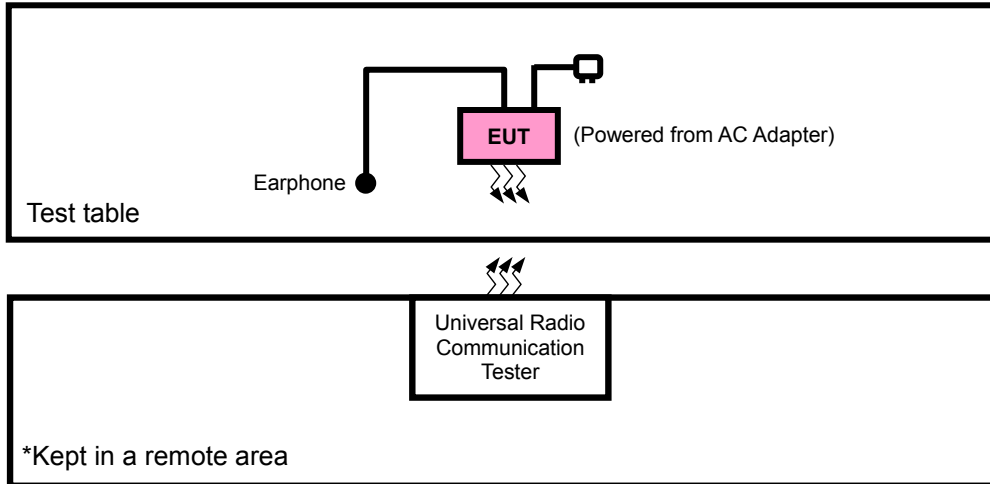

FOR CONDUCTED & E.R.P. TEST

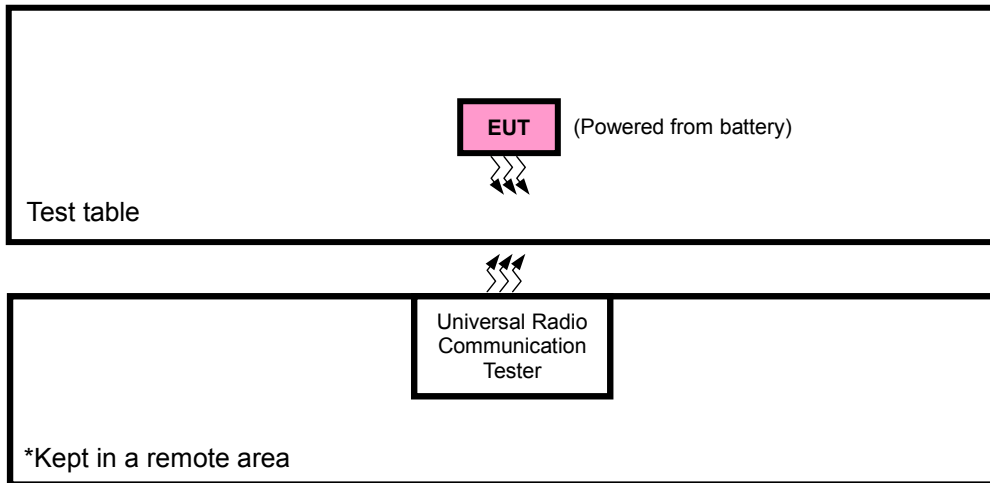



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM/EDGE/WCDMA/LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable+ Earphone with GSM ,WCDMA or LTE link
B	EUT + Battery with GSM ,WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	128 to 251	128, 189, 251	GSM, EDGE
B	FREQUENCY STABILITY	128 to 251	128, 251	GSM, EDGE
B	OCCUPIED BANDWIDTH	128 to 251	128, 189, 251	GSM, EDGE
B	BAND EDGE	128 to 251	128, 251	GSM, EDGE
B	CONDCUDETED EMISSION	128 to 251	128, 189, 251	GSM, EDGE
A	RADIATED EMISSION	128 to 251	128, 189, 251	GSM, EDGE



WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4132, 4233	WCDMA
B	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
B	BAND EDGE	4132 to 4233	4132, 4233	WCDMA
B	CONDCUDED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA

LTE BAND 5 MODE

TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	20407 to 20643	20407, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20415, 20635	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20425, 20625	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20600	10MHz	QPSK	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	6 RB / 0 RB Offset
				16QAM	6 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	15 RB / 0 RB Offset
				16QAM	15 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	25 RB / 0 RB Offset
				16QAM	25 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	50 RB / 0 RB Offset
				16QAM	50 RB / 0 RB Offset



BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM	1 RB / 0 RB Offset
					6 RB / 0 RB Offset
	20407 to 20643	20643	1.4 MHz	QPSK,16QAM	1 RB / 5 RB Offset
					6 RB / 0 RB Offset
	20415 to 20635	20415	3 MHz	QPSK,16QAM	1 RB / 0 RB Offset
					15 RB / 0 RB Offset
	20415 to 20635	20635	3 MHz	QPSK,16QAM	1 RB / 14 RB Offset
					15 RB / 0 RB Offset
20425 to 20625	20425	5MHz	QPSK,16QAM	1 RB / 0 RB Offset	
				25 RB / 0 RB Offset	
20425 to 20625	20625	5MHz	QPSK,16QAM	1 RB / 24 RB Offset	
				25 RB / 0 RB Offset	
20450 to 20600	20450	10MHz	QPSK,16QAM	1 RB / 0 RB Offset	
				50 RB / 0 RB Offset	
20450 to 20600	20600	10MHz	QPSK,16QAM	1 RB / 49 RB Offset	
				50 RB / 0 RB Offset	
CONDCUETED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 0 RB Offset
PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 62%RH	3.85Vdc from Battery	Tony
FREQUENCY STABILITY	23deg. C, 62%RH	DC 3.5V/3.85V/4.4V	Rain Wang
OCCUPIED BANDWIDTH	23deg. C, 62%RH	3.85Vdc from Battery	Rain Wang
BAND EDGE	23deg. C, 62%RH	3.85Vdc from Battery	Rain Wang
CONDCUDED EMISSION	23deg. C, 62%RH	3.85Vdc from Battery	Rain Wang
RADIATED EMISSION	25deg. C, 63.6%RH	5Vdc from adapter	Tony
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	3.85Vdc from Battery	Rain Wang

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA mode and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15dBi$.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




3.1.3 TEST SETUP

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

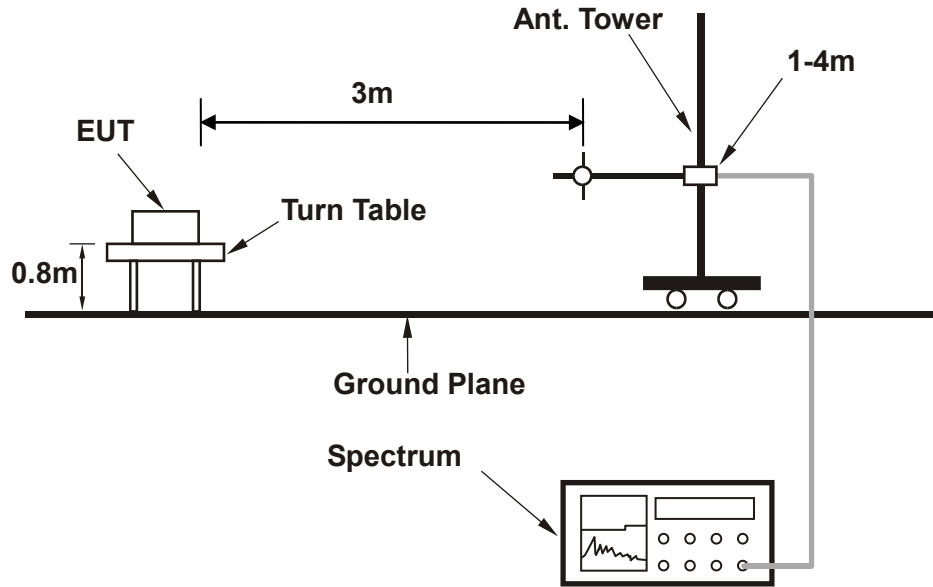


<Radiated Emission above 1 GHz>

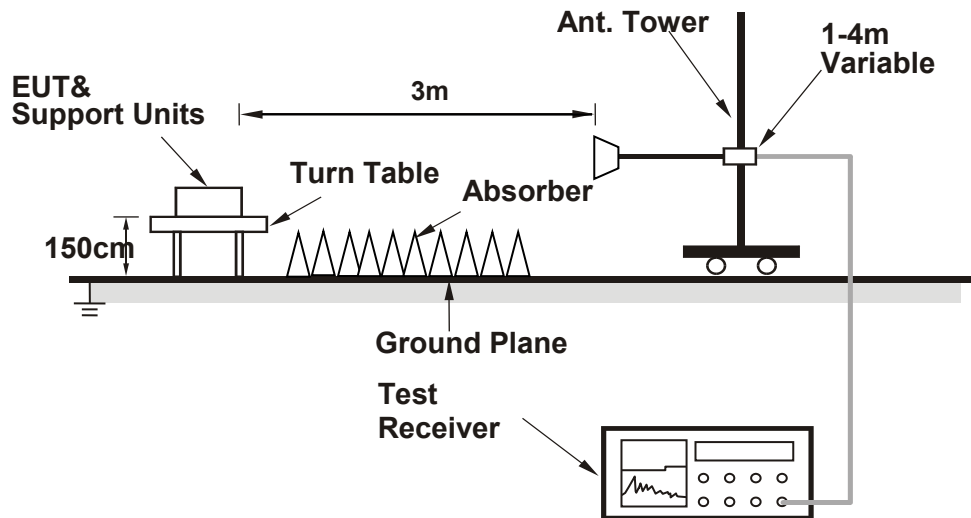

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

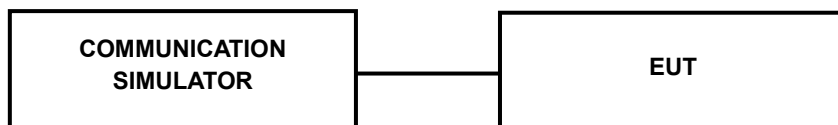



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM	32.76	32.74	32.69
GPRS 8	32.75	32.73	32.68
GPRS 10	30.65	30.63	30.58
GPRS 11	28.92	28.90	28.85
GPRS 12	26.86	26.84	26.79
EDGE 8 (MCS9)	25.62	25.60	25.55
EDGE 10 (MCS9)	24.37	24.35	24.30
EDGE 11 (MCS9)	22.12	22.10	22.05
EDGE 12 (MCS9)	19.38	19.36	19.31

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	22.97	22.94	23.02
HSPA			
HSDPA Subtest-1	21.84	21.81	21.89
HSDPA Subtest-2	22.15	22.12	22.20
HSDPA Subtest-3	21.60	21.57	21.65
HSDPA Subtest-4	21.69	21.66	21.74
DC-HSDPA Subtest-1	22.01	21.98	22.06
DC-HSDPA Subtest-2	22.23	22.20	22.28
DC-HSDPA Subtest-3	21.74	21.71	21.79
DC-HSDPA Subtest-4	21.64	21.61	21.69
HSUPA Subtest-1	22.07	22.04	22.12
HSUPA Subtest-2	20.15	20.12	20.20
HSUPA Subtest-3	21.10	21.07	21.15
HSUPA Subtest-4	20.32	20.29	20.37
HSUPA Subtest-5	22.21	22.18	22.26
HSPA+ Subtest-1	19.74	19.71	19.79



LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	3GPP MPR (dB)
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/1.4	QPSK	1	0	22.53	22.54	22.49	0
		1	2	22.57	22.58	22.53	0
		1	5	22.51	22.52	22.47	0
		3	0	22.51	22.52	22.47	0
		3	1	22.55	22.56	22.51	0
		3	3	22.49	22.50	22.45	0
	16QAM	6	0	21.60	21.61	21.56	1
		1	0	21.84	21.85	21.80	1
		1	2	22.03	22.04	21.99	1
		1	5	22.00	22.01	21.96	1
		3	0	21.83	21.84	21.79	1
		3	1	22.02	22.03	21.98	1
		3	3	21.99	22.00	21.95	1
		6	0	20.88	20.89	20.84	2
Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	3GPP MPR (dB)
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/3	QPSK	1	0	22.57	22.58	22.53	0
		1	7	22.61	22.62	22.57	0
		1	14	22.55	22.56	22.51	0
		8	0	21.57	21.58	21.53	1
		8	3	21.71	21.72	21.67	1
		8	7	21.72	21.73	21.68	1
		15	0	21.64	21.65	21.60	1
	16QAM	1	0	21.88	21.89	21.84	1
		1	7	22.07	22.08	22.03	1
		1	14	22.04	22.05	22.00	1
		8	0	20.67	20.68	20.63	2
		8	3	20.90	20.91	20.86	2
		8	7	20.65	20.66	20.61	2
		15	0	20.92	20.93	20.88	2



**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	3GPP MPR (dB)
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5/5	QPSK	1	0	22.63	22.64	22.59	1
		1	12	22.67	22.68	22.63	1
		1	24	22.61	22.62	22.57	1
		12	0	21.63	21.64	21.59	12
		12	6	21.77	21.78	21.73	12
		12	13	21.78	21.79	21.74	12
		25	0	21.70	21.71	21.66	25
	16QAM	1	0	21.94	21.95	21.90	1
		1	12	22.13	22.14	22.09	1
		1	24	22.10	22.11	22.06	1
		12	0	20.73	20.74	20.69	12
		12	6	20.96	20.97	20.92	12
		12	13	20.71	20.72	20.67	12
		25	0	20.98	20.99	20.94	25
Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	3GPP MPR (dB)
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/10	QPSK	1	0	22.66	22.67	22.62	0
		1	24	22.70	22.71	22.66	0
		1	49	22.64	22.65	22.60	0
		25	0	21.66	21.67	21.62	1
		25	12	21.80	21.81	21.76	1
		25	25	21.81	21.82	21.77	1
		50	0	21.73	21.74	21.69	1
	16QAM	1	0	21.97	21.98	21.93	1
		1	24	22.16	22.17	22.12	1
		1	49	22.13	22.14	22.09	1
		25	0	20.76	20.77	20.72	2
		25	12	20.99	21.00	20.95	2
		25	25	20.74	20.75	20.70	2
		50	0	21.01	21.02	20.97	2



ERP POWER (dBm)

GSM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
128	824.2	-4.02	33.56	27.39	548.15	H
189	836.4	-4.41	33.63	27.07	509.21	H
251	848.8	-4.56	33.57	26.86	485.07	H
128	824.2	-10.24	34.24	21.85	152.97	V
189	836.4	-10.89	34.59	21.55	142.76	V
251	848.8	-11.36	34.62	21.11	129.21	V

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

EDGE

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
128	824.2	-5.87	33.56	25.54	358.01	H
189	836.4	-6.24	33.63	25.24	334.12	H
251	848.8	-6.12	33.57	25.30	338.69	H
128	824.2	-11.67	34.24	20.42	110.05	V
189	836.4	-12.43	34.59	20.01	100.14	V
251	848.8	-11.95	34.62	20.52	112.80	V

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

WCDMA

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
4132	826.4	-13.87	33.56	17.54	56.74	H
4182	836.4	-13.25	33.63	18.23	66.51	H
4233	846.6	-13.15	33.57	18.27	67.11	H
4132	826.4	-16.28	34.24	15.81	38.07	V
4182	836.4	-17.69	34.59	14.75	29.83	V
4233	846.6	-17.45	34.62	15.02	31.79	V

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-13.27	33.67	18.25	66.88	H	7
20525	836.5	-13.79	33.62	17.68	58.67	H	7
20643	848.3	-13.07	33.65	18.43	69.58	H	7
20407	824.7	-17.72	34.25	14.38	27.40	V	7
20525	836.5	-18.18	34.60	14.27	26.72	V	7
20643	848.3	-18.06	34.63	14.42	27.67	V	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-14.10	33.67	17.42	55.25	H	7
20525	836.5	-14.81	33.62	16.66	46.39	H	7
20643	848.3	-14.17	33.65	17.33	54.01	H	7
20407	824.7	-18.55	34.25	13.55	22.64	V	7
20525	836.5	-19.20	34.60	13.25	21.13	V	7
20643	848.3	-19.16	34.63	13.32	21.48	V	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-13.08	33.72	18.49	70.65	H	7
20525	836.5	-13.73	33.62	17.74	59.48	H	7
20635	847.5	-12.94	33.65	18.56	71.76	H	7
20415	825.5	-17.53	34.30	14.62	28.98	V	7
20525	836.5	-18.12	34.60	14.33	27.09	V	7
20635	847.5	-17.93	34.57	14.49	28.13	V	7



CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-14.23	33.72	17.34	54.21	H	7
20525	836.5	-14.83	33.62	16.64	46.17	H	7
20635	847.5	-14.10	33.65	17.40	54.94	H	7
20415	825.5	-18.68	34.30	13.47	22.24	V	7
20525	836.5	-19.22	34.60	13.23	21.03	V	7
20635	847.5	-19.09	34.57	13.33	21.53	V	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-13.09	33.69	18.45	70.05	H	7
20525	836.5	-13.80	33.62	17.67	58.53	H	7
20625	846.5	-13.01	33.66	18.50	70.81	H	7
20425	826.5	-17.54	34.85	15.16	32.80	V	7
20525	836.5	-18.19	34.60	14.26	26.66	V	7
20625	846.5	-18.00	34.59	14.44	27.82	V	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-13.95	33.69	17.59	57.46	H	7
20525	836.5	-14.67	33.62	16.80	47.91	H	7
20625	846.5	-13.86	33.66	17.65	58.22	H	7
20425	826.5	-18.40	34.85	14.30	26.91	V	7
20525	836.5	-19.06	34.60	13.39	21.82	V	7
20625	846.5	-18.85	34.59	13.59	22.88	V	7



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829.0	-13.67	33.73	17.91	61.73	H	7
20525	836.5	-14.25	33.62	17.22	52.77	H	7
20600	844.0	-13.59	33.51	17.77	59.88	H	7
20450	829.0	-18.12	34.54	14.27	26.71	V	7
20525	836.5	-18.64	34.60	13.81	24.03	V	7
20600	844.0	-18.58	34.46	13.73	23.58	V	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829.0	-14.60	33.73	16.98	49.83	H	7
20525	836.5	-15.32	33.62	16.15	41.25	H	7
20600	844.0	-14.42	33.51	16.94	49.47	H	7
20450	829.0	-19.05	34.54	13.34	21.56	V	7
20525	836.5	-19.71	34.60	12.74	18.78	V	7
20600	844.0	-19.41	34.46	12.90	19.48	V	7

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

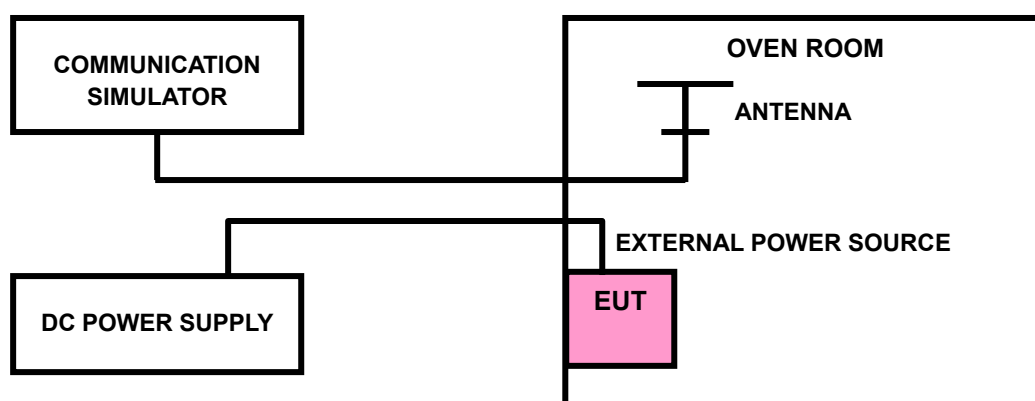



3.2.4 TEST RESULTS

GSM 850

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
3.85	0.0027	0.0028	2.5
3.5	-0.0028	-0.0026	2.5
4.4	0.0021	0.0023	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0125	-0.0119	2.5
-20	-0.0117	-0.0111	2.5
-10	-0.0103	-0.0098	2.5
0	-0.0091	-0.0086	2.5
10	-0.0069	-0.0063	2.5
20	-0.0055	-0.0050	2.5
30	-0.0038	-0.0033	2.5
40	-0.0030	-0.0025	2.5
50	-0.0010	-0.0005	2.5



EDGE 850

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
3.85	0.0020	0.0026	2.5
3.5	-0.0028	-0.0027	2.5
4.4	0.0020	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0125	-0.0107	2.5
-20	-0.0099	-0.0095	2.5
-10	-0.0088	-0.0087	2.5
0	-0.0085	-0.0072	2.5
10	-0.0062	-0.0056	2.5
20	-0.0052	-0.0043	2.5
30	-0.0037	-0.0028	2.5
40	-0.0023	-0.0008	2.5
50	0.0009	0.0001	2.5



WCDMA Band V

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
3.85	0.0019	0.0018	2.5
3.5	-0.0024	-0.0021	2.5
4.4	0.0020	0.0017	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0132	-0.0126	2.5
-20	-0.0117	-0.0112	2.5
-10	-0.0100	-0.0095	2.5
0	-0.0088	-0.0084	2.5
10	-0.0064	-0.0062	2.5
20	-0.0060	-0.0057	2.5
30	-0.0043	-0.0041	2.5
40	-0.0033	-0.0032	2.5
50	-0.0017	-0.0016	2.5



LTE Band 5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0019	0.0017	2.5
3.5	-0.0026	-0.0028	2.5
4.4	0.0019	0.0019	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0124	-0.0108	2.5
-20	-0.0113	-0.0094	2.5
-10	-0.0100	-0.0082	2.5
0	-0.0089	-0.0073	2.5
10	-0.0079	-0.0067	2.5
20	-0.0059	-0.0050	2.5
30	-0.0029	-0.0025	2.5
40	-0.0018	-0.0015	2.5
50	-0.0004	-0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0015	0.0018	2.5
3.5	-0.0019	-0.0022	2.5
4.4	0.0017	0.0019	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0123	-0.0114	2.5
-20	-0.0112	-0.0104	2.5
-10	-0.0095	-0.0088	2.5
0	-0.0078	-0.0072	2.5
10	-0.0064	-0.0059	2.5
20	-0.0053	-0.0048	2.5
30	-0.0031	-0.0028	2.5
40	-0.0018	-0.0016	2.5
50	-0.0004	-0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0019	0.0022	2.5
3.5	-0.0021	-0.0026	2.5
4.4	0.0019	0.0019	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0120	-0.0111	2.5
-20	-0.0098	-0.0091	2.5
-10	-0.0088	-0.0082	2.5
0	-0.0076	-0.0070	2.5
10	-0.0053	-0.0049	2.5
20	-0.0038	-0.0035	2.5
30	-0.0030	-0.0027	2.5
40	-0.0018	-0.0016	2.5
50	-0.0004	-0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0023	0.0025	2.5
3.5	-0.0028	-0.0024	2.5
4.4	0.0022	0.0022	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0109	2.5
-20	-0.0102	-0.0095	2.5
-10	-0.0087	-0.0081	2.5
0	-0.0065	-0.0061	2.5
10	-0.0052	-0.0048	2.5
20	-0.0040	-0.0037	2.5
30	-0.0028	-0.0025	2.5
40	-0.0014	-0.0011	2.5
50	0.0003	0.0005	2.5

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

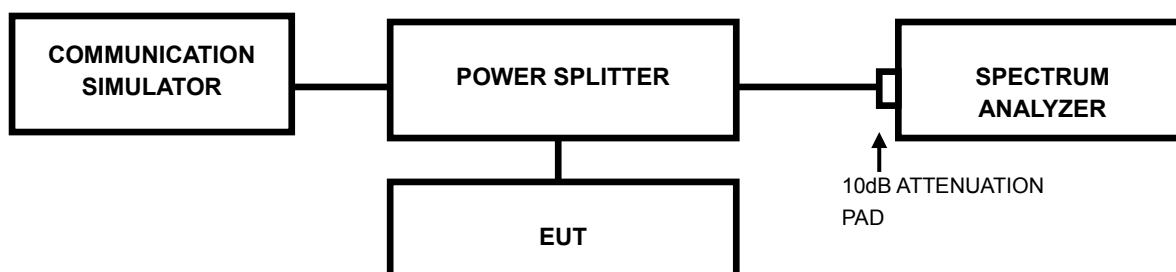




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

3.3.3 TEST RESULTS

CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (kHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)
		GSM	EDGE			WCDMA
128	824.2	244.00	246.00	4132	826.4	4.14
189	836.4	242.00	246.00	4182	836.4	4.14
251	848.8	242.00	248.00	4233	846.6	4.16

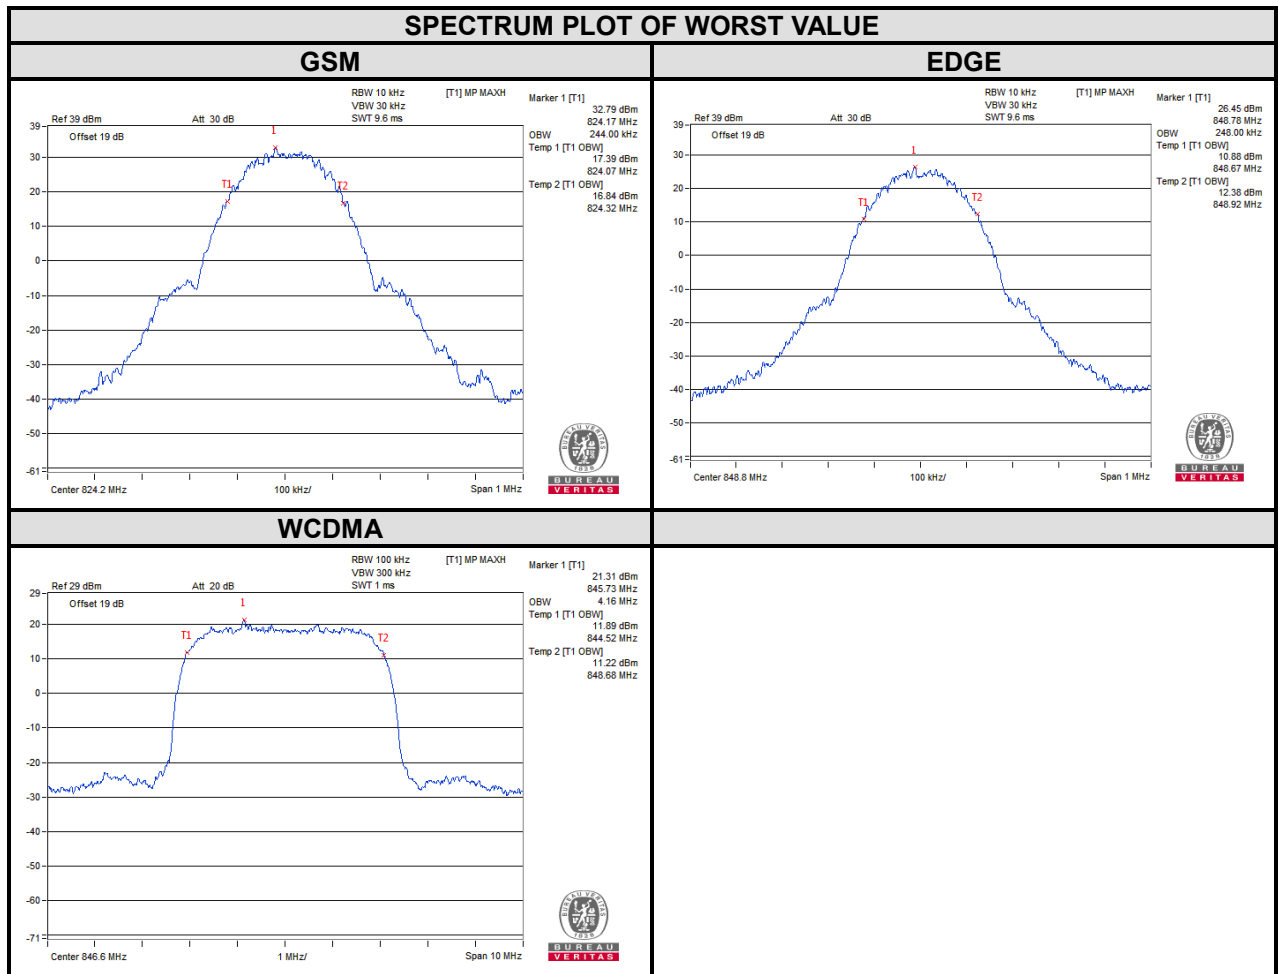




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CHANNEL	Frequency (MHz)	26dB Bandwidth (kHz)		CHANNEL	Frequency (MHz)	26dB Bandwidth (MHz)
		GSM	EDGE			
128	824.2	309.25	306.61	4132	826.4	4.67
189	836.4	312.81	318.12	4182	836.4	4.70
251	848.8	323.60	316.21	4233	846.6	4.69


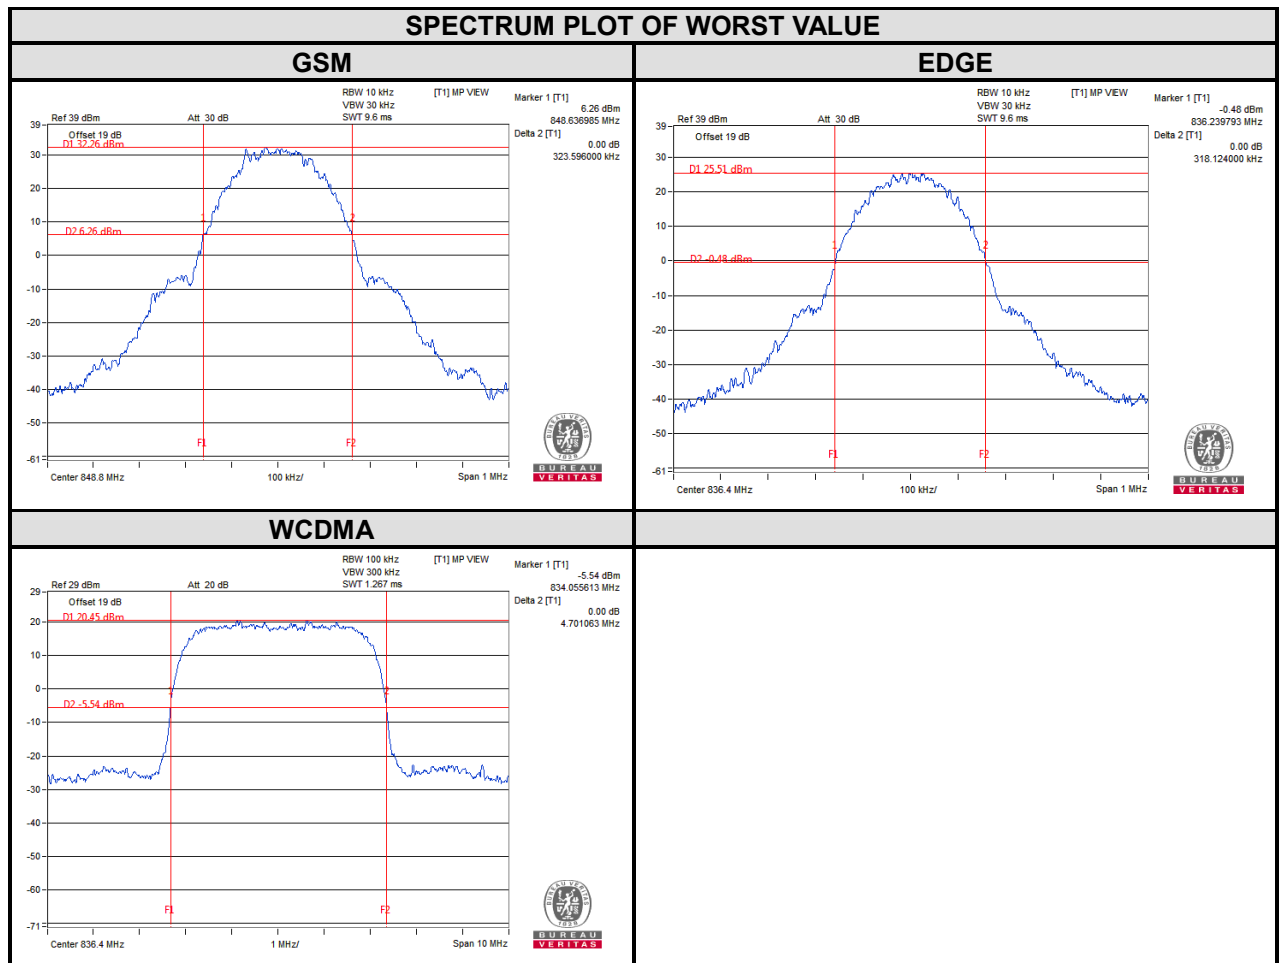




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

LTE band 5							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.09	1.09	20407	824.7	1.29	1.32
20525	836.5	1.09	1.09	20525	836.5	1.30	1.31
20643	848.3	1.09	1.09	20643	848.3	1.31	1.31

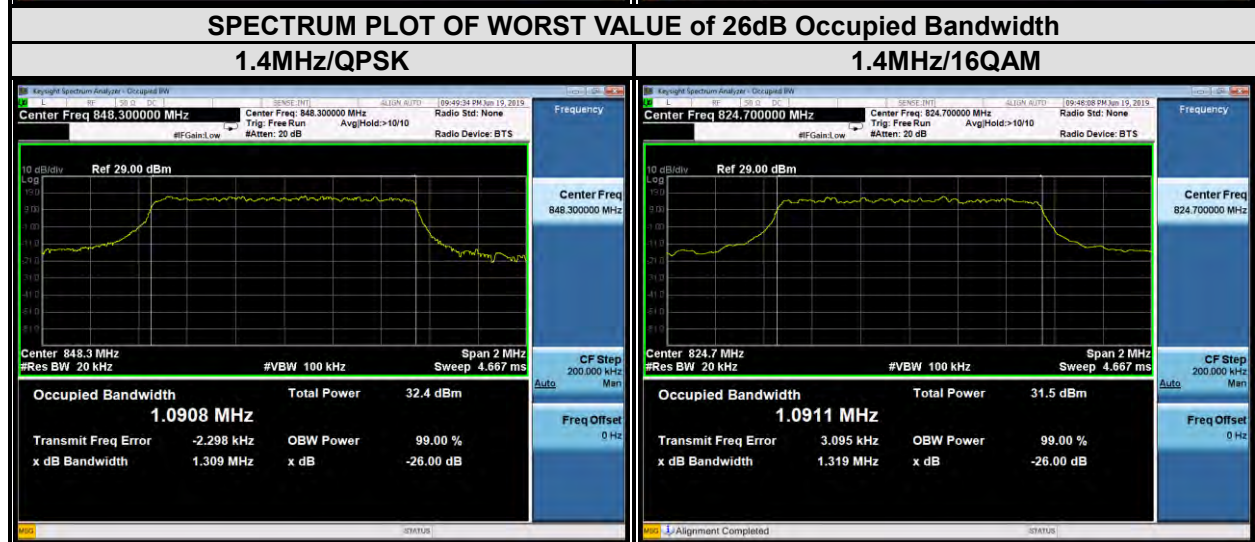
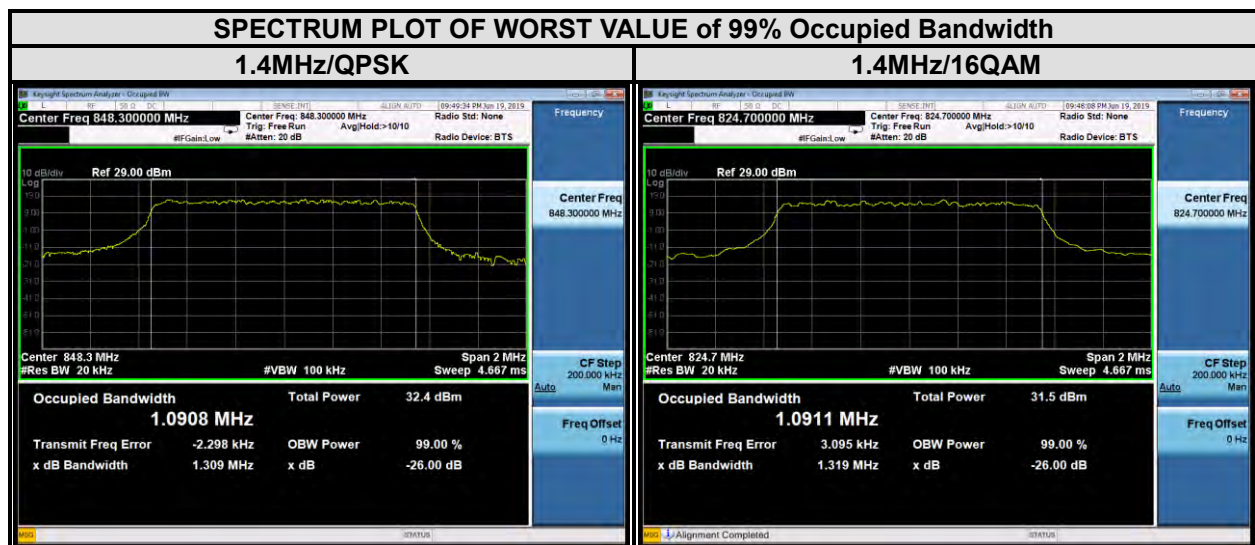




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

LTE band 5							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20415	825.5	2.69	2.69	20415	825.5	3.03	3.07
20525	836.5	2.69	2.69	20525	836.5	3.03	3.08
20635	847.5	2.69	2.69	20635	847.5	3.02	3.02

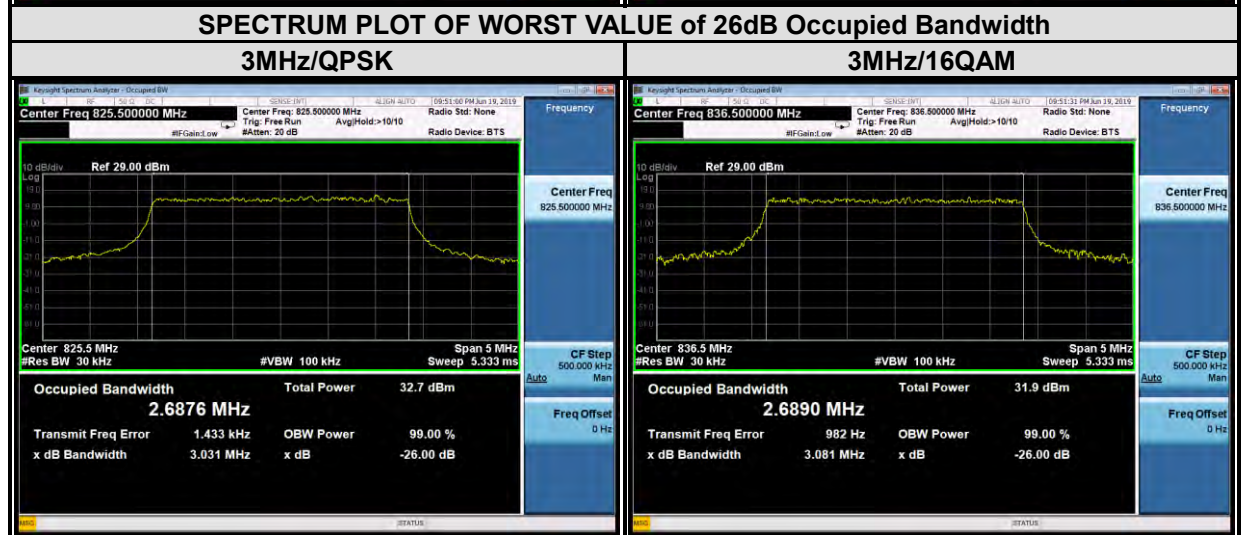
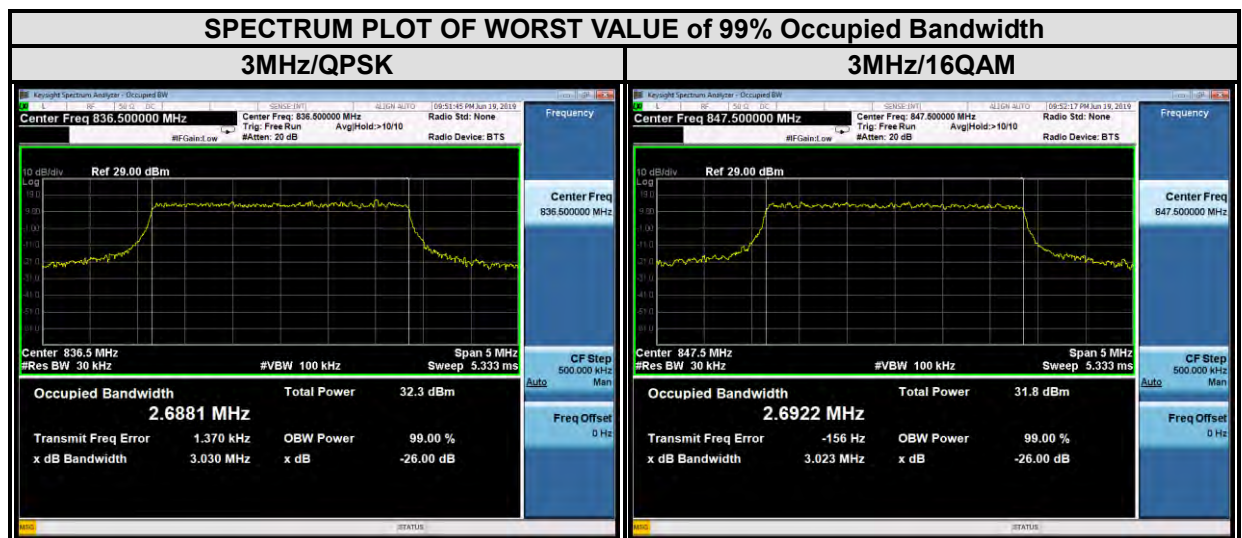




BUREAU
VERITAS

Test Report No.: RF190411W001-3

LTE band 5							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.49	4.48	20425	826.5	5.09	5.13
20525	836.5	4.48	4.48	20525	836.5	5.10	5.20
20625	846.5	4.48	4.48	20625	846.5	5.18	5.14

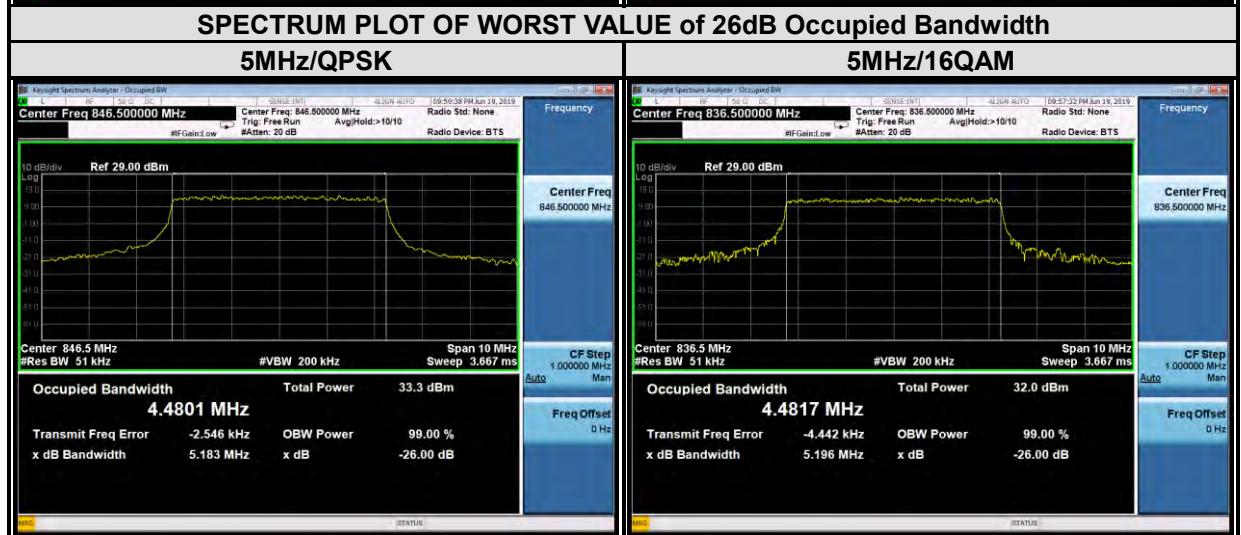
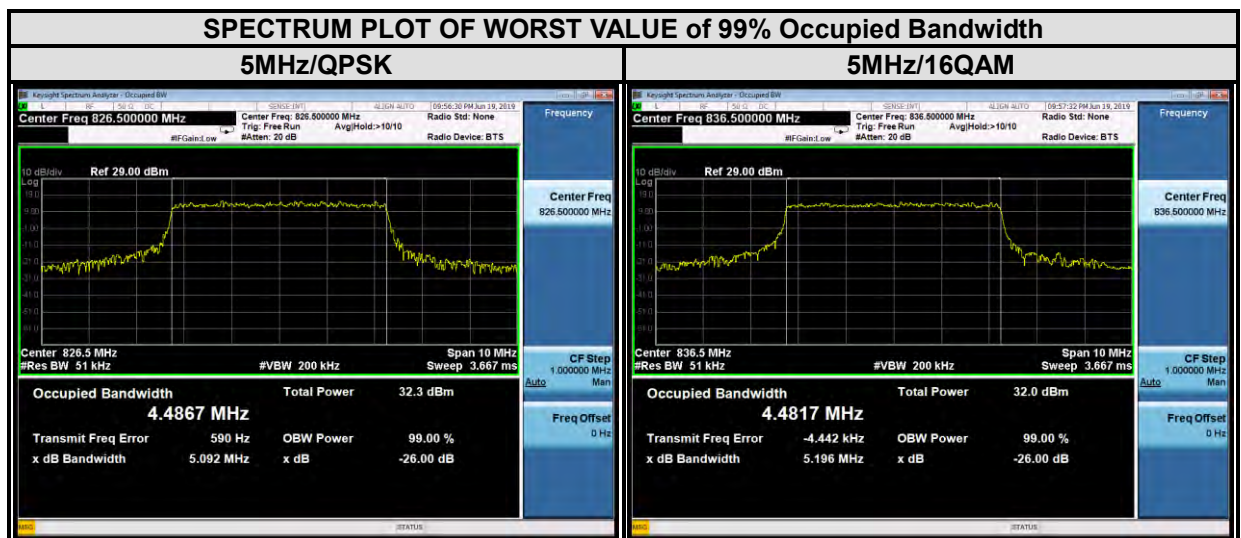




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

LTE band 5							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20450	829	8.95	8.93	20450	829	9.85	9.77
20525	836.5	8.96	8.94	20525	836.5	9.89	9.77
20600	844	8.96	8.93	20600	844	9.97	9.77

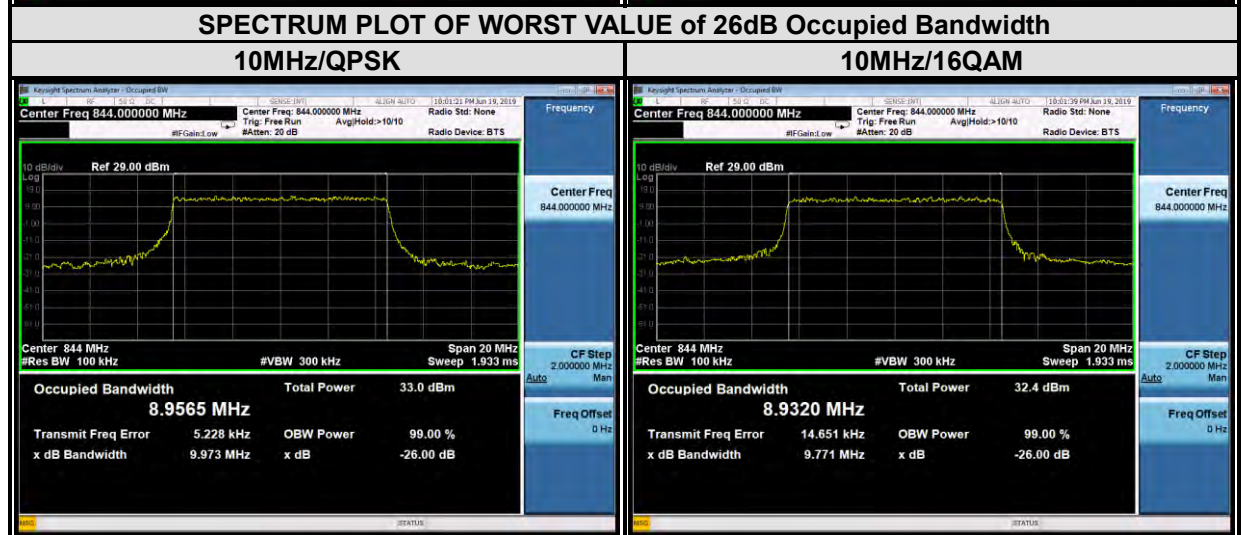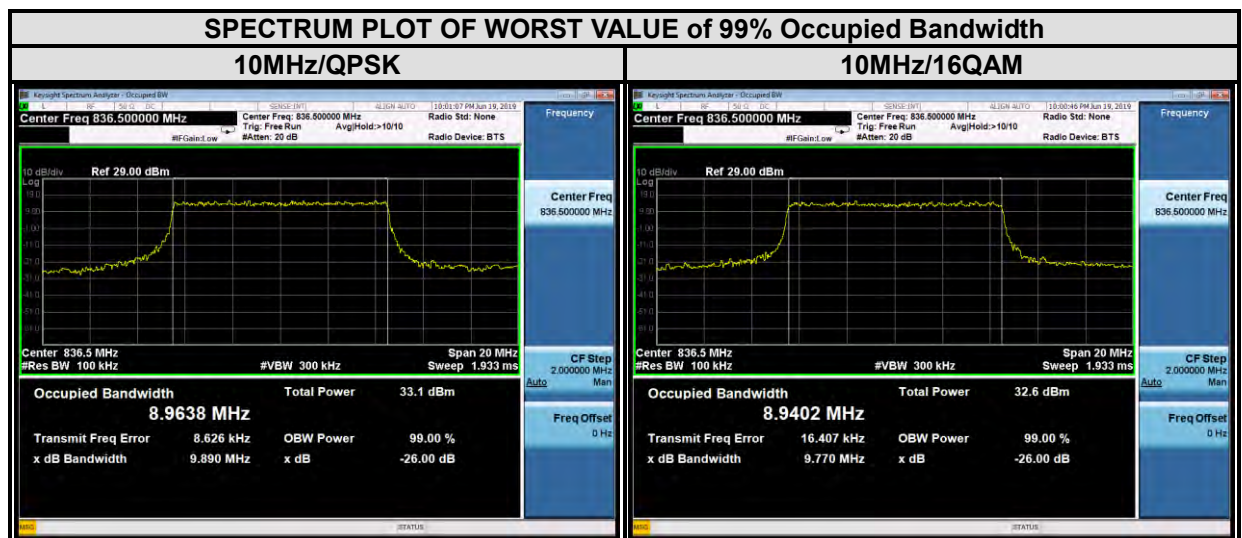


3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

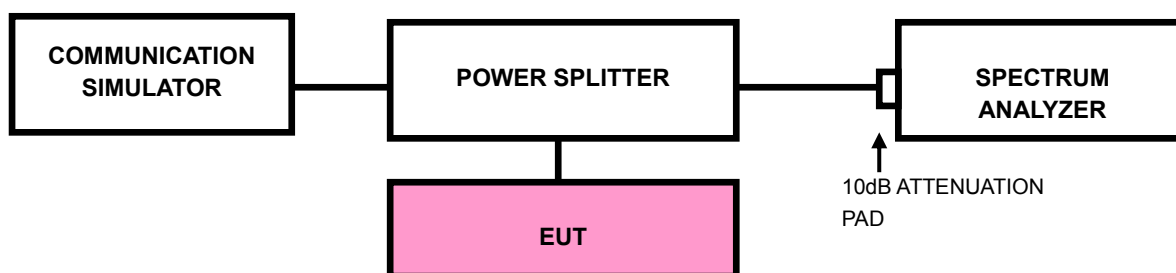



3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. Record the max trace plot into the test report.



BUREAU VERITAS

Test Report No.: RF190411W001-3

3.4.4 TEST RESULTS

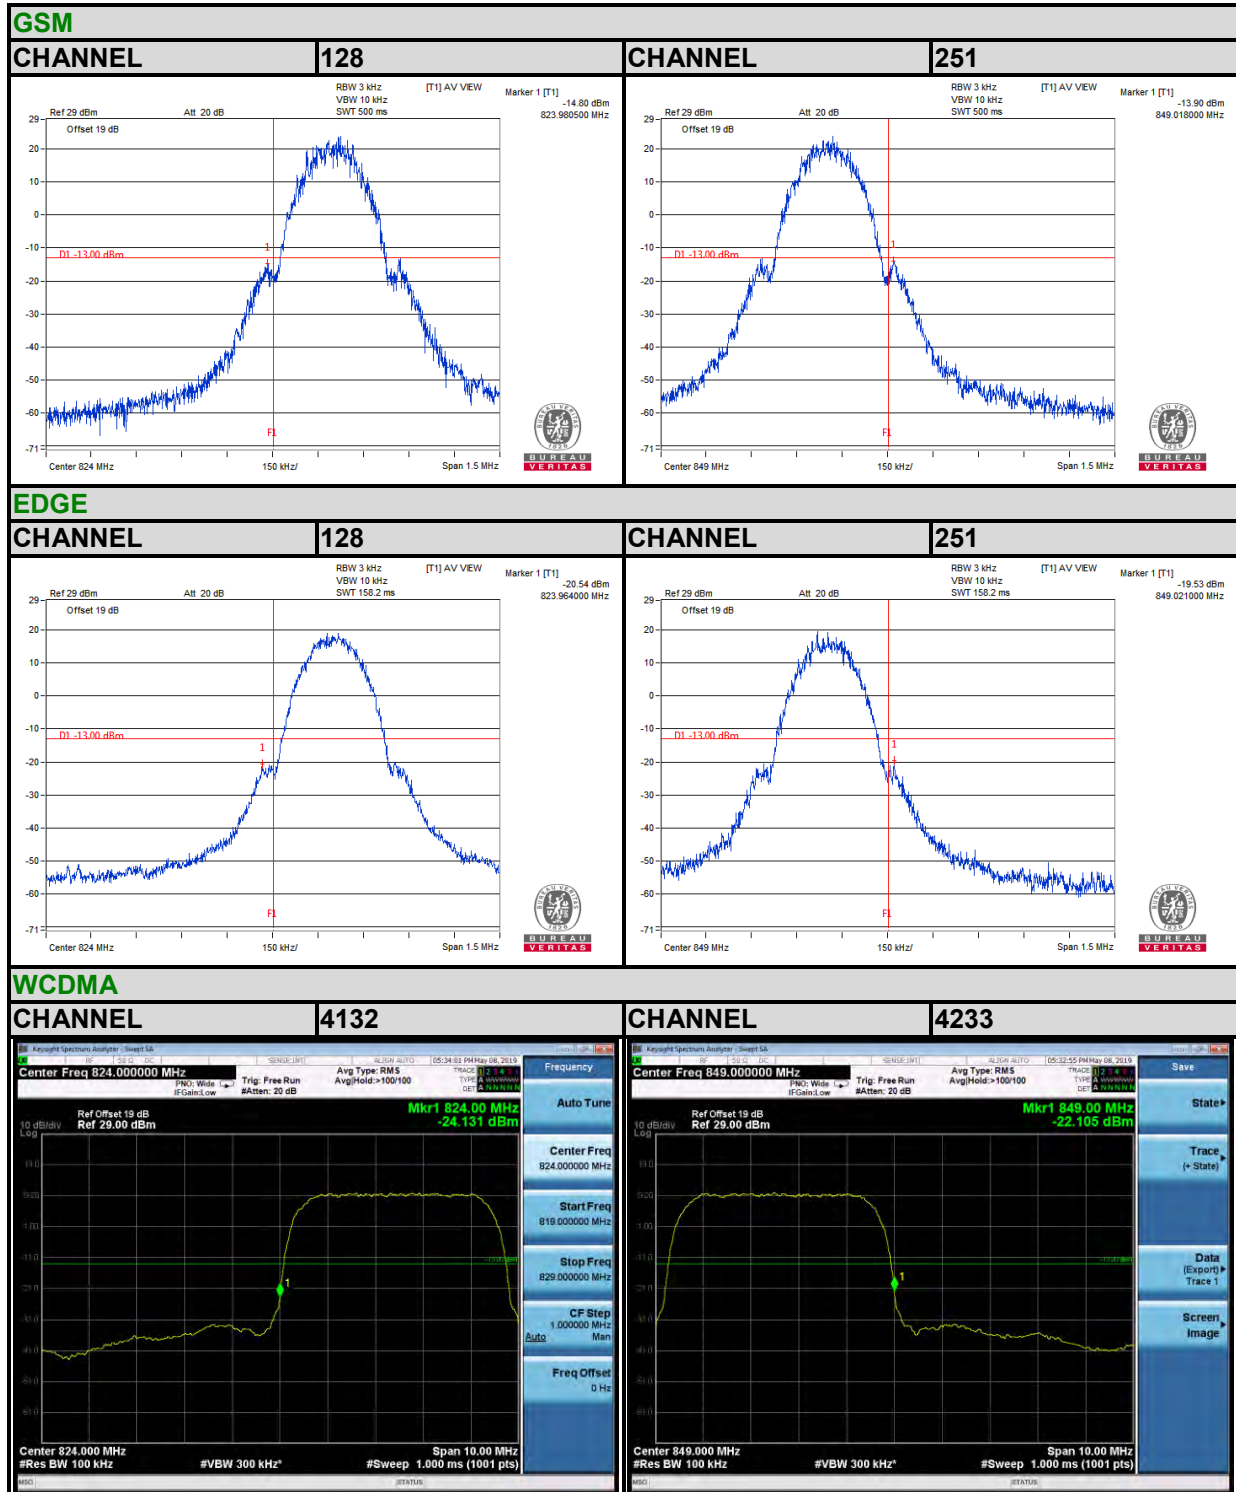



BUREAU VERITAS

Test Report No.: RF190411W001-3

LTE Band5

Channel Bandwidth: 1.4MHz QPSK

CHANNEL	20407	1 RB	CHANNEL	20643	1 RB
----------------	--------------	-------------	----------------	--------------	-------------



LTE Band5

Channel Bandwidth: 1.4MHz QPSK

CHANNEL	20407	Full RB	CHANNEL	20643	Full RB
----------------	--------------	----------------	----------------	--------------	----------------






BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 1.4MHz 16QAM

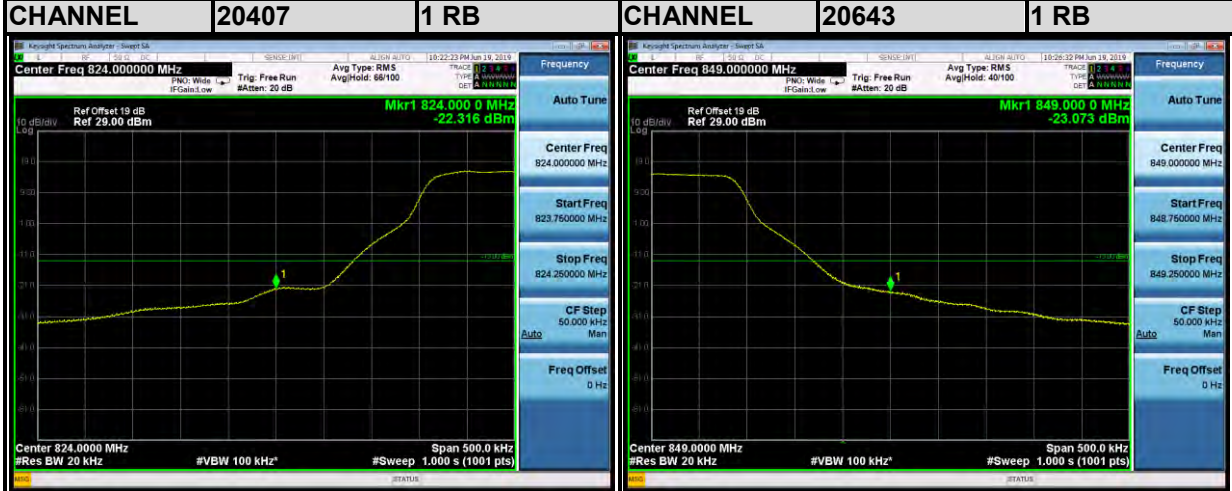

LTE Band5

Channel Bandwidth: 1.4MHz 16QAM

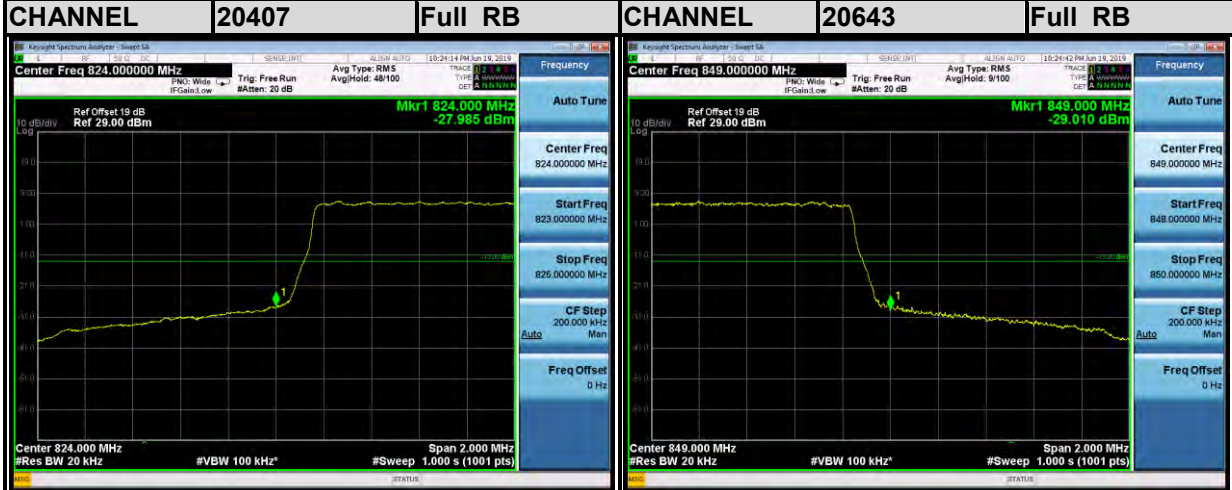



BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 3MHz QPSK



LTE Band5

Channel Bandwidth: 3MHz QPSK

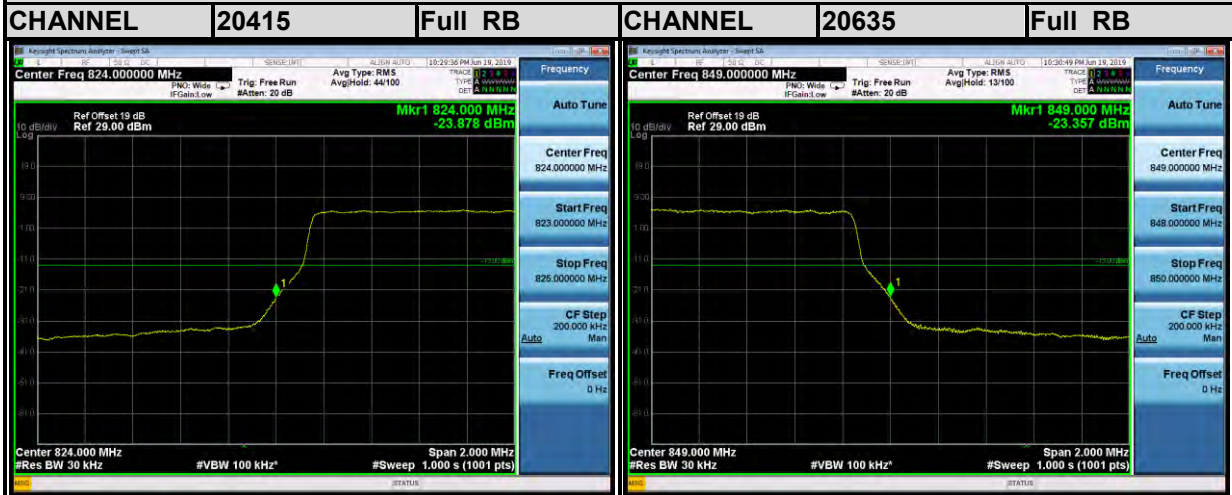



BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 3MHz 16QAM



LTE Band5

Channel Bandwidth: 3MHz 16QAM

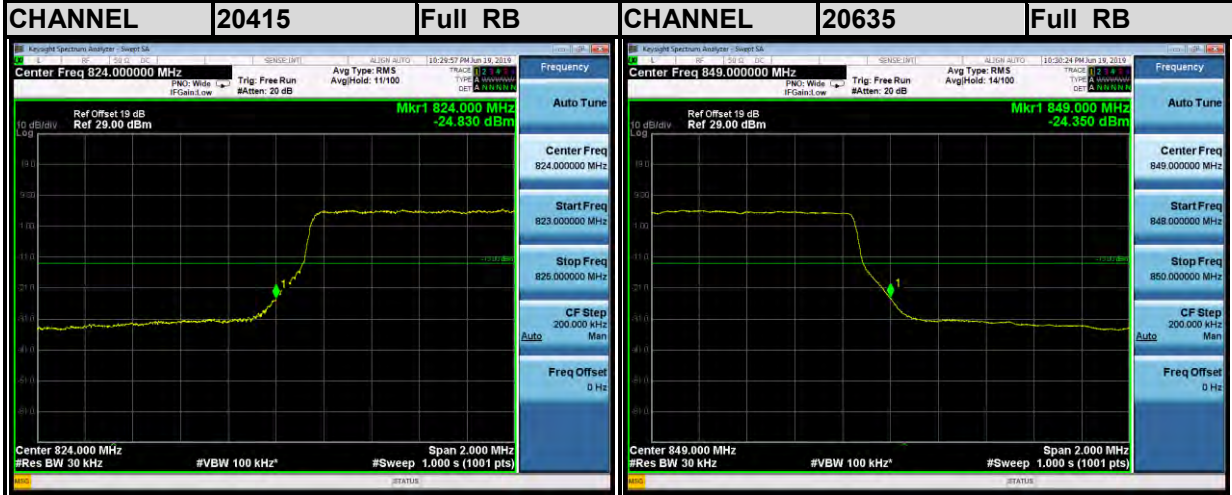




BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 5MHz QPSK

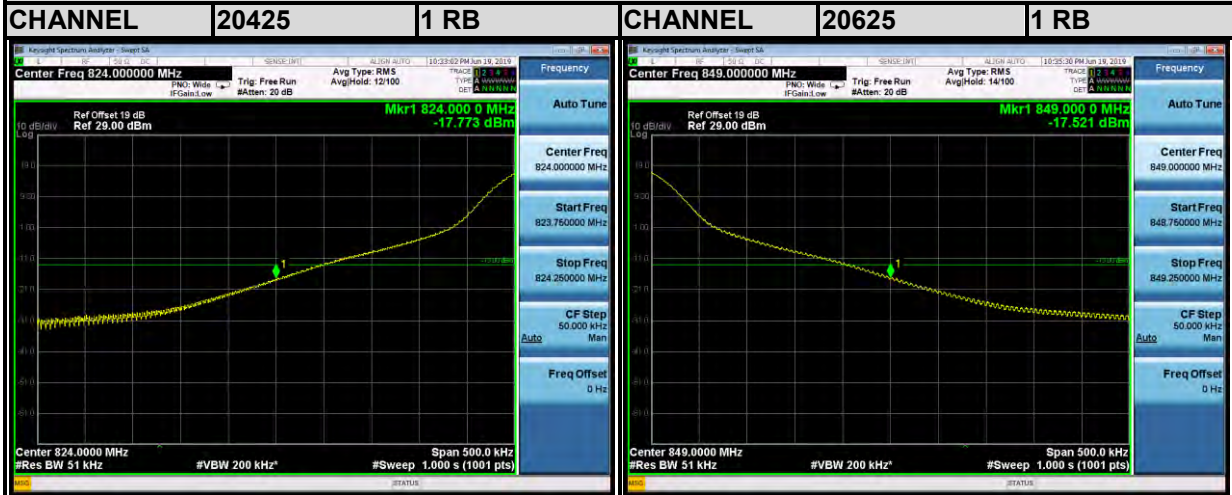

LTE Band5

Channel Bandwidth: 5MHz QPSK

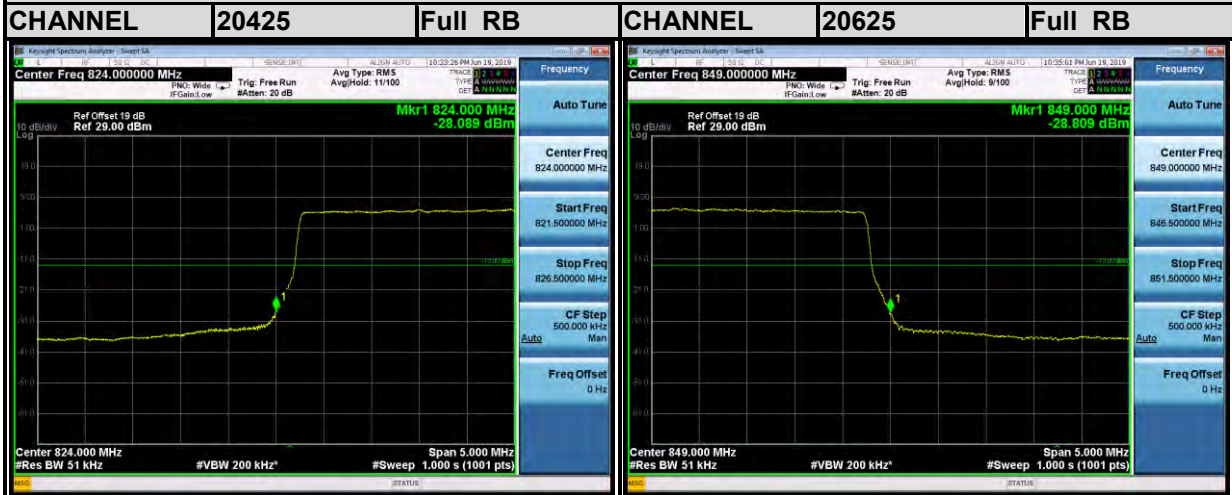




BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 5MHz 16QAM

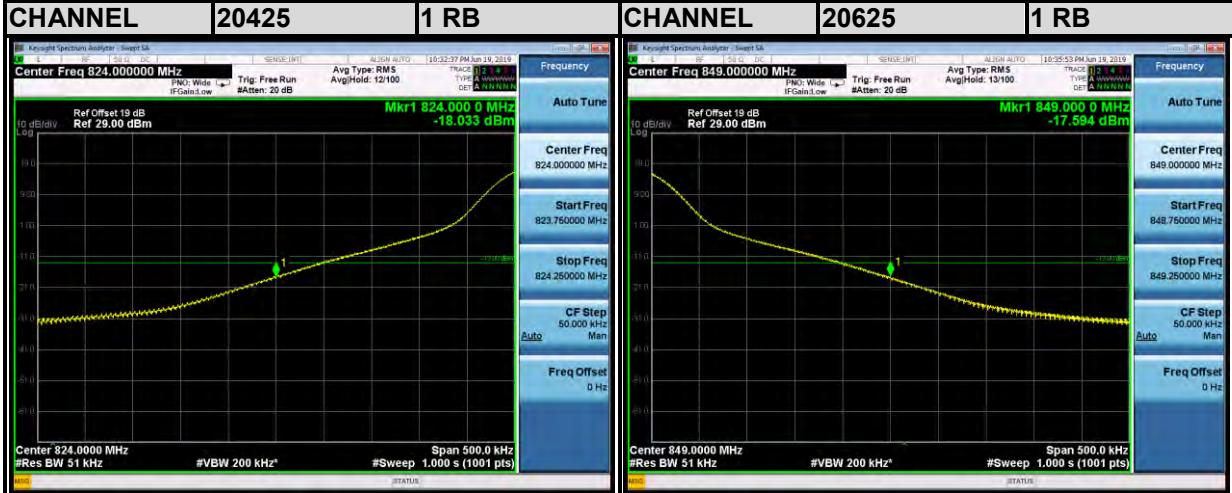

LTE Band5

Channel Bandwidth: 5MHz 16QAM

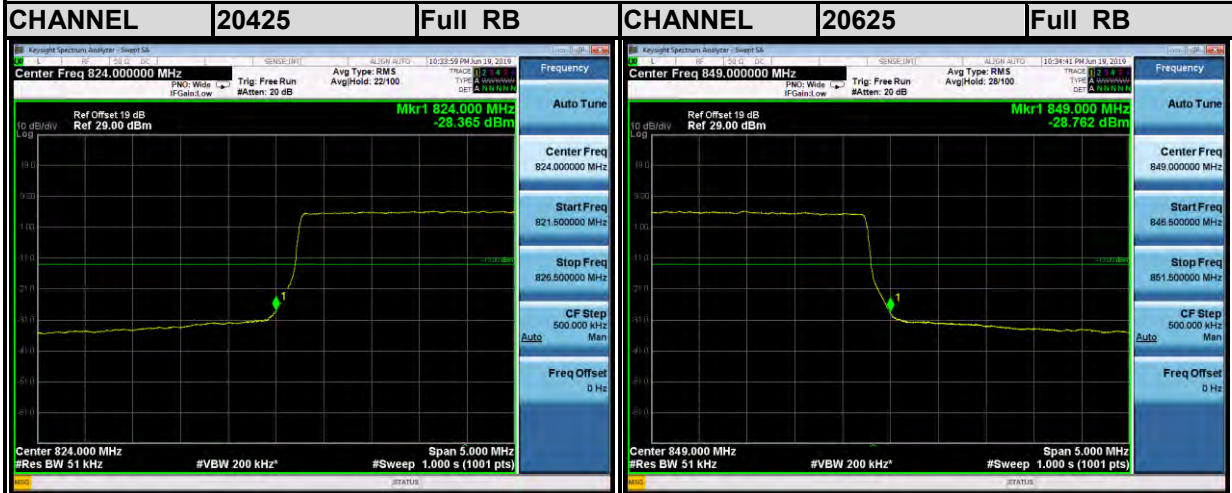




BUREAU VERITAS

Test Report No.: RF190411W001-3


LTE Band5

Channel Bandwidth: 10MHz QPSK

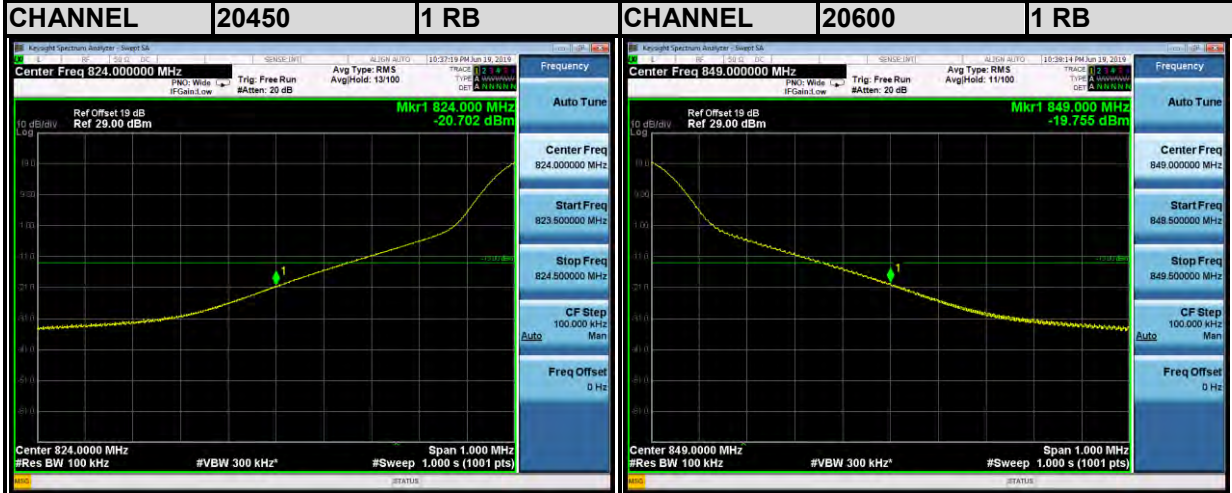

LTE Band5

Channel Bandwidth: 10MHz QPSK

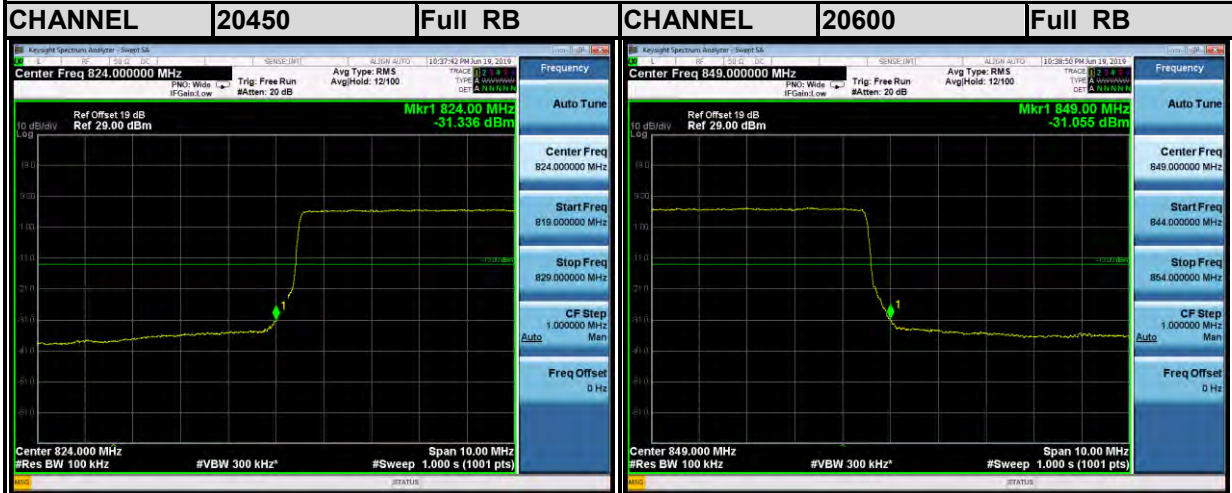



BUREAU VERITAS

Test Report No.: RF190411W001-3



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

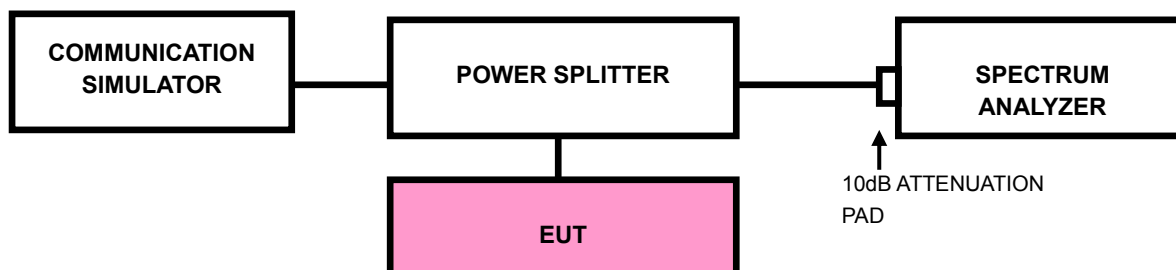




BUREAU VERITAS

Test Report No.: RF190411W001-3

3.5.4 TEST RESULTS

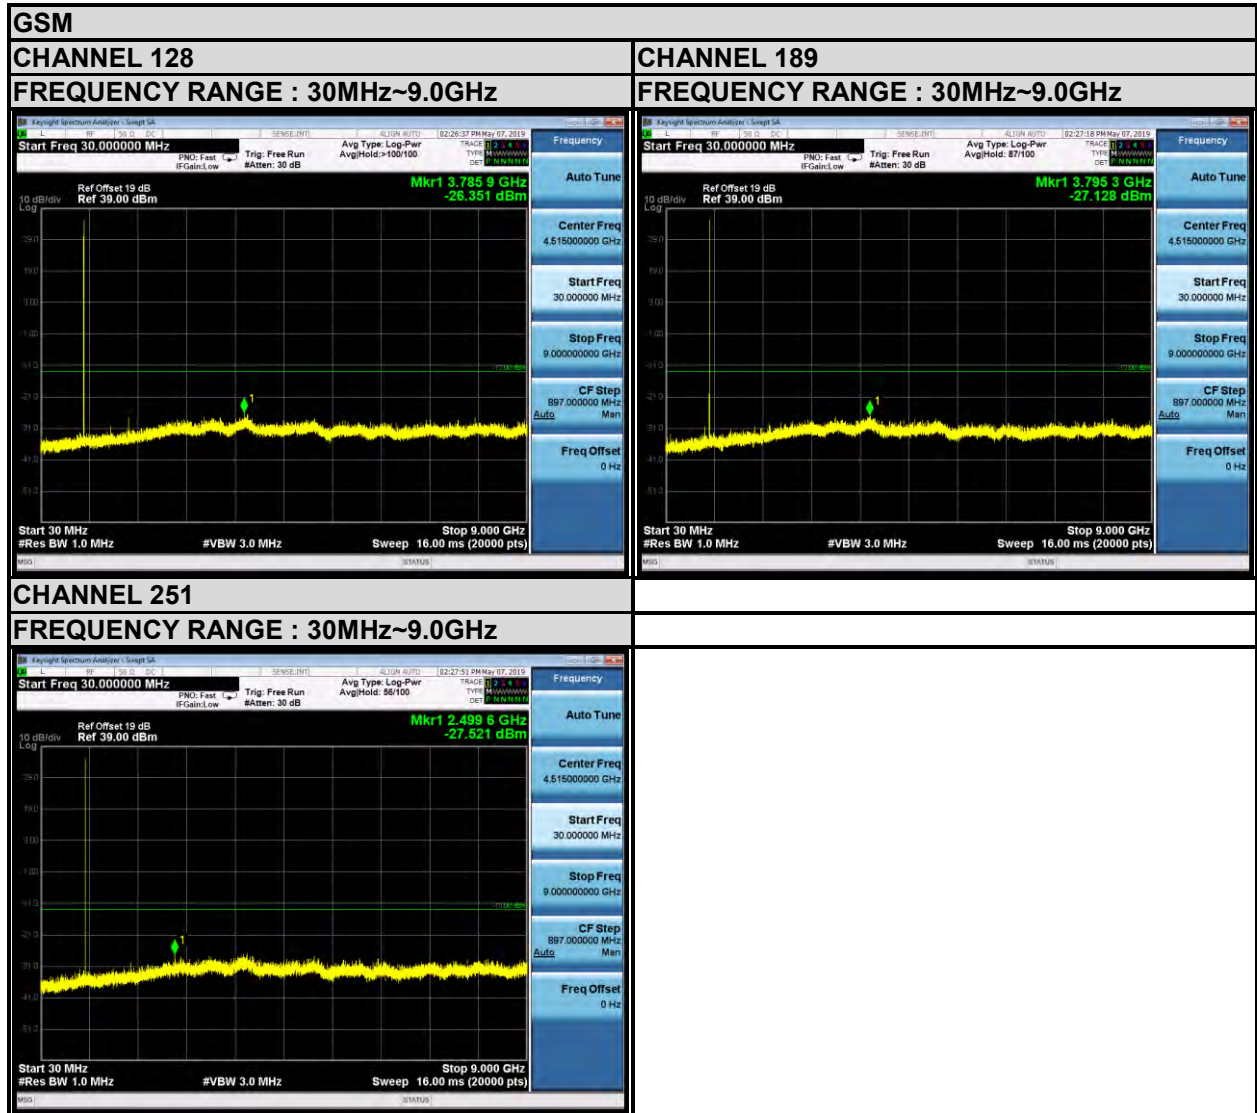



BUREAU VERITAS


Test Report No.: RF190411W001-3





BUREAU VERITAS

Test Report No.: RF190411W001-3

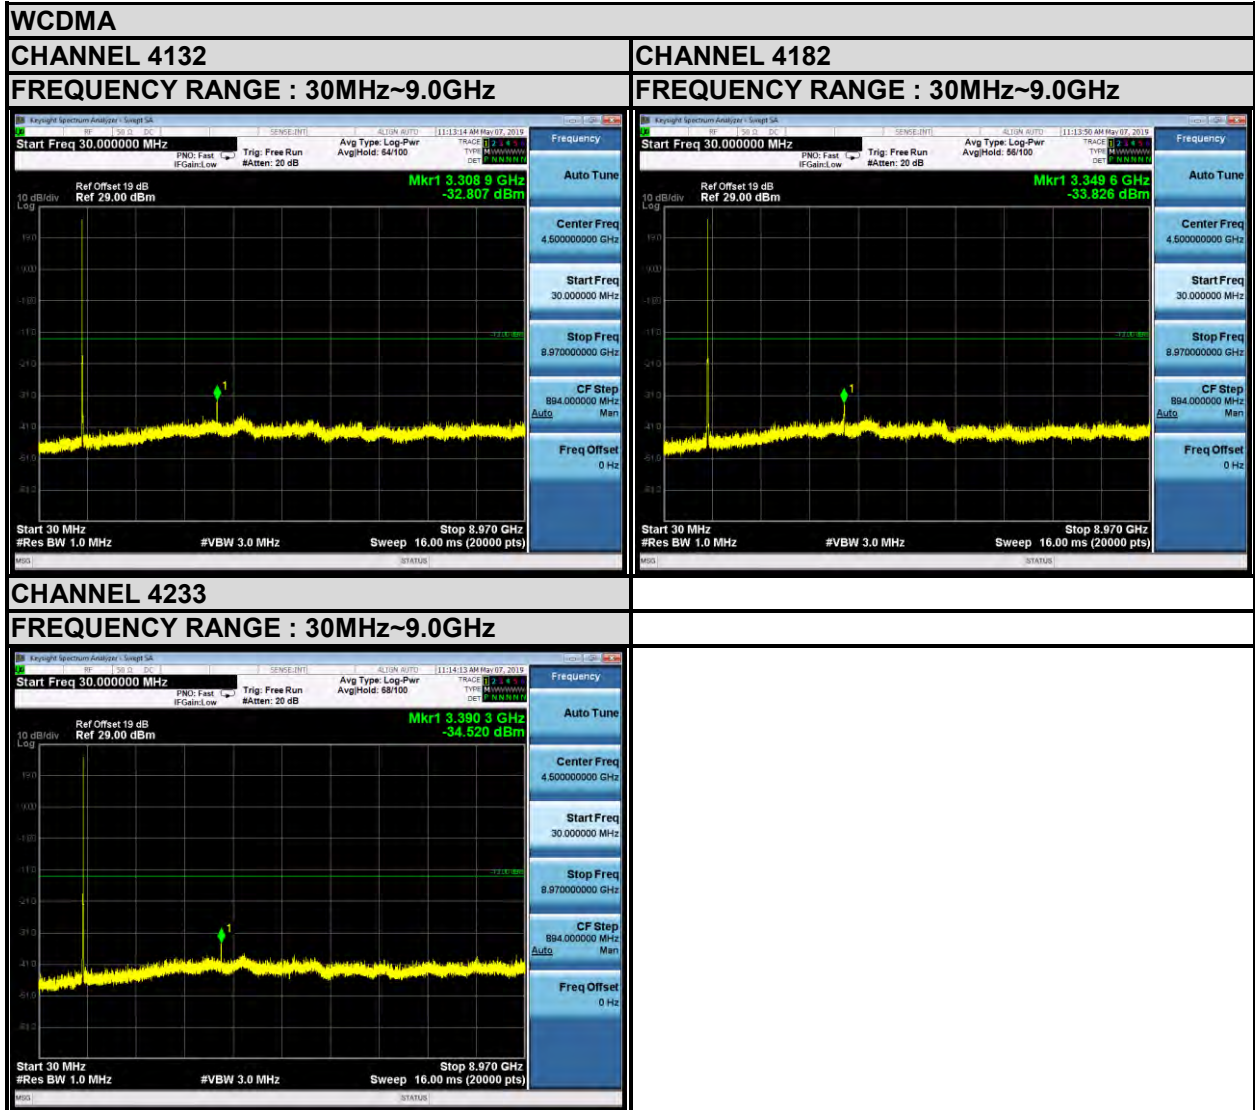



BUREAU VERITAS

Test Report No.: RF190411W001-3






BUREAU VERITAS

Test Report No.: RF190411W001-3

LTE Band 5 (Channel Bandwidth: 3MHz)


CHANNEL 20415

FREQUENCY RANGE : 30MHz~9.0GHz

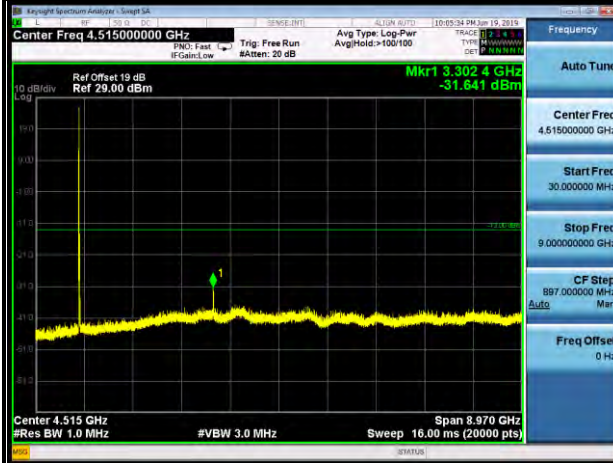


CHANNEL 20525

FREQUENCY RANGE : 30MHz~9.0GHz

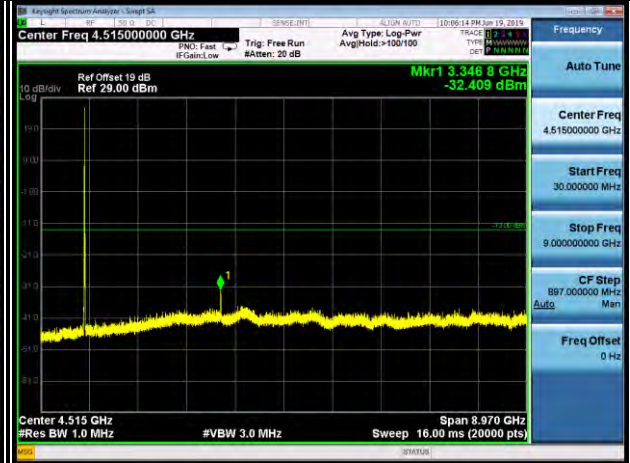

CHANNEL 20635

FREQUENCY RANGE : 30MHz~9.0GHz

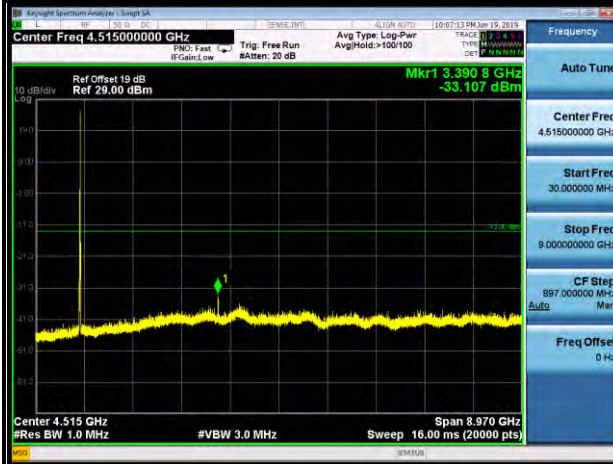



BUREAU VERITAS


Test Report No.: RF190411W001-3





BUREAU VERITAS

Test Report No.: RF190411W001-3

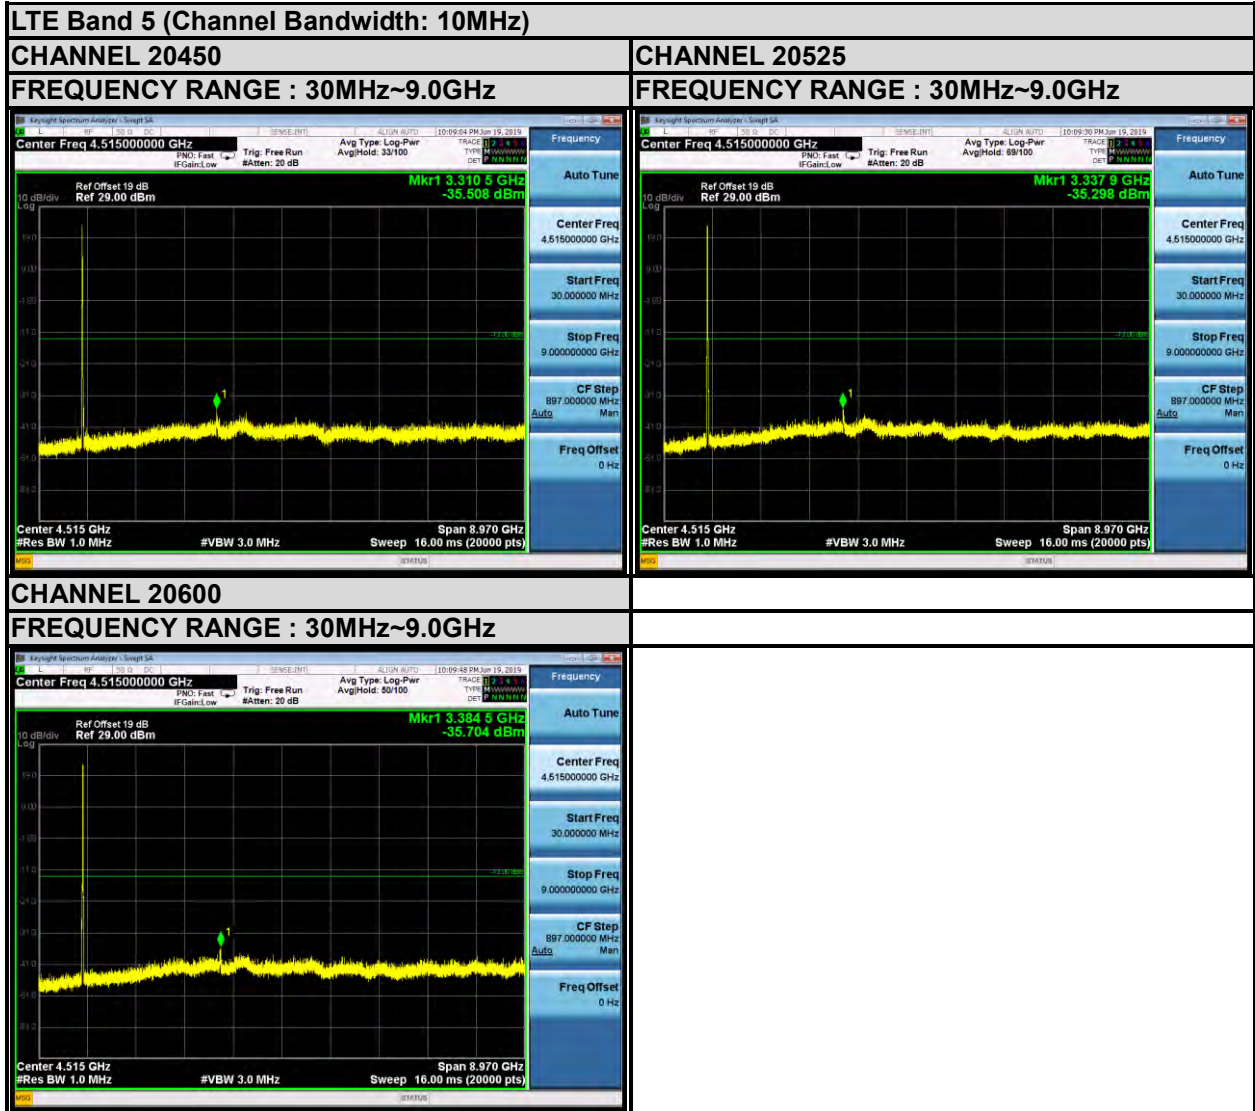



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP


<Below 30MHz>

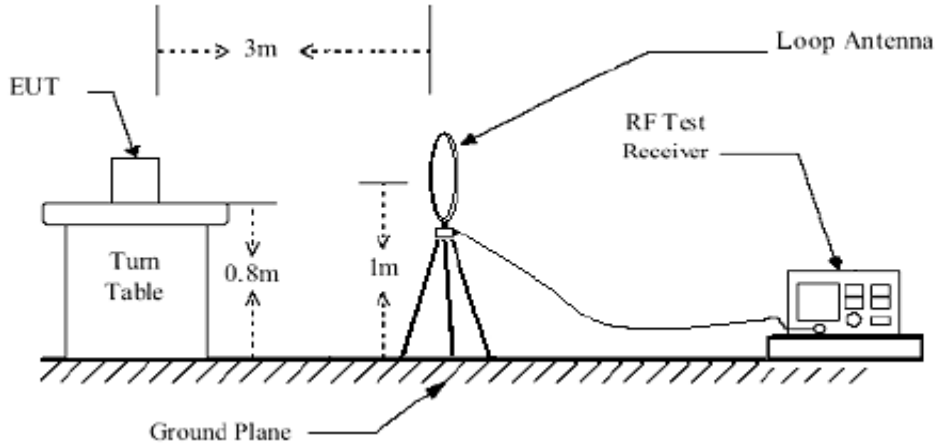

< Frequency Range 30MHz~1GHz >

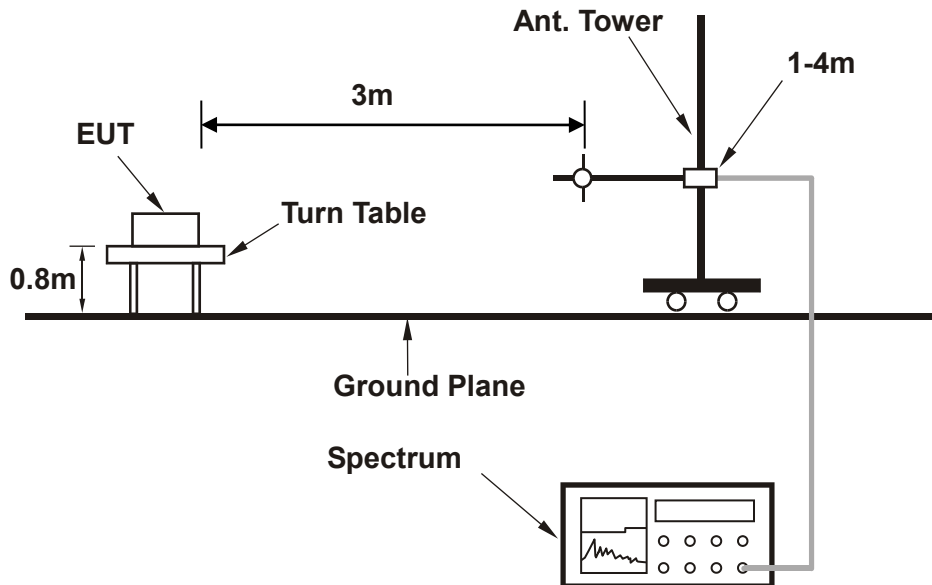

< Frequency Range above 1GHz >

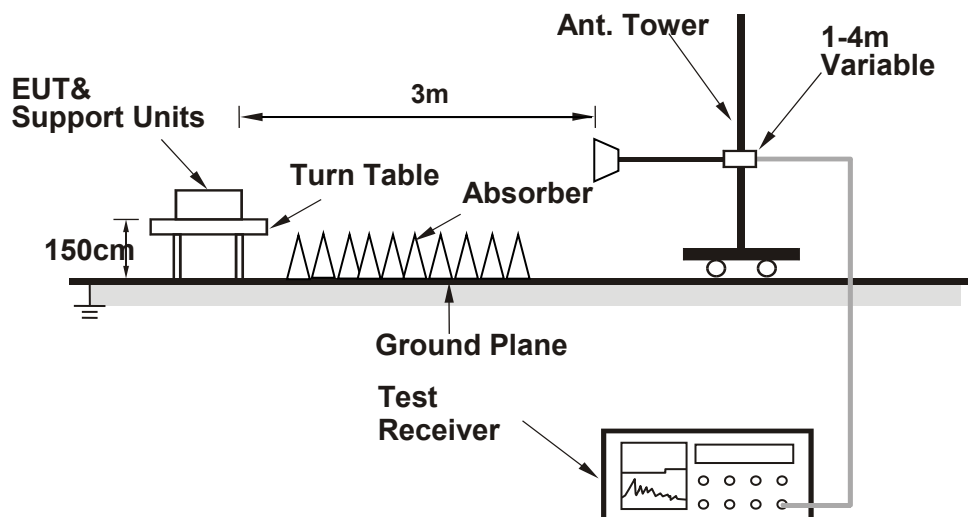

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


30 MHz – 1GHz data:

LTE Band 5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	40.670	-38.95	-52.58	-13.00	-25.95	13.63	Peak	Horizontal
2 PP	105.660	-23.73	-34.44	-13.00	-10.73	10.71	Peak	Horizontal
3	191.990	-29.46	-41.81	-13.00	-16.46	12.35	Peak	Horizontal
4	278.320	-37.92	-53.68	-13.00	-24.92	15.76	Peak	Horizontal
5	422.850	-41.88	-62.08	-13.00	-28.88	20.20	Peak	Horizontal
6	869.050	-31.41	-58.80	-13.00	-18.41	27.39	Peak	Horizontal

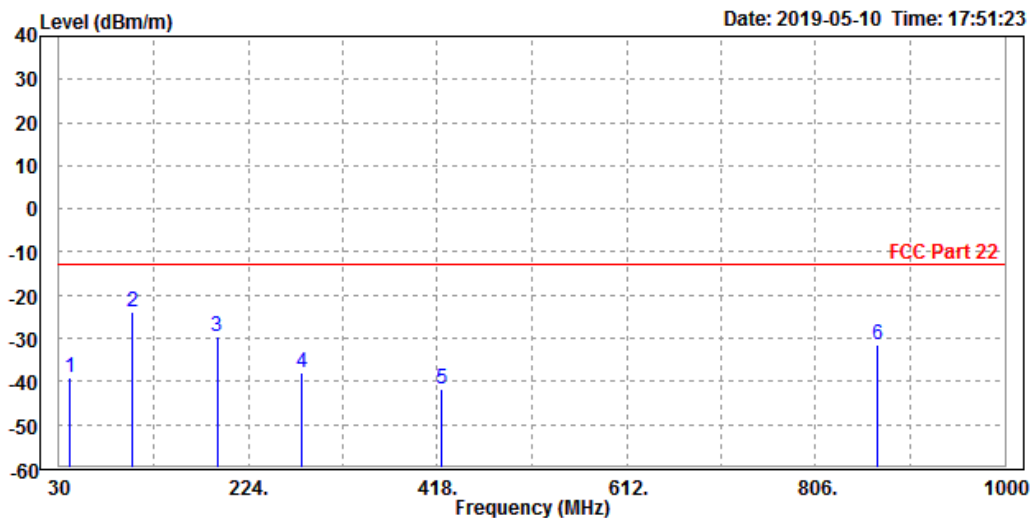




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	30.000	-28.10	-46.37	-13.00	-15.10	18.27	Peak	Vertical
2	40.670	-28.27	-42.08	-13.00	-15.27	13.81	Peak	Vertical
3	56.190	-34.03	-42.10	-13.00	-21.03	8.07	Peak	Vertical
4	94.020	-29.01	-39.38	-13.00	-16.01	10.37	Peak	Vertical
5	198.780	-32.03	-44.59	-13.00	-19.03	12.56	Peak	Vertical
6	278.320	-37.47	-53.38	-13.00	-24.47	15.91	Peak	Vertical

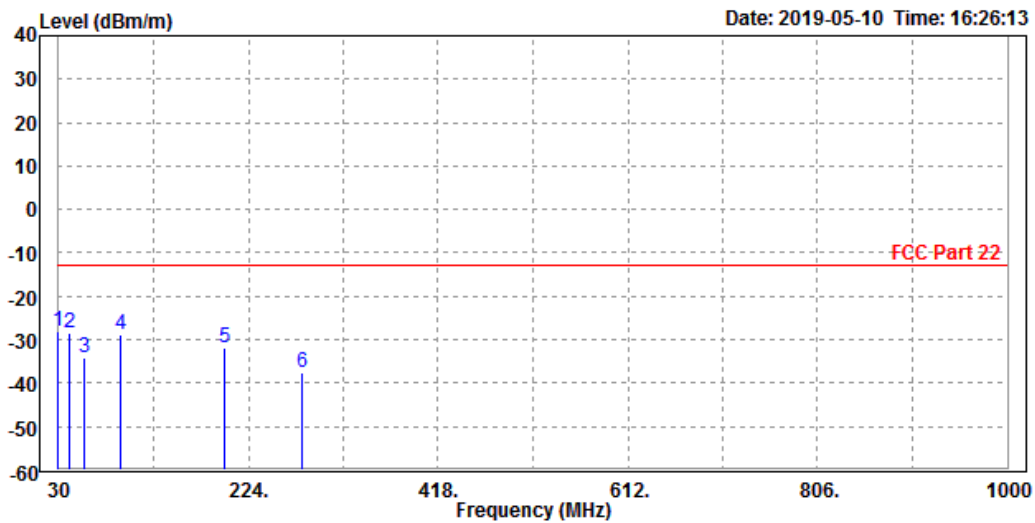



BUREAU VERITAS

Test Report No.: RF190411W001-3

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

GSM 850

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-63.85	-58.88	-13.00	-50.85	-4.97	Peak	Horizontal
2 PP	2472.000	-59.22	-57.56	-13.00	-46.22	-1.66	Peak	Horizontal

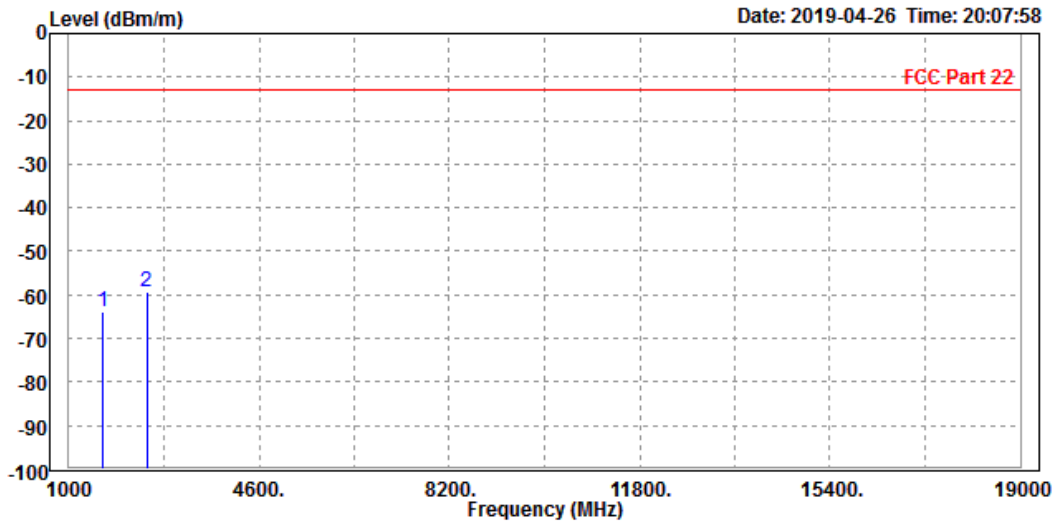




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1648.000	-57.84	-54.29	-13.00	-44.84	-3.55	Peak	Vertical
2	2472.000	-59.24	-59.07	-13.00	-46.24	-0.17	Peak	Vertical

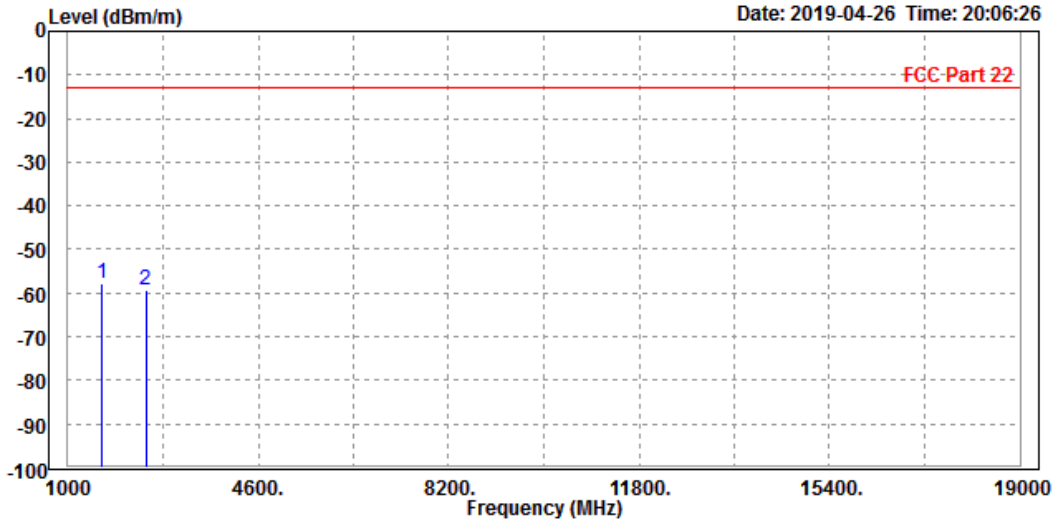




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-49.41	-44.59	-13.00	-36.41	-4.82	Peak	Horizontal
2	2508.000	-59.66	-58.06	-13.00	-46.66	-1.60	Peak	Horizontal

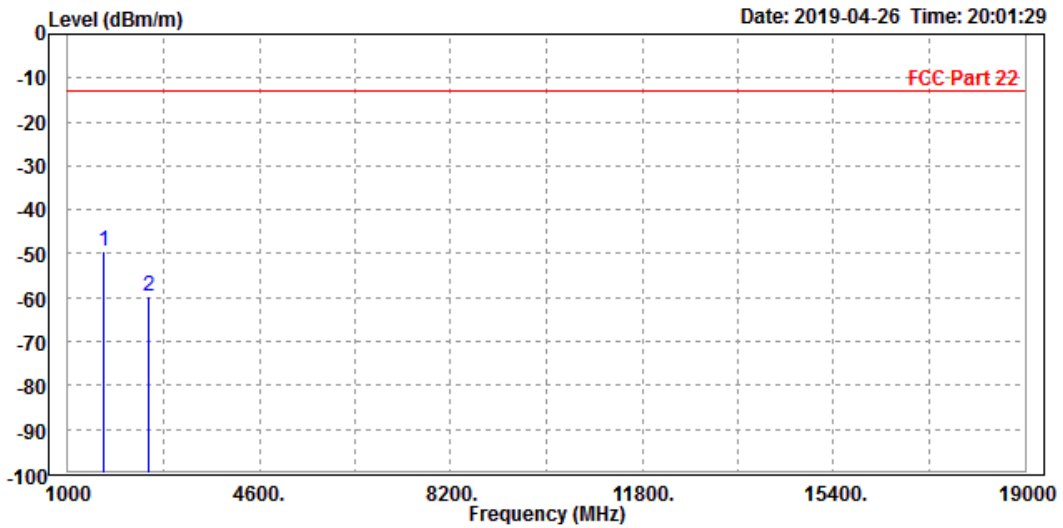




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-60.72	-57.34	-13.00	-47.72	-3.38	Peak	Vertical
2 PP	2508.000	-58.96	-58.83	-13.00	-45.96	-0.13	Peak	Vertical

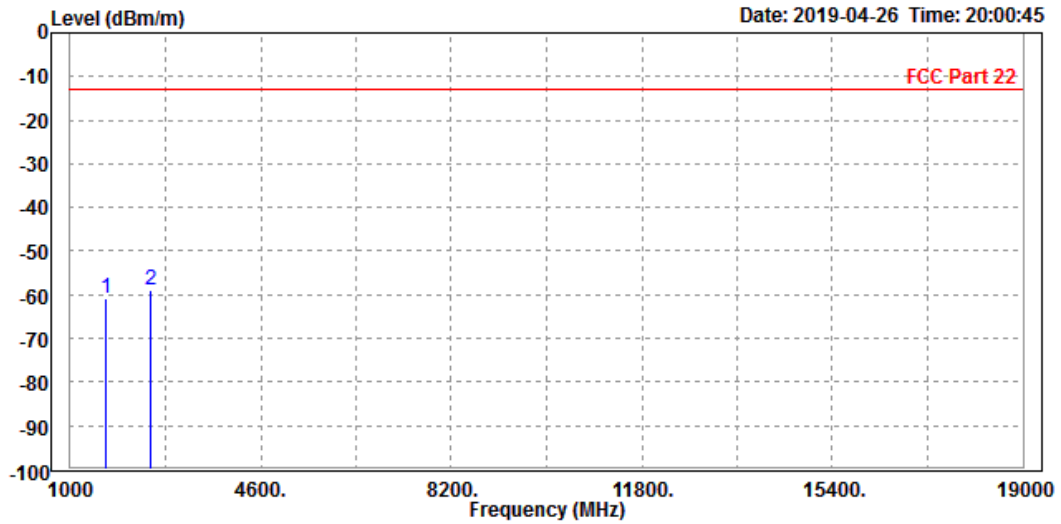




BUREAU VERITAS

Test Report No.: RF190411W001-3

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-62.93	-58.41	-13.00	-49.93	-4.52	Peak	Horizontal
2 PP	2544.000	-61.55	-60.08	-13.00	-48.55	-1.47	Peak	Horizontal

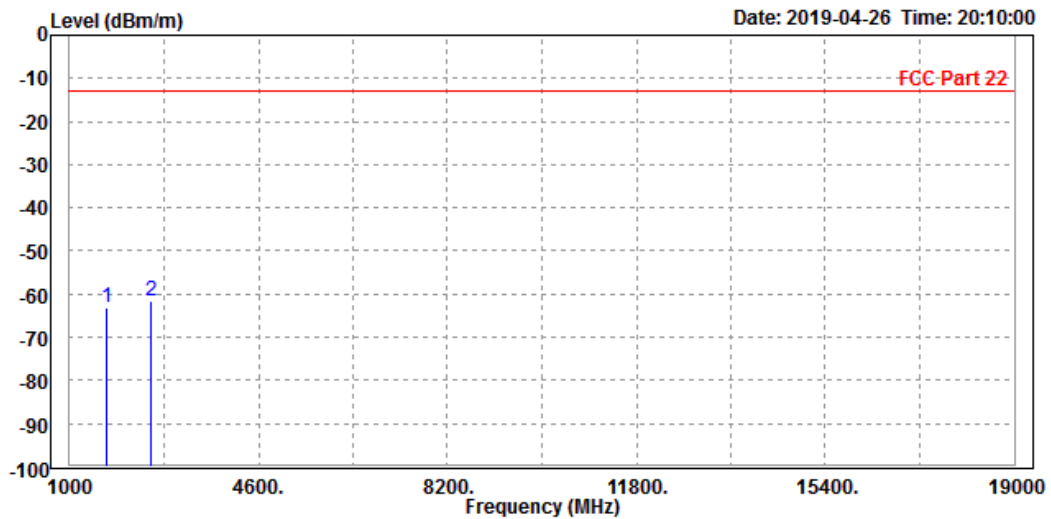




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1696.000	-60.15	-57.05	-13.00	-47.15	-3.10	Peak	Vertical
2 PP	2544.000	-59.56	-59.58	-13.00	-46.56	0.02	Peak	Vertical

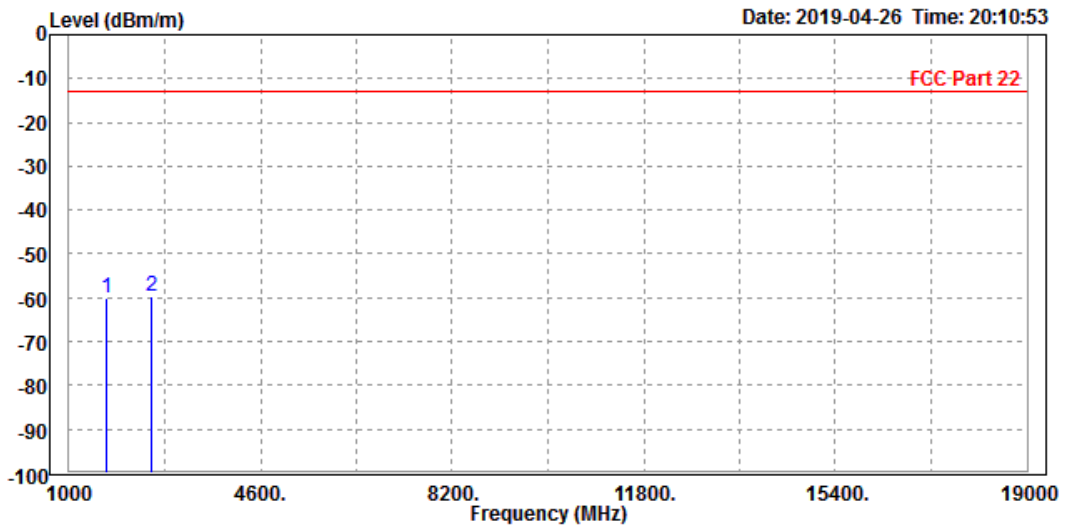



**BUREAU
VERITAS**


Test Report No.: RF190411W001-3

EDGE 850:

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-63.81	-58.84	-13.00	-50.81	-4.97	Peak	Horizontal
2 PP	2476.000	-61.19	-59.54	-13.00	-48.19	-1.65	Peak	Horizontal

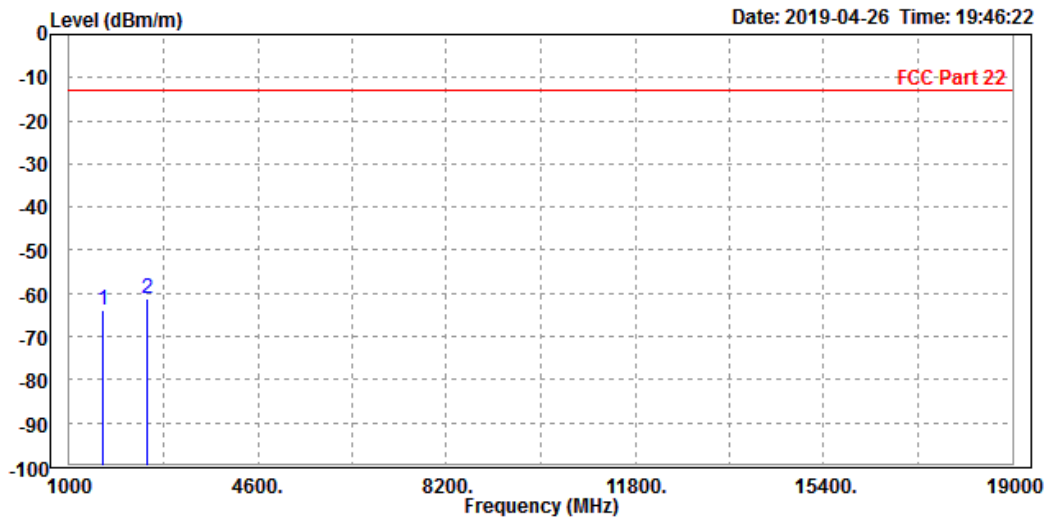




Test Report No.: RF190411W001-3

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-61.92	-58.37	-13.00	-48.92	-3.55	Peak	Vertical
2 PP	2476.000	-59.88	-59.71	-13.00	-46.88	-0.17	Peak	Vertical

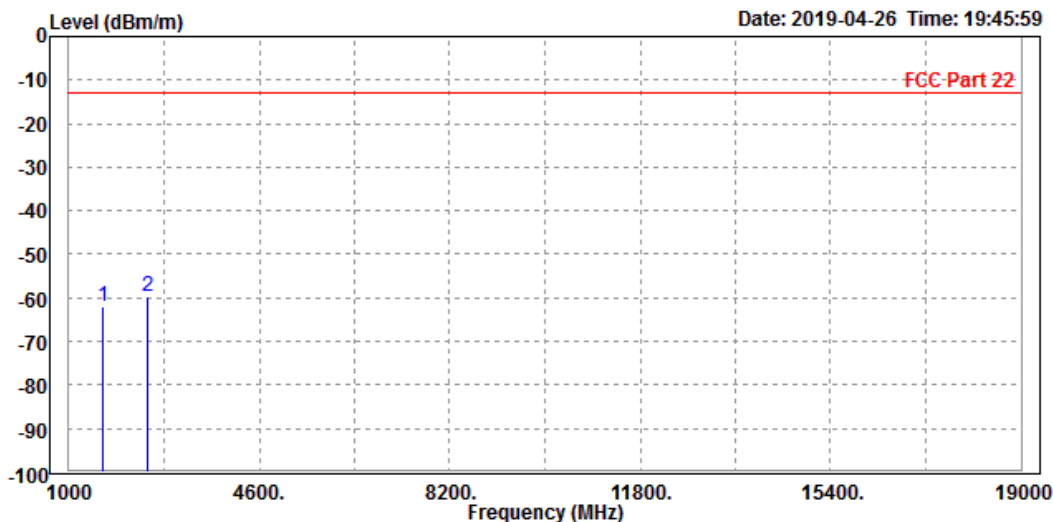




BUREAU VERITAS

Test Report No.: RF190411W001-3

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-61.16	-56.34	-13.00	-48.16	-4.82	Peak	Horizontal
2 PP	2510.000	-59.69	-58.09	-13.00	-46.69	-1.60	Peak	Horizontal

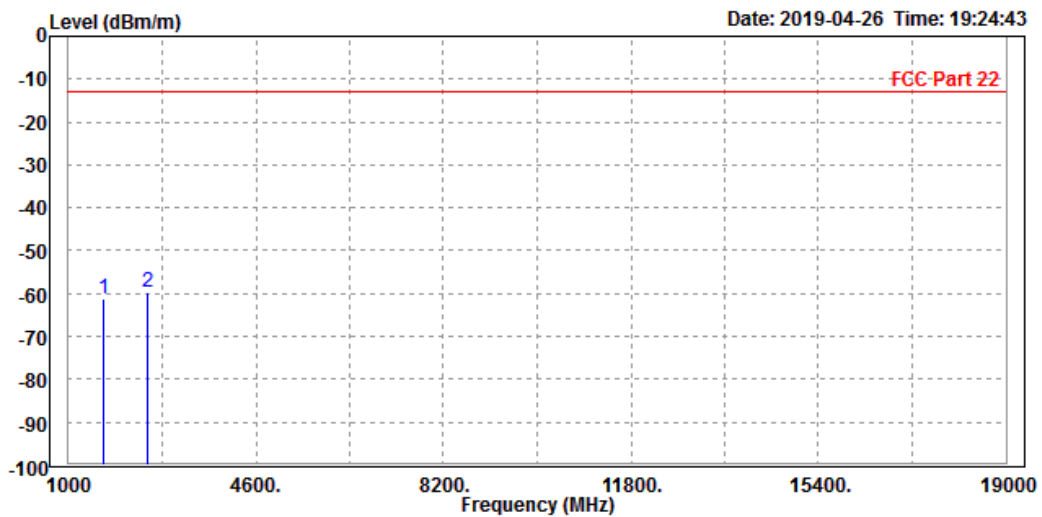




BUREAU
VERITAS

Test Report No.: RF190411W001-3

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-59.25	-55.87	-13.00	-46.25	-3.38	Peak	Vertical
2 PP	2512.000	-56.56	-56.44	-13.00	-43.56	-0.12	Peak	Vertical

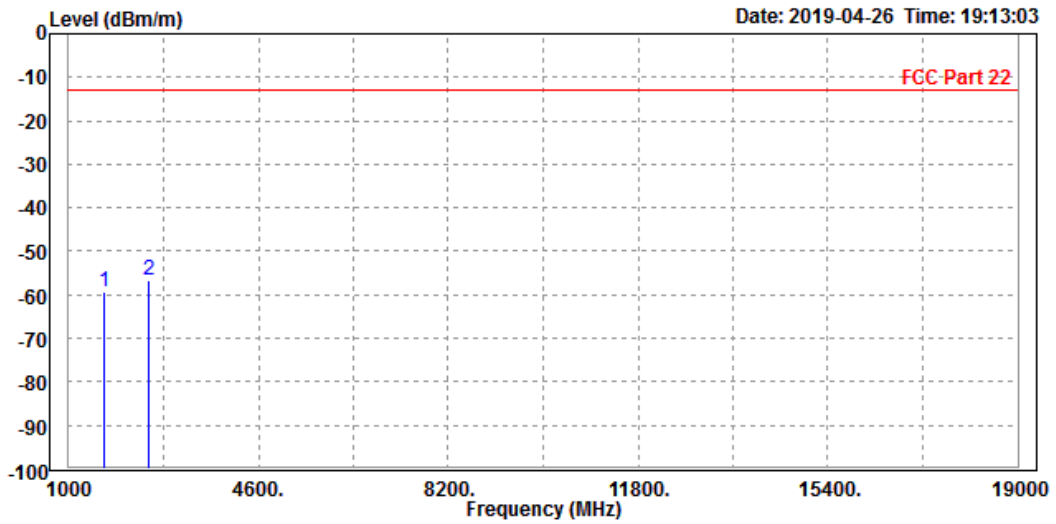




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-61.59	-57.07	-13.00	-48.59	-4.52	Peak	Horizontal
2 PP	2548.000	-61.40	-59.95	-13.00	-48.40	-1.45	Peak	Horizontal

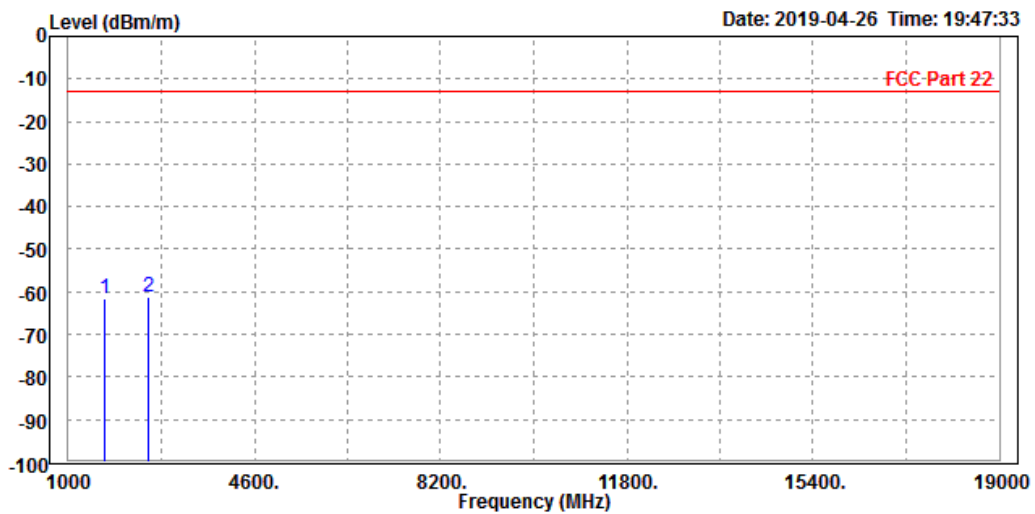




Test Report No.: RF190411W001-3

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-60.36	-57.31	-13.00	-47.36	-3.05	Peak	Vertical
2 PP	2546.000	-60.01	-60.04	-13.00	-47.01	0.03	Peak	Vertical

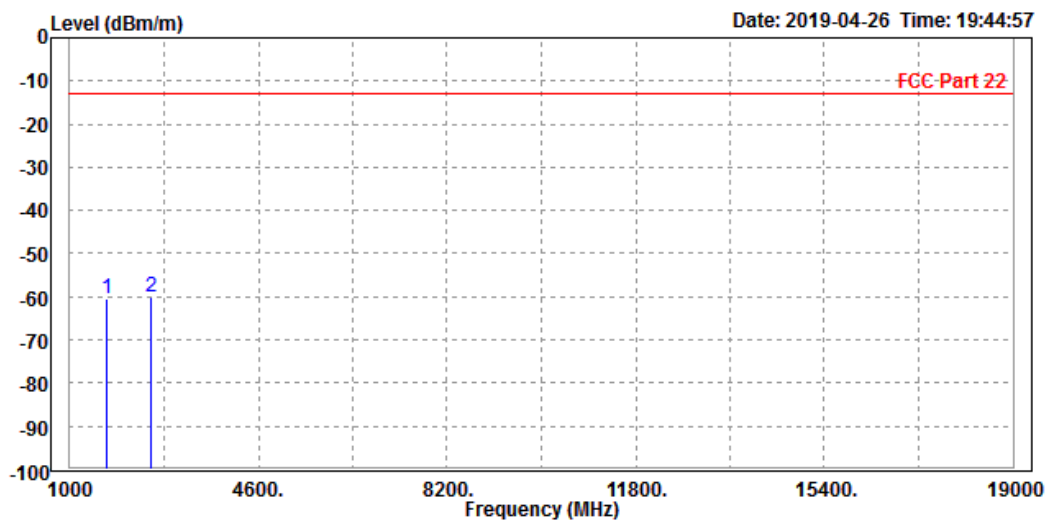



**BUREAU
VERITAS**


Test Report No.: RF190411W001-3

WCDMA Band V:

CH 4132:

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-62.41	-57.44	-13.00	-49.41	-4.97	Peak	Horizontal
2 PP	2478.000	-61.89	-60.24	-13.00	-48.89	-1.65	Peak	Horizontal

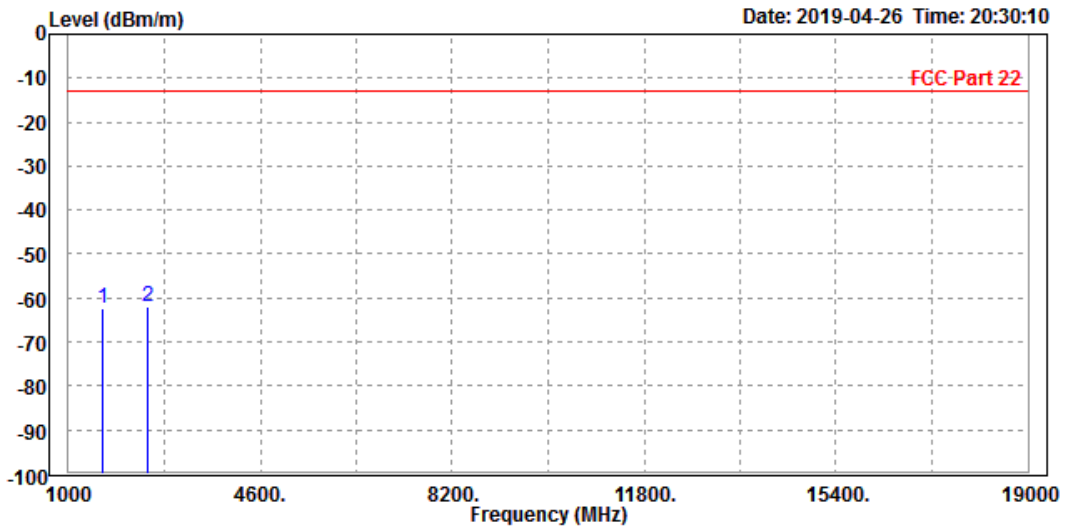




BUREAU
VERITAS

Test Report No.: RF190411W001-3

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-61.41	-57.86	-13.00	-48.41	-3.55	Peak	Vertical
2 PP	2478.000	-56.00	-55.83	-13.00	-43.00	-0.17	Peak	Vertical

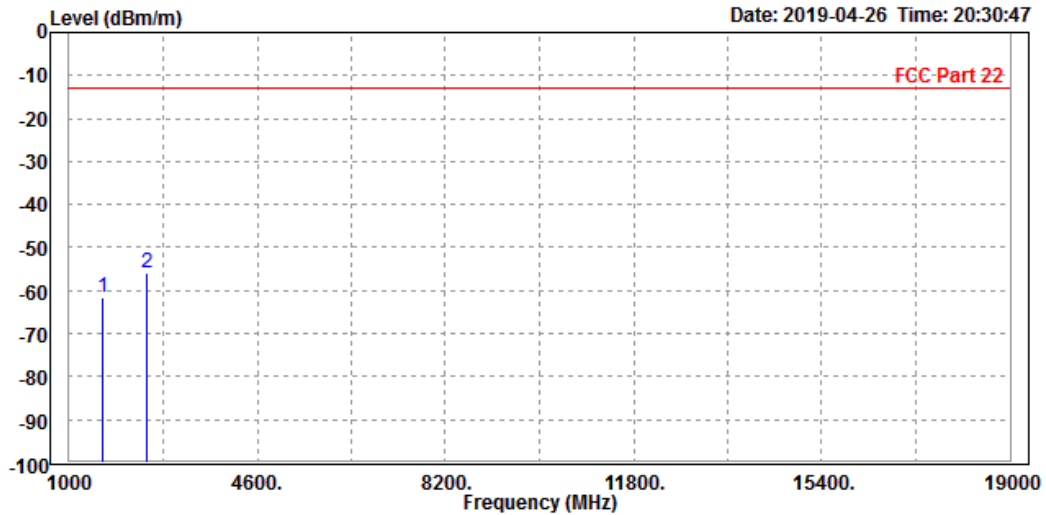




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 4182:

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1666.000	-56.60	-51.78	-13.00	-43.60	-4.82	Peak	Horizontal
2	2508.000	-61.07	-59.47	-13.00	-48.07	-1.60	Peak	Horizontal

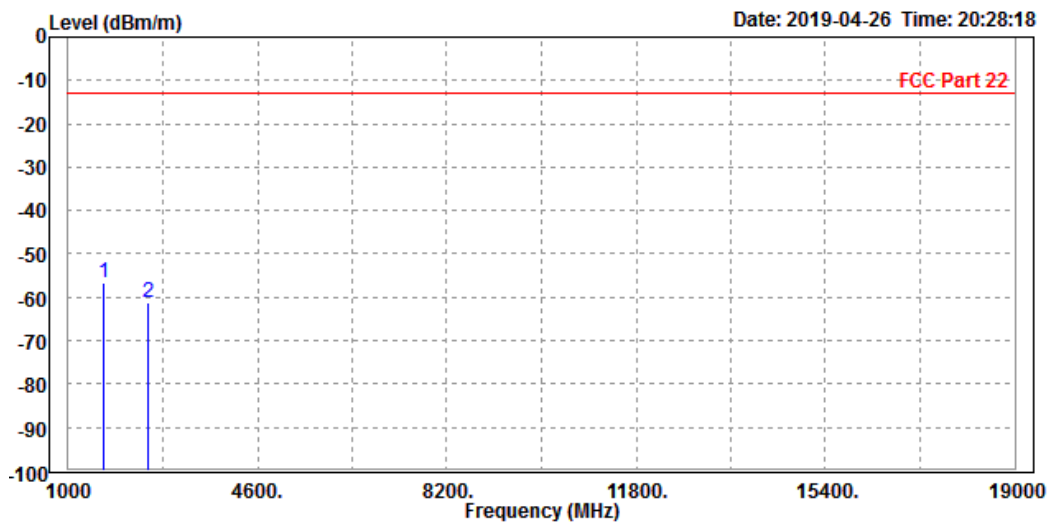




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-61.53	-58.15	-13.00	-48.53	-3.38	Peak	Vertical
2 PP	2508.000	-60.16	-60.03	-13.00	-47.16	-0.13	Peak	Vertical

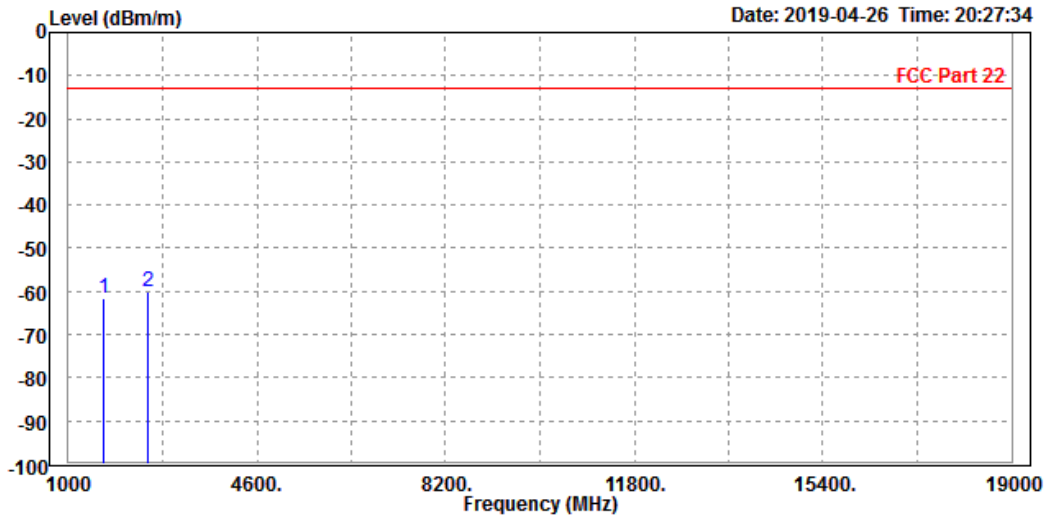




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 4233:

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1684.000	-62.44	-57.77	-13.00	-49.44	-4.67	Peak	Horizontal
2 PP	2538.000	-60.72	-59.23	-13.00	-47.72	-1.49	Peak	Horizontal

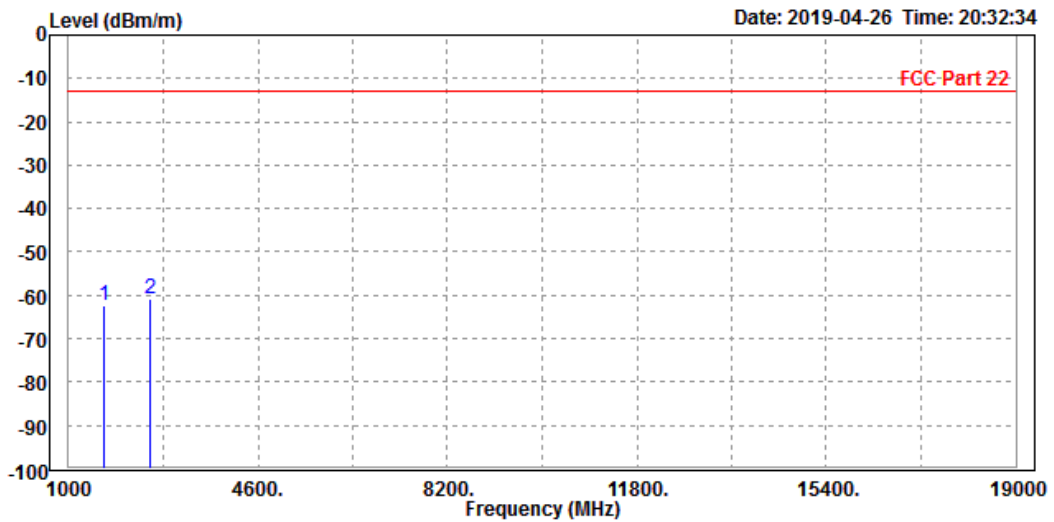




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1684.000	-60.97	-57.76	-13.00	-47.97	-3.21	Peak	Vertical
2	PP 2538.000	-58.33	-58.32	-13.00	-45.33	-0.01	Peak	Vertical

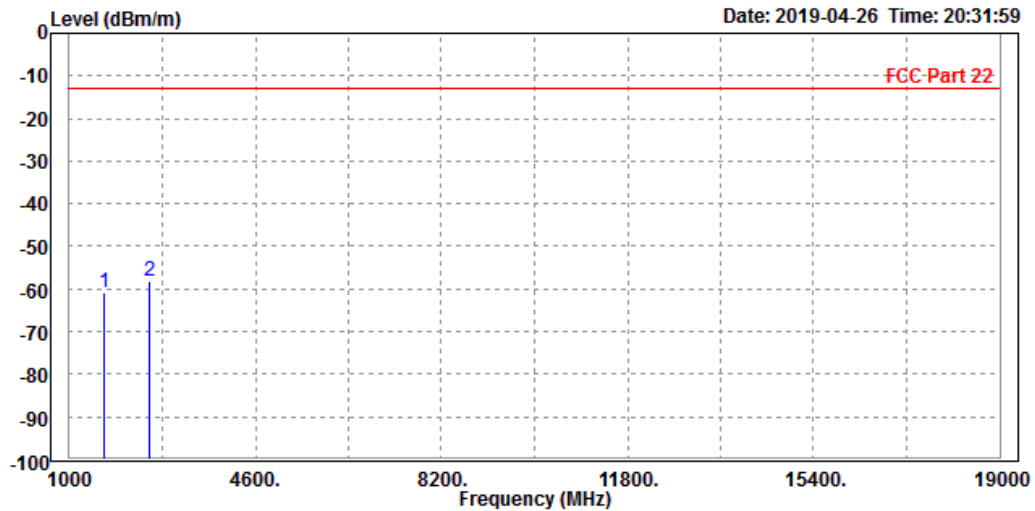



**BUREAU
VERITAS**


Test Report No.: RF190411W001-3

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Po1/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1828.000	-45.49	-42.02	-13.00	-32.49	-3.47	Peak	Horizontal
2	PP 2440.000	-42.71	-41.03	-13.00	-29.71	-1.68	Peak	Horizontal

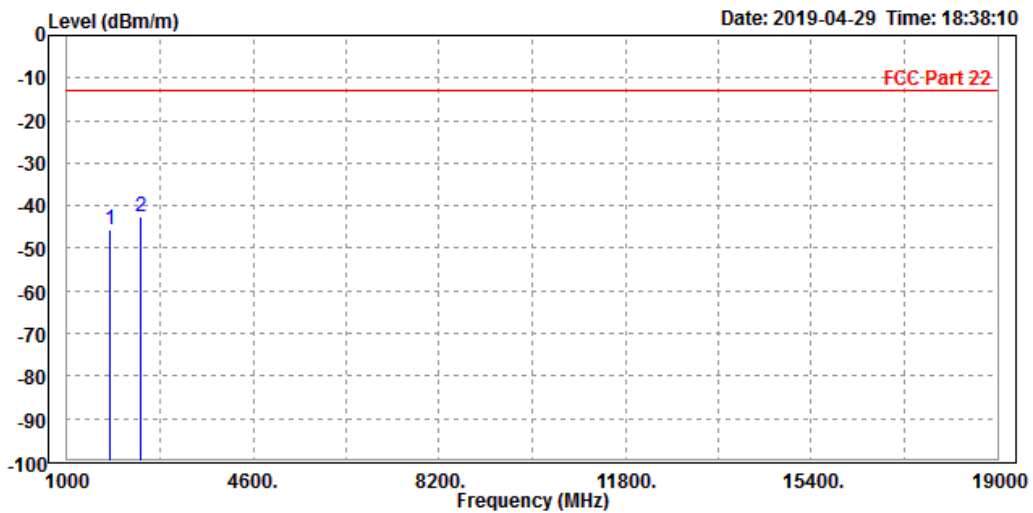




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1810.000	-44.50	-42.46	-13.00	-31.50	-2.04	Peak	Vertical
2 PP	2440.000	-40.00	-39.82	-13.00	-27.00	-0.18	Peak	Vertical

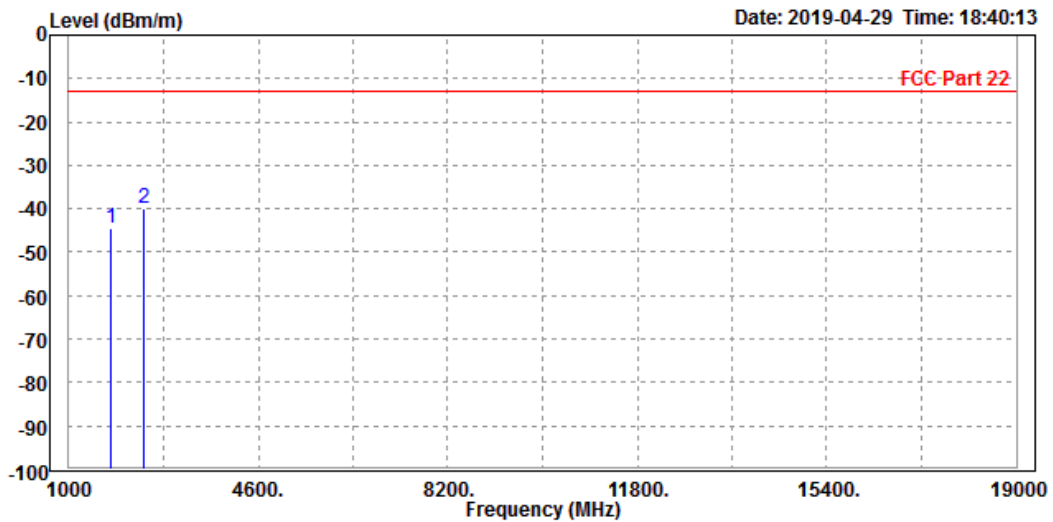




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1828.000	-45.95	-42.48	-13.00	-32.95	-3.47	Peak	Horizontal
2 PP	2440.000	-42.68	-41.00	-13.00	-29.68	-1.68	Peak	Horizontal

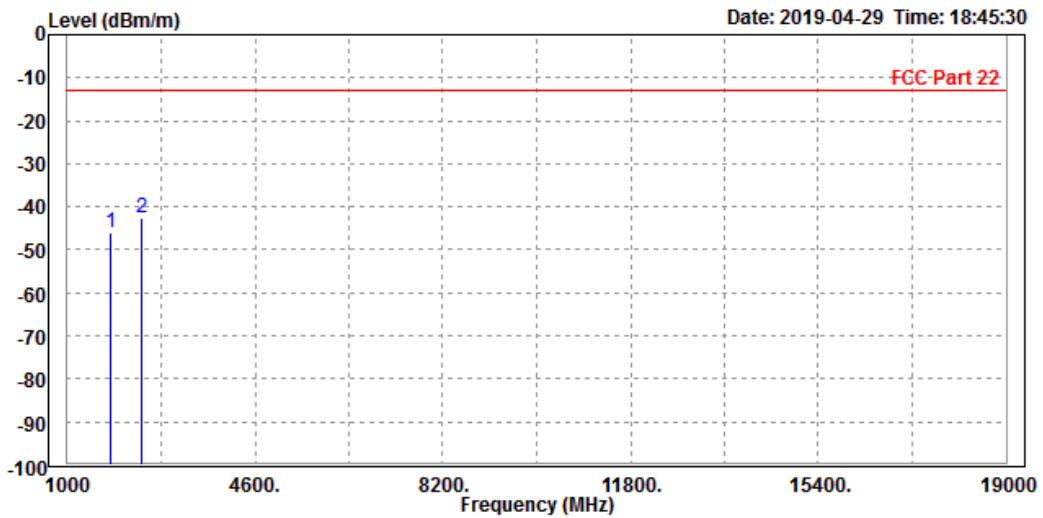




Test Report No.: RF190411W001-3

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1810.000	-45.36	-43.32	-13.00	-32.36	-2.04	Peak	Vertical
2 PP	2440.000	-40.87	-40.69	-13.00	-27.87	-0.18	Peak	Vertical

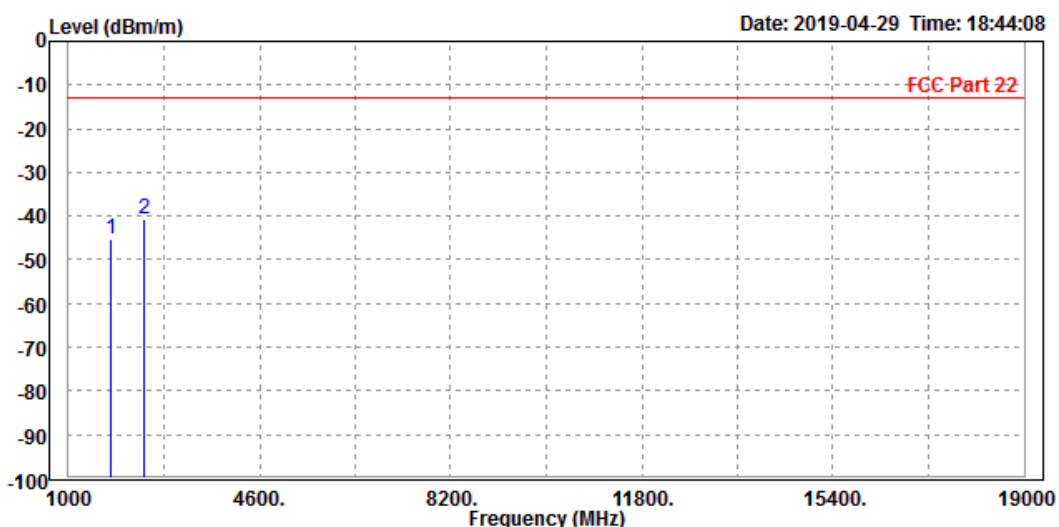




BUREAU VERITAS

Test Report No.: RF190411W001-3

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1828.000	-46.46	-42.99	-13.00	-33.46	-3.47	Peak	Horizontal
2 PP	2440.000	-42.97	-41.29	-13.00	-29.97	-1.68	Peak	Horizontal

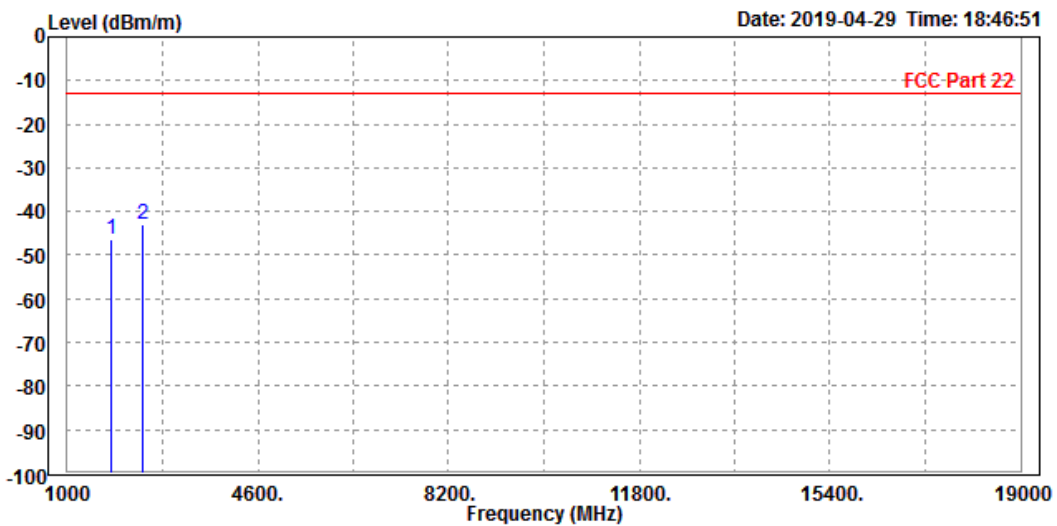




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1810.000	-44.44	-42.40	-13.00	-31.44	-2.04	Peak	Vertical
2	PP 2440.000	-40.44	-40.26	-13.00	-27.44	-0.18	Peak	Vertical

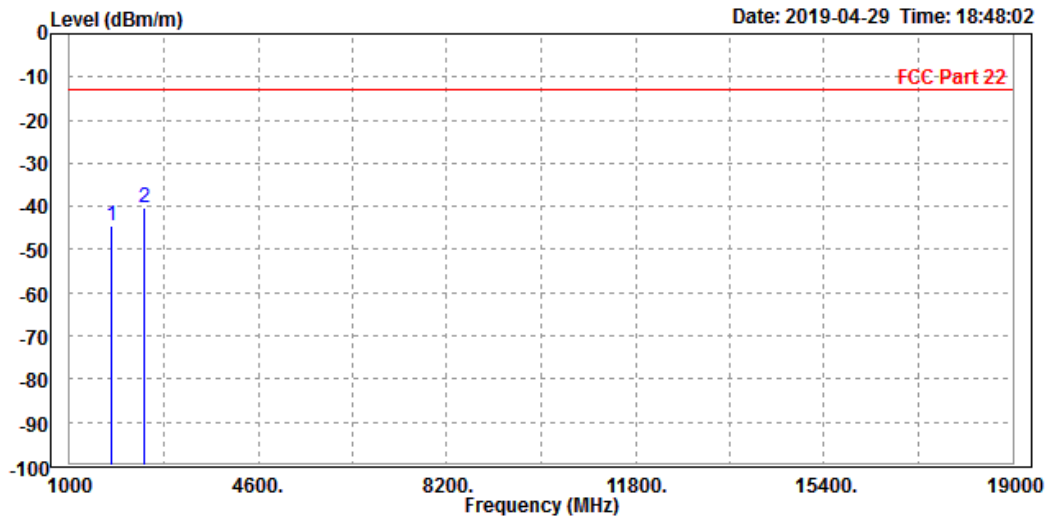




Test Report No.: RF190411W001-3

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 20450

MODE	TX channel 20450	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1649.400	-45.69	-40.74	-13.00	-32.69	-4.95	Peak	Horizontal
2 PP	2474.100	-42.77	-41.11	-13.00	-29.77	-1.66	Peak	Horizontal

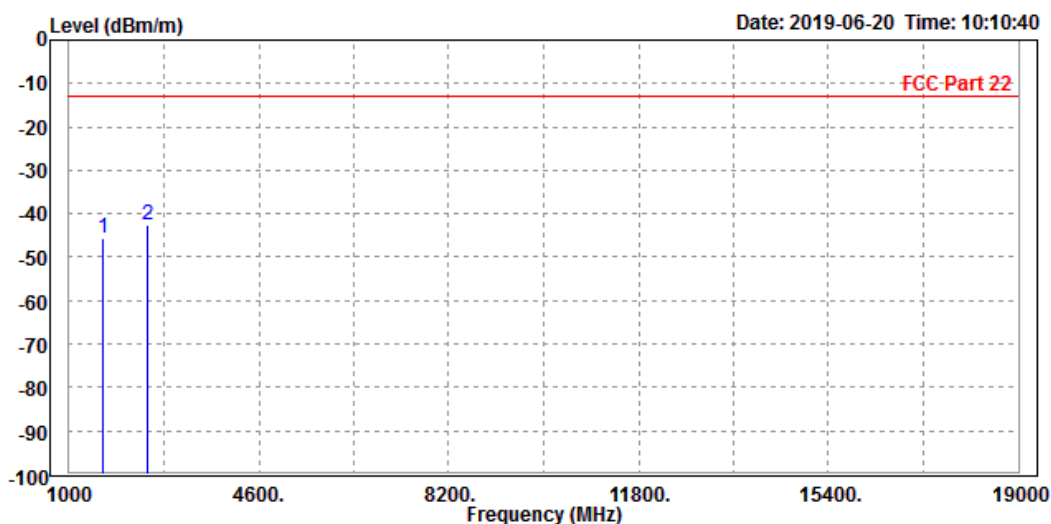




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

MODE	TX channel 20450	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1649.400	-45.81	-42.27	-13.00	-32.81	-3.54	Peak	Vertical
2 PP	2474.100	-40.39	-40.22	-13.00	-27.39	-0.17	Peak	Vertical

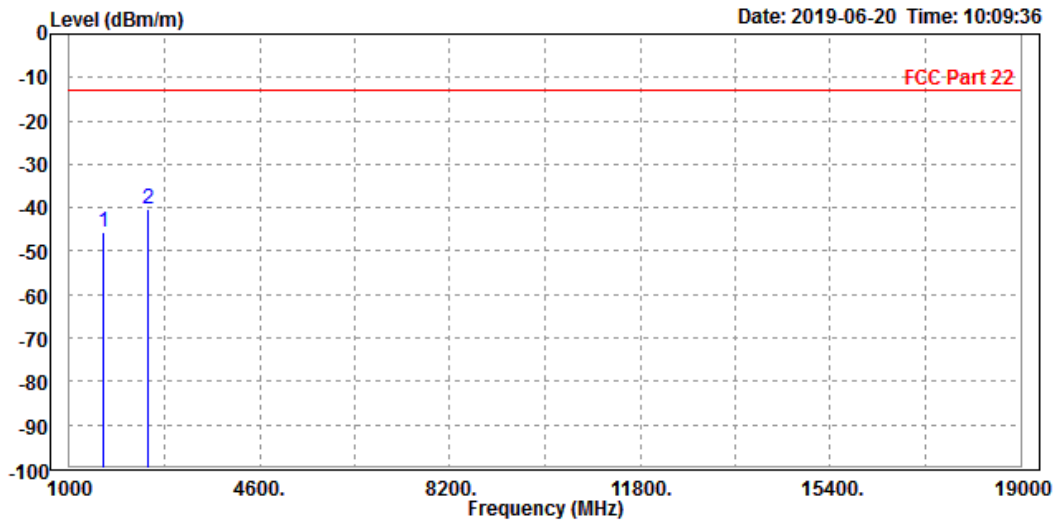




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-57.96	-53.14	-13.00	-44.96	-4.82	Peak	Horizontal
2 PP	2440.000	-41.28	-39.60	-13.00	-28.28	-1.68	Peak	Horizontal

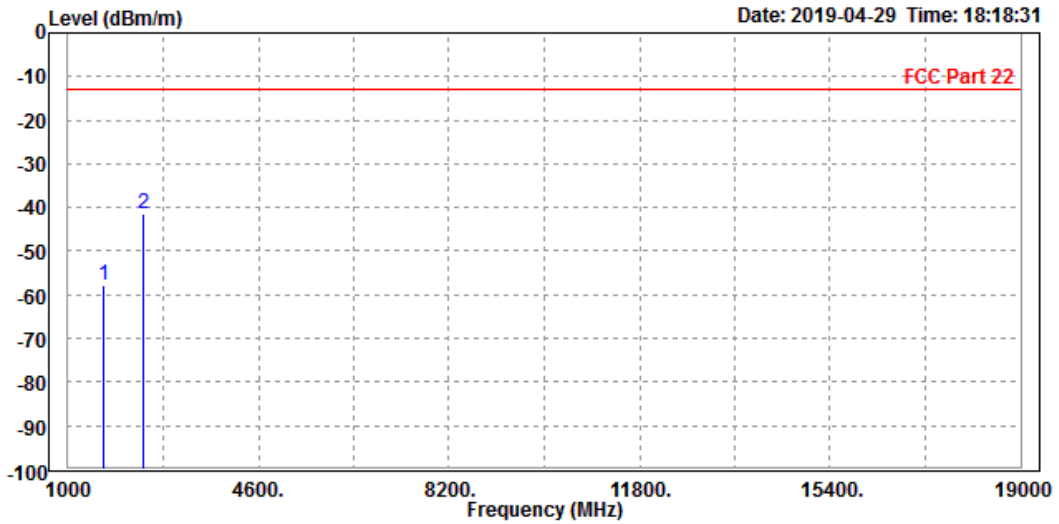




Test Report No.: RF190411W001-3

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1810.000	-45.32	-43.28	-13.00	-32.32	-2.04	Peak	Vertical
2 PP	2440.000	-36.16	-35.98	-13.00	-23.16	-0.18	Peak	Vertical

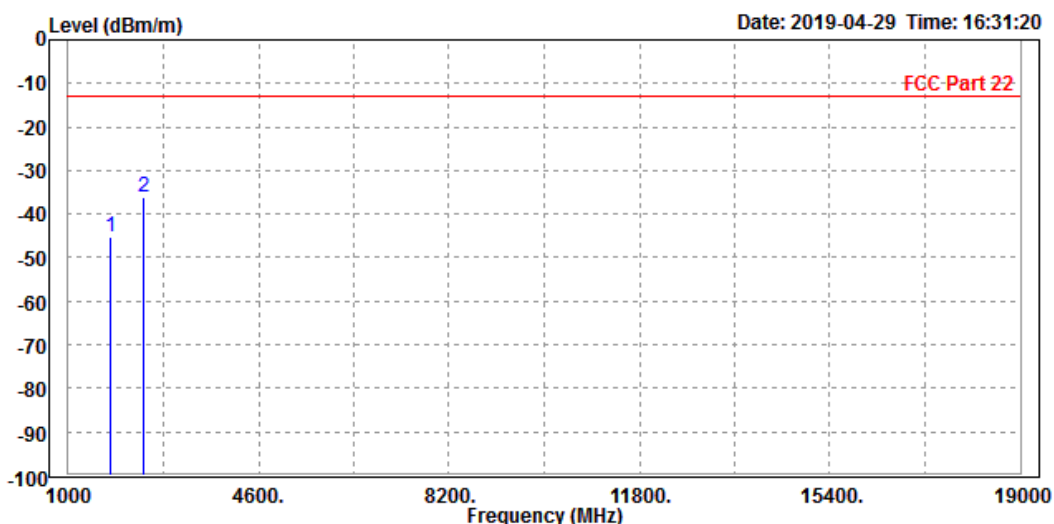




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CH 20600

MODE	TX channel 20600	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1696.600	-46.19	-41.63	-13.00	-33.19	-4.56	Peak	Horizontal
2 PP	2544.900	-41.82	-40.35	-13.00	-28.82	-1.47	Peak	Horizontal

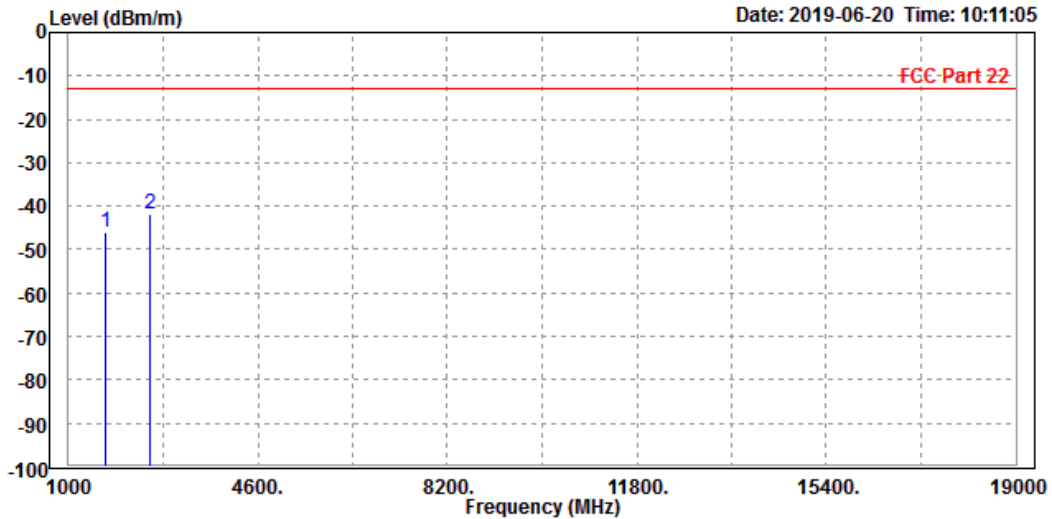




Test Report No.: RF190411W001-3

MODE	TX channel 20600	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1696.600	-45.91	-42.81	-13.00	-32.91	-3.10	Peak	Vertical
2	2544.900	-58.40	-58.42	-13.00	-45.40	0.02	Peak	Vertical

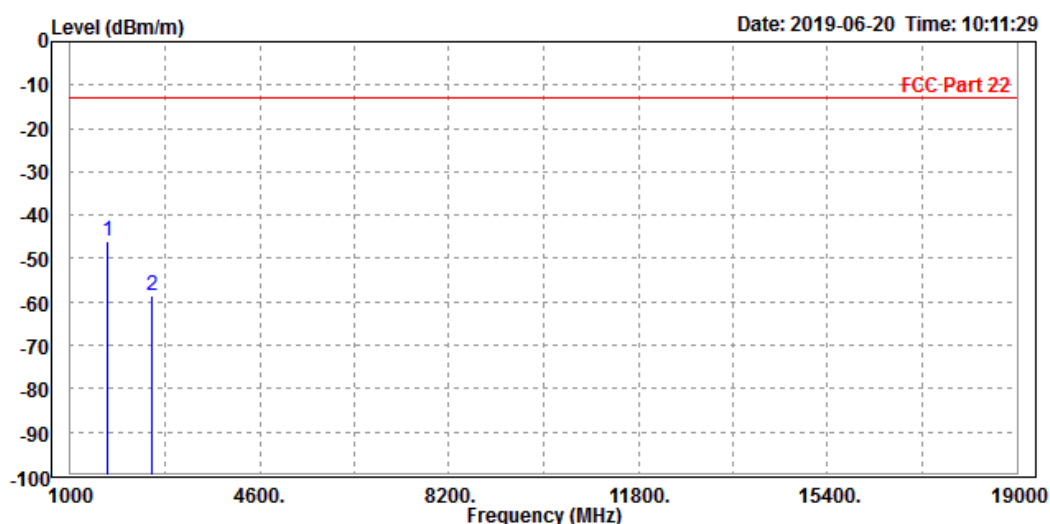


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

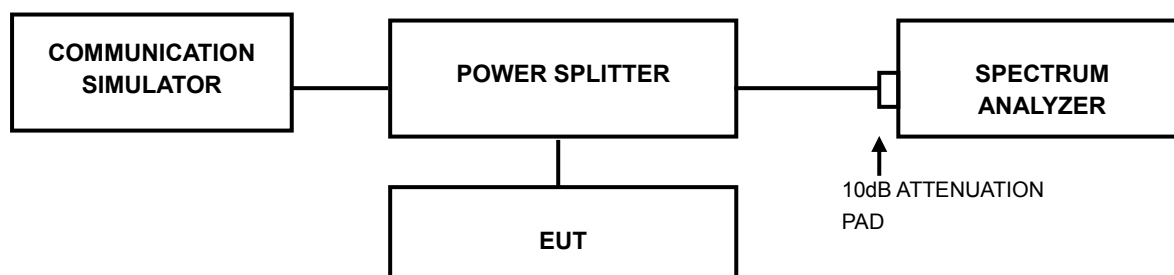

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

3.7.4 TEST RESULTS

GSM


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
128	824.2	2.61

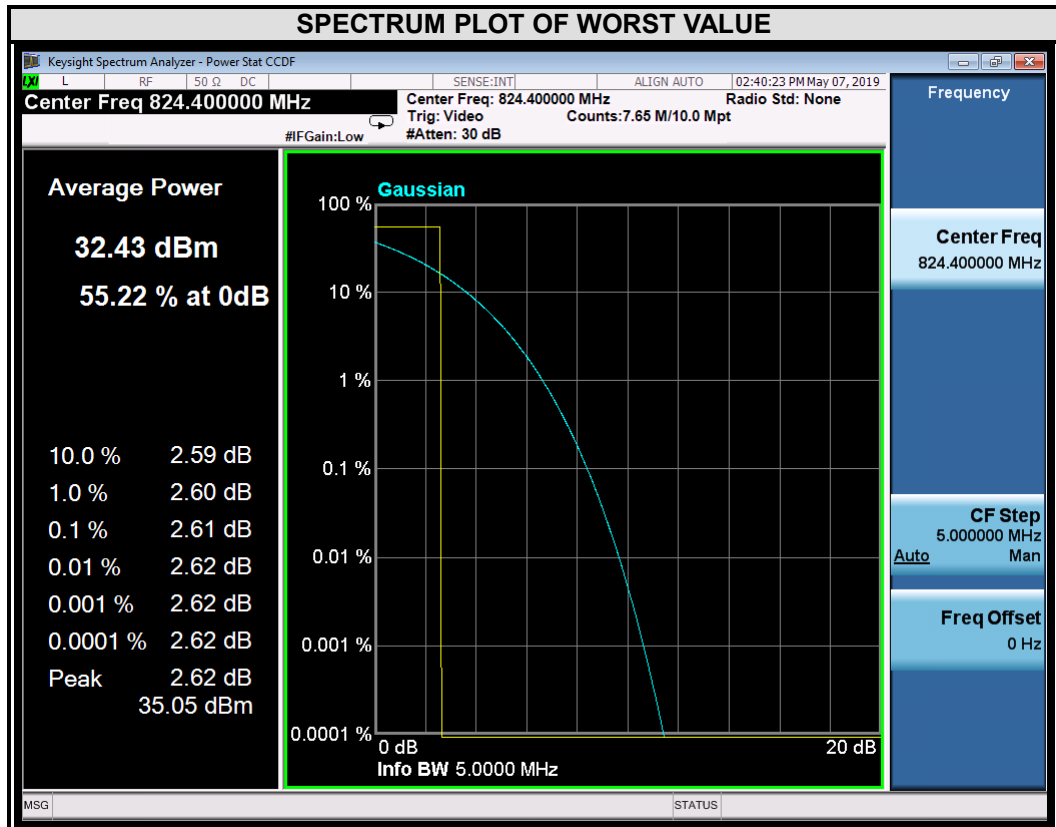



Test Report No.: RF190411W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
189	836.4	2.61

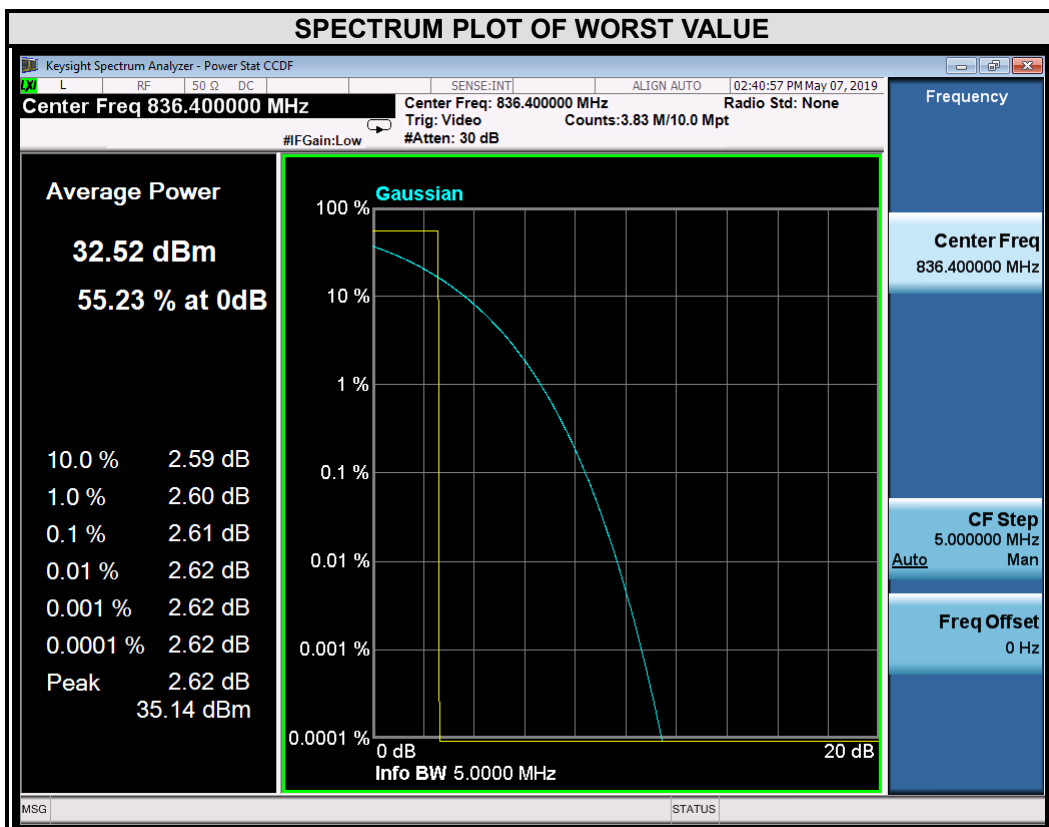



Test Report No.: RF190411W001-3

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
251	848.8	2.61

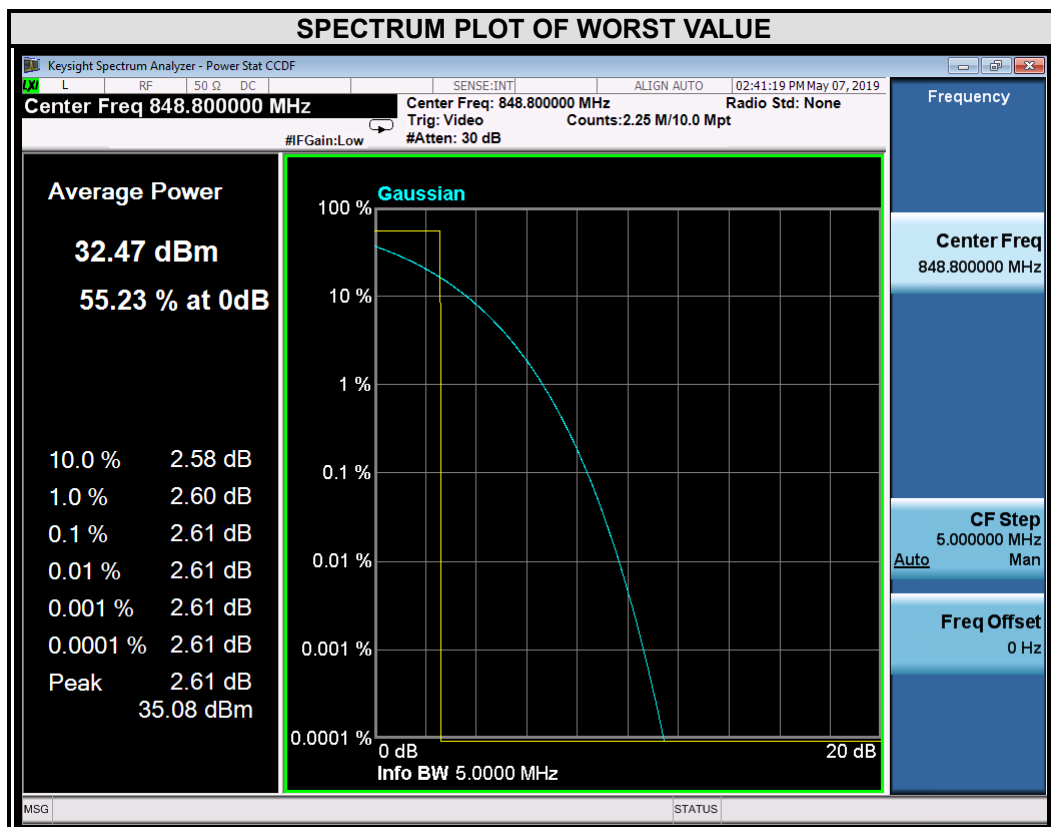




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

EDGE


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
128	824.2	5.41

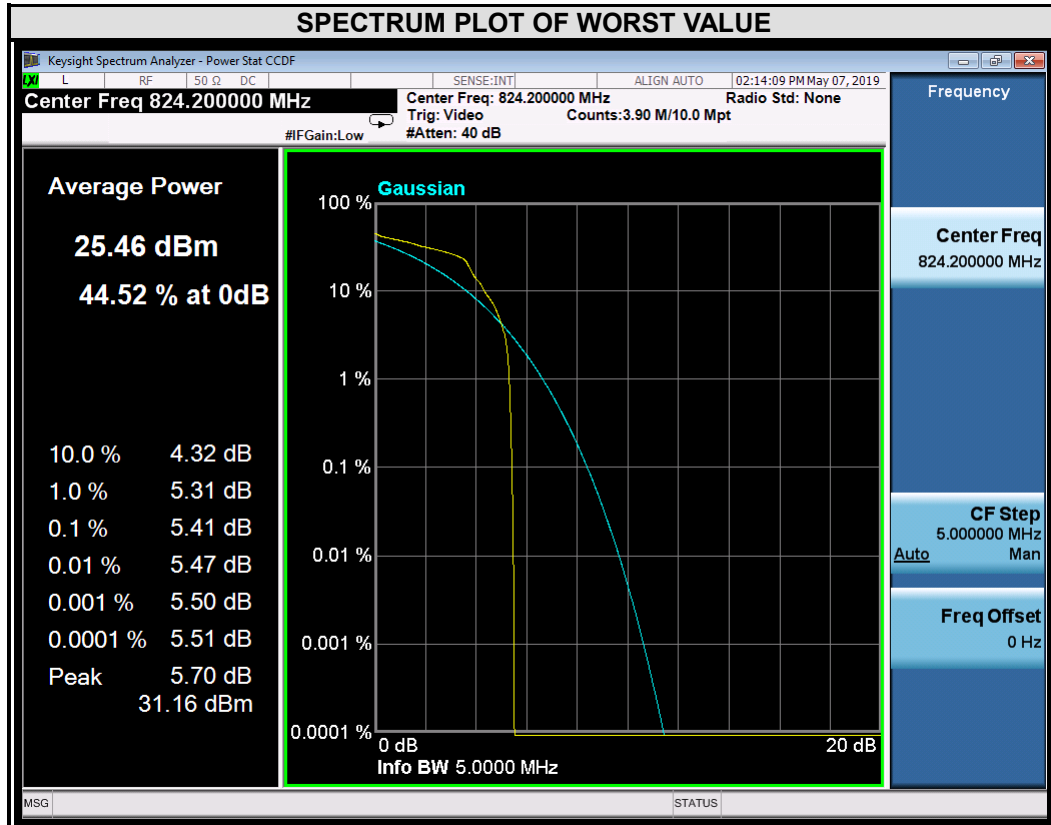




Test Report No.: RF190411W001-3

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
189	836.4	5.40

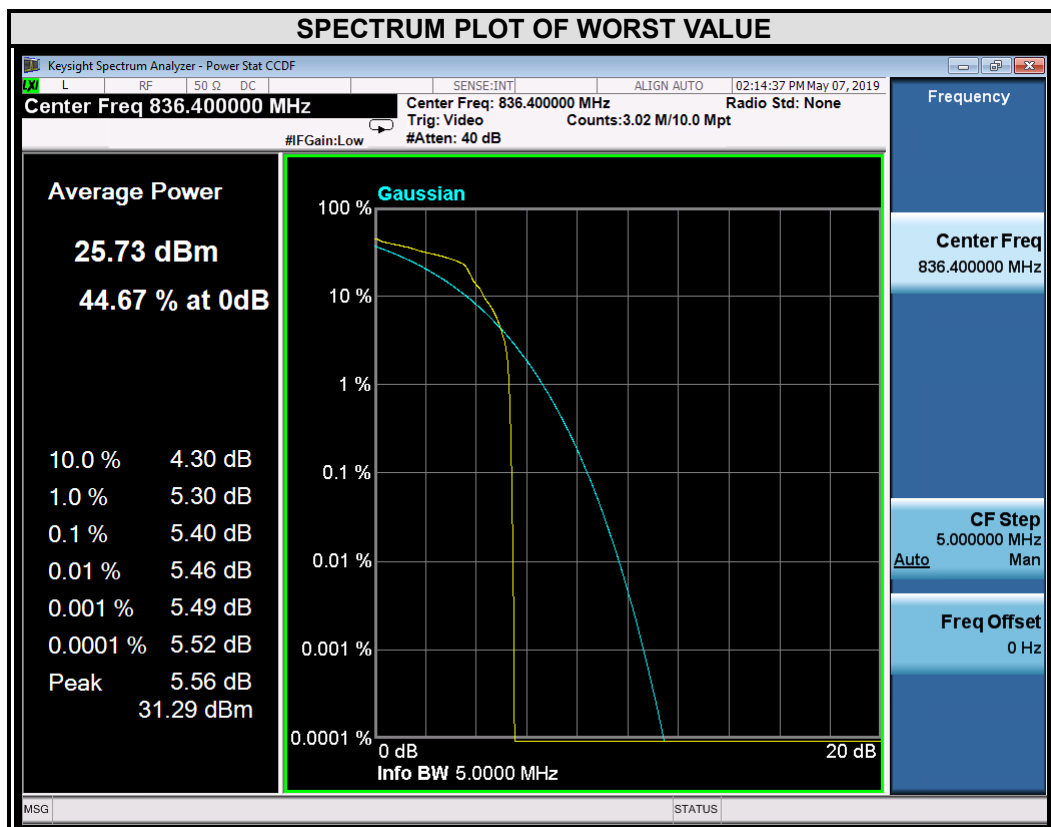



CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
251	848.8	5.41

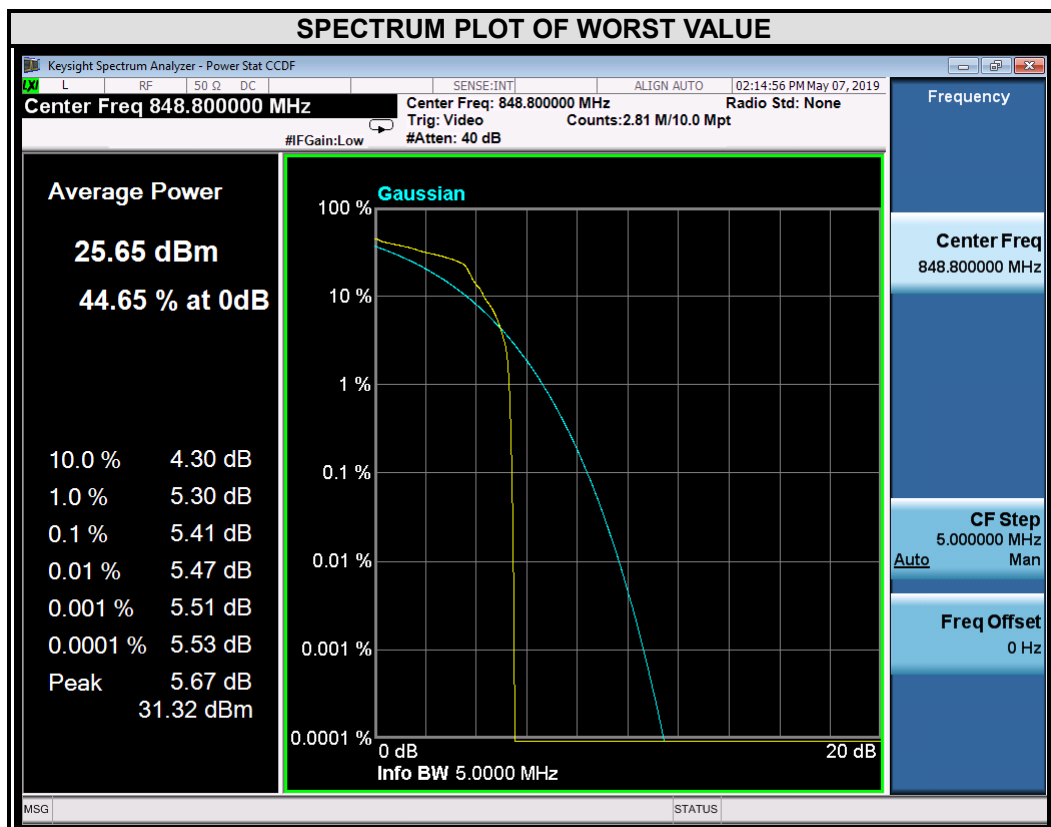




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

WCDMA


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4132	826.4	2.88

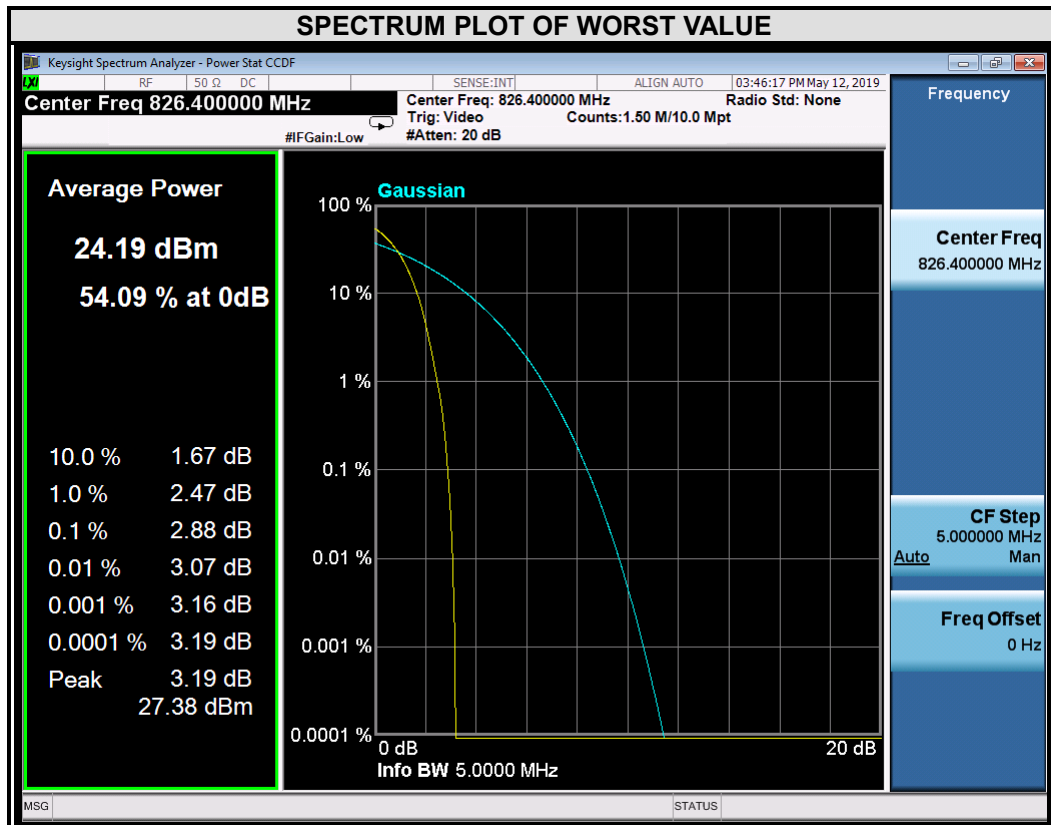



Test Report No.: RF190411W001-3


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4182	836.4	2.99

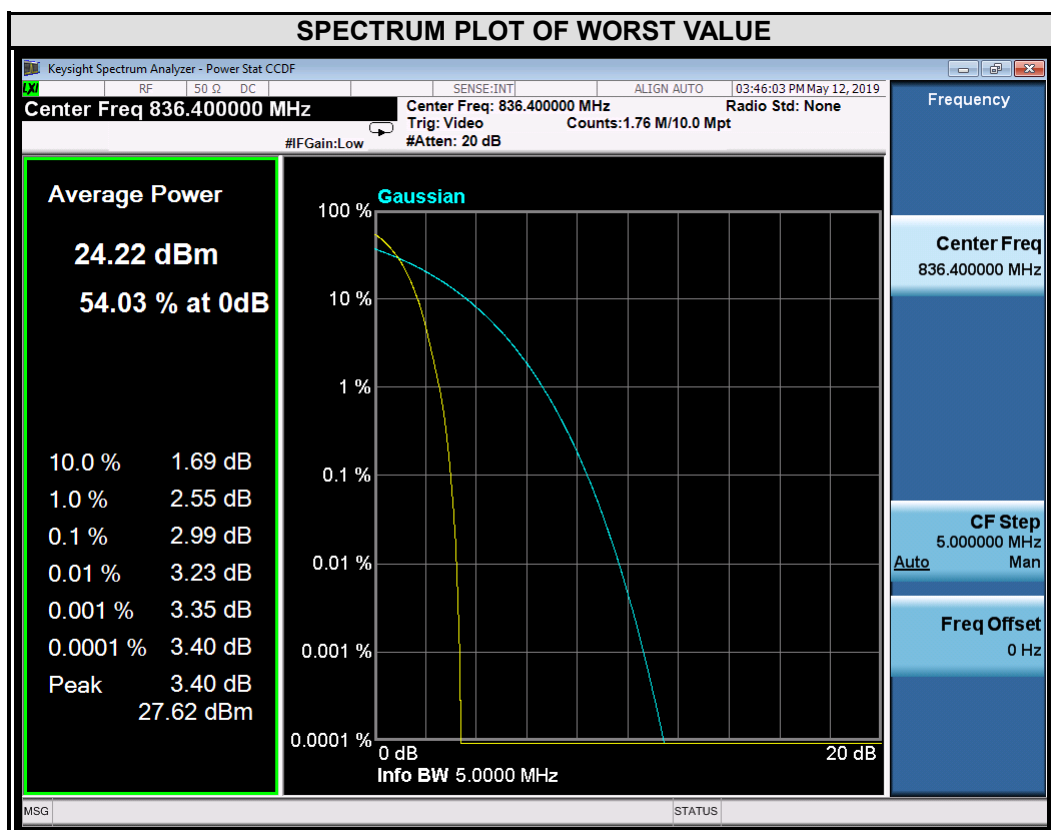



Test Report No.: RF190411W001-3

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4233	846.6	2.61

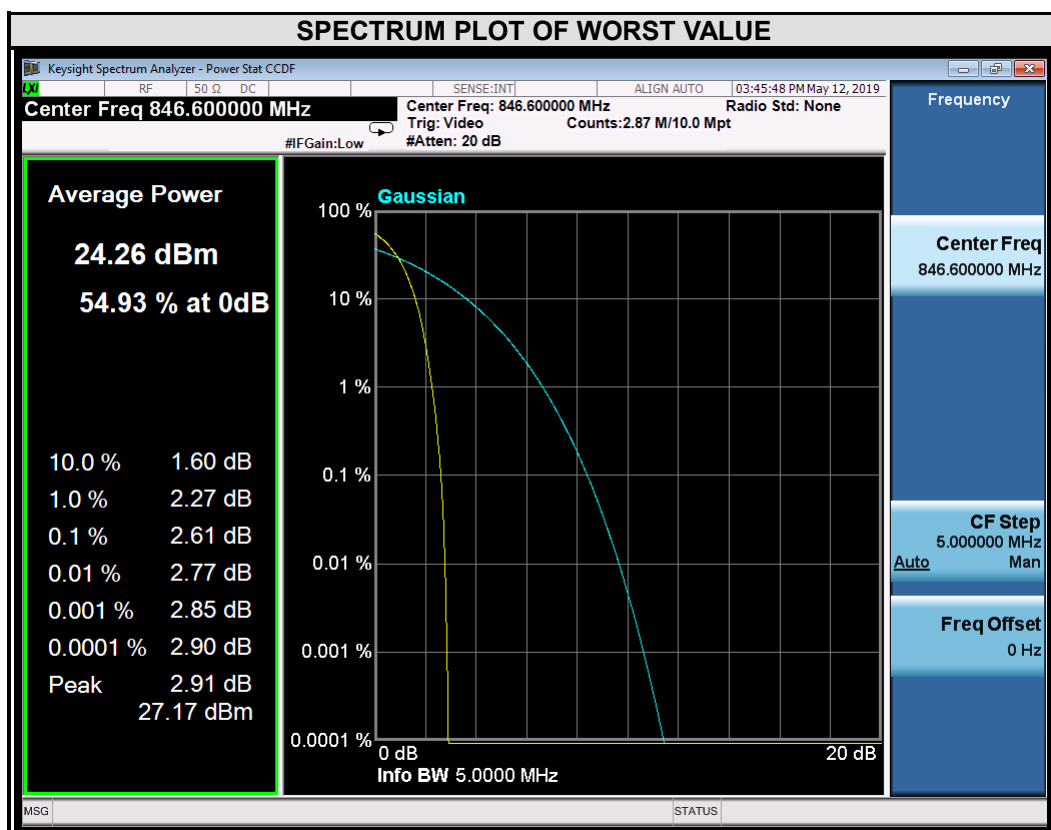




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	5.73	6.61	20415	825.5	5.73	6.47
20525	836.5	5.67	6.47	20525	836.5	5.93	6.37
20643	848.3	5.42	6.37	20635	847.5	5.52	6.28

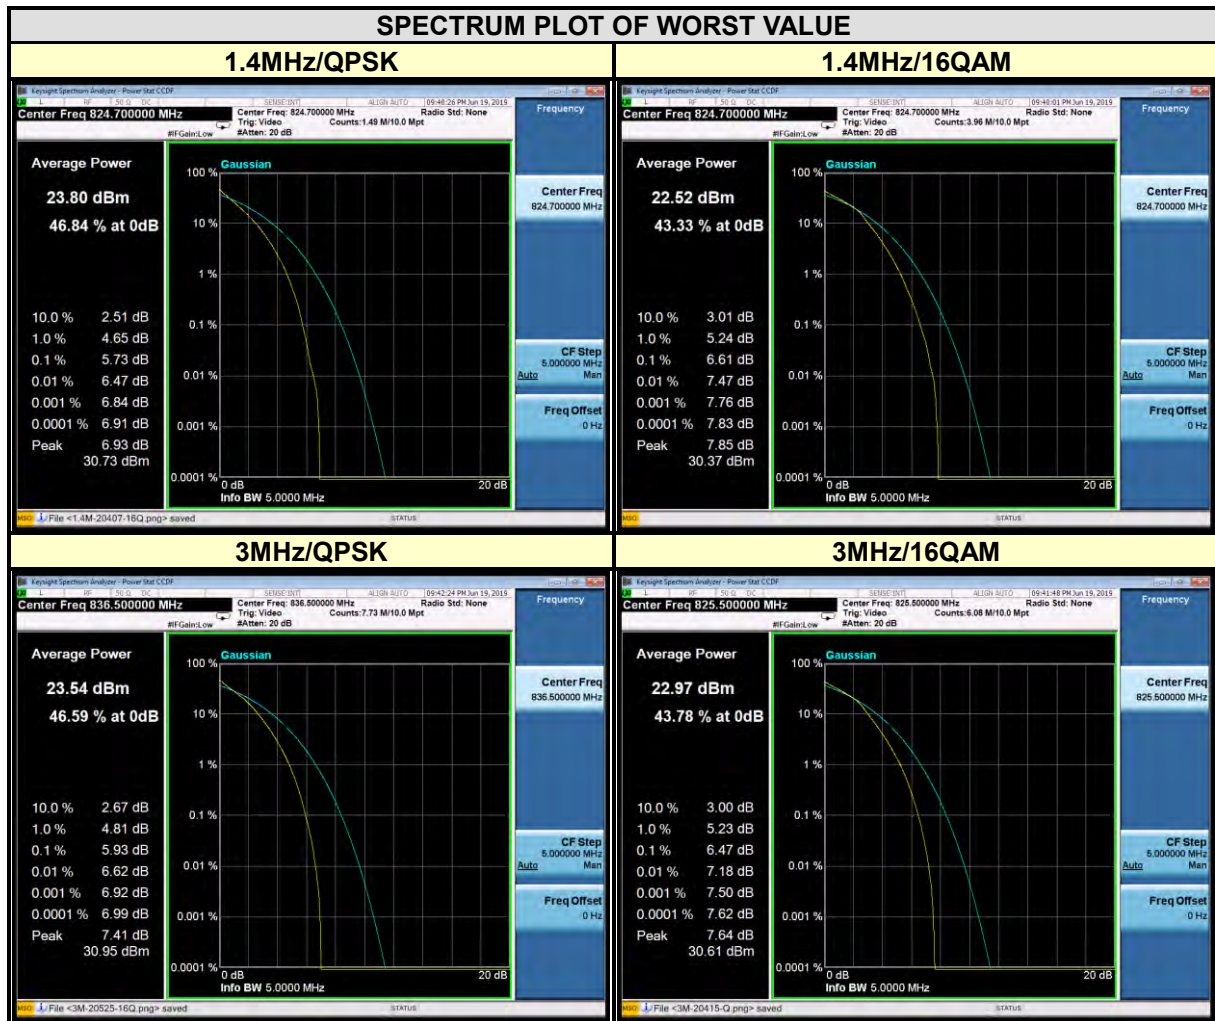




**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	5.69	6.36	20450	829	5.57	6.27
20525	836.5	5.67	6.35	20525	836.5	5.59	6.31
20625	846.5	5.91	6.25	20600	844	5.32	6.12

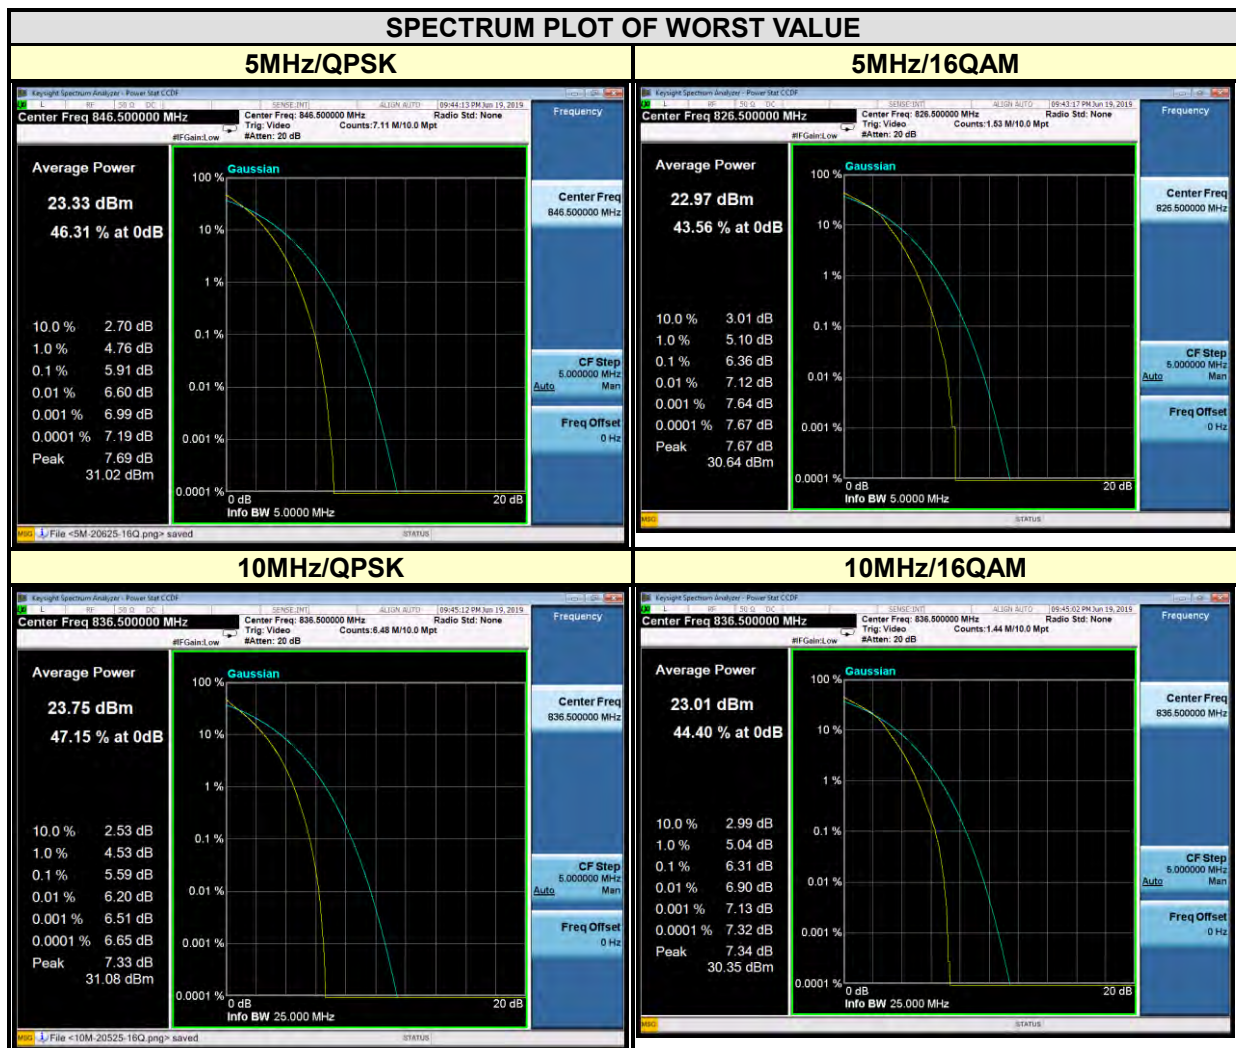



BUREAU
VERITAS

Test Report No.: RF190411W001-3

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF190411W001-3

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



**BUREAU
VERITAS**

Test Report No.: RF190411W001-3

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---