

**Xiamen Joint Tech. Co., Ltd**

# RF TEST REPORT

**Report Type:**

FCC Part 15.225 RF report

**Model:**

JNT-EVCxx/xxAC/xxC/xx/xx

**REPORT NUMBER:**

220801139SHA-001

**ISSUE DATE:**

October 18, 2022

**DOCUMENT CONTROL NUMBER:**

TTRFFCCPART15C\_V1 © 2018 Intertek



**Applicant:** Xiamen Joint Tech. Co., Ltd  
Building #1, No. 268 HouXiang Rd,Xinyang Industrial Park, Haicang District,  
XIAMEN Fujian

**Manufacturer:** Xiamen Joint Tech. Co., Ltd  
Building #1, No. 268 HouXiang Rd,Xinyang Industrial Park, Haicang District,  
XIAMEN Fujian

**Manufacturing Site:** Xiamen Joint Tech. Co., Ltd  
Building #1, No. 268 HouXiang Rd,Xinyang Industrial Park, Haicang District,  
XIAMEN Fujian

**Product Name:** Electric Vehicle AC Charger

**Type/Model:** JNT-EVCxx/xxAC/xxC/xx/xx

**FCC ID:** 2A2RN-ACEVCN13P1


### SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2019):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

### PREPARED BY: REVIEWED BY:



Project Engineer  
Dylan Tang



Reviewer  
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

**Content**

**REVISION HISTORY..... 5**

**MEASUREMENT RESULT SUMMARY ..... 6**

**1 GENERAL INFORMATION ..... 7**

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....7

1.2 TECHNICAL SPECIFICATION .....7

1.3 DESCRIPTION OF TEST FACILITY .....8

**2 TEST SPECIFICATIONS..... 9**

2.1 STANDARDS OR SPECIFICATION .....9

2.2 MODE OF OPERATION DURING THE TEST.....9

2.3 TEST SOFTWARE LIST .....9

2.4 TEST PERIPHERALS LIST .....9

2.5 TEST ENVIRONMENT CONDITION:.....9

2.6 INSTRUMENT LIST .....10

2.7 MEASUREMENT UNCERTAINTY .....12

**3 FUNDAMENTAL EMISSION ..... 13**

3.1 LIMIT .....13

3.2 MEASUREMENT PROCEDURE .....13

3.3 TEST CONFIGURATION .....14

3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS .....15

**4 SPURIOUS EMISSION ..... 16**

4.1 LIMIT .....16

4.2 MEASUREMENT PROCEDURE .....16

4.3 TEST RESULTS OF RADIATED EMISSIONS .....17

**5 FREQUENCY STABILITY (TEMPERATURE VARIATION) ..... 19**

5.1 TEST LIMIT .....19

5.2 TEST CONFIGURATION .....19

5.3 TEST PROCEDURE AND TEST SETUP .....20

5.4 TEST PROTOCOL .....20

**6 FREQUENCY STABILITY (VOLTAGE VARIATION) ..... 21**

6.1 TEST LIMIT .....21

6.2 TEST CONFIGURATION .....21

6.3 TEST PROCEDURE AND TEST SETUP .....21

6.4 TEST PROTOCOL .....22

**7 CONDUCTED EMISSIONS ..... 23**

7.1 LIMIT .....23

7.2 TEST CONFIGURATION .....23

7.3 MEASUREMENT PROCEDURE .....24

7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....25

**8 20DB BANDWIDTH ..... 27**

8.1 LIMIT.....27

8.2 TEST CONFIGURATION .....27

8.3 TEST PROCEDURE AND TEST SET UP .....28

**TEST REPORT**

8.4 TEST PROTOCOL ..... 29

**9 ANTENNA REQUIREMENT ..... 30**

## Revision History

Report No.	Version	Description	Issued Date
220801139SHA-001	Rev. 01	Initial issue of report	October 18, 2022

**Measurement result summary**

<b>TEST ITEM</b>	<b>FCC REFERANCE</b>	<b>RESULT</b>
Fundamental emission	15.225(a) (b) (c)	Pass
Spurious emission	15.225(d)	Pass
Frequency stability	15.225(e)	Pass
Conducted emissions	15.207	Pass
99% and 20dB Bandwidth	15.215(c)	Pass
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	Electric Vehicle AC Charger
Type/Model:	JNT-EVCxx/xxAC/xxC/xx/xx "xx" denotes Appearance, can be 10=10type,11=11type, 12=12type, 16=16type,17=17type. "xx" denotes Wattage, can be 16=16A, 32=32A, 40=40A,48=48A. "xx" denotes Outlet type,can be 01=type 1,02=type 2. "xx" denotes Colour, can be SR=Silver, RD=Red, BK=Black, BU=Blue or other colour. "xx" denotes Function, can be WF=WiFi+BT, 4G=4G, RF=RFID, RF/4G= RFID+4G, RF/WF=RFID+WiFi, If blank, it means Plug and charge.
Description of EUT:	The EUT is Electric Vehicle AC Charger with RFID Function, it supports WIFI and LTE function, the wireless modular FCC ID is 2AC7Z- ESP32 WROVERE and XMR201909EC25AFX. Both module are selectable, but cannot be used at same. there have two models and they are same except the appearance and display screen. So choose JNT-EVC10/48A/01C/SR/RF/4G to test as representative.
Rating:	200-240V ~ 60Hz
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Software Version:	N1-3P1-C6
Hardware Version:	N1-3P1
Serial numbers:	0221019-44-002(for radiation sample)
Sample received date:	August 15, 2022
Date of test:	August 15, 2022 ~ September 30, 2022

### 1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna gain:	3dBi

### 1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02



## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2019)

ANSI C63.10 (2013)

### 2.2 Mode of operation during the test

While testing, the internal modulation and continuously transmission was applied.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No	Description	Band and Model	S/No
-	-	-	-

### 2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

## 2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-18
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2022-11-09
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2023-07-17
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2023-06-04
<input type="checkbox"/>	Absorbing clamp	R&S	MDS 21	EC 2108	2023-06-04
<input type="checkbox"/>	CDN	Frankonia	CDN M2M316	EC 5969	2023-02-10
<input type="checkbox"/>	CDN	Schaffner	CDN M316	EC 2113-1	2023-09-19
<input checked="" type="checkbox"/>	Attenuator	Weinschel	68-6-44	EC 3043-9	2023-02-08
<input type="checkbox"/>	Tri-loop	Schwarzbeck	HXYZ 9170	EC 3384	2023-01-20
<input type="checkbox"/>	Voltage Probe	Schwarzbeck	TK9420	EC 4888	2022-10-10
<input type="checkbox"/>	Current probe	R&S	EZ-17	EC 3221	2022-12-22
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T2-02	EC 3754	2023-02-08
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T4-02	EC 3755	2023-02-08
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T8-02	EC 3756	2023-02-08
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2022-10-19
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-08-23
<input type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2022-12-26
<input type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2023-01-09
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2023-08-28
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-07-29
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2023-06-15
		EM TEST	NETWAVE-30-400	EC 5383-2	2023-06-17

**TEST REPORT**

RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-14
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2023-03-14
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2023-03-14
<input checked="" type="checkbox"/>	Spectrum analyzer	R&S	CMW500	EC5944	2023-01-20
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2023-03-14
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2023-01-11
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2022-12-09
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2023-01-11
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2023-01-11
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-07-08
<input type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2023-07-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Spectrum analyzer	Agilent	E7402A	EC 2254	2023-07-17
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-24
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 2122	2023-03-08
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2023-01-03
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2023-03-08
<input type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2023-09-13

## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

### 3 Fundamental Emission

Test result: Pass

#### 3.1 Limit

Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50


#### 3.2 Measurement Procedure

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

### 3.3 Test Configuration

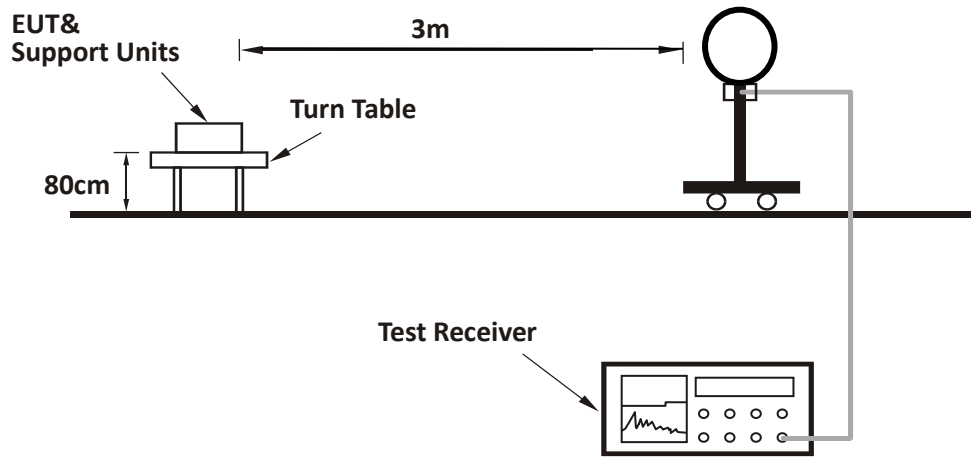

TEST REPORT

### 3.4 Test Results of Fundamental Emissions

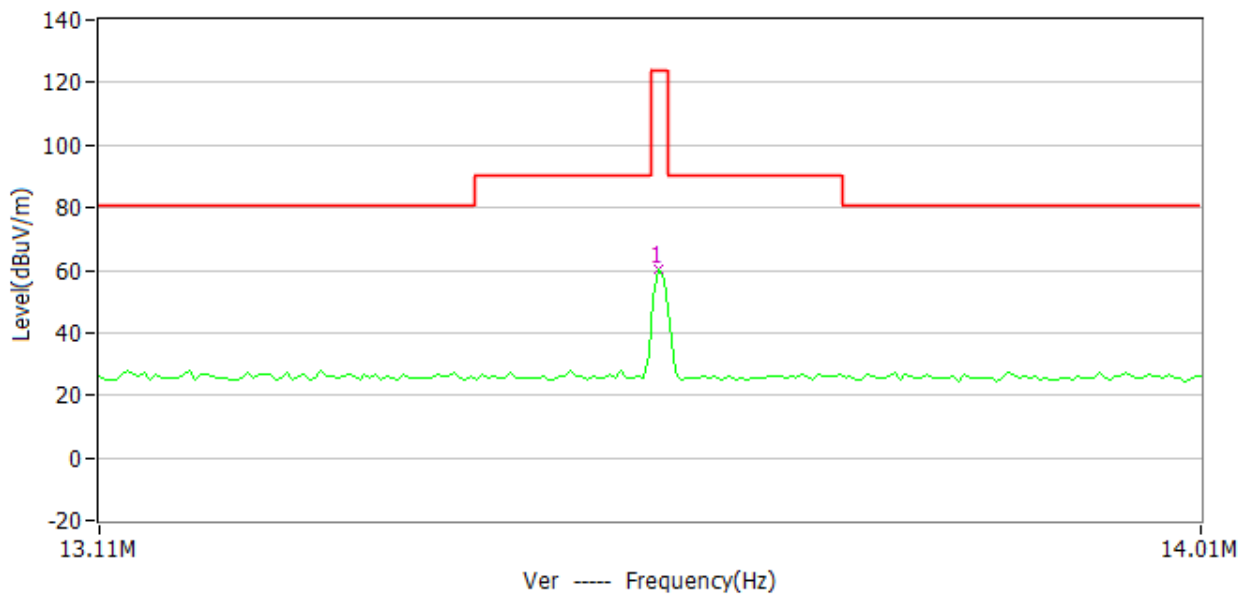

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
X	13.56	60.2	20.40	124.00	32.78	PK
Y	13.56	50.5	20.40	124.00	33.72	PK
Z	13.56	52.1	20.40	124.00	34.95	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Pre-amplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
 Limit = 40.00dBuV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

## 4 Spurious Emission

Test result: Pass

### 4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 4.2 Measurement Procedure

#### For Radiated emission below 30MHz:

- f) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- g) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- h) Both X and Y axes of the antenna are set to make the measurement.
- i) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- j) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTE:

- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz:

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



**TEST REPORT**

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were evaluated and the worst-case emissions were reported

**4.3 Test Results of Radiated Emissions**

The EUT has been tested in all three orthogonal planes, it has the worst case when it is in horizontal position for both below 30MHz & above 30MHz.

**Test data below 30MHz:**

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector	Remark
X	0.009848	60.4	20.1	127.7	67.4	PK	Spurious
X	0.508918	55.1	20.0	73.5	18.4	PK	Spurious
X	0.688377	49.9	20.1	70.9	21.0	PK	Spurious
X	1.406	32.5	20.4	64.7	32.2	PK	Spurious
X	9.482	45.1	20.3	69.5	24.4	PK	Spurious
X	22.642	48.5	20.7	69.5	21.0	PK	Spurious
Y	0.009848	69.9	20.1	127.7	57.8	PK	Spurious
Y	0.508918	54.6	20.0	73.5	18.9	PK	Spurious
Y	0.808016	45.9	20.2	69.5	23.6	PK	Spurious
Y	1.466	31.6	20.4	64.3	32.7	PK	Spurious
Y	9.482	41.7	20.3	69.5	27.8	PK	Spurious
Y	22.582	49.0	20.7	69.5	20.5	PK	Spurious
Z	9.848kHz	55.2	20.1	127.7	72.5	PK	Spurious
Z	23.976kHz	52.7	20.2	120.0	67.3	PK	Spurious
Z	508.918kHz	55.7	20.0	73.5	17.7	PK	Spurious
Z	748.196kHz	48.2	20.1	70.1	22.0	PK	Spurious
Z	1.646MHz	32.4	20.4	63.3	30.9	PK	Spurious
Z	22.523MHz	28.3	20.7	69.5	41.2	PK	Spurious

**TEST REPORT**

**Test data from 30MHz to 1000MHz:**

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	83.447	34.2	9.5	40.0	5.8	PK
H	167.061	38.7	14.2	43.5	4.8	PK
H	177.537	38.9	13.3	43.5	4.6	PK
H	216.919	40.0	12.0	46.0	6.0	PK
H	474.648	43.4	19.5	46.0	2.6	PK
H	515.291	45.4	20.5	46.0	0.6	PK
V	30.388	32.8	12.8	40.0	7.2	PK
V	40.670	39.0	13.8	40.0	1.0	PK
V	167.158	39.4	14.2	43.5	4.1	PK
V	177.537	38.0	13.3	43.5	5.5	PK
V	474.648	42.3	19.5	46.0	3.7	PK
V	515.291	45.4	20.5	46.0	0.6	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading  
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
 Limit = 40.00dBuV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


## 5 Frequency Stability (Temperature Variation)

Test result: PASS

### 5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage.

### 5.2 Test Configuration

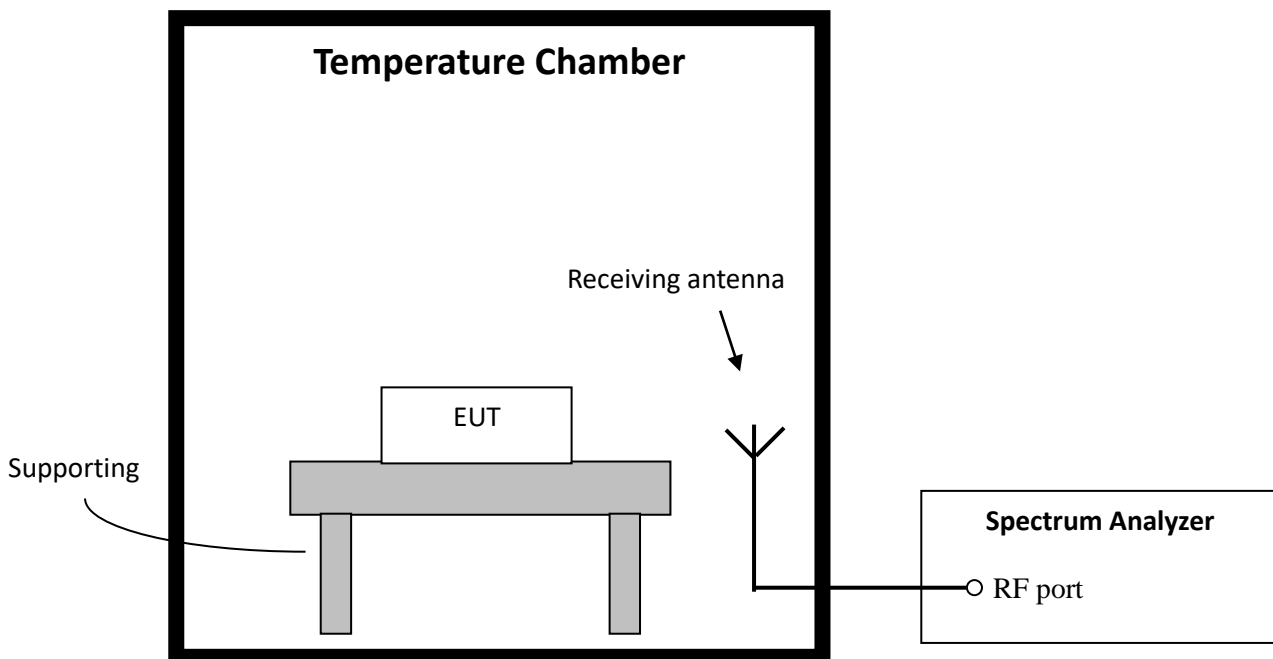

### 5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

### 5.4 Test protocol

Voltage (V)	Temp (°C)	Freq measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
240	-20	13.555	13.560	0.005	0.01
	-10	13.553		0.007	
	0	13.560		0	
	10	13.560		0	
	20	13.560		0	
	30	13.558		0.002	
	40	13.556		0.004	
	50	13.553		0.007	


## 6 Frequency Stability (Voltage Variation)

Test result: PASS

### 6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 Test Configuration

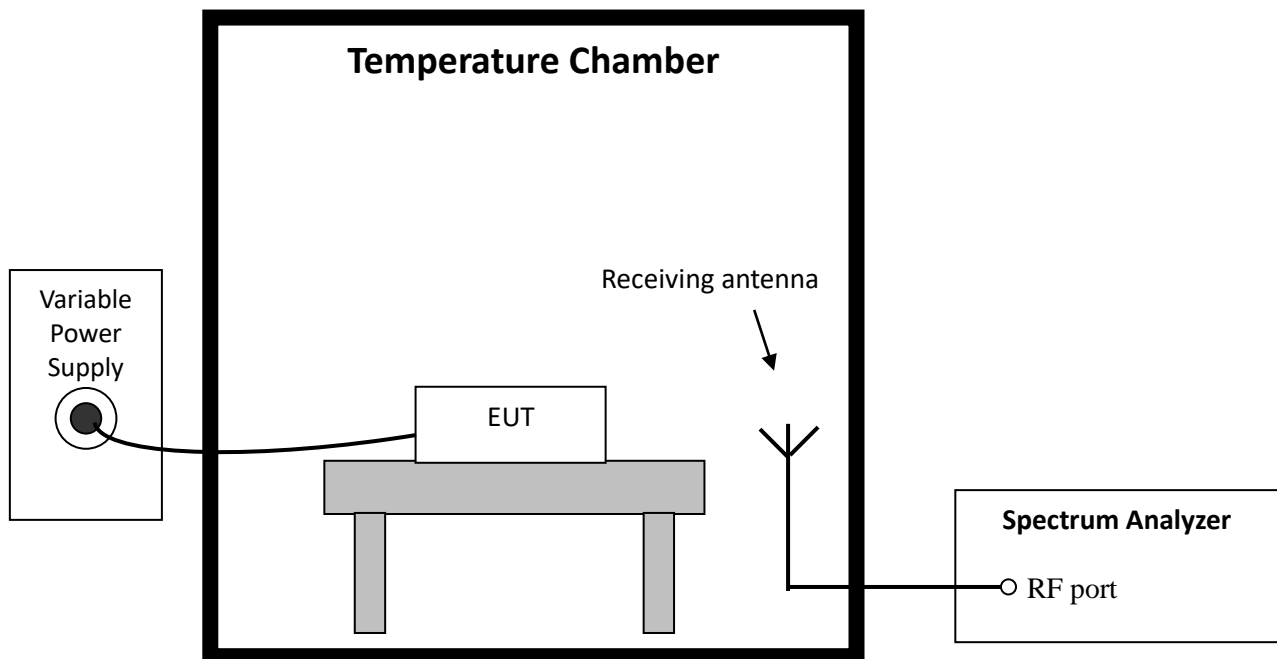

### 6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

**TEST REPORT****6.4 Test protocol**

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	240	13.560	13.560	0	0.01
	204	13.552		0.008	
	276	13.551		0.009	

## 7 Conducted emissions


Test result: Pass

### 7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 7.2 Test Configuration

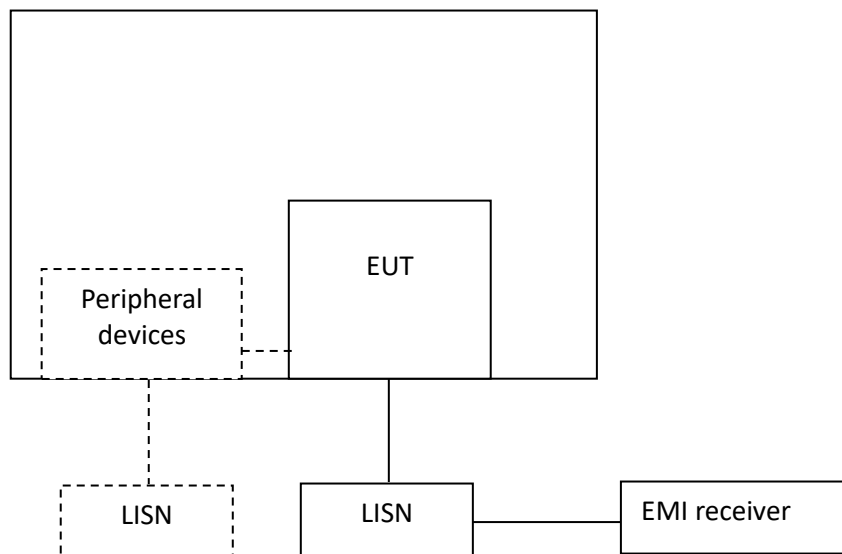

**TEST REPORT****7.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.



The bandwidth of the test receiver is set at 9 kHz.



**TEST REPORT**

**7.4 Test Results of Conducted Emissions**

Test Curve:

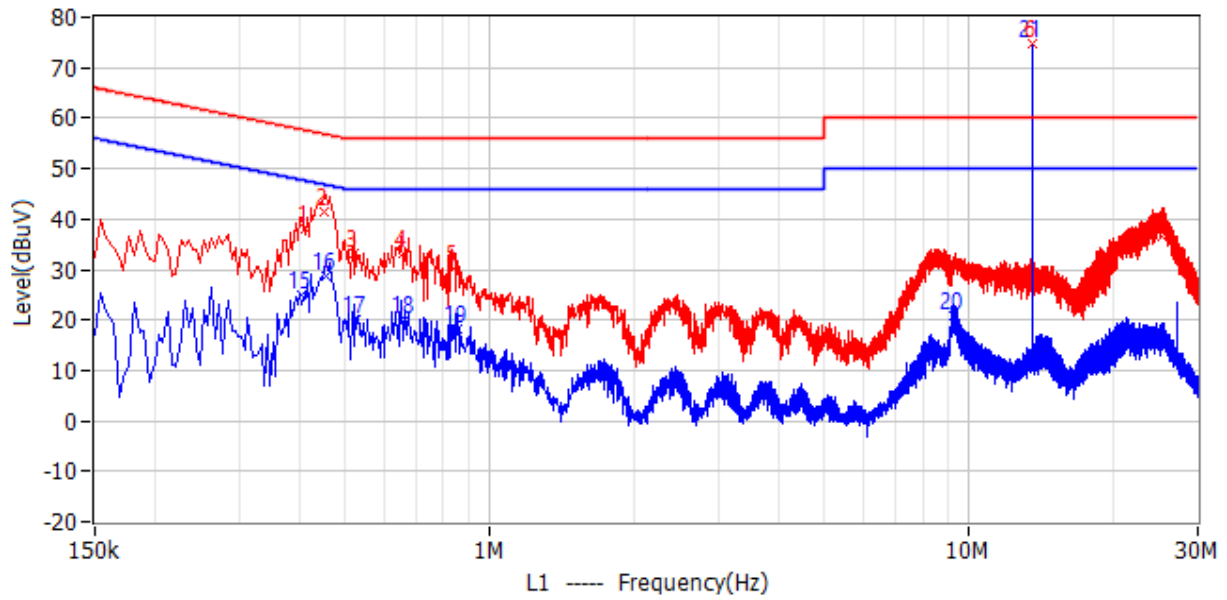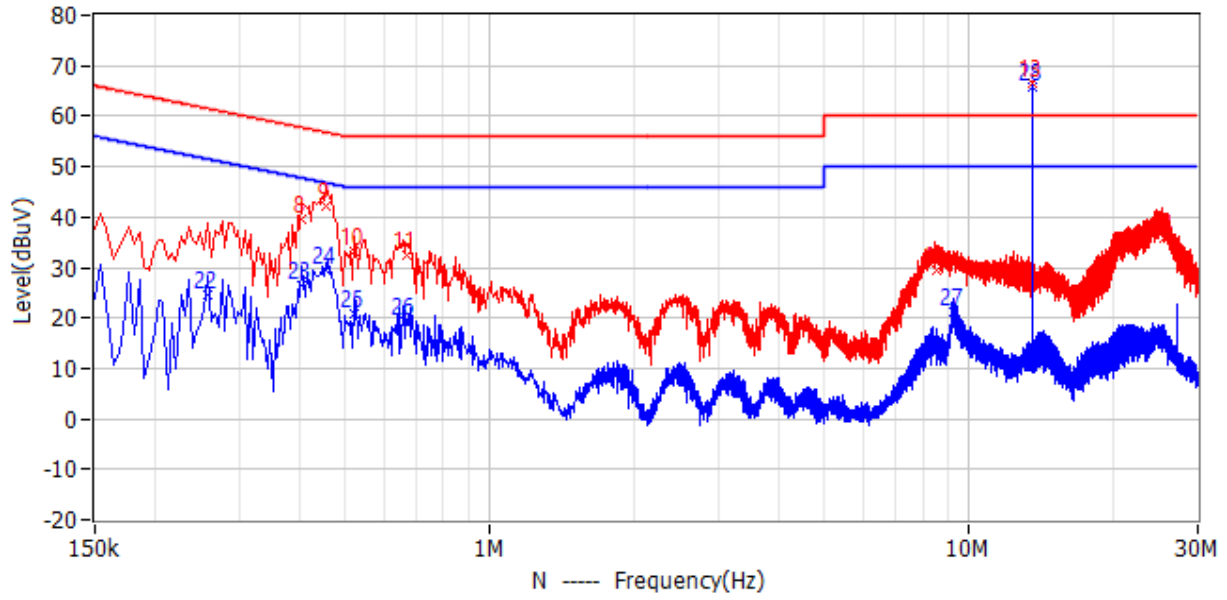

**TEST REPORT**

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	411.000kHz	57.6	38.1	19.6	31.9	6.2	QP	L1
2	451.500kHz	56.8	41.4	15.5	35.2	6.2	QP	L1
3	523.500kHz	56.0	33.2	22.8	27.0	6.2	QP	L1
4	658.500kHz	56.0	33.2	22.8	27.0	6.2	QP	L1
5	843.000kHz	56.0	30.3	25.7	24.1	6.2	QP	L1
!6	<b>13.560MHz</b>	-	74.9	-	68.5	6.4	QP	L1
7	25.310MHz	60.0	36.7	23.3	30.2	6.5	QP	L1
8	406.500kHz	57.7	39.5	18.2	33.3	6.2	QP	N
9	456.000kHz	56.8	42.3	14.5	36.0	6.3	QP	N
10	523.500kHz	56.0	33.2	22.8	26.9	6.3	QP	N
11	672.000kHz	56.0	32.5	23.5	26.2	6.3	QP	N
12	8.565MHz	60.0	29.5	30.5	23.1	6.4	QP	N
!13	<b>13.560MHz</b>	-	66.5	-	60.1	6.4	QP	N
14	25.440MHz	60.0	35.8	24.2	29.2	6.6	QP	N
15	406.500kHz	47.7	25.1	22.6	18.9	6.2	AV	L1
16	456.000kHz	46.8	28.8	17.9	22.6	6.2	AV	L1
17	528.000kHz	46.0	20.2	25.8	14.0	6.2	AV	L1
18	663.000kHz	46.0	20.2	25.8	14.0	6.2	AV	L1
19	856.500kHz	46.0	18.1	27.9	11.9	6.2	AV	L1
20	9.276MHz	50.0	20.8	29.2	14.5	6.3	AV	L1
!21	<b>13.560MHz</b>	-	74.6	-	68.2	6.4	AV	L1
22	258.000kHz	51.5	24.6	26.8	18.4	6.2	AV	N
23	406.500kHz	47.7	26.4	21.3	20.2	6.2	AV	N
24	456.000kHz	46.8	29.6	17.1	23.3	6.3	AV	N
25	523.500kHz	46.0	21.0	25.0	14.7	6.3	AV	N
26	663.000kHz	46.0	19.3	26.7	13.0	6.3	AV	N
27	9.245MHz	50.0	21.1	28.9	14.7	6.4	AV	N
!28	<b>13.560MHz</b>	-	65.7	-	59.3	6.4	AV	N

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
- 2. Corrected Reading = Original Receiver Reading + Correct Factor*
- 3. Margin = Limit - Corrected Reading*
- 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*


## 8 20dB Bandwidth

Test result: Pass

### 8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.  
No limit for 99% bandwidth.

### 8.2 Test configuration

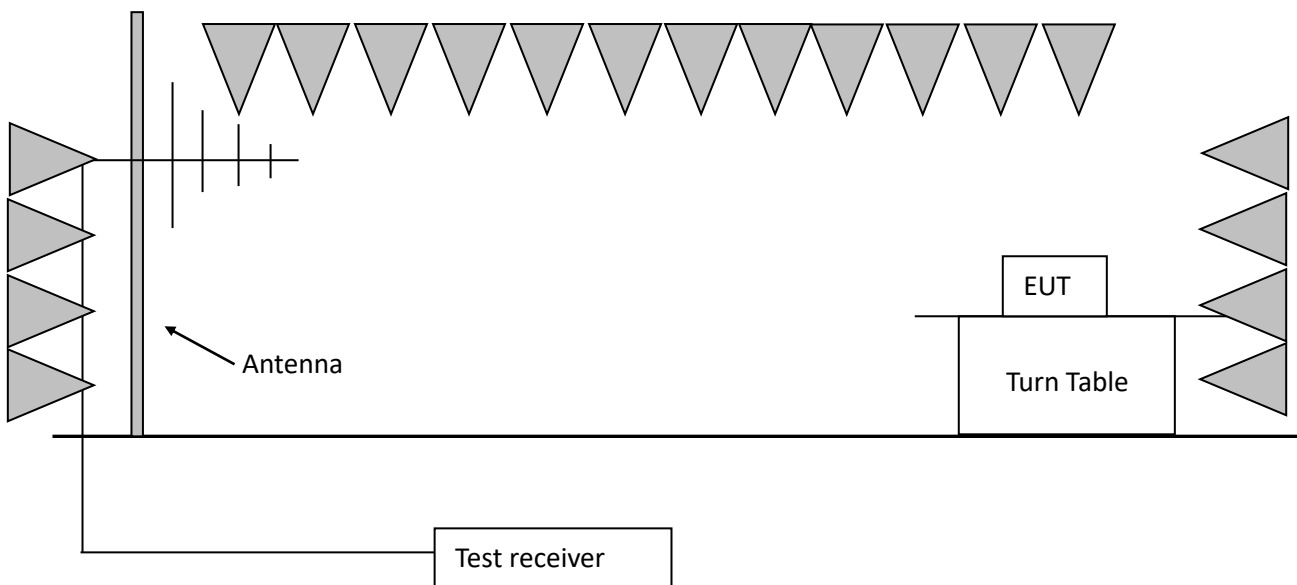

**TEST REPORT****8.3 Test procedure and test set up**

The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW  $\geq 3 \cdot$  RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

## TEST REPORT

### 8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.559902	13.562401	2.119	13.553 ~ 13.567



## 9 Antenna requirement

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

\*\*\*\*\* END \*\*\*\*\*