




TEST REPORT

Report No. : **CHEW19090136R1** **Report Verification:** 

Project No...... : **SHT2011042803EW**

FCC ID..... : **2ACCU-SLAR0919**

Applicant's name..... : **PreSonus Audio Electronics, Inc.**

Address..... : 18011 Grand Bay Court Baton Rouge, LA 70809, USA

Manufacturer..... : PreSonus Audio Electronics, Inc.

Address..... : 18011 Grand Bay Court Baton Rouge, LA 70809, USA

Test item description : **MIXER**

Trade Mark : PreSonus

Model/Type reference..... : STUDIOLIVE AR16c

Listed Model(s) : STUDIOLIVE AR12c, STUDIOLIVE AR8c

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Nov. 11, 2020

Date of testing..... : Nov. 12, 2020- Nov. 23, 2020

Date of issue..... : Nov. 24, 2020

Result..... : **PASS**

Compiled by (Position+Printed name+Signature):	File administrators Silvia Li	
Supervised by (Position+Printed name+Signature):	Project Engineer Xiao Cheng	
Approved by (Position+Printed name+Signature):	RF Manager Hans Hu	

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	<u>TEST DESCRIPTION</u>	4
3.	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
4.	<u>TEST ENVIRONMENT</u>	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
5.	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	40
5.11.	Spurious Emissions (radiated)	56
6.	<u>TEST SETUP PHOTOS</u>	60
7.	<u>EXTERANAL AND INTERNAL PHOTOS</u>	62

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-09-20	Original
R1	2020-11-24	Update external photos, make difference test on radiated emission 30M-1G, others are the same as report No. CHTEW19090136

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Bruce Wong
AC Power Line Conducted Emissions	15.207	PASS	Kang Yang
Conducted Peak Output Power	15.247 (b)(1)	PASS	Bruce Wong
20 dB Bandwidth	15.247 (a)(1)	PASS	Bruce Wong
Carrier Frequencies Separation	15.247 (a)(1)	PASS	Bruce Wong
Hopping Channel Number	15.247 (a)(1)	PASS	Bruce Wong
Dwell Time	15.247 (a)(1)	PASS	Bruce Wong
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Bruce Wong
Restricted band	15.247(d)/15.205	PASS	Kang Yang
Radiated Emissions	15.247(d)/15.209	PASS	Kang Yang

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	PreSonus Audio Electronics, Inc.
Address:	18011 Grand Bay Court Baton Rouge, LA 70809, USA
Manufacturer:	PreSonus Audio Electronics, Inc.
Address:	18011 Grand Bay Court Baton Rouge, LA 70809, USA

3.2. Product Description

Name of EUT:	MIXER
Trade Mark:	PreSonus
Model No.:	STUDIOLIVE AR16c
Listed Model(s):	STUDIOLIVE AR12c, STUDIOLIVE AR8c
Power supply:	AC 100-240V
Hardware version:	V3.0
Software version:	V3.0
Bluetooth	
Version:	Supported BT5.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	2.00dBi

3.3. Operation state

➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

➤ **TEST MODE**

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2020/10/19	2021/10/18
●	Loop Antenna	R&S	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2020/04/28	2023/04/27
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2020/05/27	2021/05/26
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A

●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● RF Conducted Method

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
○	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
○	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):


(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:


Passed **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.


AR8c

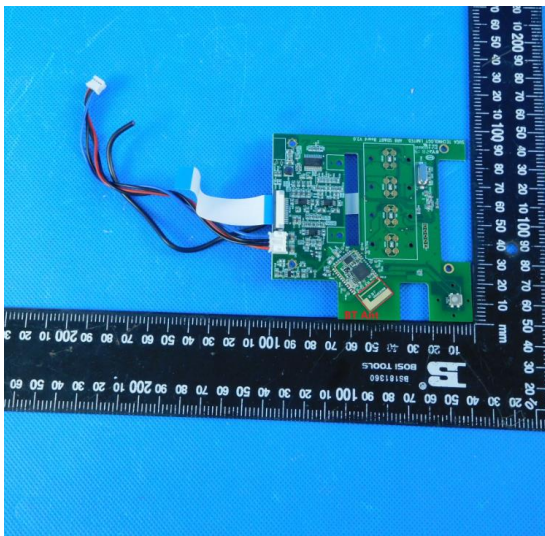

AR12c

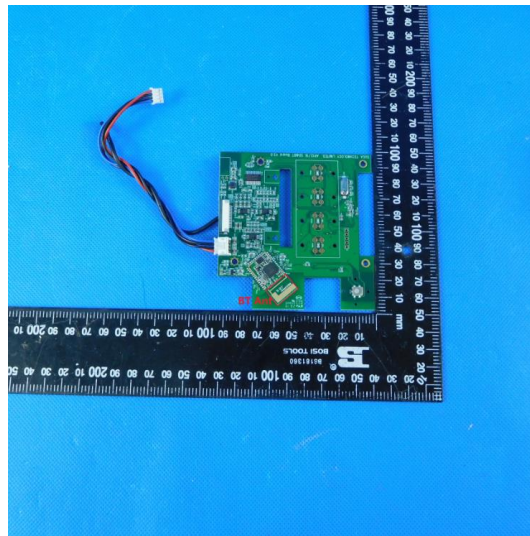

AR16c

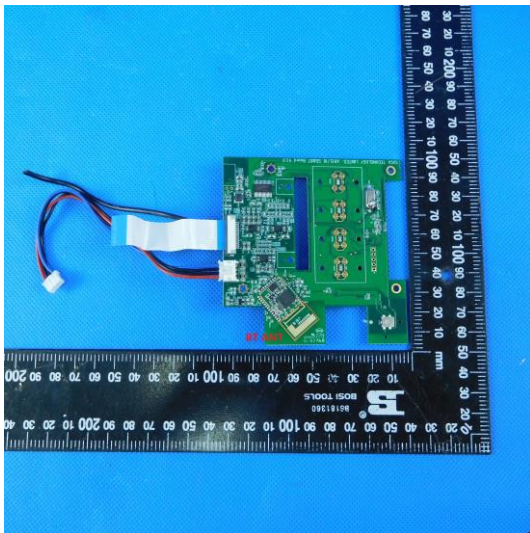

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

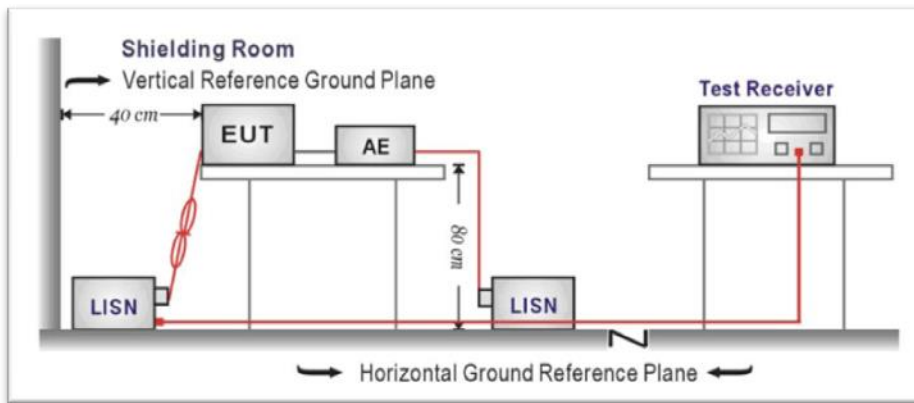

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


Passed Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level
- 3) The worst case is model: STUDIOLIVE AR16c

Test Line:

L

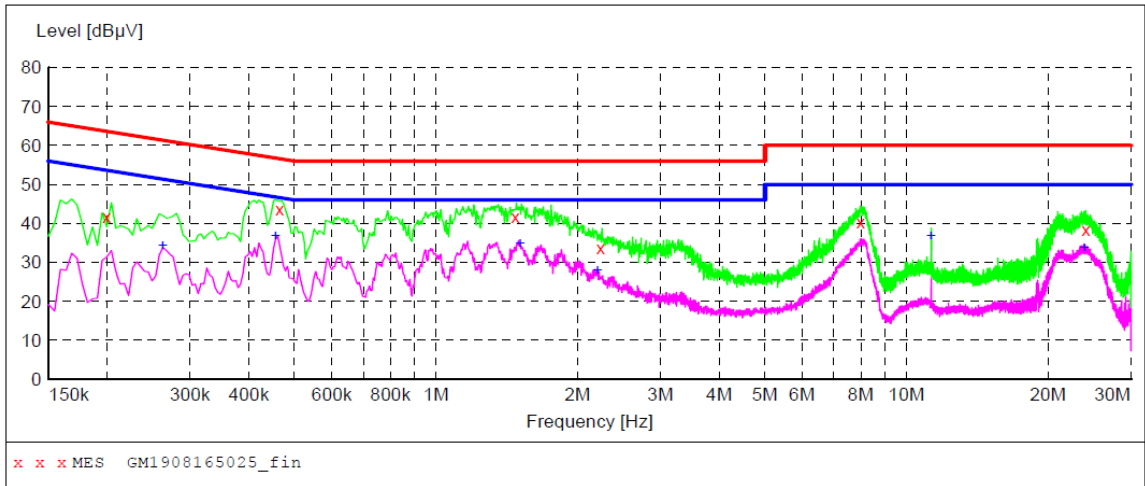

MEASUREMENT RESULT: "GM1908165025_fin"

8/16/2019 12:13PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	41.70	9.9	64	21.9	QP	L1	GND
0.465000	43.70	9.9	57	12.9	QP	L1	GND
1.473000	41.60	9.9	56	14.4	QP	L1	GND
2.238000	33.80	9.9	56	22.2	QP	L1	GND
7.989000	40.40	10.0	60	19.6	QP	L1	GND
24.040500	38.30	10.3	60	21.7	QP	L1	GND


MEASUREMENT RESULT: "GM1908165025_fin2"

8/16/2019 12:13PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.262500	34.30	9.9	51	17.1	AV	L1	GND
0.456000	36.60	9.9	47	10.2	AV	L1	GND
1.509000	34.70	9.9	46	11.3	AV	L1	GND
2.202000	27.80	9.9	46	18.2	AV	L1	GND
11.287500	36.70	10.1	50	13.3	AV	L1	GND
23.887500	33.60	10.3	50	16.4	AV	L1	GND

Test Line:

N

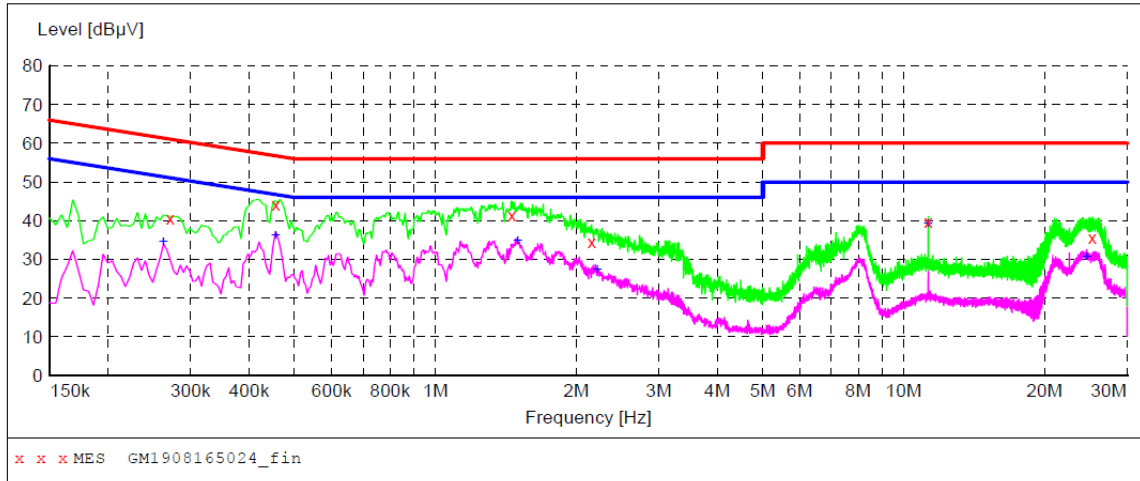

MEASUREMENT RESULT: "GM1908165024_fin"

8/16/2019 12:11PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.271500	40.50	9.9	61	20.6	QP	N	GND
0.456000	44.20	9.9	57	12.6	QP	N	GND
1.455000	41.50	9.9	56	14.5	QP	N	GND
2.157000	34.40	9.9	56	21.6	QP	N	GND
11.287500	39.70	10.1	60	20.3	QP	N	GND
25.264500	35.60	10.3	60	24.4	QP	N	GND

MEASUREMENT RESULT: "GM1908165024_fin2"

8/16/2019 12:11PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.262500	34.40	9.9	51	17.0	AV	N	GND
0.456000	36.30	9.9	47	10.5	AV	N	GND
1.500000	34.80	9.9	46	11.2	AV	N	GND
2.215500	27.20	9.9	46	18.8	AV	N	GND
11.287500	39.20	10.1	50	10.8	AV	N	GND
24.621000	30.70	10.3	50	19.3	AV	N	GND


5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

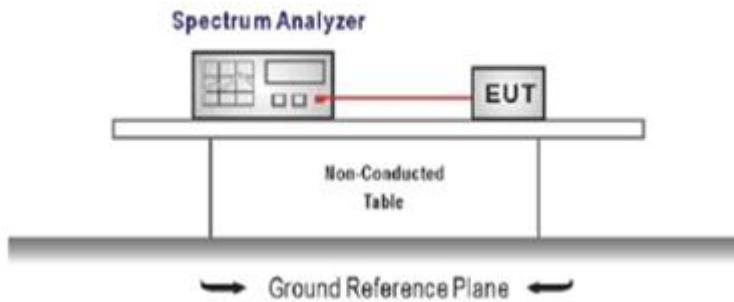

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW ≥ the 20 dB bandwidth of the emission being measured, VBW ≥ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Modulation type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
GFSK	00	-0.96	-0.99	≤ 30.00	Pass
	39	-2.15	-2.19		
	78	-2.37	-2.42		
π/4DQPSK	00	-0.58	-1.03	≤ 21.00	Pass
	39	-1.36	-1.55		
	78	-1.74	-1.92		
8DPSK	00	-0.31	-1.39	≤ 21.00	Pass
	39	-0.92	-1.56		
	78	-1.26	-2.08		

Modulation Type: GFSK	
CH00	<p>The spectrum plot for CH00 shows a GFSK signal centered at 2.402 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in MHz, with a span of 5.0 MHz. The signal is a bell-shaped curve with a peak level of -0.96 dBm at 2.40195660 GHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 1 MHz, Mode Auto Sweep, Count 500/500, and Span 5.0 MHz.</p>
CH39	<p>The spectrum plot for CH39 shows a GFSK signal centered at 2.441 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in MHz, with a span of 5.0 MHz. The signal is a bell-shaped curve with a peak level of -2.15 dBm at 2.44084080 GHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 1 MHz, Mode Auto Sweep, Count 500/500, and Span 5.0 MHz.</p>
CH78	<p>The spectrum plot for CH78 shows a GFSK signal centered at 2.48 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in MHz, with a span of 5.0 MHz. The signal is a bell-shaped curve with a peak level of -2.37 dBm at 2.47984800 GHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 1 MHz, Mode Auto Sweep, Count 500/500, and Span 5.0 MHz.</p>

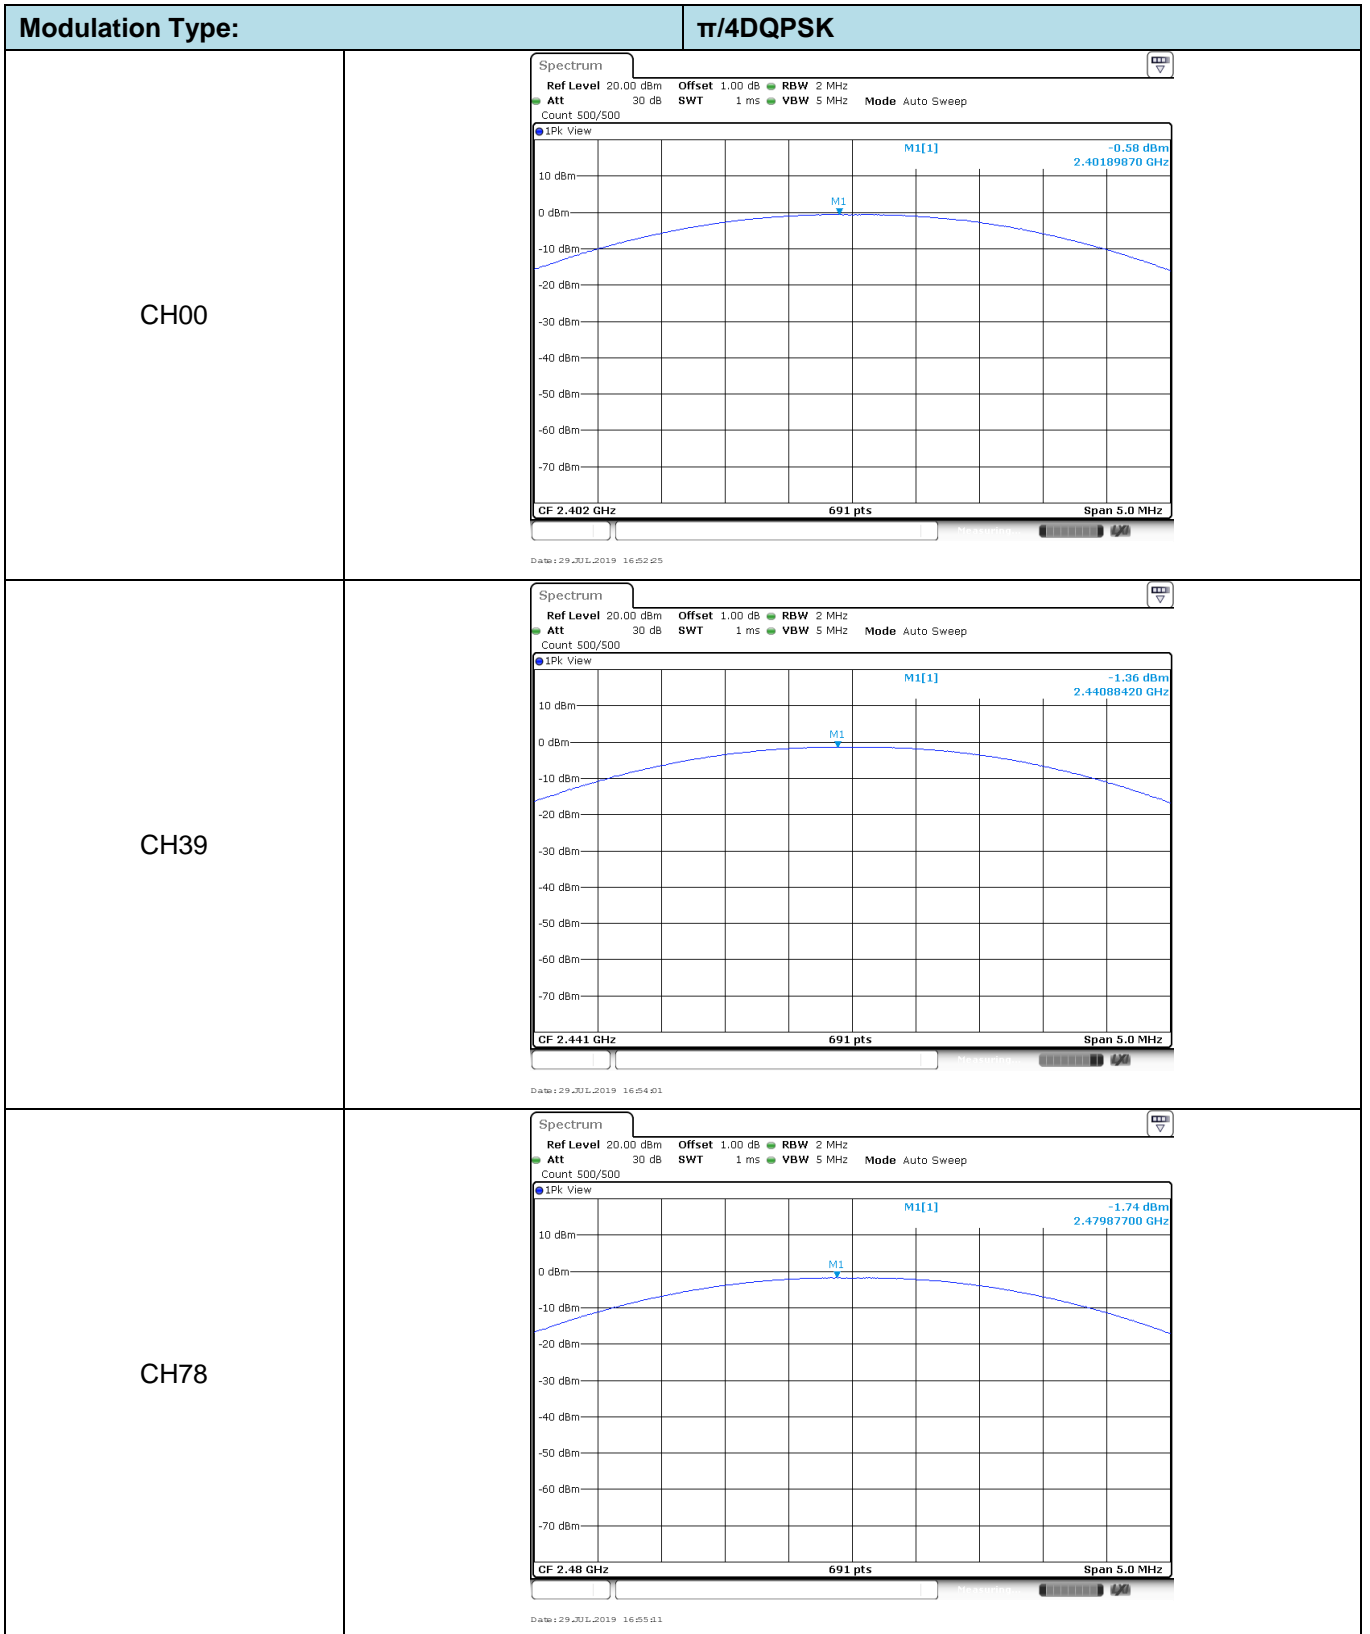


Modulation Type: 8DPSK	
CH00	<p>Spectrum plot for CH00. The plot shows a signal at 2.4021450 GHz with a level of -0.31 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 2 MHz, SWT 1 ms, VBW 5 MHz, Mode Auto Sweep, Count 500/500, CF 2.402 GHz, 691 pts, Span 5.0 MHz.</p>
CH39	<p>Spectrum plot for CH39. The plot shows a signal at 2.44097110 GHz with a level of -0.92 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 2 MHz, SWT 1 ms, VBW 5 MHz, Mode Auto Sweep, Count 500/500, CF 2.441 GHz, 691 pts, Span 5.0 MHz.</p>
CH78	<p>Spectrum plot for CH78. The plot shows a signal at 2.47997110 GHz with a level of -1.26 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 2 MHz, SWT 1 ms, VBW 5 MHz, Mode Auto Sweep, Count 500/500, CF 2.48 GHz, 691 pts, Span 5.0 MHz.</p>

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

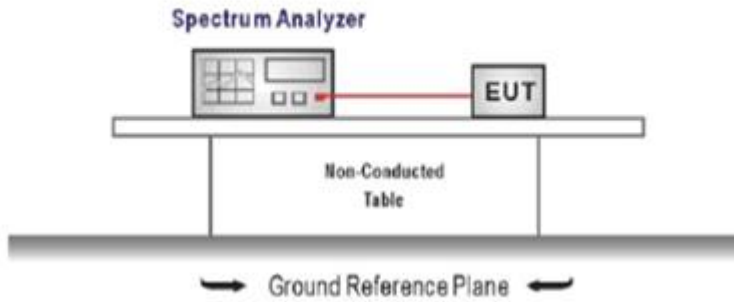

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.92	-	Pass
	39	0.93		
	78	0.93		
π/4DQPSK	00	1.25	-	Pass
	39	1.25		
	78	1.26		
8DPSK	00	1.26	-	Pass
	39	1.26		
	78	1.26		

Modulation Type:		GFSK																																
CH00	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.401545 GHz</td> <td>-26.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.4020525 GHz</td> <td>-6.72 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1</td> <td>922.5 kHz</td> <td>-0.39 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29_JUL_2019 16:47:49</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	M1	1	1	2.401545 GHz	-26.91 dBm			M2	M1	1	1	2.4020525 GHz	-6.72 dBm			D3	M1	1	1	922.5 kHz	-0.39 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	M1	1	1	2.401545 GHz	-26.91 dBm																													
M2	M1	1	1	2.4020525 GHz	-6.72 dBm																													
D3	M1	1	1	922.5 kHz	-0.39 dB																													
CH39	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.4405425 GHz</td> <td>-29.45 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.4410525 GHz</td> <td>-7.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1</td> <td>925.0 kHz</td> <td>0.50 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29_JUL_2019 16:49:21</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	M1	1	1	2.4405425 GHz	-29.45 dBm			M2	M1	1	1	2.4410525 GHz	-7.94 dBm			D3	M1	1	1	925.0 kHz	0.50 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	M1	1	1	2.4405425 GHz	-29.45 dBm																													
M2	M1	1	1	2.4410525 GHz	-7.94 dBm																													
D3	M1	1	1	925.0 kHz	0.50 dB																													
CH78	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.48 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.4795425 GHz</td> <td>-29.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>M1</td> <td>1</td> <td>1</td> <td>2.48005 GHz</td> <td>-8.10 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1</td> <td>925.0 kHz</td> <td>-0.02 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29_JUL_2019 16:50:41</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	M1	1	1	2.4795425 GHz	-29.22 dBm			M2	M1	1	1	2.48005 GHz	-8.10 dBm			D3	M1	1	1	925.0 kHz	-0.02 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	M1	1	1	2.4795425 GHz	-29.22 dBm																													
M2	M1	1	1	2.48005 GHz	-8.10 dBm																													
D3	M1	1	1	925.0 kHz	-0.02 dB																													

Modulation Type:		$\pi/4$ DQPSK																												
CH00	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Types</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4013675 GHz</td> <td>-23.14 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4018425 GHz</td> <td>-2.82 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.255 MHz</td> <td>0.23 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:52:06</p>		Types	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4013675 GHz	-23.14 dBm			M2		1	2.4018425 GHz	-2.82 dBm			D3	M1	1	1.255 MHz	0.23 dB		
Types	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4013675 GHz	-23.14 dBm																										
M2		1	2.4018425 GHz	-2.82 dBm																										
D3	M1	1	1.255 MHz	0.23 dB																										
CH39	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Types</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4403675 GHz</td> <td>-23.66 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4408425 GHz</td> <td>-3.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.2525 MHz</td> <td>0.02 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:53:51</p>		Types	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4403675 GHz	-23.66 dBm			M2		1	2.4408425 GHz	-3.59 dBm			D3	M1	1	1.2525 MHz	0.02 dB		
Types	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4403675 GHz	-23.66 dBm																										
M2		1	2.4408425 GHz	-3.59 dBm																										
D3	M1	1	1.2525 MHz	0.02 dB																										
CH78	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View</p> <p>CF 2.48 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Types</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.479365 GHz</td> <td>-24.61 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4798425 GHz</td> <td>-4.01 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.2575 MHz</td> <td>0.48 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:55:01</p>		Types	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479365 GHz	-24.61 dBm			M2		1	2.4798425 GHz	-4.01 dBm			D3	M1	1	1.2575 MHz	0.48 dB		
Types	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.479365 GHz	-24.61 dBm																										
M2		1	2.4798425 GHz	-4.01 dBm																										
D3	M1	1	1.2575 MHz	0.48 dB																										

Modulation Type:		8DPSK																																
CH00	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View M1[1] 2.40135500 GHz -23.16 dBm M2[1] 2.40184250 GHz -2.97 dBm D1 -22.975 dBm CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>2.401355 GHz</td> <td>-23.16 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td></td> <td>1</td> <td>2.4018425 GHz</td> <td>-2.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td>1</td> <td>1.2625 MHz</td> <td>0.06 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:56:44</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	2.401355 GHz	-23.16 dBm			M2			1	2.4018425 GHz	-2.97 dBm			D3	M1		1	1.2625 MHz	0.06 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1			1	2.401355 GHz	-23.16 dBm																													
M2			1	2.4018425 GHz	-2.97 dBm																													
D3	M1		1	1.2625 MHz	0.06 dB																													
CH39	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View M1[1] 2.44035500 GHz -23.69 dBm M2[1] 2.44084250 GHz -3.63 dBm D1 -23.628 dBm CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>2.440355 GHz</td> <td>-23.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td></td> <td>1</td> <td>2.4408425 GHz</td> <td>-3.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td>1</td> <td>1.2625 MHz</td> <td>-0.04 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:58:15</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	2.440355 GHz	-23.69 dBm			M2			1	2.4408425 GHz	-3.63 dBm			D3	M1		1	1.2625 MHz	-0.04 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1			1	2.440355 GHz	-23.69 dBm																													
M2			1	2.4408425 GHz	-3.63 dBm																													
D3	M1		1	1.2625 MHz	-0.04 dB																													
CH78	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT Count 500/500 IPK View M1[1] 2.47935250 GHz -24.09 dBm M2[1] 2.47984250 GHz -3.98 dBm D1 -23.975 dBm CF 2.48 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>2.4793525 GHz</td> <td>-24.09 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td></td> <td>1</td> <td>2.4798425 GHz</td> <td>-3.98 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td>1</td> <td>1.265 MHz</td> <td>0.09 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:59:06</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	2.4793525 GHz	-24.09 dBm			M2			1	2.4798425 GHz	-3.98 dBm			D3	M1		1	1.265 MHz	0.09 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1			1	2.4793525 GHz	-24.09 dBm																													
M2			1	2.4798425 GHz	-3.98 dBm																													
D3	M1		1	1.265 MHz	0.09 dB																													


5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

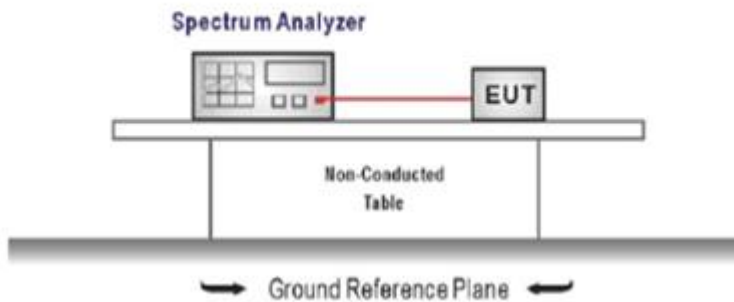

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - RBW \geq 1% of the span, VBW \geq RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable




Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥ 0.93	Pass
$\pi/4$ DQPSK	39	1.00	≥ 0.84	Pass
8DPSK	39	1.00	≥ 0.84	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3$ * The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit = $2/3$ * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

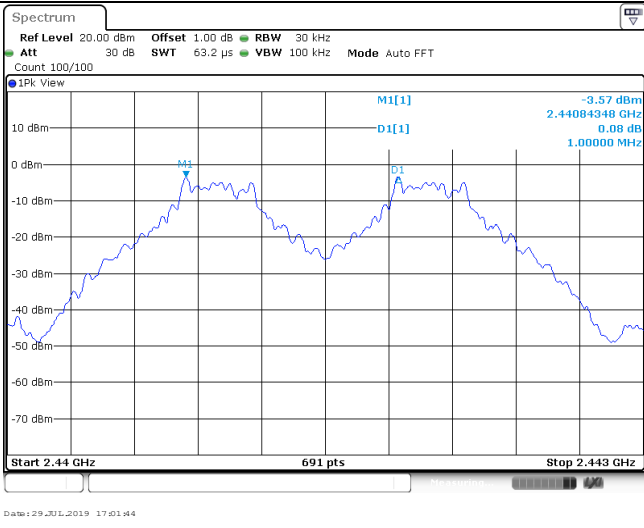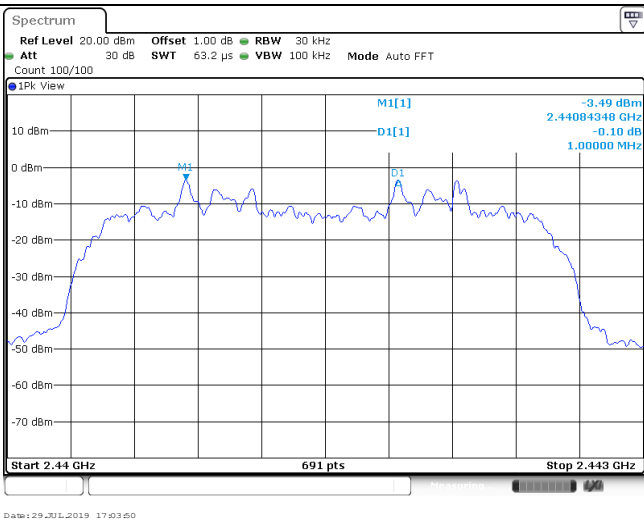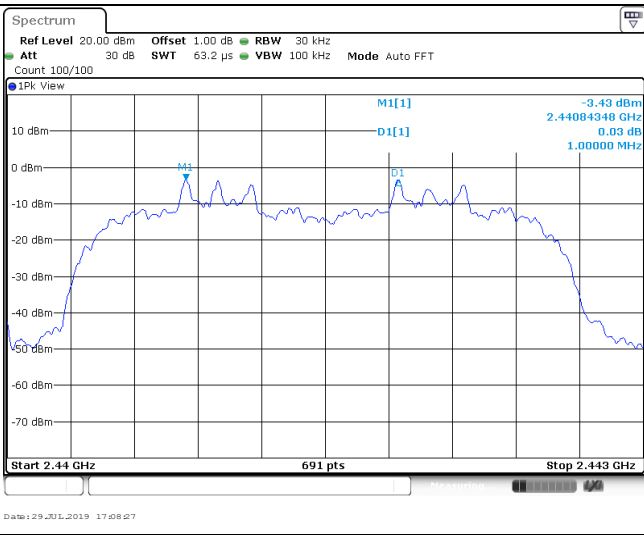
<p>GFSK</p>	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] -3.57 dBm 2.44084348 GHz 0.08 dB 1.00000 MHz</p> <p>D1[1]</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 29.JUL.2019 17:01:44</p>
<p>$\pi/4$DQPSK</p>	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] -3.49 dBm 2.44084348 GHz -0.10 dB 1.00000 MHz</p> <p>D1[1]</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 29.JUL.2019 17:03:50</p>
<p>8DPSK</p>	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] -3.43 dBm 2.44084348 GHz 0.03 dB 1.00000 MHz</p> <p>D1[1]</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 29.JUL.2019 17:08:27</p>

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

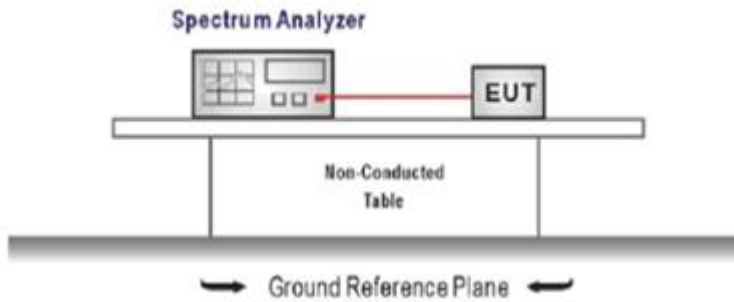

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = the frequency band of operation
 RBW ≥ 1% of the span, VBW ≥ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4DQPSK	79		
8DPSK	79		

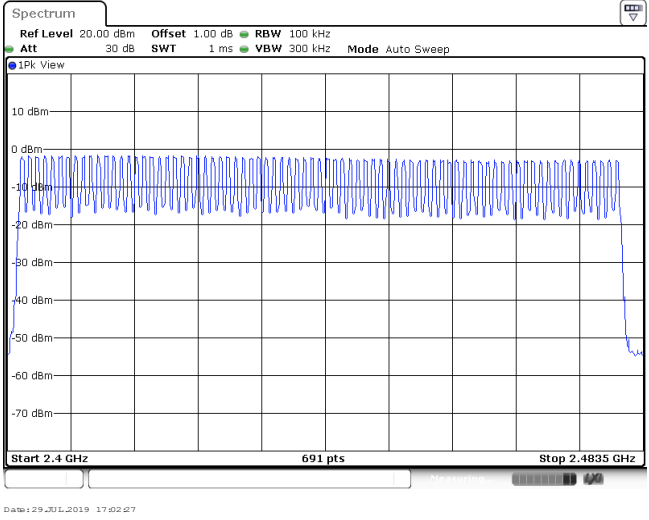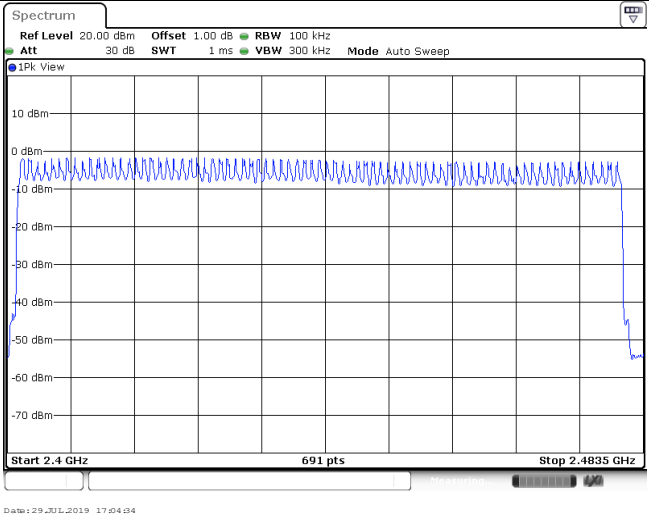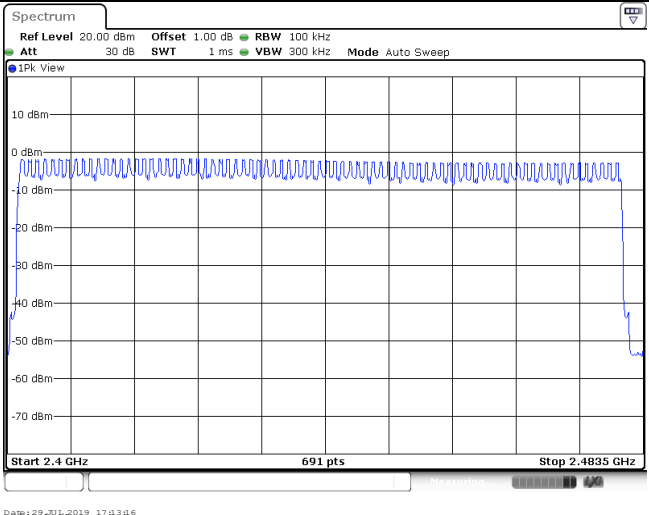
<p>GFSK</p>	
<p>$\pi/4$DQPSK</p>	
<p>8DPSK</p>	

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

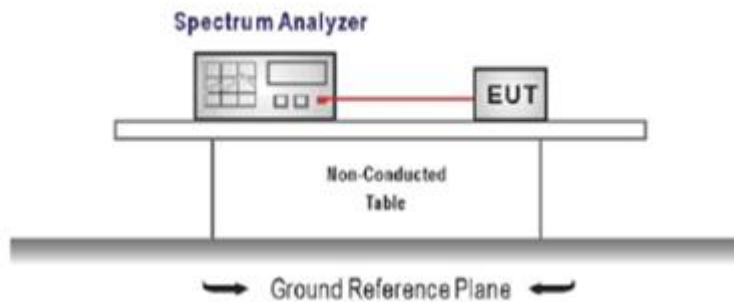

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Passed Not Applicable

Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.38	321.00	0.12	≤ 0.40	Pass
	DH3	1.63	161.00	0.26		
	DH5	2.88	112.00	0.32		
$\pi/4$ DQPSK	2DH1	0.38	321.00	0.12	≤ 0.40	Pass
	2DH3	1.64	155.00	0.25		
	2DH5	2.89	96.00	0.28		
8DPSK	3DH1	0.38	319.00	0.12	≤ 0.40	Pass
	3DH3	1.63	164.00	0.27		
	3DH5	2.89	103.00	0.30		


Modulation Type: GFSK	
DH1 Burst width	
DH1 Burst number	
DH3 Burst width	

DH3
Burst number

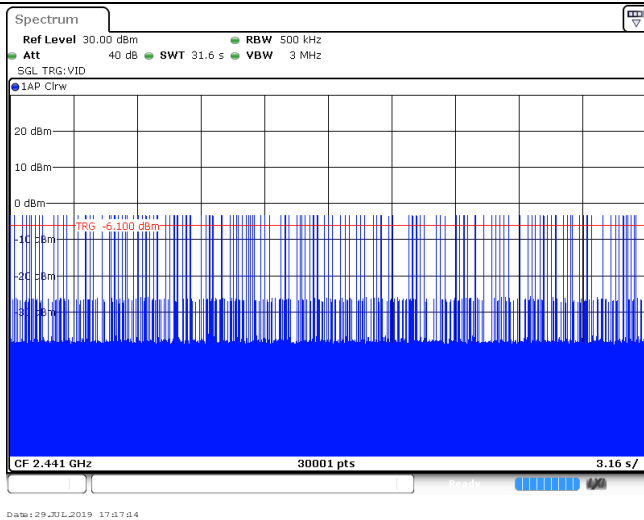


Date: 29 JUL 2019 17:07:14

DH5
Burst width

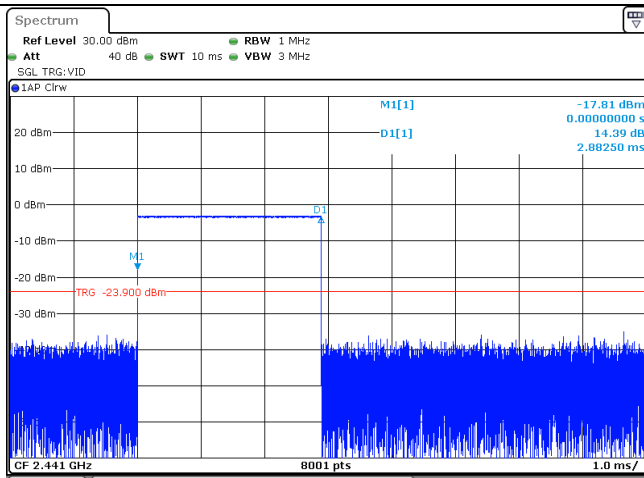

Date: 29 JUL 2019 17:07:53


DH5
Burst number

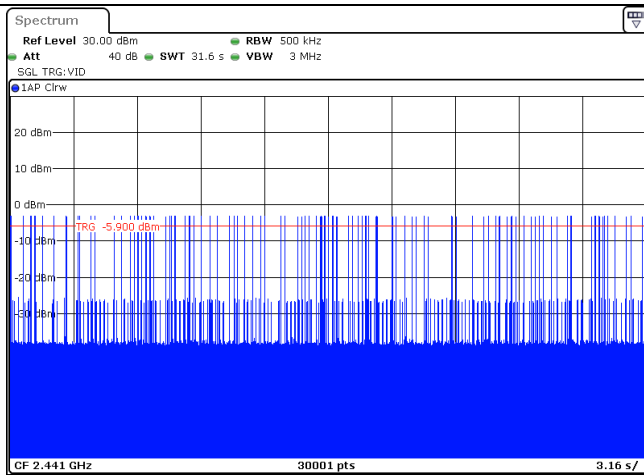


Date: 29 JUL 2019 17:08:27

Modulation Type: $\pi/4$DQPSK	
2DH1 Burst width	
2DH1 Burst number	
2DH3 Burst width	


2DH3
Burst number



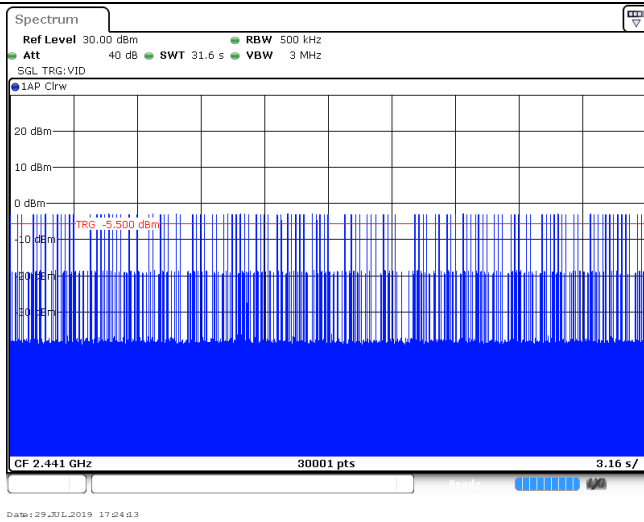


2DH5
Burst width

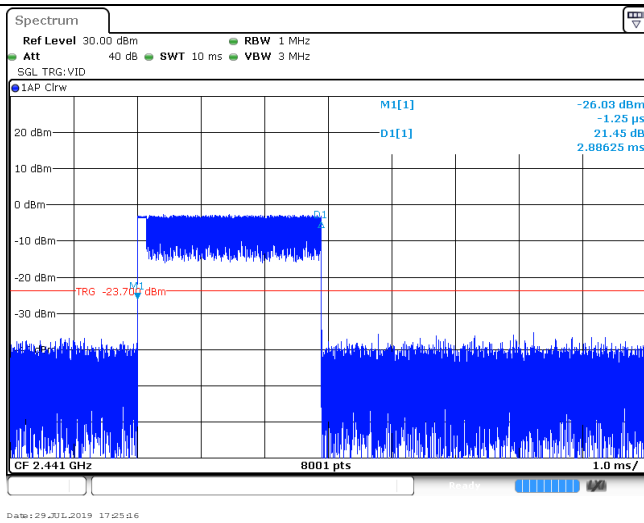


2DH5
Burst number

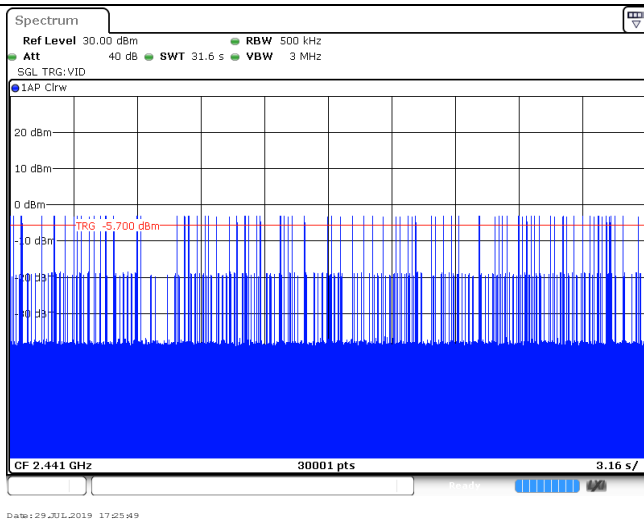


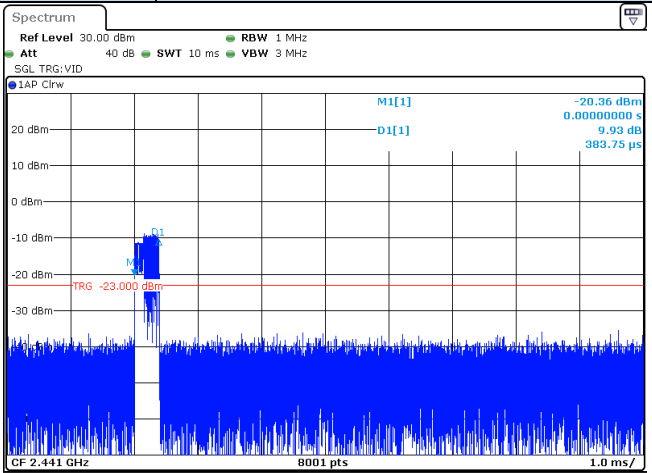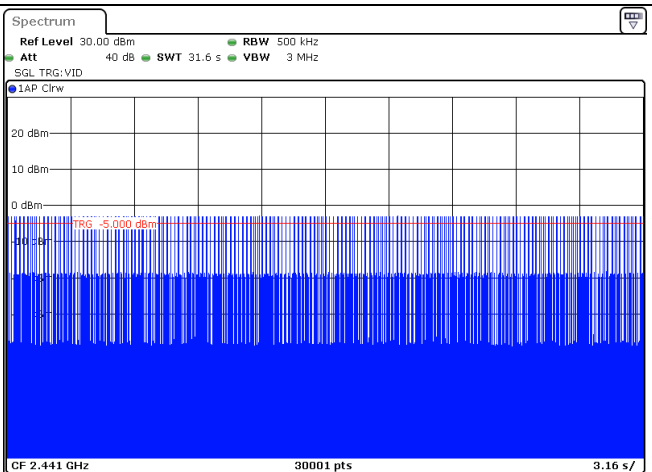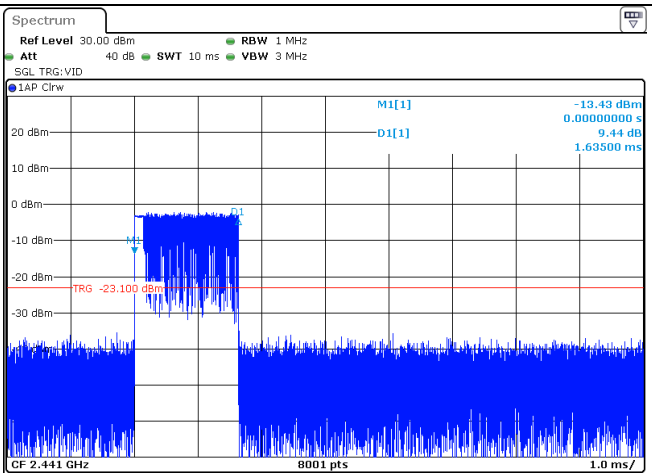Modulation Type: $\pi/4$ DQPSK	
3DH1 Burst width	 <p>Spectrum plot showing a single burst of signal. The y-axis is power in dBm from -30 to 20. The x-axis is frequency in GHz from 2.441 to 2.442. A red trigger line is at -23.000 dBm. A blue cursor M1[1] is at -20.36 dBm. A blue cursor D1[1] is at 383.75 ps. The plot shows a narrow band of signal with a peak at approximately 2.4415 GHz.</p> <p>Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 10 ms VBW 3 MHz</p> <p>CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 29 JUL 2019 17:26:50</p>
3DH1 Burst number	 <p>Spectrum plot showing a continuous signal. The y-axis is power in dBm from -30 to 20. The x-axis is frequency in GHz from 2.441 to 2.442. A red trigger line is at -5.000 dBm. The plot shows a dense signal across the entire frequency range.</p> <p>Ref Level 30.00 dBm Att 40 dB RBW 500 kHz SWT 31.6 s VBW 3 MHz</p> <p>CF 2.441 GHz 30001 pts 3.16 s/</p> <p>Date: 29 JUL 2019 17:27:23</p>
3DH3 Burst width	 <p>Spectrum plot showing a burst of signal. The y-axis is power in dBm from -30 to 20. The x-axis is frequency in GHz from 2.441 to 2.442. A red trigger line is at -23.100 dBm. A blue cursor M1[1] is at -13.43 dBm. A blue cursor D1[1] is at 1.63500 ms. The plot shows a burst of signal between approximately 2.4412 GHz and 2.4418 GHz.</p> <p>Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 10 ms VBW 3 MHz</p> <p>CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 29 JUL 2019 17:29:14</p>


3DH3
Burst number

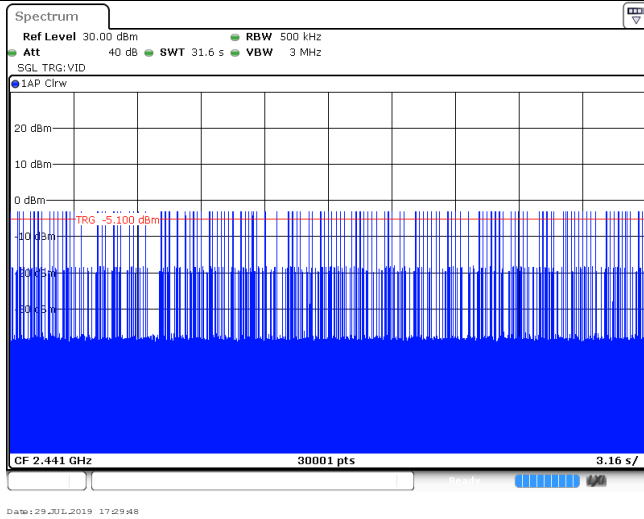

3DH5
Burst width

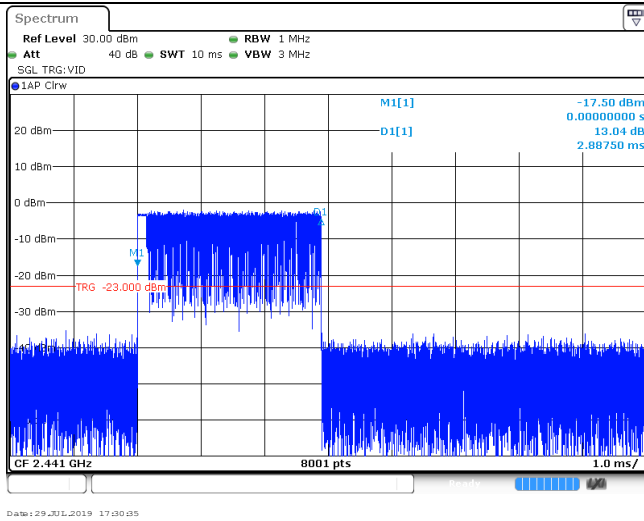

3DH5
Burst number

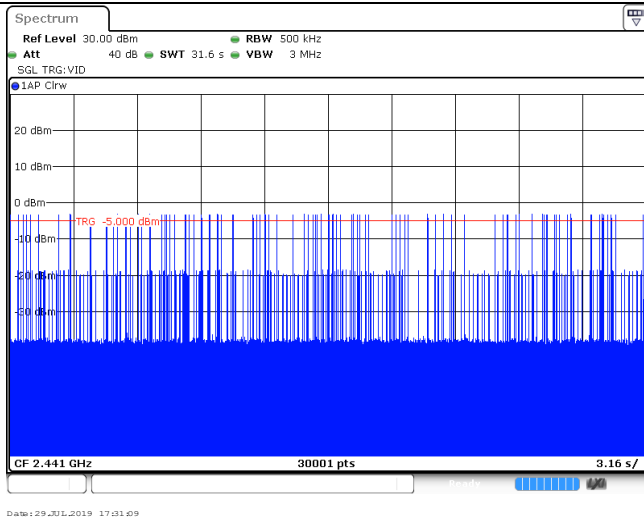

5.8. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

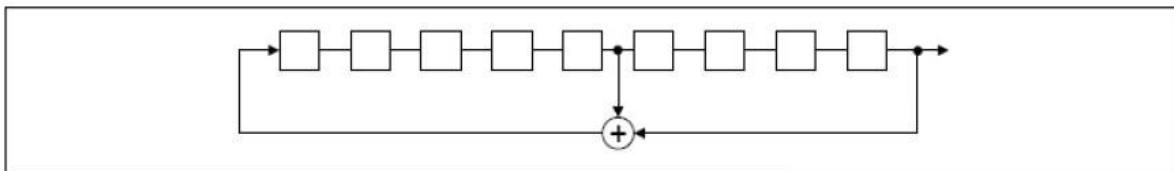

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

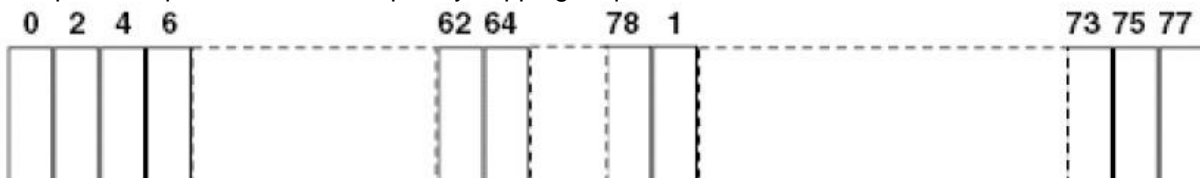

Each frequency used equally on the average by each transmitter. The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

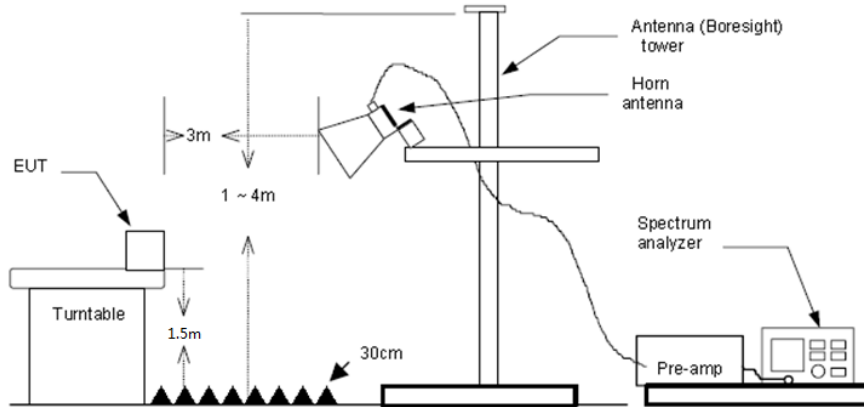

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
 RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


Passed Not Applicable

Note:


- 1) Final level= Read level + Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

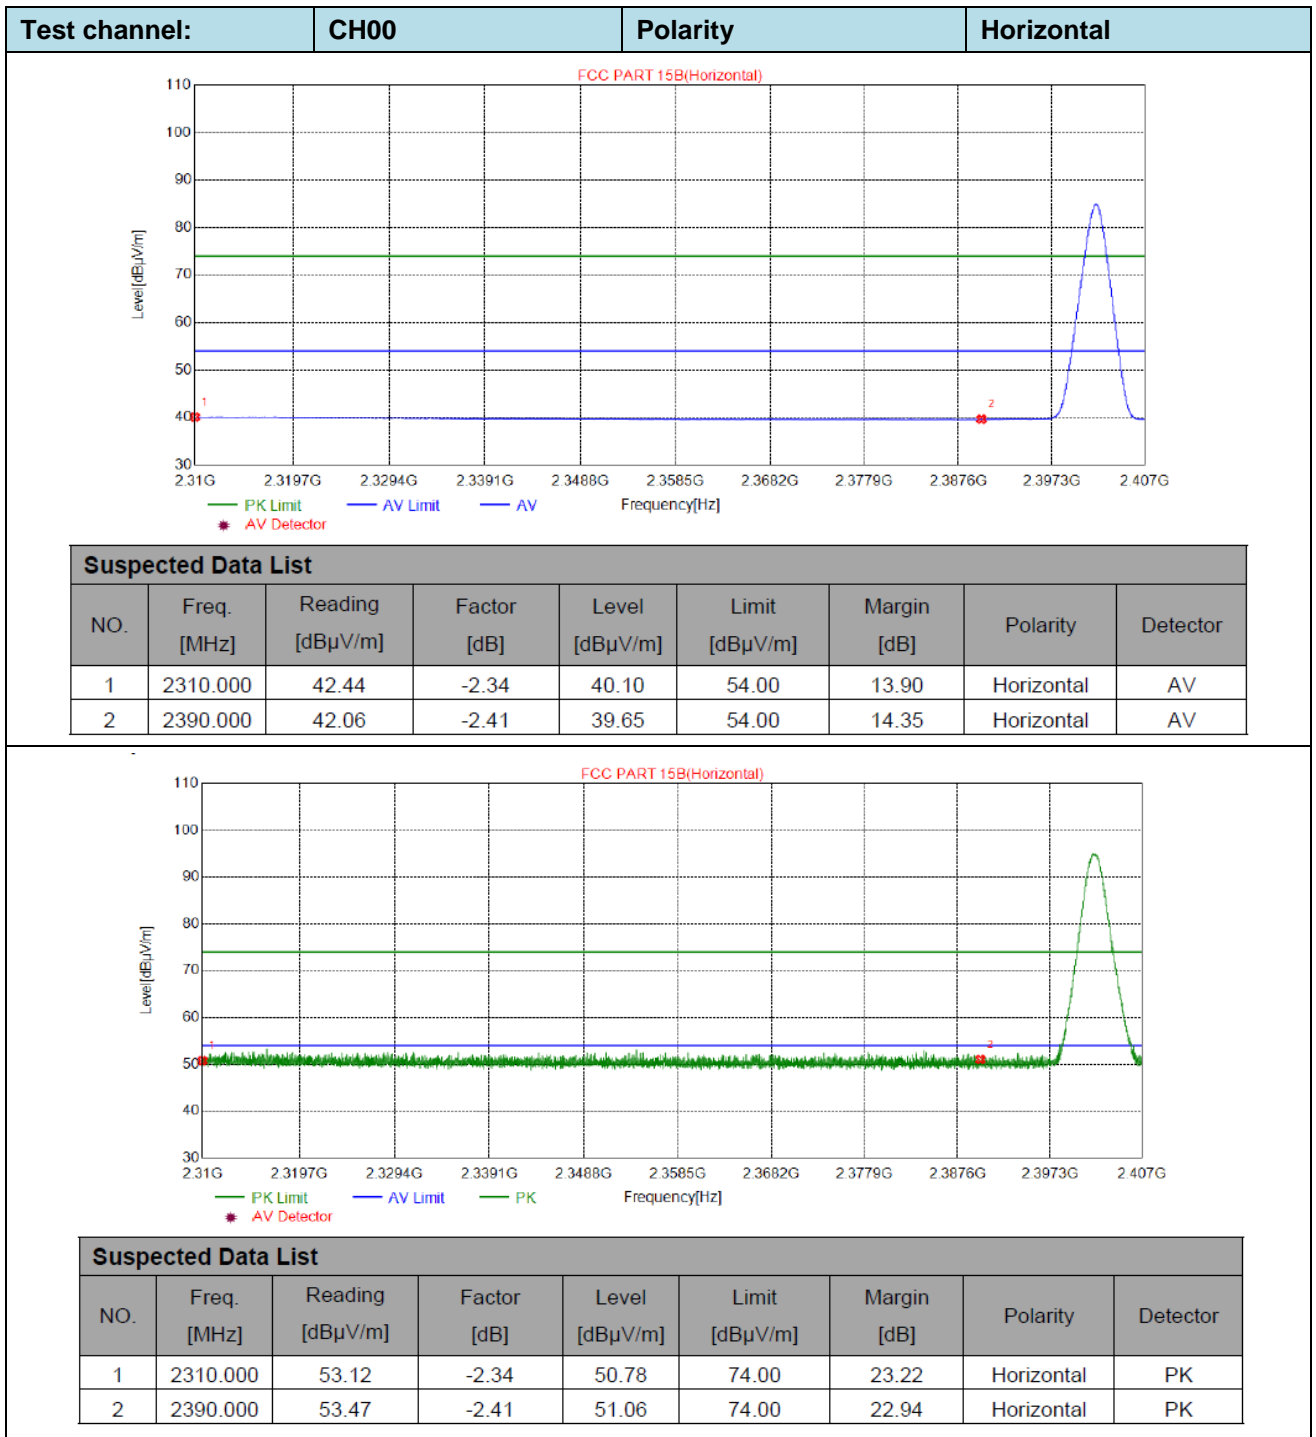


Test channel:	CH00	Polarity	Vertical
----------------------	-------------	-----------------	-----------------

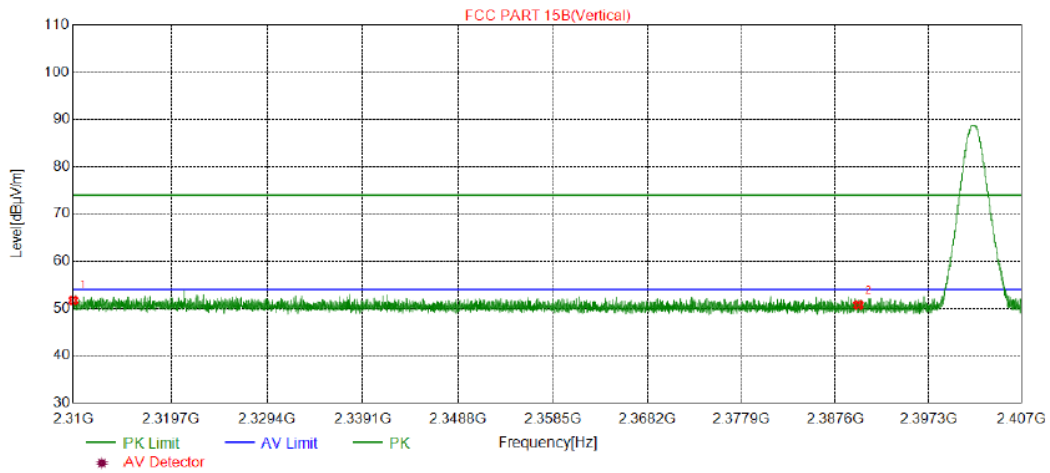


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2310.000	54.05	-2.34	51.71	74.00	22.29	Vertical	PK
2	2390.000	53.16	-2.41	50.75	74.00	23.25	Vertical	PK

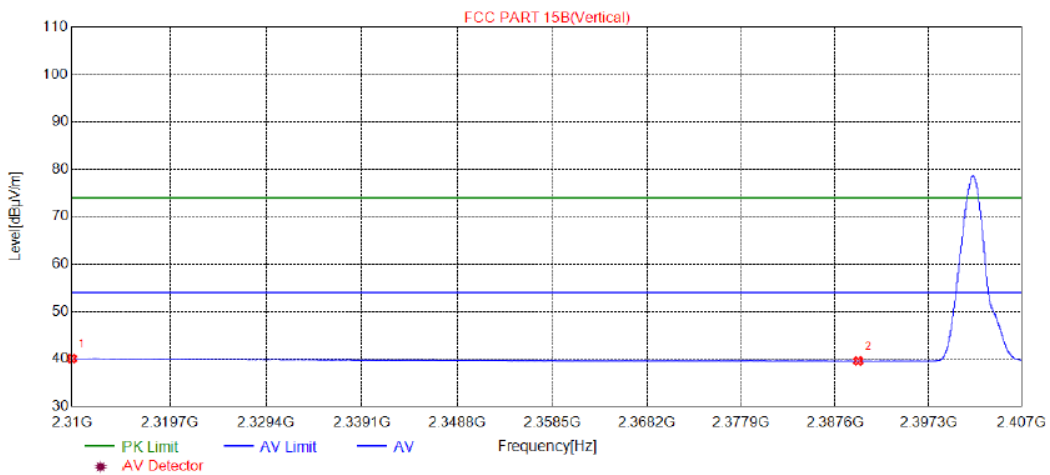


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2310.000	42.42	-2.34	40.08	54.00	13.92	Vertical	AV
2	2390.000	41.99	-2.41	39.58	54.00	14.42	Vertical	AV

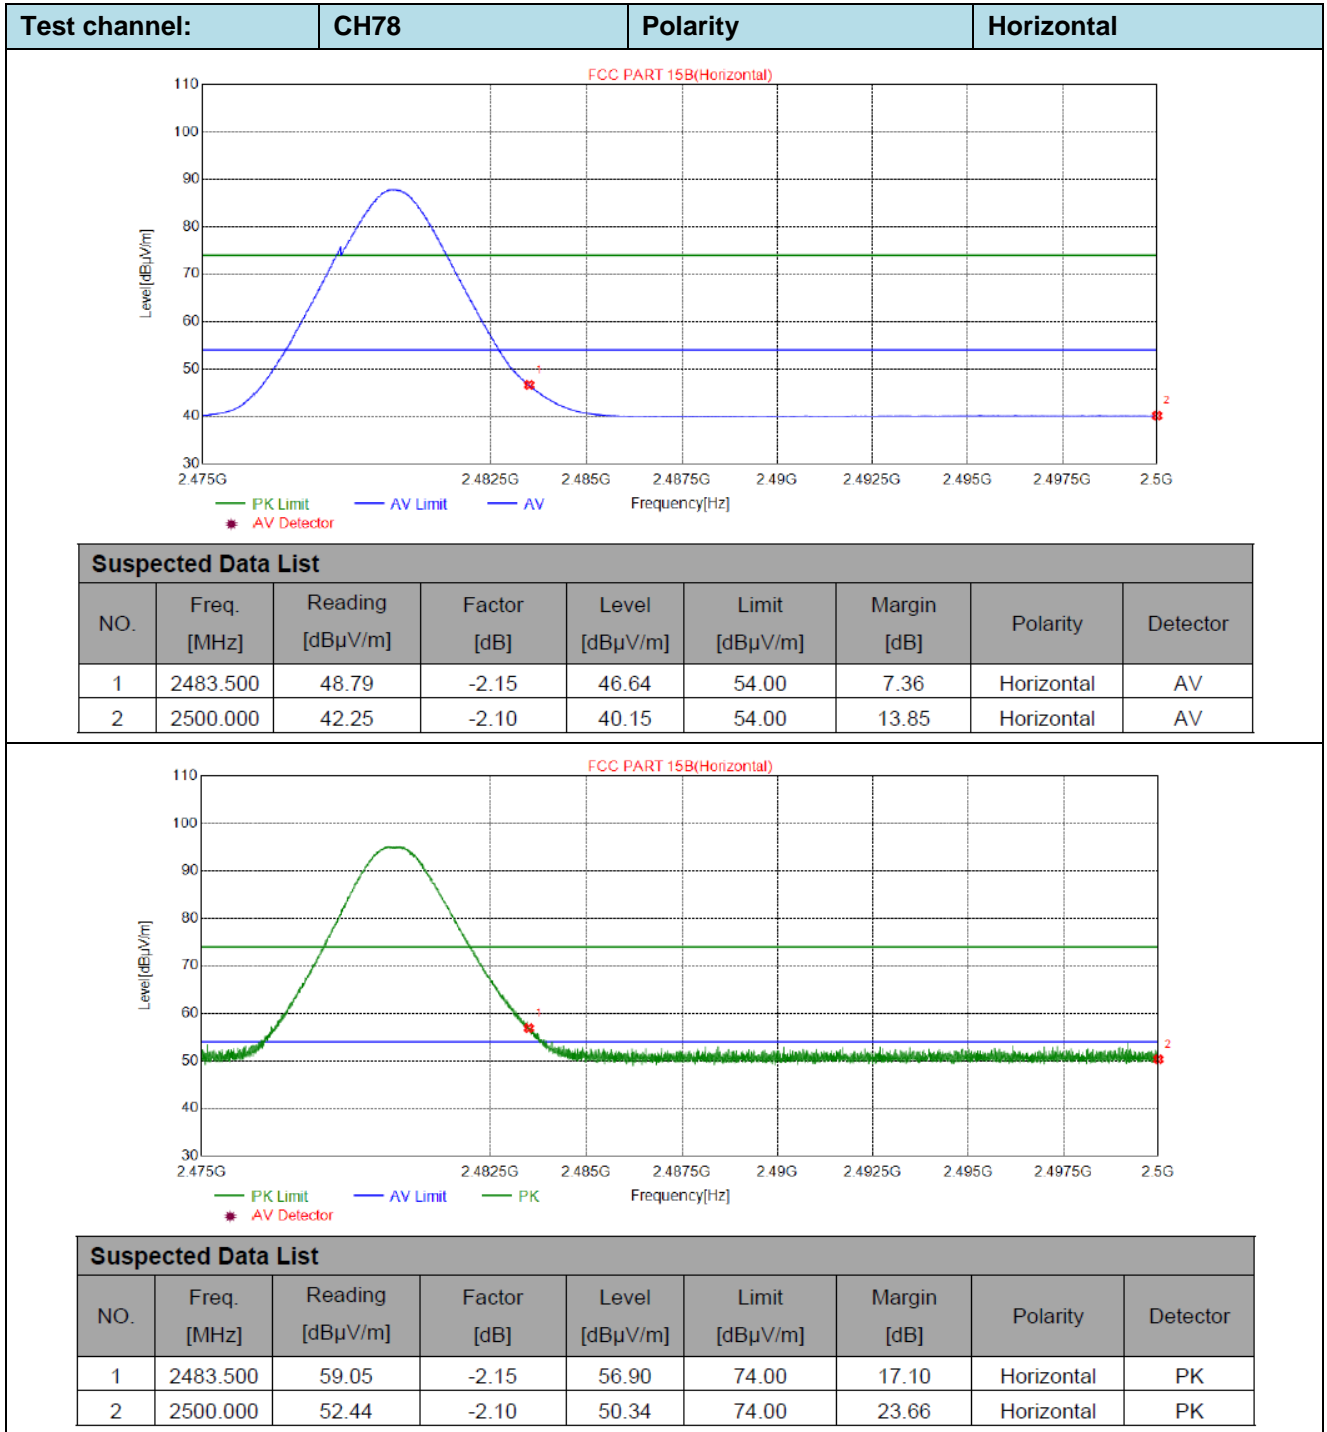

Test channel:	CH78	Polarity	Vertical
----------------------	-------------	-----------------	-----------------

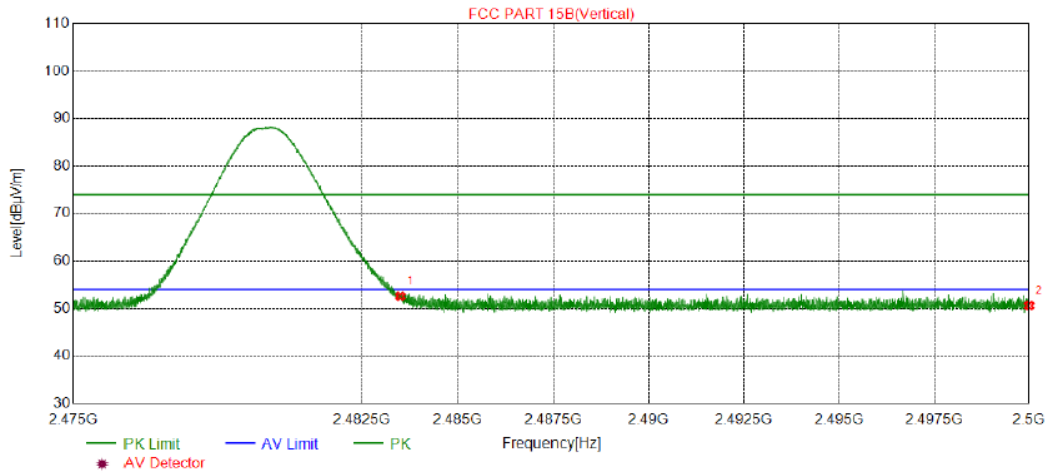

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2483.500	54.75	-2.15	52.60	74.00	21.40	Vertical	PK
2	2500.000	52.73	-2.10	50.63	74.00	23.37	Vertical	PK

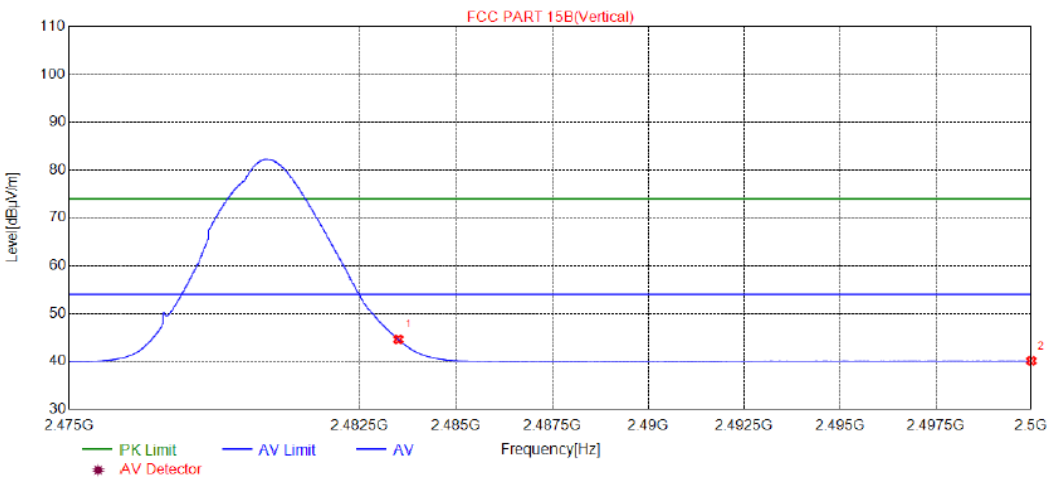


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2483.500	46.76	-2.15	44.61	54.00	9.39	Vertical	AV
2	2500.000	42.22	-2.10	40.12	54.00	13.88	Vertical	AV

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

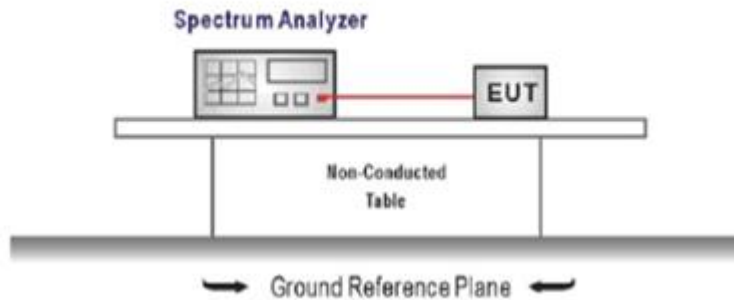

TEST PROCEDURE




1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3




TEST RESULTS

Passed Not Applicable

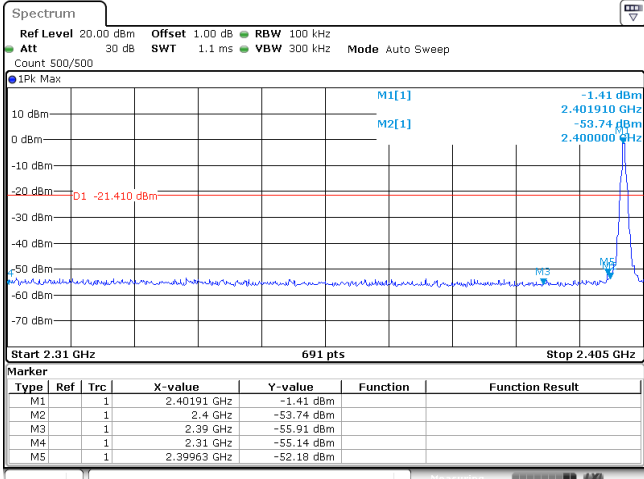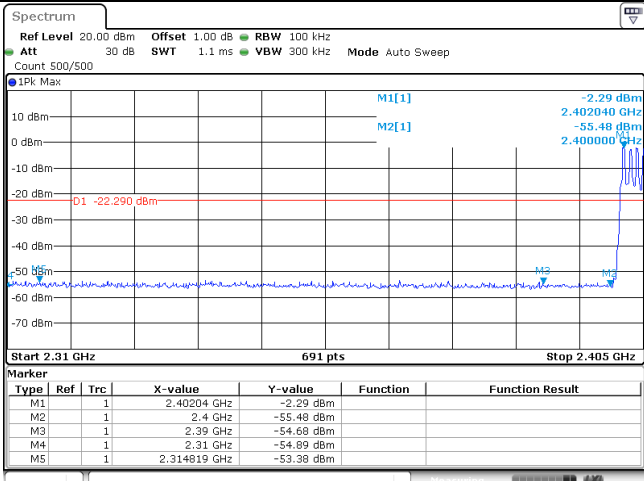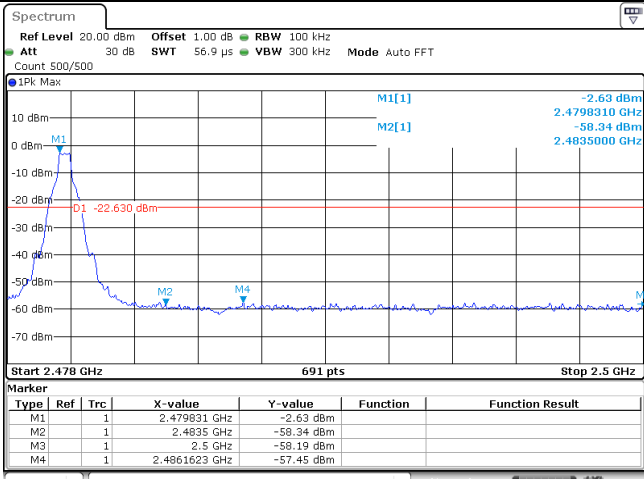
Test Item:	Band edge	Modulation type:	GFSK																																										
<p>CH00 No hopping mode</p>	 <table border="1" data-bbox="686 593 1332 694"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40191 GHz</td> <td>-1.41 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-53.74 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-55.14 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39963 GHz</td> <td>-52.18 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:48:33</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40191 GHz	-1.41 dBm			M2	1		2.4 GHz	-53.74 dBm			M3	1		2.39 GHz	-55.91 dBm			M4	1		2.31 GHz	-55.14 dBm			M5	1		2.39963 GHz	-52.18 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40191 GHz	-1.41 dBm																																									
M2	1		2.4 GHz	-53.74 dBm																																									
M3	1		2.39 GHz	-55.91 dBm																																									
M4	1		2.31 GHz	-55.14 dBm																																									
M5	1		2.39963 GHz	-52.18 dBm																																									
<p>CH00 Hopping mode</p>	 <table border="1" data-bbox="686 1108 1332 1220"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40204 GHz</td> <td>-2.29 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-55.48 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-54.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-54.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.314819 GHz</td> <td>-53.38 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 17:02:41</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40204 GHz	-2.29 dBm			M2	1		2.4 GHz	-55.48 dBm			M3	1		2.39 GHz	-54.69 dBm			M4	1		2.31 GHz	-54.89 dBm			M5	1		2.314819 GHz	-53.38 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40204 GHz	-2.29 dBm																																									
M2	1		2.4 GHz	-55.48 dBm																																									
M3	1		2.39 GHz	-54.69 dBm																																									
M4	1		2.31 GHz	-54.89 dBm																																									
M5	1		2.314819 GHz	-53.38 dBm																																									
<p>CH78 No hopping mode</p>	 <table border="1" data-bbox="686 1646 1332 1747"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.479631 GHz</td> <td>-2.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-58.34 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-58.19 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4861623 GHz</td> <td>-57.45 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:51:04</p>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479631 GHz	-2.63 dBm			M2	1		2.4835 GHz	-58.34 dBm			M3	1		2.5 GHz	-58.19 dBm			M4	1		2.4861623 GHz	-57.45 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479631 GHz	-2.63 dBm																																									
M2	1		2.4835 GHz	-58.34 dBm																																									
M3	1		2.5 GHz	-58.19 dBm																																									
M4	1		2.4861623 GHz	-57.45 dBm																																									




CH78
Hopping mode

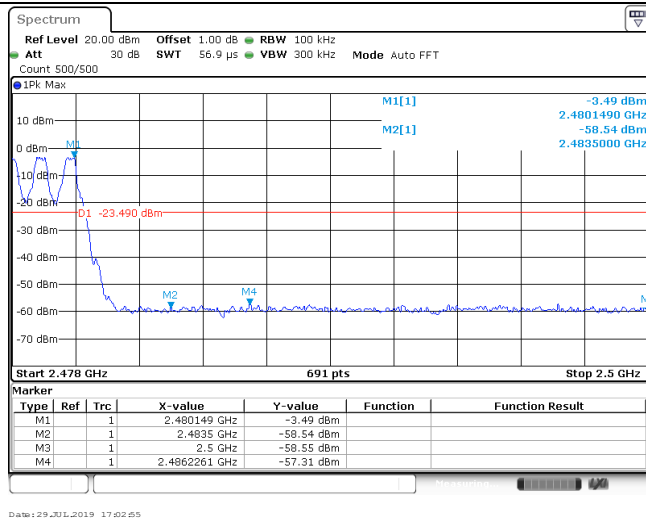

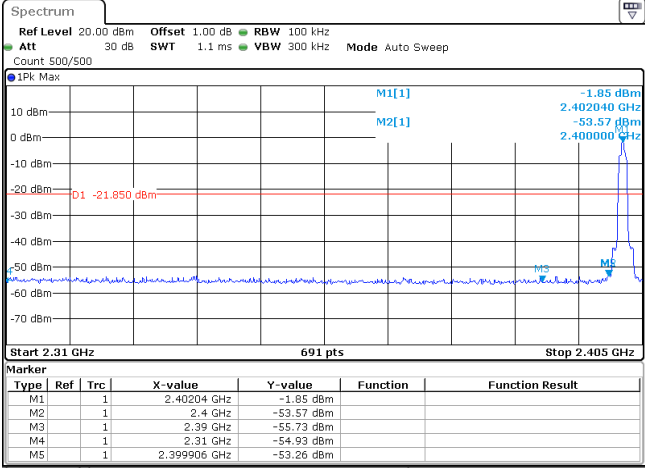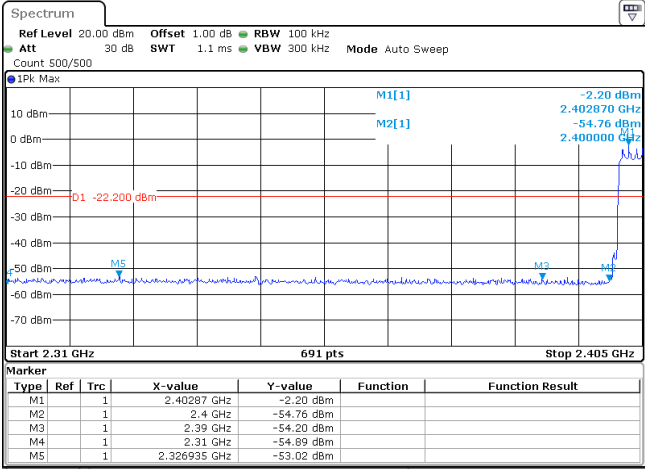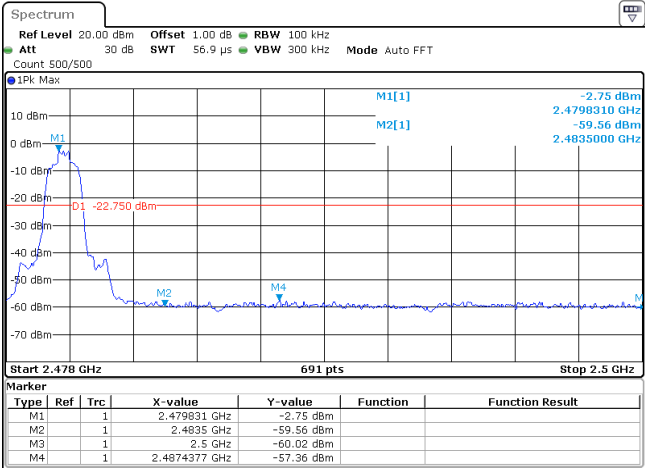
Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																																
<p>CH00 No hopping mode</p>	 <table border="1" data-bbox="687 593 1334 696"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.40204 GHz</td> <td>-1.85 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4 GHz</td> <td>-53.57 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.39 GHz</td> <td>-55.73 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.31 GHz</td> <td>-54.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td></td> <td>2.399906 GHz</td> <td>-53.26 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:52:39</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.40204 GHz	-1.85 dBm			M2	1			2.4 GHz	-53.57 dBm			M3	1			2.39 GHz	-55.73 dBm			M4	1			2.31 GHz	-54.93 dBm			M5	1			2.399906 GHz	-53.26 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.40204 GHz	-1.85 dBm																																														
M2	1			2.4 GHz	-53.57 dBm																																														
M3	1			2.39 GHz	-55.73 dBm																																														
M4	1			2.31 GHz	-54.93 dBm																																														
M5	1			2.399906 GHz	-53.26 dBm																																														
<p>CH00 Hopping mode</p>	 <table border="1" data-bbox="687 1120 1334 1223"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.40287 GHz</td> <td>-2.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4 GHz</td> <td>-54.76 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.39 GHz</td> <td>-54.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.31 GHz</td> <td>-54.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td></td> <td>2.326935 GHz</td> <td>-53.02 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 17:06:15</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.40287 GHz	-2.20 dBm			M2	1			2.4 GHz	-54.76 dBm			M3	1			2.39 GHz	-54.20 dBm			M4	1			2.31 GHz	-54.89 dBm			M5	1			2.326935 GHz	-53.02 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.40287 GHz	-2.20 dBm																																														
M2	1			2.4 GHz	-54.76 dBm																																														
M3	1			2.39 GHz	-54.20 dBm																																														
M4	1			2.31 GHz	-54.89 dBm																																														
M5	1			2.326935 GHz	-53.02 dBm																																														
<p>CH78 No hopping mode</p>	 <table border="1" data-bbox="687 1650 1334 1753"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.479831 GHz</td> <td>-2.75 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4835 GHz</td> <td>-59.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.5 GHz</td> <td>-60.02 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.4874377 GHz</td> <td>-57.36 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:55:04</p>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.479831 GHz	-2.75 dBm			M2	1			2.4835 GHz	-59.56 dBm			M3	1			2.5 GHz	-60.02 dBm			M4	1			2.4874377 GHz	-57.36 dBm										
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.479831 GHz	-2.75 dBm																																														
M2	1			2.4835 GHz	-59.56 dBm																																														
M3	1			2.5 GHz	-60.02 dBm																																														
M4	1			2.4874377 GHz	-57.36 dBm																																														




CH78
Hopping mode

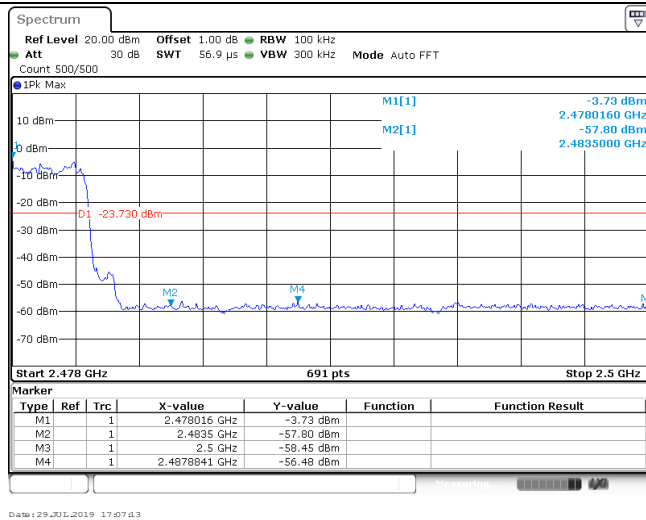

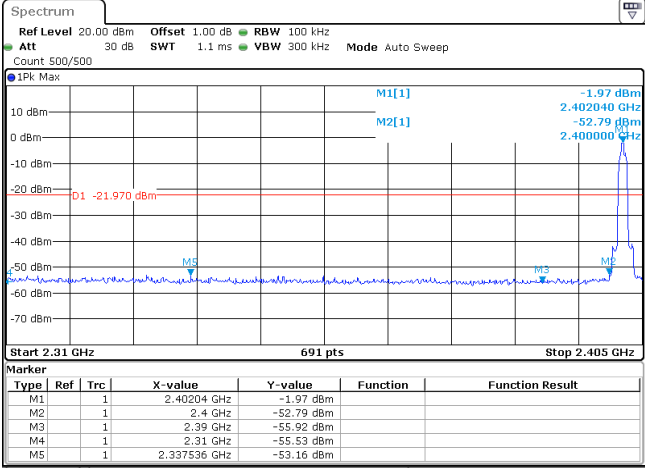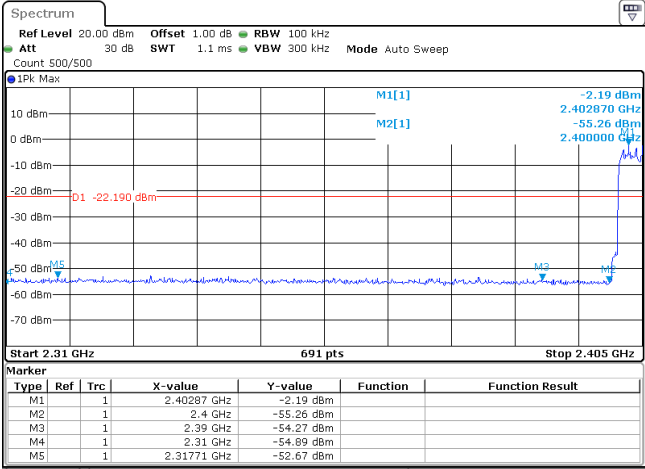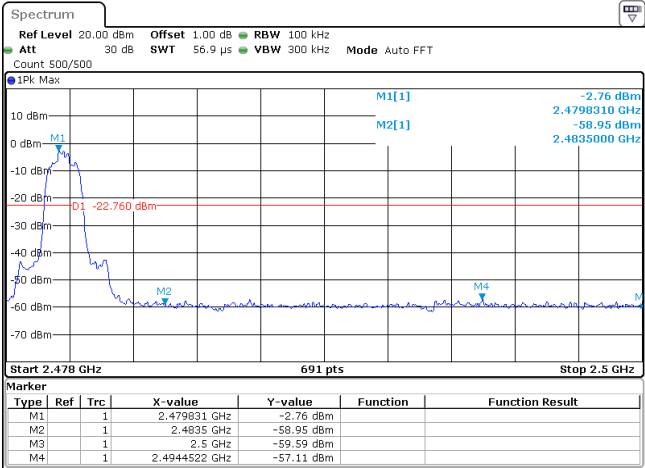
Test Item:	Band edge	Modulation type:	8DPSK																																										
<p>CH00 No hopping mode</p>		 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 500/500</p> <p>IPK Max</p> <p>M1[1] -1.97 dBm 2.40204 GHz M2[1] -52.79 dBm 2.40000 GHz</p> <p>D1 -21.970 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40204 GHz</td> <td>-1.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-52.79 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.92 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-55.53 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.337536 GHz</td> <td>-53.16 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:57:07</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40204 GHz	-1.97 dBm			M2	1		2.4 GHz	-52.79 dBm			M3	1		2.39 GHz	-55.92 dBm			M4	1		2.31 GHz	-55.53 dBm			M5	1		2.337536 GHz	-53.16 dBm			
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40204 GHz	-1.97 dBm																																									
M2	1		2.4 GHz	-52.79 dBm																																									
M3	1		2.39 GHz	-55.92 dBm																																									
M4	1		2.31 GHz	-55.53 dBm																																									
M5	1		2.337536 GHz	-53.16 dBm																																									
<p>CH00 Hopping mode</p>		 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 500/500</p> <p>IPK Max</p> <p>M1[1] -2.19 dBm 2.40287 GHz M2[1] -55.26 dBm 2.40000 GHz</p> <p>D1 -22.190 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40287 GHz</td> <td>-2.19 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-55.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-54.27 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-54.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.31771 GHz</td> <td>-52.67 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 17:13:43</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40287 GHz	-2.19 dBm			M2	1		2.4 GHz	-55.26 dBm			M3	1		2.39 GHz	-54.27 dBm			M4	1		2.31 GHz	-54.89 dBm			M5	1		2.31771 GHz	-52.67 dBm			
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40287 GHz	-2.19 dBm																																									
M2	1		2.4 GHz	-55.26 dBm																																									
M3	1		2.39 GHz	-54.27 dBm																																									
M4	1		2.31 GHz	-54.89 dBm																																									
M5	1		2.31771 GHz	-52.67 dBm																																									
<p>CH78 No hopping mode</p>		 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 56.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>IPK Max</p> <p>M1[1] -2.76 dBm 2.479631 GHz M2[1] -58.95 dBm 2.4835000 GHz</p> <p>D1 -22.760 dBm</p> <p>Start 2.478 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.479631 GHz</td> <td>-2.76 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-58.95 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-59.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4944522 GHz</td> <td>-57.11 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 29 JUL 2019 16:59:59</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479631 GHz	-2.76 dBm			M2	1		2.4835 GHz	-58.95 dBm			M3	1		2.5 GHz	-59.59 dBm			M4	1		2.4944522 GHz	-57.11 dBm										
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479631 GHz	-2.76 dBm																																									
M2	1		2.4835 GHz	-58.95 dBm																																									
M3	1		2.5 GHz	-59.59 dBm																																									
M4	1		2.4944522 GHz	-57.11 dBm																																									

CH78
Hoppig mode

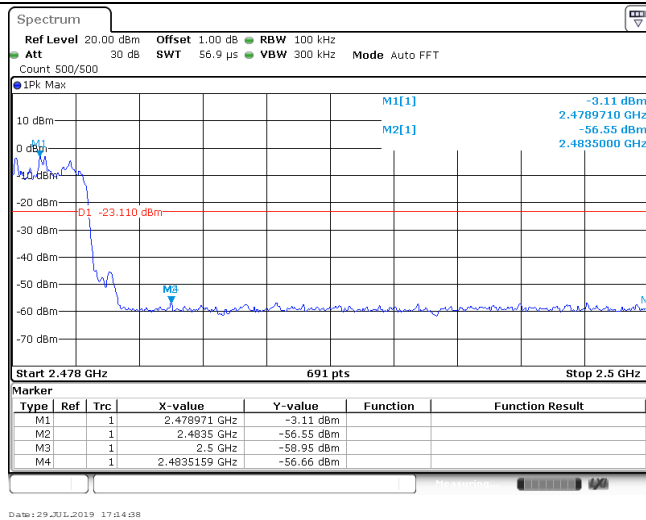

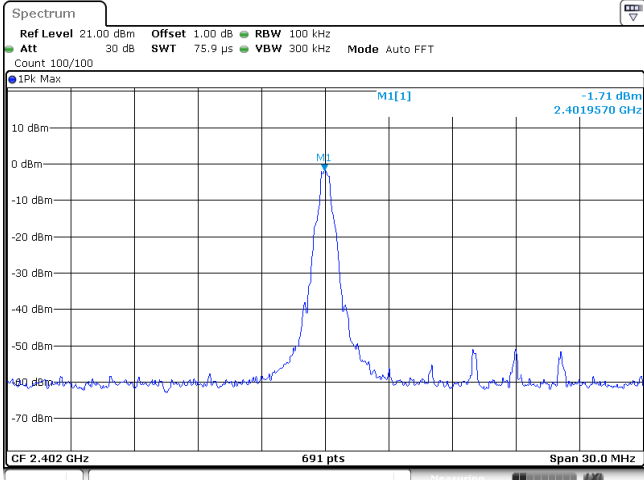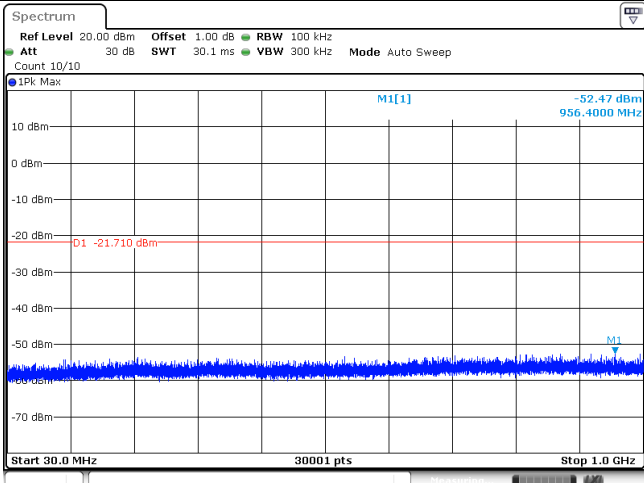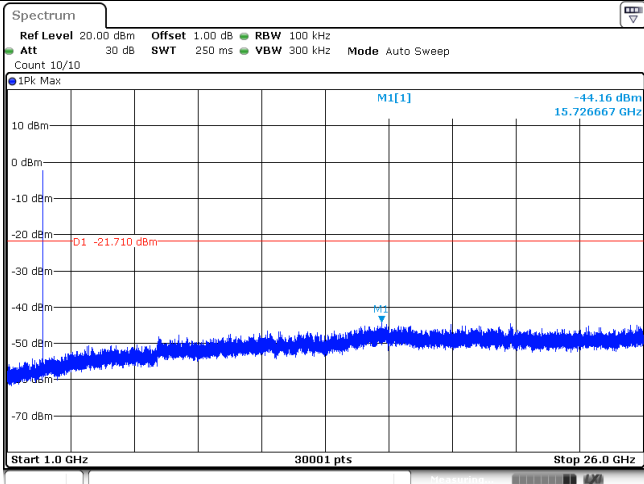
Test Item:	SE	Modulation type:	GFSK
CH00 Reference level		 <p>Spectrum</p> <p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -1.71 dBm 2.4019570 GHz</p> <p>CF 2.402 GHz 691 pts Span 30.0 MHz</p> <p>Date: 29 JUL 2019 16:48:09</p>	
CH00 30MHz~1000MHz		 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -52.47 dBm 956.4000 MHz</p> <p>D1 -21.710 dBm</p> <p>Start 30.0 MHz 30001 pts Stop 1.0 GHz</p> <p>Date: 29 JUL 2019 16:48:05</p>	
CH00 1GHz~26GHz		 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>IPK Max</p> <p>M1[1] -44.16 dBm 15.726667 GHz</p> <p>D1 -21.710 dBm</p> <p>Start 1.0 GHz 30001 pts Stop 26.0 GHz</p> <p>Date: 29 JUL 2019 16:48:01</p>	

CH39
Reference level

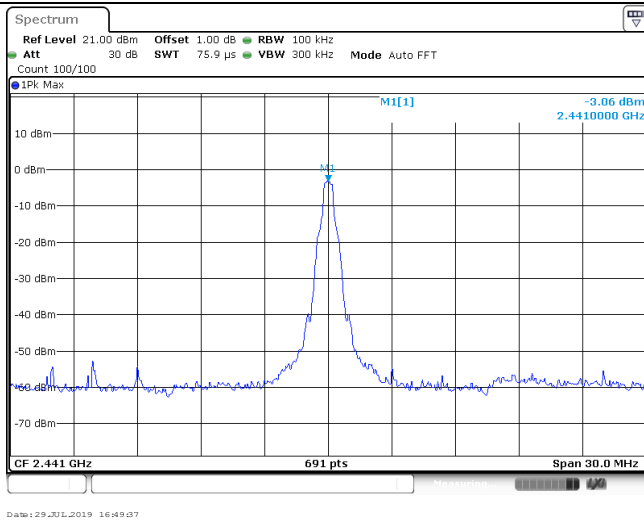


Date: 29 JUL 2019 16:49:37

CH39
30MHz~1000MHz

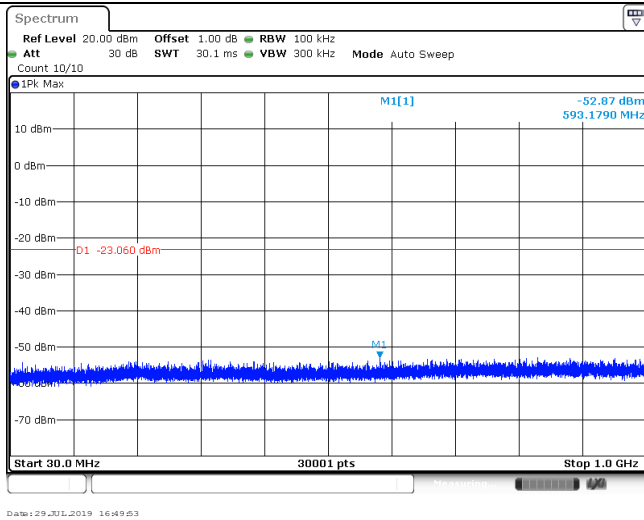


Date: 29 JUL 2019 16:49:53

CH39
1GHz~26GHz

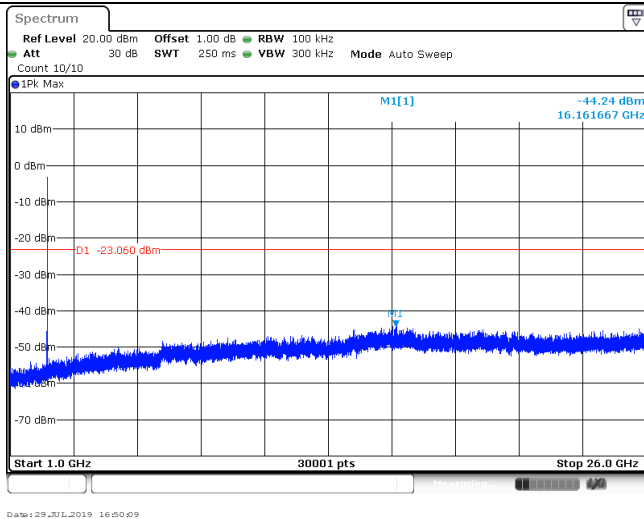


Date: 29 JUL 2019 16:50:09

CH78
Reference level

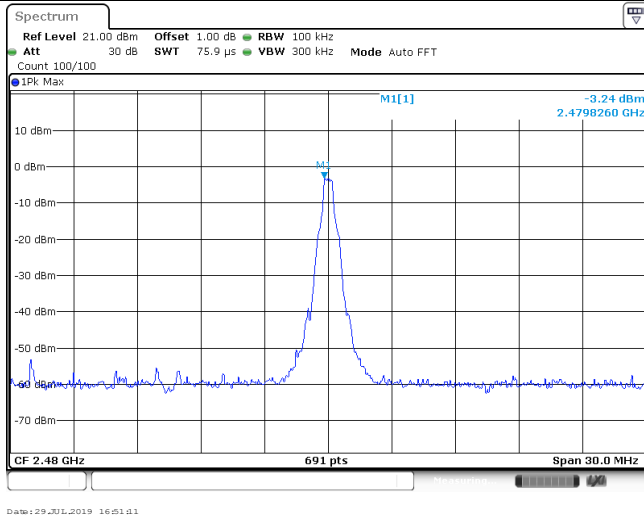


Date: 29 JUL 2019 16:51:11

CH78
30MHz~1000MHz

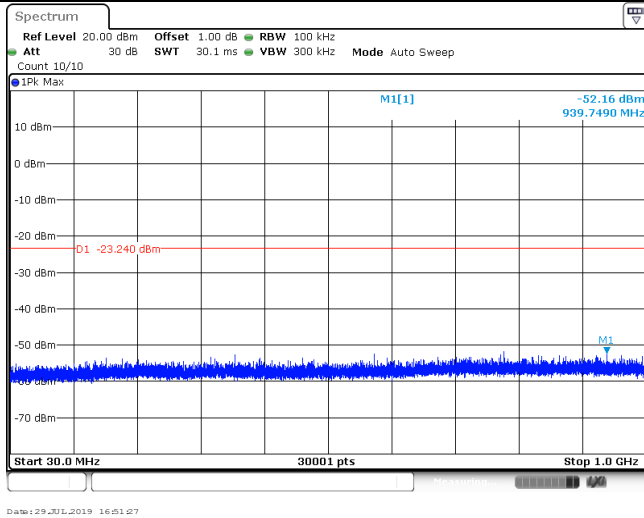

Date: 29 JUL 2019 16:51:27


CH78
1GHz~26GHz

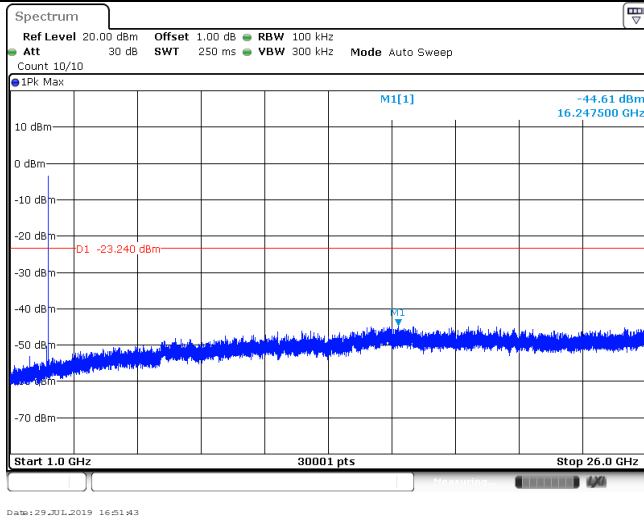


Date: 29 JUL 2019 16:51:43

Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
<p>CH00 Reference level</p>			
<p>CH00 30MHz~1000MHz</p>			
<p>CH00 1GHz~26GHz</p>			


CH39
Reference level

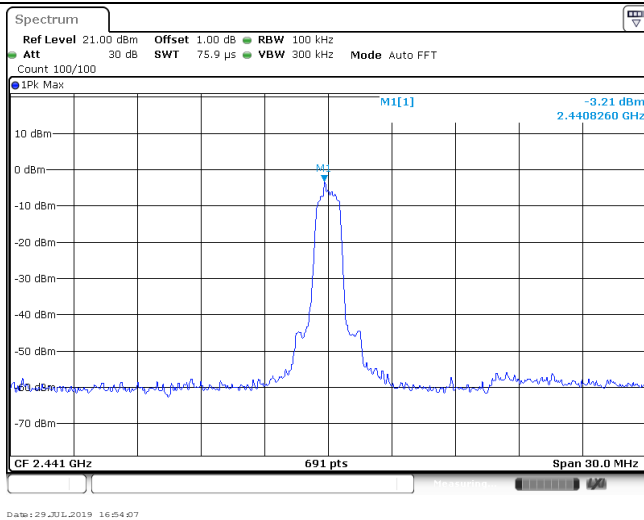


CH39
30MHz~1000MHz

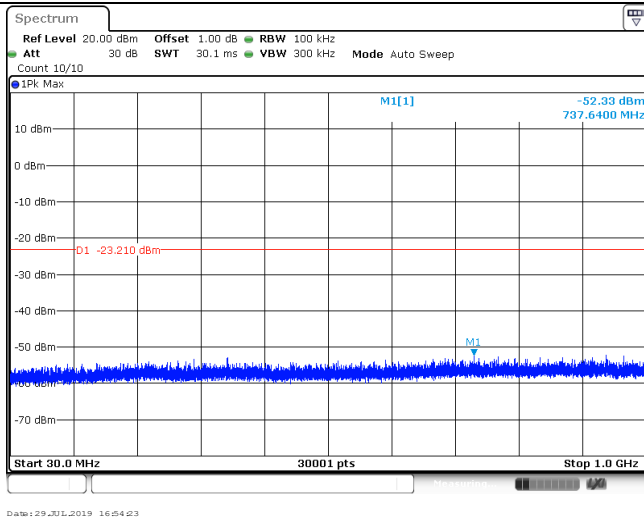


CH39
1GHz~26GHz

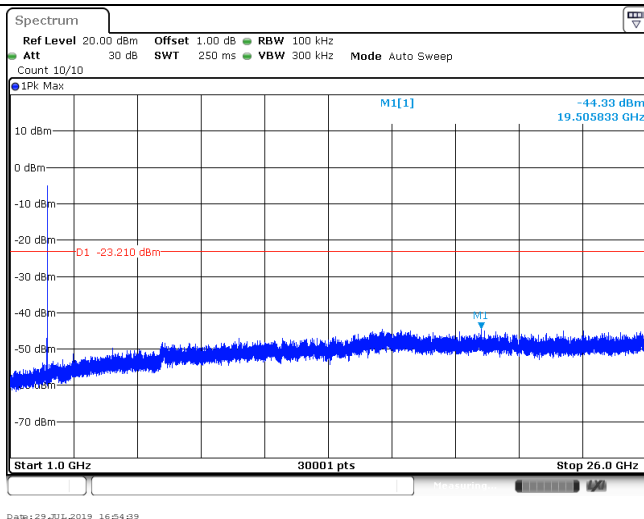


CH78
Reference level



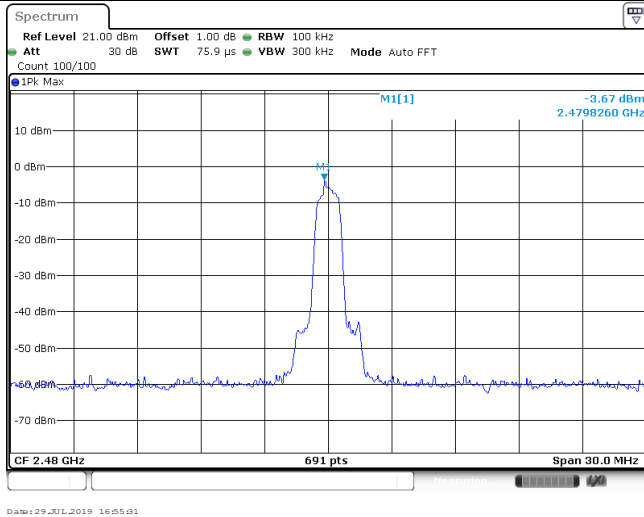





CH78
30MHz~1000MHz

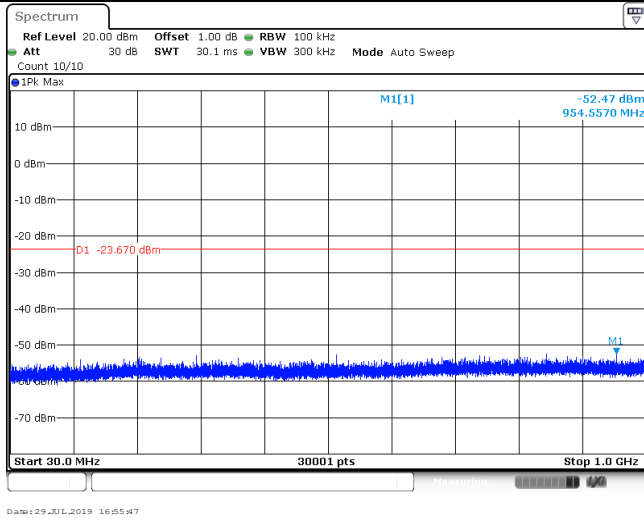


CH78
1GHz~26GHz

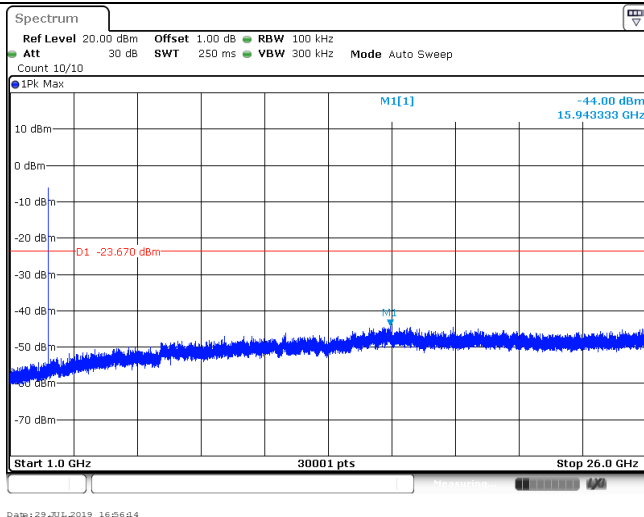

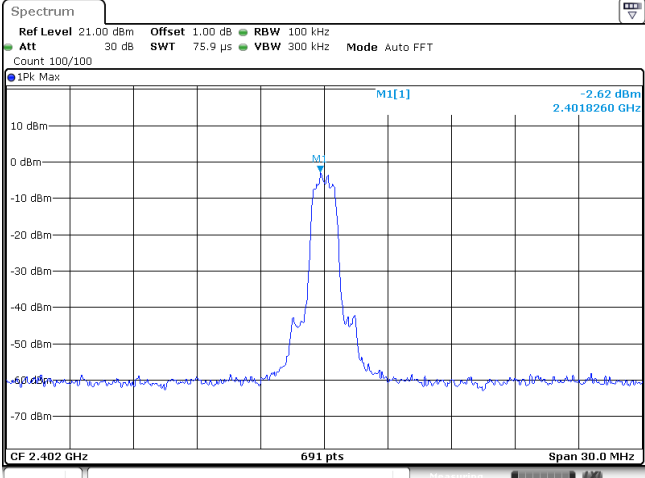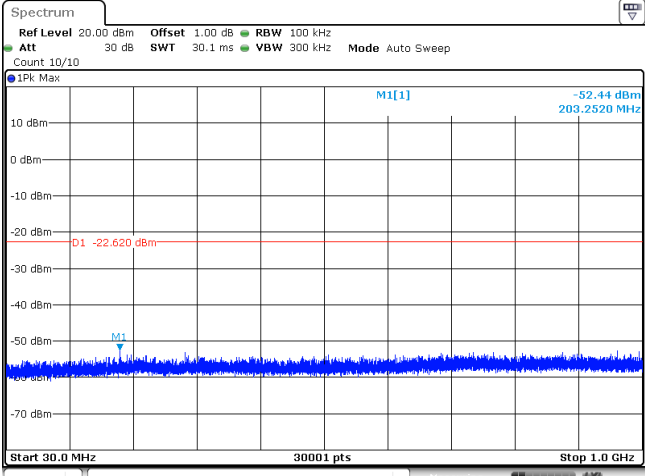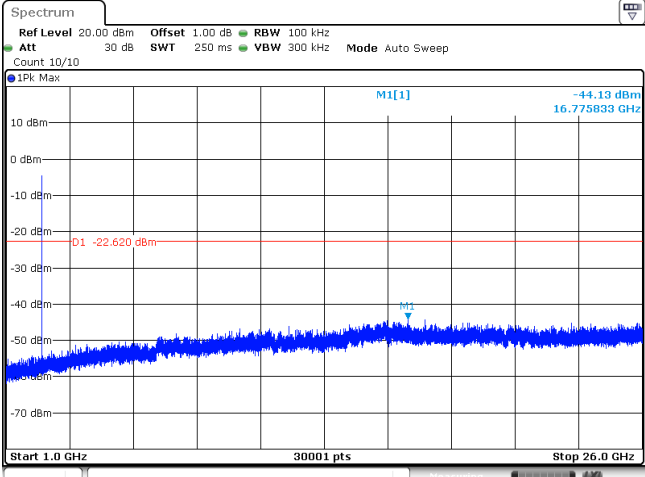
Test Item:	SE	Modulation type:	8DPSK
CH00 Reference level		 <p>Spectrum</p> <p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk Max</p> <p>M1[1] -2.62 dBm 2.4018260 GHz</p> <p>CF 2.402 GHz 691 pts Span 30.0 MHz</p> <p>Date: 29 JUL 2019 16:57:44</p>	
CH00 30MHz~1000MHz		 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>1Pk Max</p> <p>M1[1] -52.44 dBm 203.2520 MHz</p> <p>D1 -22.620 dBm</p> <p>Start 30.0 MHz 30001 pts Stop 1.0 GHz</p> <p>Date: 29 JUL 2019 16:57:50</p>	
CH00 1GHz~26GHz		 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10</p> <p>1Pk Max</p> <p>M1[1] -44.13 dBm 16.775833 GHz</p> <p>D1 -22.620 dBm</p> <p>Start 1.0 GHz 30001 pts Stop 26.0 GHz</p> <p>Date: 29 JUL 2019 16:57:56</p>	
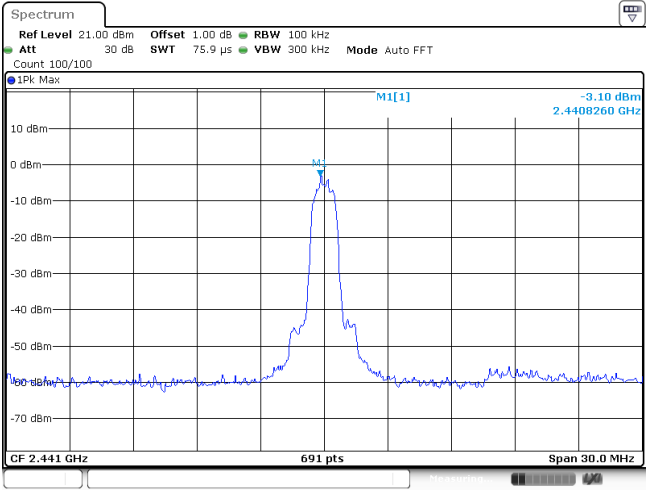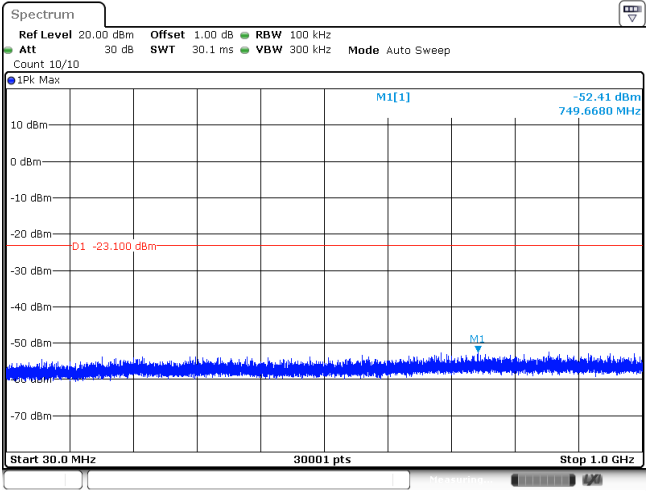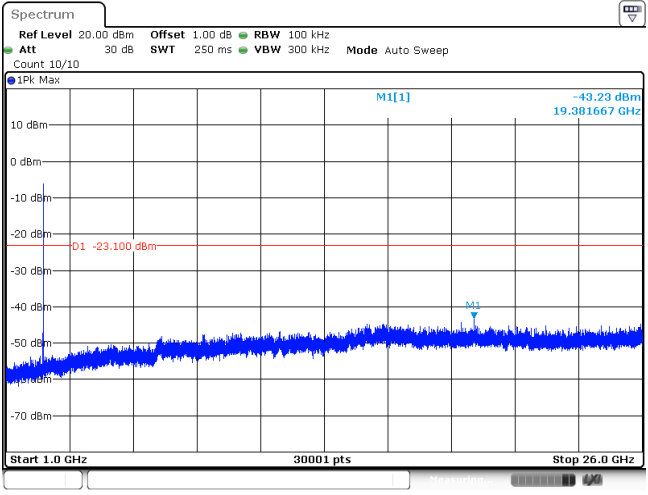
<p>CH39 Reference level</p>	 <p>Spectrum Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 1Pk Max M1[1] -3.10 dBm 2.4408260 GHz CF 2.441 GHz 691 pts Span 30.0 MHz Date: 29 JUL 2019 16:58:30</p>
<p>CH39 30MHz~1000MHz</p>	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -52.41 dBm 749.6680 MHz D1 -23.100 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 29 JUL 2019 16:58:36</p>
<p>CH39 1GHz~26GHz</p>	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -43.23 dBm 19.381667 GHz D1 -23.100 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 29 JUL 2019 16:59:02</p>


CH78
Reference level

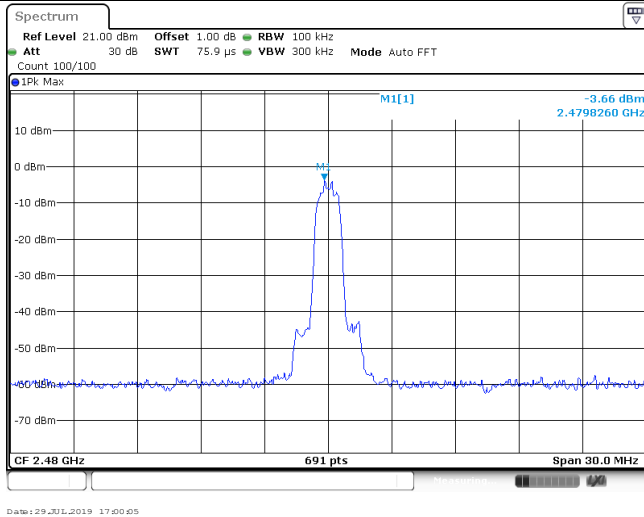

CH78
30MHz~1000MHz

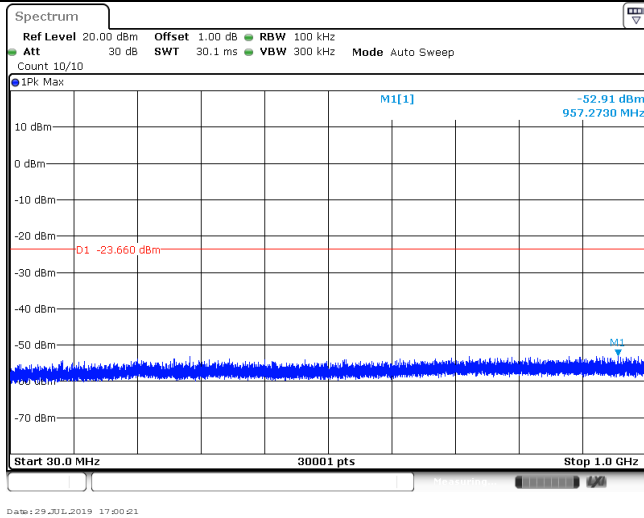

CH78
1GHz~26GHz

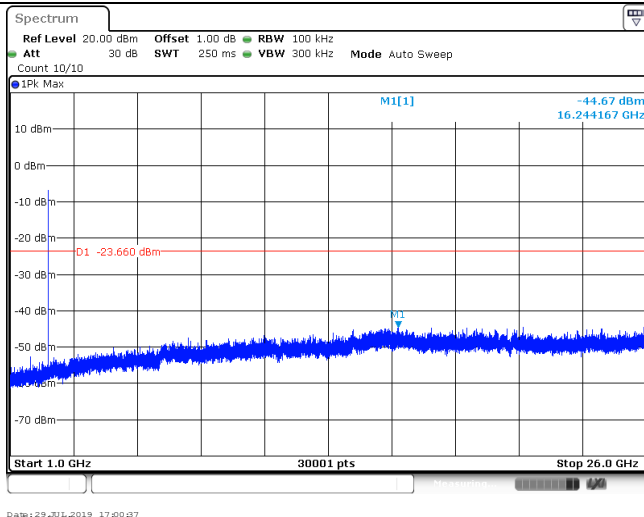

5.11. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- Below 30 MHz

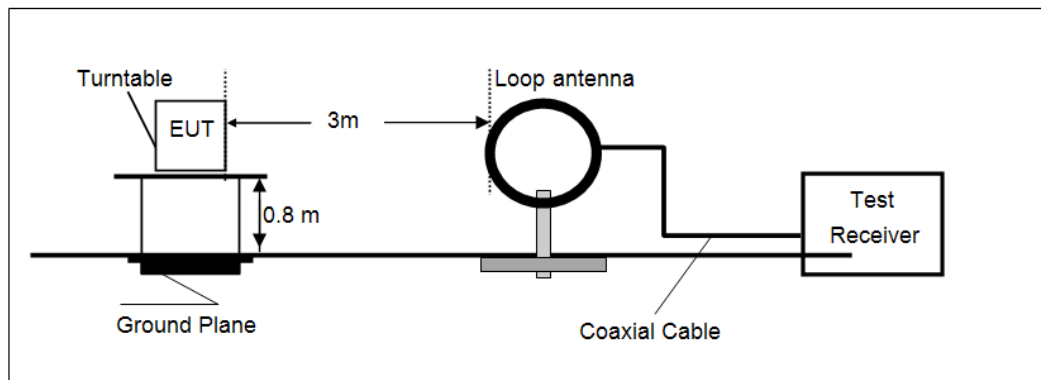

- 30 MHz ~1000 MHz

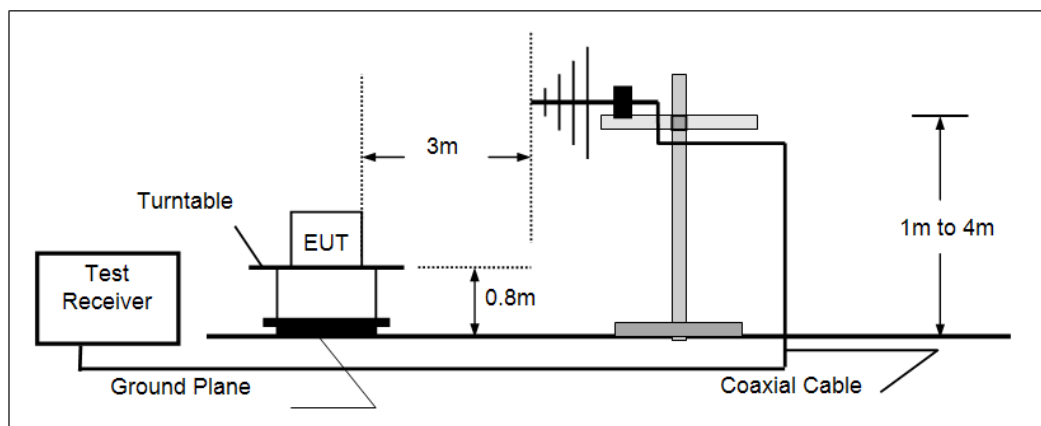

- Above 1 GHz

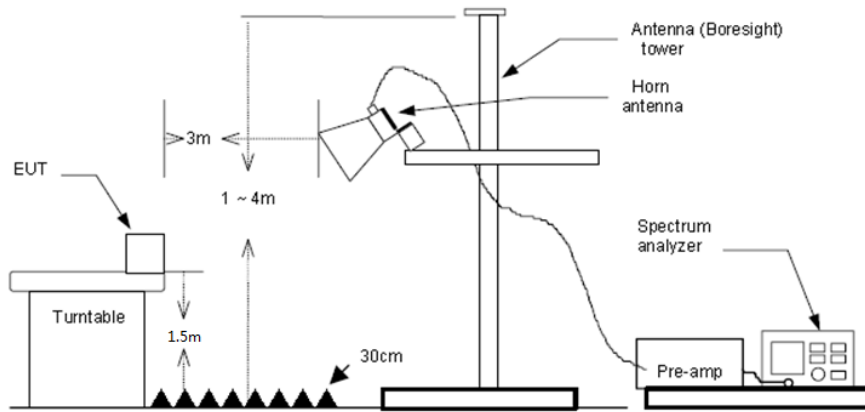

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
 - RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
 - RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable



Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 6) The worst case is model: STUDIOLIVE AR16c

➤ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

➤ 30 MHz ~ 1 GHz

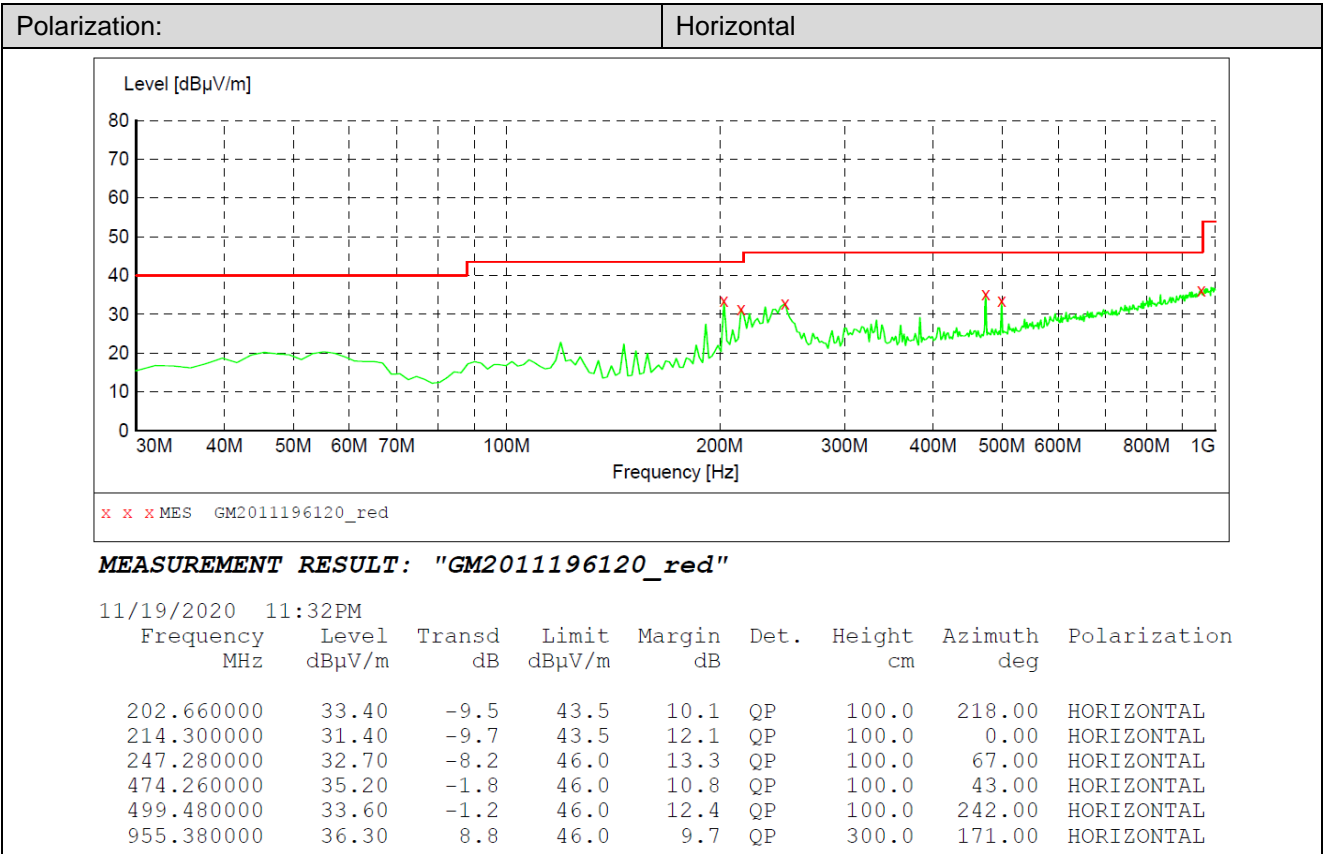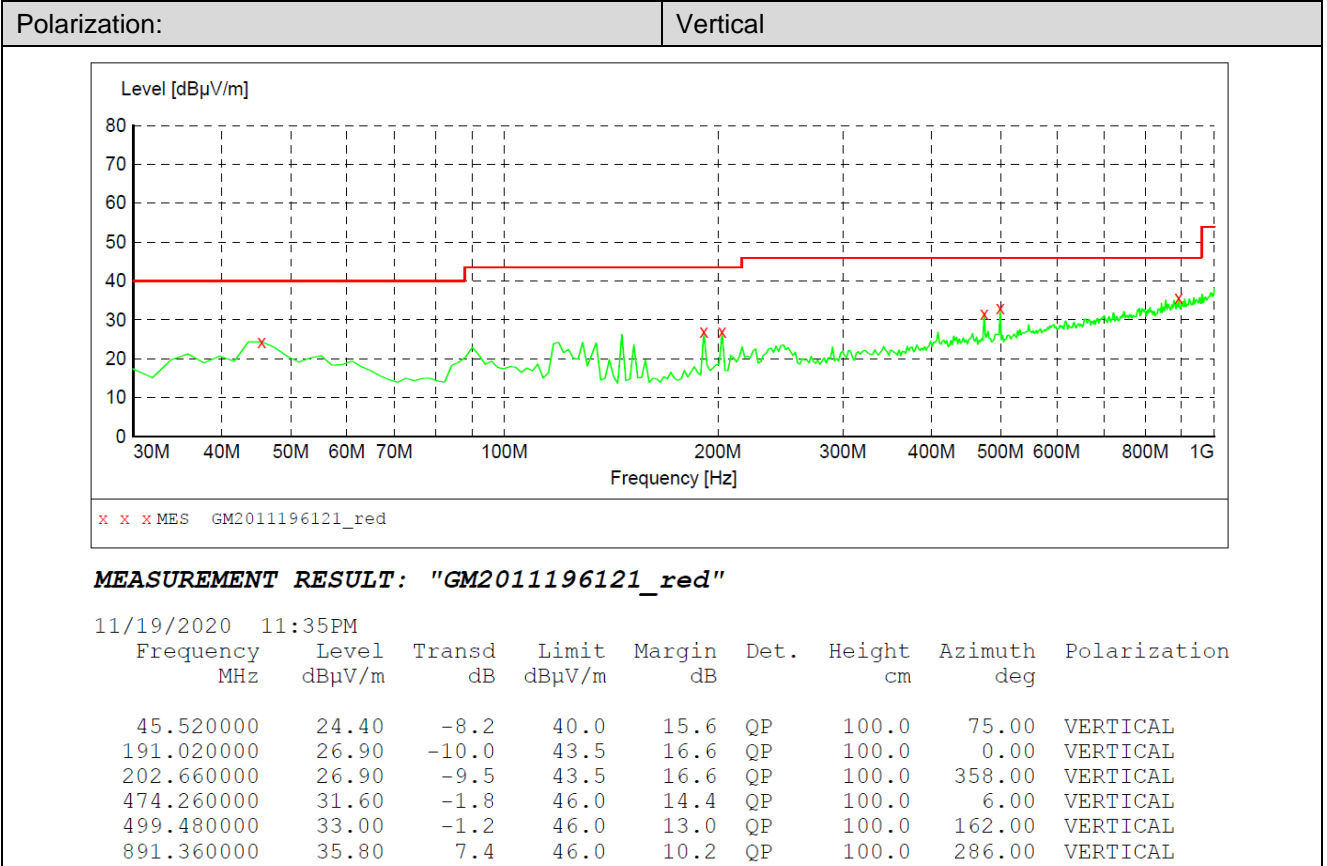

➤ 1 GHz ~ 25 GHz

Test channel				CH00			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1188.000	37.19	-5.96	31.23	74.00	42.77	Horizontal	PK
2991.625	43.17	-0.07	43.10	74.00	30.90	Horizontal	PK
3985.968	37.48	2.97	40.45	74.00	33.55	Horizontal	PK
6250.781	33.31	10.94	44.25	74.00	29.75	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1242.343	36.74	-5.72	31.02	74.00	42.98	Vertical	PK
2987.218	47.24	-0.05	47.19	74.00	26.81	Vertical	PK
3985.968	37.48	2.97	40.45	74.00	33.55	Vertical	PK
5310.781	35.95	8.47	44.42	74.00	29.58	Vertical	PK

Test channel				CH39			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1133.656	37.96	-6.53	31.43	74.00	42.57	Horizontal	PK
2994.562	40.38	-0.09	40.29	74.00	33.71	Horizontal	PK
4171.031	33.93	3.65	37.58	74.00	36.42	Horizontal	PK
5047.875	32.60	8.30	40.90	74.00	33.10	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1270.250	36.89	-5.65	31.24	74.00	42.76	Vertical	PK
3000.437	39.38	-0.12	39.26	74.00	34.74	Vertical	PK
3993.312	35.70	3.00	38.70	74.00	35.30	Vertical	PK
4983.250	38.04	7.74	45.78	74.00	28.22	Vertical	PK


Test channel				CH78			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1254.093	37.01	-5.69	31.32	74.00	42.68	Horizontal	PK
2987.218	38.43	-0.05	38.38	74.00	35.62	Horizontal	PK
3598.218	35.00	1.44	36.44	74.00	37.56	Horizontal	PK
5097.812	32.63	8.78	41.41	74.00	32.59	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1220.312	36.88	-5.78	31.10	74.00	42.90	Vertical	PK
2988.687	43.86	-0.05	43.81	74.00	30.19	Vertical	PK
3994.781	38.71	3.00	41.71	74.00	32.29	Vertical	PK
4984.718	38.08	7.75	45.83	74.00	28.17	Vertical	PK

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)

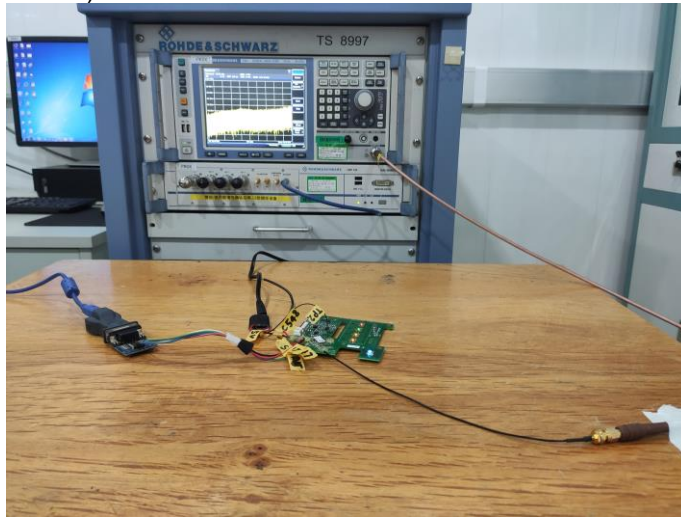

Radiated Emissions





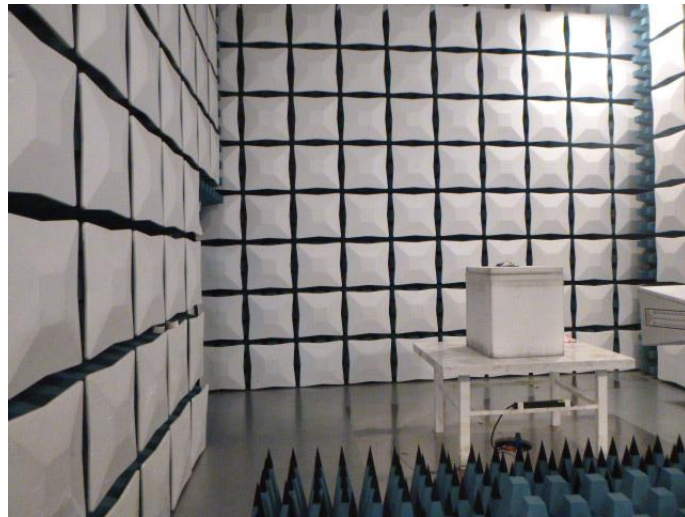


7. EXTERANAL AND INTERNAL PHOTOS

External Photos

AR8c

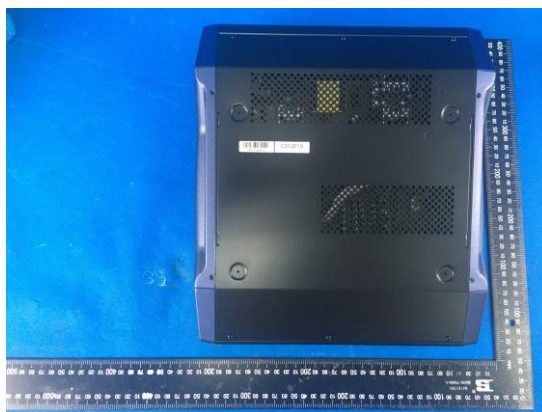


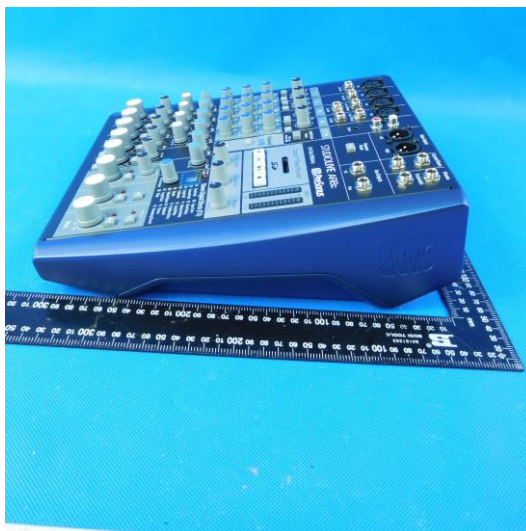
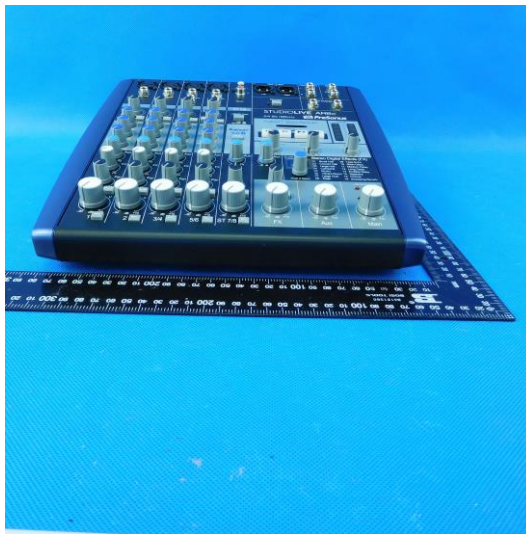




AR12c





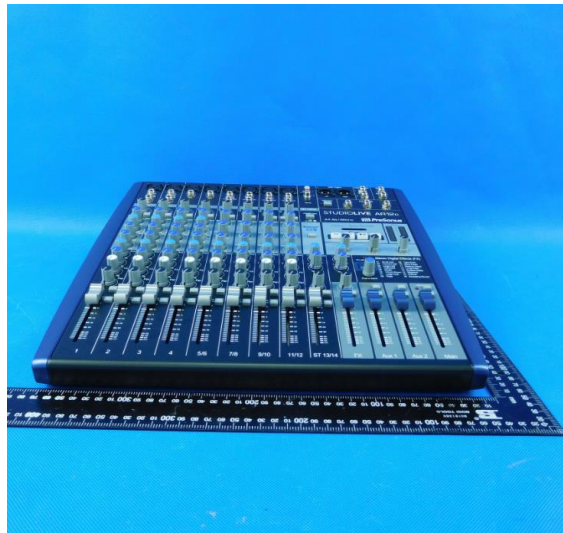


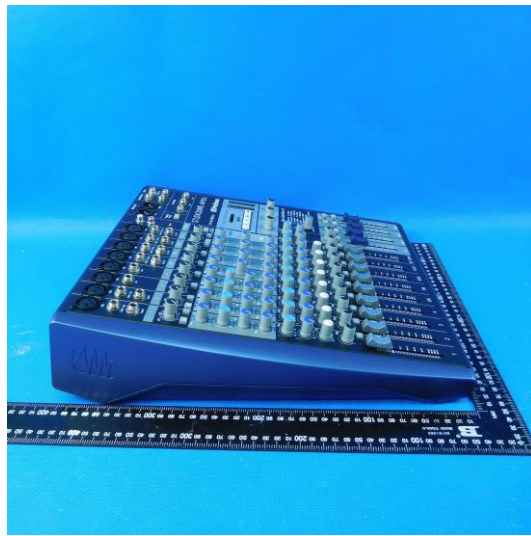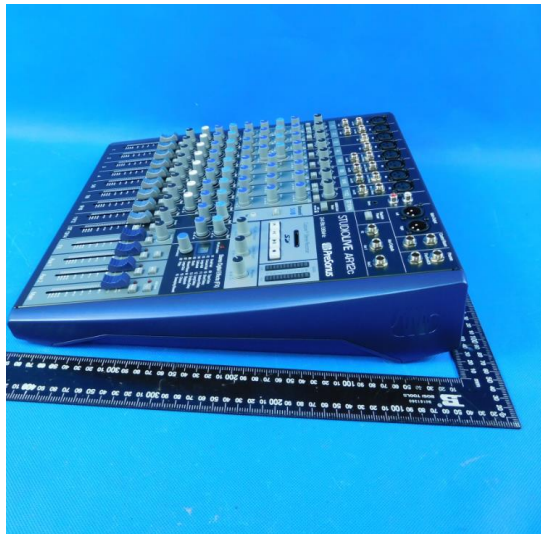

AR16c



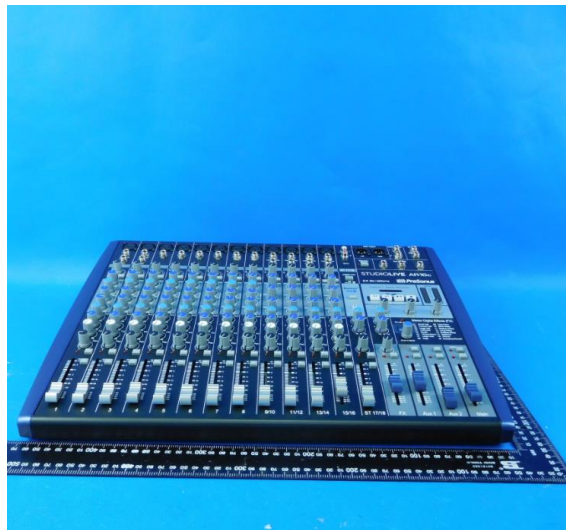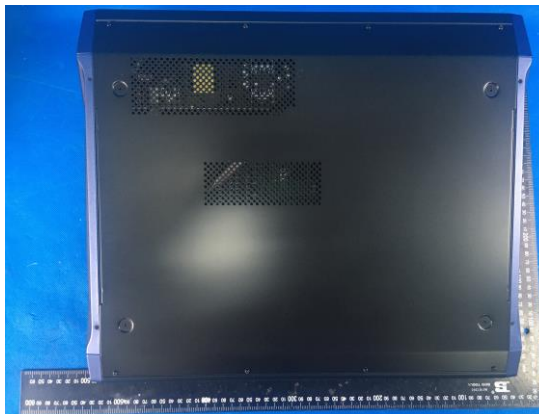

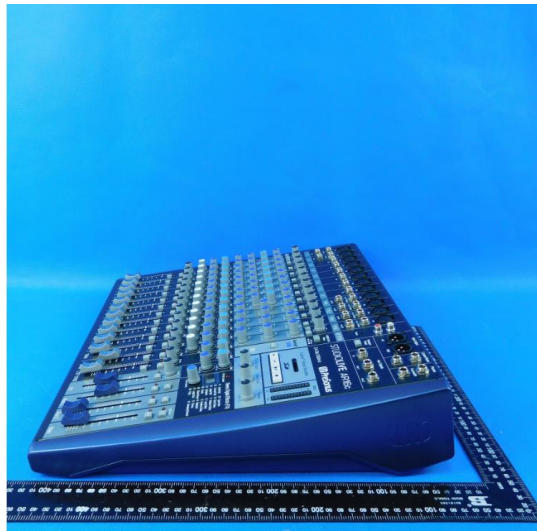

Internal Photos

AR8c

