

TEST REPORT

Model Number		Bluetooth Retro Phone Handset RP-ES63-BN, ES63-RP-TA 2ACE5-ES63BN
Prepared for Address		TELEPHONE EST (HK) CO., LTD Room709,7F, FuLi tianhe commercial building,Linhe East Road and tianhe district, Guangzhou, China
Prepared by : Address :		EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Tel: (0755) 26954280 Fax: (0755) 26954282
		ENS2306300193W00201R July 5, 2023 to July 18, 2023 July 18, 2023



Table of Contents

1 TEST RESULT CERTIFICATION	
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS 4.2 MEASUREMENT EQUIPMENT USED 4.3 DESCRIPTION OF TEST MODES 	7
5 FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES 5.2 EQUIPMENT 5.3 LABORATORY ACCREDITATIONS AND LISTINGS	9
6 TEST SYSTEM UNCERTAINTY	
7 SETUP OF EQUIPMENT UNDER TEST	
 7.1 RADIO FREQUENCY TEST SETUP 1 7.2 RADIO FREQUENCY TEST SETUP 2 7.3 CONDUCTED EMISSION TEST SETUP 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 7.5 SUPPORT EQUIPMENT 	11 13 14
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS	
 8.1 Standard Applicable 8.2 EUT Pseudorandom Frequency Hopping Sequence 8.3 Equal Hopping Frequency Use 8.4 Frequency Hopping System 	
9 TEST REQUIREMENTS	
 9.1 20DB&99%BANDWIDTH 9.2 CARRIER FREQUENCY SEPARATION	
9.6 CONDUCTED SUPRIOUS EMISSION	
9.8 CONDUCTED EMISSION TEST 9.9 ANTENNA APPLICATION	66



1 TEST RESULT CERTIFICATION

Applicant	:	TELEPHONE EST (HK) CO., LTD
Address	:	Room709,7F, FuLi tianhe commercial building,Linhe East Road and tianhe district, Guangzhou, China
Manufacturer	:	TELEPHONE EST (HK) CO., LTD
Address	:	Room709,7F, FuLi tianhe commercial building,Linhe East Road and tianhe district, Guangzhou, China
EUT	:	Bluetooth Retro Phone Handset
Model Name	:	RP-ES63-BN, ES63-RP-TA
Trademark	:	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS						
STANDARD TEST RESULT						
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS					
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017)	PASS					

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 2 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report

Date of Test :

Prepared by :

Reviewer:

Ju Ina Una Yu /Editor due Ha SHENZHEN Joe Xia/Supervisor ENTER FSTING

Approve & Authorized Signer :

Lisa Wang/Manager

July 5, 2023 to July 18, 2023

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Modified History

Version	Report No.	Revision Date	Summary
	ENS2306300193W00201R	/	Original Report





2 EUT TECHNICAL DESCRIPTION

Characteristics	Description				
Product:	Bluetooth Retro Phone Handset				
Model Number:	RP-ES63-BN, ES63-RP-TA These models are the same except the model name and appearance, Here select RP-ES63-BN for test.				
Sample:	1#				
Data Rate:	1Mbps for GFSK modulation 2Mbps for π/4-DQPSK modulation 3Mbps for 8DPSK modulation				
Modulation:	GFSK, π/4-DQPSK, 8DPSK				
Operating Frequency Range(s) :	2402-2480MHz				
Number of Channels:	79 channels				
Transmit Power Max:	-3.5 dBm(0.000447 W)				
Antenna Type:	PCB Antenna				
Antenna Gain:	2.21 dBi				
Power supply:	DC5V from USB DC 3.7V from battery				
Product SW/HW version:	HW: V2.0 SW: V1.0				
Radio SW/HW version:	HW: V2.0 SW: V1.0				
Temperature Range:	-10° C ~ +45° C				

Note: for more details, please refer to the User's manual of the EUT.

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	RSS-247.5.1 RSS-Gen.6.7	Emission Bandwidth	PASS	
15.247(a)(1)	RSS-247.5.1	Carrier Frequency Separation	PASS	
15.247(a)(1)	RSS-247.5.1	Number of Hopping Frequencies	PASS	
15.247(a)(1)	RSS-247.5.1	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	RSS-247.5.4 RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emissions	PASS	
15.207	RSS-Gen 8.8	Conducted Emission	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
15.247 (a) (1)/g/h	-	Frequency Hopping System	PASS	

3 SUMMARY OF TEST RESULT

NOTE: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: 2ACE5-ES63BN** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017) FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCI	101384	2023/5/13	1 Year
L.I.S.N.	Rohde & Schwarz	ENV216	5	2023/5/13	1 Year
L.I.S.N.	Kyoritsu	KNW-407	8-1492-9	2023/5/13	1 Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval		
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2023/5/13	1 Year		
Pre-Amplifie	Lunar EM	LNA30M3G-25	J1010000070	2023/5/13	1 Year		
Bilog Antenna	Schwarzbeck	VULB9163	661	2023/5/13	2 Year		
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2023/5/13	2 Year		
Pre-Amplifie	SKET	LNPA_0118G-45	SK2019051801	2023/5/13	1 Year		
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/13	2 Year		
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2023/5/13	1 Year		
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	2023/5/13	2 Year		
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	2023/5/13	1 Year		

For other test items:

Equipment	Manufacturer	Model No.	Model No. Serial No.		Cal. Interval	
Wireless Connectivity Tester	R&S	CMW270	102543	2023/5/13	1Year	
Automatic Control Unit	Tonscend	JS0806-2	2118060480	2023/5/13	1Year	
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	2023/5/13	1Year	
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	2023/5/13	1Year	
UP/DOWN-Converter	R&S	CMW-Z800A	100274	2023/5/13	1Year	
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	2023/5/13	1Year	
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	2023/5/13	1Year	
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	2023/5/13	1 Year	

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for π /4-DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
0	2402	39	2441				
1	2403	40	2442	76	2478		
2	2404	41	2443	77	2479		
				78	2480		
Note: fc=2402M	Note: fc=2402MHz+k×1MHz k=0 to 78						

Test Frequency and channel for Bluetooth

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (SHENZHEN) CO., LTD.

Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

: Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)
Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943
Accredited by A2LA The Certificate Number is 4321.01.
Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008
 EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Parameter	Measurement Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

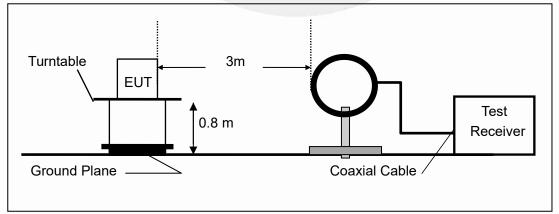


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



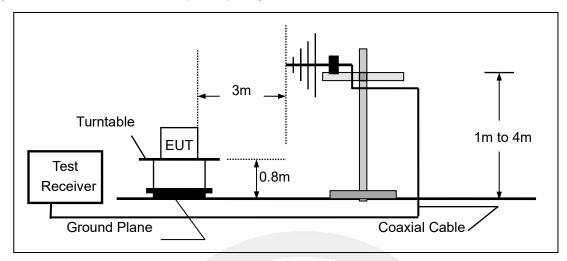

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

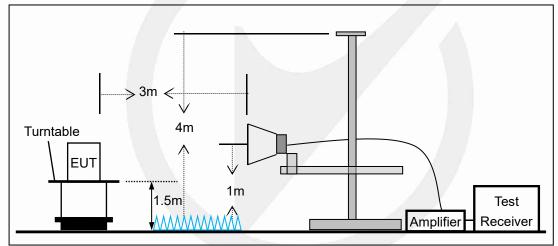




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.


Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

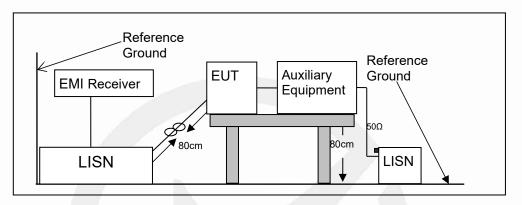



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

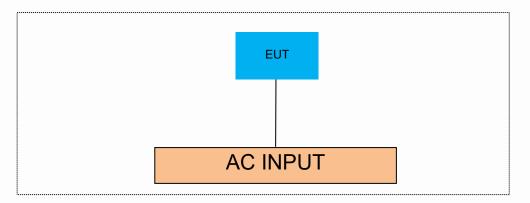

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
1	1	1	1

Auxiliary Cable List and Details						
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite			
power line	0.5	Unshielded	1			

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E46L	11S168003748Z0LR06E0HG
/	1	1	1

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

0246	62 64 78 1	73 75 71

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode: 35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.



9 TEST REQUIREMENTS

9.1 20DB&99%BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1 and RSS-Gen.6.7

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.948	2401.508	2402.456		
DH5	Ant1	2441	0.951	2440.505	2441.456		
DH5	Ant1	2480	0.954	2479.505	2480.459		
2DH5	Ant1	2402	1.293	2401.340	2402.633		
2DH5	Ant1	2441	1.299	2440.337	2441.636		
2DH5	Ant1	2480	1.323	2479.310	2480.633		
3DH5	Ant1	2402	1.284	2401.331	2402.615		
3DH5	Ant1	2441	1.287	2440.331	2441.618		
3DH5	Ant1	2480	1.290	2479.328	2480.618		

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn






深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信濃标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



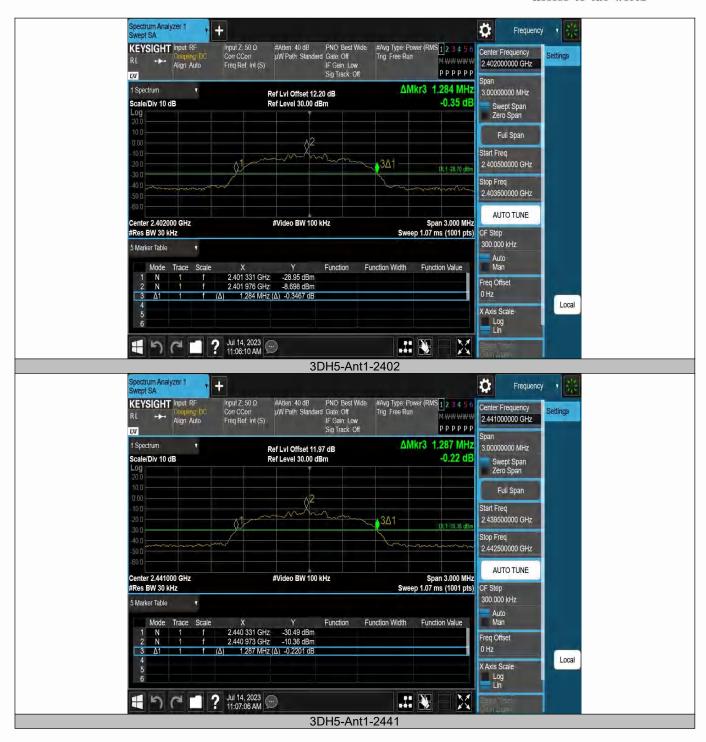


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2306300193W00201R

Ver.1.0



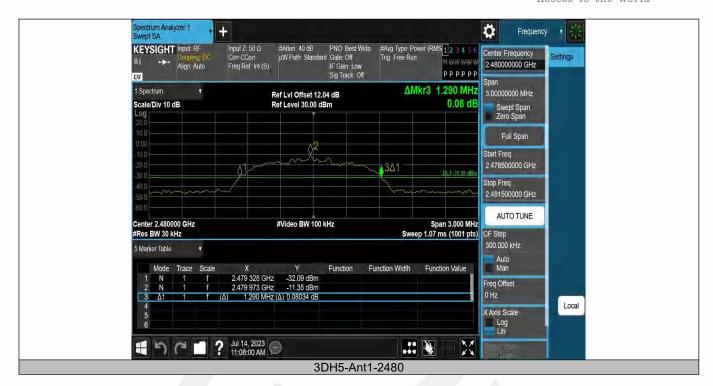




Occupied Channel Bandwidth

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.86196	2401.5420	2402.4039		
DH5	Ant1	2441	0.87708	2440.5348	2441.4119		
DH5	Ant1	2480	0.89233	2479.5297	2480.4220		
2DH5	Ant1	2402	1.1813	2401.3832	2402.5645		
2DH5	Ant1	2441	1.1837	2440.3815	2441.5652		
2DH5	Ant1	2480	1.1905	2479.3790	2480.5695		
3DH5	Ant1	2402	1.1870	2401.3866	2402.5736		
3DH5	Ant1	2441	1.1874	2440.3851	2441.5725		
3DH5	Ant1	2480	1.1928	2479.3825	2480.5753		





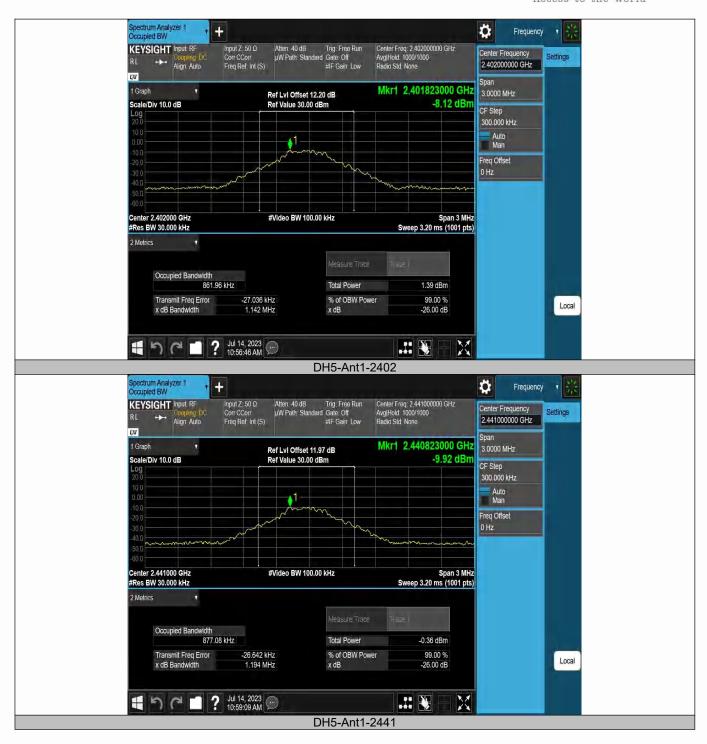

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Spectrum Analyzer 1			Frequency	y y x12
KEYSIGHT Input RF Coupling DC R L ↔ Align Auto Freq	Z 50 Ω Atten 40 dB Trig: Free Run CCorr µW Path Standard Gate: Off Ref. Int (S) #IF Gain: Low	Center Freq: 2.480000000 GHz Avg Hold: 1000/1000 Radio Std: None	Center Frequency 2.48000000 GHz	Settings
1 Graph v Scale/Div 10.0 dB	Ref Lvi Offset 12.04 dB Ref Value 30.00 dBm	Mkr1 2.479967000 GHz -11.78 dBm		
20.0			CF Step 300.000 kHz	
10.0	1		Auto Man	
-10.0 -20.0 -30.0			Freq Offset 0 Hz	
40.0		Jummennen		
-60.0 Center 2.480000 GHz #Res BW 30.000 kHz 2 Metrics	#Video BW 100.00 kHz	Span 3 MHz Sweep 3.20 ms (1001 pts)		
Occupied Bandwidth	Messure Trac			
1.1928 MHz	Total Power	-1.74 dBm		
Transmit Freq Error x dB Bandwidth	-21.102 kHz % of OBW Po 1.400 MHz x dB	wer 99.00 % -26.00 dB		Local
まっ c l ? Jui 11:	14, 2023)8:13 AM	 N - X		
	3DH5-Ant1	-2480		



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =300kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: For Limit = 20dB bandwidth * 2/3


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Нор	0.992	≥0.954	PASS
2DH5	Ant1	Нор	1.002	≥0.882	PASS
3DH5	Ant1	Нор	0.986	≥0.860	PASS

深圳信测标准技术服务股份有限公司 地址;广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn







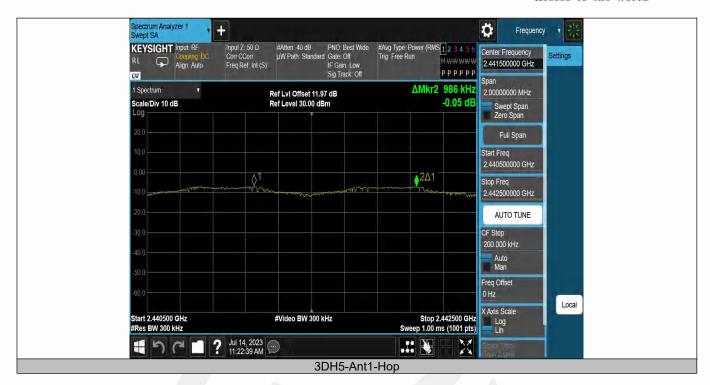



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation (2400-2483.5MHz) RBW = 300KHz VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS
2DH5	Ant1	Нор	79	≥15	PASS
3DH5	Ant1	Нор	79	≥15	PASS

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF	 Input Z: 50 Ω #Atten: 40 dB PNO: Fast	#Avg Type: Power (RMS123456	Frequence Center Frequency	
R L Coupling: DC Align: Auto	Corr CCorr µW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain: Low Sig Track: Off	Trig Free Run MWWWW PPPPP	2.441750000 GHz	Settings
Lvr 1 Spectrum • Scale/Div 10 dB Log	Ref Lvi Offset 12.20 dB Ref Level 30.00 dBm		Span 83.5000000 MHz Swept Span Zero Span	
20.0			Full Span	1
10.0			Start Freq 2.400000000 GHz	1
4944	www.www.www.www.www.www.www.	ananhananhanan	Stop Freq 2.483500000 GHz	
-20.0			AUTO TUNE CF Step	
-40.0			8.350000 MHz	
-50.0			Man Freq Offset 0 Hz	
Start 2.40000 GHz #Res BW 300 kHz	#Video BW 300 kHz	Stop 2.48350 GHz Sweep 1.00 ms (1001 pts)	X Axis Scale	Local
J901?	Jul 14, 2023 11:24:25 AM			



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

9.4.5 Test Results


Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: TotalHops(DH1)=(1600/2/79)*31.6 TotalHops(DH3)=(1600/4/79)*31.6 TotalHops(DH5)=(1600/6/79)*31.6 Dwell Time= BurstWidth* TotalHops

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.388	320	0.124	≤0.4	PASS
DH3	Ant1	Нор	1.643	160	0.263	≤0.4	PASS
DH5	Ant1	Нор	2.889	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Нор	0.396	320	0.127	≤0.4	PASS
2DH3	Ant1	Нор	1.649	160	0.264	≤0.4	PASS
2DH5	Ant1	Нор	2.896	106.67	0.309	≤0.4	PASS
3DH1	Ant1	Нор	0.398	320	0.127	≤0.4	PASS
3DH3	Ant1	Нор	1.648	160	0.264	≤0.4	PASS
3DH5	Ant1	Нор	2.899	106.67	0.309	≤0.4	PASS


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



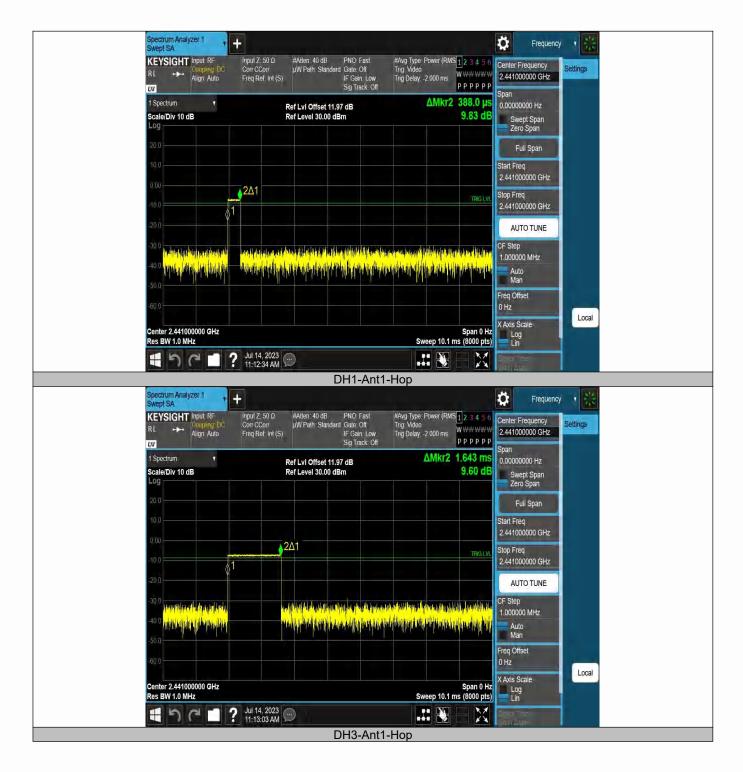

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn







深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Spectrum Analyzer 1	+	k a statut	Frequency	y y Sta
KEYSIGHT Input RF RL ↔ Align Auto	Input Z: 50 Ω #Atlen: 40 dB PNO Fast Corr CCorr μW Path Standard Gate. Off Freq Ref. Int (S) Sig Track: Off Sig Track: Off	#Avg Type: Power (RMS <mark>123456</mark> Trig: Video Trig Delay -2.000 ms PPPPP	Center Frequency 2.441000000 GHz	Settings
1 Spectrum	Ref Lvi Offset 11.97 dB Ref Level 30.00 dBm	ΔMkr2 1.649 ms 7.48 dB	Span 0.00000000 Hz Swept Span Zero Span	
20.0			Full Span Start Freq	
0.00	2Δ1	TRIG LVL	2.441000000 GHz Stop Freq	
-10.0			2.441000000 GHz AUTO TUNE	
-30.0 40 0 40 40 40 40 40 40 40 40 40 40 40 40	hen die die kaarde die staar di Die staar die staar di	n han an a	CF Step 1.000000 MHz Auto Man	
-60.0			Freq Offset 0 Hz	Local
Center 2.441000000 GHz Res BW 1.0 MHz	Jul 14, 2023	Span 0 Hz Sweep 10.1 ms (8000 pts)	X Axis Scale Log Lin	
	11:20:08 AM 2DH3-Ant		(Saan (Laan)	
anopi art			Frequency	y v 🔣
KEYSIGHT Input RF RL +++ Coupling DC Align Auto	Input Z: 50 Ω #Atten: 40 dB PNO: Fast Corr CCorr μW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain. Low Sig Track: Off	#Avg Type: Power (RMS 12 3 4 5 6 Trig: Video Trig Delay: -2.000 ms P P P P P P	Center Frequency 2.441000000 GHz Span	Settings
1 Spectrum v Scale/Div 10 dB	Ref LvI Offset 11.97 dB Ref Level 30.00 dBm	ΔMkr2 2.896 ms 7.20 dB	0.000000000 Hz Swept Span Zero Span	
20.0			Full Span	
0.00	2Δ1		Start Freq 2.441000000 GHz Stop Freq	
-10.0	hits of a determined of the state of the state of the basis of the basis of the state of the sta	TRIG LVL	2.441000000 GHz	
		under die seeligdel beste ferste die die beste gebe	CF Step 1.000000 MHz	
-40.0 a tha an an		nin in biologich nie onder station in the party of	Auto Man Freq Offset	
-60.0 Center 2.441000000 GHz		Span 0 Hz	0 Hz X Axis Scale Log	Local
Res BW 1.0 MHz	Jul 14, 2023	Sweep 10.1 ms (8000 pts)	Log Lin	
	2DH5-Ant		i Saan Laam	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市街山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2306300193W00201R



KEYSIGHT multiller mer 2000 mer 400 mer 4	Spectrum Analyzer 1	+		Frequency	¥ 5,2
Sector Ref Level 33:00 dBm 7.99 cB Sector Sector <t< td=""><td>KEYSIGHT Input RF RL →→ Couping: DC Align Auto</td><td>Input Z: 50 Ω #Atten: 40 dB PNO: Fast Corr CCorr µW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain: Low</td><td>Trig. Video Trig Delay2:000 ms</td><td>Center Frequency 2.441000000 GHz</td><td></td></t<>	KEYSIGHT Input RF RL →→ Couping: DC Align Auto	Input Z: 50 Ω #Atten: 40 dB PNO: Fast Corr CCorr µW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain: Low	Trig. Video Trig Delay2:000 ms	Center Frequency 2.441000000 GHz	
Image: Autor of the second	1 Spectrum			0.00000000 Hz Swept Span	
Significant Arrangeers Significant Arrangeers Signi				Full Span Start Freq	
Signed ward of the start	-10.0		TRIG LVL	Stop Freq	
500 Image: State of the		configurate the particular in the second	and the second stands of the	CF Step 1.000000 MHz	
Center 2.44100000 GHZ Res BW 10. MHz Sweep 10. ms (800 DHS)		landa shinadahili a la din unan dia kuta walatin.	ערשו כור בא יויון זו נוגעיון נוייארן דיר בי בי בי בי א	Man Freq Offset	
Spectrum Analyzer 1 Wery ISA Align Auto Ref Lvi Offset 11,97 dB Sectrum	Res BW 1.0 MHz	Jul 14, 2023	Sweep 10.1 ms (8000 pts)	Log	Local
Spectrum Analyzer 1 Swept SA KEYSIGHT Input RF RI Might Auto Sector Coor Preg Ret. Ivt (S) Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Ref. Lv1 Offset 11.97 dB Ref. Lv1 Offset 11.97 dB Ref. Lv1 Offset 11.97 dB Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Div 10 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Common Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Scale Diversion Coord Spectrum Ref. Lv1 Offset 11.97 dB Common Diversion Coord Common Diversion Coord				Ster Laam	
KEYSIGHT Input Z: 50 Ω #Atten-40 dB PNO Fast #Avg Type Power (RMS 12 3 4 5 6) Center Frequency Settings NL Augn Auto Preg Ref Ivt (S) #Atten-40 dB PNO Tast Trg Vdeo Trg Vdeo Carton ov Span 0.0000000 GHz Svept Span Zero Span Feig Span Statt Freq 2.441000000 GHz Svept Span Zero Span Feig Span Statt Freq 2.441000000 GHz Statt Freq 3.44100000 GHz Statt Freq 3.44100 GHz Statt				Frequency	v 🔆
1 Spectrum Ref Lvi Offset 11.97 dB AMkr2 1.648 ms 0.00000000 Hz Scale/Div 10 dB Ref Level 30.00 dBm 6.87 dB Swept Span 203 Full Span Full Span 104 204 Start Freq 2.44100000 GHz 204 Full Span Start Freq 2.44100000 GHz 204 Full Span Start Freq 2.44100000 GHz 205 Full Span Start Freq 2.44100000 GHz 204 Full Span Start Freq 2.441000000 GHz 205 Freq Offset 1.00000 MHz Auto 205 Freq Offset 1.000000 MHz Auto 206 Freq Offset 1.000000 MHz Auto 206 Freq Offset 1.000000 MHz Auto 206 Freq Offset Log Log Log 207 Freq Offset Log Log Log Log 208 Freq Offset Log Log Log Log Log	KEYSIGHT Input RF RL + Align Auto	Corr CCorr µW Path Standard Gate Off Freq Ref. Int (S) IF Gain Low	Trig Video Trig Delay2.000 ms	Center Frequency 2.441000000 GHz	
100 201 THE LAW PLAN Start Freq 2.441000000 GHz 200 200 2.441000000 GHz Stop Freq 2.441000000 GHz 200 41000000 GHz 2.441000000 GHz AUTO TUNE 200 41000000 GHz 41000000 GHz 41000000 GHz 200 500 Freq Offset 0 Hz 200 500 500 100000 GHz 41000000 GHz 200 500 500 500 100000 GHz 200 500 500 500 500 100000 GHz 200 500 500 500 500 100000 GHz 200 2014, 2023 500 500 100000 GHz 100000 GHz 2014, 2023 500 1000000 GHz 1000000 GHz 1000000 GHz 1000000 GHz 1000000 GHz 1000000 GHz 2014, 2023 500 5000000000 GHz 10000000000000000000000000000	Scale/Div 10 dB			0.00000000 Hz Swept Span	
000 201 THIGLY Stop Freq 2.441000000 GHz 200 400 <td< td=""><td></td><td></td><td></td><td>Start Freq</td><td></td></td<>				Start Freq	
39.0 All of 10 ML 40.0 Maximum of the standard stand	-10.0	litere Raide to frieden L	TRIGLVL	Stop Freq 2.441000000 GHz	
Center 2.441000000 GHz Res BW 1.0 MHz Sweep 10.1 ms (8000 pts) Lin Center 2.441000000 GHz Res BW 1.0 MHz Center 2.441000000 GHz Res BW 1.0 MHz Center 2.441000000 GHz Sweep 10.1 ms (8000 pts) Lin Center 2.44100000 GHz Sweep 10.1 ms (8000 pts) Lin Center 2.44100000 GHz Sweep 10.1 ms (8000 pts) Lin Center 2.4410 sweep 10.1 ms (8000 pts)	-30.0	darlan a zil yezhoù d'ar hit d'han di katen a A d'han a zil yezhoù d'han di katen di katen di katen di katen di		CF Step 1.000000 MHz	
Center 2.44100000 GHz Res BW 1.0 MHz Sweep 10.1 ms (8000 pts)	-50.0	d terkinde verken de an ittige bester.	and har in a dillas adhradi	Man Freq Offset	
E 5 C I ? Jul 14, 2023 💬 📰 💽 🚺 🕅 🖓 🖂 🕅 🕅	Center 2.441000000 GHz Res BW 1.0 MHz		Sweep 10.1 ms (8000 pts)	X Axis Scale	Local
3DH3-Ant1-Hop	1 7 C 1			Signal Time" (Boan (Leann)	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2306300193W00201R



Spectrum Analyzer 1 Swept SA	+		Frequency	y - y - x - x - x - x - x - x - x - x -
KEYSIGHT input RF RL +++ Align: Auto	Corr CCorr pW Path: Standard Gate: Off In	vg Type: Power (RMS <mark>123456</mark> g. Vídeo g Delay2.000 ms Р Р Р Р Р Р	Center Frequency 2.441000000 GHz	Settings
1 Spectrum v Scale/Div 10 dB Log	Ref Lvi Offset 11.97 dB Ref Level 30.00 dBm	ΔMkr2 2.899 ms 7.49 dB	Span 0.00000000 Hz Swept Span Zero Span	
20.0			Fuli Span	
10.0			Start Freq 2.441000000 GHz	
-10.0		TRIG LVL	Stop Freq 2.441000000 GHz	
-20.0			AUTO TUNE CF Step	
-40 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	and industrial and the second s	analalaran dan seria dan seria Anala dan seria dan s	1.000000 MHz Auto Man	
-60.0			Freq Offset 0 Hz	Local
Center 2.441000000 GHz Res BW 1.0 MHz		Span 0 Hz Sweep 10.1 ms (8000 pts)	X Axis Scale Log Lin	LUCAI
1941	? Jul 14, 2023 11:24:41 AM		Sigiral Time" (Bidan Zoan)	
	3DH5-Ant1-H	on		

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.4 and RSS-Gen 6.12

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-4.51	≤20.97	PASS
DH5	Ant1	2441	-6.16	≤20.97	PASS
DH5	Ant1	2480	-7.11	≤20.97	PASS
2DH5	Ant1	2402	-4.22	≤20.97	PASS
2DH5	Ant1	2441	-5.87	≤20.97	PASS
2DH5	Ant1	2480	-6.48	≤20.97	PASS
3DH5	Ant1	2402	-3.5	≤20.97	PASS
3DH5	Ant1	2441	-5.14	≤20.97	PASS
3DH5	Ant1	2480	-6.06	≤20.97	PASS

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2306300193W00201R






深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn


Report No. ENS2306300193W00201R



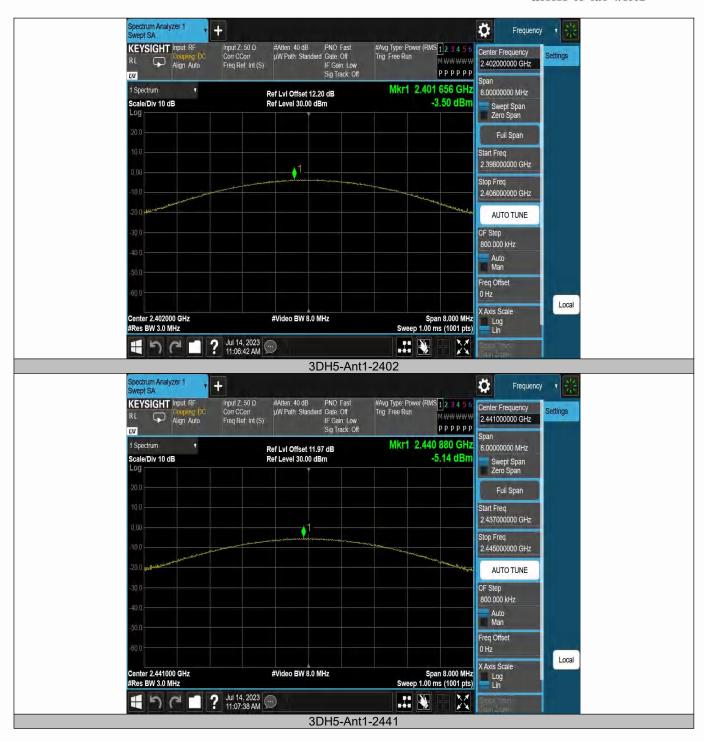

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



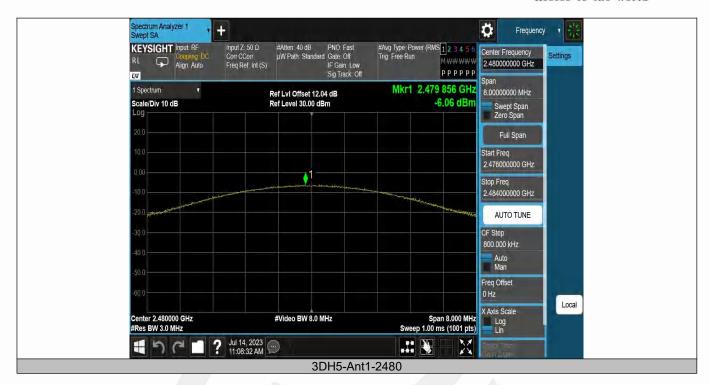

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247 5.5

9.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \ge 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW \geq 1% of the span=100kHz Set VBW \geq 3 x RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.6.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

Band edge measurements

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, GFSK) result recorded was report as below:

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-5.63	-48.04	≤-25.63	PASS
DH5	Ant1	High	2480	-8.40	-47.77	≤-28.4	PASS
DH5	Ant1	Low	Hop_2402	-6.24	-48.36	≤-26.24	PASS
DH5	Ant1	High	Hop 2480	-8.92	-47.61	≤-28.92	PASS

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



pectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Free Run #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF Center Frequency Settings Align Auto MWWWW 2.352500000 GHz рррррр L)XI pan Mkr5 2.355 965 GHz 1 Spectrum 105.000000 MHz ۲ Ref LvI Offset 11.94 dB Ref Level 20.00 dBm Scale/Div 10 dB -48.36 dBn Swept Span Zero Span Full Span LT -26-24 dE Start Freq 2.300000000 GHz 5 13 04 OP Stop Freq 2.405000000 GHz AUTO TUNE Start 2.30000 GHz #Video BW 300 kHz Stop 2.40500 GHz CF Step #Res BW 100 kHz Sweep 3.87 ms (1001 pts) 10.500000 MHz 5 Marker Table ÷. Auto Man Trace Scale Х Function Function Width Function Value Mode -6.235 dBm -51.10 dBm -49.79 dBm -51.44 dBm 2.405 000 GHz 2.400 000 GHz 2.390 000 GHz 2.310 000 GHz ZZZZ Freq Offset 2 0 Hz Local X Axis Scale N 2 355 965 GHz -48.36 dBm Log Lin 🕂 🖒 🍽 🚺 ? Jul 14, 2023 💬 X DH5-Ant1-Hop 2402 Spectrum Analyzer 1 Wept SA Ö x 5, + Frequency #Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Free Run #Atten: 30 dB PNO: Fast pW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF Center Frequency Settings Align Auto MWWWW 2.51000000 GHz рррррр LXI. ban Mkr4 2,505 20 GHz 1 Spectrum 80.0000000 MHz Ref LvI Offset 11.99 dB Ref Level 20.00 dBm -47.61 dBn Scale/Div 10 dB Swept Span Zero Span Full Span Start Freq 2.470000000 GHz 0.0 -28.92 dE 14 03 12 Stop Freq 2.550000000 GHz AUTO TUNE start 2.47000 GHz #Video BW 300 kHz Stop 2.55000 GHz #Res BW 100 kHz Sweep 3.00 ms (1001 pts) CF Step 8.000000 MHz 5 Marker Table Auto Man Scale Function Function Width Function Value Mode Trace х Y -8.921 dBm -51.81 dBm -50.48 dBm 2.478 96 GHz 2.483 50 GHz 2.500 00 GHz NNN Freq Offset -47.61 dB Local X Axis Scale Log Lin 🕂 🥱 🍋 🗖 ? Jul 14, 2023 💬 X .:: 📎 DH5-Ant1-Hop 2480

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn




Conducted Spurious Emission

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, GFSK) result recorded was report as below:

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-5.57	-5.57		PASS
DH5	Ant1	2402	30~1000	-5.57	-59.85	≤-25.57	PASS
DH5	Ant1	2402	1000~26500	-5.57	-45.37	≤-25.57	PASS
DH5	Ant1	2441	0~Reference	-7.30	-7.30		PASS
DH5	Ant1	2441	30~1000	-7.30	-60.35	≤-27.3	PASS
DH5	Ant1	2441	1000~26500	-7.30	-48.26	≤-27.3	PASS
DH5	Ant1	2480	0~Reference	-8.32	-8.32		PASS
DH5	Ant1	2480	30~1000	-8.32	-60.25	≤-28.32	PASS
DH5	Ant1	2480	1000~26500	-8.32	-48.84	≤-28.32	PASS





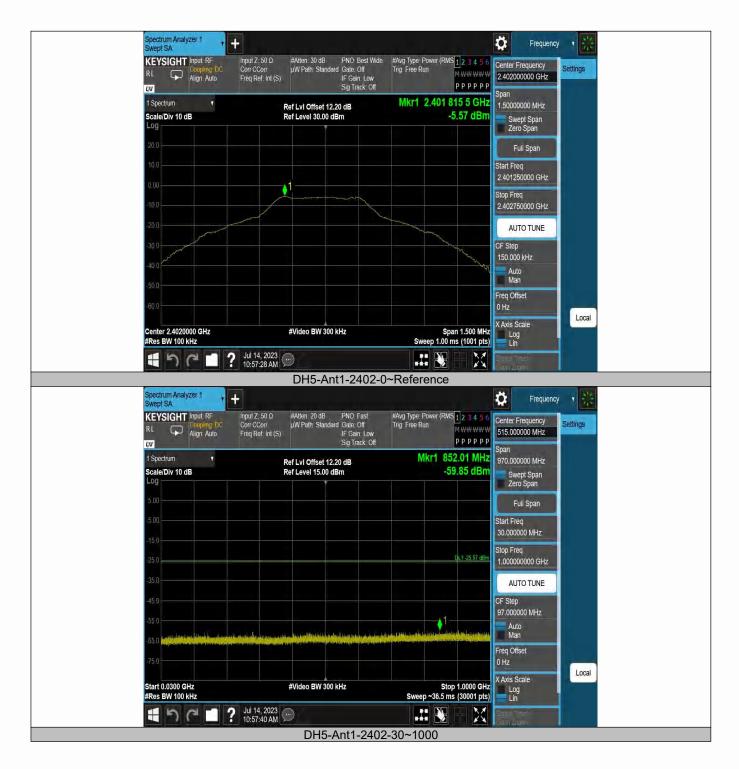

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



pectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Free Run #Atten: 20 dB PNO: Fast pW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF Center Frequency Settings Align Auto MWWWW 13.750000000 GHz рррррр L)XI Span Mkr2 4,803 75 GHz 1 Spectrum 25.5000000 GHz ٧ Ref LvI Offset 12.20 dB Ref Level 15.00 dBm Scale/Div 10 dB -45.37 dBn Swept Span Zero Span Full Span 1 -25.57 dB Start Freq 1.000000000 GHz 72 Stop Freq 26.500000000 GHz AUTO TUNE Start 1.00 GHz #Video BW 300 kHz Stop 26.50 GHz CF Step #Res BW 100 kHz Sweep ~943 ms (30001 pts) 2.550000000 GHz 5 Marker Table Auto Man Mode Trace Scale Х V Function Function Width Function Value 2.401 65 GHz -6.423 dBm N Freq Offset 4.803 75 GHz -45.37 dBm Ν Local X Axis Scale Log Lin モッペロ? Jul 14, 2023 💬 X DH5-Ant1-2402-1000~26500 Spectrum Analyzer 1 Swept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 (Trig: Free Run #Atten: 30 dB PNO. Best Wide µW Path Standard Gate. Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) KEYSIGHT Input RF Center Frequency Coupling: DC Align: Auto Settings 2.441000000 GHz рррррр LNI. ban Mkr1 2.440 815 5 GHz 1 Spectrum T 1.50000000 MHz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm -7.30 dBm Scale/Div 10 dB Swept Span Zero Span _og Full Span Start Freq 2.440250000 GHz ø Stop Freq 2.441750000 GHz AUTO TUNE CF Step 150.000 kHz Auto Man Freq Offset 0 Hz Local X Axis Scale Span 1.500 MHz Sweep 1.00 ms (1001 pts) Center 2.4410000 GHz #Video BW 300 kHz Log Lin #Res BW 100 kHz **?** Jul 14, 2023 X -うる DH5-Ant1-2441-0~Reference

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2306300193W00201R





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Swept SA KEYSIGHT Input: RF R L Align: Auto	Input Z: 50 Ω #Atten: 20 dB PNO: Fast Corr CCorr µW Path: Standard Gate. Off Freq Ref. Int (S) IF Gain. Low Sig Track: Off	#Avg Type: Power (RMS <mark>1</mark> 23456) Trig: Free Run M V///WWW PPPPP	13.73000000 GHZ	Settings
1 Spectrum • Scale/Div 10 dB Log	Ref LvI Offset 12.04 dB Ref Level 15.00 dBm	Mkr2 9.919 90 GHz -48.84 dBm	Edicado do crite	
-5.00			Full Span	
-25,0	<u>i</u> 2	DL1-28.32-dBm	Start Freq 1.000000000 GHz	
-45.0 -55.0 -65.0 -75.0			Stop Freq 26.500000000 GHz	
Start 1.00 GHz #Res BW 100 kHz	#Video BW 300 kHz	Stop 26.50 GHz Sweep ~943 ms (30001 pts)		
5 Marker Table Mode Trace Scale 1 N 1 f	e X Y Function F 2.479 85 GHz -8.555 dBm	Function Width Function Value	2.550000000 GHz Auto Man	
2 N 1 f	9.919 90 GHz -48.84 dBm		Freq Offset 0 Hz	
4 5 6			X Axis Scale Log Lin	Local
- n c	? Jul 14, 2023		Big val 1 met I Span "Logni	

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-Gen and RSS-247

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.	205, Restricted bands		
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

 $\mathsf{VBW} \geq \mathsf{RBW}$

Sweep = auto

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Detector function = peak Trace = max hold For Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	22° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Freq.	Ant.Pol.		ssion BuV/m)	Limit 3m	(dBuV/m)	Ove	er(dB)
(MHz)	H/V	PK È	AV	PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor

深圳信测标准技术服务股份有限公司 地址:广东省深圳市街山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Spurious Emission Above 1GHz (1GHz to 25GHz)

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, GFSK) result recorded was report as below:

Test mode:	GFS	K	Freque	ency:	Channel	0: 2402MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(101112)	H/V	PK	AV	PK	AV	PK	AV
7766	V	56.83	42.74	74	54	-17.17	-11.26
10112	V	57.78	43.89	74	54	-16.22	-10.11
13682	V	56.61	42.49	74	54	-17.39	-11.51
7766	Н	57.69	43.8	74	54	-16.31	-10.20
9806	Н	57.94	43.82	74	54	-16.06	-10.18
14430	Н	57.57	43.36	74	54	-16.43	-10.64
L	•				•		

Test mode:GFSKFrequency:Channel 39: 2441MHz

Freq.	Ant.Pol.	Emission Lev	el(dBuV/m)	Limit 3m	(dBuV/m)	Ove	r(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
7732	V	58.52	44.34	74	54	-15.48	-9.66
9840	V	57.58	43.39	74	54	-16.42	-10.61
13240	V	56.8	43.02	74	54	-17.20	-10.98
7596	н	57.64	43.52	74	54	-16.36	-10.48
9874	Н	57.52	43.61	74	54	-16.48	-10.39
11472	Н	57.49	43.6	74	54	-16.51	-10.40

Test mode: GFSK

К

Frequency:

Channel 78: 2480MHz

Freq.	Ant.Pol.	Emission Lev	vel(dBuV/m)	Limit 3m	(dBuV/m)	Over	(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
8140	V	58.22	44.34	74	54	-15.78	-9.66
9908	V	58.48	44.34	74	54	-15.52	-9.66
13988	V	57.36	43.44	74	54	-16.64	-10.56
7460	Н	57.28	43.17	74	54	-16.72	-10.83
9806	Н	57.64	43.73	74	54	-16.36	-10.27
13104	Н	57.35	43.5	74	54	-16.65	-10.50

Note:

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst(Antenna 1, GFSK, Hopping) result recorded was report as below:

Test mode:	GFSK	Frequence	cy: Ch	annel 0: 2402MH	7
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2381.36	Н	44.42	74	31.13	54
2386.8	V	44.2	74	31.09	54

Test mode:	GFSK	Frequenc	cy: Ch	annel 78: 2480MI	Ηz
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.83	Н	43.77	74	30.82	54
2484.127	V	44.55	74	31.64	54

Test mode:	GFSK	Frequenc	су: Но	pping	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2393.6	Н	49.35	74	35.53	54
2400	Н	51.19	74	37.06	54
2483.5	н	50.94	74	36.83	54
2394.74	V	48.62	74	34.71	54
2400	V	50.84	74	36.95	54
2483.5	V	49.3	74	35.18	54

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.


(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn


Report No. ENS2306300193W00201R



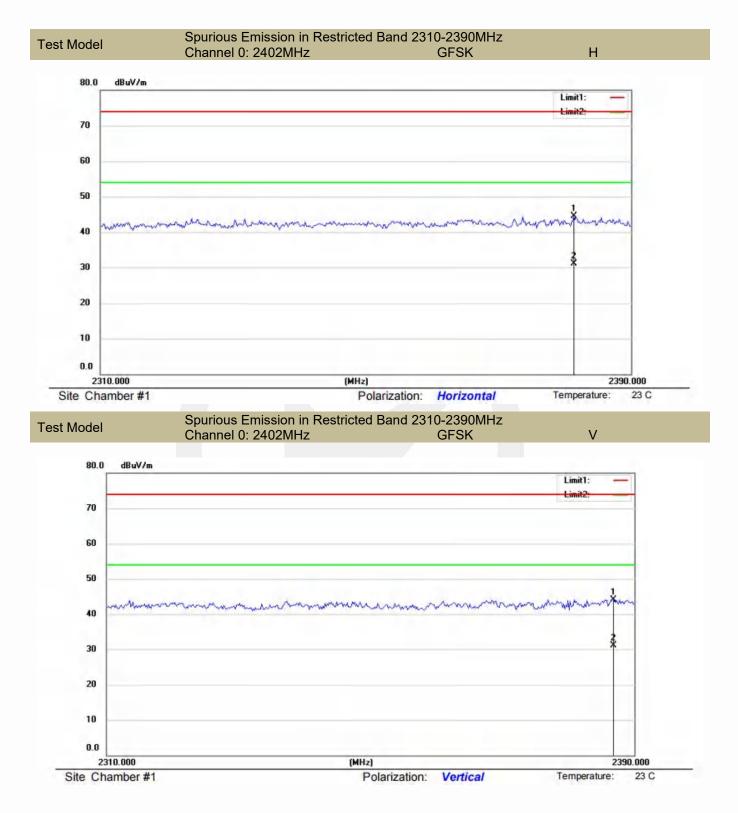


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



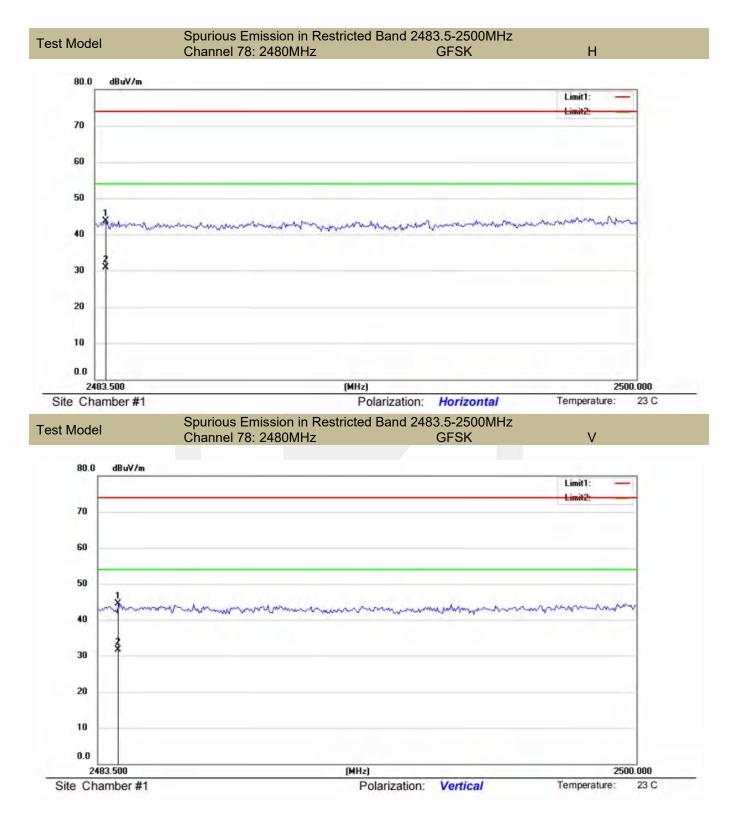


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



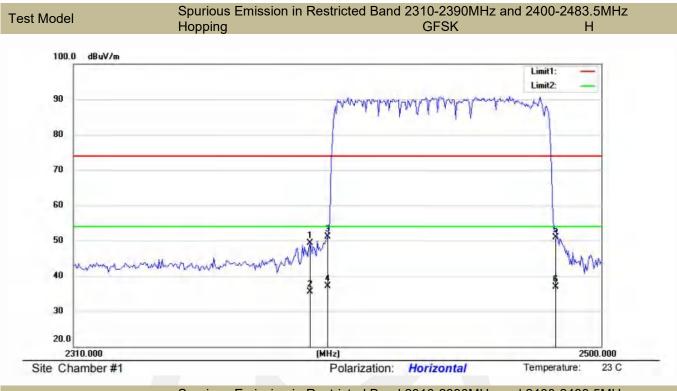

 Test Model
 Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz

 Hopping
 GFSK
 V

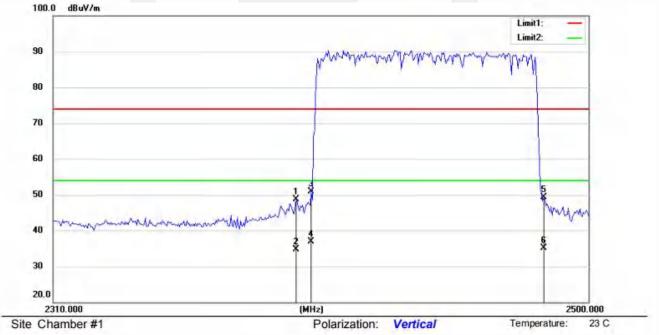


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



■ Spurious Emission below 1GHz (30MHz to 1GHz)

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, 8DPSK) result recorded was report as below:

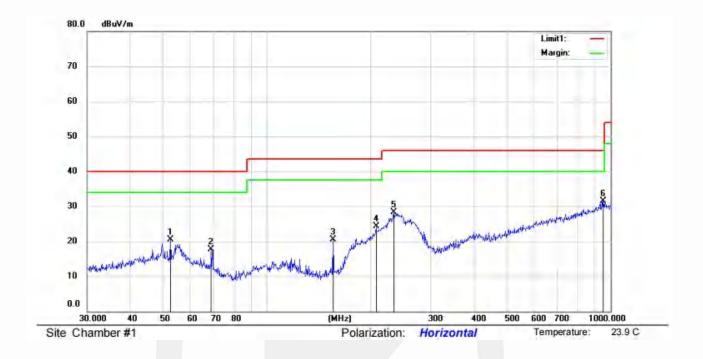

No.	Mk.	Freq.	Reading Level	Ant. Factor	Pre Amp Gain	Cable loss	Measure- ment	Limit	Over		н	Degree	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	cm	deg.	Comment
1		52.3912	36.43	13.76	30.49	0.84	20.54	40.00	-19.46	QP		1.1	
2		68.8721	36.96	10.13	30.55	1.1	17.64	40.00	-22.36	QP			
3	-	155.9101	40.98	8.72	30.59	1.47	20.58	43.50	-22.92	QP			
4		207.8501	41.06	11.82	30.32	1.77	24.33	43.50	-19.17	QP			
5		234.1684	43.87	12.56	30.18	1.99	28.24	46.00	-17.76	QP			
6	*	952.0937	33.84	23.21	29.59	4.13	31.59	46.00	-14.41	QP			
_													


*:Maximum data

x:Over limit !:over margin

Operator: Ccyf

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



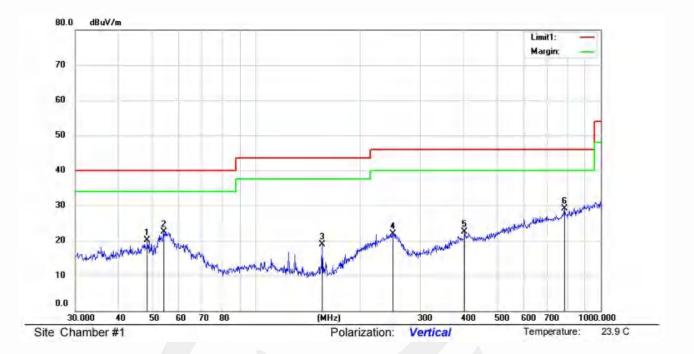

No.	Mk.	Freq.	Reading Level	Ant. Factor	Pre Amp Gain	Cable loss	Measure- ment	Limit	Over		н	Degree	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	cm	deg.	Comment
1		48.5016	35.93	13.94	30.49	0.76	20.14	40.00	-19.86	QP			
2	_	54.2610	38.62	13.57	30.5	0.9	22.59	40.00	-17.41	QP			
3		155.9101	39.38	8.72	30.59	1.47	18.98	43.50	-24.52	QP			
4		249.4250	36.96	12.98	30.1	2.13	21.97	46.00	-24.03	QP			
5		403.2500	32.42	16.34	29.82	3.63	22.57	46.00	-23.43	QP			
6	*	785.0935	34.11	21.4	30.23	3.79	29.07	46.00	-16.93	QP			

*:Maximum data x:Over limit 1:over margin

Operator: Ccyf

Remark:

- 1. Measurement (dB μ V/m) = Antenna Factor(dB) Amp Factor(dB) + Cable Loss(dB) + Reading(dB μ V/m)
- 2. Over (dB) = Measurement (dBµV/m) Limit (dBµV/m)

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207 According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Co	nducted Emission Limit	
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall early at t	he transition frequencies	

Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



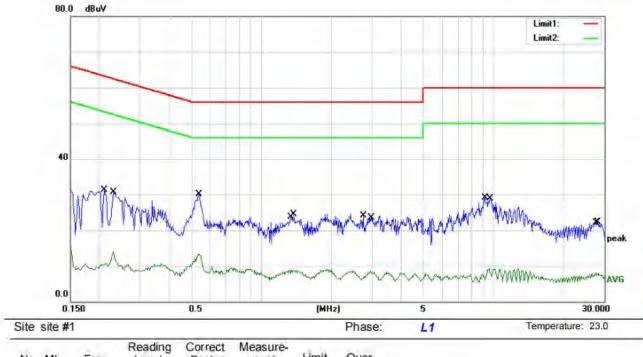

No.	Mk.	Freq.	Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2100	21.85	9.49	31.34	63.21	-31.87	QP	
2		0.2300	4.66	9.50	14.16	52.45	-38.29	AVG	
3		0.5340	3.61	9.63	13.24	46.00	-32.76	AVG	
4	•	0.5380	20.53	9.63	30.16	56.00	-25.84	QP	
5	-	1.3420	-0.65	9.50	8.85	46.00	-37.15	AVG	10
6	-	1.3780	14.99	9.50	24.49	56.00	-31.51	QP	
7		2.7420	14.56	9.55	24.11	56.00	-31.89	QP	
8		2.9500	-1.12	9.54	8.42	46.00	-37.58	AVG	
9	-	9.1980	19.53	9.50	29.03	60.00	-30.97	QP	
10		9,5660	-0.16	9.49	9.33	50.00	-40.67	AVG	
11		27.5740	-1.74	9.63	7.89	50.00	-42.11	AVG	
12		28.0900	12.62	9.63	22.25	60.00	-37.75	QP	
-									

*:Maximum data x:Over limit


hit !: over margin

Comment: Factor build in receiver.

Operator: Chen li

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



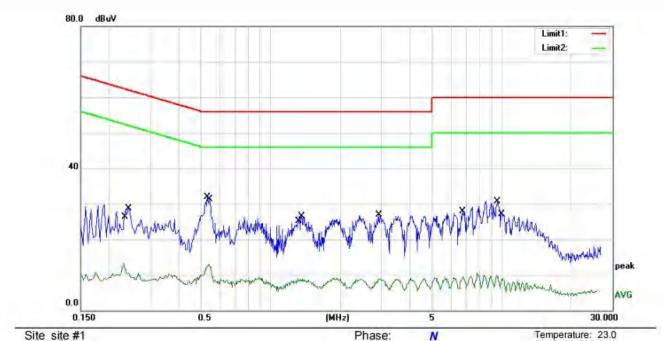

one	one						i nase.			and the second second
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.2300	3.73	9.50	13.23	52.45	-39.22	AVG		
2	-	0.2404	18.71	9.50	28.21	62.08	-33.87	QP		
3		0.5300	22.30	9.63	31.93	56.00	-24.07	QP		
4		0.5380	3.25	9,63	12.88	46.00	-33.12	AVG		
5		1.3060	-0.56	9.50	8.94	46,00	-37.06	AVG		
6		1.3540	16.97	9.50	26.47	56.00	-29.53	QP		
7	-	2.9260	17.43	9.54	26.97	56.00	-29.03	QP		
8		2.9420	-0.59	9.54	8.95	46.00	-37.05	AVG		
9	-	6.7580	18.27	9.55	27.82	60.00	-32.18	QP		
10		6.7940	-0.13	9.56	9.43	50.00	-40.57	AVG		
11	1	9.5500	21.21	9.49	30.70	60.00	-29.30	QP		
12		9.9500	-0.62	9.48	8.86	50.00	-41.14	AVG		

*:Maximum data x

x:Over limit 1:over margin

Comment. Factor build in receiver.

Operator: Chen li

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.9 ANTENNA APPLICATION

9.9.1 Antenna Requirement

Standard	Requirement			
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.			
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.			
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.			
RSS-247 Section 5.4	the transmitter employs an antenna system that emits multiple rectional beams, but does not emit multiple directional beams multaneously, the total output power conducted to the array or arrays at comprise the device (i.e. the sum of the power supplied to all ntennas, antenna elements, staves, etc., and summed across all arriers or frequency channels) shall not exceed the applicable output ower limit. However, the total conducted output power shall be reduced (1 dB below the specified limits for each 3 dB that the directional gain i the antenna/antenna array exceeds 6 dBi. The directional antenna ain shall be computed as the sum of 10 log (number of array elements r staves) plus the directional gain of the element or stave having the ghest gain.			

9.9.2 Result

PASS.

Note:

- Antenna use a permanently attached antenna which is not replaceable.
 - □ Not using a standard antenna jack or electrical connector for antenna replacement
 - □ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	1	21.05
10	20.1	0.28	1	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

Detail of factor for radiated emission

*** End of Report ***

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



声 明

Statement

1. 本报告无授权批准人签字及"检验检测专用章"无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效,委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内,仅作为客户委托、科研、教学或内部 质量控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定,未考虑不确定度所带来的风险,本实验室不承担相关责任,特别约定、 标准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议,请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn