



FCC Test Report

**Test Report
On Behalf of**

C-SMARTLINK INFORMATION TECHNOLOGY CO., LIMITED

For

3-in-1 Travel Wireless Charger

**Model No.: WA0105A, MOWA0105, VIWA0105, SEWA0105,
LIWA0105, KAWA0105, HOWA0105, HSWA0105, GMWA0105,
FAWA0105, EXWA0105, AIWA0105, USWA0105, XFWA0105,
WA0105X(X=A~Z, can be replaced by one letter from A-Z or blank,
indicate different sales customers and sales markets)**

FCC ID: 2ACFF-WA0105A

Prepared For : C-SMARTLINK INFORMATION TECHNOLOGY CO., LIMITED
101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan Community,
Yuanshan Street, Longgang District, Shenzhen, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Sept. 01, 2023 ~ Sept. 20, 2023

Date of Report: Sept. 20, 2023

Report Number: HK2309014071-1E



Test Result Certification

Applicant's Name..... : C-SMARTLINK INFORMATION TECHNOLOGY CO., LIMITED
 Address..... : 101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan Community, Yuanshan Street, Longgang District, Shenzhen, China

Manufacture's Name..... : C-Smartlink Information Technology Co., Ltd.
 Address..... : 101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan Community, Yuanshan Street, Longgang District, Shenzhen, China

Product Description

Trade Mark: N/A

Product Name..... : 3-in-1 Travel Wireless Charger

Model and/or Type Reference: WA0105A, MOWA0105, VIWA0105, SEWA0105, LIWA0105, KAWA0105, HOWA0105, HSWA0105, GMWA0105, FAWA0105, EXWA0105, AIWA0105, USWA0105, XFWA0105, WA0105X(X=A~Z, can be replaced by one letter from A-Z or blank, indicate different sales customers and sales markets)

Standards : FCC Rules and Regulations Part 15 Subpart C (Section 15.209)

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of performance of tests : **Sept. 01, 2023 ~ Sept. 20, 2023**

Date of Issue..... : **Sept. 20, 2023**

Test Result..... : **Pass**

Testing Engineer : *Gary Qian*

 (Gary Qian)

Technical Manager : *Zden Hu*

 (Eden Hu)

Authorized Signatory : *Jason Zhou*

 (Jason Zhou)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Table of Contents

Page

1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2. General Information	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Operation of EUT during testing	7
2.4. Test Mode	7
2.5. Description of Test Setup	9
2.6. Description of Support Units	10
2.7. Measurement Instruments List	11
3. Conducted Emission Test	12
3.1. Block Diagram of Test Setup	12
3.2. Conducted Power Line Emission Limit	12
3.3. Test Procedure	12
4. Radiated Emissions	15
4.1. Block Diagram of Test Setup	15
4.2. Rules and specifications	16
4.3. Test Procedure	17
4.4. Test Result	17
5. Antenna Requirement	28
6. Photographs of Test	29
7. Photos of the EUT	31



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Sept. 20, 2023	Jason Zhou



1. Test Summary

1.1. Test Procedures and Results

Description of Test	Section Number	Result
Conducted Emissions Test	15.207	COMPLIANT
Radiated Emission Test	15.209	COMPLIANT
Antenna Requirement	15.203	COMPLIANT

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
 Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:
 A2LA Accreditation Code is 4781.01.
 FCC Designation Number is CN1229.
 Canada IC CAB identifier is CN0045.
 CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.71dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.28dB, k=2



2. General Information

2.1. General Description of EUT

Factory's Name:	HUNAN C-SMARTLINK TECHNOLOGY CO., LTD.
Address:	Building 5-6-7-8, Chengnan Electronic Information Industrial Park, Chenxi Industrial Development Zone, Chenxi County, Huaihua, Hunan Province, China
Factory's Name:	C-Smartlink Information Technology Co., Ltd.
Address:	101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan Community, Yuanshan Street, Longgang District, Shenzhen, China
Equipment:	3-in-1 Travel Wireless Charger
Model Name:	WA0105A
Series Models:	MOWA0105, VIWA0105, SEWA0105, LIWA0105, KAWA0105, HOWA0105, HSWA0105, GMWA0105, FAWA0105, EXWA0105, AIWA0105, USWA0105, XFWA0105, WA0105X(X=A~Z, can be replaced by one letter from A-Z or blank, indicate different sales customers and sales markets)
Model Difference:	All model's the function, software and electric circuit are the same, only with product color and model named different. Test sample model: WA0105A.
Trade Mark:	N/A
FCC ID:	2ACFF-WA0105A
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Operation frequency:	112KHz~205KHz
Test frequency:	Mobile Phone: 130KHz Earbuds: 128KHz Watch: 128KHz
Modulation Type:	ASK
Power Source:	Input Voltage: DC5V-9V Rated Input Current: 3A Phone Output: 5W/ 7.5W/10W/15W(Max.) Watch Output: 3W (Max.) Earbuds Output: 5W (Max.)
Power Rating:	Input Voltage: DC5V-9V Rated Input Current: 3A Phone Output: 5W/ 7.5W/10W/15W(Max.) Watch Output: 3W (Max.) Earbuds Output: 5W (Max.)
<p>Note: The transfer system includes three coils, 3 coils can work individually or can work at the same time. All the situation(full load, half load and empty load) has been tested, only the worst situation (ANT1+ANT2+ANT3) was recorded in the report.</p>	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2.2. Carrier Frequency of Channels

	Test Frequency
01	Mobile Phone:130KHz
02	Watch: 128KHz
03	Earbuds: 128KHz

2.3. Operation of EUT during testing

Operating Mode

The mode is used: Transmitting mode

2.4. Test Mode

Test Item	Test mode	Description
Radiated & Conducted test cases	ANT1+ANT2+ANT3	Mode 1:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Full Load)
		Mode 2:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Full Load)
		Mode 3:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Full Load)
		Mode 4:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Half Load)
		Mode 5:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Half Load)
		Mode 6:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Half Load)
		Mode 7:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Null Load)
		Mode 8:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Null Load)
		Mode 9:AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Null Load)
	No Loads	AC/DC Adapter+ EUT (Null Load)
	ANT1 Alone	Mode 1: AC/DC Adapter+ EUT + Wireless load (Full load) Mode 2: AC/DC Adapter+ EUT + Wireless load (Half load) Mode 3: AC/DC Adapter+ EUT + Wireless load (Null load)
	ANT2 Alone	Mode 1: AC/DC Adapter+ EUT + Wireless load (Full load) Mode 2: AC/DC Adapter+ EUT + Wireless load (Half load) Mode 3: AC/DC Adapter+ EUT + Wireless load (Null load)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




	ANT3 Alone	Mode 1: AC/DC Adapter+ EUT + Earbuds (Battery Status: <1%) Mode 2: AC/DC Adapter+ EUT + Earbuds (Battery Status: <50%) Mode 3: AC/DC Adapter+ EUT + Earbuds (Battery Status: <100%)
--	------------	---

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The wireless charging equipment for testing and evaluation Earbuds, and the wireless load replaces the(Phone, Watch).
4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.

2.5. Description of Test Setup

Operation of EUT during testing:

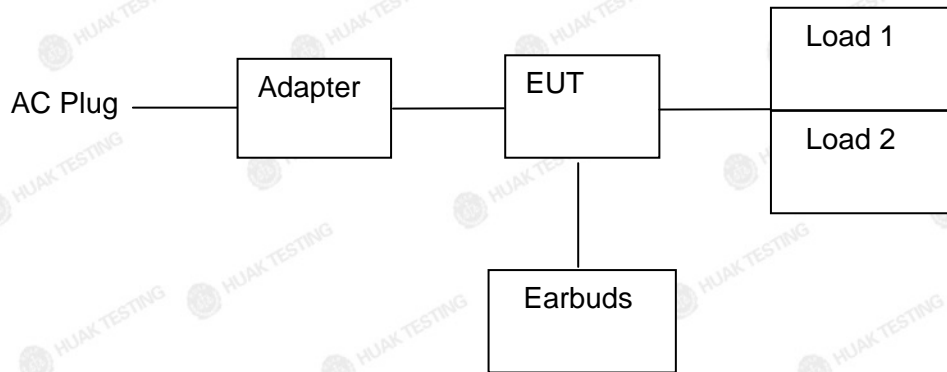

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.6. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	3-in-1 Travel Wireless Charger	N/A	WA0105A	N/A	EUT
2	USB Cable	N/A	N/A	Length:1.03m	Accessory
3	Adapter	N/A	MDY-12-EF	Input: 100-240V, 50/60Hz, 1.7A Max Normal output:5V, 3A Fast output: 5V-20V, 6.2-3.25A (67W Max)	Accessory
4	Load 1	YBZ	N/A	Wireless input:15W Max	Peripheral
5	Load 2	YBZ	N/A	Wireless input:3W	Peripheral
6	Earbuds	Airpods	N/A	Wireless input:5W	Peripheral

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.




2.7. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 17, 2023	1 Year
2.	Receiver	R&S	ESR-7	HKE-010	Feb. 17, 2023	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 17, 2023	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 17, 2023	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 17, 2023	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 17, 2023	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 17, 2023	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 17, 2023	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 17, 2023	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Feb. 17, 2023	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 17, 2023	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 17, 2023	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 17, 2023	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 17, 2023	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year
19.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 17, 2023	1 Year

3. Conducted Emission Test

3.1. Block Diagram of Test Setup

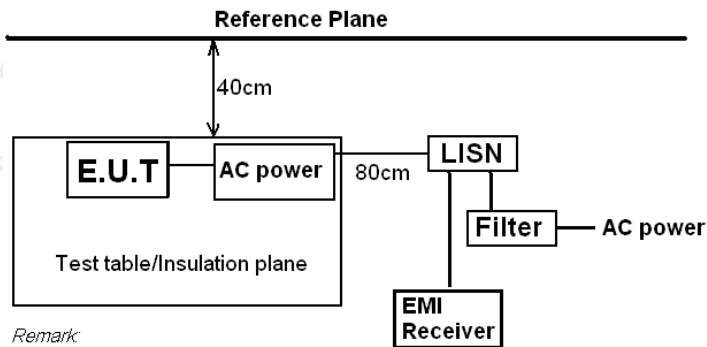

Remark
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

3.2. Conducted Power Line Emission Limit

According to FCC Part 15.207(a)

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207 Line Conducted Emission Limit is same as above table.

3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




3.4. Test Result

PASS

All the test modes completed for test. Only the worst result of Full Load was reported as below:

Test Specification: Line

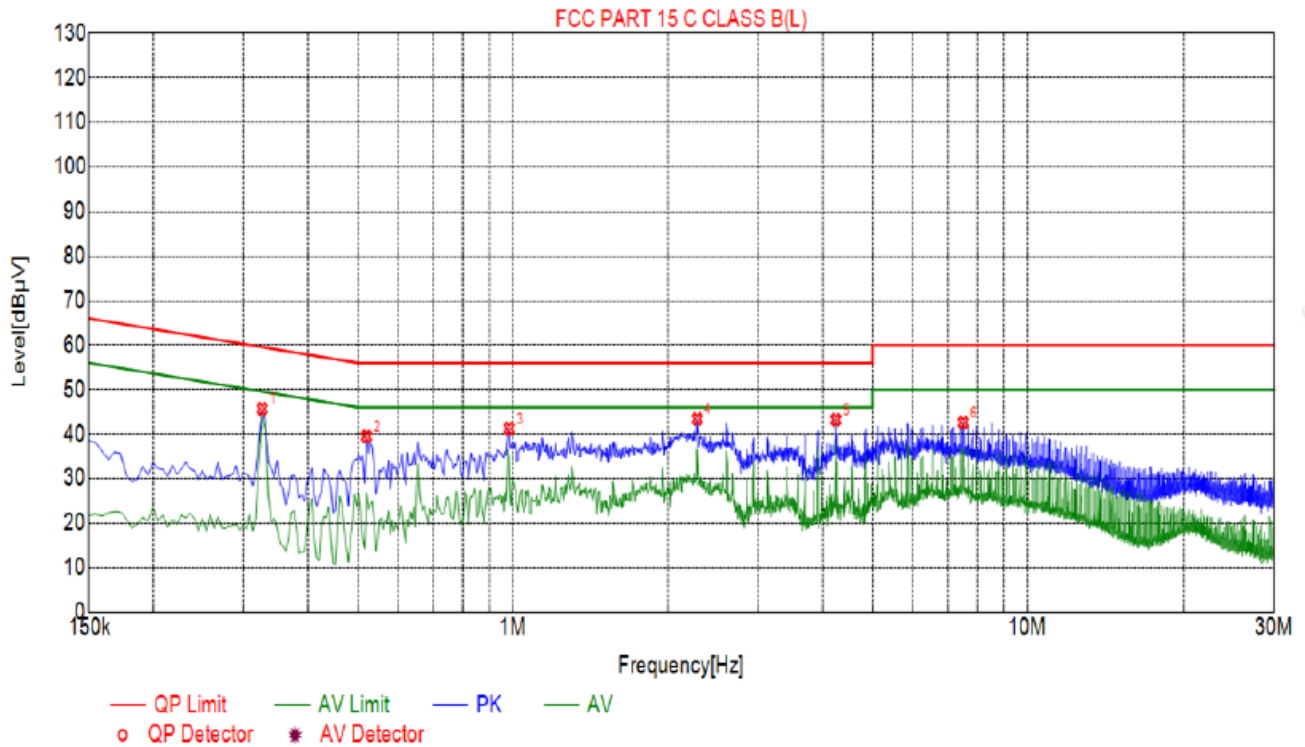

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.3255	45.68	20.05	59.57	13.89	25.63	PK	L
2	0.5190	39.46	20.04	56.00	16.54	19.42	PK	L
3	0.9825	41.25	20.06	56.00	14.75	21.19	PK	L
4	2.2830	43.40	20.18	56.00	12.60	23.22	PK	L
5	4.2450	43.23	20.25	56.00	12.77	22.98	PK	L
6	7.5120	42.62	20.17	60.00	17.38	22.45	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

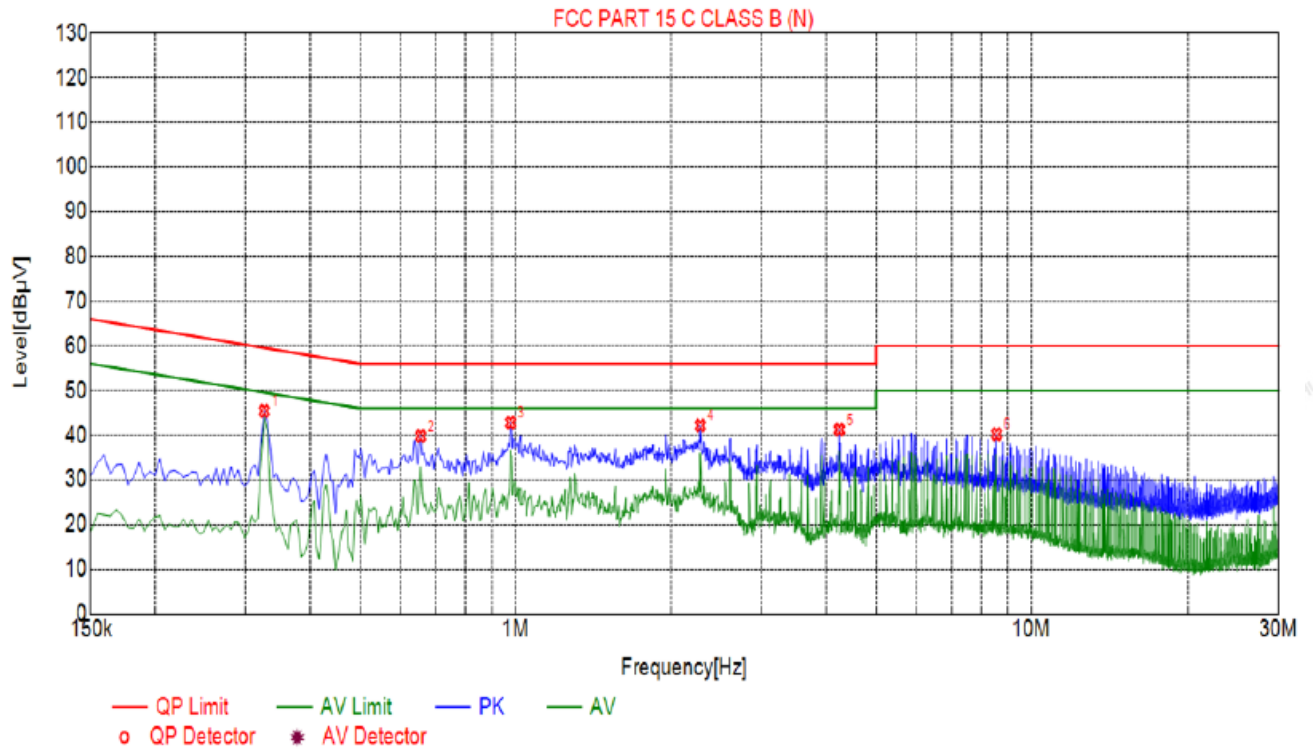

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.3255	45.44	20.05	59.57	14.13	25.39	PK	N
2	0.6540	39.81	20.05	56.00	16.19	19.76	PK	N
3	0.9780	42.80	20.06	56.00	13.20	22.74	PK	N
4	2.2830	42.16	20.18	56.00	13.84	21.98	PK	N
5	4.2450	41.24	20.25	56.00	14.76	20.99	PK	N
6	8.5695	40.20	20.13	60.00	19.80	20.07	PK	N



Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

4. Radiated Emissions

4.1. Block Diagram of Test Setup

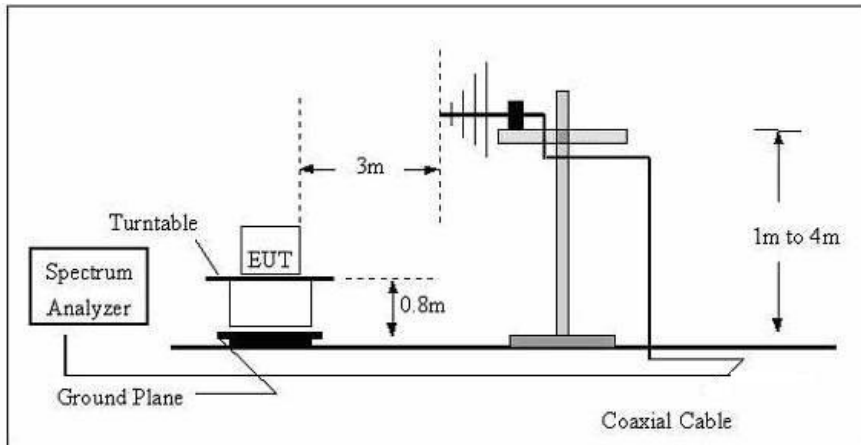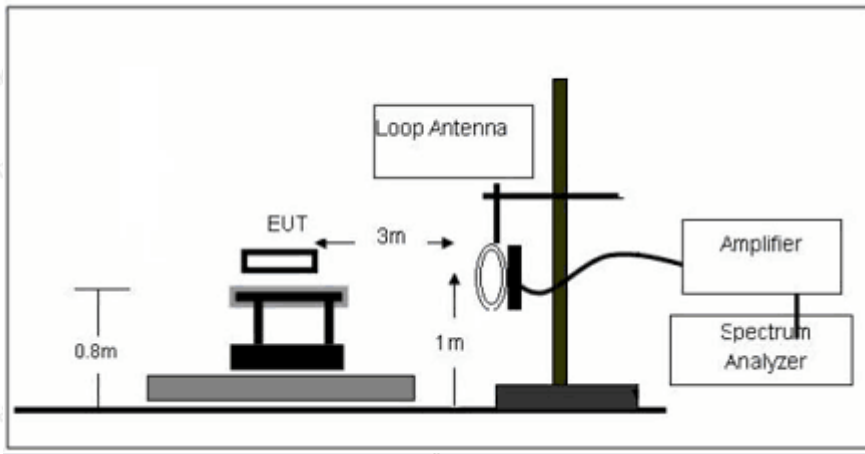



4.2. Rules and specifications

CFR 47 Part 15, section 15.205

Only spurious emissions are permitted in any of the frequency bands listed the tables in these sections.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

CFR 47 Part 15, section 15.209

The emissions from an intentional radiator shall not exceed the limits in the tables in these sections using an average detector.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(KHz))+40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(KHz))+40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

CFR 47 Part 15, section 15.35

When average radiated emission measurements are specified, the limit on the peak level of the radio Frequency emission is 20dB above the maximum permitted average emission limit.

Transmitter Spurious Emissions 9KHz-30MHz			
	9-150KHz	150-490KHz	490KHz-30MHz
Resolution Bandwidth	200Hz	9KHz	9KHz
Video Bandwidth	600Hz	30KHz	30KHz
Detector	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, According to part 15.31(f)(2), per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4. Test Result

PASS


Note: All the test modes completed for test. Only the worst result (ANT1+ANT2+ANT3) was reported as below.



Mobile Phone:

For 9KHz - 30MHz

Coaxial:

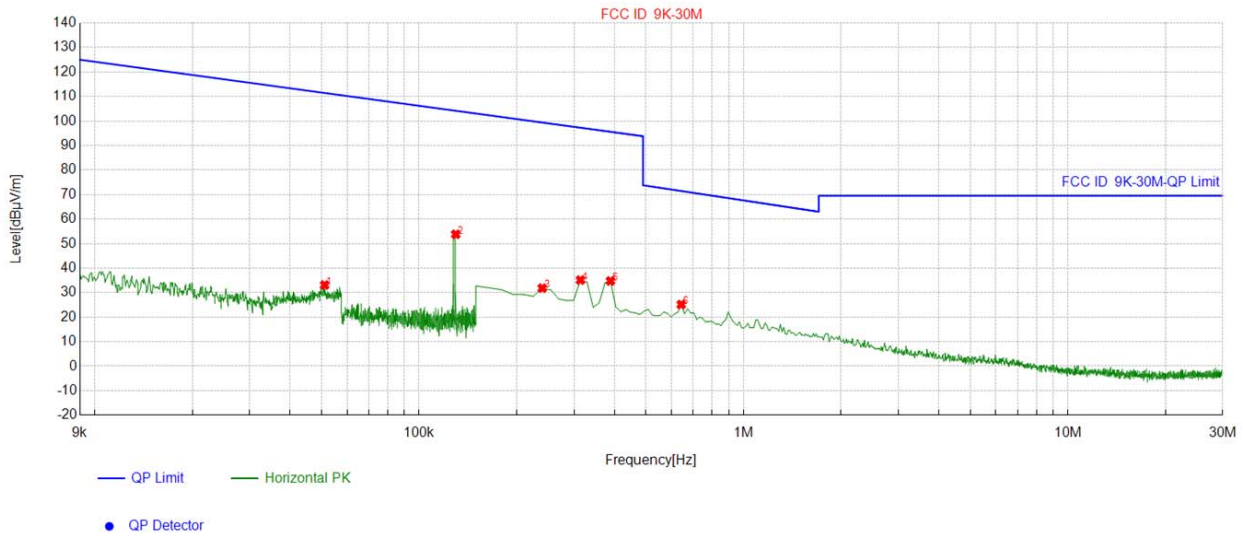


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.05111	-10.40	43.50	33.10	111.44	78.34
2	0.129686	-10.60	64.40	53.80	104.18	50.38
3	0.239595	-10.89	42.71	31.82	99.38	67.56
4	0.314257	-11.35	46.47	35.12	97.27	62.15
5	0.388919	-11.19	45.96	34.77	95.60	60.83
6	0.642771	-10.95	36.10	25.15	71.45	46.30

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Coplanar:

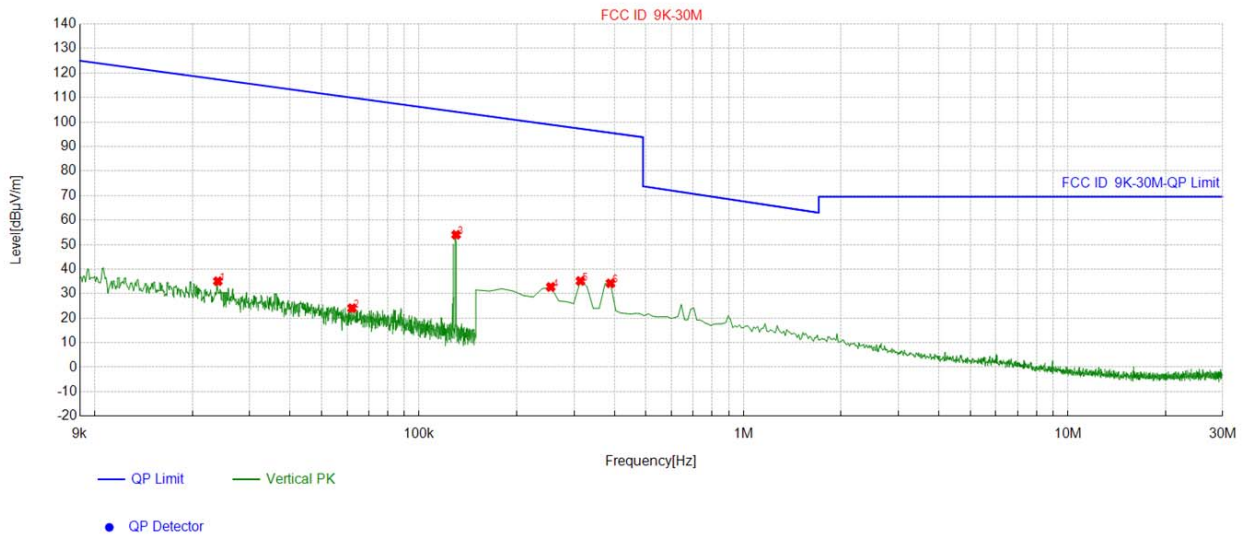


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.023953	-10.75	45.82	35.07	117.36	82.29
2	0.062113	-10.56	34.63	24.07	109.92	85.85
3	0.129968	-10.60	64.61	54.01	104.16	50.15
4	0.254527	-11.01	43.71	32.70	98.91	66.21
5	0.314257	-11.35	46.51	35.16	97.27	62.11
6	0.388919	-11.19	45.40	34.21	95.60	61.39

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Earbuds:
For 9KHz - 30MHz
Coaxial:

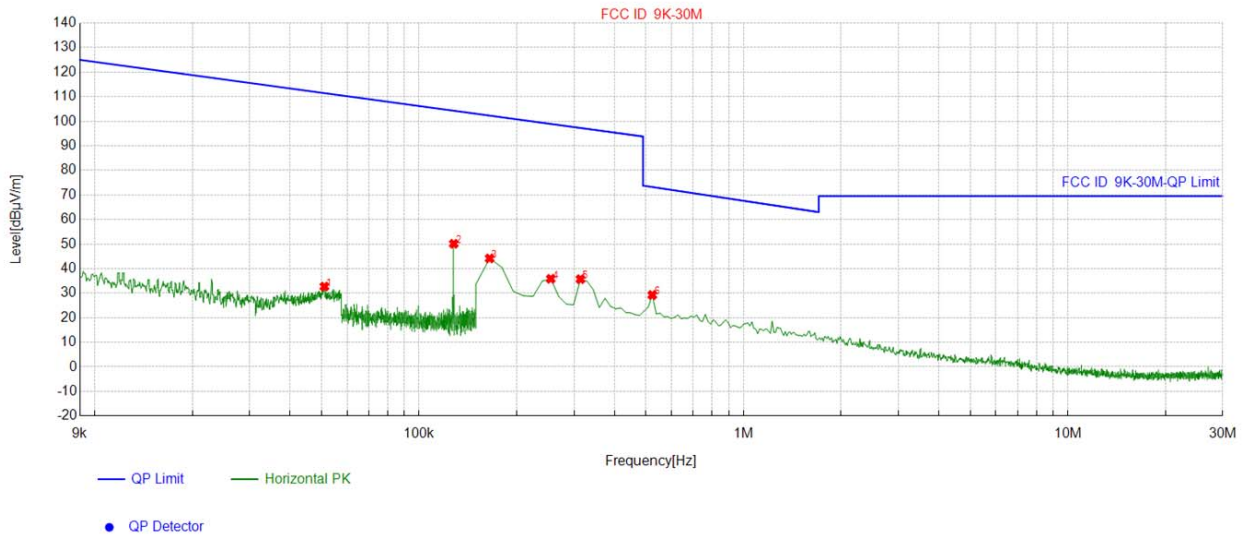


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.051039	-10.40	43.10	32.70	111.45	78.75
2	0.127852	-10.60	60.71	50.11	104.29	54.18
3	0.164932	-10.58	54.74	44.16	102.30	58.14
4	0.254527	-11.01	46.85	35.84	98.91	63.07
5	0.314257	-11.35	47.05	35.70	97.27	61.57
6	0.523312	-10.96	40.22	29.26	73.23	43.97

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Coplanar:

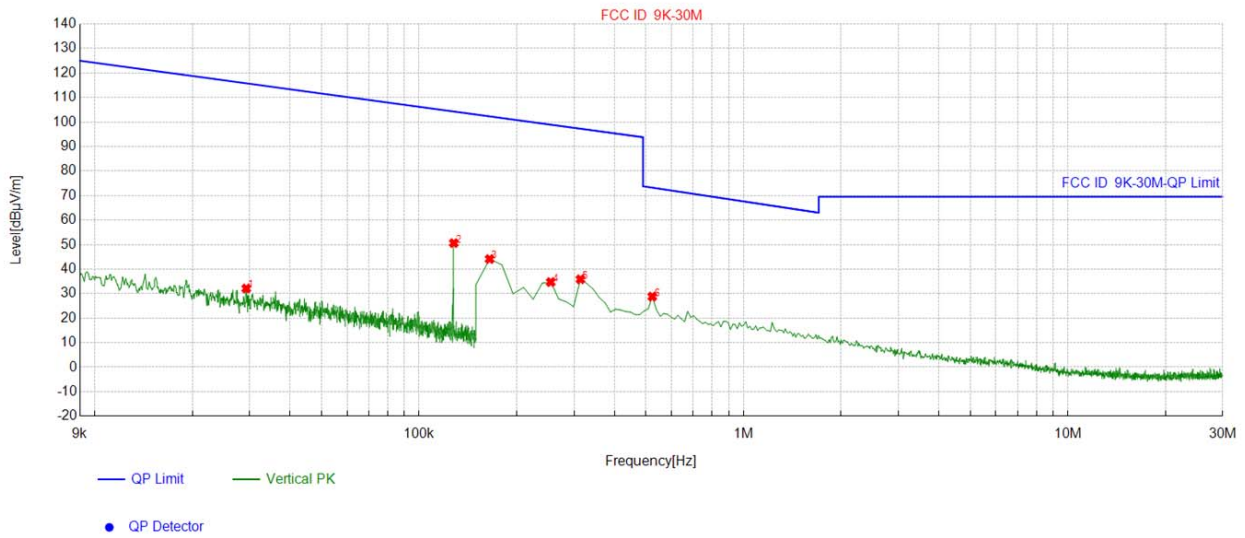

Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.029314	-10.72	42.81	32.09	115.78	83.69
2	0.127852	-10.60	61.22	50.62	104.29	53.67
3	0.164932	-10.58	54.69	44.11	102.30	58.19
4	0.254527	-11.01	45.71	34.70	98.91	64.21
5	0.314257	-11.35	47.20	35.85	97.27	61.42
6	0.523312	-10.96	39.75	28.79	73.23	44.44


Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Watch:

For 9KHz - 30MHz

Coaxial:

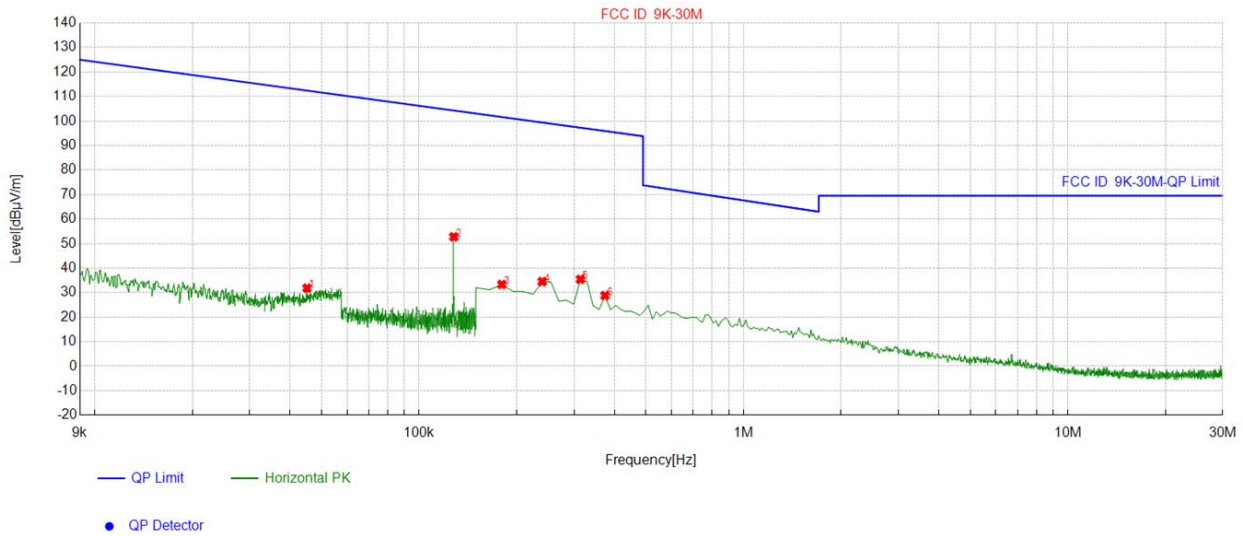


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.045114	-10.38	42.19	31.81	112.42	80.61
2	0.127852	-10.60	63.36	52.76	104.29	51.53
3	0.179865	-10.58	43.91	33.33	101.62	68.29
4	0.239595	-10.89	45.38	34.49	99.38	64.89
5	0.314257	-11.35	46.76	35.41	97.27	61.86
6	0.373987	-11.23	40.02	28.79	95.91	67.12

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Coplanar:

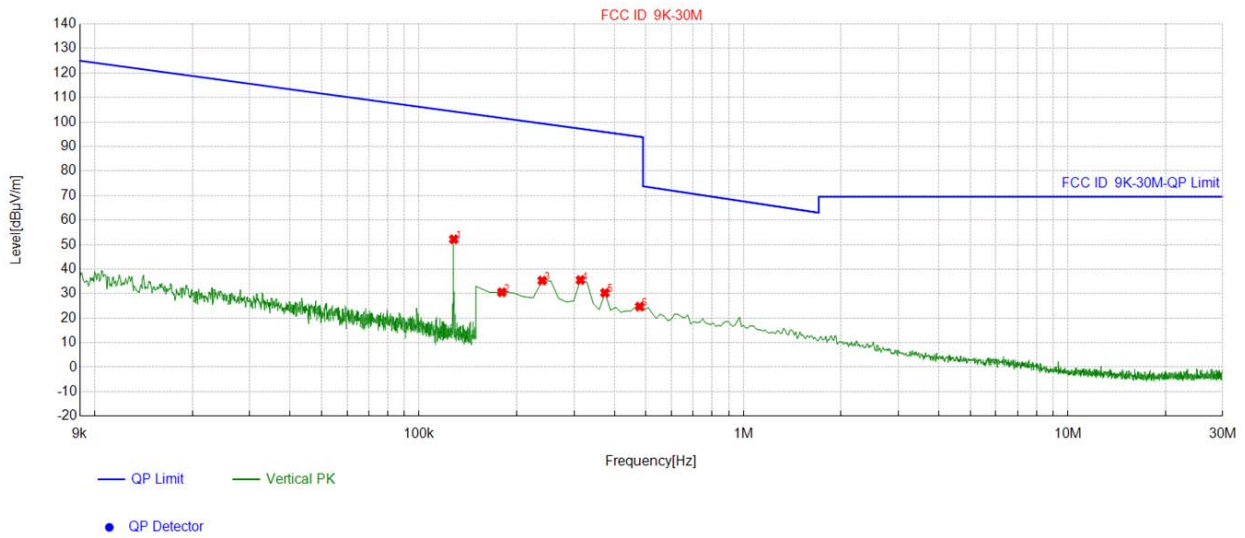


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.127852	-10.60	62.77	52.17	104.29	52.12
2	0.179865	-10.58	41.13	30.55	101.62	71.07
3	0.239595	-10.89	46.20	35.31	99.38	64.07
4	0.314257	-11.35	46.88	35.53	97.27	61.74
5	0.373987	-11.23	41.55	30.32	95.91	65.59
6	0.478514	-11.00	35.70	24.70	93.99	69.29

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Mobile Phone+Earbuds+Watch:
For 9KHz - 30MHz

Coaxial:

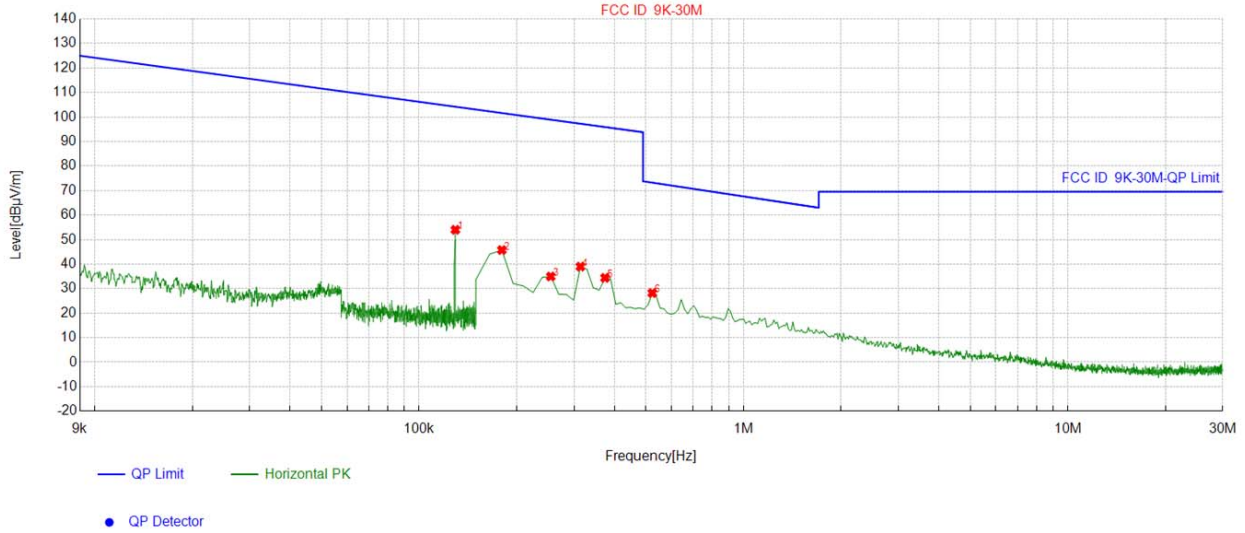


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.129333	-10.60	64.59	53.99	104.20	50.21
2	0.179865	-10.58	56.31	45.73	101.62	55.89
3	0.254527	-11.01	45.97	34.96	98.91	63.95
4	0.314257	-11.35	50.34	38.99	97.27	58.28
5	0.373987	-11.23	45.62	34.39	95.91	61.52
6	0.523312	-10.96	39.16	28.20	73.23	45.03

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Coplanar:

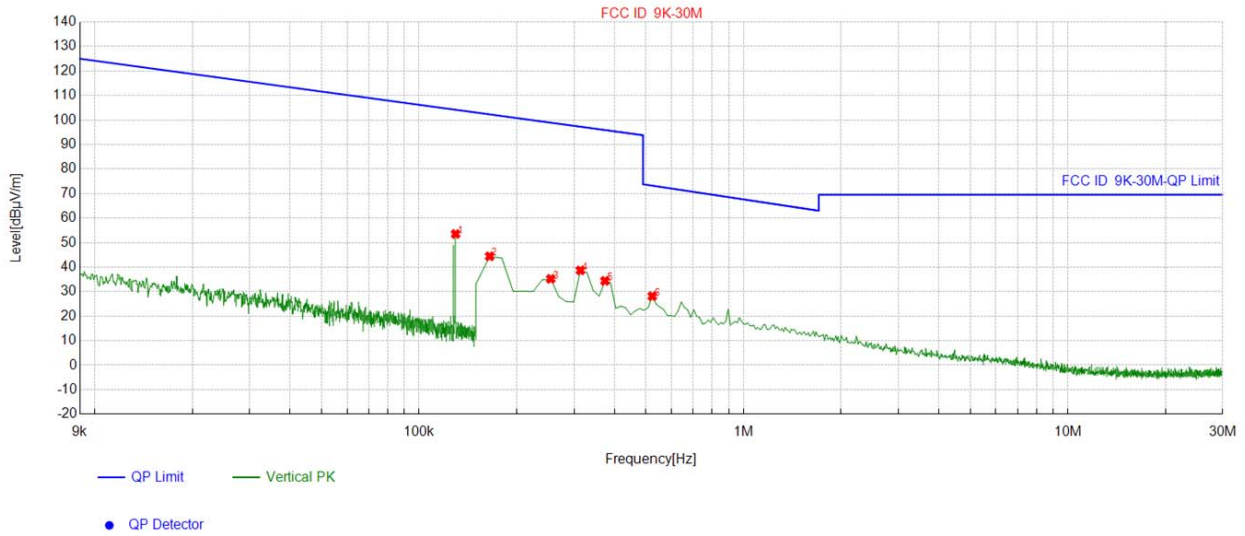


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.129545	-10.60	64.12	53.52	104.18	50.66
2	0.164932	-10.58	54.99	44.41	102.30	57.89
3	0.254527	-11.01	46.23	35.22	98.91	63.69
4	0.314257	-11.35	50.02	38.67	97.27	58.60
5	0.373987	-11.23	45.61	34.38	95.91	61.53
6	0.523312	-10.96	39.10	28.14	73.23	45.09

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



For 30MHz-1GHz

Antenna polarity: H

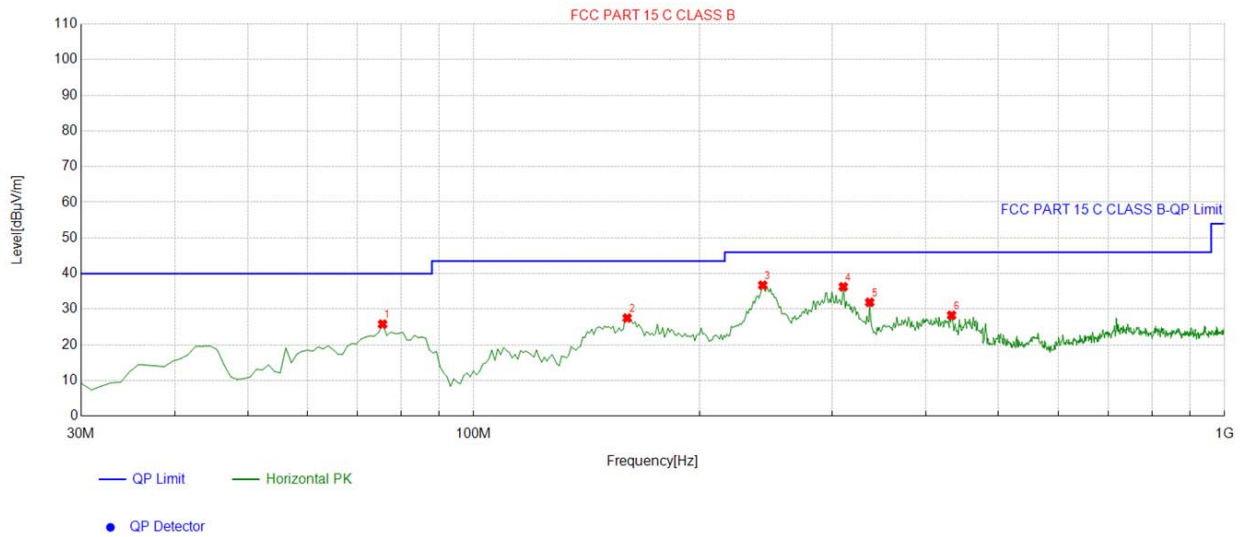


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	75.635636	-16.90	42.71	25.81	40.00	14.19	100	205	Horizontal
2	160.11011	-17.27	44.80	27.53	43.50	15.97	100	81	Horizontal
3	242.64264	-13.28	50.01	36.73	46.00	9.27	100	266	Horizontal
4	310.61061	-11.82	48.12	36.30	46.00	9.70	100	101	Horizontal
5	336.82682	-11.44	43.37	31.93	46.00	14.07	100	273	Horizontal
6	432.95295	-8.26	36.56	28.30	46.00	17.70	100	308	Horizontal

Remark: Factor = Cable loss + Antenna factor – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

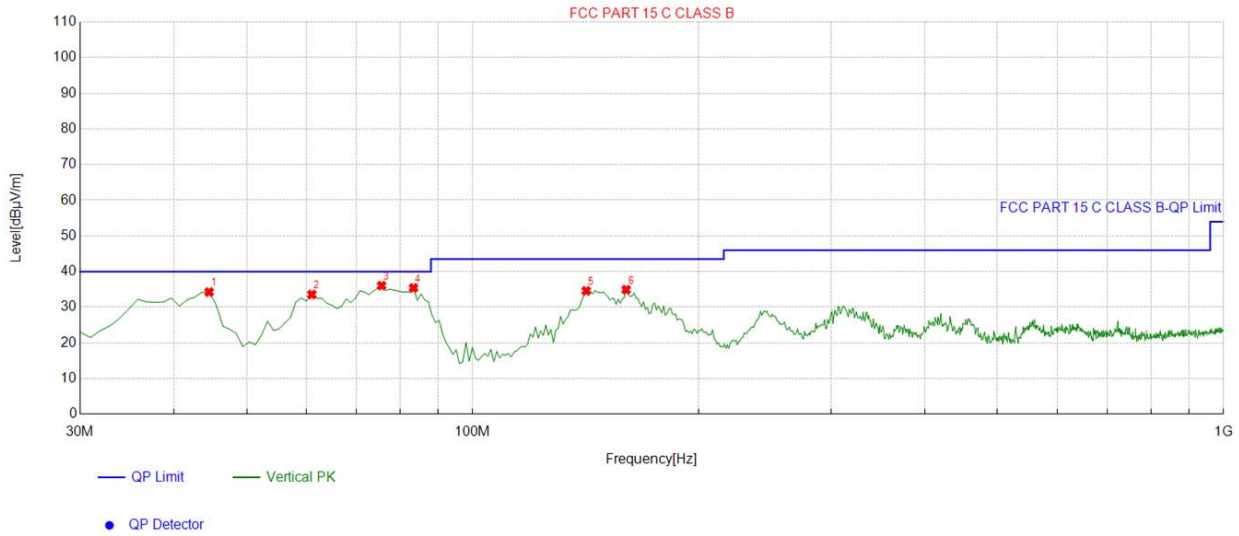

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.564565	-15.07	49.32	34.25	40.00	5.75	100	230	Vertical
2	61.071071	-14.27	47.84	33.57	40.00	6.43	100	258	Vertical
3	75.635636	-16.90	52.96	36.06	40.00	3.94	100	262	Vertical
4	83.403403	-17.71	53.14	35.43	40.00	4.57	100	279	Vertical
5	141.66166	-18.11	52.70	34.59	43.50	8.91	100	21	Vertical
6	160.11011	-17.27	52.18	34.91	43.50	8.59	100	31	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

5. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction


The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.

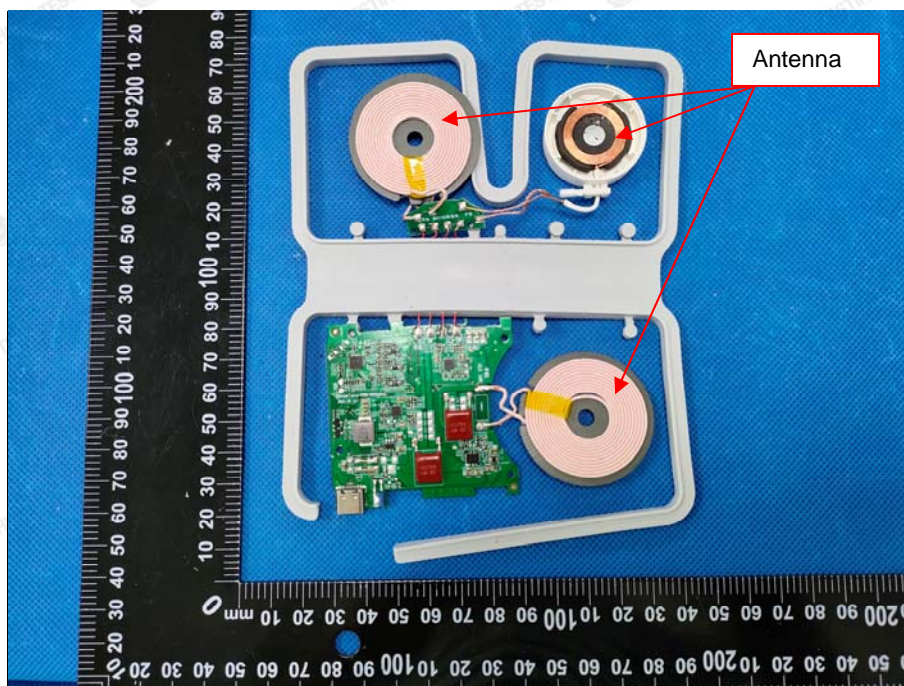



6. Photographs of Test

Radiated Emissions

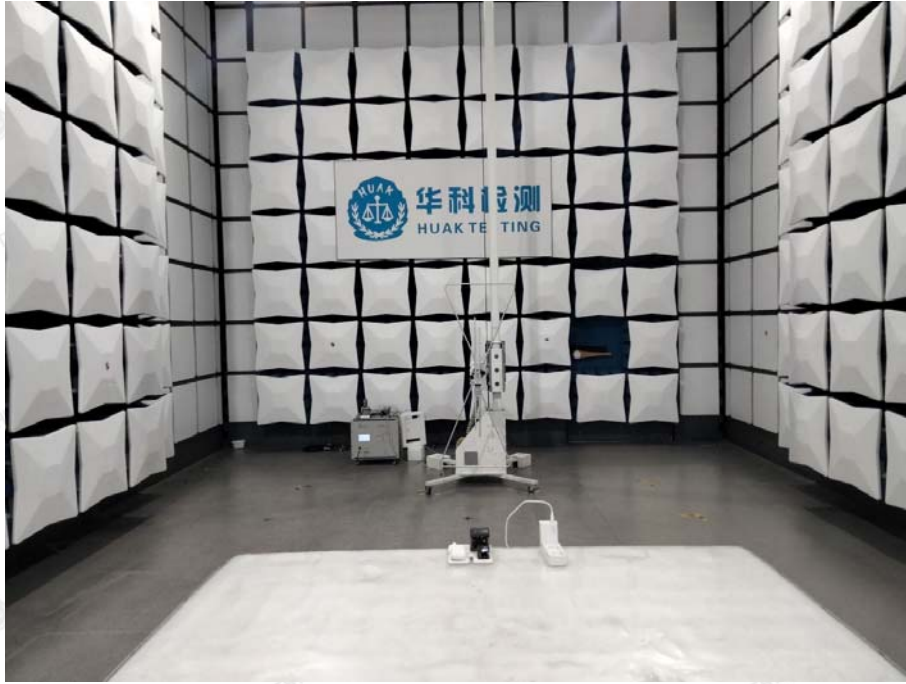

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----