



### Engineering Test Report No. 2104526-01

Report Date	June 29, 2022	
Manufacturer Name	Corteva Agriscience LLC	
Manufacturer Address	9330 Zionsville Rd Indianapolis, IN 46268	
Test Item Name Model No.	ActiveSense AIR1 Sensor AIR1B	
Date Received	April 15, 2022	
Test Dates	April 18 – May 11, 2022	
Specifications	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 Innovation, Science, and Economic Development Canada, RSS-GEN Innovation, Science, and Economic Development Canada, RSS-247	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Tylar Jozefczyk	Dayne Putnam
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	4800004225	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
2.1.	Scope of Tests .....	4
2.2.	Purpose .....	4
2.3.	Identification of the EUT .....	4
3.	Power Input .....	4
4.	Grounding .....	5
5.	Support Equipment .....	5
6.	Interconnect Leads .....	5
7.	Modifications Made to the EUT .....	5
8.	Modes of Operation .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	6
11.	Deviation, Additions to, or Exclusions from Test Specifications .....	6
12.	Laboratory Conditions .....	6
13.	Summary .....	6
14.	Sample Calculations .....	6
15.	Statement of Conformity .....	7
16.	Certification .....	7
17.	Photographs of EUT .....	8
18.	Equipment List .....	9
19.	Block Diagram of Test Setup .....	10
20.	6dB/20dB Bandwidth .....	11
21.	Occupied Bandwidth (99%) .....	18
22.	Carrier Frequency Separation .....	25
23.	Number of Carrier Channels .....	27
24.	Average Time of Occupancy .....	29
25.	Effective Isotropic Radiated Power (EIRP) .....	31
26.	Case Spurious Radiated Emissions .....	35
27.	Band-Edge Compliance .....	58
29.	Scope of Accreditation .....	65

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
–	29 JUN 2022	Initial Release of Engineering Test Report No. 2104526-01

## 2. Introduction

### 2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Corteva Agriscience LLC ActiveSense AIR1 Sensor (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Corteva Agriscience LLC located in Indianapolis, IN.

### 2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC “Code of Federal Regulations” Title 47, Part 15, Subpart C, §15.247 for a Frequency Hopping Spread Spectrum intentional radiator and Digital Modulation intentional radiator operating within the 902 – 928MHz band.

The test series was also performed to determine if the EUT meets the RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for a Frequency Hopping Spread Spectrum intentional radiator and Digital Modulation intentional radiator operating within the 902 – 928MHz band.

Testing was performed in accordance with ANSI C63.10-2013.

### 2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	ActiveSense AIR1 Sensor
Model/Part No.	AIR1B
Serial No.	US #6
Size of EUT	97.7mm x 37.5mm x 25.8mm
Software/Firmware Version	1.21
Device Type	Digitally Modulated Transmission Device (500kHz) Frequency Hopping Transmission Device (125kHz)
Band of Operation	902 – 928MHz
Modulation Type	LoRa
Antenna Type	SMD
Antenna Gain (dBi) <sup>1</sup>	-2.2dBi
Output Power	125kHz: 0.0957W (19.81dBm) 500kHz: 0.076W (18.83dBm)
6dB/20dB Bandwidth	125kHz: 146.9kHz 500kHz: 629.4kHz
Occupied Bandwidth (99% CBW)	125kHz: 215.5kHz 500kHz: 729kHz
Emission Classification	125kHz: 125KX1D 500kHz: 500KX1D
FCC ID & ISED UPN Number	FCC ID: 2A2SBAIR1B ISED UPN: 28122-AIR1B

Note 1 – Antenna gain is supplied by the manufacturer. Elite is not responsible for the accuracy of the antenna gain.

The EUT listed above was used throughout the test series.

## 3. Power Input

The EUT was powered by 3.6VDC from an internal battery.

#### 4. Grounding

The EUT was not connected to ground.

#### 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Cell Phone	Samsung Galaxy S9	N/A

#### 6. Interconnect Leads

No interconnect leads were used during the tests.

#### 7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

#### 8. Modes of Operation

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes:

Mode	Description
125kHz Tx	The EUT was powered on and set to transmit at one of the following frequencies: - 902.3MHz (125kHz, Max dBm (22dBm), DR0) - 908.5MHz (125kHz, Max dBm (22dBm), DR0) - 914.9MHz (125kHz, Max dBm (22dBm), DR0)
500kHz Tx	The EUT was powered on and set to transmit at one of the following frequencies: - 903MHz (500kHz, Max dBm (22dBm), DR4) - 907.8MHz (500kHz, Max dBm (22dBm), DR4) - 914.2MHz (500kHz, Max dBm (22dBm), DR4)
Hopping	The EUT was powered on and set to hop over the 902 – 928MHz band.

#### 9. Test Specifications

The tests were performed to selected portions of, and in accordance with, the test specifications.

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B
- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019 KDB 558074 D01v05r02
- RSS-Gen Issue 5, February 2020, Amendment 2, Innovation, Science, and Economic Development

Canada, "General Requirements for Compliance of Radio Apparatus"

- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices"

### 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Corteva Agriscience LLC and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247, Innovation, Science, and Economic Development Canada, RSS-247, and ANSI C63.4-2014 specifications.

### 11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

### 12. Laboratory Conditions

The ambient parameters of the laboratory during testing were as follows:

Ambient Parameters	Value
Temperature	21.5°C
Relative Humidity	24%
Atmospheric Pressure	1018.28mb

### 13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Requirements	Test Method	S/N	Results
6dB/20dB Bandwidth	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Occupied Bandwidth (99%)	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Carrier Frequency Separation	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Number of Carrier Channels	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Average Time of Occupancy	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Effective Isotropic Radiated Power (EIRP)	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Case Spurious Radiated Emissions	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms
Band-Edge Compliance	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	US #6	Conforms

### 14. Sample Calculations

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: FS (dB}\mu\text{V/m)} = \text{MTR (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dB $\mu$ V/m term to  $\mu$ V/m, the dB $\mu$ V/m is first divided by 20. The

Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in  $\mu\text{V}/\text{m}$  terms.

$$\text{Formula 2: FS } (\mu\text{V}/\text{m}) = \text{AntiLog} [(\text{FS (dB}\mu\text{V}/\text{m)})/20]$$


## 15. Statement of Conformity

The Corteva Agriscience LLC ActiveSense AIR1 Sensor (Model No. AIR1B) did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247.

## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 17. Photographs of EUT

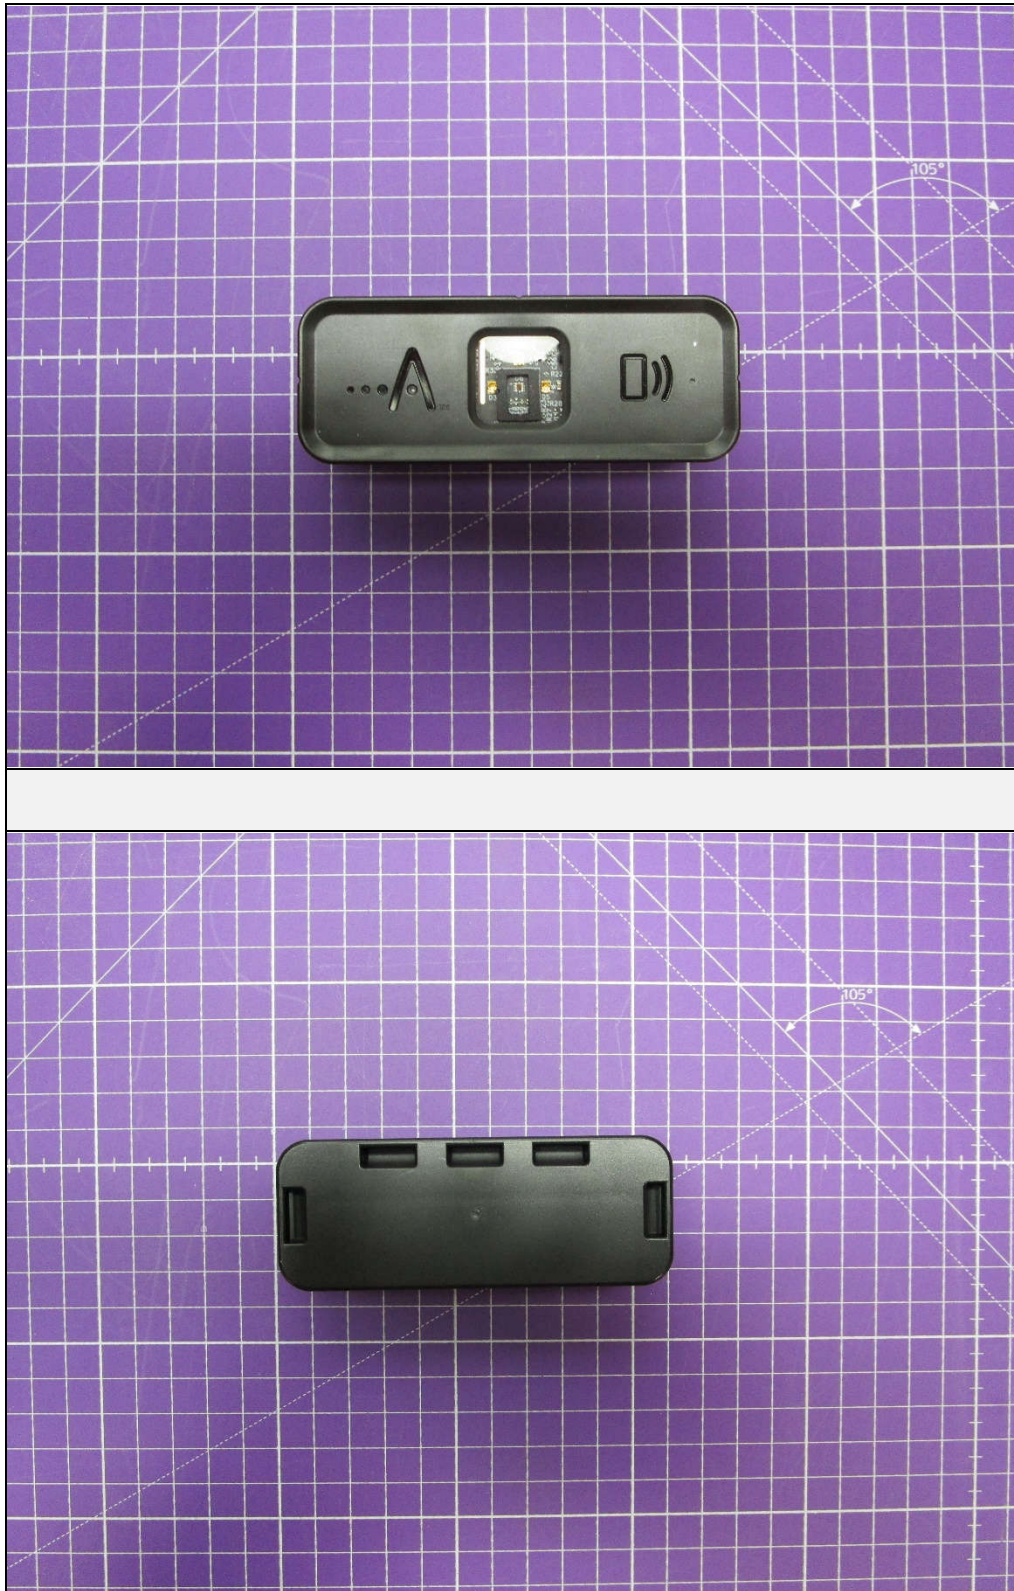



## 18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW14	PREAMPLIFIER	PLANAR	PE2-35-120-5R0-10-12-SFF	PL22671	1-20GHZ	9/21/2021	9/21/2022
CDZ3	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
GRE2	SIGNAL GENERATOR	AGILENT	E4438C	MY42081749	250KHZ-6GHZ	3/4/2022	3/4/2023
NLS0	24" ACTIVE LOOP ANTENNA	EMCO	6502	89979	10KHZ-30MHZ	9/11/2020	9/11/2022
NSDS1	UNIVERSAL SPHERICAL DIPOLE SOURCE	AET	USDS-H	AET-1116		NOTE 1	
NWQ0	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66657	1GHZ-18GHZ	6/13/2022	6/13/2023
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	5/26/2022	5/26/2024
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	3/31/2022	3/31/2023
SES0	24VDC POWER SUPPLY	P-TRANS	FS-32024-1M	001	18-27VDC	NOTE 1	
VBV2	CISPR EN FCC ICES RE.EXE	ELITE	CISPR EN FCC ICES RE.EXE	---	---	N/A	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
XPQ3	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	4	1.8GHZ-10GHZ	9/7/2021	9/7/2023


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

### 19. Block Diagram of Test Setup

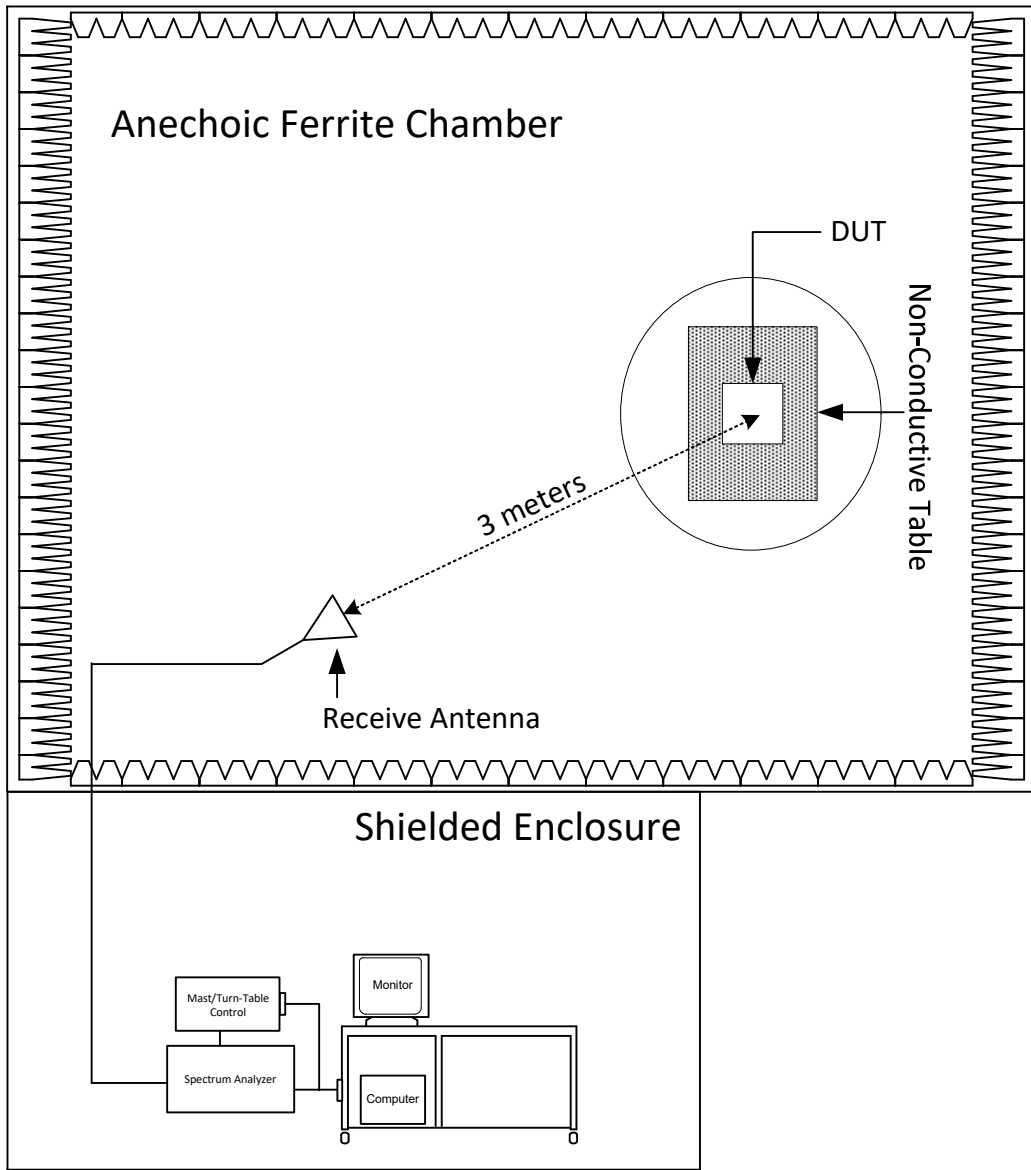

Radiated Measurements Test Setup

20. 6dB/20dB Bandwidth


EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	Room 21
Type of Antennas Used	Bilog Antenna
Notes	N/A

Requirements
<p><u>For Frequency Hopping Systems:</u></p> <p>Systems using frequency hopping techniques operating in the 902 – 928MHz band are allowed a maximum 20dB bandwidth of 500kHz.</p> <hr/> <p><u>For DTS Systems:</u></p> <p>Systems using digital modulation techniques shall have a minimum 6dB bandwidth of 500kHz</p>


Procedure
<p><u>For Frequency Hopping Systems:</u></p> <p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously.</p> <p>The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to <math>\geq 1\%</math> of the 20dB BW. The span was set to approximately 2 to 3 times the 20dB bandwidth.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was then screenshot and saved.</p> <hr/> <p><u>For DTS Systems:</u></p> <p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. The EUT was allowed to transmit continuously.</p> <p>The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 100kHz, the video bandwidth (VBW) was set to the same as or 3 times greater than the RBW, and the span was set to 3 times the RBW.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was then screenshot and saved.</p>

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Result	20dB BW = 146.9kHz
Notes	

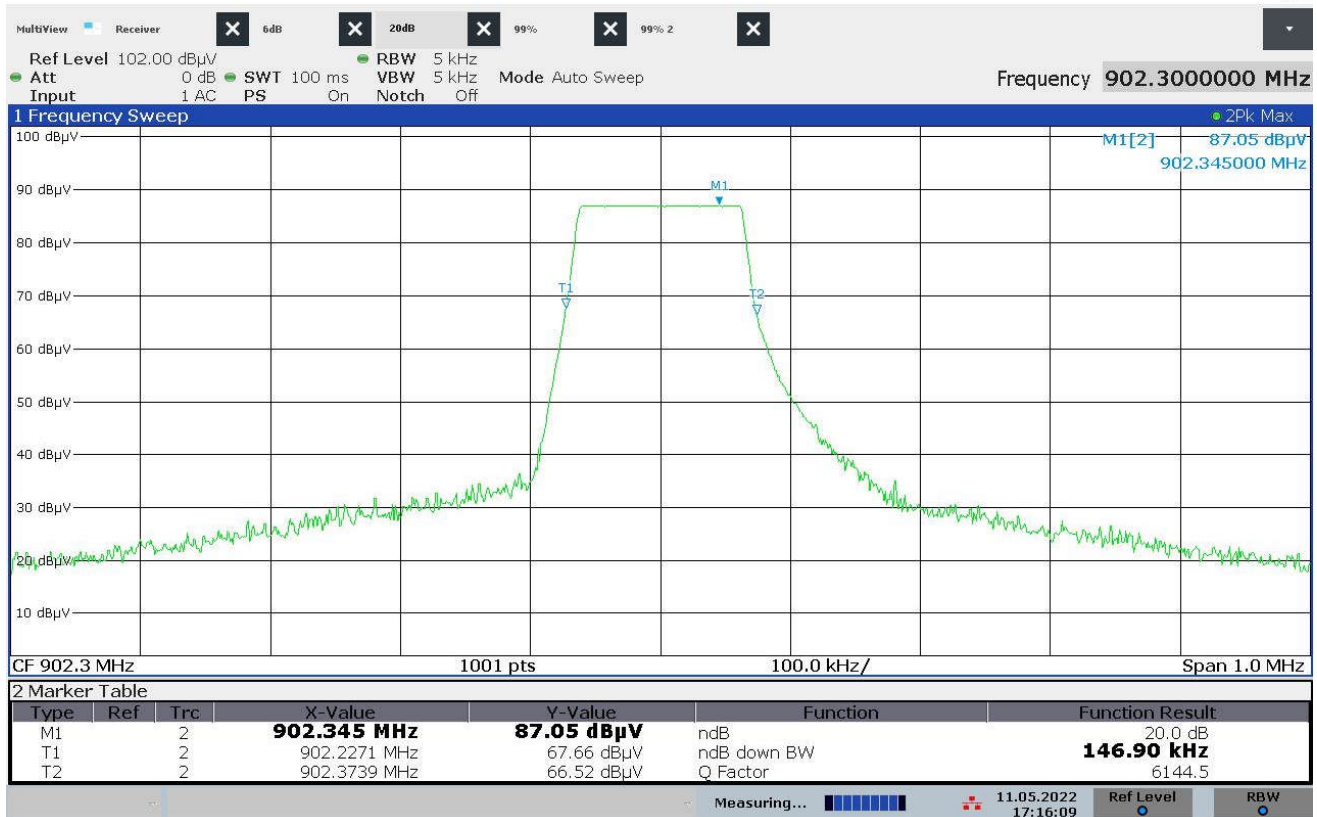


17:16:10 11.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	908.5MHz
Result	20dB BW = 145.9kHz
Notes	

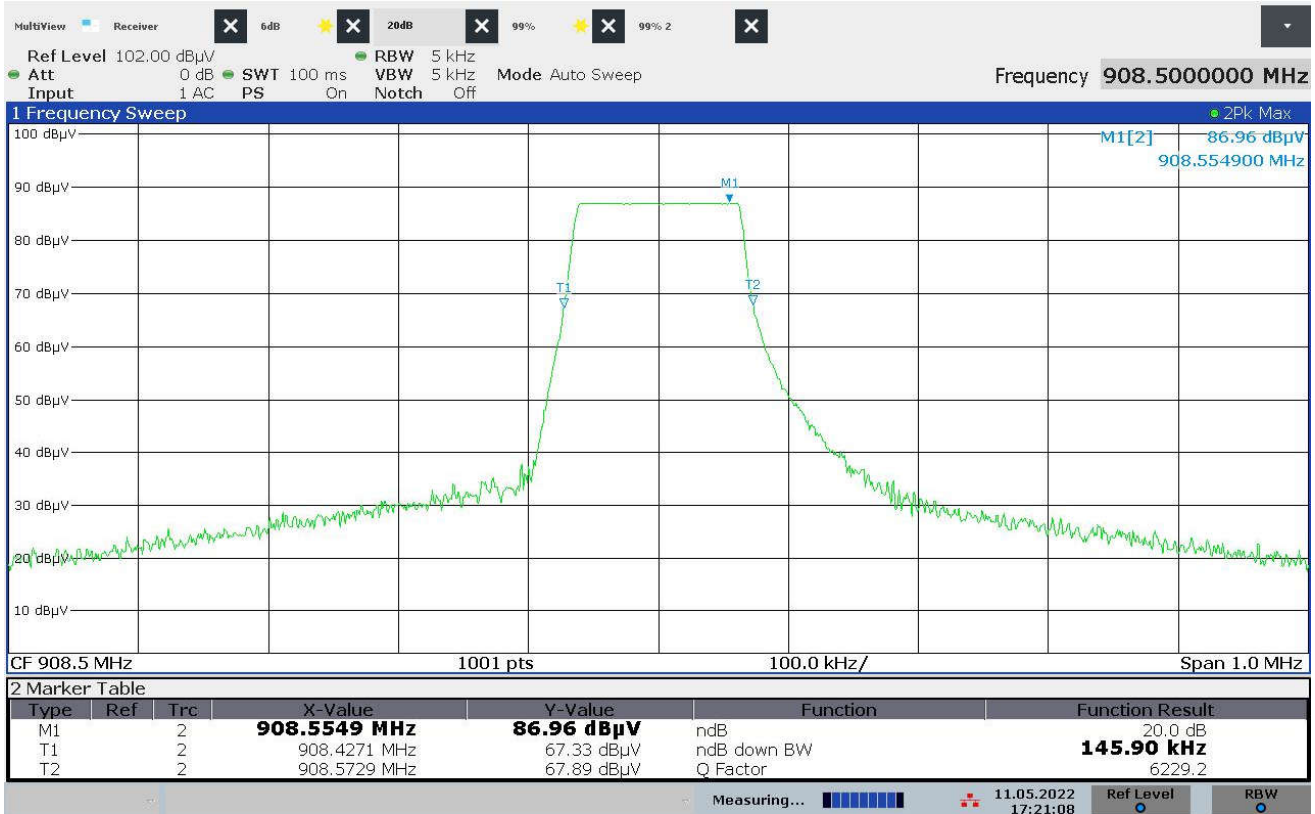


17:21:09 11.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Result	20dB BW = 146.9kHz
Notes	

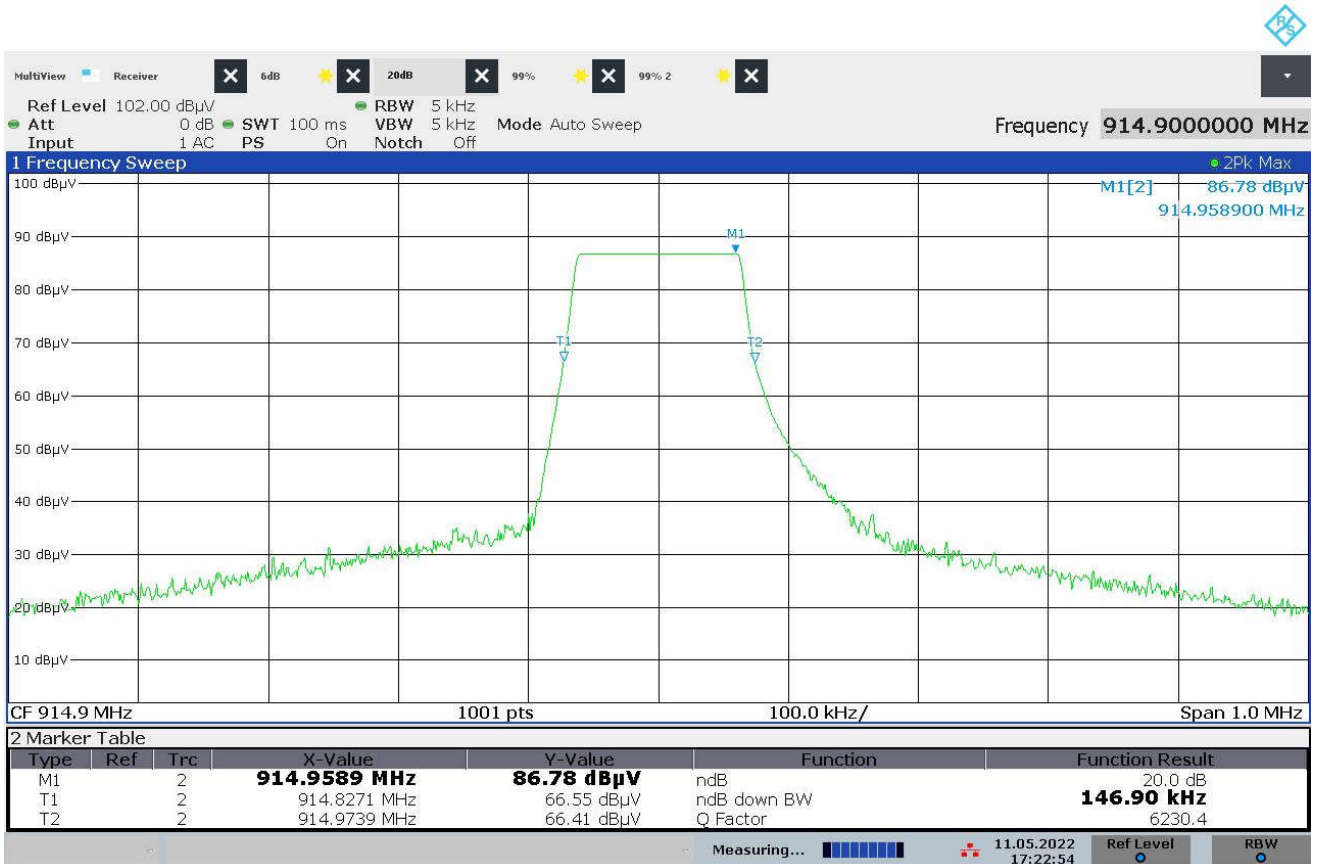

17:22:54 11.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Result	6dB BW = 627.4kHz
Notes	

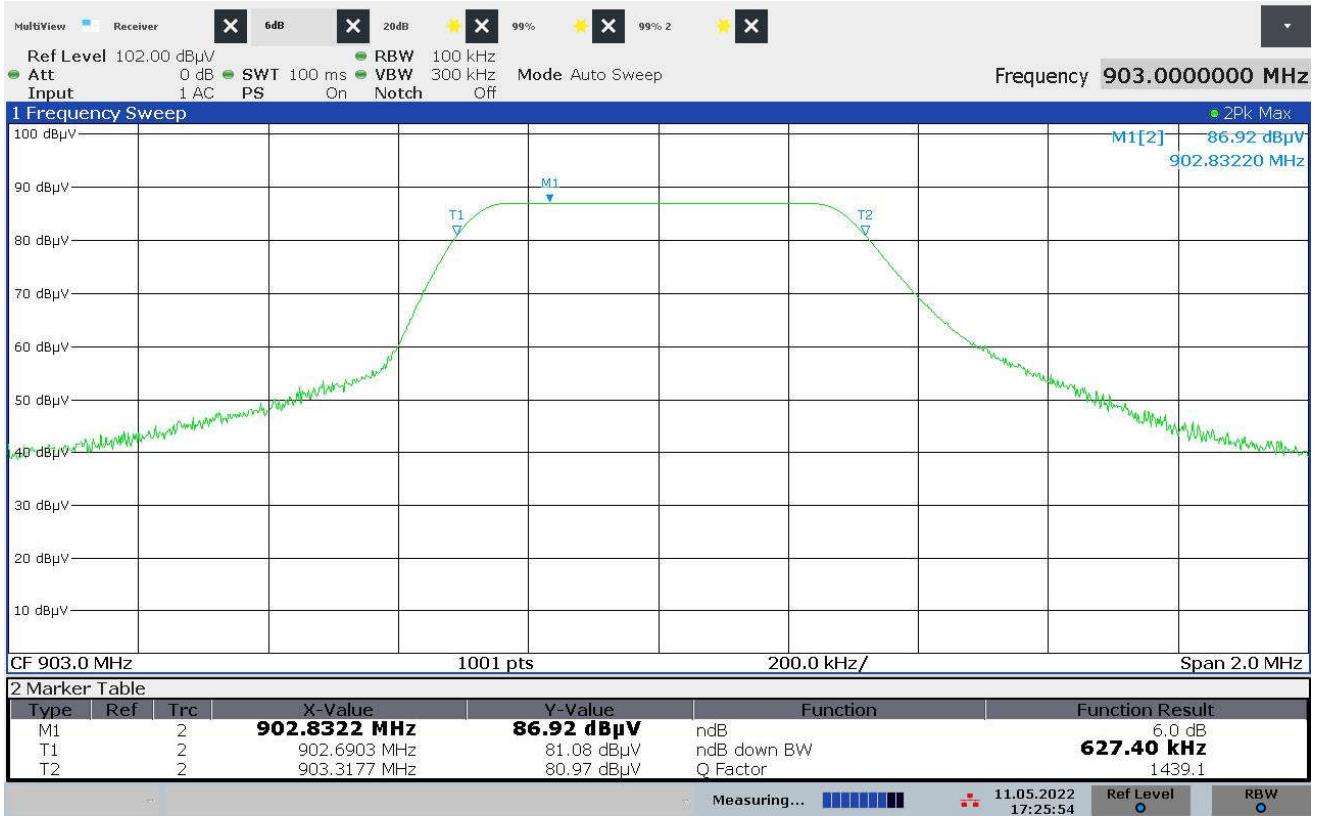

17:25:55 11.05.2022


Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	907.8MHz
Result	6dB BW = 627.4kHz
Notes	



17:28:24 11.05.2022



Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Result	6dB BW = 629.4kHz
Notes	

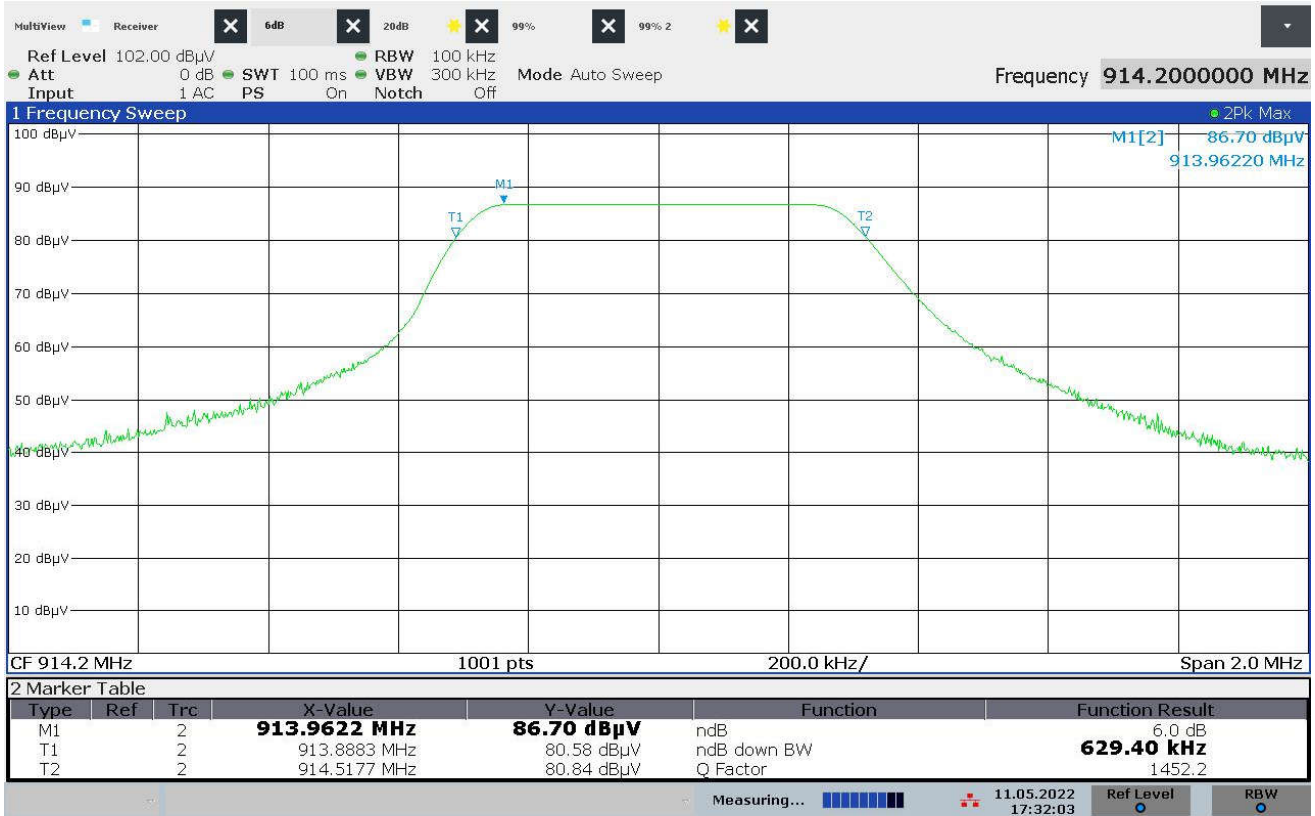

17:32:04 11.05.2022


21. Occupied Bandwidth (99%)

EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx, 500kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	N/A
Type of Antennas Used	Loop Antenna
Notes	N/A


Procedure	
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.</p> <p>The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 1% to 5% of the actual occupied / x dB bandwidth, the video bandwidth (VBW) was set 3 times greater than the RBW, and the span was set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency.</p> <p>The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.</p>	

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Result	OBW = 215.5kHz
Notes	

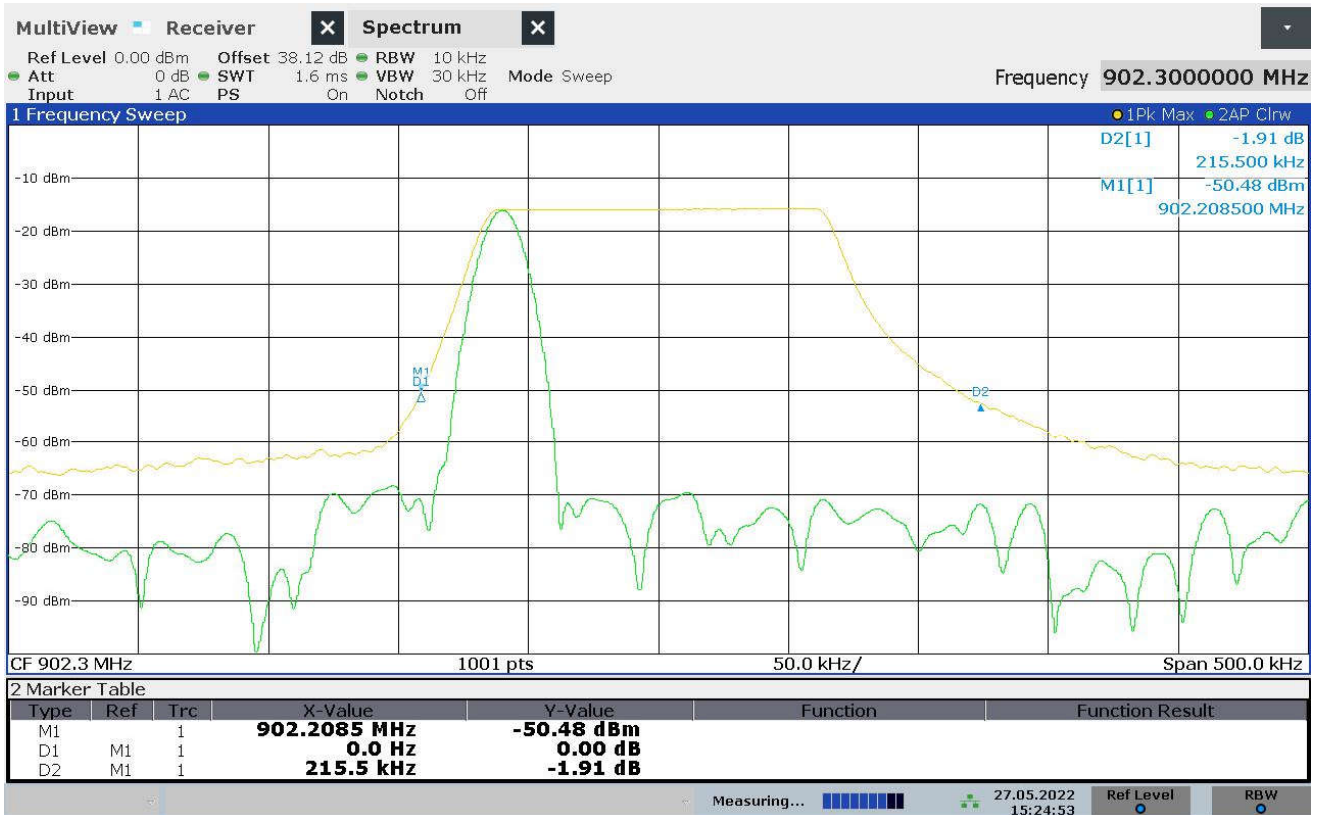


15:24:53 27.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	908.5MHz
Result	OBW = 205.5kHz
Notes	

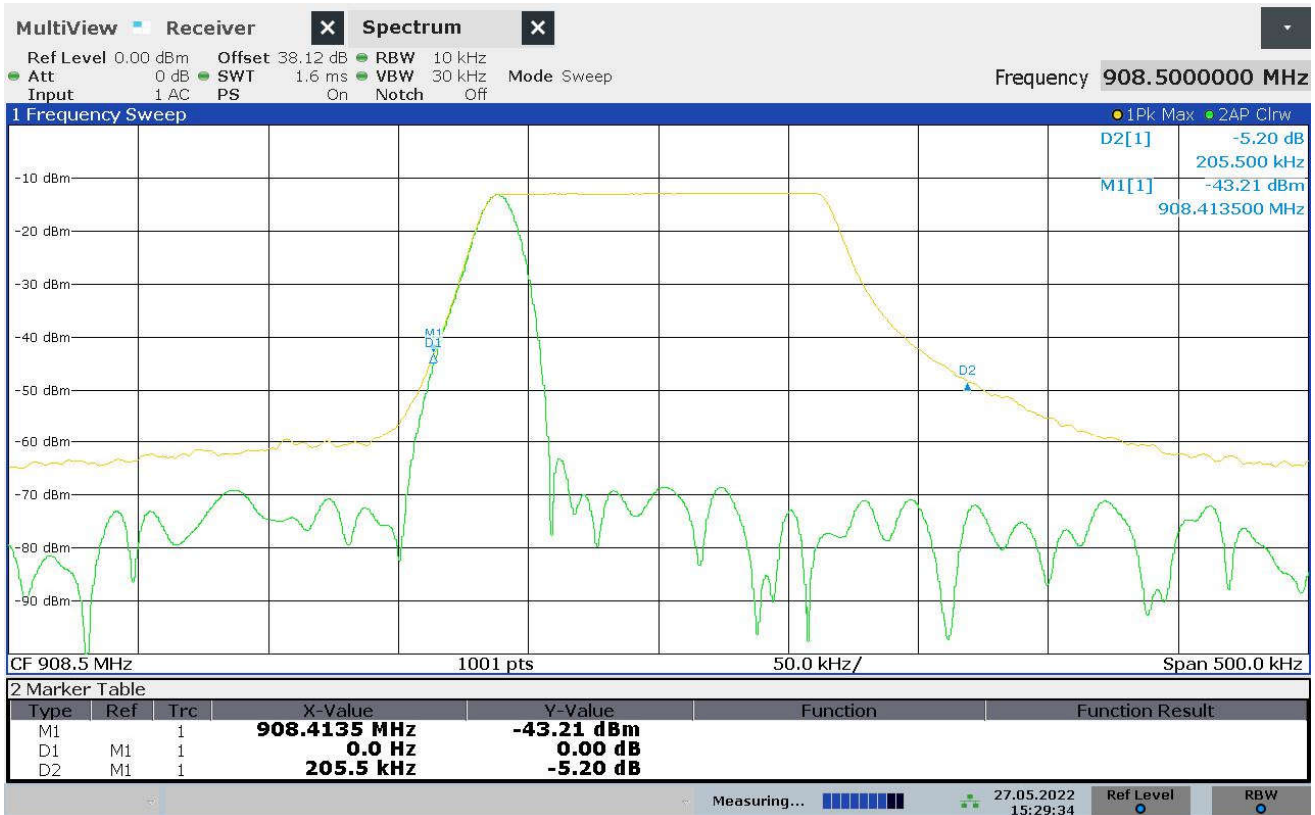


15:29:35 27.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Result	OBW = 208kHz
Notes	

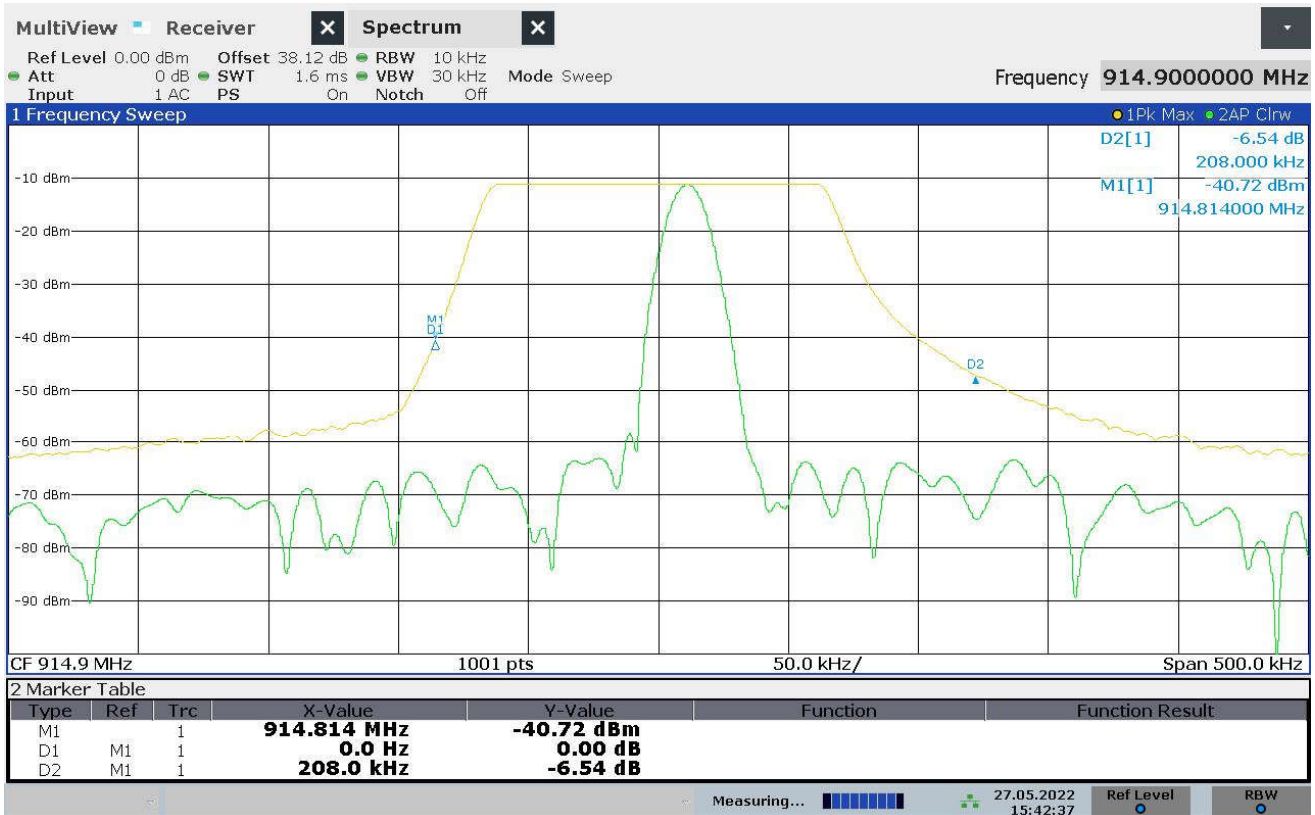


15:42:38 27.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Result	OBW = 687kHz
Notes	

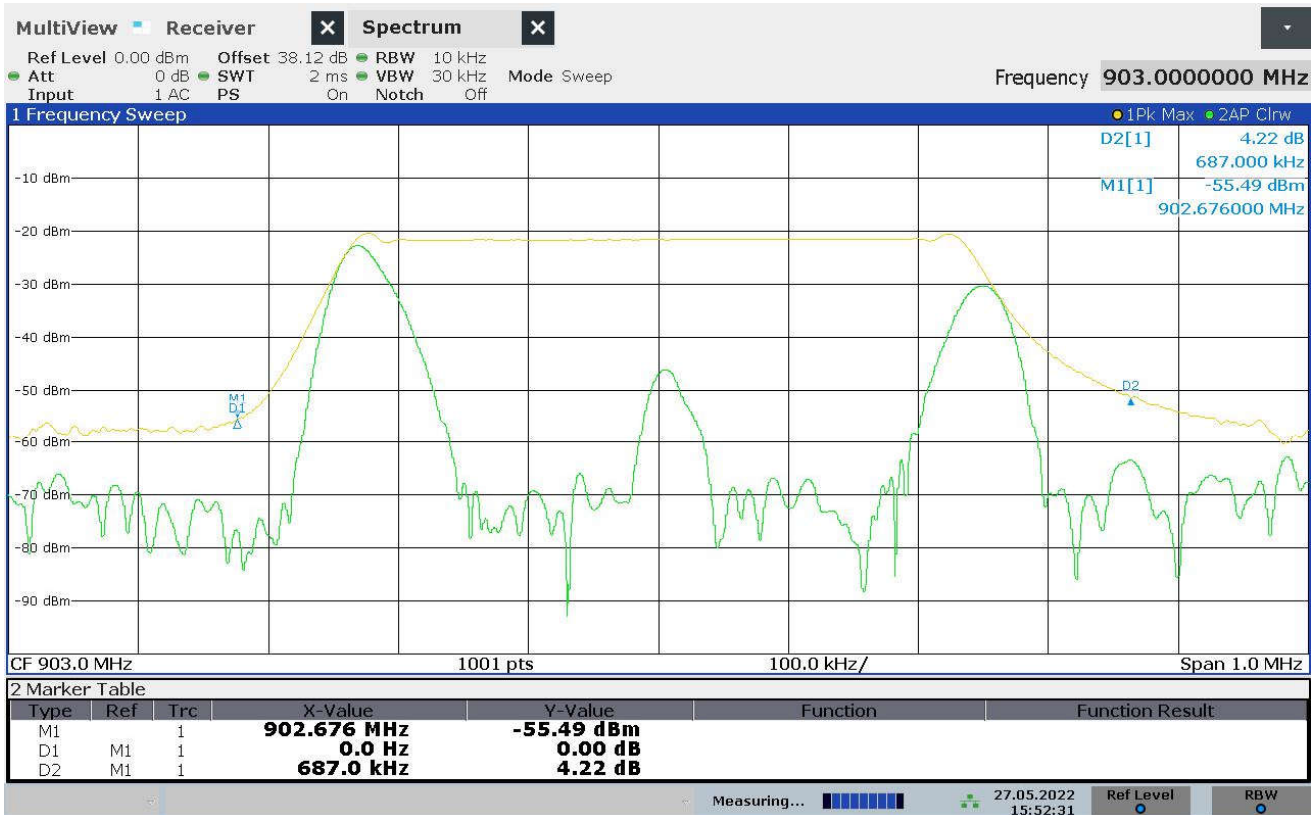


15:52:32 27.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	907.8MHz
Result	OBW = 718kHz
Notes	

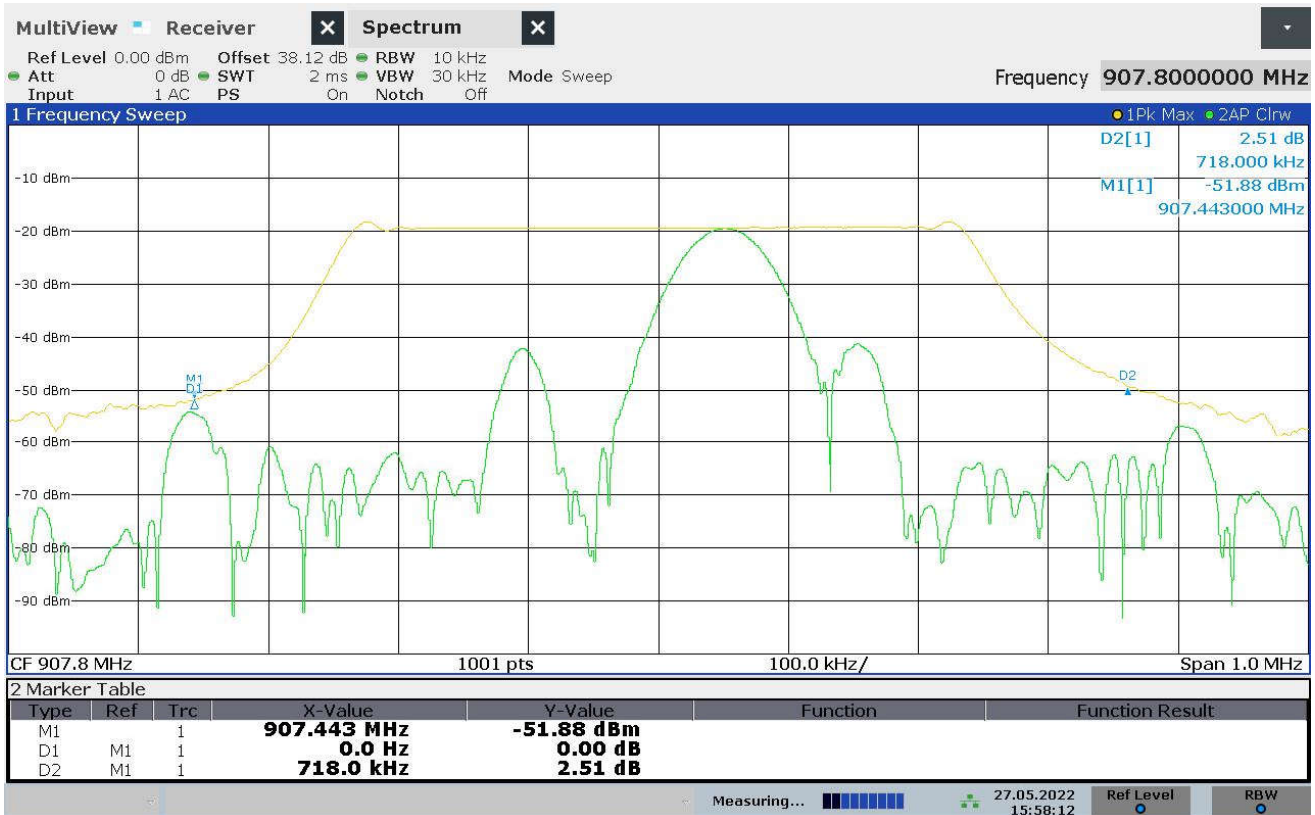

15:58:13 27.05.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Result	OBW = 729kHz
Notes	

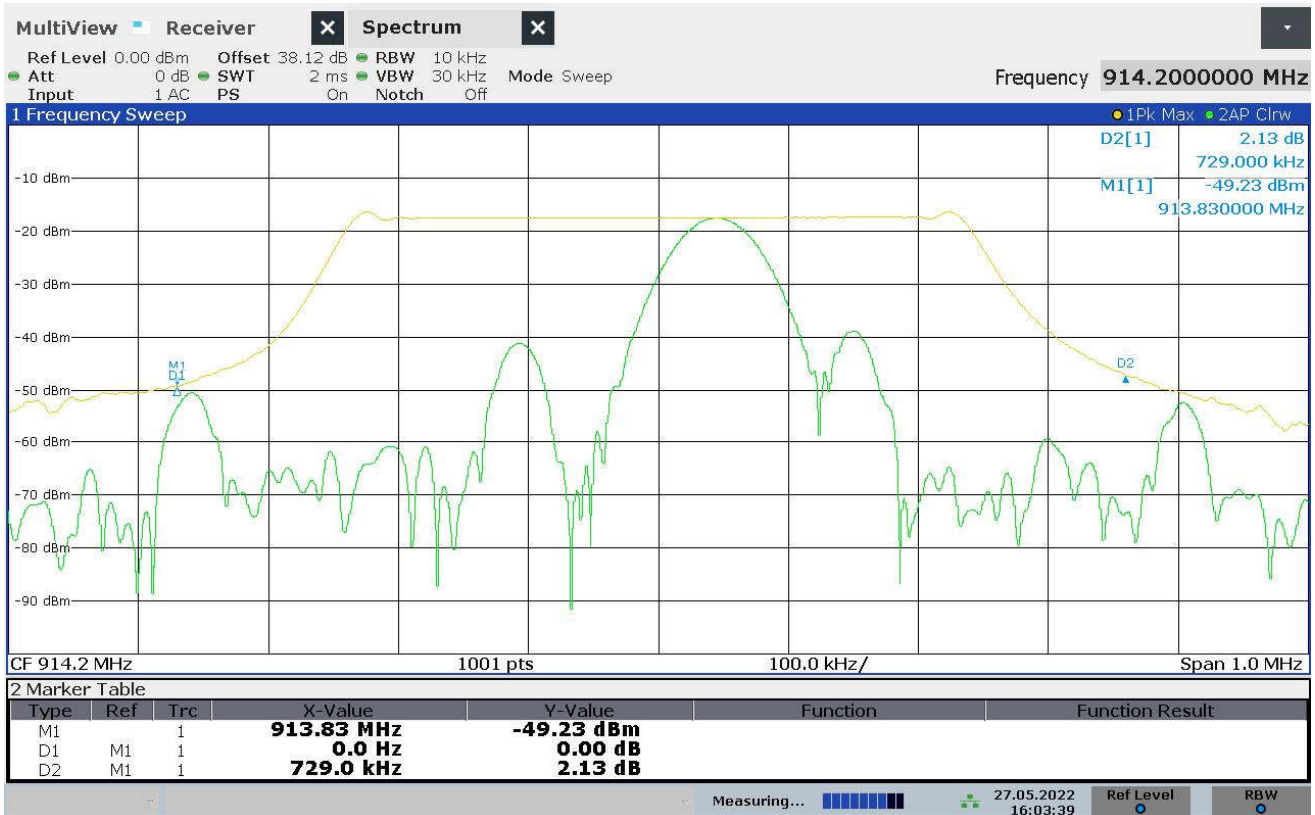

16:03:39 27.05.2022



## 22. Carrier Frequency Separation

EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Antenna Conducted
Type of Test Site	Tabletop
Test Site Used	N/A
Type of Antennas Used	N/A
Notes	

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1

Requirement
Channel carrier frequencies shall be separated by a minimum of 25kHz or the 20dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Procedure
<p>The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously.</p> <p>Span was set wide enough to capture the peaks of two adjacent channels. The resolution bandwidth was set to approximately 30% of the channel spacing. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.</p>

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Result	Separation = 200.8kHz
Notes	



16:09:59 27.05.2022

23. Number of Carrier Channels


EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	Hopping

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	N/A
Type of Antennas Used	Loop Antenna
Notes	

Requirements
The system shall use at least 50 hopping frequencies.

Procedure
<p>The EUT was setup inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.</p> <p>The resolution bandwidth (RBW) was set to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.</p> <p>The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.</p>

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	Hopping
Result	63 hopping frequencies
Notes	

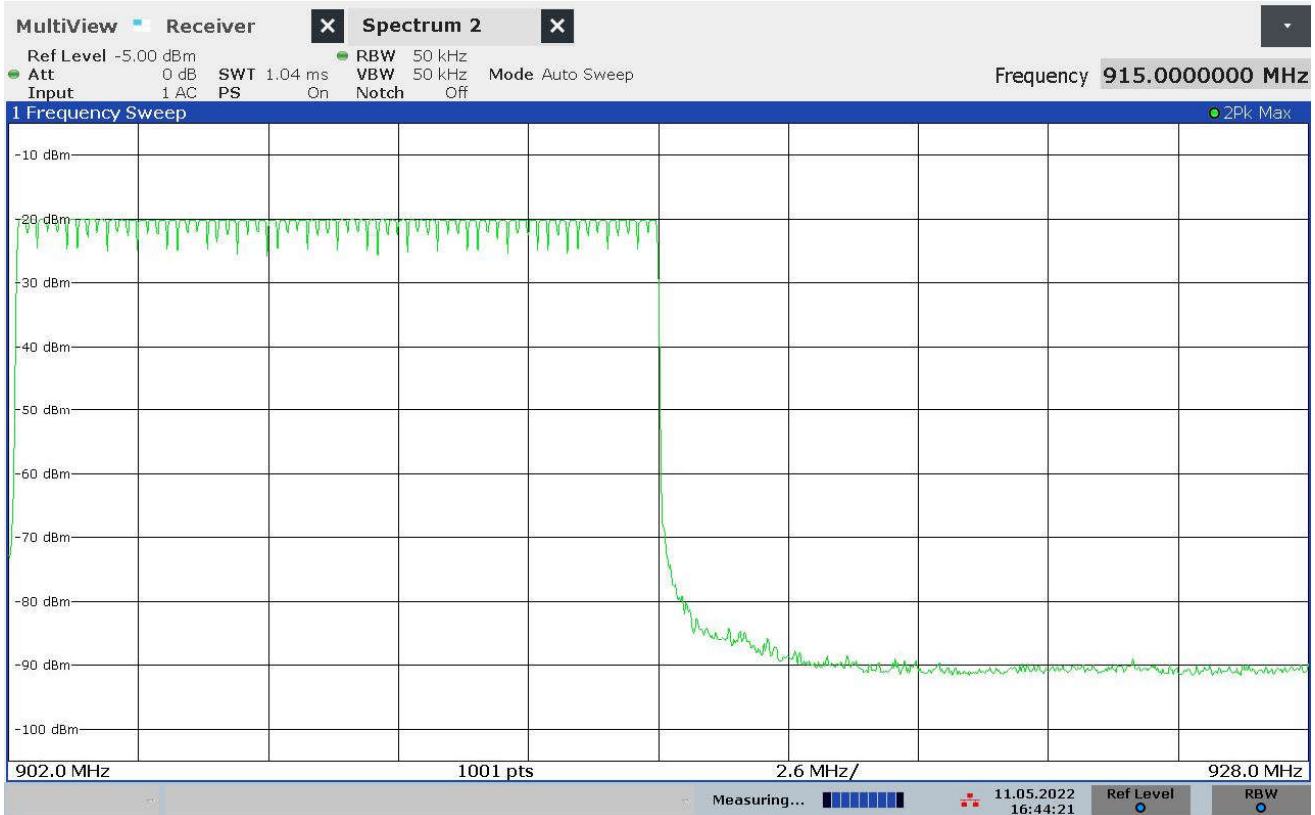

16:44:22 11.05.2022

## 24. Average Time of Occupancy


EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	N/A
Type of Antennas Used	Loop Antenna
Notes	

Requirements
The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

Procedure
<p>With the hopping function enabled, the EUT was allowed to transmit continuously.</p> <p>The spectrum analyzer was set to zero span centered on a hopping channel. The resolution bandwidth (RBW) was set <math>\geq</math> to the channel spacing. The sweep was set to capture the entire dwell time per hopping channel. The peak detector and 'Max-Hold' function were engaged. The analyzer's display was plotted using a 'screen dump' utility.</p>

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	Hopping
Result	Ave. Time of Occupancy = 0.28s
Notes	

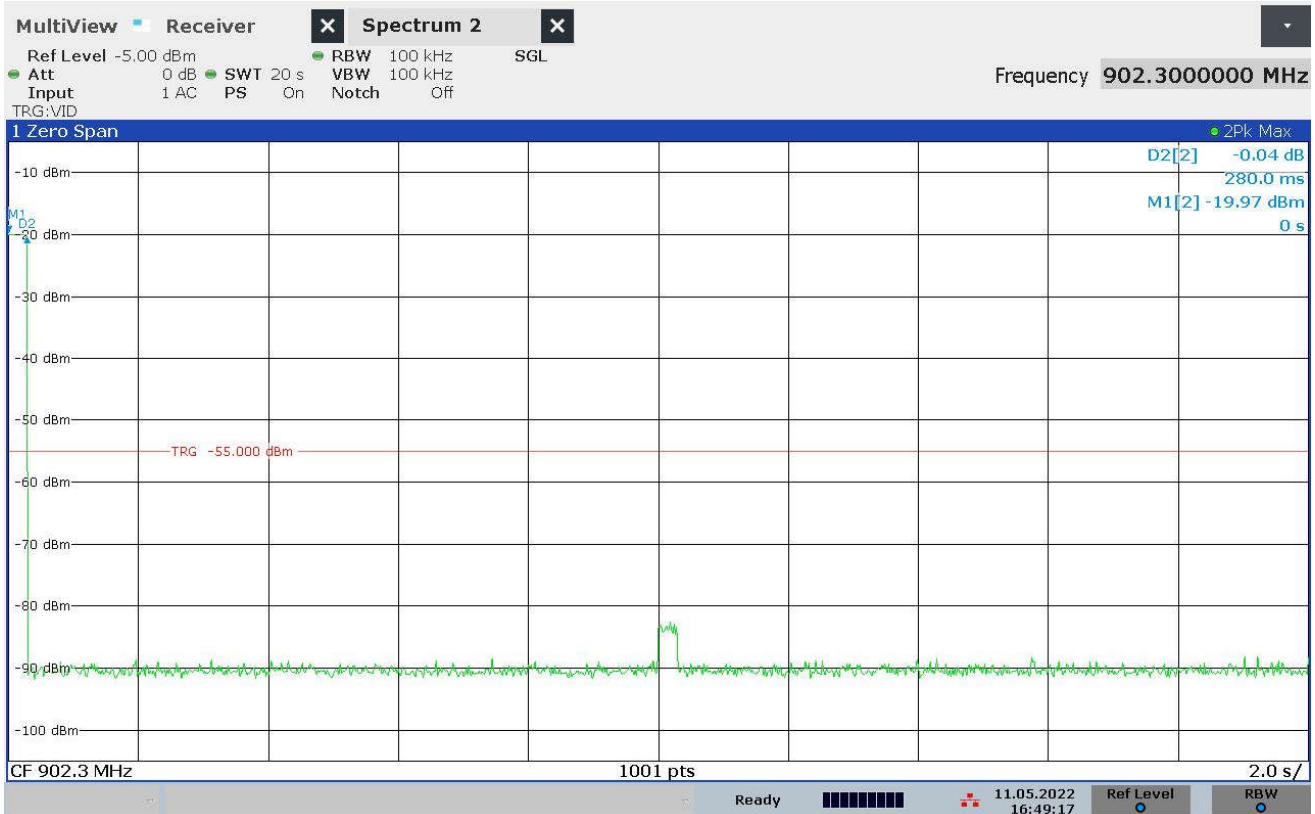

16:49:18 11.05.2022

25. Effective Isotropic Radiated Power (EIRP)

EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx, 500kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	Room 21
Type of Antennas Used	Below 1GHz: Bilog (or equivalent)
Notes	

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3

Requirements
<p><u>For Frequency Hopping Systems in the 902 – 928MHz band with <math>\geq 50</math> Channels</u>            The output power shall not exceed 4W (36dBm).</p> <hr/> <p><u>For DTS</u>            The output power shall not exceed 4W (36dBm).</p>

## Procedures

### For Frequency Hopping Systems

The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle, and high hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.

---

### For DTS Systems

The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 6dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle, and high channels.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.



Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Result	Max EIRP = 0.0957W (19.81dBm)
Notes	

Freq (MHz)	Ant Pol	Wide BW Meter Reading (dBμV)	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total (dBμV/m)	EIRP (dBm)	Limit (dB)	Margin (dB)
902.30	H	86.60	2.04	26.47	0.00	115.11	19.81	36.00	-16.19
	V	76.19	2.04	26.47	0.00	104.70	9.40	36.00	-26.60
908.50	H	82.71	2.05	26.42	0.00	111.18	15.88	30.00	-14.12
	V	72.81	2.05	26.42	0.00	101.28	5.98	30.00	-24.02
914.90	H	86.30	2.05	26.37	0.00	114.72	19.42	30.00	-10.58
	V	77.81	2.05	26.37	0.00	106.23	10.93	30.00	-19.07

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Result	Max EIRP = 0.076W (18.83dBm)
Notes	

Freq (MHz)	Ant Pol	Wide BW Meter Reading (dBμV)	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total (dBμV/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
903.00	H	83.74	2.04	26.47	0.00	112.25	16.95	30.00	-13.05
	V	75.48	2.04	26.47	0.00	103.99	8.69	30.00	-21.31
907.80	H	84.40	2.05	26.43	0.00	112.87	17.57	30.00	-12.43
	V	77.10	2.05	26.43	0.00	105.57	10.27	30.00	-19.73
914.20	H	85.70	2.05	26.38	0.00	114.13	18.83	30.00	-11.17
	V	77.30	2.05	26.38	0.00	105.73	10.43	30.00	-19.57

26. Case Spurious Radiated Emissions

EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx, 500kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	Room 21
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-Ridged Waveguide (or equivalent)
Notes	N/A

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

**Procedure**

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.


Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 10GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10GHz.


- 1) For all harmonics not in the restricted bands, the following procedure was used:
  - a) The field strength of the fundamental was measured using a bilog antenna. The bilog antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
    - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
    - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
    - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
  - d) All harmonics not in the restricted bands must be at least 20dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
  - a) The field strengths of all emissions below 1GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - b) The field strengths of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels were measured, the following steps were taken when taking all measurements:
    - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.

- iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in §15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in §15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, the peak readings must comply with the §15.35(b) limits. §15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1GHz must be no greater than 20dB above the limits specified in §15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10Hz video bandwidth may be further adjusted by a duty cycle correction factor derived from  $20 \cdot \log(\text{dwell time}/100\text{msec})$ . These readings must be no greater than the limits specified in §15.209(a).

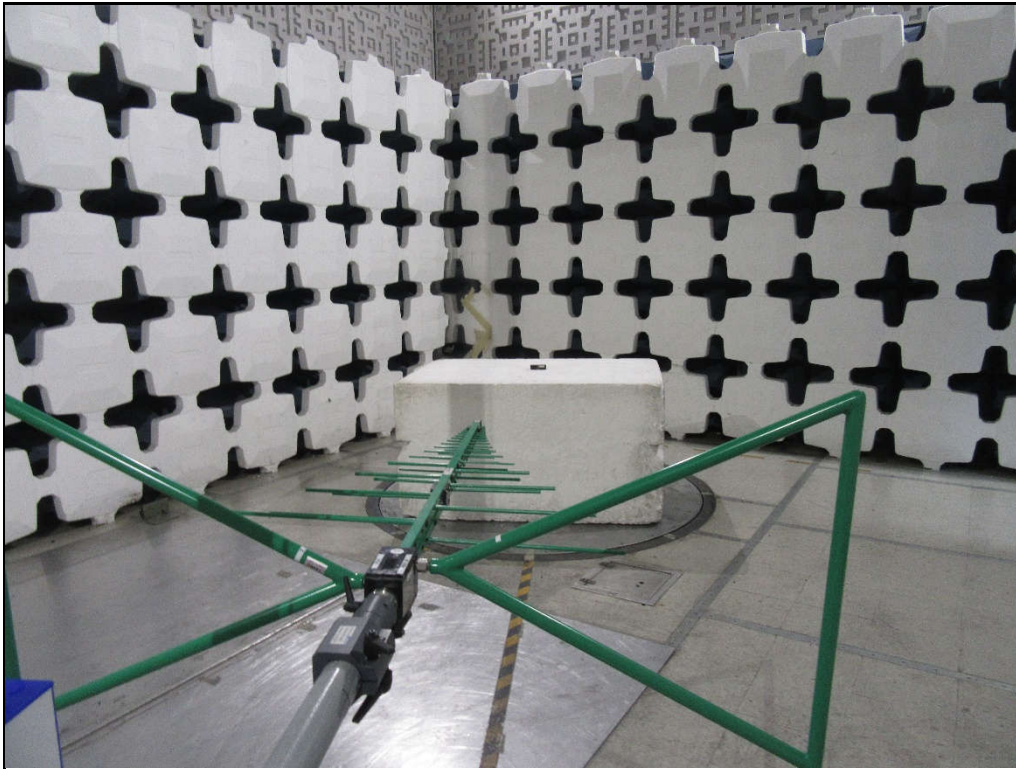


Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna Polarization Horizontal

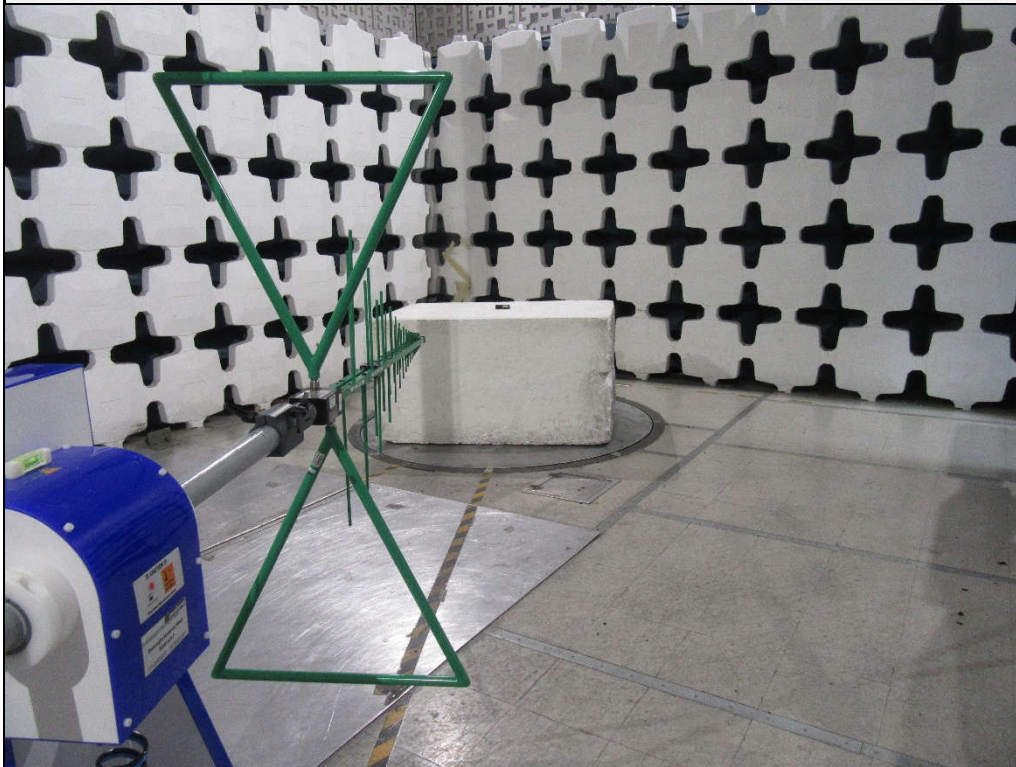

Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna Polarization Vertical



Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Horizontal

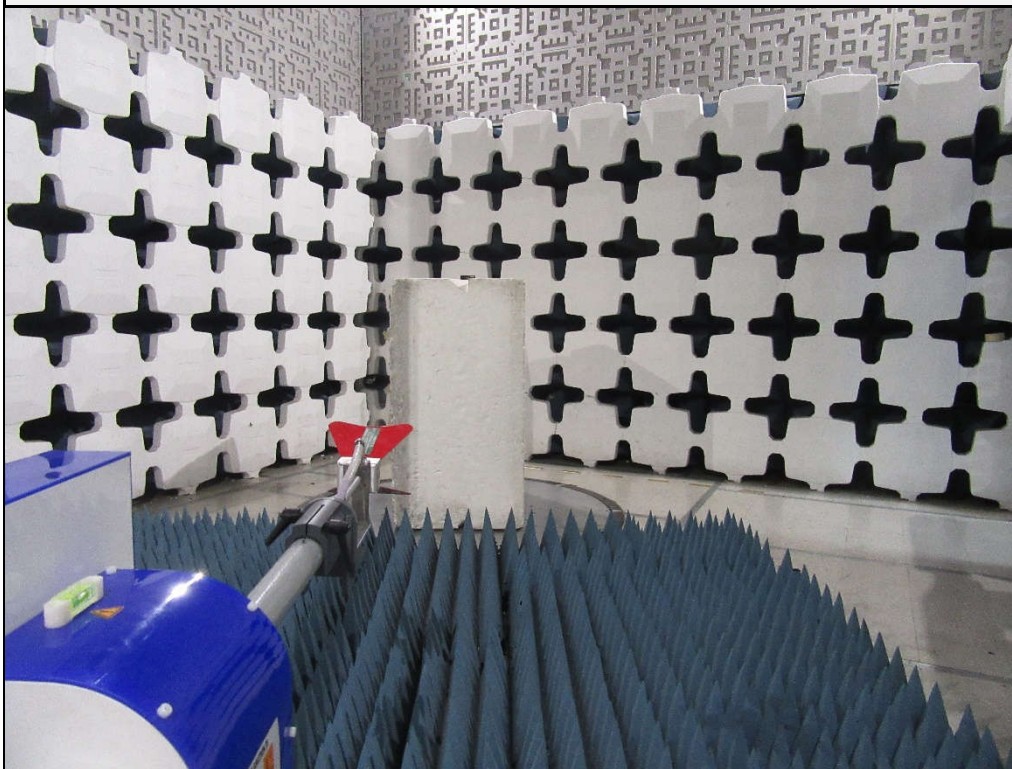

Test Setup for Spurious Radiated Emissions, Above 1GHz – Antenna Polarization Vertical

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2706.90	H	50.71	Ambient	3.68	32.57	-40.41	46.54	212.36	5000.00	-27.44
	V	50.80	Ambient	3.68	32.57	-40.41	46.63	214.57	5000.00	-27.35
3609.20	H	49.99	Ambient	4.26	33.21	-40.31	47.15	227.90	5000.00	-26.82
	V	50.12	Ambient	4.26	33.21	-40.31	47.28	231.33	5000.00	-26.69
4511.50	H	49.75	Ambient	4.71	34.18	-40.10	48.53	267.14	5000.00	-25.44
	V	49.41	Ambient	4.71	34.18	-40.10	48.19	256.88	5000.00	-25.78
5413.80	H	54.21		5.14	34.99	-40.25	54.10	506.95	5000.00	-19.88
	V	54.64		5.14	34.99	-40.25	54.53	532.68	5000.00	-19.45
8120.70	H	48.51	Ambient	6.50	35.79	-39.97	50.83	348.10	5000.00	-23.15
	V	50.44	Ambient	6.50	35.79	-39.97	52.76	434.72	5000.00	-21.22
9023.00	H	49.37	Ambient	6.51	36.28	-39.73	52.43	418.42	5000.00	-21.55
	V	49.50	Ambient	6.51	36.28	-39.73	52.56	424.73	5000.00	-21.42



Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2706.90	H	38.30	Ambient	3.68	32.57	-40.41	0.00	34.13	50.88	500.00	-19.85
	V	38.30	Ambient	3.68	32.57	-40.41	0.00	34.13	50.88	500.00	-19.85
3609.20	H	36.17	Ambient	4.26	33.21	-40.31	0.00	33.33	46.42	500.00	-20.64
	V	36.20	Ambient	4.26	33.21	-40.31	0.00	33.36	46.58	500.00	-20.61
4511.50	H	36.05	Ambient	4.71	34.18	-40.10	0.00	34.83	55.17	500.00	-19.14
	V	36.30	Ambient	4.71	34.18	-40.10	0.00	35.08	56.79	500.00	-18.89
5413.80	H	47.27		5.14	34.99	-40.25	0.00	47.16	228.02	500.00	-6.82
	V	48.94		5.14	34.99	-40.25	0.00	48.83	276.35	500.00	-5.15
8120.70	H	37.05	Ambient	6.50	35.79	-39.97	0.00	39.37	93.05	500.00	-14.61
	V	36.44	Ambient	6.50	35.79	-39.97	0.00	38.76	86.74	500.00	-15.22
9023.00	H	35.72	Ambient	6.51	36.28	-39.73	0.00	38.78	86.92	500.00	-15.20
	V	36.67	Ambient	6.51	36.28	-39.73	0.00	39.73	96.96	500.00	-14.25

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
902.30	H	83.45		2.04	26.47	0.00	111.96	396306.74		
	V	75.19		2.04	26.47	0.00	103.70	153119.84		
1804.60	H	61.31		2.93	30.91	-40.89	54.27	516.81	39630.67	-37.69
	V	56.71		2.93	30.91	-40.89	49.67	304.32	39630.67	-42.29
6316.10	H	55.05		5.62	35.48	-40.15	56.01	631.43	39630.67	-35.95
	V	55.01		5.62	35.48	-40.15	55.97	628.53	39630.67	-35.99
7218.40	H	50.79	Ambient	6.12	35.67	-40.07	52.51	422.36	39630.67	-39.45
	V	51.95	Ambient	6.12	35.67	-40.07	53.67	482.70	39630.67	-38.29

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	908.5MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2725.50	H	51.16	Ambient	3.69	32.58	-40.41	47.03	224.59	5000.00	-26.95
	V	50.60	Ambient	3.69	32.58	-40.41	46.47	210.57	5000.00	-27.51
3634.00	H	49.97	Ambient	4.27	33.20	-40.29	47.16	228.03	5000.00	-26.82
	V	49.65	Ambient	4.27	33.20	-40.29	46.84	219.78	5000.00	-27.14
4542.50	H	49.85	Ambient	4.73	34.24	-40.12	48.70	272.28	5000.00	-25.28
	V	49.34	Ambient	4.73	34.24	-40.12	48.19	256.75	5000.00	-25.79
5451.00	H	53.79		5.16	35.00	-40.24	53.71	484.92	5000.00	-20.27
	V	55.24		5.16	35.00	-40.24	55.16	573.01	5000.00	-18.82
7268.00	H	54.26	Ambient	6.14	35.69	-40.06	56.03	633.37	5000.00	-17.95
	V	55.67	Ambient	6.14	35.69	-40.06	57.44	745.00	5000.00	-16.54
8176.50	H	50.82	Ambient	6.50	35.84	-39.95	53.21	457.37	5000.00	-20.77
	V	53.06	Ambient	6.50	35.84	-39.95	55.45	591.93	5000.00	-18.53
9085.00	H	51.20	Ambient	6.54	36.31	-39.72	54.34	521.05	5000.00	-19.64
	V	53.14	Ambient	6.54	36.31	-39.72	56.28	651.45	5000.00	-17.70

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	908.5MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2725.50	H	38.04	Ambient	3.69	32.58	-40.41	0.00	33.91	49.59	500.00	-20.07
	V	37.90	Ambient	3.69	32.58	-40.41	0.00	33.77	48.80	500.00	-20.21
3634.00	H	36.00	Ambient	4.27	33.20	-40.29	0.00	33.19	45.65	500.00	-20.79
	V	36.30	Ambient	4.27	33.20	-40.29	0.00	33.49	47.26	500.00	-20.49
4542.50	H	36.56	Ambient	4.73	34.24	-40.12	0.00	35.41	58.95	500.00	-18.57
	V	36.60	Ambient	4.73	34.24	-40.12	0.00	35.45	59.23	500.00	-18.53
5451.00	H	49.10		5.16	35.00	-40.24	0.00	49.02	282.60	500.00	-4.96
	V	49.48		5.16	35.00	-40.24	0.00	49.40	295.23	500.00	-4.58
7268.00	H	48.60	Ambient	6.14	35.69	-40.06	0.00	50.37	330.11	500.00	-3.61
	V	49.94	Ambient	6.14	35.69	-40.06	0.00	51.71	385.17	500.00	-2.27
8176.50	H	38.42	Ambient	6.50	35.84	-39.95	0.00	40.81	109.72	500.00	-13.17
	V	43.91	Ambient	6.50	35.84	-39.95	0.00	46.30	206.43	500.00	-7.68
9085.00	H	46.09	Ambient	6.54	36.31	-39.72	0.00	49.23	289.32	500.00	-4.75
	V	46.00	Ambient	6.54	36.31	-39.72	0.00	49.14	286.34	500.00	-4.84

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	908.5MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
908.50	H	82.42		2.05	26.42	0.00	110.89	350268.05		
	V	72.53		2.05	26.42	0.00	101.00	112176.15		
1817.00	H	62.95		2.94	30.93	-40.87	55.95	627.20	35026.80	-34.94
	V	55.80		2.94	30.93	-40.87	48.80	275.36	35026.80	-42.09
6359.50	H	55.23		5.65	35.50	-40.15	56.23	648.21	35026.80	-34.65
	V	57.28		5.65	35.50	-40.15	58.28	820.76	35026.80	-32.60

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2744.70	H	51.47	Ambient	3.71	32.60	-40.40	47.38	233.76	5000.00	-26.60
	V	51.05	Ambient	3.71	32.60	-40.40	46.96	222.72	5000.00	-27.02
3659.60	H	50.57	Ambient	4.29	33.20	-40.27	47.79	245.10	5000.00	-26.19
	V	50.41	Ambient	4.29	33.20	-40.27	47.63	240.63	5000.00	-26.35
4574.50	H	50.52	Ambient	4.74	34.32	-40.13	49.45	296.88	5000.00	-24.53
	V	50.22	Ambient	4.74	34.32	-40.13	49.15	286.81	5000.00	-24.83
7319.20	H	52.88		6.17	35.69	-40.06	54.68	542.12	5000.00	-19.30
	V	54.17		6.17	35.69	-40.06	55.97	628.92	5000.00	-18.01
8234.10	H	49.95	Ambient	6.50	35.88	-39.94	52.39	416.52	5000.00	-21.59
	V	49.63	Ambient	6.50	35.88	-39.94	52.07	401.45	5000.00	-21.91
9149.00	H	49.89	Ambient	6.58	36.32	-39.70	53.09	451.28	5000.00	-20.89
	V	48.77	Ambient	6.58	36.32	-39.70	51.97	396.69	5000.00	-22.01

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2744.70	H	37.43	Ambient	3.71	32.60	-40.40	0.00	33.34	46.43	500.00	-20.64
	V	37.43	Ambient	3.71	32.60	-40.40	0.00	33.34	46.43	500.00	-20.64
3659.60	H	36.09	Ambient	4.29	33.20	-40.27	0.00	33.31	46.27	500.00	-20.67
	V	36.17	Ambient	4.29	33.20	-40.27	0.00	33.39	46.70	500.00	-20.59
4574.50	H	36.47	Ambient	4.74	34.32	-40.13	0.00	35.40	58.90	500.00	-18.58
	V	36.58	Ambient	4.74	34.32	-40.13	0.00	35.51	59.65	500.00	-18.47
7319.20	H	44.98		6.17	35.69	-40.06	0.00	46.78	218.32	500.00	-7.20
	V	46.92		6.17	35.69	-40.06	0.00	48.72	272.96	500.00	-5.26
8234.10	H	38.60	Ambient	6.50	35.88	-39.94	0.00	41.04	112.76	500.00	-12.94
	V	37.04	Ambient	6.50	35.88	-39.94	0.00	39.48	94.22	500.00	-14.50
9149.00	H	38.60	Ambient	6.58	36.32	-39.70	0.00	41.80	123.01	500.00	-12.18
	V	36.80	Ambient	6.58	36.32	-39.70	0.00	40.00	99.99	500.00	-13.98

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
914.90	H	86.30		2.05	26.37	0.00	114.72	544773.59		
	V	77.48		2.05	26.37	0.00	105.90	197340.42		
1829.80	H	61.15		2.95	30.94	-40.85	54.19	512.31	54477.36	-40.53
	V	55.84		2.95	30.94	-40.85	48.88	277.99	54477.36	-45.84
5489.40	H	47.40		5.18	34.99	-40.24	47.34	232.72	54477.36	-47.39
	V	52.23		5.18	34.99	-40.24	52.17	405.83	54477.36	-42.56
6404.30	H	53.73		5.67	35.54	-40.14	54.80	549.37	54477.36	-39.93
	V	54.86		5.67	35.54	-40.14	55.93	625.70	54477.36	-38.80



Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2709.00	H	51.76	Ambient	3.68	32.57	-40.41	47.60	239.76	5000.00	-26.38
	V	51.38	Ambient	3.68	32.57	-40.41	47.22	229.50	5000.00	-26.76
3612.00	H	50.45	Ambient	4.26	33.21	-40.31	47.62	240.37	5000.00	-26.36
	V	49.55	Ambient	4.26	33.21	-40.31	46.72	216.71	5000.00	-27.26
4515.00	H	50.00	Ambient	4.71	34.19	-40.11	48.79	275.17	5000.00	-25.19
	V	50.23	Ambient	4.71	34.19	-40.11	49.02	282.56	5000.00	-24.96
5418.00	H	53.41		5.15	35.00	-40.25	53.30	462.55	5000.00	-20.68
	V	55.50		5.15	35.00	-40.25	55.39	588.39	5000.00	-18.59
8127.00	H	51.45		6.50	35.80	-39.96	53.78	488.74	5000.00	-20.20
	V	53.94		6.50	35.80	-39.96	56.27	651.00	5000.00	-17.71
9030.00	H	49.75	Ambient	6.52	36.28	-39.73	52.82	437.60	5000.00	-21.16
	V	50.70	Ambient	6.52	36.28	-39.73	53.77	488.17	5000.00	-20.21

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2709.00	H	37.74	Ambient	3.68	32.57	-40.41	0.00	33.58	47.73	500.00	-20.40
	V	37.21	Ambient	3.68	32.57	-40.41	0.00	33.05	44.90	500.00	-20.93
3612.00	H	36.12	Ambient	4.26	33.21	-40.31	0.00	33.29	46.17	500.00	-20.69
	V	36.12	Ambient	4.26	33.21	-40.31	0.00	33.29	46.17	500.00	-20.69
4515.00	H	36.27	Ambient	4.71	34.19	-40.11	0.00	35.06	56.64	500.00	-18.92
	V	36.34	Ambient	4.71	34.19	-40.11	0.00	35.13	57.10	500.00	-18.85
5418.00	H	42.35		5.15	35.00	-40.25	0.00	42.24	129.47	500.00	-11.74
	V	45.62		5.15	35.00	-40.25	0.00	45.51	188.65	500.00	-8.47
8127.00	H	37.20		6.50	35.80	-39.96	0.00	39.53	94.75	500.00	-14.45
	V	41.78		6.50	35.80	-39.96	0.00	44.11	160.54	500.00	-9.87
9030.00	H	36.48	Ambient	6.52	36.28	-39.73	0.00	39.55	94.97	500.00	-14.43
	V	37.74	Ambient	6.52	36.28	-39.73	0.00	40.81	109.79	500.00	-13.17

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
903.00	H	83.70		2.04	26.47	0.00	112.21	407652.53		
	V	75.50		2.04	26.47	0.00	104.01	158595.24		
1806.00	H	58.88		2.93	30.92	-40.88	51.84	390.90	40765.25	-40.36
	V	54.01		2.93	30.92	-40.88	46.97	223.13	40765.25	-45.23
6321.00	H	50.30	Ambient	5.63	35.49	-40.15	51.26	365.66	40765.25	-40.94
	V	59.22	Ambient	5.63	35.49	-40.15	60.18	1021.11	40765.25	-32.02
7224.00	H	53.21		6.12	35.68	-40.07	54.94	558.49	40765.25	-37.27
	V	53.21		6.12	35.68	-40.07	54.94	558.49	40765.25	-37.27

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	907.8MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2723.40	H	51.70	Ambient	3.69	32.58	-40.41	47.56	238.89	5000.00	-26.42
	V	51.70	Ambient	3.69	32.58	-40.41	47.56	238.89	5000.00	-26.42
3631.20	H	51.20	Ambient	4.27	33.20	-40.29	48.39	262.63	5000.00	-25.59
	V	49.35	Ambient	4.27	33.20	-40.29	46.54	212.25	5000.00	-27.44
4539.00	H	50.14	Ambient	4.72	34.24	-40.12	48.98	281.28	5000.00	-25.00
	V	50.21	Ambient	4.72	34.24	-40.12	49.05	283.56	5000.00	-24.93
5446.80	H	54.41		5.16	35.00	-40.25	54.33	520.60	5000.00	-19.65
	V	54.74		5.16	35.00	-40.25	54.66	540.75	5000.00	-19.32
7262.40	H	52.13		6.14	35.69	-40.06	53.90	495.43	5000.00	-20.08
	V	54.76		6.14	35.69	-40.06	56.53	670.62	5000.00	-17.45
8170.20	H	50.39	Ambient	6.50	35.83	-39.95	52.77	434.97	5000.00	-21.21
	V	53.23	Ambient	6.50	35.83	-39.95	55.61	603.19	5000.00	-18.37
9078.00	H	48.92	Ambient	6.54	36.31	-39.72	52.05	400.39	5000.00	-21.93
	V	48.97	Ambient	6.54	36.31	-39.72	52.10	402.70	5000.00	-21.88

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	907.8MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBµV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBµV/m)	Average Total at 3m (µV/m)	Average Limit at 3m (µV/m)	Margin (dB)
2723.40	H	38.15	Ambient	3.69	32.58	-40.41	0.00	34.01	50.20	500.00	-19.97
	V	38.15	Ambient	3.69	32.58	-40.41	0.00	34.01	50.20	500.00	-19.97
3631.20	H	36.01	Ambient	4.27	33.20	-40.29	0.00	33.20	45.69	500.00	-20.78
	V	35.95	Ambient	4.27	33.20	-40.29	0.00	33.14	45.38	500.00	-20.84
4539.00	H	36.49	Ambient	4.72	34.24	-40.12	0.00	35.33	58.43	500.00	-18.65
	V	36.54	Ambient	4.72	34.24	-40.12	0.00	35.38	58.77	500.00	-18.60
5446.80	H	43.34		5.16	35.00	-40.25	0.00	43.26	145.55	500.00	-10.72
	V	44.50		5.16	35.00	-40.25	0.00	44.42	166.34	500.00	-9.56
7262.40	H	38.34		6.14	35.69	-40.06	0.00	40.11	101.27	500.00	-13.87
	V	41.82		6.14	35.69	-40.06	0.00	43.59	151.17	500.00	-10.39
8170.20	H	36.76	Ambient	6.50	35.83	-39.95	0.00	39.14	90.56	500.00	-14.84
	V	39.73	Ambient	6.50	35.83	-39.95	0.00	42.11	127.48	500.00	-11.87
9078.00	H	35.91	Ambient	6.54	36.31	-39.72	0.00	39.04	89.53	500.00	-14.94
	V	36.06	Ambient	6.54	36.31	-39.72	0.00	39.19	91.09	500.00	-14.79

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	907.8MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
907.80	H	84.39		2.05	26.43	0.00	112.86	439683.72		
	V	76.60		2.05	26.43	0.00	105.07	179324.81		
1815.60	H	61.81		2.94	30.93	-40.87	54.80	549.76	43968.37	-38.06
	V	57.11		2.94	30.93	-40.87	50.10	320.02	43968.37	-42.76
6354.60	H	55.04	Ambient	5.65	35.50	-40.15	56.04	633.66	43968.37	-36.83
	V	55.14	Ambient	5.65	35.50	-40.15	56.14	641.00	43968.37	-36.73

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2742.60	H	51.38	Ambient	3.70	32.60	-40.40	47.28	231.24	5000.00	-26.70
	V	51.70	Ambient	3.70	32.60	-40.40	47.60	239.92	5000.00	-26.38
3656.80	H	49.64	Ambient	4.29	33.20	-40.27	46.85	220.13	5000.00	-27.13
	V	50.00	Ambient	4.29	33.20	-40.27	47.21	229.45	5000.00	-26.77
4571.00	H	50.43	Ambient	4.74	34.31	-40.13	49.35	293.51	5000.00	-24.63
	V	49.47	Ambient	4.74	34.31	-40.13	48.39	262.80	5000.00	-25.59
7313.60	H	50.88	Ambient	6.16	35.69	-40.06	52.68	430.50	5000.00	-21.30
	V	56.16	Ambient	6.16	35.69	-40.06	57.96	790.63	5000.00	-16.02
8227.80	H	50.51	Ambient	6.50	35.87	-39.94	52.95	443.94	5000.00	-21.03
	V	50.93	Ambient	6.50	35.87	-39.94	53.37	465.93	5000.00	-20.61
9142.00	H	50.48	Ambient	6.57	36.32	-39.70	53.67	482.65	5000.00	-20.31
	V	49.39	Ambient	6.57	36.32	-39.70	52.58	425.73	5000.00	-21.40

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2742.60	H	37.60	Ambient	3.70	32.60	-40.40	0.00	33.50	47.32	500.00	-20.48
	V	37.56	Ambient	3.70	32.60	-40.40	0.00	33.46	47.10	500.00	-20.52
3656.80	H	35.96	Ambient	4.29	33.20	-40.27	0.00	33.17	45.57	500.00	-20.81
	V	36.00	Ambient	4.29	33.20	-40.27	0.00	33.21	45.78	500.00	-20.77
4571.00	H	36.25	Ambient	4.74	34.31	-40.13	0.00	35.17	57.36	500.00	-18.81
	V	36.25	Ambient	4.74	34.31	-40.13	0.00	35.17	57.36	500.00	-18.81
7313.60	H	35.62	Ambient	6.16	35.69	-40.06	0.00	37.42	74.30	500.00	-16.56
	V	40.84	Ambient	6.16	35.69	-40.06	0.00	42.64	135.51	500.00	-11.34
8227.80	H	36.76	Ambient	6.50	35.87	-39.94	0.00	39.20	91.16	500.00	-14.78
	V	37.22	Ambient	6.50	35.87	-39.94	0.00	39.66	96.12	500.00	-14.32
9142.00	H	36.31	Ambient	6.57	36.32	-39.70	0.00	39.50	94.44	500.00	-14.48
	V	36.40	Ambient	6.57	36.32	-39.70	0.00	39.59	95.42	500.00	-14.39



Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
914.20	H	84.62		2.05	26.38	0.00	113.05	449214.98		
	V	76.88		2.05	26.38	0.00	105.31	184269.83		
1828.40	H	62.03		2.95	30.94	-40.85	55.07	566.63	44921.50	-37.98
	V	59.01		2.95	30.94	-40.85	52.05	400.22	44921.50	-41.00
5485.20	H	39.52	Ambient	5.18	34.99	-40.24	39.46	93.92	44921.50	-53.59
	V	39.52	Ambient	5.18	34.99	-40.24	39.46	93.92	44921.50	-53.59
6399.40	H	39.72	Ambient	5.67	35.53	-40.14	40.78	109.42	44921.50	-52.27
	V	39.56	Ambient	5.67	35.53	-40.14	40.62	107.43	44921.50	-52.43

## 27. Band-Edge Compliance

EUT Information	
Manufacturer	Corteva Agriscience LLC
Product	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx, 500kHz Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Antenna Conducted
Type of Test Site	Elite Test Bench
Type of Antennas Used	N/A
Notes	None

Procedure	
<p>1) Low Band Edge:</p> <ul style="list-style-type: none"> <li>a) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.</li> <li>b) The EUT was set to transmit continuously at the channel closest to the low band-edge hopping function disabled.</li> <li>c) To determine the band edge compliance, the following spectrum analyzer settings were used: <ul style="list-style-type: none"> <li>o Center Frequency = 902MHz (low band-edge frequency).</li> <li>o Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.</li> <li>o Resolution Bandwidth (RBW) = <math>\geq 1\%</math> of the span.</li> <li>o 'Max-Hold' function was engaged.</li> </ul> </li> <li>d) The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.</li> <li>e) The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)</li> <li>f) The analyzer's display was then screenshot and saved.</li> <li>g) Steps (d) through (f) were repeated with the frequency hopping function enabled.</li> </ul> <p>2) High Band Edge:</p> <ul style="list-style-type: none"> <li>a) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.</li> <li>b) The EUT was set to transmit continuously at the channel closest to the high band-edge hopping function disabled.</li> <li>c) To determine the band edge compliance, the following spectrum analyzer settings were used: <ul style="list-style-type: none"> <li>o Center Frequency = 928MHz (high band-edge frequency).</li> <li>o Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.</li> </ul> </li> </ul>	

- Resolution Bandwidth (RBW) =  $\geq 1\%$  of the span.
- 'Max-Hold' function was engaged.
- d) The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- e) The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
- f) The analyzer's display was then screenshot and saved.
- g) Steps (d) through (f) were repeated with the frequency hopping function enabled.

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	902.3MHz
Notes	Low Band Edge




10:22:29 19.04.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	125kHz Tx
Frequency Tested	914.9MHz
Notes	High Band Edge



10:58:39 19.04.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	903MHz
Notes	Low Band Edge

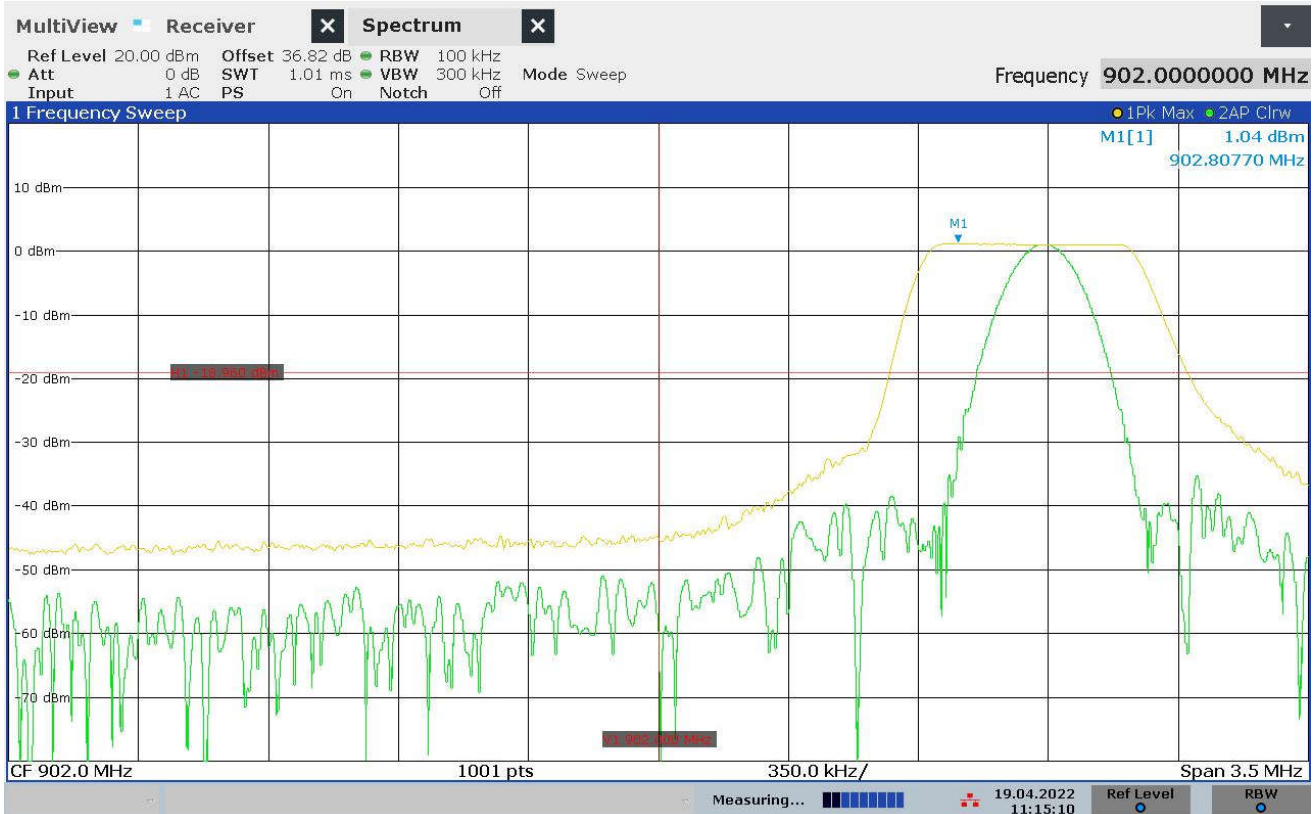

11:15:11 19.04.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	500kHz Tx
Frequency Tested	914.2MHz
Notes	High Band Edge



11:38:07 19.04.2022

Test Details	
Manufacturer	Corteva Agriscience LLC
EUT	ActiveSense AIR1 Sensor
Model No.	AIR1B
Serial No.	US #6
Mode	Hopping
Notes	



16:35:39 27.05.2022



## 29. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

**Test Technology:****Test Method(s) <sup>1</sup>:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

***Electrostatic Discharge (ESD)***

ISO 10605 (2001, 2008);  
CS-11979 Section 7.0; CS.00054, Section 5.10;  
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;  
GMW 3097 Section 3.6

***Conducted Emissions***

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;  
CISPR 25 (2016), Sections 6.3 and 6.4;  
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;  
GMW 3097, Section 3.3.2;  
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

***Radiated Emissions Anechoic***

CISPR 25 (2002, 2008), Section 6.4;  
CISPR 25 (2016), Section 6.5;  
CS-11979, Section 5.3; CS.00054, Section 5.6.3;  
GMW 3097, Section 3.3.1;  
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);  
ECE Regulation 10.06 Annex 7 (Broadband)  
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 06/24/2021



Page 1 of 8

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
<b>Emissions</b> Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
Cellular Radiated Spurious Emissions	ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134 124 UMTS; 3GPP TS 34.124; ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<b>Emissions (cont'd)</b>	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
<b>Immunity</b>	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<b>Immunity (cont'd)</b>	
Power Frequency Magnetic Field Immunity ( <i>Down to 3 A/m</i> )	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
<b><i>TxRx EMC Requirements</i></b>	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
<b><i>European Radio Test Standards</i></b>	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

<u>Test Technology:</u>	<u>Test Method(s) <sup>1</sup>:</u>
<i>Canadian Radio Tests</i>	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
<i>Mexico Radio Tests</i>	IFT-008-2015; NOM-208-SCFI-2016
<i>Japan Radio Tests</i>	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
<i>Taiwan Radio Tests</i>	LP-0002 (July 15, 2020)
<i>Australia/New Zealand Radio Tests</i>	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
<i>Hong Kong Radio Tests</i>	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
<i>Korean Radio Test Standards</i>	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
<i>Vietnam Radio Test Standards</i>	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT
<i>Vietnam EMC Test Standards</i>	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
<i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i>	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANSI C63.10:2013, ANSI C63.17:2013 and FCC KDB 905462 D02 (v02))
<i>Licensed Radio Service Equipment</i>	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANSI C63.26:2015)

**Test Technology:**

***OIA (Over the Air) Performance***  
 GSM, GPRS, EGPRS  
 UMTS (W-CDMA)  
 LTE including CAT M1  
 A-GPS for UMTS/GSM  
 LTS A-GPS, A-GLONASS,  
 SIB8/SIB16  
 Large Device/Laptop/Tablet Testing  
 Integrated Device Testing  
 WiFi 802.11 a/b/g/n/a

**Test Method(s) <sup>1</sup>:**

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;  
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

***Electrical Measurements and Simulation***

**AC Voltage / Current**

(1mV to 5kV) 60 Hz  
 (0.1V to 250V) up to 500 MHz  
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H  
 FAA AC 150/5345-43J  
 FAA AC 150/5345-44K

**DC Voltage / Current**

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E

**Power Factor / Efficiency / Crest Factor**

(Power to 30kW)

FAA AC 150/5345-47C  
 FAA EB 67D

**Resistance**

(1mΩ to 4000MΩ)

**Surge**

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

**On the following products and materials:**

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

<sup>1</sup> When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements - Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

<b>Rule Subpart/Technology</b>	<b>Test Method</b>	<b>Maximum Frequency (MHz)</b>
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

<sup>2</sup> Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.





## Accredited Laboratory

A2LA has accredited

### ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19<sup>th</sup> day of May 2021.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 1786.01  
Valid to June 30, 2023

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*