

Accredited as:
Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory,
First and Boiler test
laboratoryNotified Body 0408
IC 2932K-1Non-executive
Board of Directors:
KR Dipl.-Ing. Johann
MARIHARTManagement:
Dipl.-Ing. Dr. Stefan
HAAS
Mag. Christoph
WENNINGERRegistered Office:
Krugerstrasse 16
1015 Vienna/AustriaBranch Offices:
Dornbirn, Graz,
Innsbruck, Klagenfurt,
Linz, Salzburg, St. Pölten
Wels, Vienna, Brixen (I)
and Filderstadt (D)Company Register
Court / - Number:
Vienna / FN 288476 fBank Details:
UC BA 52949 001 066
IBAN
AT131200052949001066
BIC BKAUATWW
RZB 001-04.093.282
IBAN
AT153100000104093282
BIC RZBAATWWVAT ATU63240488
DVR 3002476**TEST REPORT**
of the accredited test laboratory

TÜV Nr.:M/FG-16/107

Applicant: imagotag GmbH
St. Peter Gürtel 10b
A – 8042 Graz

Tested Product: Networking transceiver Module: R26

FCC-ID: 2ACQM-E00011

IC-ID: 12154A-E00011

Manufacturer: imagotag GmbH
St. Peter Gürtel 10b
A – 8042 Graz

Output power / field strength: 3,51 mV/m average @ 3m distance
power supply: 3 VDC via internal bat.

Frequency range: 2404 - 2479,25 MHz
Channel separation: 0,35 MHz

Standard: FCC: 47 CFR Part 15 (October 1, 2015 edition)
RSS-210 Issue 8, December 2010

TÜV AUSTRIA SERVICES GMBH
Test laboratory for EMC

Supervisor of EMC-laboratory:

Ing. Wilhelm Seier



03.05.2016

Copy Nbr.: 01

checked by:

Ing. Michael Emminger

A publication of this test report is only permitted literally.

Copying or reproduction of partial sections needs a written permission of TÜV AUSTRIA
SERVICES GMBH.

The results of this test report only refer to the provided equipment.

LIST OF MEASUREMENTS

The complete list of measurements called for in 47 CFR 15 and RSS-210 is given below.

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
	Intentional Radiators	
	Test object data	3
2.1033	Number of channels and channel spacing	4
15.249 (e) A 2.9	Duty Cycle for averaging	5
15.249 (a) (c) A 2.9	Field strength at 2400 – 2483,5 MHz	6-8
15.249 (d) (e) A 2.9	Emissions outside 2400 – 2483,5 MHz (15.209)	9-20

TEST OBJECT DATA

General EUT Description

This transceiver module is working in a network consisting of a controller station, so called Accesspoint, and various displays. The Accesspoint transmits information to the displays and receives acknowledgements.

This device is a module to be integrated into a display operating in the network system. The device can be equipped with a passive RFID TAG. As this tag will be placed far away from the transceiver electronics, no additional measurements were performed. The module is not intended to be sold separately, it will be used only by the manufacturer to be integrated into display devices.

2.1033 (c) Technical description

2.1033 (4) Type of emission: Phase shift keying – declared channel bandwidth 542 kHz –
'virtual' channel spacing 0,35 MHz. Only 11 channels from the channel plan are used, therefore the channel spacing in reality is much higher and varies from 2,45 MHz minimum up to 17,15 MHz.

2.1033 (5) Frequency range: 2404 – 2479,25 MHz (channel center frequencies of channel 0 up to ch. 10)

2.1033 (6) Power range and Controls: The maximum field strength measured is 3,51 mV/m average @ 3m distance. There is no power control or regulation.

2.1033 (7) Maximum output power rating: 3,51 mV/m average @ 3m distance.

2.1033 (8) DC Voltage and Current: 3V internal battery
maximum current consumption: 28,0 mA during continuous transmission

RSS-135 This standard does not apply to:

- 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Number of channels and channel spacing

§ 2.1033

Channel plan:

Channel Number	Center frequency (MHz)	Channel spacing (MHz)
0	2404	
1	2409,95	5,95
2	2421,85	11,9
3	2424,65	2,8
4	2441,8	17,15
5	2449,15	7,35
6	2461,75	12,6
7	2469,45	7,7
8	2474,35	4,9
9	2476,8	2,45
10	2479,25	2,45


Tests were performed on channels 0, 4 and 10.

Test Equipment used: N/A

Duty Cycle measurements for averaging

§ 15.249 (e)

Mode: start of data reception (handshaking gives worst case in 100ms)

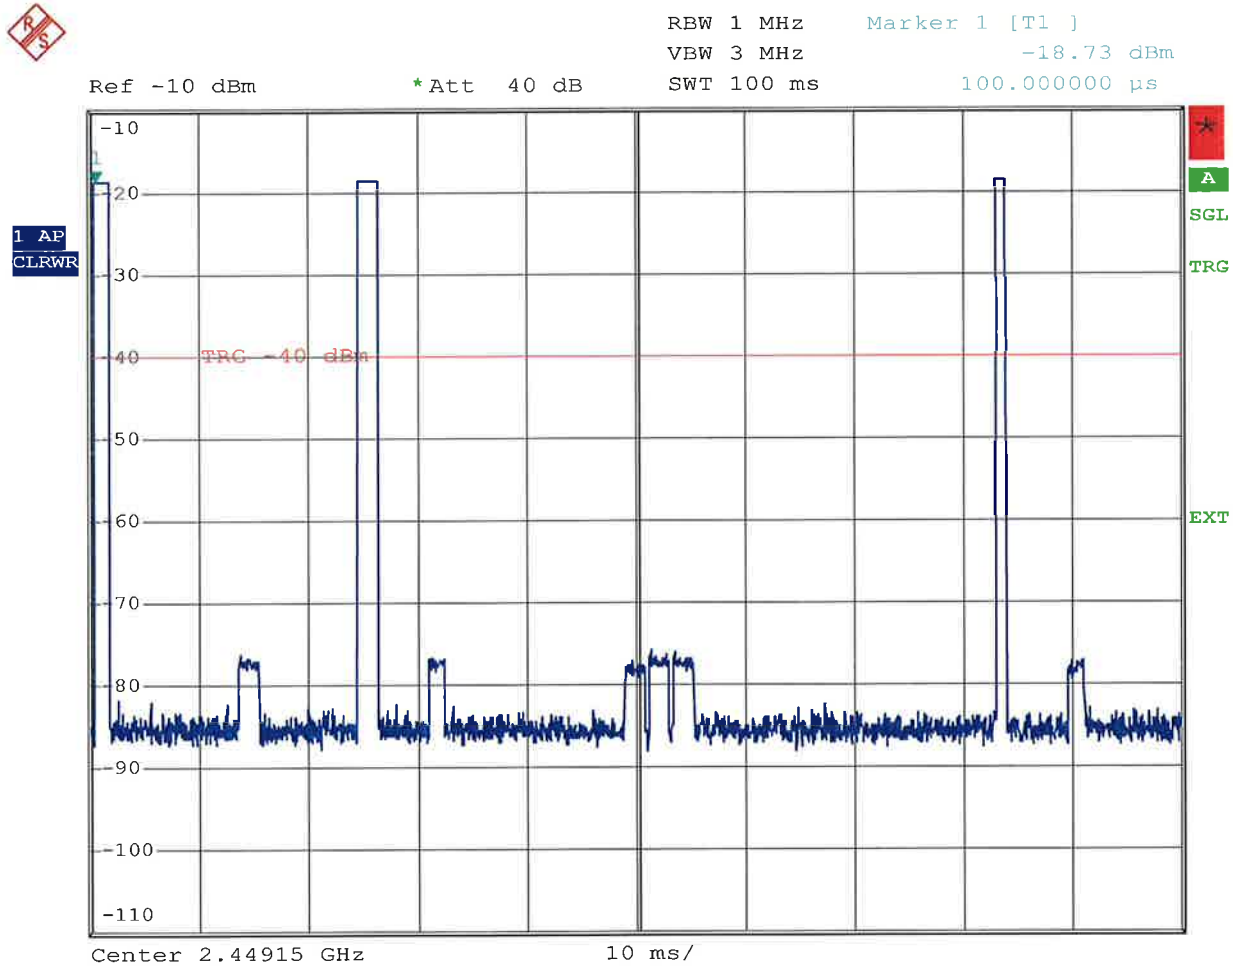

Date: 1.JAN.2000 06:37:06

According to the timing protocol description provided by the manufacturer and attached as technical description to the application for certification, the transmission burst time was checked to not exceed the declared value. The declared value was taken for calculation, as that gives the worst case. Transmission bursts of 1,48ms length occurring twice in 100ms with another handshaking burst of 1,97ms length give a duty cycle of 4,93% or an average factor of -26,1 dB.

LIMIT SUBCLAUSE 15.249(e)

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Equipment used: NT-203/1

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 0 (2404 MHz)

The maximum peak value measured was 97,0 dB μ V/m = 70,79 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 70,9 dB μ V/m = 3,51 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 4 (2441,8 MHz)

The maximum peak value measured was 96,1 dB μ V/m = 63,8 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 70,0 dB μ V/m = 3,16 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 10 (2479,25 MHz)

The maximum peak value measured was 96,7 dB μ V/m = 68,4 mV/m at 3m distance.

With the averaging factor calculated on page 5 of this test report of -26,1 dB the maximum average value is then 70,6 dB μ V/m = 3,39 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

**Emissions outside 2400 – 2483,5 MHz
Channel 0 (2404 MHz)**

§ 15.249 (d) (e)

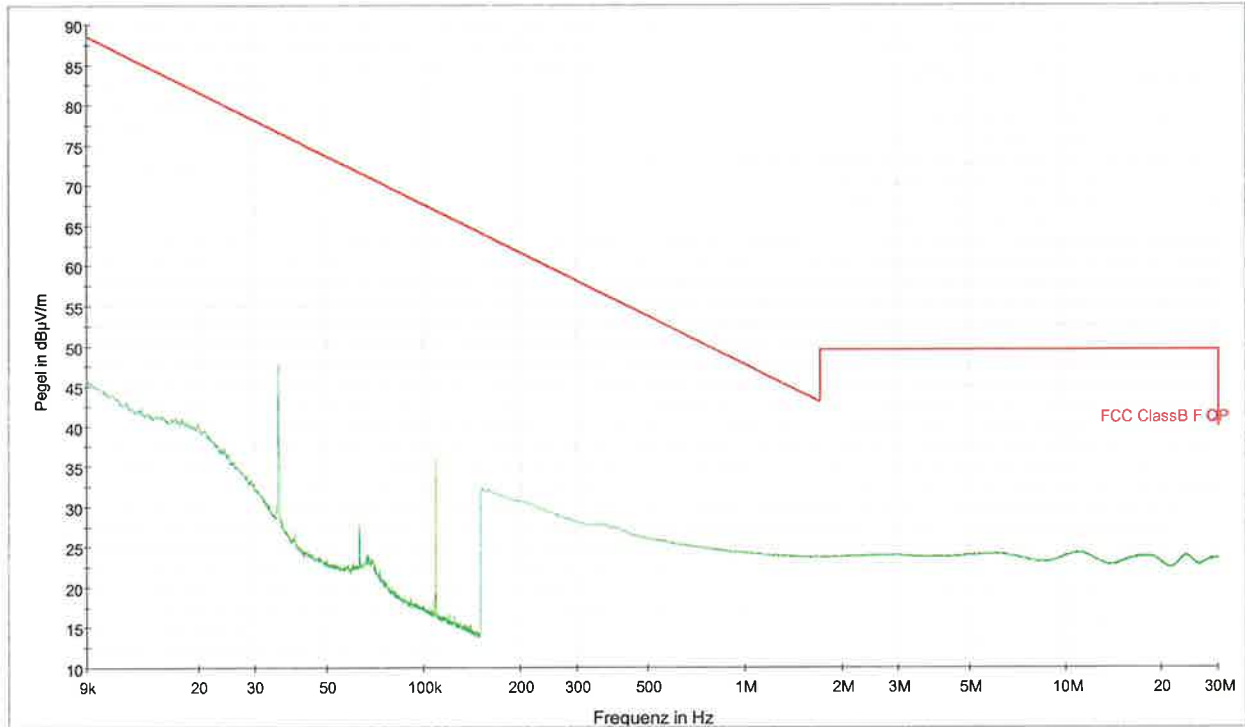

Preview Result 1-QPK * Critical_Freqs CAV — FCC ClassB F QP + Final_Result CAV

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:
EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404 MHz) – average values above 1 GHz are shown in magenta – green = peak

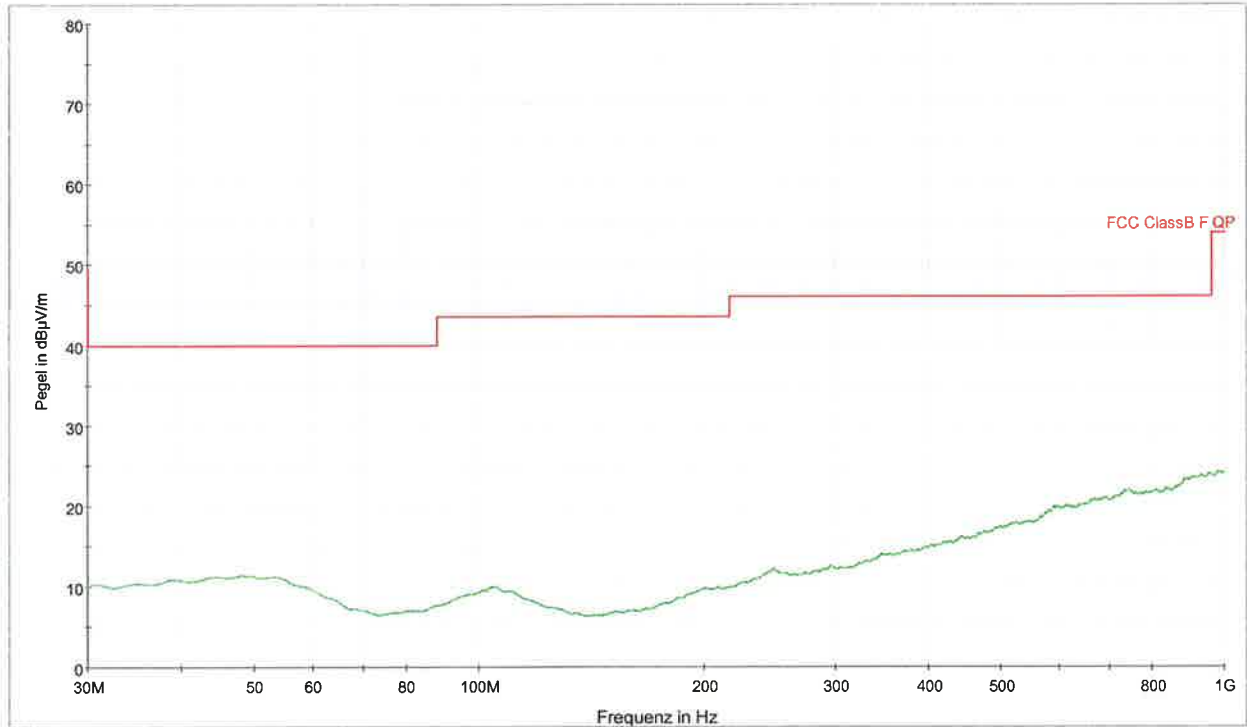

— Preview Result 1-QPK — FCC ClassB F QP × Final_Result QPK

LIMIT

see page 9

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404 MHz) – average values above 1 GHz are shown in magenta – green = peak

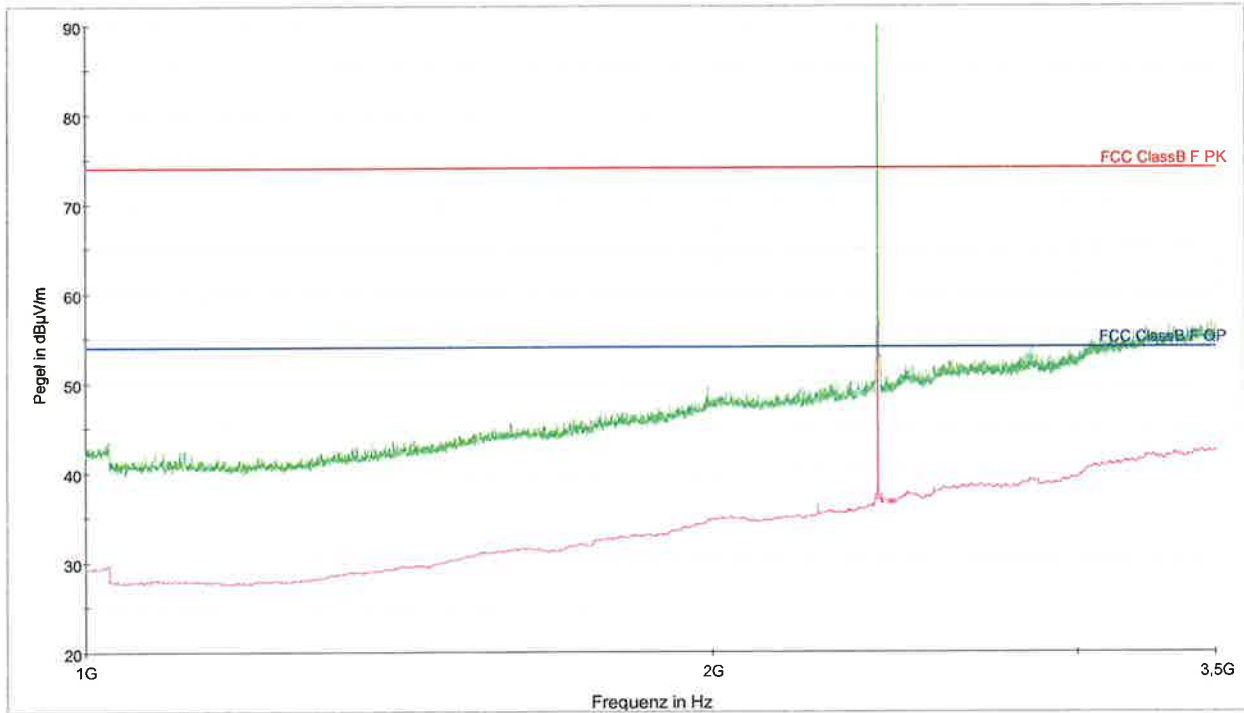

Preview Result 2-AVG Preview Result 1-PK+ FCC Class B F PK
FCC Class B F QP × Final_Result PK+ + Final_Result AVG

LIMIT

see page 9

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404 MHz) – average values above 1 GHz are shown in magenta – green = peak

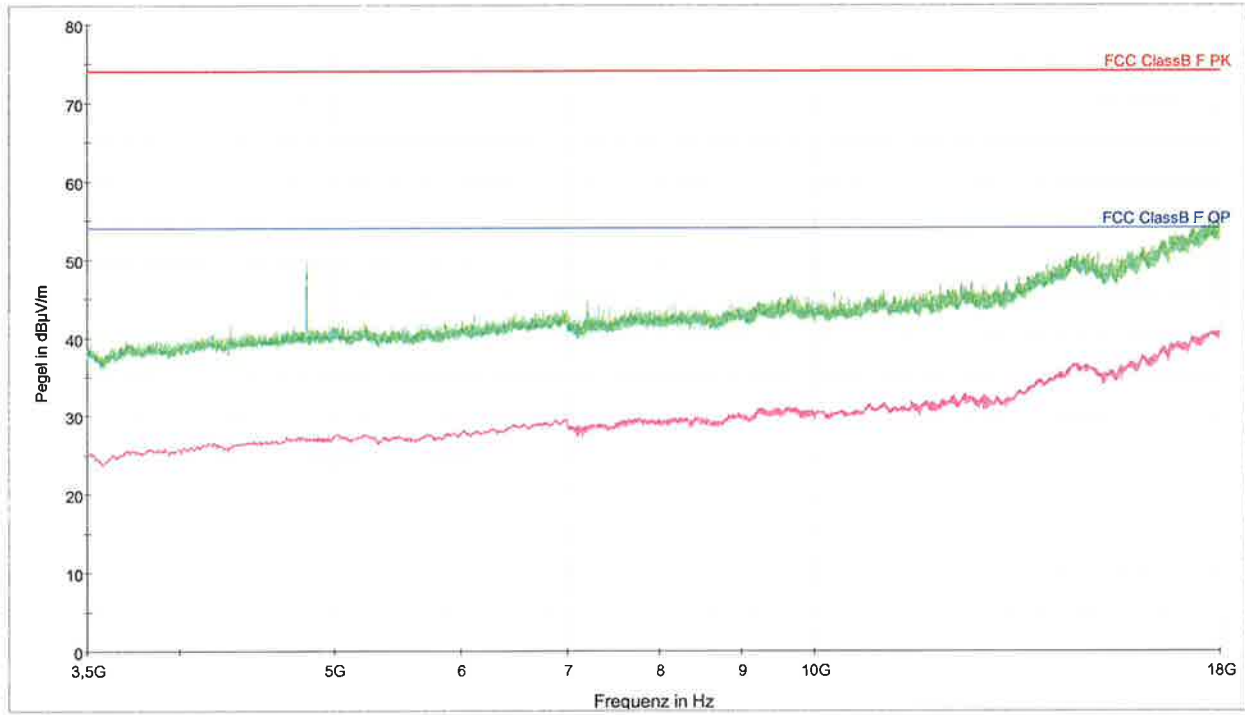

Preview Result 2-AVG Preview Result 1-PK+ FCC ClassB F PK
FCC ClassB F QP × Final_Result PK+ + Final_Result AVG


LIMIT **see page 9**

Test Equipment used:
EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz
Channel 4 (2441.8 MHz)

§ 15.249 (d) (e)

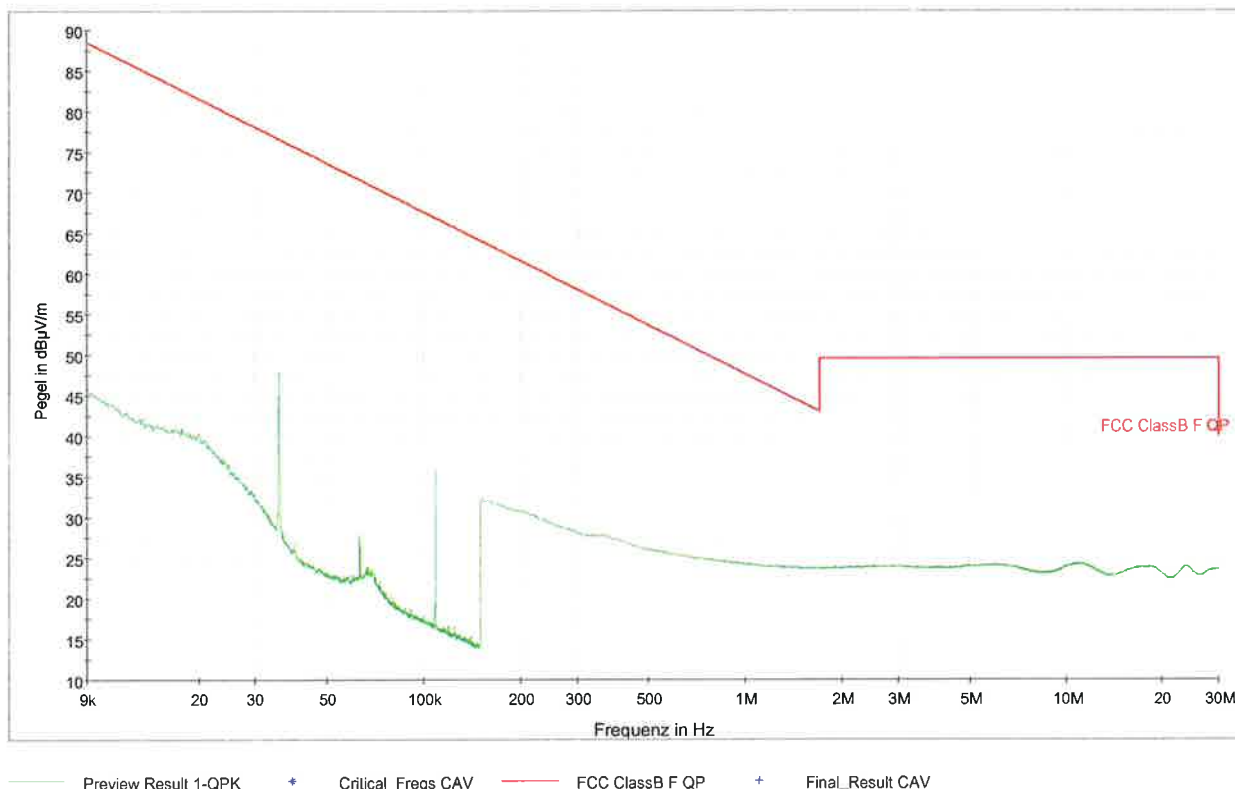

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:
EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 4 (2441,8 MHz) – average values above 1 GHz are shown in magenta – green = peak

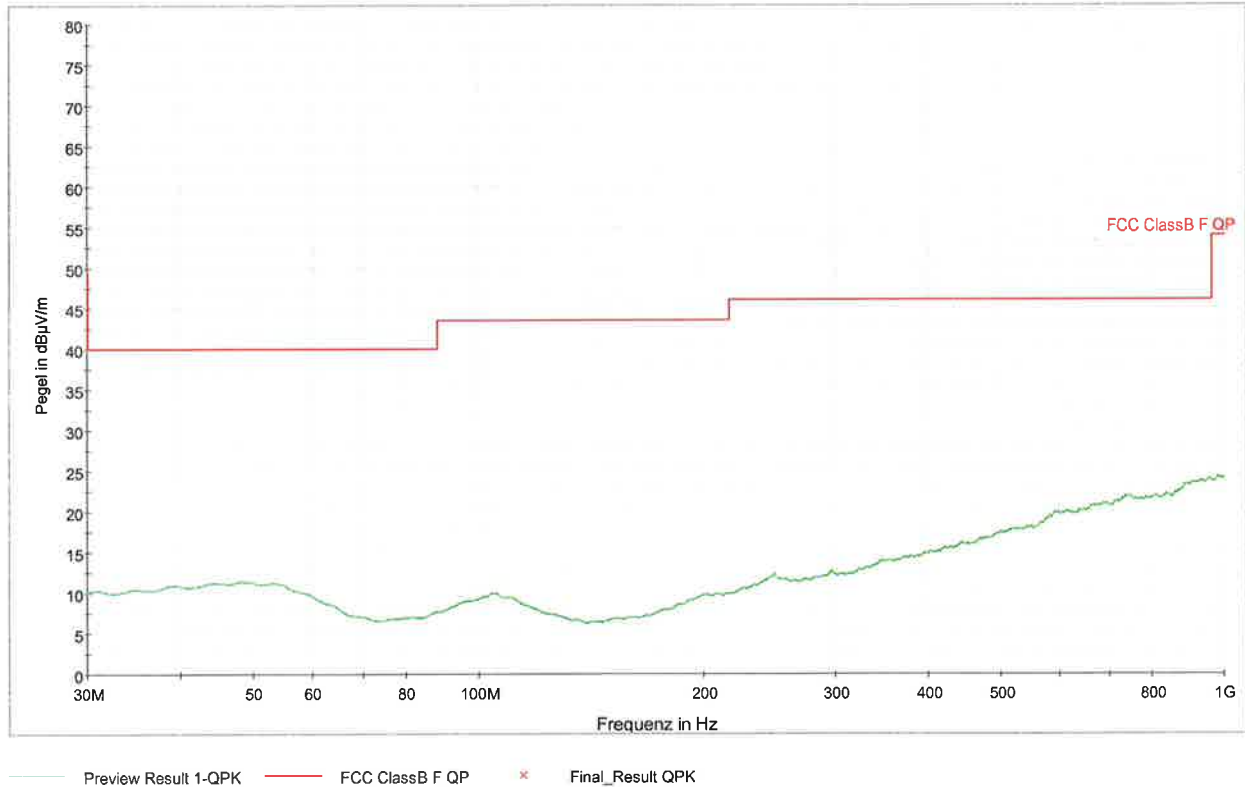

LIMIT

see page 13

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 4 (2441,8 MHz) – average values above 1 GHz are shown in magenta – green = peak

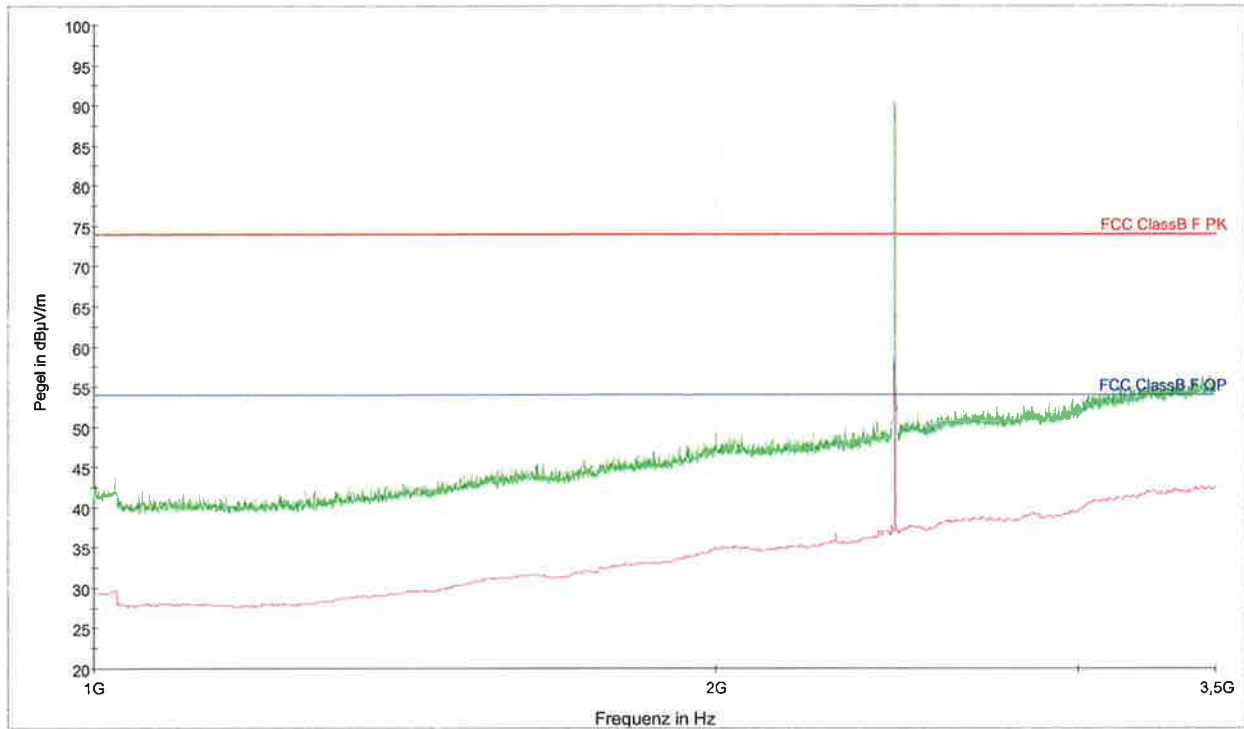

Preview Result 2-AVG Preview Result 1-PK+ FCC ClassB F PK FCC ClassB F QP

LIMIT

see page 13

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 4 (2441,8 MHz) – average values above 1 GHz are shown in magenta – green = peak

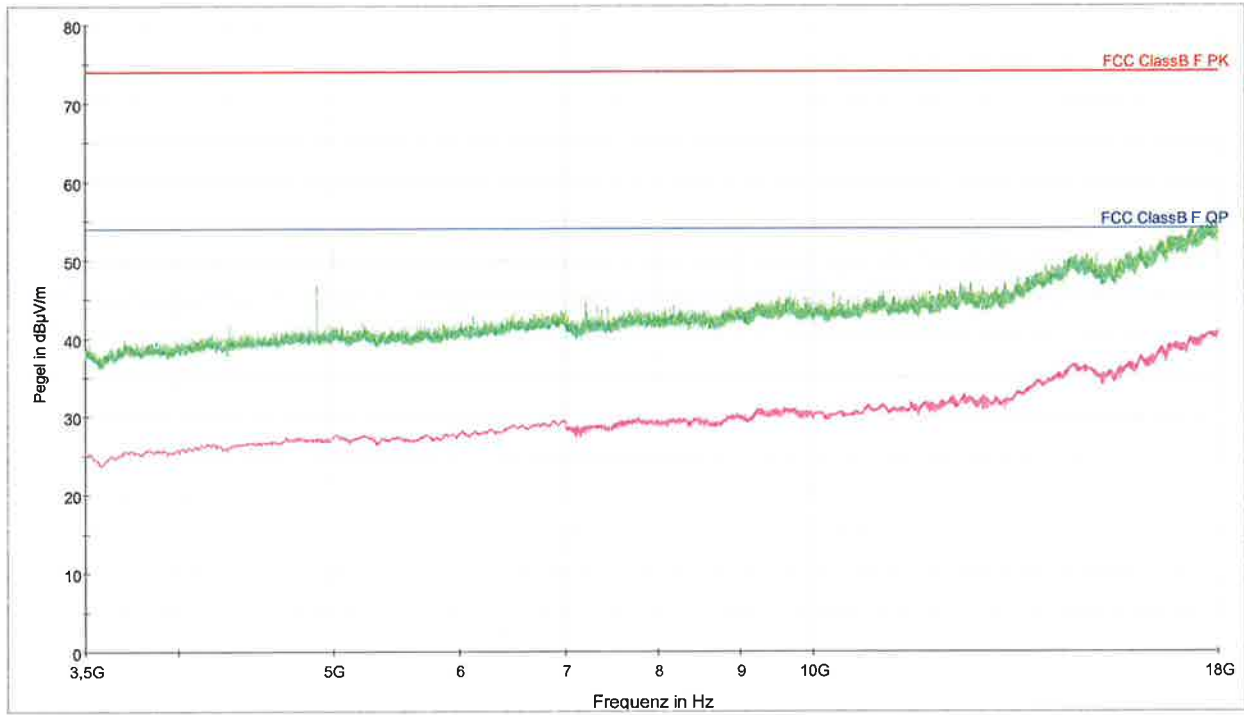

— Preview Result 2-AVG — Preview Result 1-PK+ — FCC ClassB F PK
— FCC ClassB F QP × Final_Result PK+ + Final_Result AVG

LIMIT

see page 13


Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz
Channel 10 (2470-25 MHz)

§ 15.249 (d) (e)

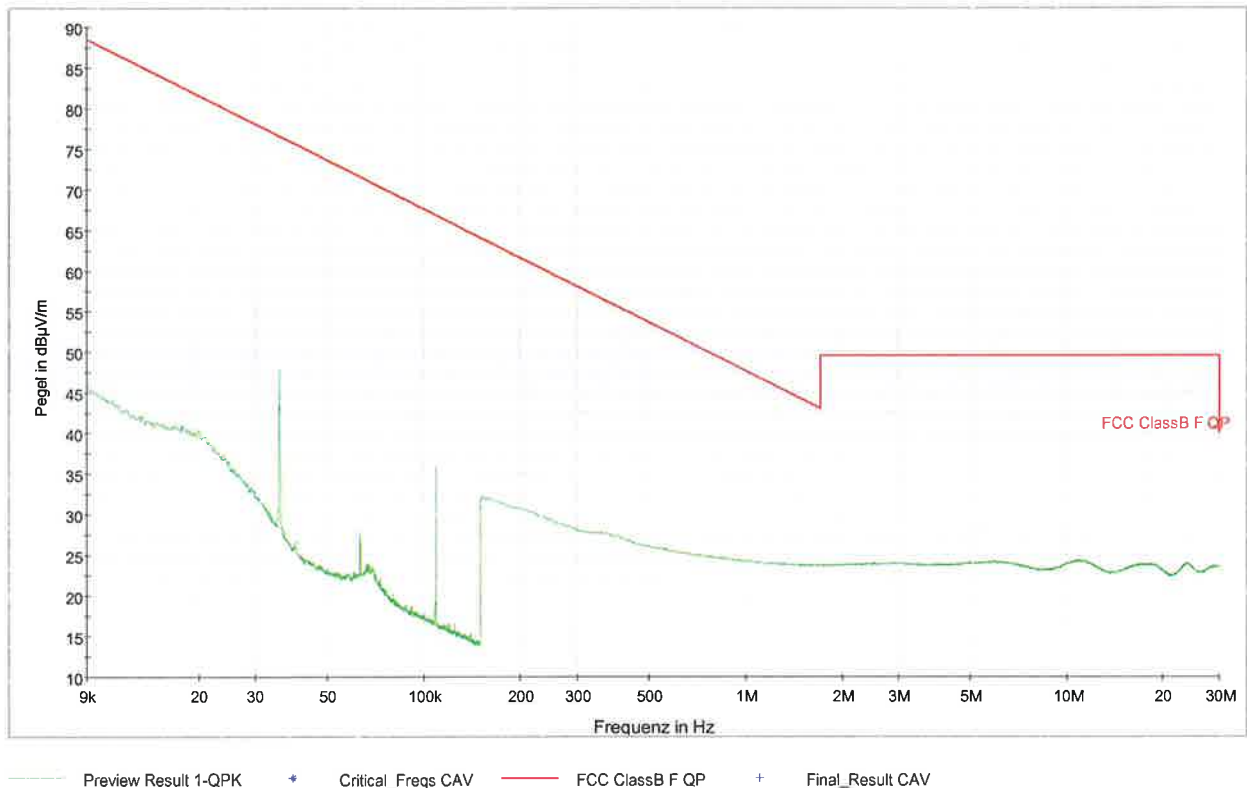

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:
EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 10 (2479,25 MHz) – average values above 1 GHz are shown in magenta – green = peak

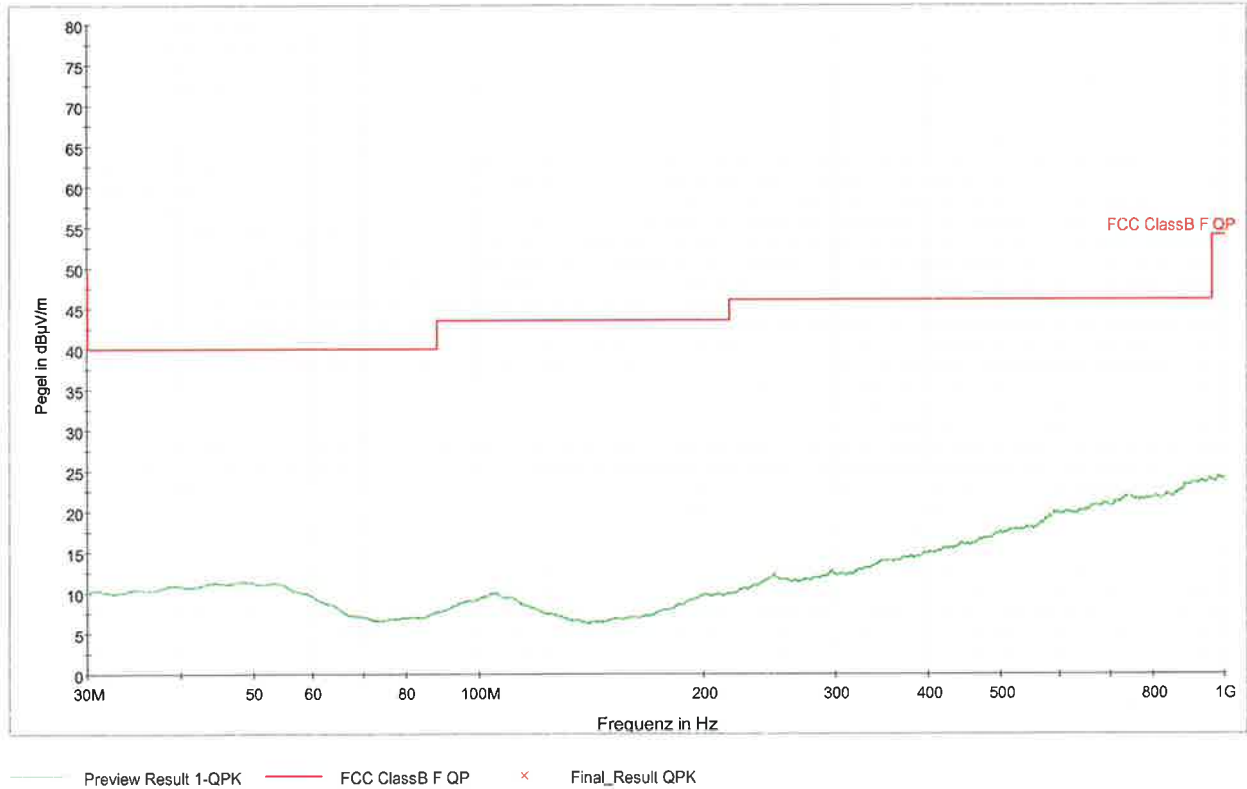

LIMIT

see page 17

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 10 (2479,25 MHz) – average values above 1 GHz are shown in magenta – green = peak

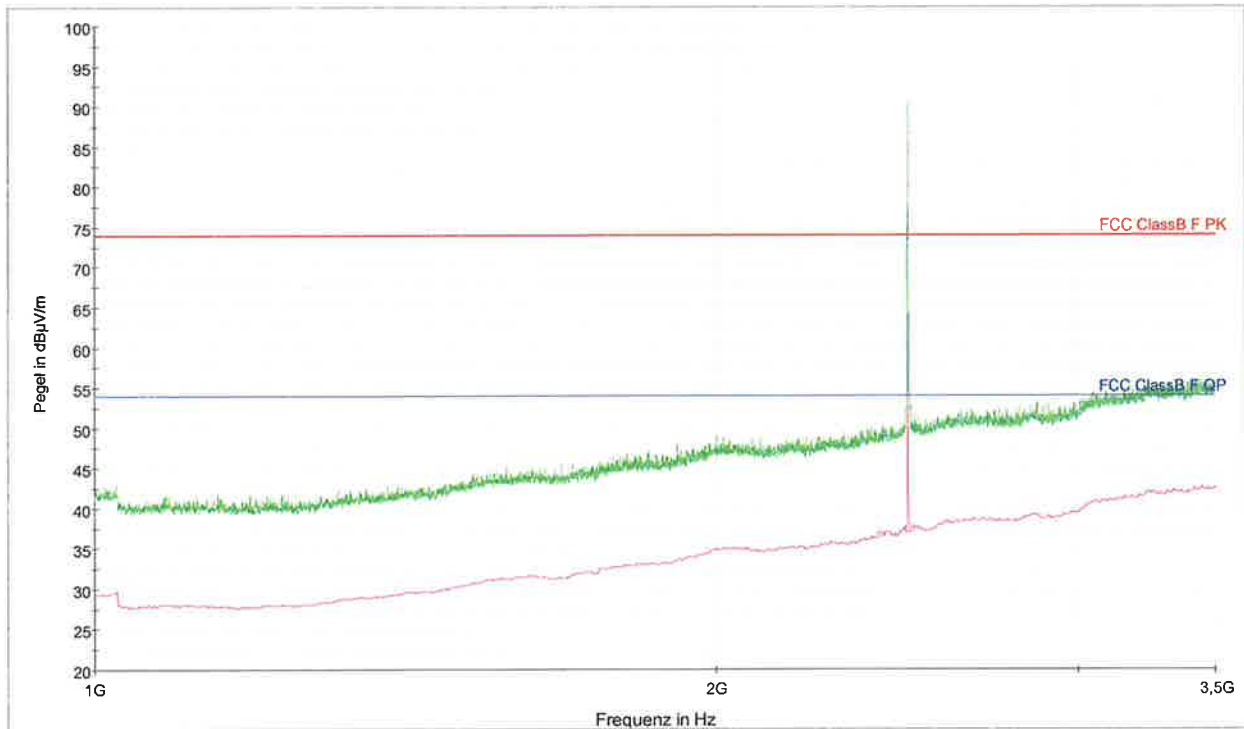

Preview Result 2-AVG Preview Result 1-PK+ FCC ClassB F PK FCC ClassB F QP

LIMIT

see page 17

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 10 (2479,25 MHz) – average values above 1 GHz are shown in magenta – green = peak

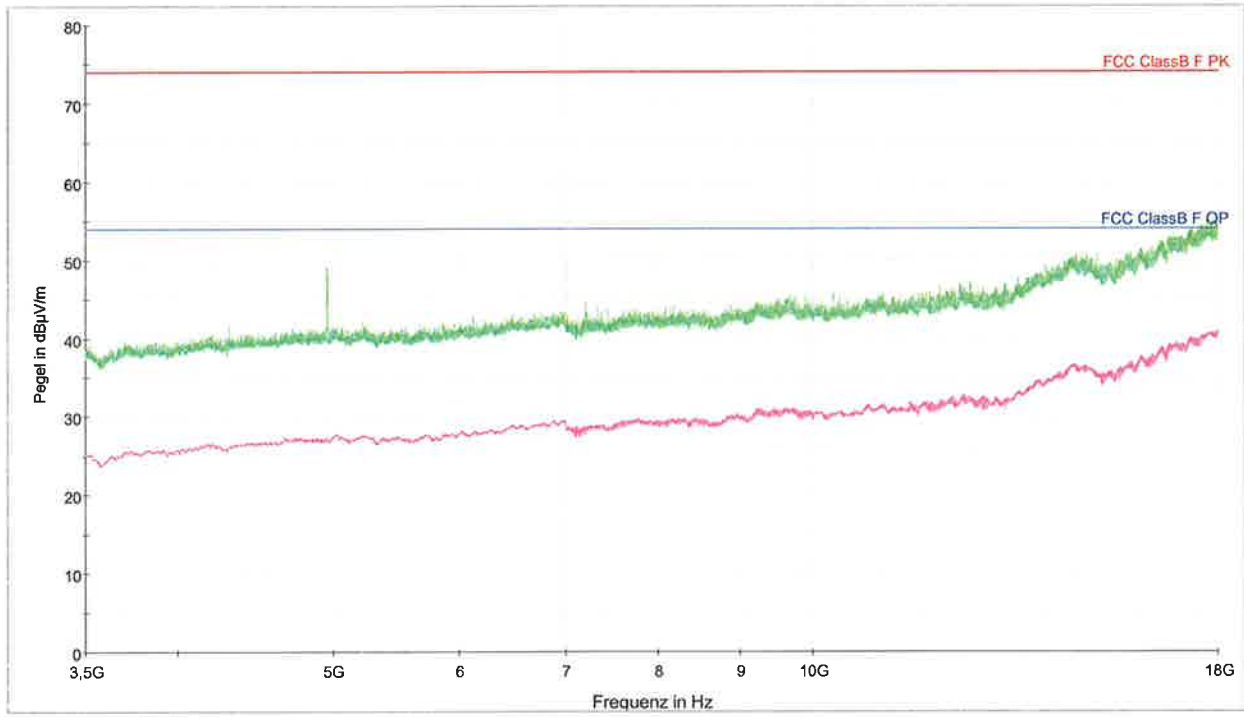

— Preview Result 2-AVG × Preview Result 1-PK+ — FCC ClassB F PK
— FCC ClassB F QP + Final_Result PK+ + Final_Result AVG

LIMIT

see page 17

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Appendix 1

Test equipment used

<input type="checkbox"/>	Anechoic Chamber with 3m measurement distance	NT-100	<input type="checkbox"/>	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-173
<input type="checkbox"/>	Stripline according to ISO 11452-5	NT-108	<input type="checkbox"/>	Spectrum analyzer – FSP7 9 kHz – 7 GHz	NT-200
<input type="checkbox"/>	MA4000 - Antenna mast 1 - 4 m height	NT-110/1	<input type="checkbox"/>	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
<input type="checkbox"/>	DS - Turntable 0 - 400 ° Azimuth	NT-111/1	<input type="checkbox"/>	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207
<input type="checkbox"/>	CO3000 Controller Mast+Turntable	NT-112/1	<input type="checkbox"/>	Digital Radio Tester CTS55	NT-208
<input type="checkbox"/>	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	<input type="checkbox"/>	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
<input type="checkbox"/>	HFH-Z2 - Loop Antenna 9 kHz - 30 MHz	NT-122	<input type="checkbox"/>	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
<input type="checkbox"/>	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	<input type="checkbox"/>	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
<input type="checkbox"/>	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	<input type="checkbox"/>	Digital Radio Tester Aeroflex 3920	NT-212/1
<input type="checkbox"/>	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	<input type="checkbox"/>	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
<input type="checkbox"/>	3116 - Horn Antenna 18 - 40 GHz	NT-126	<input type="checkbox"/>	RubiSource T&M Timing reference	NT-216
<input type="checkbox"/>	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	<input type="checkbox"/>	Radiocommunication analyzer SWR 1180 MD	NT-217
<input type="checkbox"/>	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	<input type="checkbox"/>	Mixer M19HWD 40 GHz – 60 GHz	NT-218
<input type="checkbox"/>	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	<input type="checkbox"/>	Mixer M12HWD 60 GHz – 90 GHz	NT-219
<input type="checkbox"/>	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	<input type="checkbox"/>	DSO9104 Digital scope	NT-220/1
<input type="checkbox"/>	3146 - Log. Per. Antenna 200 – 1000 MHz	NT-131	<input type="checkbox"/>	TPS 2014 Digital scope	NT-222
<input type="checkbox"/>	VULB 9163 Trilog Antenna 30 – 3000 MHz	NT-131/1	<input type="checkbox"/>	Artificial Ear according to IEC 60318	NT-224
<input type="checkbox"/>	Loop Antenna H-Field	NT-132	<input type="checkbox"/>	1 kHz Sound calibrator	NT-225
<input type="checkbox"/>	Horn Antenna 500 MHz - 2900 MHz	NT-133	<input type="checkbox"/>	B10 - Harmonics and flicker analyzer	NT-232
<input type="checkbox"/>	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	<input type="checkbox"/>	SRM-3000 Spectrum analyzer	NT-233
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	<input type="checkbox"/>	SRM-3006 Spectrum analyzer	NT-233/1a
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	<input type="checkbox"/>	E-field probe SRM 75 MHz – 3 GHz	NT-234
<input type="checkbox"/>	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	<input type="checkbox"/>	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-d
<input type="checkbox"/>	Conical Dipol Antenna PCD8250	NT-138	<input type="checkbox"/>	Hall-Teslameter ETM-1	NT-241
<input type="checkbox"/>	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	<input type="checkbox"/>	EFA-3 H-field- / E-field probe	NT-243
<input type="checkbox"/>	HZ-1 Antenna tripod	NT-150	<input type="checkbox"/>	Field Meter EMR-200 100 kHz – 3 GHz	NT-244
<input type="checkbox"/>	BN 1500 Antenna tripod	NT-151	<input type="checkbox"/>	E-field probe 100 kHz – 3 GHz	NT-245
<input type="checkbox"/>	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	<input type="checkbox"/>	H-field probe 300 kHz – 30 MHz	NT-246


Division:
Industry & Energy

Department: FG

Test report number:
M/FG-16/107

Page: 1 of 4

Date: 03.05.2016

Checked by: 

Appendix 1 (continued)

Test equipment used

<input type="checkbox"/>	E-field probe 3 MHz – 18 GHz	NT-247	<input type="checkbox"/>	Oscillatory Wave Simulator incl. Coupling networks	NT-328a+b+c
<input type="checkbox"/>	H-field probe 27 MHz – 1 GHz	NT-248	<input type="checkbox"/>	BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330
<input type="checkbox"/>	ELT-400 1 Hz – 400 kHz	NT-249	<input type="checkbox"/>	T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331
<input type="checkbox"/>	MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	<input type="checkbox"/>	500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
<input type="checkbox"/>	FCC-2031 EM Injection clamp	NT-251	<input type="checkbox"/>	AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
<input type="checkbox"/>	FCC-2031-DCN Ferrite decoupling network	NT-252	<input type="checkbox"/>	APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
<input type="checkbox"/>	PR50 Current Probe	NT-253	<input type="checkbox"/>	Preamplifier 1 GHz - 4 GHz	NT-335
<input type="checkbox"/>	i310s Current Probe	NT-254/1	<input type="checkbox"/>	Preamplifier for GPS MKU 152 A	NT-336
<input type="checkbox"/>	Fluke 87 V True RMS Multimeter	NT-260	<input type="checkbox"/>	Preamplifier 100 MHz – 23 GHz	NT-337
<input type="checkbox"/>	Model 2000 Digital Multimeter	NT-261	<input type="checkbox"/>	DC Block 10 MHz – 18 GHz Model 8048	NT-338
<input type="checkbox"/>	Fluke 87 V Digital Multimeter	NT-262/1	<input type="checkbox"/>	2-97201 Electronic load	NT-341
<input type="checkbox"/>	ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
<input type="checkbox"/>	ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
<input type="checkbox"/>	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	<input type="checkbox"/>	VDS 200 Mobil-impuls-generator	NT-350
<input type="checkbox"/>	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	<input type="checkbox"/>	LD 200 Mobil-impuls-generator	NT-351
<input type="checkbox"/>	PHE 4500/B Power amplifier	NT-304	<input type="checkbox"/>	MPG 200 Mobil-Impuls-Generators	NT-352
<input type="checkbox"/>	EZ10 T-Artificial Network	NT-305	<input type="checkbox"/>	EFT 200 Mobil-impuls-generator	NT-353
<input type="checkbox"/>	SMG - Signal generator 0,1 - 1000 MHz	NT-310	<input type="checkbox"/>	AN 200 S1 Artificial Network	NT-354
<input type="checkbox"/>	SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	<input type="checkbox"/>	FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
<input type="checkbox"/>	RefRad Reference generator	NT-312	<input type="checkbox"/>	PHE 4500 - Mains impedance network	NT-401
<input type="checkbox"/>	SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	<input type="checkbox"/>	IP 6.2 Coupling filter for data lines (Surge)	NT-403
<input type="checkbox"/>	40 MHz Arbitrary Generator TGA1241	NT-315	<input type="checkbox"/>	TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
<input type="checkbox"/>	Artificial mains network NSLK 8127-PLC	NT-316	<input type="checkbox"/>	ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
<input type="checkbox"/>	PEFT - Burst generator up to 4 kV	NT-320	<input type="checkbox"/>	IP 4 - Capacitive clamp (Burst)	NT-411
<input type="checkbox"/>	ESD 30 System up to 25 kV	NT-321	<input type="checkbox"/>	Highpass-Filter 100 MHz – 3 GHz	NT-412
<input type="checkbox"/>	PSURGE 4.1 Surge generator	NT-324	<input type="checkbox"/>	Highpass-Filter 600 MHz – 4 GHz	NT-413
<input type="checkbox"/>	IMU4000 Immunity test system	NT-325/1	<input type="checkbox"/>	Highpass-Filter 1250 MHz – 4 GHz	NT-414
<input type="checkbox"/>	VCS 500-M6 Surge-Generator	NT-326	<input type="checkbox"/>	Highpass-Filter 1800 MHz – 16 GHz	NT-415


Division:
Industry & Energy

Department: FG

Test report number:
M/FG-16/107

Page: 2 of 4

Date: 03.05.2016

Checked by: 

Appendix 1 (continued)

Test equipment used

<input type="checkbox"/>	Highpass-Filter 3500 MHz – 18 GHz	NT-416	<input type="checkbox"/>	FCC-801-S25 Coupling decoupling network	NT-462
<input type="checkbox"/>	RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	<input type="checkbox"/>	FCC-801-T4 Coupling decoupling network	NT-463
<input type="checkbox"/>	RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	<input type="checkbox"/>	FCC-801-C1 Coupling decoupling network	NT-464
<input type="checkbox"/>	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	<input type="checkbox"/>	SW 9605 - Current probe 150 kHz – 30 MHz	NT-465/1
<input type="checkbox"/>	RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	<input type="checkbox"/>	95242-1 – Current probe 1 MHz – 400 MHz	NT-468
<input type="checkbox"/>	RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	<input type="checkbox"/>	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471
<input type="checkbox"/>	RF-Attenuator 30 dB	NT-424	<input type="checkbox"/>	GA 1240 Power amplifier according to EN 61000-4-16	NT-480
<input type="checkbox"/>	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	<input type="checkbox"/>	Coupling networks according to EN 61000-4-16	NT-481 - NT-483
<input type="checkbox"/>	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	<input type="checkbox"/>	Van der Hoofden Test Head	NT-484
<input type="checkbox"/>	RF-Attenuator 6 dB	NT-428	<input type="checkbox"/>	PC P4 3 GHz Test computer	NT-500
<input type="checkbox"/>	RF-Attenuator 0 dB - 81 dB	NT-429	<input type="checkbox"/>	PC P4 1700 MHz Notebook	NT-505
<input type="checkbox"/>	WRU 27 - Band blocking 27 MHz	NT-430	<input type="checkbox"/>	Monitoring camera with Monitor	NT-511
<input type="checkbox"/>	WHJ450C9 AA - High pass 450 MHz	NT-431	<input type="checkbox"/>	ES-K1 Version 1.71 SP2 Test software	NT-520
<input type="checkbox"/>	WHJ250C9 AA - High pass 250 MHz	NT-432	<input type="checkbox"/>	EMC32 Version 9.26.01 Test software	NT-520/1
<input type="checkbox"/>	RF-Load 150 W	NT-433	<input type="checkbox"/>	SRM-TS Version 1.3 software for SRM-3000	NT-522
<input type="checkbox"/>	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	<input type="checkbox"/>	SRM-TS Version 1.3.1 software for SRM-3006	NT-522/1
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-436	<input type="checkbox"/>	Spitzenberger und Spies Test software V3.4	NT-525
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-437	<input type="checkbox"/>	Noise power test apparatus according to EN 55014	NT-530
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 10 dB	NT-438	<input type="checkbox"/>	Vertical coupling plane (ESD)	NT-531
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 20 dB	NT-439	<input type="checkbox"/>	Test cable #4 for EN 61000-4-6	NT-553
<input type="checkbox"/>	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	<input type="checkbox"/>	Test cable #3 for conducted emission	NT-554
<input type="checkbox"/>	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	<input type="checkbox"/>	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556
<input type="checkbox"/>	Power Divider 6 dB/1 W/50 Ohm	NT-443	<input type="checkbox"/>	Test cable #8 Sucoflex 104EA	NT-559
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-444	<input type="checkbox"/>	Test cable #9 (for outdoor measurements)	NT-580
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-445	<input type="checkbox"/>	Test cable #10 (for outdoor measurements)	NT-581
<input type="checkbox"/>	Tube imitations according to EN 55015	NT-450	<input type="checkbox"/>	Test cable #13 Sucoflex 104PE	NT-584
<input type="checkbox"/>	FCC-801-M3-16A Coupling decoupling network	NT-458	<input type="checkbox"/>	Test cable #21 for SRM-3000	NT-592
<input type="checkbox"/>	FCC-801-M2-50A Coupling decoupling network	NT-459	<input type="checkbox"/>	Shield chamber	NT-600
<input type="checkbox"/>	FCC-801-M5-25 Coupling decoupling network	NT-460	<input type="checkbox"/>	Climatic chamber	M-1200
<input type="checkbox"/>	FCC-801-AF10 Coupling decoupling network	NT-461			


Division:
Industry & Energy

Department: FG

Test report number:
M/FG-16/107

Page: 3 of 4

Date: 03.05.2016

Checked by: 

Appendix 1 (continued) Test equipment used

<input type="checkbox"/>	Anechoic Chamber 3 m / 5 m measuring distance	EMV-100	<input type="checkbox"/>	Log.per Antenna 80-2700 MHz STLP 9128 E special	EMV-304
<input type="checkbox"/>	Turntabel 6 m diameter	EMV-101	<input type="checkbox"/>	Log.per Antenna 0,7 – 9 GHz STLP9149	EMV-305
<input type="checkbox"/>	Antenna mast 1 – 4 m	EMV-102	<input type="checkbox"/>	Load Dump Generator LD 200N	EMV-350
<input type="checkbox"/>	Mast and Turntable controller FC-06	EMV-103	<input type="checkbox"/>	Ultra Compact Symulator UCS 200N100	EMV-351
<input type="checkbox"/>	EMC Video/Audiosystem	EMV-104	<input type="checkbox"/>	Automotive Power fail module PFM 200N100.1	EMV-352
<input type="checkbox"/>	EMC Software EMC32 V9.26.01	EMV-105	<input type="checkbox"/>	Voltage Drop Symulator VDS 200Q100	EMV-353
<input type="checkbox"/>	Hornantenna 1 – 18 GHz HF 907	EMV-110	<input type="checkbox"/>	Arb. Generator AutoWave	EMV-354
<input type="checkbox"/>	Antennapre.amp. 1 – 18 GHz ERZ-LNA0200-1800-30-2	EMV-111	<input type="checkbox"/>	Ultra Compact Symulator UCS 500N7	EMV-355
<input type="checkbox"/>	Trilog Antenna 30-3000 MHz VULB9163	EMV-112	<input type="checkbox"/>	Coupling decoupling network CNI 503B7 / 32 A	EMV-356
<input type="checkbox"/>	Monopol 9 kHz – 30 MHz VAMP 9243	EMV-113	<input type="checkbox"/>	Coupling decoupling network CNI 503B7 / 63 A	EMV-357
<input type="checkbox"/>	Antennapre.amp 18 – 40 GHz BBV 9721	EMV-114	<input type="checkbox"/>	Telecom Surge Generator TSurge 7	EMV-358
<input type="checkbox"/>	DC Artificial Network PVDC 8300	EMV-150	<input type="checkbox"/>	Coupling decoupling network CNI 508N2	EMV-359
<input type="checkbox"/>	AC Artificial Network NNLK 8121 RC	EMV-151	<input type="checkbox"/>	Coupling decoupling network CNV 504N2.2	EMV-360
<input type="checkbox"/>	EMI Receiver ESR26	EMV-200	<input type="checkbox"/>	Immunity generator NSG4060/NSG4060-1	EMV-361
<input type="checkbox"/>	Signalgenerator 9 kHz – 40 GHz N5173B	EMV-201	<input type="checkbox"/>	Coupling network CDND M316-2	EMV-362
<input type="checkbox"/>	GPS Frequency normal B-88	EMV-202	<input type="checkbox"/>	Coupling network CT419-5	EMV-363
<input type="checkbox"/>	DC Power supply N5745A	EMV-203	<input type="checkbox"/>	ESD Generator NSG 437	EMV-364
<input type="checkbox"/>	DC Power supply N5745A	EMV-204	<input type="checkbox"/>	Pulse Limiter VTSD 9561-F BNC	EMV-405
<input type="checkbox"/>	Spektrum Analyzator FSV40	EMV-205	<input type="checkbox"/>	Transient emission BSM200N40+BS200N100	EMV-450+451
<input type="checkbox"/>	Thd Multimeter Model 2015	EMV-206	<input type="checkbox"/>	Cap. Coupling Clamp HFK	EMV-455
<input type="checkbox"/>	Poweramplifier PAS15000	EMV-207/abc	<input type="checkbox"/>	Mag. Field System MS100N+MC26100+MC2630	EMV-456-458
<input type="checkbox"/>	Inrush Current Source	EMV-208/abc	<input type="checkbox"/>	Coupling network CDN M2-100A	EMV-459
<input type="checkbox"/>	Arb.-generator Sycore	EMV-209	<input type="checkbox"/>	Coupling network CDN M3-32A	EMV-460
<input type="checkbox"/>	Harmonics/Flicker analyzer ARS 16/3	EMV-210	<input type="checkbox"/>	Coupling network CDN M5-100A	EMV-461
<input type="checkbox"/>	HF- Ampflifier 9 kHz-250 MHz BBA150	EMV-300	<input type="checkbox"/>	Current Clamp CIP 9136A	EMV-462
<input type="checkbox"/>	HF- Amplifier 80 -1000 MHz BBA150	EMV-301	<input type="checkbox"/>	DC Artificial Network HV-AN 150	EMV-464+465
<input type="checkbox"/>	HF- Amplifier 0,8 - 6 GHz BBA150	EMV-302	<input type="checkbox"/>	Coupling Clamp EM 101	EMV-466
<input type="checkbox"/>	High Power Ant. 20-200 MHz VHBD 9134	EMV-303	<input type="checkbox"/>	Decoupling Clamp FTC 101	EMV-467
			<input type="checkbox"/>	Power attenuator DG 250 W 6 GHz 6 dB	EMV-469

Division:
Industry & Energy

Department: FG

Test report number:
M/FG-16/107

Page: 4 of 4

Date: 03.05.2016

Checked by: 

Appendix 2 Photodocumentation

Description: General view #1

Division:
Industry & Energy

Department: FG

Test report reference:
M/FG-16/107

Page: 1 of 7

Date: 03.05.2016

checked by: 



Appendix 2 Photodocumentation

Description: General view #2

Division:
Industry & Energy

Department: FG

Test report reference:
M/FG-16/107

Page: 2 of 7

Date: 03.05.2016

checked by: _____



Appendix 2 Photodocumentation

Description: Battery compartment opened


Division:
Industry & Energy


Department: FG

Test report reference:
M/FG-16/107

Page: 3 of 7

Date: 03.05.2016

checked by: 

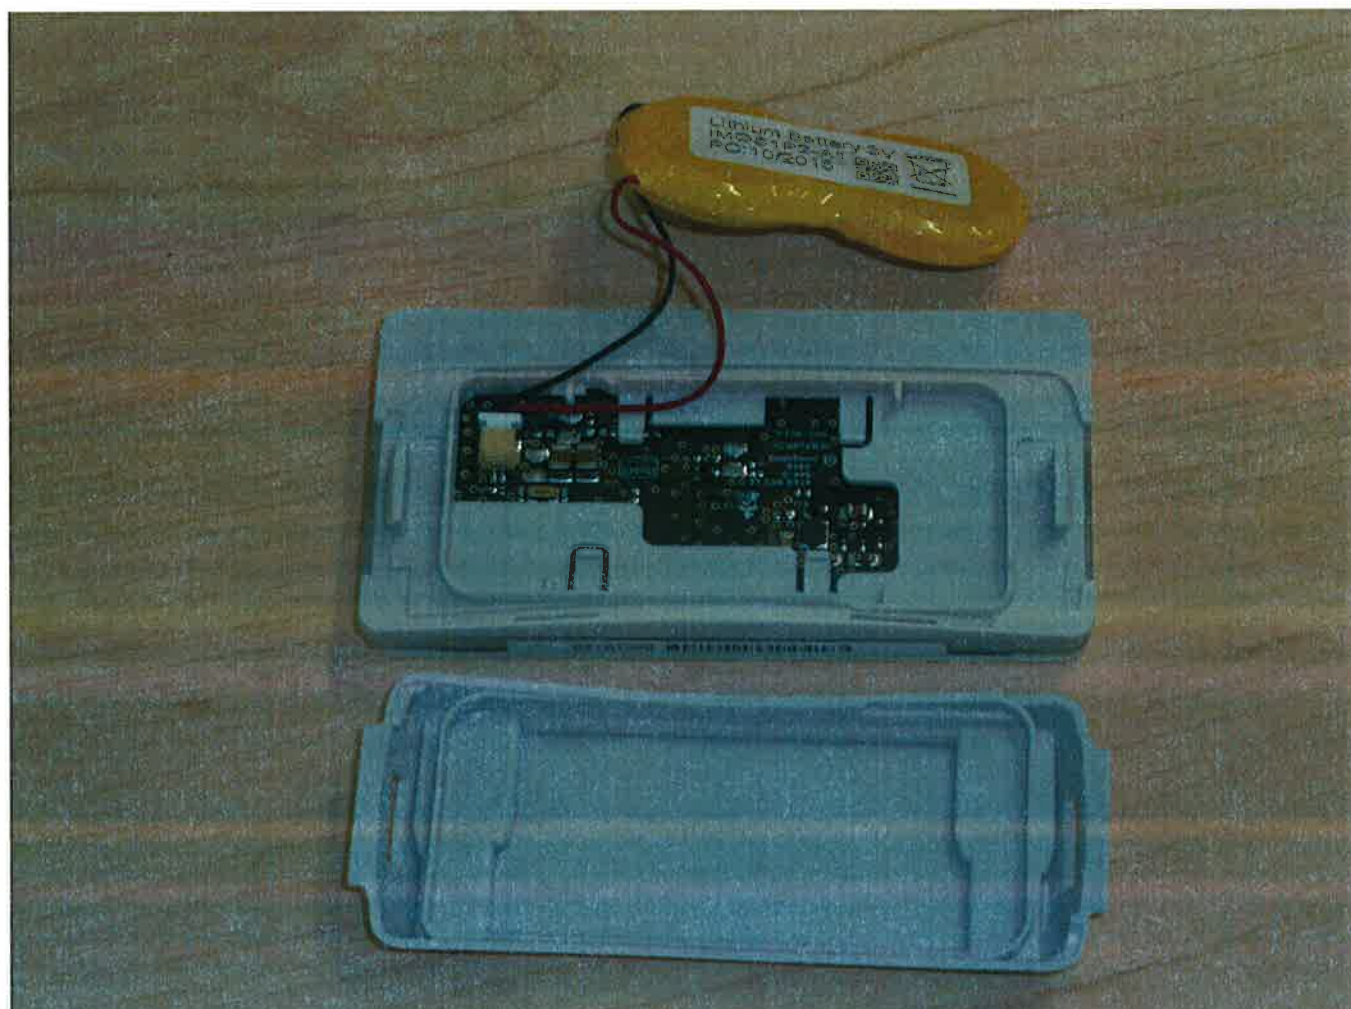

Appendix 2 Photodocumentation

Description: Case opened

Division:
Industry & Energy

Department: FG

Test report reference:
M/FG-16/107

Page: 4 of 7

Date: 03.05.2016

checked by:



Appendix 2 Photodocumentation

Description: Inside view

Division:
Industry & Energy


Department: FG

Test report reference:
M/FG-16/107

Page: 5 of 7

Date: 03.05.2016

checked by: _____

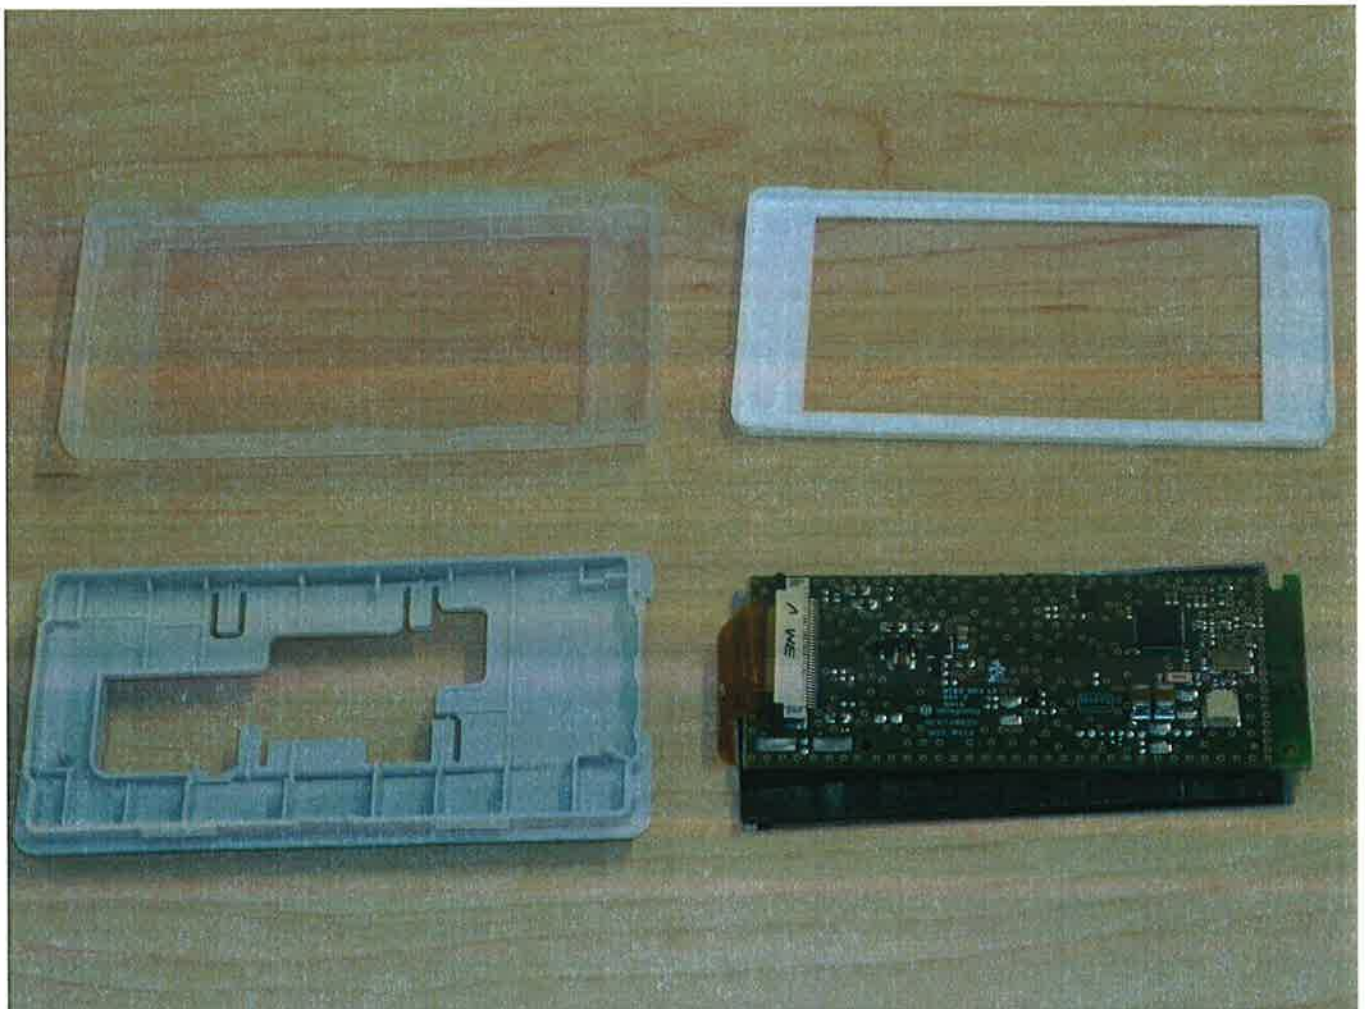

Appendix 2 Photodocumentation

Description: Test setup below 1GHz

Division:
Industry & Energy


Department: FG

Test report reference:
M/FG-16/107

Page: 6 of 7

Date: 03.05.2016

checked by: 

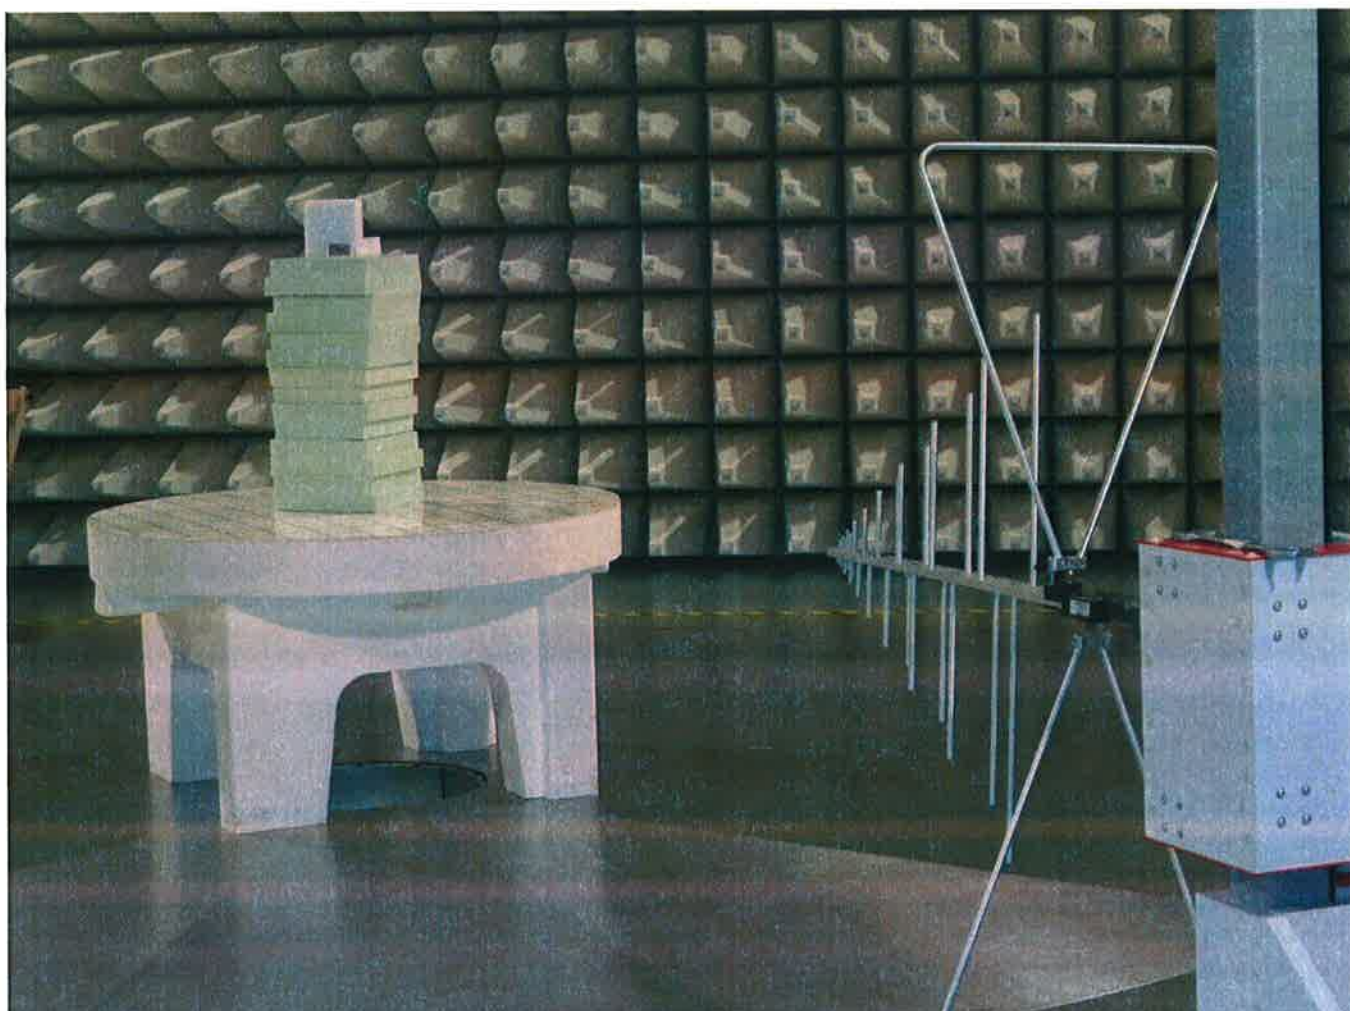

Appendix 2 Photodocumentation

Description: Test setup above 1GHz

Division:
Industry & Energy

Department: FG

Test report reference:
M/FG-16/107

Page: 7 of 7

Date: 03.05.2016

checked by: 

