

# TEST REPORT

**Product Name** : WiFi 6 communication module  
**Model Number** : ZK-7921, ZK-7921AU-TV, ZK-7921US,  
ZK-7921-M2AE, ZK-7921-DG, ZK-7921-DGX,  
ZK-7921-PC  
**FCC ID** : 2ACWK792X

**Prepared for** : CT UNITE COMMUNICATION TECHNOLOGY LTD  
**Address** : 308.312, Jindong, industrial village, No. 3838, Nanshan  
Avenue, Nanshan District, Shenzhen, China

**Prepared by** : EMTEK (SHENZHEN) CO., LTD.  
**Address** : Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

**Report Number** : ENS2209160004W00204R  
**Date(s) of Tests** : September 28, 2022 to November 28, 2022  
**Date of issue** : November 30, 2022

## TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2 EUT TECHNICAL DESCRIPTION.....</b>	<b>5</b>
<b>3 SUMMARY OF TEST RESULT.....</b>	<b>7</b>
<b>4 TEST METHODOLOGY.....</b>	<b>8</b>
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
4.3 DESCRIPTION OF TEST MODES.....	9
<b>5 FACILITIES AND ACCREDITATIONS.....</b>	<b>13</b>
5.1 FACILITIES.....	13
5.2 LABORATORY ACCREDITATIONS AND LISTINGS.....	13
<b>6 TEST SYSTEM UNCERTAINTY.....</b>	<b>14</b>
<b>7 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>15</b>
7.1 RADIO FREQUENCY TEST SETUP.....	15
7.2 RADIO FREQUENCY TEST SETUP.....	15
7.3 CONDUCTED EMISSION TEST SETUP.....	17
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	18
7.5 SUPPORT EQUIPMENT.....	18
<b>8 TEST REQUIREMENTS.....</b>	<b>19</b>
8.1 BANDWIDTH MEASUREMENT.....	19
8.2 MAXIMUM CONDUCTED OUTPUT POWER.....	220
8.3 MAXIMUM PEAK POWER DENSITY.....	315
8.4 UNDESIRABLE RADIATED SPURIOUS EMISSION.....	407
8.5 POWER LINE CONDUCTED EMISSIONS.....	444
8.6 ANTENNA APPLICATION.....	445

## Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2209160004W00204R	/	Original Report

# 1 TEST RESULT CERTIFICATION

Applicant : CT UNITE COMMUNICATION TECHNOLOGY LTD  
 Address : 308.312, Jindong, industrial village, No. 3838, Nanshan Avenue, Nanshan District, Shenzhen, China  
 Manufacturer : CT UNITE COMMUNICATION TECHNOLOGY LTD  
 Address : 308.312, Jindong, industrial village, No. 3838, Nanshan Avenue, Nanshan District, Shenzhen, China  
 EUT : WiFi 6 communication module  
 Model Name : ZK-7921, ZK-7921AU-TV, ZK-7921US, ZK-7921-M2AE, ZK-7921-DG, ZK-7921-DGX, ZK-7921-PC  
 (Note: The only difference in models is the model's name, all other information is the same. The main test model applied for this report is ZK-7921)  
 Trademark : 


**Measurement Procedure Used:**


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	<b>PASS</b>


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407.


The test results of this report relate only to the tested sample identified in this report.

Date of Test : September 28, 2022 to November 28, 2022

Prepared by :   
 Una Yu/Editor

Reviewer :   
 Joe Xia/Supervisor

Approved & Authorized Signer :   
 Lisa Wang/Manager



## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	WiFi 6 communication module
Model Number	ZK-7921, ZK-7921AU-TV, ZK-7921US, ZK-7921-M2AE, ZK-7921-DG, ZK-7921-DGX, ZK-7921-PC (Note: The only difference in models is the model's name, all other information is the same. The main test model applied for this report is ZK-7921)
WLAN Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(160MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ax(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ax(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ax(80MHz channel bandwidth)
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 600 Mbps 802.11ac/ax:up to 1.733Gbps
Modulation	<input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n <input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac/ax
Frequency Range	5150MHz-5250MHz Band
	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a <input checked="" type="checkbox"/> 5180-5240MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5190-5230MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5180-5240MHz for 802.11ac(HT20) <input checked="" type="checkbox"/> 5190-5230MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5210MHz for 802.11ac(HT80) <input checked="" type="checkbox"/> 5250MHz for 802.11ac(HT160) <input checked="" type="checkbox"/> 5180-5240MHz for 802.11ax(HT20) <input checked="" type="checkbox"/> 5190-5230MHz for 802.11ax(HT40) <input checked="" type="checkbox"/> 5210MHz for 802.11ax(HT80)
	5250MHz-5350MHz Band
	<input checked="" type="checkbox"/> 5260-5320MHz for 802.11a <input checked="" type="checkbox"/> 5260-5320MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5270-5310MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5260-5320MHz for 802.11ac(HT20) <input checked="" type="checkbox"/> 5270-5310MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5290MHz for 802.11ac(HT80) <input checked="" type="checkbox"/> 5250MHz for 802.11ac(HT160) <input checked="" type="checkbox"/> 5260-5320MHz for 802.11ax(HT20) <input checked="" type="checkbox"/> 5270-5310MHz for 802.11ax(HT40) <input checked="" type="checkbox"/> 5290MHz for 802.11ax(HT80)

	5470MHz-5725MHz Band	
	<input checked="" type="checkbox"/> 5500-5700MHz for 802.11a <input checked="" type="checkbox"/> 5500-5700MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5510-5670MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5500-5700MHz for 802.11ac(HT20) <input checked="" type="checkbox"/> 5510-5670MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5530-5610MHz for 802.11ac(HT80) <input checked="" type="checkbox"/> 5570MHz for 802.11ac(HT160) <input checked="" type="checkbox"/> 5500-5700MHz for 802.11ax(HT20) <input checked="" type="checkbox"/> 5510-5670MHz for 802.11ax(HT40) <input checked="" type="checkbox"/> 5530-5610MHz for 802.11ax(HT80)	
	<input checked="" type="checkbox"/> UNII-3 with 5725MHz-5850MHz Band	
	<input checked="" type="checkbox"/> 5745-5825MHz for 802.11a <input checked="" type="checkbox"/> 5745-5825MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5755-5795MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5745-5825MHz for 802.11ac(HT20) <input checked="" type="checkbox"/> 5755-5795MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5775MHz for 802.11ac(HT80) <input checked="" type="checkbox"/> 5745-5825MHz for 802.11ax(HT20) <input checked="" type="checkbox"/> 5755-5795MHz for 802.11ax(HT40) <input checked="" type="checkbox"/> 5775MHz for 802.11ax(HT80)	
<b>TPC Function</b>	<input type="checkbox"/> Applicable	<input checked="" type="checkbox"/> Not Applicable
<b>Antenna Type</b>	PCB Antenna	
<b>Antenna Gain</b>	ANT1: 3.92dBi , ANT2: 3.92dBi	
<b>Power Supply</b>	DC 5V	
<b>Temperature Range</b>	-10°C ~85°C	

*Note: for more details, please refer to the user's manual of the EUT.*

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	N/A	
15.407(a) 15.203	Antenna Application	PASS	
<p>NOTE1: N/A (Not Applicable).</p> <p>NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v02r01, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.</p>			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ACWK792X filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

### 4.2 MEASUREMENT EQUIPMENT USED

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2022/5/14	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2022/5/14	1Year
Pre-Amplifie	Lunar EM	LNA30M3G-25	J1010000007 0	2022/5/14	1Year
Pre-Amplifier	HP	8447F	2944A07999	2022/5/14	1Year
Pre-Amplifie	SKET	LNPA_0118G-45	SK20190518 01	2022/5/14	1Year
Pre-Amplifie	Lunar EM	LNA1G18-48	J1011131010 001	2022/5/14	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2021/6/12	2 Year
Bilog Antenna	Schwarzbeck	VULB9163	659	2021/8/22	2 Year
Bilog Antenna	Schwarzbeck	VULB9163	712	2021/7/5	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2021/6/12	2 Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2021/6/12	2 Year
Wideband Radio Communication Tester	R&S	CMW500	140822	2022/5/15	1Year
Thermometer	Hegao	HTC-1	\	2022/5/17	1Year

#### For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal Analyzer	Agilent	N9010A	MY53470879	2022/5/14	1Year
Vector Signal Generator	Agilent	N5182B	MY53050878	2022/5/14	1Year
Analog Signal Generator	Agilent	N5171B	MY53050553	2022/5/14	1Year
Power Meter	Agilent	PS-X10-100	\	2022/5/15	1Year
Blocking Box	THEDA	AD211	TW5451140	2022/5/14	1Year
Switchgroup	THEDA	ETF-025(VASC6 )	TW5451008	N/A	N/A
MIMO Matrix Switch	THEDA	4P5TM18	TW5451009	N/A	N/A
Thermometer	Hegao	HTC-1	\	2022/5/17	1Year



### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### Wifi 5G with 5150-5250MHz

Frequency and Channel list for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (40)/ 802.11ac/ax(40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac(80)/802.11ax(80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

**Test** Frequency and Channel for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

**Test** Frequency and channel for 802.11n (40)/ 802.11ac/ax(40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

**Test** Frequency and channel for 802.11ac(80)/802.11ax(80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

**Wifi 5G with 5250-5350MHz**

Frequency and Channel list for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

Frequency and Channel list for 802.11n (40)/ 802.11ac/ax(40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Frequency and Channel list for 802.11ac(80)/802.11ax(80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

**Test** Frequency and Channel for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	56	5280	64	5320

**Test** Frequency and channel for 802.11n (40)/ 802.11ac/ax(40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

**Test** Frequency and channel for 802.11ac(80)/802.11ax(80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

**Wifi 5G with 5470-5725MHz**

Frequency and Channel list for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640		

Frequency and Channel list for 802.11n (40)/ 802.11ac/ax(40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670
110	5550	126	5630		

Frequency and Channel list for 802.11ac(80)/802.11ax(80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610		

**Test** Frequency and Channel for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	140	5700

**Test** Frequency and channel for 802.11n (40)/ 802.11ac/ax(40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510			134	5670

**Test** Frequency and channel for 802.11ac(80)/802.11ax(80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610		

**Wifi 5G with 5725MHz-5850MHz**

Frequency and Channel list for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (40)/ 802.11ac/ax(40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac(80)/802.11ax(80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

**Test** Frequency and Channel for 802.11a/n(20)/802.11ac(20)/802.11ax(20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

**Test** Frequency and channel for 802.11n (40)/ 802.11ac/ax(40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755			159	5795

**Test** Frequency and channel for 802.11ac(80)/802.11ax(80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Multi-antenna correlation:

<input checked="" type="checkbox"/>	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
<input type="checkbox"/>	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

ANT1: 3.92dBi , ANT2: 3.92dBi

 ANT1+ANT2: Directional gain =  $10 \log [(10^{3.92/20} + 10^{3.92/20})^2 / 2]$  dBi=6.93dBi

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

**Accredited by FCC**

Designation Number: CN1204

Test Firm Registration Number: 882943

**Accredited by A2LA**

The Certificate Number is 4321.01

**Accredited by Industry Canada**

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

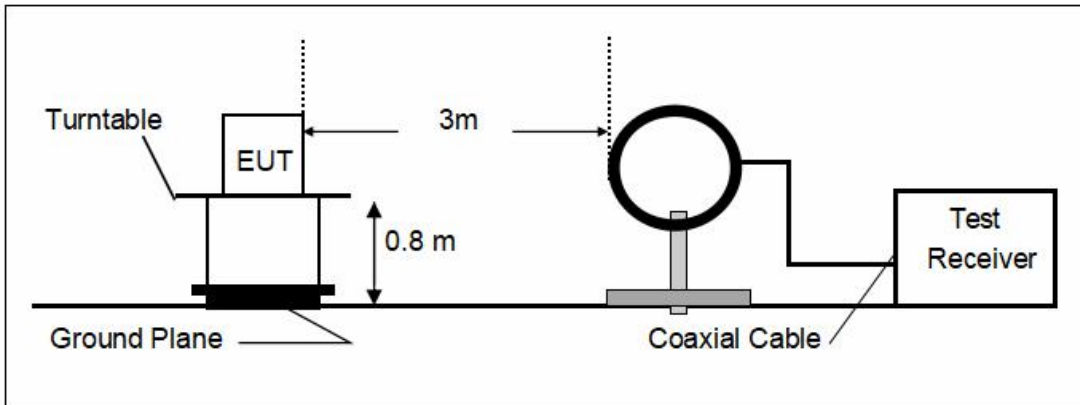

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

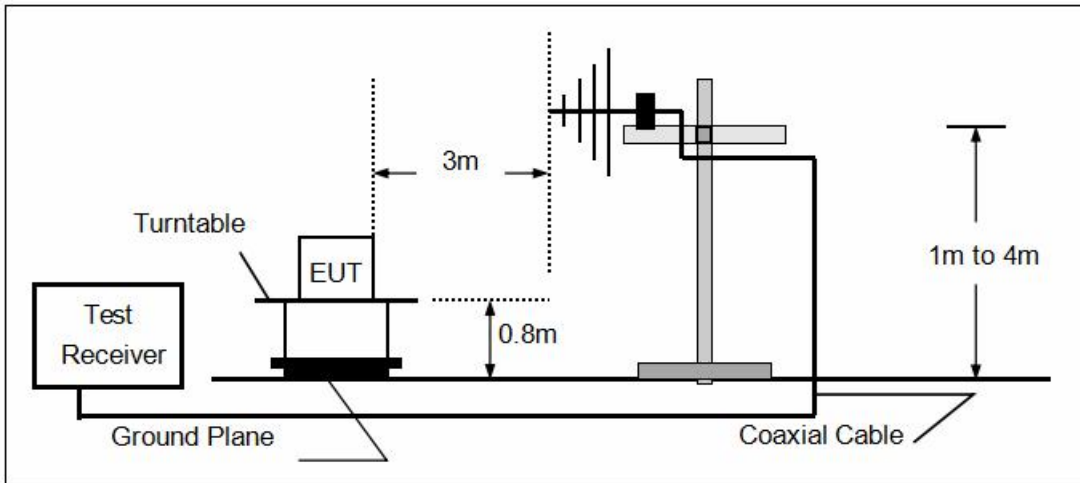

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

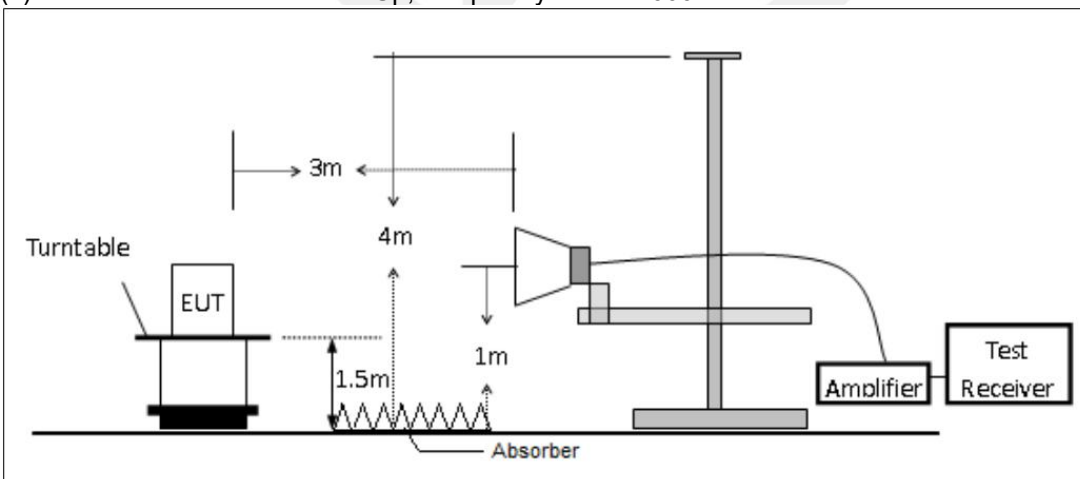




### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

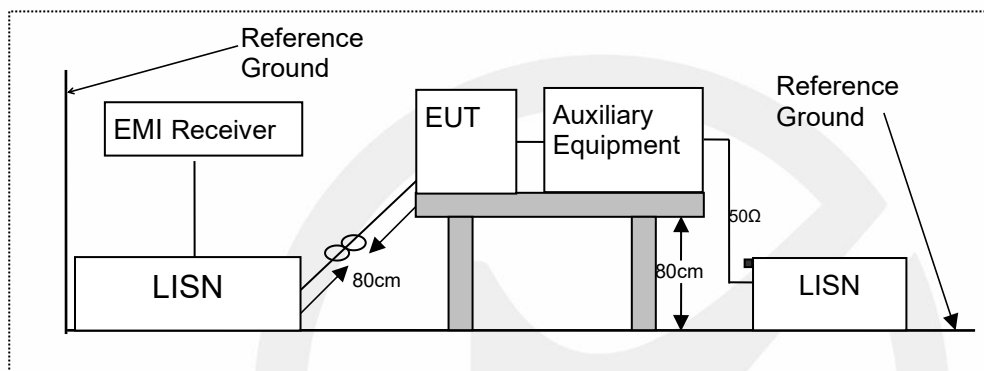

### 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

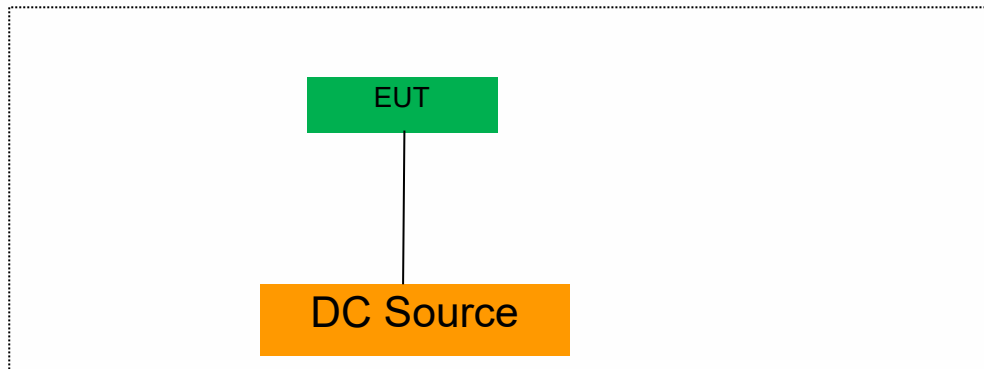

### 7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 BANDWIDTH MEASUREMENT

#### 8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I  
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C  
According to FCC Part 15.407(a)(3) for UNII Band III  
According to FCC Part 15.407(e) for UNII Band III  
According to 789033 D02 Section II(C)  
According to 789033 D02 Section II(D)

#### 8.1.2 Conformance Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

#### 8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

##### 1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW.
4. Set VBW  $\geq 3 \times$  RBW.
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

## 8.1.5 Test Results

**Emission Bandwidth (26dB)**

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	26.08	5167.36	5193.44	---	---
	Ant2	5180	24.56	5167.28	5191.84	---	---
	Ant1	5200	27.48	5185.92	5213.40	---	---
	Ant2	5200	26.12	5187.56	5213.68	---	---
	Ant1	5240	20.04	5230.00	5250.04	---	---
	Ant2	5240	20.00	5229.96	5249.96	---	---
	Ant1	5260	27.40	5246.28	5273.68	---	---
	Ant2	5260	25.08	5247.08	5272.16	---	---
	Ant1	5280	26.76	5266.12	5292.88	---	---
	Ant2	5280	24.84	5267.88	5292.72	---	---
	Ant1	5320	32.16	5305.92	5338.08	---	---
	Ant2	5320	26.16	5306.84	5333.00	---	---
	Ant1	5500	24.80	5487.48	5512.28	---	---
	Ant2	5500	25.80	5486.80	5512.60	---	---
	Ant1	5580	24.96	5567.28	5592.24	---	---
	Ant2	5580	25.56	5566.80	5592.36	---	---
	Ant1	5700	24.68	5687.36	5712.04	---	---
	Ant2	5700	25.16	5687.52	5712.68	---	---
	Ant1	5745	24.40	5732.56	5756.96	---	---
	Ant2	5745	26.12	5732.32	5758.44	---	---
	Ant1	5785	26.56	5771.24	5797.80	---	---
	Ant2	5785	25.32	5772.36	5797.68	---	---
	Ant1	5825	25.68	5812.32	5838.00	---	---
	Ant2	5825	25.32	5811.92	5837.24	---	---
11N20MIMO	Ant1	5180	25.40	5167.20	5192.60	---	---
	Ant2	5180	24.44	5167.76	5192.20	---	---
	Ant1	5200	25.40	5187.68	5213.08	---	---
	Ant2	5200	25.36	5187.24	5212.60	---	---
	Ant1	5240	20.28	5229.80	5250.08	---	---
	Ant2	5240	20.08	5229.92	5250.00	---	---
	Ant1	5260	24.96	5247.60	5272.56	---	---
	Ant2	5260	24.68	5247.76	5272.44	---	---
	Ant1	5280	25.44	5267.36	5292.80	---	---
	Ant2	5280	23.92	5268.16	5292.08	---	---
	Ant1	5320	25.44	5307.40	5332.84	---	---
	Ant2	5320	25.16	5307.08	5332.24	---	---
	Ant1	5500	25.36	5487.28	5512.64	---	---
	Ant2	5500	24.44	5487.80	5512.24	---	---
	Ant1	5580	25.80	5567.28	5593.08	---	---
	Ant2	5580	24.60	5567.96	5592.56	---	---
	Ant1	5700	25.80	5686.88	5712.68	---	---
	Ant2	5700	24.32	5688.00	5712.32	---	---
	Ant1	5745	25.72	5732.20	5757.92	---	---
	Ant2	5745	25.80	5732.00	5757.80	---	---
	Ant1	5785	26.00	5771.76	5797.76	---	---
	Ant2	5785	25.20	5772.36	5797.56	---	---
	Ant1	5825	26.12	5811.76	5837.88	---	---
	Ant2	5825	25.04	5812.12	5837.16	---	---
11N40MIMO	Ant1	5190	40.72	5169.60	5210.32	---	---

	Ant2	5190	40.48	5169.60	5210.08	---	---
	Ant1	5230	40.72	5209.52	5250.24	---	---
	Ant2	5230	40.32	5209.84	5250.16	---	---
	Ant1	5270	40.80	5249.44	5290.24	---	---
	Ant2	5270	40.48	5249.84	5290.32	---	---
	Ant1	5310	41.04	5289.44	5330.48	---	---
	Ant2	5310	40.16	5289.92	5330.08	---	---
	Ant1	5510	40.88	5489.52	5530.40	---	---
	Ant2	5510	40.08	5489.84	5529.92	---	---
	Ant1	5550	40.96	5529.60	5570.56	---	---
	Ant2	5550	40.00	5530.00	5570.00	---	---
	Ant1	5670	40.88	5649.44	5690.32	---	---
	Ant2	5670	40.48	5649.84	5690.32	---	---
	Ant1	5755	40.88	5734.44	5775.32	---	---
	Ant2	5755	40.48	5734.60	5775.08	---	---
	Ant1	5795	41.20	5774.28	5815.48	---	---
	Ant2	5795	40.32	5774.84	5815.16	---	---
11AC20MIMO	Ant1	5180	25.20	5167.68	5192.88	---	---
	Ant2	5180	25.64	5167.60	5193.24	---	---
	Ant1	5200	25.40	5187.60	5213.00	---	---
	Ant2	5200	24.12	5187.88	5212.00	---	---
	Ant1	5240	20.36	5229.84	5250.20	---	---
	Ant2	5240	20.24	5229.84	5250.08	---	---
	Ant1	5260	24.72	5247.32	5272.04	---	---
	Ant2	5260	24.36	5247.44	5271.80	---	---
	Ant1	5280	24.96	5267.48	5292.44	---	---
	Ant2	5280	24.08	5267.96	5292.04	---	---
	Ant1	5320	26.32	5307.48	5333.80	---	---
	Ant2	5320	24.88	5307.40	5332.28	---	---
	Ant1	5500	25.16	5487.28	5512.44	---	---
	Ant2	5500	24.64	5487.76	5512.40	---	---
	Ant1	5580	24.92	5567.88	5592.80	---	---
	Ant2	5580	24.52	5567.40	5591.92	---	---
	Ant1	5700	25.96	5687.52	5713.48	---	---
	Ant2	5700	24.52	5687.76	5712.28	---	---
	Ant1	5745	26.28	5731.72	5758.00	---	---
	Ant2	5745	24.64	5732.80	5757.44	---	---
Ant1	5785	25.92	5772.20	5798.12	---	---	
Ant2	5785	24.64	5772.76	5797.40	---	---	
Ant1	5825	25.32	5812.56	5837.88	---	---	
Ant2	5825	25.24	5812.80	5838.04	---	---	
11AC40MIMO	Ant1	5190	40.56	5169.68	5210.24	---	---
	Ant2	5190	40.32	5169.76	5210.08	---	---
	Ant1	5230	40.88	5209.60	5250.48	---	---
	Ant2	5230	40.24	5209.76	5250.00	---	---
	Ant1	5270	40.72	5249.52	5290.24	---	---
	Ant2	5270	40.40	5249.76	5290.16	---	---
	Ant1	5310	40.80	5289.68	5330.48	---	---
	Ant2	5310	40.16	5289.92	5330.08	---	---
	Ant1	5510	40.80	5489.60	5530.40	---	---
	Ant2	5510	40.24	5489.92	5530.16	---	---
	Ant1	5550	40.88	5529.68	5570.56	---	---
	Ant2	5550	40.00	5530.00	5570.00	---	---
	Ant1	5670	40.88	5649.60	5690.48	---	---
	Ant2	5670	40.48	5649.84	5690.32	---	---




	Ant1	5755	40.72	5734.60	5775.32	---	---	
	Ant2	5755	40.32	5734.92	5775.24	---	---	
	Ant1	5795	41.28	5774.28	5815.56	---	---	
	Ant2	5795	40.24	5774.84	5815.08	---	---	
11AC80MIMO	Ant1	5210	80.16	5169.84	5250.00	---	---	
	Ant2	5210	80.16	5170.00	5250.16	---	---	
	Ant1	5290	80.48	5249.68	5330.16	---	---	
	Ant2	5290	80.16	5249.84	5330.00	---	---	
	Ant1	5530	80.64	5489.68	5570.32	---	---	
	Ant2	5530	80.16	5489.84	5570.00	---	---	
	Ant1	5610	80.48	5569.68	5650.16	---	---	
	Ant2	5610	80.32	5569.84	5650.16	---	---	
	Ant1	5775	80.96	5734.36	5815.32	---	---	
	Ant2	5775	80.32	5734.84	5815.16	---	---	
11AX20MIMO	Ant1	5180	22.84	5168.64	5191.48	---	---	
	Ant2	5180	25.48	5168.28	5193.76	---	---	
	Ant1	5200	22.48	5188.96	5211.44	---	---	
	Ant2	5200	23.64	5188.24	5211.88	---	---	
	Ant1	5240	20.00	5229.96	5249.96	---	---	
	Ant2	5240	20.00	5230.00	5250.00	---	---	
	Ant1	5260	26.52	5246.32	5272.84	---	---	
	Ant2	5260	23.32	5248.60	5271.92	---	---	
	Ant1	5280	25.36	5265.92	5291.28	---	---	
	Ant2	5280	23.40	5268.36	5291.76	---	---	
	Ant1	5320	23.80	5308.52	5332.32	---	---	
	Ant2	5320	23.72	5307.96	5331.68	---	---	
	Ant1	5500	28.76	5483.96	5512.72	---	---	
	Ant2	5500	23.48	5488.36	5511.84	---	---	
	Ant1	5580	25.32	5566.56	5591.88	---	---	
	Ant2	5580	24.92	5567.88	5592.80	---	---	
	Ant1	5700	30.56	5685.96	5716.52	---	---	
	Ant2	5700	25.48	5688.32	5713.80	---	---	
	Ant1	5745	30.64	5731.08	5761.72	---	---	
	Ant2	5745	25.08	5732.40	5757.48	---	---	
	Ant1	5785	34.16	5768.84	5803.00	---	---	
	Ant2	5785	25.32	5771.56	5796.88	---	---	
	Ant1	5825	25.16	5813.16	5838.32	---	---	
	Ant2	5825	26.20	5812.84	5839.04	---	---	
	11AX40MIMO	Ant1	5190	39.84	5170.08	5209.92	---	---
		Ant2	5190	39.76	5170.08	5209.84	---	---
		Ant1	5230	39.68	5210.08	5249.76	---	---
		Ant2	5230	39.76	5210.08	5249.84	---	---
Ant1		5270	39.76	5250.08	5289.84	---	---	
Ant2		5270	39.76	5250.00	5289.76	---	---	
Ant1		5310	39.84	5290.08	5329.92	---	---	
Ant2		5310	39.84	5290.08	5329.92	---	---	
Ant1		5510	39.84	5490.08	5529.92	---	---	
Ant2		5510	39.76	5490.08	5529.84	---	---	
Ant1		5550	39.84	5530.08	5569.92	---	---	
Ant2		5550	39.84	5530.08	5569.92	---	---	
Ant1		5670	39.92	5650.00	5689.92	---	---	
Ant2		5670	39.84	5650.08	5689.92	---	---	
Ant1		5755	39.92	5735.00	5774.92	---	---	
Ant2		5755	39.92	5735.00	5774.92	---	---	
Ant1		5795	39.84	5775.08	5814.92	---	---	

	Ant2	5795	39.84	5775.08	5814.92	---	---
11AX80MIMO	Ant1	5210	80.64	5169.68	5250.32	---	---
	Ant2	5210	80.80	5169.52	5250.32	---	---
	Ant1	5290	80.80	5249.52	5330.32	---	---
	Ant2	5290	80.80	5249.52	5330.32	---	---
	Ant1	5530	80.80	5489.68	5570.48	---	---
	Ant2	5530	80.64	5489.68	5570.32	---	---
	Ant1	5610	80.64	5569.68	5650.32	---	---
	Ant2	5610	80.48	5569.68	5650.16	---	---
	Ant1	5775	80.80	5734.52	5815.32	---	---
	Ant2	5775	80.64	5734.52	5815.16	---	---






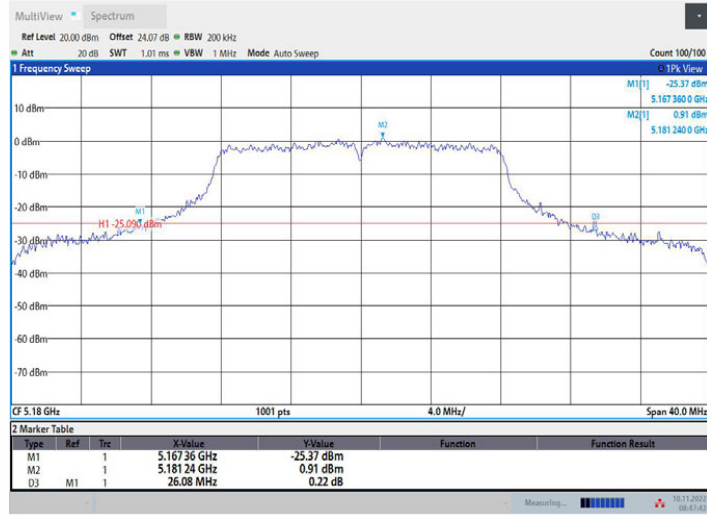


09:47:43 10.11.2022

## 11A\_Ant1\_5180

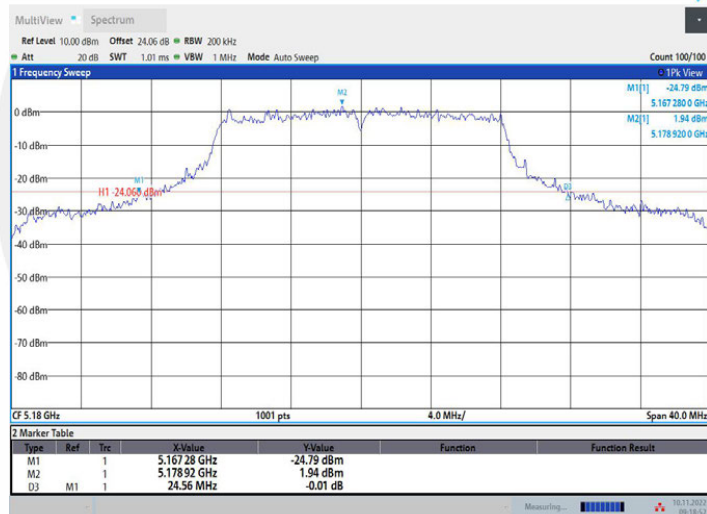


09:18:53 10.11.2022


## 11A\_Ant2\_5180

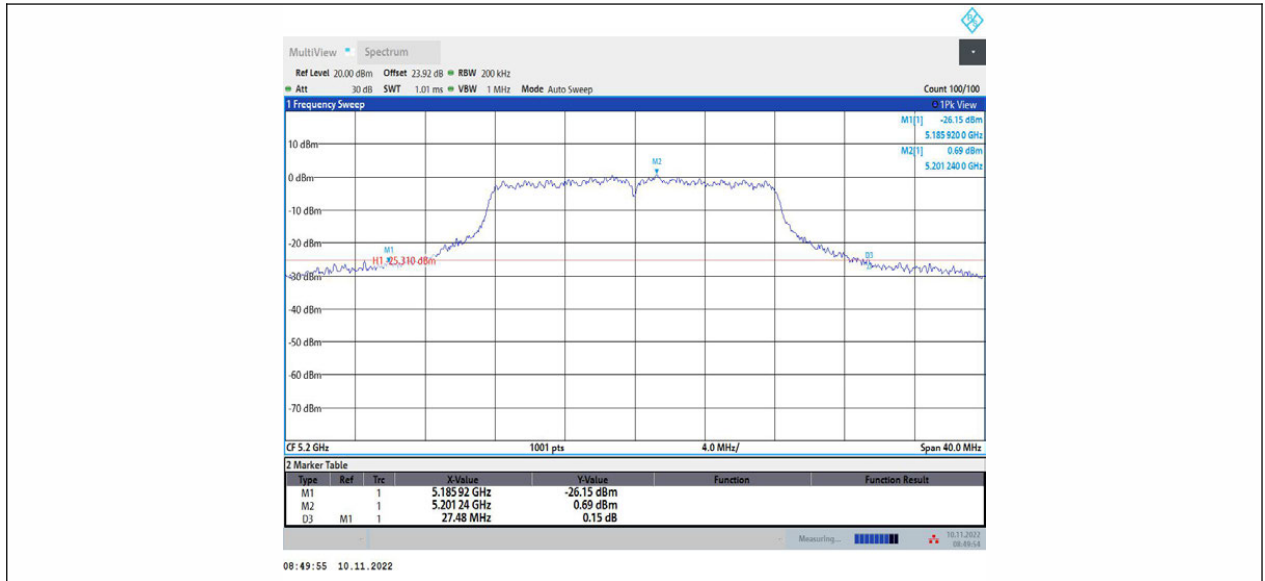


11A\_Ant1\_5200

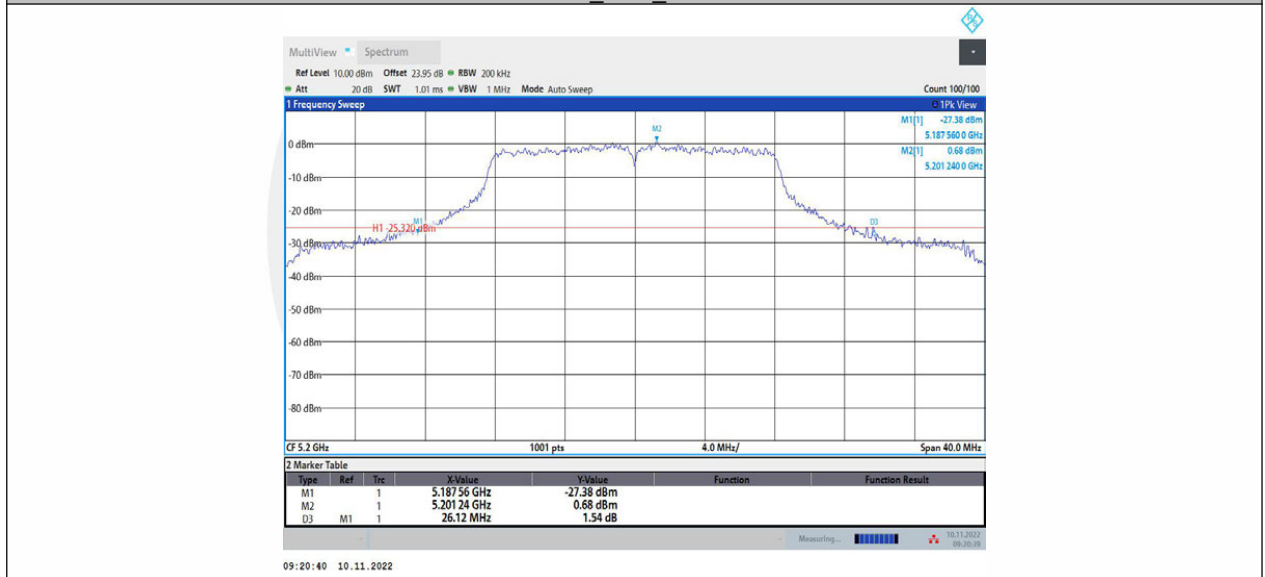


11A\_Ant2\_5200

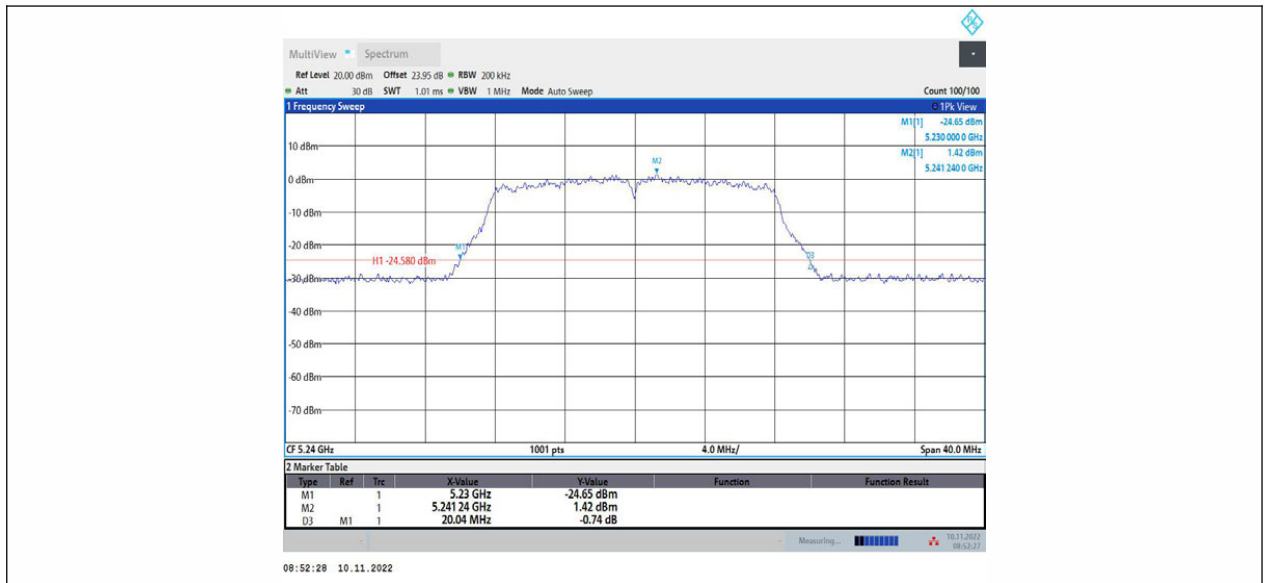


11A\_Ant1\_5240

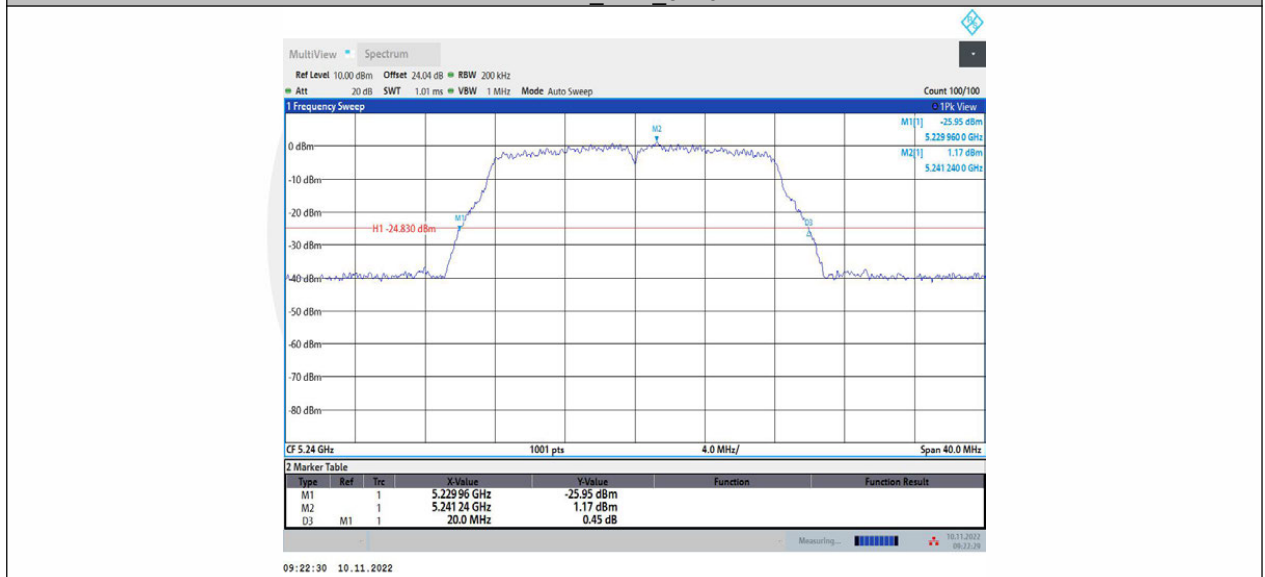


11A\_Ant2\_5240

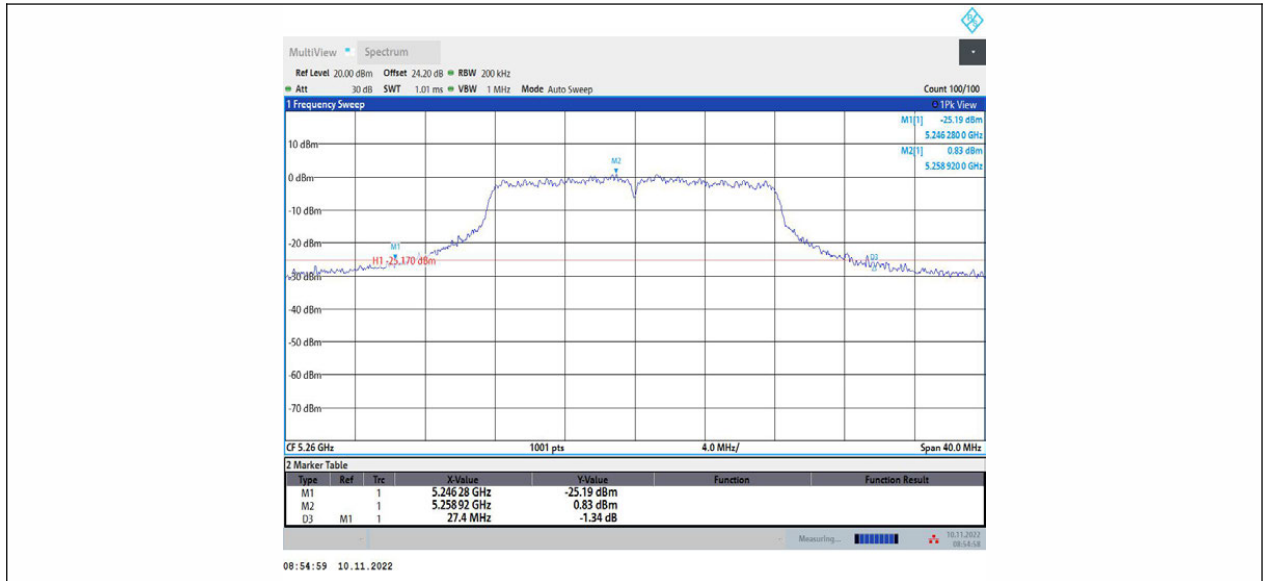


11A\_Ant1\_5260

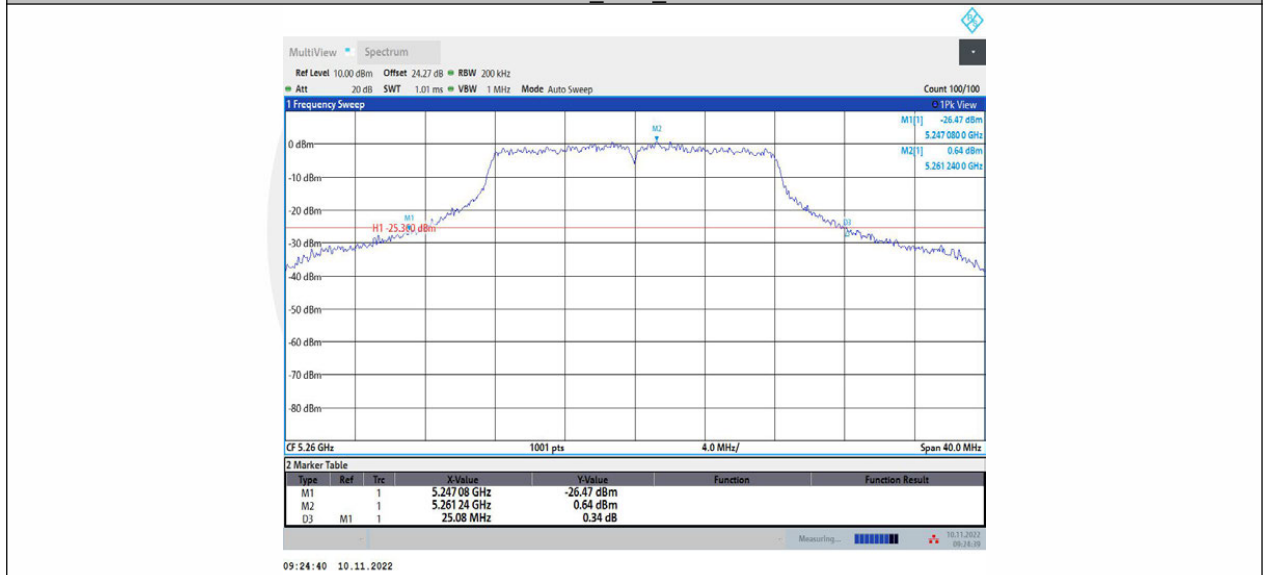


11A\_Ant2\_5260

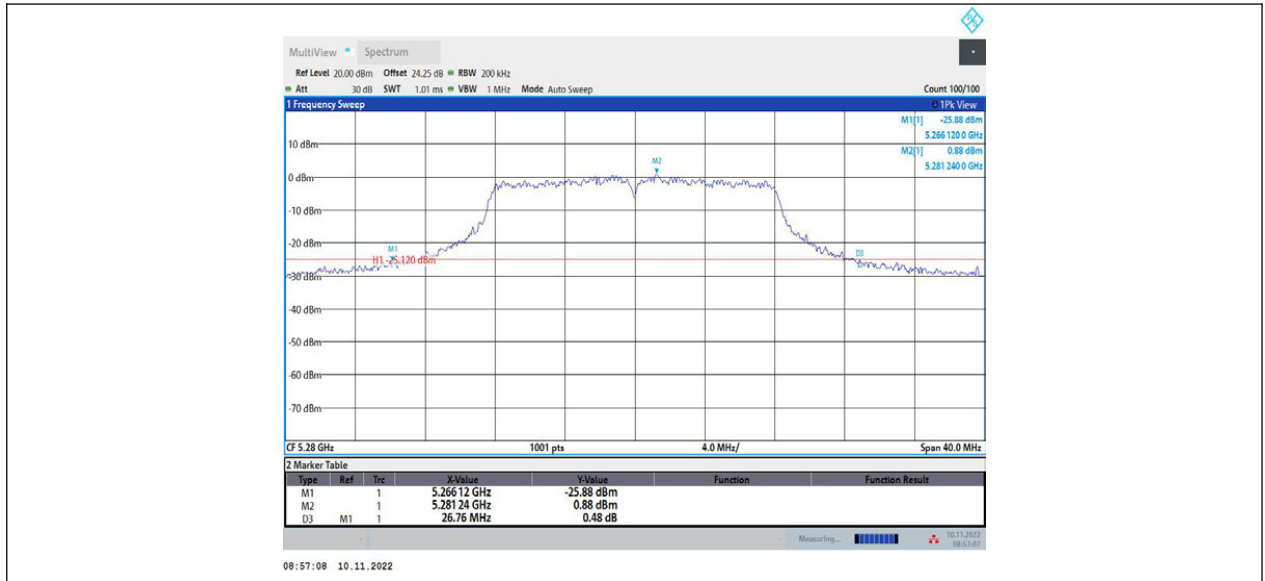


11A\_Ant1\_5280

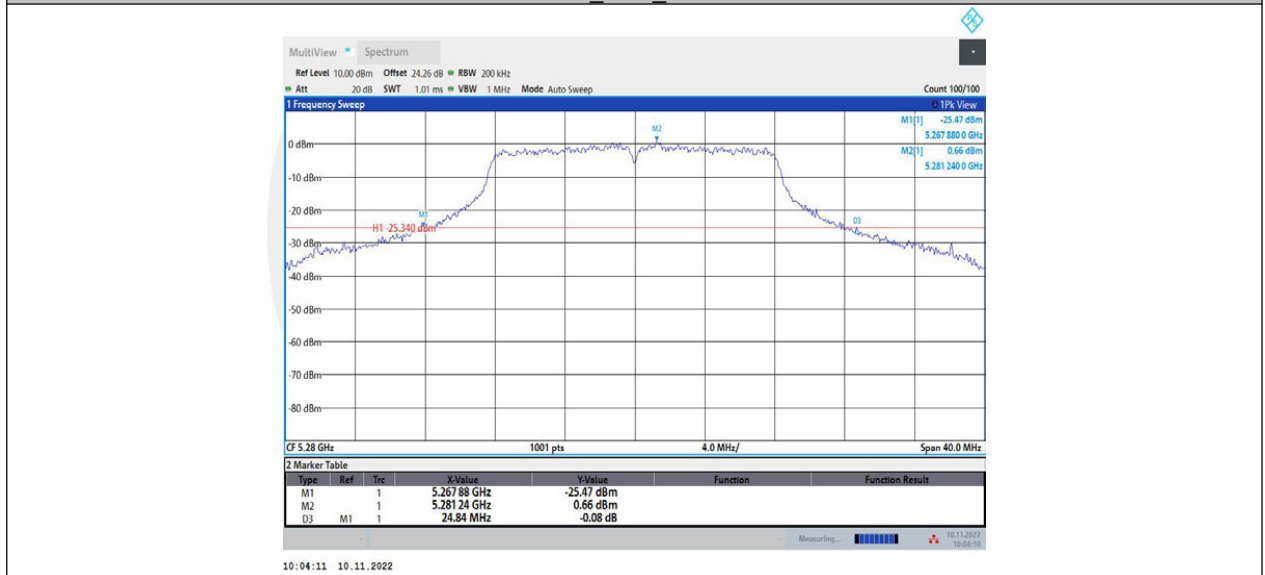


11A\_Ant2\_5280

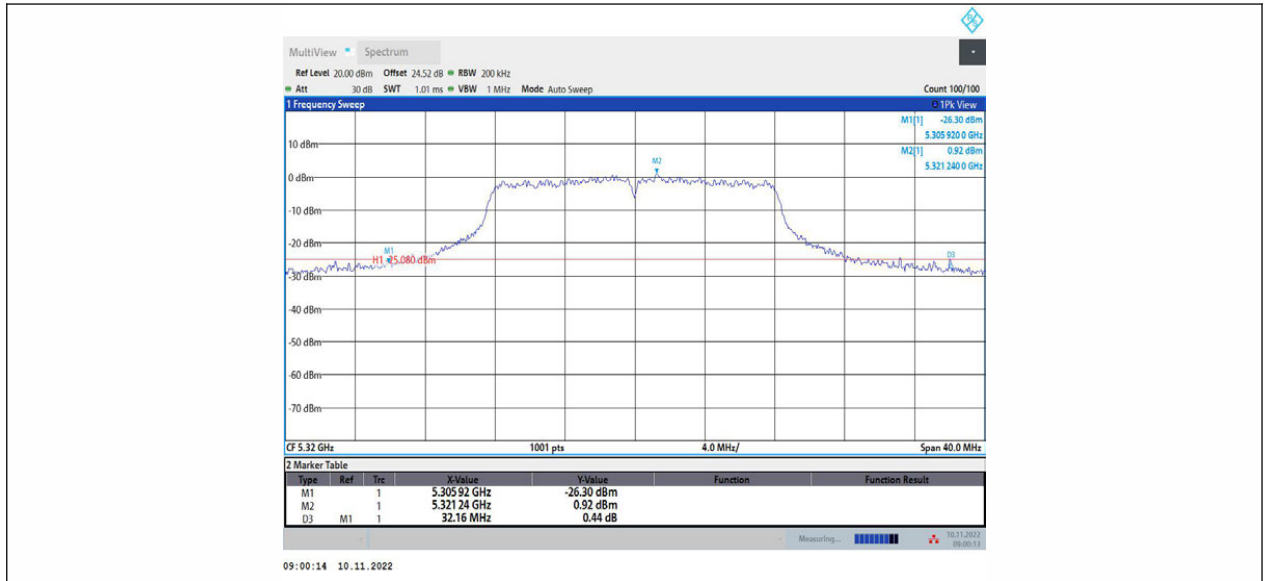

11A\_Ant1\_5320

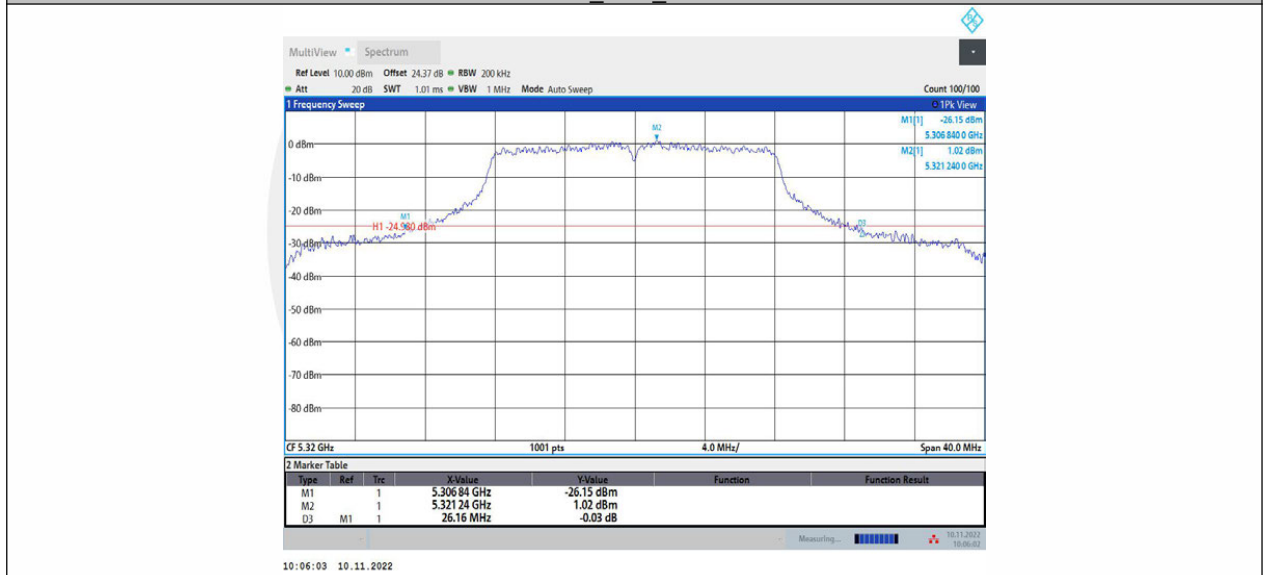


11A\_Ant2\_5320

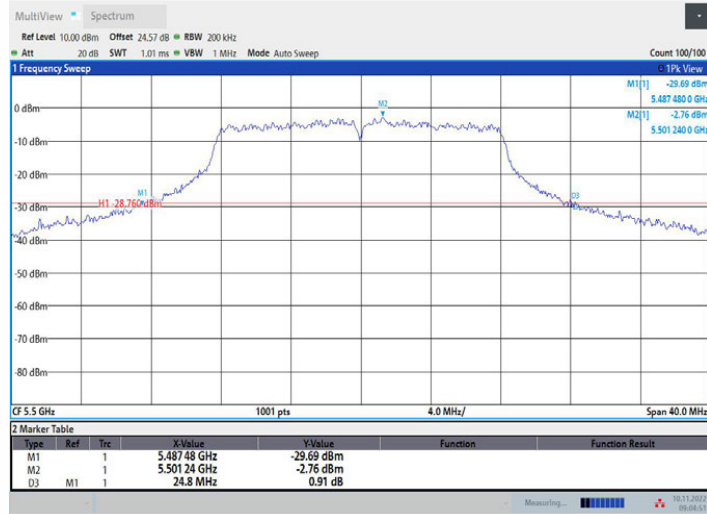

09:04:52 10.11.2022

11A\_Ant1\_5500

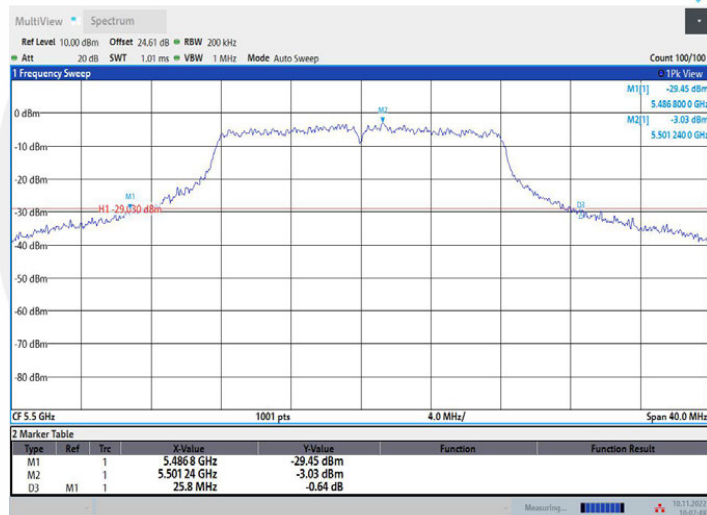


10:07:48 10.11.2022

11A\_Ant2\_5500



09:06:29 10.11.2022


11A\_Ant1\_5580

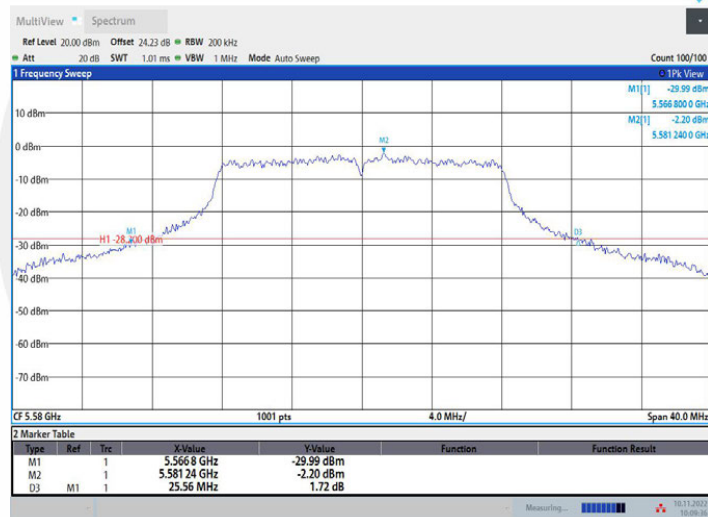

10:09:37 10.11.2022


11A\_Ant2\_5580



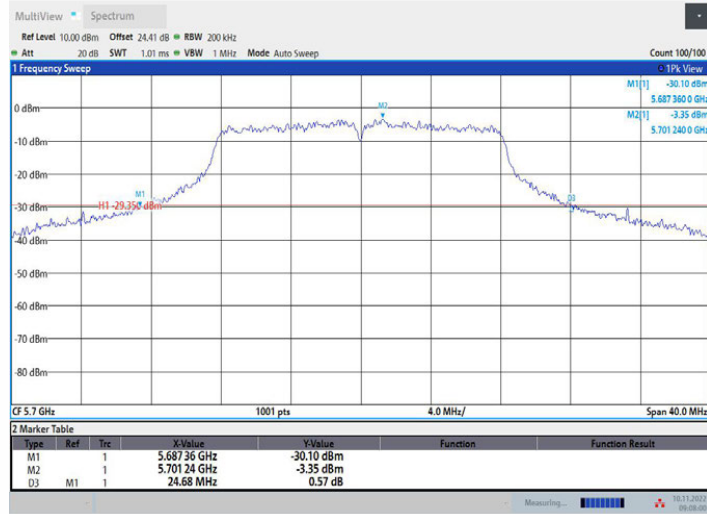


09:08:00 10.11.2022

11A\_Ant1\_5700

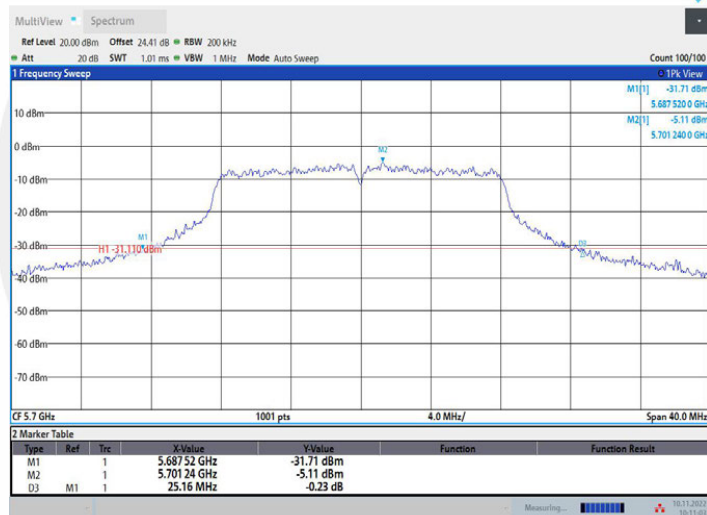

10:11:04 10.11.2022


11A\_Ant2\_5700

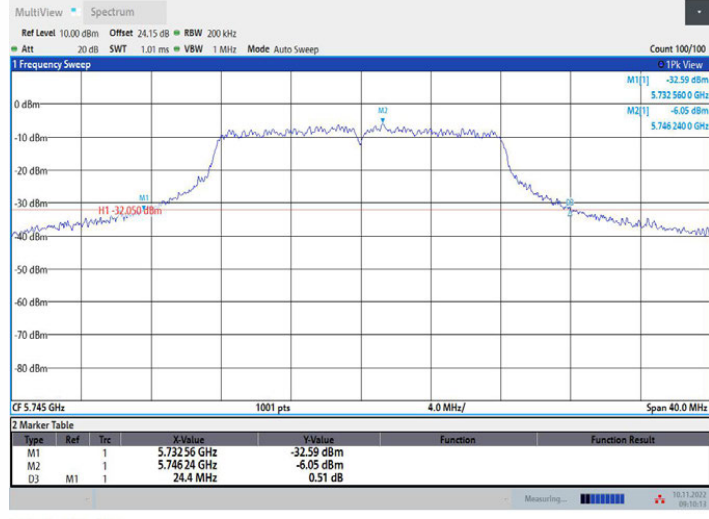

11A\_Ant1\_5745




11A\_Ant2\_5745

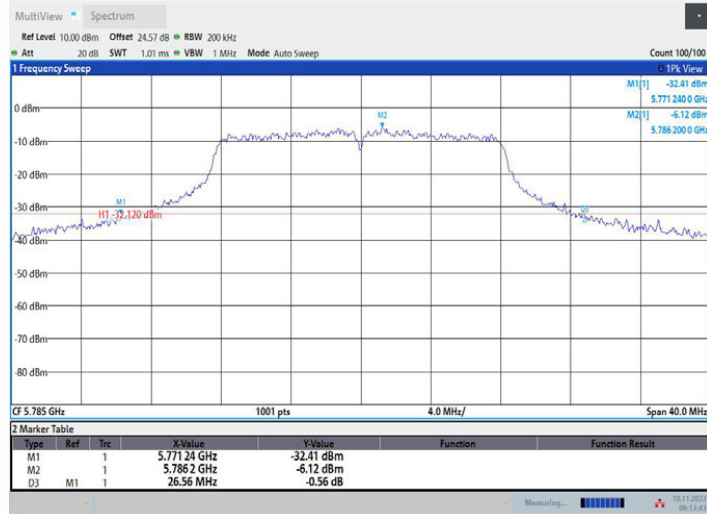


09:13:43 10.11.2022

11A\_Ant1\_5785

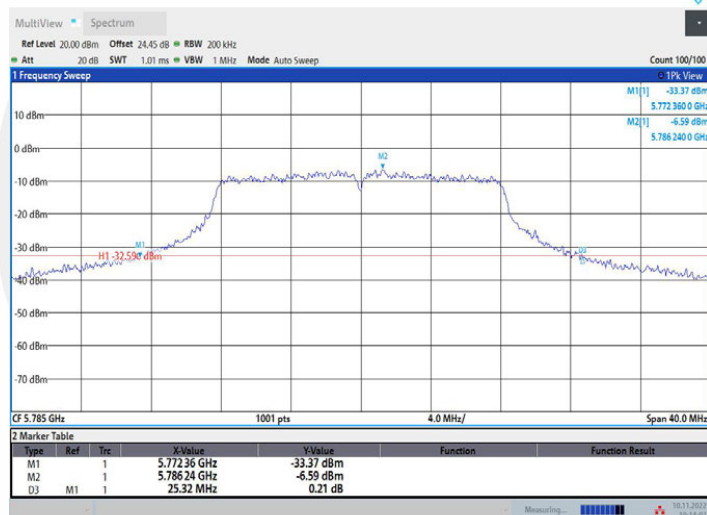

10:14:08 10.11.2022

11A\_Ant2\_5785

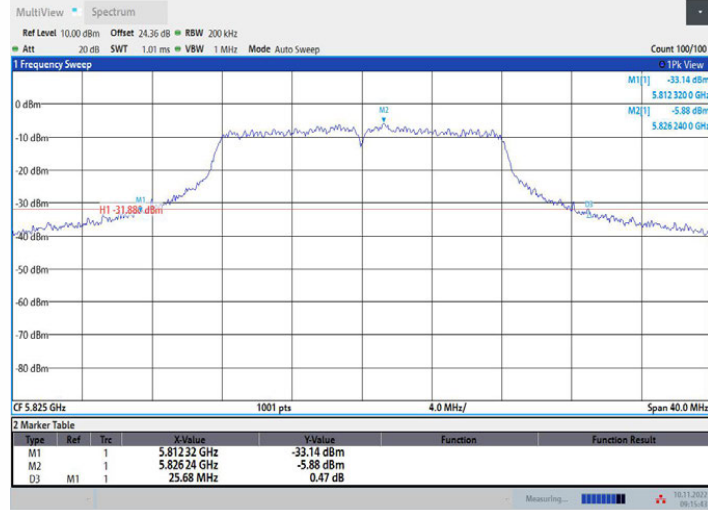


09:15:44 10.11.2022

11A\_Ant1\_5825




10:15:42 10.11.2022


11A\_Ant2\_5825

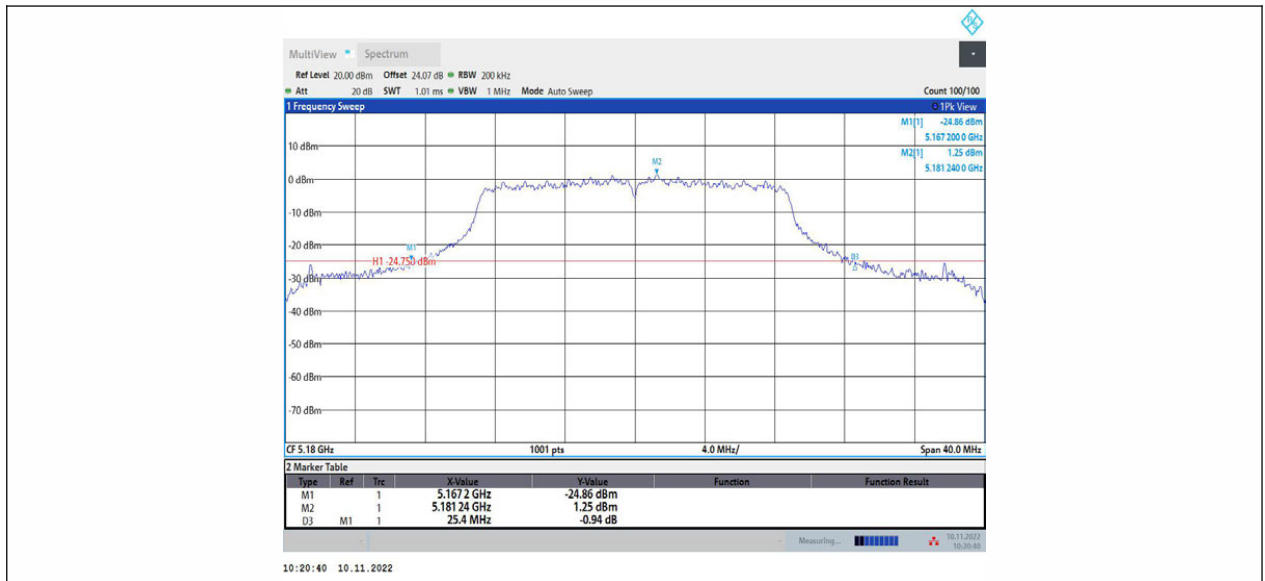

11N20MIMO\_Ant1\_5180

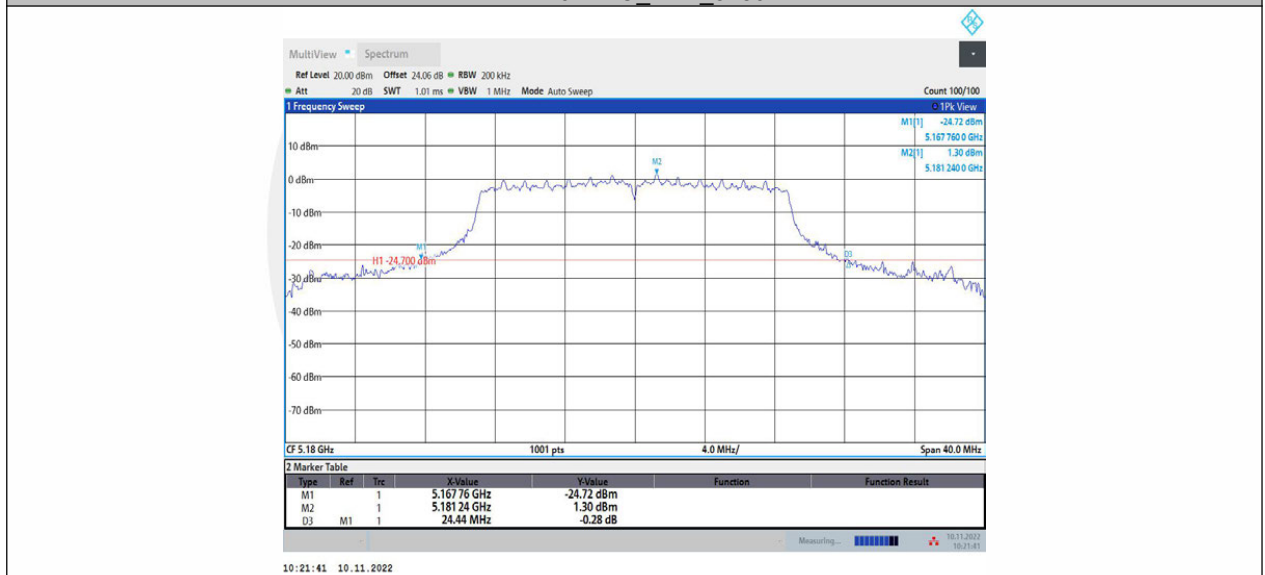

11N20MIMO\_Ant2\_5180

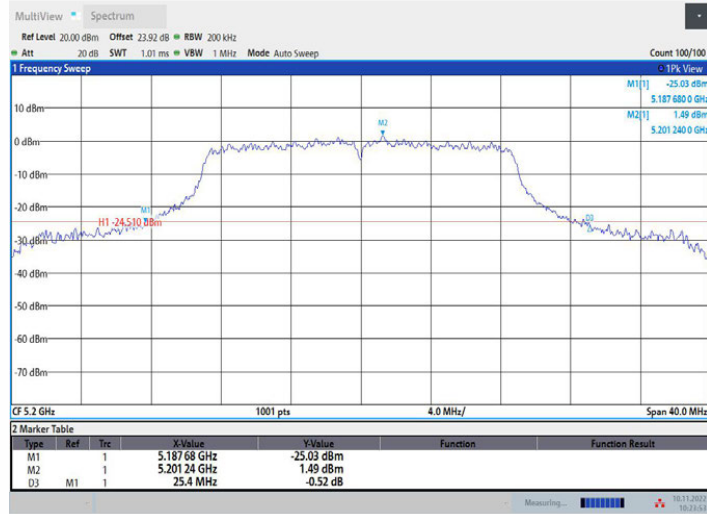


10:23:53 10.11.2022

11N20MIMO\_Ant1\_5200




10:24:55 10.11.2022


11N20MIMO\_Ant2\_5200

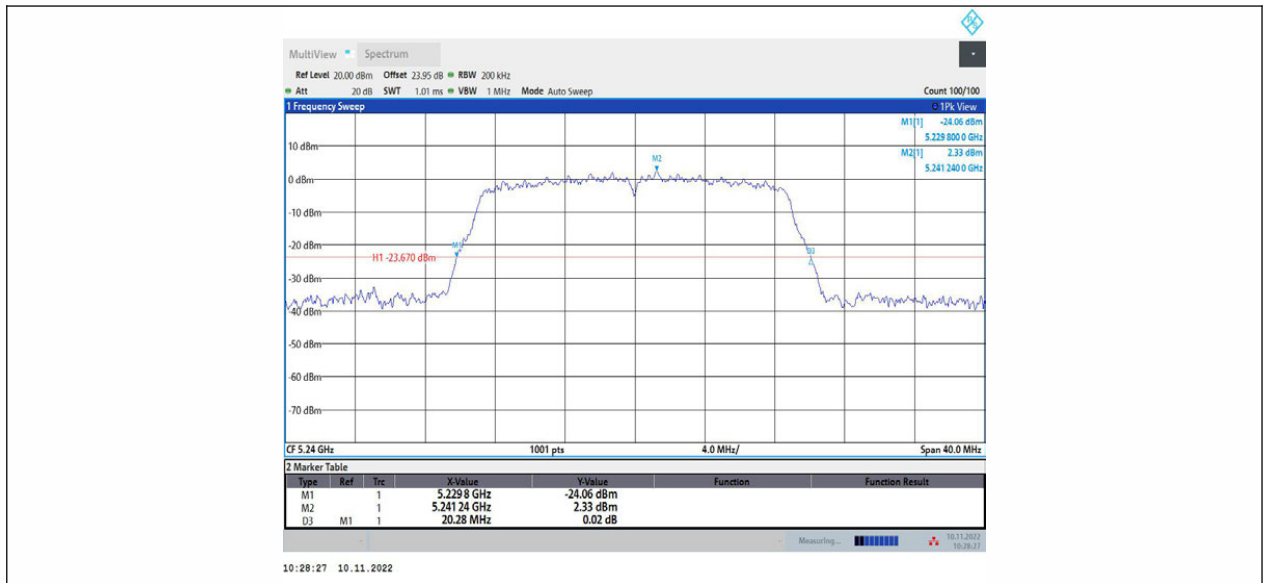


11N20MIMO\_Ant1\_5240

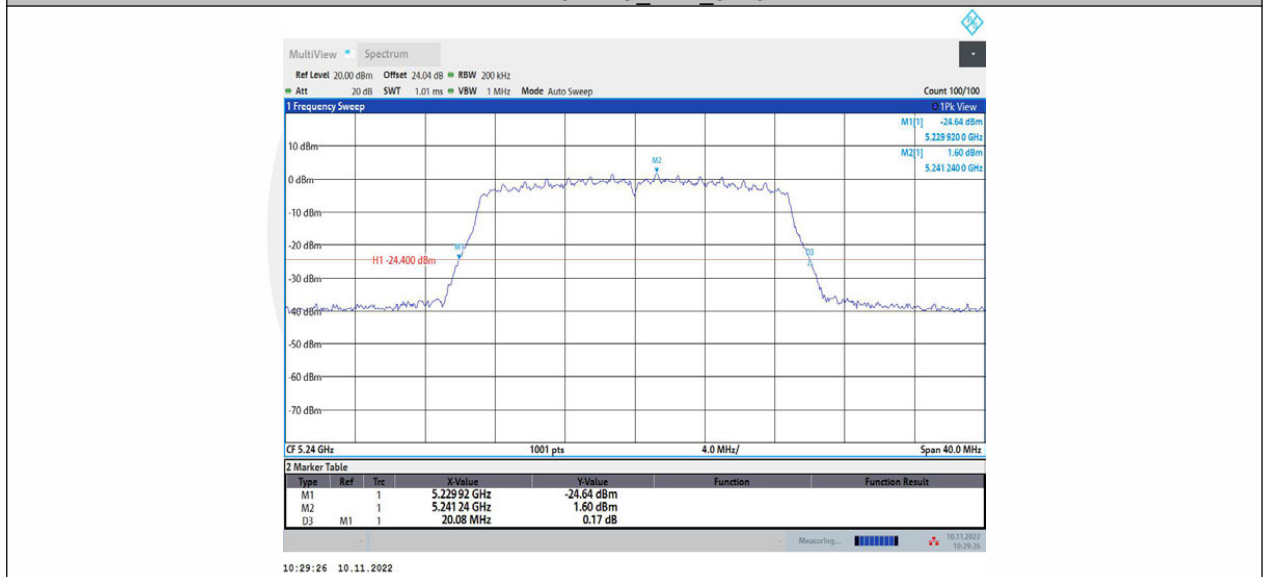

11N20MIMO\_Ant2\_5240

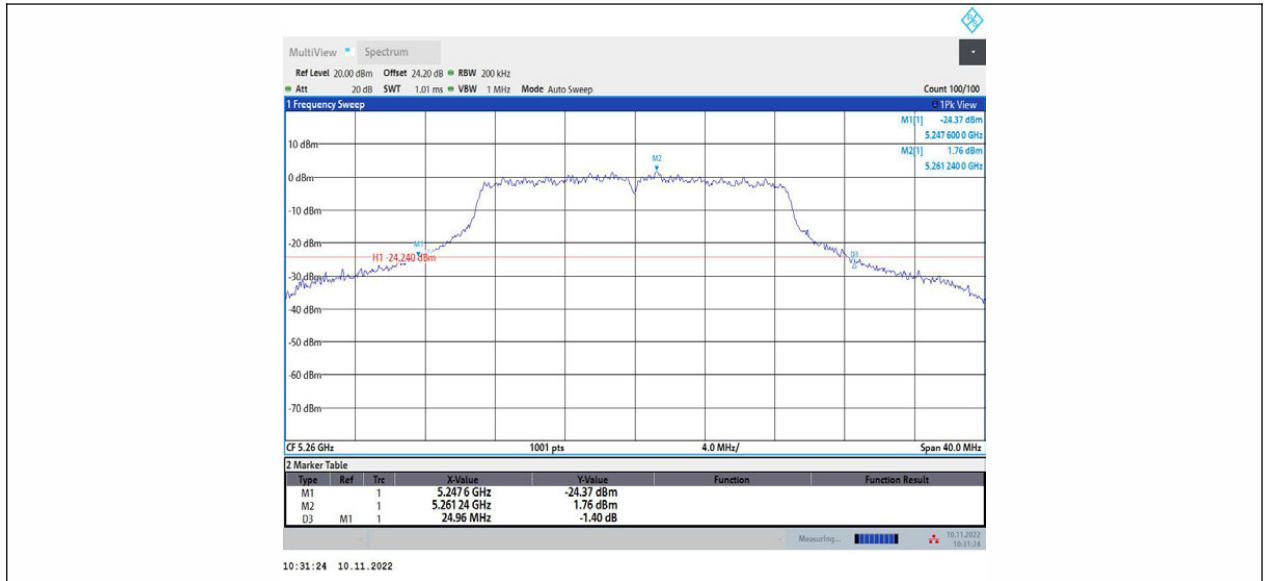


11N20MIMO\_Ant1\_5260

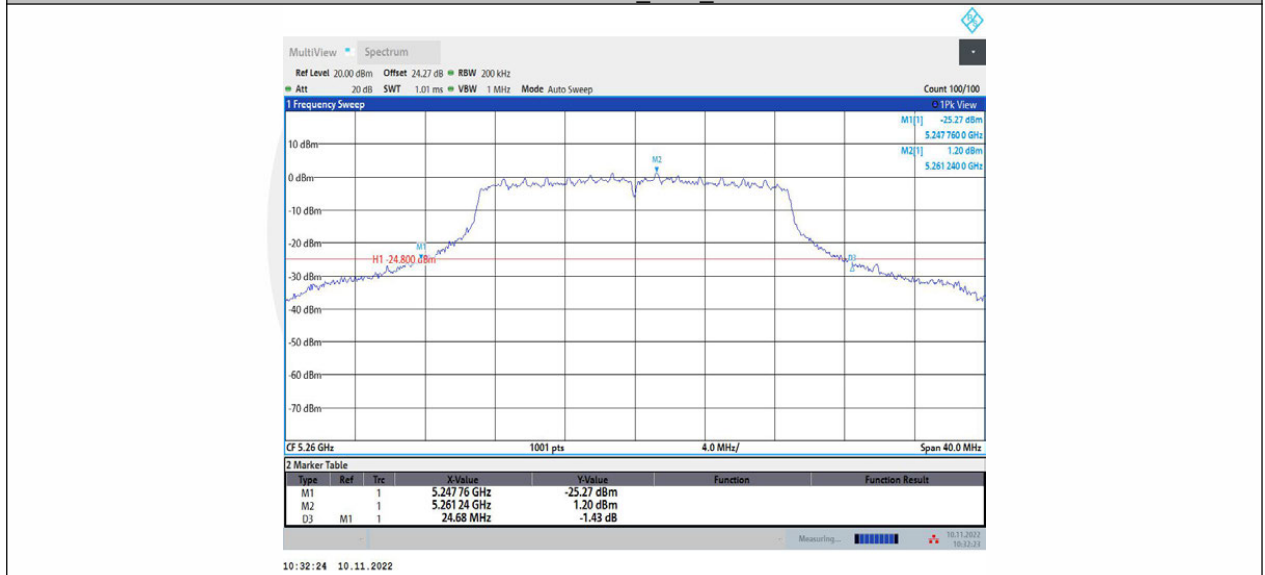


11N20MIMO\_Ant2\_5260




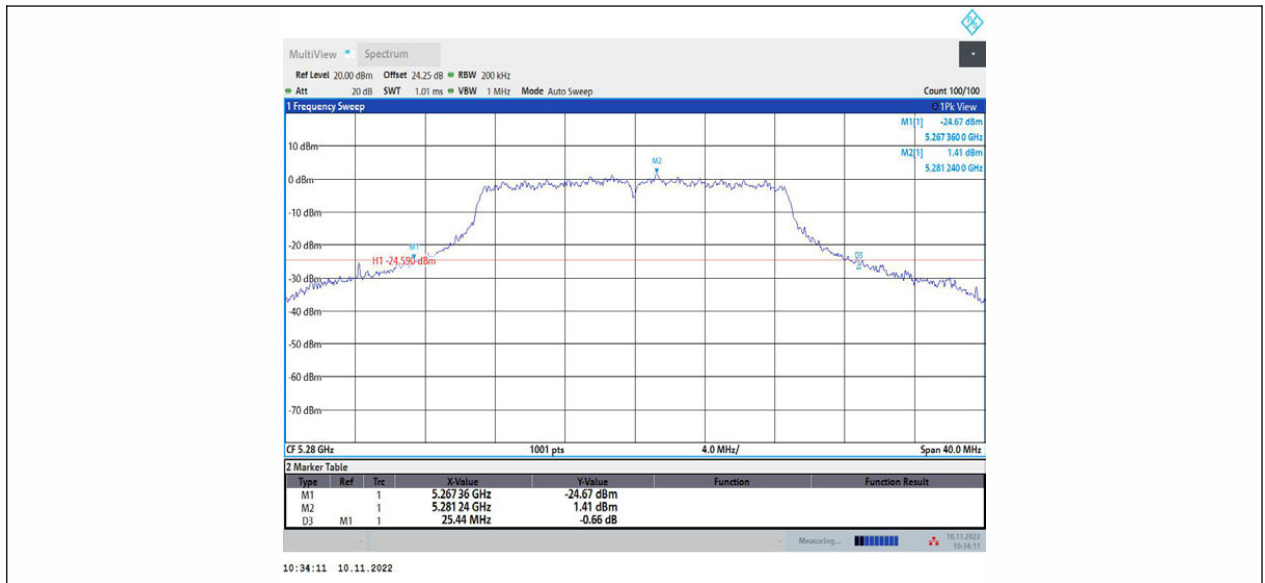

11N20MIMO\_Ant1\_5280

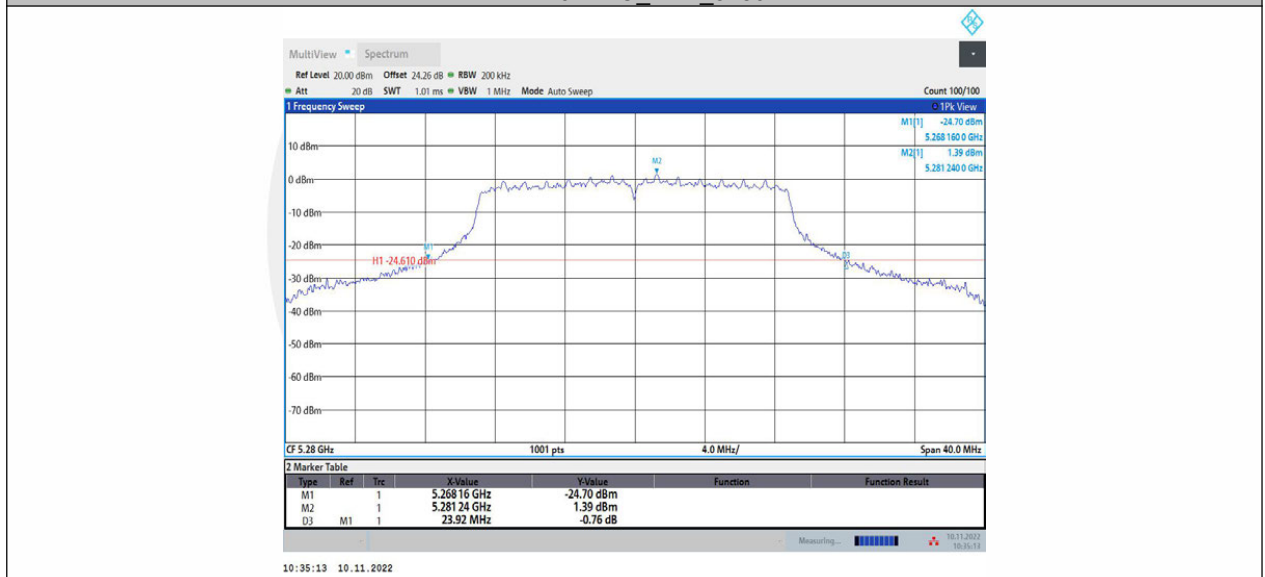

11N20MIMO\_Ant2\_5280

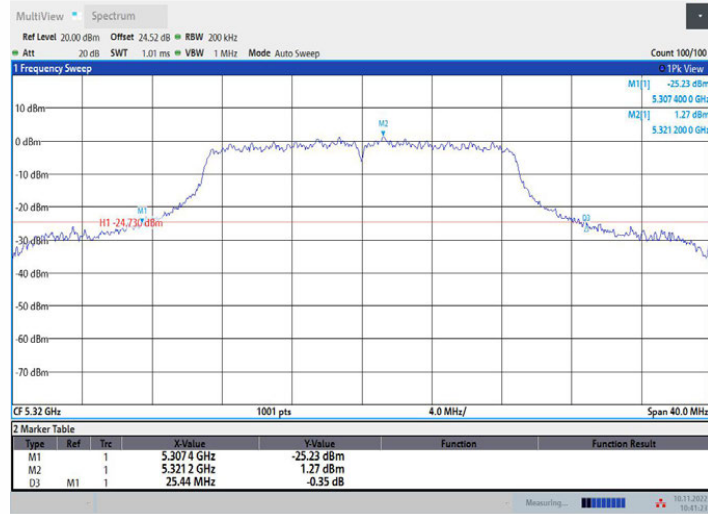


10:41:24 10.11.2022

11N20MIMO\_Ant1\_5320




10:42:26 10.11.2022

11N20MIMO\_Ant2\_5320

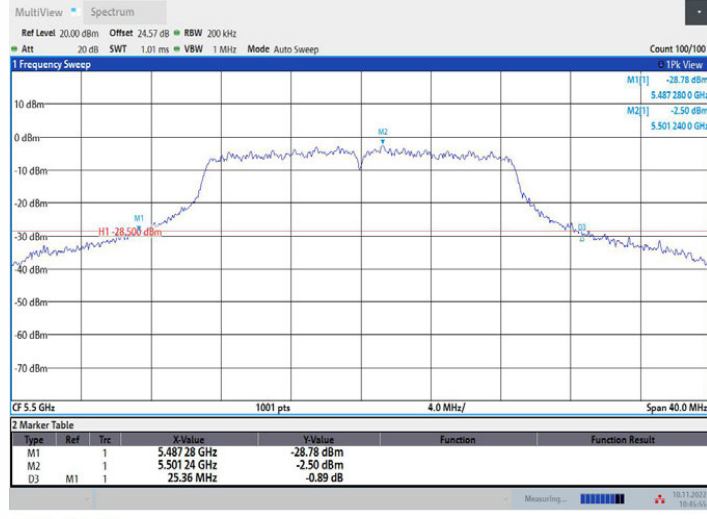


10:45:56 10.11.2022

11N20MIMO\_Ant1\_5500

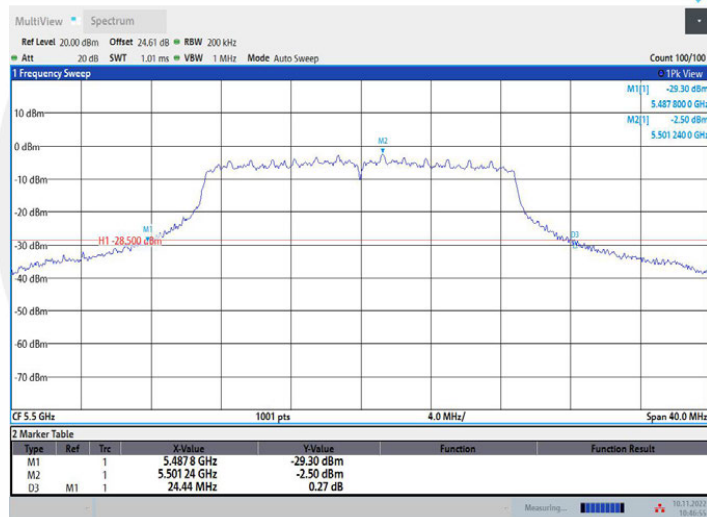


10:46:56 10.11.2022


11N20MIMO\_Ant2\_5500

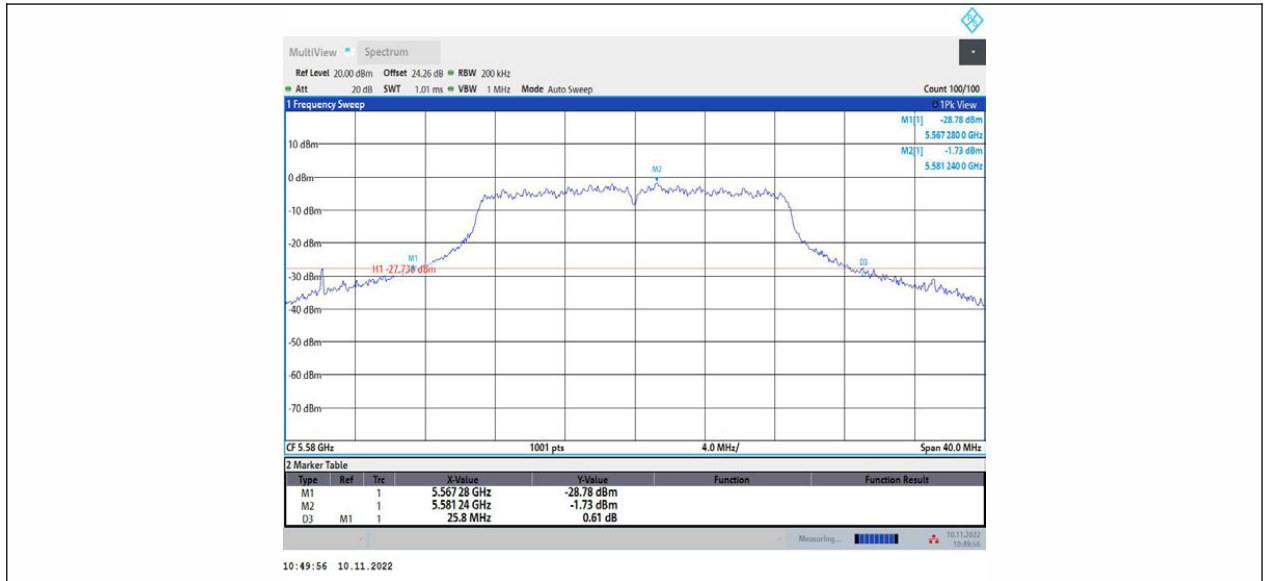


11N20MIMO\_Ant1\_5580

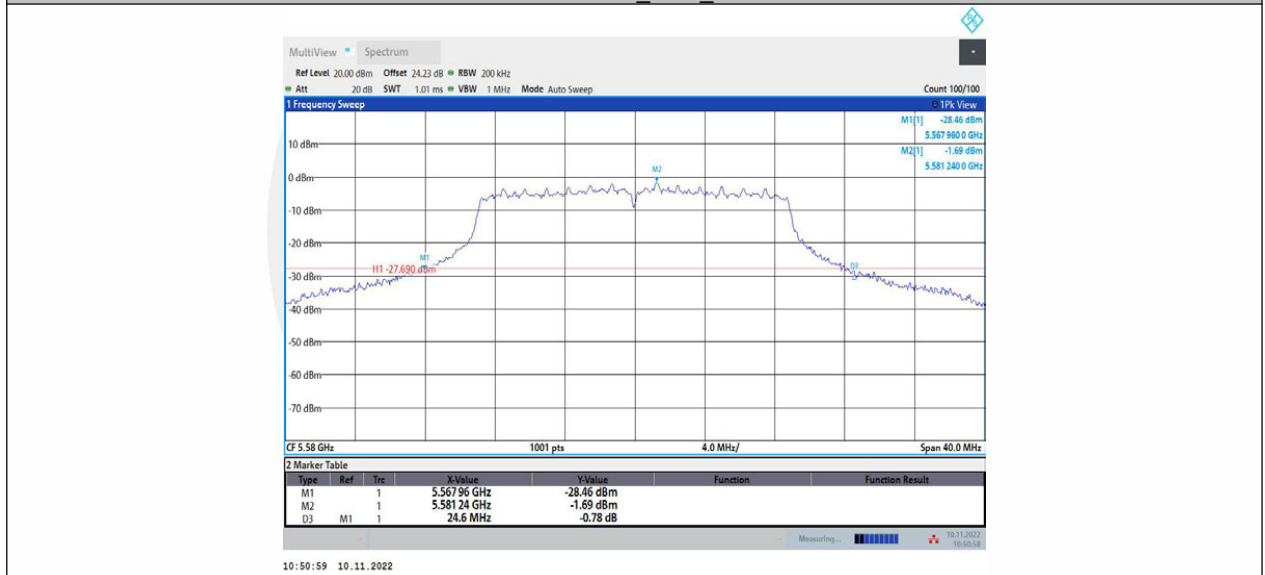

11N20MIMO\_Ant2\_5580

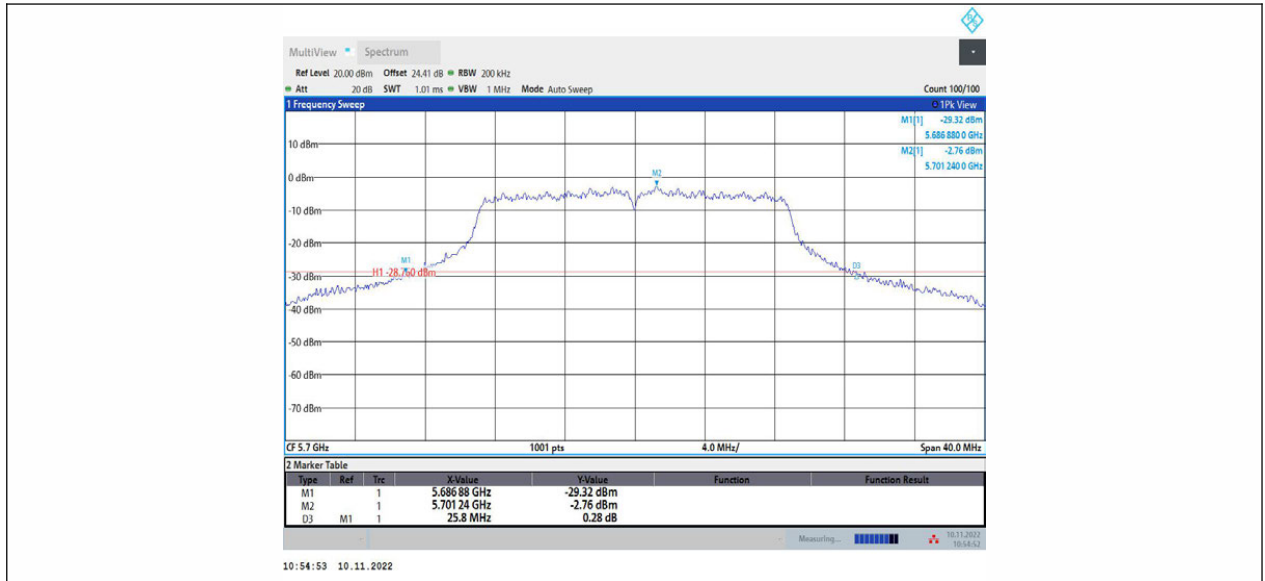

11N20MIMO\_Ant1\_5700

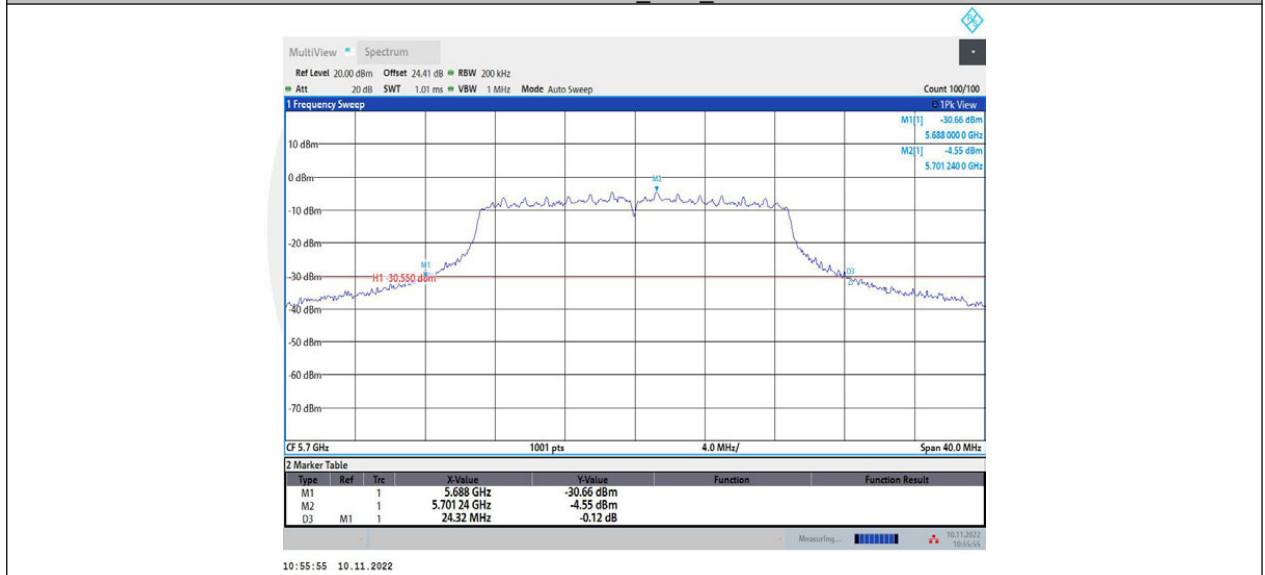


11N20MIMO\_Ant2\_5700




11:04:07 10.11.2022

11N20MIMO\_Ant1\_5745

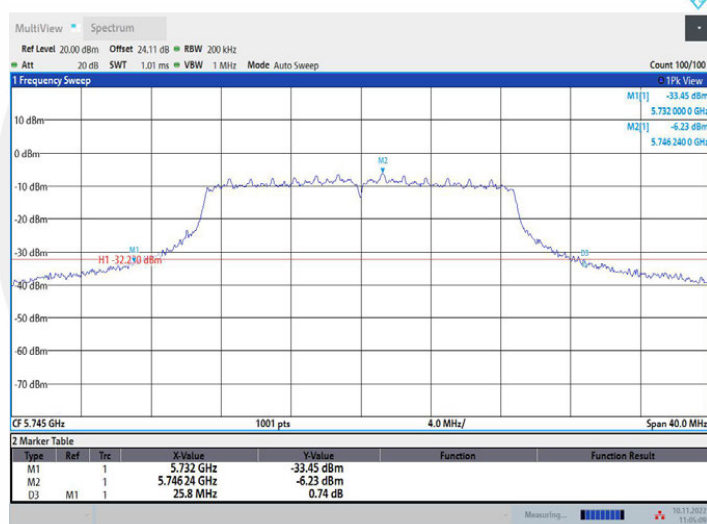


11:05:09 10.11.2022

11N20MIMO\_Ant2\_5745

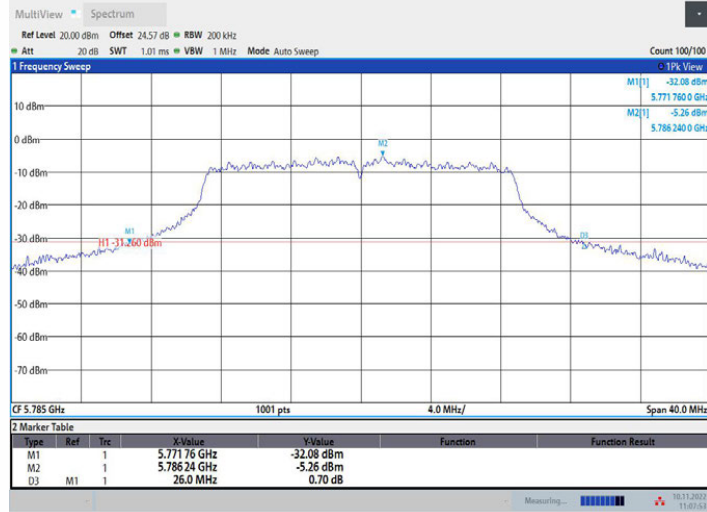

11:07:54 10.11.2022

11N20MIMO\_Ant1\_5785

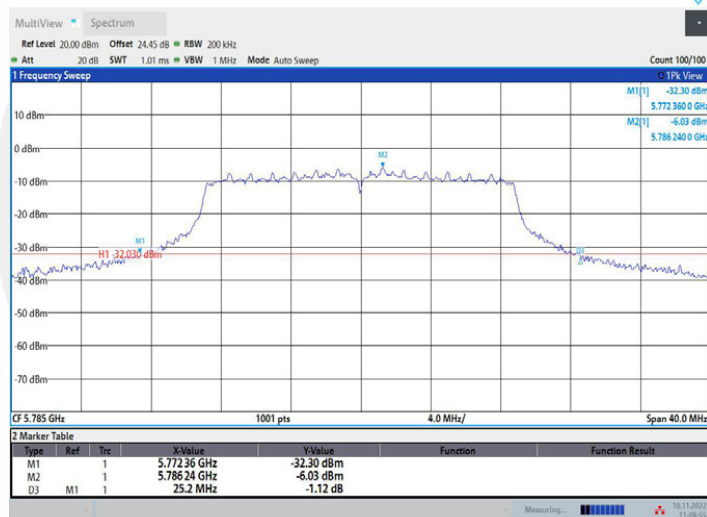


11:08:56 10.11.2022

11N20MIMO\_Ant2\_5785



11:11:13 10.11.2022


11N20MIMO\_Ant1\_5825

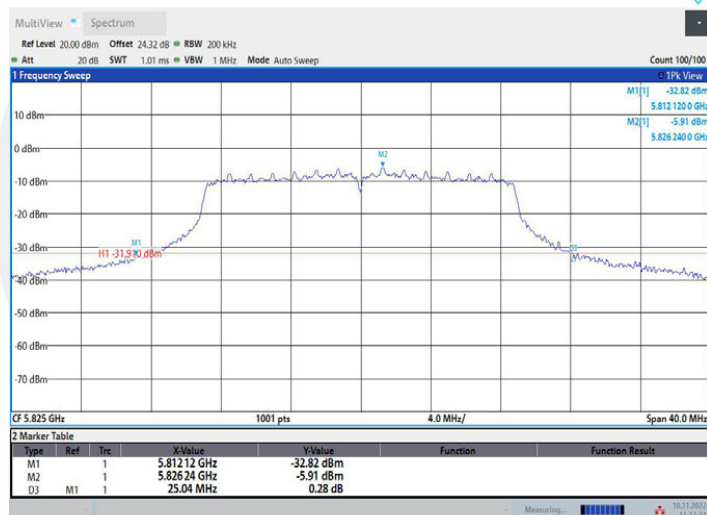


11:12:15 10.11.2022

11N20MIMO\_Ant2\_5825




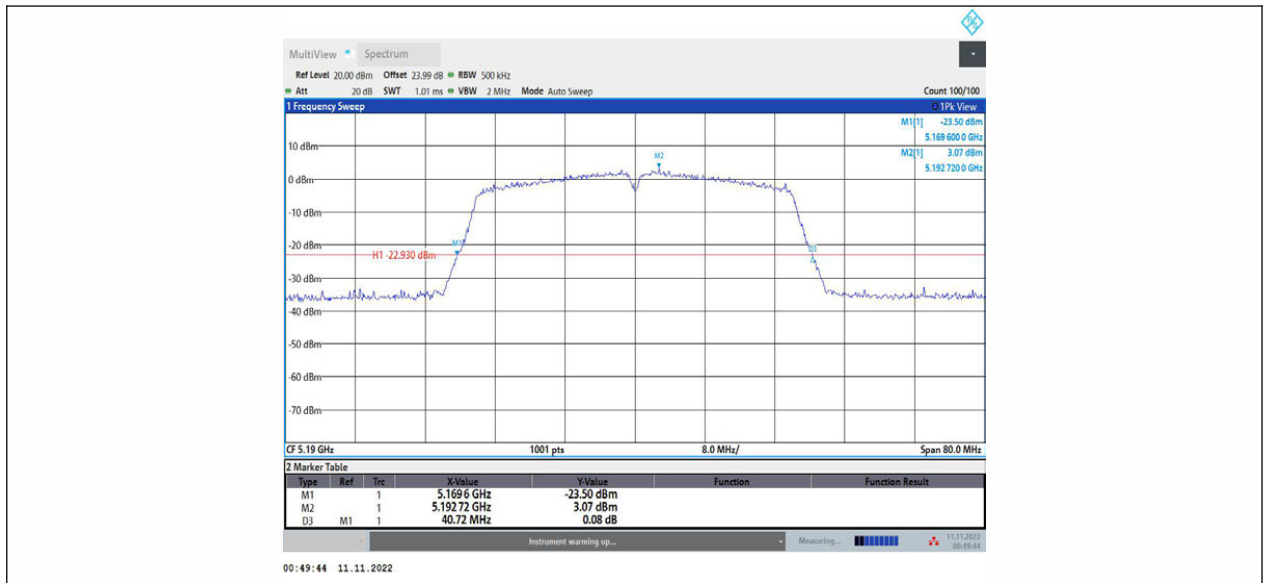


11N40MIMO\_Ant1\_5190

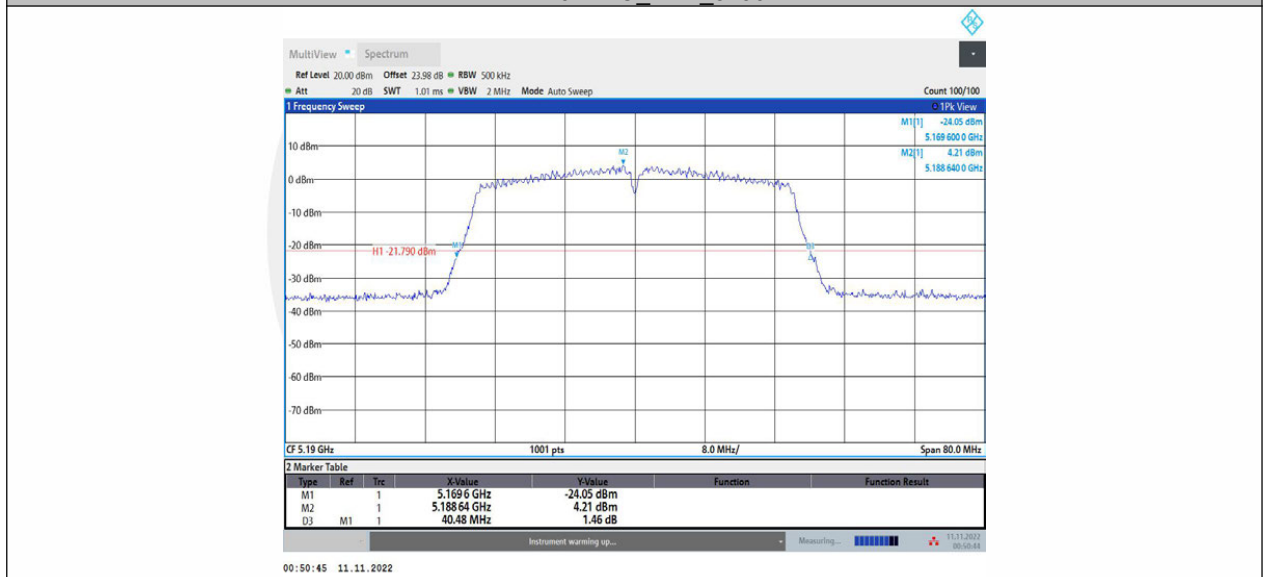


11N40MIMO\_Ant2\_5190

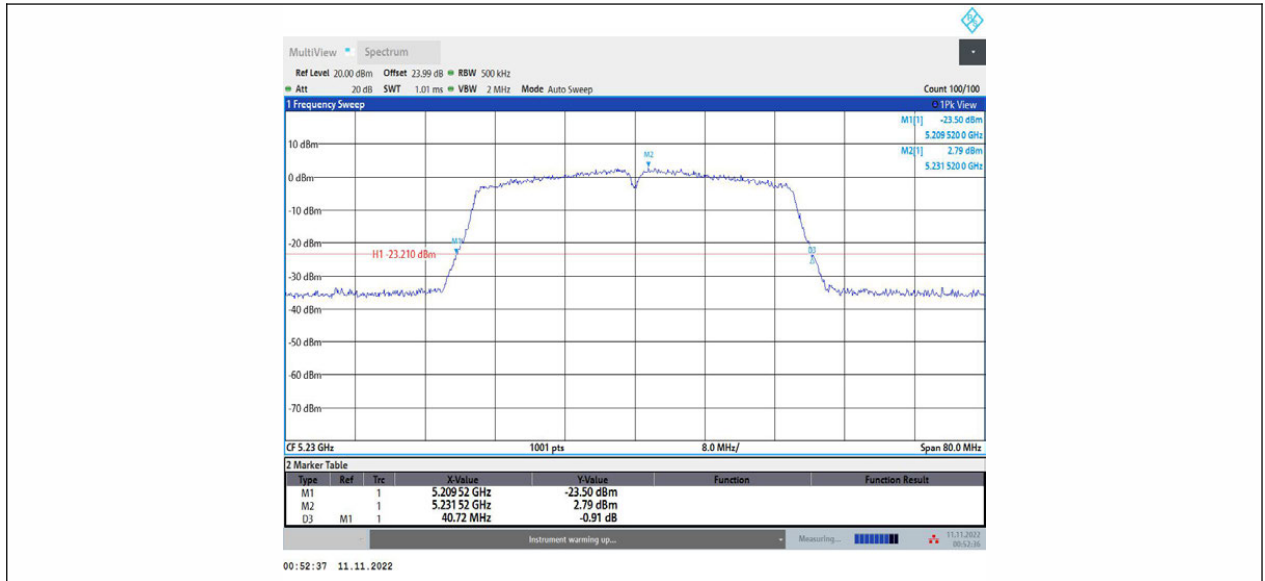


11N40MIMO\_Ant1\_5230

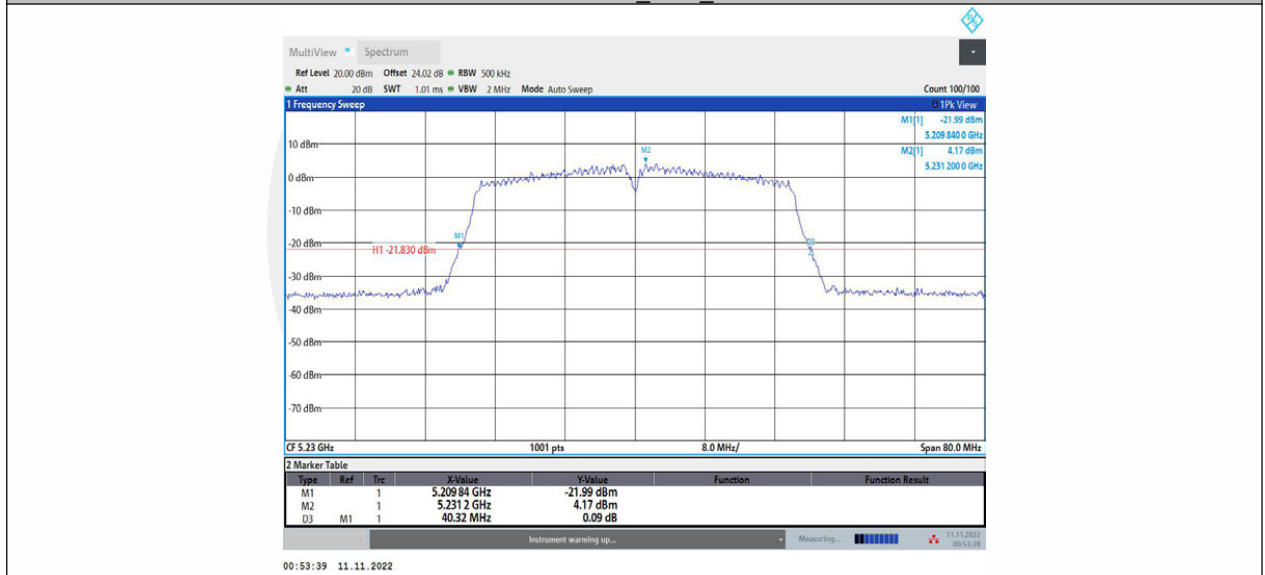


11N40MIMO\_Ant2\_5230

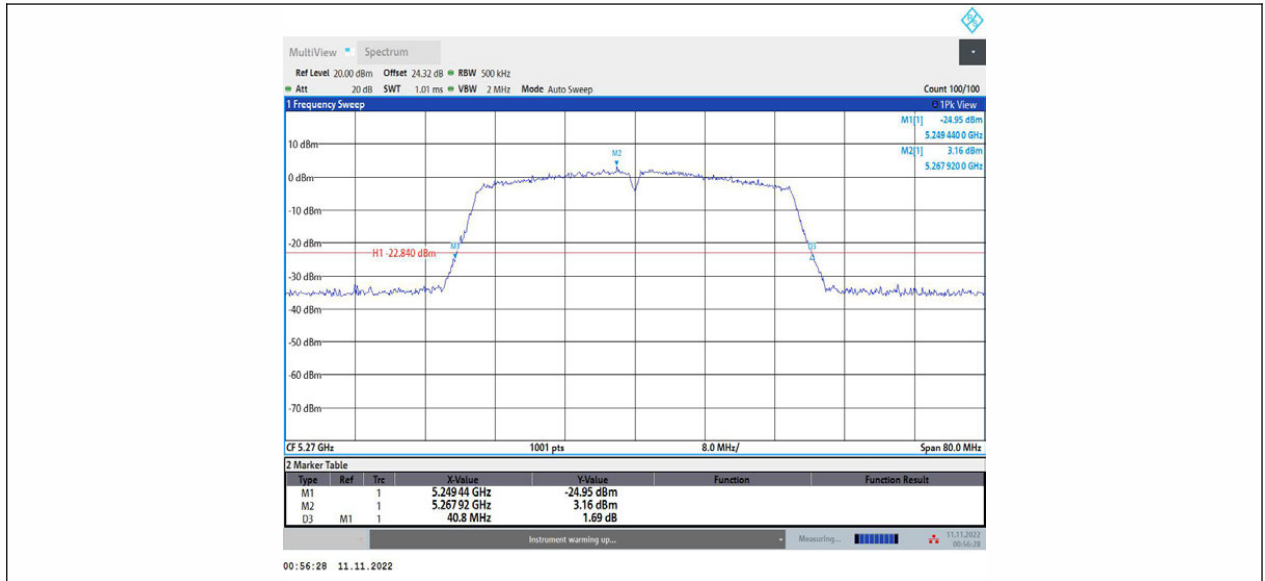


11N40MIMO\_Ant1\_5270

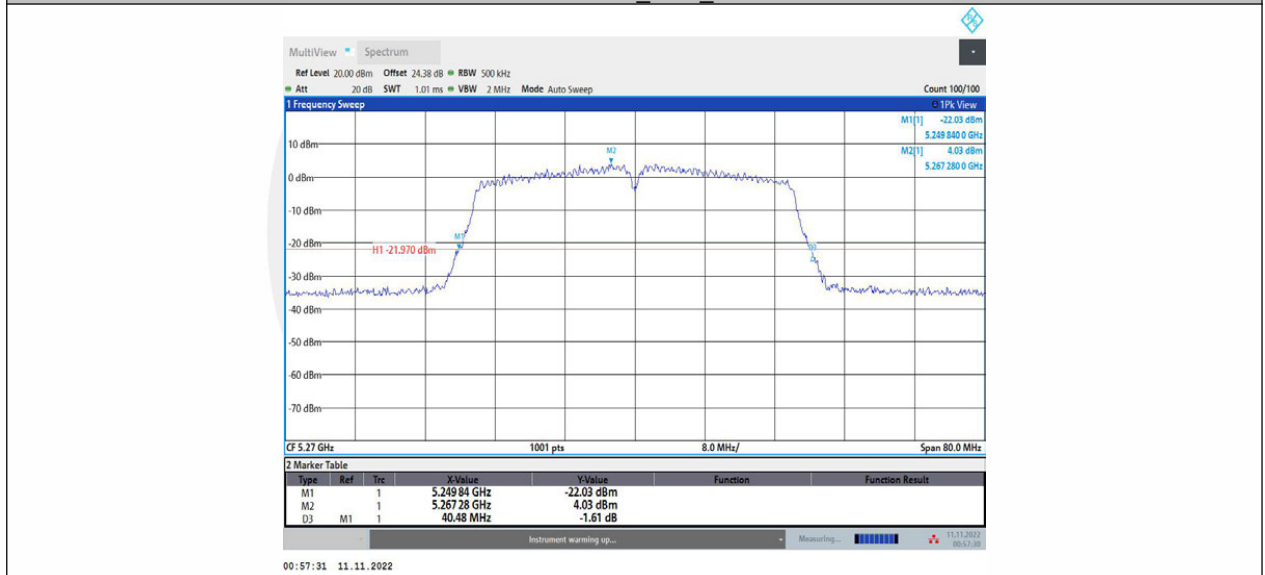


11N40MIMO\_Ant2\_5270

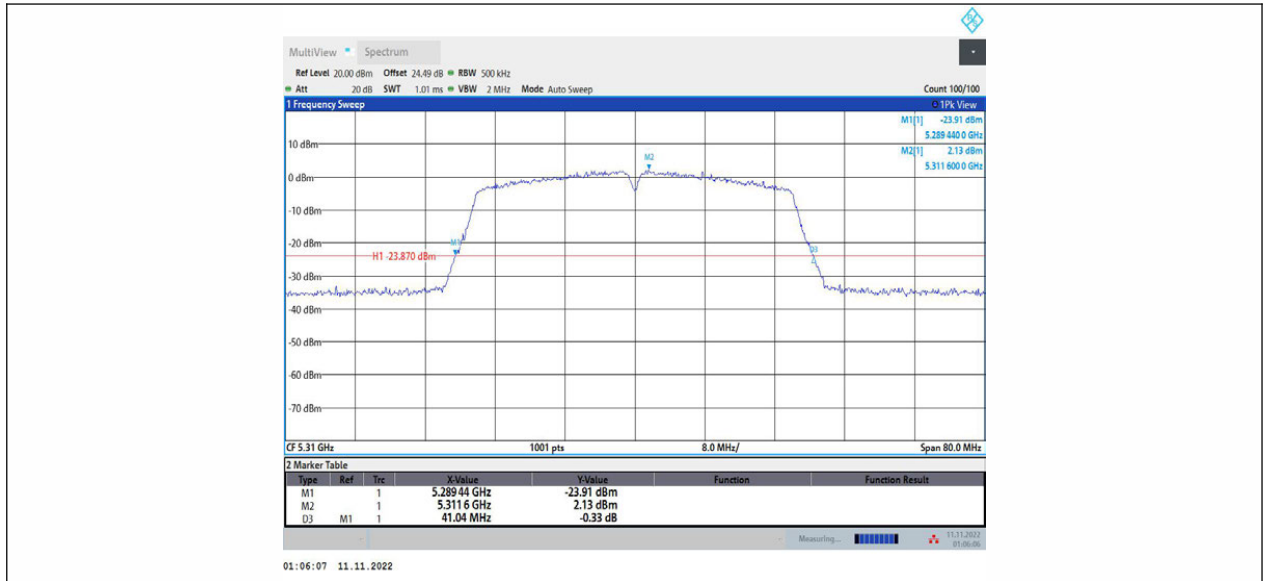


11N40MIMO\_Ant1\_5310

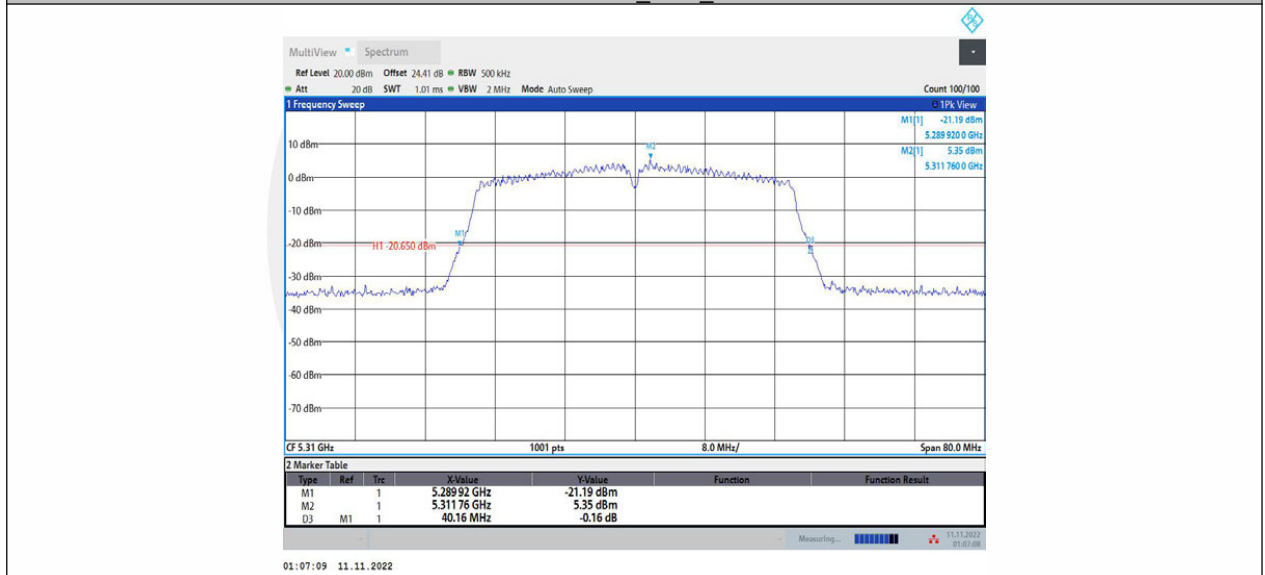


11N40MIMO\_Ant2\_5310

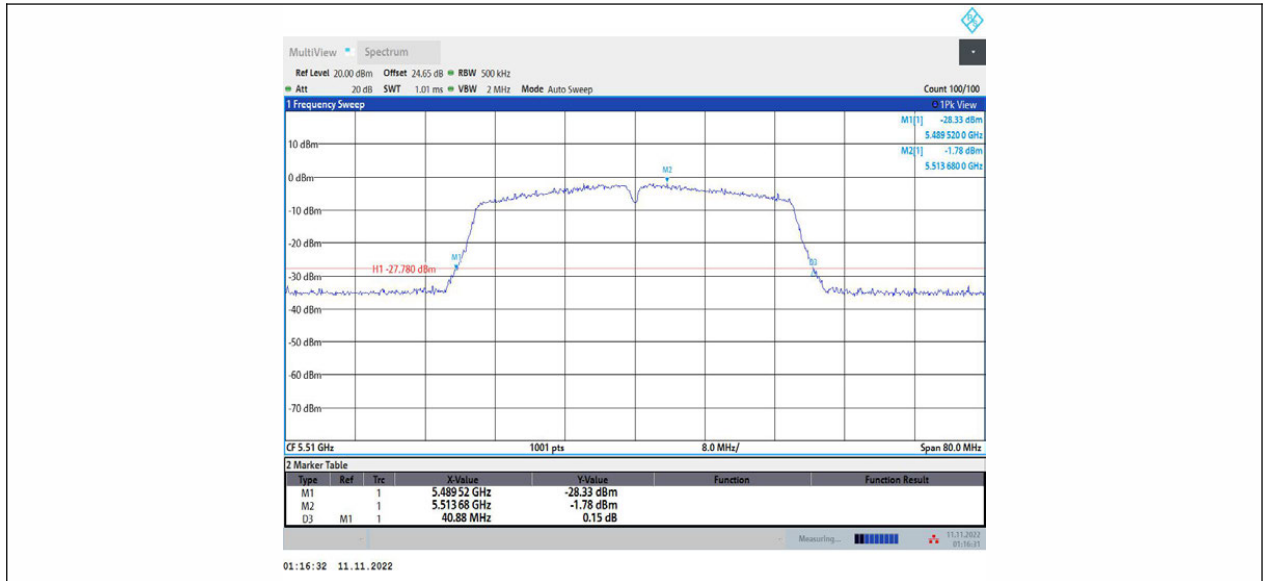


11N40MIMO\_Ant1\_5510

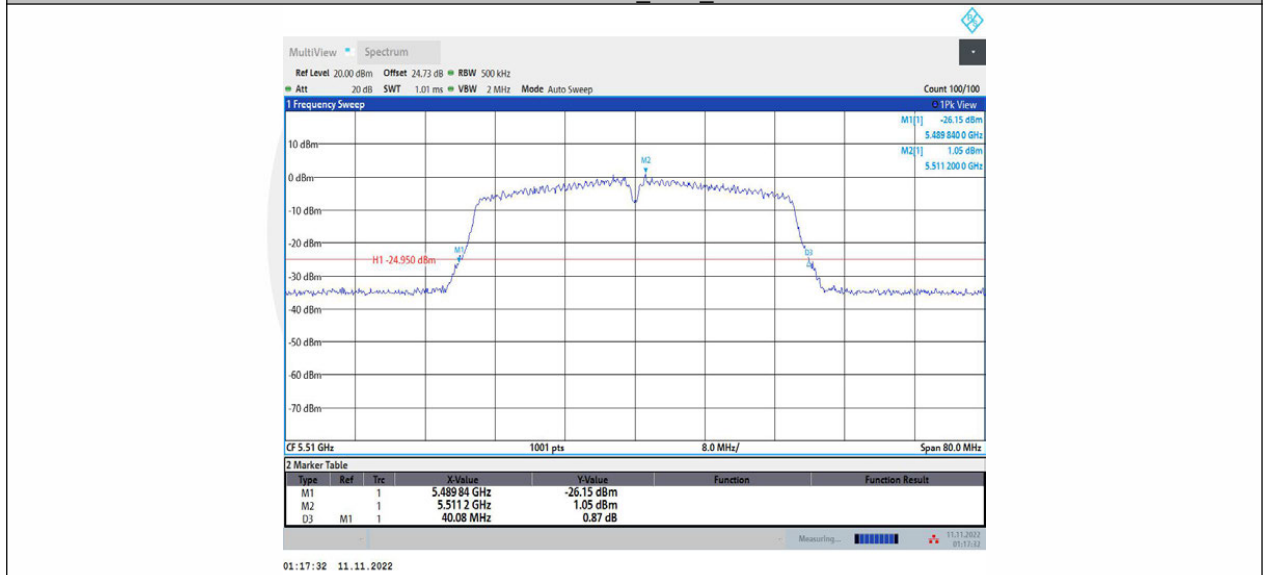


11N40MIMO\_Ant2\_5510

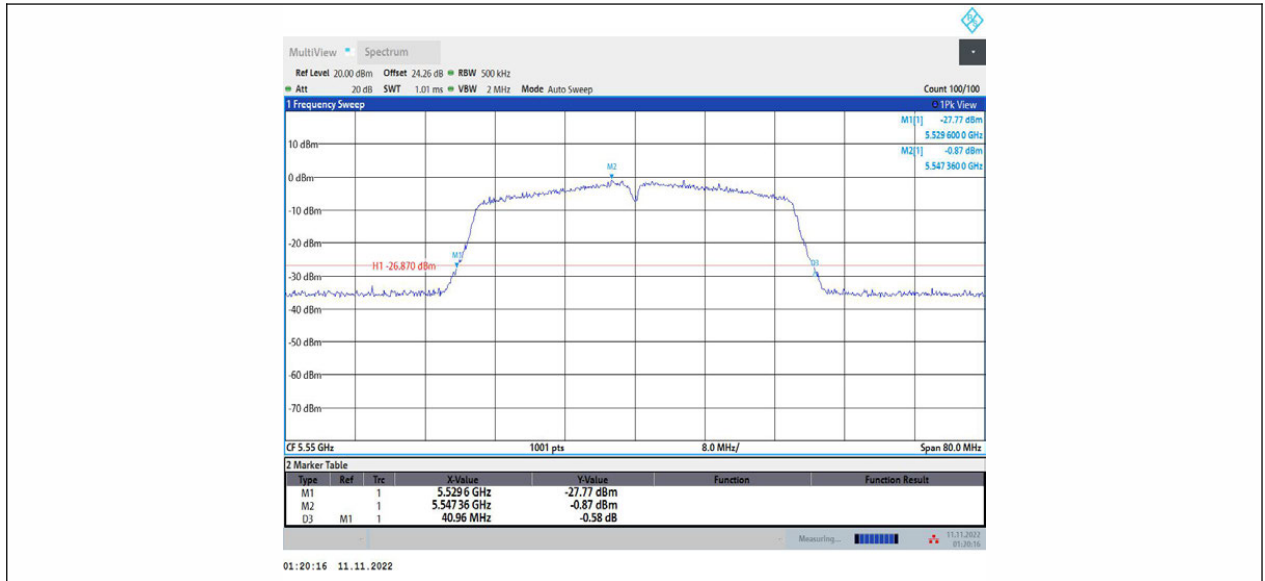


11N40MIMO\_Ant1\_5550

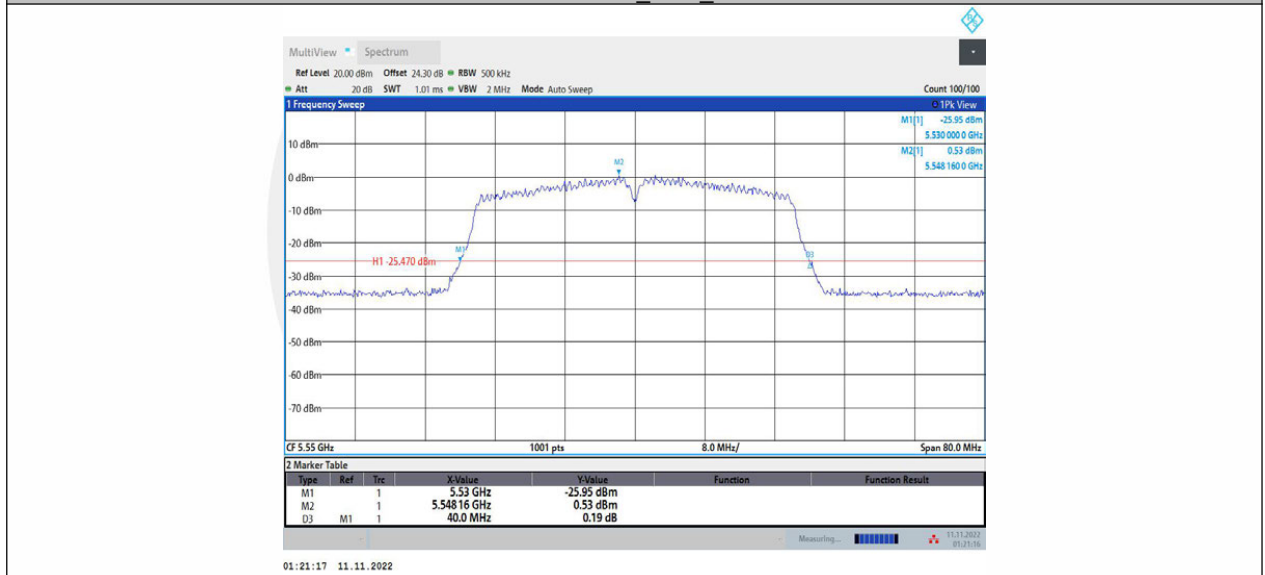

11N40MIMO\_Ant2\_5550

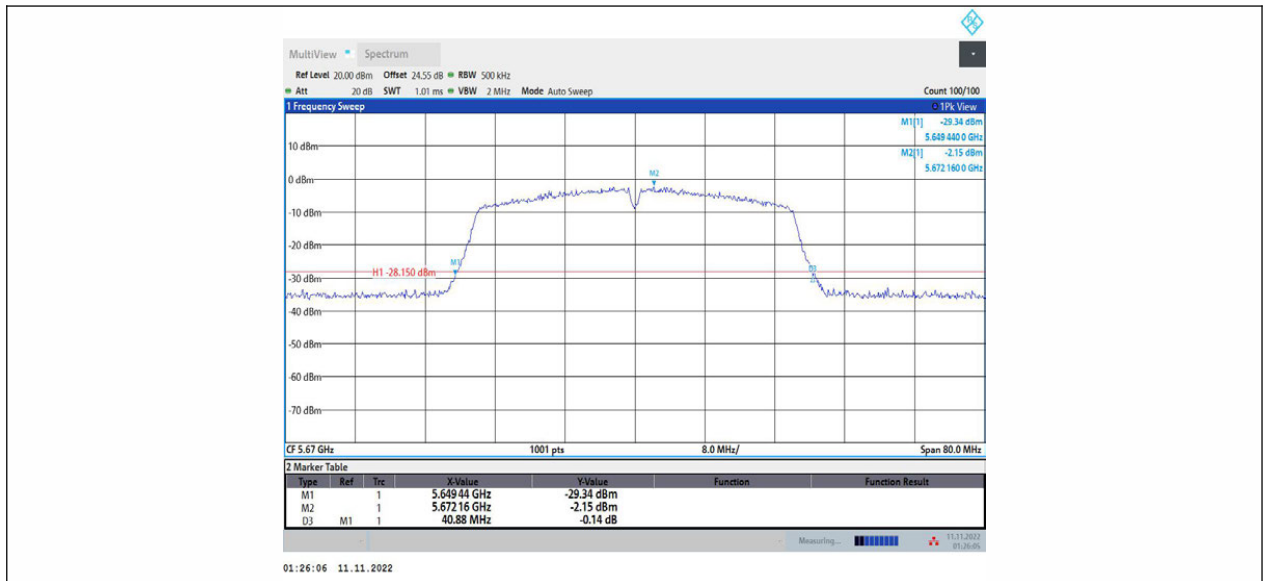

11N40MIMO\_Ant1\_5670

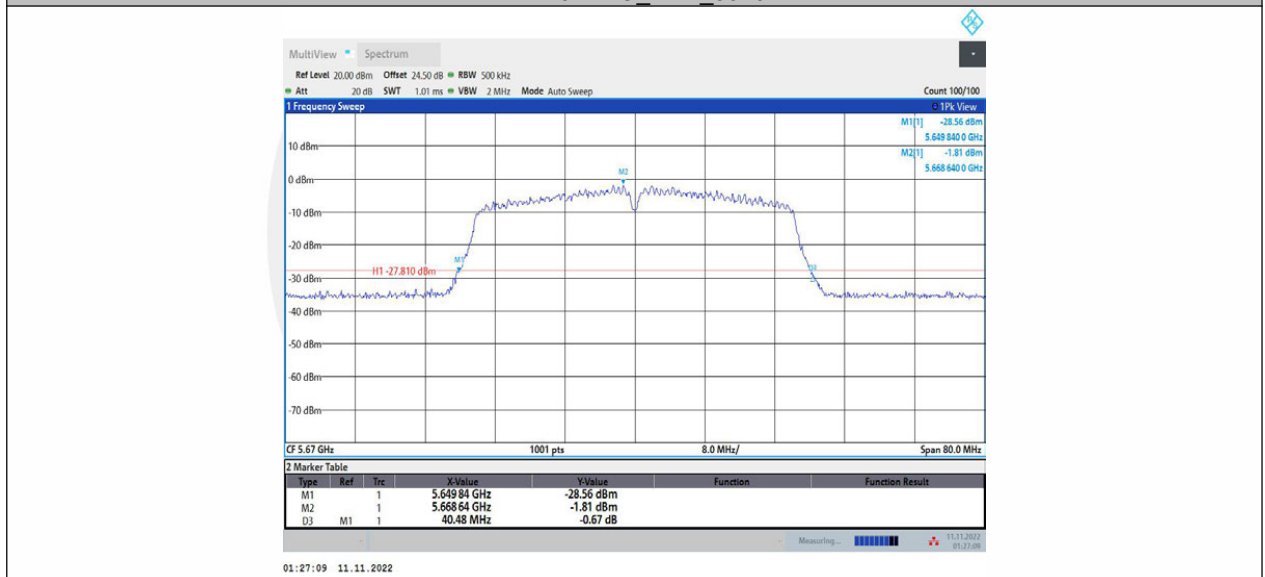


11N40MIMO\_Ant2\_5670



01:34:23 11.11.2022


11N40MIMO\_Ant1\_5755

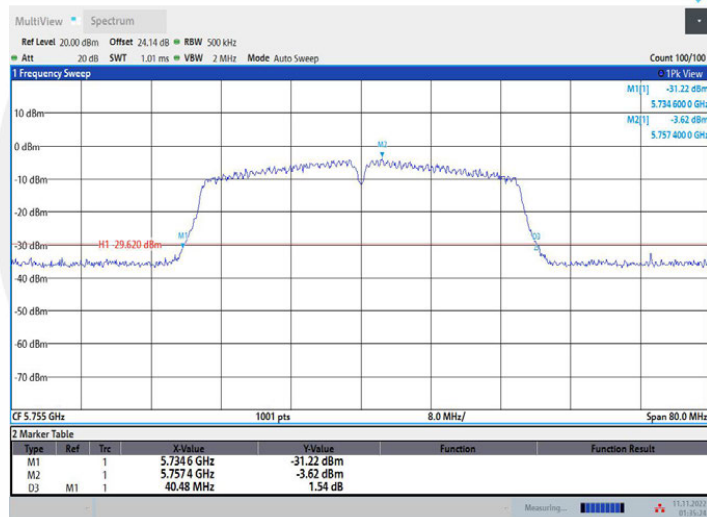


01:35:25 11.11.2022

11N40MIMO\_Ant2\_5755




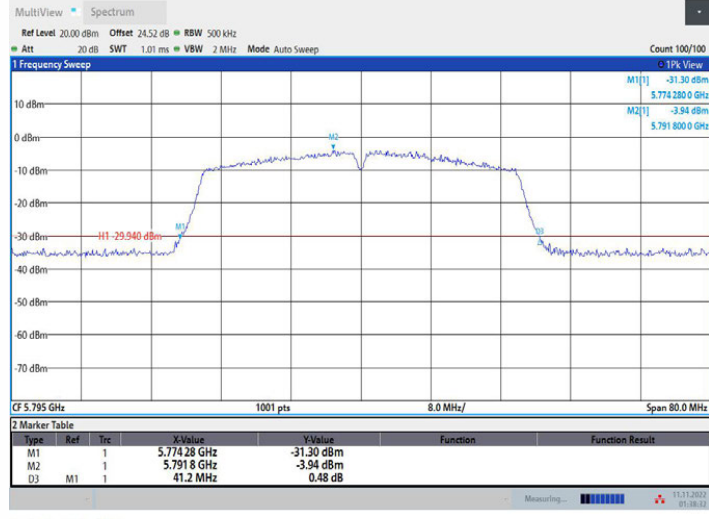


11N40MIMO\_Ant1\_5795

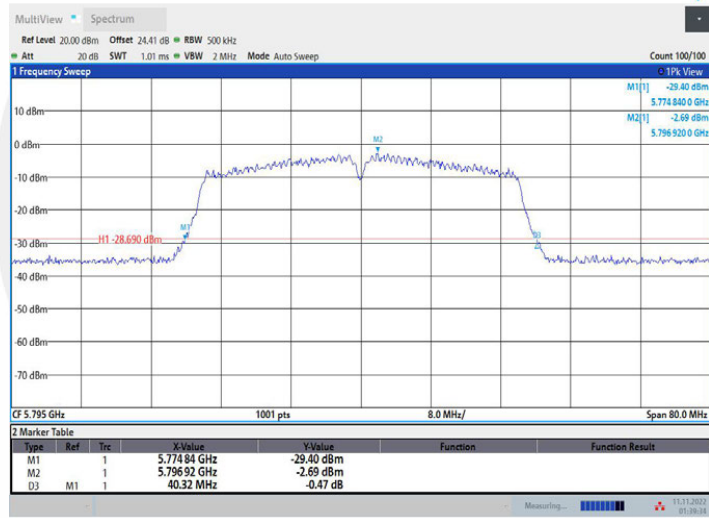


11N40MIMO\_Ant2\_5795

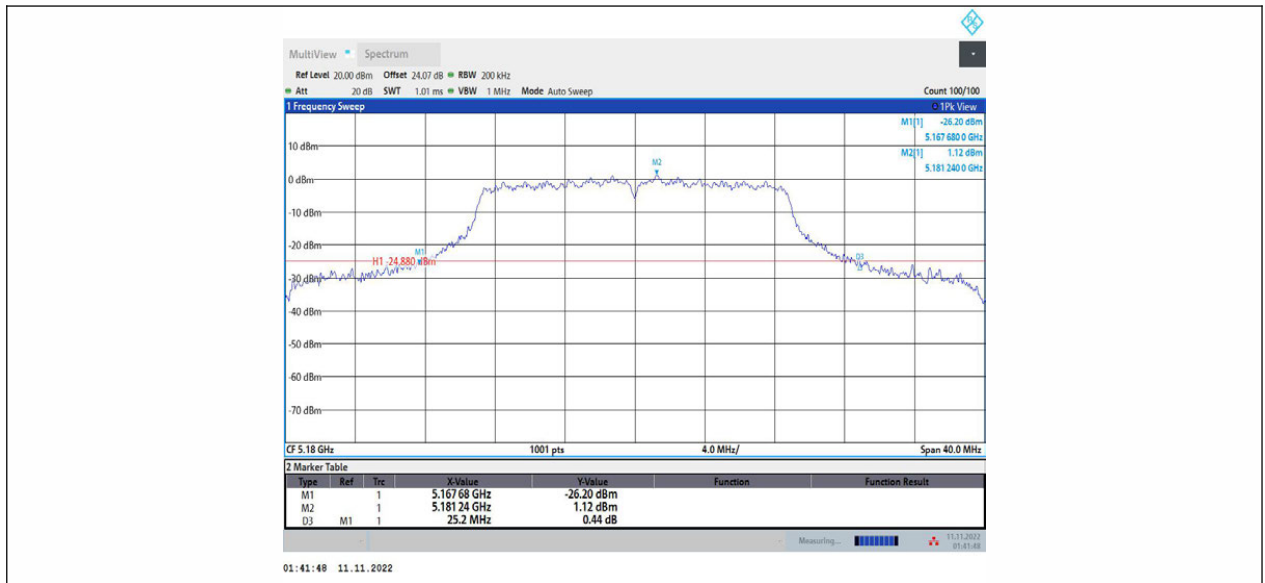


11AC20MIMO\_Ant1\_5180

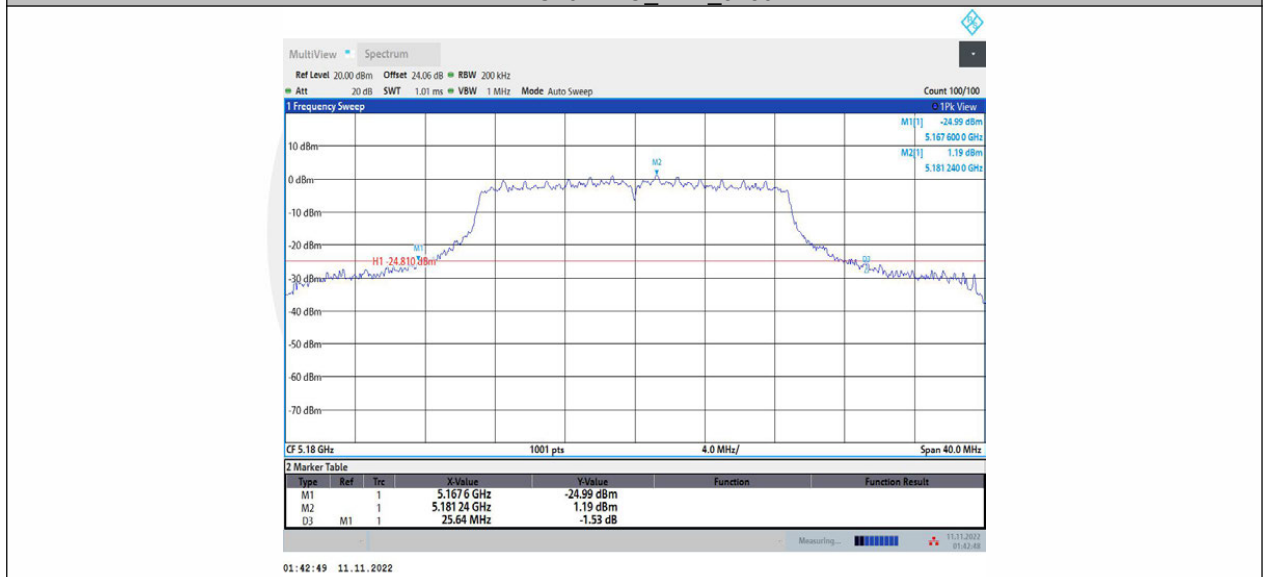


11AC20MIMO\_Ant2\_5180

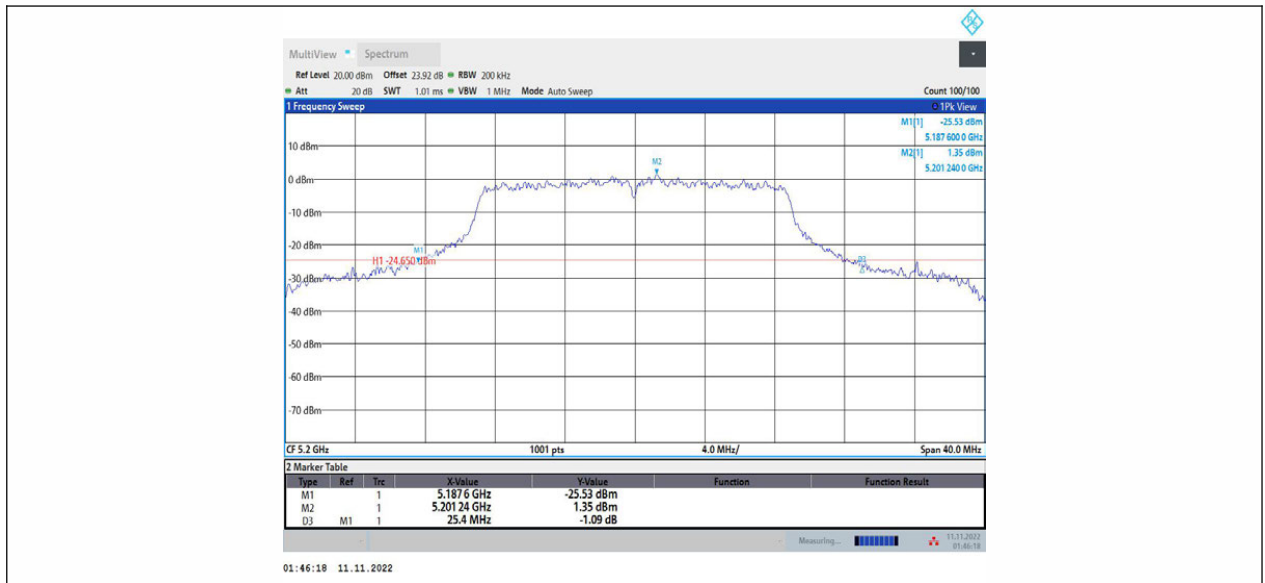


11AC20MIMO\_Ant1\_5200

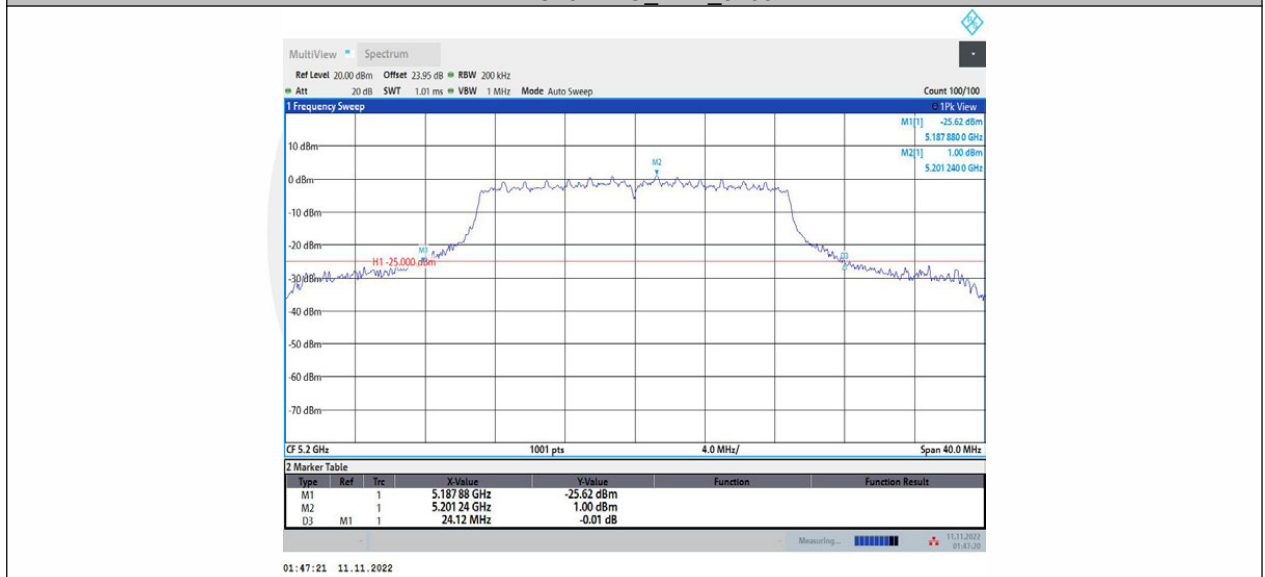


11AC20MIMO\_Ant2\_5200

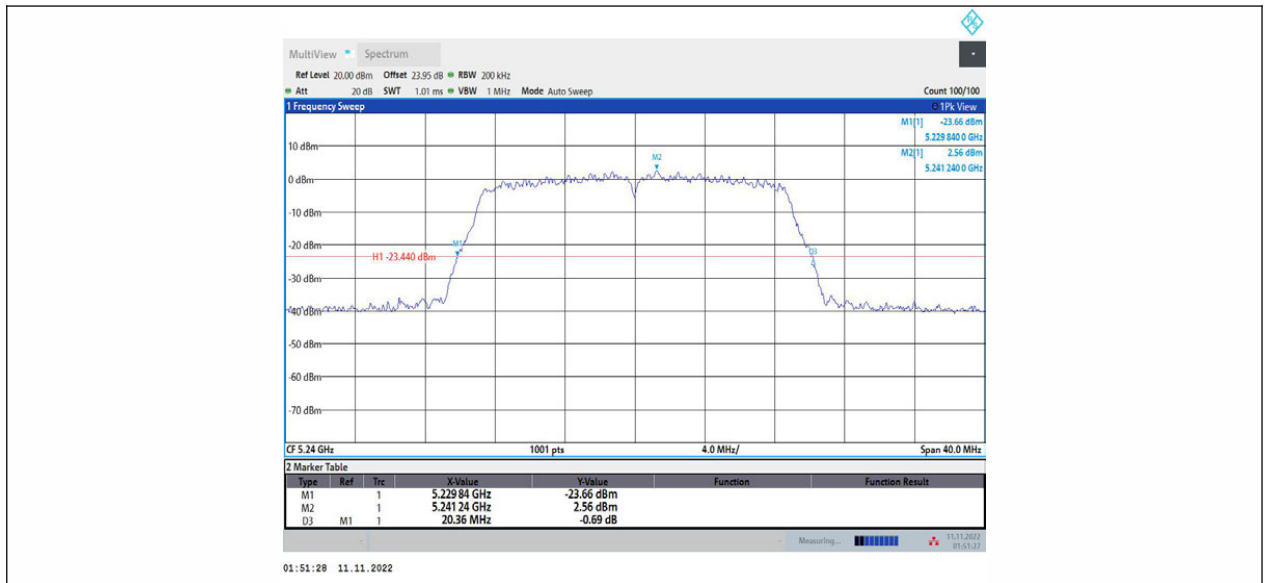


11AC20MIMO\_Ant1\_5240

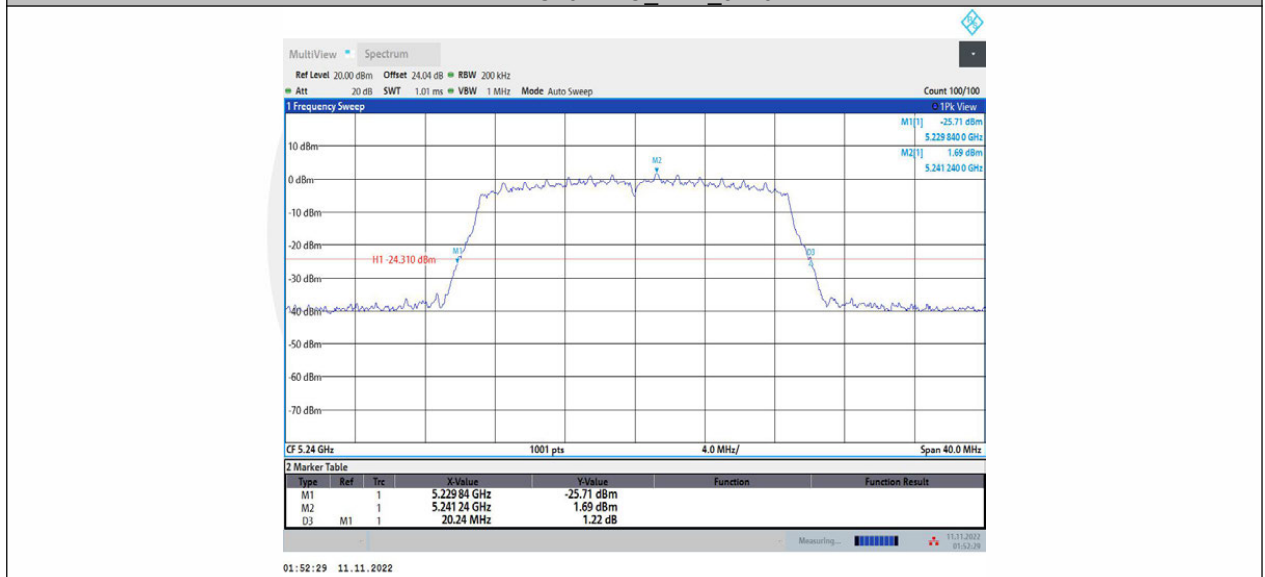

11AC20MIMO\_Ant2\_5240

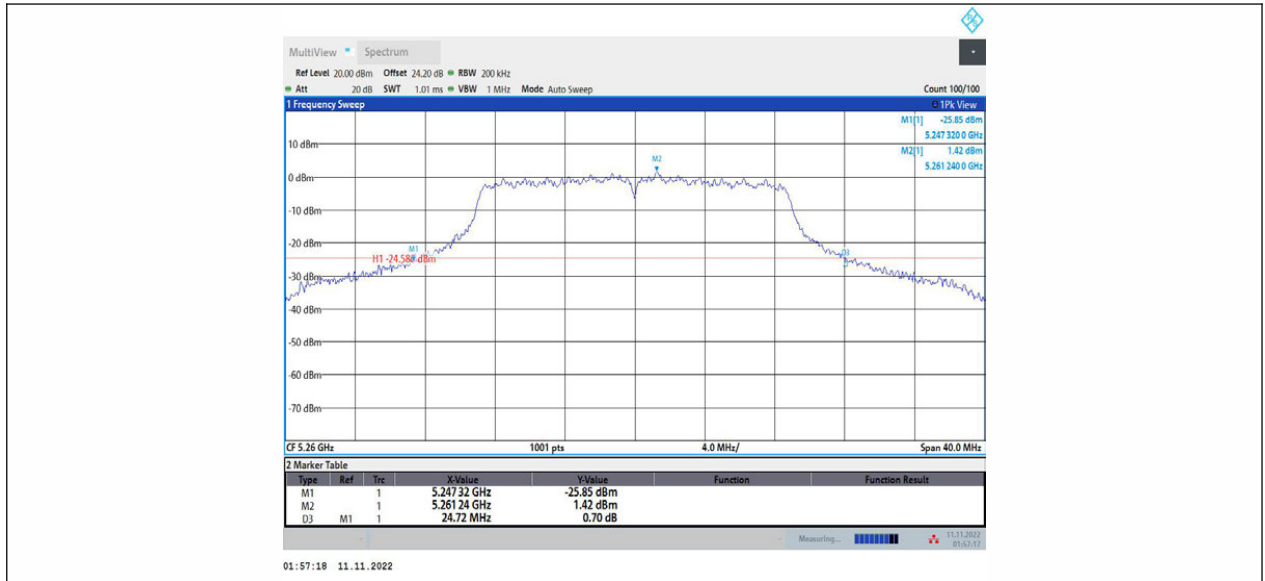

11AC20MIMO\_Ant1\_5260

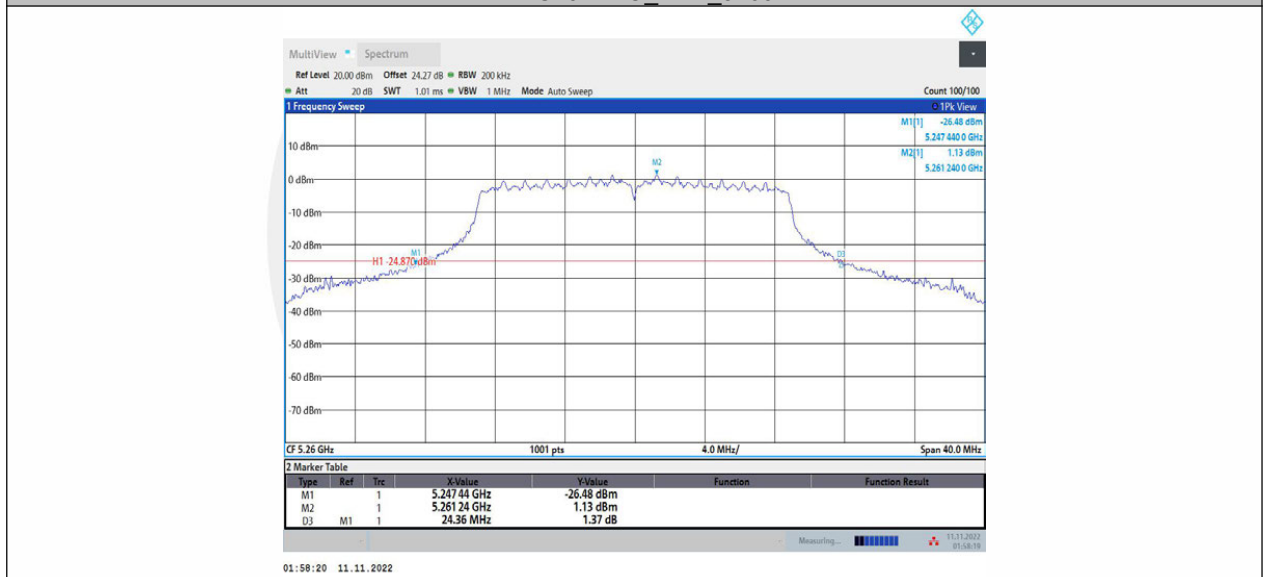

11AC20MIMO\_Ant2\_5260