


Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

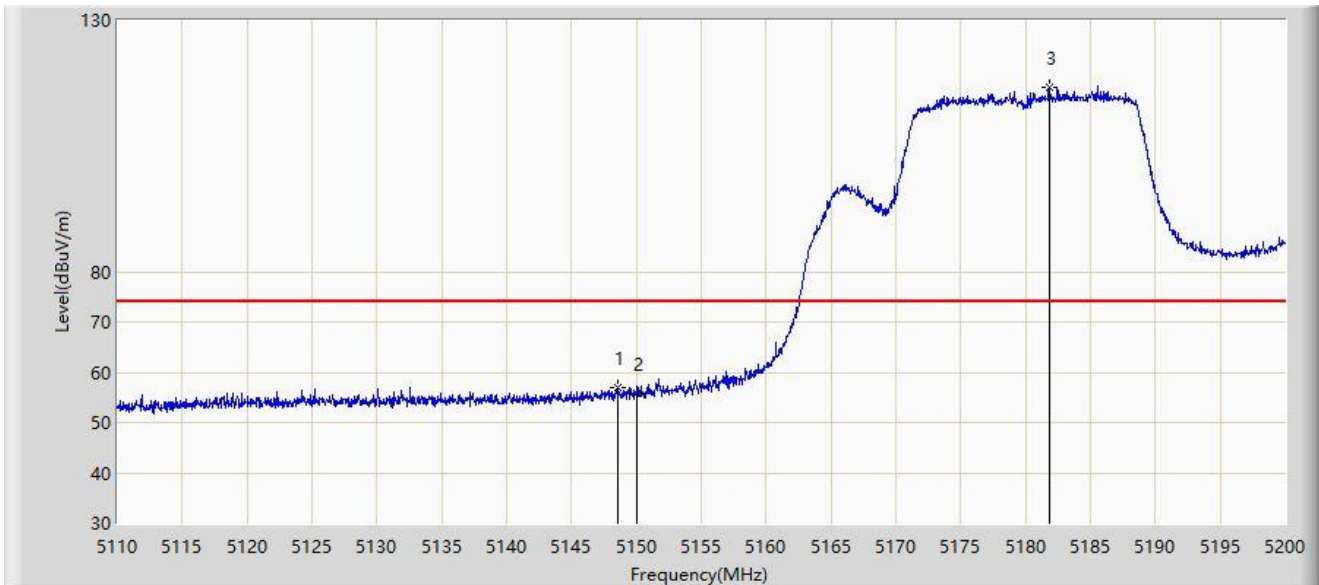


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.610	56.917	60.454	-17.083	74.000	-3.537	PK
2		5150.000	55.777	59.023	-18.223	74.000	-3.246	PK
3		5181.820	116.551	76.649	N/A	N/A	39.902	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

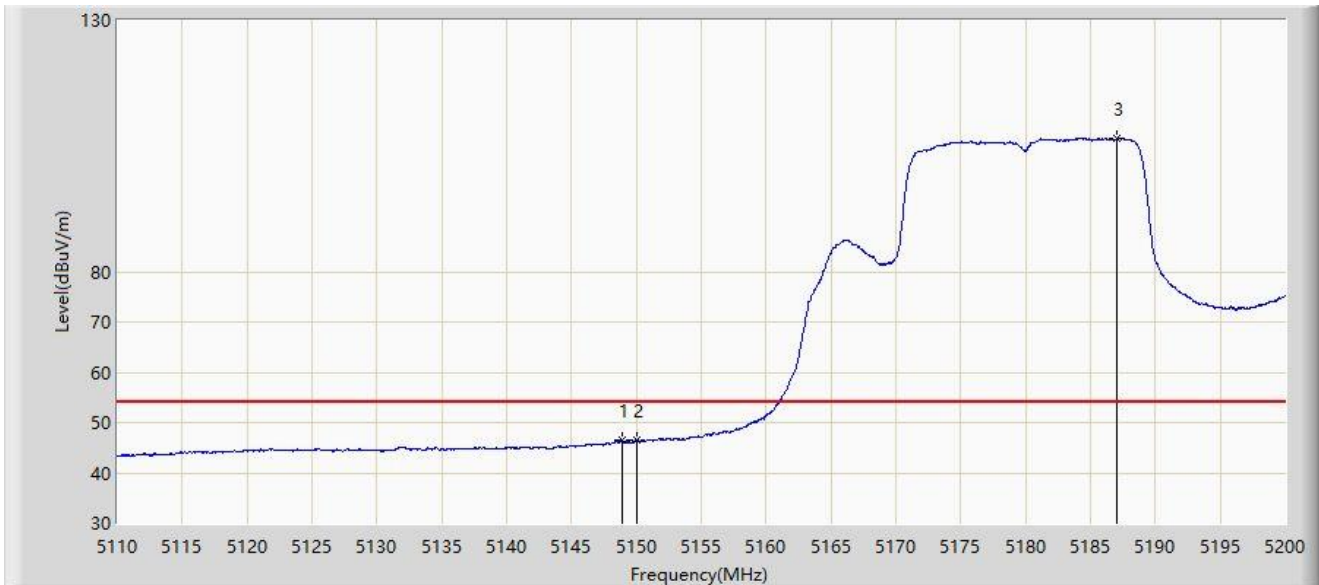


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.925	46.448	49.923	-7.552	54.000	-3.476	AV
2		5150.000	46.389	49.635	-7.611	54.000	-3.246	AV
3		5187.085	106.563	71.364	N/A	N/A	35.199	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

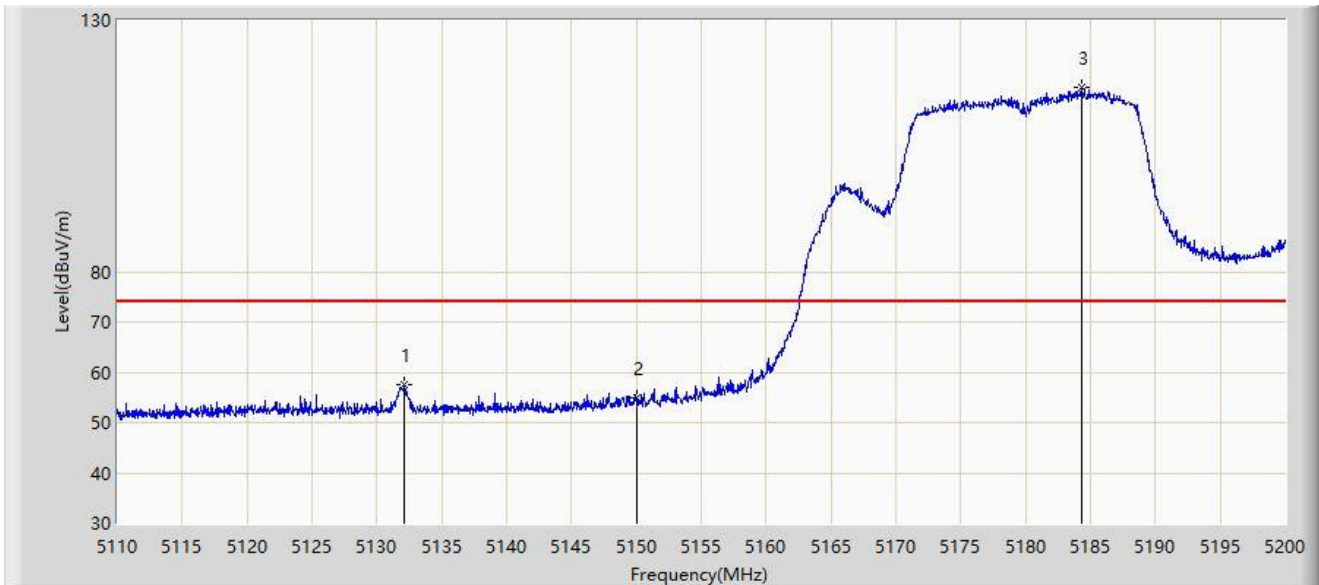


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5132.140	57.422	62.067	-16.578	74.000	-4.645	PK
2		5150.000	54.799	58.045	-19.201	74.000	-3.246	PK
3		5184.295	116.742	80.955	N/A	N/A	35.787	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

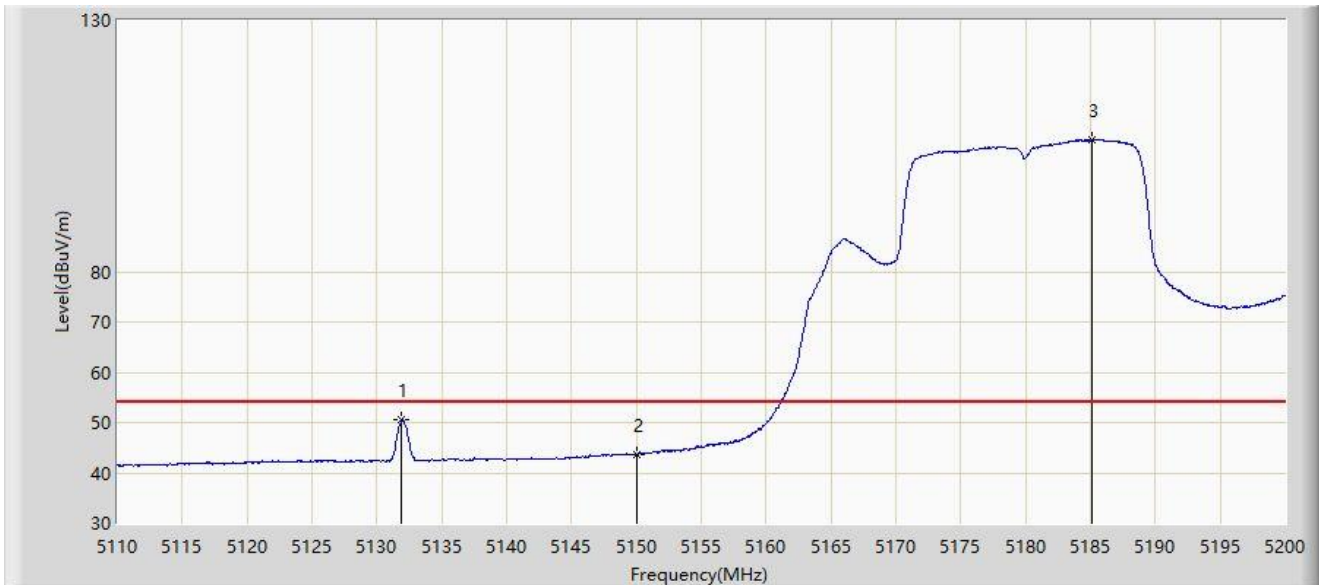


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5131.915	50.476	55.139	-3.524	54.000	-4.664	AV
2		5150.000	43.734	46.980	-10.266	54.000	-3.246	AV
3		5185.105	106.324	71.320	N/A	N/A	35.005	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

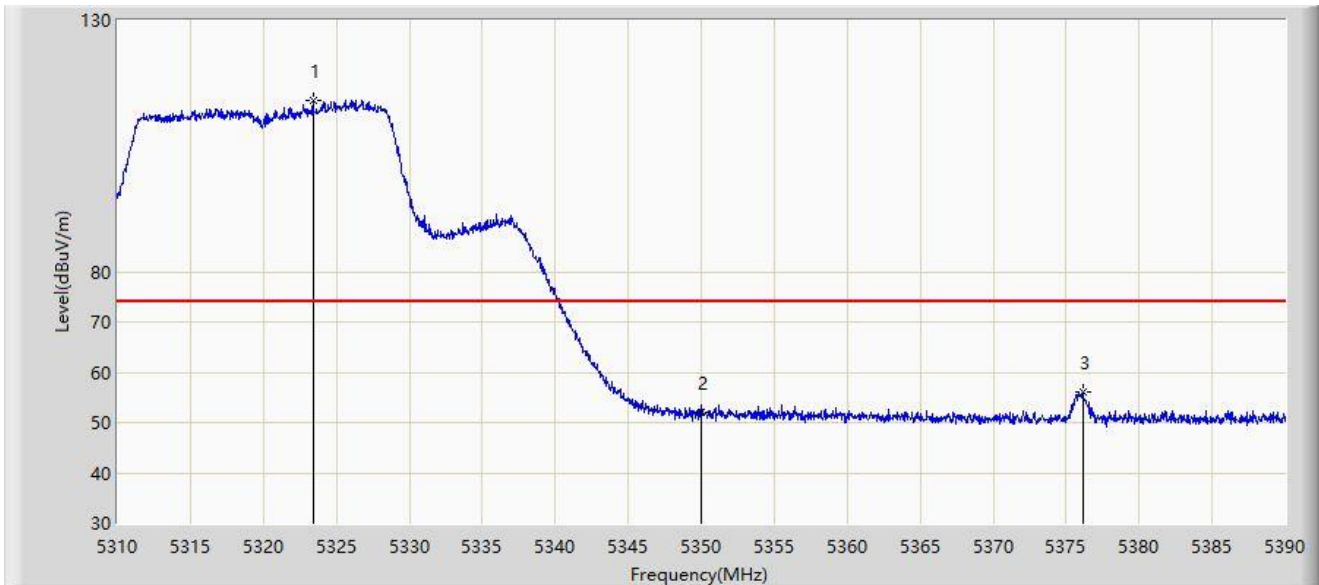


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.400	114.027	74.309	N/A	N/A	39.718	PK
2		5350.000	52.062	53.466	-21.938	74.000	-1.404	PK
3	*	5376.160	56.155	61.115	-17.845	74.000	-4.960	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

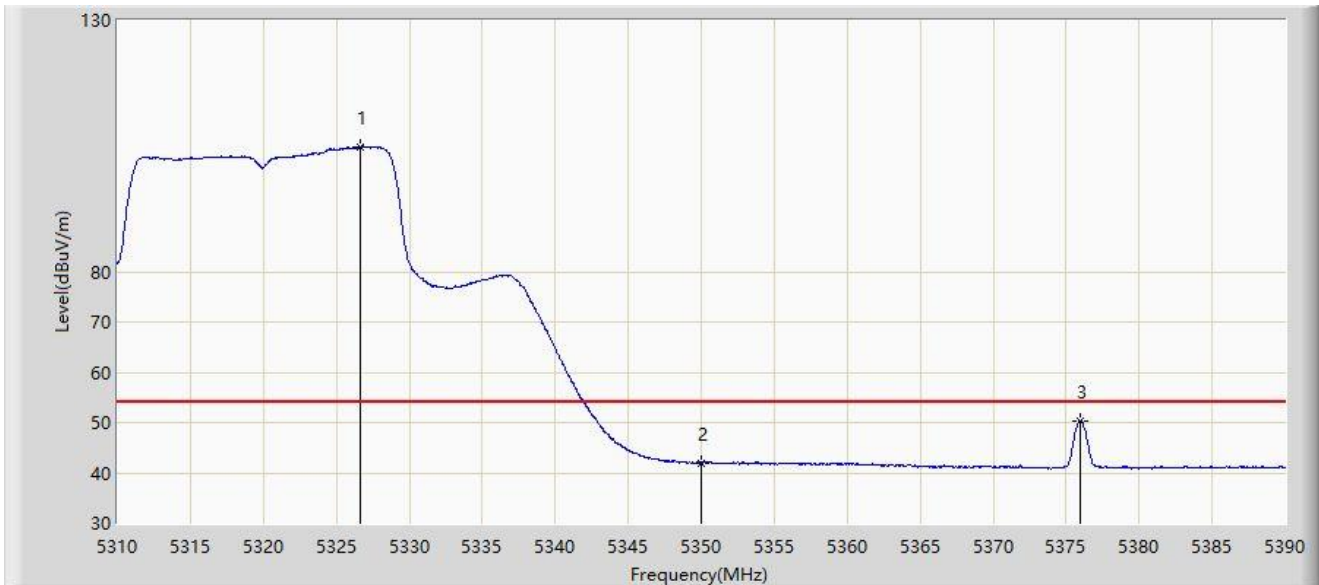


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.640	104.709	65.891	N/A	N/A	38.818	AV
2		5350.000	41.943	43.347	-12.057	54.000	-1.404	AV
3	*	5375.960	50.377	55.346	-3.623	54.000	-4.969	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

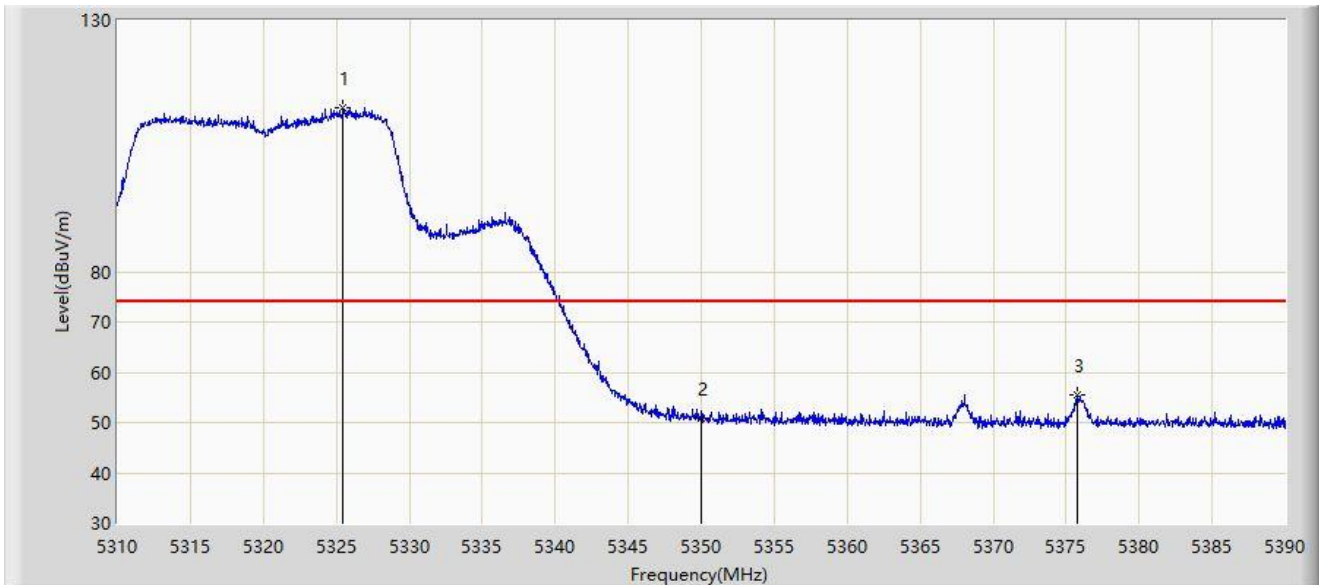


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.440	112.647	73.939	N/A	N/A	38.708	PK
2		5350.000	50.879	52.283	-23.121	74.000	-1.404	PK
3	*	5375.800	55.422	60.399	-18.578	74.000	-4.978	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

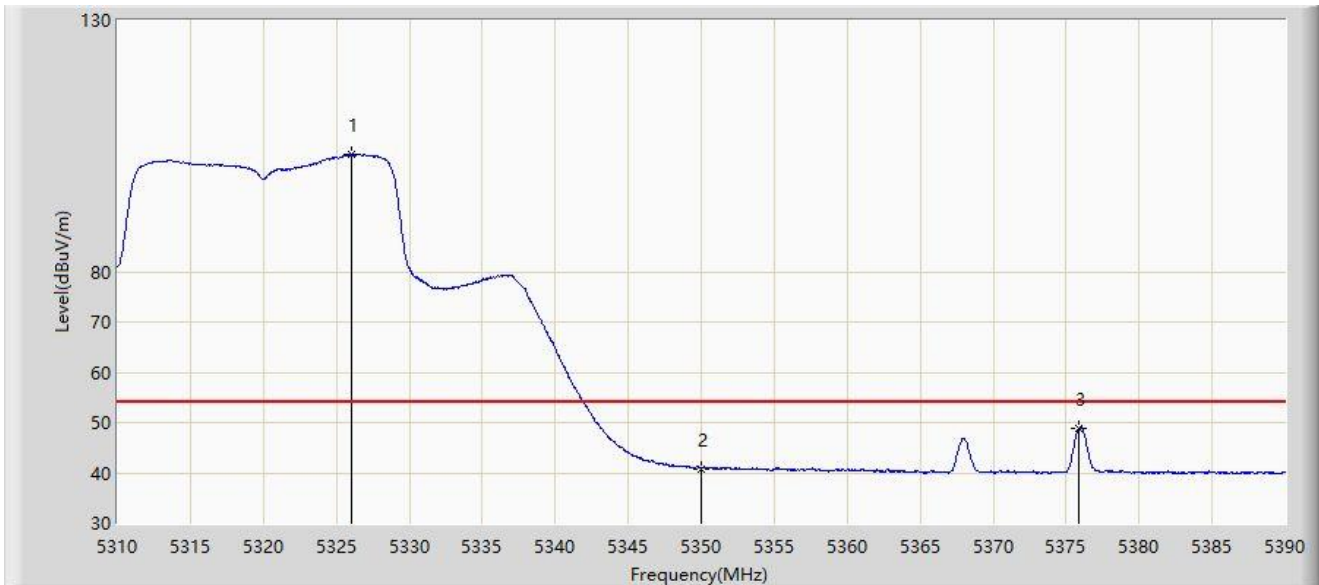


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.000	103.203	64.593	N/A	N/A	38.611	AV
2		5350.000	40.844	42.248	-13.156	54.000	-1.404	AV
3	*	5375.880	48.894	53.867	-5.106	54.000	-4.974	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

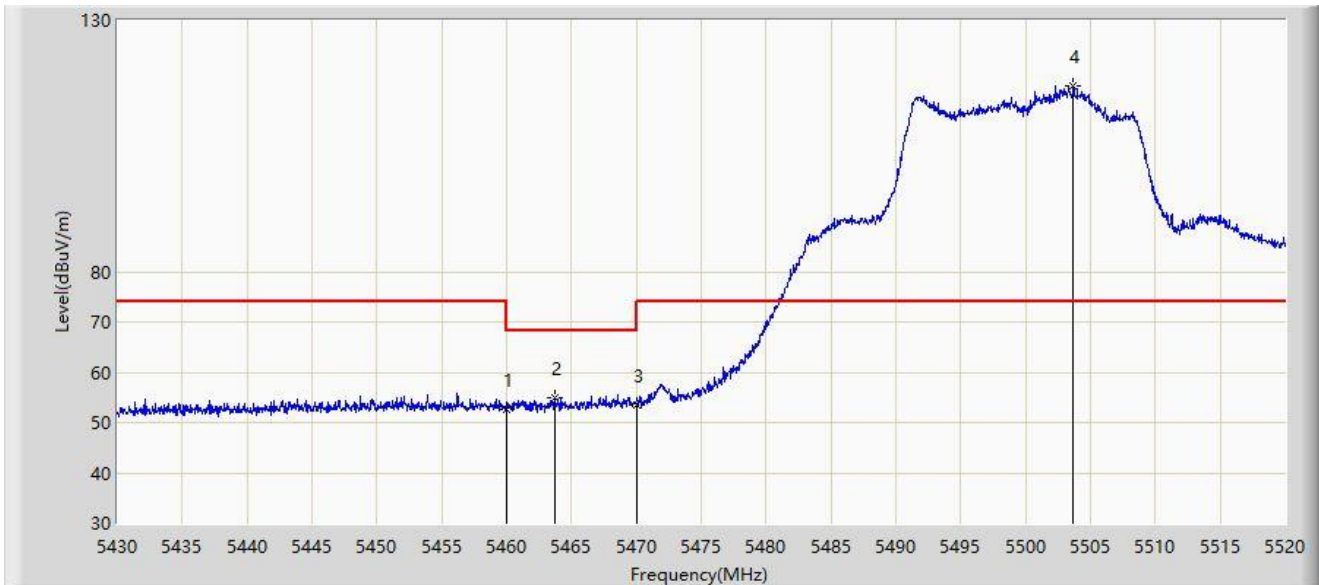


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	52.747	56.090	-15.453	68.200	-3.343	PK
2	*	5463.750	54.959	58.012	-13.241	68.200	-3.052	PK
3		5470.000	53.476	55.086	-14.724	68.200	-1.610	PK
4		5503.665	116.947	73.677	N/A	N/A	43.270	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

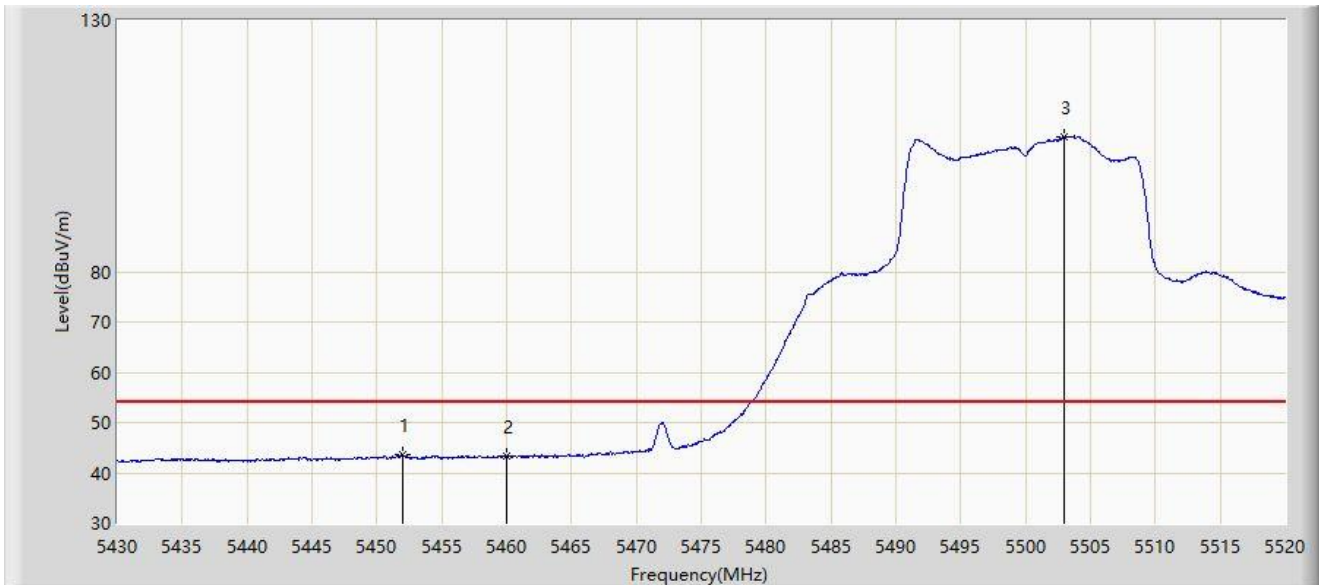


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5451.960	43.573	47.437	-10.427	54.000	-3.864	AV
2		5460.000	43.282	46.625	-10.718	54.000	-3.343	AV
3		5502.990	106.949	64.864	N/A	N/A	42.085	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

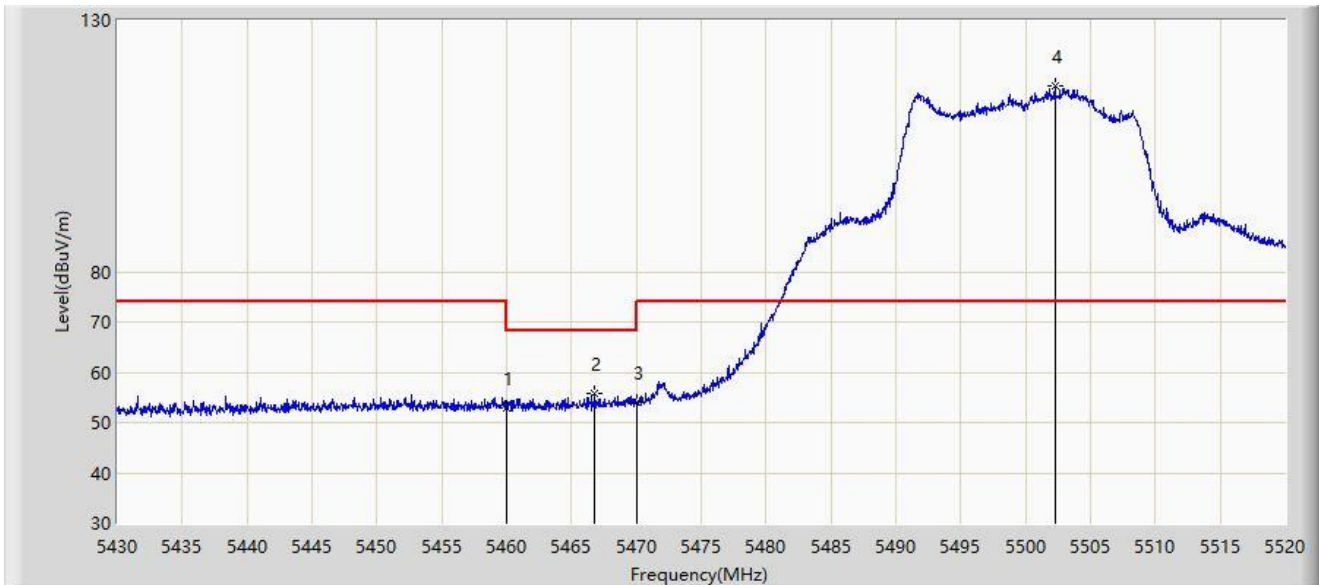


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	52.838	56.181	-15.362	68.200	-3.343	PK
2	*	5466.765	55.677	58.239	-12.523	68.200	-2.561	PK
3		5470.000	53.967	55.577	-14.233	68.200	-1.610	PK
4		5502.270	116.941	76.331	N/A	N/A	40.610	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

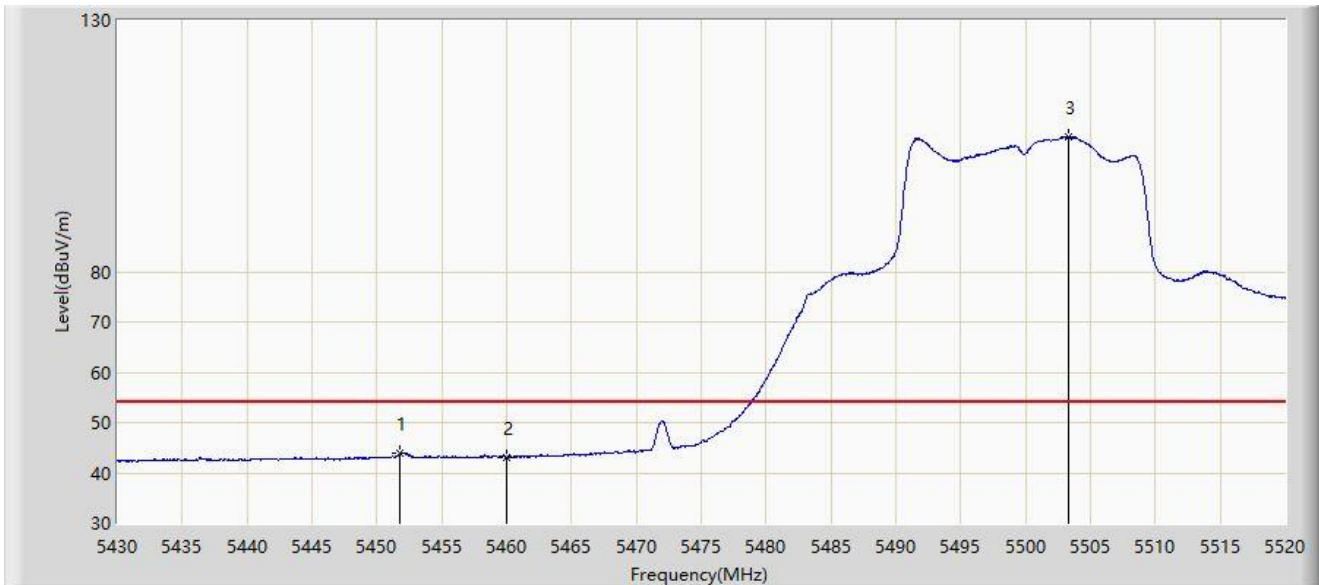


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5451.780	43.889	47.752	-10.111	54.000	-3.863	AV
2		5460.000	43.129	46.472	-10.871	54.000	-3.343	AV
3		5503.260	106.864	64.229	N/A	N/A	42.635	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

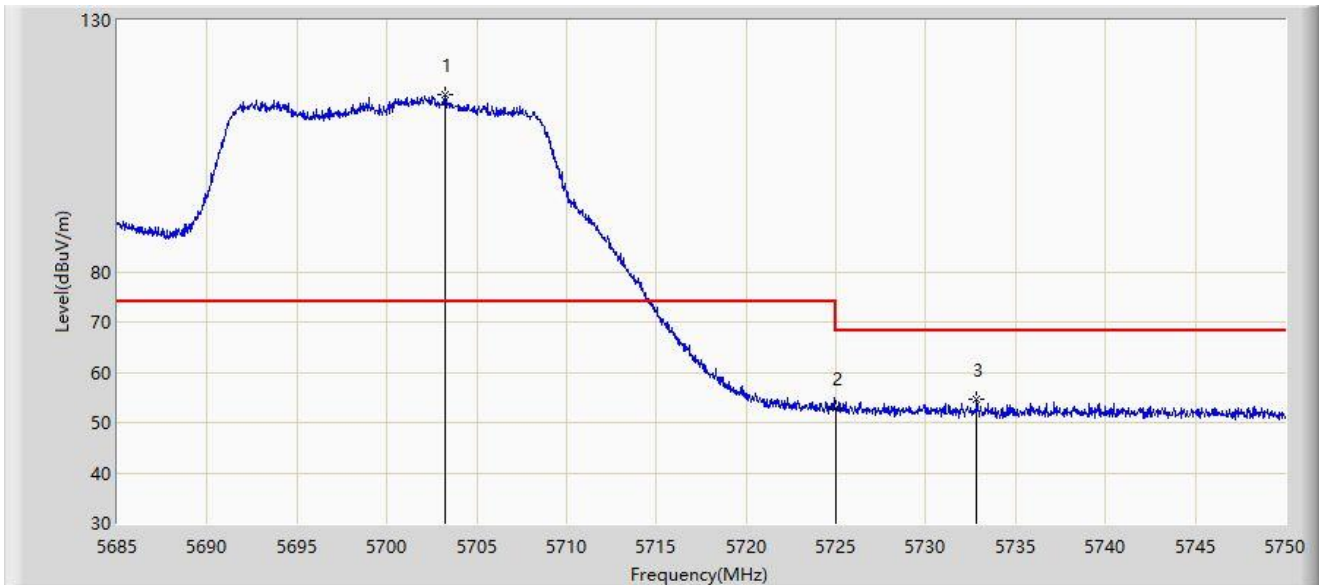


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5703.232	115.308	77.416	N/A	N/A	37.892	PK
2		5725.000	52.850	54.685	-15.350	68.200	-1.836	PK
3	*	5732.840	54.511	58.578	-13.689	68.200	-4.067	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

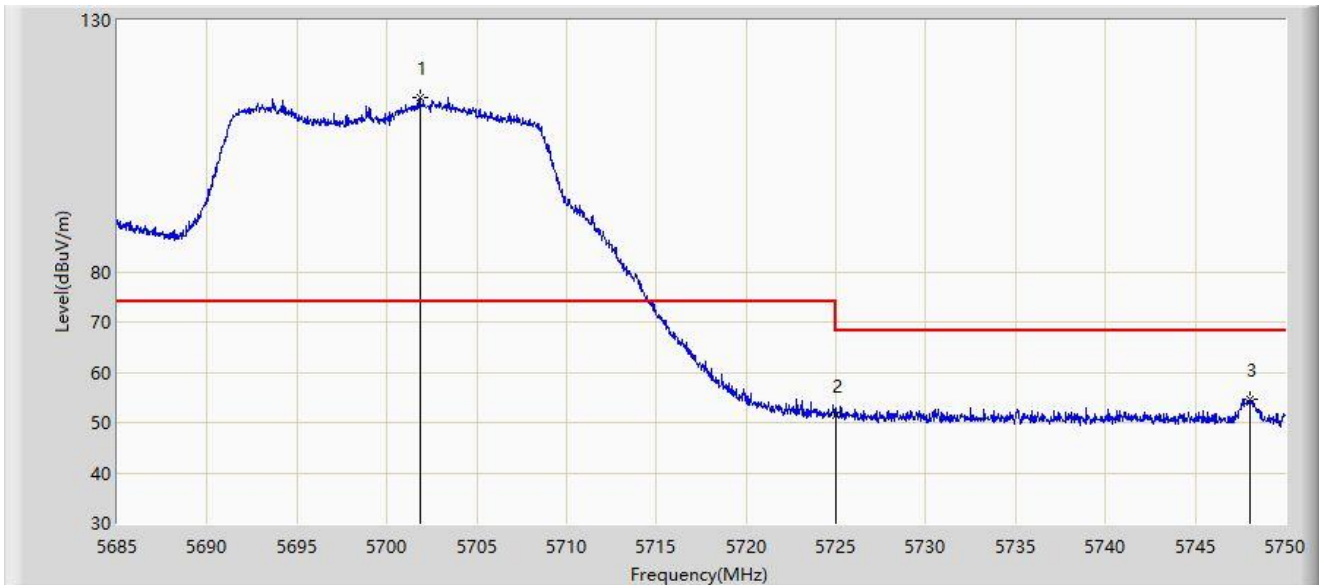


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.868	114.686	77.892	N/A	N/A	36.794	PK
2		5725.000	51.305	53.140	-16.895	68.200	-1.836	PK
3	*	5748.018	54.721	59.708	-13.479	68.200	-4.987	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

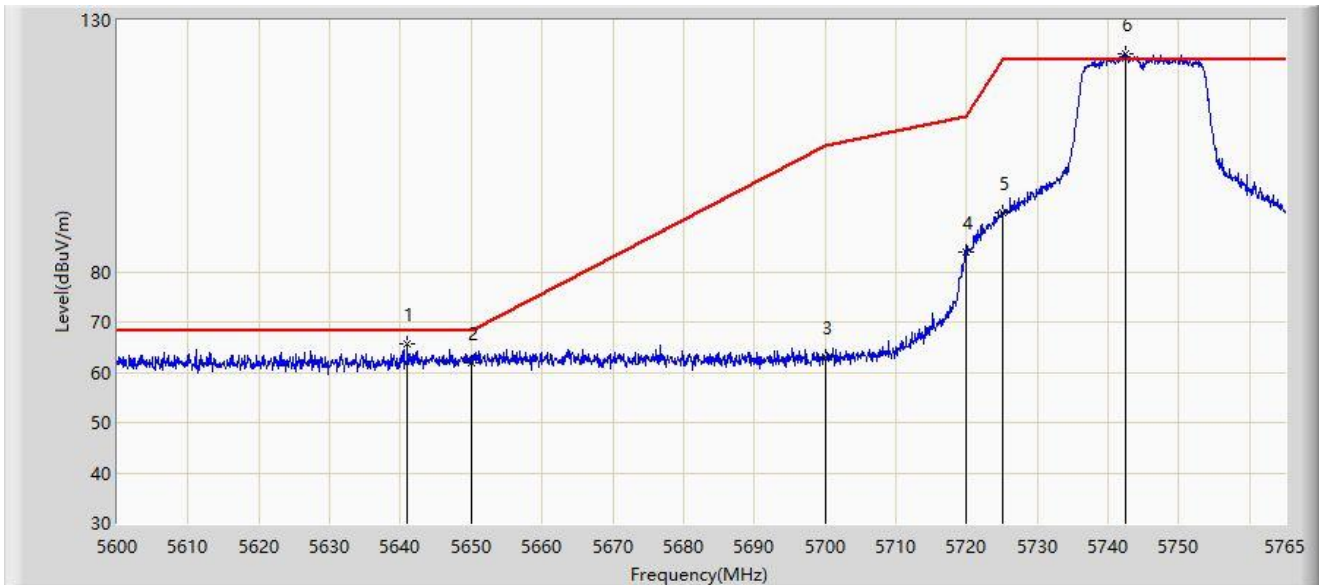


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.002	65.599	70.300	-2.601	68.200	-4.701	PK
2		5650.000	61.745	66.323	-6.455	68.200	-4.577	PK
3		5700.000	62.939	67.540	-42.261	105.200	-4.600	PK
4		5720.000	83.871	88.389	-26.929	110.800	-4.519	PK
5		5725.000	91.767	96.268	-30.433	122.200	-4.502	PK
6		5742.478	123.370	127.535	N/A	N/A	-4.165	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

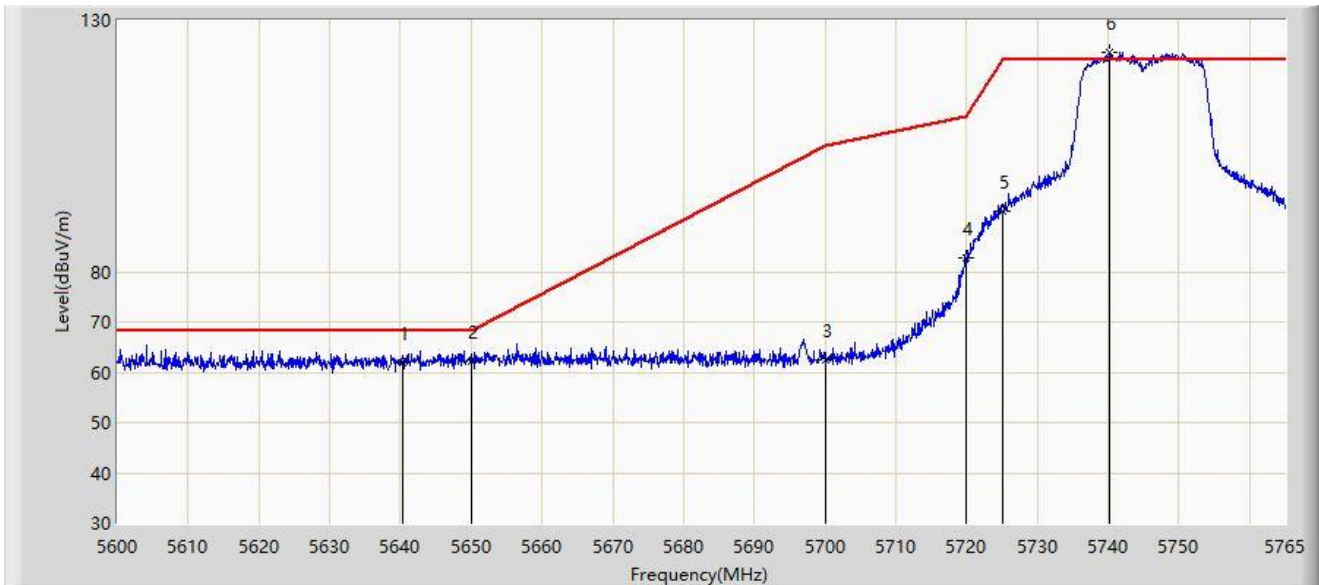


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5640.260	61.756	66.465	-6.444	68.200	-4.709	PK
2	*	5650.000	62.199	66.777	-6.001	68.200	-4.577	PK
3		5700.000	62.372	66.973	-42.828	105.200	-4.600	PK
4		5720.000	82.863	87.381	-27.937	110.800	-4.519	PK
5		5725.000	92.011	96.512	-30.189	122.200	-4.502	PK
6		5740.250	123.767	127.977	N/A	N/A	-4.211	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

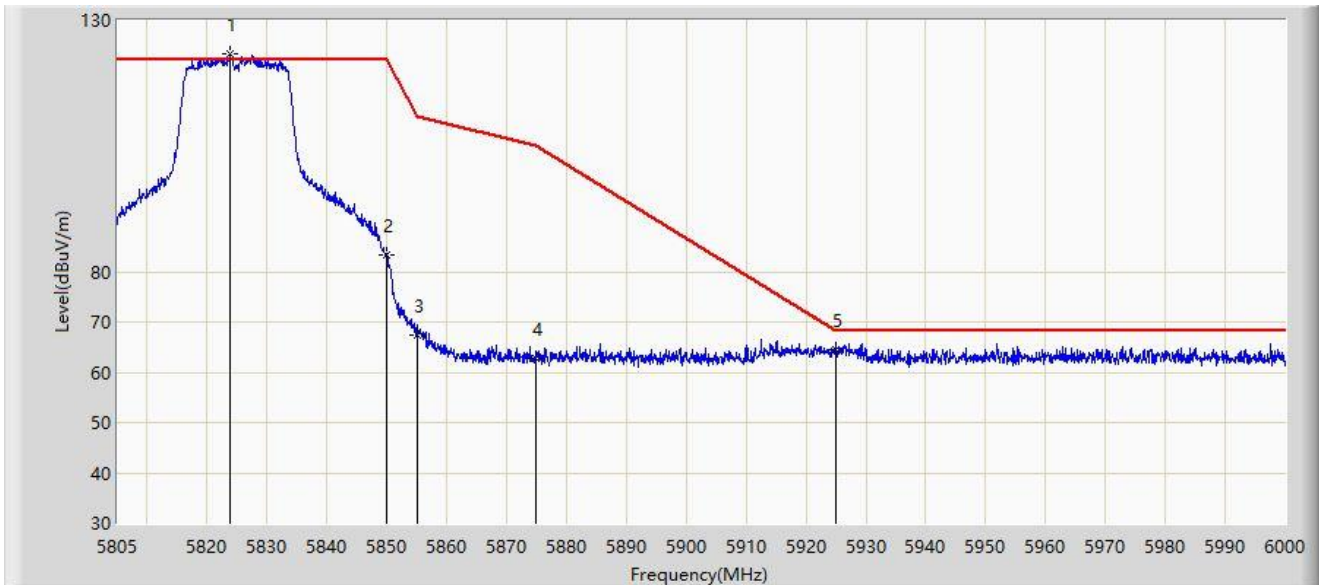


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.817	123.432	127.378	N/A	N/A	-3.946	PK
2		5850.000	83.470	87.581	-38.730	122.200	-4.111	PK
3		5855.000	67.307	71.420	-43.493	110.800	-4.113	PK
4		5875.000	62.790	66.837	-42.410	105.200	-4.046	PK
5	*	5925.000	64.364	68.124	-3.836	68.200	-3.760	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

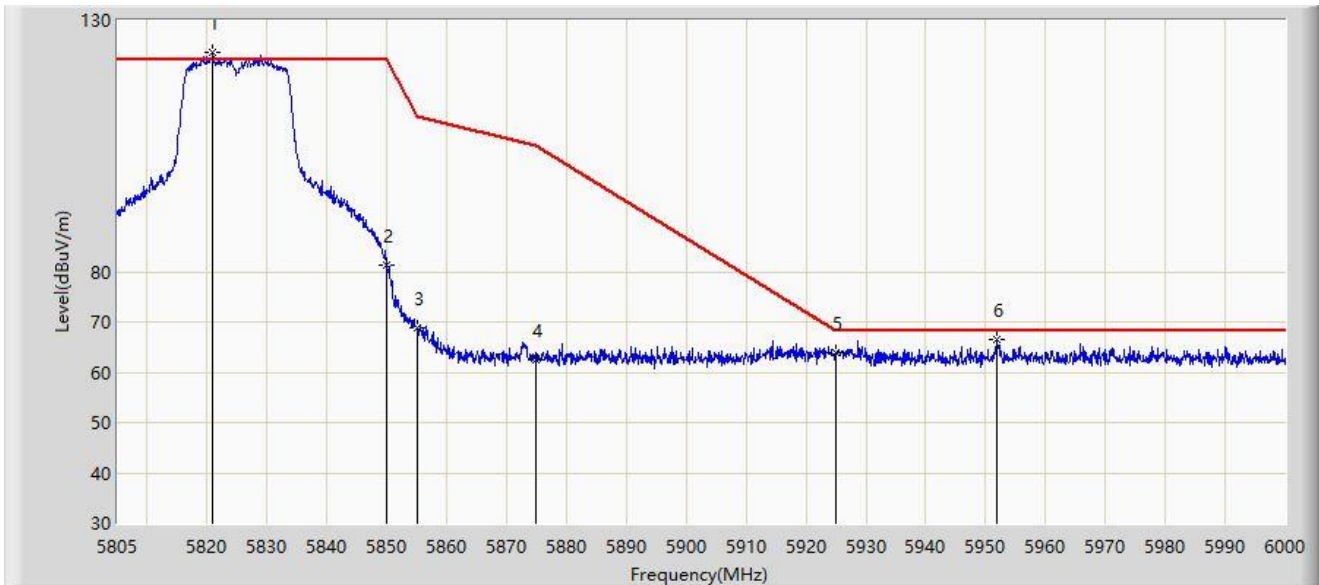


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5820.990	123.505	127.358	N/A	N/A	-3.852	PK
2		5850.000	81.358	85.469	-40.842	122.200	-4.111	PK
3		5855.000	68.849	72.962	-41.951	110.800	-4.113	PK
4		5875.000	62.380	66.427	-42.820	105.200	-4.046	PK
5		5925.000	63.814	67.574	-4.386	68.200	-3.760	PK
6	*	5951.933	66.389	69.923	-1.811	68.200	-3.534	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

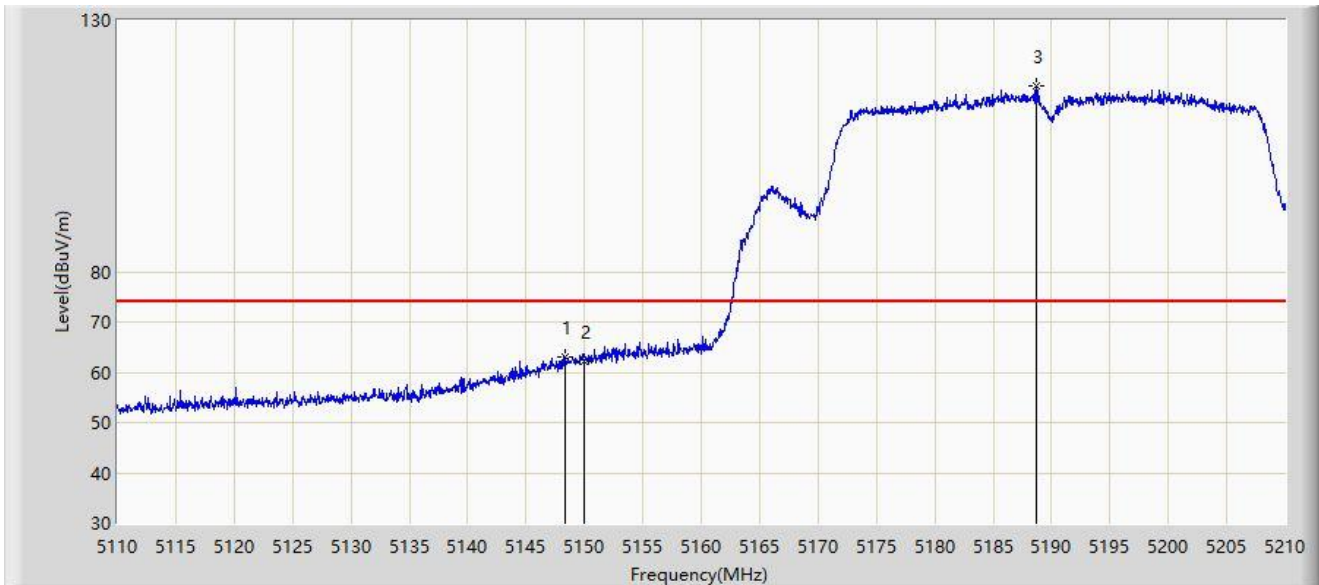


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.300	63.151	66.750	-10.849	74.000	-3.599	PK
2		5150.000	62.161	65.407	-11.839	74.000	-3.246	PK
3		5188.650	116.931	79.906	N/A	N/A	37.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

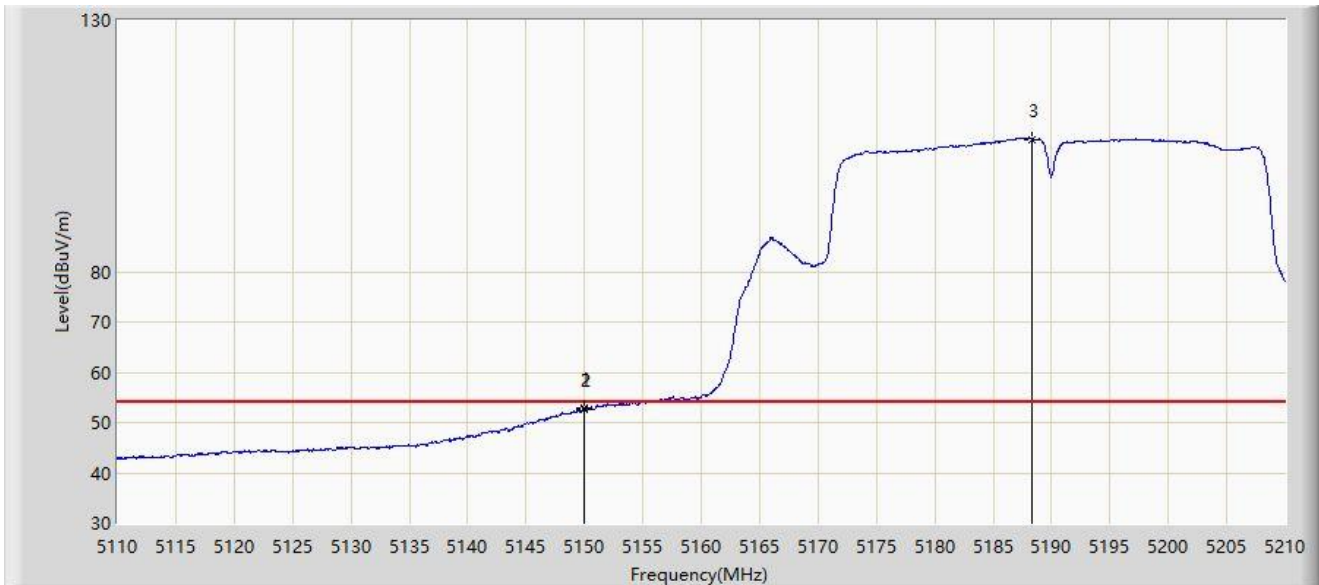


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.950	52.778	56.041	-1.222	54.000	-3.262	AV
2		5150.000	52.666	55.912	-1.334	54.000	-3.246	AV
3		5188.350	106.315	69.718	N/A	N/A	36.597	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

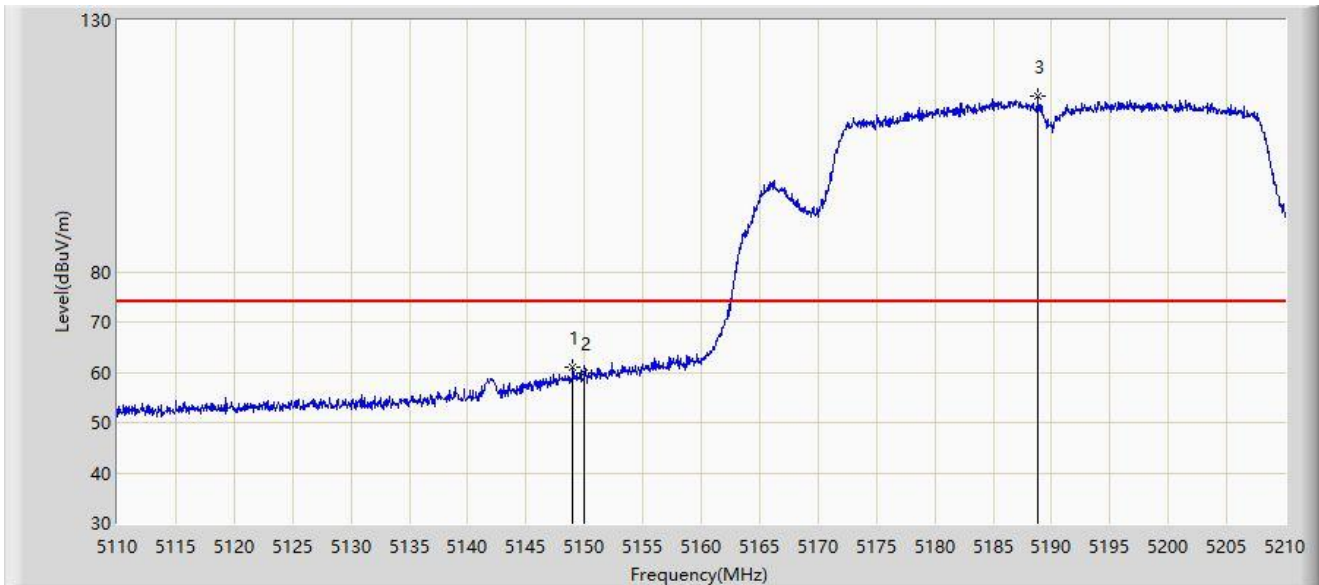


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.000	60.972	64.433	-13.028	74.000	-3.461	PK
2		5150.000	59.875	63.121	-14.125	74.000	-3.246	PK
3		5188.850	114.811	77.480	N/A	N/A	37.331	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

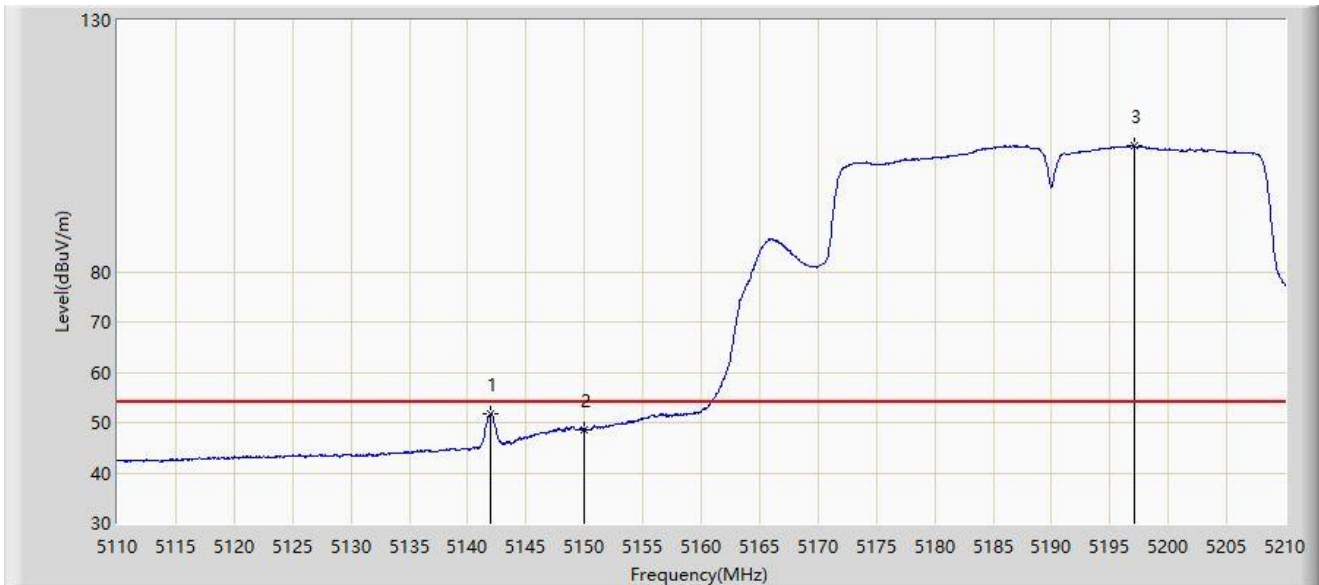


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.000	51.677	55.811	-2.323	54.000	-4.134	AV
2		5150.000	48.685	51.931	-5.315	54.000	-3.246	AV
3		5197.050	105.002	69.496	N/A	N/A	35.507	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

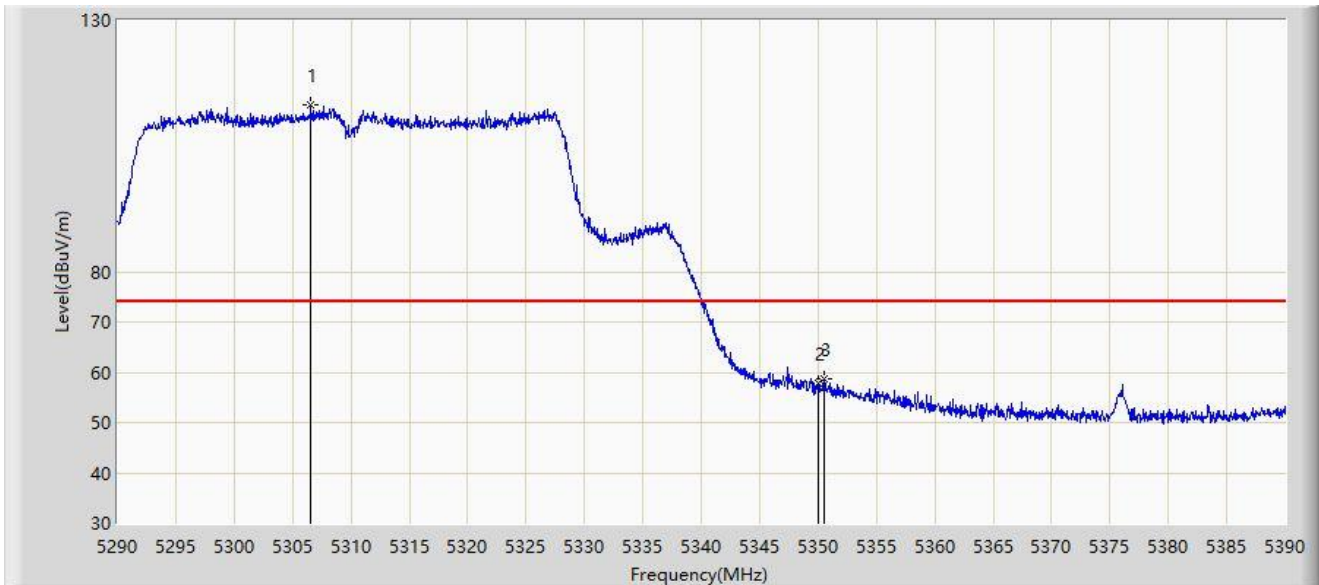


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.600	113.204	74.290	N/A	N/A	38.913	PK
2		5350.000	57.866	59.270	-16.134	74.000	-1.404	PK
3	*	5350.500	58.730	60.401	-15.270	74.000	-1.671	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

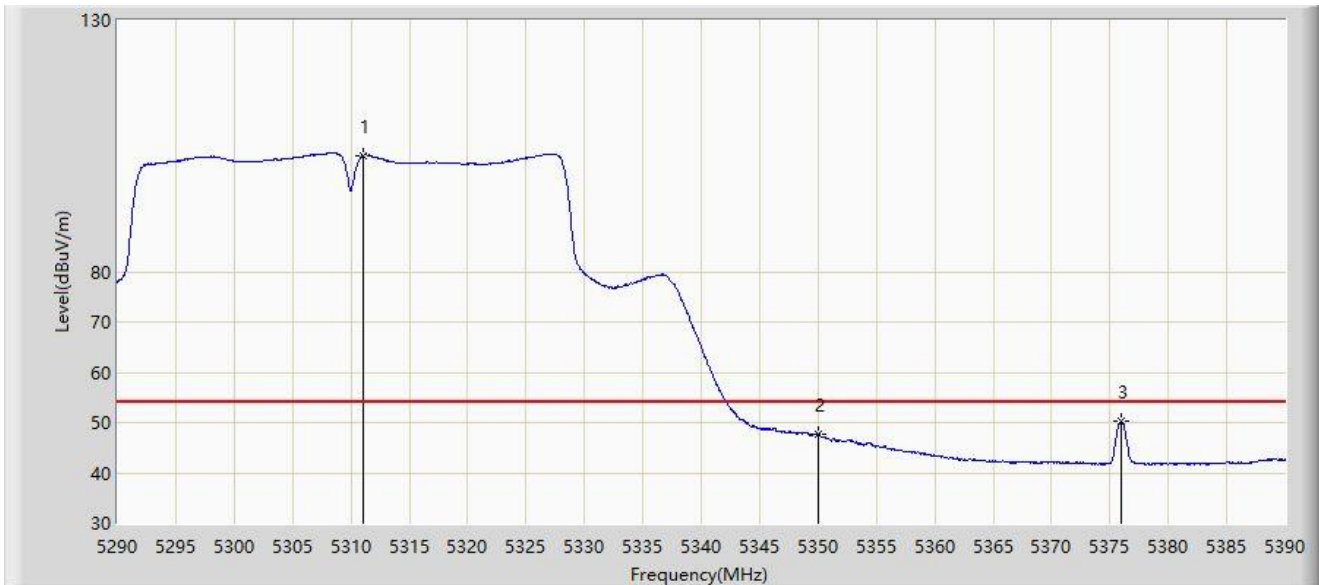


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.050	103.170	59.419	N/A	N/A	43.751	AV
2		5350.000	47.599	49.003	-6.401	54.000	-1.404	AV
3	*	5375.950	50.176	55.146	-3.824	54.000	-4.970	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

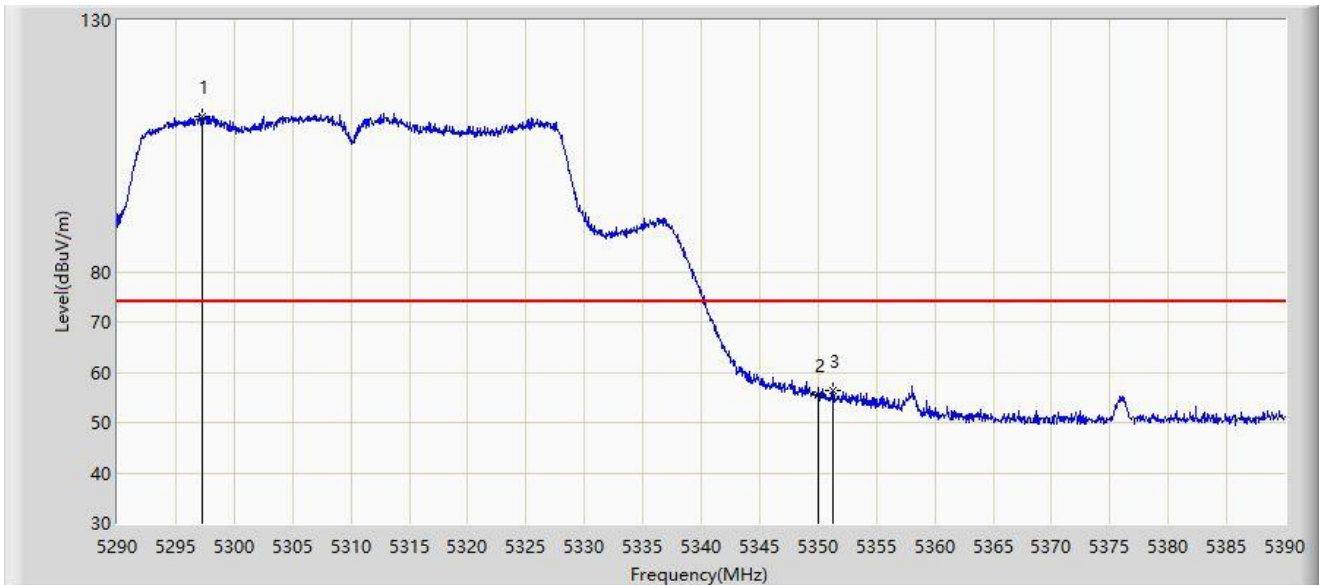


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5297.300	110.983	68.845	N/A	N/A	42.138	PK
2		5350.000	55.486	56.890	-18.514	74.000	-1.404	PK
3	*	5351.300	56.440	58.502	-17.560	74.000	-2.062	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

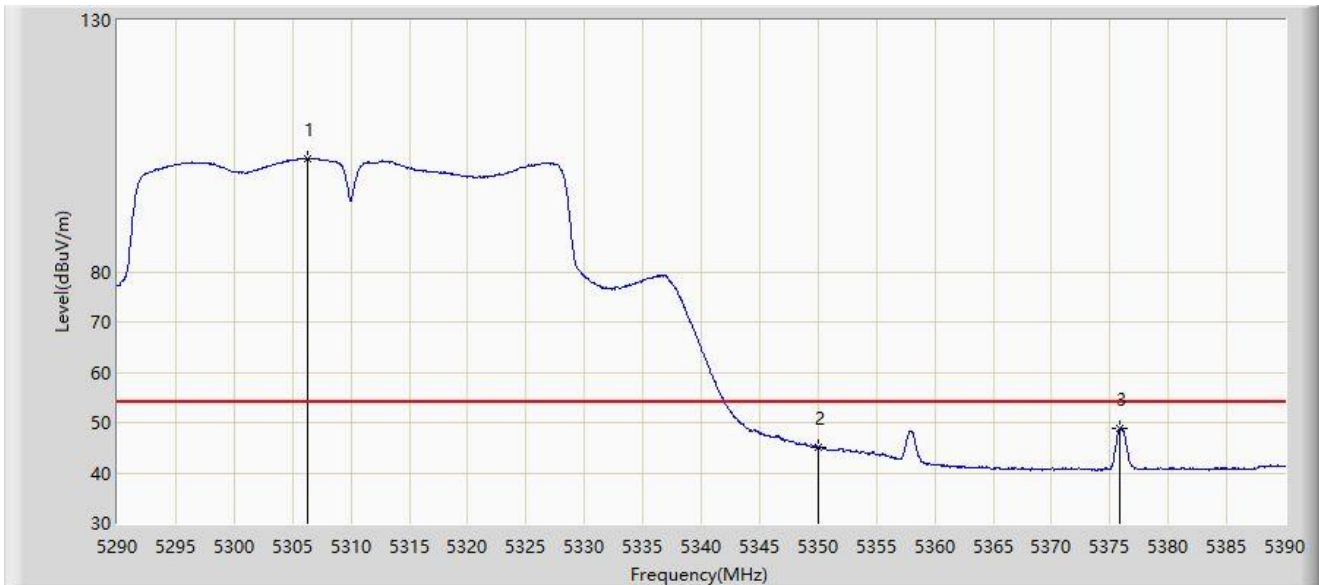


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.300	102.590	63.828	N/A	N/A	38.763	AV
2		5350.000	45.035	46.439	-8.965	54.000	-1.404	AV
3	*	5375.900	48.854	53.826	-5.146	54.000	-4.973	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

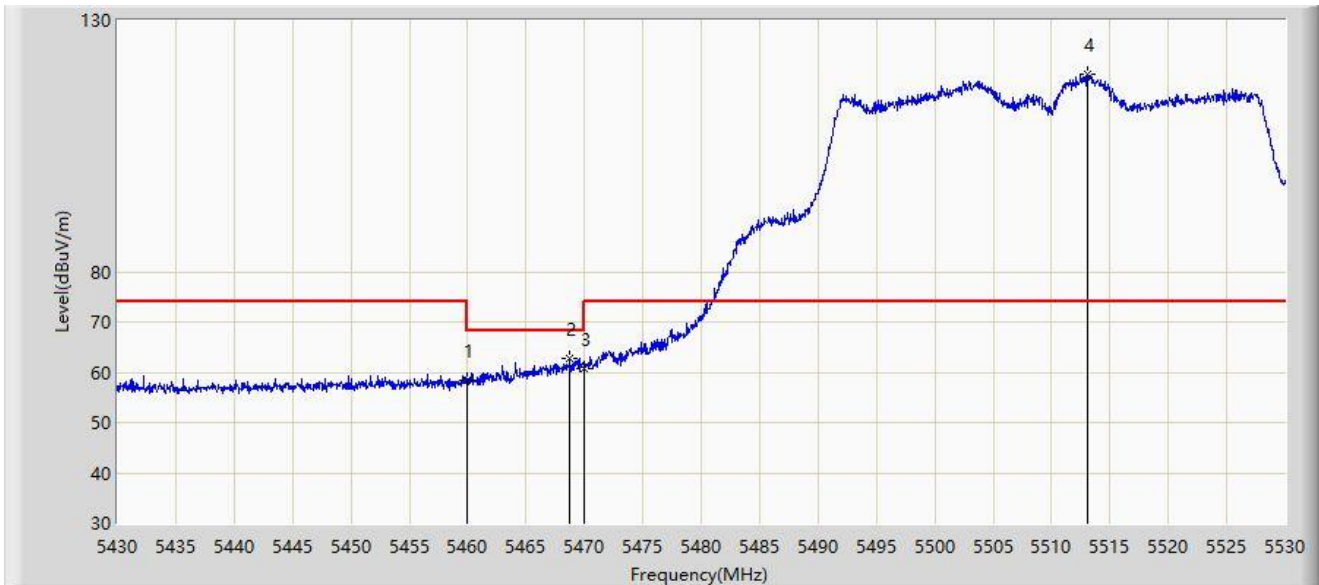


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	58.533	61.876	-9.667	68.200	-3.343	PK
2	*	5468.750	62.709	64.756	-5.491	68.200	-2.047	PK
3		5470.000	60.640	62.250	-7.560	68.200	-1.610	PK
4		5513.100	119.210	77.581	N/A	N/A	41.630	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

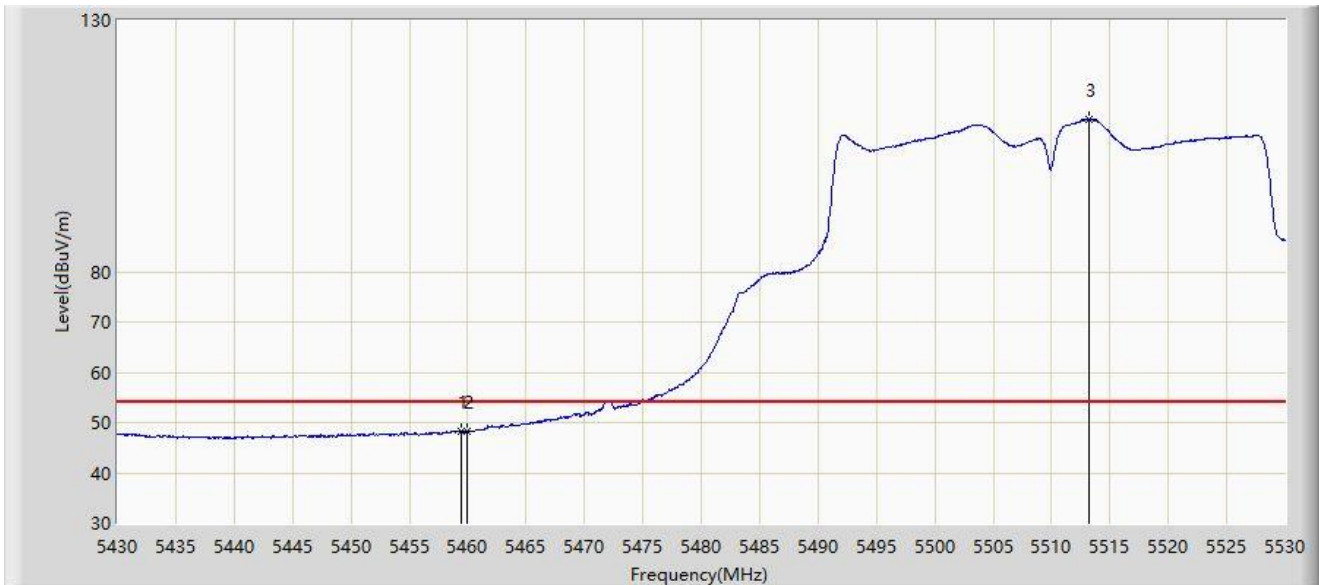


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.500	48.391	51.800	-5.609	54.000	-3.408	AV
2		5460.000	48.360	51.703	-5.640	54.000	-3.343	AV
3		5513.150	110.244	68.550	N/A	N/A	41.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

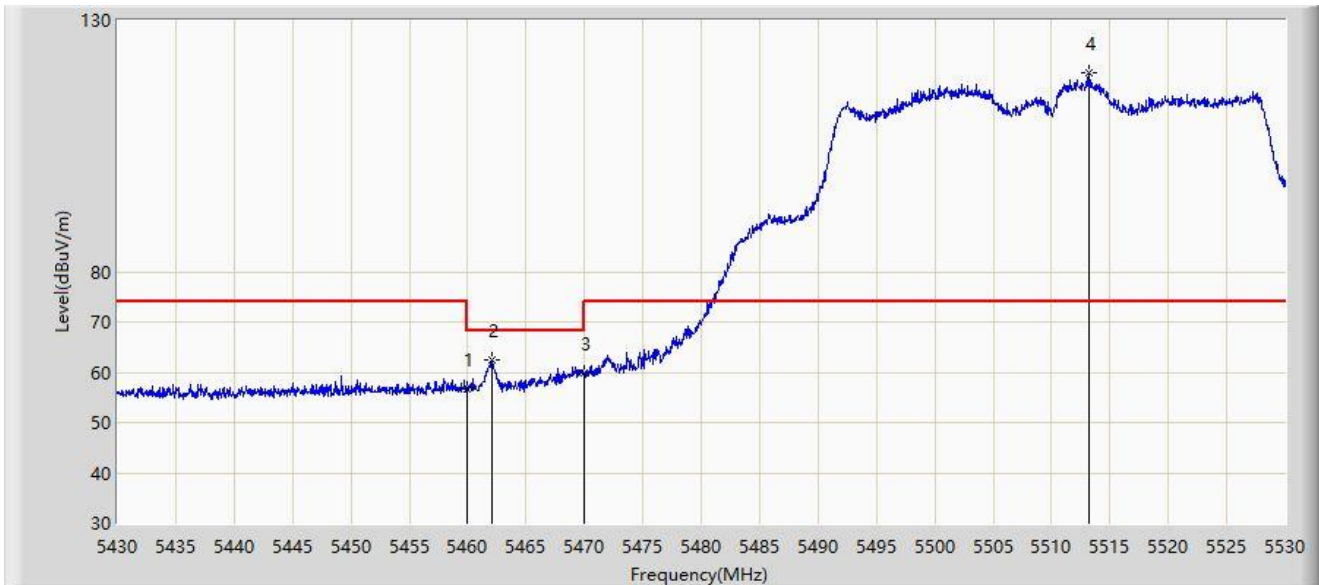


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	56.769	60.112	-11.431	68.200	-3.343	PK
2	*	5462.050	62.326	65.533	-5.874	68.200	-3.207	PK
3		5470.000	59.799	61.409	-8.401	68.200	-1.610	PK
4		5513.150	119.571	77.877	N/A	N/A	41.694	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

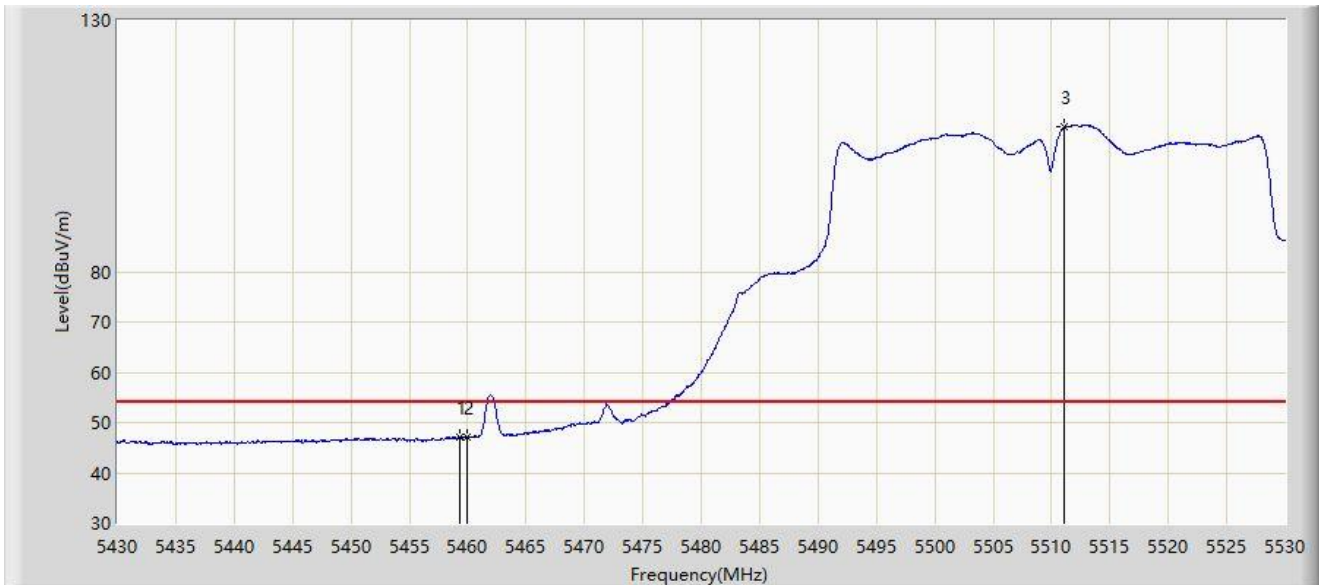


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.300	47.220	50.651	-6.780	54.000	-3.431	AV
2		5460.000	47.185	50.528	-6.815	54.000	-3.343	AV
3		5511.050	108.728	69.048	N/A	N/A	39.681	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

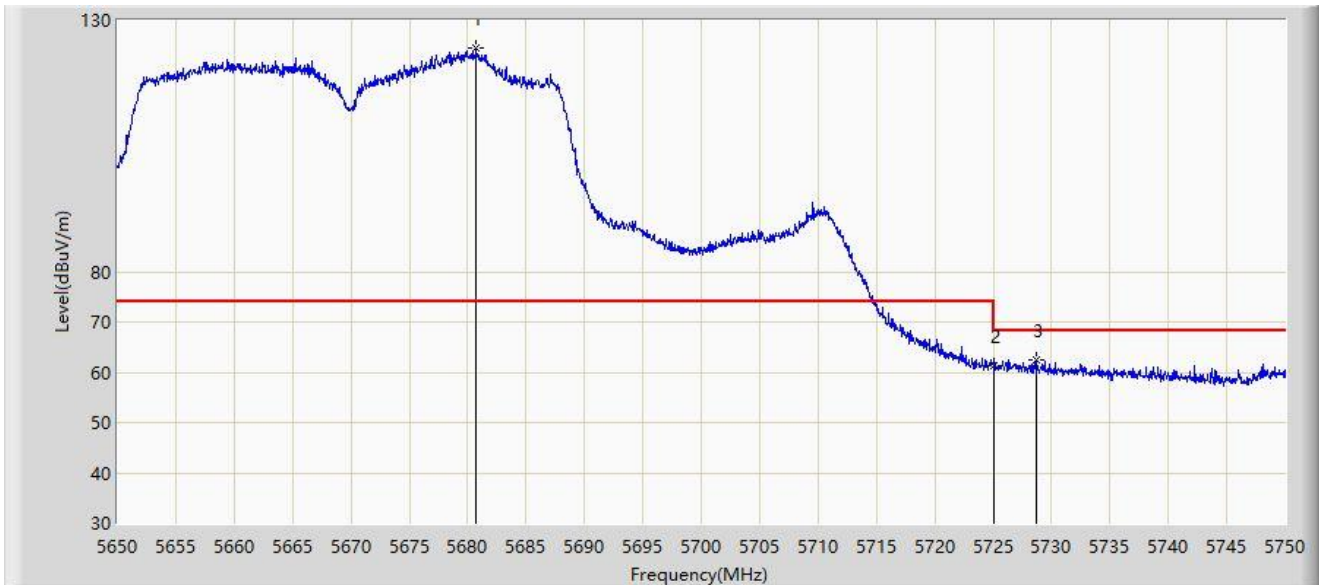


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5680.750	124.350	79.999	N/A	N/A	44.351	PK
2		5725.000	61.431	63.266	-6.769	68.200	-1.836	PK
3	*	5728.750	62.347	65.662	-5.853	68.200	-3.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

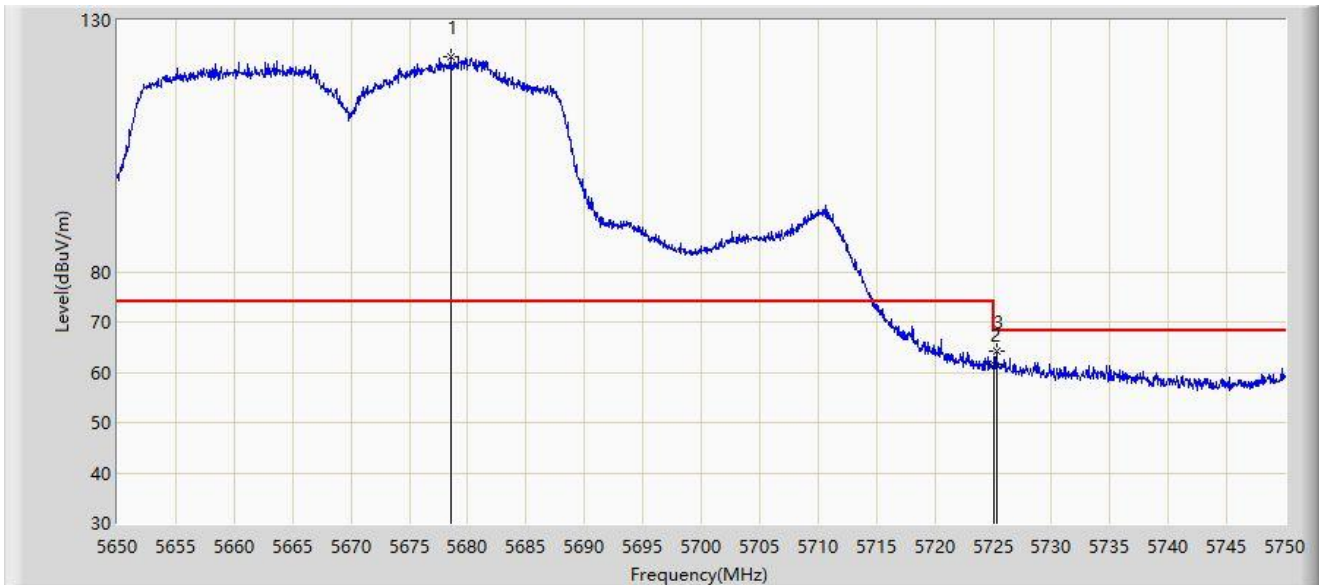


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.550	122.858	81.917	N/A	N/A	40.940	PK
2		5725.000	61.633	63.468	-6.567	68.200	-1.836	PK
3	*	5725.300	64.309	66.313	-3.891	68.200	-2.005	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

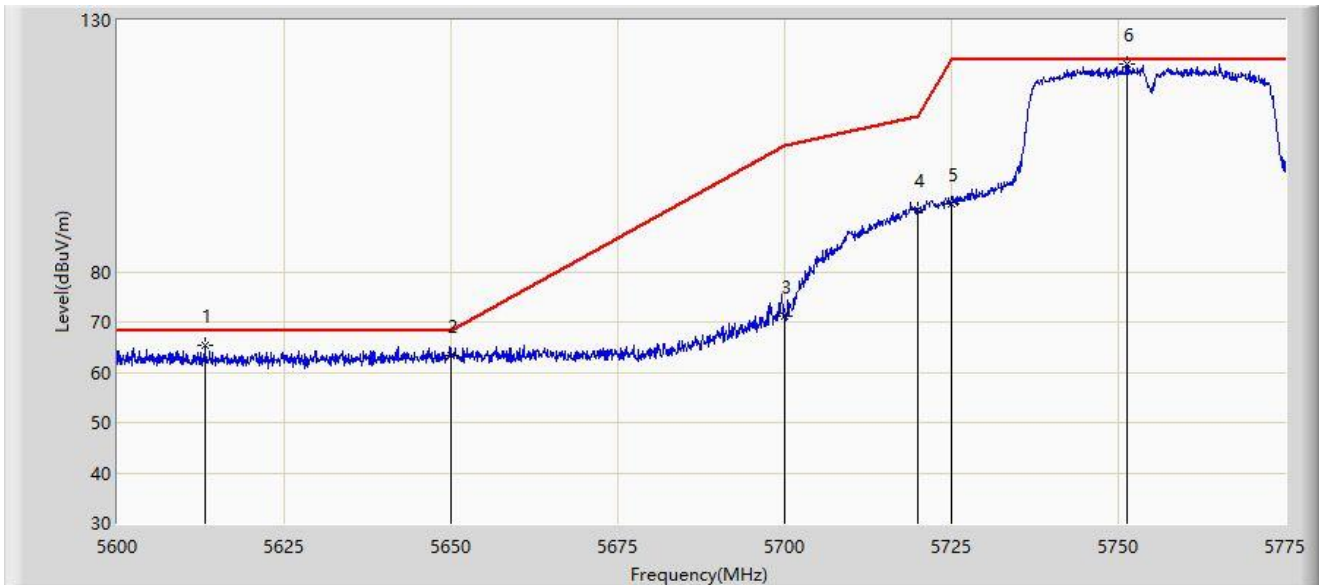


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5613.125	65.319	70.115	-2.881	68.200	-4.796	PK
2		5650.000	63.235	67.813	-4.965	68.200	-4.577	PK
3		5700.000	71.195	75.796	-34.005	105.200	-4.600	PK
4		5720.000	92.212	96.730	-18.588	110.800	-4.519	PK
5		5725.000	93.399	97.900	-28.801	122.200	-4.502	PK
6		5751.288	121.344	125.301	N/A	N/A	-3.956	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

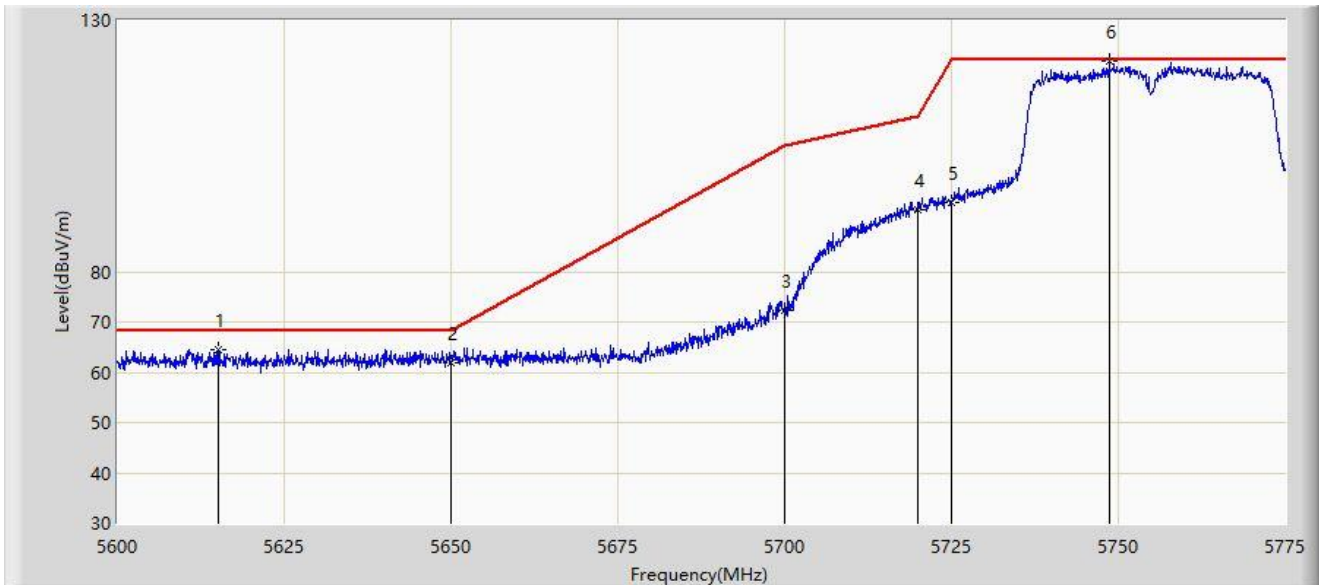


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5615.050	64.360	69.171	-3.840	68.200	-4.812	PK
2		5650.000	62.023	66.601	-6.177	68.200	-4.577	PK
3		5700.000	72.243	76.844	-32.957	105.200	-4.600	PK
4		5720.000	92.335	96.853	-18.465	110.800	-4.519	PK
5		5725.000	93.663	98.164	-28.537	122.200	-4.502	PK
6		5748.575	121.813	125.835	N/A	N/A	-4.022	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

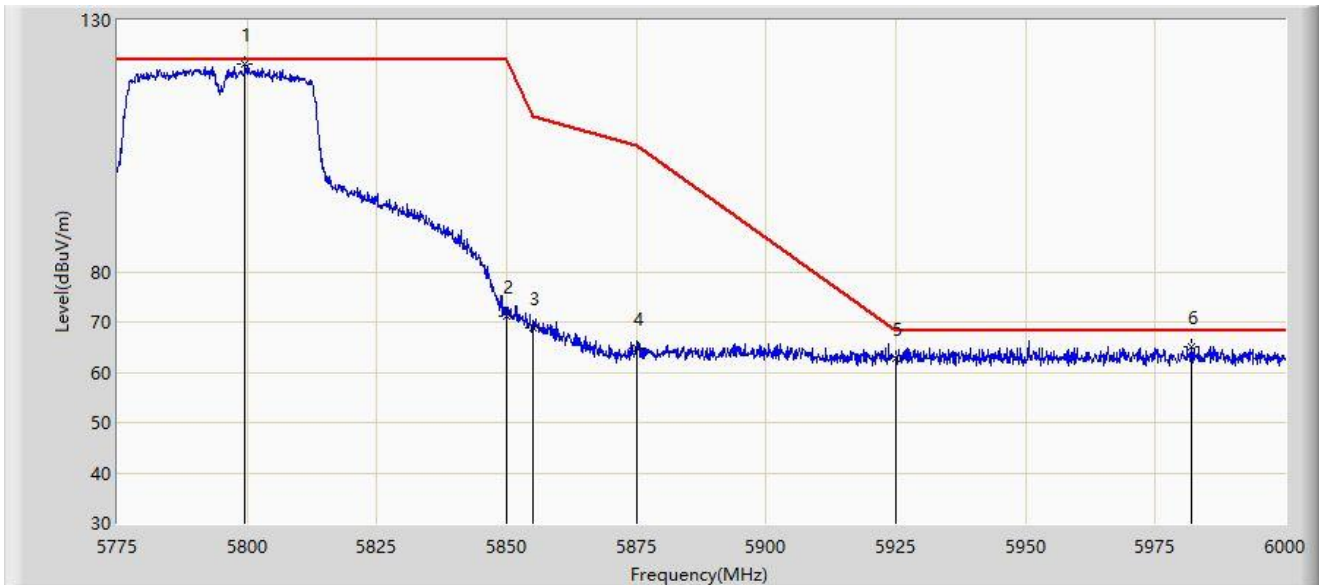


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5799.525	121.192	124.874	N/A	N/A	-3.681	PK
2		5850.000	71.129	75.240	-51.071	122.200	-4.111	PK
3		5855.000	68.752	72.865	-42.048	110.800	-4.113	PK
4		5875.000	64.878	68.925	-40.322	105.200	-4.046	PK
5		5925.000	62.804	66.564	-5.396	68.200	-3.760	PK
6	*	5981.888	65.106	68.386	-3.094	68.200	-3.279	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

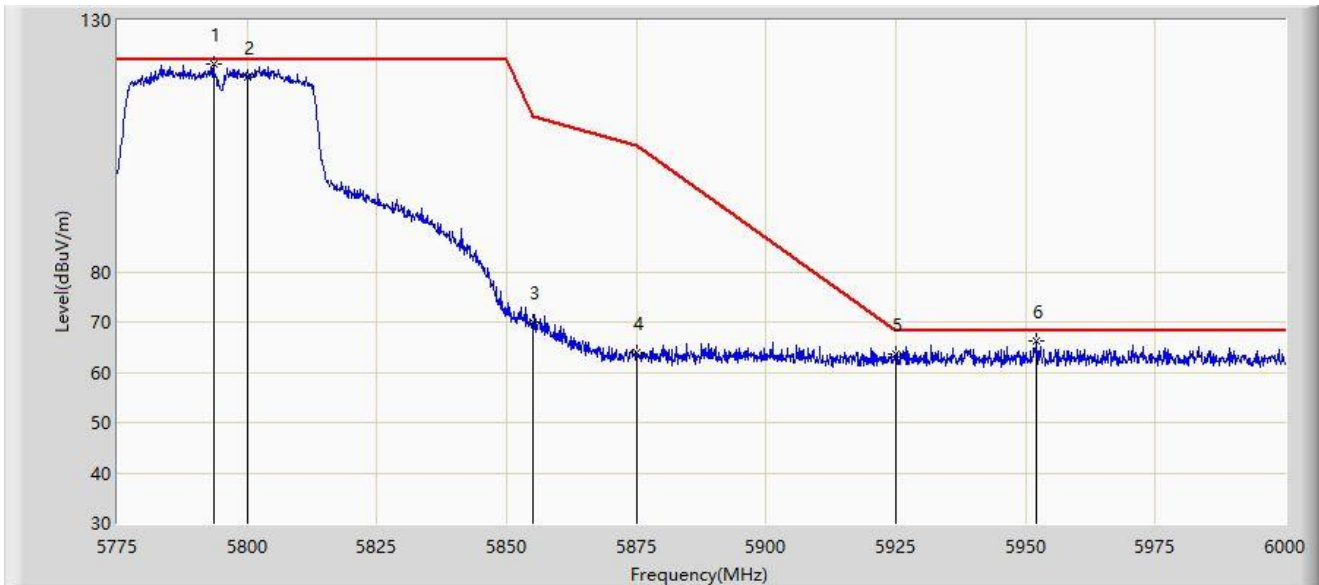


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5793.562	121.381	125.139	N/A	N/A	-3.758	PK
2		5800.000	118.795	122.470	-3.405	122.200	-3.675	PK
3		5855.000	69.933	74.046	-40.867	110.800	-4.113	PK
4		5875.000	63.821	67.868	-41.379	105.200	-4.046	PK
5		5925.000	63.479	67.239	-4.721	68.200	-3.760	PK
6	*	5952.075	66.173	69.706	-2.027	68.200	-3.533	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

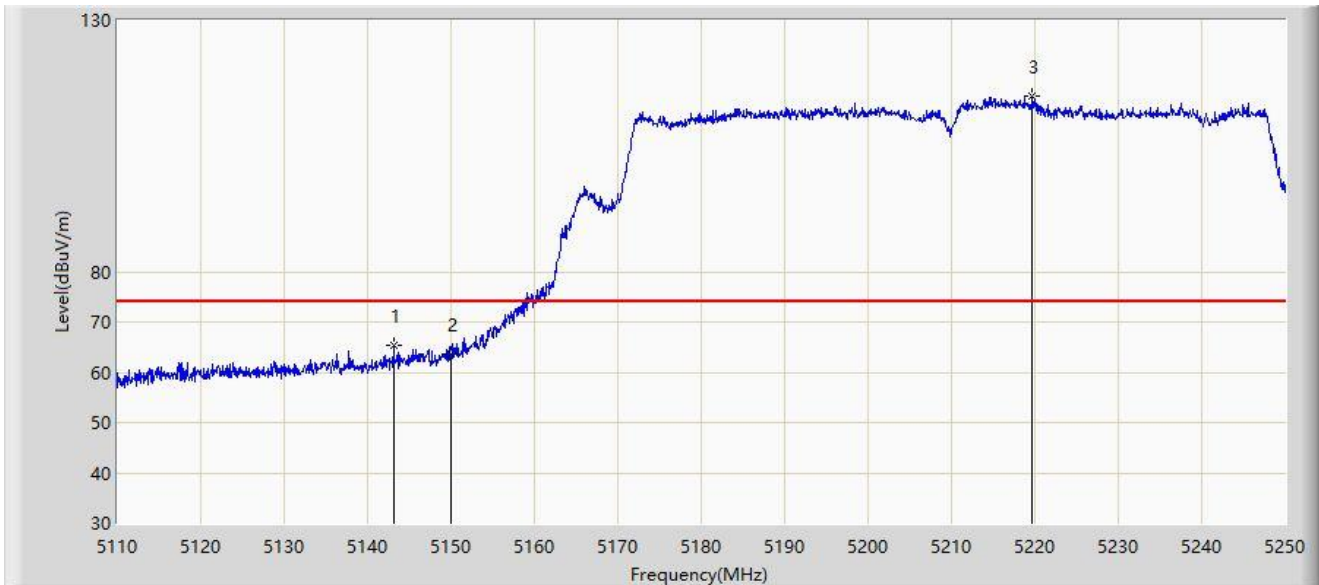


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5143.075	65.280	69.462	-8.720	74.000	-4.181	PK
2		5150.000	63.586	66.832	-10.414	74.000	-3.246	PK
3		5219.650	114.982	71.347	N/A	N/A	43.636	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

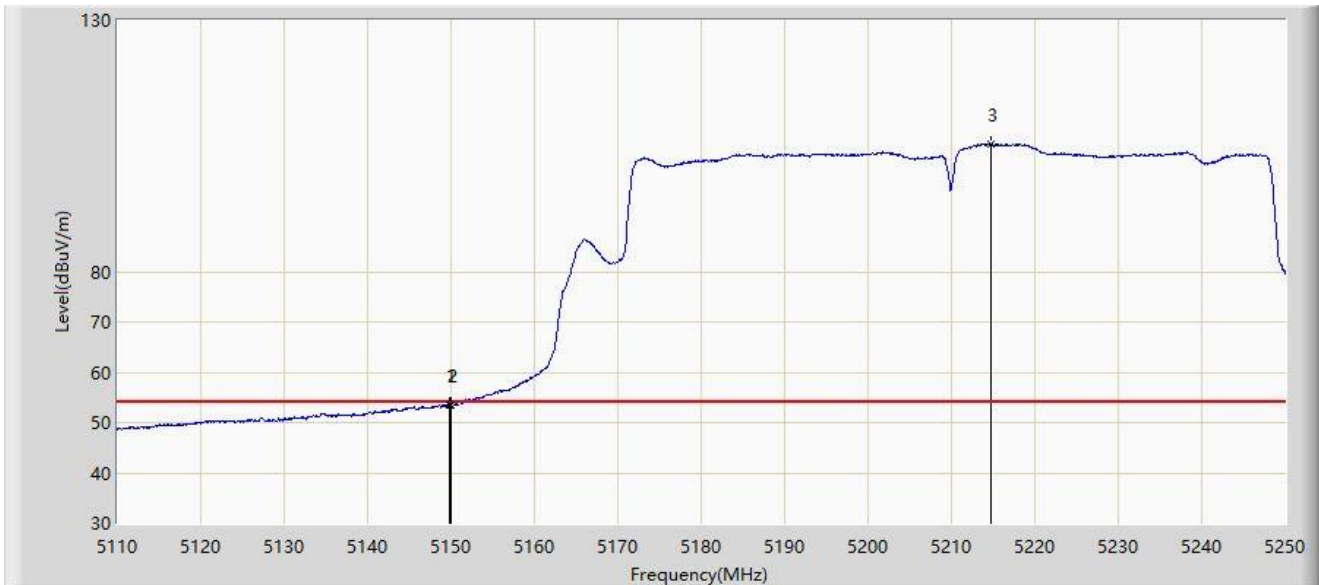


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.825	53.489	56.793	-0.511	54.000	-3.304	AV
2		5150.000	53.454	56.700	-0.546	54.000	-3.246	AV
3		5214.775	105.359	68.721	N/A	N/A	36.638	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

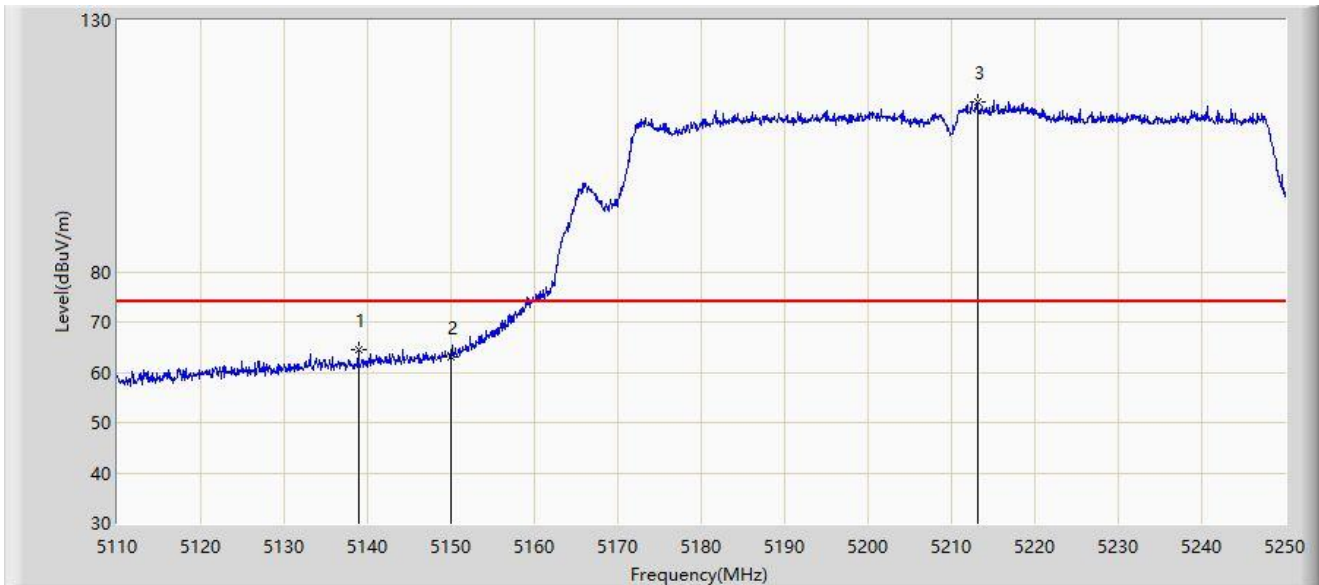


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.875	64.526	68.916	-9.474	74.000	-4.389	PK
2		5150.000	63.021	66.267	-10.979	74.000	-3.246	PK
3		5213.125	113.864	78.709	N/A	N/A	35.155	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

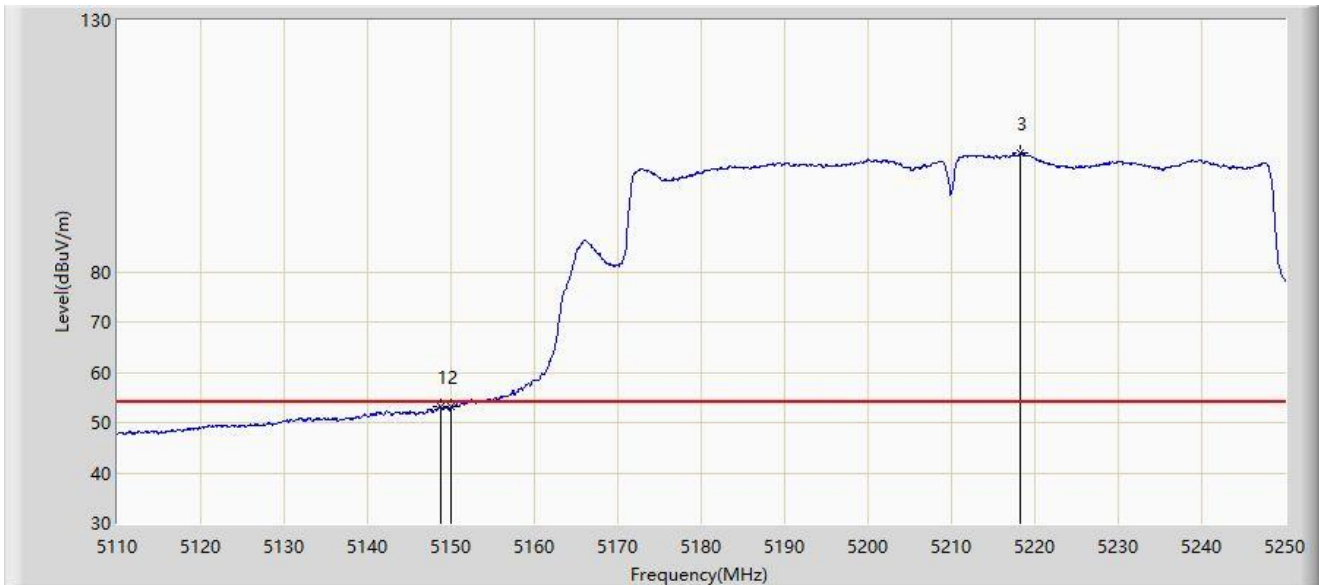


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.700	53.117	56.636	-0.883	54.000	-3.519	AV
2		5150.000	53.049	56.295	-0.951	54.000	-3.246	AV
3		5218.300	103.485	61.005	N/A	N/A	42.480	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

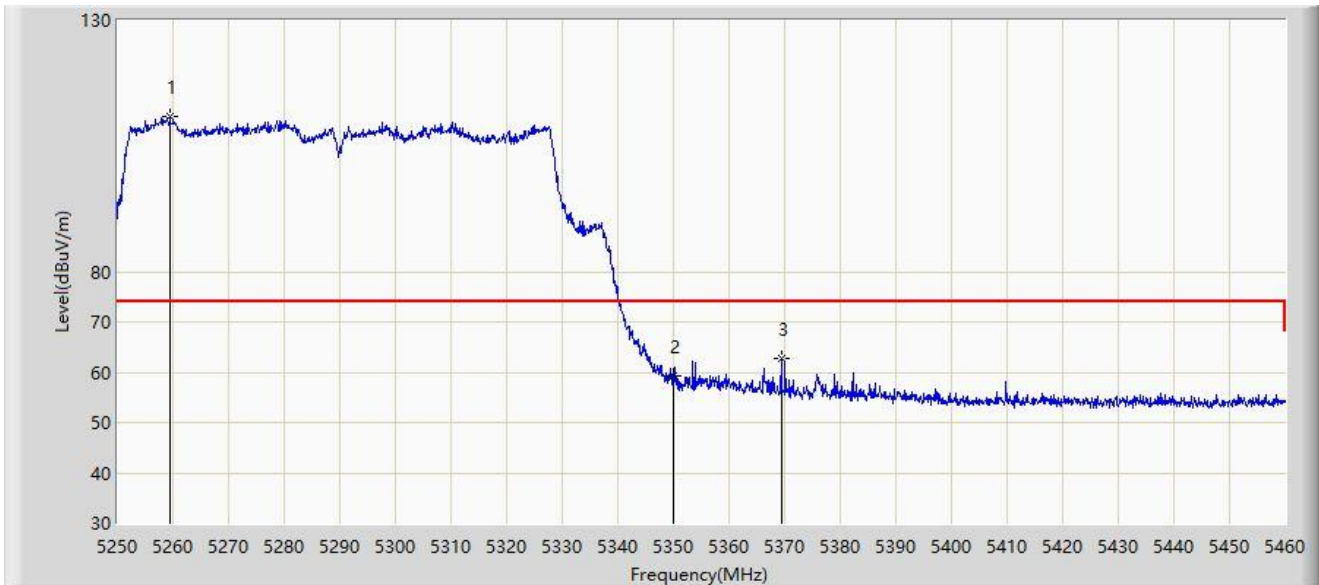


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.470	110.935	65.350	N/A	N/A	45.586	PK
2		5350.000	59.316	60.720	-14.684	74.000	-1.404	PK
3	*	5369.360	62.637	67.476	-11.363	74.000	-4.839	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

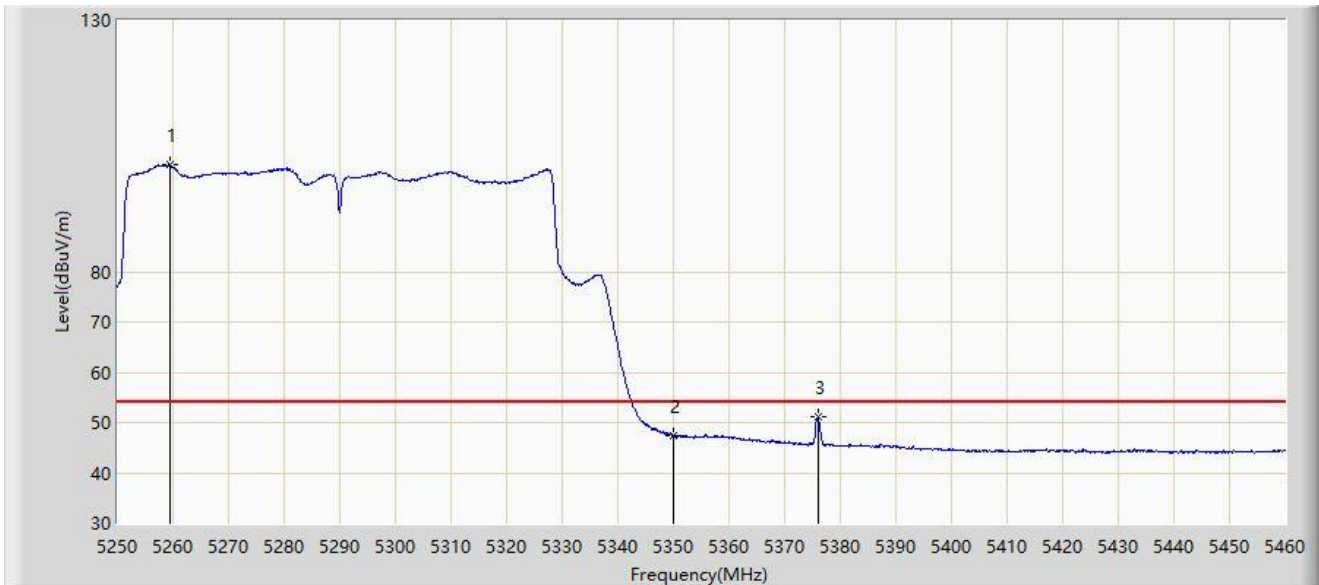


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.360	101.214	55.810	N/A	N/A	45.404	AV
2		5350.000	47.413	48.817	-6.587	54.000	-1.404	AV
3	*	5375.960	51.171	56.140	-2.829	54.000	-4.969	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

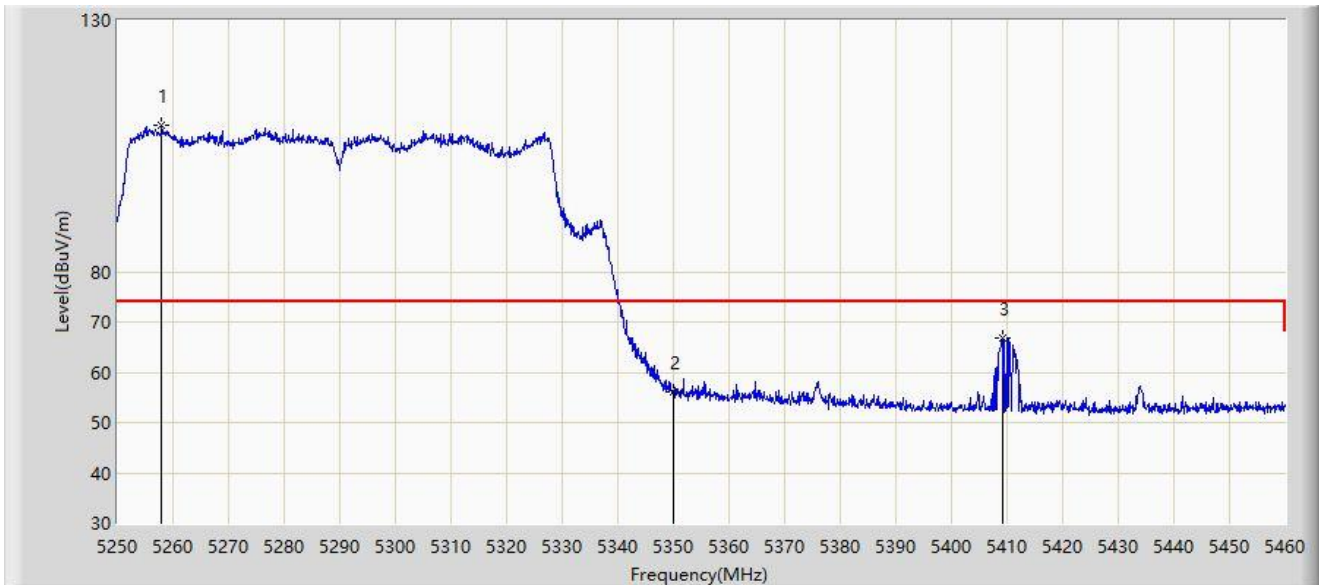


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5257.980	109.185	66.116	N/A	N/A	43.069	PK
2		5350.000	56.193	57.597	-17.807	74.000	-1.404	PK
3	*	5409.285	66.867	71.934	-7.133	74.000	-5.067	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

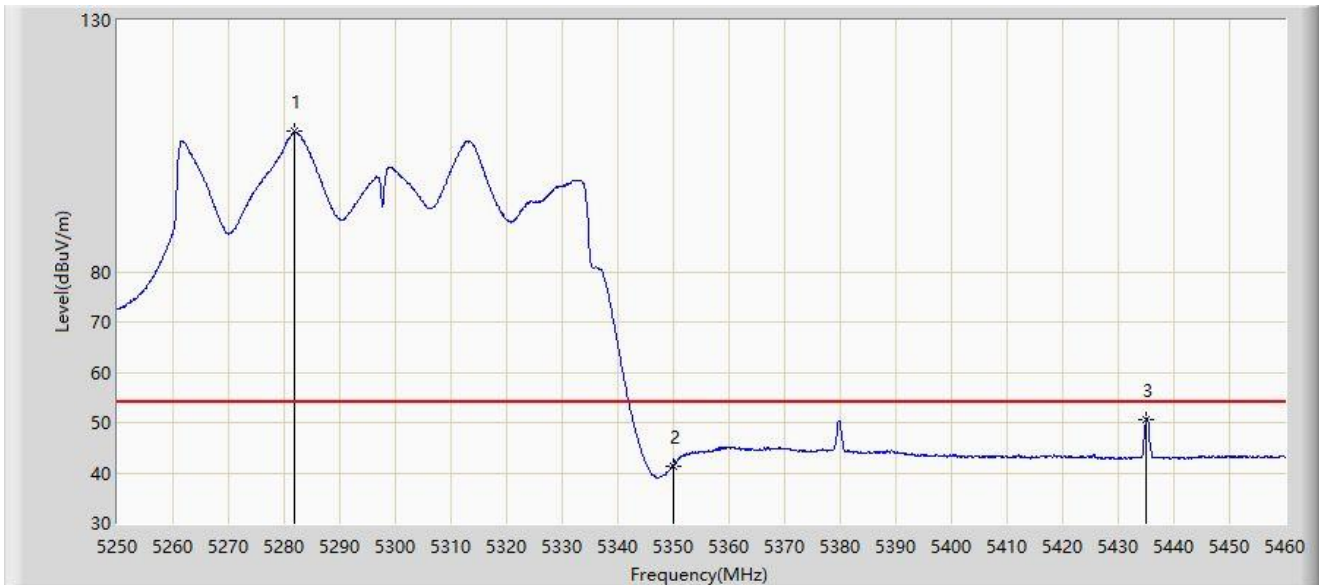


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5281.920	107.836	61.683	N/A	N/A	46.153	AV
2		5350.000	41.449	42.853	-12.551	54.000	-1.404	AV
3	*	5435.115	50.713	55.685	-3.287	54.000	-4.972	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

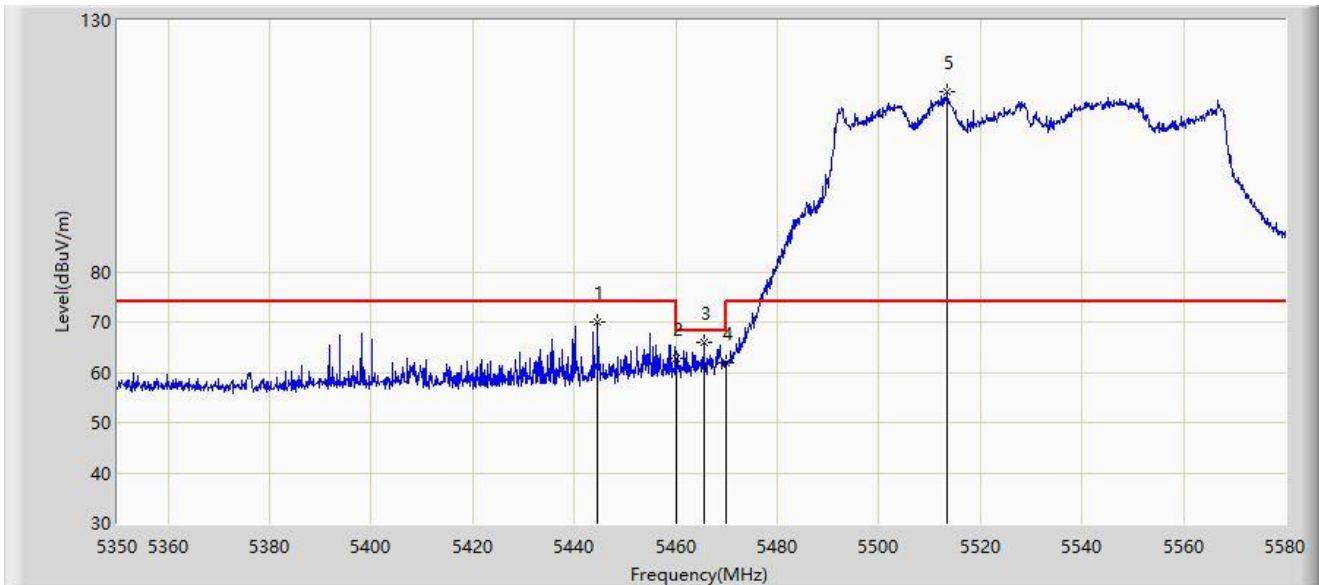


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5444.645	70.069	74.267	-3.931	74.000	-4.197	PK
2		5460.000	62.793	66.136	-5.407	68.200	-3.343	PK
3	*	5465.575	65.819	68.588	-2.381	68.200	-2.768	PK
4		5470.000	61.763	63.373	-6.437	68.200	-1.610	PK
5		5513.415	115.715	73.715	N/A	N/A	42.001	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

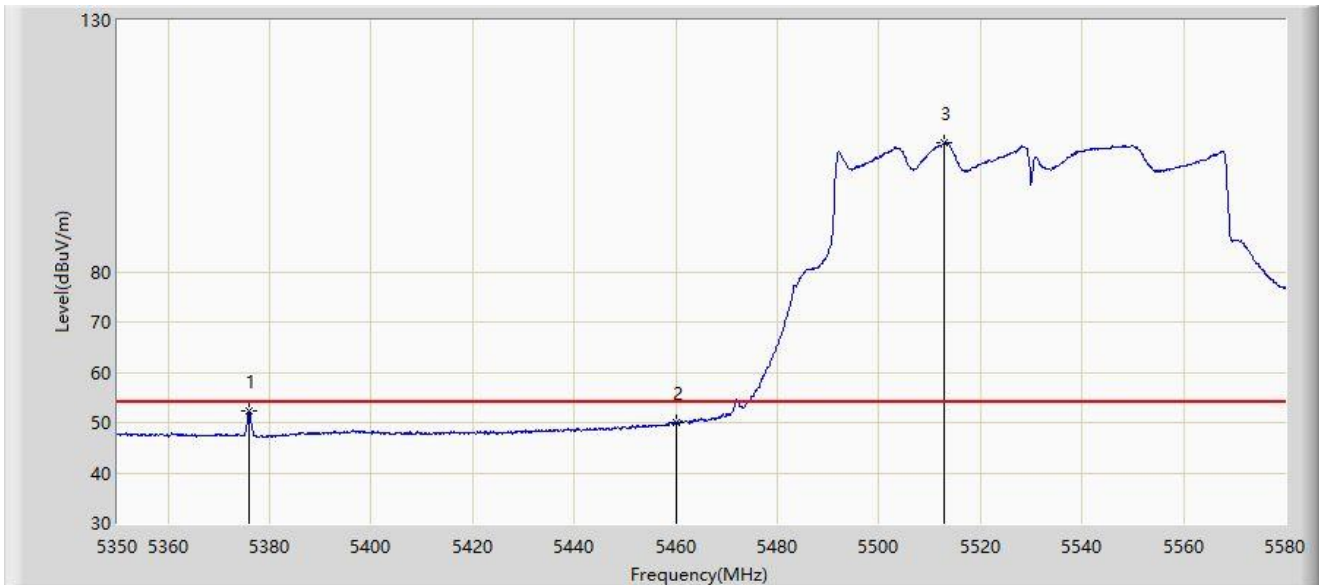


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5375.875	52.244	57.465	-1.756	54.000	-5.222	AV
2		5460.000	49.967	53.310	-4.033	54.000	-3.343	AV
3		5512.955	105.624	64.183	N/A	N/A	41.442	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

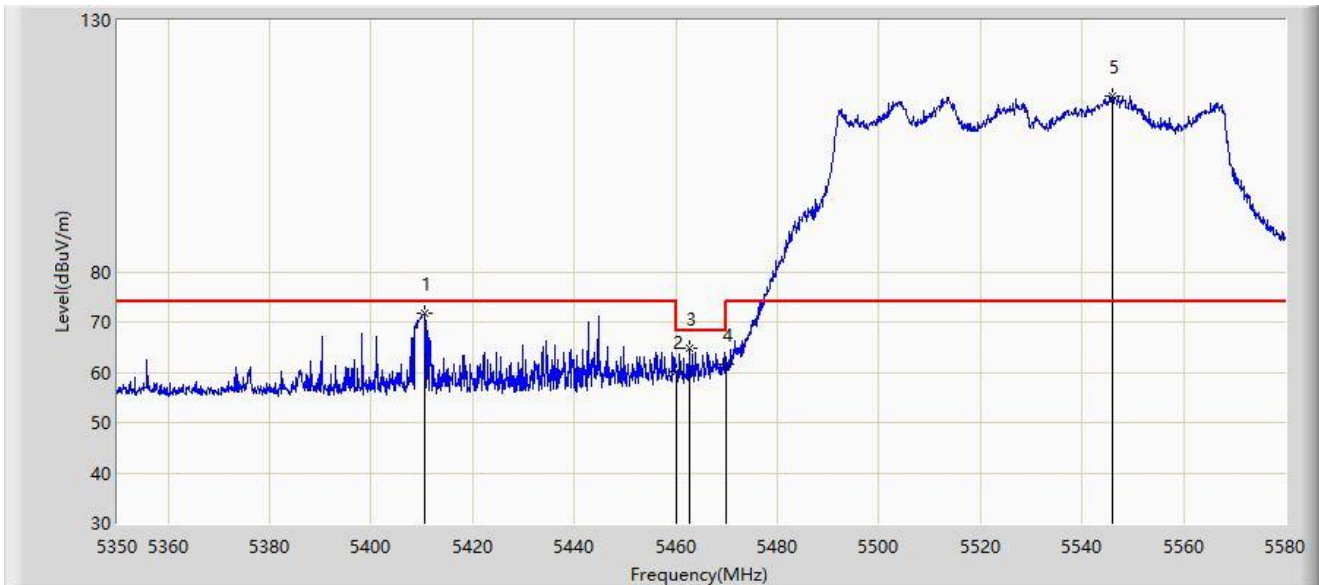


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5410.490	71.747	76.301	-2.253	74.000	-4.555	PK
2		5460.000	60.068	63.411	-8.132	68.200	-3.343	PK
3		5462.585	64.846	68.020	-3.354	68.200	-3.174	PK
4		5470.000	61.541	63.151	-6.659	68.200	-1.610	PK
5		5545.960	115.006	74.597	N/A	N/A	40.409	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

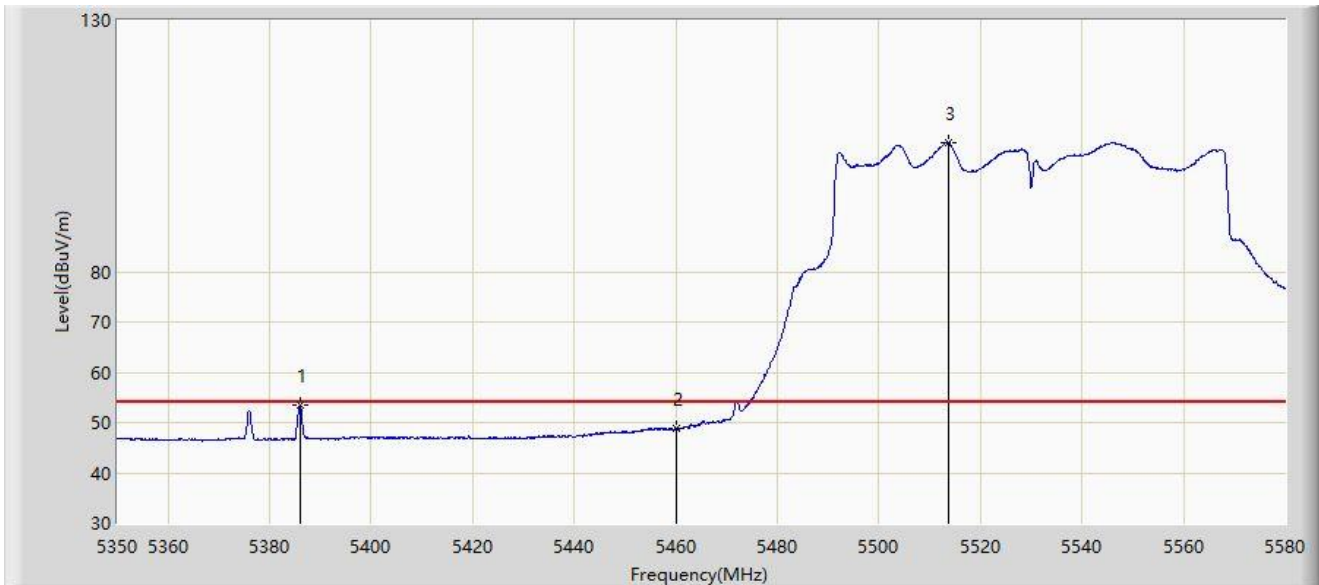


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5385.995	53.489	58.542	-0.511	54.000	-5.053	AV
2		5460.000	48.707	52.050	-5.293	54.000	-3.343	AV
3		5513.760	105.685	63.421	N/A	N/A	42.263	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Time: 2023/09/05 - 20:28
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

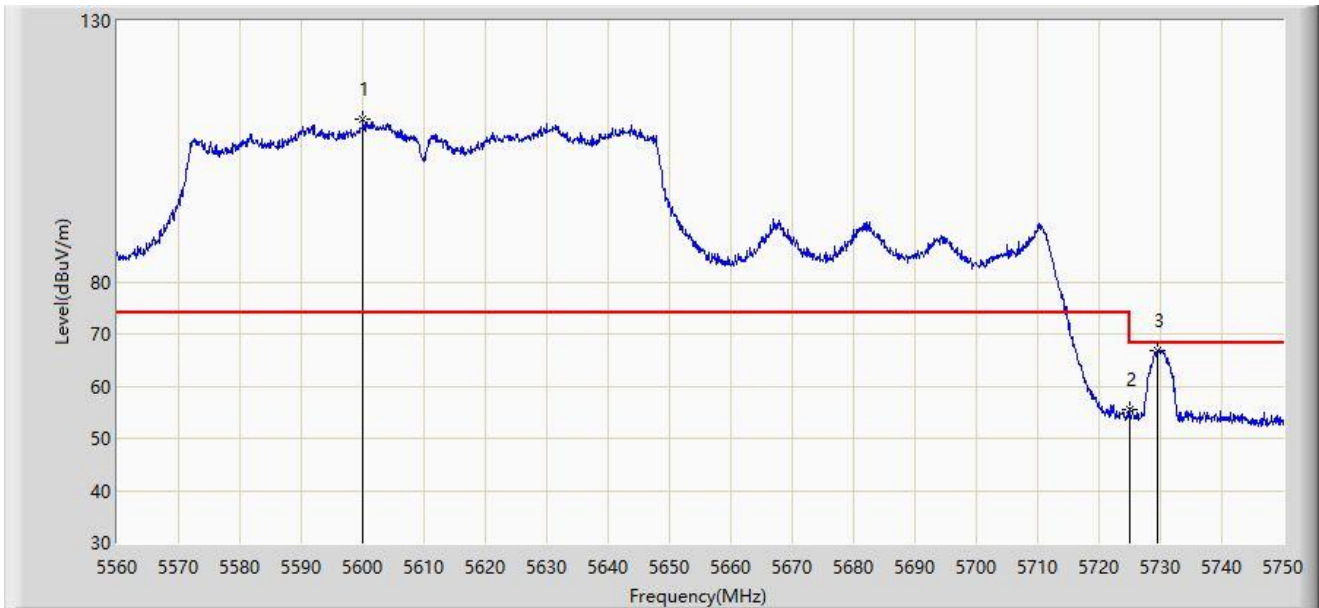


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5600.090	111.165	69.649	N/A	N/A	41.515	PK
2		5725.000	55.609	52.787	-12.591	68.200	2.821	PK
3	*	5729.575	66.841	65.762	-1.359	68.200	1.079	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Time: 2023/09/05 - 20:30
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

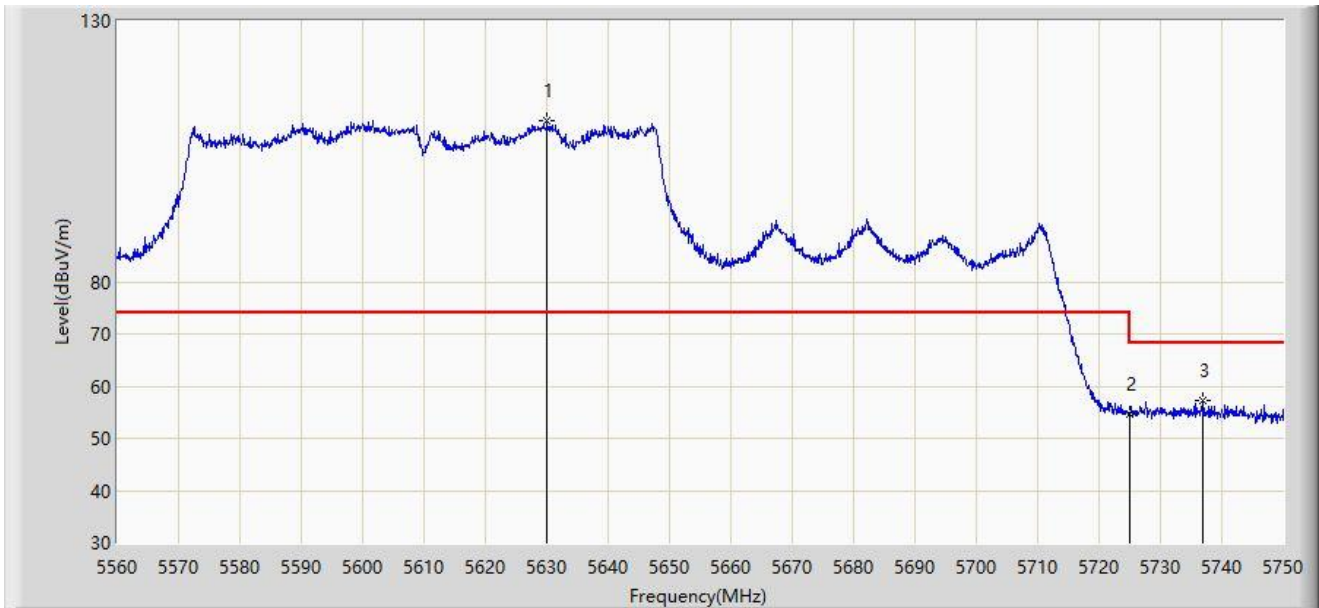


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5630.015	110.815	64.190	N/A	N/A	46.625	PK
2		5725.000	54.584	51.762	-13.616	68.200	2.821	PK
3	*	5736.985	57.202	57.136	-10.998	68.200	0.065	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

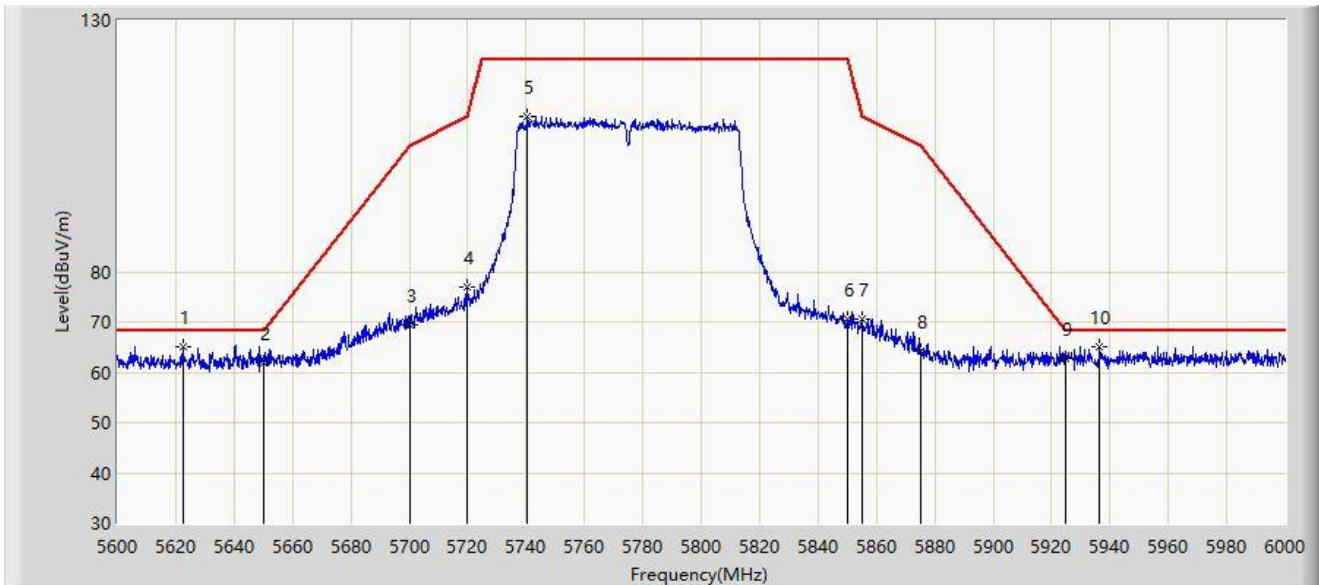


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5622.600	65.181	70.051	-3.019	68.200	-4.871	PK
2		5650.000	61.893	66.471	-6.307	68.200	-4.577	PK
3		5700.000	69.446	74.047	-35.754	105.200	-4.600	PK
4		5720.000	76.892	81.410	-33.908	110.800	-4.519	PK
5		5740.600	110.956	115.159	N/A	N/A	-4.203	PK
6		5850.000	70.600	74.711	-51.600	122.200	-4.111	PK
7		5855.000	70.489	74.602	-40.311	110.800	-4.113	PK
8		5875.000	64.108	68.155	-41.092	105.200	-4.046	PK
9		5925.000	62.799	66.559	-5.401	68.200	-3.760	PK
10		5936.400	65.025	68.672	-3.175	68.200	-3.647	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

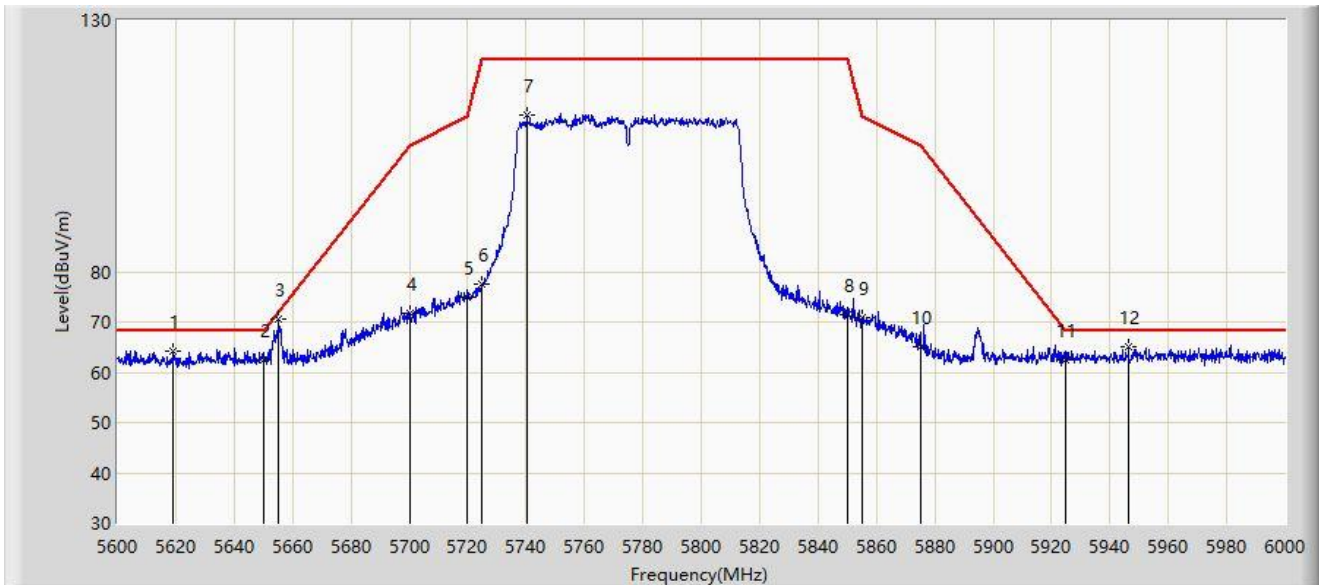


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5619.200	64.072	68.916	-4.128	68.200	-4.844	PK
2		5650.000	62.489	67.067	-5.711	68.200	-4.577	PK
3	*	5655.200	70.586	75.093	-1.462	72.048	-4.507	PK
4		5700.000	71.713	76.314	-33.487	105.200	-4.600	PK
5		5720.000	75.016	79.534	-35.784	110.800	-4.519	PK
6		5725.000	77.587	82.088	-44.613	122.200	-4.502	PK
7		5740.400	111.260	115.467	N/A	N/A	-4.207	PK
8		5850.000	71.562	75.673	-50.638	122.200	-4.111	PK
9		5855.000	70.822	74.935	-39.978	110.800	-4.113	PK
10		5875.000	65.098	69.145	-40.102	105.200	-4.046	PK
11		5925.000	62.350	66.110	-5.850	68.200	-3.760	PK
12		5946.400	65.097	68.654	-3.103	68.200	-3.557	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

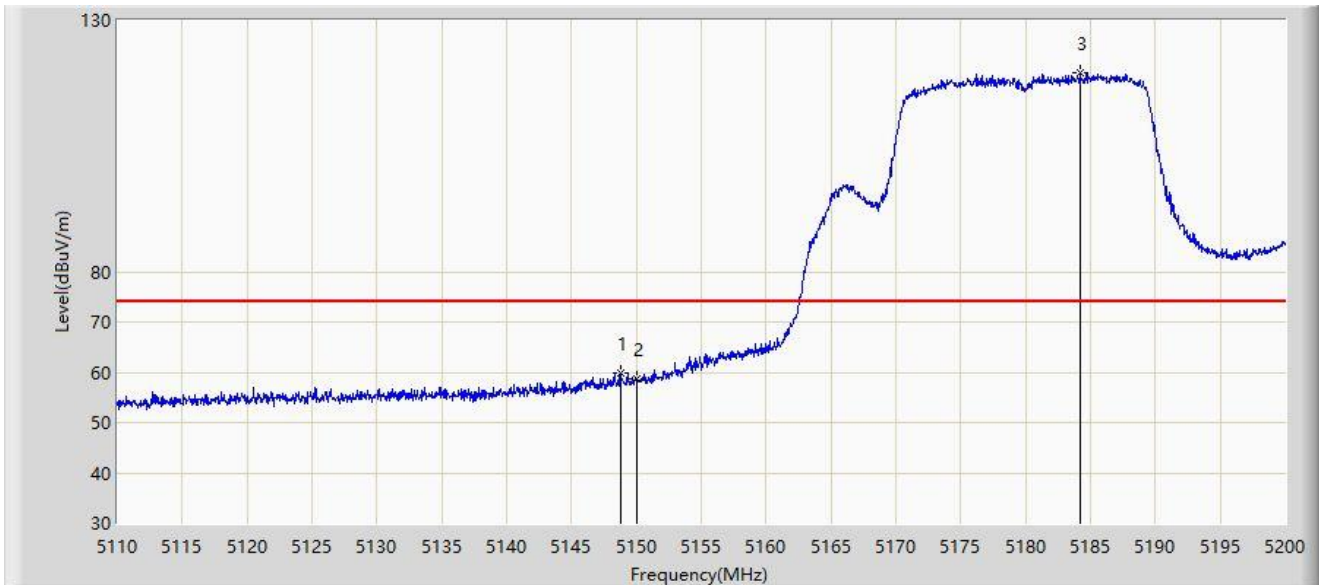

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.745	59.827	63.337	-14.173	74.000	-3.510	PK
2		5150.000	58.735	61.981	-15.265	74.000	-3.246	PK
3		5184.205	119.452	83.559	N/A	N/A	35.894	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	48.800	52.046	-5.200	54.000	-3.246	AV
2		5186.815	109.419	74.434	N/A	N/A	34.985	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

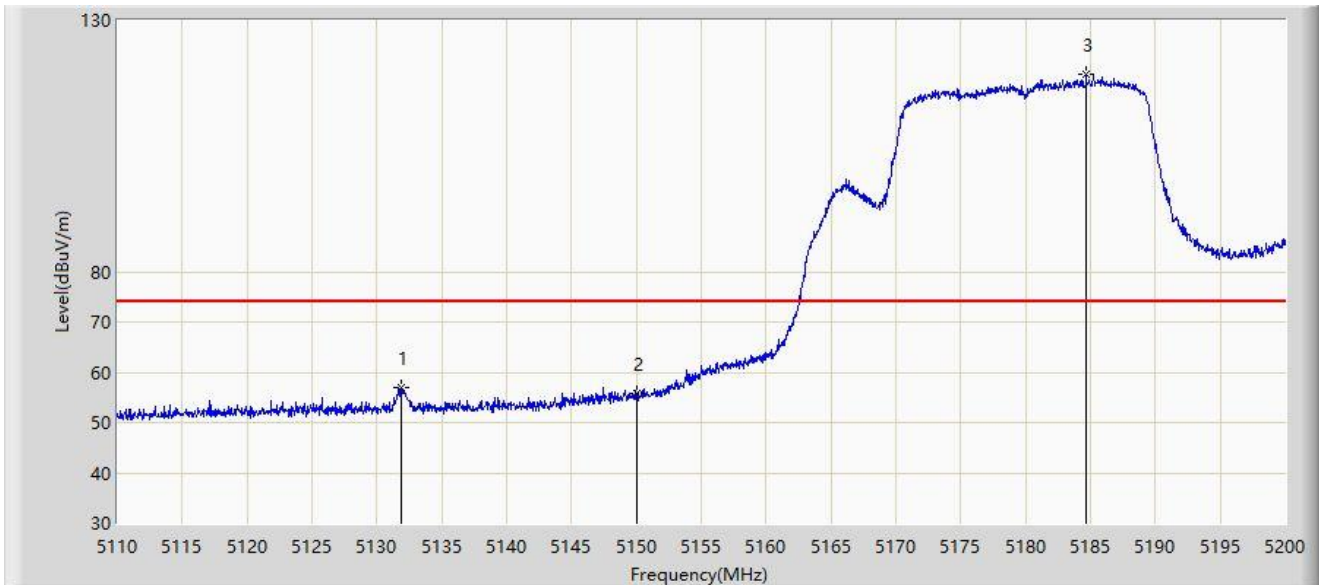

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5131.915	57.006	61.669	-16.994	74.000	-4.664	PK
2		5150.000	55.745	58.991	-18.255	74.000	-3.246	PK
3		5184.655	119.235	83.873	N/A	N/A	35.363	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5132.050	49.564	54.216	-4.436	54.000	-4.652	AV
2		5150.000	45.036	48.282	-8.964	54.000	-3.246	AV
3		5186.095	107.879	73.070	N/A	N/A	34.809	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

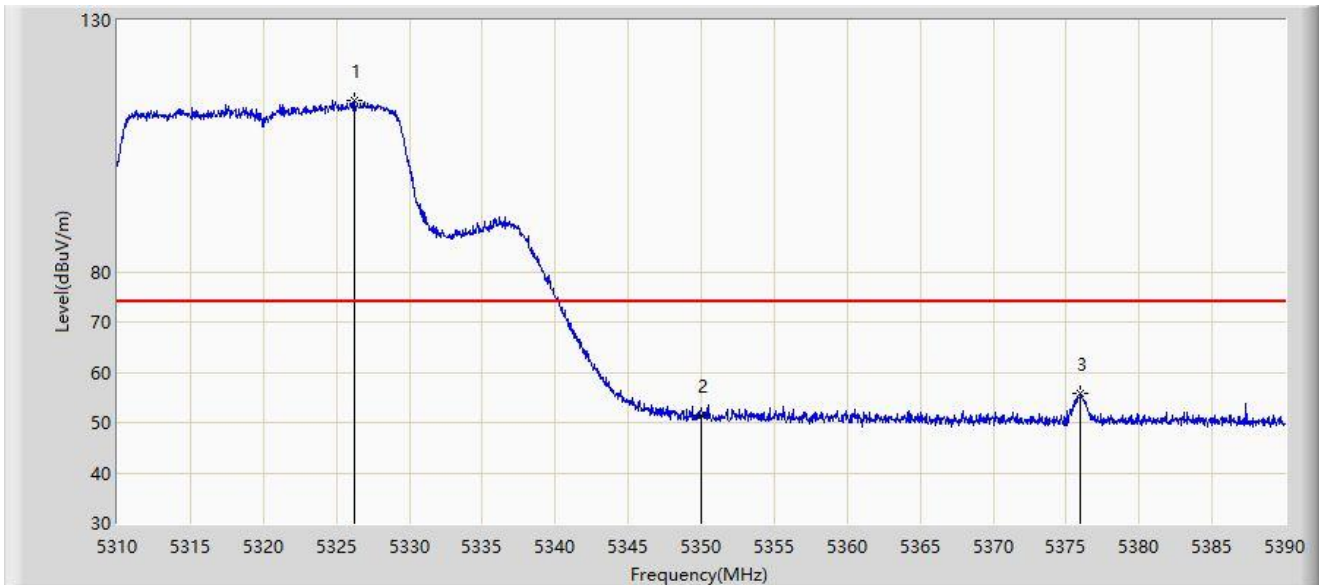


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.200	114.146	75.571	N/A	N/A	38.575	PK
2		5350.000	51.426	52.830	-22.574	74.000	-1.404	PK
3	*	5375.960	55.675	60.644	-18.325	74.000	-4.969	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

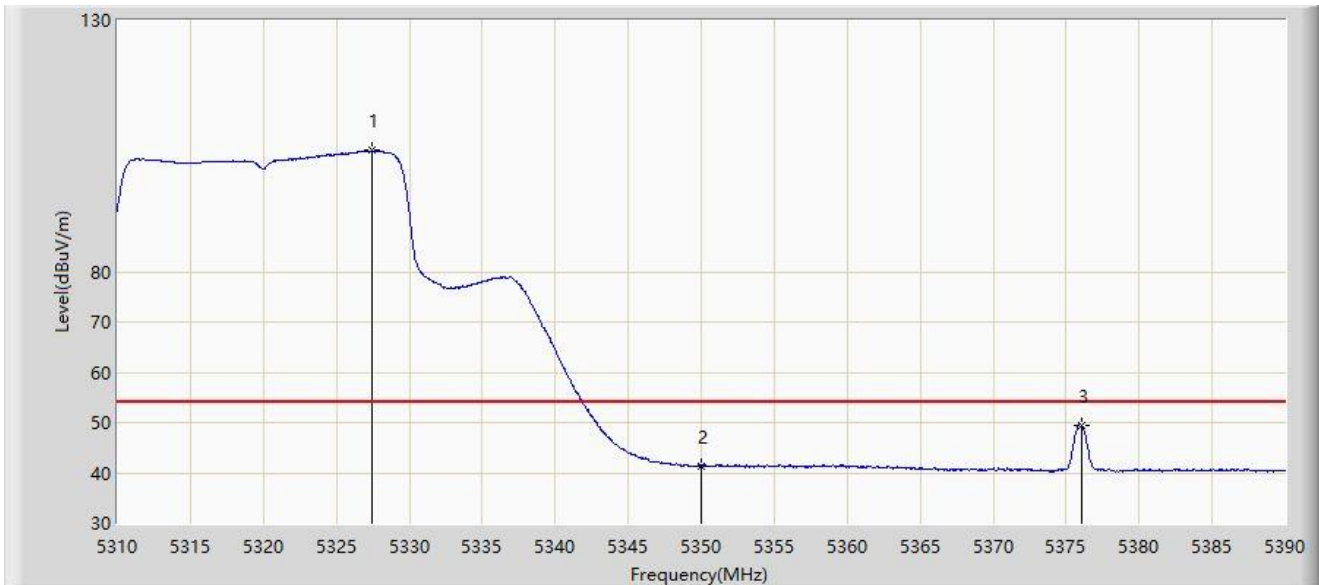


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.440	104.083	64.666	N/A	N/A	39.416	AV
2		5350.000	41.422	42.826	-12.578	54.000	-1.404	AV
3	*	5376.040	49.553	54.519	-4.447	54.000	-4.966	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

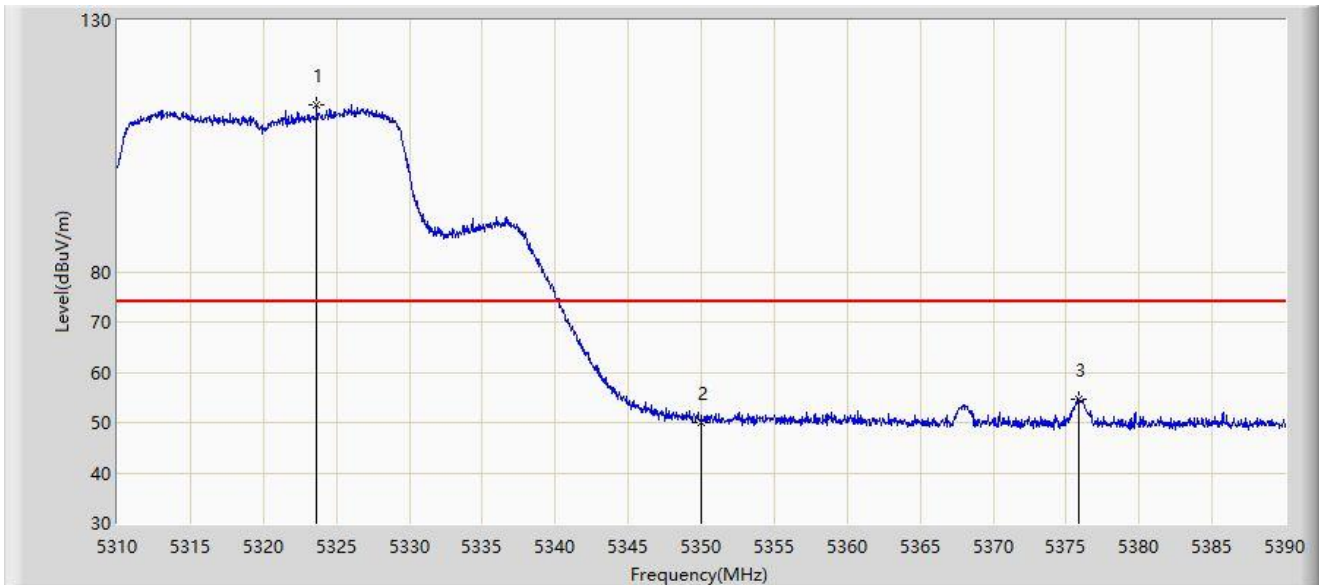


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.680	113.080	73.388	N/A	N/A	39.692	PK
2		5350.000	49.976	51.380	-24.024	74.000	-1.404	PK
3	*	5375.880	54.711	59.684	-19.289	74.000	-4.974	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

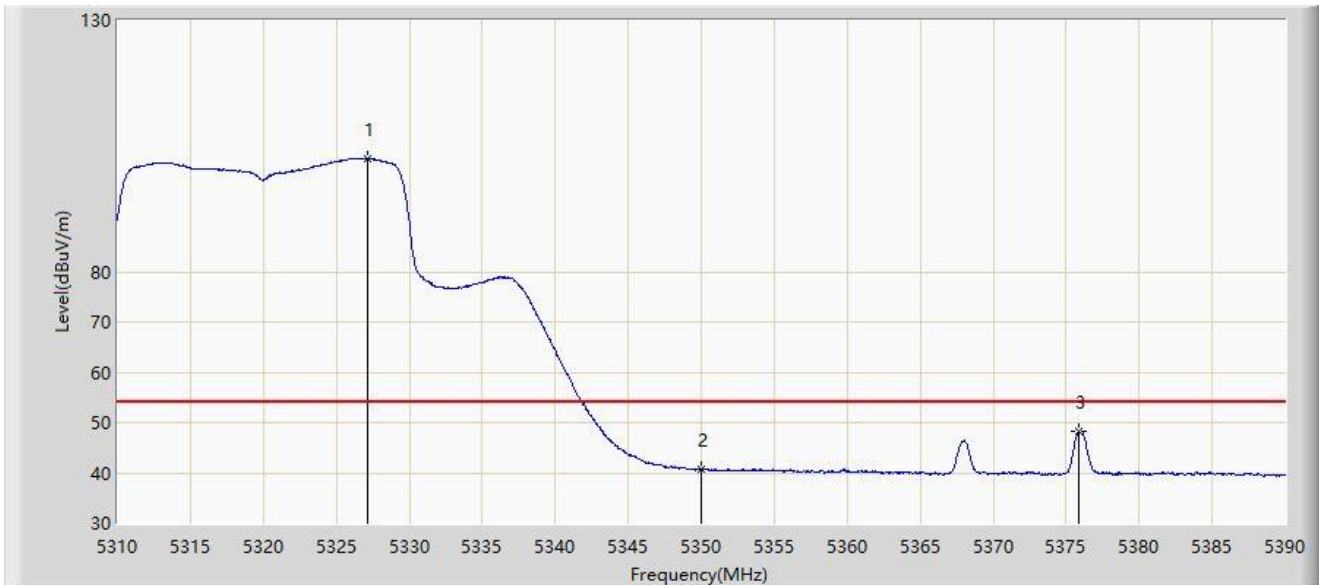


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.160	102.521	63.389	N/A	N/A	39.133	AV
2		5350.000	40.768	42.172	-13.232	54.000	-1.404	AV
3	*	5375.840	48.214	53.189	-5.786	54.000	-4.976	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

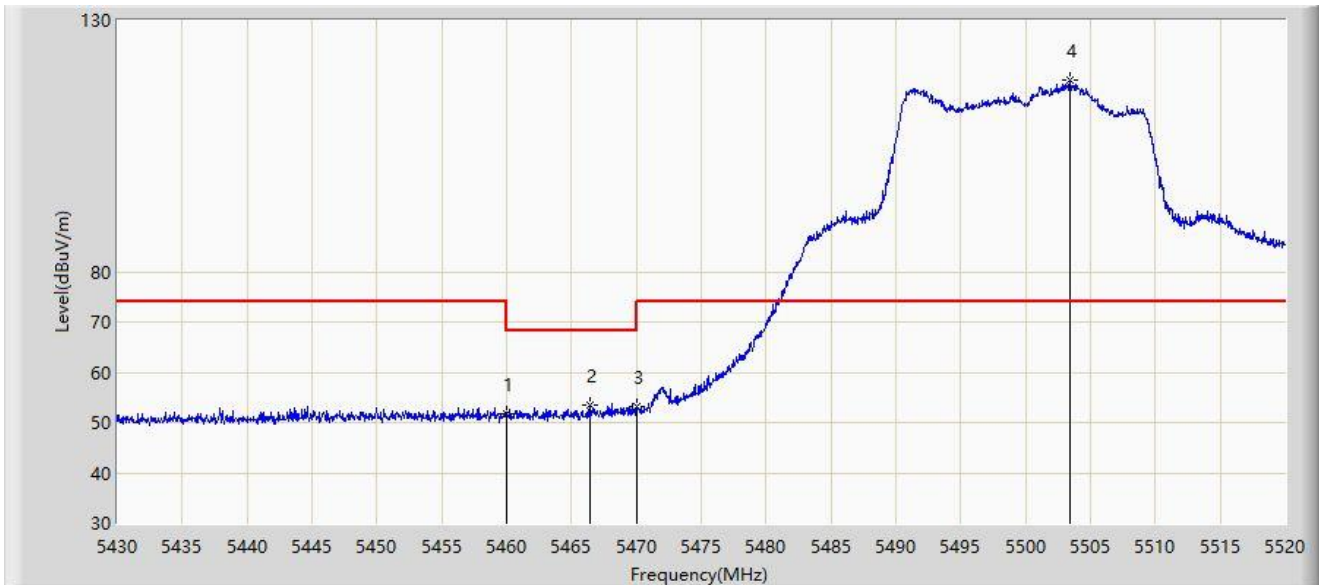


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5460.000	51.853	55.196	-16.347	68.200	-3.343	PK
2	*	5466.405	53.532	56.171	-14.668	68.200	-2.640	PK
3		5470.000	53.103	54.713	-15.097	68.200	-1.610	PK
4		5503.395	118.133	75.276	N/A	N/A	42.857	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

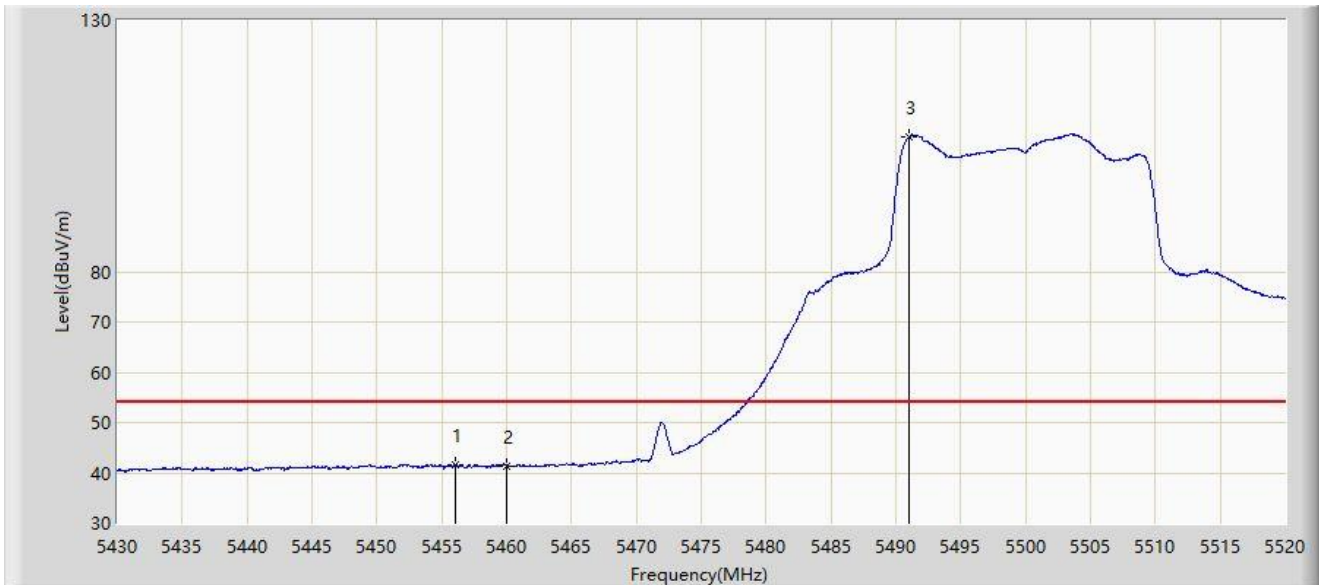


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.010	41.675	45.313	-12.325	54.000	-3.638	AV
2		5460.000	41.444	44.787	-12.556	54.000	-3.343	AV
3		5491.065	106.921	62.187	N/A	N/A	44.734	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

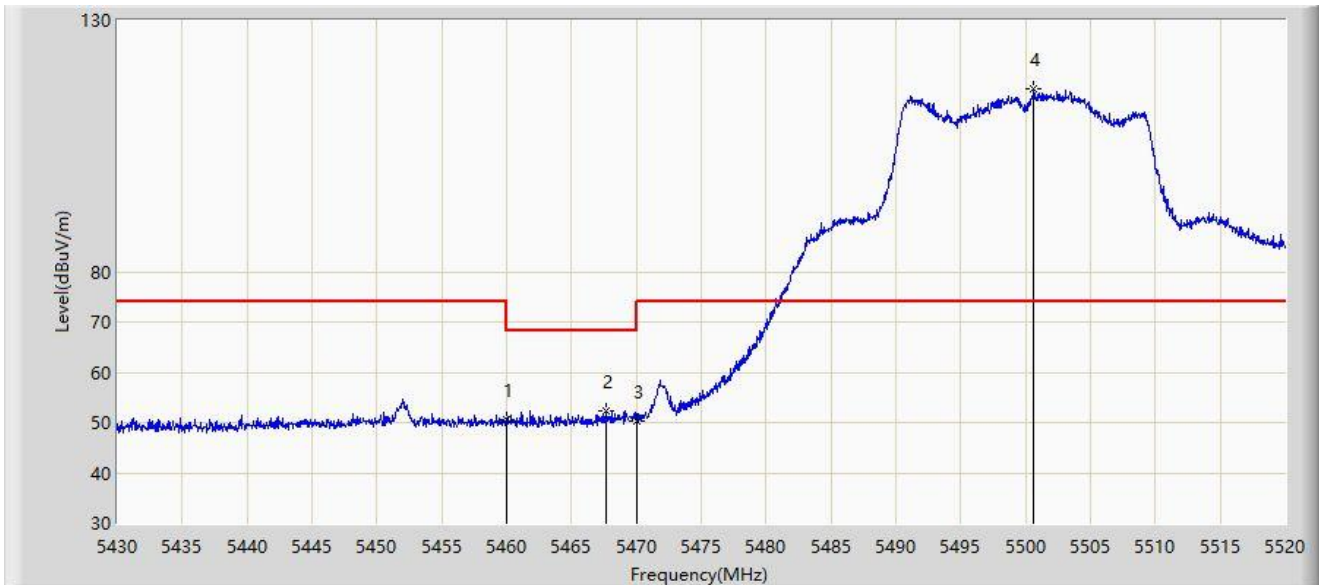


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	50.474	53.817	-17.726	68.200	-3.343	PK
2	*	5467.665	52.331	54.692	-15.869	68.200	-2.360	PK
3		5470.000	50.307	51.917	-17.893	68.200	-1.610	PK
4		5500.650	116.237	77.536	N/A	N/A	38.701	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

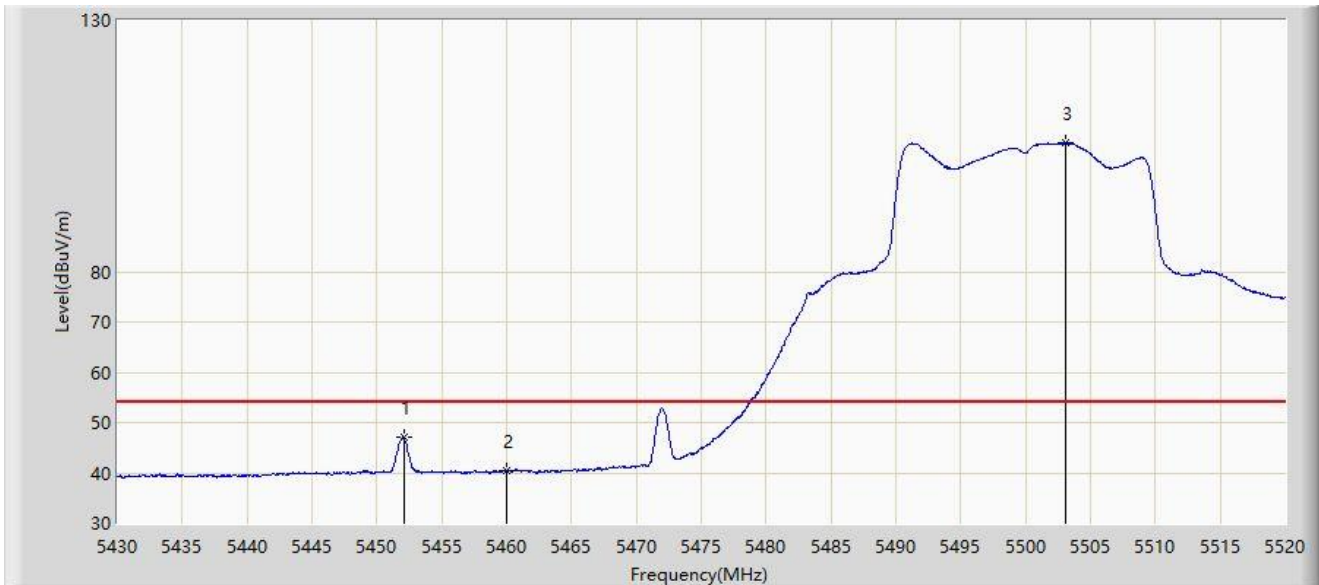


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.050	46.998	50.856	-7.002	54.000	-3.857	AV
2		5460.000	40.355	43.698	-13.645	54.000	-3.343	AV
3		5503.035	105.651	63.469	N/A	N/A	42.182	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

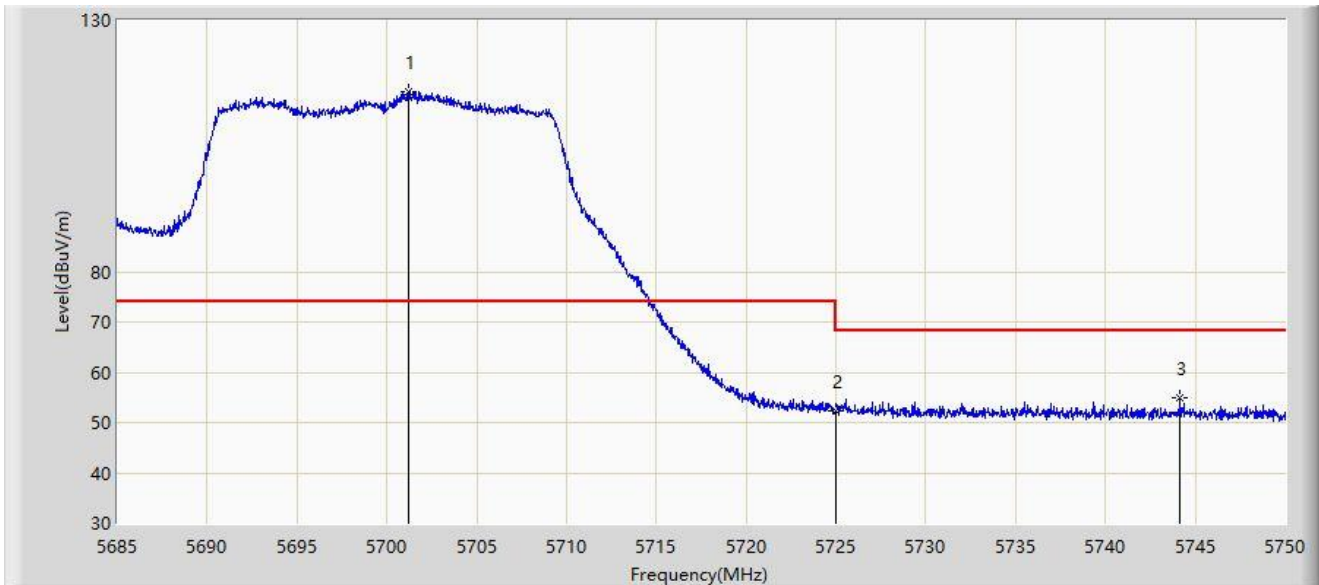


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.185	115.783	79.727	N/A	N/A	36.056	PK
2		5725.000	52.278	54.113	-15.922	68.200	-1.836	PK
3	*	5744.150	54.830	59.680	-13.370	68.200	-4.851	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

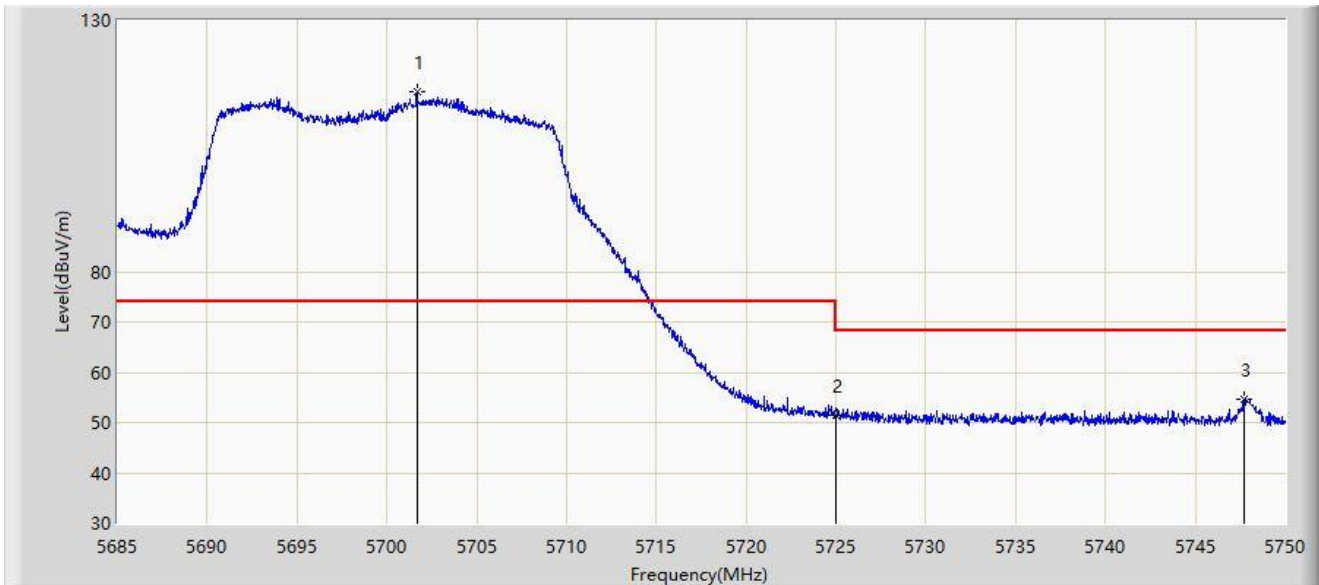


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.672	115.865	79.306	N/A	N/A	36.559	PK
2		5725.000	51.492	53.327	-16.708	68.200	-1.836	PK
3	*	5747.692	54.766	59.793	-13.434	68.200	-5.027	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

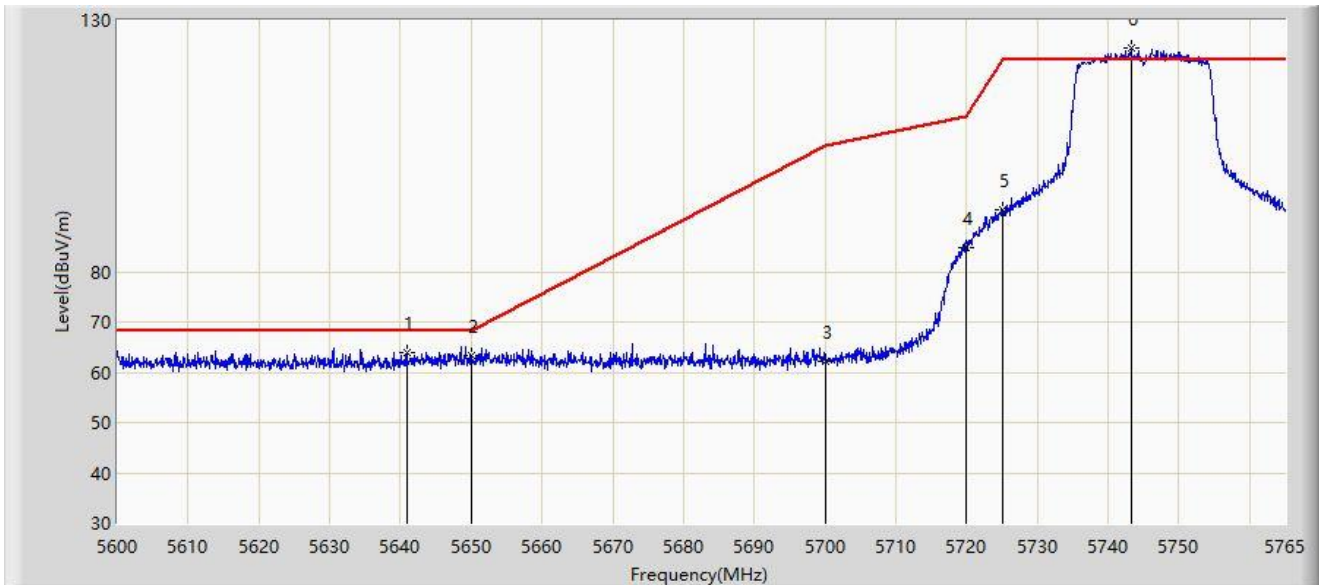


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5640.837	64.011	68.714	-4.189	68.200	-4.702	PK
2		5650.000	63.231	67.809	-4.969	68.200	-4.577	PK
3		5700.000	62.099	66.700	-43.101	105.200	-4.600	PK
4		5720.000	84.649	89.167	-26.151	110.800	-4.519	PK
5		5725.000	92.366	96.867	-29.834	122.200	-4.502	PK
6		5743.220	124.358	128.507	N/A	N/A	-4.148	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

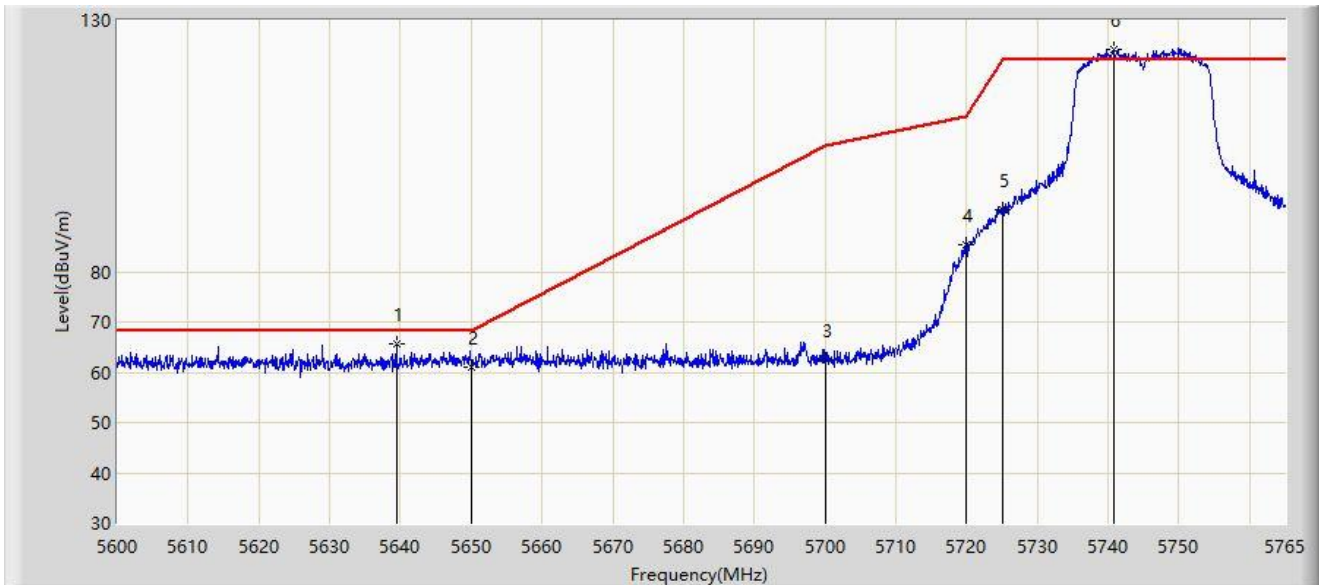


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.435	65.624	70.341	-2.576	68.200	-4.717	PK
2		5650.000	61.145	65.723	-7.055	68.200	-4.577	PK
3		5700.000	62.474	67.075	-42.726	105.200	-4.600	PK
4		5720.000	85.297	89.815	-25.503	110.800	-4.519	PK
5		5725.000	92.368	96.869	-29.832	122.200	-4.502	PK
6		5740.745	124.342	128.542	N/A	N/A	-4.200	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

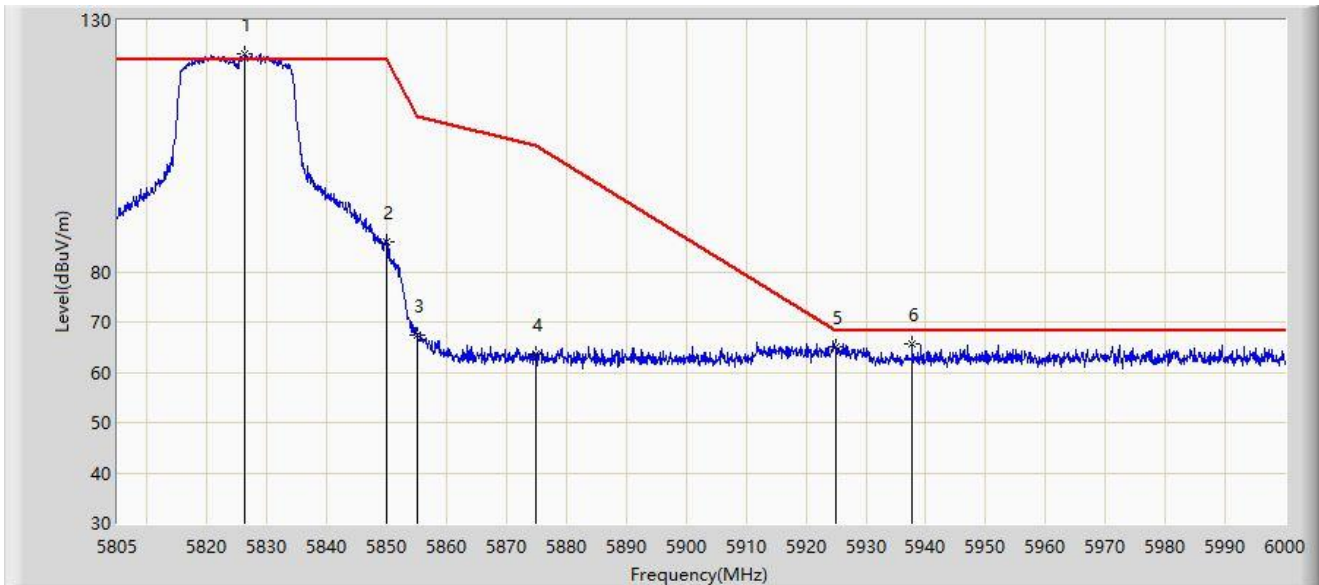


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.353	123.291	127.320	N/A	N/A	-4.028	PK
2		5850.000	85.944	90.055	-36.256	122.200	-4.111	PK
3		5855.000	67.369	71.482	-43.431	110.800	-4.113	PK
4		5875.000	63.590	67.637	-41.610	105.200	-4.046	PK
5		5925.000	64.969	68.729	-3.231	68.200	-3.760	PK
6	*	5937.697	65.709	69.345	-2.491	68.200	-3.636	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

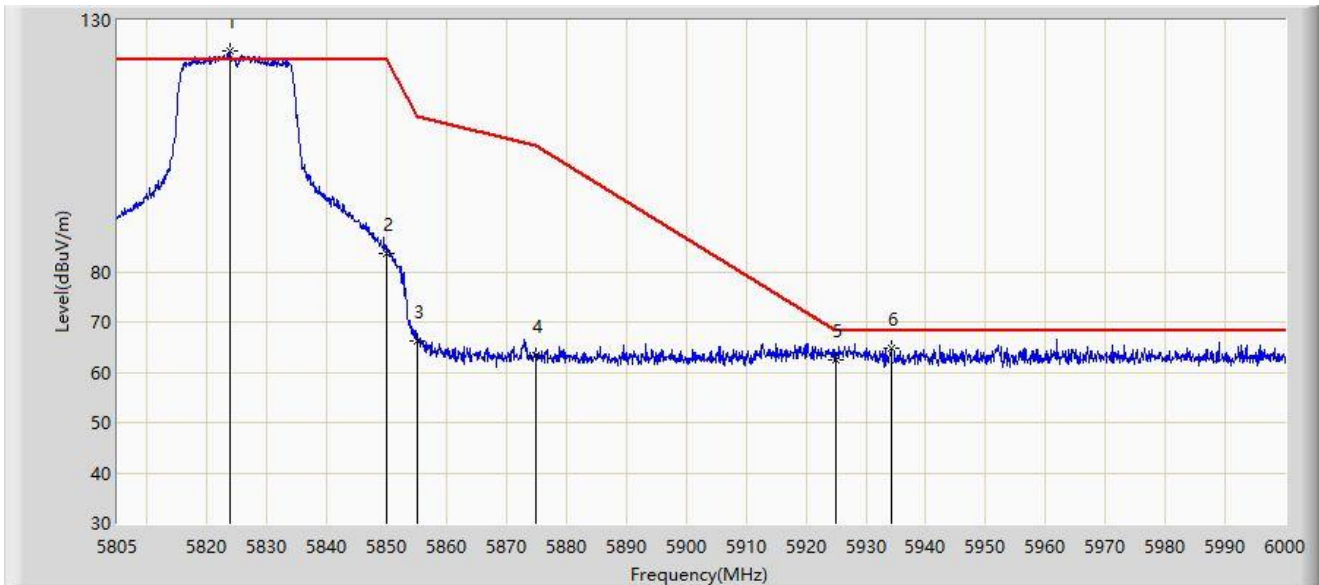


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.720	123.783	127.725	N/A	N/A	-3.942	PK
2		5850.000	83.561	87.672	-38.639	122.200	-4.111	PK
3		5855.000	66.205	70.318	-44.595	110.800	-4.113	PK
4		5875.000	63.473	67.520	-41.727	105.200	-4.046	PK
5		5925.000	62.578	66.338	-5.622	68.200	-3.760	PK
6	*	5934.187	64.666	68.333	-3.534	68.200	-3.668	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

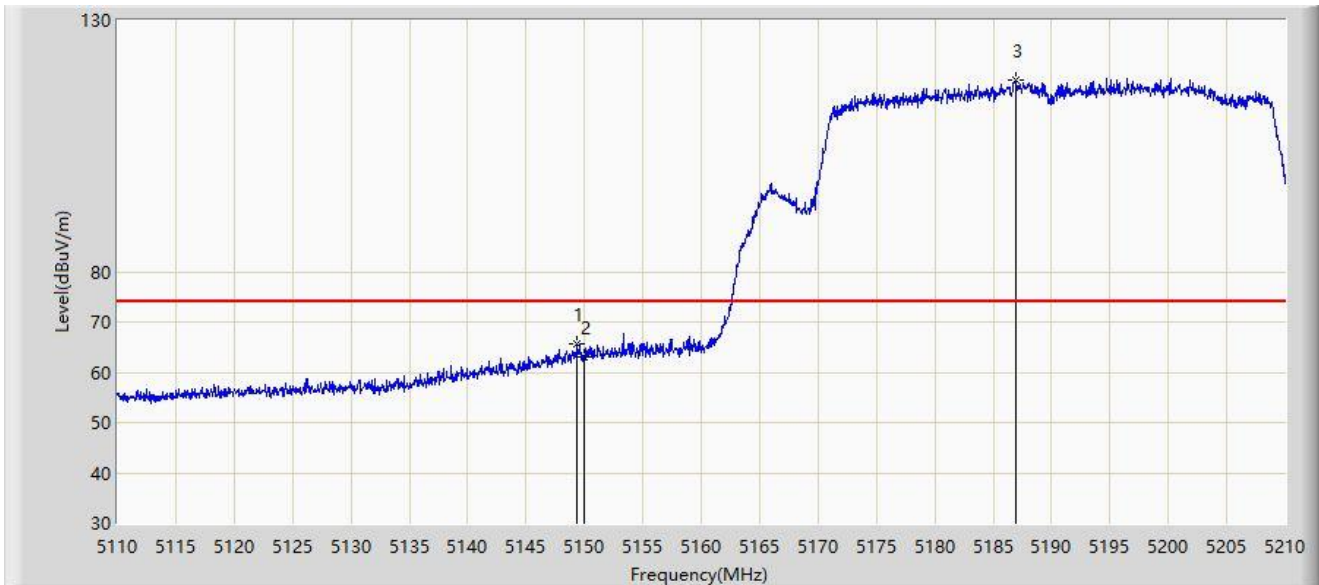


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.400	65.785	69.172	-8.215	74.000	-3.387	PK
2		5150.000	63.111	66.357	-10.889	74.000	-3.246	PK
3		5187.000	118.063	82.931	N/A	N/A	35.131	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

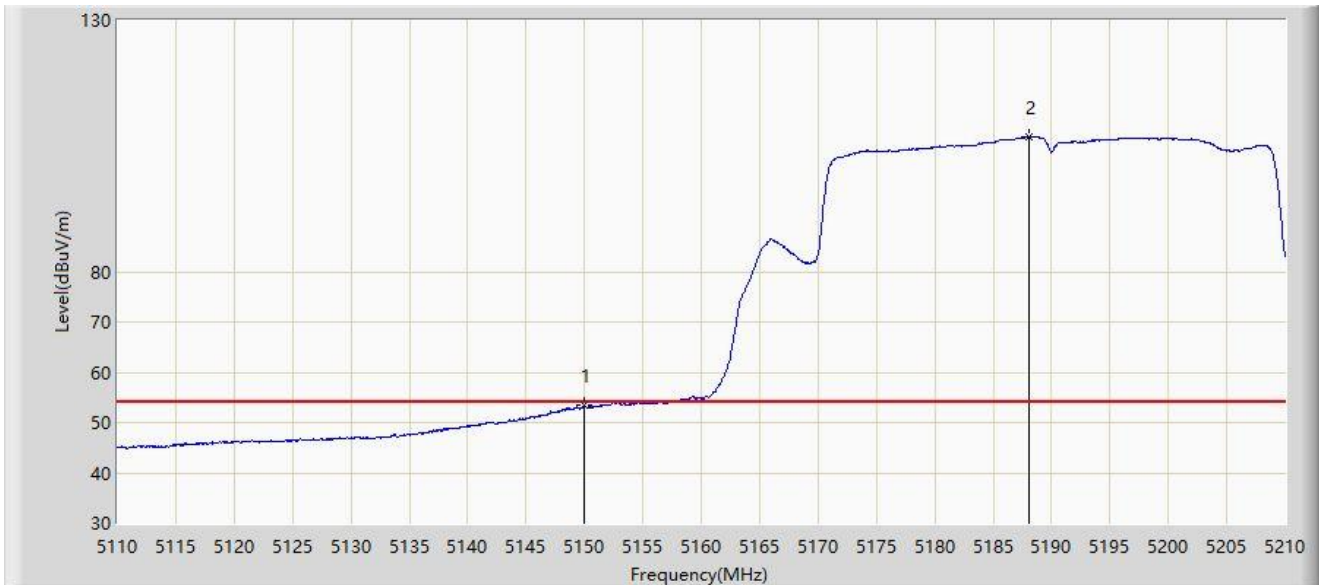


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	53.358	56.604	-0.642	54.000	-3.246	AV
2		5188.050	106.913	70.711	N/A	N/A	36.201	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

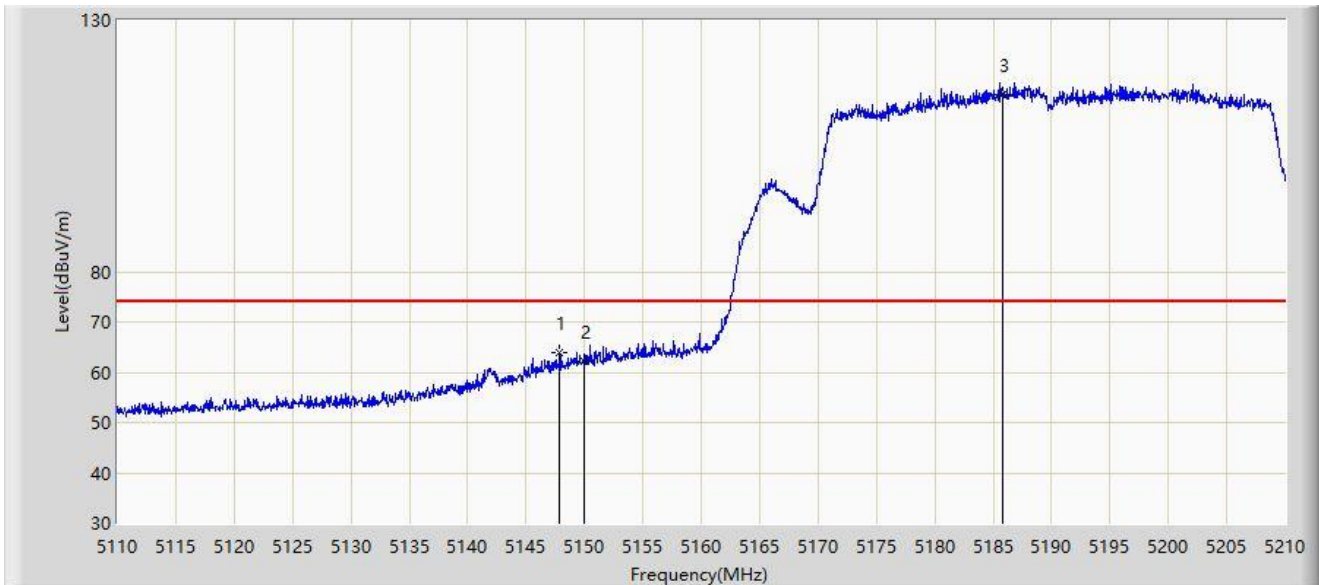


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.900	63.996	67.676	-10.004	74.000	-3.680	PK
2		5150.000	62.064	65.310	-11.936	74.000	-3.246	PK
3		5185.850	115.257	80.482	N/A	N/A	34.775	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

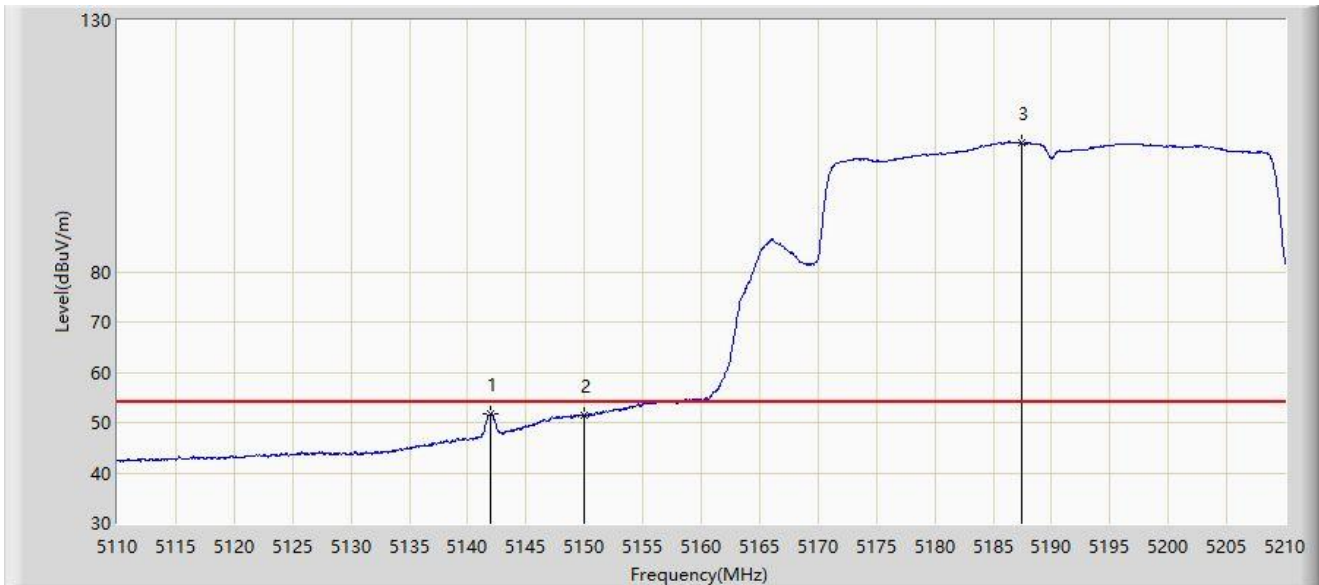


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5142.000	51.796	55.930	-2.204	54.000	-4.134	AV
2		5150.000	51.382	54.628	-2.618	54.000	-3.246	AV
3		5187.400	105.634	70.185	N/A	N/A	35.449	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

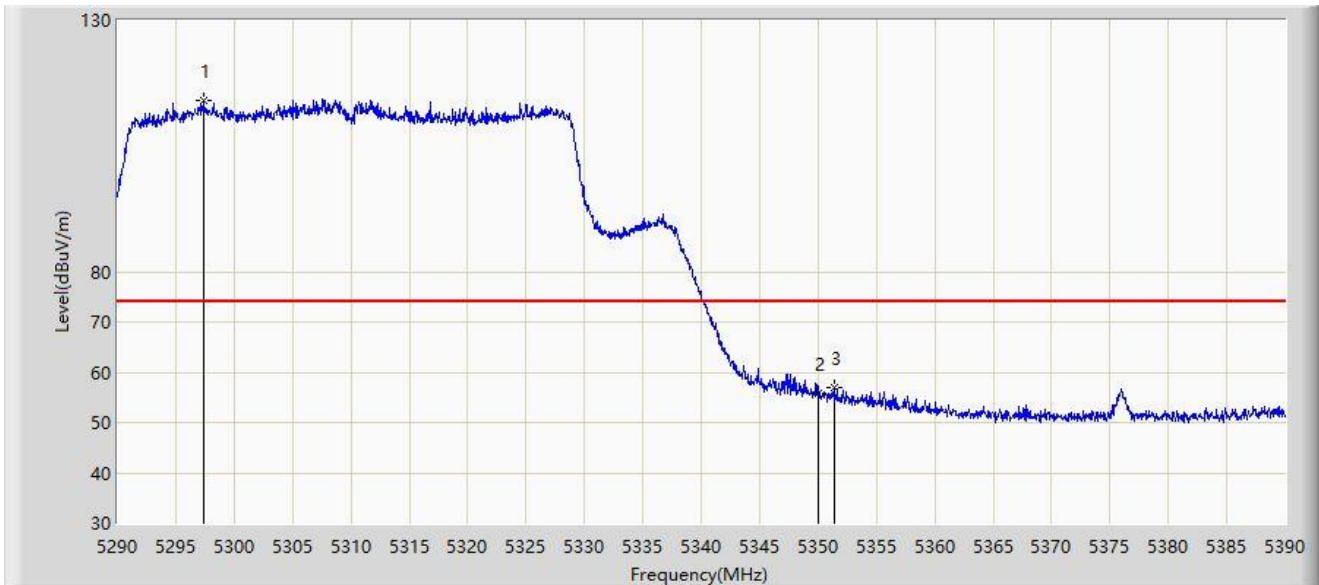


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5297.400	114.003	71.736	N/A	N/A	42.267	PK
2		5350.000	55.915	57.319	-18.085	74.000	-1.404	PK
3	*	5351.350	56.937	59.023	-17.063	74.000	-2.087	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

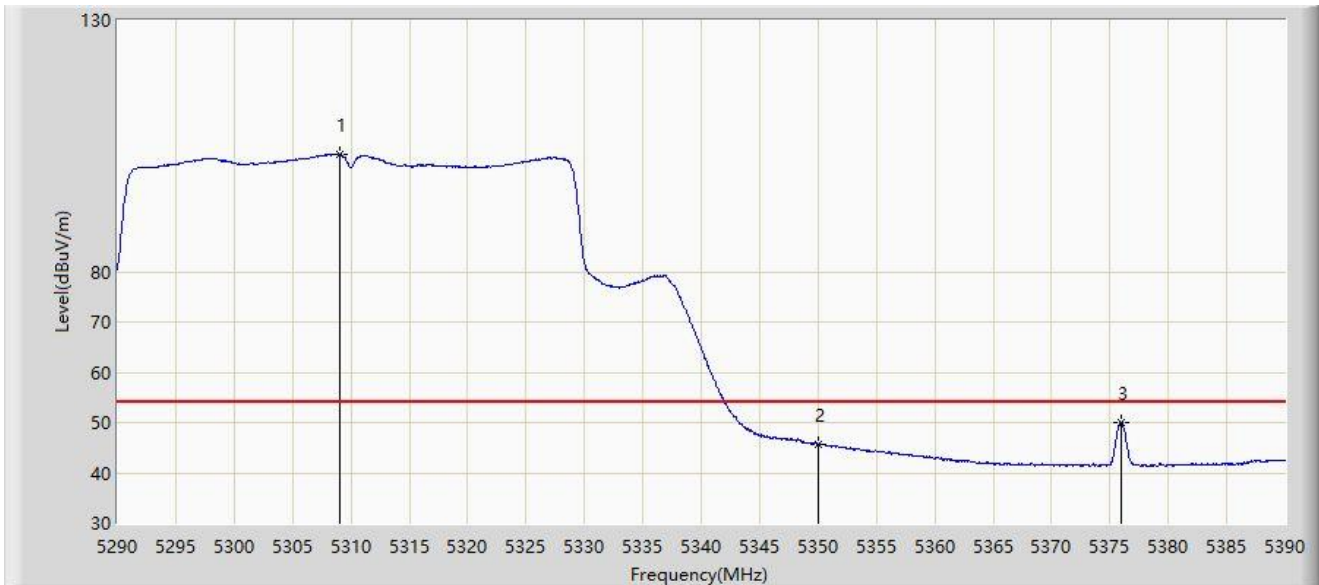


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.100	103.223	62.303	N/A	N/A	40.920	AV
2		5350.000	45.713	47.117	-8.287	54.000	-1.404	AV
3	*	5375.950	50.047	55.017	-3.953	54.000	-4.970	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

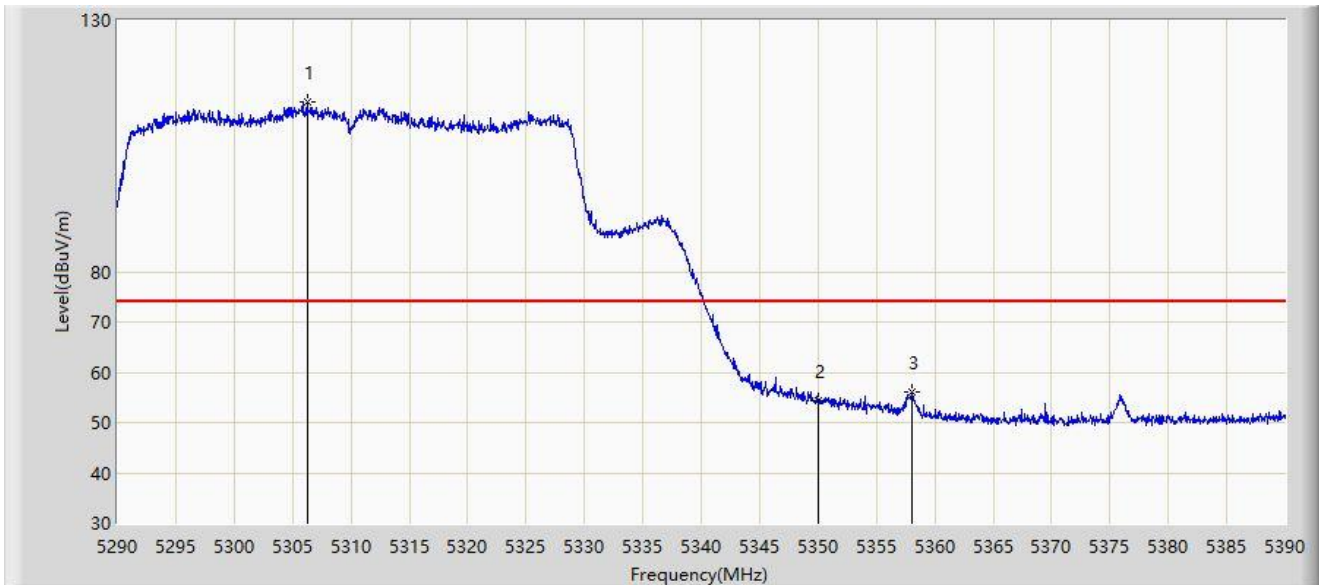


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5306.250	113.762	75.020	N/A	N/A	38.743	PK
2		5350.000	54.310	55.714	-19.690	74.000	-1.404	PK
3	*	5358.000	55.997	59.757	-18.003	74.000	-3.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

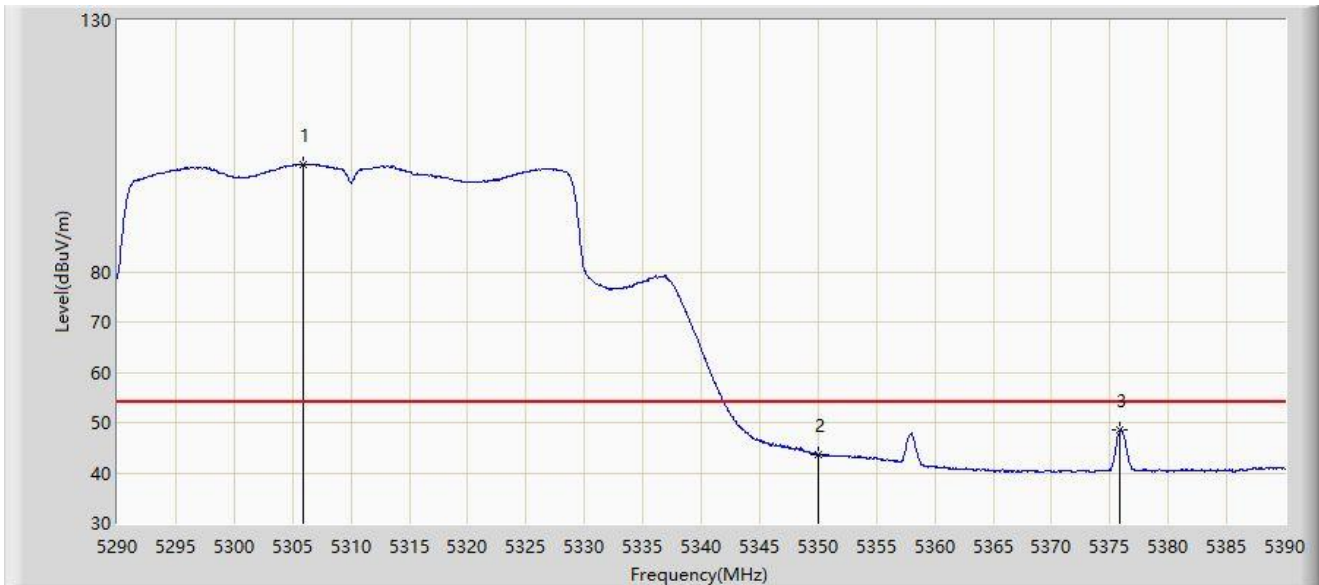


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.950	101.287	62.669	N/A	N/A	38.619	AV
2		5350.000	43.635	45.039	-10.365	54.000	-1.404	AV
3	*	5375.900	48.503	53.475	-5.497	54.000	-4.973	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

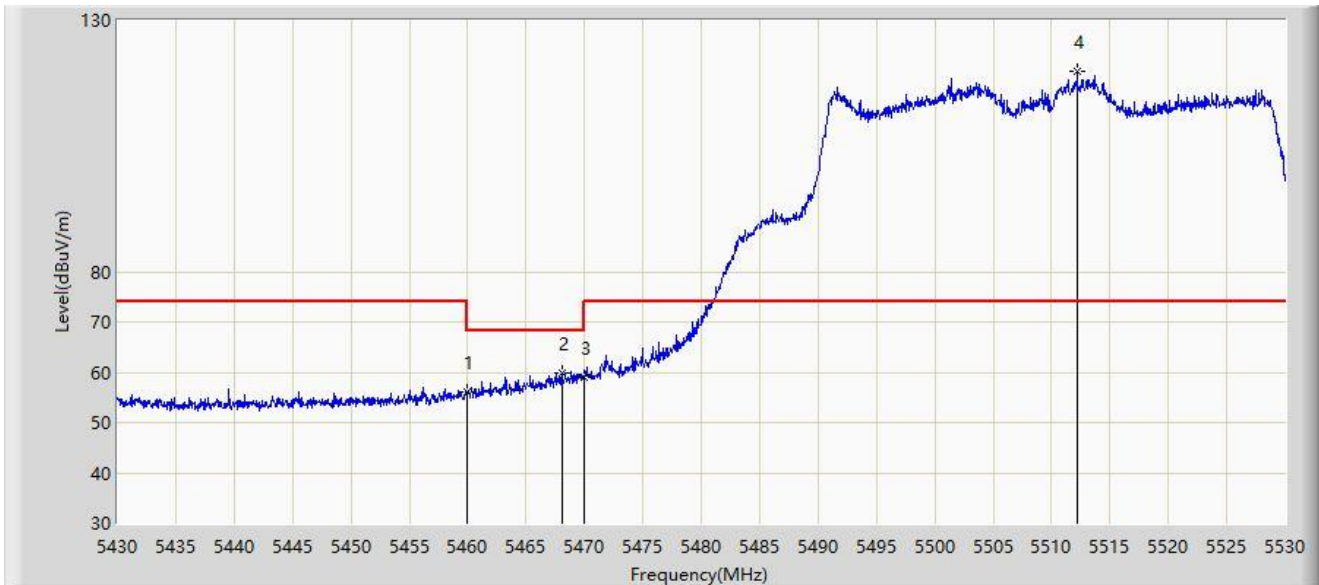


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	56.228	59.571	-11.972	68.200	-3.343	PK
2	*	5468.050	59.888	62.138	-8.312	68.200	-2.249	PK
3		5470.000	58.852	60.462	-9.348	68.200	-1.610	PK
4		5512.200	119.744	79.290	N/A	N/A	40.454	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

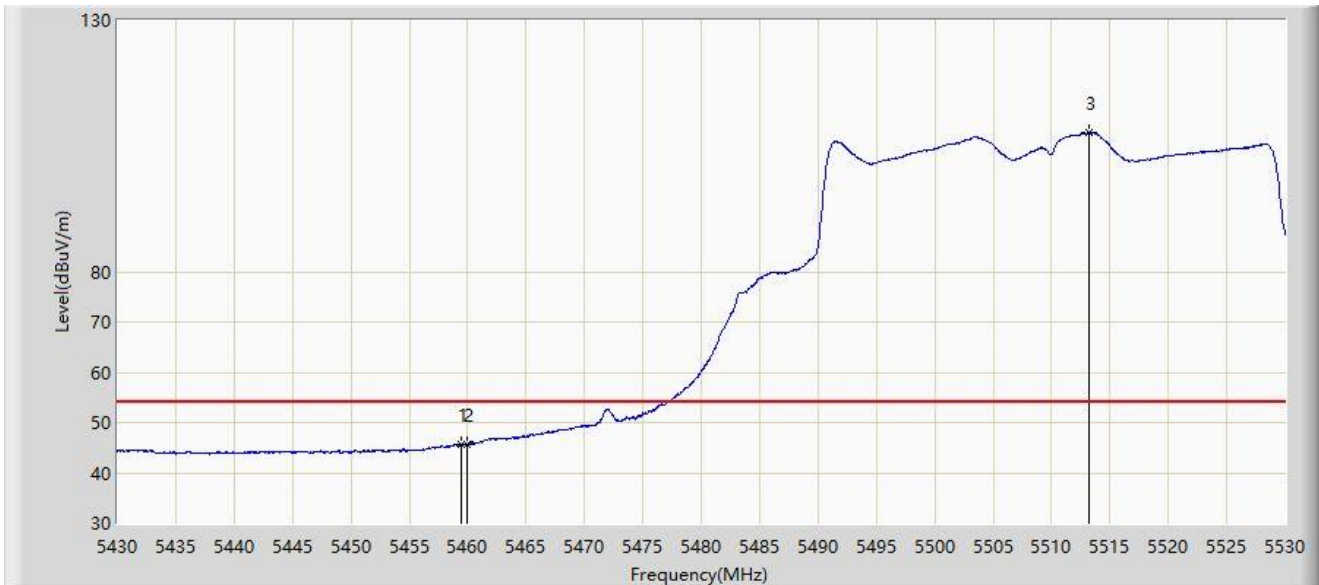


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.400	45.788	49.208	-8.212	54.000	-3.421	AV
2		5460.000	45.604	48.947	-8.396	54.000	-3.343	AV
3		5513.150	107.616	65.922	N/A	N/A	41.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

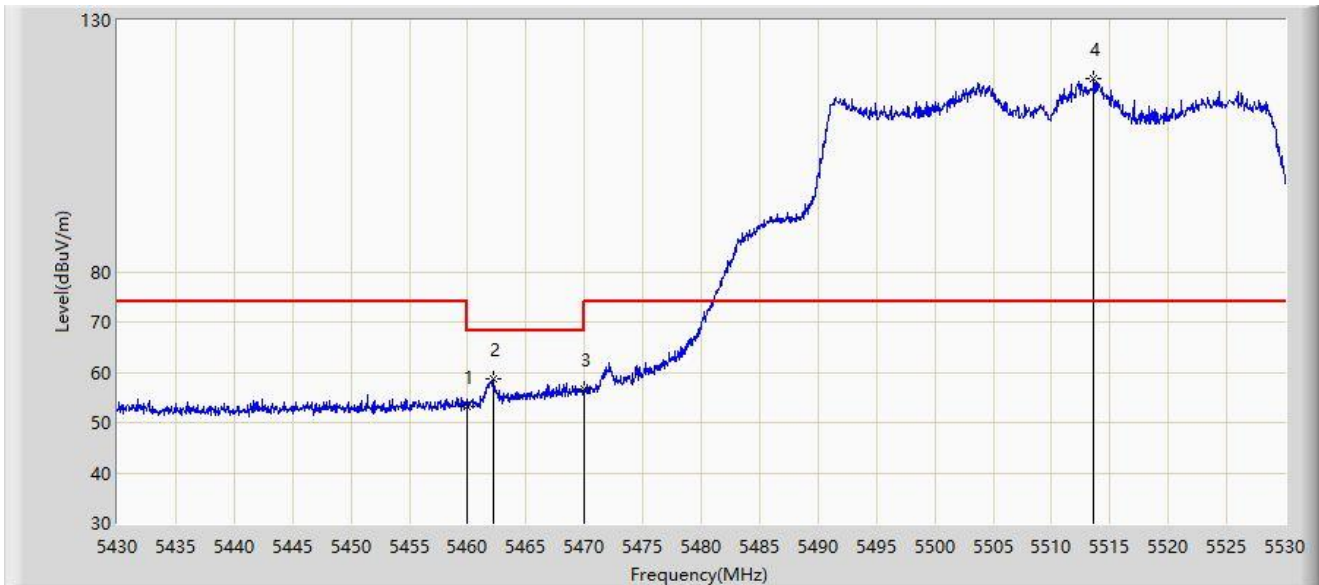

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	53.114	56.457	-15.086	68.200	-3.343	PK
2	*	5462.150	58.605	61.812	-9.595	68.200	-3.207	PK
3		5470.000	56.684	58.294	-11.516	68.200	-1.610	PK
4		5513.600	118.431	76.222	N/A	N/A	42.208	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.950	43.921	47.271	-10.079	54.000	-3.350	AV
2		5460.000	43.772	47.115	-10.228	54.000	-3.343	AV
3		5513.300	107.092	65.221	N/A	N/A	41.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

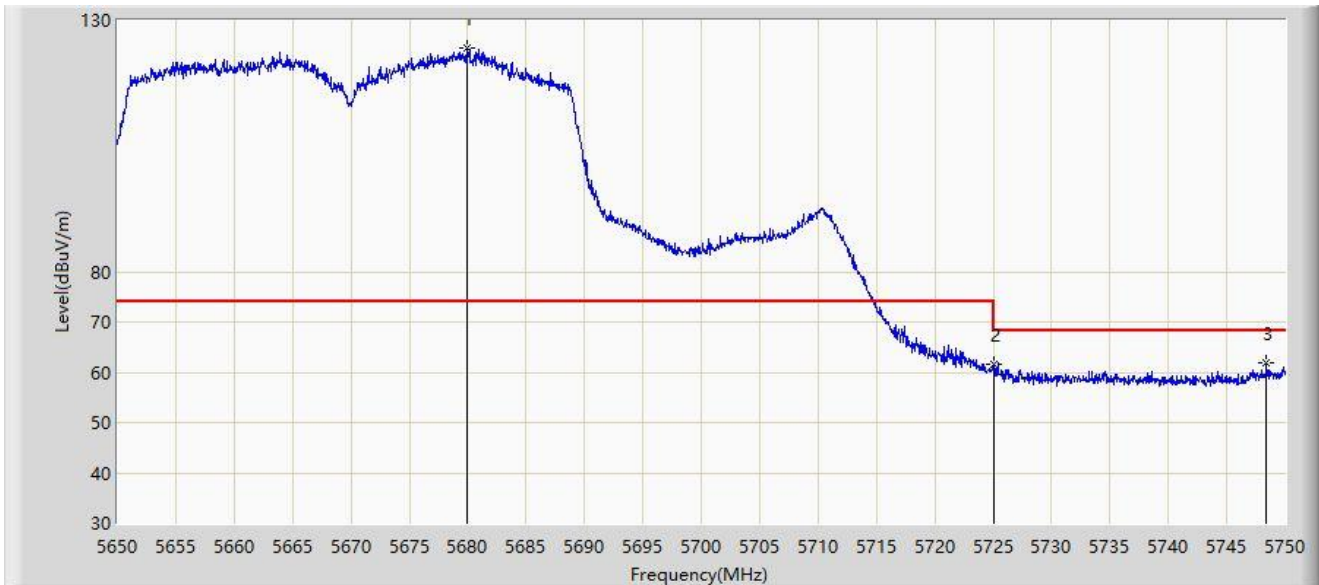


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5679.900	124.486	81.302	N/A	N/A	43.184	PK
2		5725.000	61.685	63.520	-6.515	68.200	-1.836	PK
3	*	5748.400	61.911	66.950	-6.289	68.200	-5.039	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

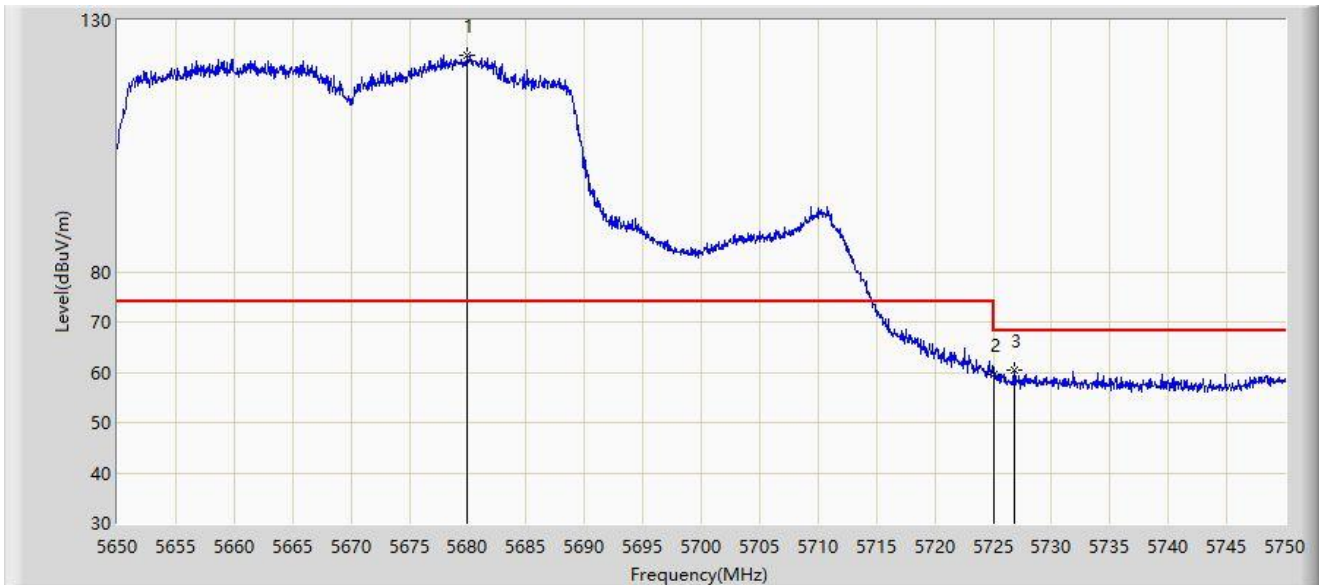


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5679.900	123.160	79.976	N/A	N/A	43.184	PK
2		5725.000	59.435	61.270	-8.765	68.200	-1.836	PK
3	*	5726.800	60.317	63.032	-7.883	68.200	-2.715	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

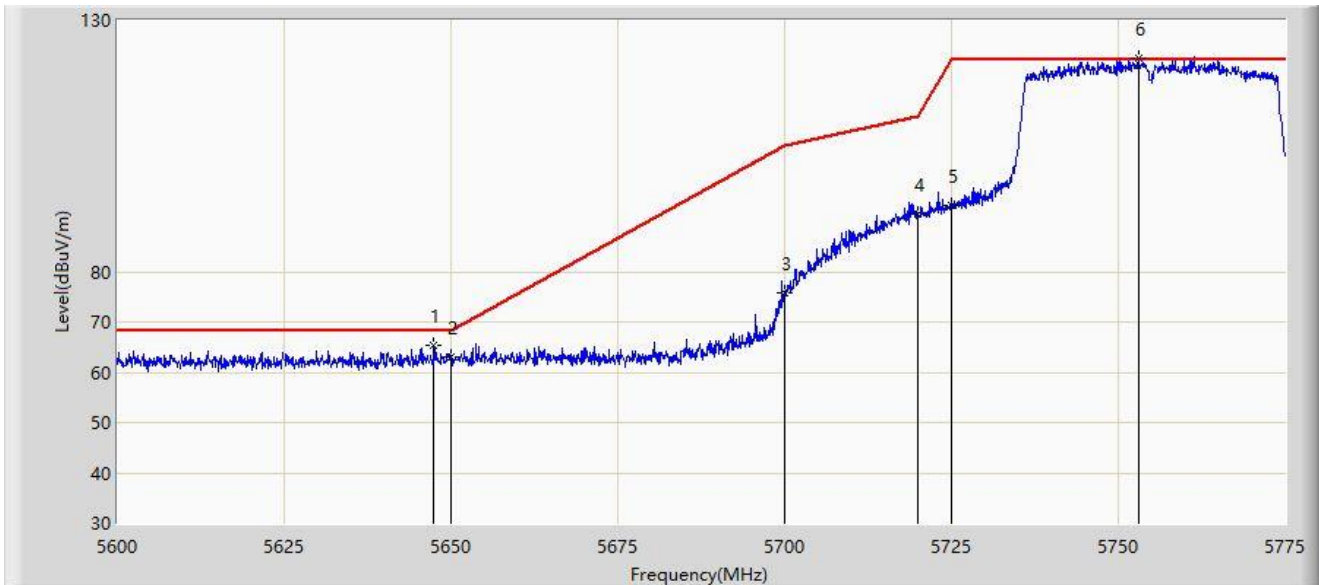


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.425	65.459	70.072	-2.741	68.200	-4.613	PK
2		5650.000	63.167	67.745	-5.033	68.200	-4.577	PK
3		5700.000	75.928	80.529	-29.272	105.200	-4.600	PK
4		5720.000	91.335	95.853	-19.465	110.800	-4.519	PK
5		5725.000	93.251	97.752	-28.949	122.200	-4.502	PK
6		5753.038	122.489	126.404	N/A	N/A	-3.915	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

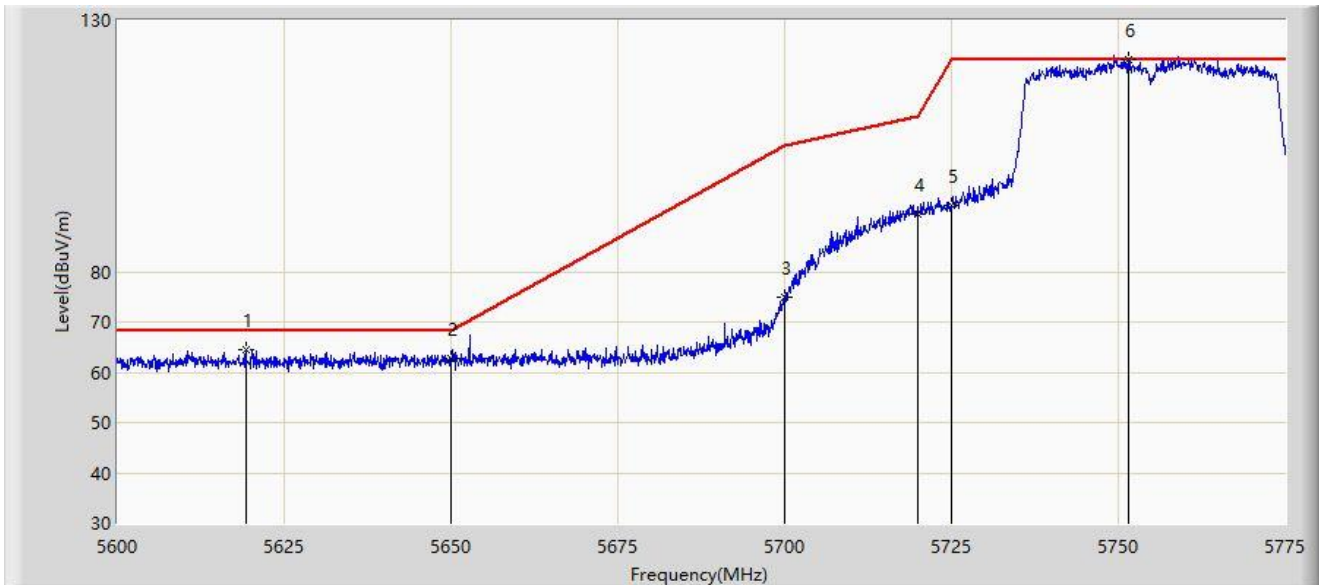


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5619.250	64.373	69.217	-3.827	68.200	-4.845	PK
2		5650.000	62.757	67.335	-5.443	68.200	-4.577	PK
3		5700.000	75.071	79.672	-30.129	105.200	-4.600	PK
4		5720.000	91.309	95.827	-19.491	110.800	-4.519	PK
5		5725.000	93.077	97.578	-29.123	122.200	-4.502	PK
6		5751.462	122.106	126.059	N/A	N/A	-3.954	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

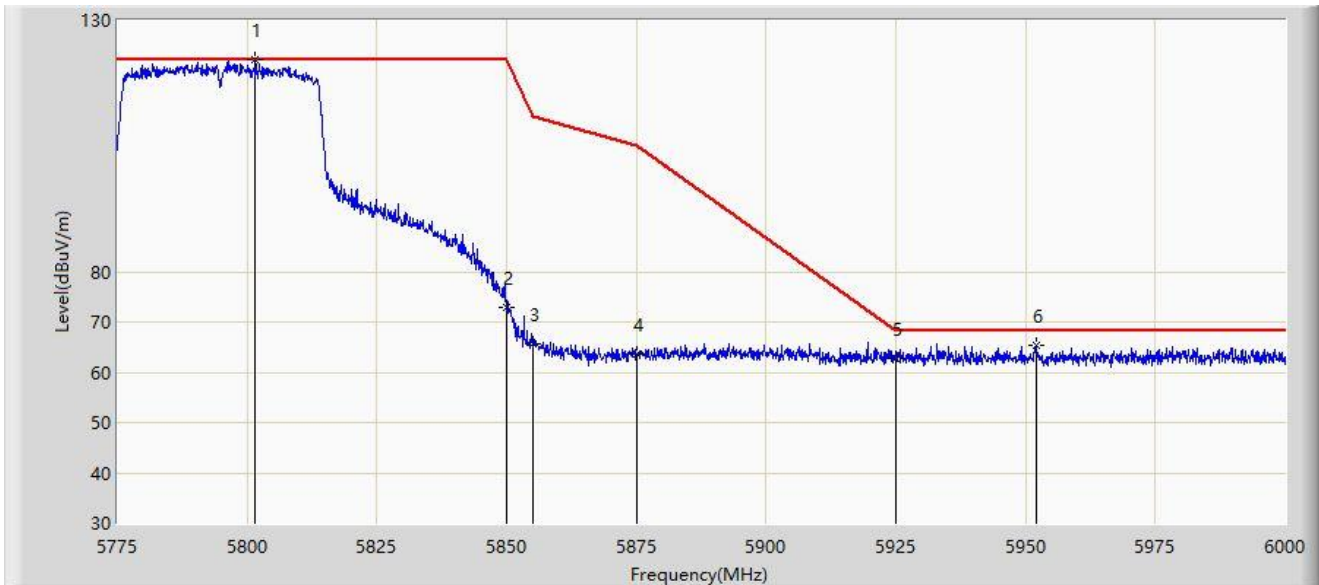


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5801.550	122.275	125.929	N/A	N/A	-3.654	PK
2		5850.000	72.766	76.877	-49.434	122.200	-4.111	PK
3		5855.000	65.599	69.712	-45.201	110.800	-4.113	PK
4		5875.000	63.485	67.532	-41.715	105.200	-4.046	PK
5		5925.000	62.744	66.504	-5.456	68.200	-3.760	PK
6	*	5952.075	65.238	68.771	-2.962	68.200	-3.533	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

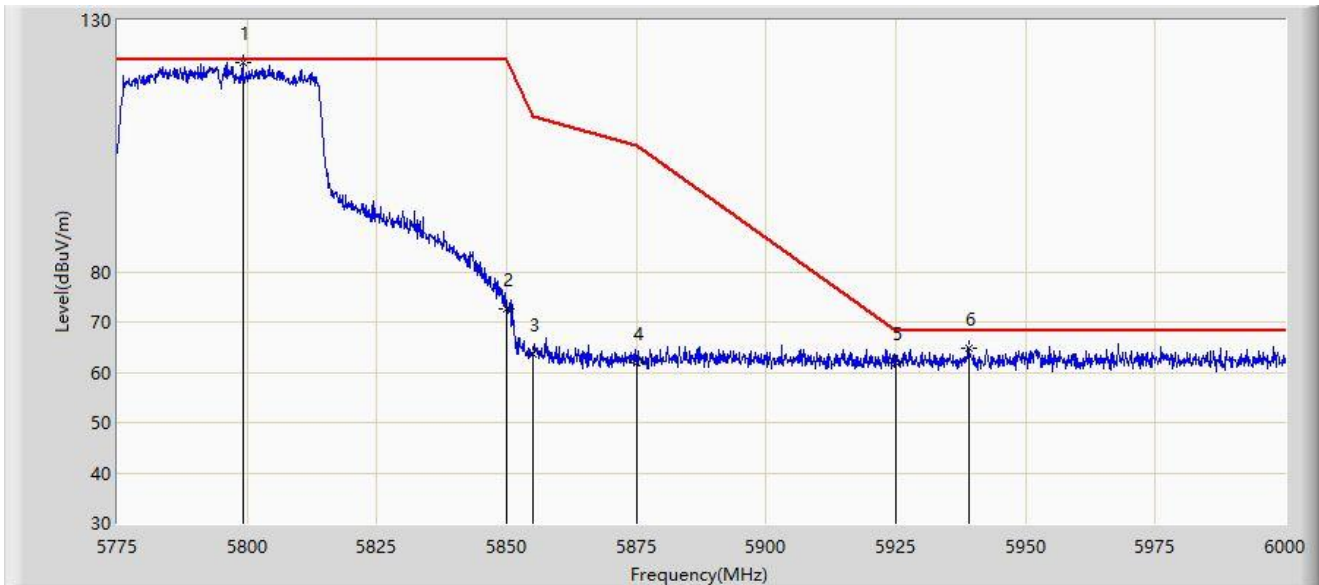


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5799.187	121.453	125.139	N/A	N/A	-3.686	PK
2		5850.000	72.740	76.851	-49.460	122.200	-4.111	PK
3		5855.000	63.513	67.626	-47.287	110.800	-4.113	PK
4		5875.000	61.968	66.015	-43.232	105.200	-4.046	PK
5		5925.000	61.757	65.517	-6.443	68.200	-3.760	PK
6	*	5939.025	64.648	68.272	-3.552	68.200	-3.624	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

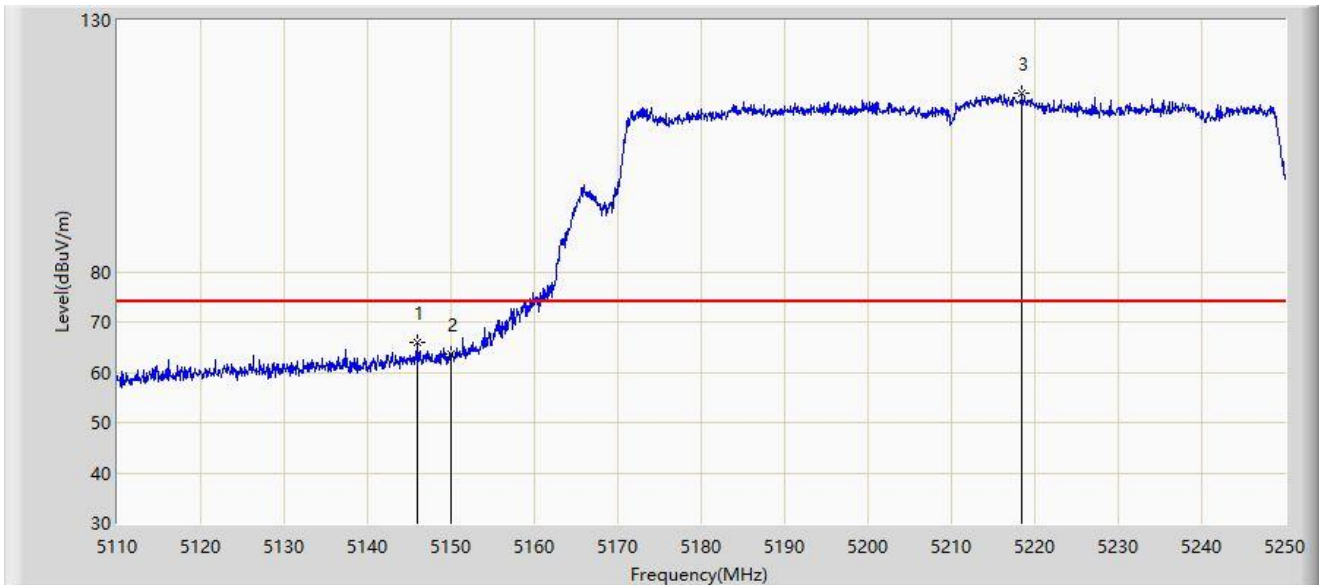


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.050	65.919	69.859	-8.081	74.000	-3.941	PK
2		5150.000	63.483	66.729	-10.517	74.000	-3.246	PK
3		5218.500	115.595	72.844	N/A	N/A	42.751	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

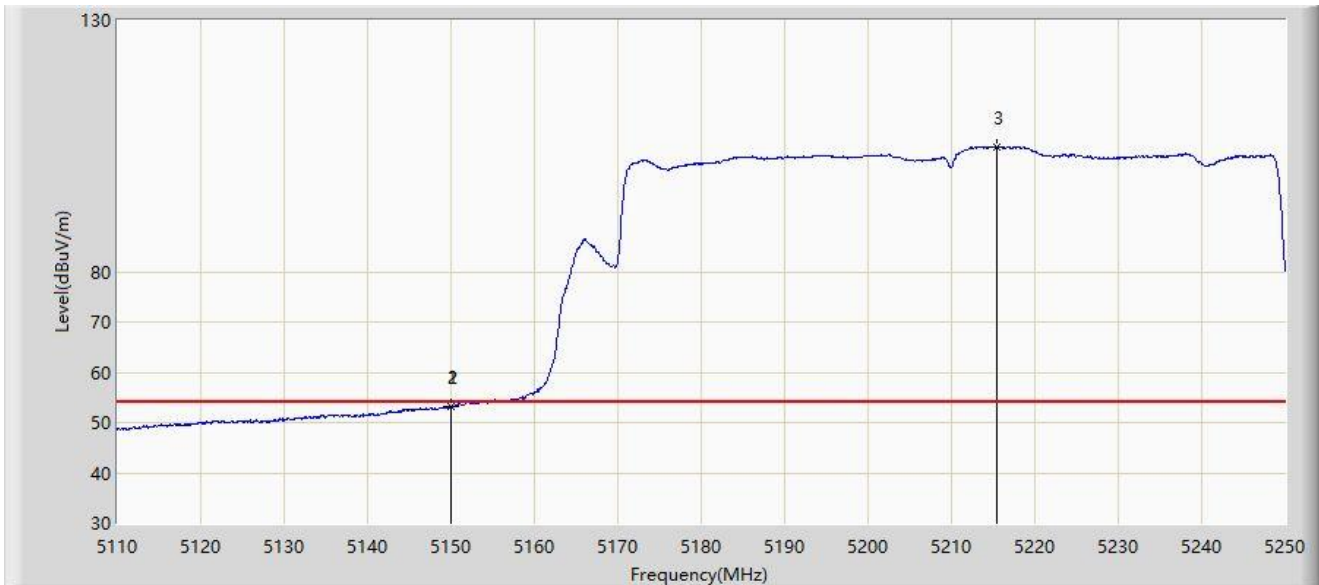


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.970	53.218	56.474	-0.782	54.000	-3.256	AV
2		5150.000	53.178	56.424	-0.822	54.000	-3.246	AV
3		5215.490	104.824	67.238	N/A	N/A	37.587	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

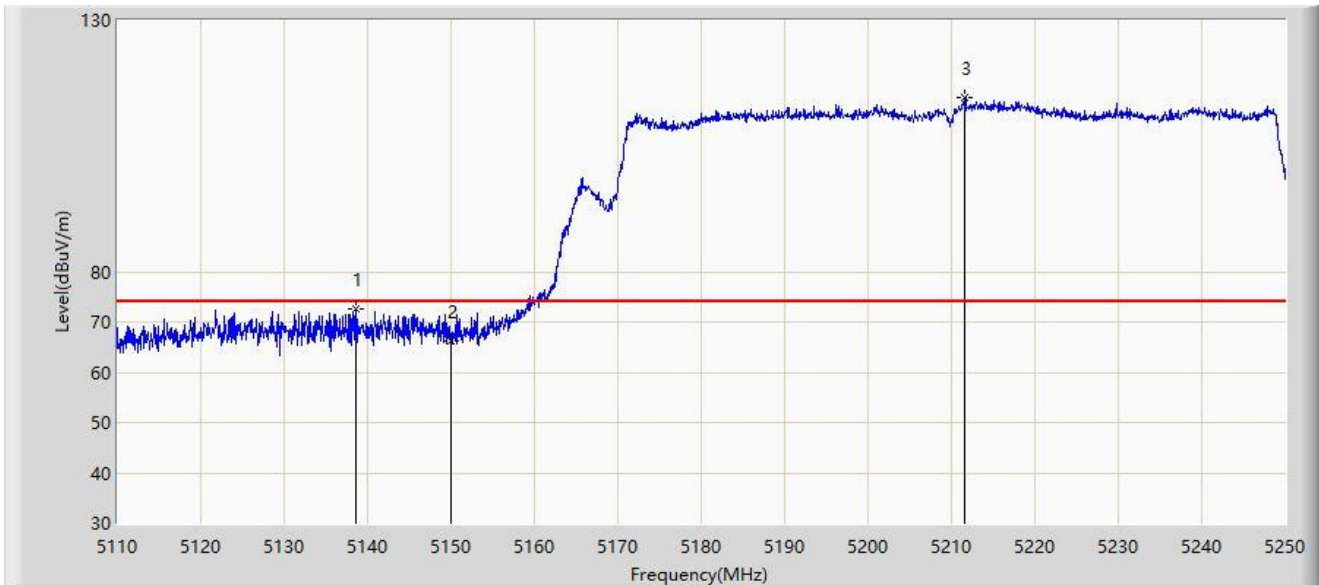


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.560	72.726	77.109	-1.274	74.000	-4.382	PK
2		5150.000	66.115	69.361	-7.885	74.000	-3.246	PK
3		5211.500	114.700	80.156	N/A	N/A	34.543	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

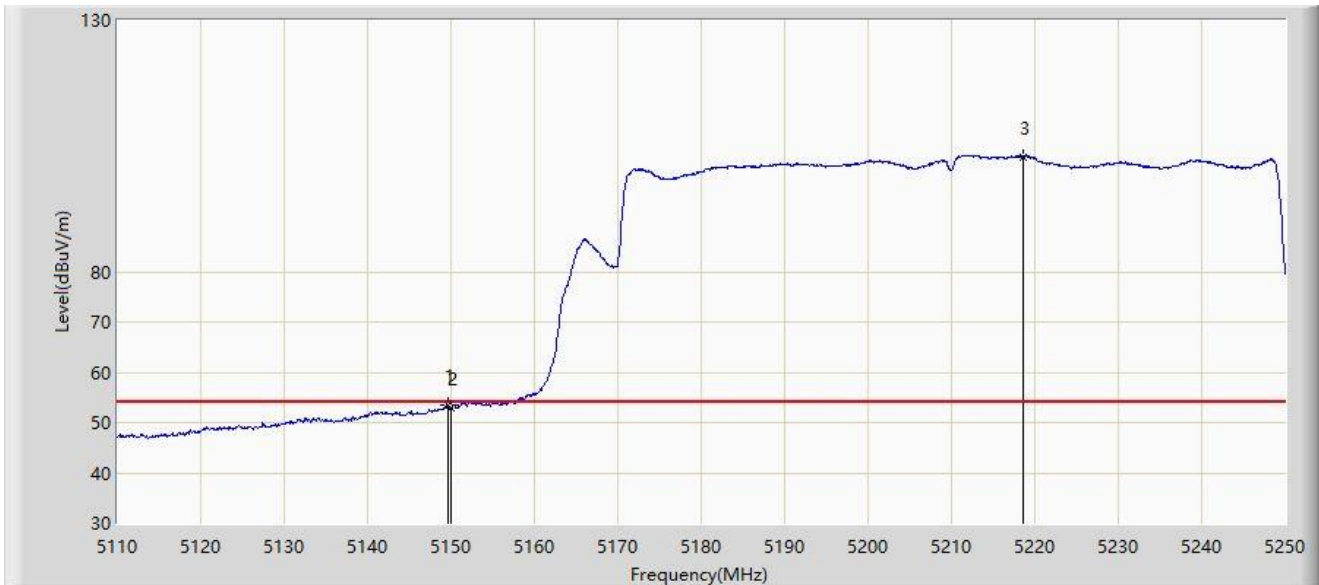


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.690	53.416	56.749	-0.584	54.000	-3.333	AV
2		5150.000	52.868	56.114	-1.132	54.000	-3.246	AV
3		5218.570	102.896	60.050	N/A	N/A	42.846	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

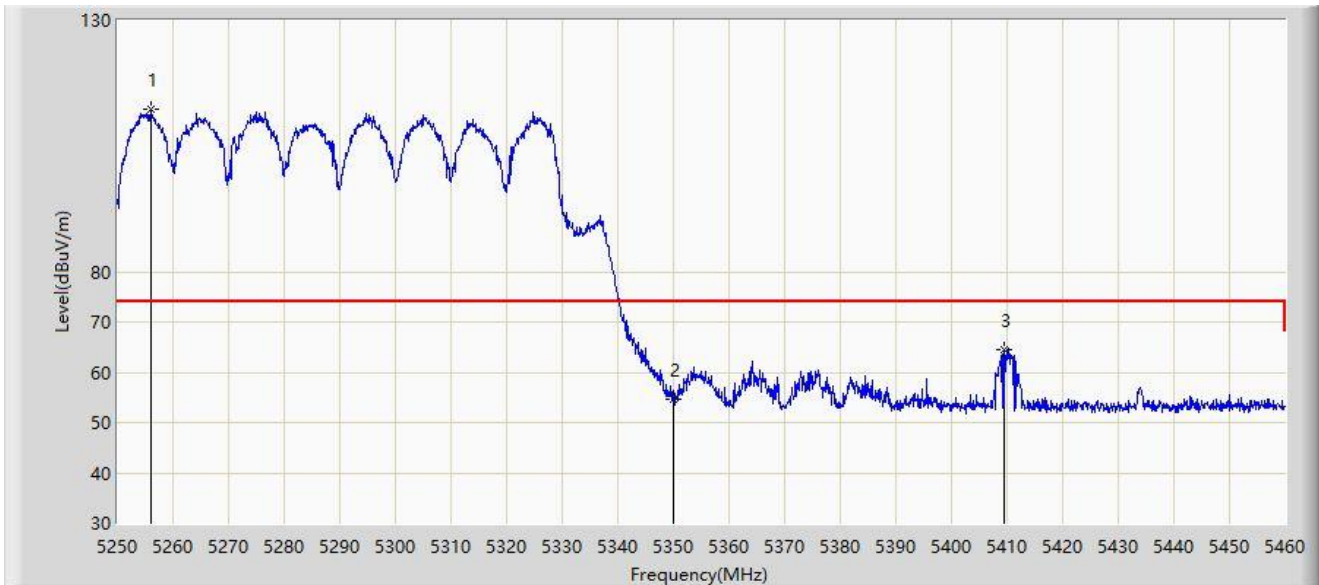


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5255.985	112.267	72.496	N/A	N/A	39.771	PK
2		5350.000	54.782	56.186	-19.218	74.000	-1.404	PK
3	*	5409.495	64.443	69.509	-9.557	74.000	-5.066	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

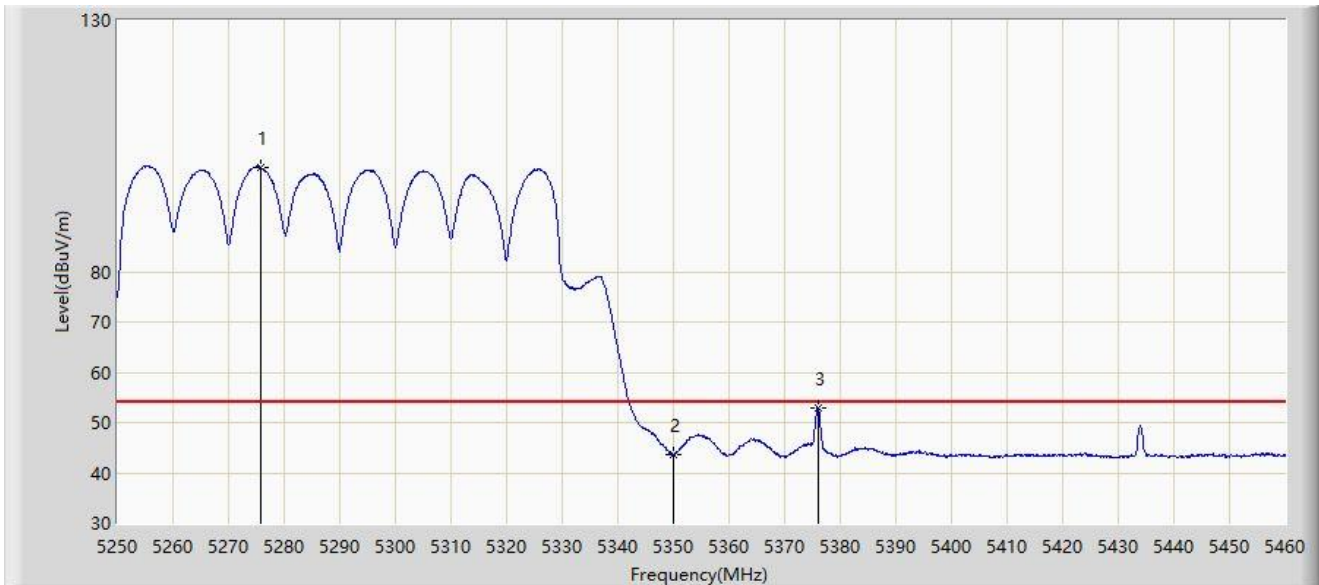


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5275.725	100.809	63.032	N/A	N/A	37.777	AV
2		5350.000	43.531	44.935	-10.469	54.000	-1.404	AV
3	*	5376.000	52.943	57.910	-1.057	54.000	-4.968	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

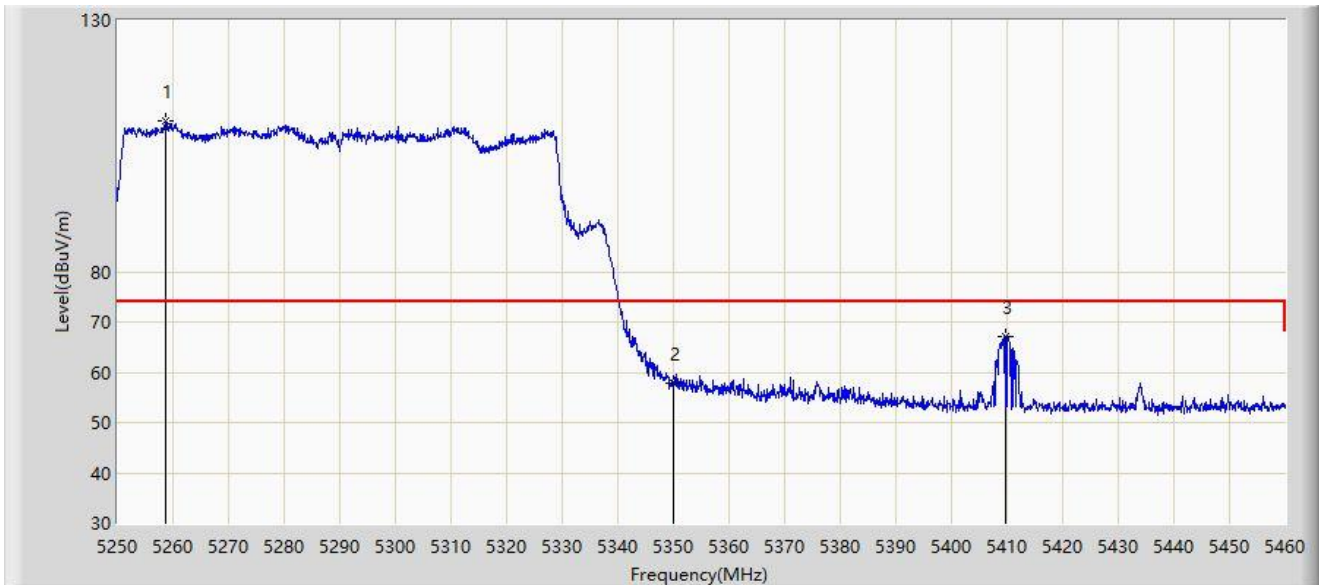


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5258.610	109.981	65.821	N/A	N/A	44.160	PK
2		5350.000	57.760	59.164	-16.240	74.000	-1.404	PK
3	*	5409.810	67.237	72.302	-6.763	74.000	-5.065	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

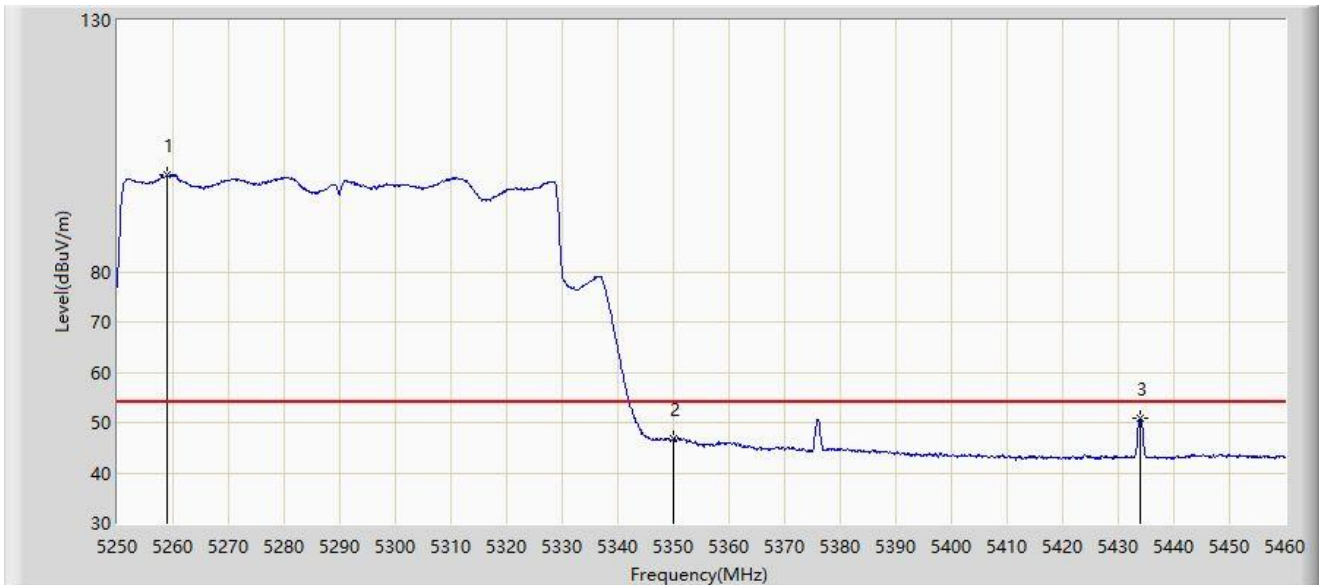


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.030	99.154	54.294	N/A	N/A	44.860	AV
2		5350.000	46.671	48.075	-7.329	54.000	-1.404	AV
3	*	5434.065	50.995	55.972	-3.005	54.000	-4.977	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

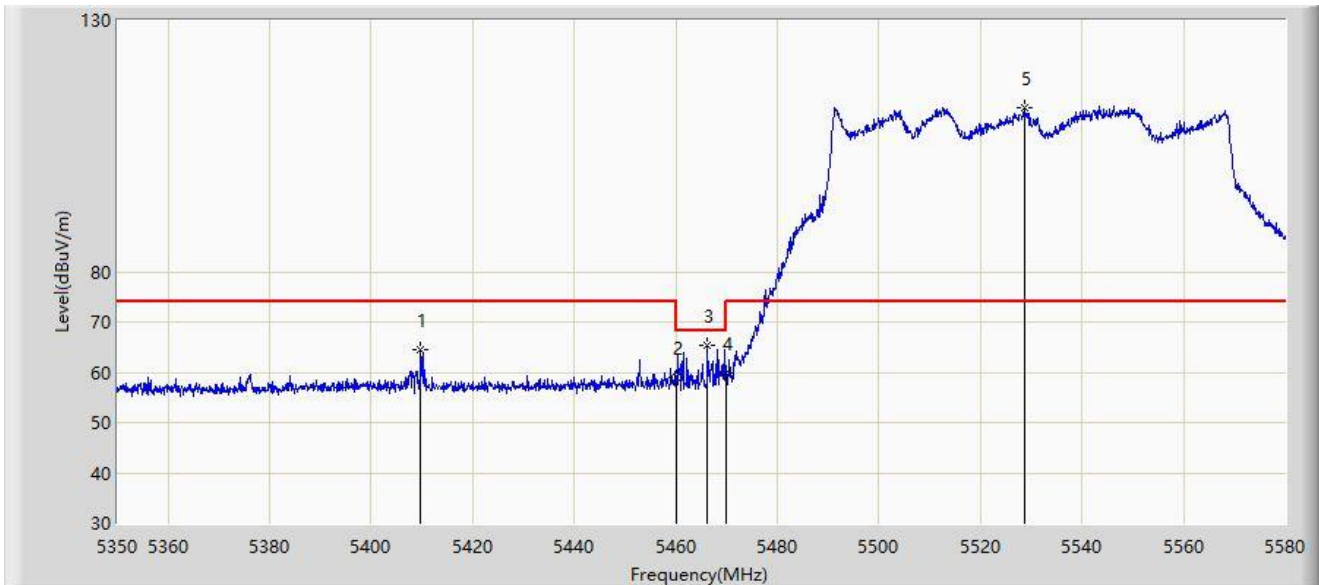


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5409.685	64.530	69.098	-9.470	74.000	-4.569	PK
2		5460.000	58.861	62.204	-9.339	68.200	-3.343	PK
3	*	5466.265	65.336	67.997	-2.864	68.200	-2.662	PK
4		5470.000	59.940	61.550	-8.260	68.200	-1.610	PK
5		5528.595	112.599	66.868	N/A	N/A	45.731	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

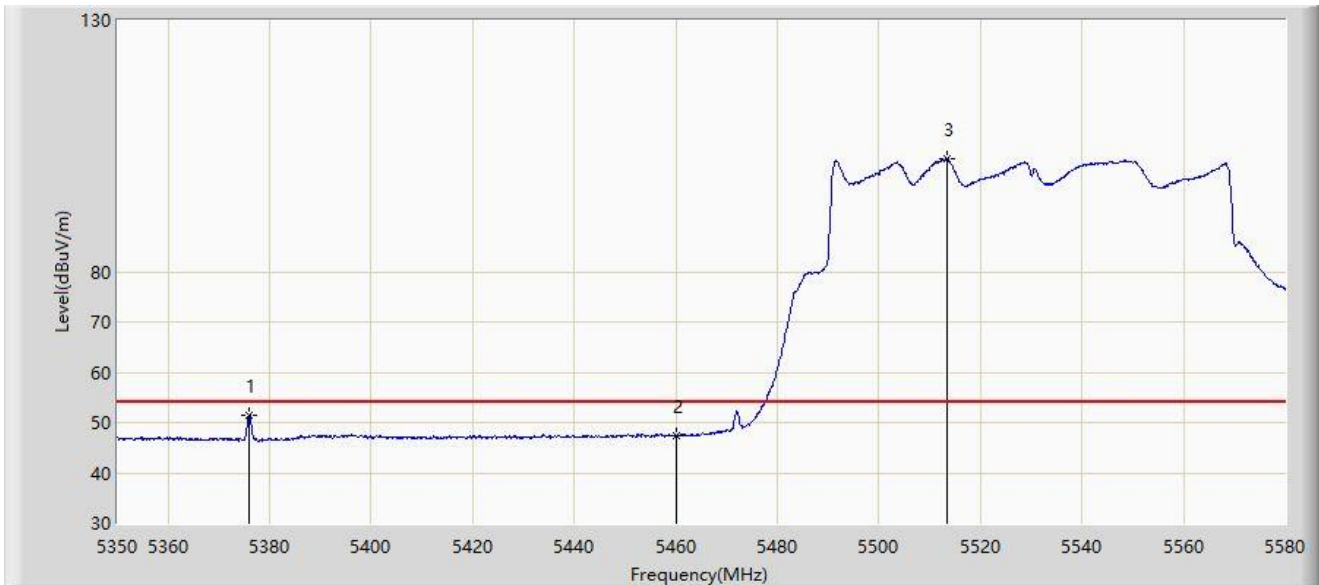


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5375.990	51.563	56.791	-2.437	54.000	-5.228	AV
2		5460.000	47.481	50.824	-6.519	54.000	-3.343	AV
3		5513.300	102.366	60.495	N/A	N/A	41.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

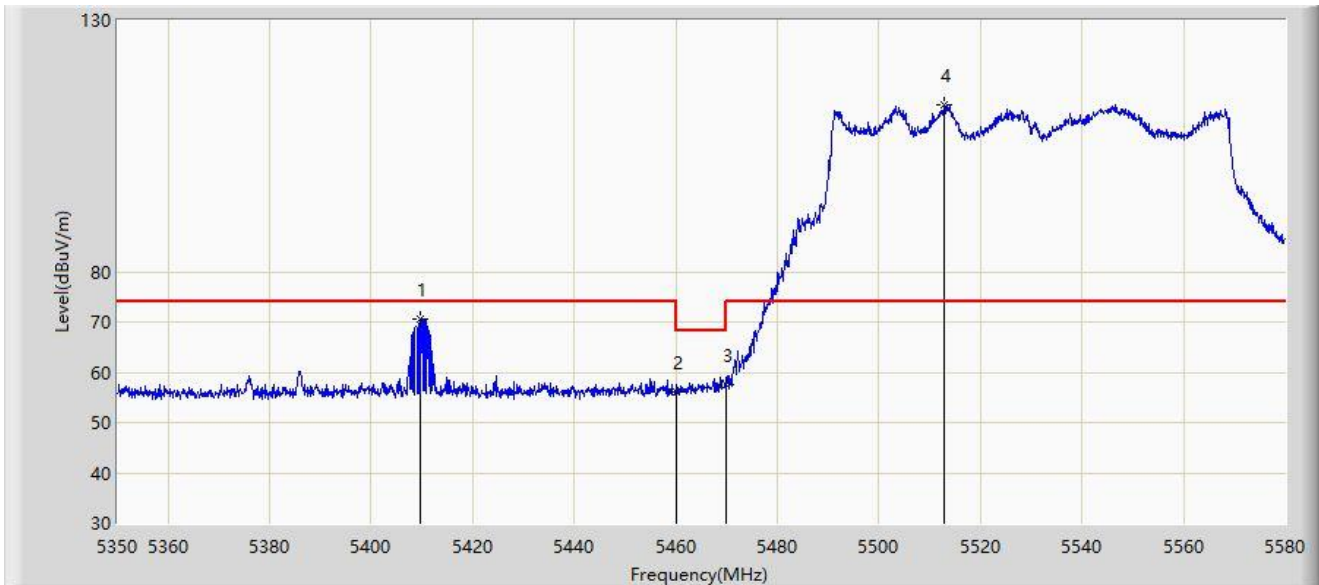


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5409.685	70.624	75.192	-3.376	74.000	-4.569	PK
2		5460.000	56.023	59.366	-12.177	68.200	-3.343	PK
3		5470.000	57.513	59.123	-10.687	68.200	-1.610	PK
4		5512.955	113.160	71.719	N/A	N/A	41.442	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

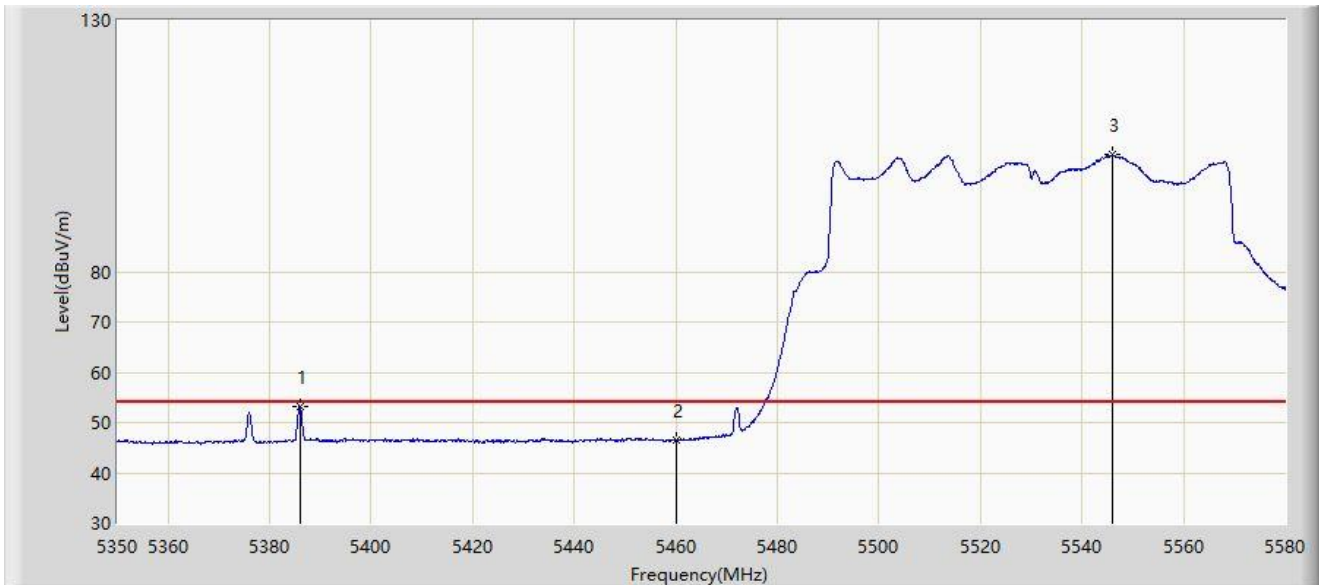


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5385.995	53.220	58.273	-0.780	54.000	-5.053	AV
2		5460.000	46.613	49.956	-7.387	54.000	-3.343	AV
3		5545.960	103.200	62.791	N/A	N/A	40.409	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

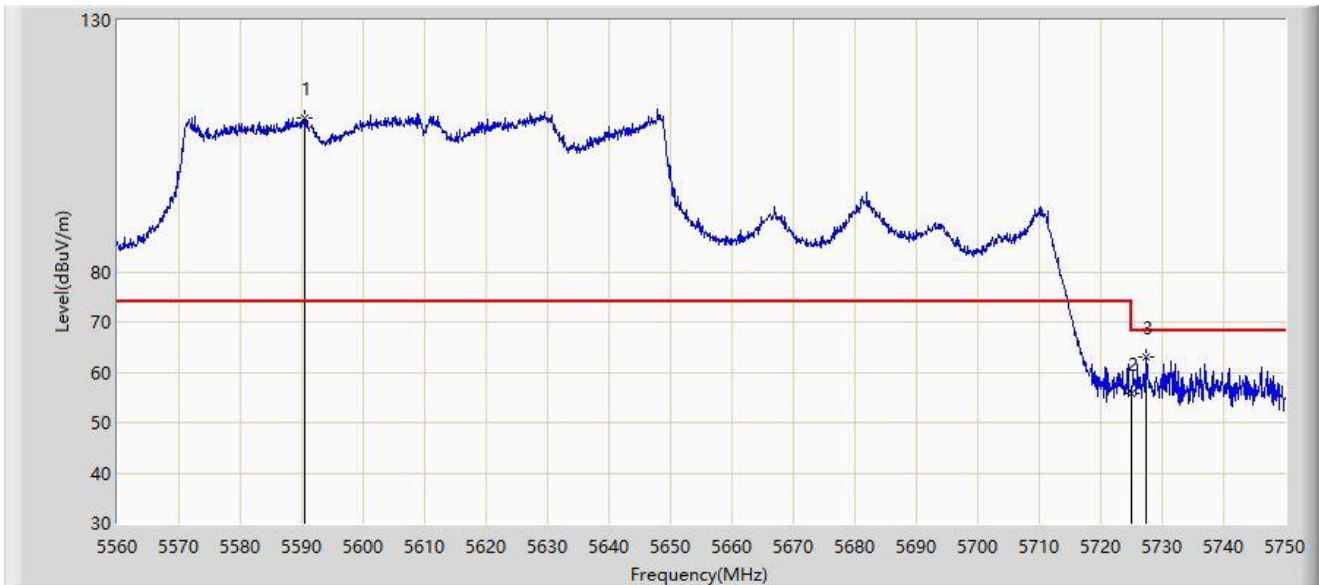


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5590.590	110.682	65.059	N/A	N/A	45.623	PK
2		5725.000	55.909	57.744	-12.291	68.200	-1.836	PK
3	*	5727.295	62.925	65.835	-5.275	68.200	-2.909	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-26
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

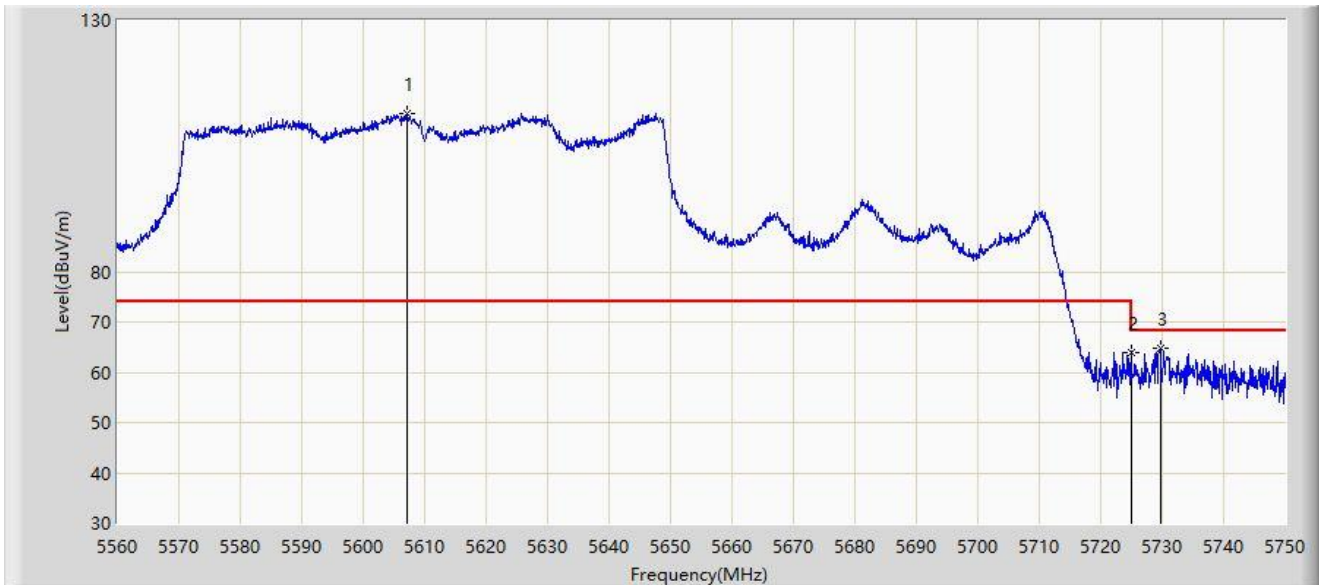


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5607.025	111.330	69.990	N/A	N/A	41.340	PK
2		5725.000	64.017	65.852	-4.183	68.200	-1.836	PK
3	*	5729.670	64.656	68.219	-3.544	68.200	-3.564	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

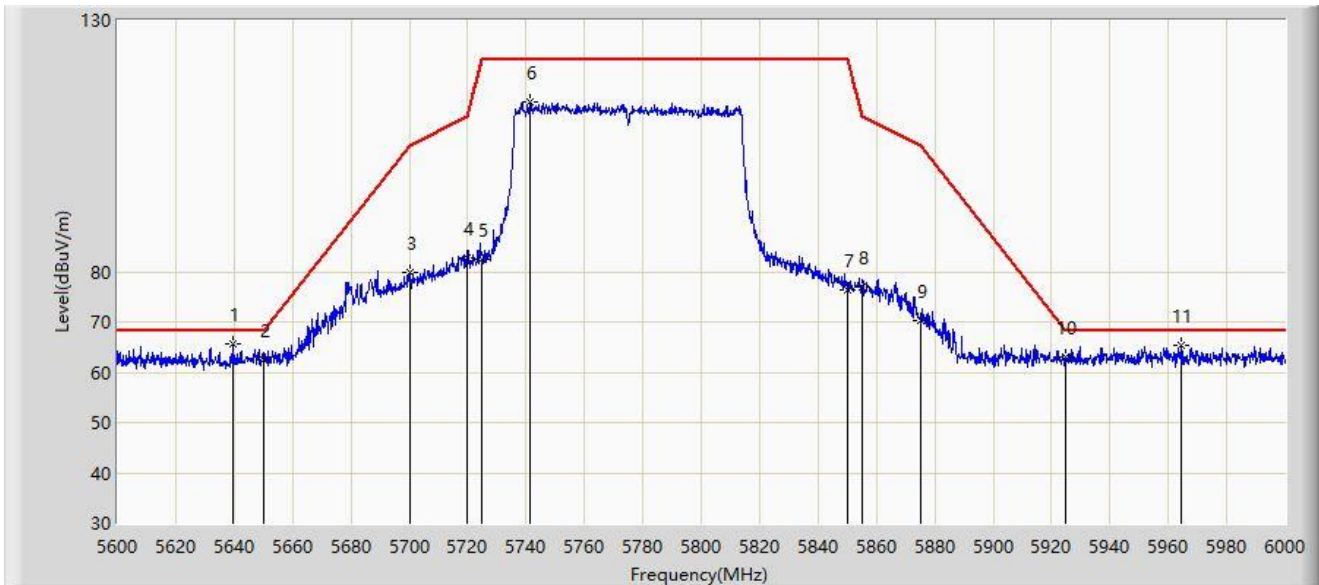


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5639.800	65.621	70.335	-2.579	68.200	-4.714	PK
2		5650.000	62.531	67.109	-5.669	68.200	-4.577	PK
3		5700.000	79.960	84.561	-25.240	105.200	-4.600	PK
4		5720.000	82.798	87.316	-28.002	110.800	-4.519	PK
5		5725.000	82.512	87.013	-39.688	122.200	-4.502	PK
6		5741.400	113.871	118.058	N/A	N/A	-4.187	PK
7		5850.000	76.425	80.536	-45.775	122.200	-4.111	PK
8		5855.000	76.814	80.927	-33.986	110.800	-4.113	PK
9		5875.000	70.233	74.280	-34.967	105.200	-4.046	PK
10		5925.000	63.146	66.906	-5.054	68.200	-3.760	PK
11		5964.200	65.502	68.989	-2.698	68.200	-3.487	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-08-28
Limit: FCC_5.8G_RE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

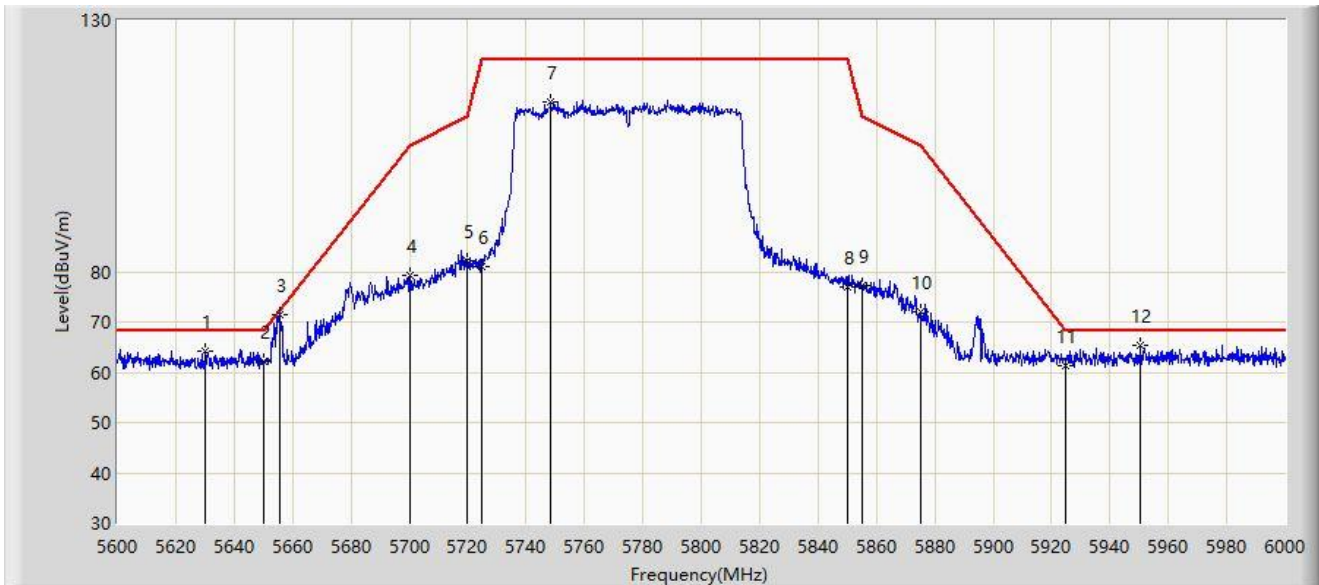

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5630.200	64.343	69.158	-3.857	68.200	-4.815	PK
2		5650.000	62.220	66.798	-5.980	68.200	-4.577	PK
3	*	5655.400	71.590	76.094	-0.606	72.196	-4.505	PK
4		5700.000	79.416	84.017	-25.784	105.200	-4.600	PK
5		5720.000	82.294	86.812	-28.506	110.800	-4.519	PK
6		5725.000	80.913	85.414	-41.287	122.200	-4.502	PK
7		5748.600	113.741	117.762	N/A	N/A	-4.020	PK
8		5850.000	77.063	81.174	-45.137	122.200	-4.111	PK
9		5855.000	77.187	81.300	-33.613	110.800	-4.113	PK
10		5875.000	71.921	75.968	-33.279	105.200	-4.046	PK
11		5925.000	61.407	65.167	-6.793	68.200	-3.760	PK
12		5950.600	65.461	69.000	-2.739	68.200	-3.540	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

AX52e – Radio 0:

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

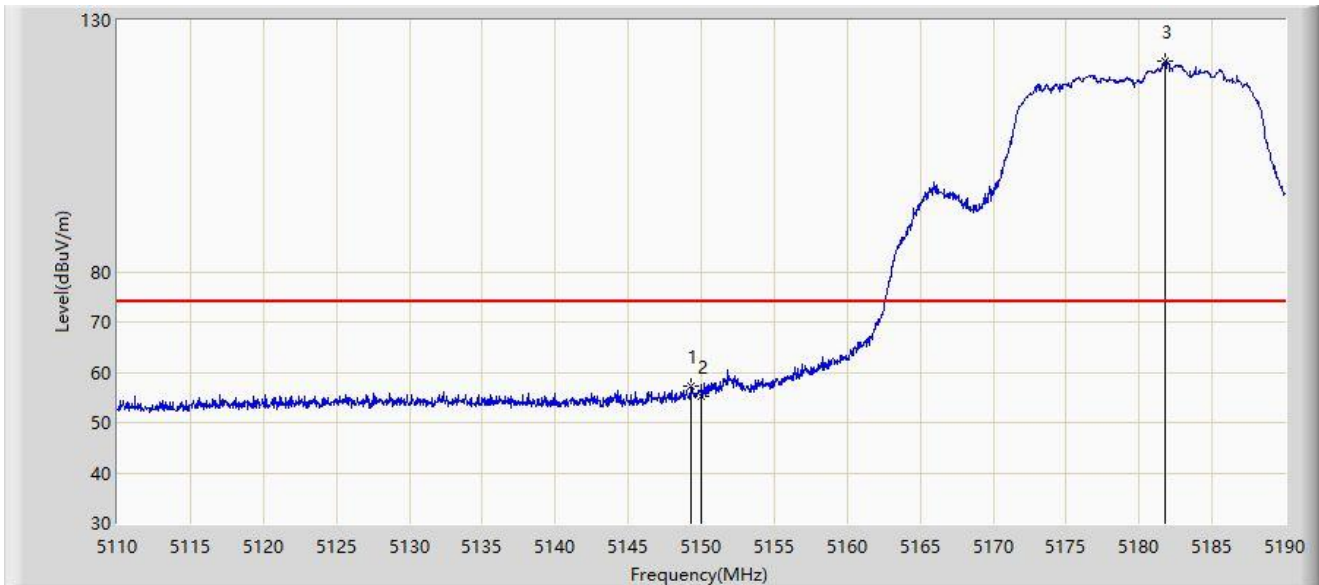


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.280	57.216	60.625	-16.784	74.000	-3.409	PK
2		5150.000	55.311	58.557	-18.689	74.000	-3.246	PK
3		5181.800	121.958	82.020	N/A	N/A	39.938	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

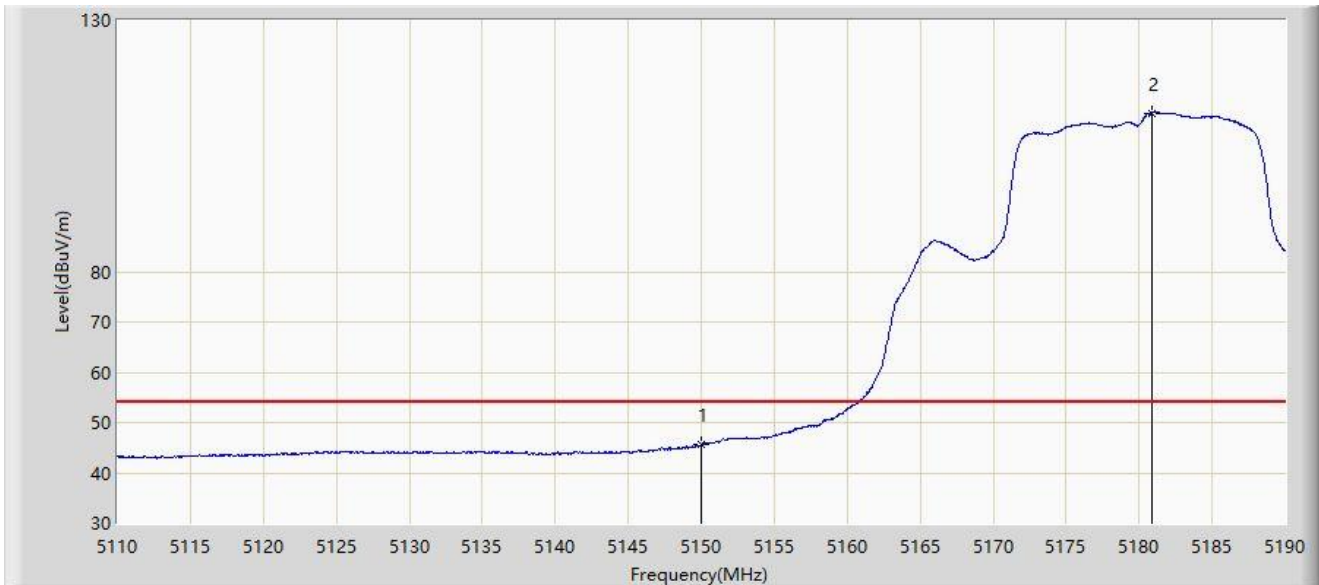


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	45.606	48.852	-8.394	54.000	-3.246	AV
2		5180.840	111.536	70.426	N/A	N/A	41.110	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

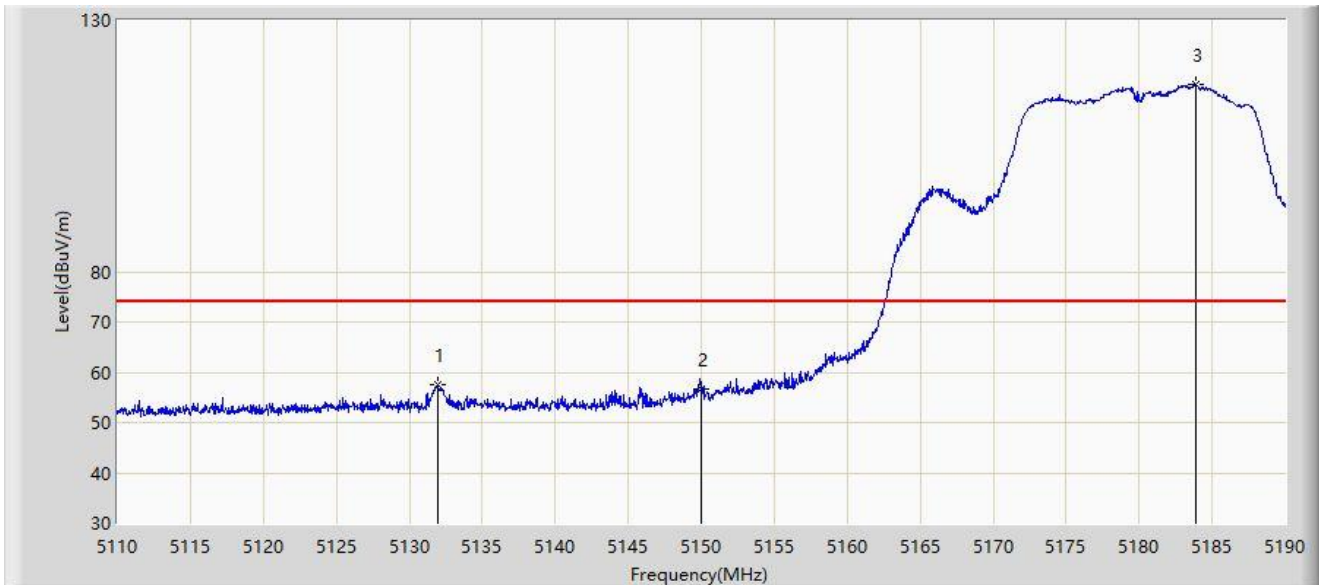


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5131.960	57.544	62.204	-16.456	74.000	-4.660	PK
2		5150.000	56.569	59.815	-17.431	74.000	-3.246	PK
3		5183.880	117.265	80.966	N/A	N/A	36.299	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

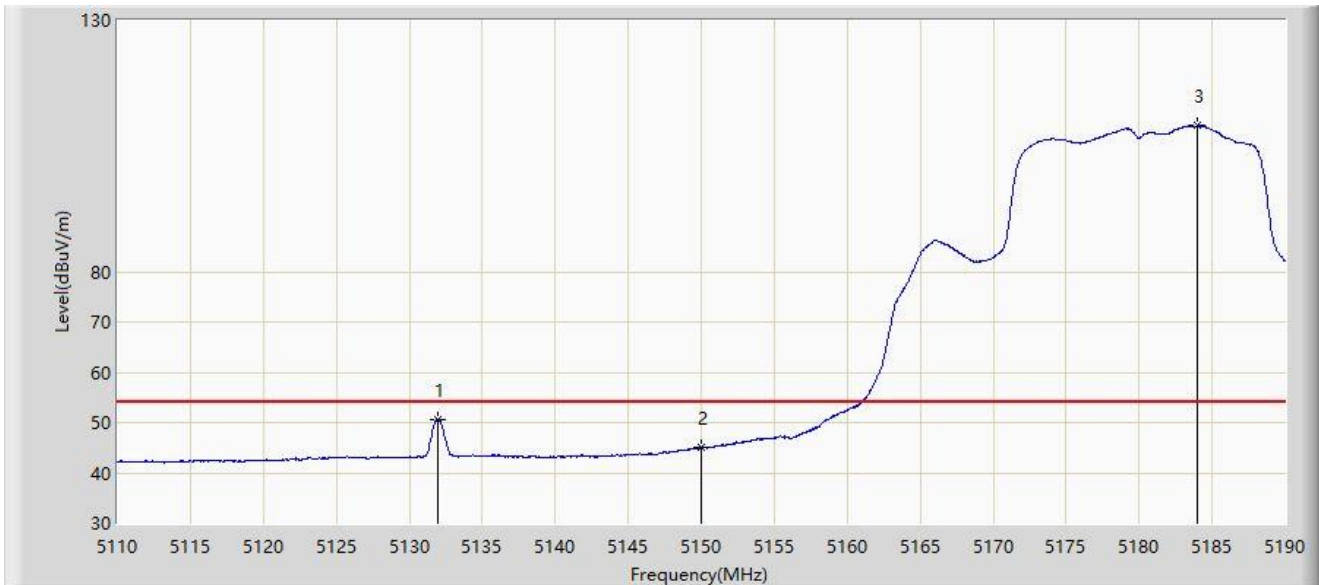


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5131.920	50.672	55.335	-3.328	54.000	-4.663	AV
2		5150.000	44.954	48.200	-9.046	54.000	-3.246	AV
3		5183.960	109.078	72.889	N/A	N/A	36.189	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-31
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

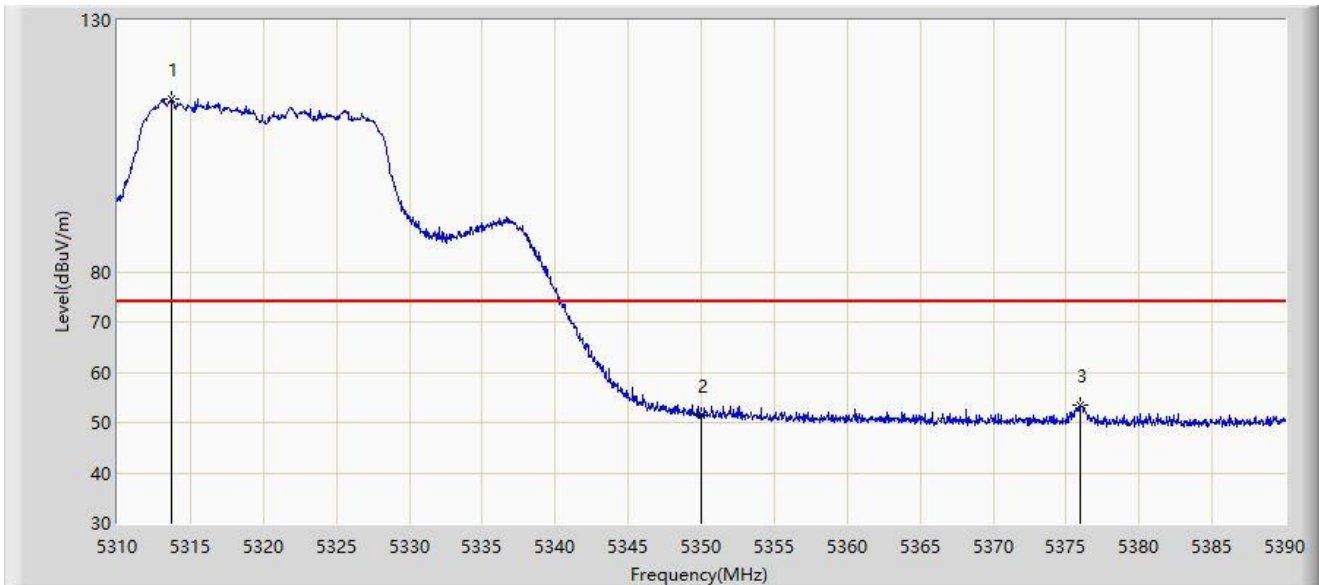


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.680	114.260	67.533	N/A	N/A	46.728	PK
2		5350.000	51.470	52.874	-22.530	74.000	-1.404	PK
3	*	5376.000	53.354	58.321	-20.646	74.000	-4.968	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-31
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

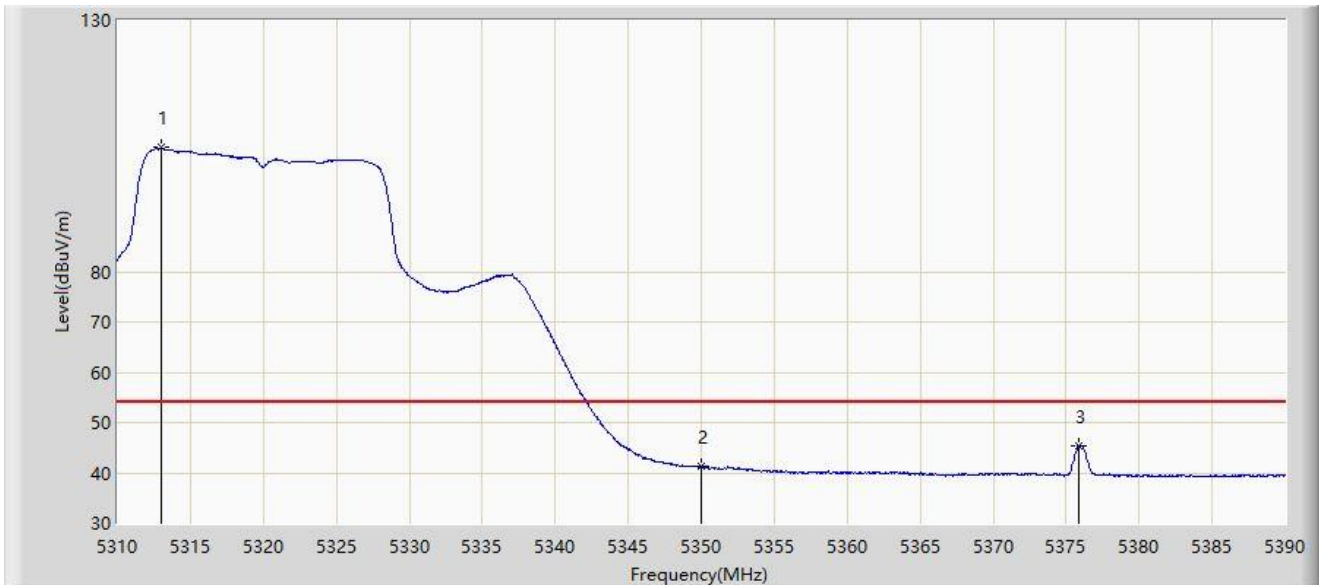


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.960	104.692	58.239	N/A	N/A	46.453	AV
2		5350.000	41.233	42.637	-12.767	54.000	-1.404	AV
3	*	5375.840	45.505	50.480	-8.495	54.000	-4.976	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-31
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

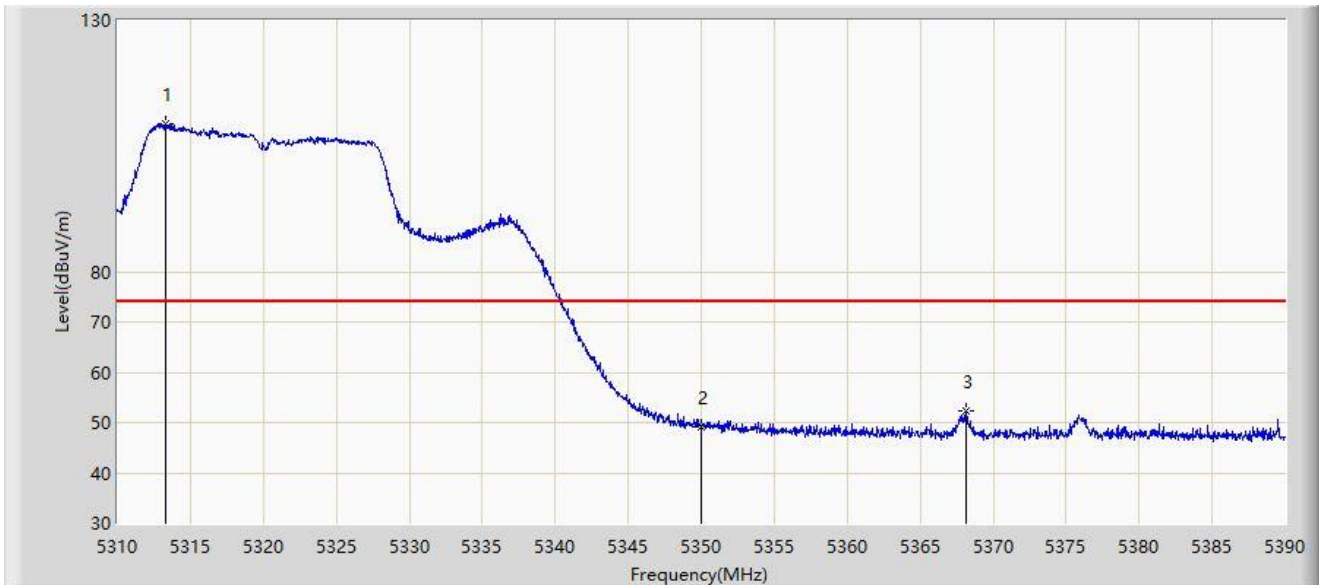


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.320	109.449	62.805	N/A	N/A	46.644	PK
2		5350.000	49.238	50.642	-24.762	74.000	-1.404	PK
3	*	5368.160	52.187	56.986	-21.813	74.000	-4.798	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-31
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

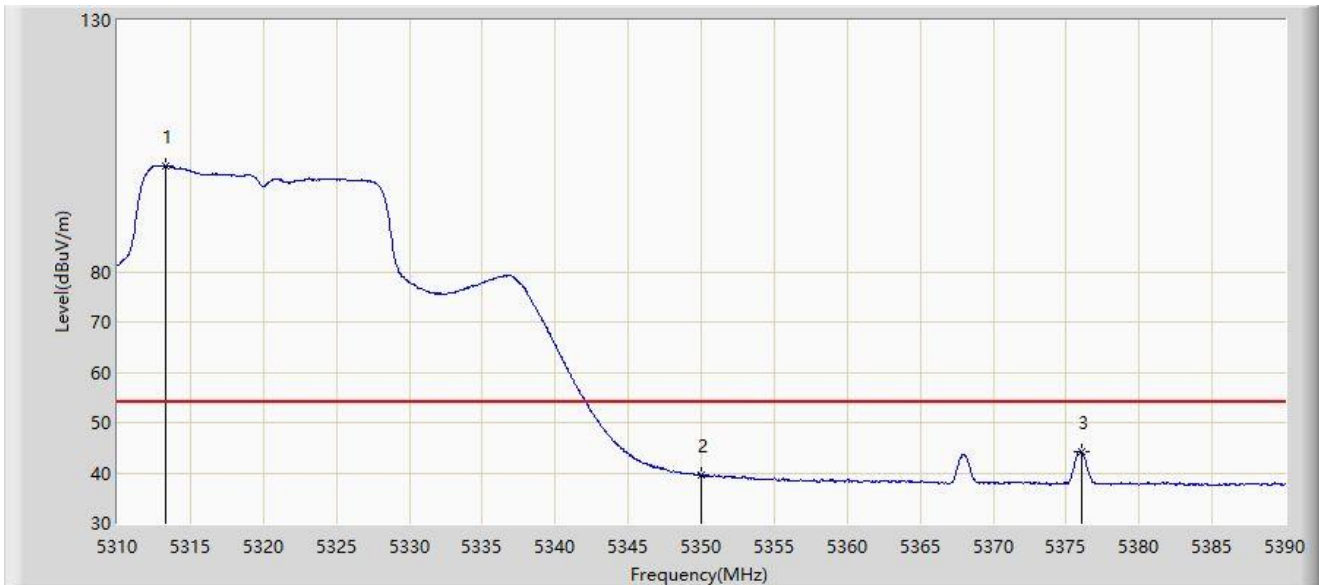


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.320	100.965	54.321	N/A	N/A	46.644	AV
2		5350.000	39.585	40.989	-14.415	54.000	-1.404	AV
3	*	5376.040	44.160	49.126	-9.840	54.000	-4.966	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

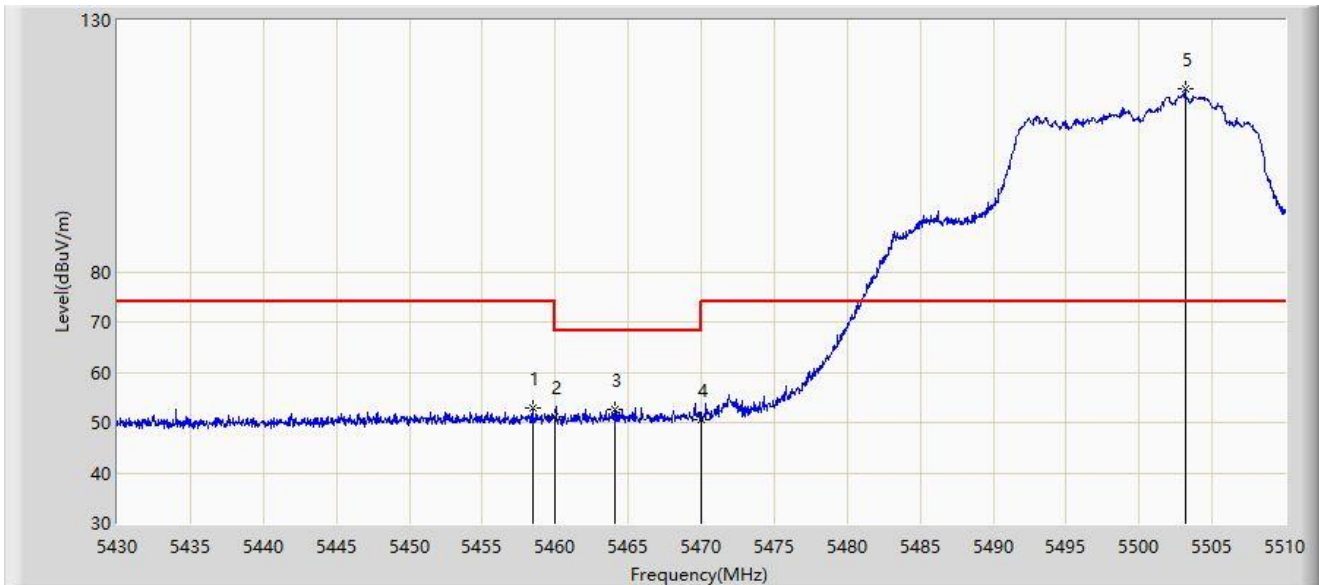


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.440	52.998	56.442	-21.002	74.000	-3.444	PK
2		5460.000	51.159	54.502	-17.041	68.200	-3.343	PK
3	*	5464.040	52.567	55.587	-15.633	68.200	-3.020	PK
4		5470.000	50.634	52.244	-17.566	68.200	-1.610	PK
5		5503.160	116.270	73.819	N/A	N/A	42.450	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

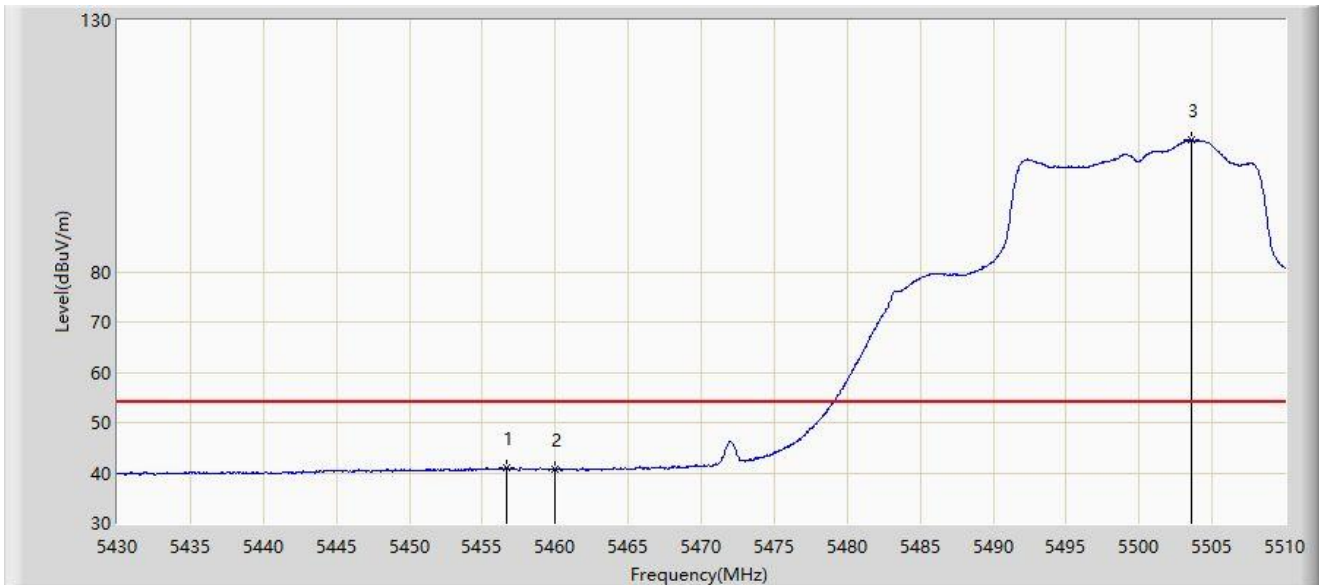


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5456.640	41.053	44.672	-12.947	54.000	-3.619	AV
2		5460.000	40.791	44.134	-13.209	54.000	-3.343	AV
3		5503.600	106.146	62.951	N/A	N/A	43.194	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

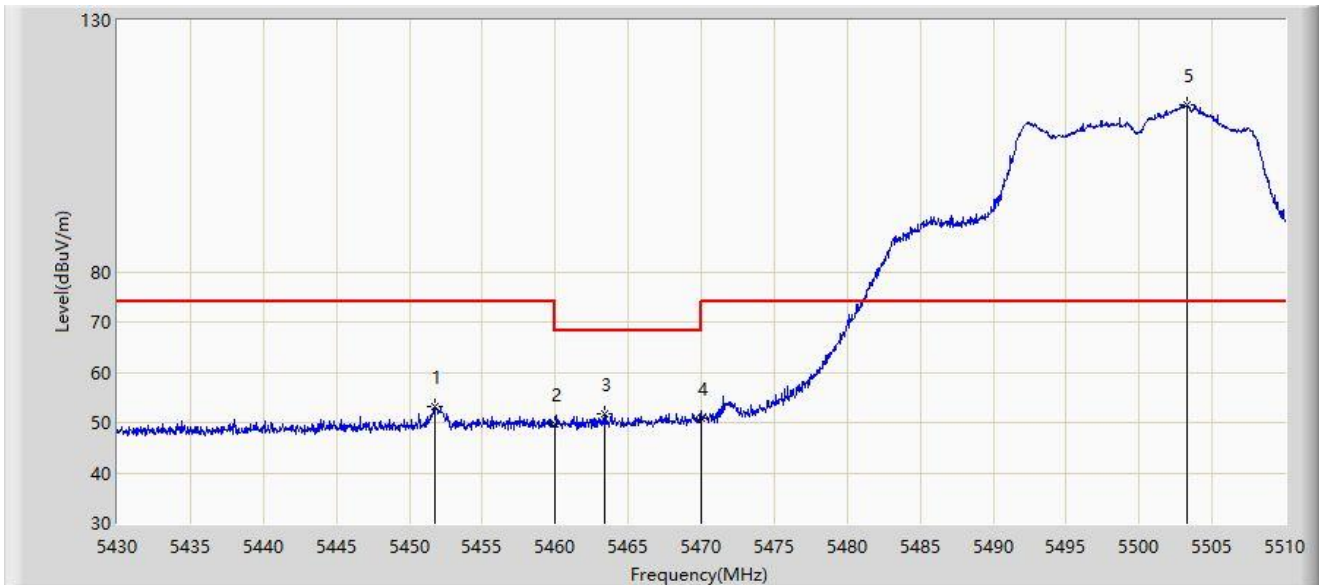


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.760	53.261	57.123	-20.739	74.000	-3.863	PK
2		5460.000	49.641	52.984	-18.559	68.200	-3.343	PK
3	*	5463.360	51.763	54.860	-16.437	68.200	-3.097	PK
4		5470.000	50.788	52.398	-17.412	68.200	-1.610	PK
5		5503.240	113.144	70.541	N/A	N/A	42.603	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

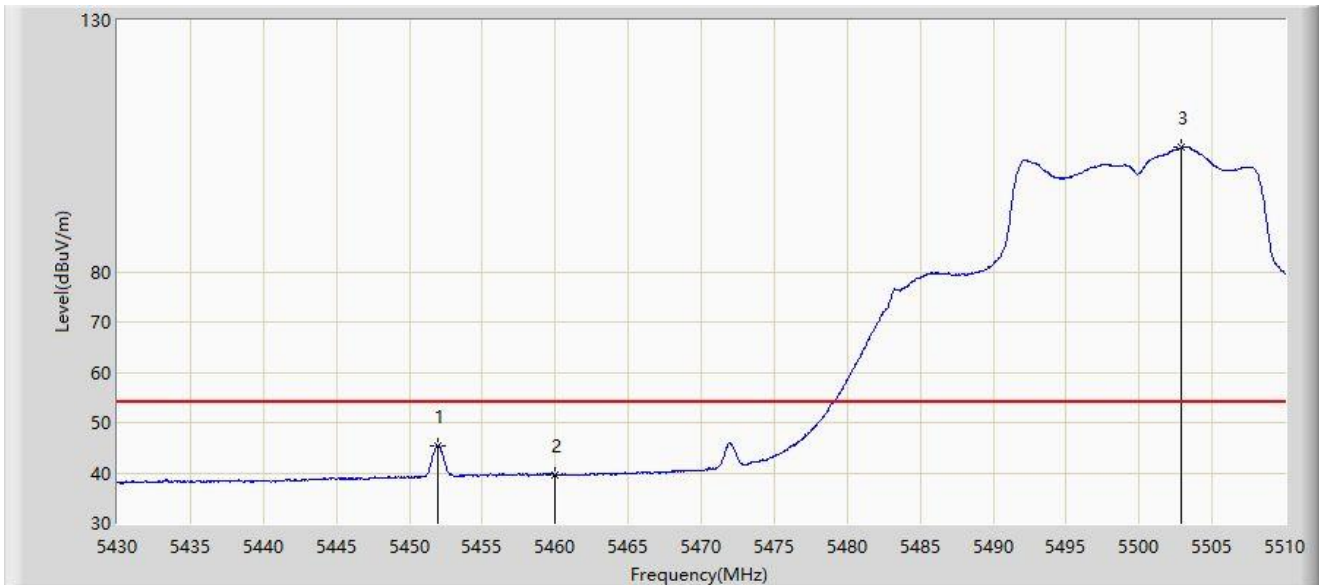


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5451.960	45.379	49.243	-8.621	54.000	-3.864	AV
2		5460.000	39.539	42.882	-14.461	54.000	-3.343	AV
3		5502.920	104.691	62.757	N/A	N/A	41.934	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

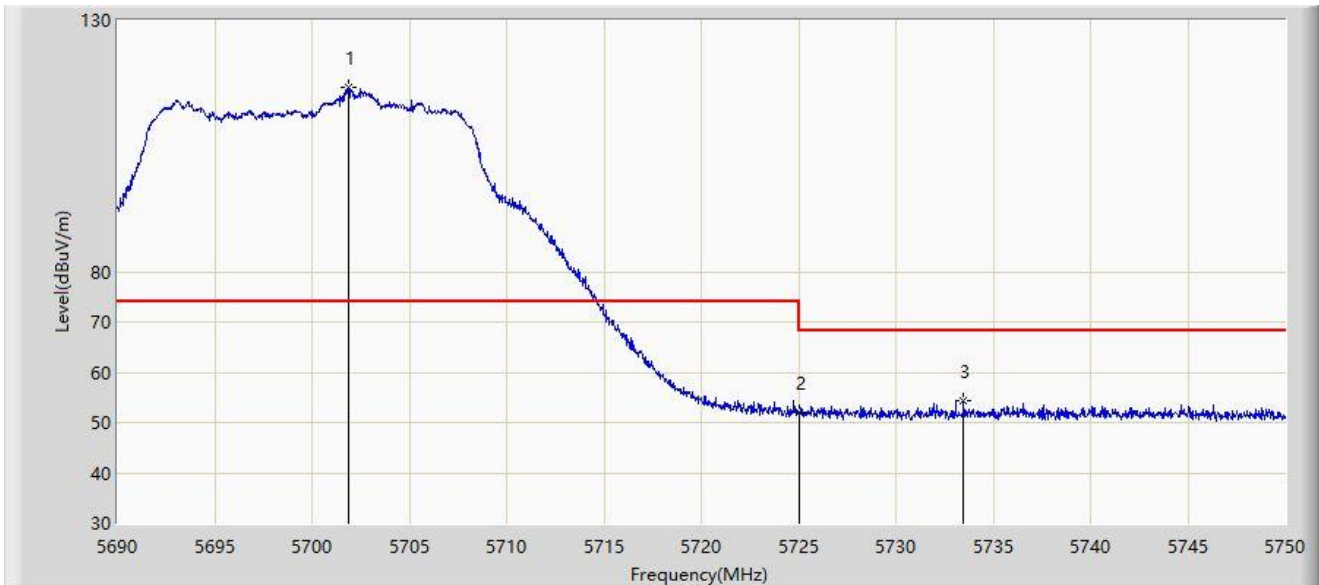


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5701.910	116.623	79.778	N/A	N/A	36.845	PK
2		5725.000	52.029	53.864	-16.171	68.200	-1.836	PK
3	*	5733.470	54.233	58.353	-13.967	68.200	-4.121	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

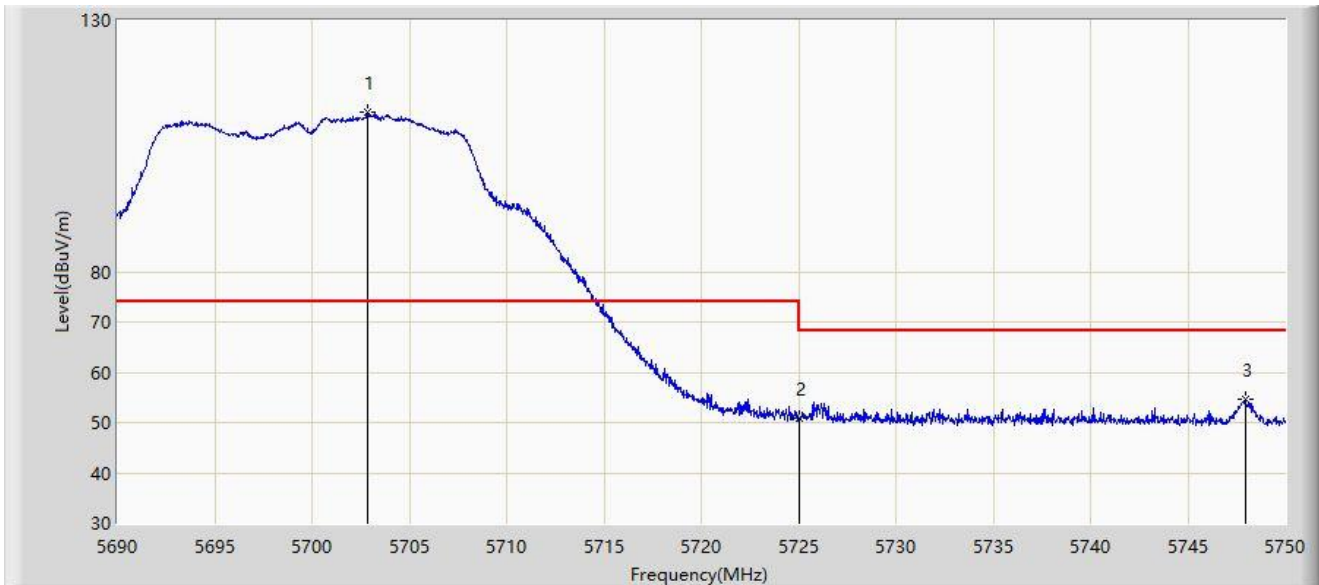


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.870	111.638	73.991	N/A	N/A	37.647	PK
2		5725.000	50.986	52.821	-17.214	68.200	-1.836	PK
3	*	5747.960	54.658	59.648	-13.542	68.200	-4.990	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

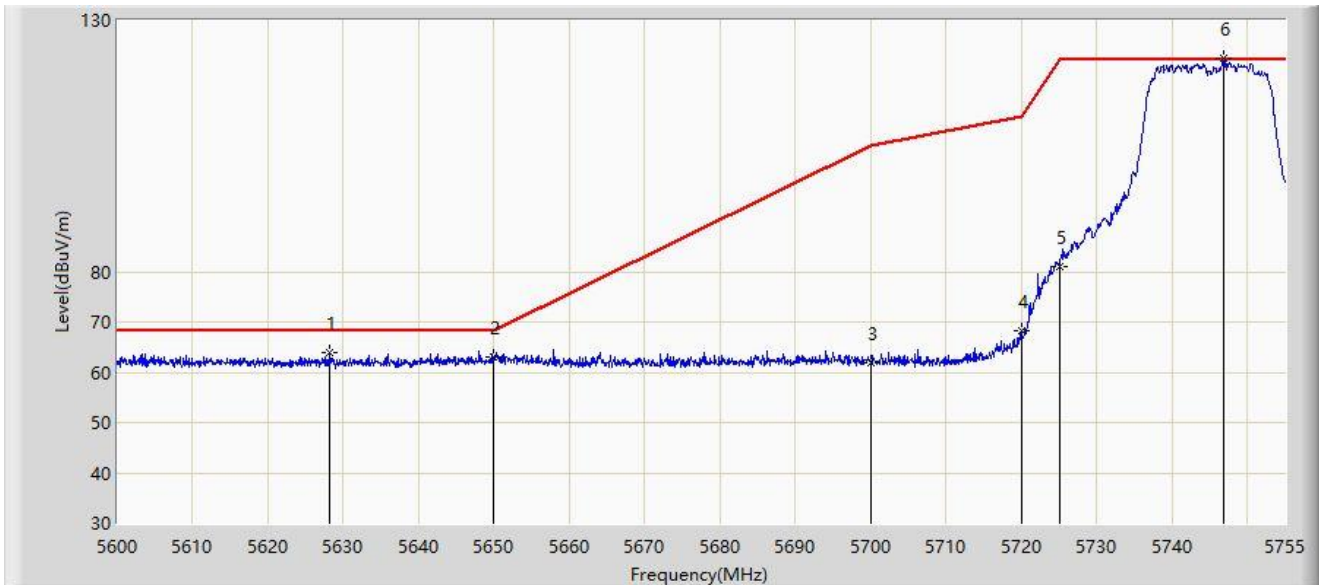


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5628.210	63.984	71.272	-4.216	68.200	-7.287	PK
2		5650.000	62.960	70.280	-5.240	68.200	-7.319	PK
3		5700.000	62.013	69.187	-43.187	105.200	-7.174	PK
4		5720.000	68.117	75.589	-42.683	110.800	-7.472	PK
5		5725.000	81.120	88.581	-41.080	122.200	-7.461	PK
6		5746.862	122.393	129.894	N/A	N/A	-7.500	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-30
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52e Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

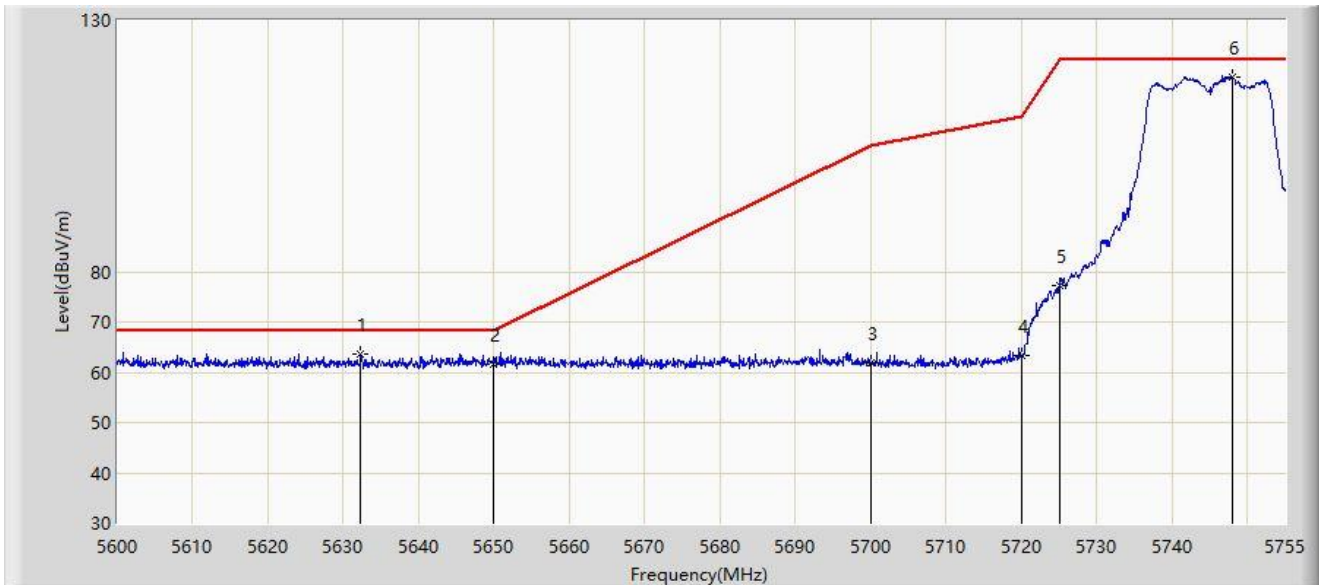

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5632.317	63.549	70.850	-4.651	68.200	-7.301	PK
2		5650.000	61.687	69.007	-6.513	68.200	-7.319	PK
3		5700.000	61.856	69.030	-43.344	105.200	-7.174	PK
4		5720.000	63.256	70.728	-47.544	110.800	-7.472	PK
5		5725.000	77.380	84.841	-44.820	122.200	-7.461	PK
6		5747.947	118.787	126.278	N/A	N/A	-7.491	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).