


Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11a at 5825MHz	

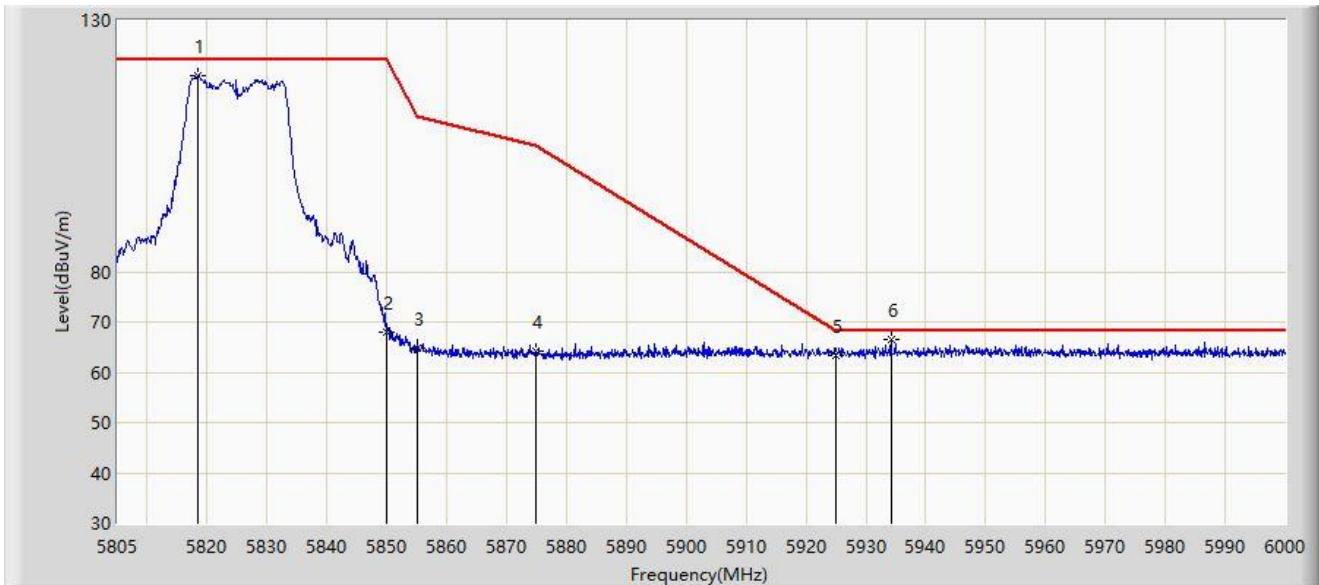


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5818.455	119.130	126.442	N/A	N/A	-7.312	PK
2		5850.000	67.995	75.232	-54.205	122.200	-7.237	PK
3		5855.000	64.826	72.044	-45.974	110.800	-7.217	PK
4		5875.000	64.100	71.452	-41.100	105.200	-7.352	PK
5		5925.000	63.435	70.561	-4.765	68.200	-7.126	PK
6	*	5934.187	66.555	73.624	-1.645	68.200	-7.068	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

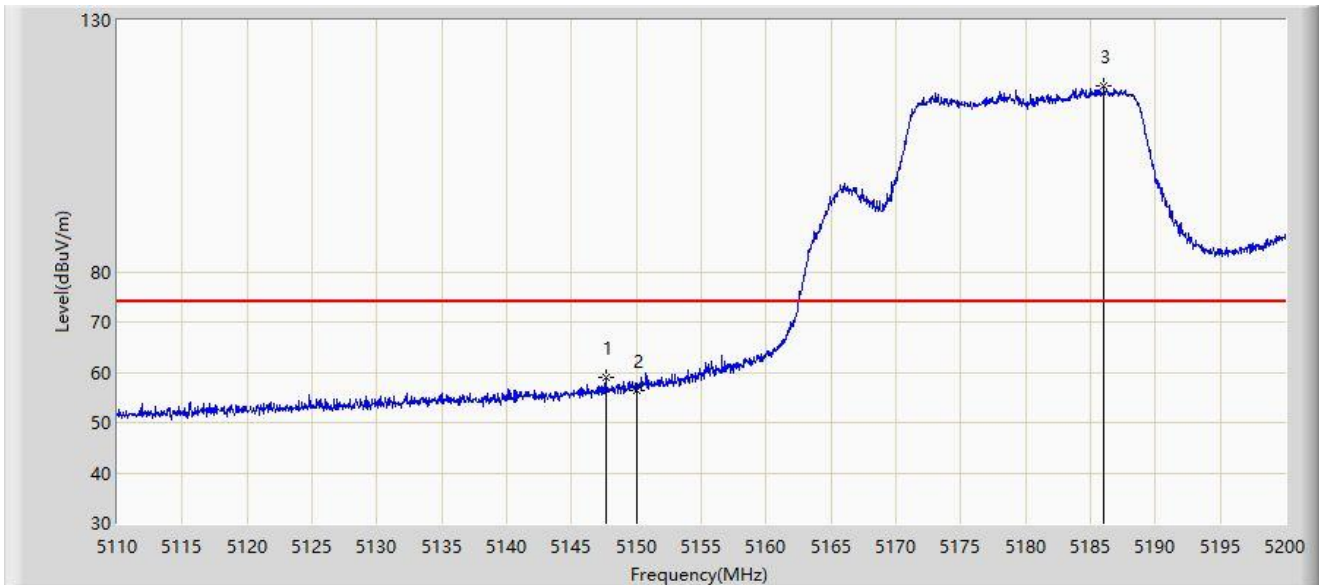


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.620	59.001	62.742	-14.999	74.000	-3.741	PK
2		5150.000	56.476	59.722	-17.524	74.000	-3.246	PK
3		5186.050	116.871	82.068	N/A	N/A	34.802	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

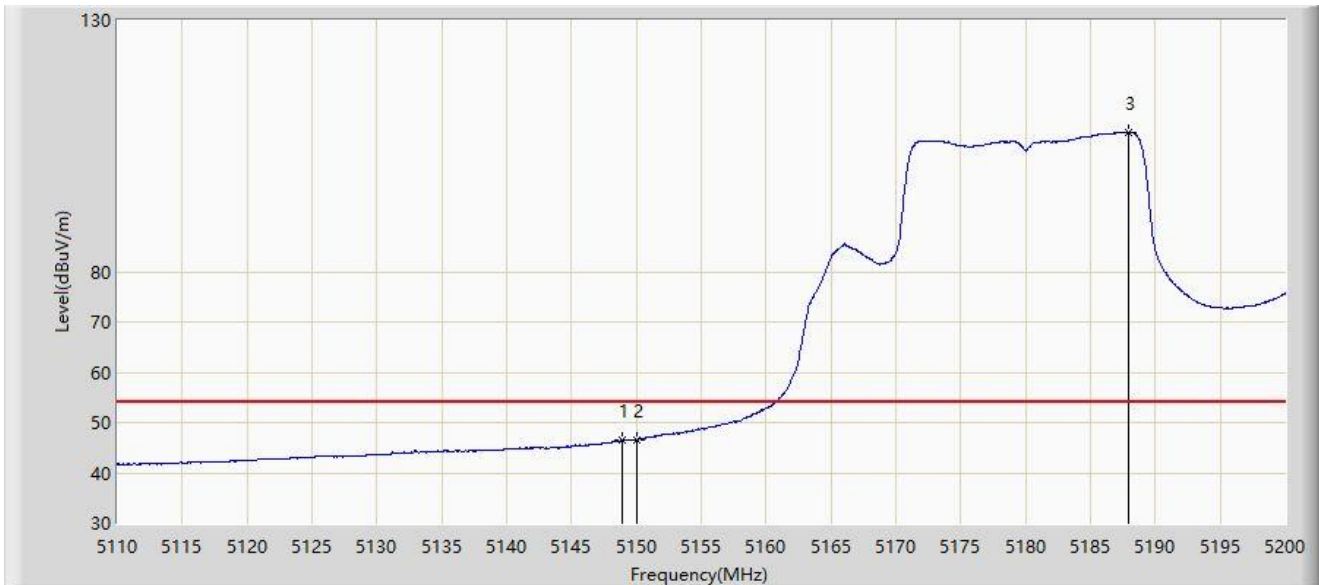


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.925	46.646	50.121	-7.354	54.000	-3.476	AV
2		5150.000	46.542	49.788	-7.458	54.000	-3.246	AV
3		5187.895	107.703	71.706	N/A	N/A	35.996	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

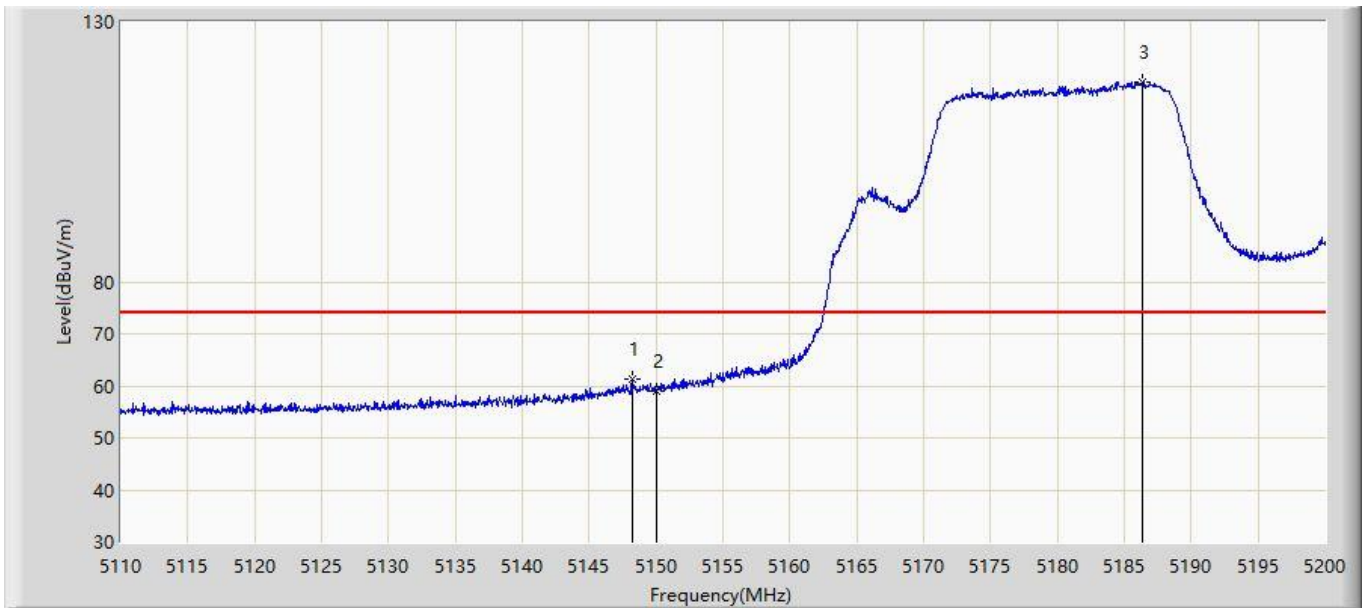


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.205	61.264	64.881	-12.736	74.000	-3.617	PK
2		5150.000	58.953	62.199	-15.047	74.000	-3.246	PK
3		5186.320	118.384	83.543	N/A	N/A	34.840	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

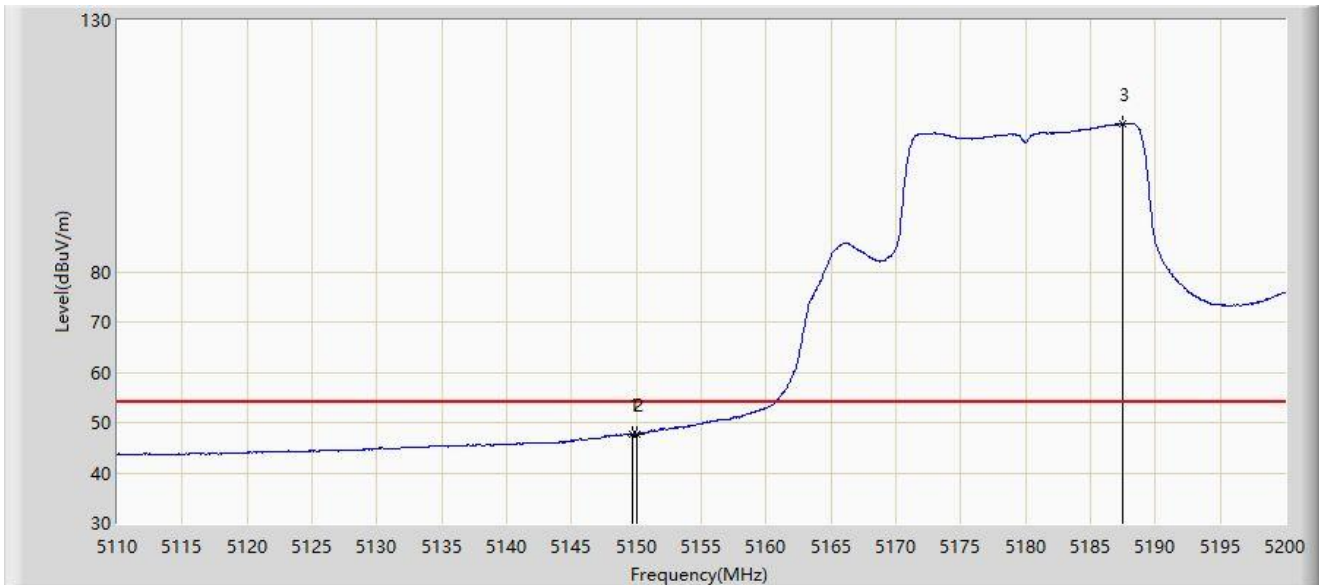


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.690	47.791	51.124	-6.209	54.000	-3.333	AV
2		5150.000	47.670	50.916	-6.330	54.000	-3.246	AV
3		5187.490	109.430	73.909	N/A	N/A	35.521	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

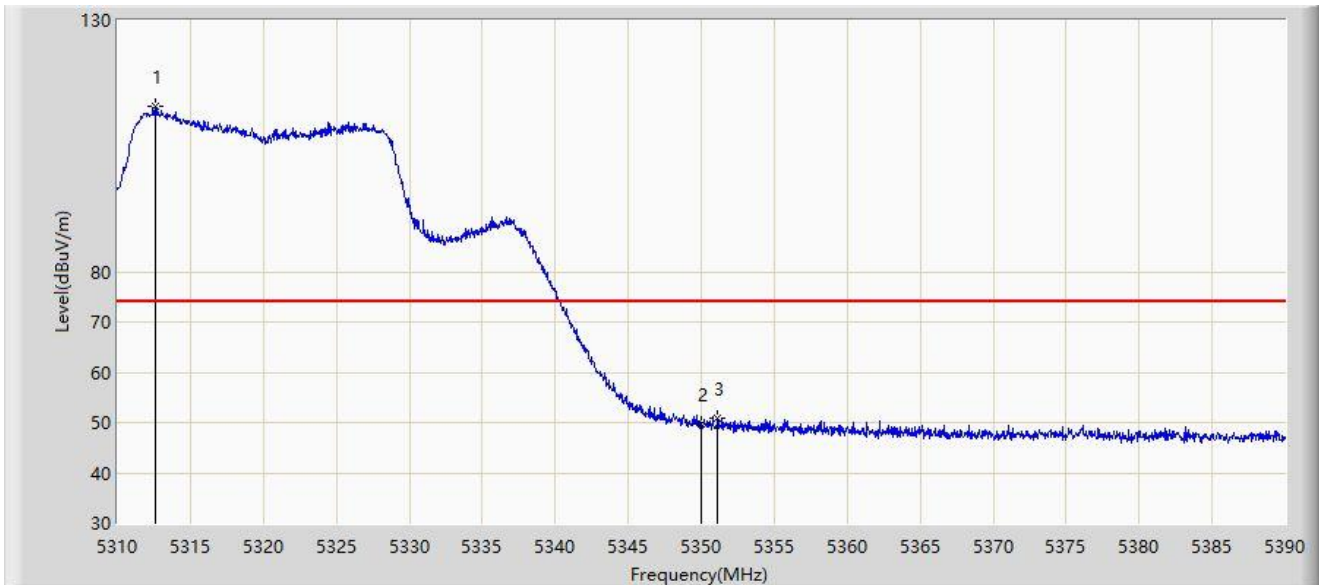


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.600	112.972	66.819	N/A	N/A	46.152	PK
2		5350.000	49.746	51.150	-24.254	74.000	-1.404	PK
3	*	5351.120	51.005	52.979	-22.995	74.000	-1.973	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

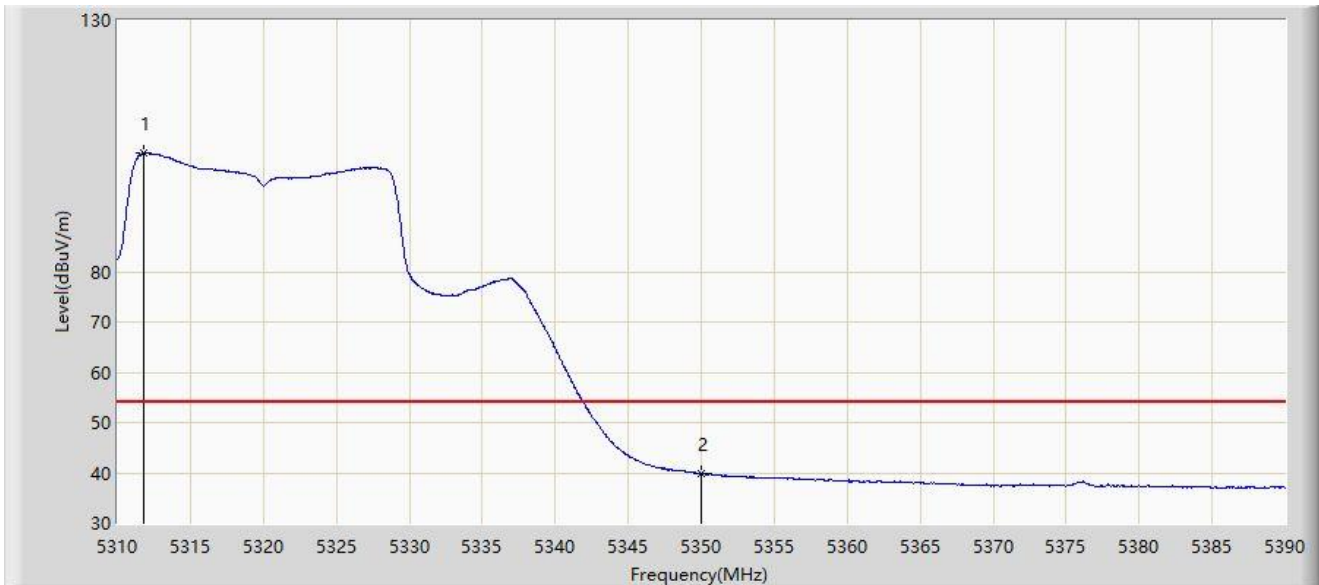


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.840	103.540	58.617	N/A	N/A	44.922	AV
2	*	5350.000	39.903	41.307	-14.097	54.000	-1.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

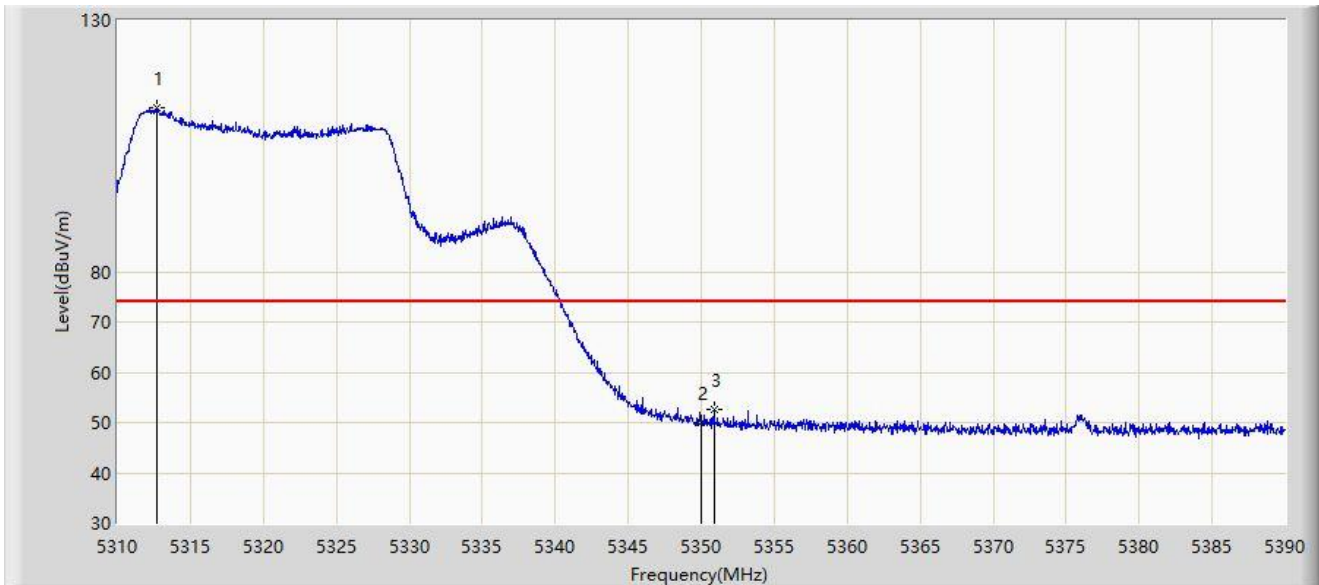


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.680	112.588	66.306	N/A	N/A	46.282	PK
2		5350.000	49.979	51.383	-24.021	74.000	-1.404	PK
3	*	5350.880	52.545	54.402	-21.455	74.000	-1.856	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

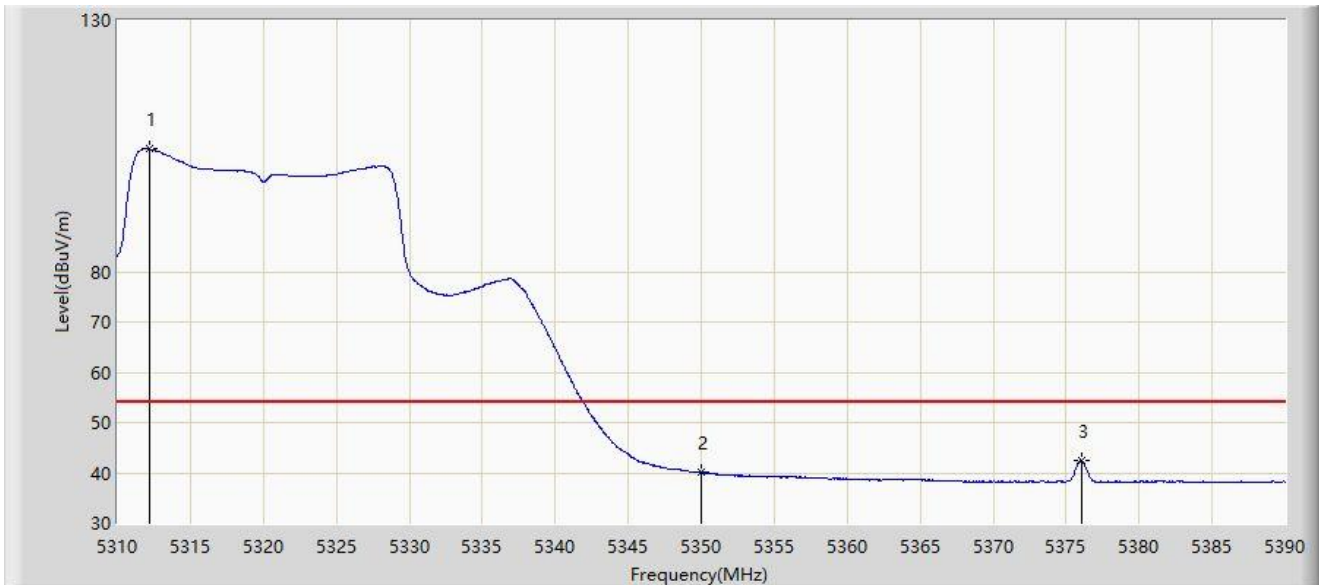


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.200	104.412	58.907	N/A	N/A	45.506	AV
2		5350.000	40.064	41.468	-13.936	54.000	-1.404	AV
3	*	5376.040	42.409	47.375	-11.591	54.000	-4.966	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

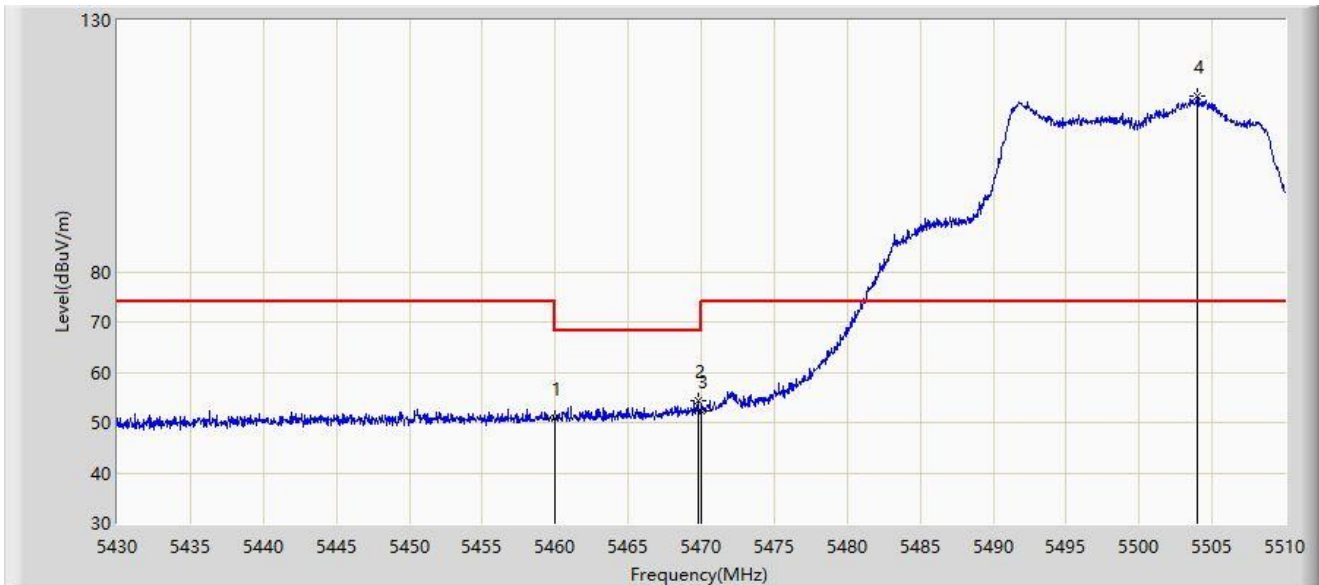


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	50.823	54.166	-17.377	68.200	-3.343	PK
2	*	5469.760	54.480	56.172	-13.720	68.200	-1.692	PK
3		5470.000	52.365	53.975	-15.835	68.200	-1.610	PK
4		5504.000	114.971	71.313	N/A	N/A	43.659	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

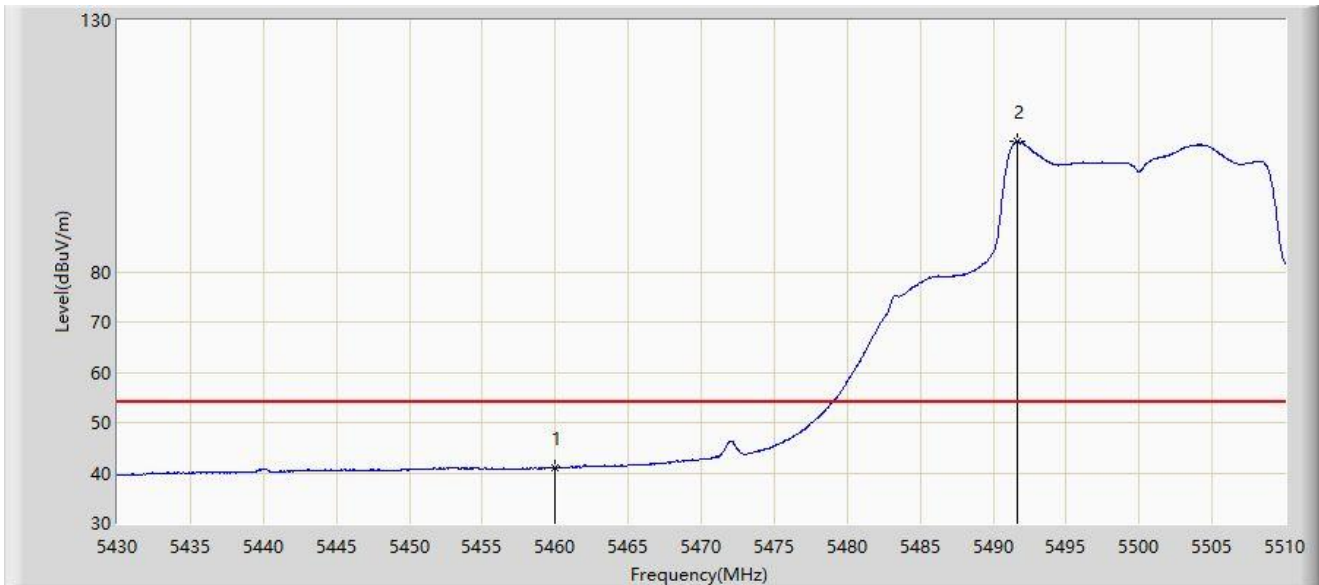


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	41.006	44.349	-12.994	54.000	-3.343	AV
2		5491.680	105.869	60.699	N/A	N/A	45.170	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

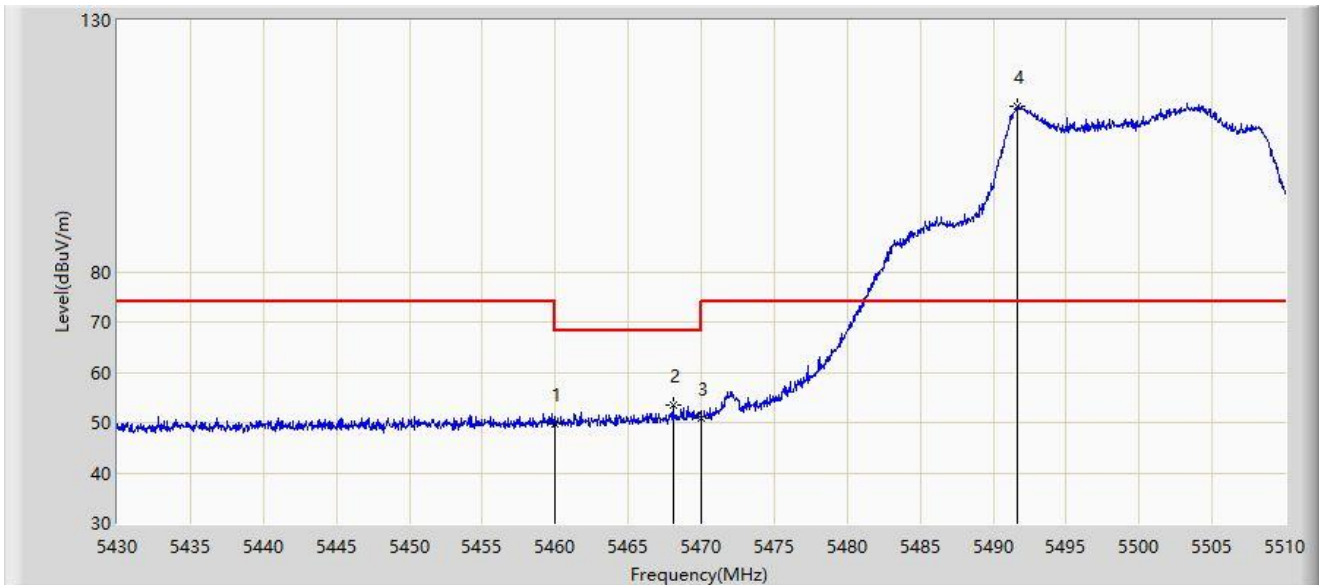


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	49.588	52.931	-18.612	68.200	-3.343	PK
2	*	5468.080	53.514	55.752	-14.686	68.200	-2.238	PK
3		5470.000	50.854	52.464	-17.346	68.200	-1.610	PK
4		5491.680	112.803	67.633	N/A	N/A	45.170	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

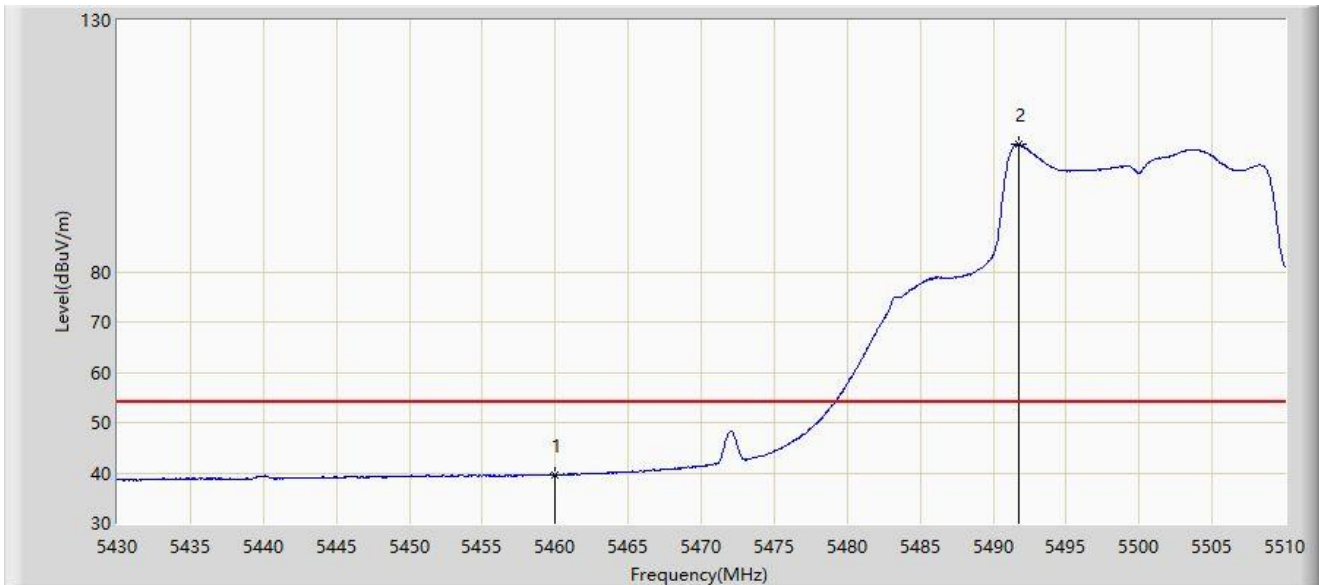


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	39.689	43.032	-14.311	54.000	-3.343	AV
2		5491.760	105.321	60.160	N/A	N/A	45.160	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

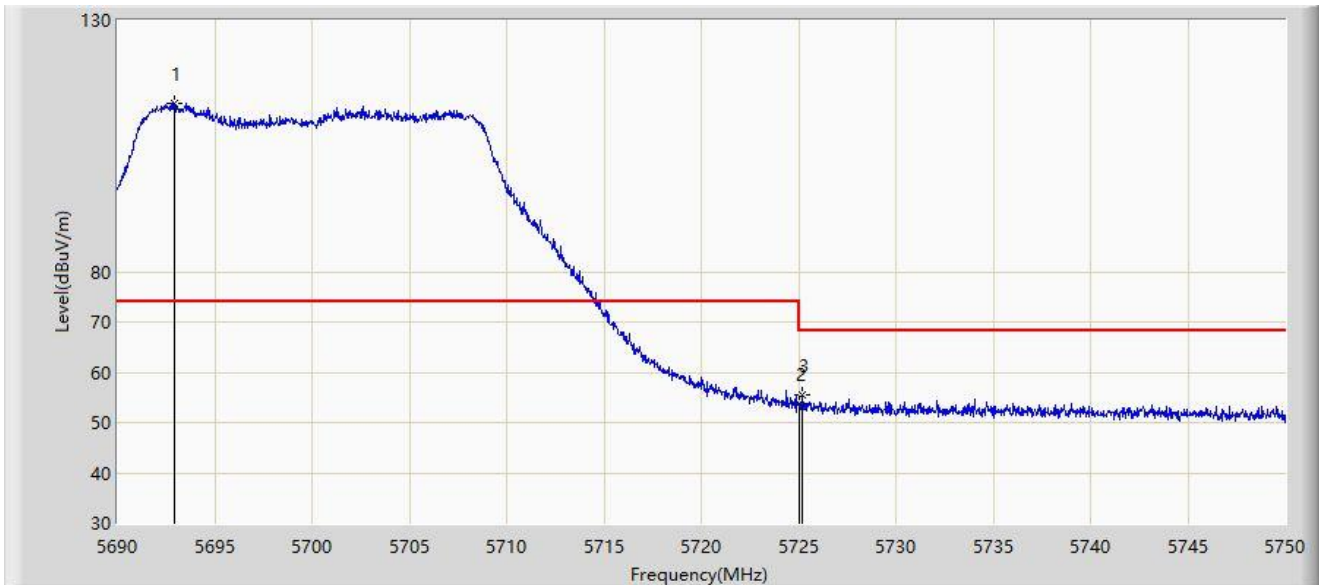


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5692.910	113.548	72.471	N/A	N/A	41.076	PK
2		5725.000	53.787	55.622	-14.413	68.200	-1.836	PK
3	*	5725.190	55.403	57.347	-12.797	68.200	-1.944	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

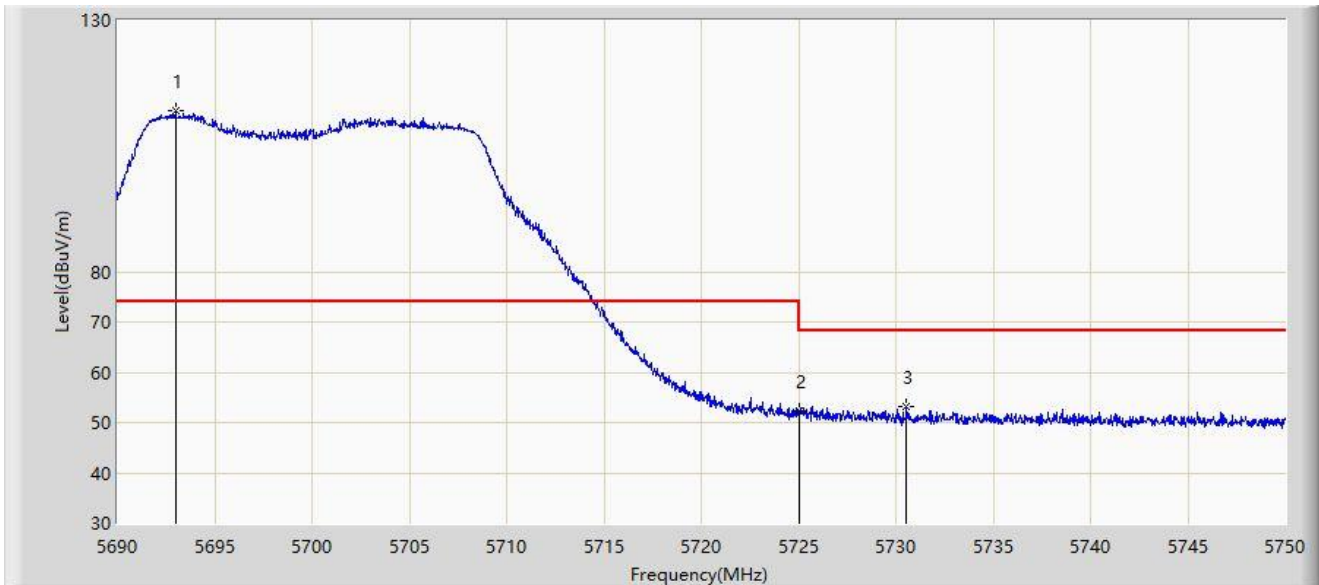


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5692.970	111.977	70.870	N/A	N/A	41.106	PK
2		5725.000	52.222	54.057	-15.978	68.200	-1.836	PK
3	*	5730.530	53.262	56.968	-14.938	68.200	-3.706	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

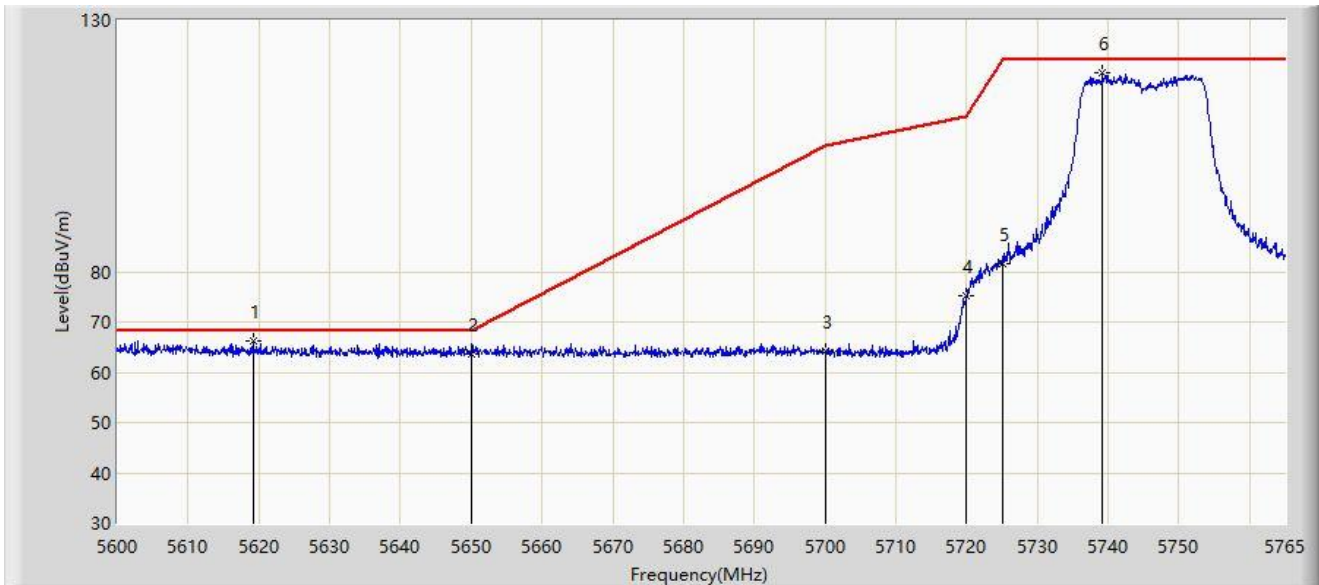


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5619.223	66.330	73.588	-1.870	68.200	-7.257	PK
2		5650.000	63.580	70.900	-4.620	68.200	-7.319	PK
3		5700.000	64.135	71.309	-41.065	105.200	-7.174	PK
4		5720.000	75.101	82.573	-35.699	110.800	-7.472	PK
5		5725.000	81.531	88.992	-40.669	122.200	-7.461	PK
6		5739.178	119.623	127.142	N/A	N/A	-7.519	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

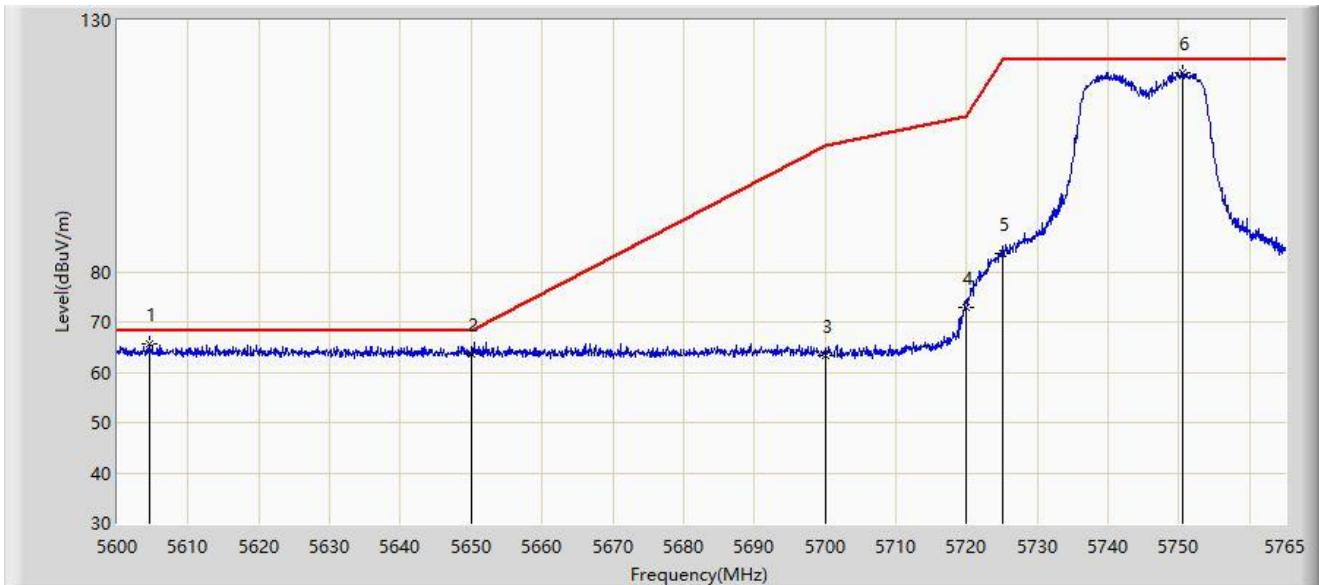


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5604.455	65.716	72.913	-2.484	68.200	-7.197	PK
2		5650.000	63.603	70.923	-4.597	68.200	-7.319	PK
3		5700.000	63.334	70.508	-41.866	105.200	-7.174	PK
4		5720.000	73.034	80.506	-37.766	110.800	-7.472	PK
5		5725.000	83.629	91.090	-38.571	122.200	-7.461	PK
6		5750.480	119.666	127.133	N/A	N/A	-7.468	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

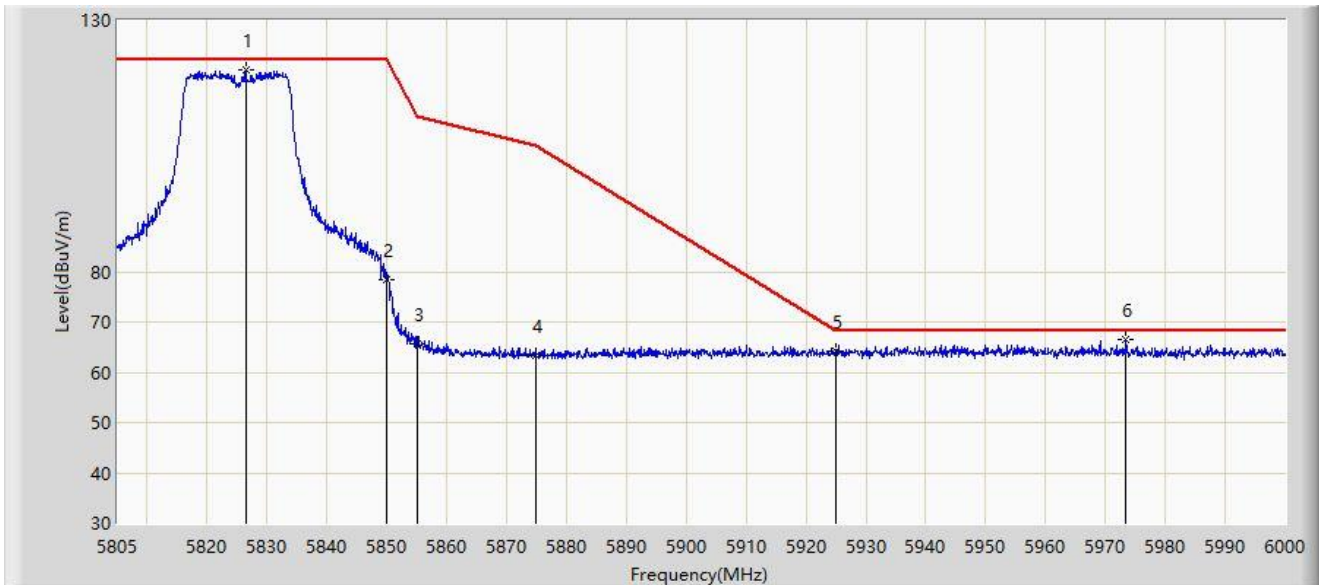


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.450	120.030	127.305	N/A	N/A	-7.275	PK
2		5850.000	78.380	85.617	-43.820	122.200	-7.237	PK
3		5855.000	65.744	72.962	-45.056	110.800	-7.217	PK
4		5875.000	63.216	70.568	-41.984	105.200	-7.352	PK
5		5925.000	64.253	71.379	-3.947	68.200	-7.126	PK
6	*	5973.480	66.518	73.501	-1.682	68.200	-6.984	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

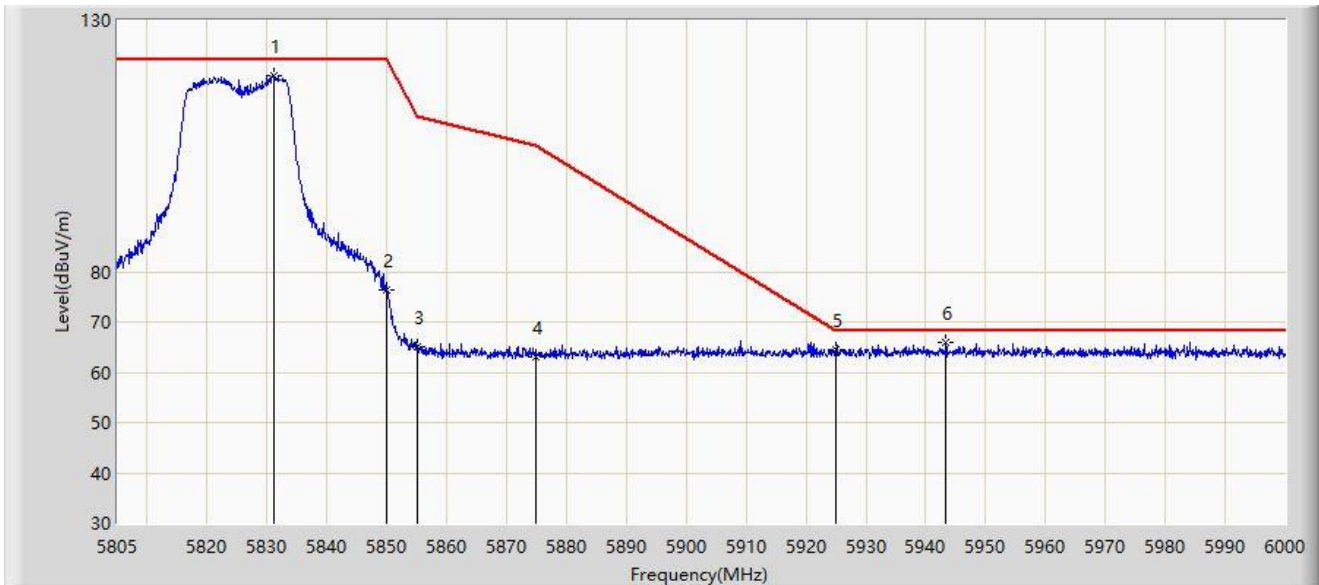


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5831.033	119.071	126.337	N/A	N/A	-7.266	PK
2		5850.000	76.299	83.536	-45.901	122.200	-7.237	PK
3		5855.000	65.167	72.385	-45.633	110.800	-7.217	PK
4		5875.000	63.073	70.425	-42.127	105.200	-7.352	PK
5		5925.000	64.514	71.640	-3.686	68.200	-7.126	PK
6	*	5943.353	65.889	72.888	-2.311	68.200	-6.999	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

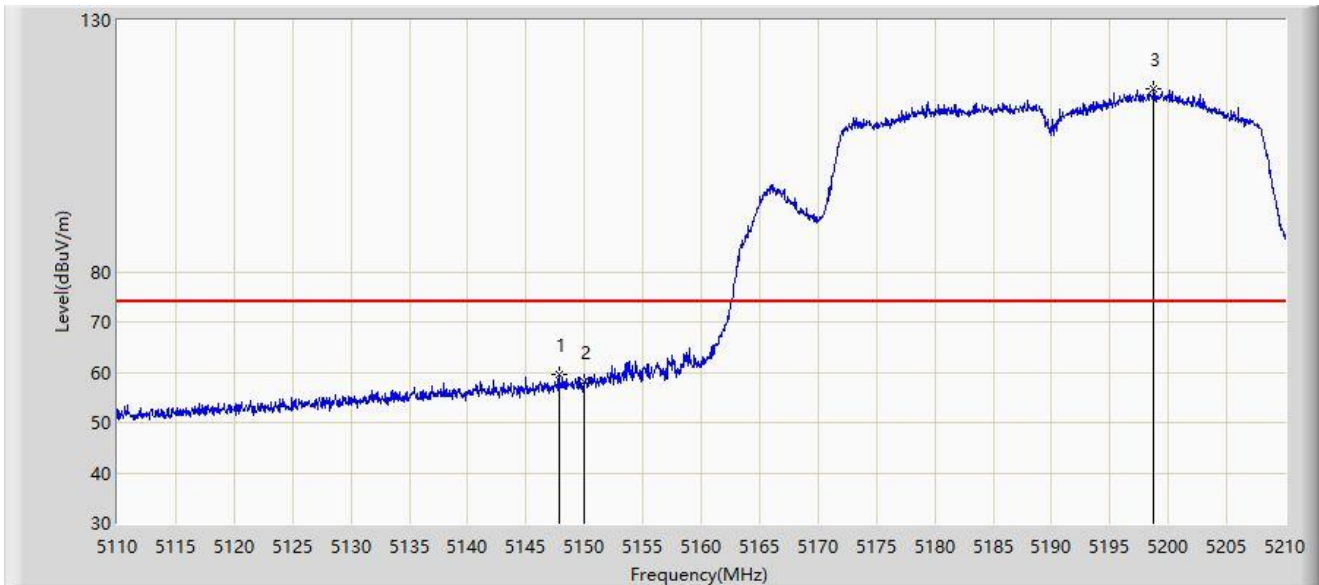


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.800	59.634	63.336	-14.366	74.000	-3.703	PK
2		5150.000	58.012	61.258	-15.988	74.000	-3.246	PK
3		5198.750	116.442	79.826	N/A	N/A	36.616	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

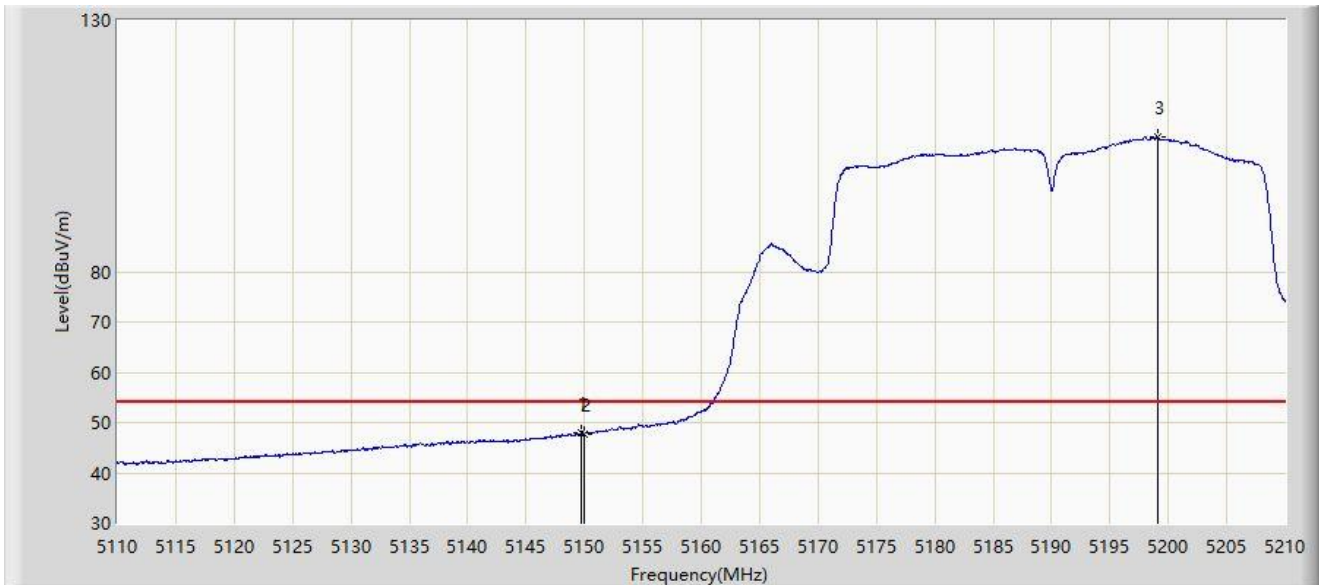


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.750	47.846	51.168	-6.154	54.000	-3.322	AV
2		5150.000	47.645	50.891	-6.355	54.000	-3.246	AV
3		5199.050	106.764	69.868	N/A	N/A	36.896	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

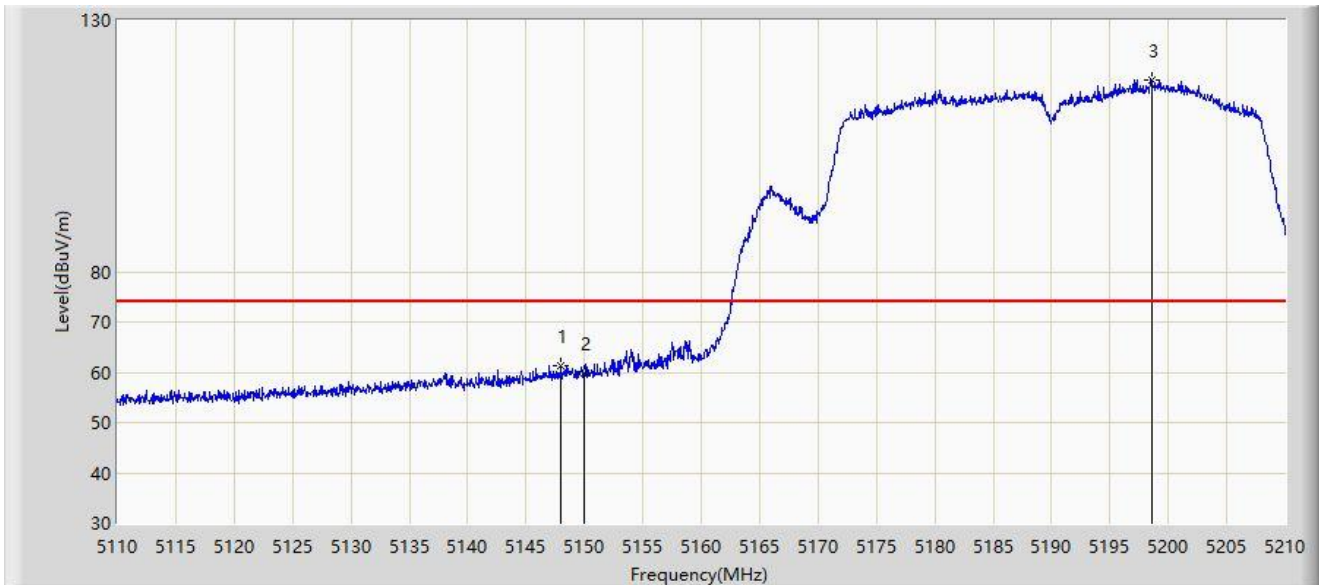


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.000	61.301	64.959	-12.699	74.000	-3.658	PK
2		5150.000	59.926	63.172	-14.074	74.000	-3.246	PK
3		5198.600	118.063	81.587	N/A	N/A	36.476	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

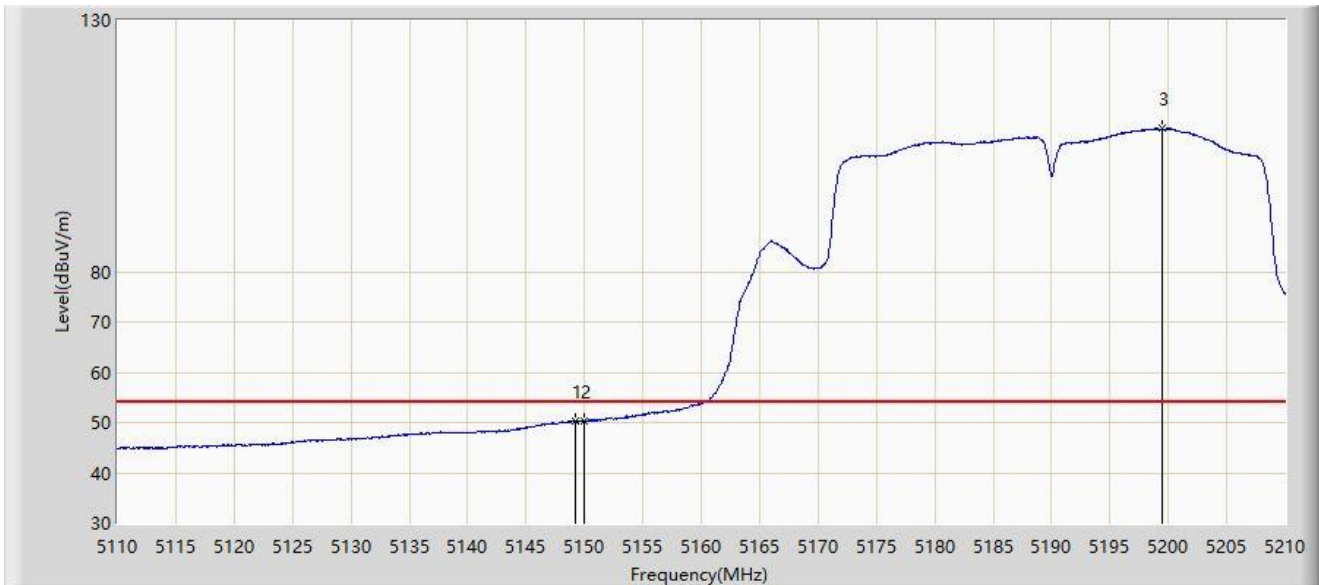


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.200	50.338	53.762	-3.662	54.000	-3.424	AV
2		5150.000	50.296	53.542	-3.704	54.000	-3.246	AV
3		5199.450	108.454	71.126	N/A	N/A	37.328	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

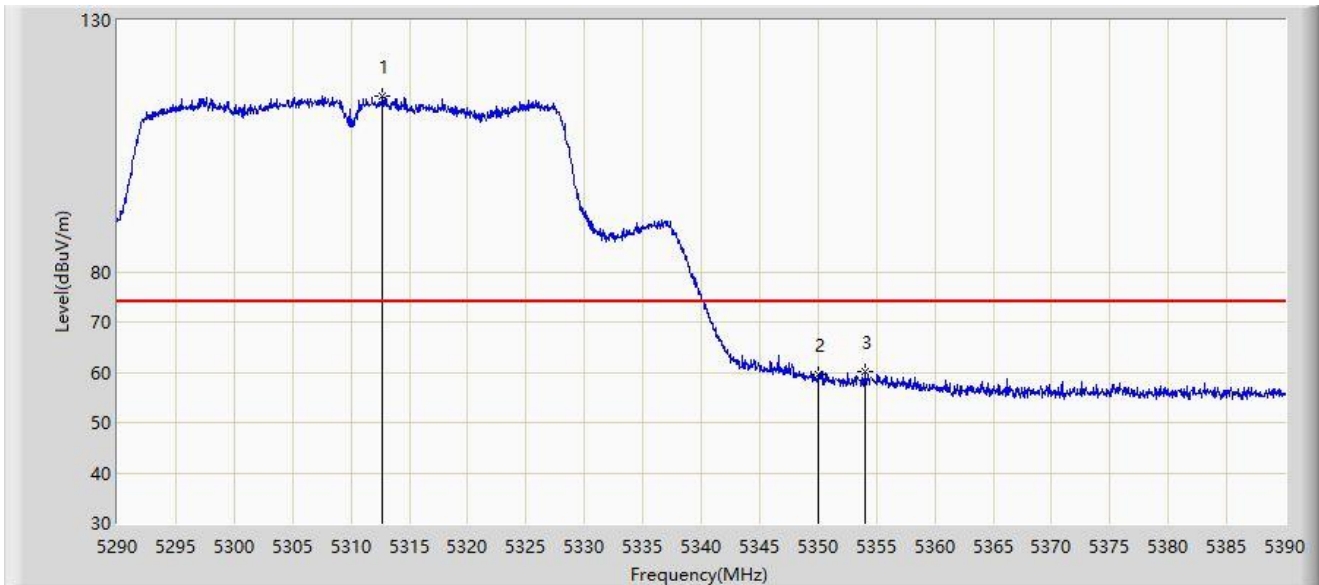


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.700	114.974	68.660	N/A	N/A	46.314	PK
2		5350.000	59.445	60.849	-14.555	74.000	-1.404	PK
3	*	5354.000	60.111	63.073	-13.889	74.000	-2.961	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

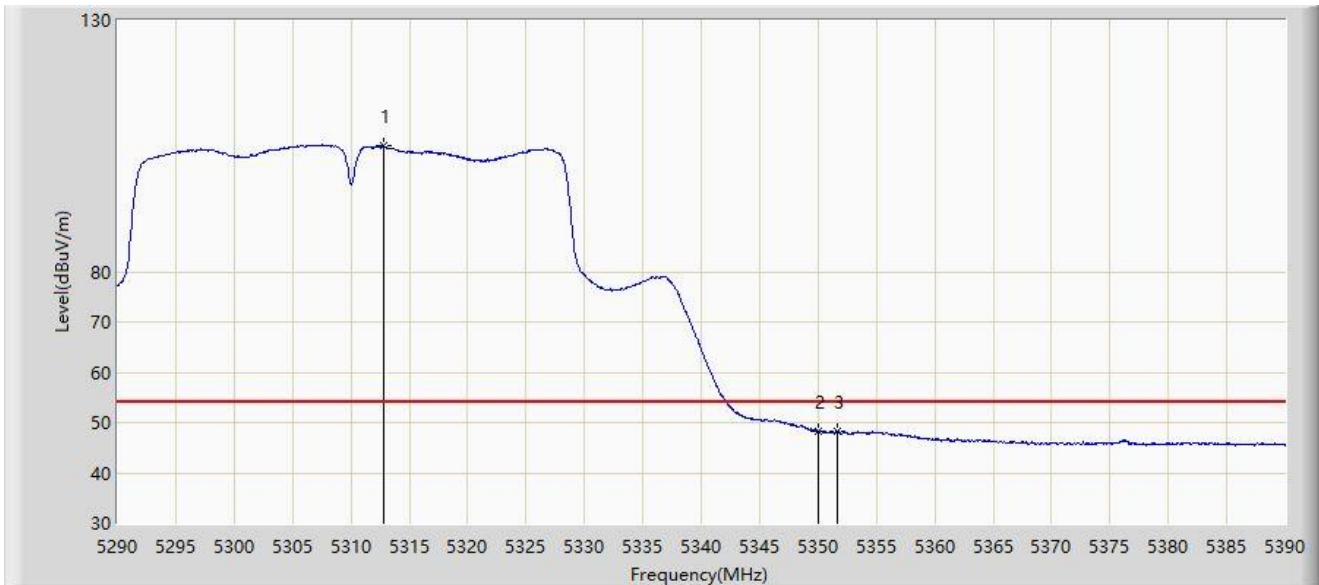


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.800	105.026	58.658	N/A	N/A	46.368	AV
2		5350.000	48.331	49.735	-5.669	54.000	-1.404	AV
3	*	5351.700	48.385	50.587	-5.615	54.000	-2.202	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

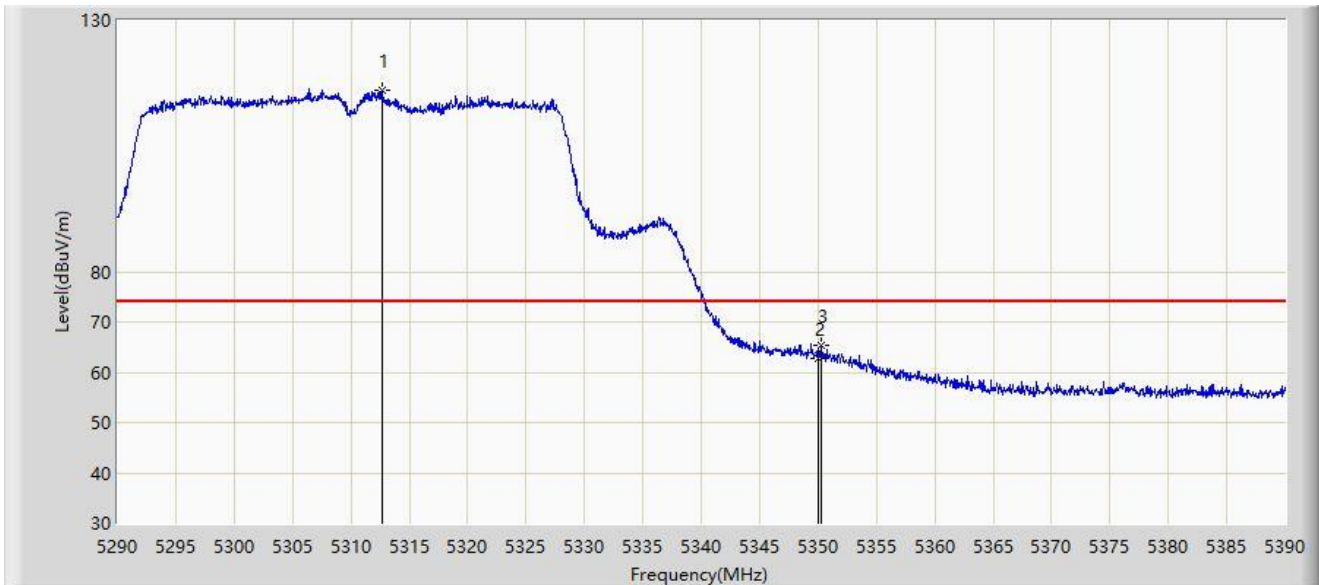


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.650	116.032	69.799	N/A	N/A	46.234	PK
2		5350.000	62.665	64.069	-11.335	74.000	-1.404	PK
3	*	5350.300	65.431	66.995	-8.569	74.000	-1.564	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

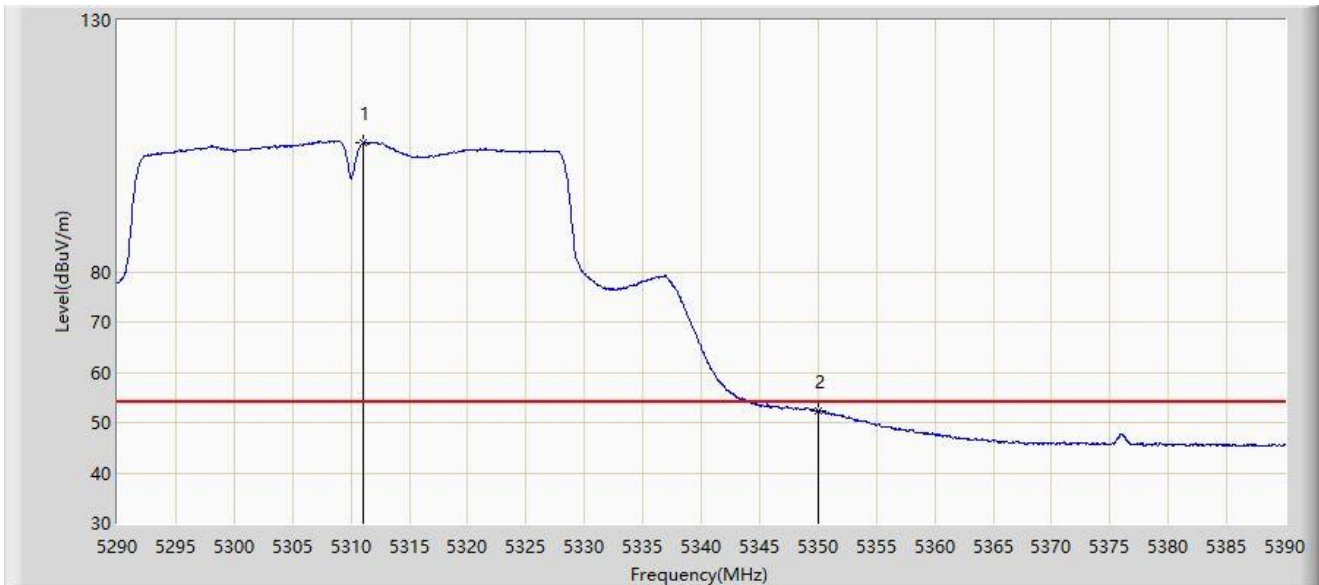


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.100	105.693	61.868	N/A	N/A	43.825	AV
2	*	5350.000	52.419	53.823	-1.581	54.000	-1.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

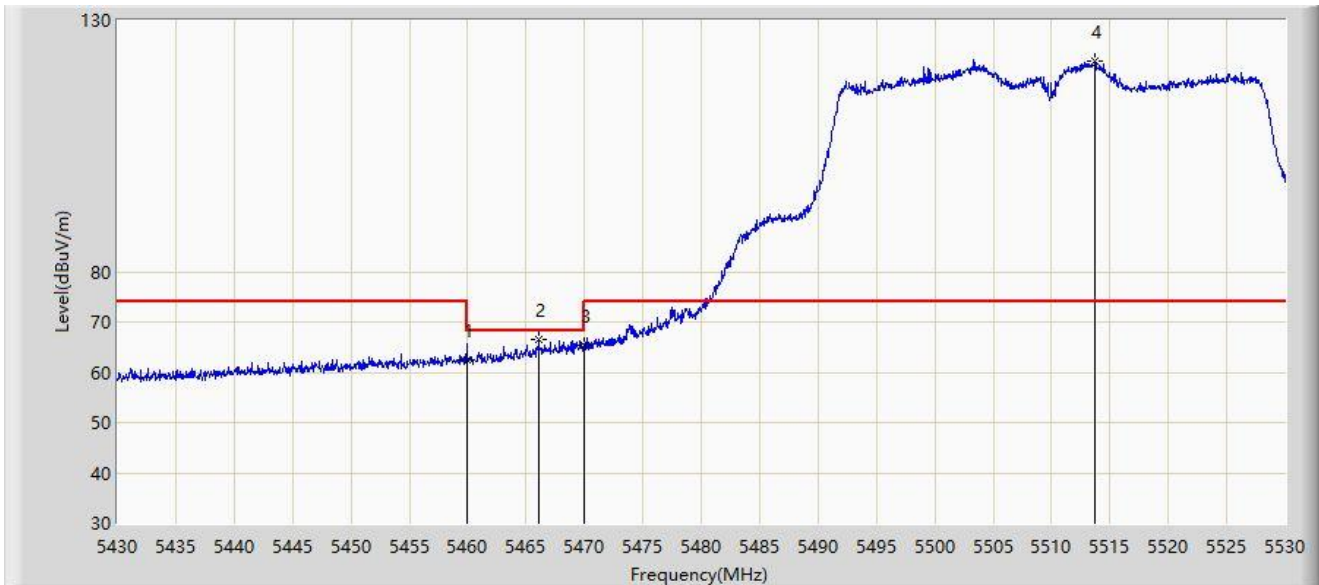


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	62.522	65.865	-5.678	68.200	-3.343	PK
2	*	5466.100	66.452	69.139	-1.748	68.200	-2.687	PK
3		5470.000	65.354	66.964	-2.846	68.200	-1.610	PK
4		5513.750	121.803	79.543	N/A	N/A	42.260	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

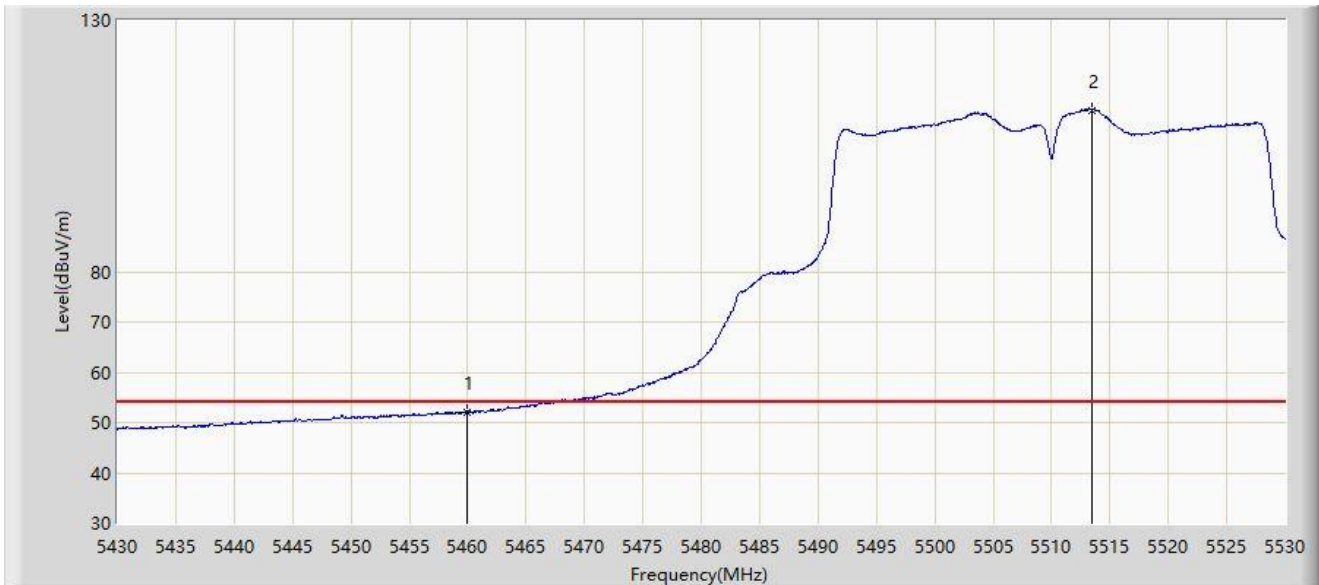


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	52.136	55.479	-1.864	54.000	-3.343	AV
2		5513.450	112.173	70.133	N/A	N/A	42.040	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

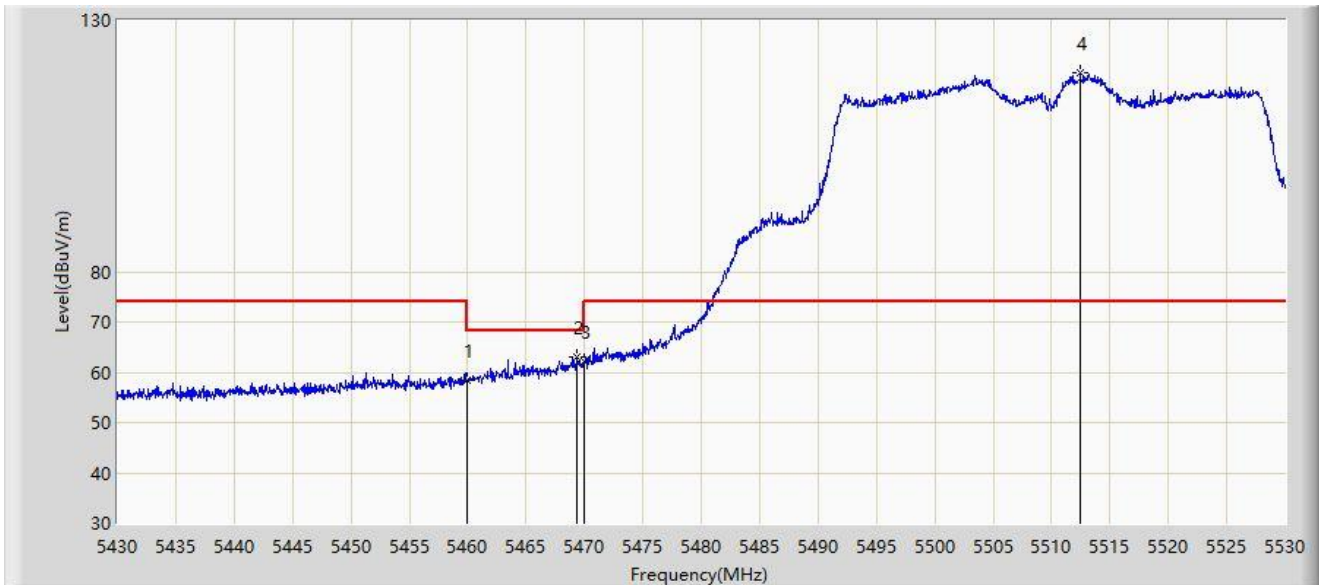


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	58.445	61.788	-9.755	68.200	-3.343	PK
2	*	5469.350	63.031	64.831	-5.169	68.200	-1.800	PK
3		5470.000	62.195	63.805	-6.005	68.200	-1.610	PK
4		5512.450	119.668	78.909	N/A	N/A	40.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

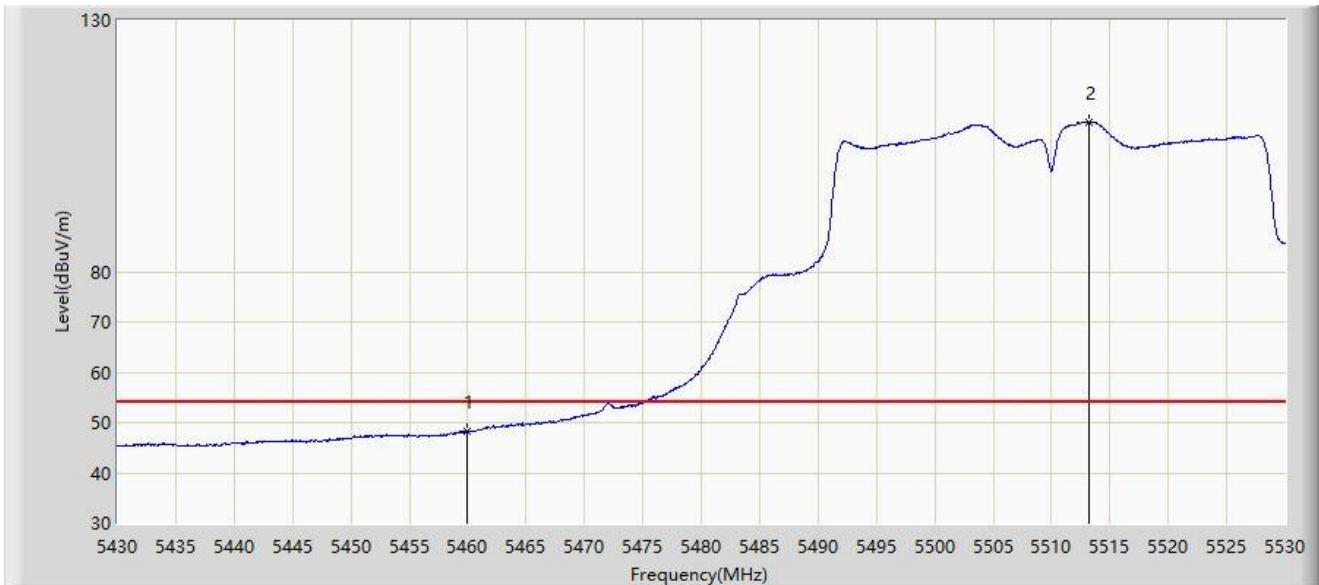


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	48.145	51.488	-5.855	54.000	-3.343	AV
2		5513.150	109.756	68.062	N/A	N/A	41.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

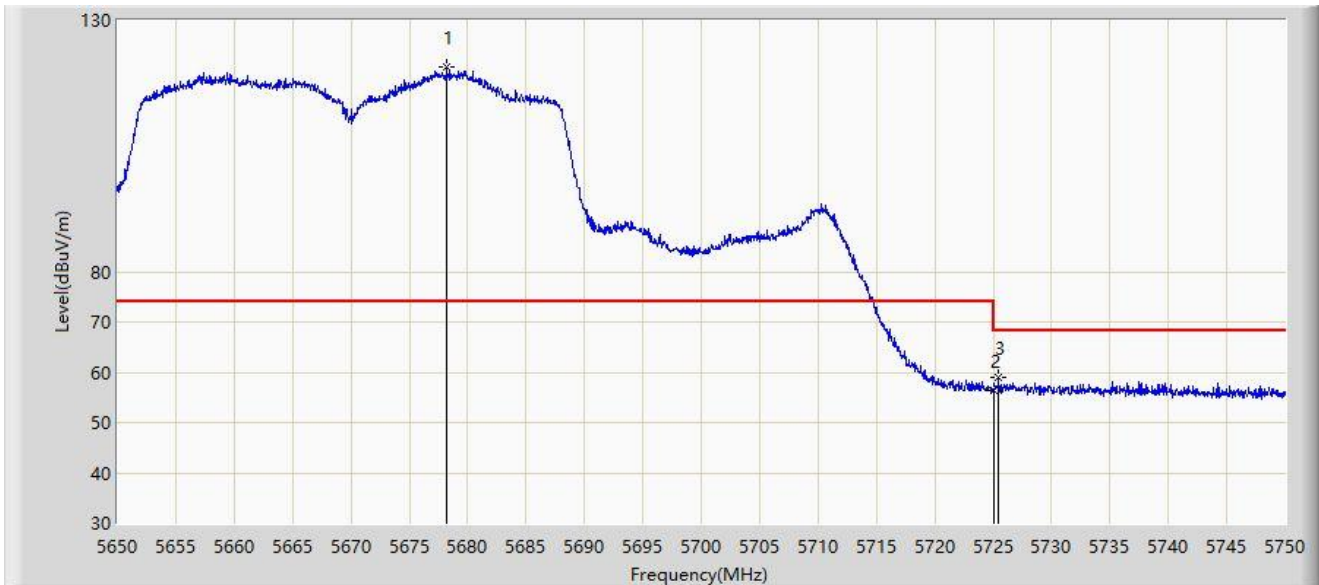


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.200	120.582	80.125	N/A	N/A	40.457	PK
2		5725.000	56.256	58.091	-11.944	68.200	-1.836	PK
3	*	5725.450	58.944	61.030	-9.256	68.200	-2.086	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

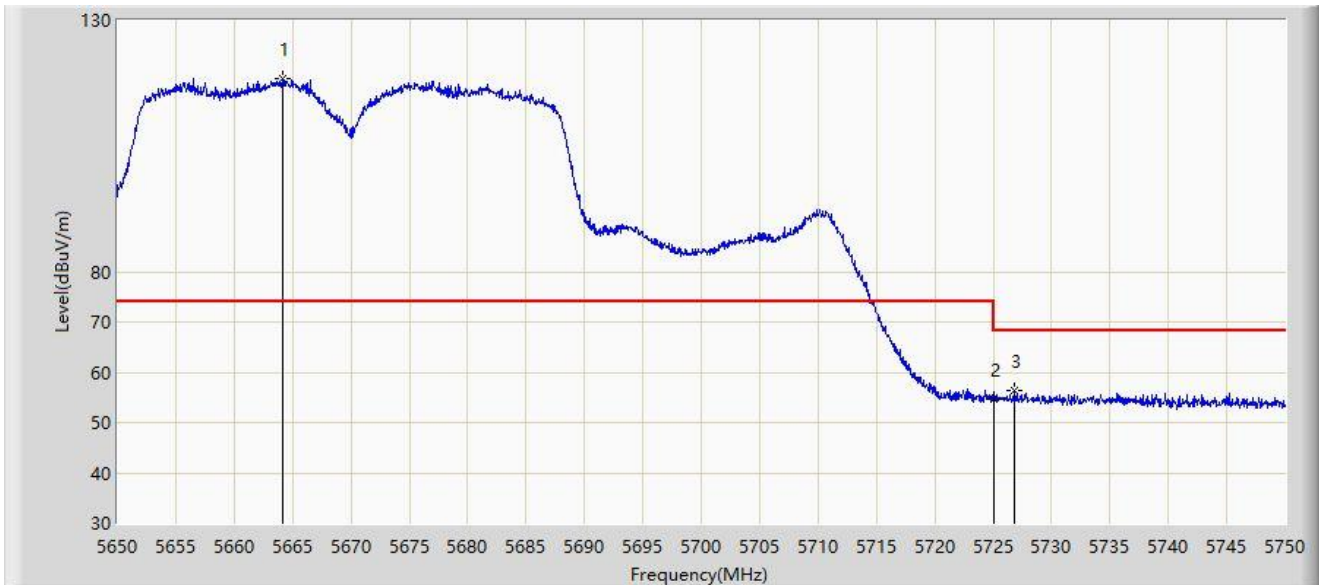


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5664.150	118.295	77.797	N/A	N/A	40.498	PK
2		5725.000	54.732	56.567	-13.468	68.200	-1.836	PK
3	*	5726.850	56.232	58.969	-11.968	68.200	-2.737	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

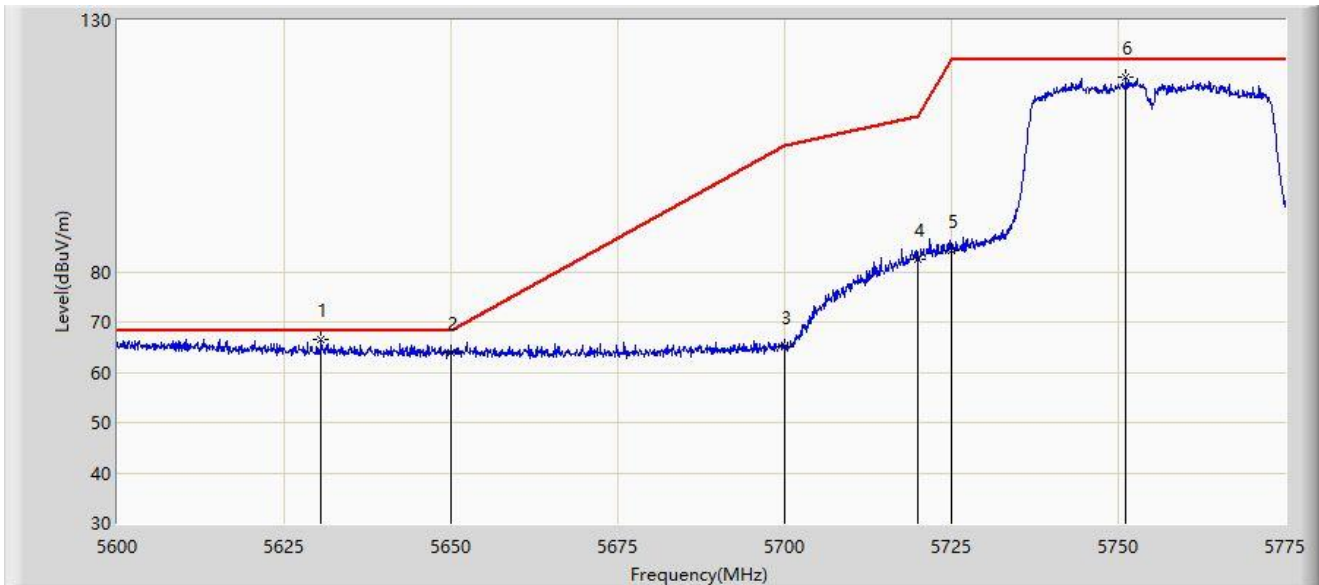


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5630.538	66.488	73.783	-1.712	68.200	-7.296	PK
2		5650.000	63.887	71.207	-4.313	68.200	-7.319	PK
3		5700.000	65.214	72.388	-39.986	105.200	-7.174	PK
4		5720.000	82.589	90.061	-28.211	110.800	-7.472	PK
5		5725.000	84.318	91.779	-37.882	122.200	-7.461	PK
6		5751.200	118.713	126.174	N/A	N/A	-7.461	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

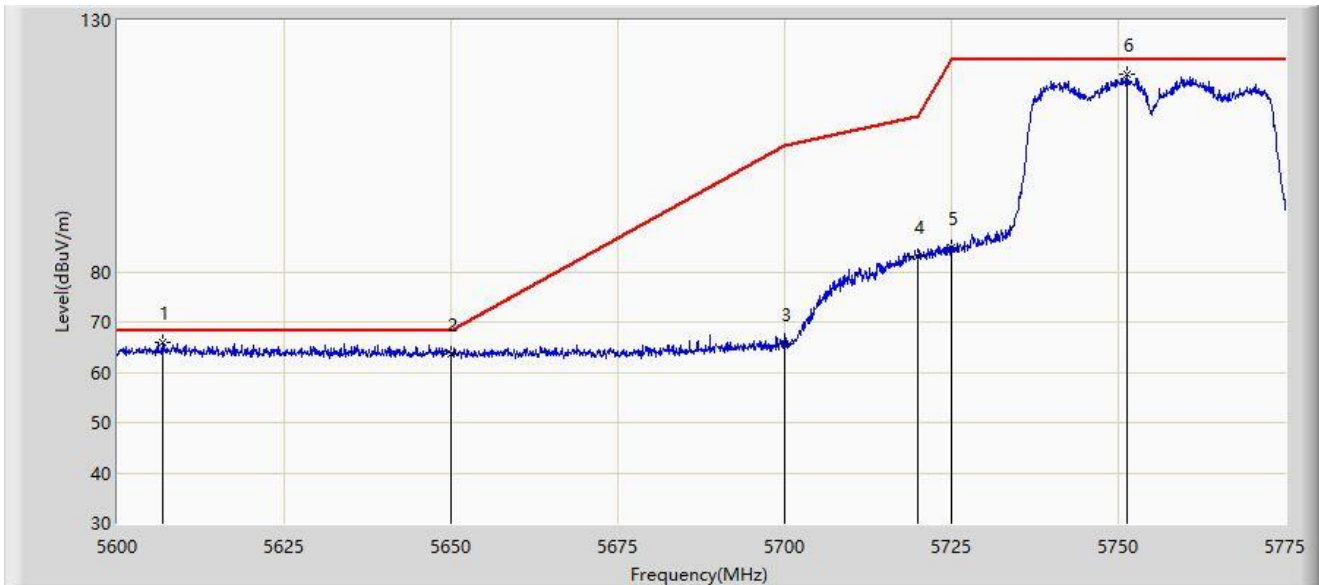


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5606.737	66.067	73.278	-2.133	68.200	-7.212	PK
2		5650.000	63.644	70.964	-4.556	68.200	-7.319	PK
3		5700.000	65.612	72.786	-39.588	105.200	-7.174	PK
4		5720.000	83.010	90.482	-27.790	110.800	-7.472	PK
5		5725.000	84.680	92.141	-37.520	122.200	-7.461	PK
6		5751.288	119.297	126.757	N/A	N/A	-7.461	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

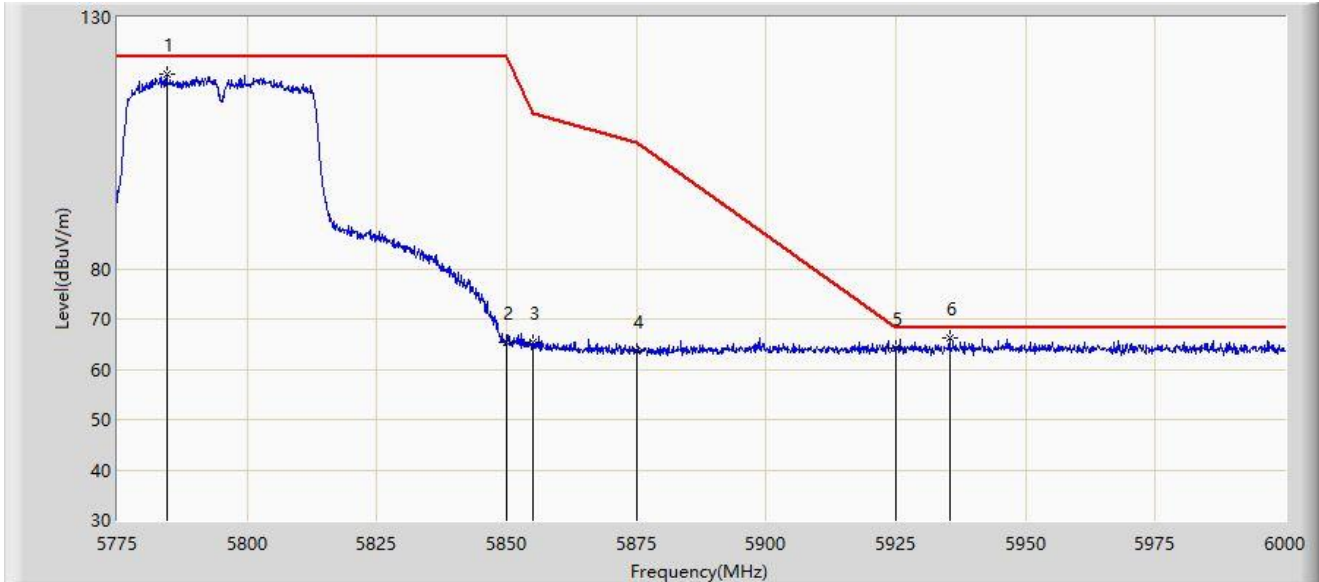


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5784.450	118.768	126.172	N/A	N/A	-7.404	PK
2		5850.000	65.364	72.601	-56.836	122.200	-7.237	PK
3		5855.000	65.250	72.468	-45.550	110.800	-7.217	PK
4		5875.000	63.718	71.070	-41.482	105.200	-7.352	PK
5		5925.000	64.060	71.186	-4.140	68.200	-7.126	PK
6	*	5935.312	66.130	73.190	-2.070	68.200	-7.061	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

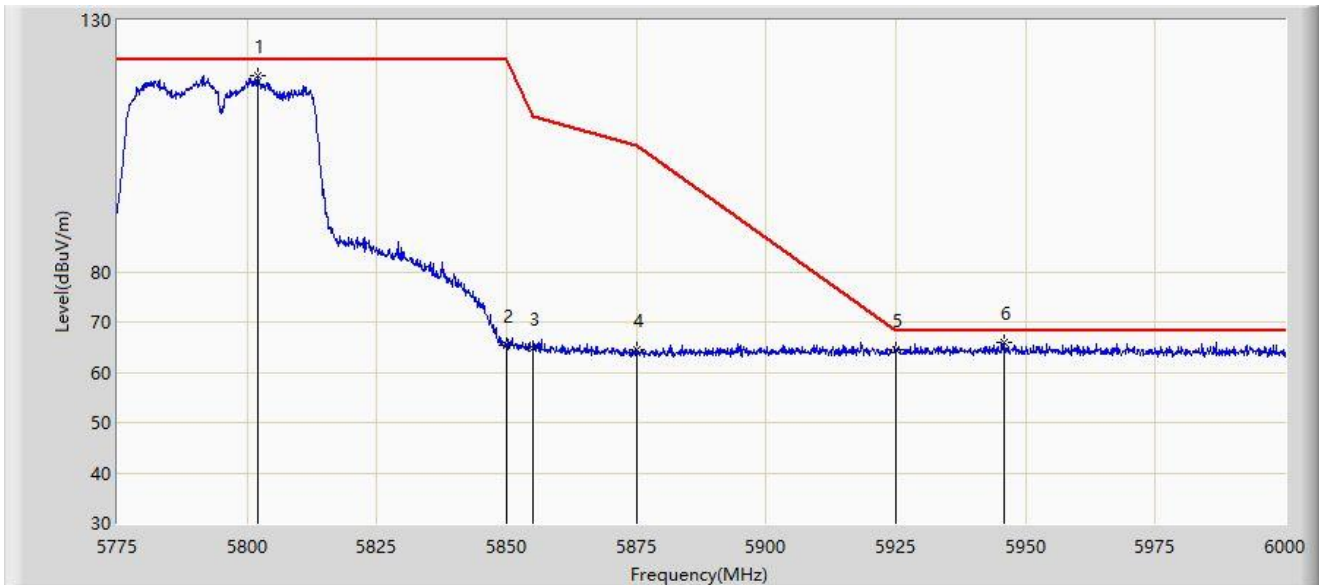


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5802.000	119.034	126.427	N/A	N/A	-7.392	PK
2		5850.000	65.231	72.468	-56.969	122.200	-7.237	PK
3		5855.000	64.766	71.984	-46.034	110.800	-7.217	PK
4		5875.000	64.494	71.846	-40.706	105.200	-7.352	PK
5		5925.000	64.449	71.575	-3.751	68.200	-7.126	PK
6	*	5945.775	66.066	73.046	-2.134	68.200	-6.981	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

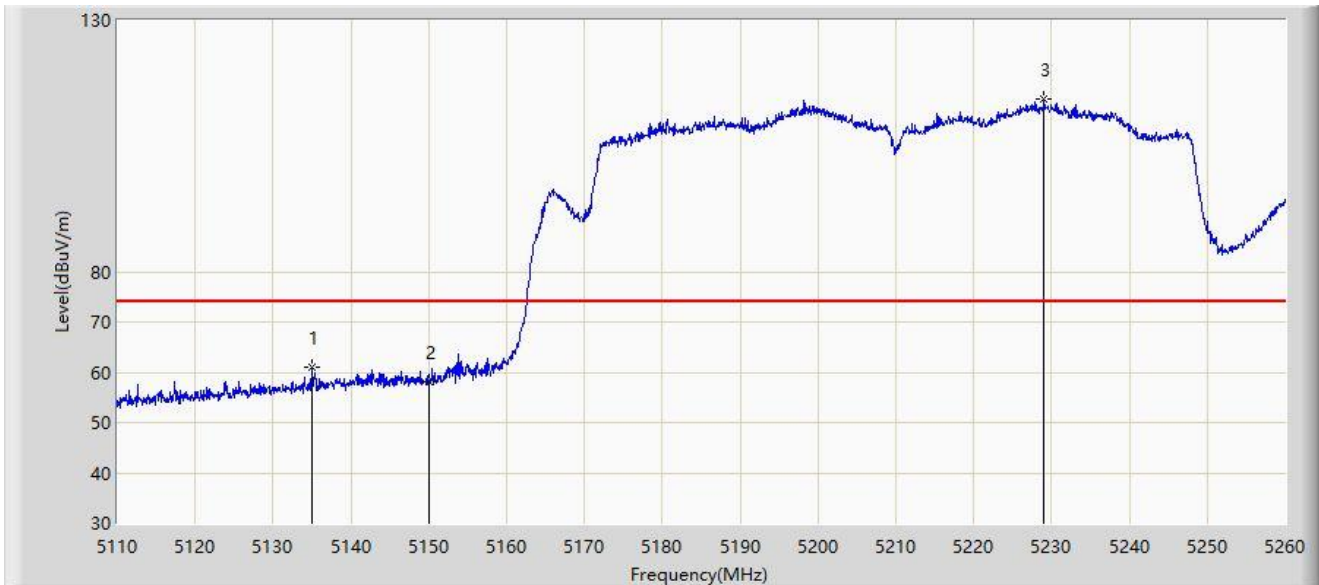


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5135.050	61.079	65.494	-12.921	74.000	-4.415	PK
2		5150.000	58.183	61.429	-15.817	74.000	-3.246	PK
3		5229.025	114.356	77.923	N/A	N/A	36.433	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

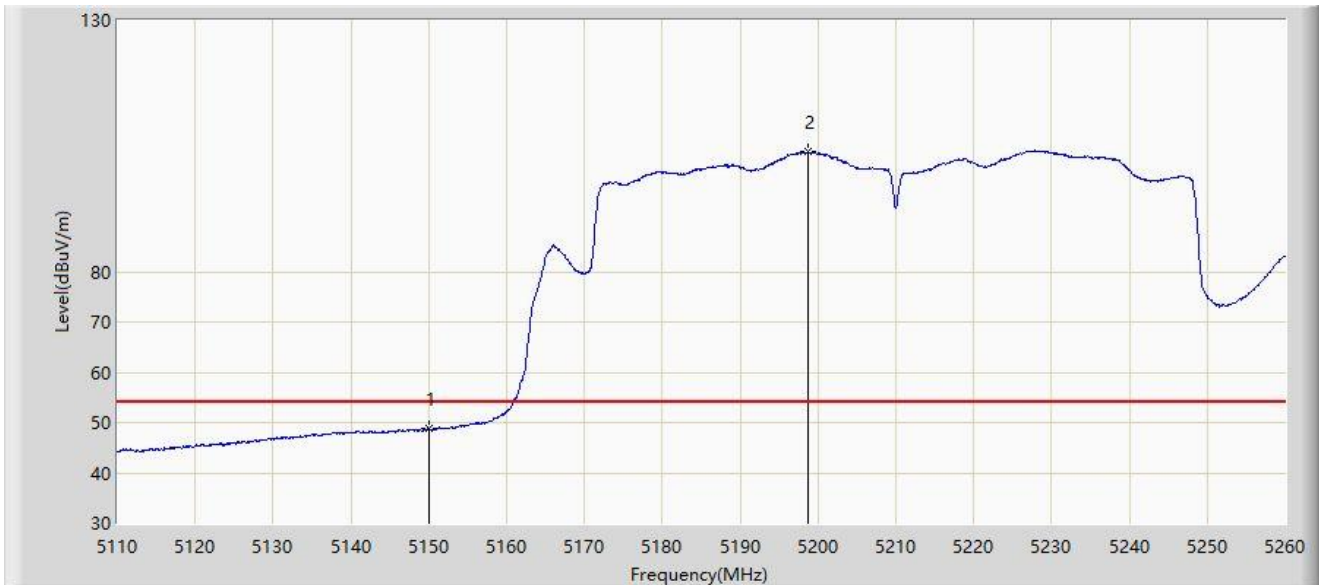


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	48.773	52.019	-5.227	54.000	-3.246	AV
2		5198.650	103.803	67.280	N/A	N/A	36.523	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

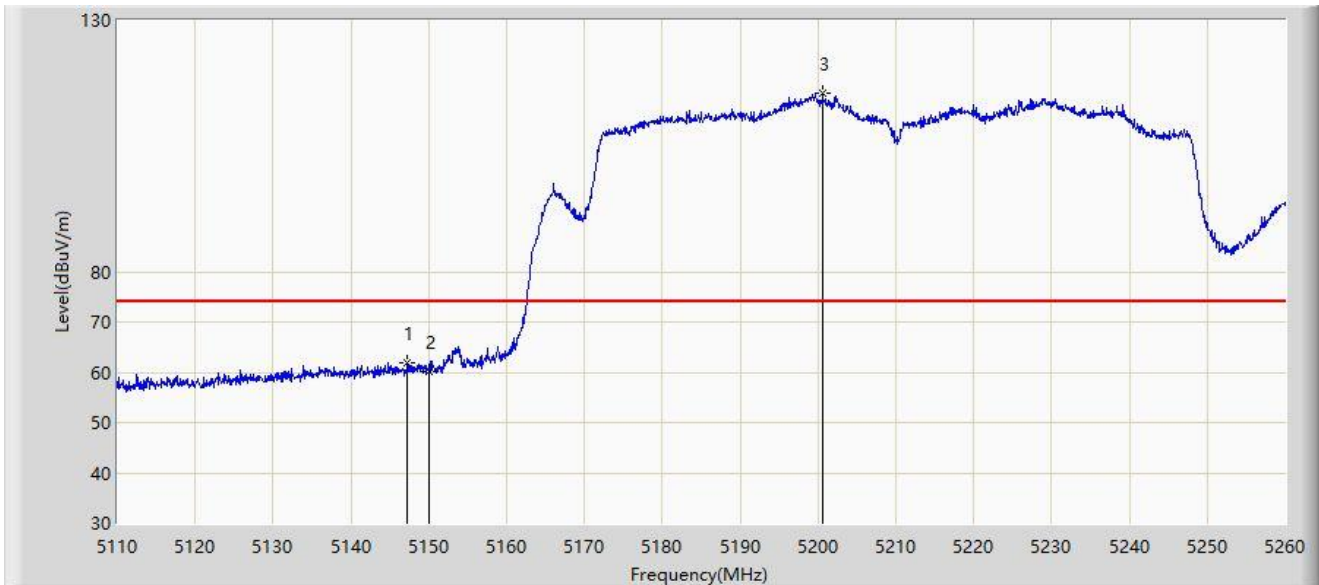


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.200	61.819	65.652	-12.181	74.000	-3.834	PK
2		5150.000	60.228	63.474	-13.772	74.000	-3.246	PK
3		5200.600	115.388	76.548	N/A	N/A	38.841	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

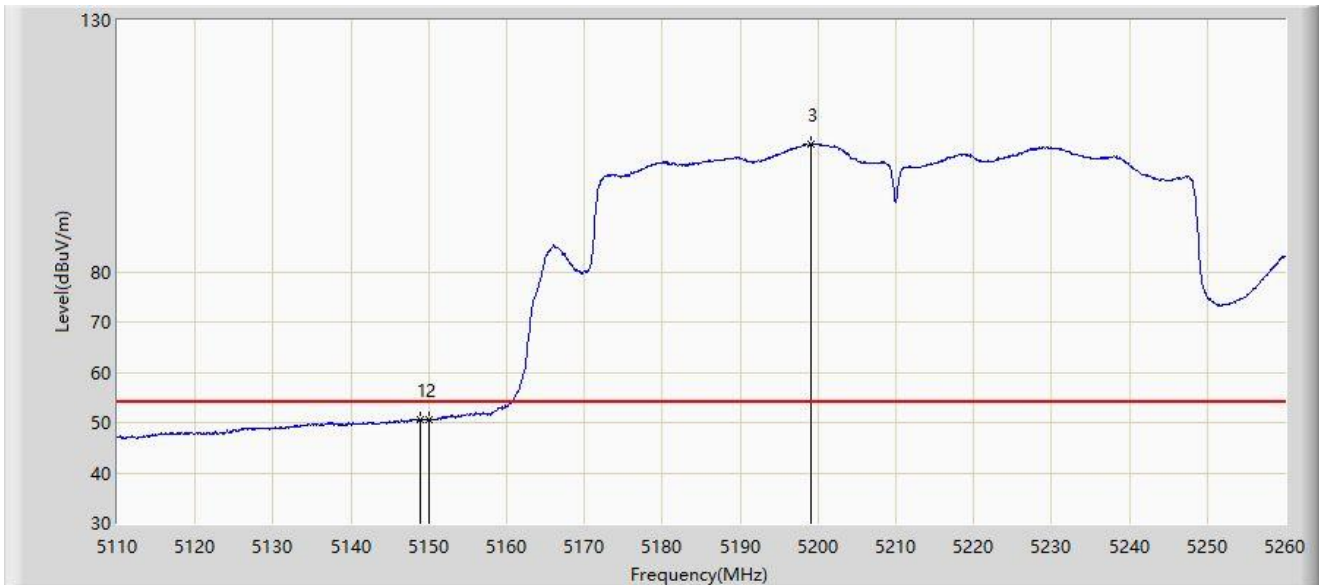


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.925	50.700	54.175	-3.300	54.000	-3.476	AV
2		5150.000	50.588	53.834	-3.412	54.000	-3.246	AV
3		5199.100	105.391	68.448	N/A	N/A	36.943	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

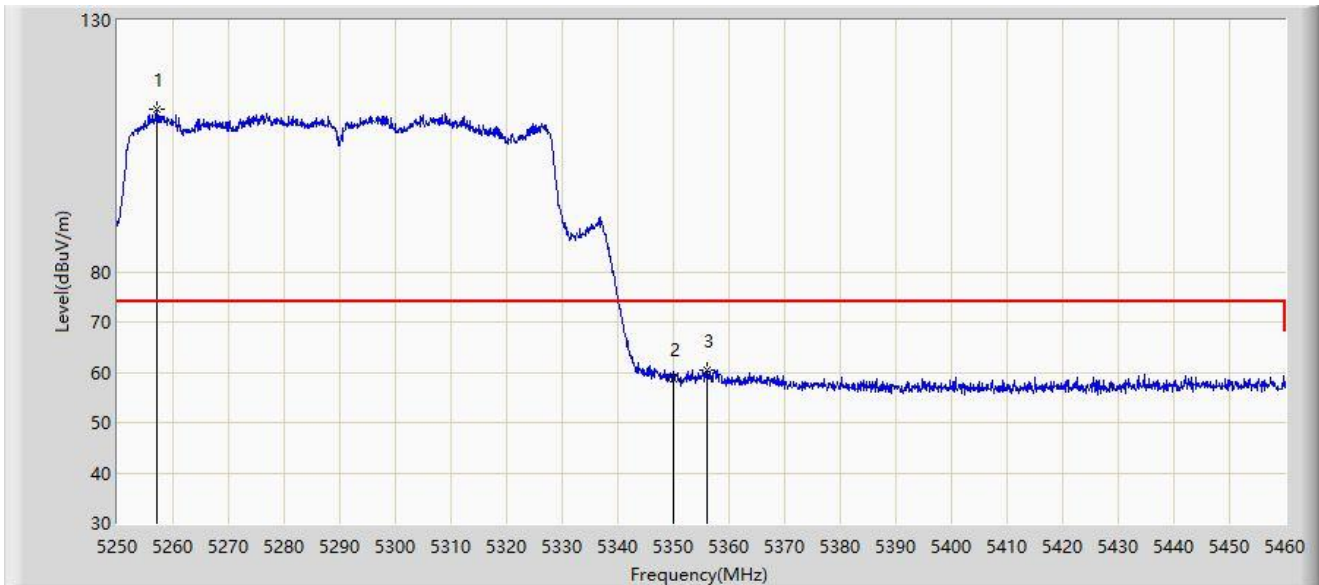


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5257.140	112.178	70.640	N/A	N/A	41.539	PK
2		5350.000	58.731	60.135	-15.269	74.000	-1.404	PK
3	*	5356.050	60.513	63.924	-13.487	74.000	-3.412	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

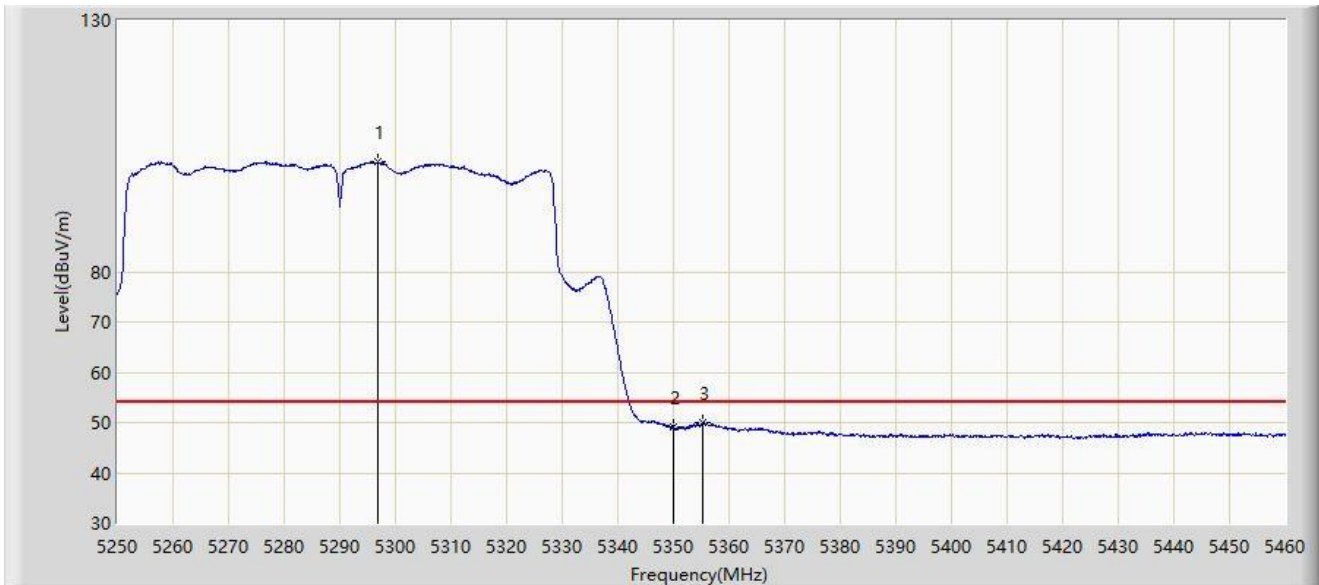


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5296.935	101.773	60.103	N/A	N/A	41.669	AV
2		5350.000	49.199	50.603	-4.801	54.000	-1.404	AV
3	*	5355.210	49.882	53.093	-4.118	54.000	-3.211	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

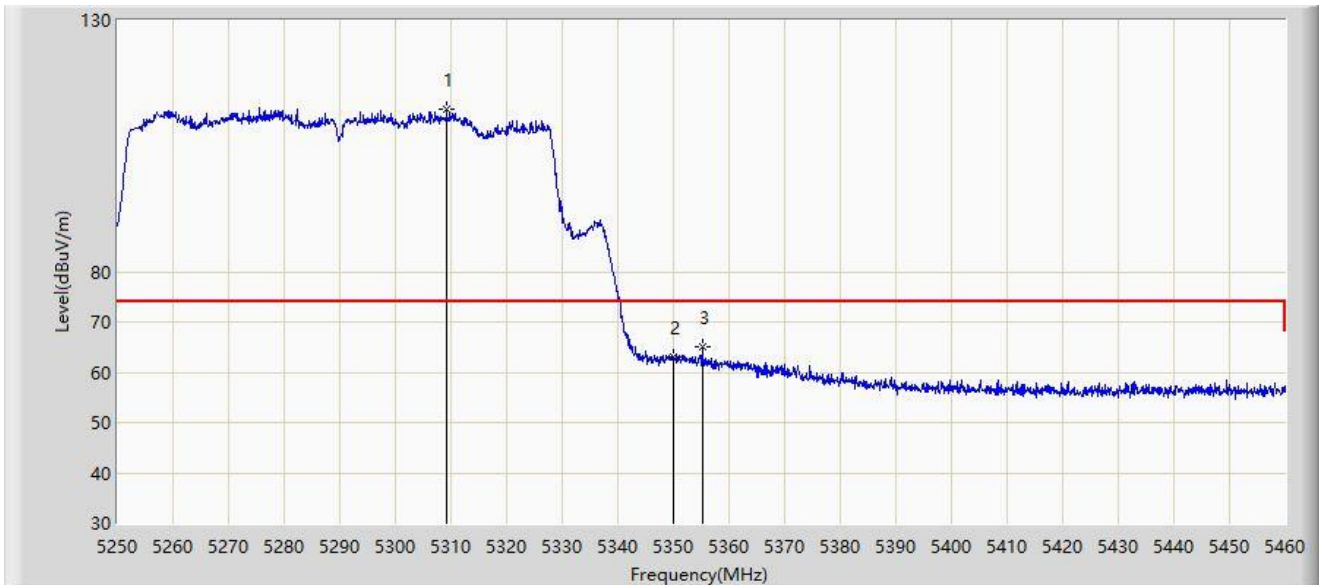


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5309.220	112.351	71.271	N/A	N/A	41.079	PK
2		5350.000	62.977	64.381	-11.023	74.000	-1.404	PK
3	*	5355.210	65.017	68.228	-8.983	74.000	-3.211	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

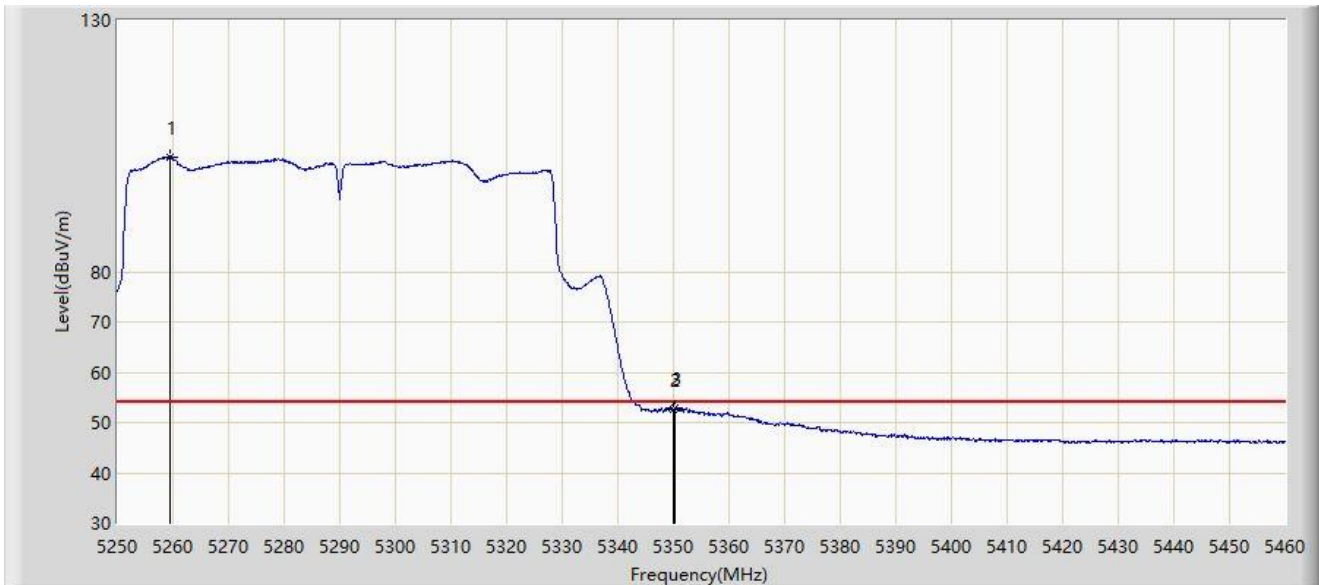


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.450	102.850	57.298	N/A	N/A	45.553	AV
2		5350.000	52.533	53.937	-1.467	54.000	-1.404	AV
3	*	5350.380	52.971	54.578	-1.029	54.000	-1.607	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

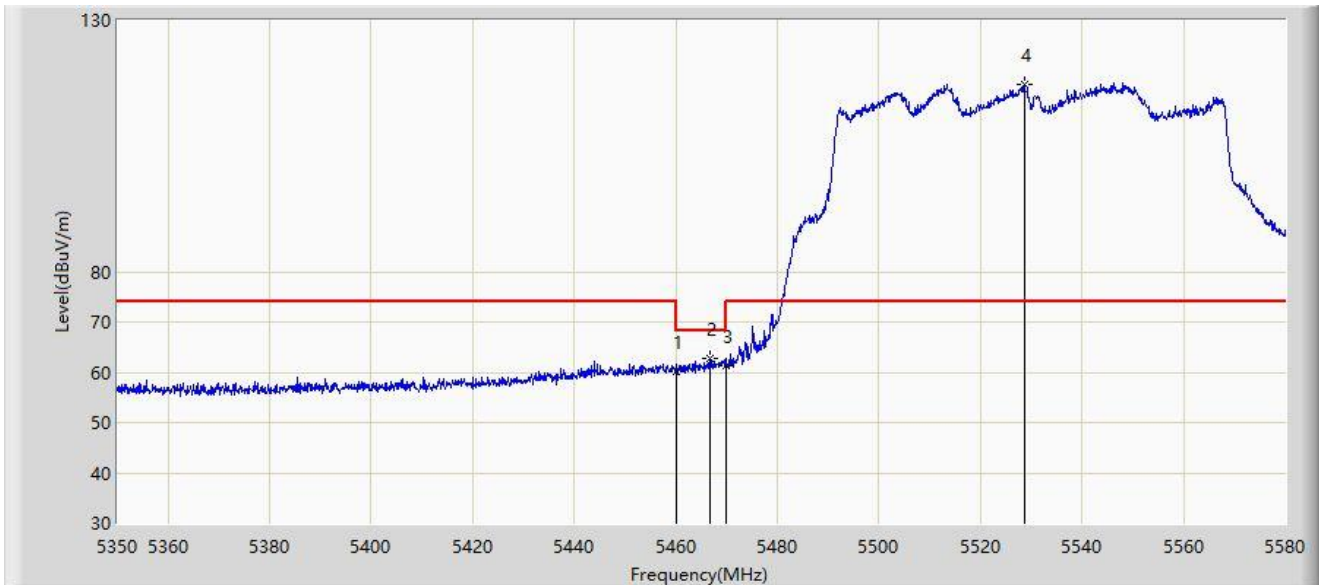


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	60.186	63.529	-8.014	68.200	-3.343	PK
2	*	5466.610	62.616	65.211	-5.584	68.200	-2.595	PK
3		5470.000	61.445	63.055	-6.755	68.200	-1.610	PK
4		5528.710	117.312	71.412	N/A	N/A	45.900	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

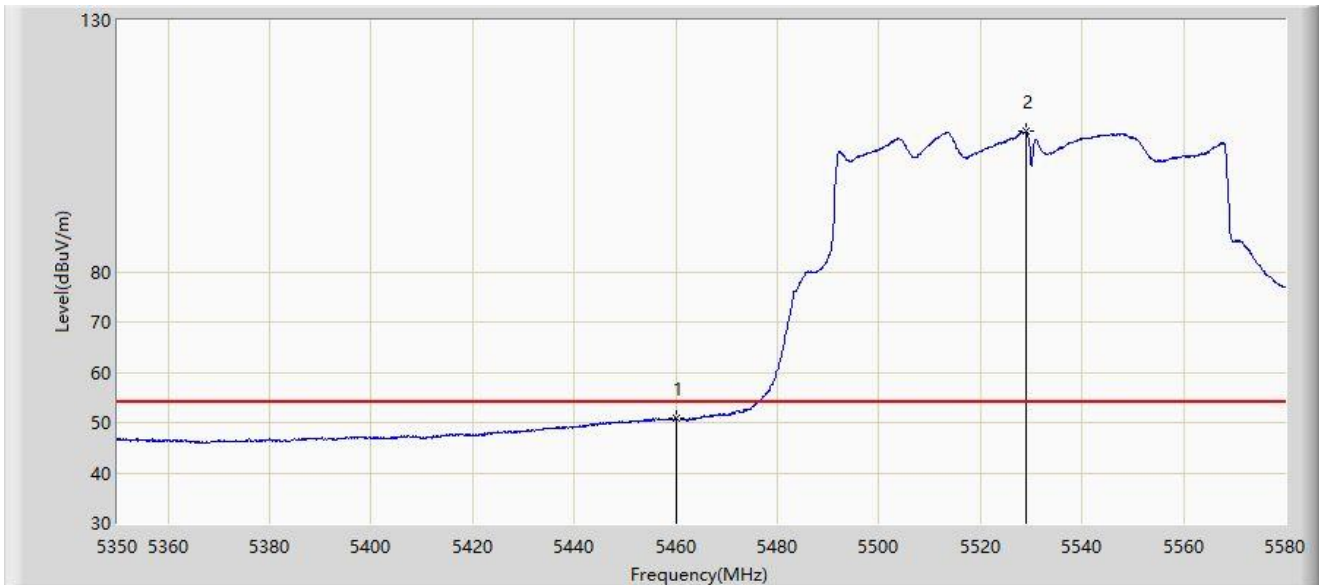


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	50.876	54.219	-3.124	54.000	-3.343	AV
2		5529.055	107.834	61.266	N/A	N/A	46.568	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

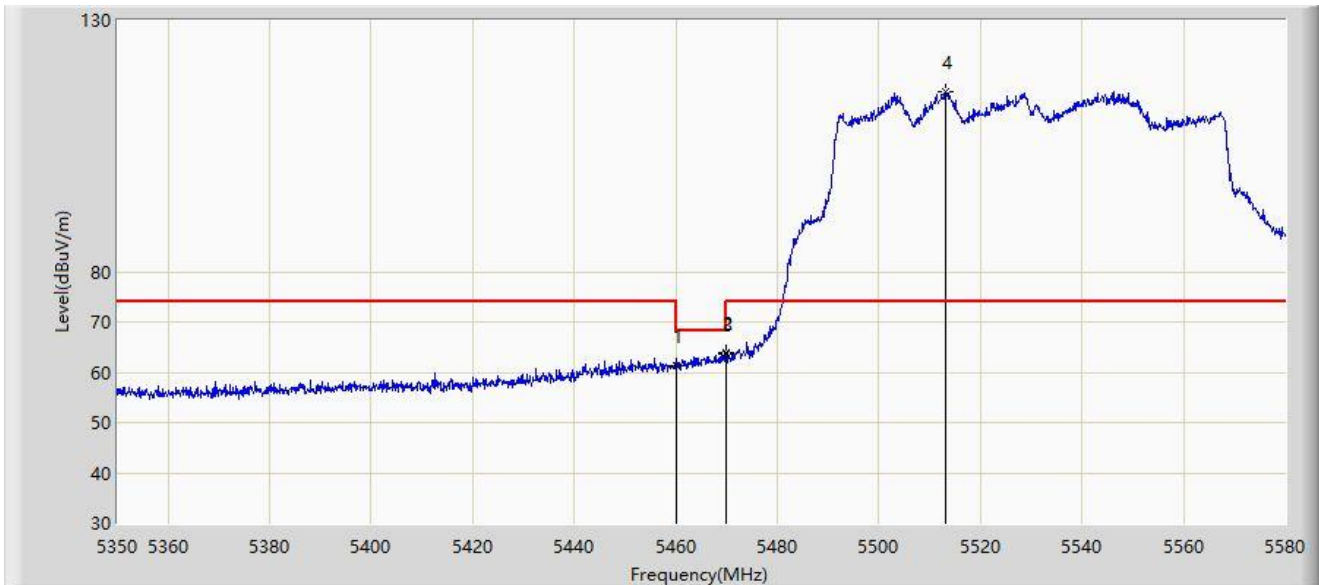


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	61.315	64.658	-6.885	68.200	-3.343	PK
2	*	5469.945	63.980	65.609	-4.220	68.200	-1.629	PK
3		5470.000	63.700	65.310	-4.500	68.200	-1.610	PK
4		5513.185	115.744	74.005	N/A	N/A	41.740	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

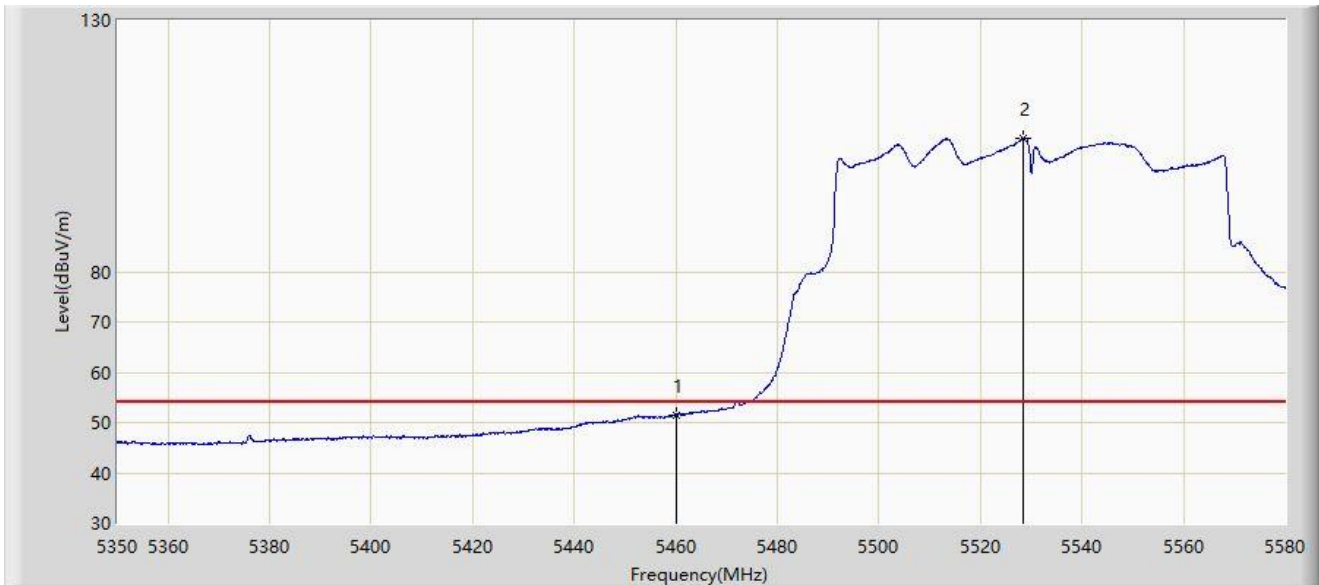


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	51.576	54.919	-2.424	54.000	-3.343	AV
2		5528.365	106.620	61.238	N/A	N/A	45.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

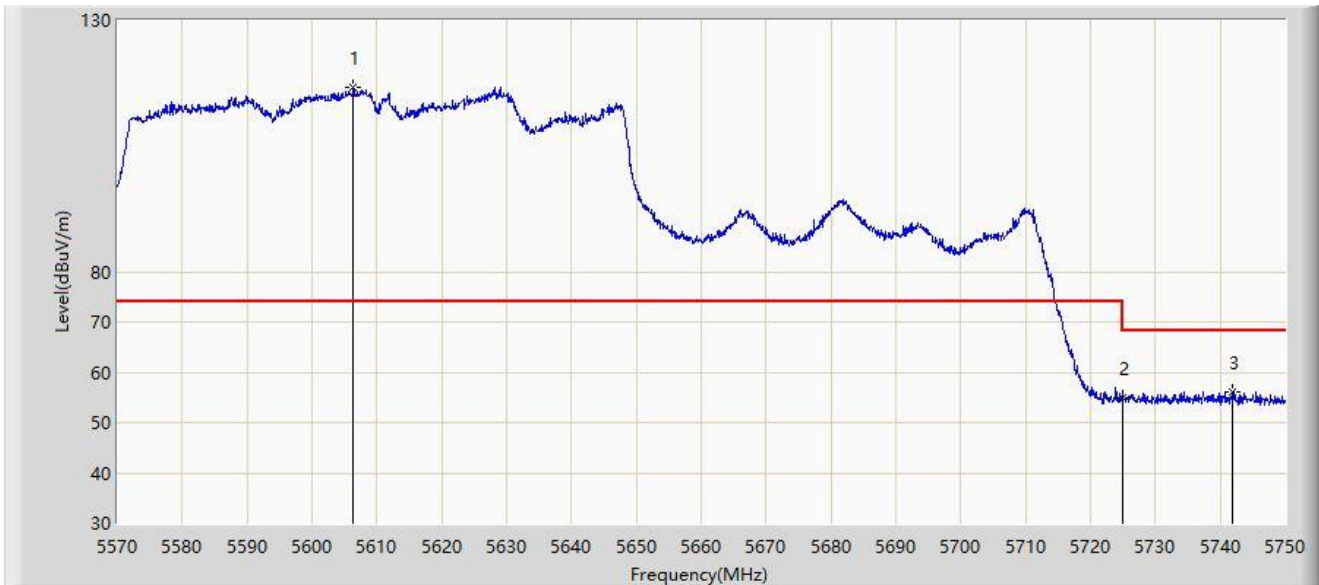


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5606.360	116.530	76.112	N/A	N/A	40.418	PK
2		5725.000	55.052	56.887	-13.148	68.200	-1.836	PK
3	*	5741.810	56.170	60.855	-12.030	68.200	-4.686	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

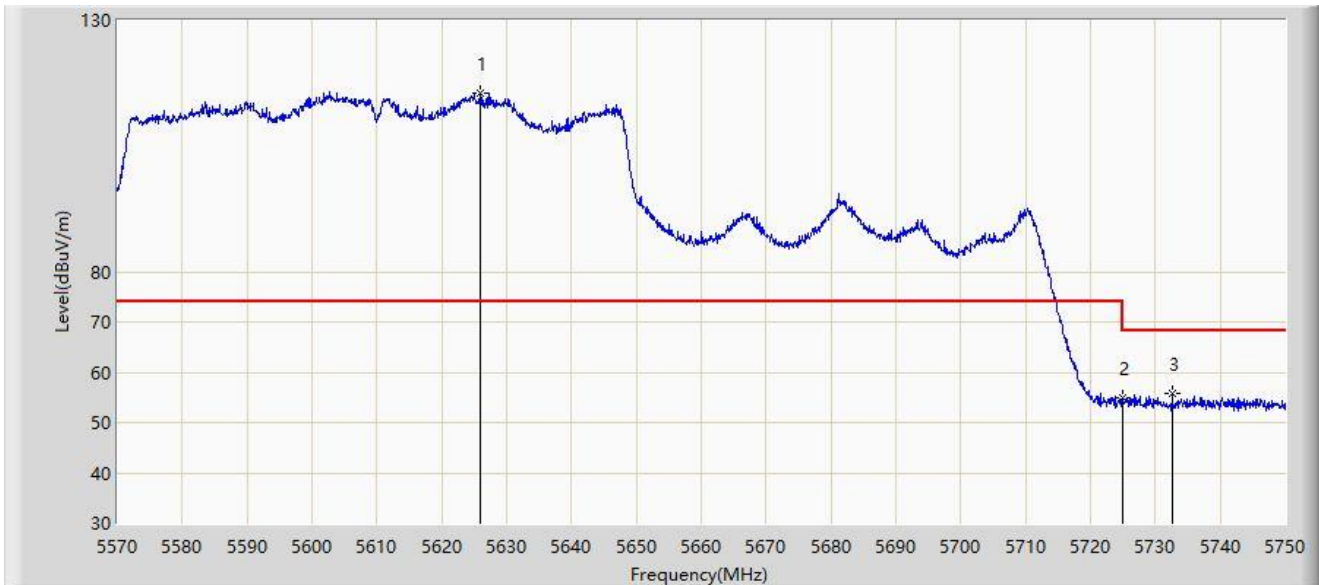


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5625.890	115.395	76.100	N/A	N/A	39.295	PK
2		5725.000	54.795	56.630	-13.405	68.200	-1.836	PK
3	*	5732.630	55.708	59.733	-12.492	68.200	-4.026	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

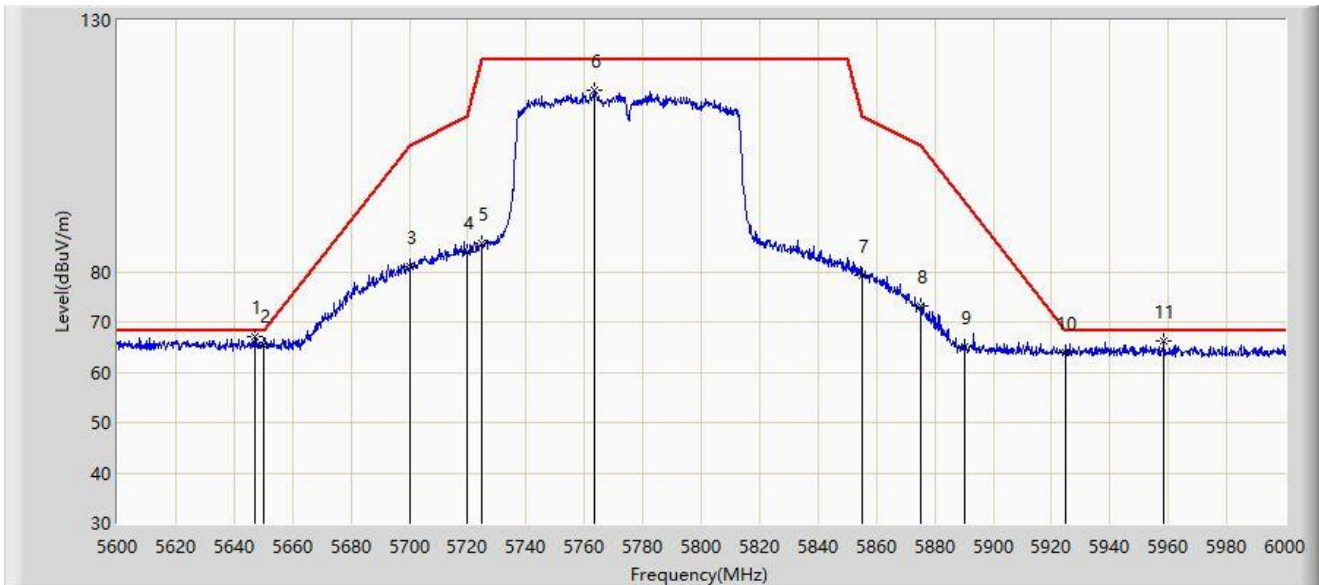


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.200	67.055	74.377	-1.145	68.200	-7.322	PK
2		5650.000	65.434	72.754	-2.766	68.200	-7.319	PK
3		5700.000	81.004	88.178	-24.196	105.200	-7.174	PK
4		5720.000	83.873	91.345	-26.927	110.800	-7.472	PK
5		5725.000	85.721	93.182	-36.479	122.200	-7.461	PK
6		5763.400	116.116	123.496	N/A	N/A	-7.380	PK
7		5855.000	79.149	86.367	-31.651	110.800	-7.217	PK
8		5875.000	73.220	80.572	-31.980	105.200	-7.352	PK
9		5890.000	65.106	72.321	-28.994	94.100	-7.214	PK
10		5925.000	63.980	71.106	-4.220	68.200	-7.126	PK
11		5958.600	66.323	73.293	-1.877	68.200	-6.970	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

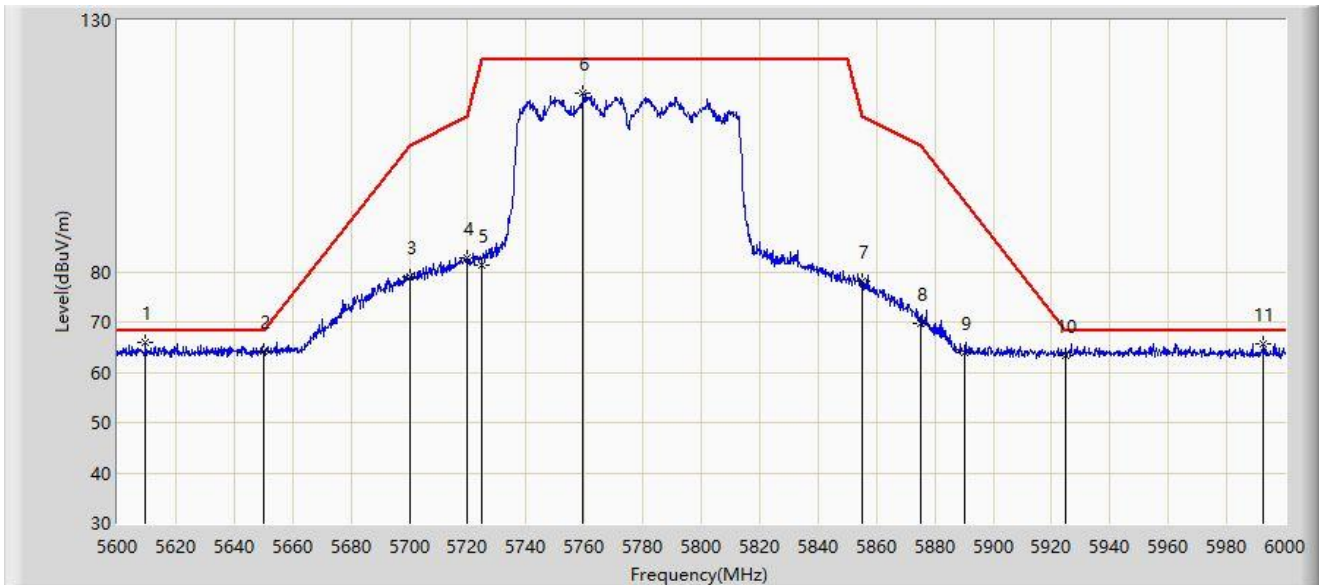


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5609.600	65.811	73.033	-2.389	68.200	-7.222	PK
2		5650.000	64.259	71.579	-3.941	68.200	-7.319	PK
3		5700.000	79.090	86.264	-26.110	105.200	-7.174	PK
4		5720.000	82.725	90.197	-28.075	110.800	-7.472	PK
5		5725.000	81.399	88.860	-40.801	122.200	-7.461	PK
6		5759.600	115.491	122.875	N/A	N/A	-7.383	PK
7		5855.000	77.982	85.200	-32.818	110.800	-7.217	PK
8		5875.000	69.851	77.203	-35.349	105.200	-7.352	PK
9		5890.000	63.831	71.046	-30.269	94.100	-7.214	PK
10		5925.000	63.237	70.363	-4.963	68.200	-7.126	PK
11		5992.600	65.656	72.628	-2.544	68.200	-6.973	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

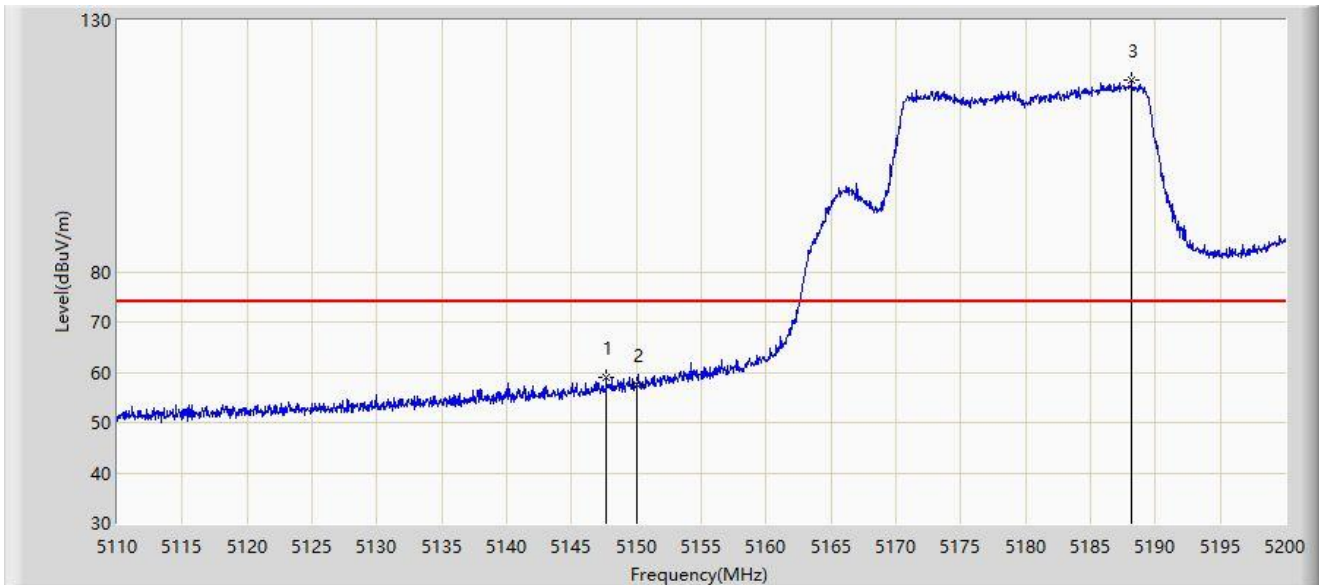


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.665	58.857	62.588	-15.143	74.000	-3.731	PK
2		5150.000	57.668	60.914	-16.332	74.000	-3.246	PK
3		5188.165	118.203	81.850	N/A	N/A	36.353	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-21
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

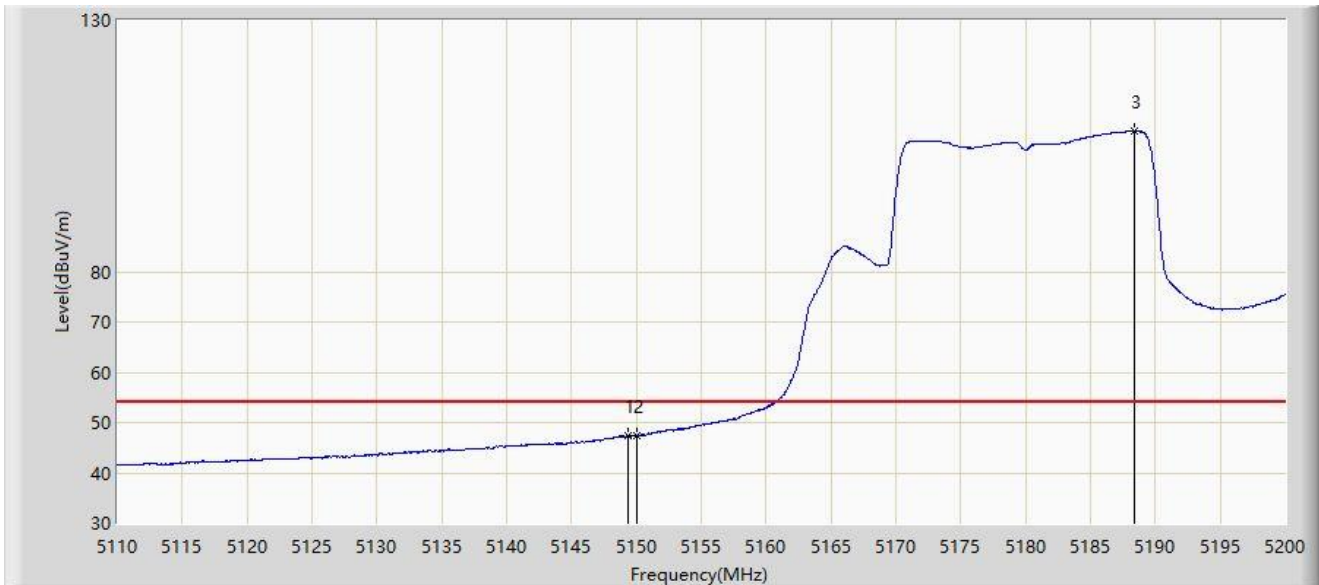


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.330	47.401	50.801	-6.599	54.000	-3.400	AV
2		5150.000	47.307	50.553	-6.693	54.000	-3.246	AV
3		5188.345	107.969	71.378	N/A	N/A	36.590	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

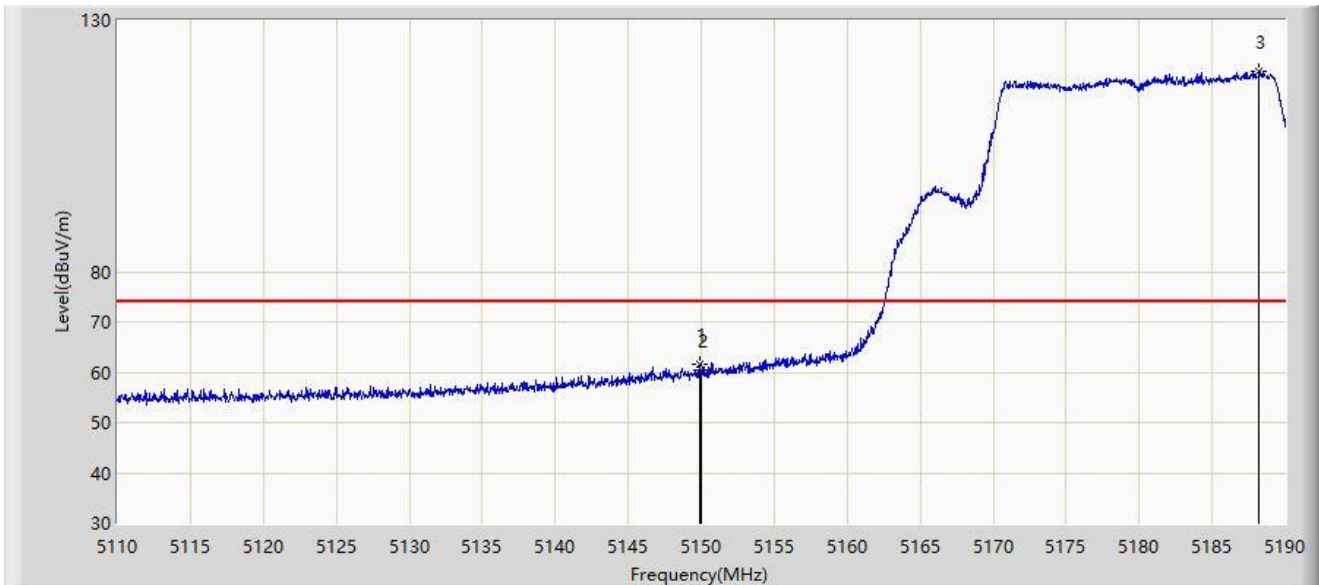


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.880	61.560	64.846	-12.440	74.000	-3.286	PK
2		5150.000	60.458	63.704	-13.542	74.000	-3.246	PK
3		5188.240	119.983	83.531	N/A	N/A	36.452	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

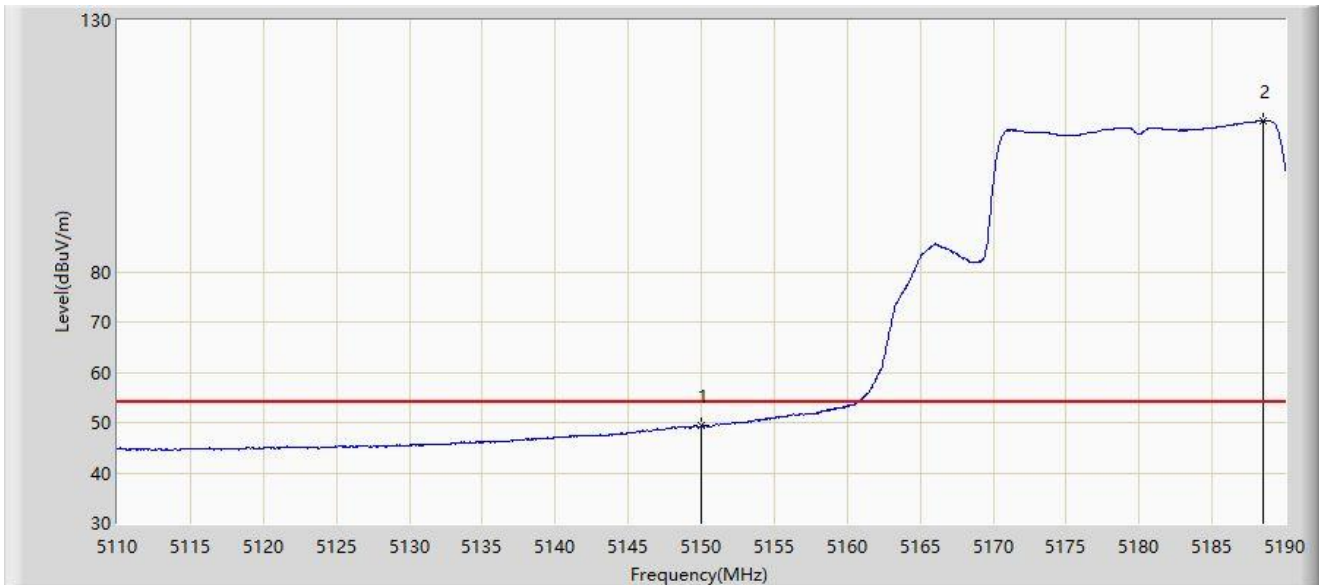


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	49.298	52.544	-4.702	54.000	-3.246	AV
2		5188.520	109.972	73.146	N/A	N/A	36.827	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

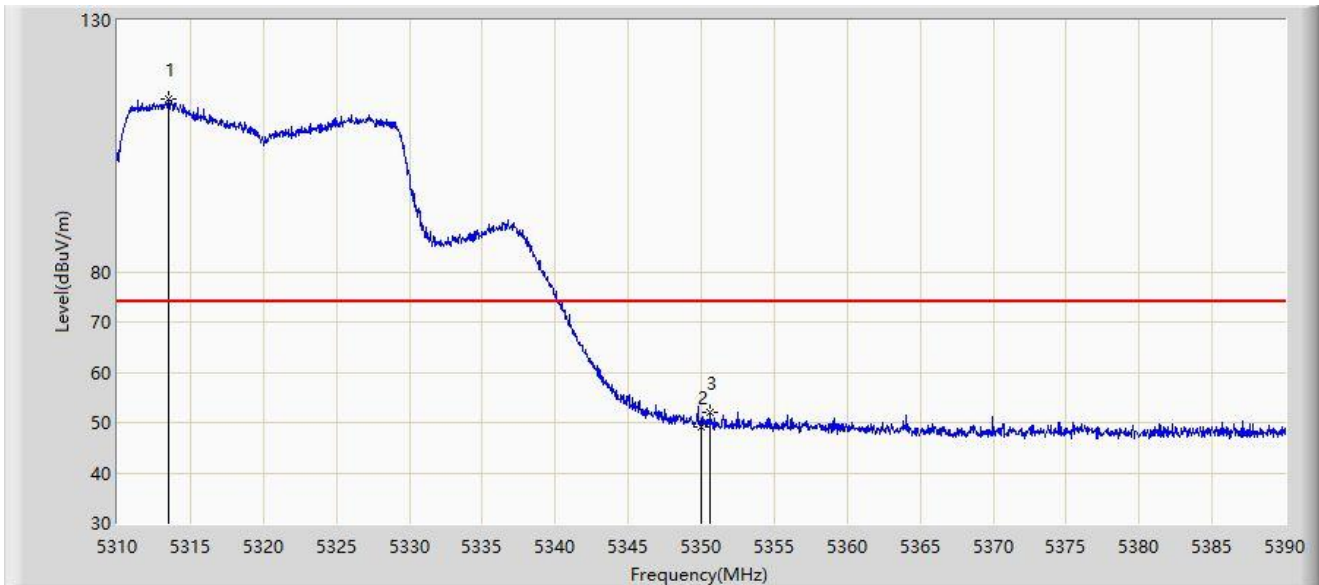


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.480	114.359	67.630	N/A	N/A	46.728	PK
2		5350.000	49.211	50.615	-24.789	74.000	-1.404	PK
3	*	5350.640	51.969	53.708	-22.031	74.000	-1.740	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

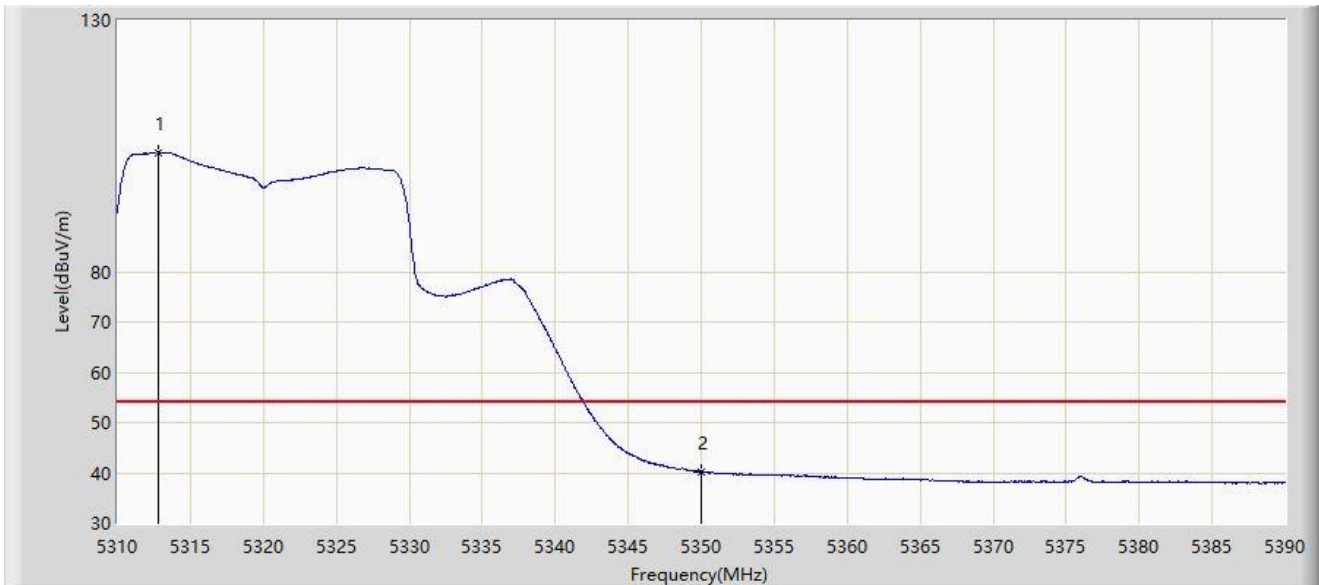


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.800	103.761	57.393	N/A	N/A	46.368	AV
2	*	5350.000	40.223	41.627	-13.777	54.000	-1.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

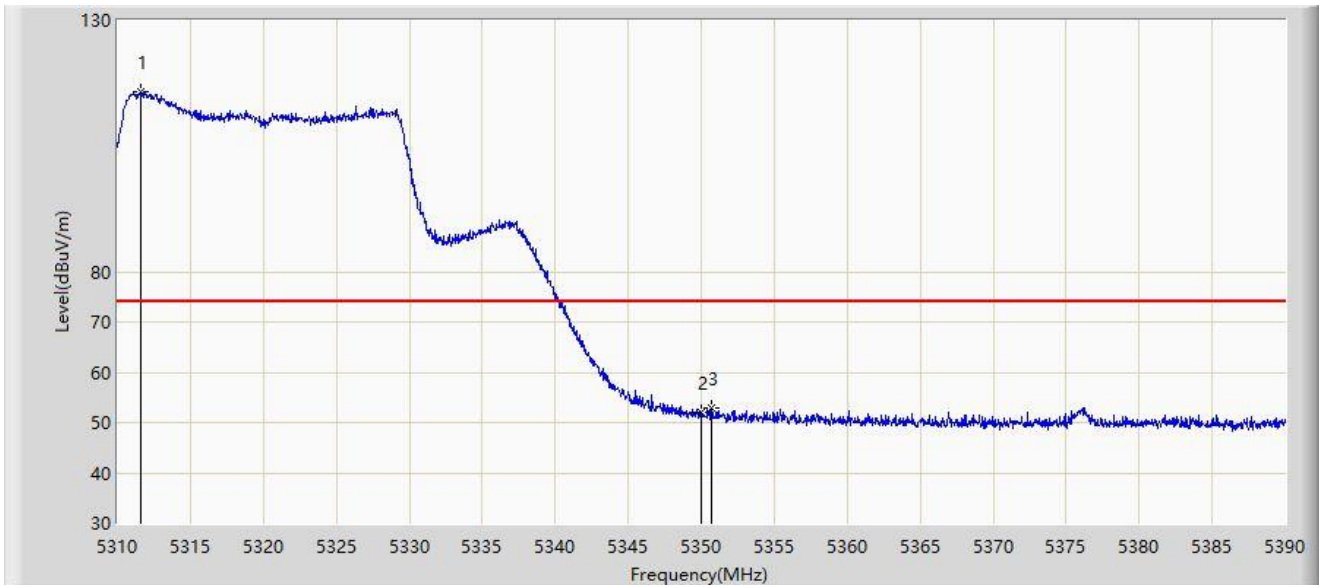


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.560	115.872	71.368	N/A	N/A	44.504	PK
2		5350.000	51.941	53.345	-22.059	74.000	-1.404	PK
3	*	5350.680	52.807	54.566	-21.193	74.000	-1.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

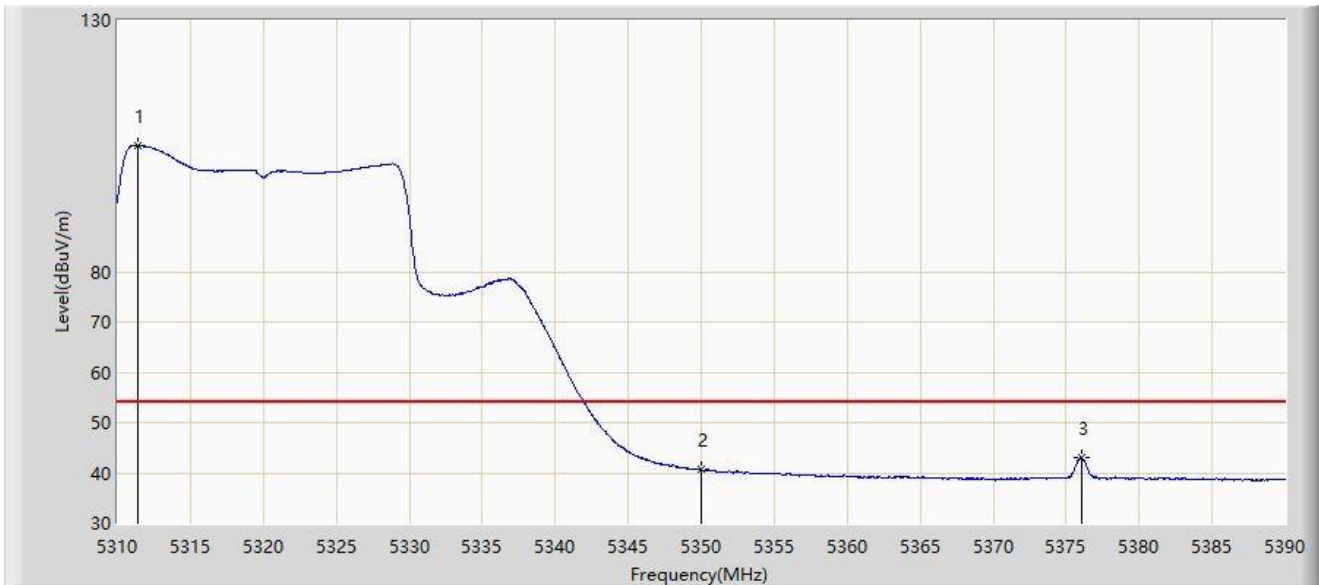


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.440	105.149	60.822	N/A	N/A	44.327	AV
2		5350.000	40.676	42.080	-13.324	54.000	-1.404	AV
3	*	5376.040	42.983	47.949	-11.017	54.000	-4.966	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

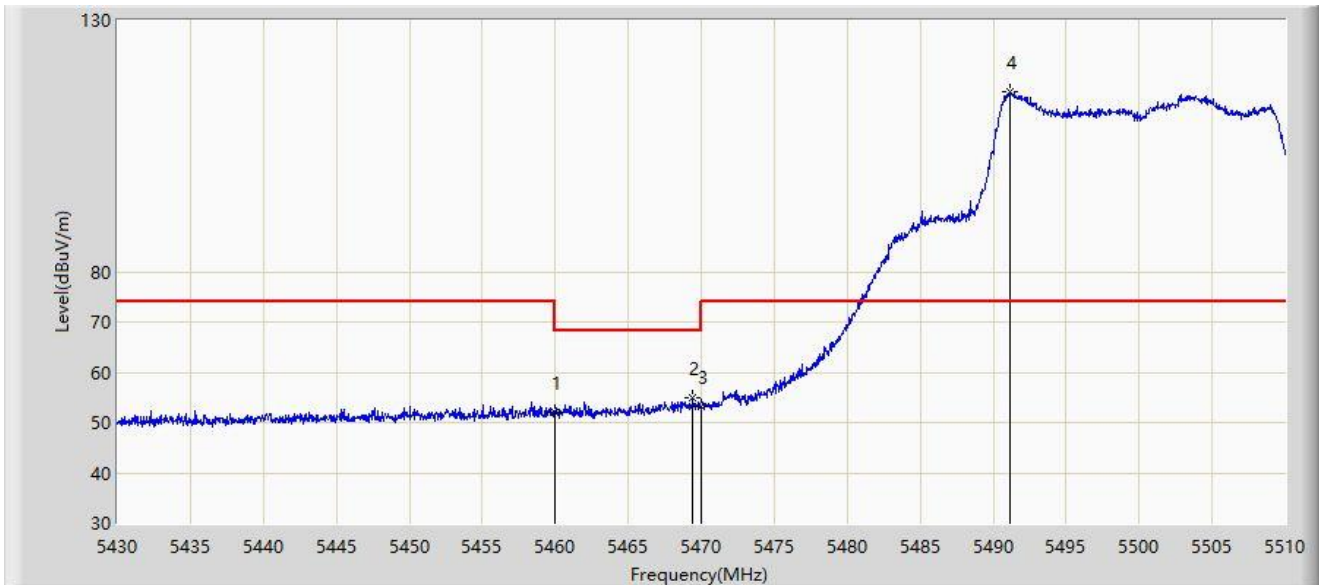


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	51.997	55.340	-16.203	68.200	-3.343	PK
2	*	5469.400	54.831	56.620	-13.369	68.200	-1.789	PK
3		5470.000	53.306	54.916	-14.894	68.200	-1.610	PK
4		5491.120	115.934	71.127	N/A	N/A	44.807	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

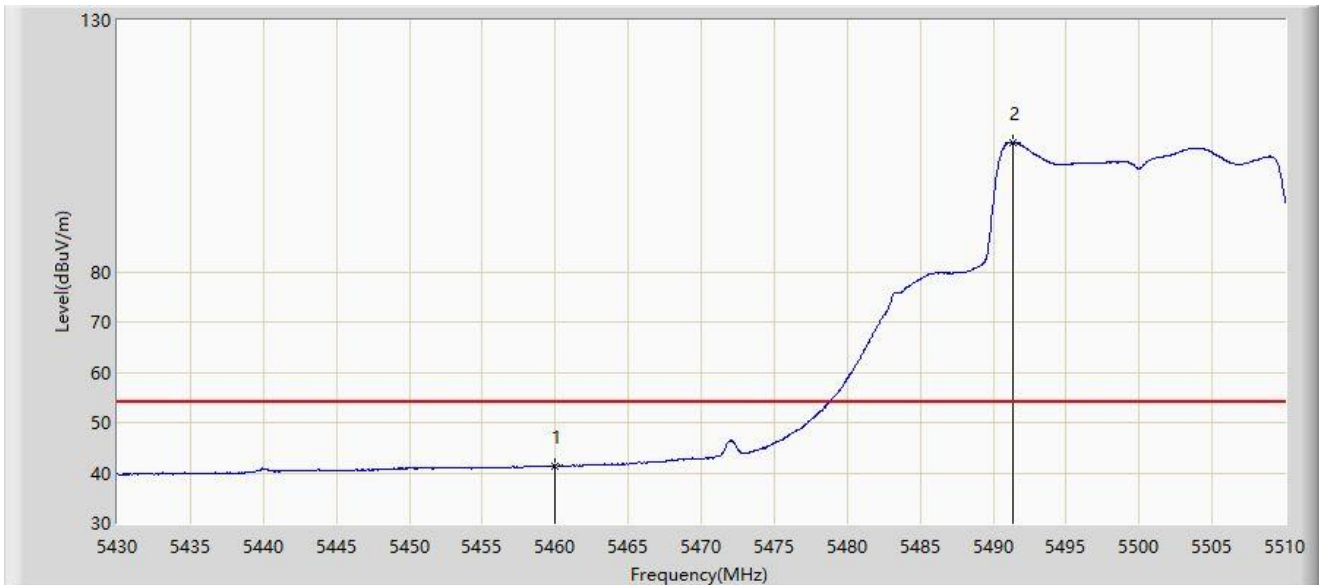


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	41.410	44.753	-12.590	54.000	-3.343	AV
2		5491.400	105.729	60.683	N/A	N/A	45.047	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

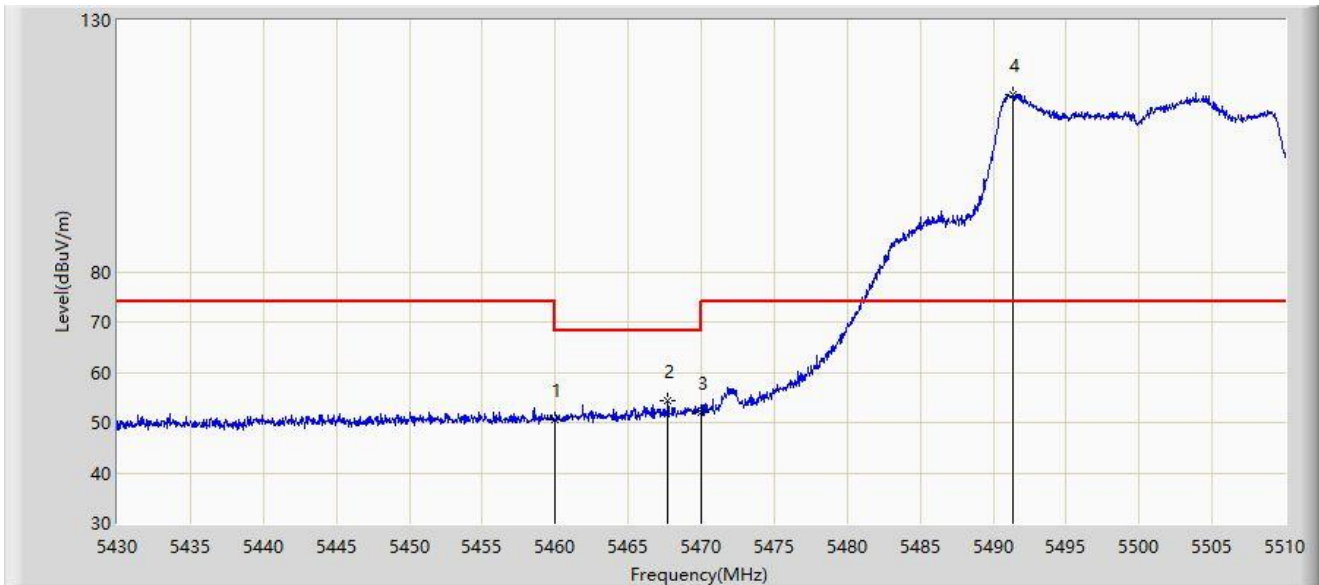


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	50.480	53.823	-17.720	68.200	-3.343	PK
2	*	5467.720	54.248	56.594	-13.952	68.200	-2.346	PK
3		5470.000	52.059	53.669	-16.141	68.200	-1.610	PK
4		5491.360	115.202	70.183	N/A	N/A	45.020	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

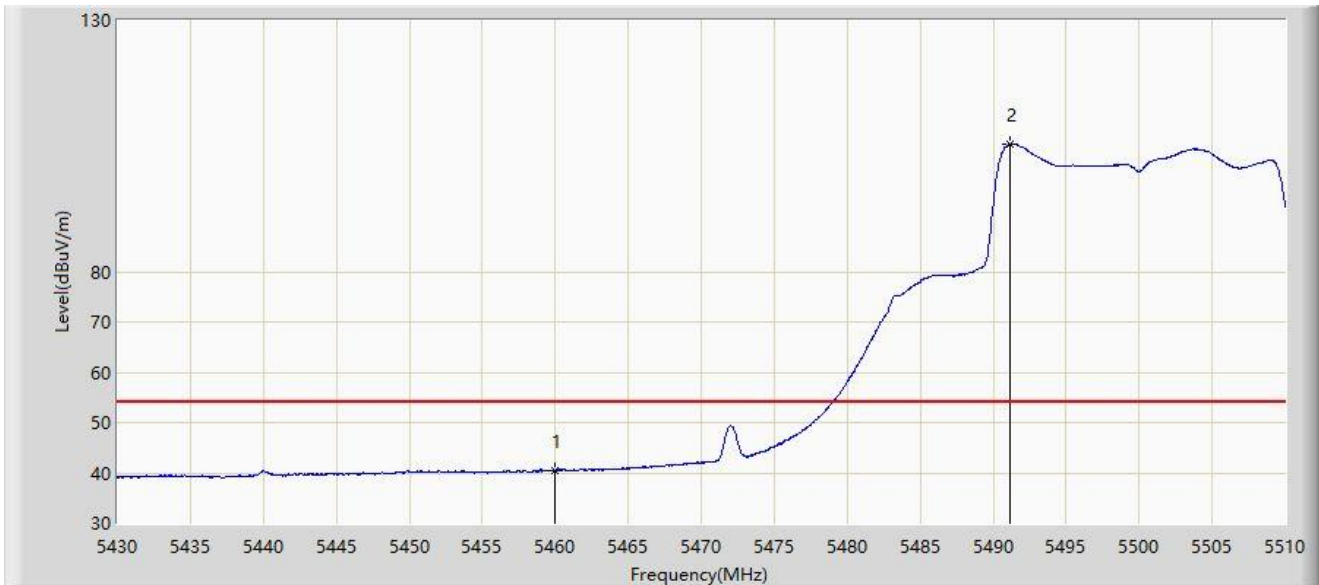


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	40.414	43.757	-13.586	54.000	-3.343	AV
2		5491.160	105.445	60.585	N/A	N/A	44.859	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

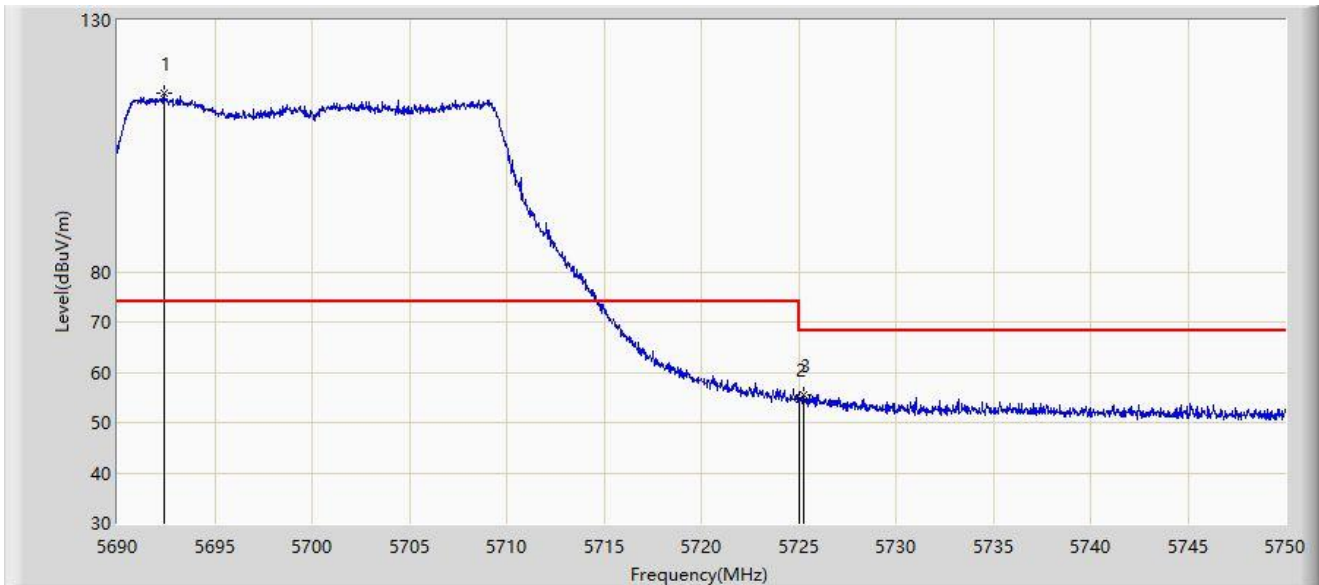


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5692.400	115.460	74.654	N/A	N/A	40.806	PK
2		5725.000	54.587	56.422	-13.613	68.200	-1.836	PK
3	*	5725.250	55.610	57.587	-12.590	68.200	-1.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

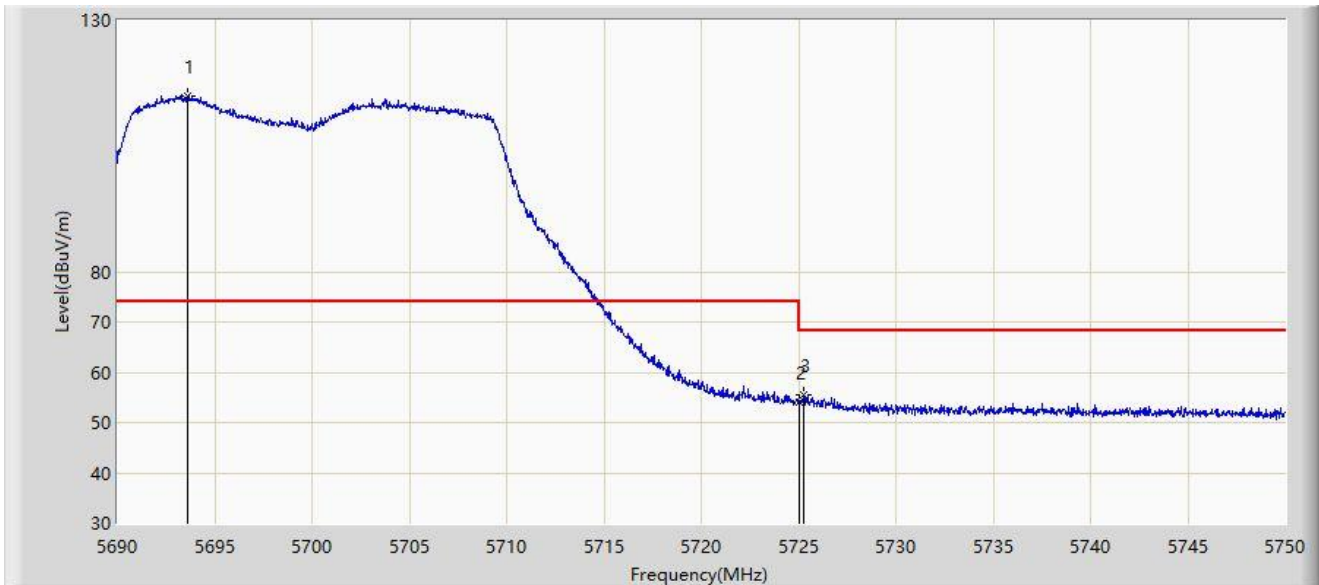


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5693.630	114.976	73.648	N/A	N/A	41.328	PK
2		5725.000	54.115	55.950	-14.085	68.200	-1.836	PK
3	*	5725.280	55.476	57.470	-12.724	68.200	-1.993	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

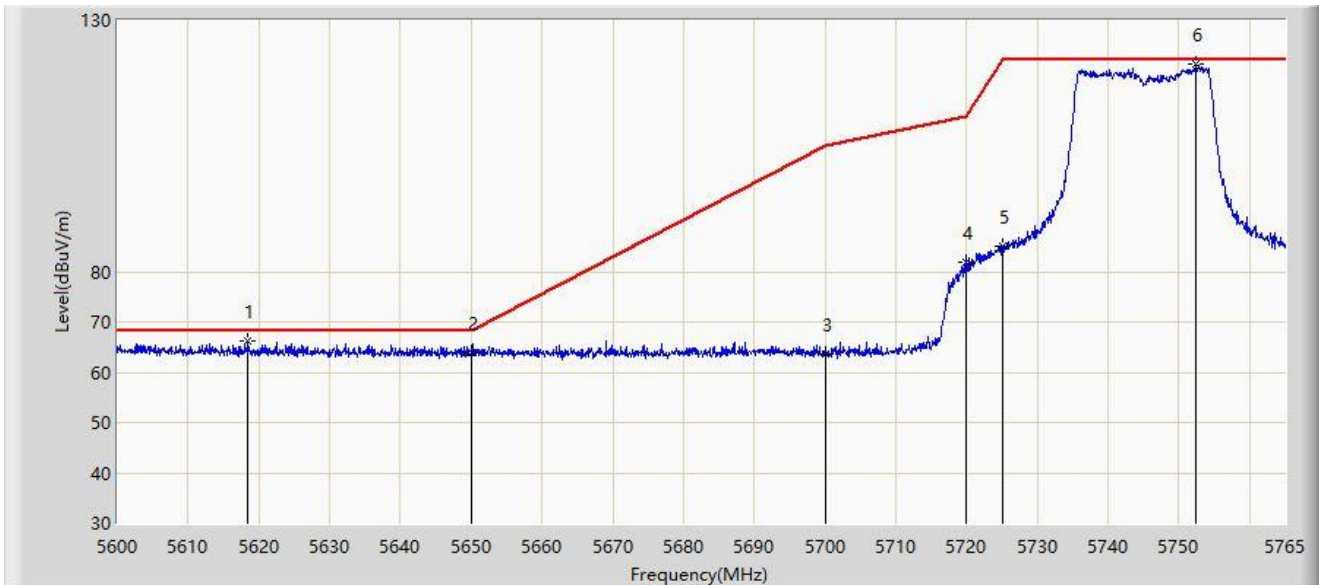


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5618.397	66.207	73.462	-1.993	68.200	-7.255	PK
2		5650.000	63.915	71.235	-4.285	68.200	-7.319	PK
3		5700.000	63.699	70.873	-41.501	105.200	-7.174	PK
4		5720.000	81.826	89.298	-28.974	110.800	-7.472	PK
5		5725.000	84.980	92.441	-37.220	122.200	-7.461	PK
6		5752.377	121.336	128.786	N/A	N/A	-7.449	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

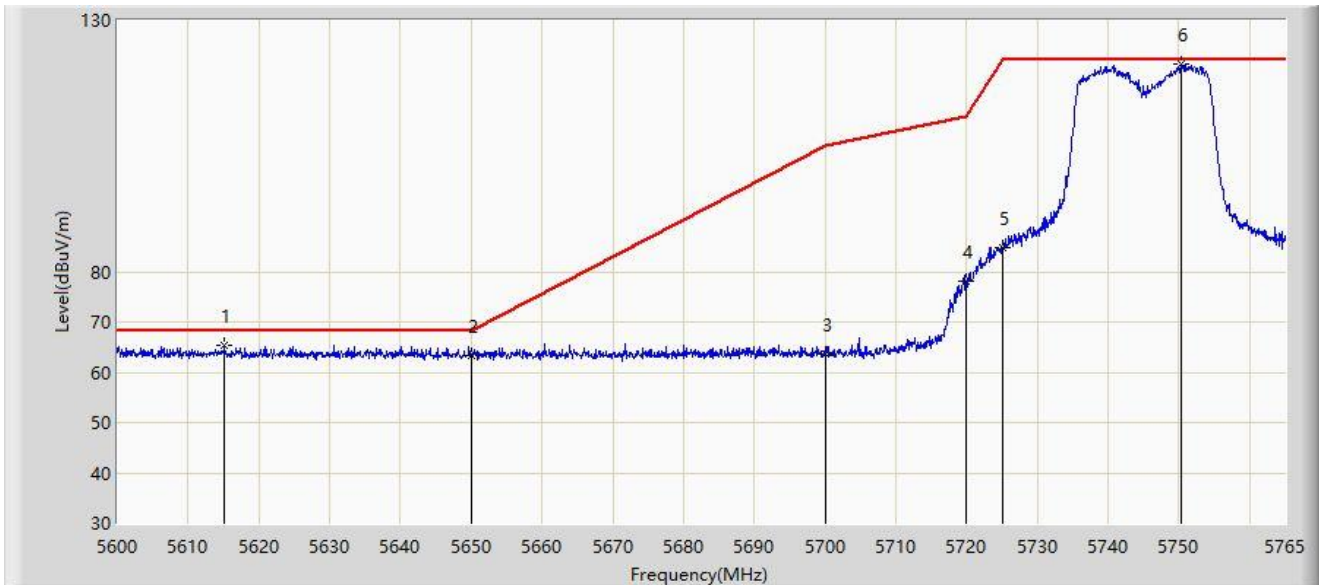


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5615.180	65.336	72.579	-2.864	68.200	-7.243	PK
2		5650.000	63.269	70.589	-4.931	68.200	-7.319	PK
3		5700.000	63.509	70.683	-41.691	105.200	-7.174	PK
4		5720.000	78.077	85.549	-32.723	110.800	-7.472	PK
5		5725.000	84.894	92.355	-37.306	122.200	-7.461	PK
6		5750.315	121.219	128.688	N/A	N/A	-7.469	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

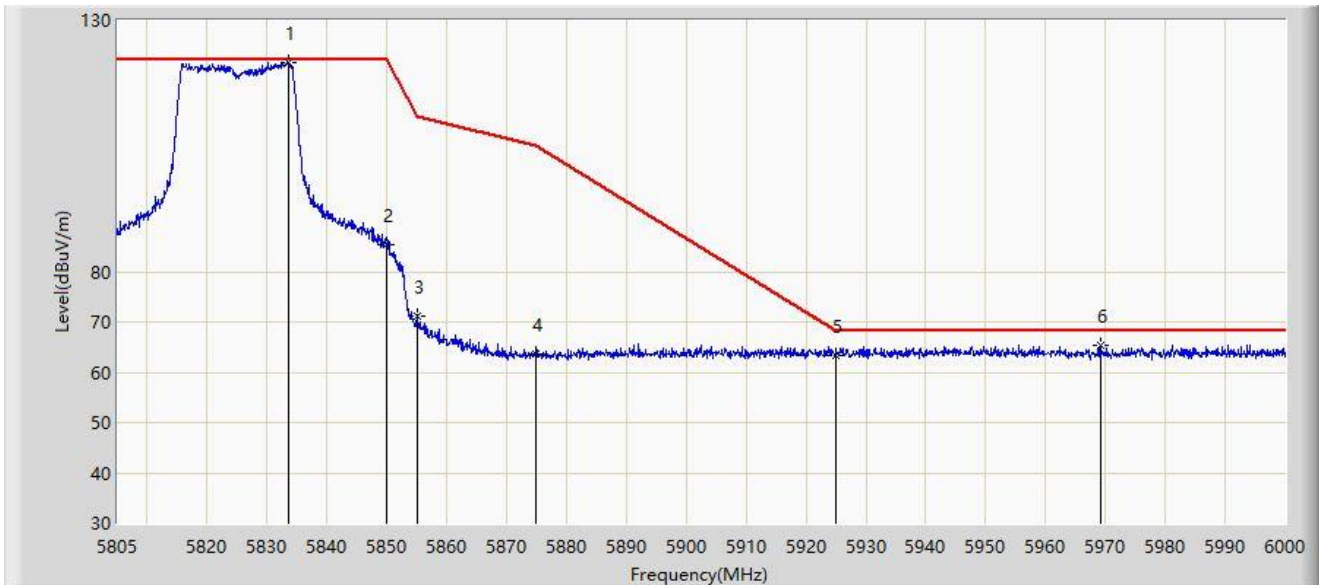


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5833.665	121.518	128.782	N/A	N/A	-7.264	PK
2		5850.000	85.224	92.461	-36.976	122.200	-7.237	PK
3		5855.000	71.077	78.295	-39.723	110.800	-7.217	PK
4		5875.000	63.576	70.928	-41.624	105.200	-7.352	PK
5		5925.000	63.272	70.398	-4.928	68.200	-7.126	PK
6	*	5969.092	65.367	72.344	-2.833	68.200	-6.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

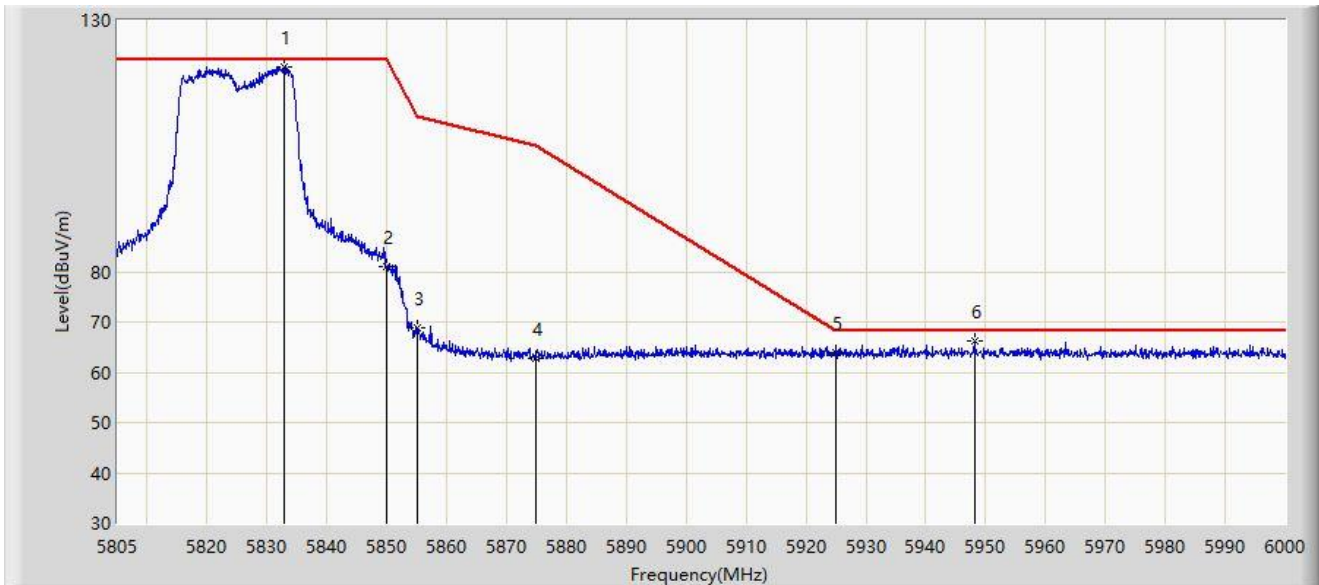


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5832.788	120.616	127.881	N/A	N/A	-7.265	PK
2		5850.000	80.902	88.139	-41.298	122.200	-7.237	PK
3		5855.000	68.699	75.917	-42.101	110.800	-7.217	PK
4		5875.000	62.752	70.104	-42.448	105.200	-7.352	PK
5		5925.000	64.054	71.180	-4.146	68.200	-7.126	PK
6	*	5948.130	66.206	73.177	-1.994	68.200	-6.970	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

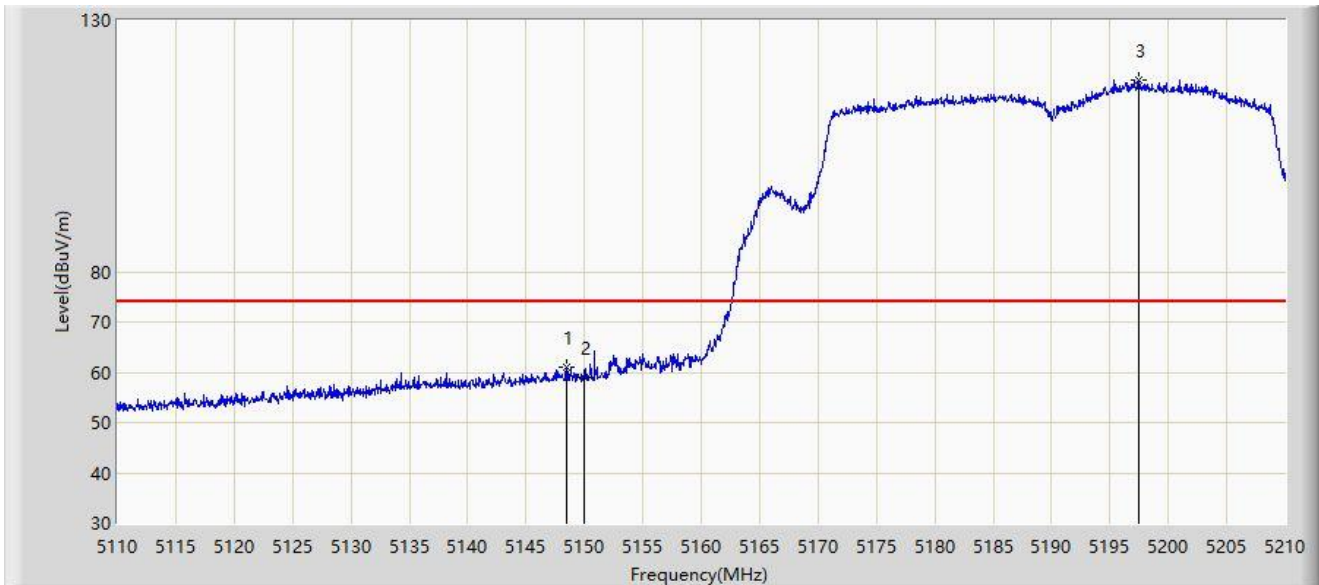


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.500	61.130	64.689	-12.870	74.000	-3.559	PK
2		5150.000	58.942	62.188	-15.058	74.000	-3.246	PK
3		5197.500	118.049	82.377	N/A	N/A	35.673	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

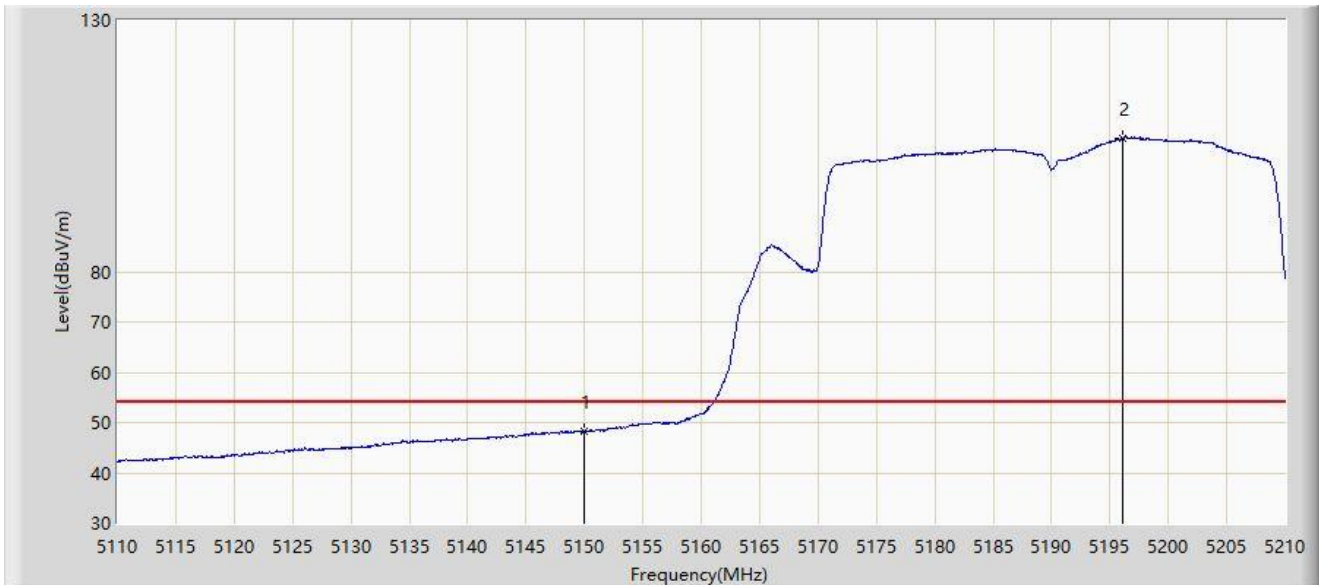


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	48.144	51.390	-5.856	54.000	-3.246	AV
2		5196.100	106.587	71.341	N/A	N/A	35.245	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

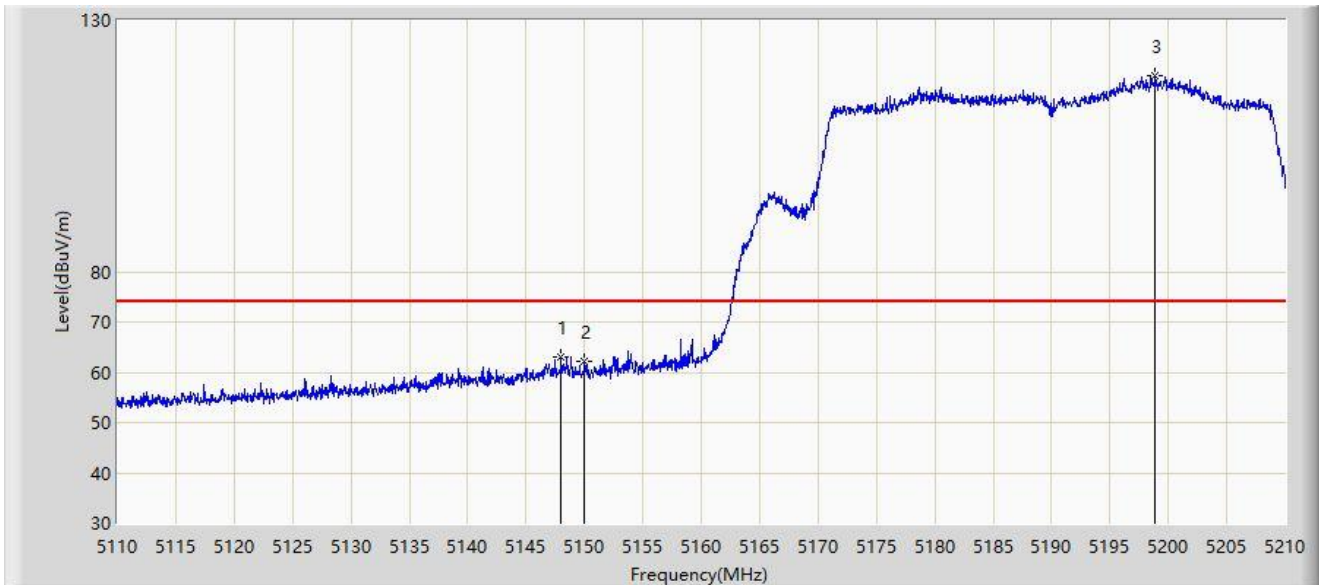


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.000	63.188	66.846	-10.812	74.000	-3.658	PK
2		5150.000	62.127	65.373	-11.873	74.000	-3.246	PK
3		5198.900	118.946	82.190	N/A	N/A	36.756	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

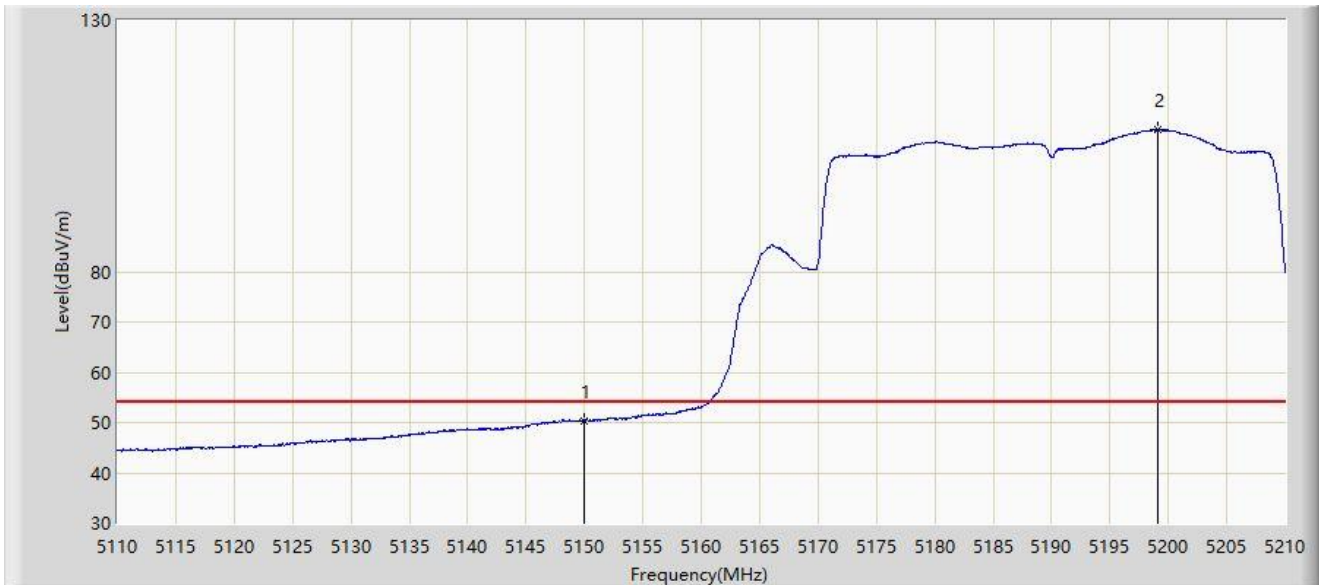


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.295	53.541	-3.705	54.000	-3.246	AV
2		5199.050	108.121	71.225	N/A	N/A	36.896	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

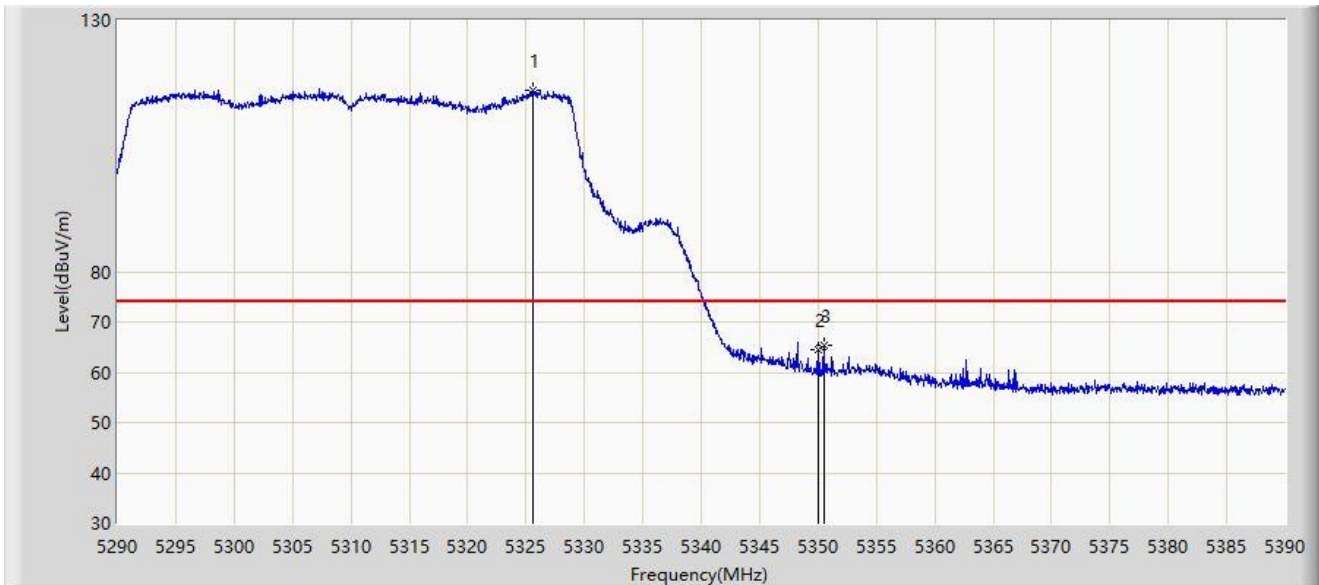


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.550	116.129	77.440	N/A	N/A	38.690	PK
2		5350.000	64.439	65.843	-9.561	74.000	-1.404	PK
3	*	5350.500	65.426	67.097	-8.574	74.000	-1.671	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

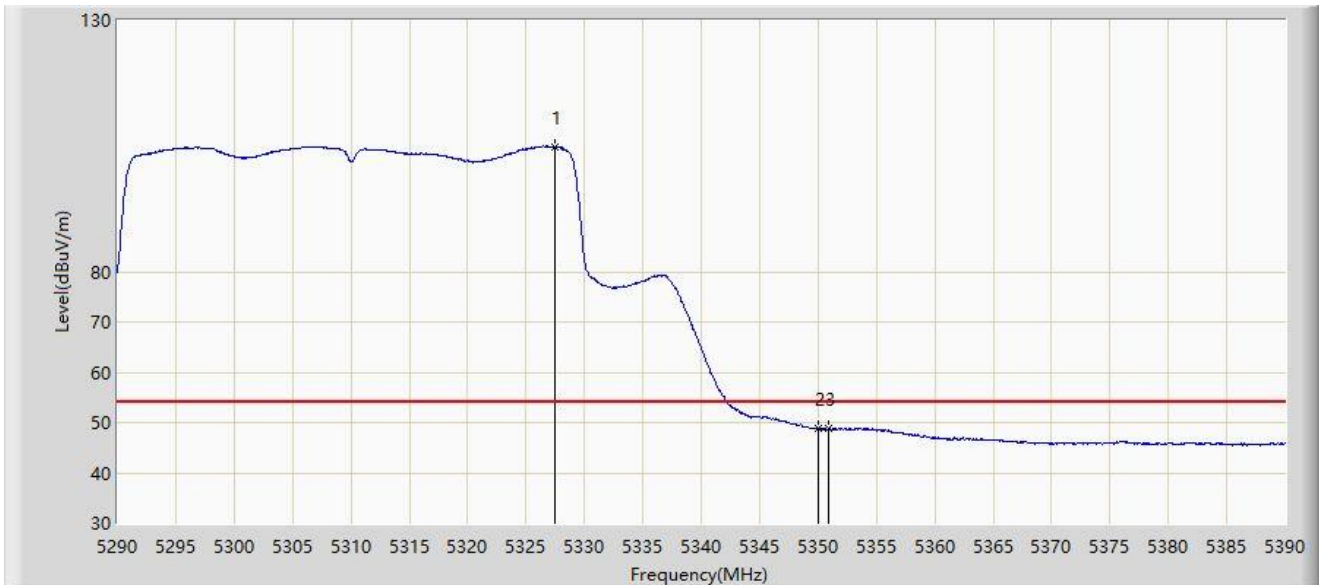


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.450	104.832	65.405	N/A	N/A	39.426	AV
2		5350.000	48.754	50.158	-5.246	54.000	-1.404	AV
3	*	5350.900	48.881	50.747	-5.119	54.000	-1.866	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

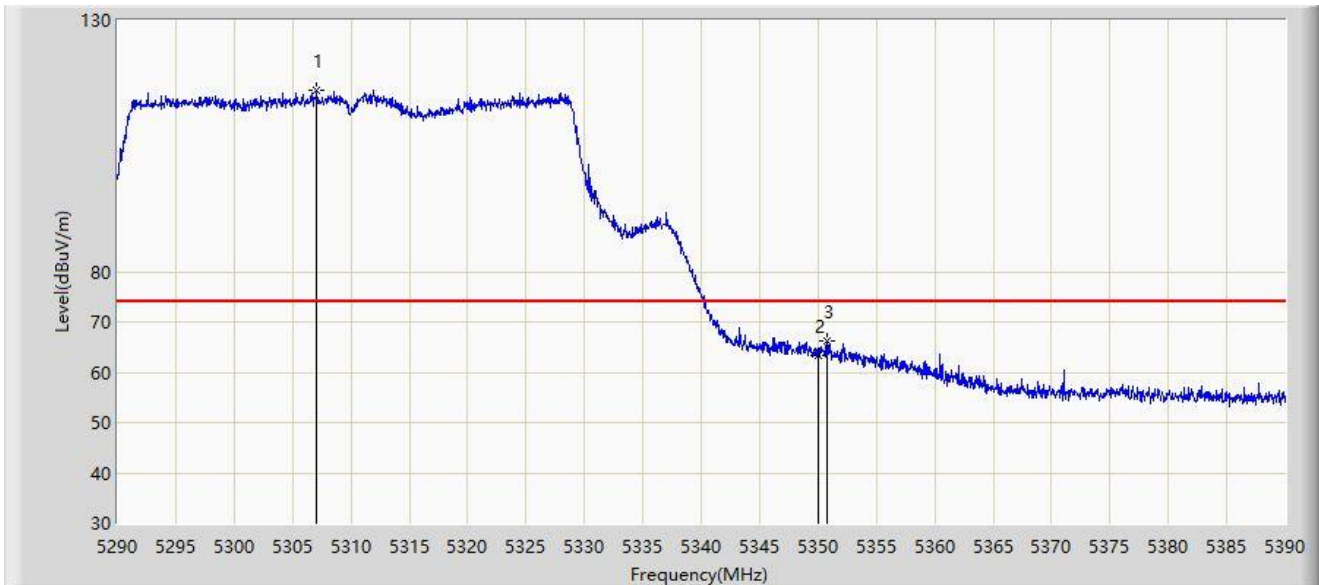


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.050	116.198	77.036	N/A	N/A	39.162	PK
2		5350.000	63.274	64.678	-10.726	74.000	-1.404	PK
3	*	5350.750	66.104	67.897	-7.896	74.000	-1.793	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

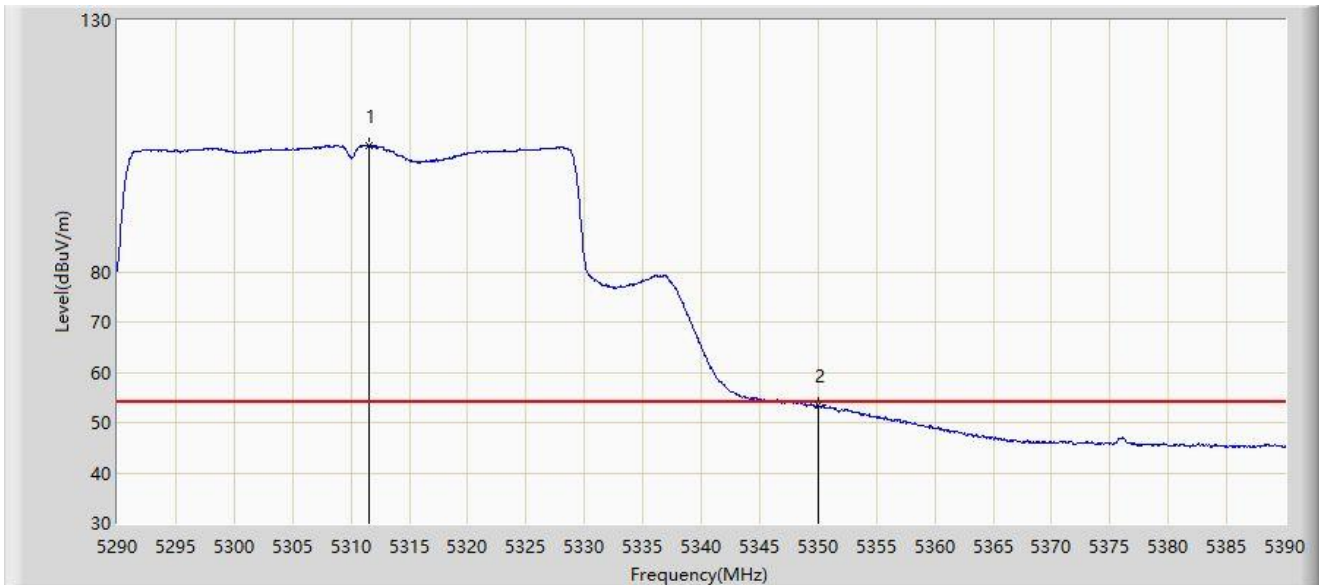


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.550	105.122	60.633	N/A	N/A	44.489	AV
2	*	5350.000	53.380	54.784	-0.620	54.000	-1.404	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

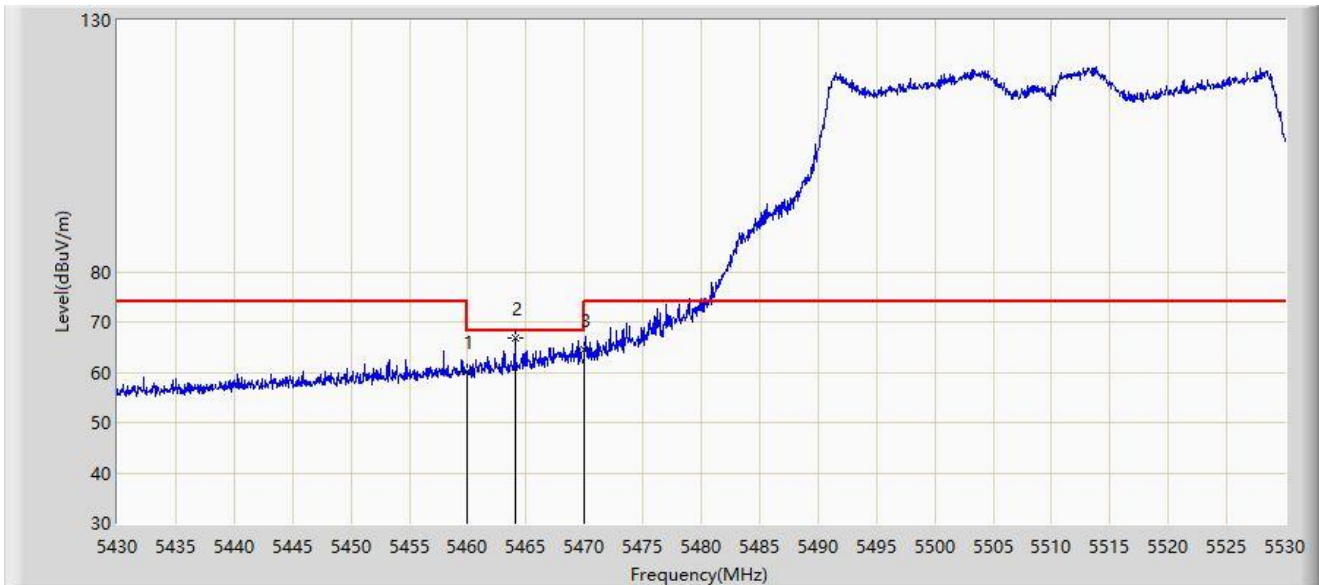


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	60.243	63.586	-7.957	68.200	-3.343	PK
2		5464.050	66.810	69.828	N/A	N/A	-3.018	PK
3	*	5470.000	64.518	66.128	-3.682	68.200	-1.610	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

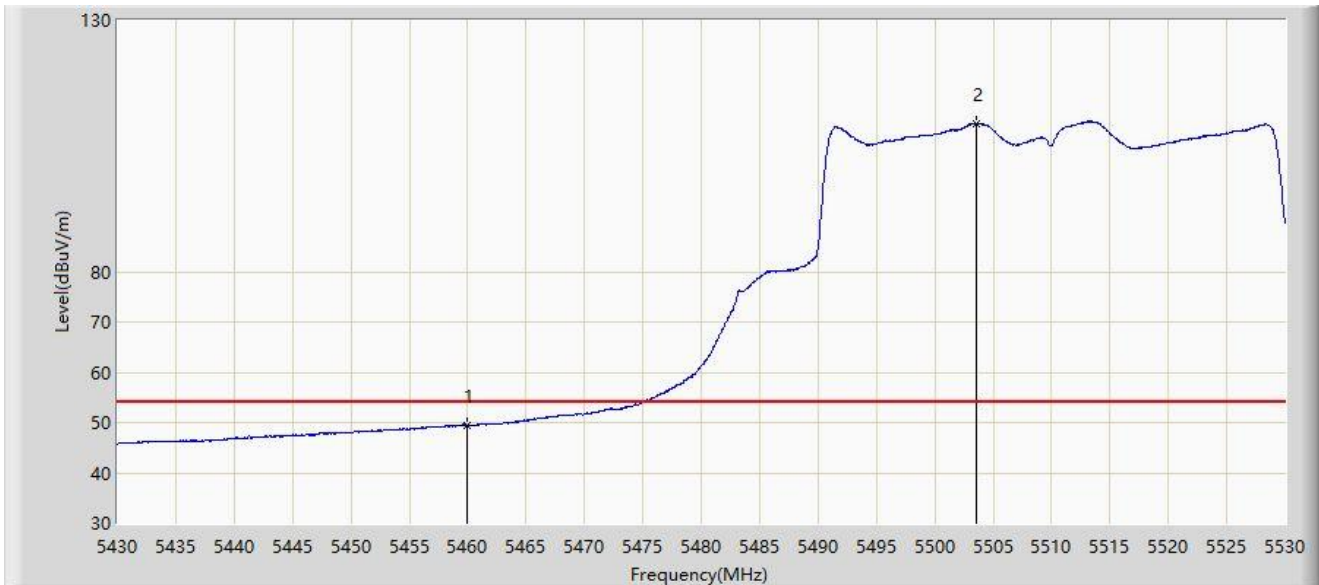


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	49.493	52.836	-4.507	54.000	-3.343	AV
2		5503.500	109.392	66.362	N/A	N/A	43.030	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

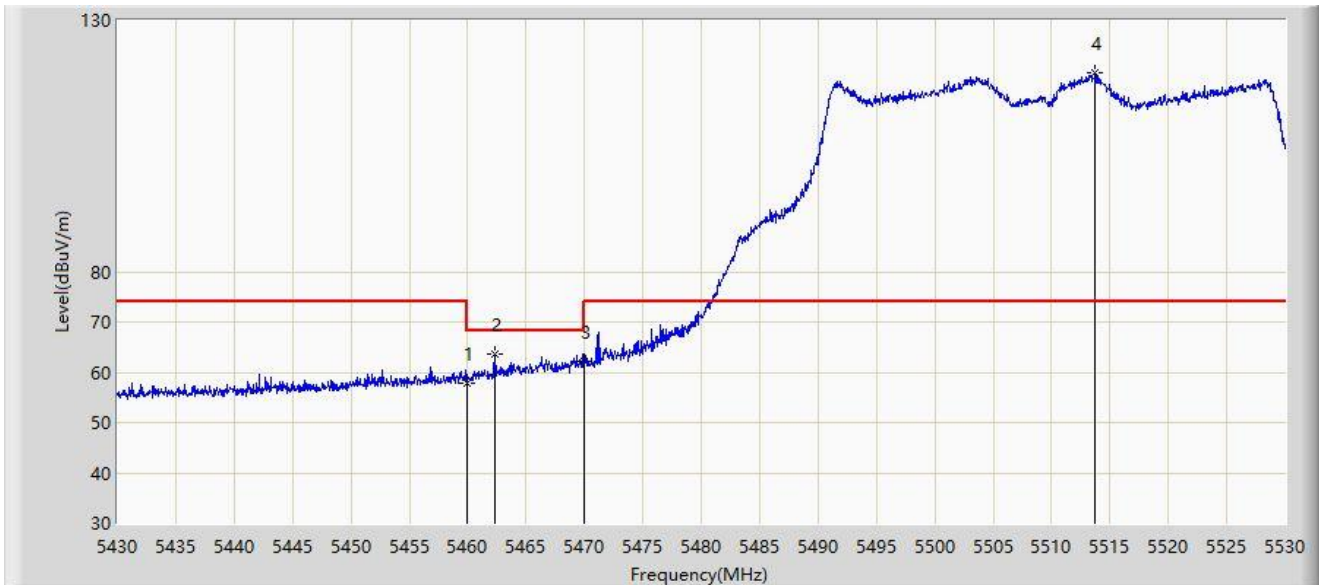


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	57.758	61.101	-10.442	68.200	-3.343	PK
2	*	5462.350	63.654	66.860	-4.546	68.200	-3.206	PK
3		5470.000	62.171	63.781	-6.029	68.200	-1.610	PK
4		5513.700	119.428	77.185	N/A	N/A	42.243	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

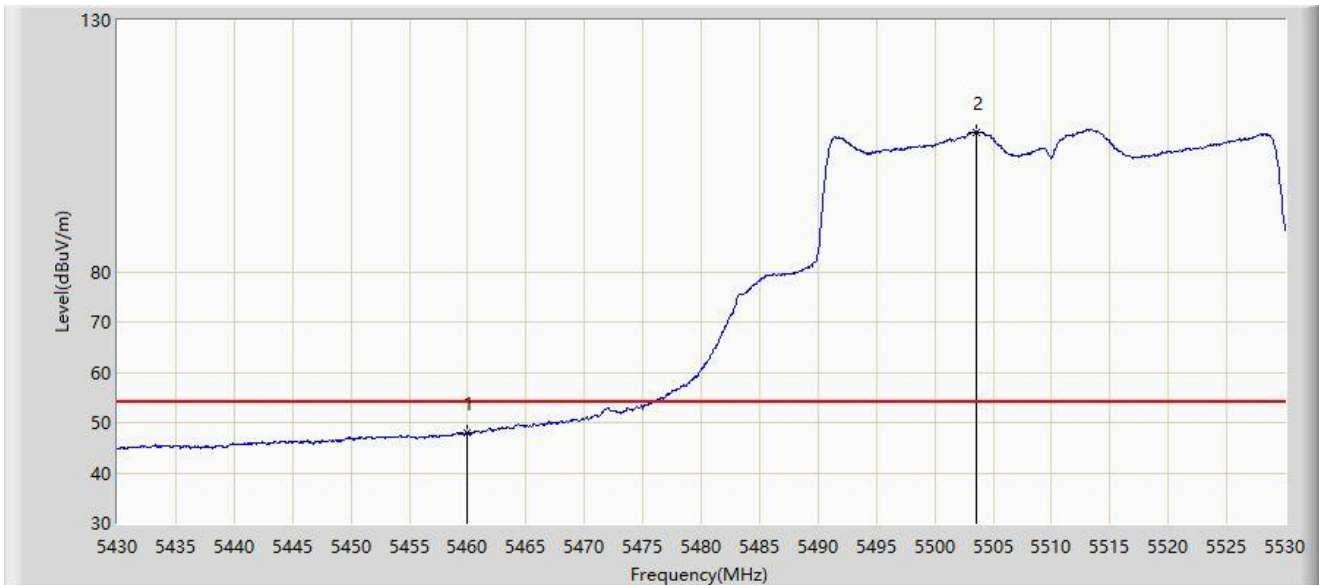


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	48.052	51.395	-5.948	54.000	-3.343	AV
2		5503.550	107.826	64.714	N/A	N/A	43.112	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

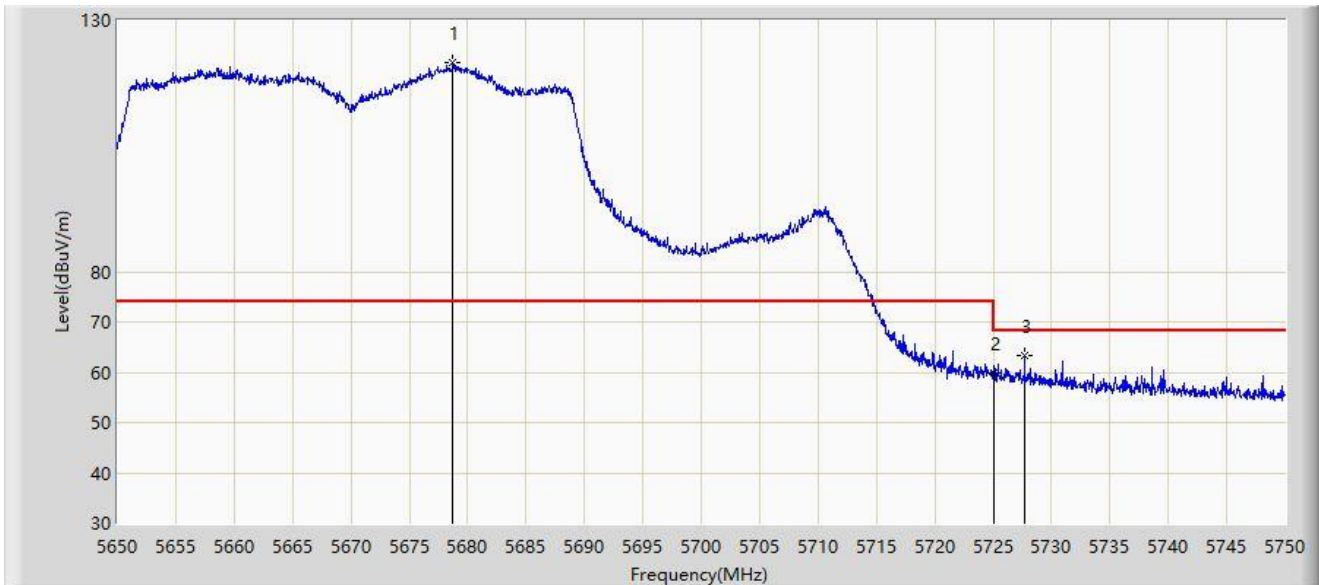


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5678.700	121.512	80.338	N/A	N/A	41.174	PK
2		5725.000	59.967	61.802	-8.233	68.200	-1.836	PK
3	*	5727.700	63.244	66.257	-4.956	68.200	-3.012	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

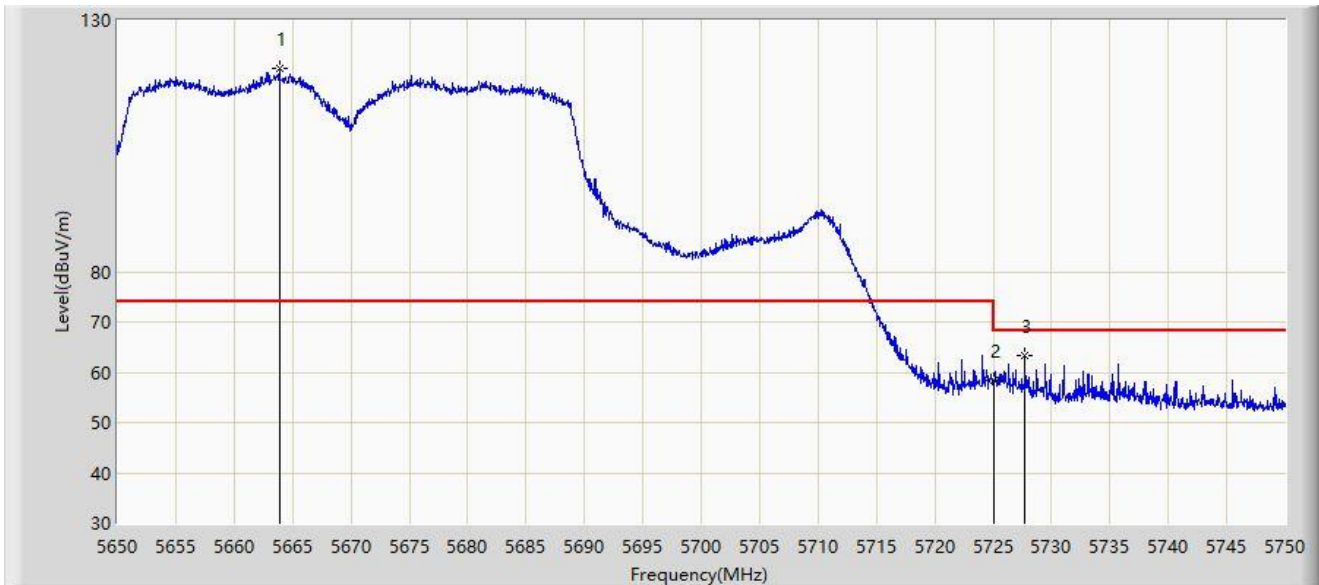


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5663.850	120.379	80.282	N/A	N/A	40.098	PK
2		5725.000	58.289	60.124	-9.911	68.200	-1.836	PK
3	*	5727.700	63.244	66.257	-4.956	68.200	-3.012	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

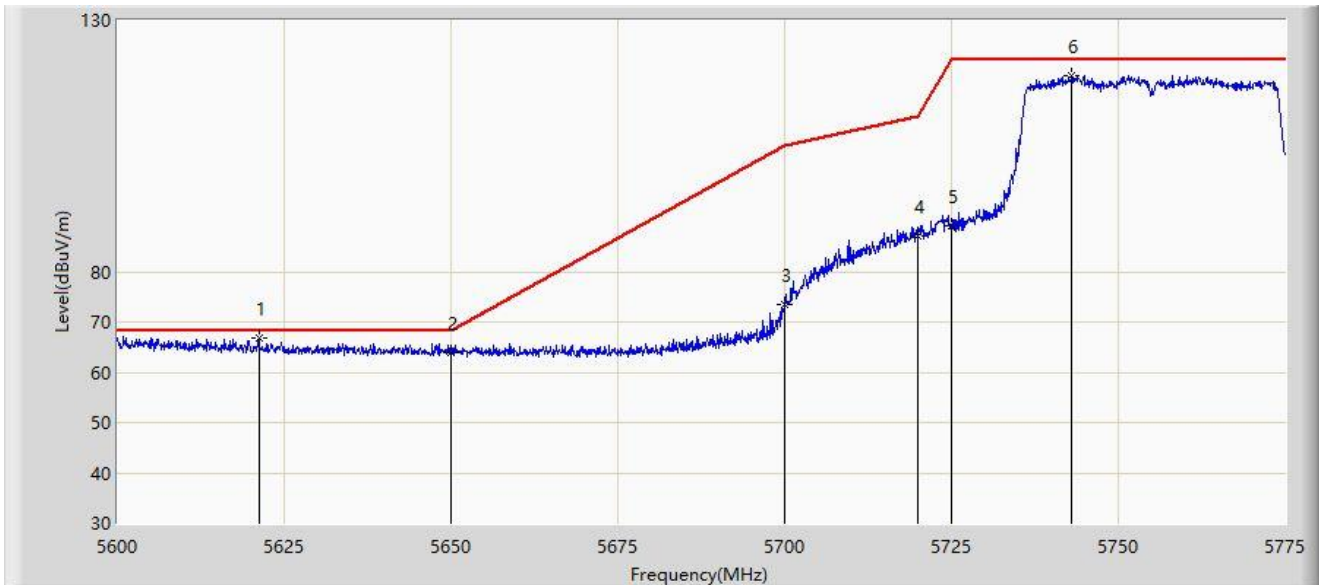


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.263	66.748	74.013	-1.452	68.200	-7.266	PK
2		5650.000	63.999	71.319	-4.201	68.200	-7.319	PK
3		5700.000	73.513	80.687	-31.687	105.200	-7.174	PK
4		5720.000	87.101	94.573	-23.699	110.800	-7.472	PK
5		5725.000	89.000	96.461	-33.200	122.200	-7.461	PK
6		5743.062	119.083	126.618	N/A	N/A	-7.536	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

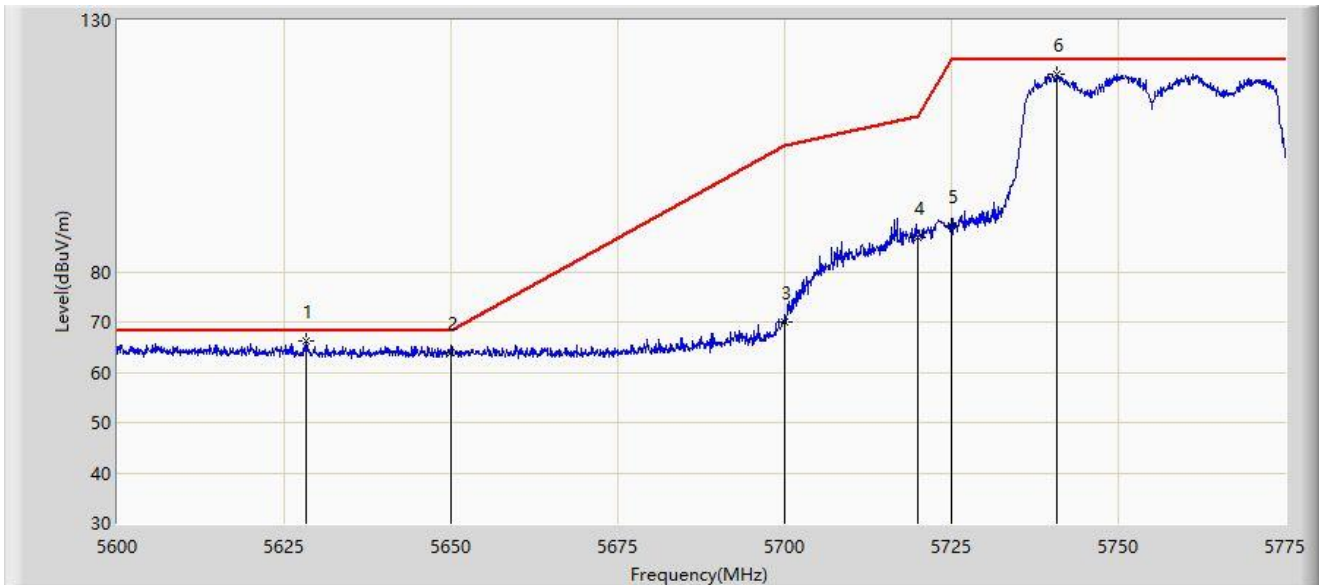


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5628.263	66.284	73.572	-1.916	68.200	-7.289	PK
2		5650.000	63.934	71.254	-4.266	68.200	-7.319	PK
3		5700.000	70.117	77.291	-35.083	105.200	-7.174	PK
4		5720.000	86.697	94.169	-24.103	110.800	-7.472	PK
5		5725.000	89.177	96.638	-33.023	122.200	-7.461	PK
6		5740.700	119.244	126.770	N/A	N/A	-7.525	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

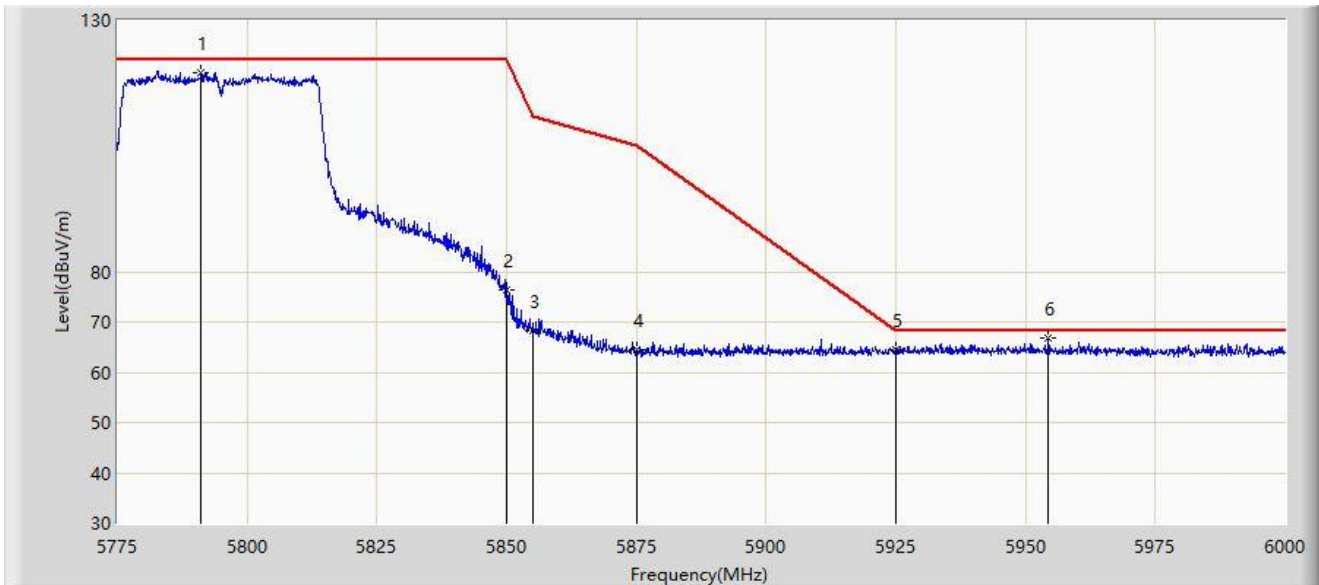


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5791.087	119.631	127.056	N/A	N/A	-7.425	PK
2		5850.000	76.343	83.580	-45.857	122.200	-7.237	PK
3		5855.000	68.284	75.502	-42.516	110.800	-7.217	PK
4		5875.000	64.430	71.782	-40.770	105.200	-7.352	PK
5		5925.000	64.631	71.757	-3.569	68.200	-7.126	PK
6	*	5954.437	66.831	73.801	-1.369	68.200	-6.971	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

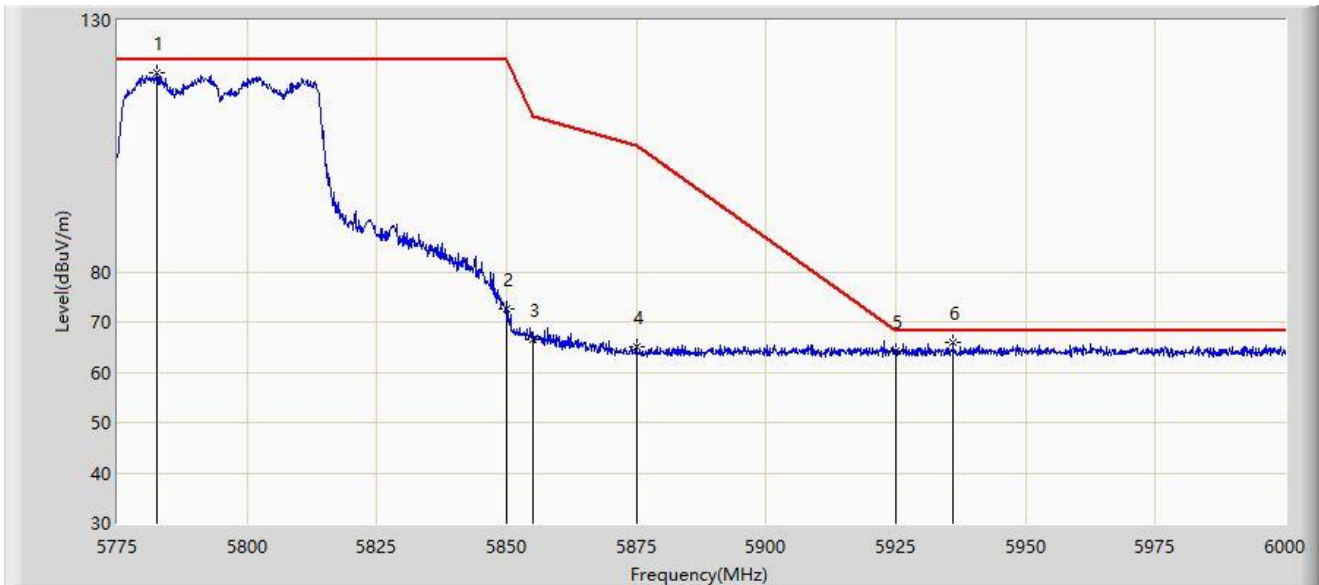


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5782.650	119.706	127.105	N/A	N/A	-7.399	PK
2		5850.000	72.647	79.884	-49.553	122.200	-7.237	PK
3		5855.000	66.665	73.883	-44.135	110.800	-7.217	PK
4		5875.000	65.115	72.467	-40.085	105.200	-7.352	PK
5		5925.000	64.288	71.414	-3.912	68.200	-7.126	PK
6	*	5935.987	65.876	72.931	-2.324	68.200	-7.055	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

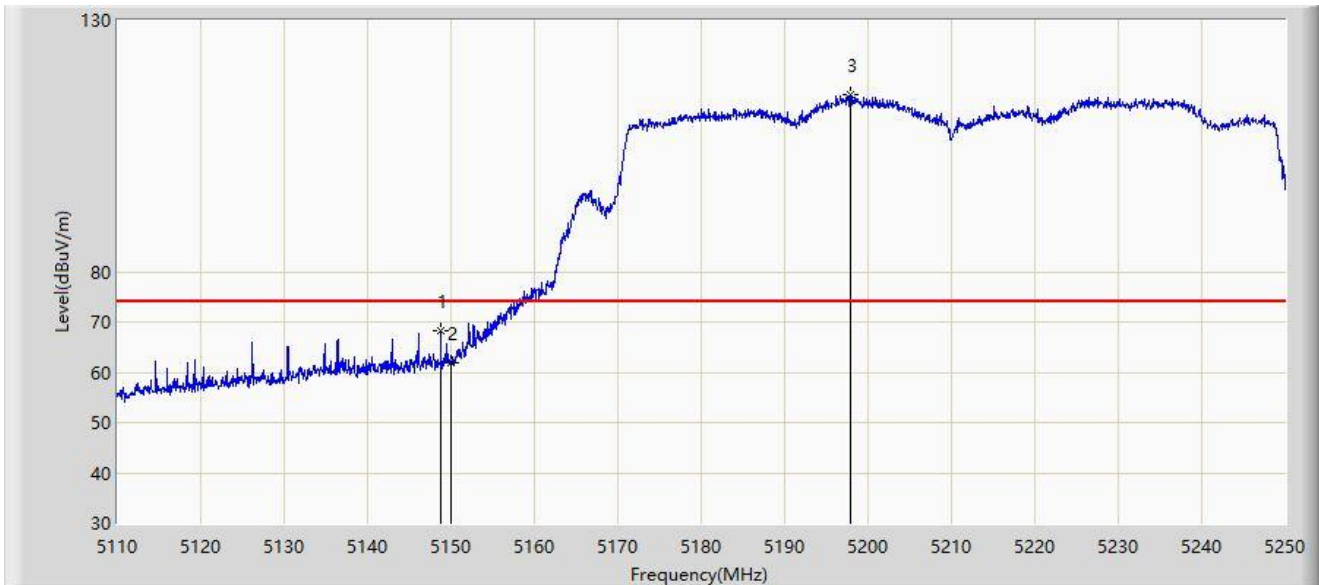


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.780	68.354	71.858	-5.646	74.000	-3.504	PK
2		5150.000	61.980	65.226	-12.020	74.000	-3.246	PK
3		5197.850	115.195	79.283	N/A	N/A	35.912	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

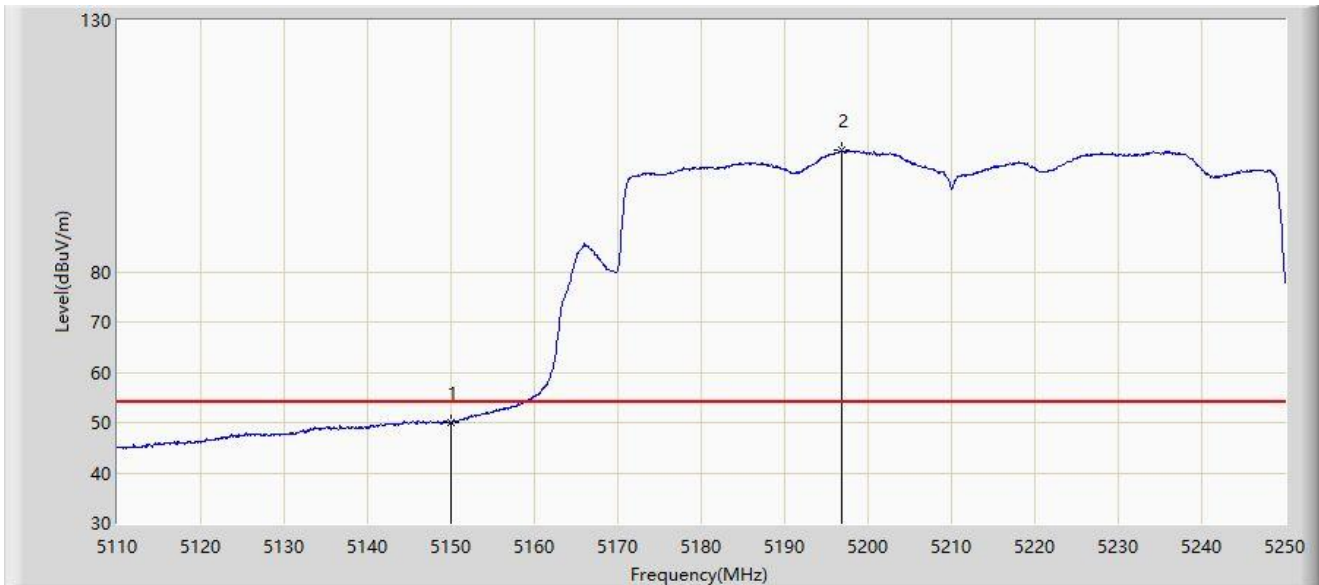


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.049	53.295	-3.951	54.000	-3.246	AV
2		5196.870	104.099	68.659	N/A	N/A	35.439	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

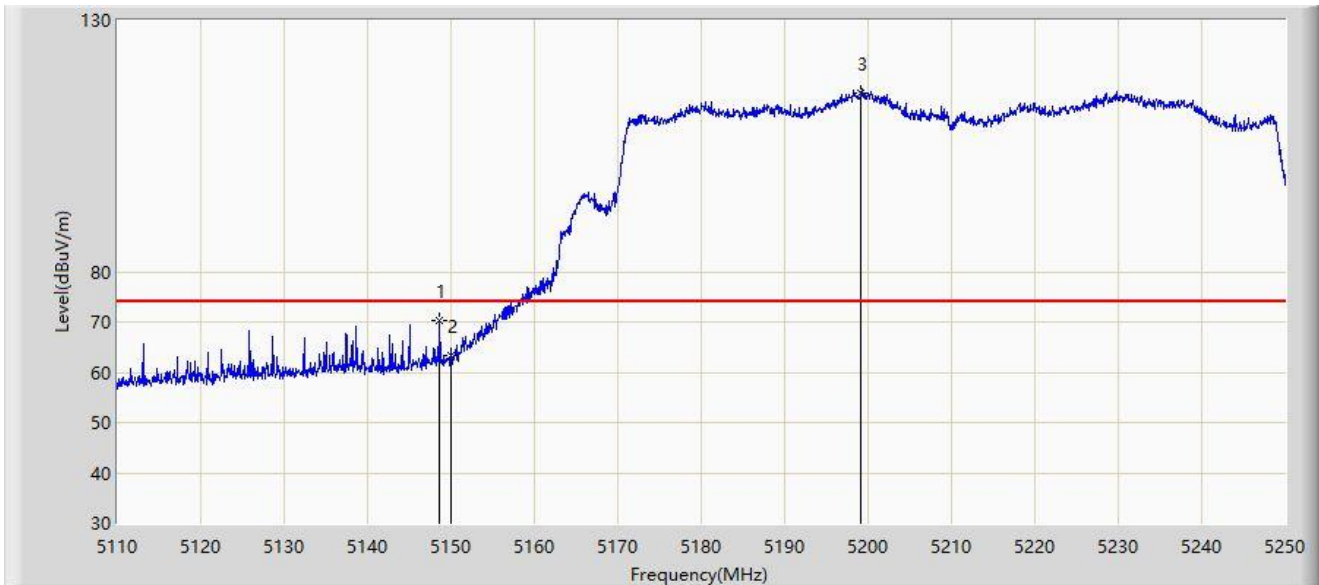


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.640	70.305	73.836	-3.695	74.000	-3.531	PK
2		5150.000	63.428	66.674	-10.572	74.000	-3.246	PK
3		5199.180	115.646	78.628	N/A	N/A	37.018	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-22
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

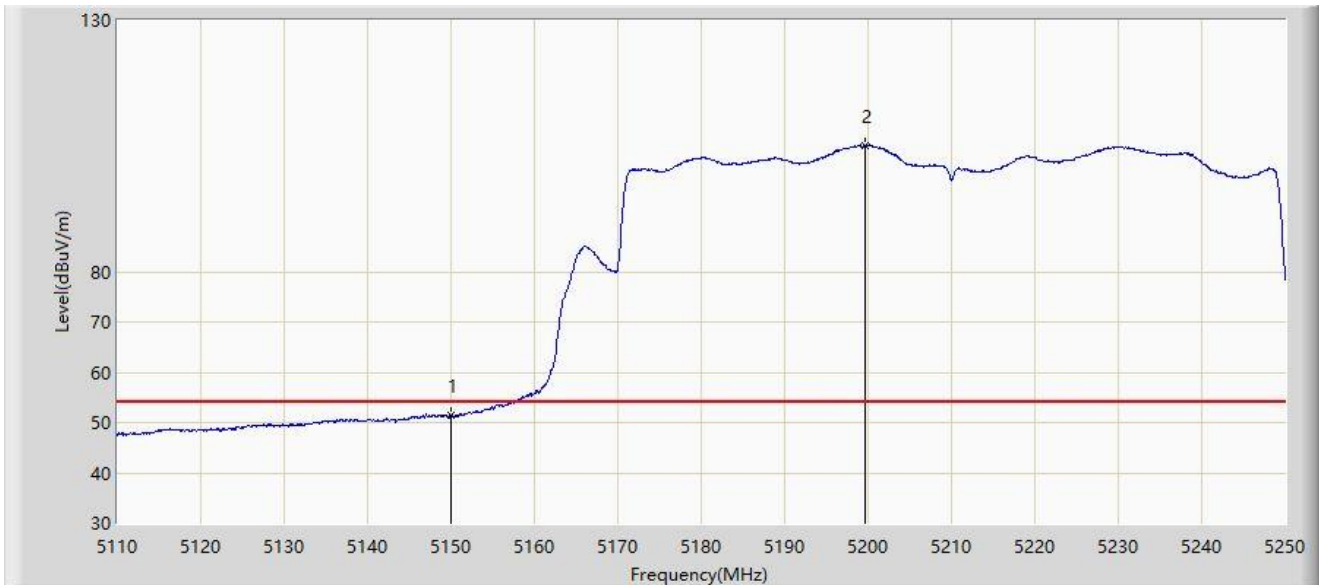


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	51.546	54.792	-2.454	54.000	-3.246	AV
2		5199.670	105.030	67.412	N/A	N/A	37.617	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

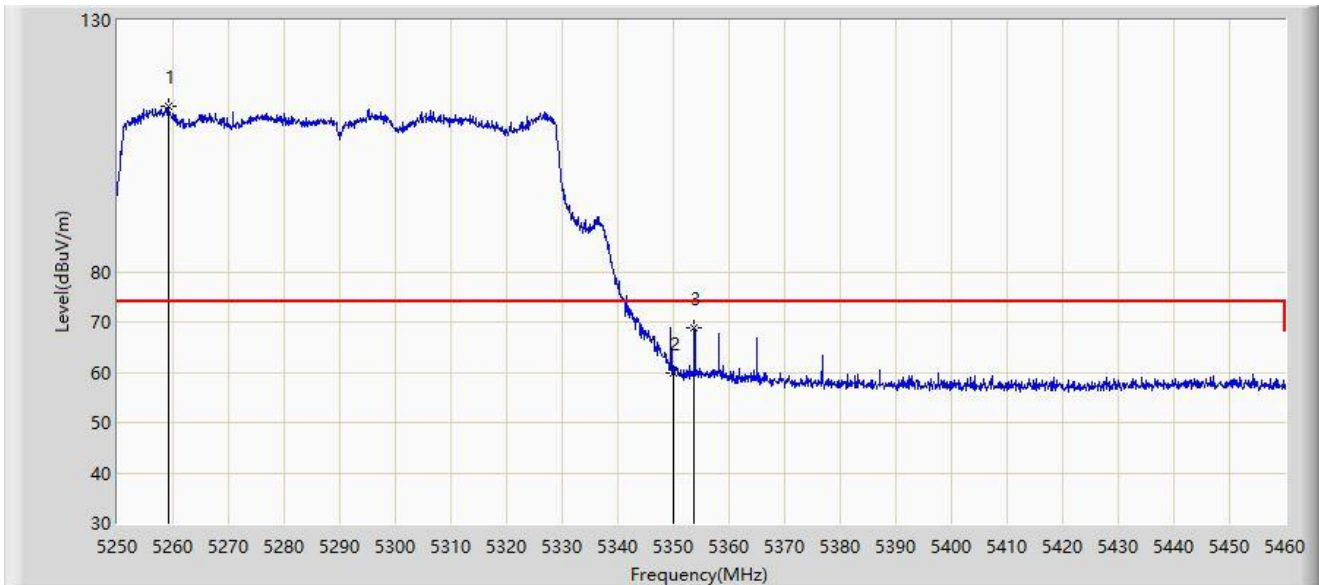


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.135	112.934	67.901	N/A	N/A	45.033	PK
2		5350.000	59.812	61.216	-14.188	74.000	-1.404	PK
3	*	5353.740	68.888	71.768	-5.112	74.000	-2.880	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

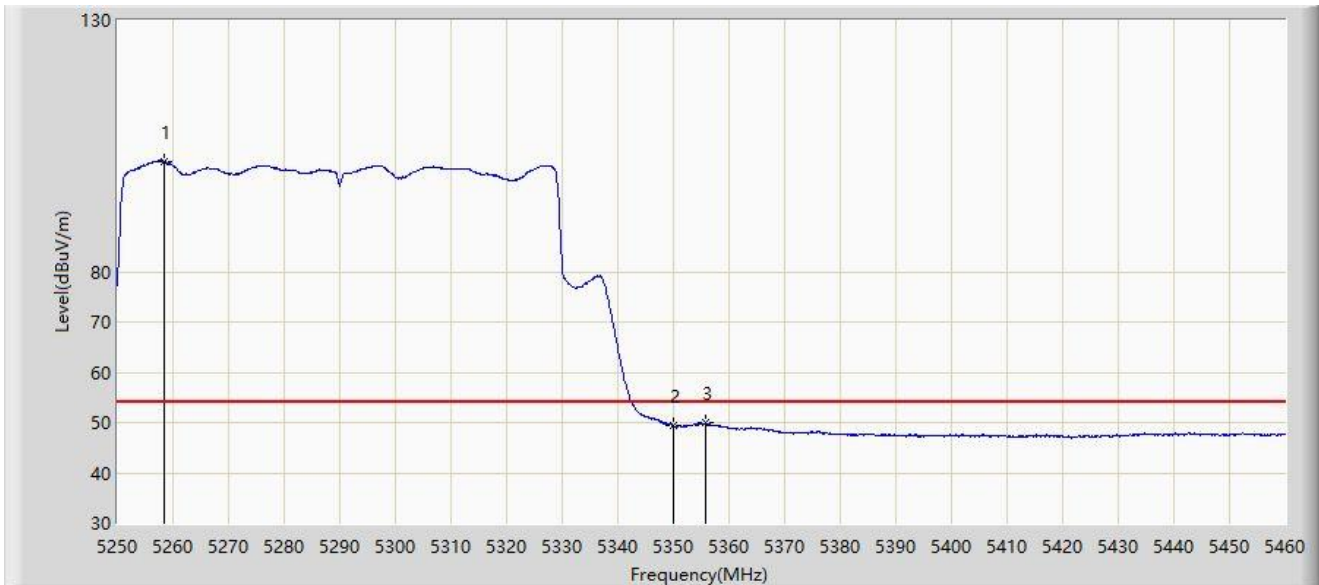


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5258.400	101.911	58.115	N/A	N/A	43.796	AV
2		5350.000	49.328	50.732	-4.672	54.000	-1.404	AV
3	*	5355.735	49.894	53.228	-4.106	54.000	-3.334	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

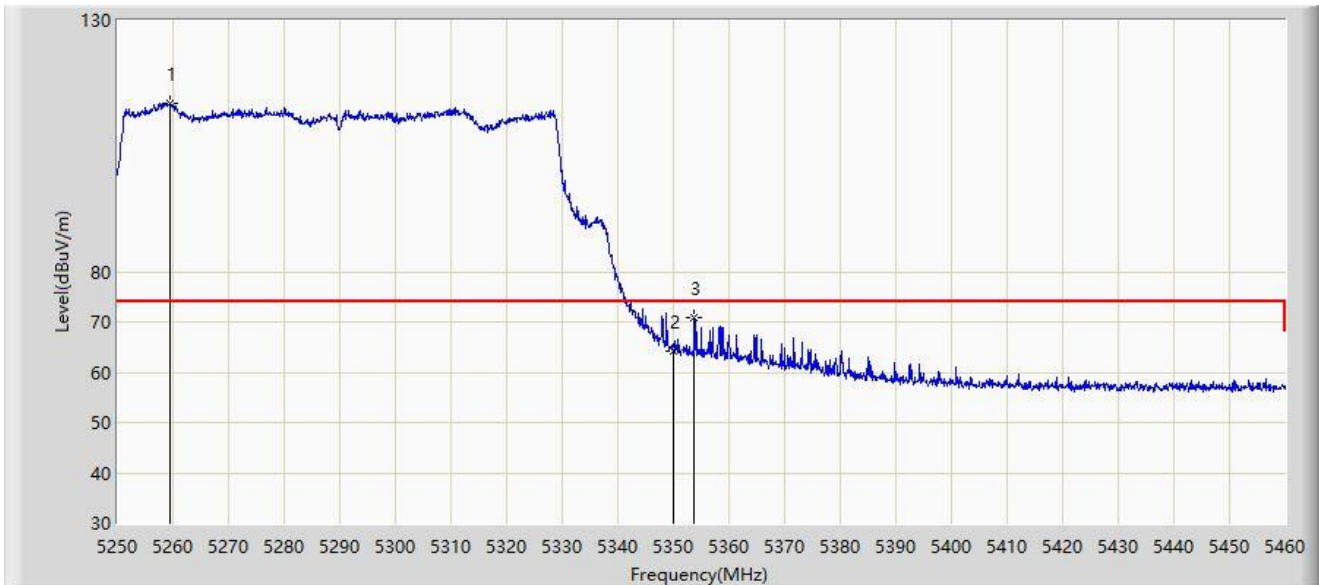


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.345	113.522	68.143	N/A	N/A	45.379	PK
2		5350.000	64.267	65.671	-9.733	74.000	-1.404	PK
3	*	5353.740	70.920	73.800	-3.080	74.000	-2.880	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-24
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

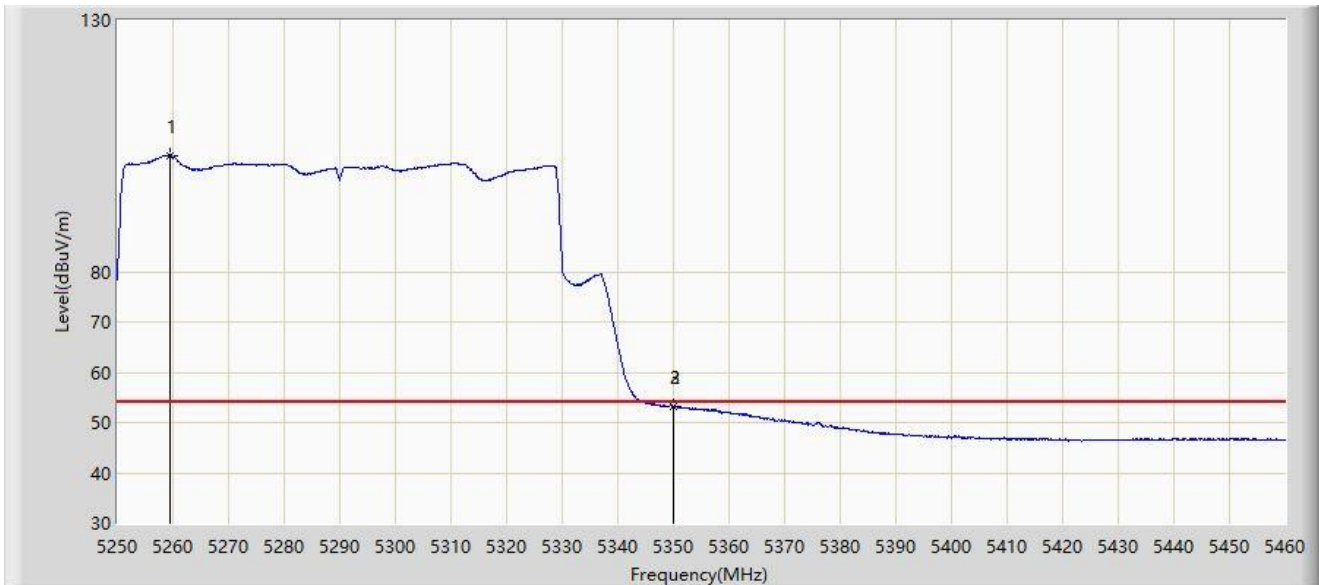


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5259.555	103.188	57.463	N/A	N/A	45.725	AV
2		5350.000	53.277	54.681	-0.723	54.000	-1.404	AV
3	*	5350.065	53.281	54.719	-0.719	54.000	-1.439	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

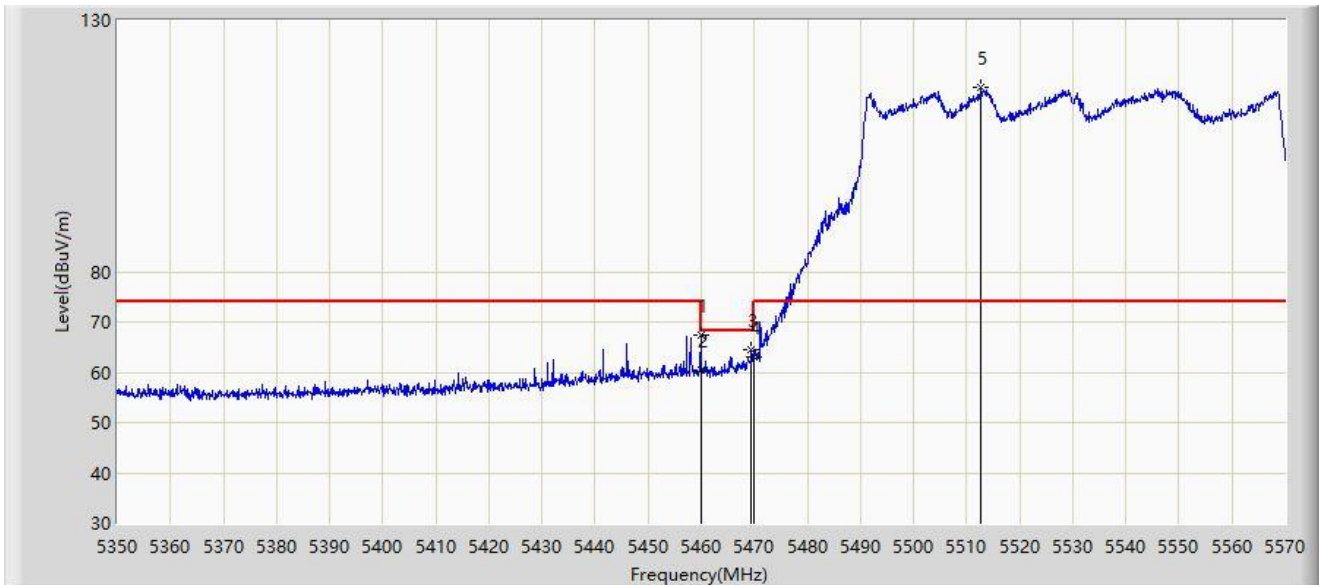


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.890	67.404	70.762	-6.596	74.000	-3.358	PK
2		5460.000	60.541	63.884	-7.659	68.200	-3.343	PK
3	*	5469.460	64.625	66.402	-3.575	68.200	-1.777	PK
4		5470.000	63.095	64.705	-5.105	68.200	-1.610	PK
5		5512.690	116.755	75.666	N/A	N/A	41.090	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

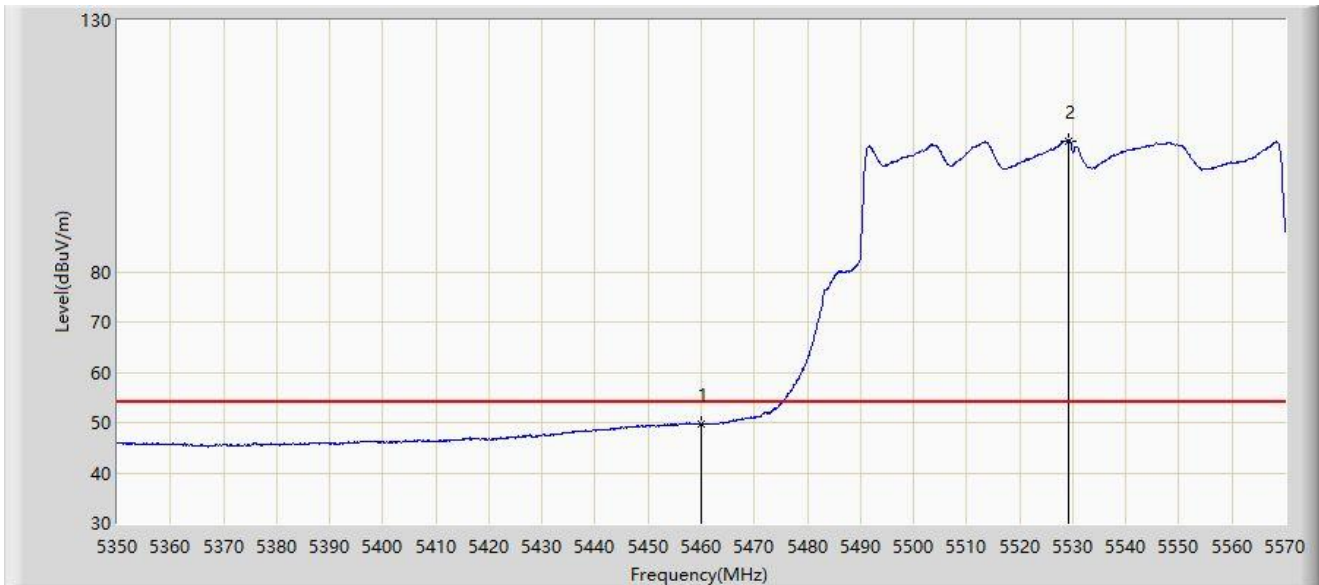


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	49.851	53.194	-4.149	54.000	-3.343	AV
2		5529.190	106.080	59.229	N/A	N/A	46.851	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

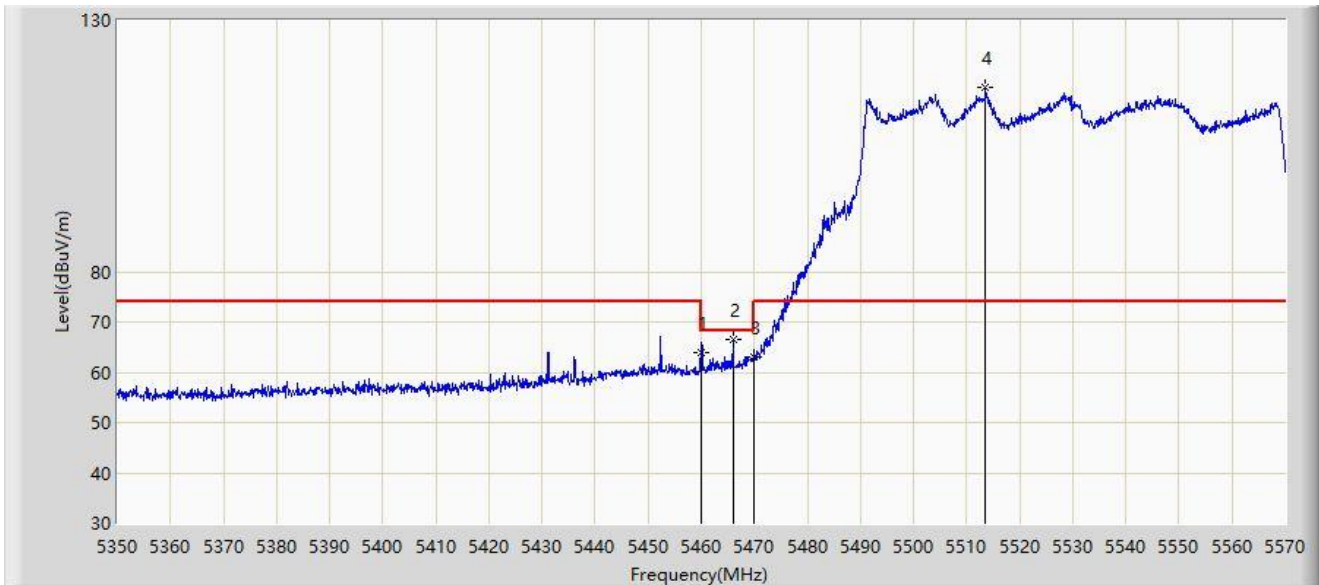


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	64.050	67.393	-4.150	68.200	-3.343	PK
2	*	5465.940	66.664	69.376	-1.536	68.200	-2.711	PK
3		5470.000	62.944	64.554	-5.256	68.200	-1.610	PK
4		5513.570	116.611	74.436	N/A	N/A	42.174	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

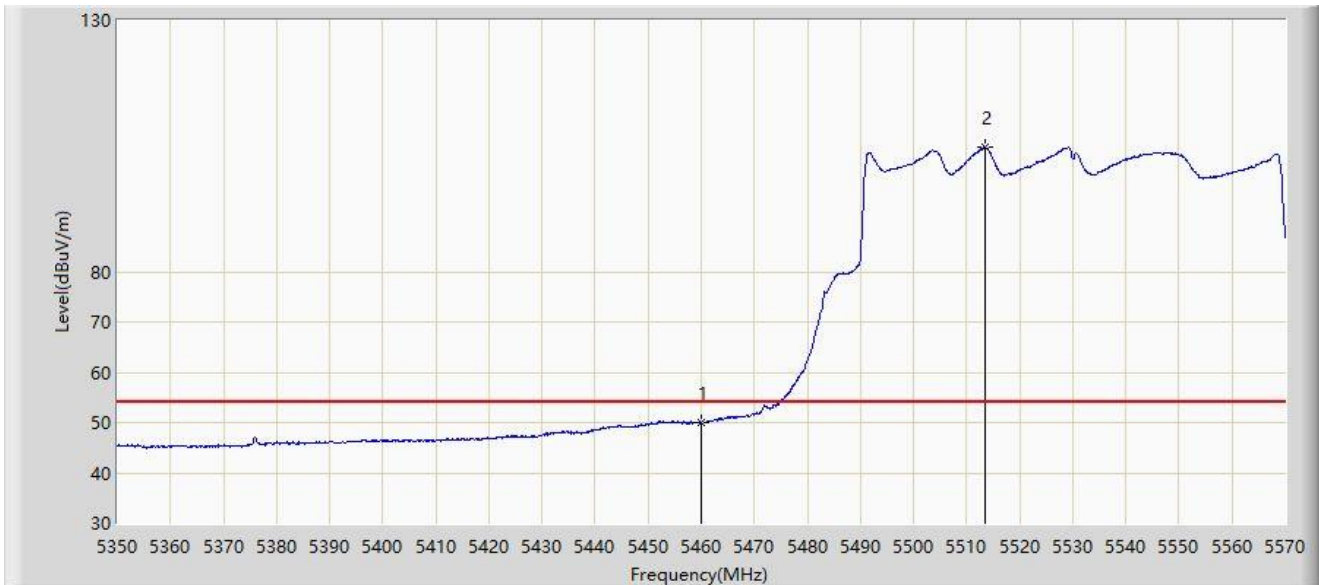


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	49.977	53.320	-4.023	54.000	-3.343	AV
2		5513.350	104.691	62.764	N/A	N/A	41.928	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

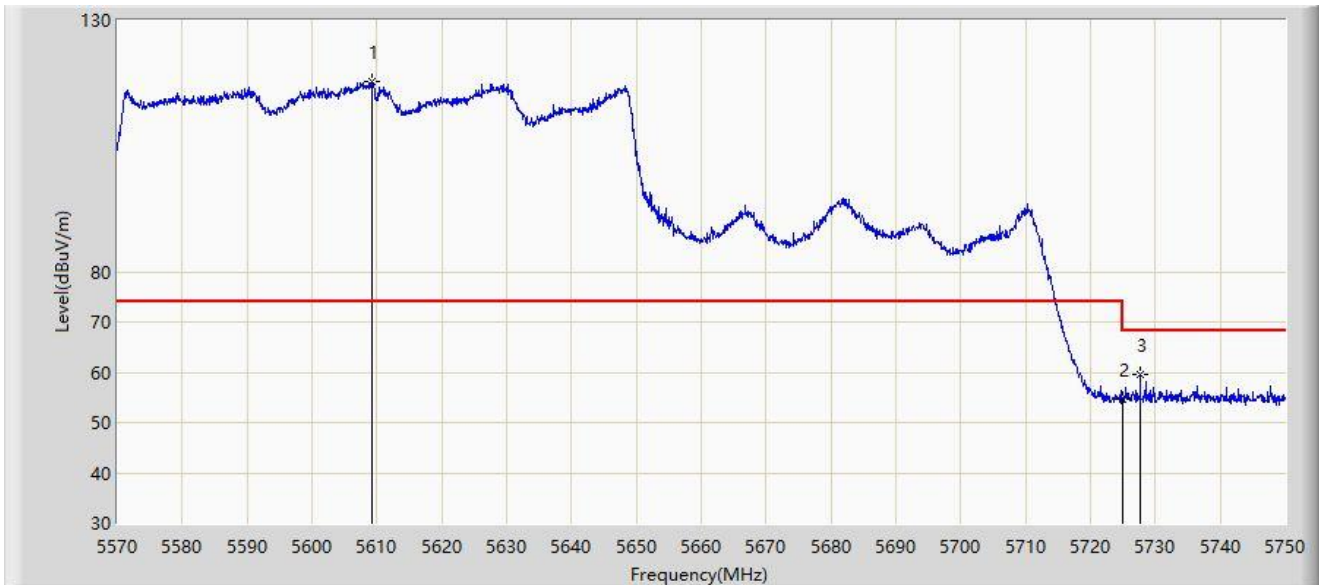


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5609.150	117.914	73.417	N/A	N/A	44.498	PK
2		5725.000	54.679	56.514	-13.521	68.200	-1.836	PK
3	*	5727.680	59.437	62.442	-8.763	68.200	-3.004	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

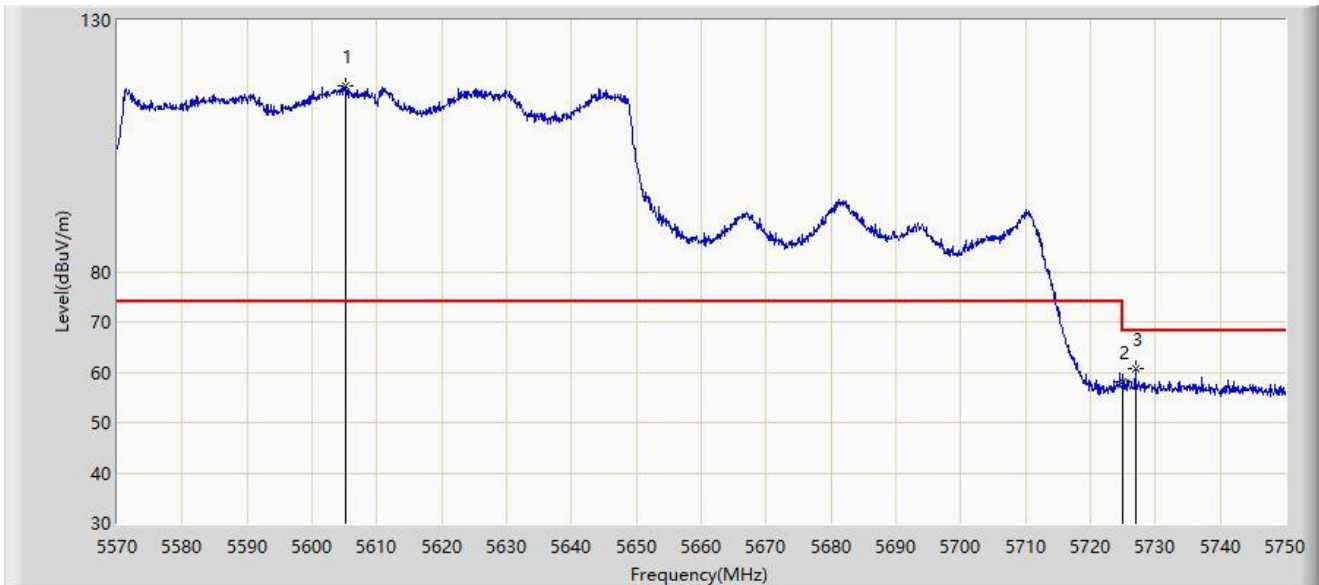


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5605.100	116.832	77.454	N/A	N/A	39.378	PK
2		5725.000	58.043	59.878	-10.157	68.200	-1.836	PK
3	*	5726.960	60.768	63.553	-7.432	68.200	-2.786	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Horizontal
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

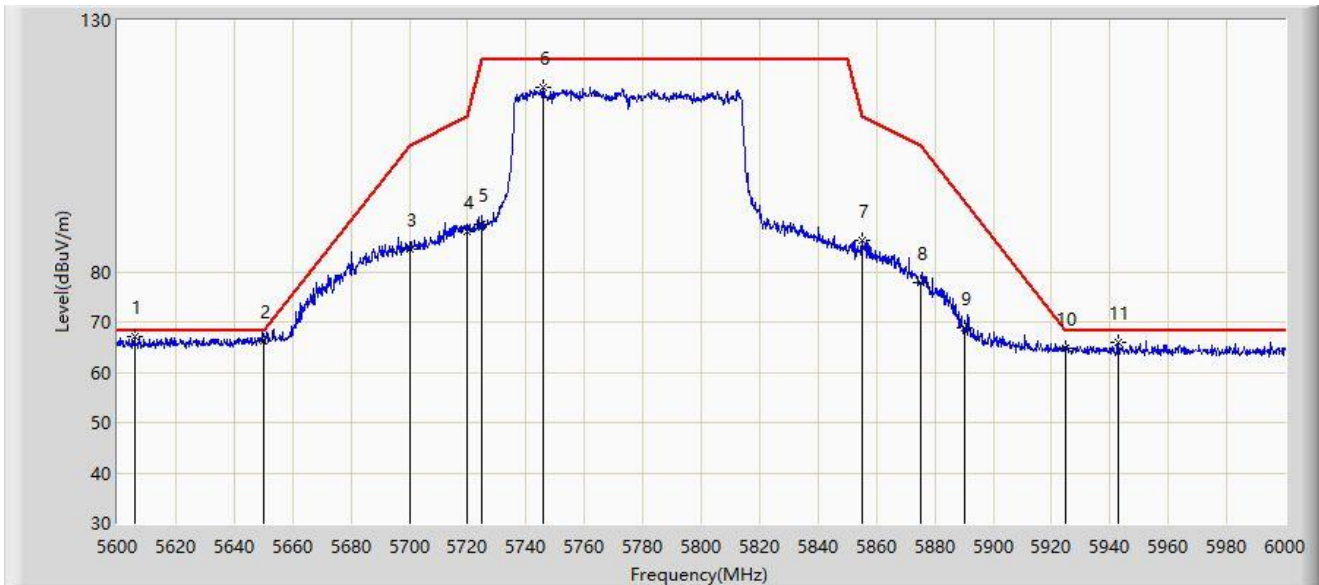


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5605.800	67.244	74.449	-0.956	68.200	-7.205	PK
2		5650.000	66.352	73.672	-1.848	68.200	-7.319	PK
3		5700.000	84.419	91.593	-20.781	105.200	-7.174	PK
4		5720.000	88.112	95.584	-22.688	110.800	-7.472	PK
5		5725.000	89.560	97.021	-32.640	122.200	-7.461	PK
6		5746.000	116.565	124.073	N/A	N/A	-7.508	PK
7		5855.000	86.148	93.366	-24.652	110.800	-7.217	PK
8		5875.000	77.921	85.273	-27.279	105.200	-7.352	PK
9		5890.000	68.720	75.935	-25.380	94.100	-7.214	PK
10		5925.000	64.710	71.836	-3.490	68.200	-7.126	PK
11		5942.800	66.071	73.074	-2.129	68.200	-7.004	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-08-25
Limit: FCC_5.8G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz-AC3	Polarity: Vertical
EUT: AX52 Anywhere Network Node	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

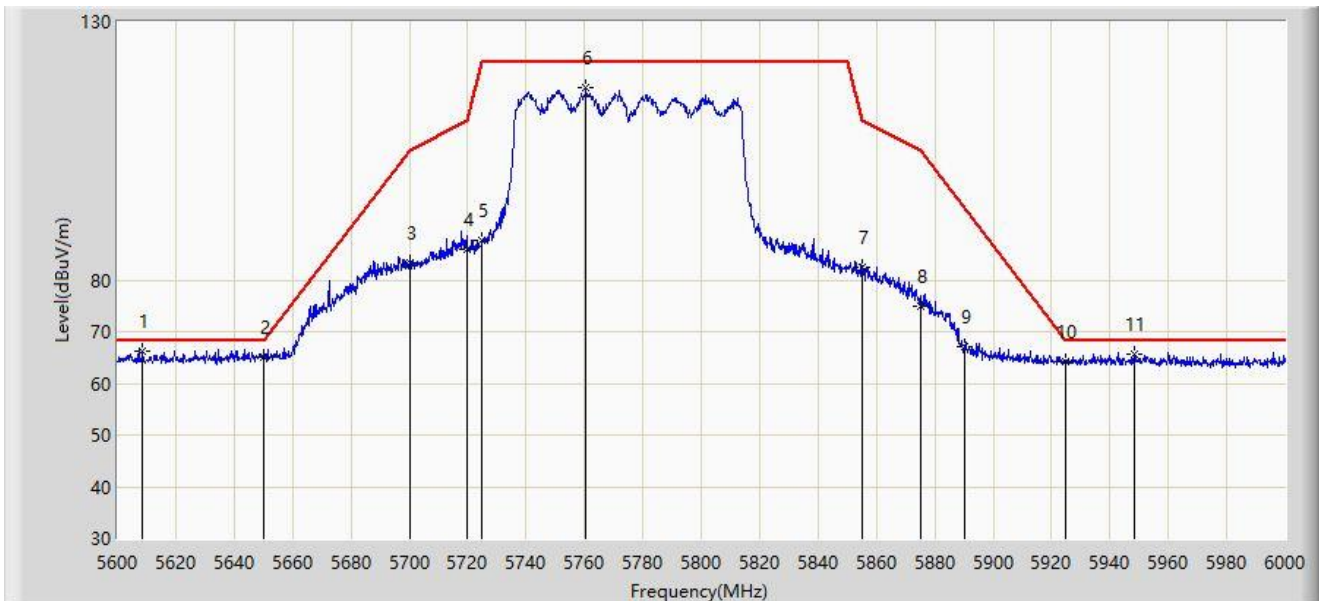

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5608.600	66.213	73.432	-1.987	68.200	-7.219	PK
2		5650.000	65.145	72.465	-3.055	68.200	-7.319	PK
3		5700.000	83.458	90.632	-21.742	105.200	-7.174	PK
4		5720.000	86.006	93.478	-24.794	110.800	-7.472	PK
5		5725.000	87.556	95.017	-34.644	122.200	-7.461	PK
6		5760.600	117.209	124.589	N/A	N/A	-7.381	PK
7		5855.000	82.491	89.709	-28.309	110.800	-7.217	PK
8		5875.000	74.988	82.340	-30.212	105.200	-7.352	PK
9		5890.000	67.187	74.402	-26.913	94.100	-7.214	PK
10		5925.000	64.155	71.281	-4.045	68.200	-7.126	PK
11		5948.200	65.618	72.589	-2.582	68.200	-6.971	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

AX52 – Radio 0:

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: AX52 Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

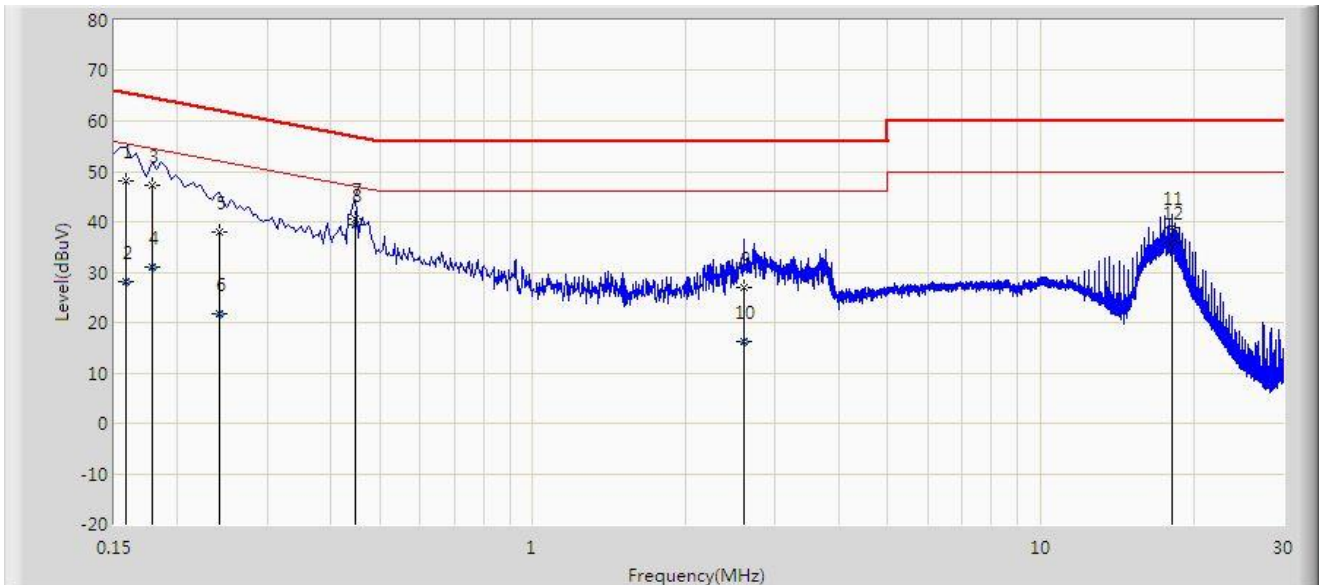


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.158	48.123	38.200	-17.445	65.568	9.923	QP
2		0.158	28.095	18.172	-27.473	55.568	9.923	AV
3		0.178	47.239	37.236	-17.339	64.578	10.004	QP
4		0.178	30.951	20.948	-23.627	54.578	10.004	AV
5		0.242	38.111	28.230	-23.916	62.027	9.881	QP
6		0.242	21.780	11.899	-30.247	52.027	9.881	AV
7		0.446	40.535	30.805	-16.414	56.949	9.730	QP
8	*	0.446	39.277	29.547	-7.673	46.949	9.730	AV
9		2.602	26.931	17.151	-29.069	56.000	9.780	QP
10		2.602	16.212	6.432	-29.788	46.000	9.780	AV
11		18.106	38.789	28.464	-21.211	60.000	10.325	QP
12		18.106	35.824	25.498	-14.176	50.000	10.325	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: AX52 Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

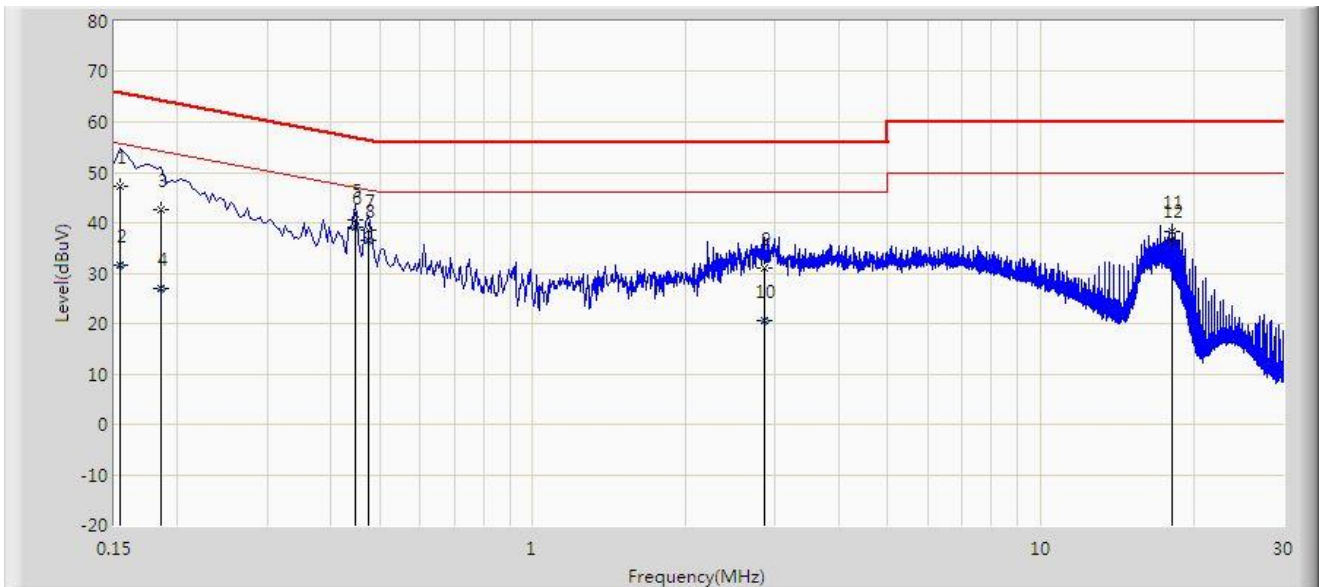

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	47.271	37.630	-18.510	65.781	9.641	QP
2		0.154	31.517	21.875	-24.265	55.781	9.641	AV
3		0.186	42.656	33.008	-21.557	64.213	9.648	QP
4		0.186	26.996	17.348	-27.217	54.213	9.648	AV
5		0.446	40.443	30.733	-16.506	56.949	9.710	QP
6	*	0.446	39.132	29.422	-7.817	46.949	9.710	AV
7		0.474	38.602	28.892	-17.842	56.444	9.710	QP
8		0.474	36.552	26.842	-9.892	46.444	9.710	AV
9		2.850	30.938	21.191	-25.062	56.000	9.747	QP
10		2.850	20.500	10.753	-25.500	46.000	9.747	AV
11		18.110	38.130	27.847	-21.870	60.000	10.284	QP
12		18.110	36.523	26.240	-13.477	50.000	10.284	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

AX52e – Radio 0:

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: AX52e Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

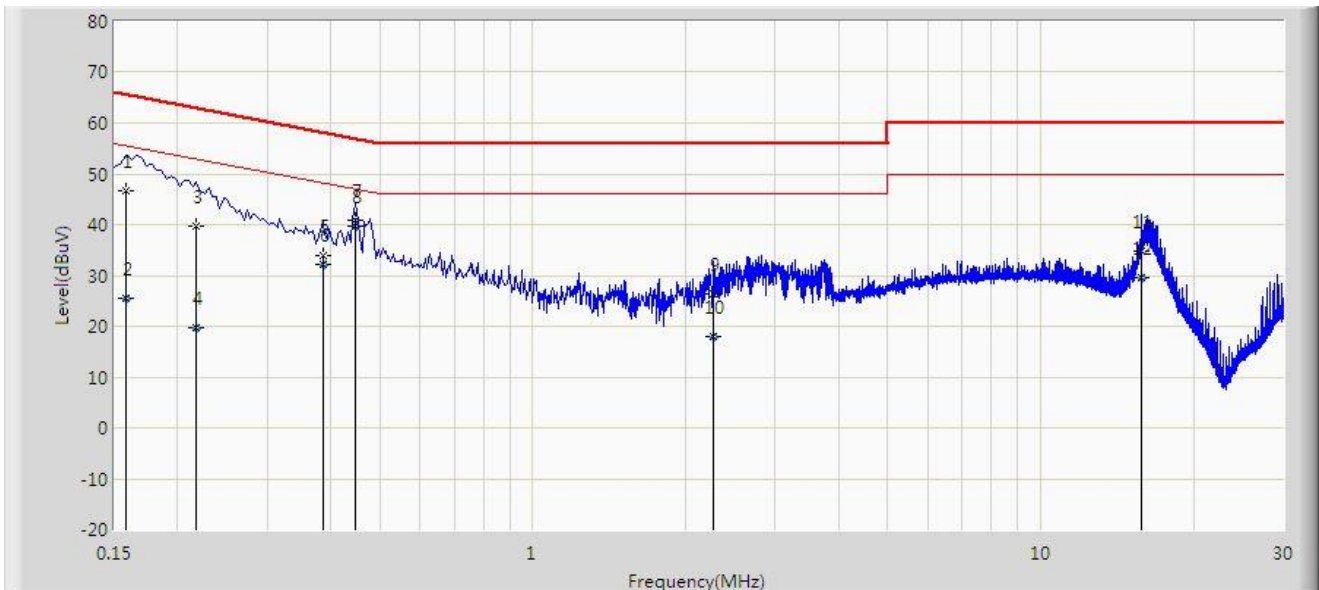


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.158	46.726	36.803	-18.842	65.568	9.923	QP
2		0.158	25.488	15.564	-30.081	55.568	9.923	AV
3		0.218	39.700	29.683	-23.195	62.895	10.017	QP
4		0.218	19.780	9.763	-33.115	52.895	10.017	AV
5		0.386	33.776	24.044	-24.374	58.149	9.732	QP
6		0.386	32.158	22.426	-15.992	48.149	9.732	AV
7		0.446	40.793	31.063	-16.156	56.949	9.730	QP
8	*	0.446	39.705	29.975	-7.244	46.949	9.730	AV
9		2.266	26.296	16.506	-29.704	56.000	9.790	QP
10		2.266	17.833	8.043	-28.167	46.000	9.790	AV
11		15.770	34.853	24.586	-25.147	60.000	10.268	QP
12		15.770	29.427	19.159	-20.573	50.000	10.268	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: AX52e Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

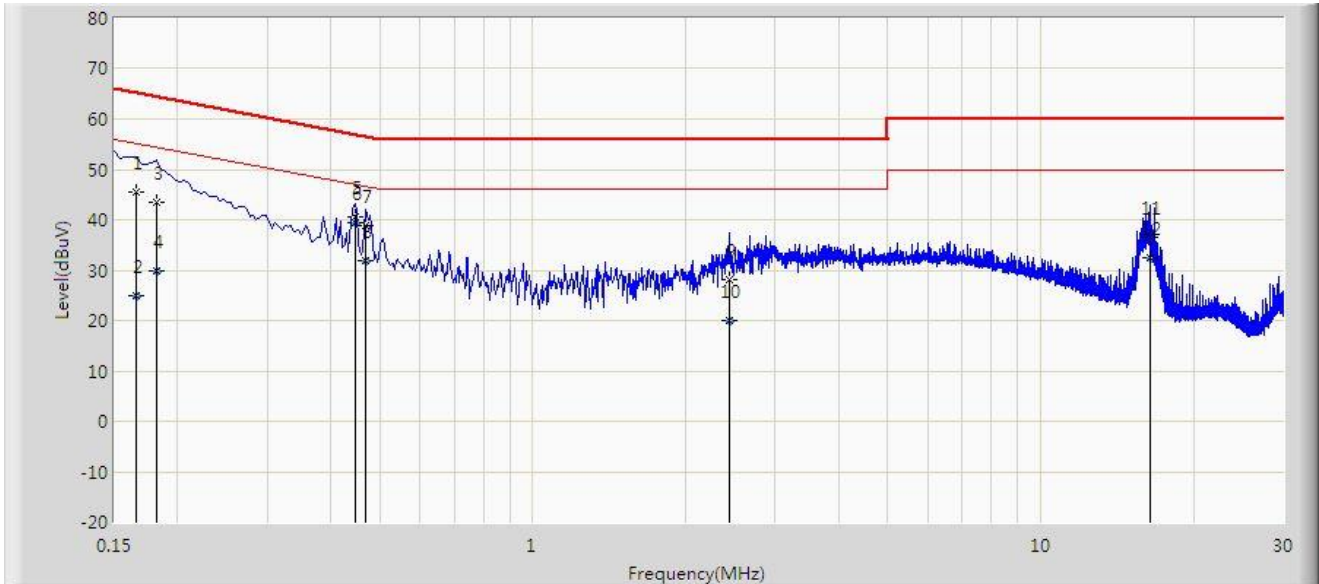

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.166	45.363	35.723	-19.795	65.158	9.640	QP
2		0.166	24.880	15.240	-30.278	55.158	9.640	AV
3		0.182	43.517	33.874	-20.877	64.394	9.643	QP
4		0.182	29.725	20.082	-24.669	54.394	9.643	AV
5		0.446	40.619	30.909	-16.330	56.949	9.710	QP
6	*	0.446	39.421	29.711	-7.528	46.949	9.710	AV
7		0.470	38.750	29.040	-17.764	56.514	9.710	QP
8		0.470	31.809	22.099	-14.705	46.514	9.710	AV
9		2.430	28.107	18.358	-27.893	56.000	9.749	QP
10		2.430	19.980	10.231	-26.020	46.000	9.749	AV
11		16.374	36.540	26.286	-23.460	60.000	10.254	QP
12		16.374	32.347	22.094	-17.653	50.000	10.254	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

AX52 – Radio 1:

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: AX52 Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

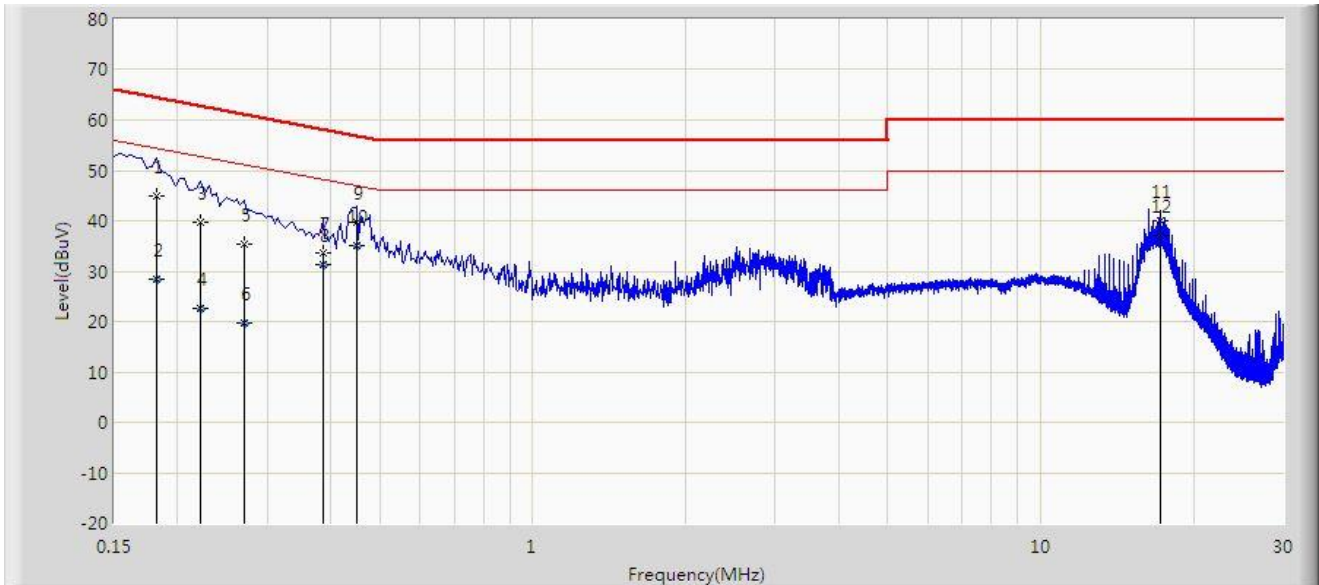


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.182	44.849	34.825	-19.545	64.394	10.023	QP
2		0.182	28.325	18.301	-26.069	54.394	10.023	AV
3		0.222	39.604	29.607	-23.139	62.744	9.997	QP
4		0.222	22.521	12.524	-30.222	52.744	9.997	AV
5		0.270	35.354	25.558	-25.764	61.118	9.796	QP
6		0.270	19.658	9.862	-31.460	51.118	9.796	AV
7		0.386	33.651	23.920	-24.498	58.149	9.732	QP
8		0.386	31.298	21.566	-16.851	48.149	9.732	AV
9		0.450	39.612	29.882	-17.263	56.875	9.730	QP
10	*	0.450	35.209	25.479	-11.666	46.875	9.730	AV
11		17.218	40.092	29.775	-19.908	60.000	10.317	QP
12		17.218	37.240	26.923	-12.760	50.000	10.317	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2023-09-04
Temperature: 26.3°C	Humidity: 65.5%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Mark Long
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: AX52 Anywhere Network Node	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

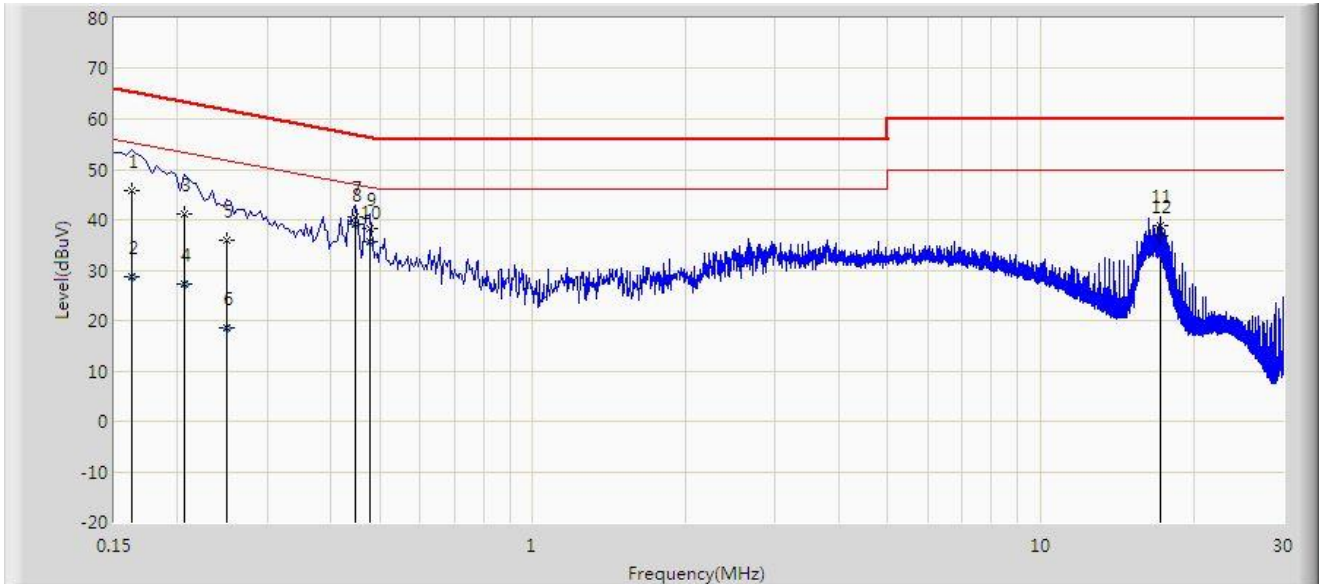

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.162	45.906	36.266	-19.455	65.361	9.640	QP
2		0.162	28.651	19.011	-26.709	55.361	9.640	AV
3		0.206	41.041	31.368	-22.324	63.365	9.673	QP
4		0.206	27.303	17.631	-26.062	53.365	9.673	AV
5		0.250	36.027	26.337	-25.730	61.757	9.690	QP
6		0.250	18.613	8.923	-33.144	51.757	9.690	AV
7		0.446	40.590	30.880	-16.359	56.949	9.710	QP
8	*	0.446	39.046	29.336	-7.903	46.949	9.710	AV
9		0.478	38.251	28.541	-18.122	56.374	9.710	QP
10		0.478	35.661	25.951	-10.713	46.374	9.710	AV
11		17.218	38.767	28.488	-21.233	60.000	10.279	QP
12		17.218	36.886	26.607	-13.114	50.000	10.279	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2305RSU022-UT” file.

Appendix C – EUT Photograph

Refer to “2305RSU022-UE” file.

The End
