


Site: AC1	Time: 2016/01/05 - 17:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 2	

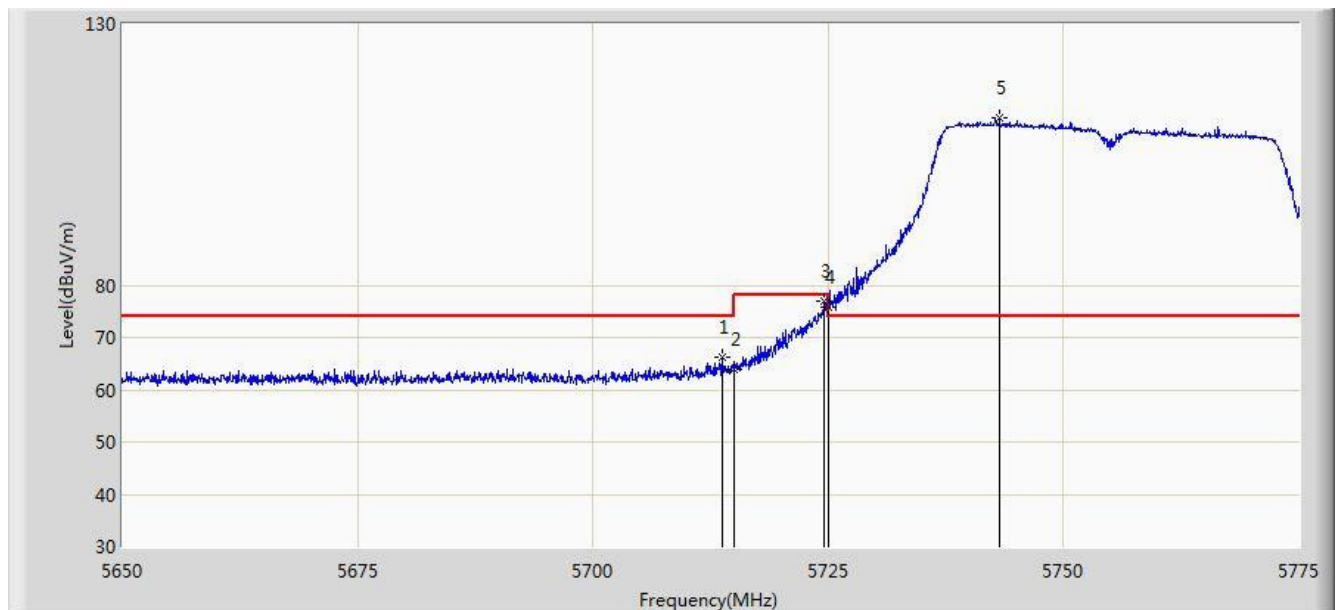


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.687	66.099	62.342	-7.901	74.000	3.757	PK
2			5715.000	63.980	60.219	-10.020	74.000	3.761	PK
3			5724.562	76.983	73.194	-1.217	78.200	3.790	PK
4			5725.000	75.658	71.867	-2.542	78.200	3.791	PK
5		*	5743.187	111.941	108.095	N/A	N/A	3.846	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 2	

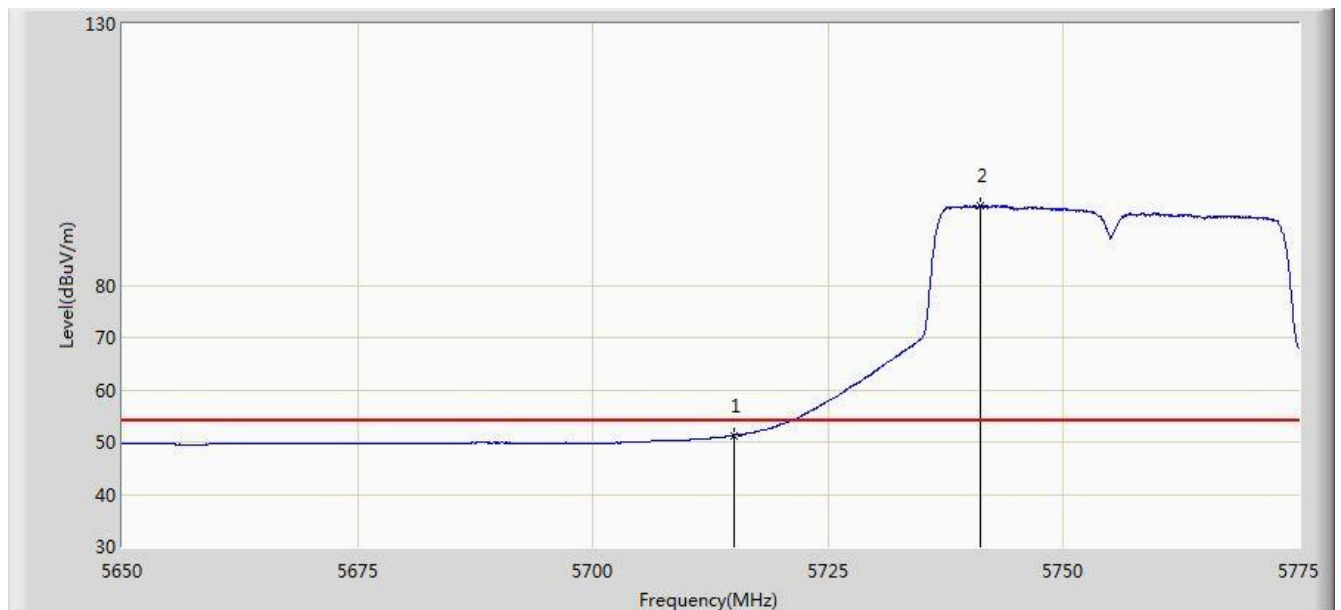


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.282	47.521	-2.718	54.000	3.761	AV
2		*	5741.187	95.181	91.341	N/A	N/A	3.840	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 2	

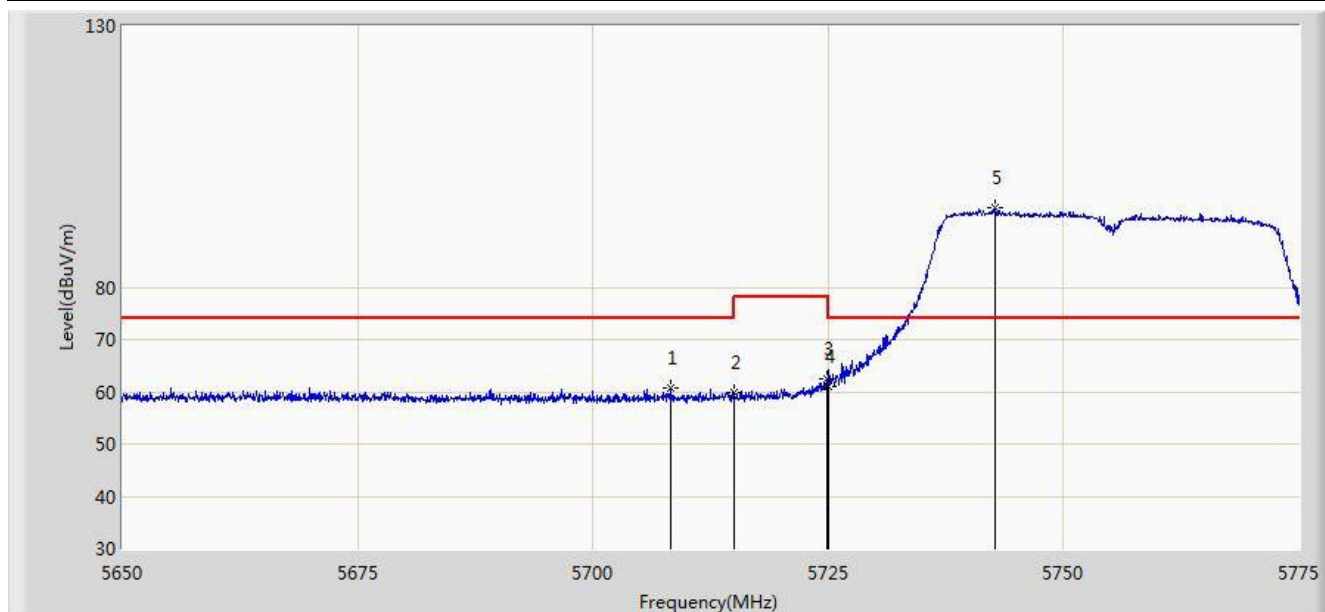


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5708.250	60.621	56.880	-13.379	74.000	3.741	PK
2			5715.000	59.818	56.057	-14.182	74.000	3.761	PK
3			5724.812	62.452	58.662	-15.748	78.200	3.790	PK
4			5725.000	61.058	57.267	-17.142	78.200	3.791	PK
5		*	5742.750	95.114	91.269	N/A	N/A	3.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 2	

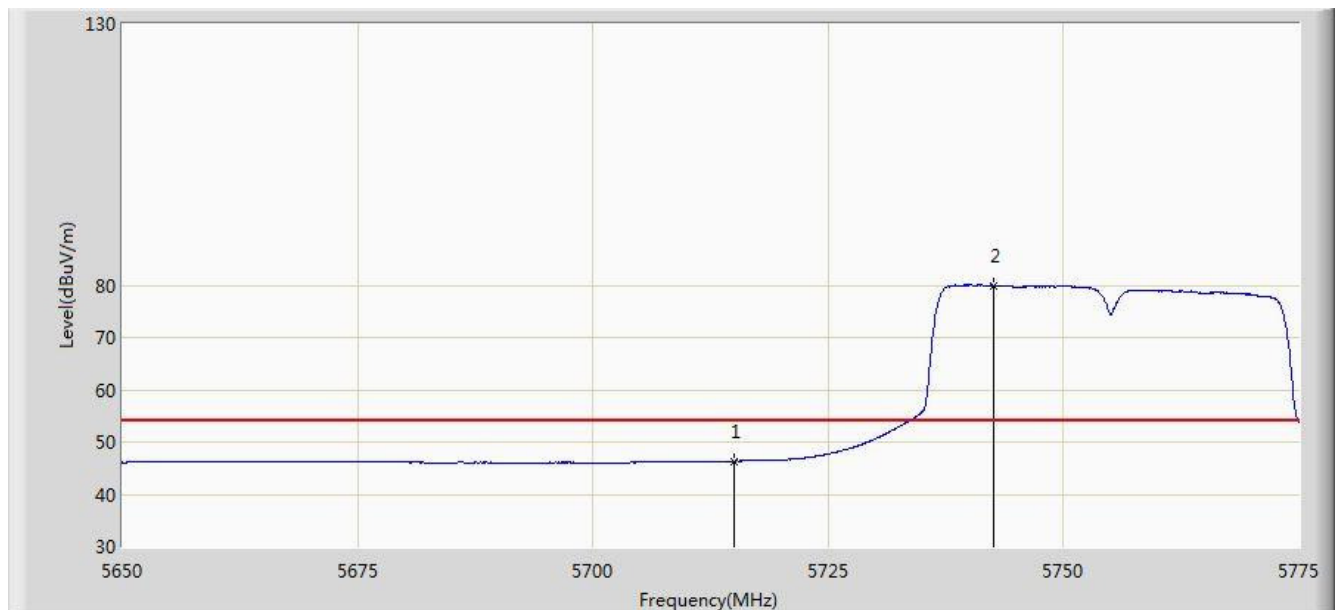


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.368	42.607	-7.632	54.000	3.761	AV
2		*	5742.500	79.953	76.109	N/A	N/A	3.844	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 2	

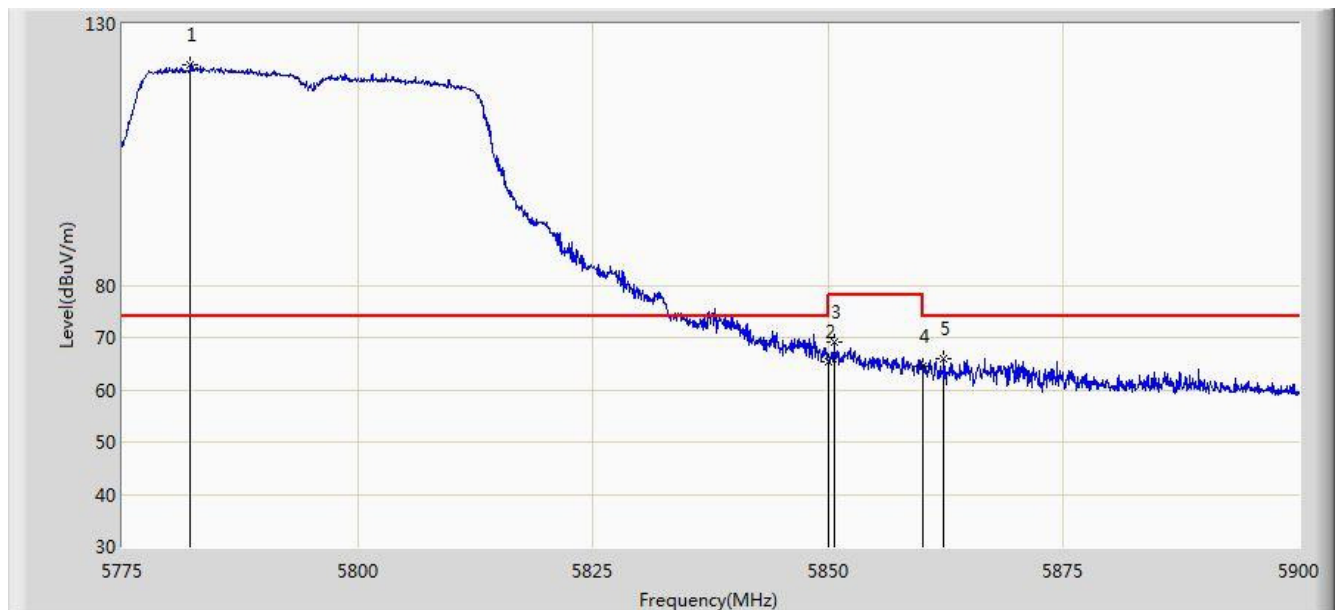


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.250	122.131	118.200	N/A	N/A	3.930	PK
2			5850.000	65.333	61.276	-12.867	78.200	4.058	PK
3			5850.625	69.111	65.054	-9.089	78.200	4.058	PK
4			5860.000	64.411	60.348	-9.589	74.000	4.064	PK
5			5862.312	66.025	61.959	-7.975	74.000	4.066	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 2	

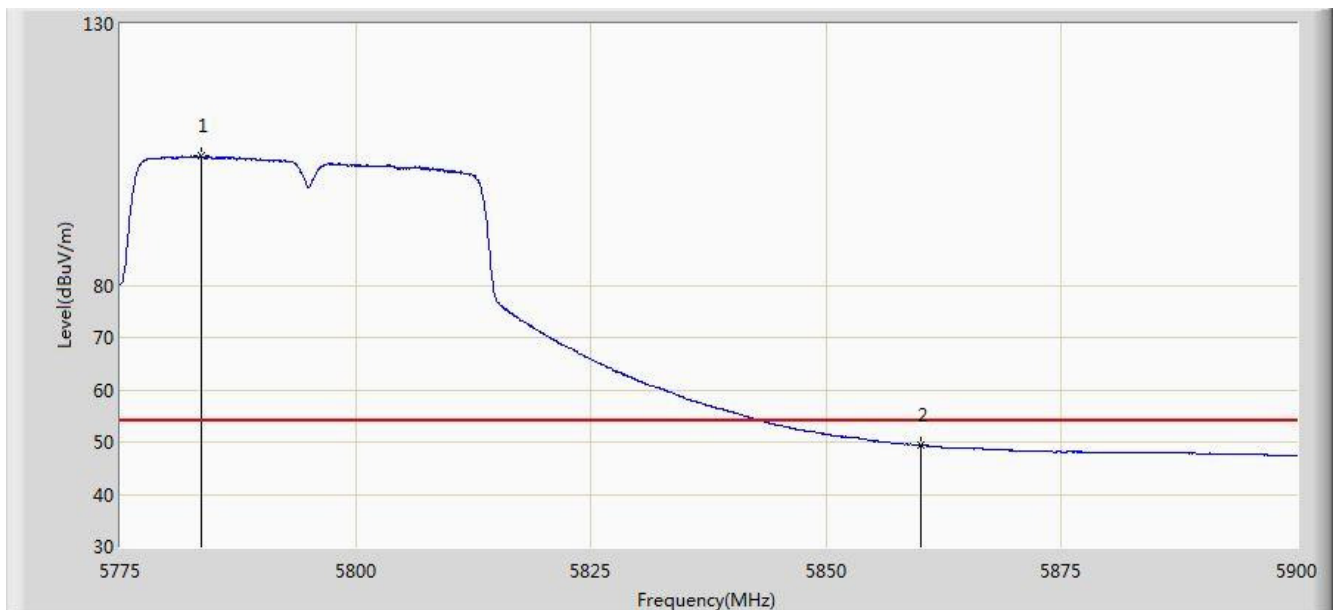


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.625	104.718	100.785	N/A	N/A	3.933	AV
2			5860.000	49.354	45.291	-4.646	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 2	

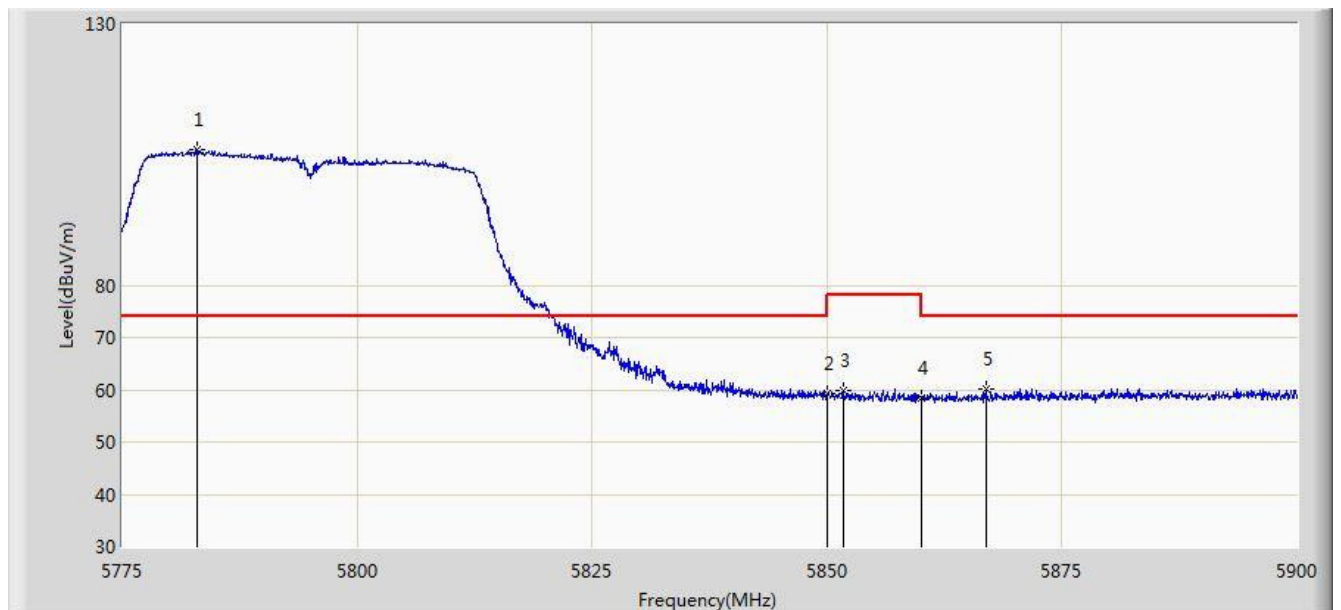


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.000	105.941	102.009	N/A	N/A	3.932	PK
2			5850.000	59.206	55.149	-18.994	78.200	4.058	PK
3			5851.750	59.977	55.919	-18.223	78.200	4.059	PK
4			5860.000	58.380	54.317	-15.620	74.000	4.064	PK
5			5866.875	60.042	55.962	-13.958	74.000	4.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 2	

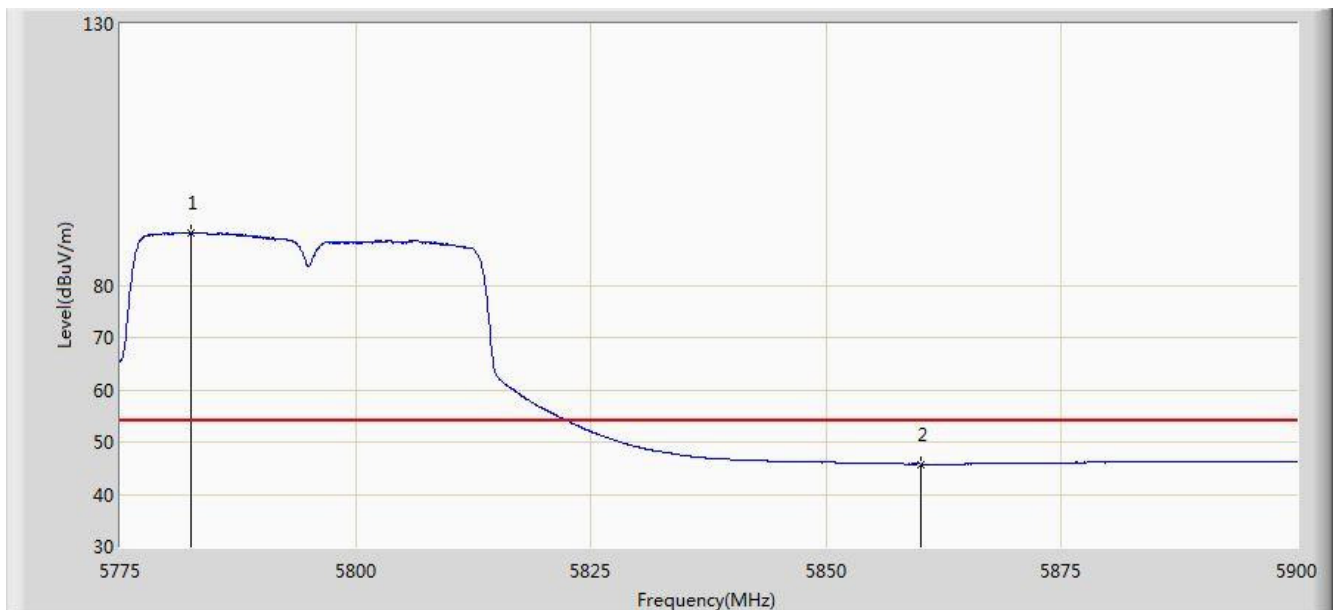


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.500	90.115	86.184	N/A	N/A	3.932	AV
2			5860.000	45.790	41.727	-8.210	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 2	

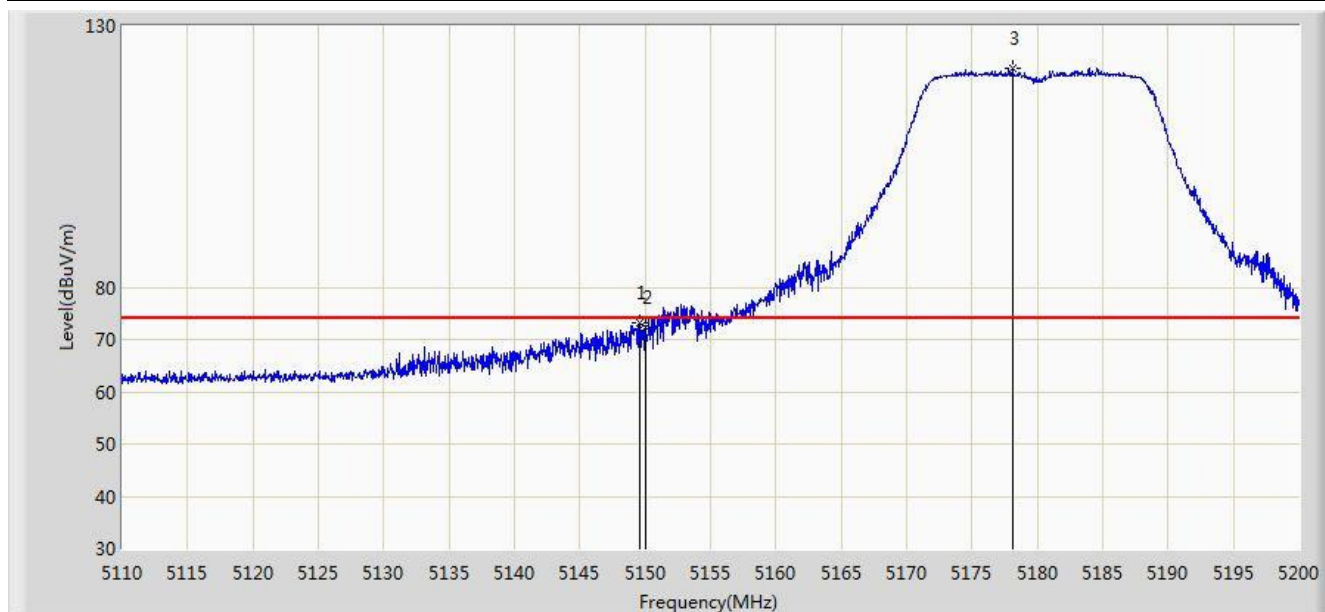


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	73.083	69.774	-0.917	74.000	3.308	PK
2			5150.000	72.279	68.970	-1.721	74.000	3.309	PK
3		*	5178.085	121.866	118.591	N/A	N/A	3.274	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 2	

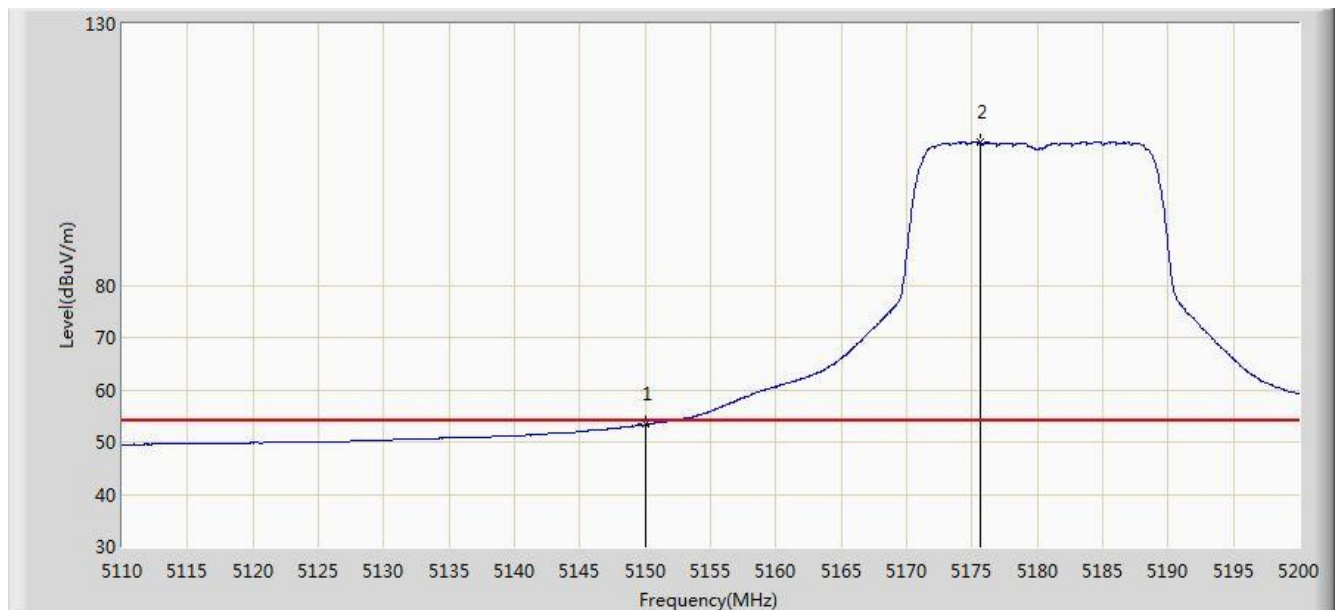


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.343	50.034	-0.657	54.000	3.309	AV
2		*	5175.610	107.289	104.012	N/A	N/A	3.276	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 2	

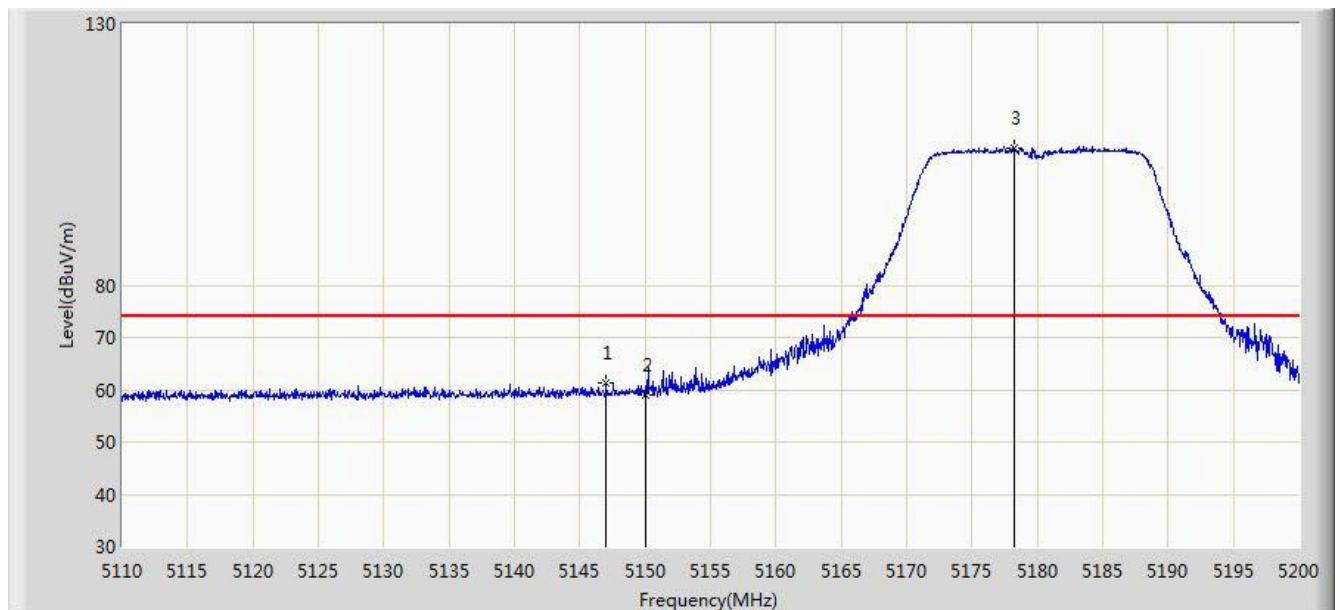


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.035	61.316	58.007	-12.684	74.000	3.309	PK
2			5150.000	58.990	55.681	-15.010	74.000	3.309	PK
3		*	5178.220	106.281	103.007	N/A	N/A	3.275	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 2	

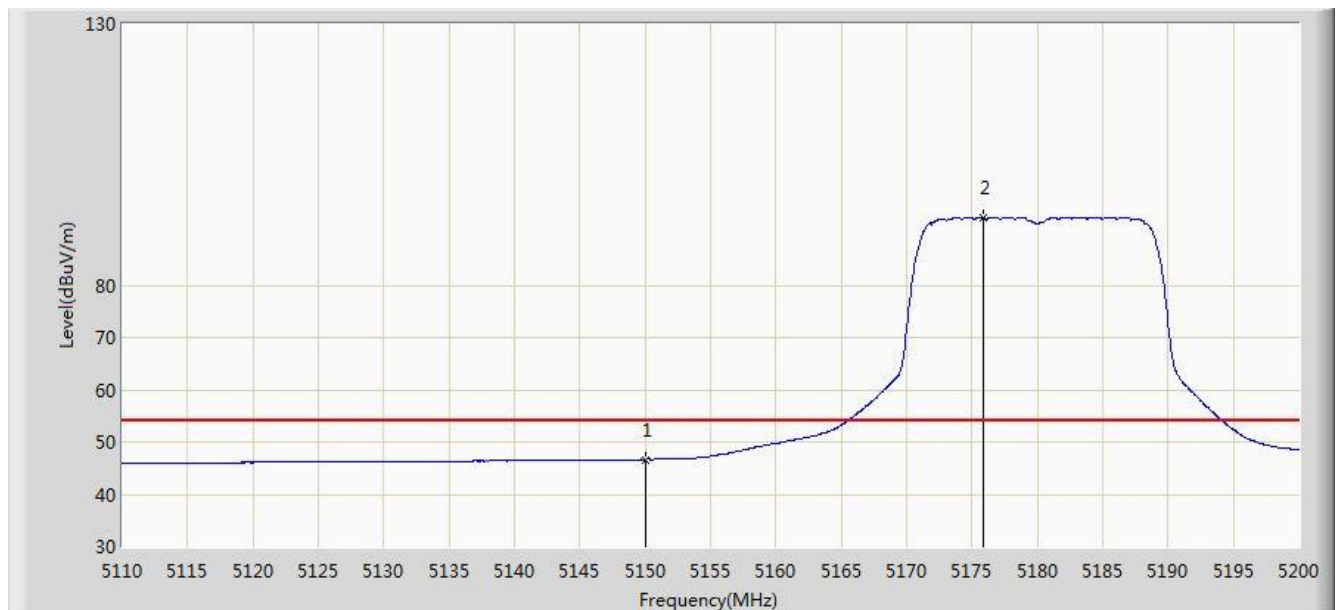


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.654	43.345	-7.346	54.000	3.309	AV
2		*	5175.880	92.951	89.675	N/A	N/A	3.276	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 2	

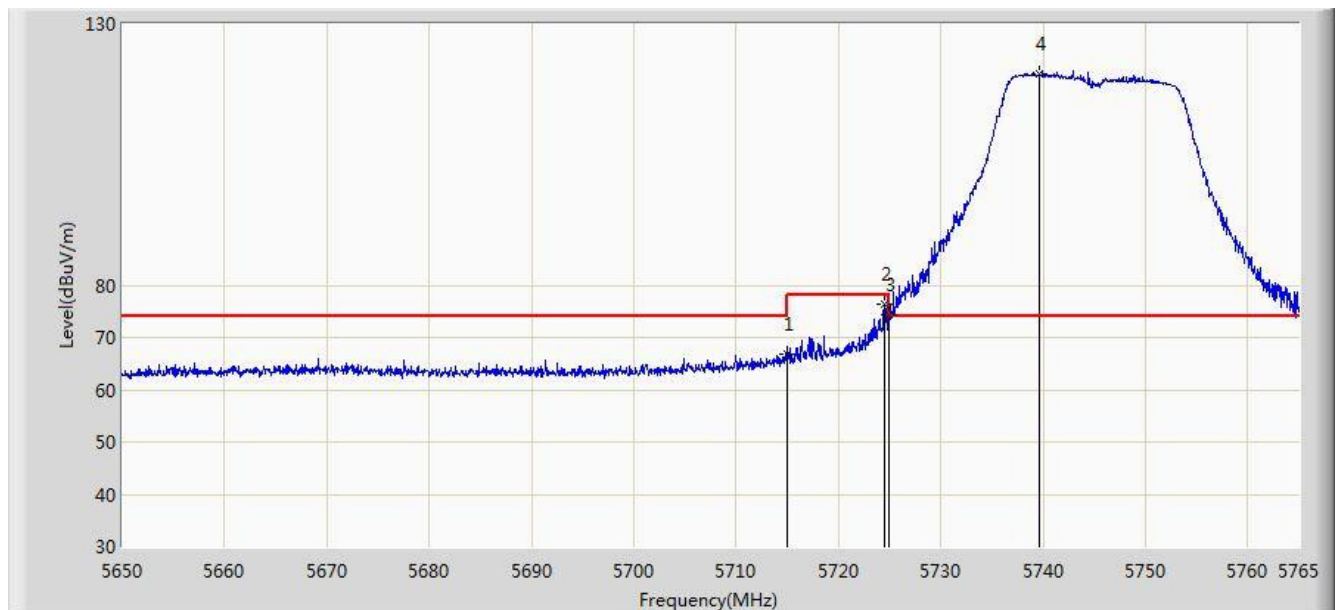


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	66.778	63.017	-7.222	74.000	3.761	PK
2			5724.462	76.297	72.508	-1.903	78.200	3.790	PK
3			5725.000	74.424	70.633	-3.776	78.200	3.791	PK
4		*	5739.700	120.546	116.710	N/A	N/A	3.836	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 2	

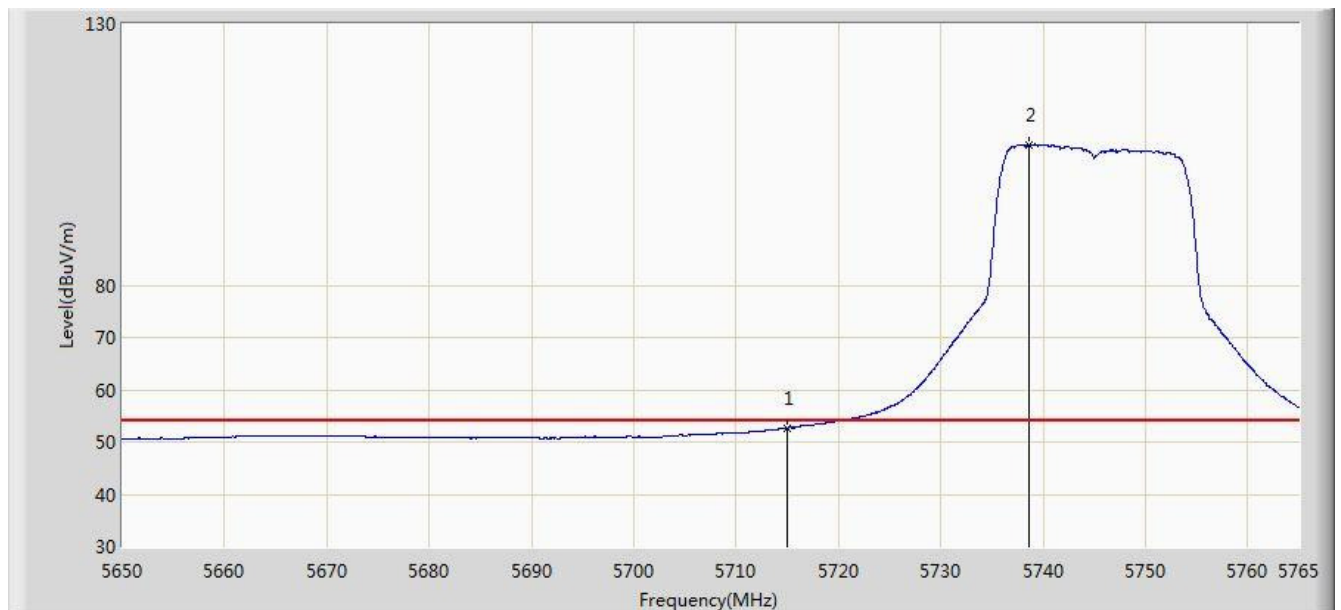


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.706	48.945	-1.294	54.000	3.761	AV
2		*	5738.665	106.935	103.102	N/A	N/A	3.833	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 2	

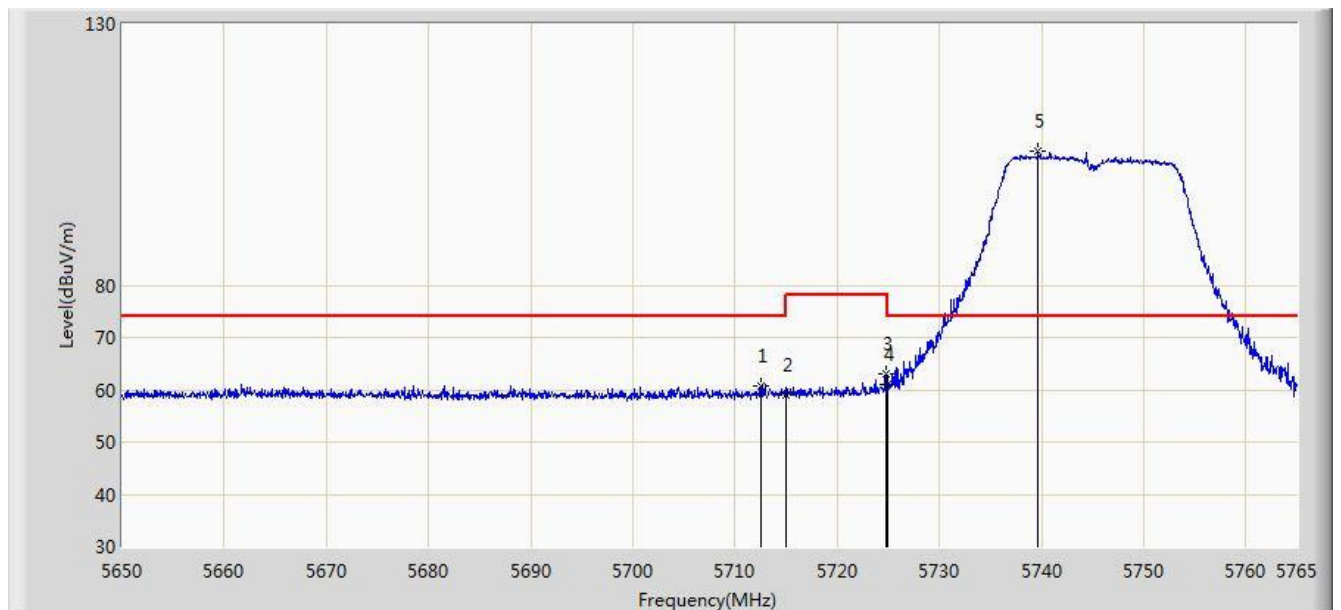


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.560	60.652	56.898	-13.348	74.000	3.754	PK
2			5715.000	59.016	55.255	-14.984	74.000	3.761	PK
3			5724.808	63.030	59.240	-15.170	78.200	3.790	PK
4			5725.000	60.940	57.149	-17.260	78.200	3.791	PK
5		*	5739.643	105.617	101.781	N/A	N/A	3.836	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 2	

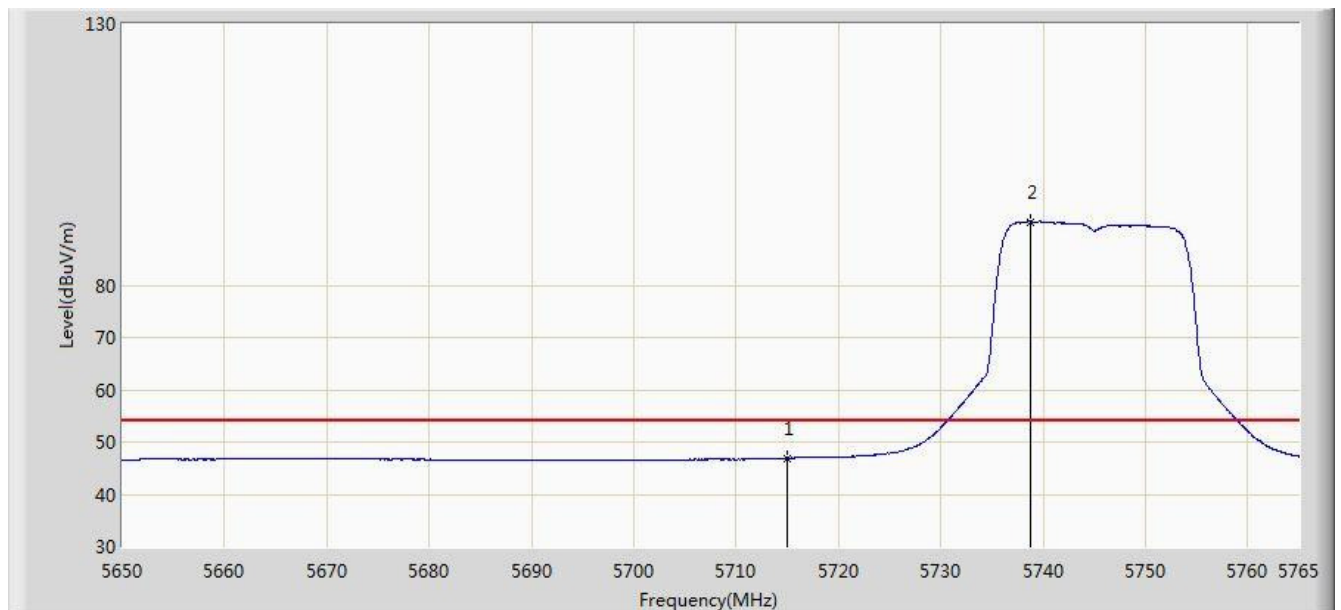


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.946	43.185	-7.054	54.000	3.761	AV
2		*	5738.837	91.998	88.164	N/A	N/A	3.834	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 2	

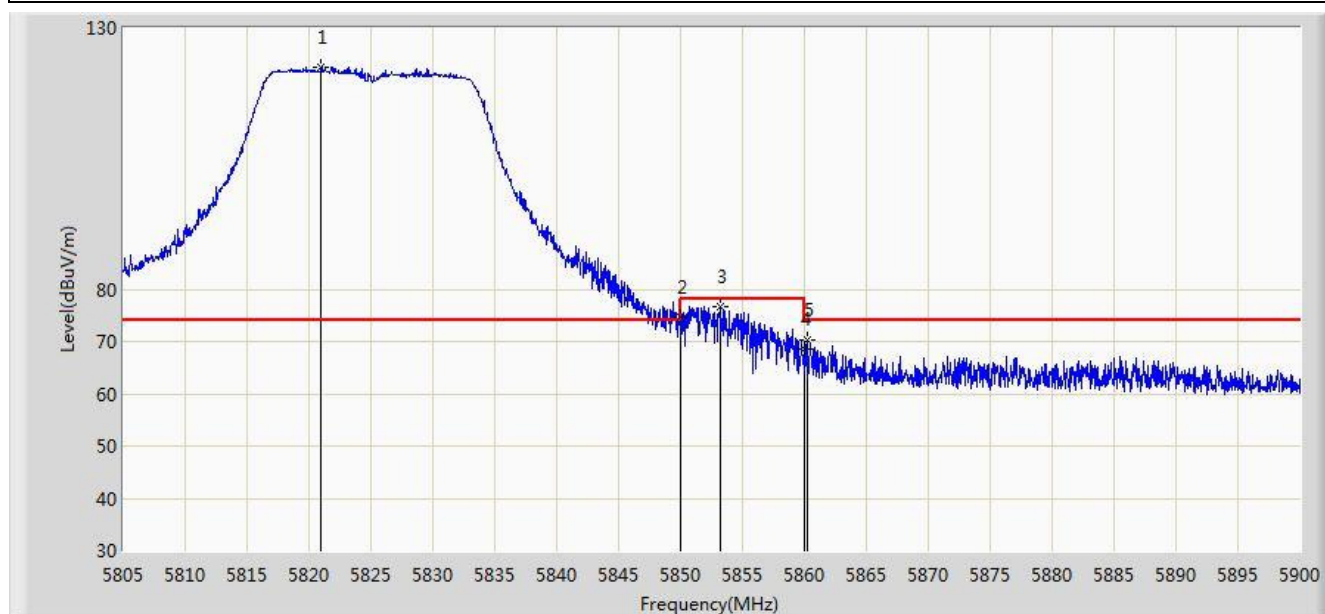


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.007	122.424	118.428	N/A	N/A	3.996	PK
2			5850.000	74.678	70.621	-3.522	78.200	4.058	PK
3			5853.165	76.753	72.694	-1.447	78.200	4.059	PK
4			5860.000	68.656	64.593	-5.344	74.000	4.064	PK
5			5860.243	70.352	66.288	-3.648	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 2	

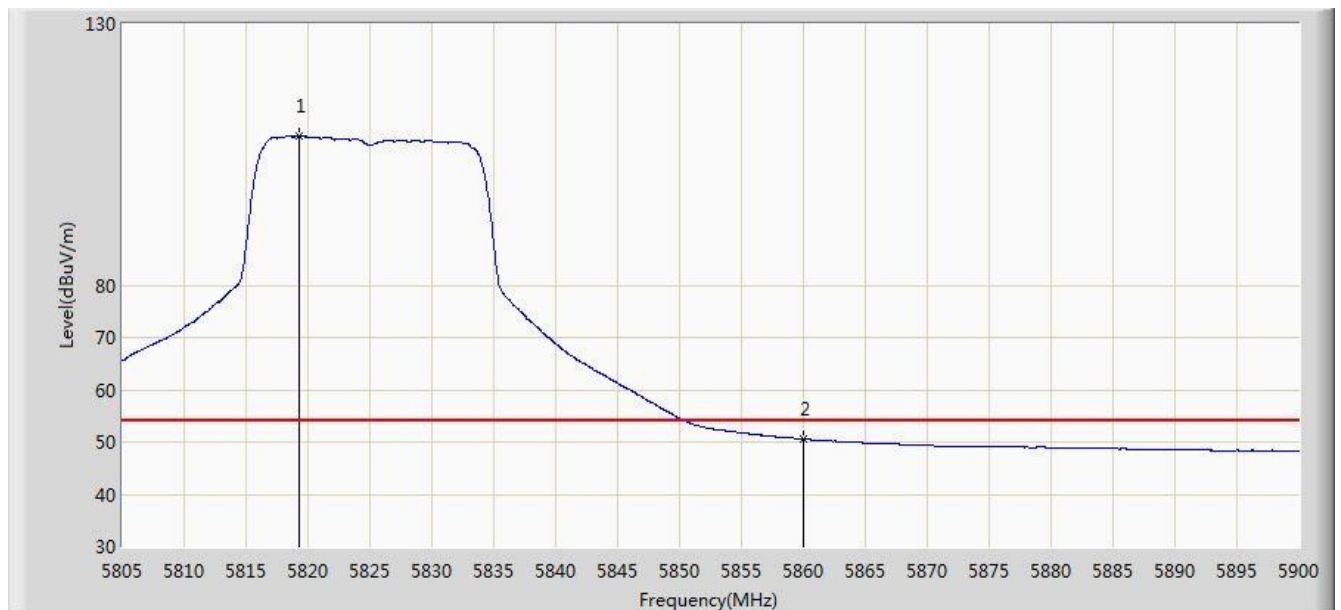


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.297	108.442	104.450	N/A	N/A	3.992	AV
2			5860.000	50.565	46.502	-3.435	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 2	

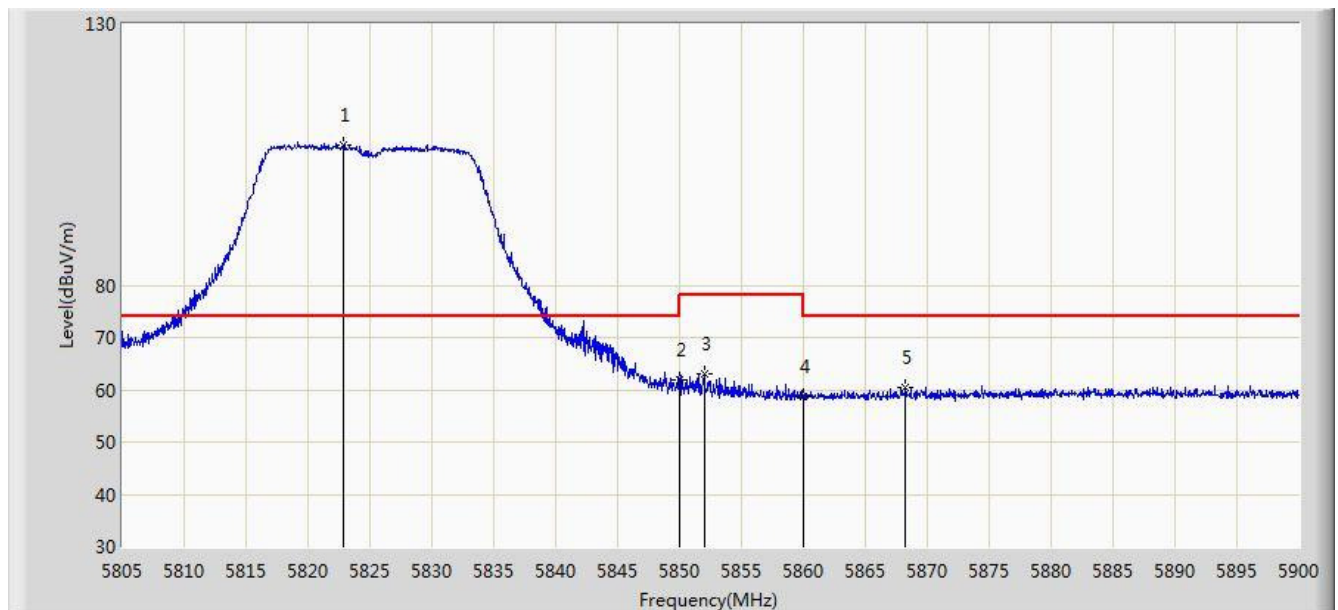


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.908	106.908	102.908	N/A	N/A	4.001	PK
2			5850.000	61.873	57.816	-16.327	78.200	4.058	PK
3			5852.025	62.903	58.845	-15.297	78.200	4.058	PK
4			5860.000	58.715	54.652	-15.285	74.000	4.064	PK
5			5868.270	60.406	56.322	-13.594	74.000	4.084	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 2	

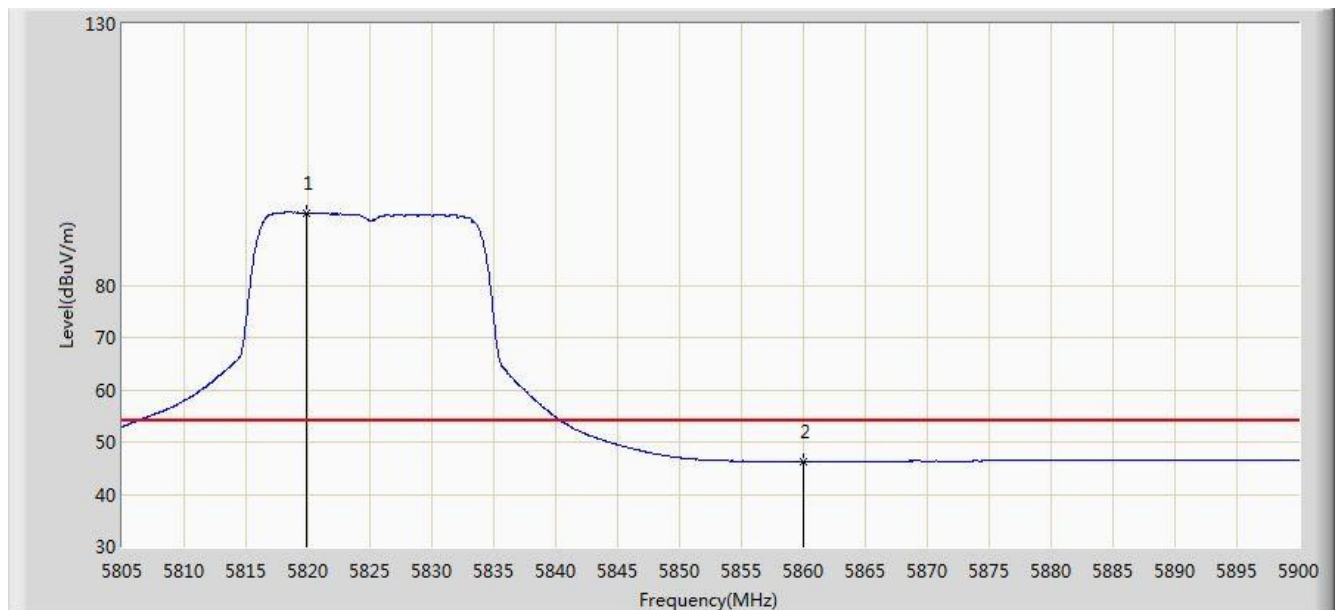


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	93.840	89.846	N/A	N/A	3.994	AV
2			5860.000	46.229	42.166	-7.771	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 2	

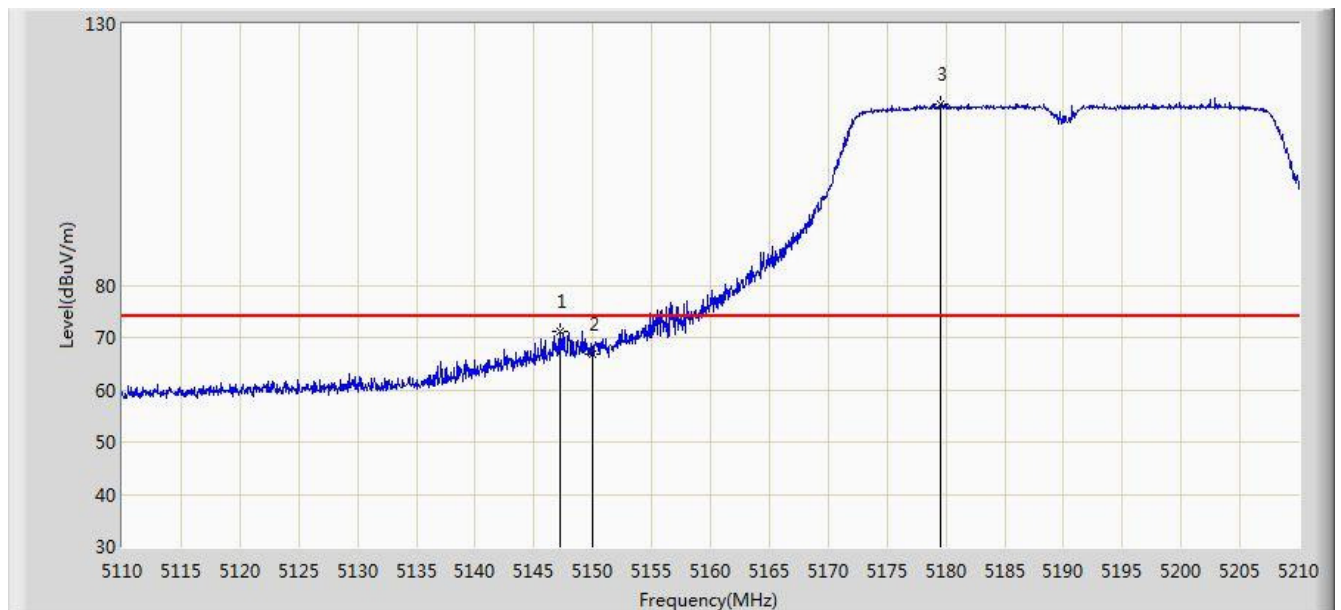


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.250	71.082	67.773	-2.918	74.000	3.309	PK
2			5150.000	66.931	63.622	-7.069	74.000	3.309	PK
3		*	5179.600	114.639	111.366	N/A	N/A	3.273	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 2	

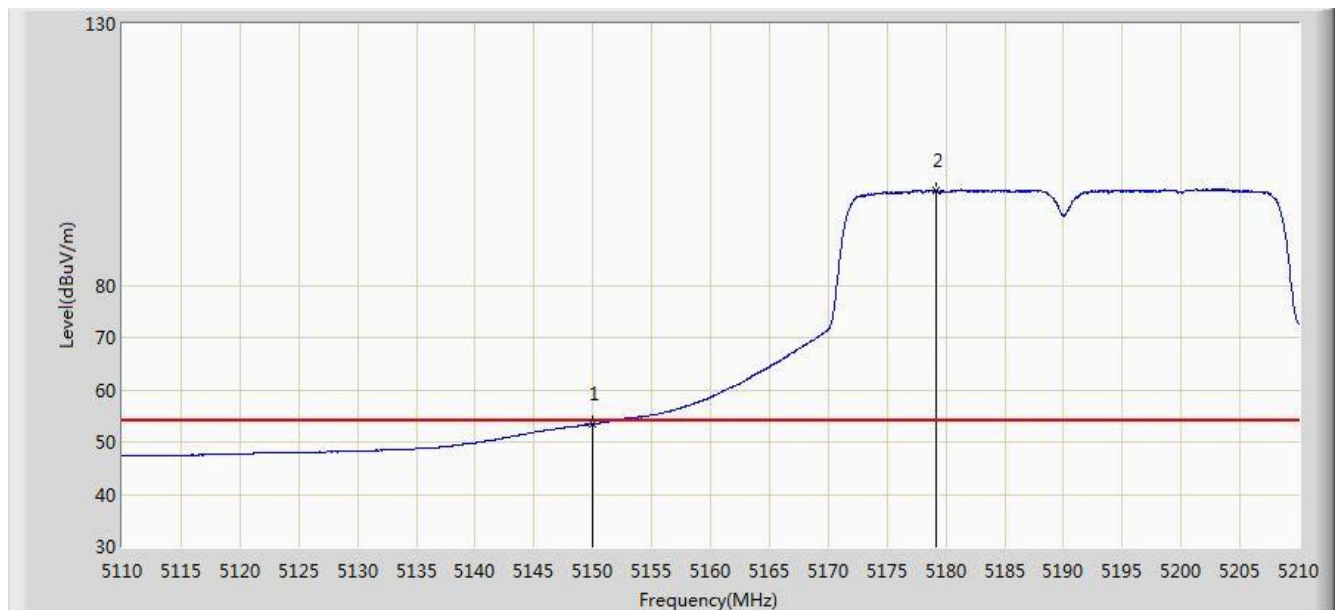


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.469	50.160	-0.531	54.000	3.309	AV
2		*	5179.150	98.063	94.789	N/A	N/A	3.274	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 2	

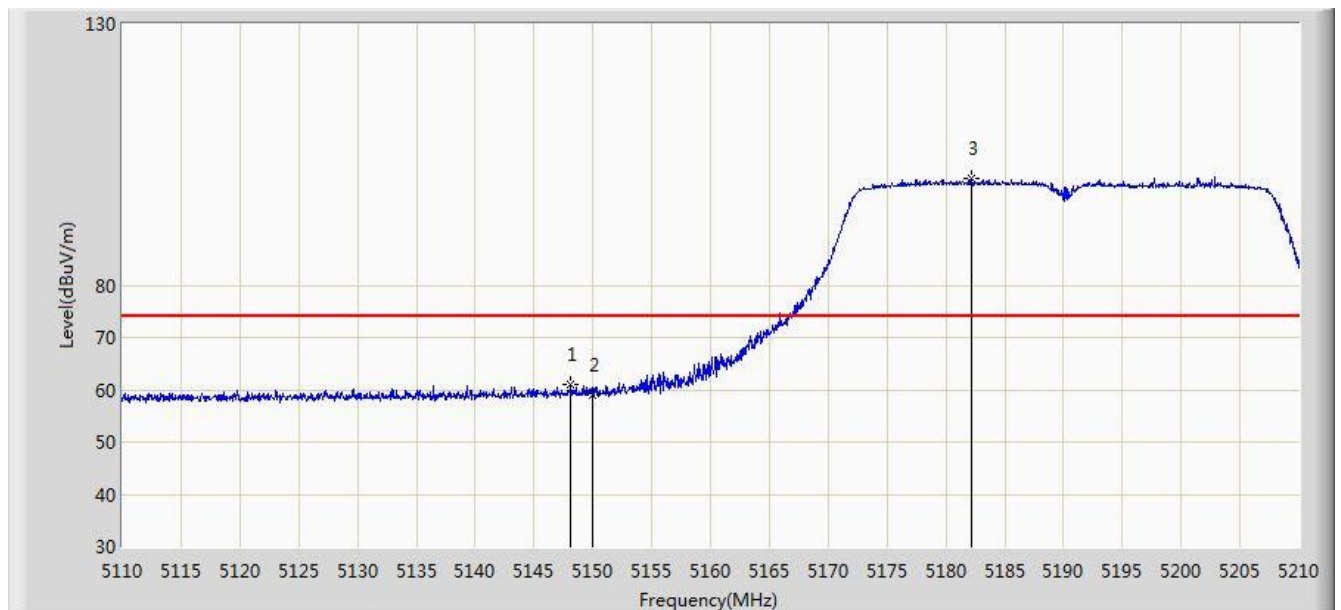


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.150	60.908	57.599	-13.092	74.000	3.309	PK
2			5150.000	59.025	55.716	-14.975	74.000	3.309	PK
3		*	5182.150	100.550	97.279	N/A	N/A	3.271	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 2	

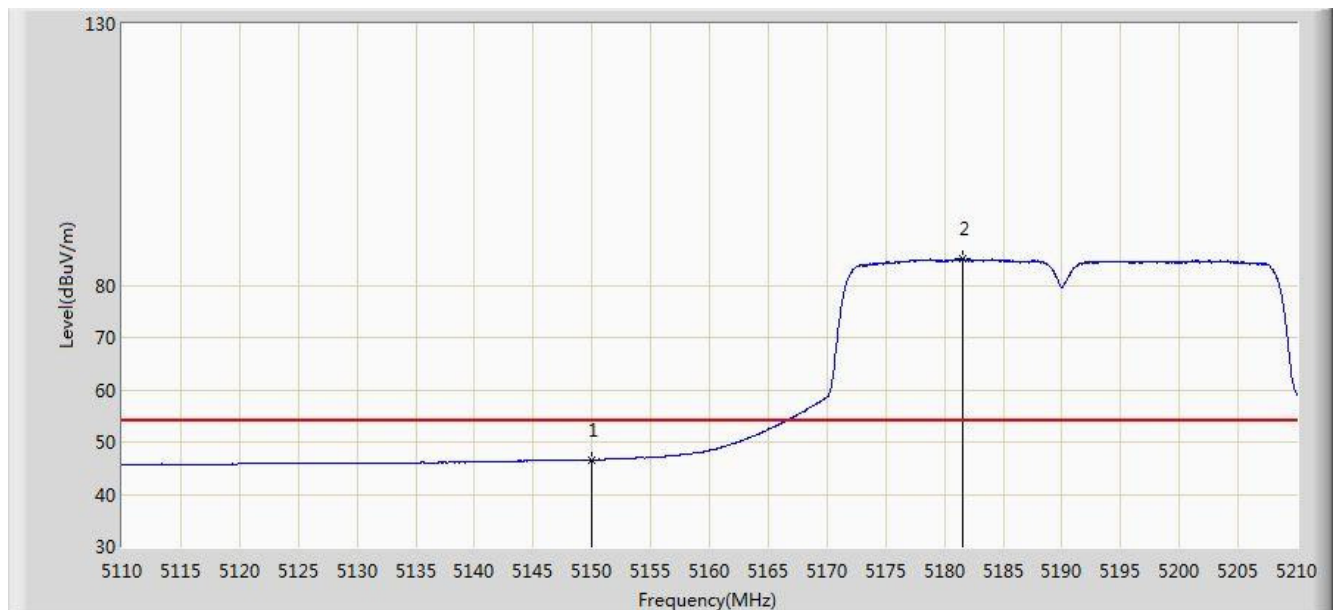


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.655	43.346	-7.345	54.000	3.309	AV
2		*	5181.500	85.000	81.728	N/A	N/A	3.271	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 2	

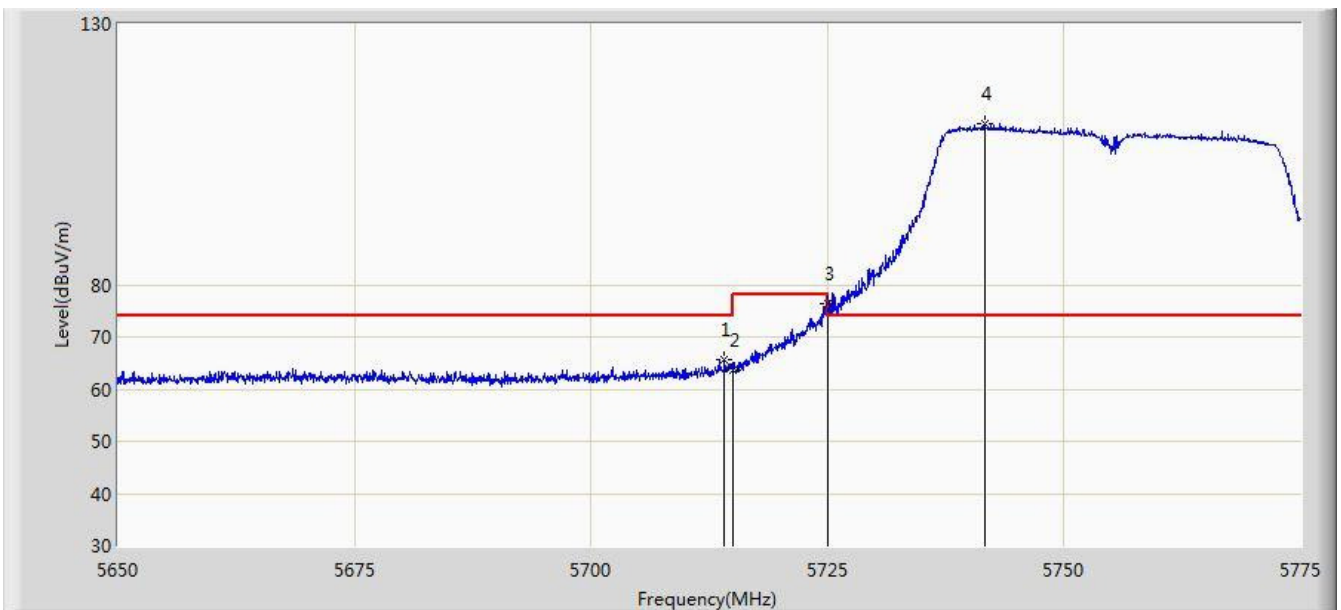


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.062	65.666	61.908	-8.334	74.000	3.758	PK
2			5715.000	63.735	59.974	-10.265	74.000	3.761	PK
3			5725.000	76.263	72.472	-1.937	78.200	3.791	PK
4		*	5741.562	110.924	107.083	N/A	N/A	3.841	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 2	

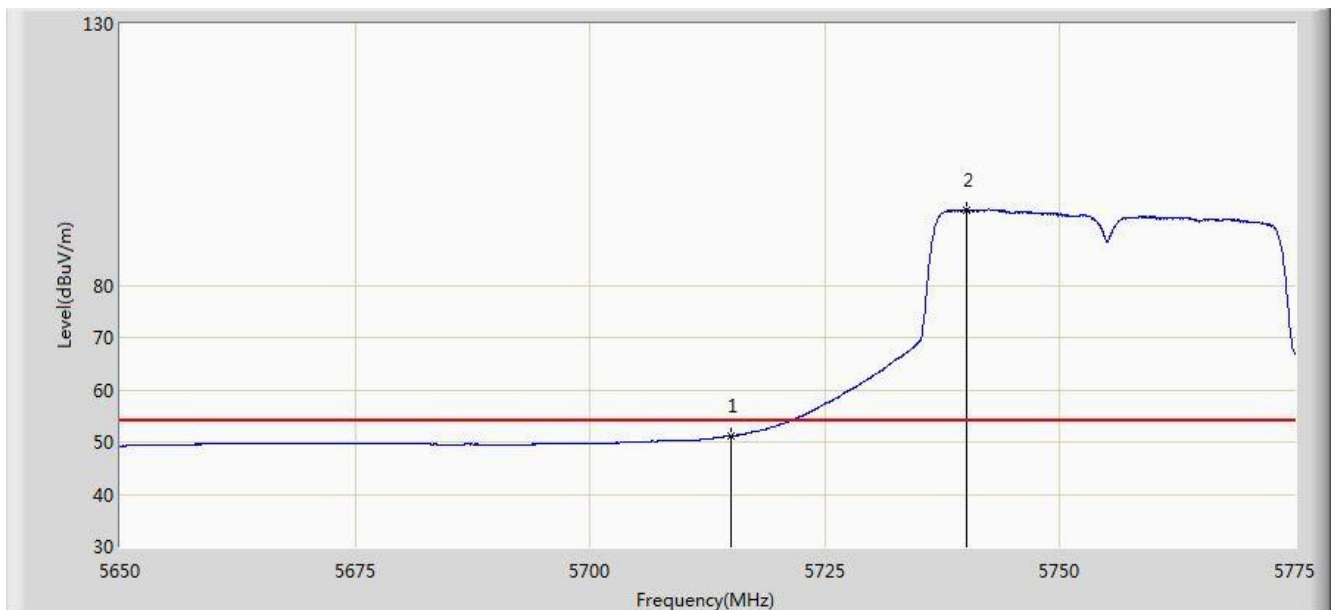


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.207	47.446	-2.793	54.000	3.761	AV
2		*	5740.000	94.467	90.630	N/A	N/A	3.837	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 2	

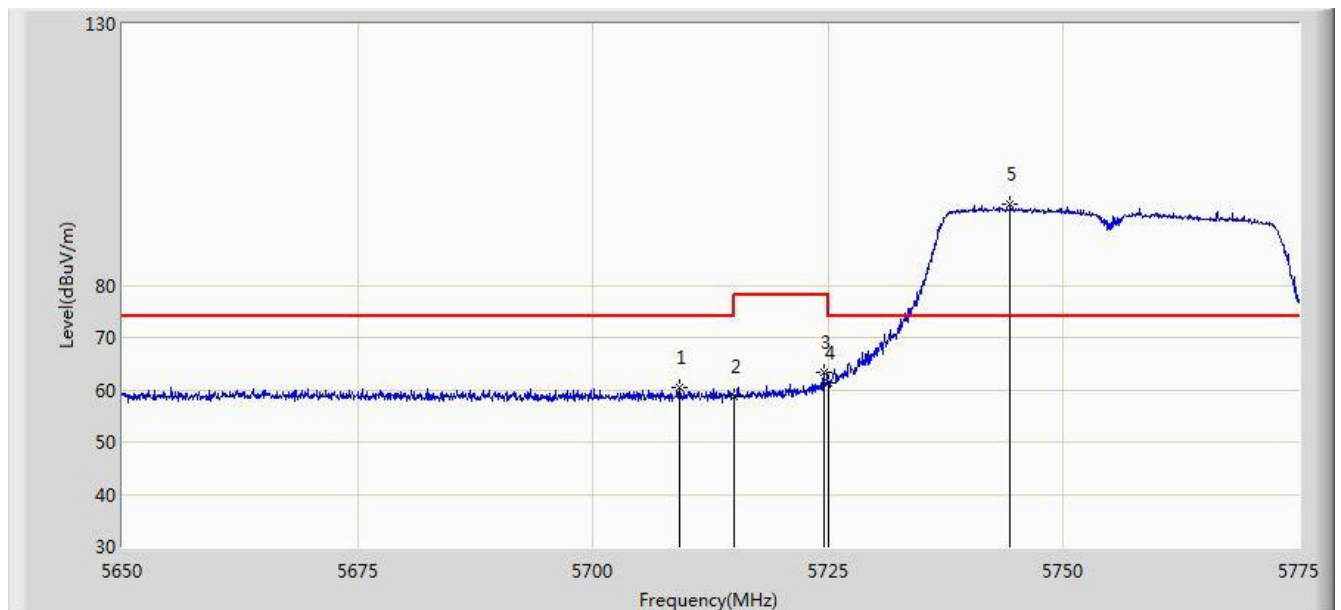


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5709.187	60.383	56.639	-13.617	74.000	3.744	PK
2			5715.000	58.575	54.814	-15.425	74.000	3.761	PK
3			5724.500	63.446	59.657	-14.754	78.200	3.790	PK
4			5725.000	61.400	57.609	-16.800	78.200	3.791	PK
5		*	5744.375	95.461	91.611	N/A	N/A	3.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 2	

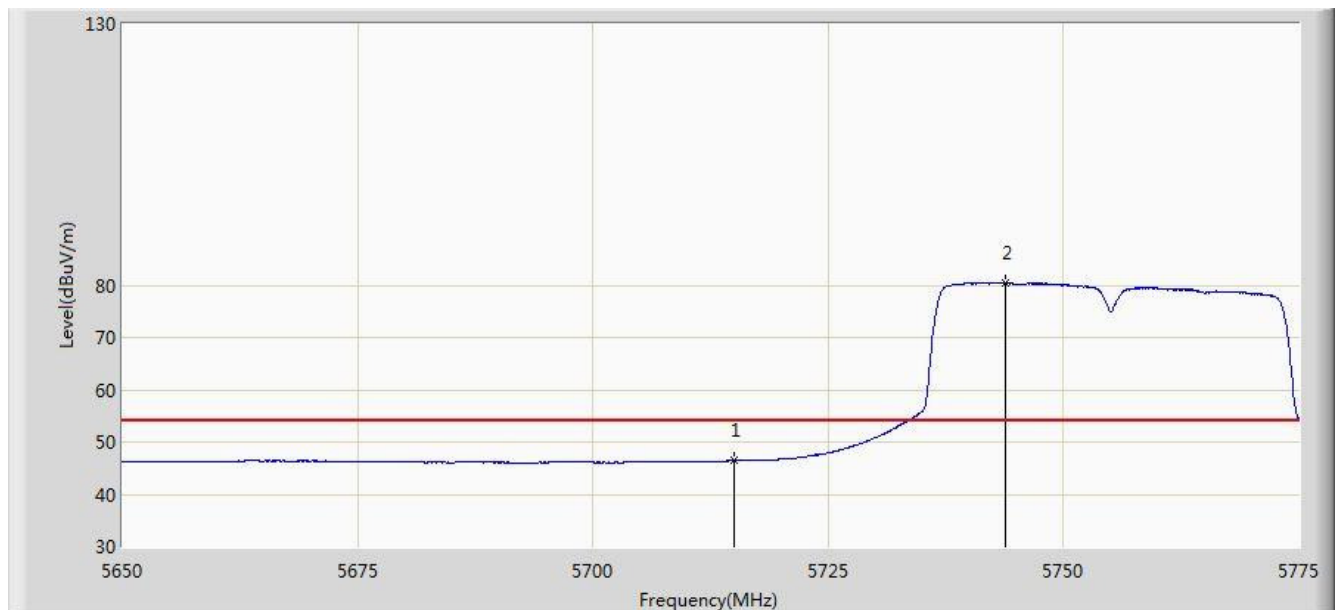


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.463	42.702	-7.537	54.000	3.761	AV
2		*	5743.812	80.516	76.668	N/A	N/A	3.848	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 2	

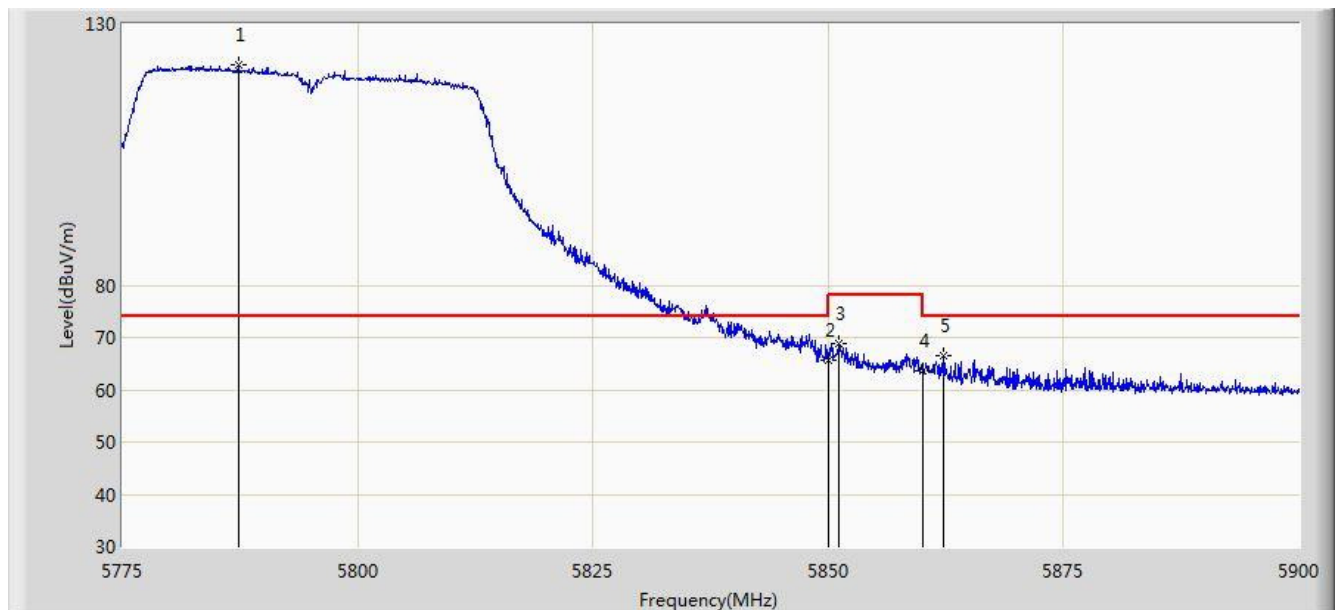


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.375	122.101	118.161	N/A	N/A	3.941	PK
2			5850.000	65.788	61.731	-12.412	78.200	4.058	PK
3			5851.062	68.978	64.920	-9.222	78.200	4.057	PK
4			5860.000	63.734	59.671	-10.266	74.000	4.064	PK
5			5862.250	66.653	62.587	-7.347	74.000	4.066	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 2	

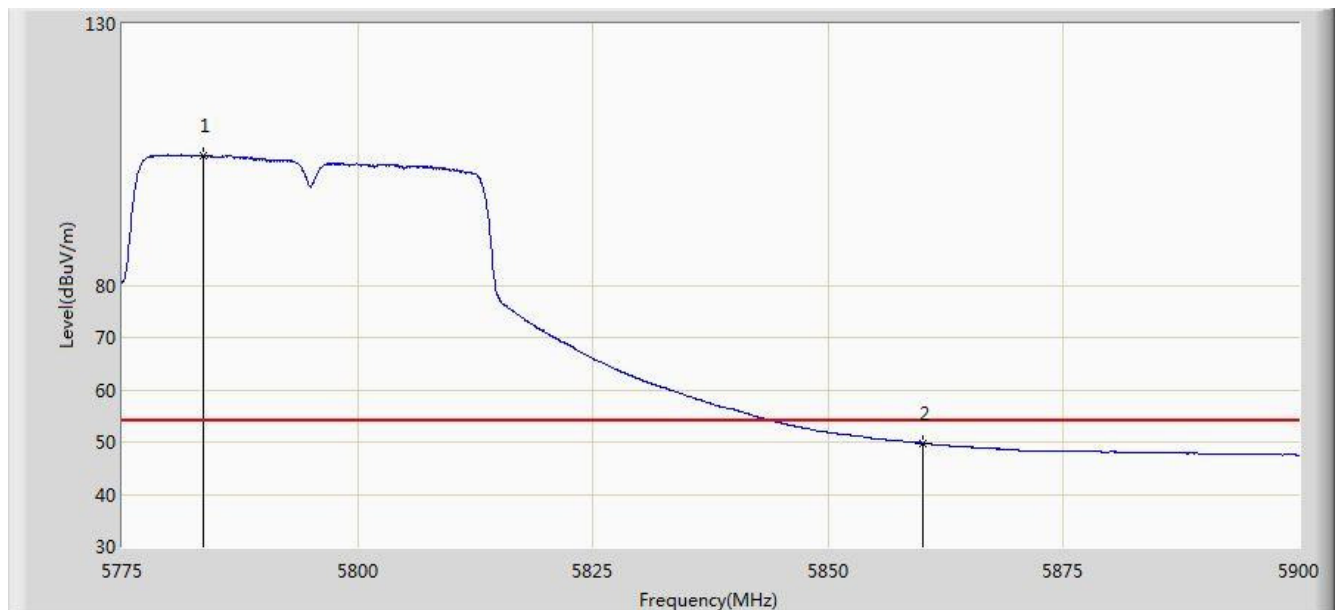


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.687	104.822	100.888	N/A	N/A	3.934	AV
2			5860.000	49.800	45.737	-4.200	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 2	

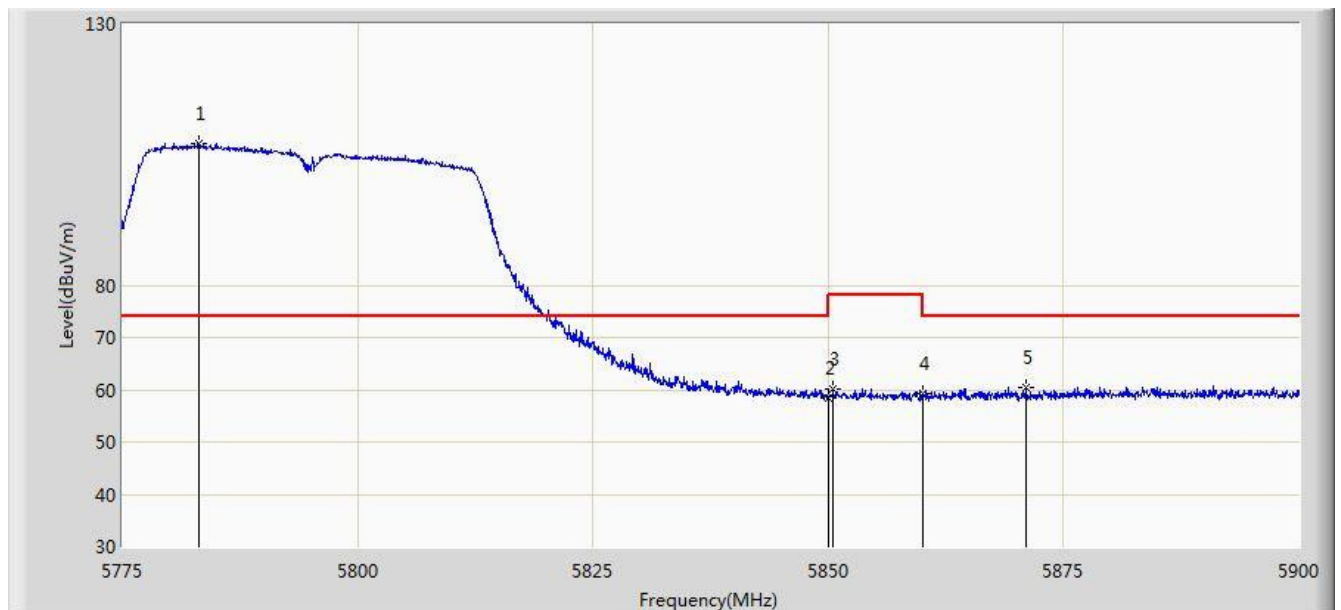


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.187	106.959	103.026	N/A	N/A	3.933	PK
2			5850.000	58.546	54.489	-19.654	78.200	4.058	PK
3			5850.500	60.262	56.205	-17.938	78.200	4.058	PK
4			5860.000	59.402	55.339	-14.598	74.000	4.064	PK
5			5871.000	60.411	56.319	-13.589	74.000	4.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 2	

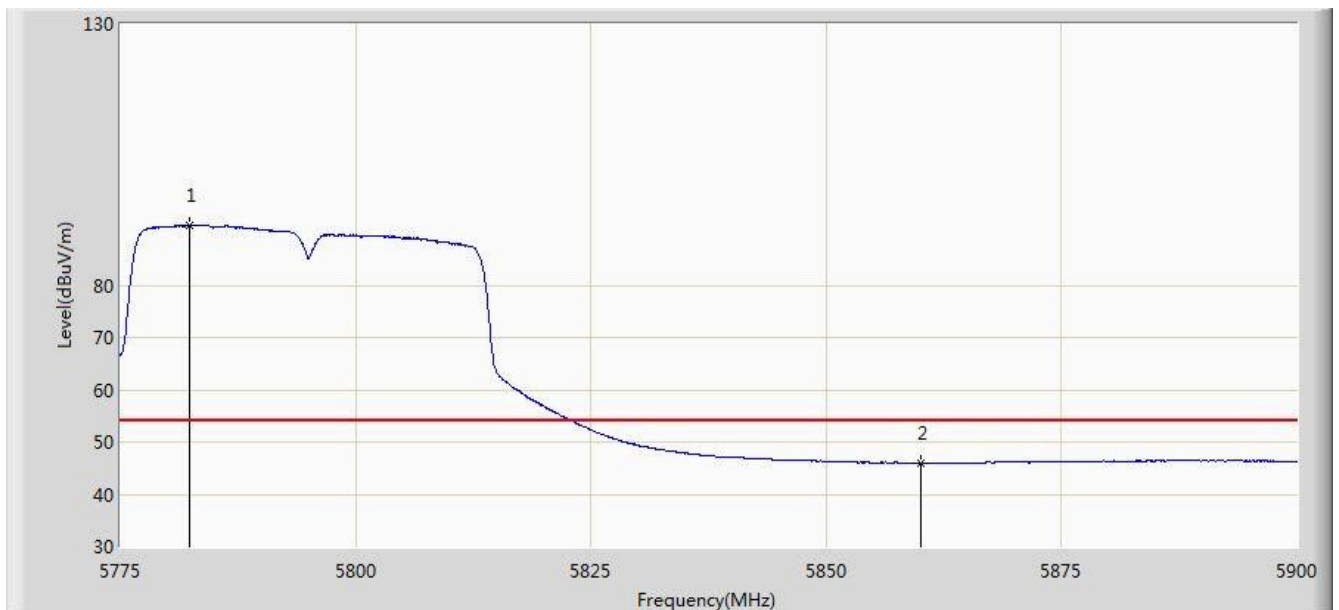


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.312	91.483	87.552	N/A	N/A	3.930	AV
2			5860.000	46.032	41.969	-7.968	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2	

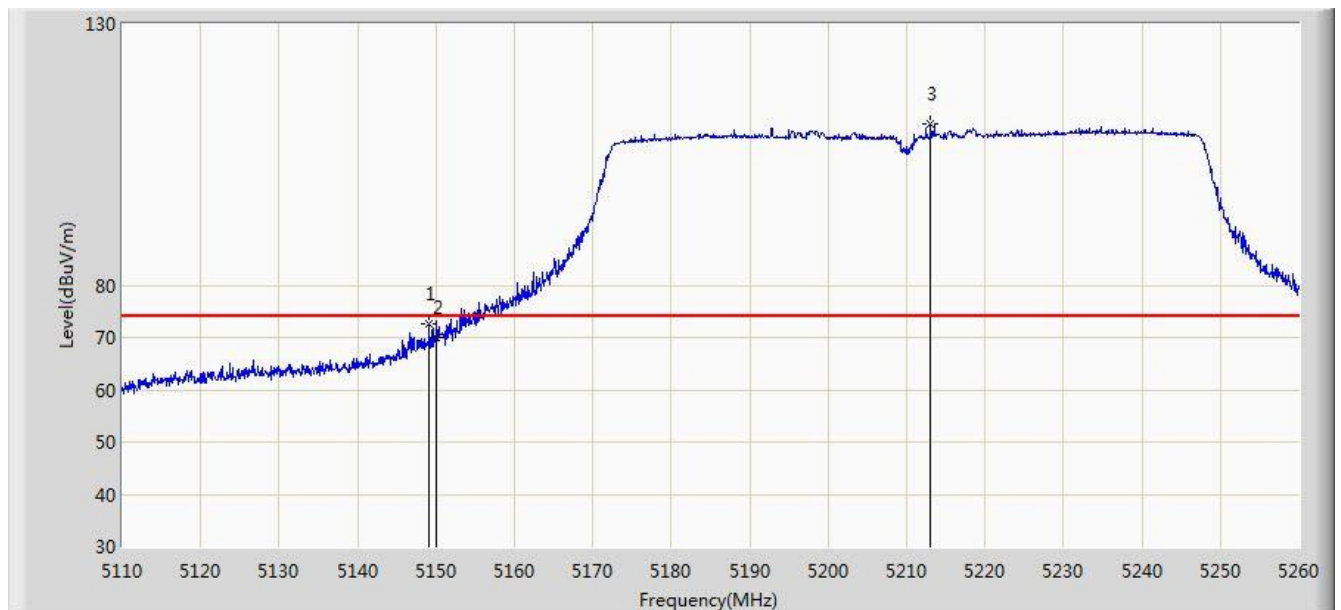


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	72.504	69.195	-1.496	74.000	3.309	PK
2			5150.000	69.951	66.642	-4.049	74.000	3.309	PK
3		*	5213.050	110.919	107.698	N/A	N/A	3.221	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2	

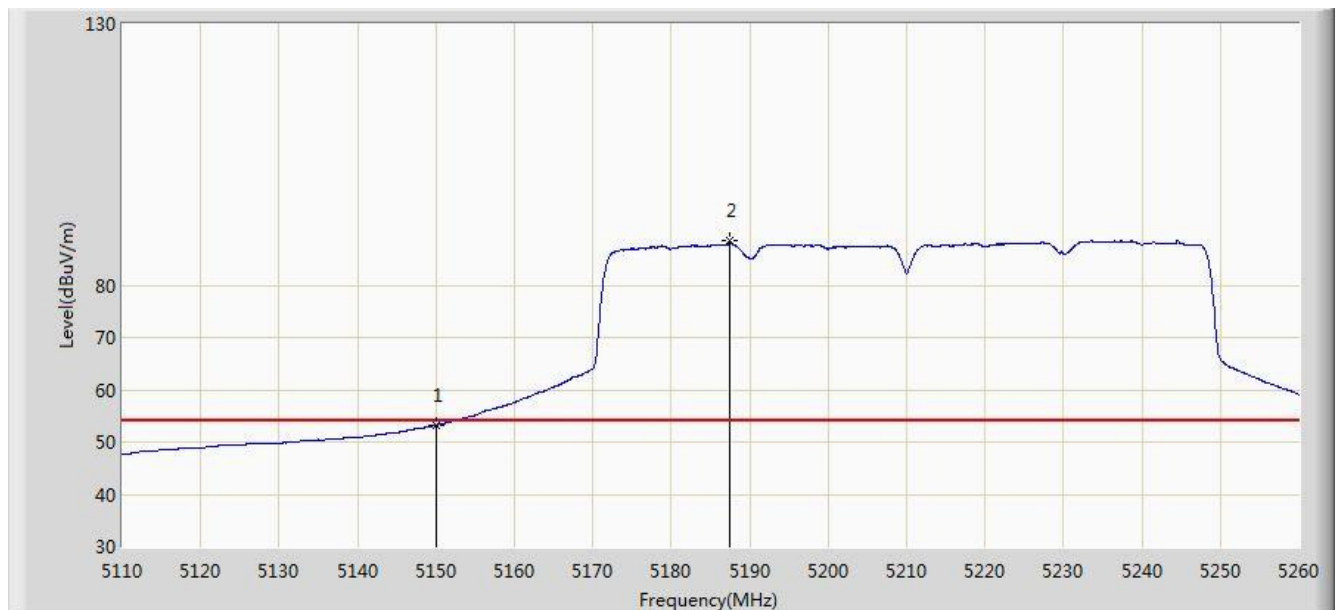


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.163	49.854	-0.837	54.000	3.309	AV
2		*	5187.400	88.542	85.278	N/A	N/A	3.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2	

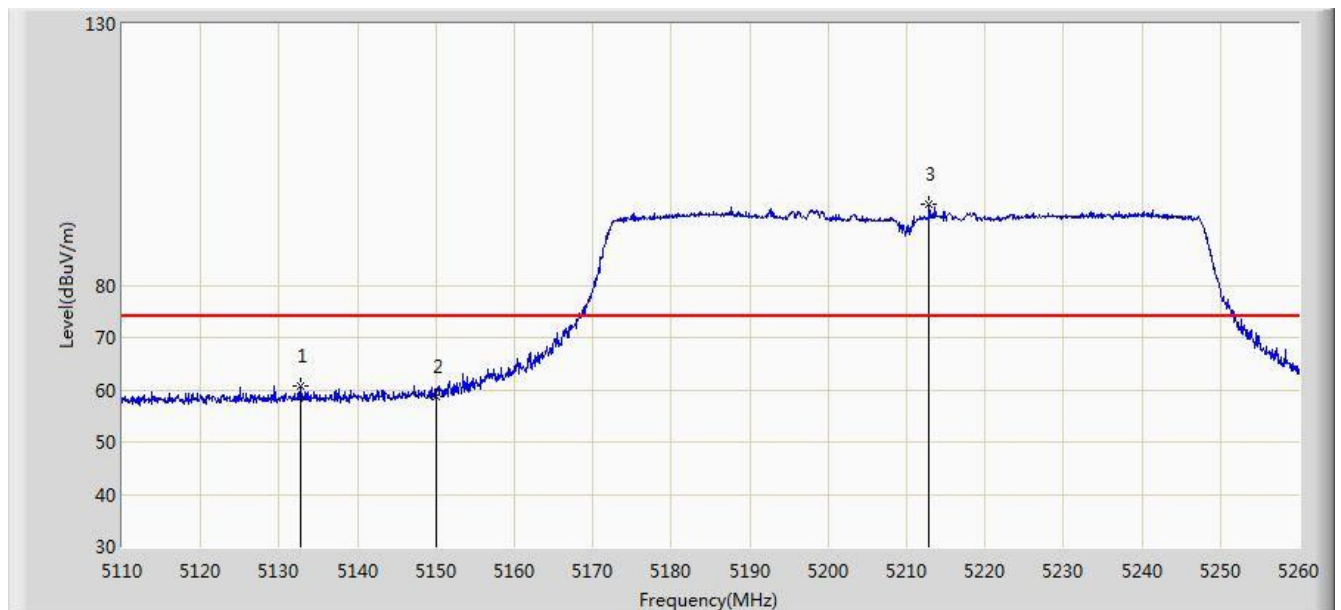


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.725	60.689	57.381	-13.311	74.000	3.309	PK
2			5150.000	58.833	55.524	-15.167	74.000	3.309	PK
3		*	5212.900	95.545	92.324	N/A	N/A	3.221	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2	

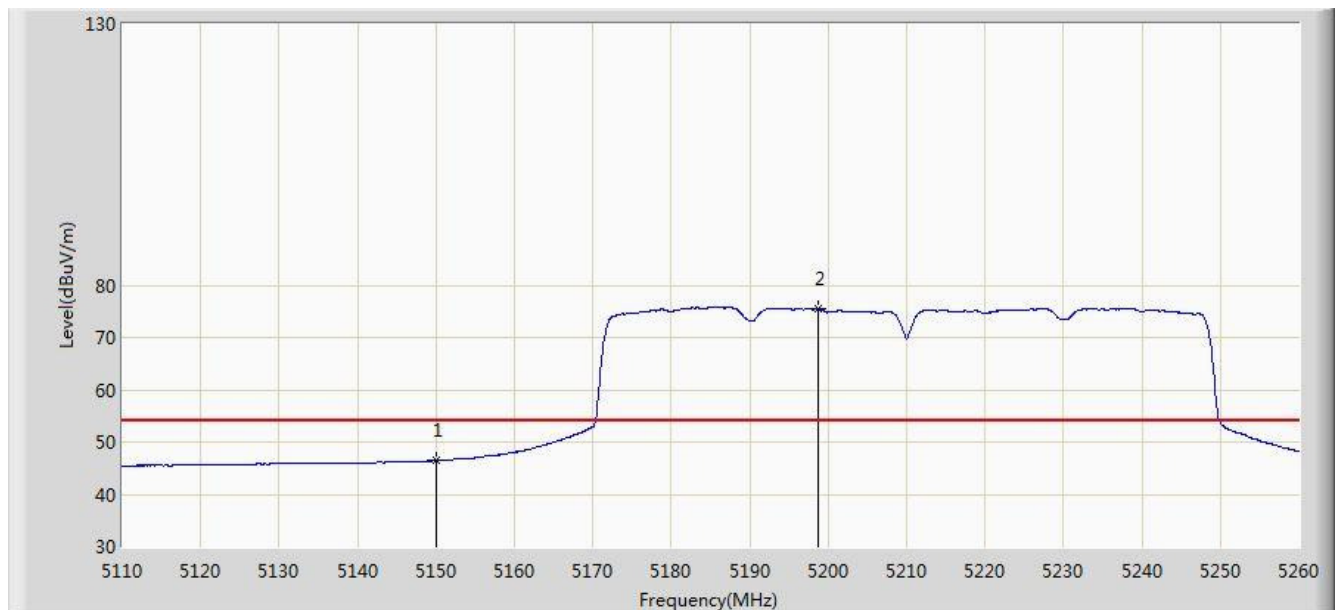


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.401	43.092	-7.599	54.000	3.309	AV
2		*	5198.650	75.519	72.268	N/A	N/A	3.252	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 2	

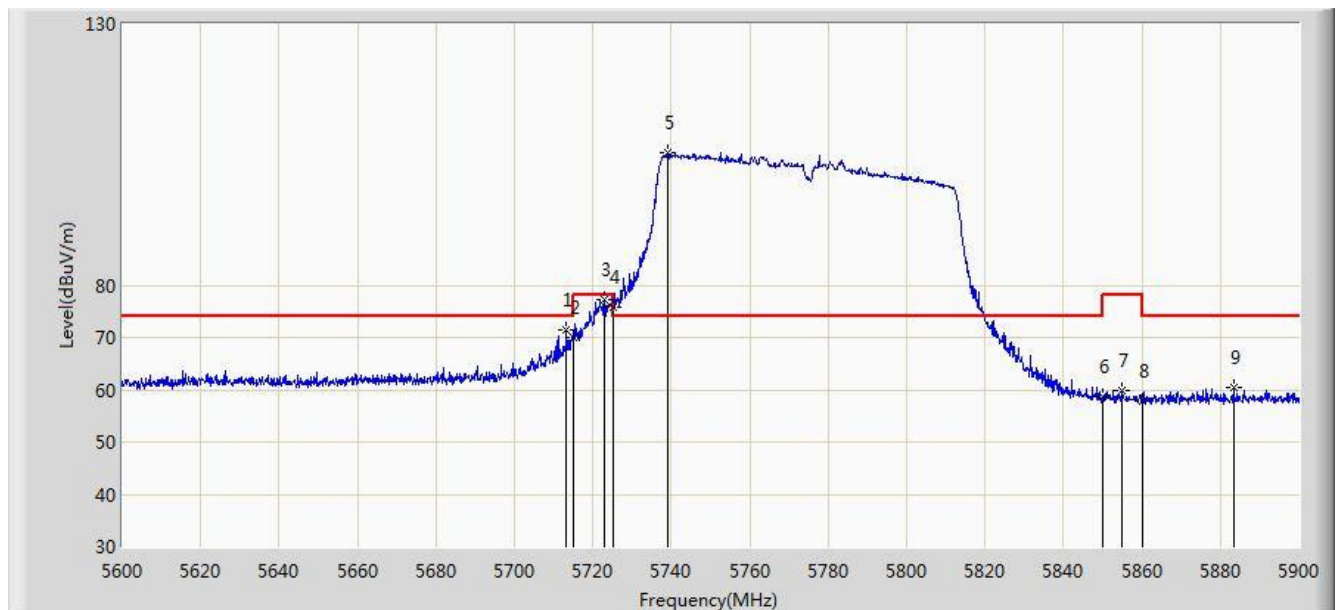


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.250	71.539	67.783	-2.461	74.000	3.755	PK
2			5715.000	69.920	66.159	-4.080	74.000	3.761	PK
3			5723.000	77.218	73.433	-0.982	78.200	3.784	PK
4			5725.000	75.810	72.019	-2.390	78.200	3.791	PK
5		*	5739.200	105.495	101.660	N/A	N/A	3.835	PK
6			5850.000	58.717	54.660	-19.483	78.200	4.058	PK
7			5854.700	59.824	55.764	-18.376	78.200	4.060	PK
8			5860.000	57.734	53.671	-16.266	74.000	4.064	PK
9			5883.350	60.298	56.168	-13.702	74.000	4.131	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 2	

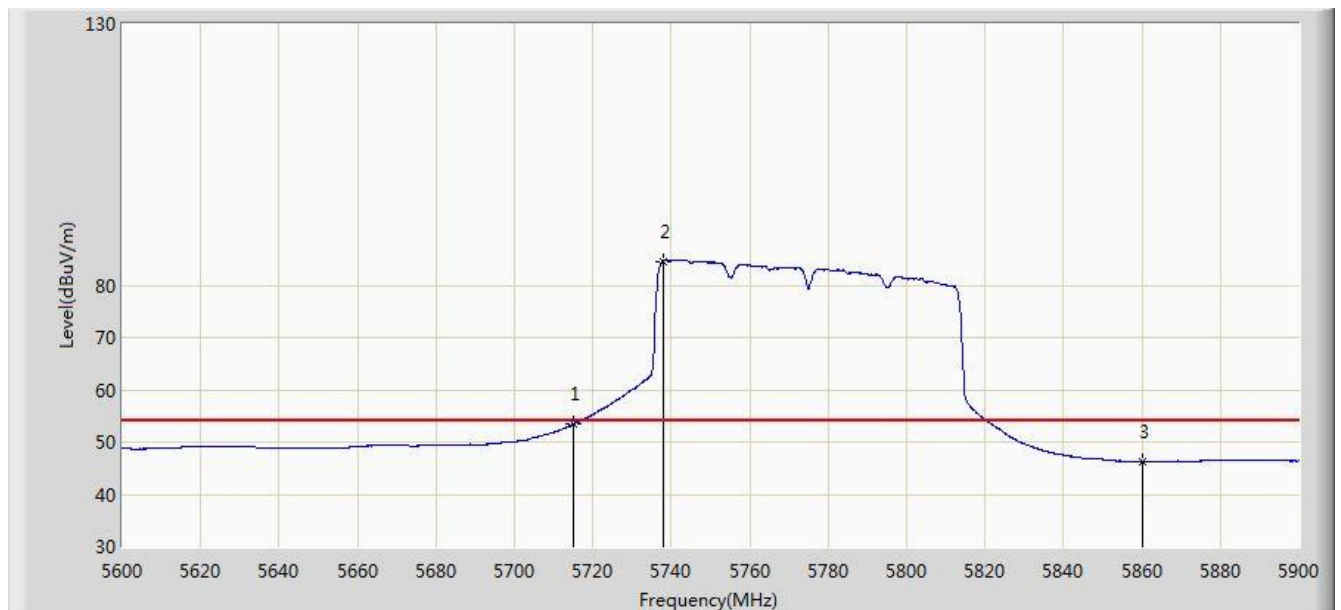


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.420	49.659	-0.580	54.000	3.761	AV
2		*	5737.850	84.541	80.710	N/A	N/A	3.830	AV
3			5860.000	46.268	42.205	-7.732	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 2	

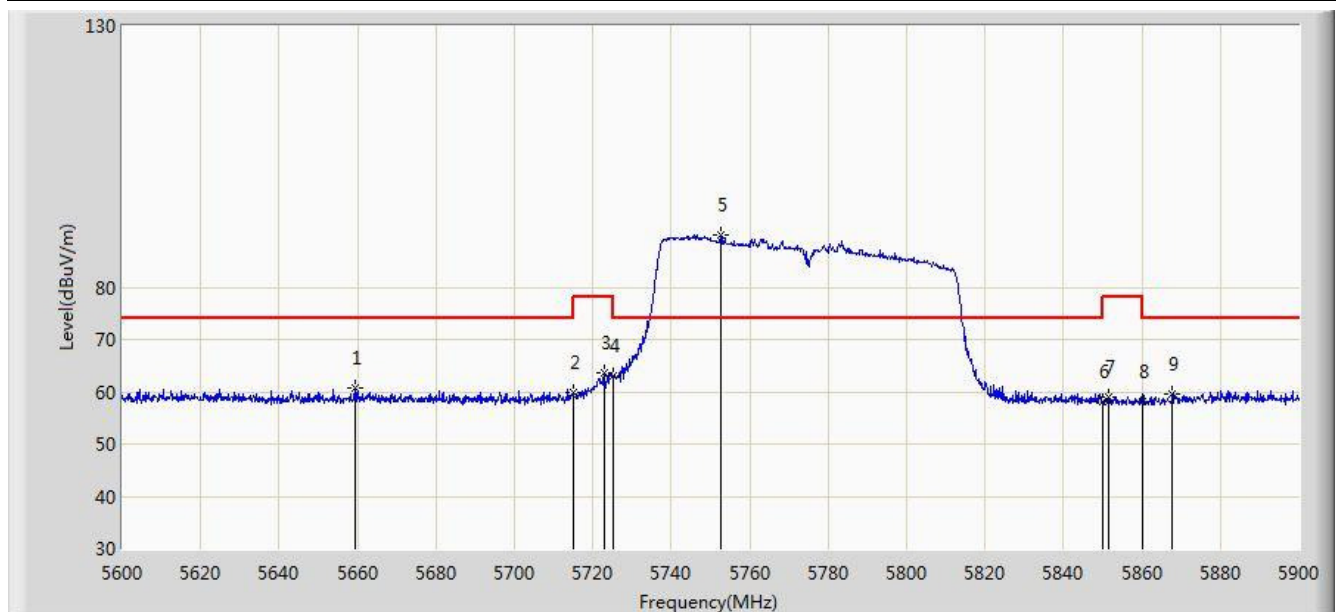


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5659.250	60.757	57.112	-13.243	74.000	3.645	PK
2			5715.000	59.723	55.962	-14.277	74.000	3.761	PK
3			5722.850	63.521	59.737	-14.679	78.200	3.784	PK
4			5725.000	63.093	59.302	-15.107	78.200	3.791	PK
5		*	5752.550	89.924	86.043	N/A	N/A	3.881	PK
6			5850.000	58.092	54.035	-20.108	78.200	4.058	PK
7			5851.400	59.120	55.062	-19.080	78.200	4.058	PK
8			5860.000	58.174	54.111	-15.826	74.000	4.064	PK
9			5867.750	59.704	55.622	-14.296	74.000	4.082	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 2	

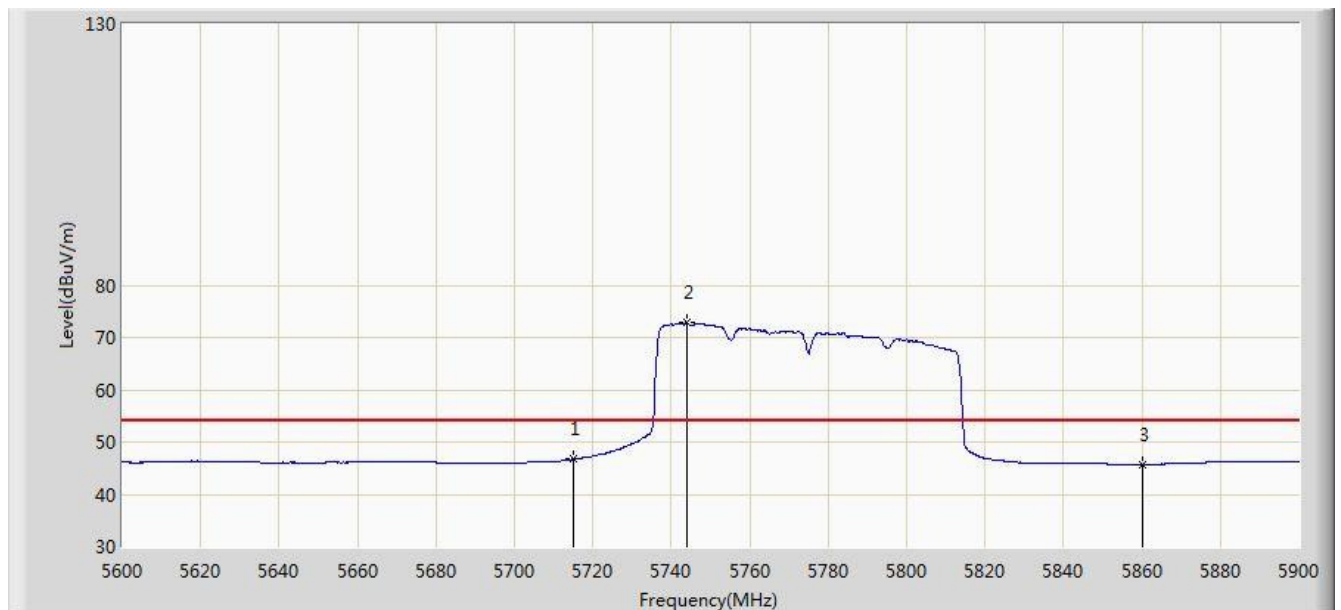


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.710	42.949	-7.290	54.000	3.761	AV
2		*	5744.000	72.790	68.941	N/A	N/A	3.849	AV
3			5860.000	45.723	41.660	-8.277	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1 + 2	

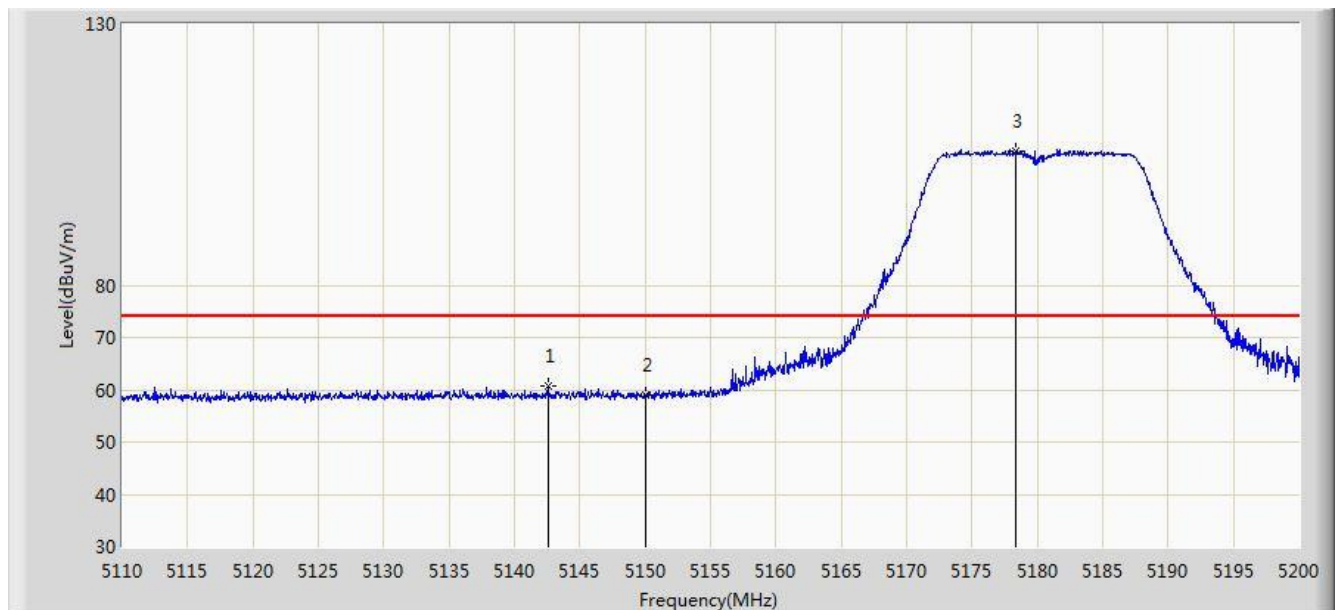


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.580	60.809	57.500	-13.191	74.000	3.309	PK
2			5150.000	59.008	55.699	-14.992	74.000	3.309	PK
3		*	5178.400	105.671	102.397	N/A	N/A	3.275	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1 + 2	

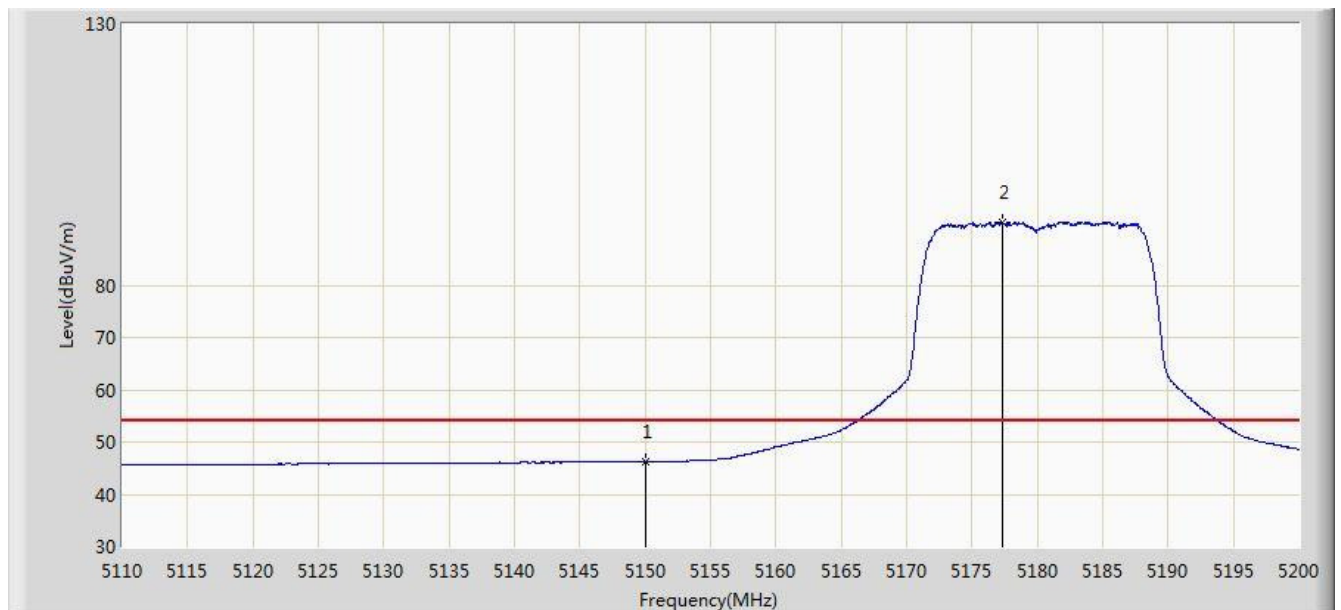


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.191	42.882	-7.809	54.000	3.309	AV
2		*	5177.275	92.027	88.752	N/A	N/A	3.274	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1 + 2	

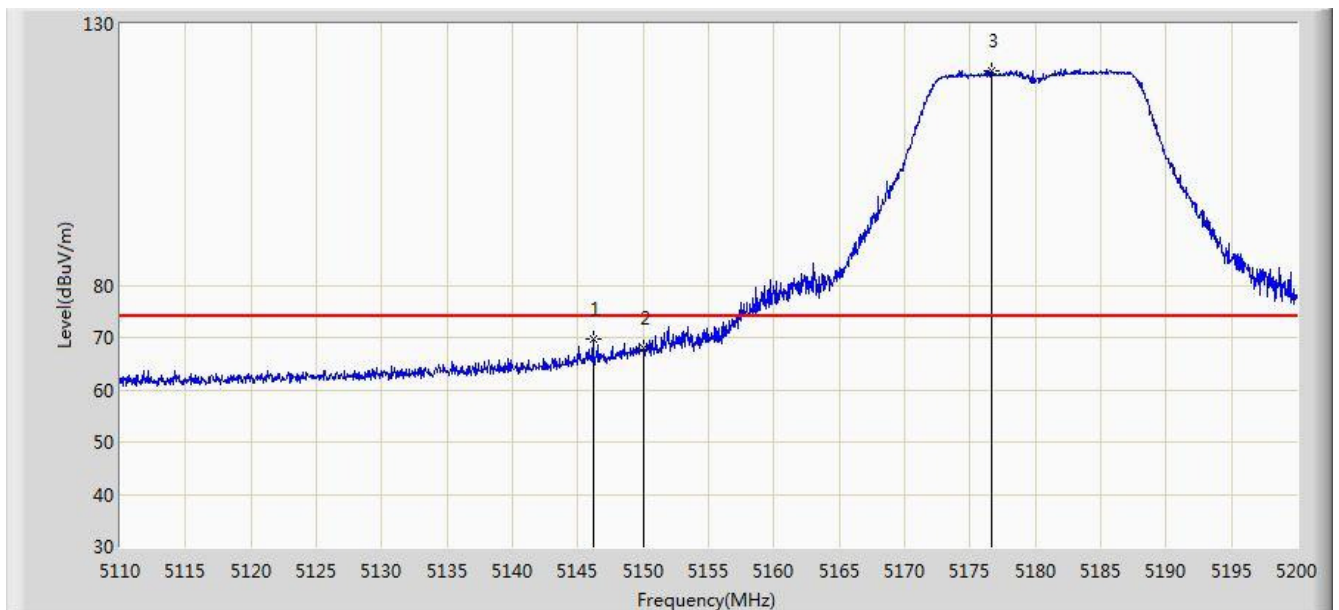


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.180	69.618	66.309	-4.382	74.000	3.308	PK
2			5150.000	67.850	64.541	-6.150	74.000	3.309	PK
3		*	5176.690	121.158	117.882	N/A	N/A	3.276	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1 + 2	

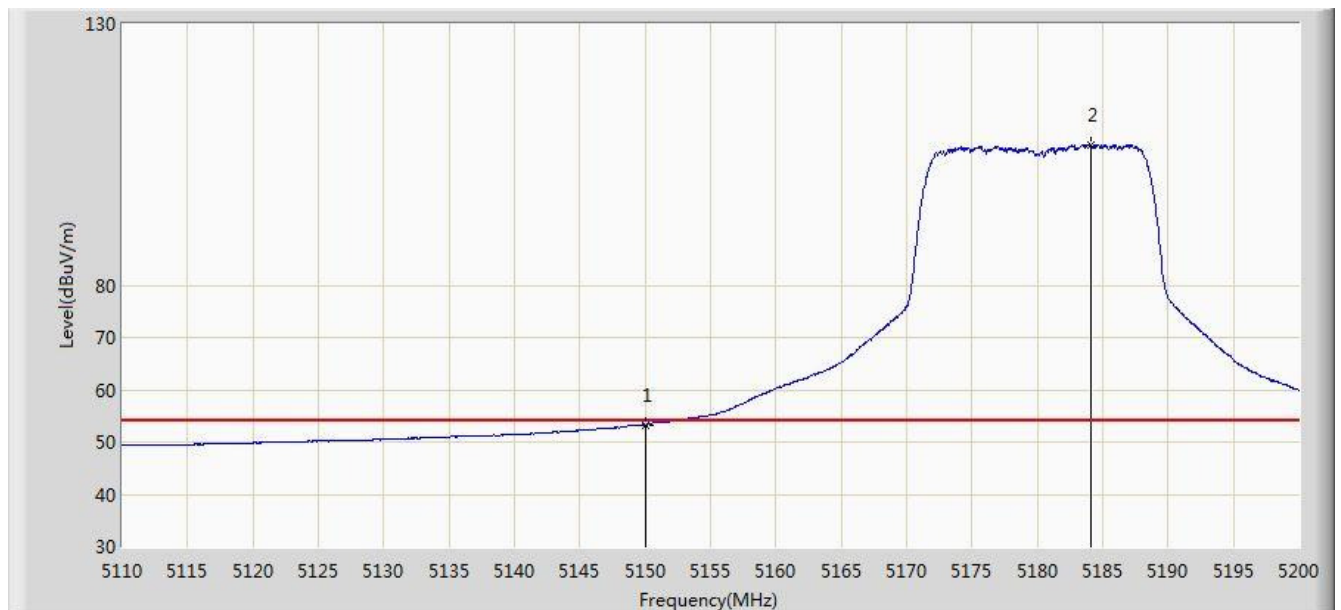


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.274	49.965	-0.726	54.000	3.309	AV
2		*	5184.115	106.911	103.643	N/A	N/A	3.269	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1 + 2	

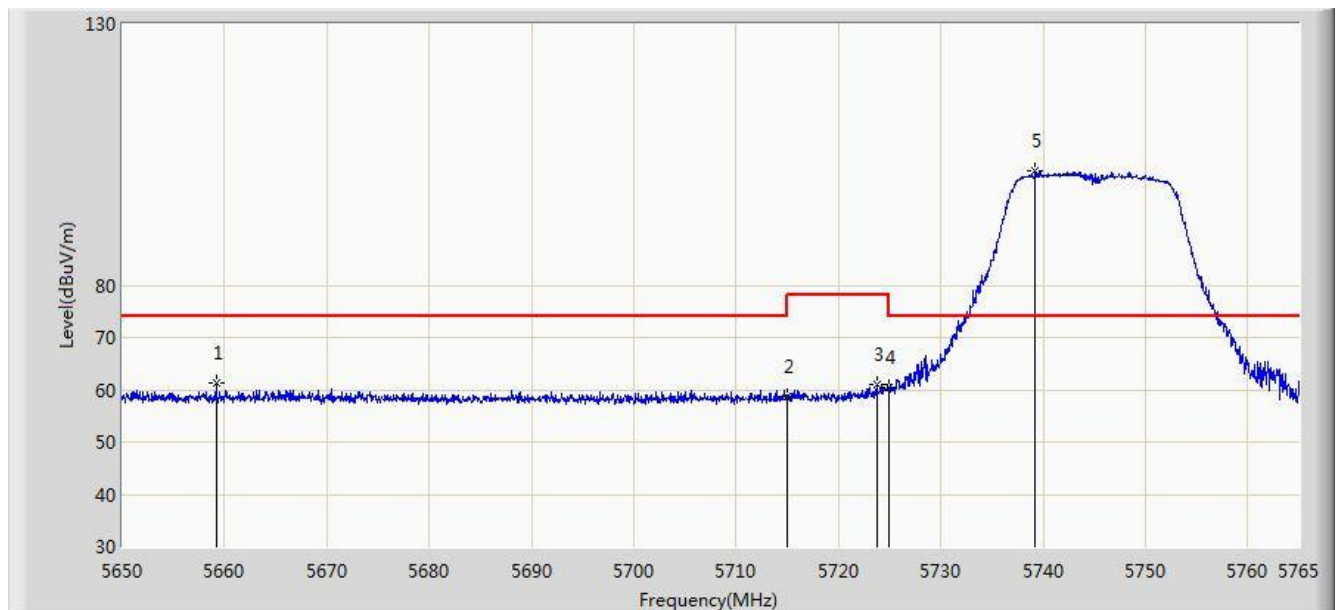


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5659.200	61.291	57.646	-12.709	74.000	3.645	PK
2			5715.000	58.611	54.850	-15.389	74.000	3.761	PK
3			5723.715	60.872	57.085	-17.328	78.200	3.786	PK
4			5725.000	60.357	56.566	-17.843	78.200	3.791	PK
5		*	5739.240	101.811	97.976	N/A	N/A	3.835	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1 + 2	

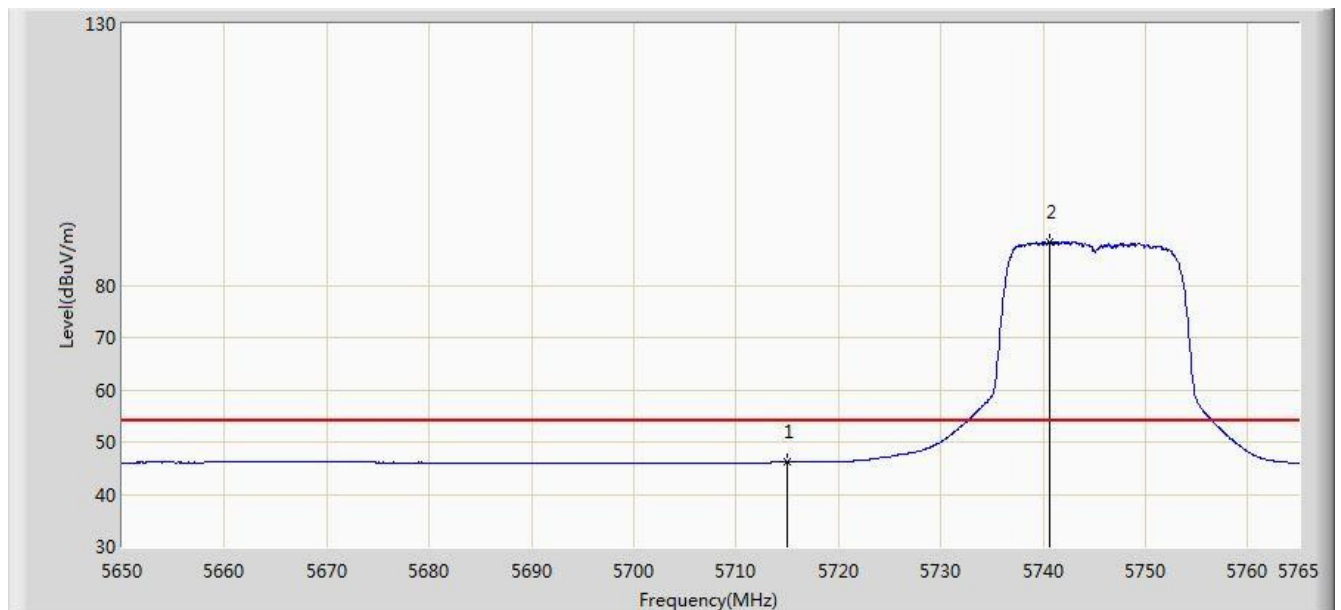


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.129	42.368	-7.871	54.000	3.761	AV
2		*	5740.620	88.231	84.392	N/A	N/A	3.838	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1 + 2	

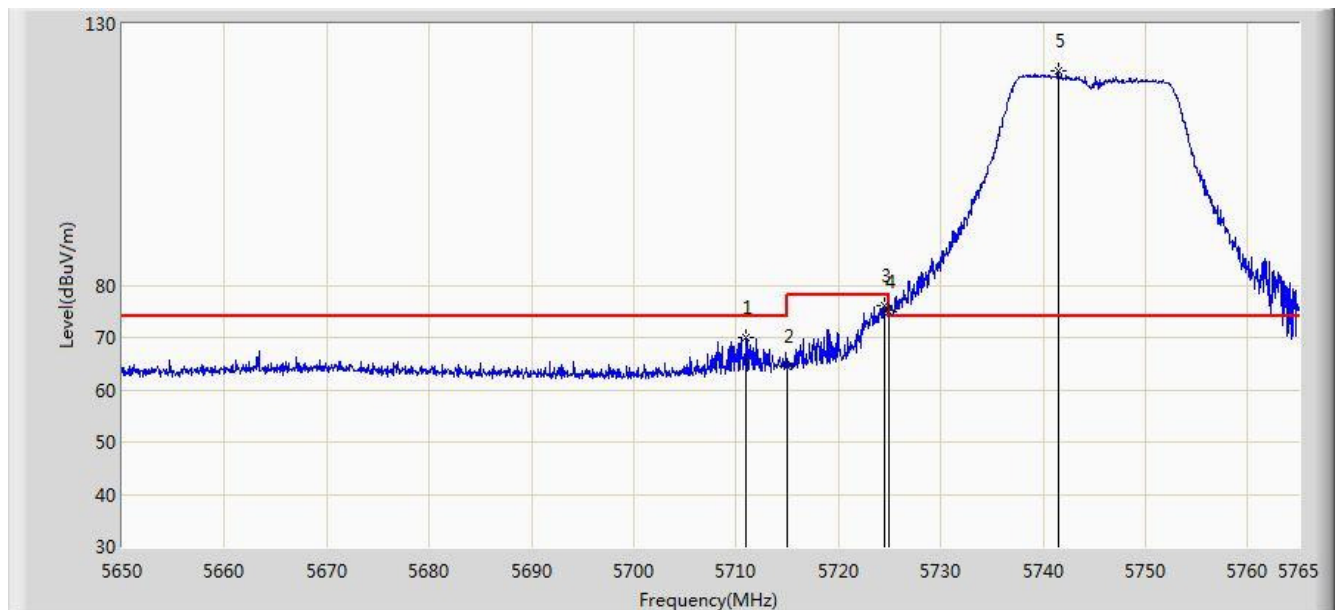


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.950	70.113	66.364	-3.887	74.000	3.748	PK
2			5715.000	64.441	60.680	-9.559	74.000	3.761	PK
3		*	5724.462	76.107	72.318	-2.093	78.200	3.790	PK
4			5725.000	75.045	71.254	-3.155	78.200	3.791	PK
5		*	5741.482	121.052	117.211	N/A	N/A	3.842	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/05 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1 + 2	

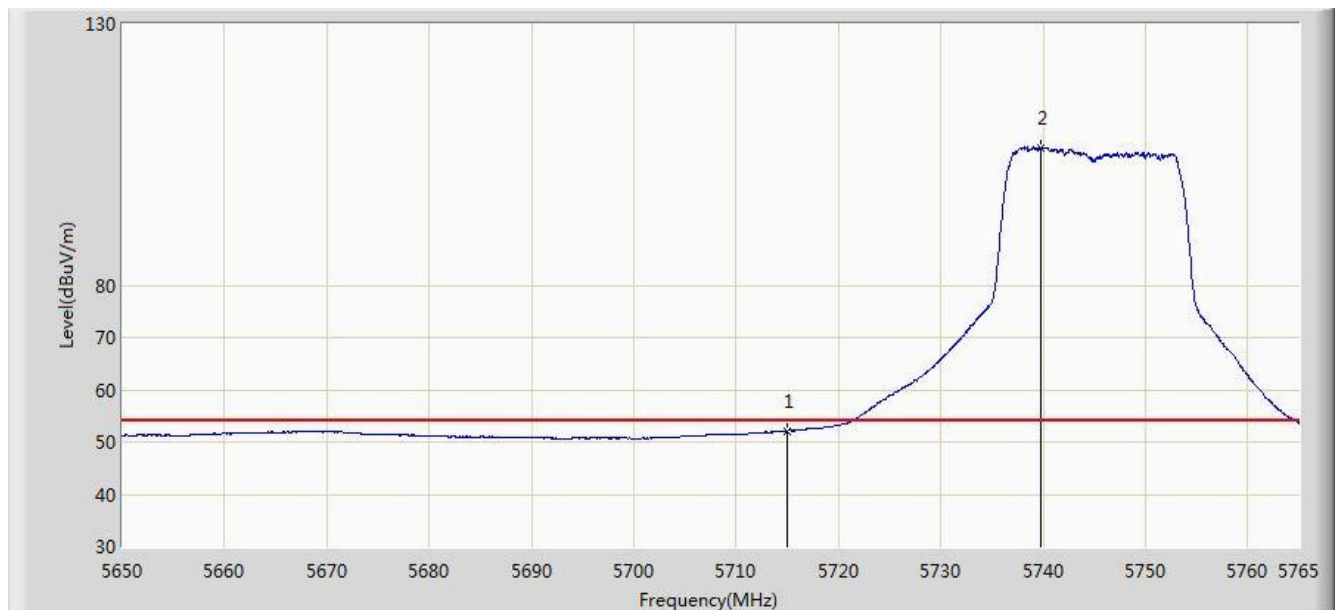


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.165	48.404	-1.835	54.000	3.761	AV
2		*	5739.815	106.290	102.454	N/A	N/A	3.836	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1 + 2	

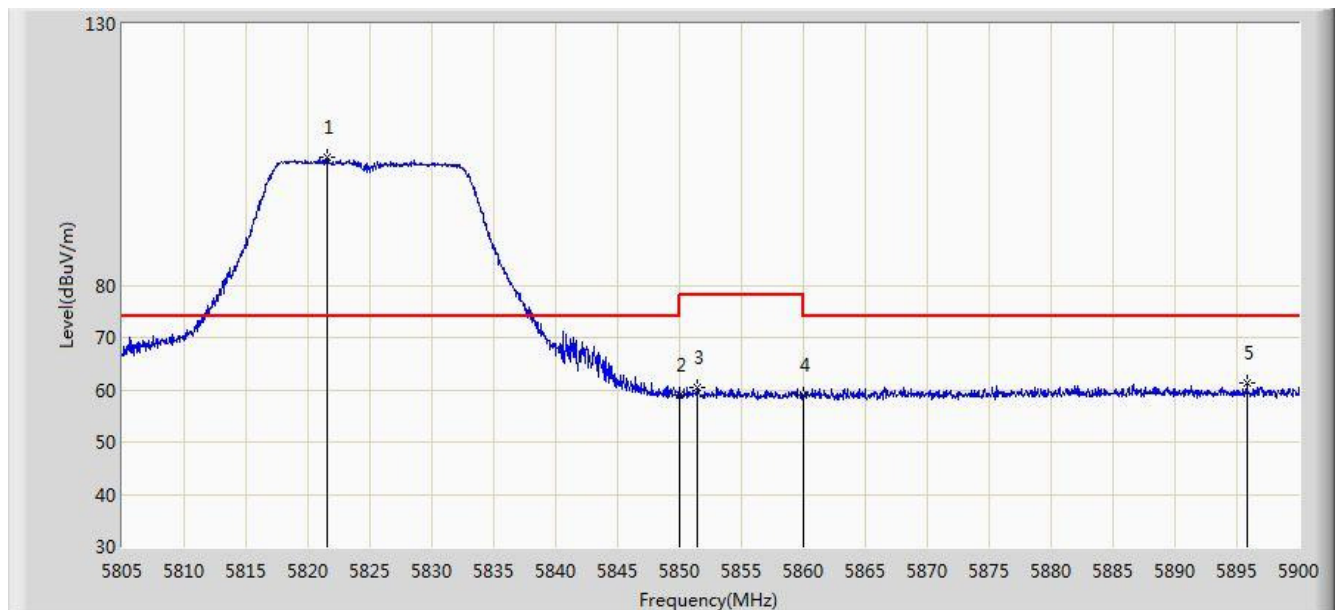


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.578	104.419	100.422	N/A	N/A	3.997	PK
2			5850.000	58.952	54.895	-19.248	78.200	4.058	PK
3			5851.455	60.463	56.405	-17.737	78.200	4.058	PK
4			5860.000	58.844	54.781	-15.156	74.000	4.064	PK
5			5895.820	61.305	57.137	-12.695	74.000	4.168	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1 + 2	

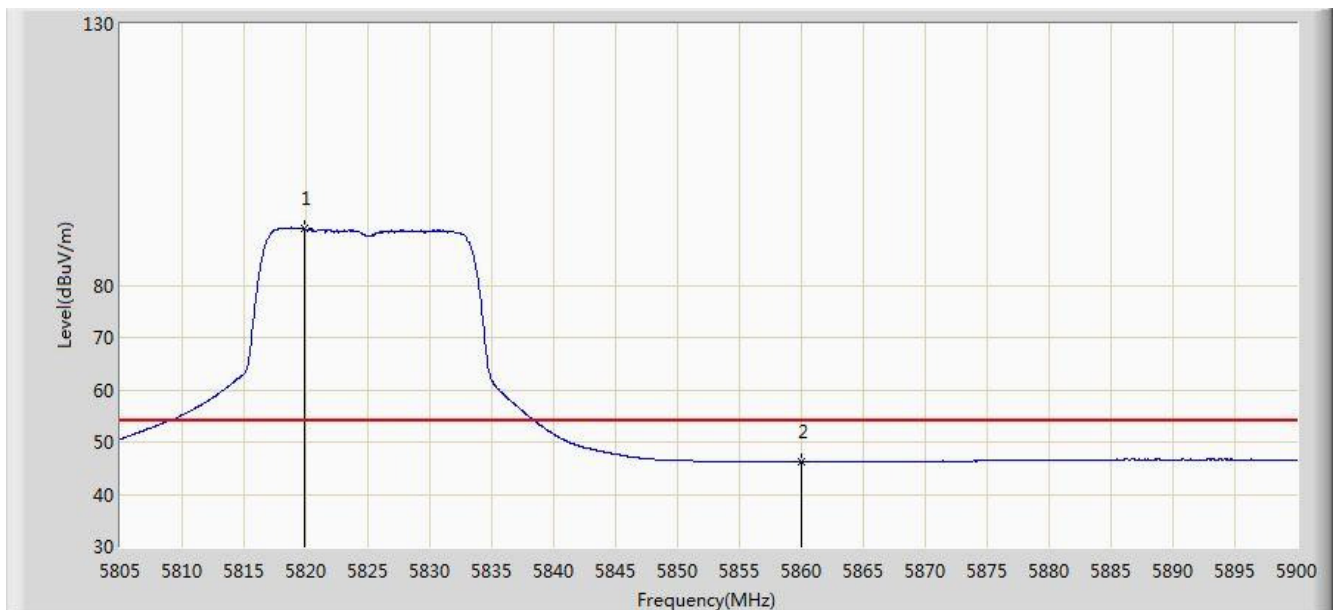


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	90.831	86.837	N/A	N/A	3.994	AV
2			5860.000	46.190	42.127	-7.810	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1 + 2	

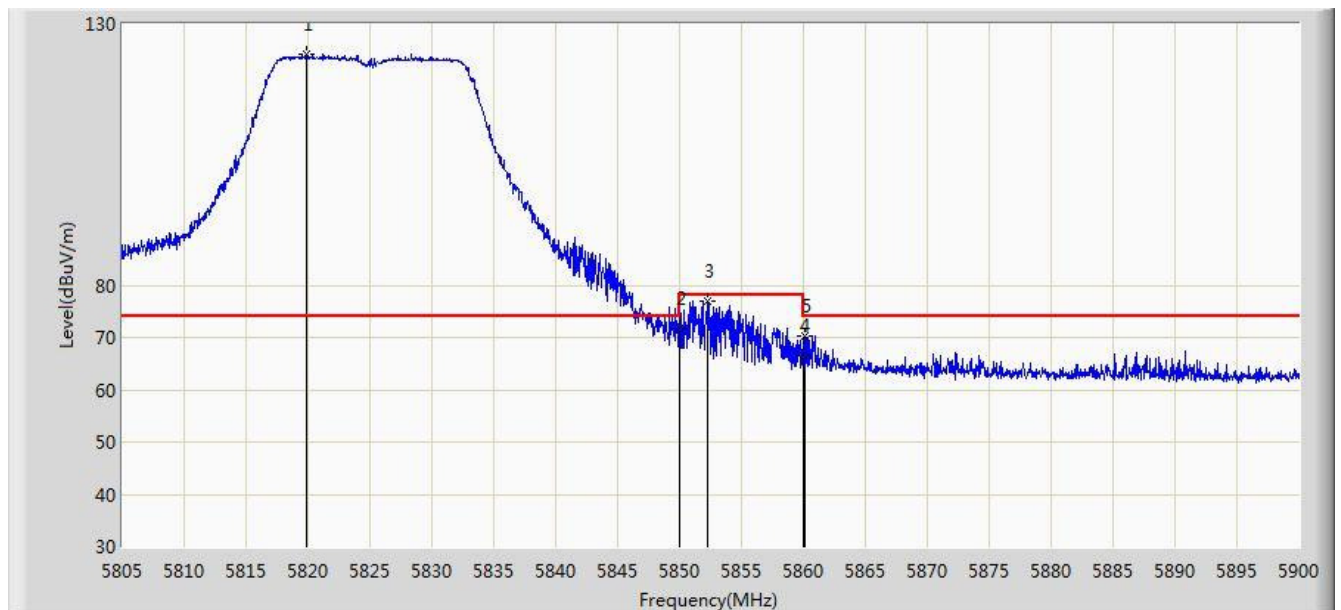


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	124.303	120.309	N/A	N/A	3.994	PK
2			5850.000	71.724	67.667	-6.476	78.200	4.058	PK
3			5852.310	76.890	72.831	-1.310	78.200	4.059	PK
4			5860.000	66.601	62.538	-7.399	74.000	4.064	PK
5			5860.147	70.285	66.222	-3.715	74.000	4.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1 + 2	

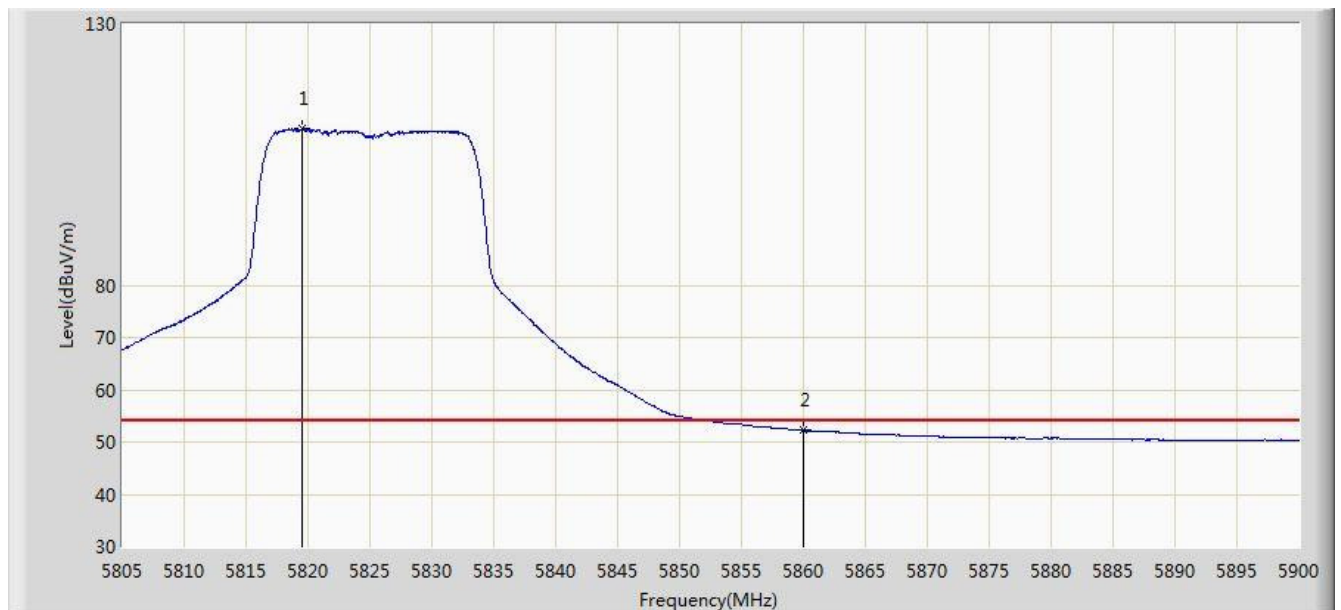


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.583	109.952	105.959	N/A	N/A	3.994	AV
2			5860.000	52.236	48.173	-1.764	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 1 + 2	

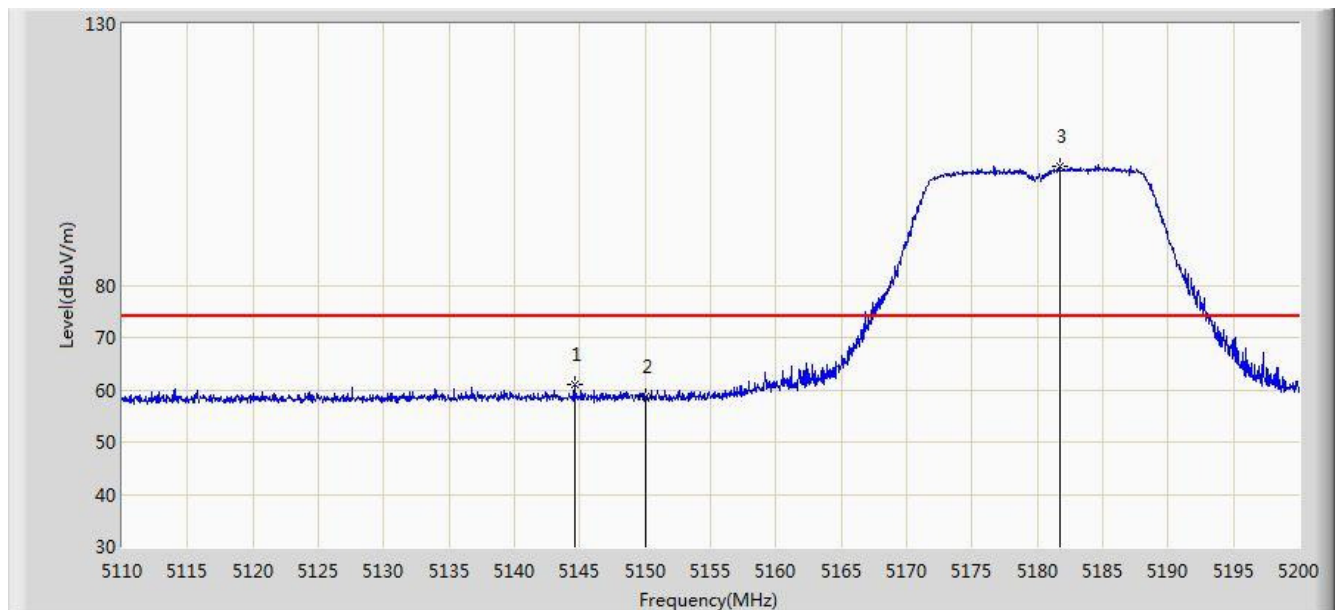


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.605	61.006	57.697	-12.994	74.000	3.310	PK
2			5150.000	58.683	55.374	-15.317	74.000	3.309	PK
3		*	5181.730	102.865	99.594	N/A	N/A	3.272	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 1 + 2	

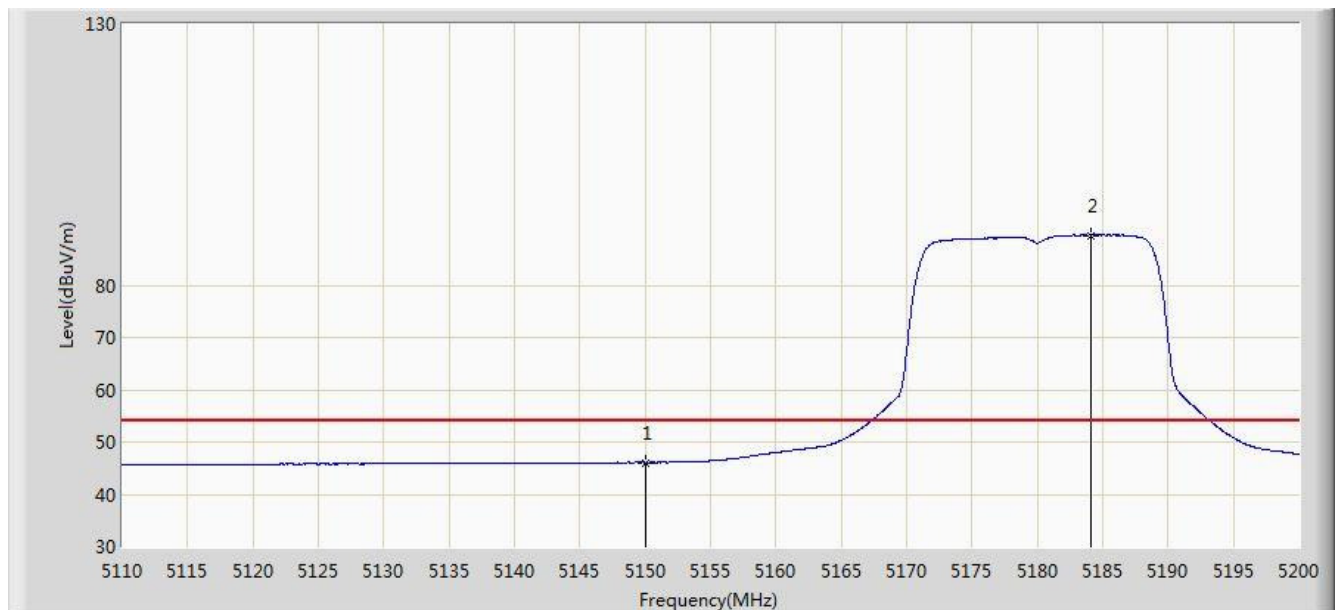


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.057	42.748	-7.943	54.000	3.309	AV
2		*	5184.115	89.565	86.297	N/A	N/A	3.269	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 1 + 2	

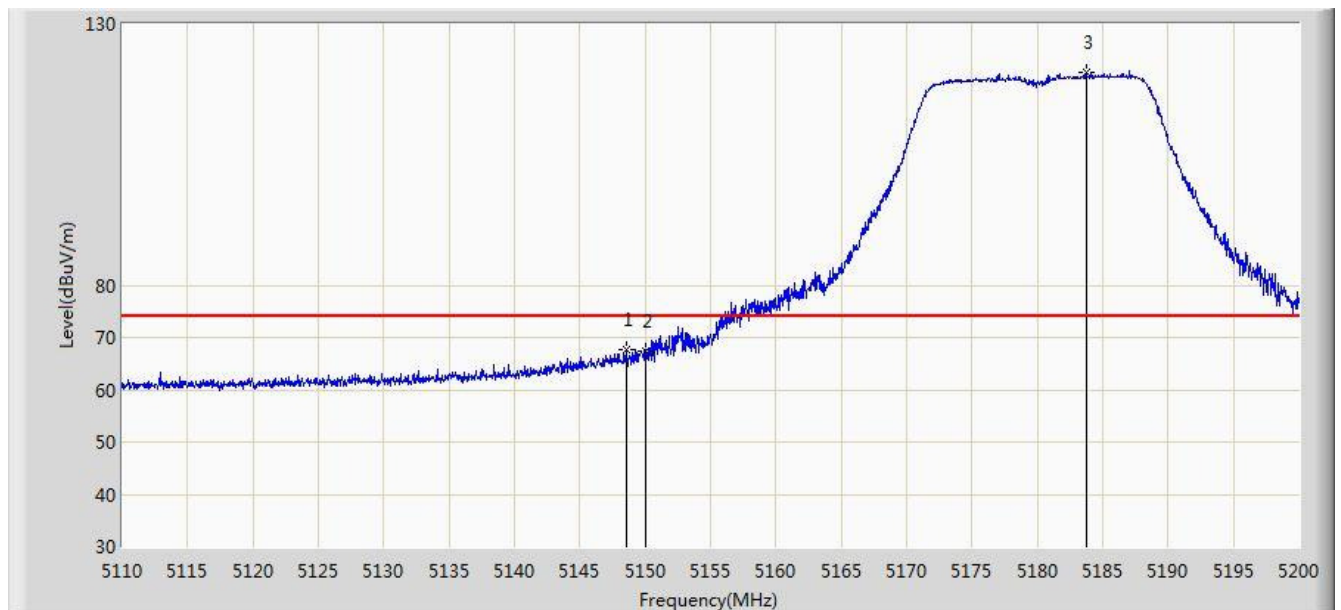


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.565	67.690	64.381	-6.310	74.000	3.309	PK
2			5150.000	67.391	64.082	-6.609	74.000	3.309	PK
3		*	5183.710	120.646	117.377	N/A	N/A	3.269	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 1 + 2	

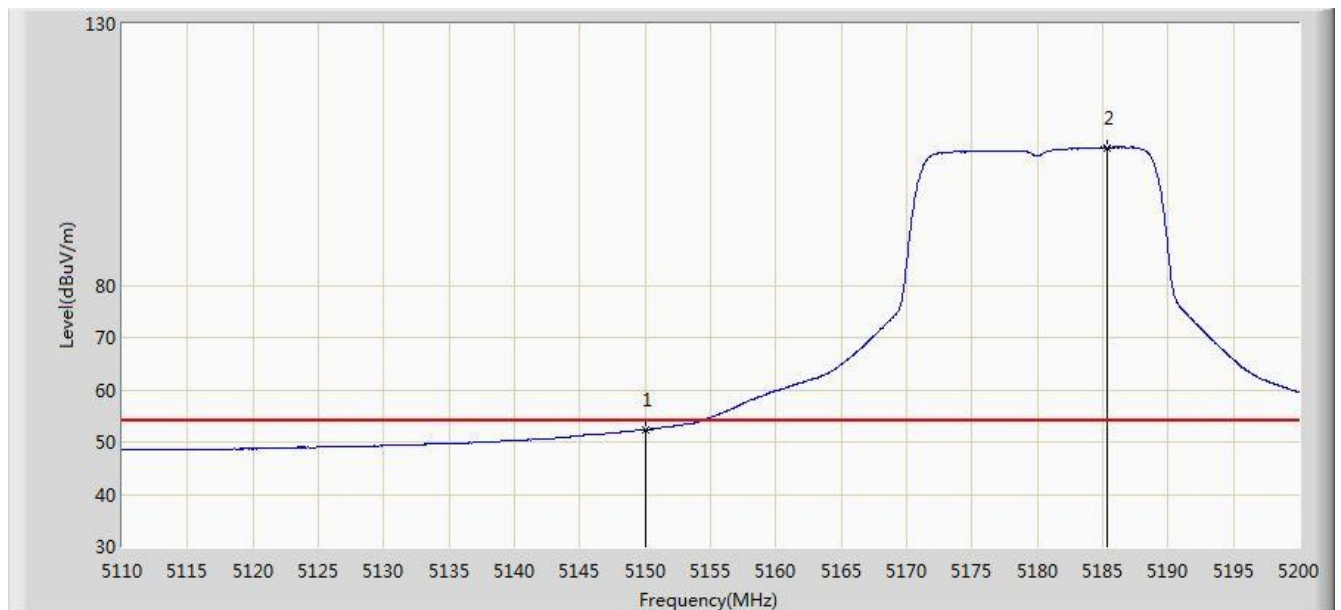


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.429	49.120	-1.571	54.000	3.309	AV
2		*	5185.375	106.360	103.093	N/A	N/A	3.267	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 1 + 2	

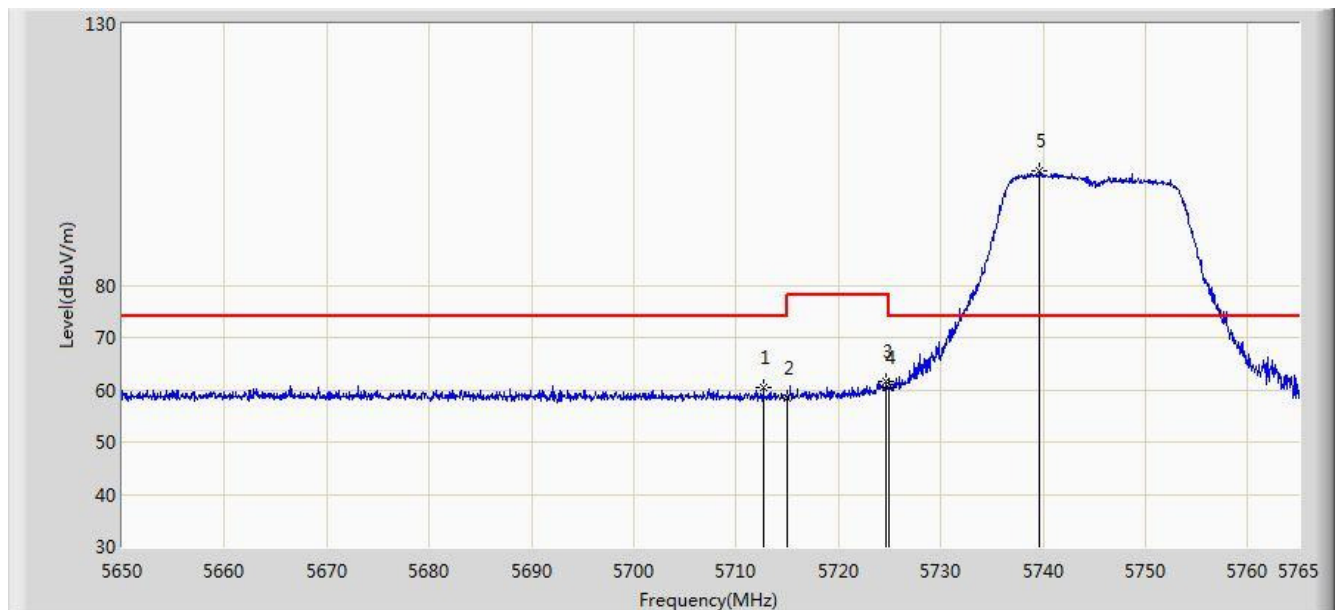


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.618	60.356	56.602	-13.644	74.000	3.754	PK
2			5715.000	58.509	54.748	-15.491	74.000	3.761	PK
3			5724.635	61.462	57.672	-16.738	78.200	3.790	PK
4			5725.000	60.454	56.663	-17.746	78.200	3.791	PK
5		*	5739.700	101.790	97.954	N/A	N/A	3.836	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 1 + 2	

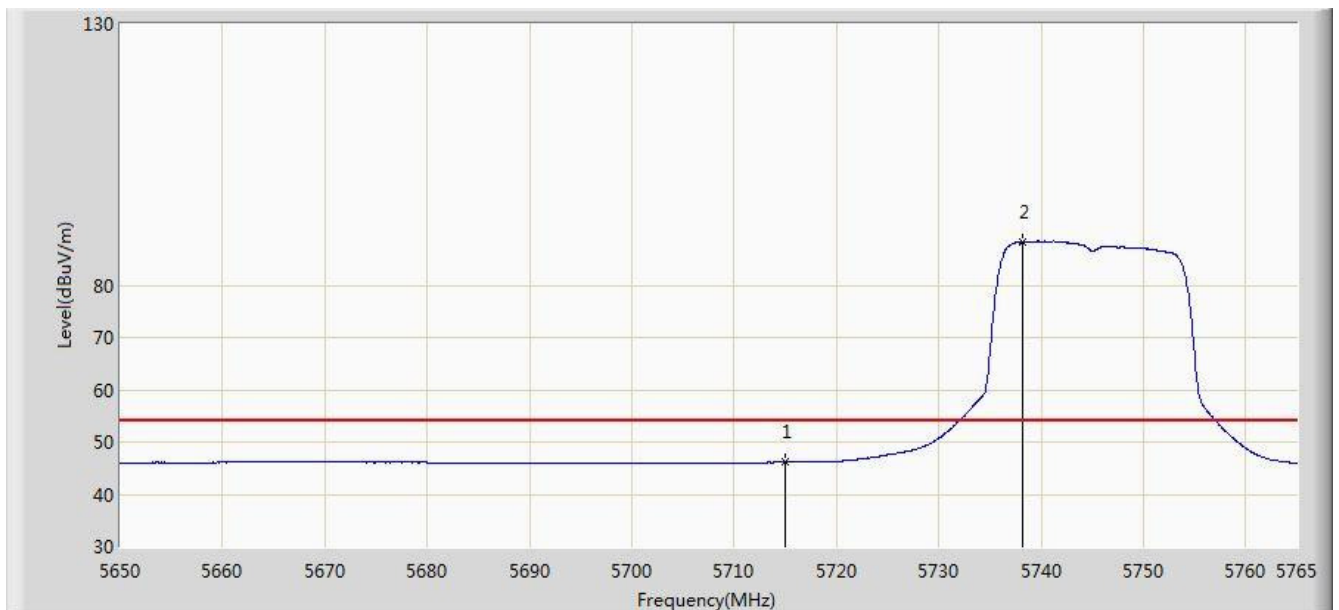


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.186	42.425	-7.814	54.000	3.761	AV
2		*	5738.263	88.260	84.428	N/A	N/A	3.833	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 1 + 2	

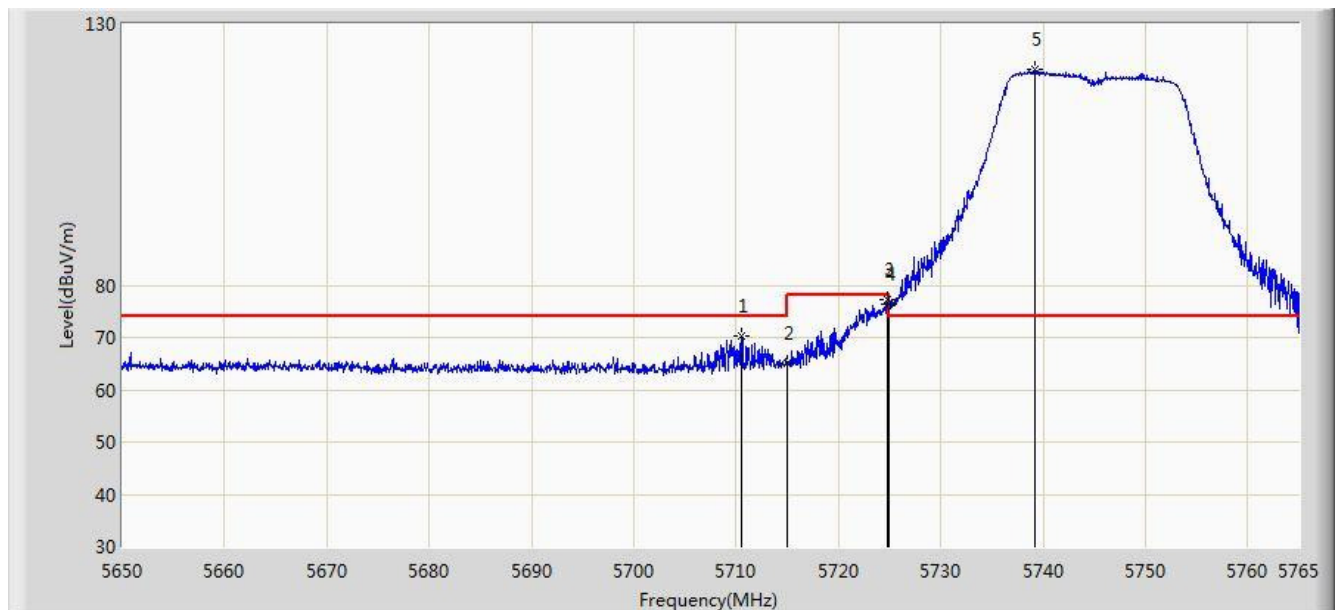


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.547	70.182	66.434	-3.818	74.000	3.747	PK
2			5715.000	65.071	61.310	-8.929	74.000	3.761	PK
3			5724.750	77.134	73.344	-1.066	78.200	3.790	PK
4			5725.000	76.517	72.726	-1.683	78.200	3.791	PK
5		*	5739.183	121.201	117.366	N/A	N/A	3.835	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 1 + 2	

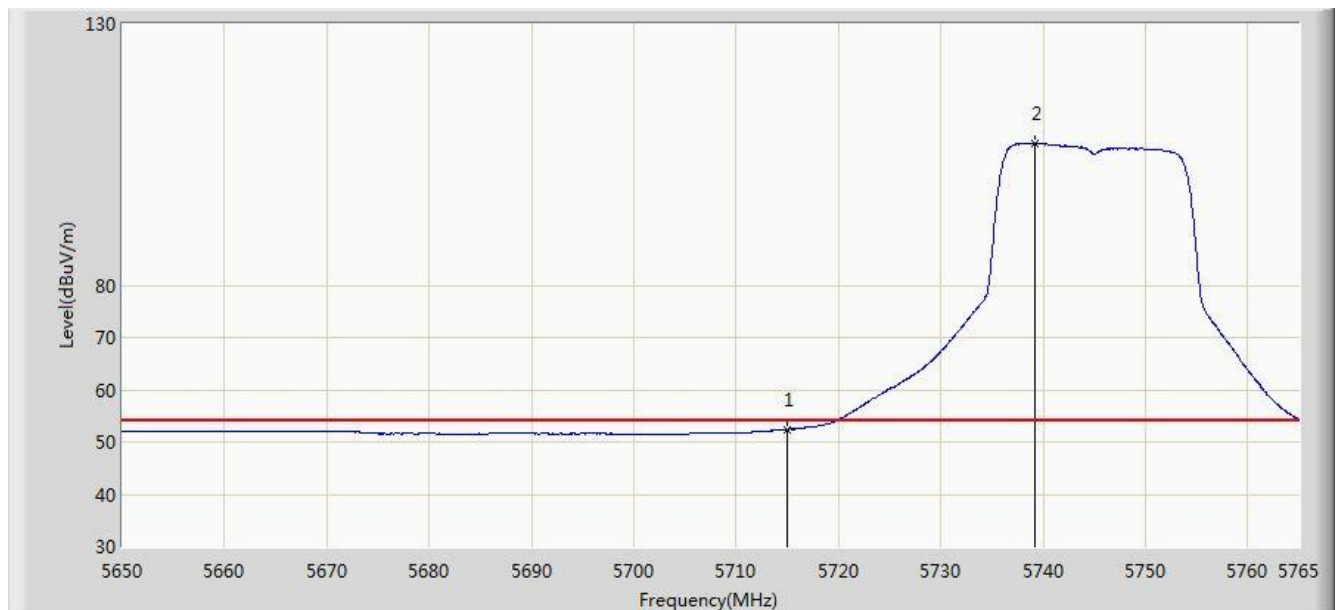


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.388	48.627	-1.612	54.000	3.761	AV
2		*	5739.183	106.991	103.156	N/A	N/A	3.835	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 1 + 2	

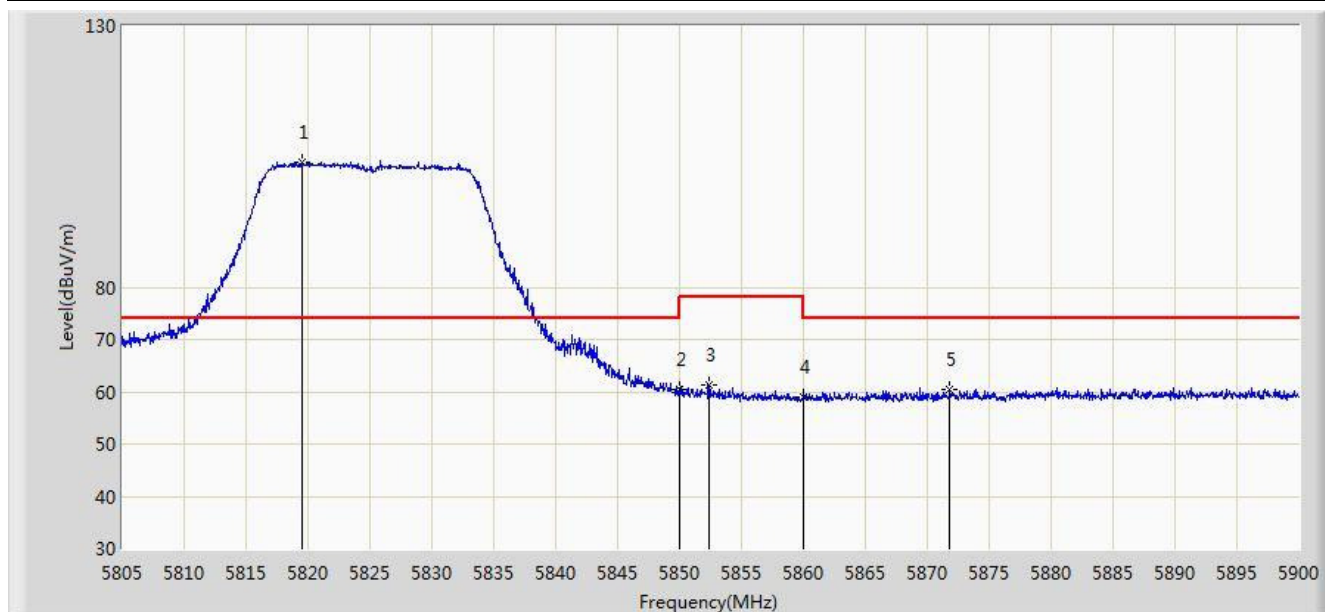


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.583	103.774	99.781	N/A	N/A	3.994	PK
2			5850.000	60.346	56.289	-17.854	78.200	4.058	PK
3			5852.357	61.228	57.169	-16.972	78.200	4.059	PK
4			5860.000	59.005	54.942	-14.995	74.000	4.064	PK
5			5871.833	60.293	56.198	-13.707	74.000	4.096	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 1 + 2	

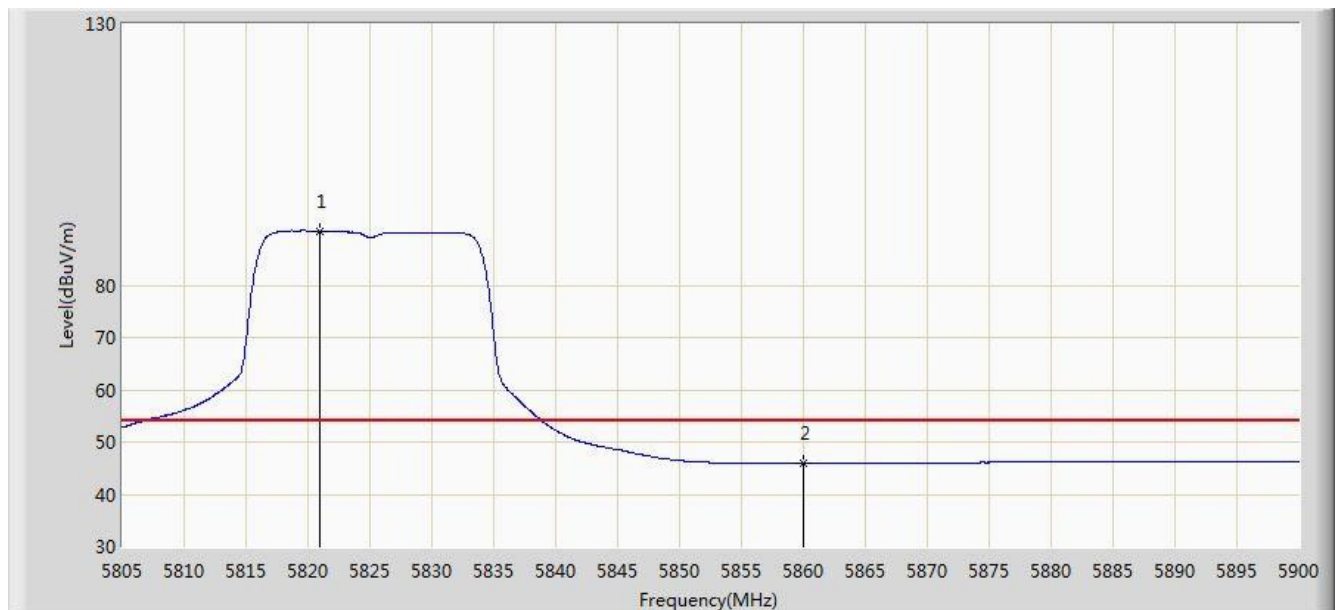


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.913	90.423	86.427	N/A	N/A	3.996	AV
2			5860.000	45.867	41.804	-8.133	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 1 + 2	

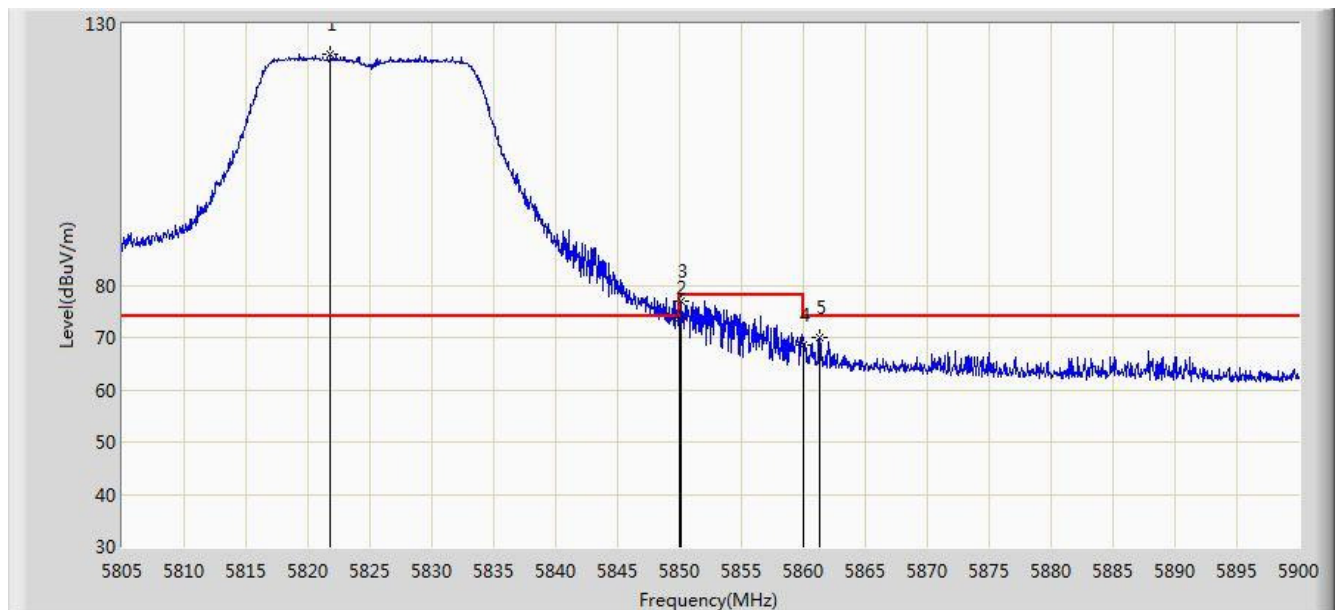


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.815	124.222	120.224	N/A	N/A	3.998	PK
2			5850.000	73.863	69.806	-4.337	78.200	4.058	PK
3			5850.125	76.952	72.895	-1.248	78.200	4.058	PK
4			5860.000	68.693	64.630	-5.307	74.000	4.064	PK
5			5861.288	69.953	65.889	-4.047	74.000	4.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 1 + 2	

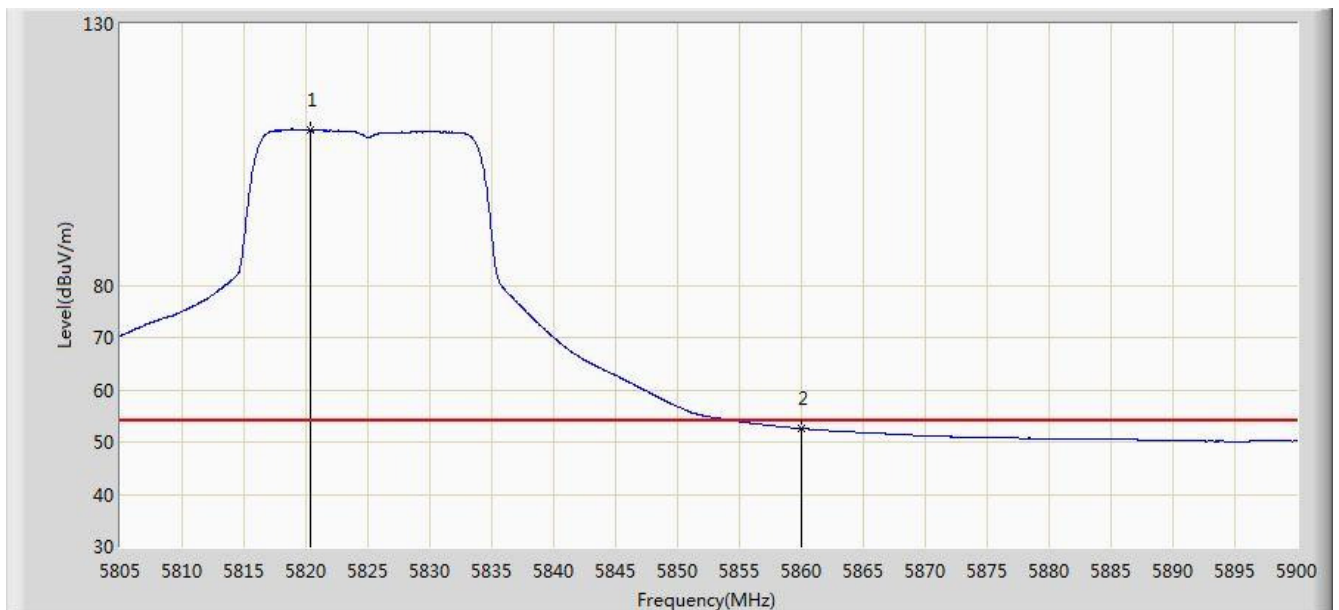


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.342	109.661	105.666	N/A	N/A	3.994	AV
2			5860.000	52.582	48.519	-1.418	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 1 + 2	

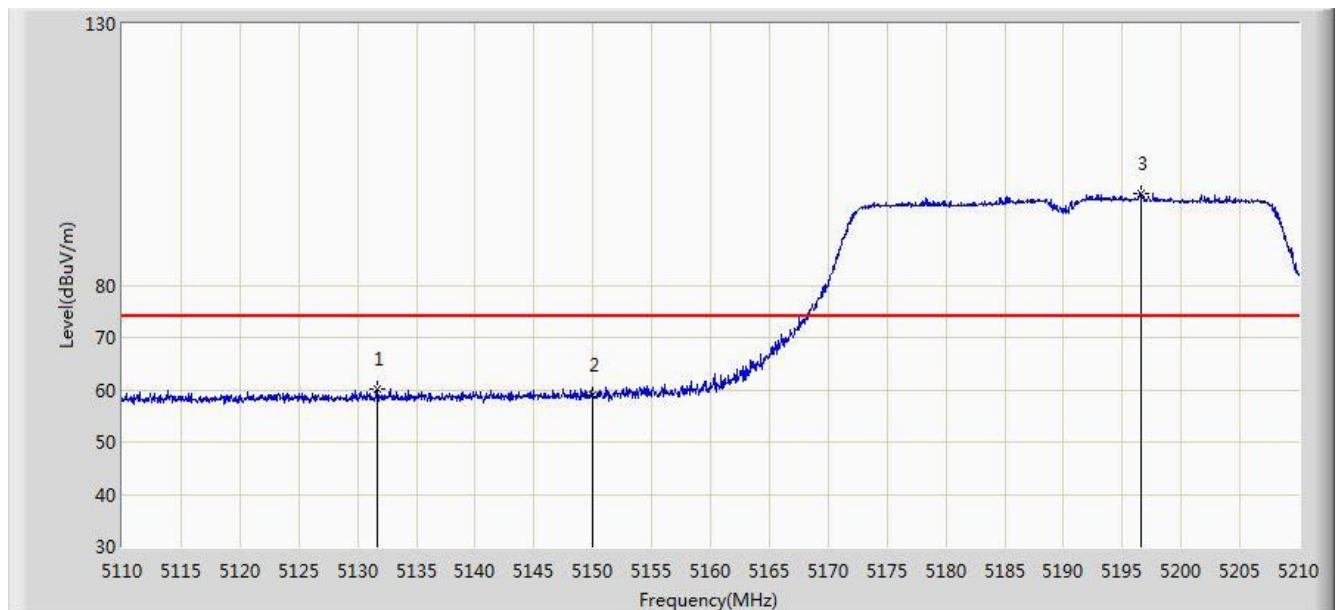


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.650	60.013	56.705	-13.987	74.000	3.308	PK
2			5150.000	59.009	55.700	-14.991	74.000	3.309	PK
3		*	5196.650	97.649	94.396	N/A	N/A	3.253	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 1 + 2	

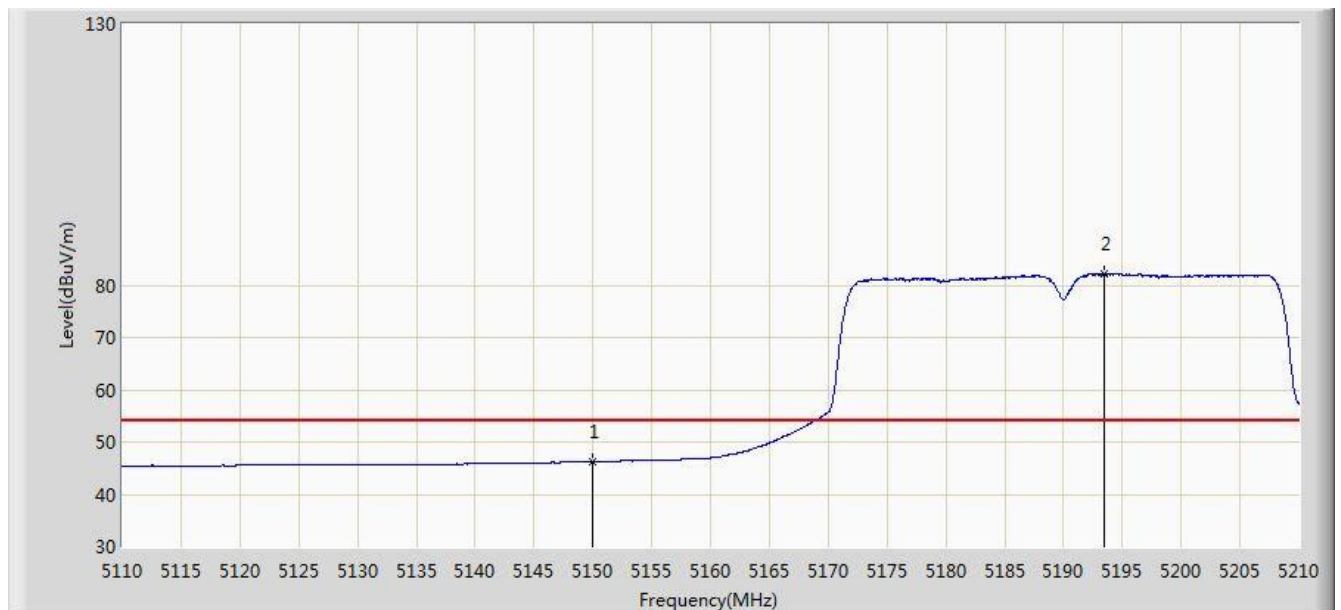


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.193	42.884	-7.807	54.000	3.309	AV
2		*	5193.450	82.118	78.861	N/A	N/A	3.257	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 1 + 2	

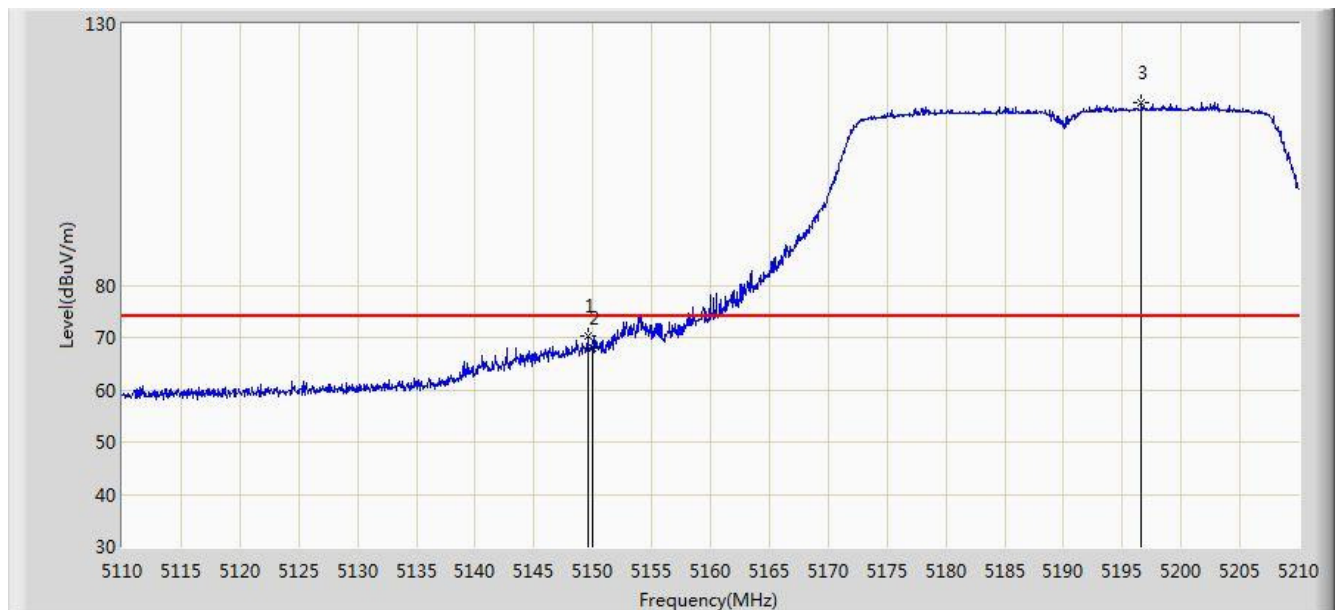


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	70.147	66.838	-3.853	74.000	3.309	PK
2			5150.000	67.975	64.666	-6.025	74.000	3.309	PK
3		*	5196.650	114.986	111.733	N/A	N/A	3.253	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 1 + 2	

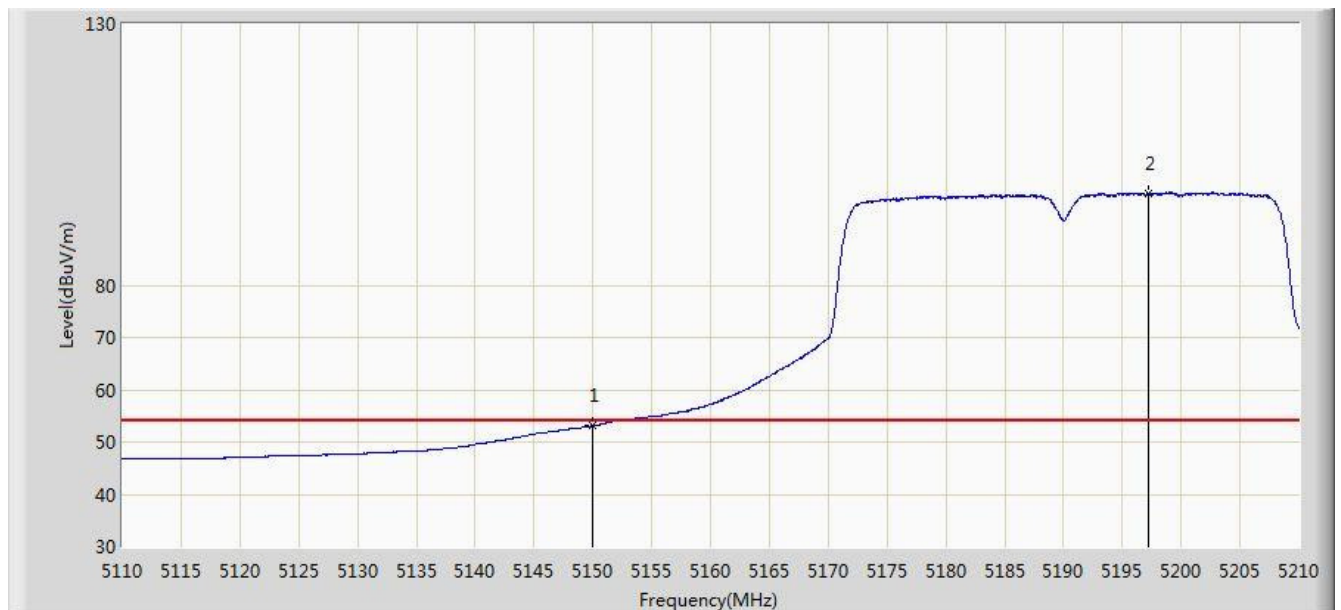


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.170	49.861	-0.830	54.000	3.309	AV
2		*	5197.250	97.586	94.333	N/A	N/A	3.252	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 1 + 2	

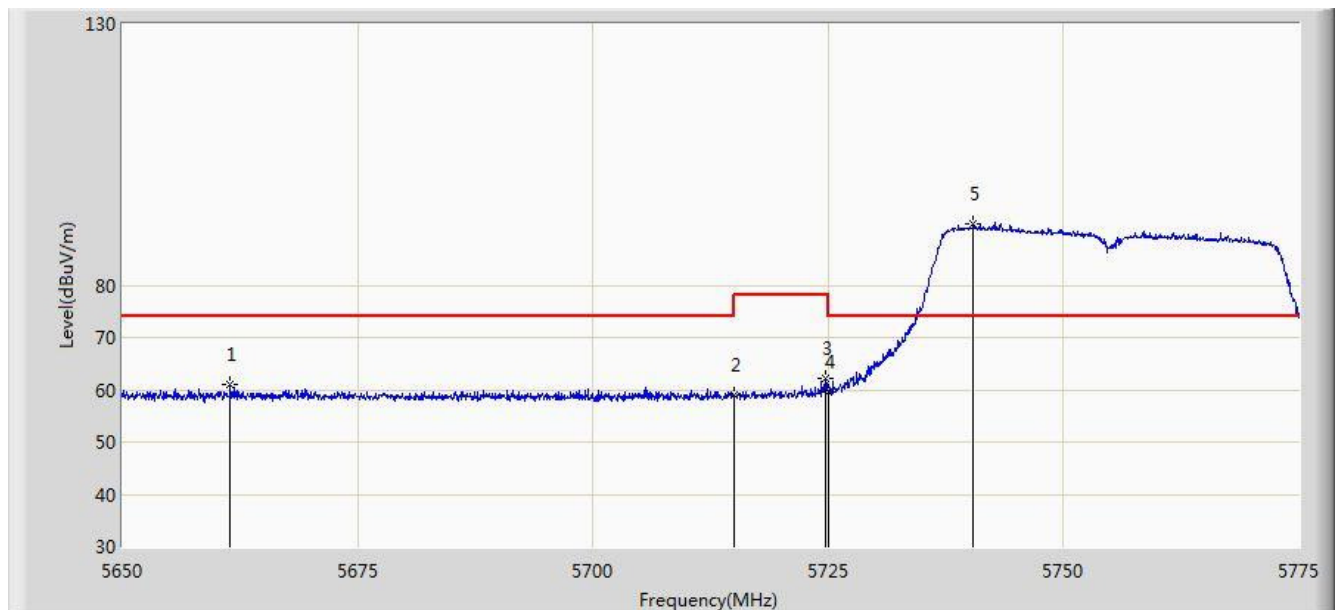


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5661.500	60.981	57.333	-13.019	74.000	3.649	PK
2			5715.000	58.853	55.092	-15.147	74.000	3.761	PK
3			5724.687	62.194	58.404	-16.006	78.200	3.790	PK
4			5725.000	59.464	55.673	-18.736	78.200	3.791	PK
5		*	5740.375	91.808	87.970	N/A	N/A	3.838	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 1 + 2	

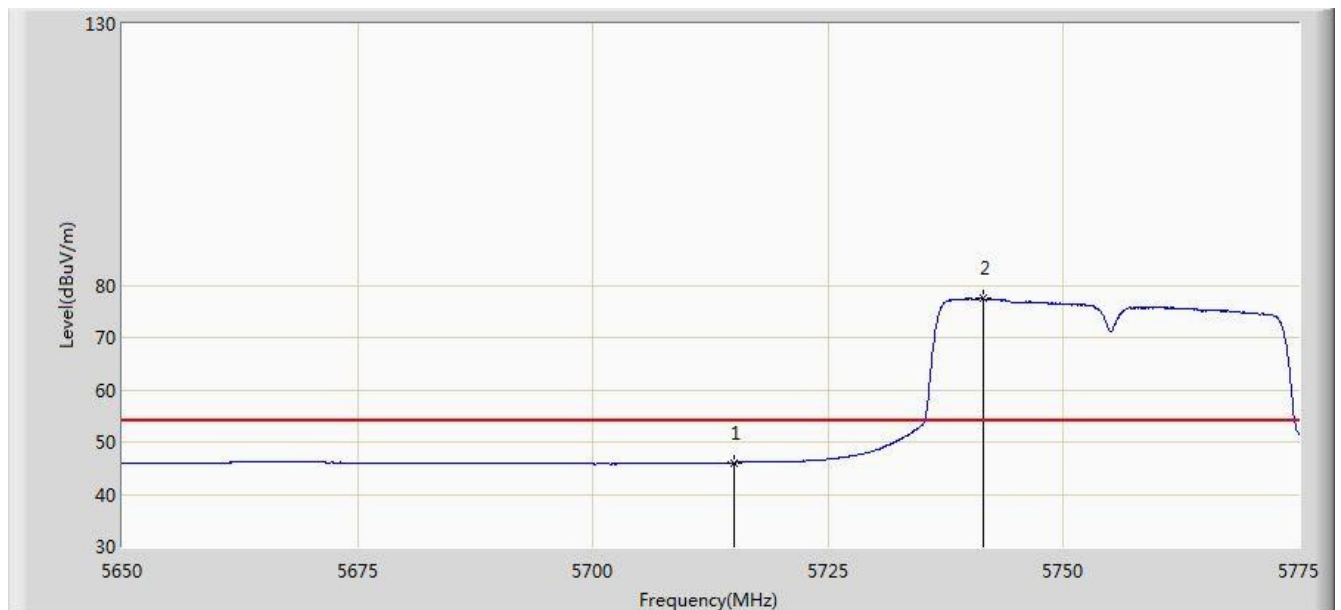


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.079	42.318	-7.921	54.000	3.761	AV
2		*	5741.500	77.392	73.551	N/A	N/A	3.842	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 14:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 1 + 2	

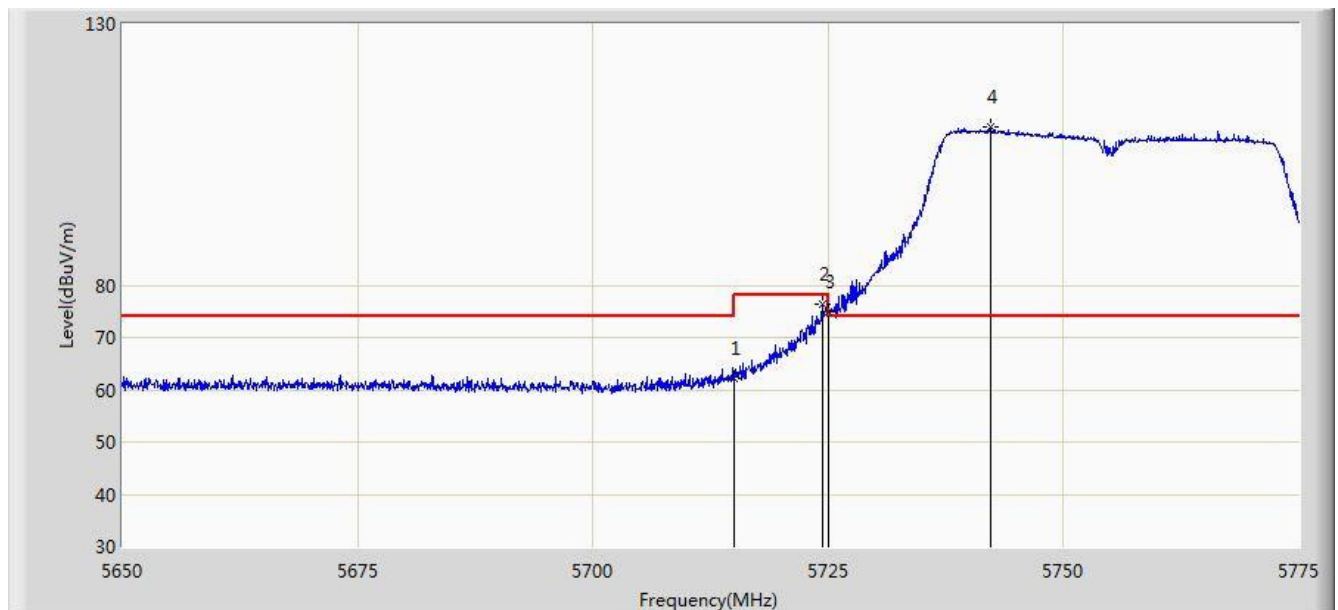


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.175	58.414	-11.825	74.000	3.761	PK
2			5724.375	76.506	72.717	-1.694	78.200	3.790	PK
3			5725.000	74.901	71.110	-3.299	78.200	3.791	PK
4		*	5742.312	110.382	106.539	N/A	N/A	3.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 1 + 2	

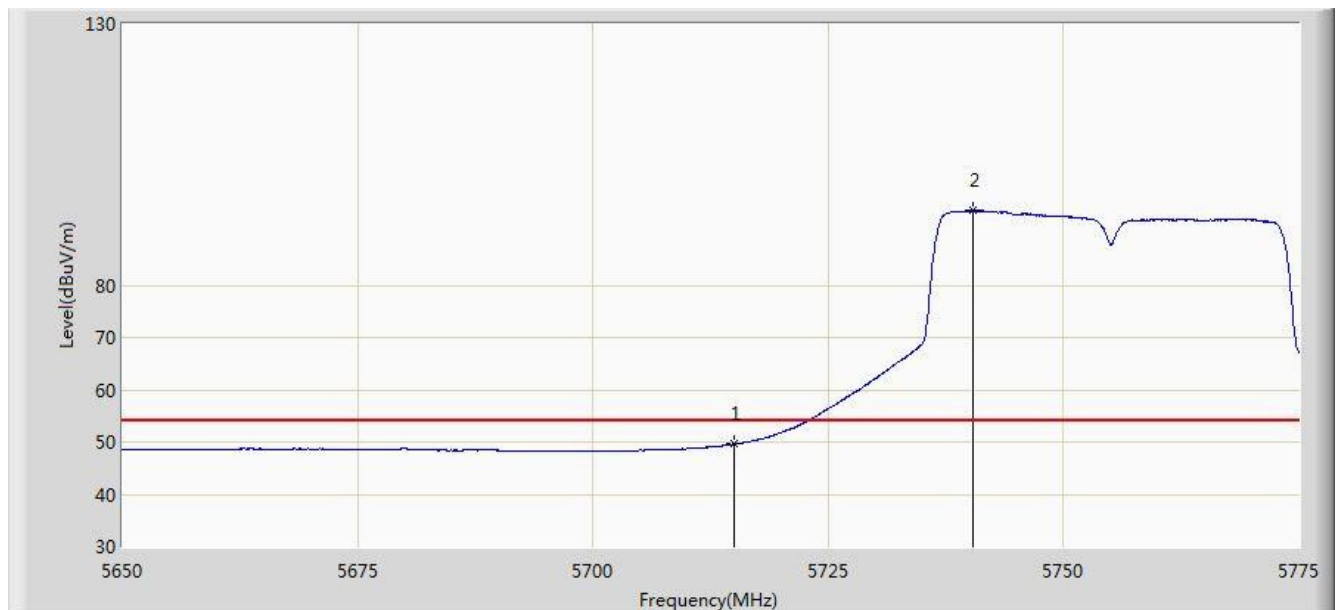


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.628	45.867	-4.372	54.000	3.761	AV
2		*	5740.312	94.281	90.443	N/A	N/A	3.838	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 1 + 2	

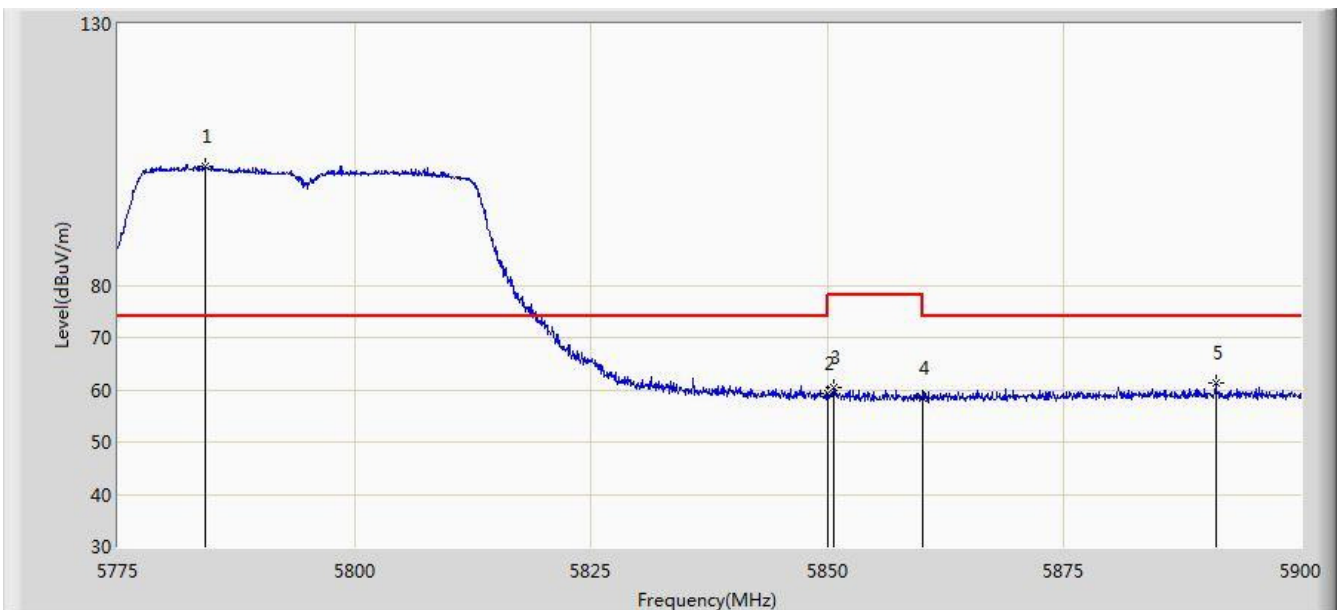


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.187	102.832	98.898	N/A	N/A	3.935	PK
2			5850.000	59.222	55.165	-18.978	78.200	4.058	PK
3			5850.625	60.320	56.263	-17.880	78.200	4.058	PK
4			5860.000	58.404	54.341	-15.596	74.000	4.064	PK
5			5891.000	61.307	57.154	-12.693	74.000	4.153	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 1 + 2	

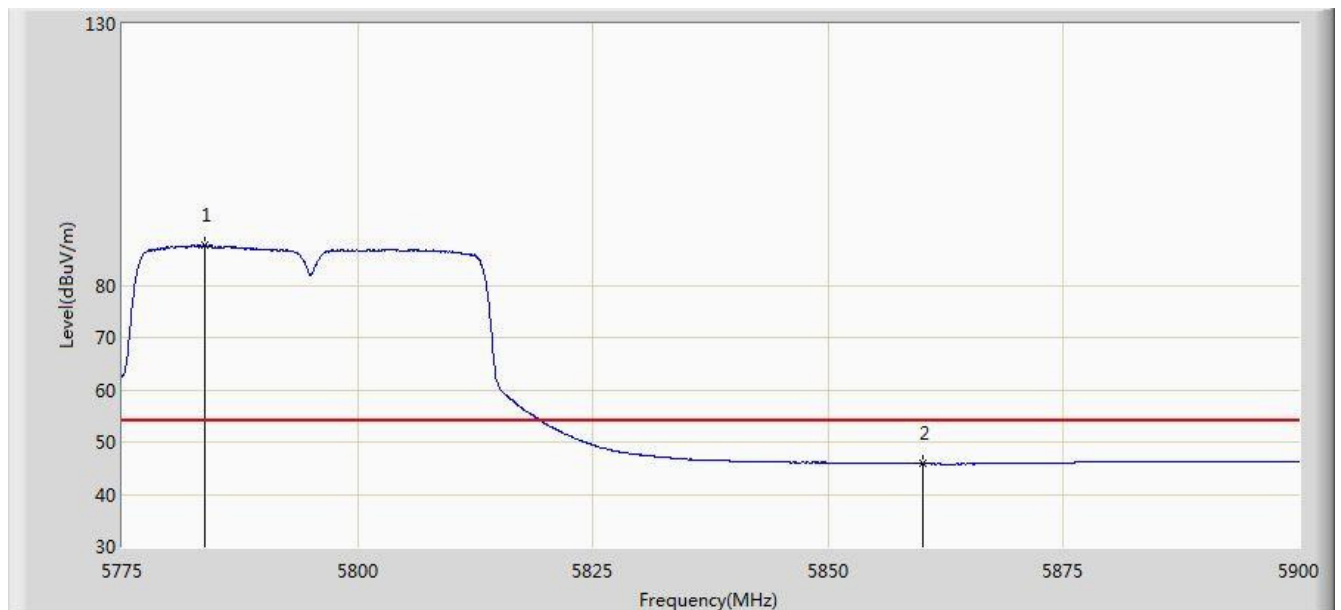


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.750	87.615	83.681	N/A	N/A	3.934	AV
2			5860.000	45.830	41.767	-8.170	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 1 + 2	

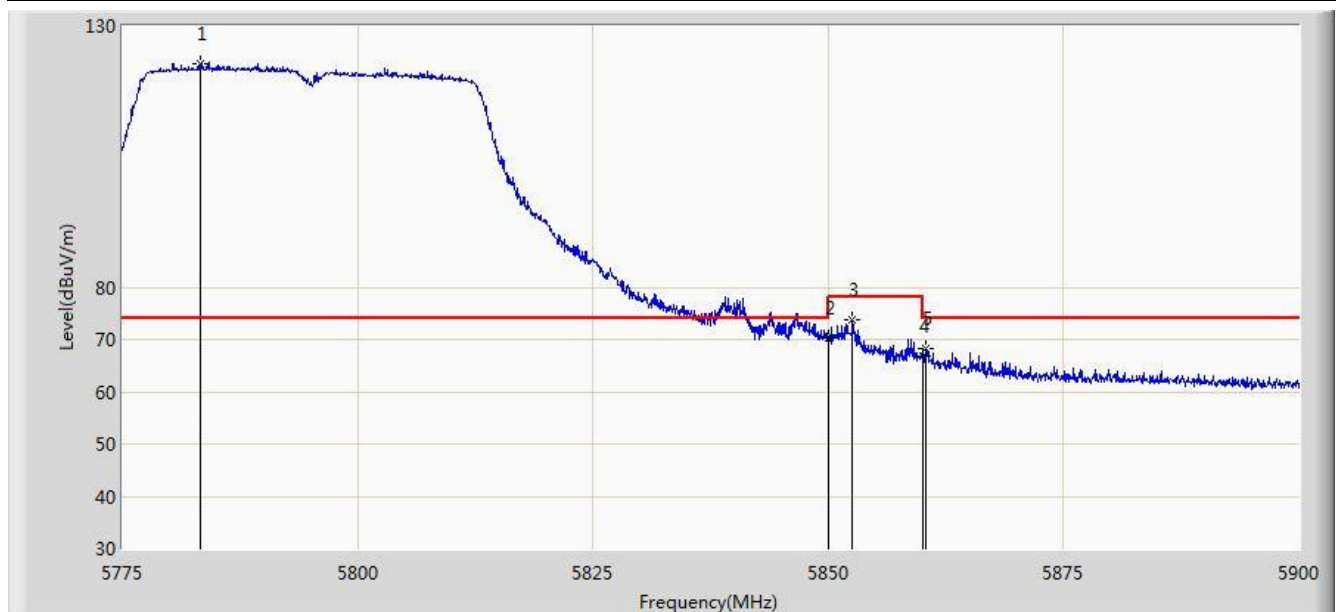


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.250	122.720	118.787	N/A	N/A	3.933	PK
2			5850.000	70.369	66.312	-7.831	78.200	4.058	PK
3			5852.562	73.744	69.685	-4.456	78.200	4.058	PK
4			5860.000	66.942	62.879	-7.058	74.000	4.064	PK
5			5860.312	68.285	64.221	-5.715	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 1 + 2	

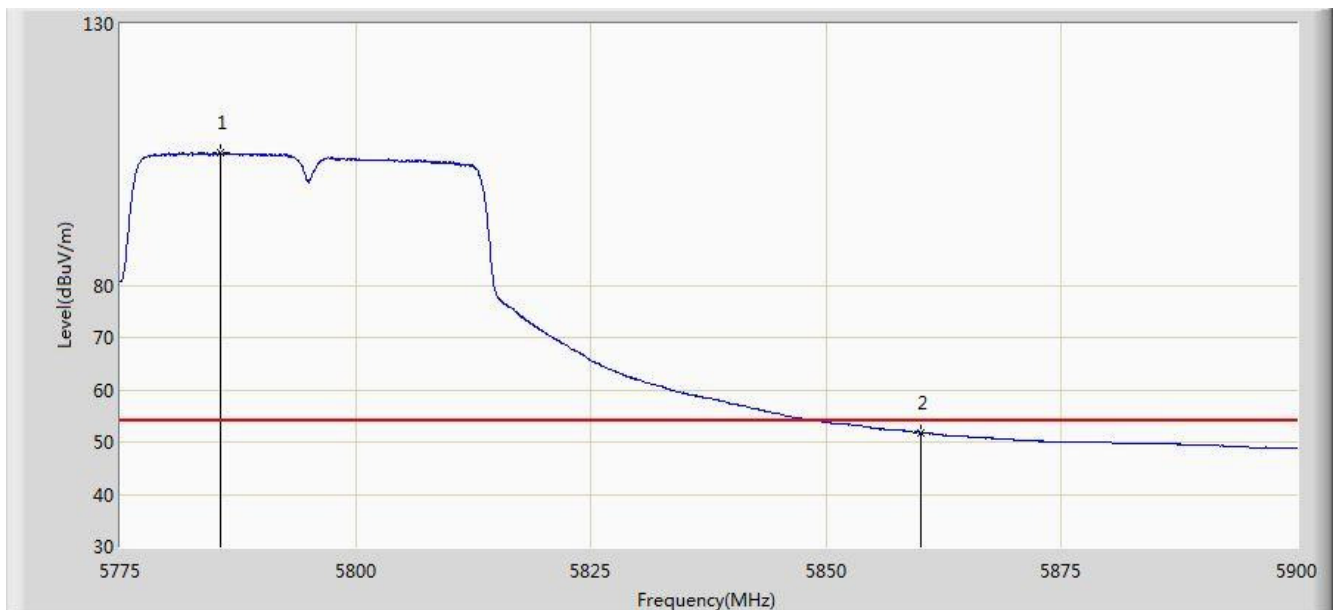


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.625	105.327	101.390	N/A	N/A	3.937	AV
2			5860.000	51.845	47.782	-2.155	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 1 + 2	

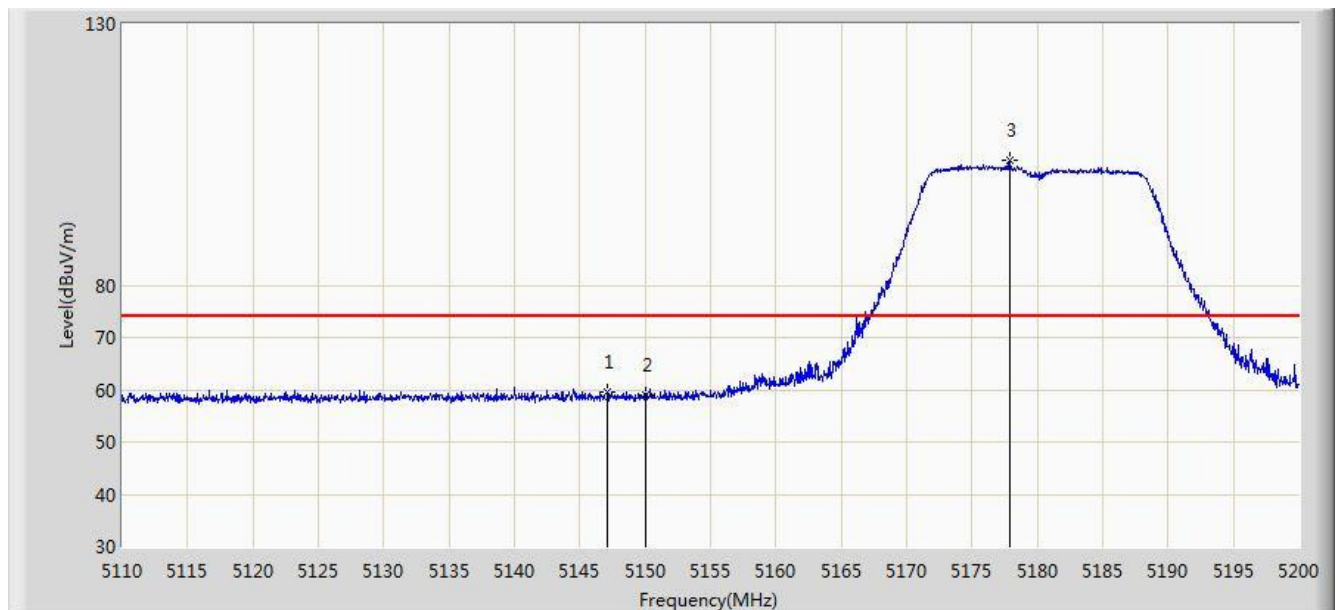


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.125	59.700	56.391	-14.300	74.000	3.309	PK
2			5150.000	58.891	55.582	-15.109	74.000	3.309	PK
3		*	5177.950	103.980	100.705	N/A	N/A	3.274	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 1 + 2	

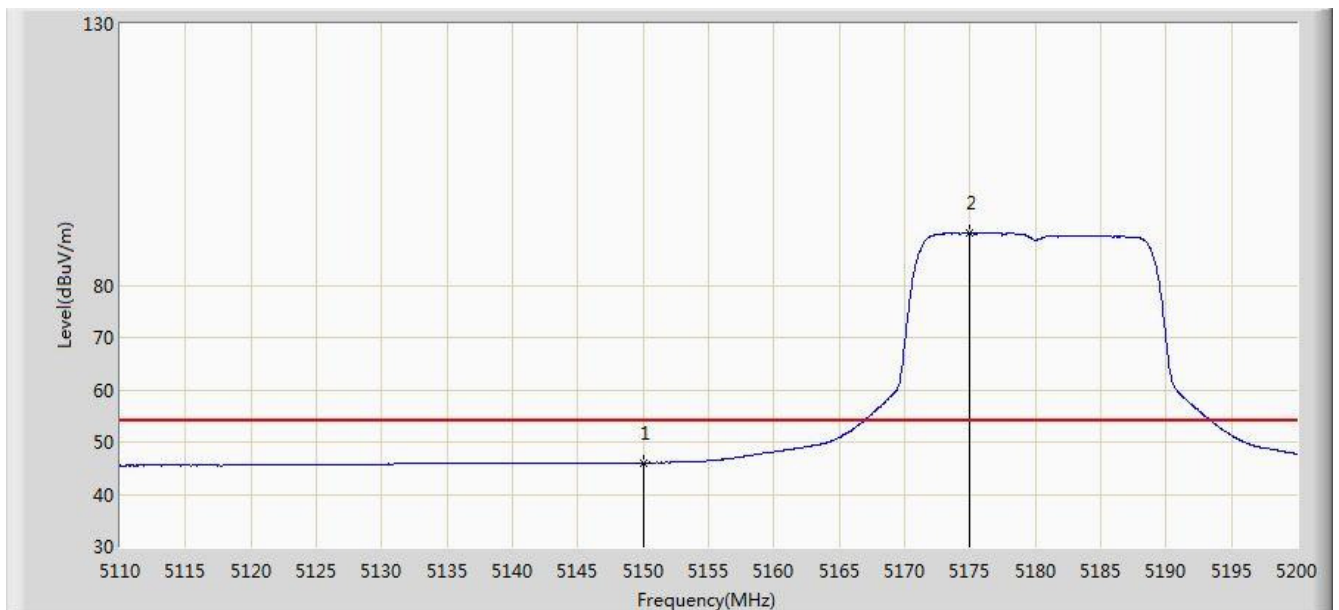


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.073	42.764	-7.927	54.000	3.309	AV
2		*	5174.980	90.102	86.825	N/A	N/A	3.277	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 1 + 2	

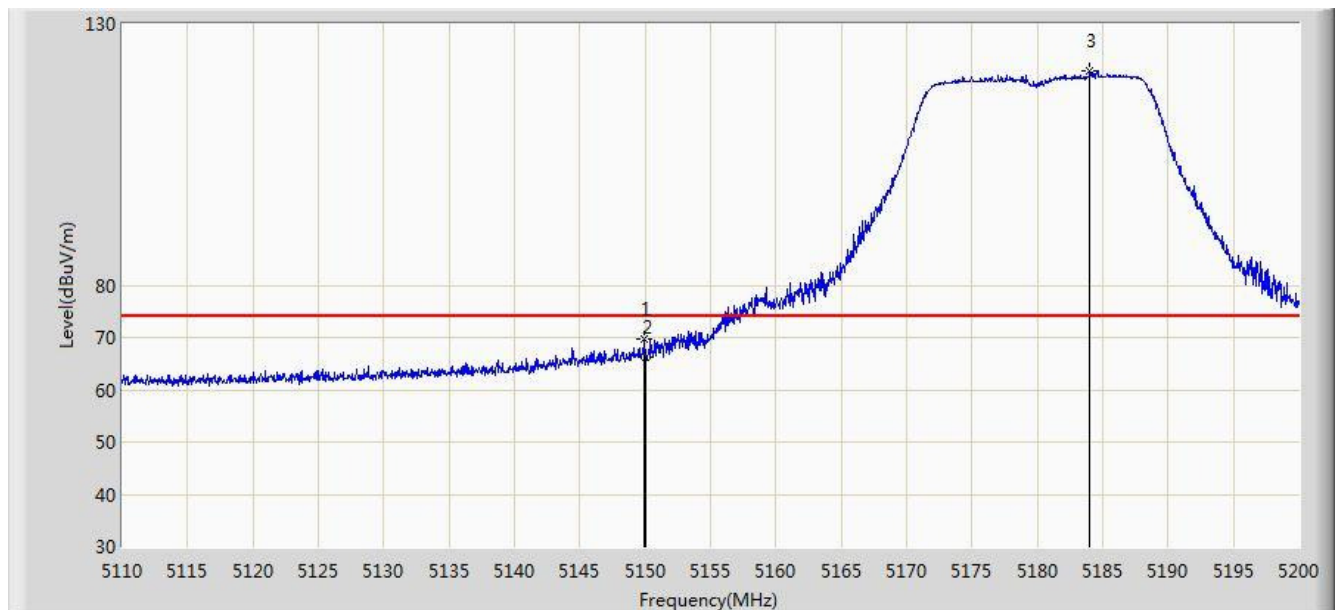


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.915	69.702	66.393	-4.298	74.000	3.309	PK
2			5150.000	66.335	63.026	-7.665	74.000	3.309	PK
3		*	5183.980	120.893	117.624	N/A	N/A	3.268	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 1 + 2	

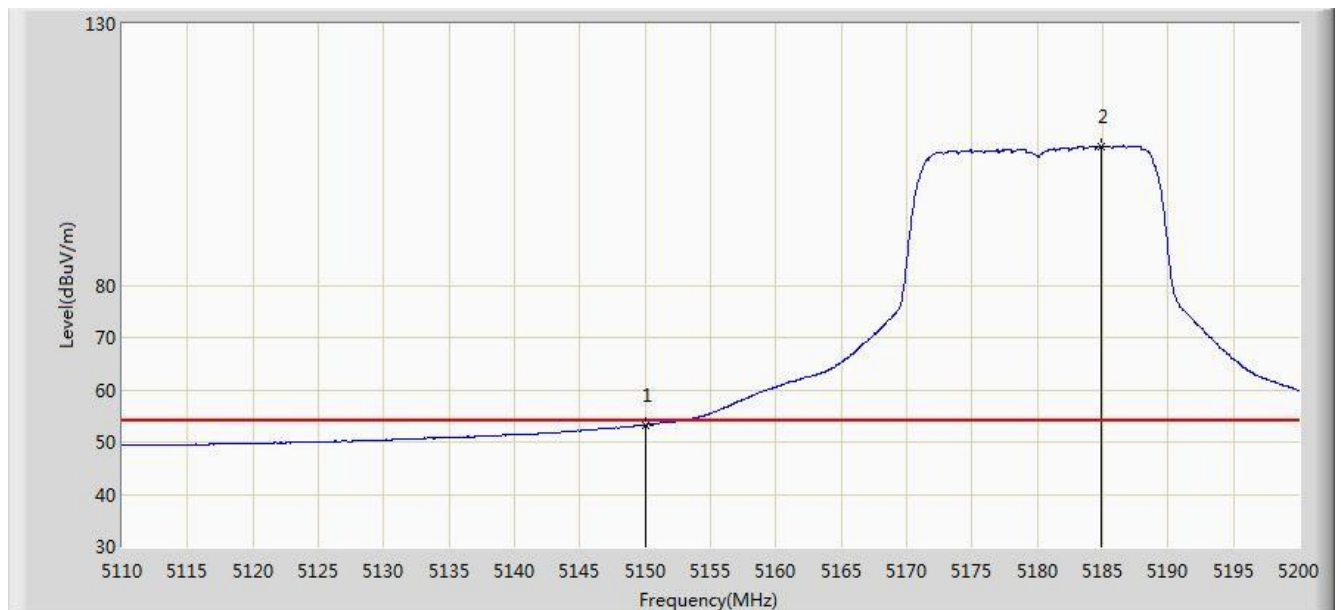


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.306	49.997	-0.694	54.000	3.309	AV
2		*	5184.880	106.575	103.308	N/A	N/A	3.268	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 1 + 2	

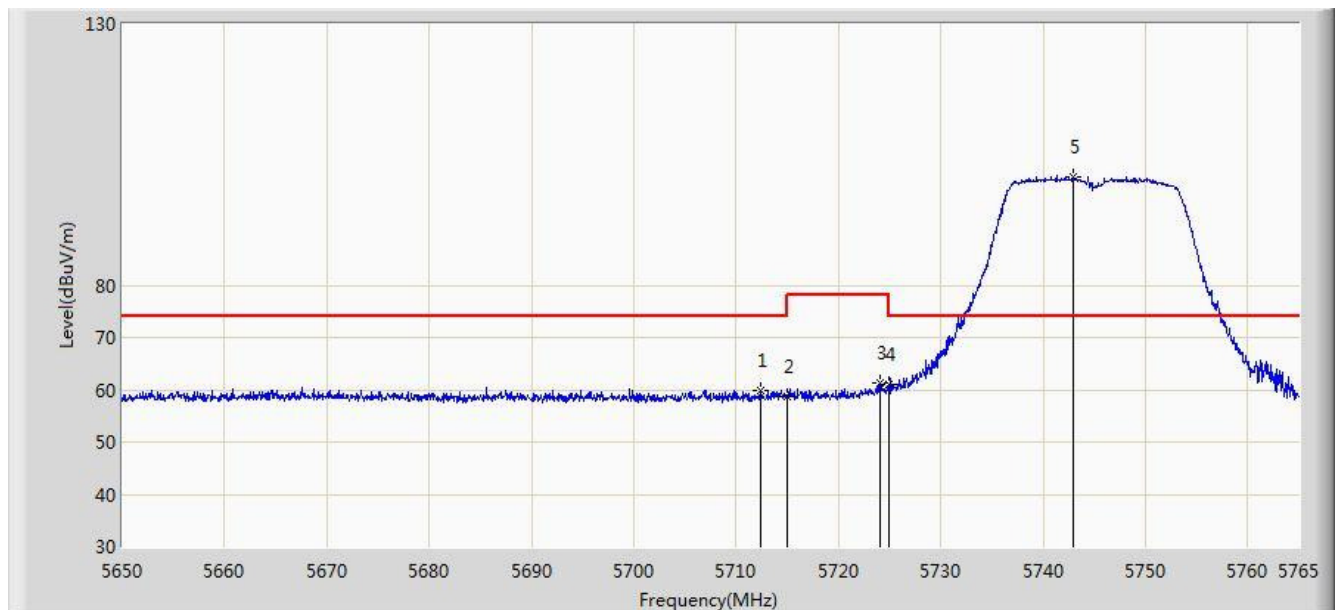


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.445	59.971	56.218	-14.029	74.000	3.753	PK
2			5715.000	58.626	54.865	-15.374	74.000	3.761	PK
3			5724.002	61.396	57.608	-16.804	78.200	3.788	PK
4			5725.000	60.875	57.084	-17.325	78.200	3.791	PK
5		*	5742.920	100.661	96.816	N/A	N/A	3.845	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 1 + 2	

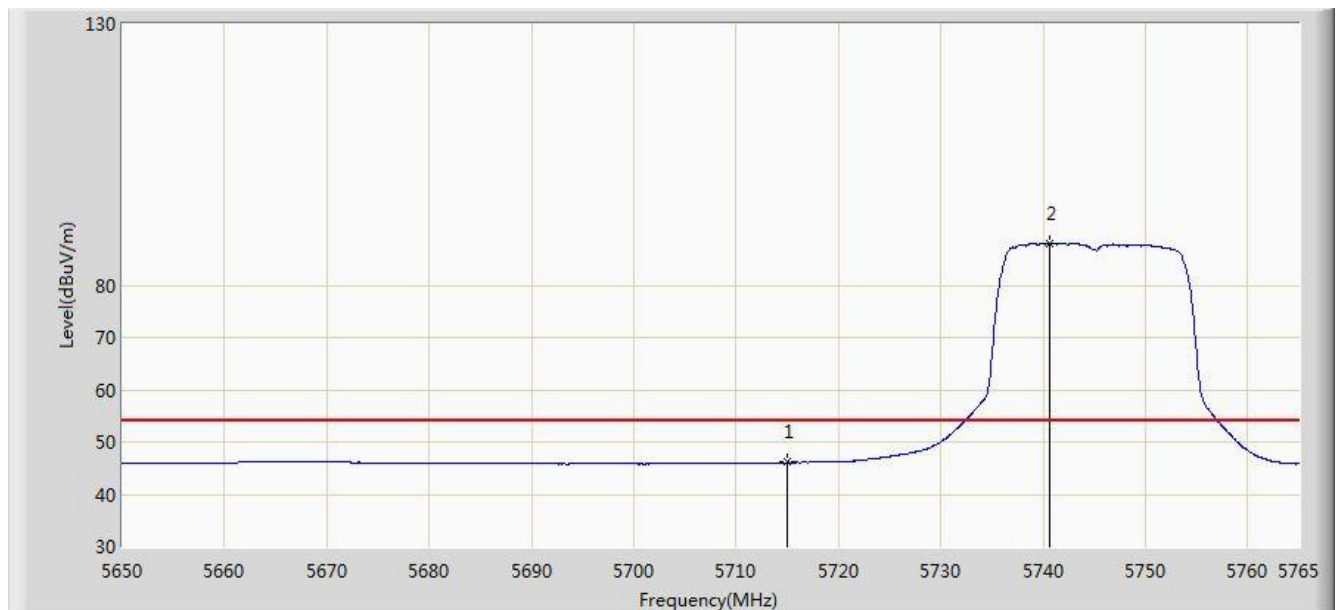


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.090	42.329	-7.910	54.000	3.761	AV
2		*	5740.620	87.943	84.104	N/A	N/A	3.838	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 1 + 2	

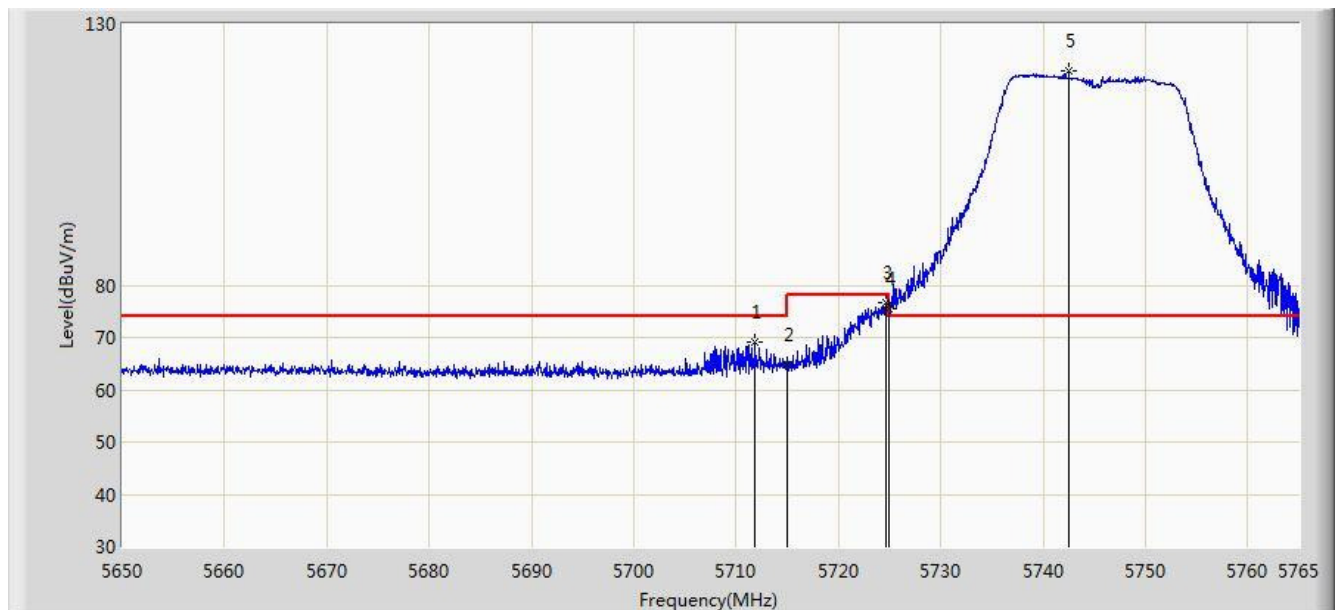


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.870	69.197	65.445	-4.803	74.000	3.752	PK
2			5715.000	64.796	61.035	-9.204	74.000	3.761	PK
3			5724.635	76.793	73.003	-1.407	78.200	3.790	PK
4			5725.000	75.416	71.625	-2.784	78.200	3.791	PK
5		*	5742.518	120.892	117.048	N/A	N/A	3.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 1 + 2	

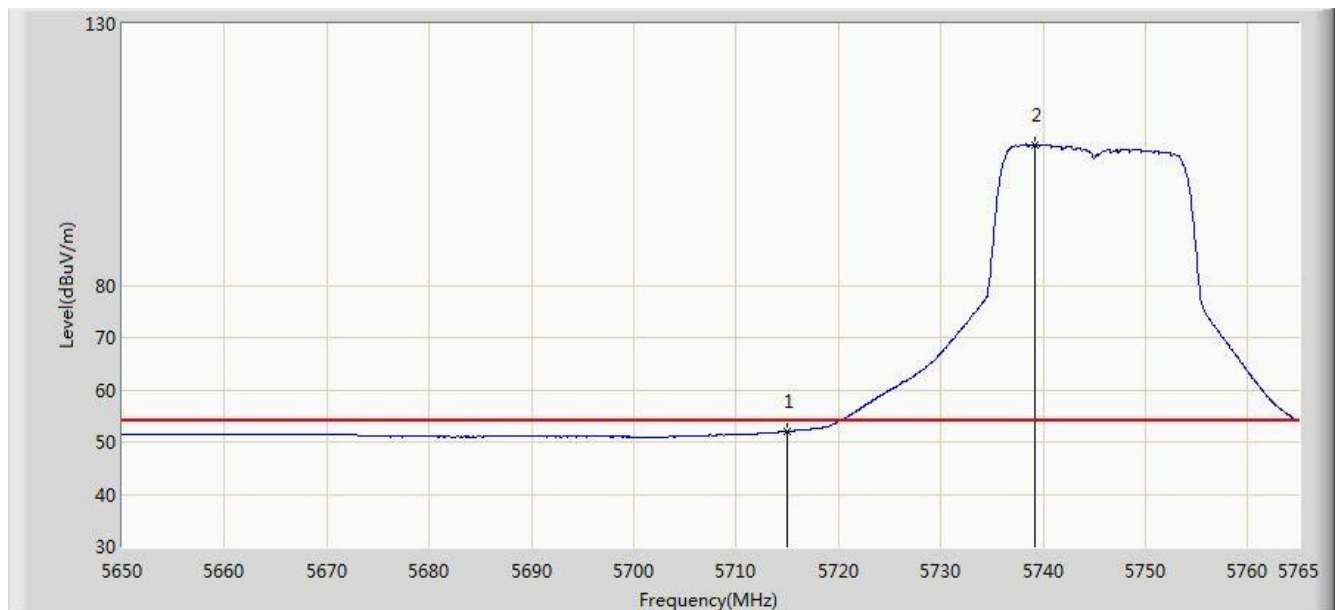


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.030	48.269	-1.970	54.000	3.761	AV
2		*	5739.183	106.913	103.078	N/A	N/A	3.835	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 1 + 2	

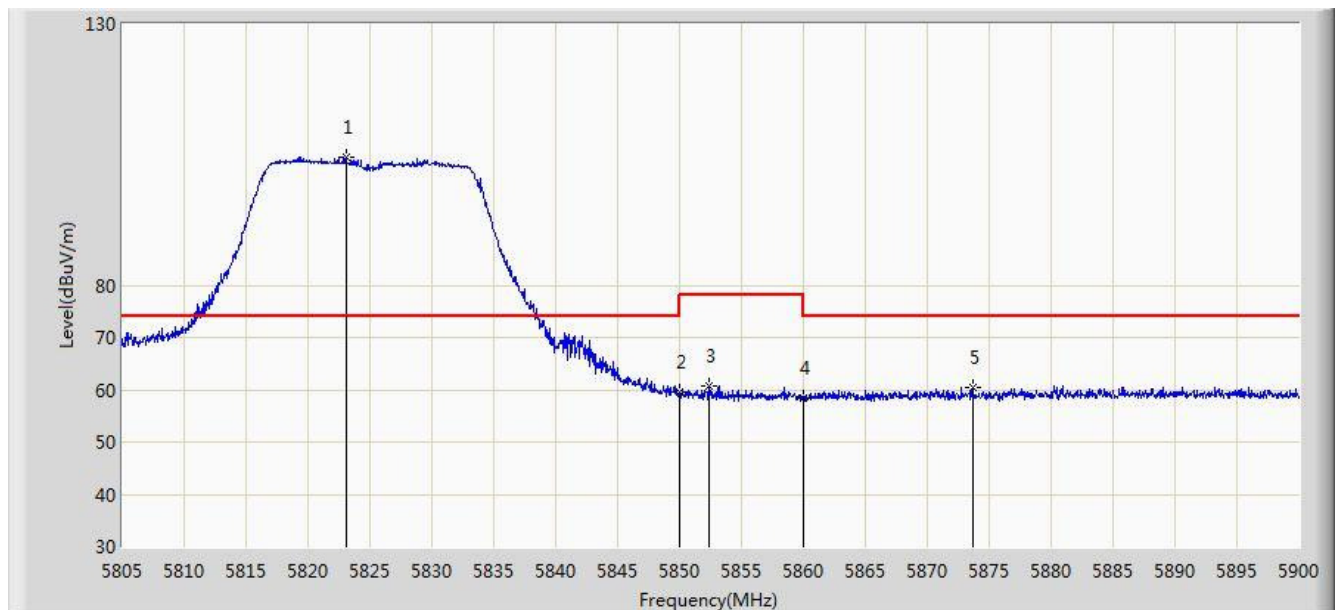


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.050	104.557	100.556	N/A	N/A	4.000	PK
2			5850.000	59.562	55.505	-18.638	78.200	4.058	PK
3			5852.405	60.652	56.593	-17.548	78.200	4.058	PK
4			5860.000	58.437	54.374	-15.563	74.000	4.064	PK
5			5873.685	60.574	56.473	-13.426	74.000	4.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 1 + 2	

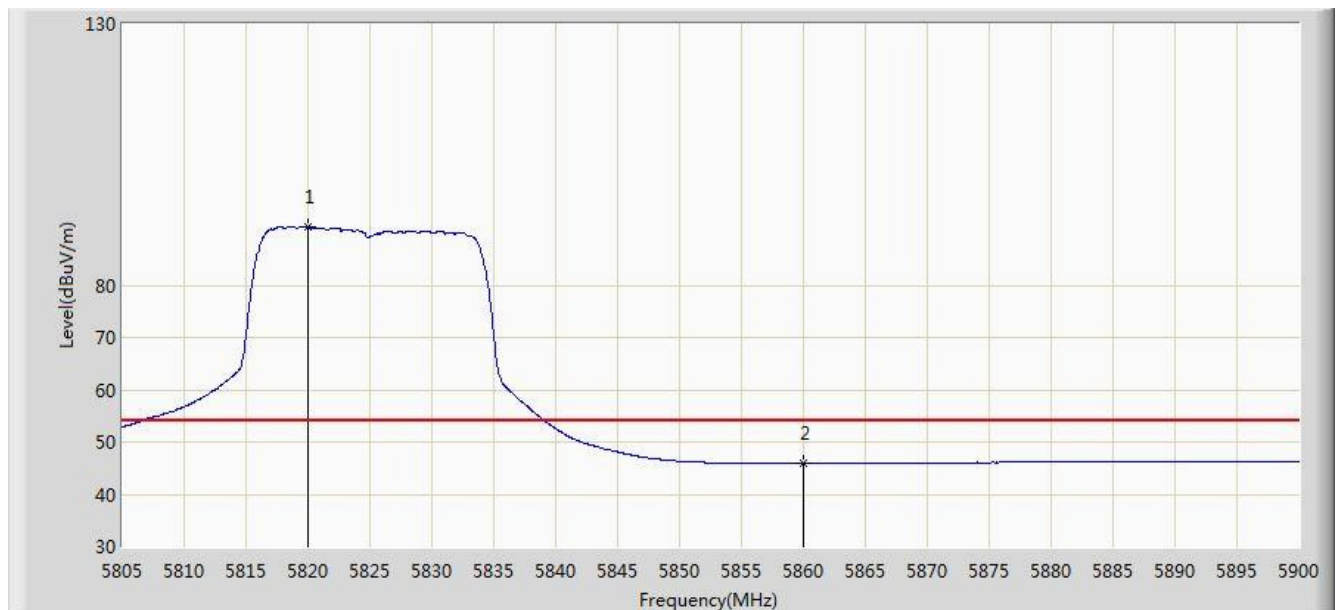


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.010	91.100	87.106	N/A	N/A	3.994	AV
2			5860.000	45.861	41.798	-8.139	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 1 + 2	

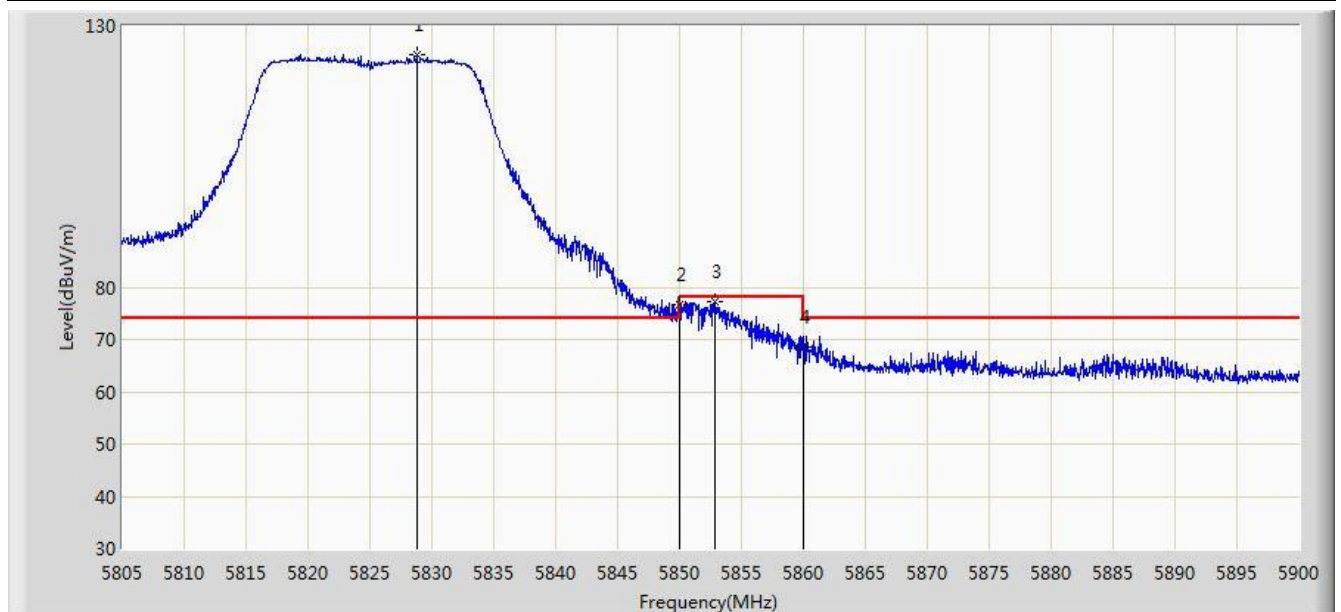


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.797	124.380	120.366	N/A	N/A	4.015	PK
2			5850.000	76.645	72.588	-1.555	78.200	4.058	PK
3			5852.833	77.201	73.142	-0.999	78.200	4.060	PK
4			5860.000	68.445	64.382	-5.555	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 1 + 2	

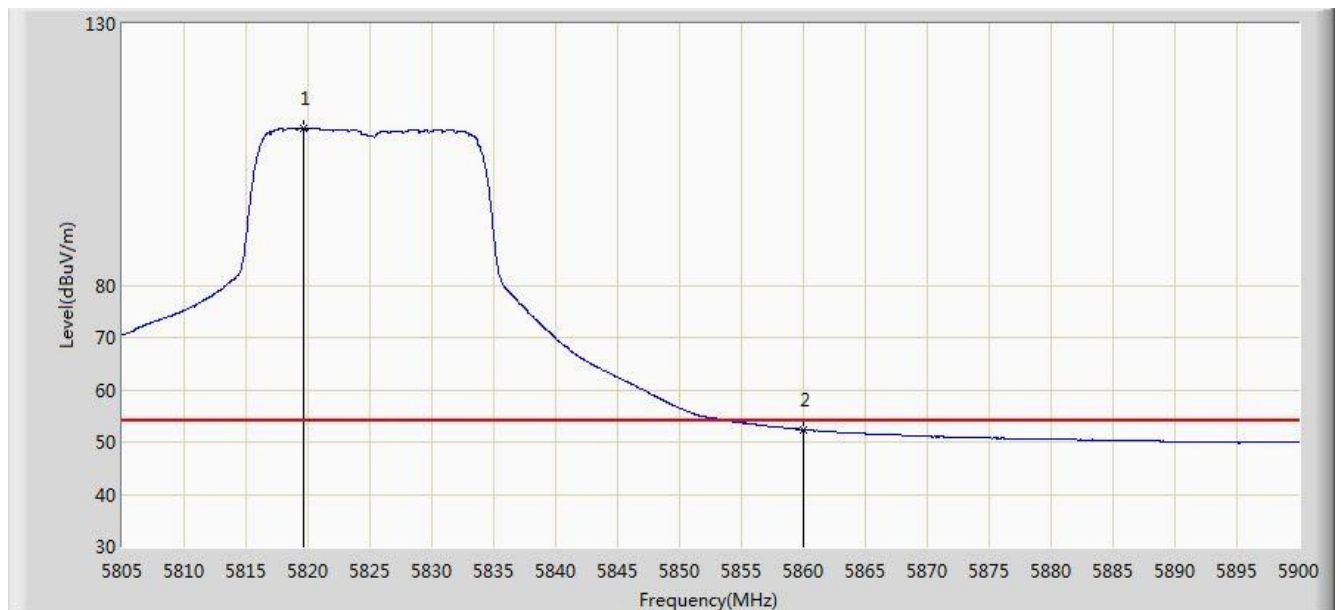


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.678	109.993	106.000	N/A	N/A	3.994	AV
2			5860.000	52.376	48.313	-1.624	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 1 + 2	

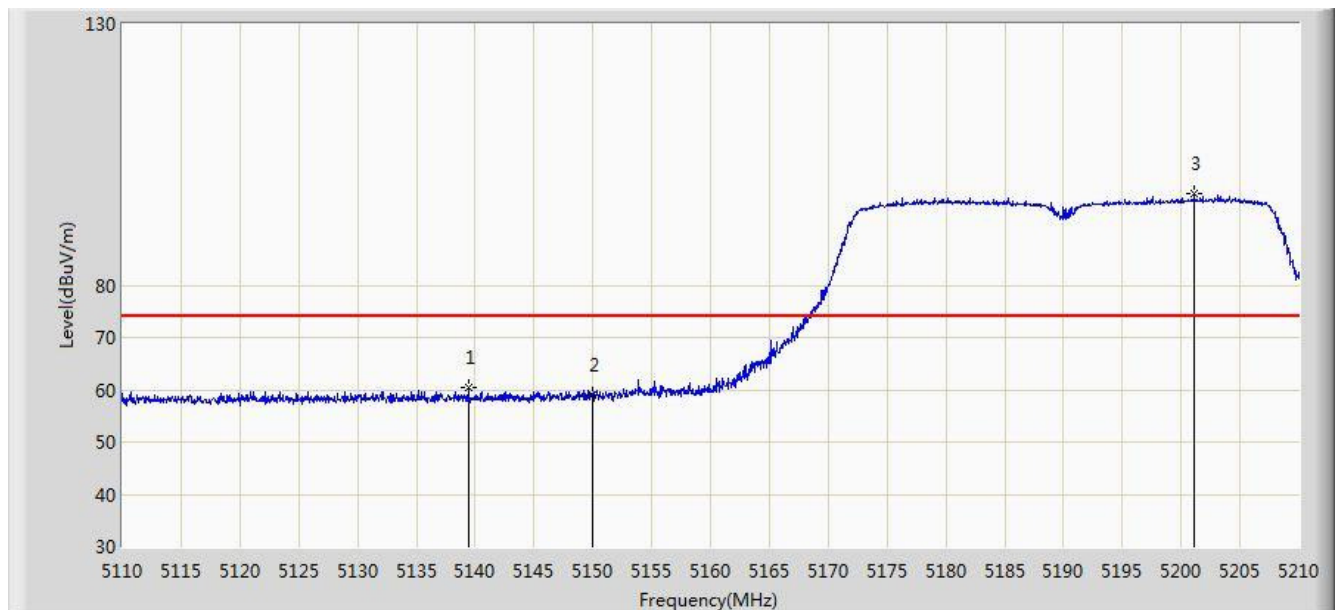


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.450	60.352	57.042	-13.648	74.000	3.310	PK
2			5150.000	58.904	55.595	-15.096	74.000	3.309	PK
3		*	5201.100	97.426	94.180	N/A	N/A	3.247	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 1 + 2	

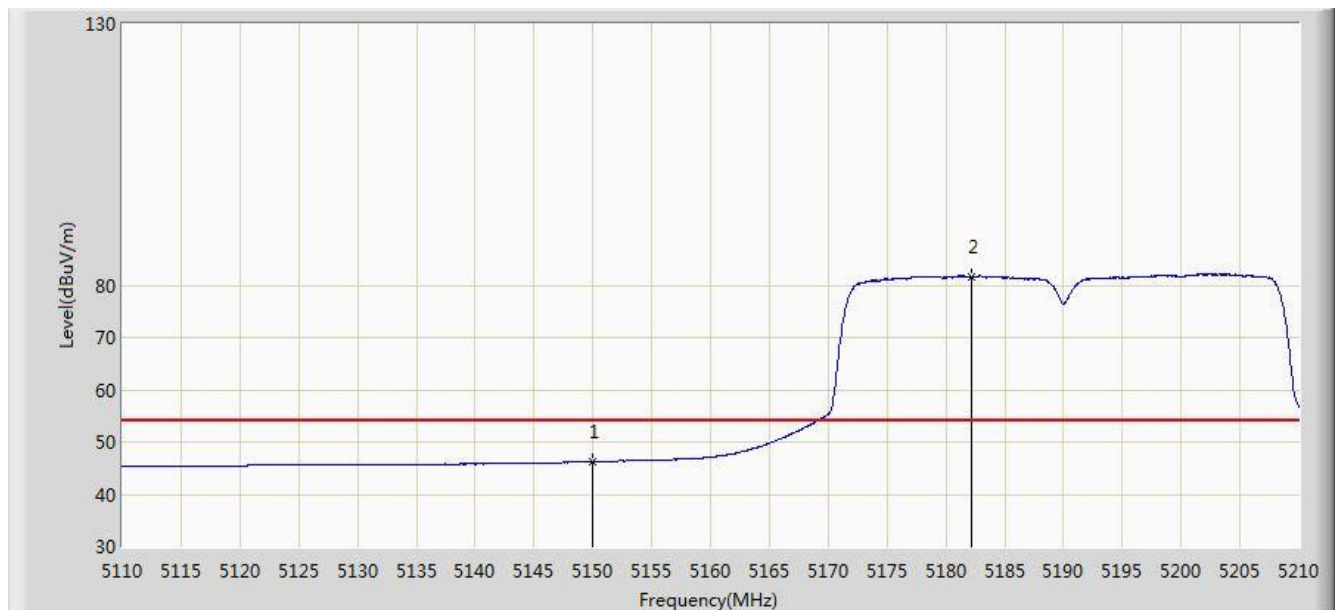


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.165	42.856	-7.835	54.000	3.309	AV
2		*	5182.150	81.711	78.440	N/A	N/A	3.271	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 1 + 2	

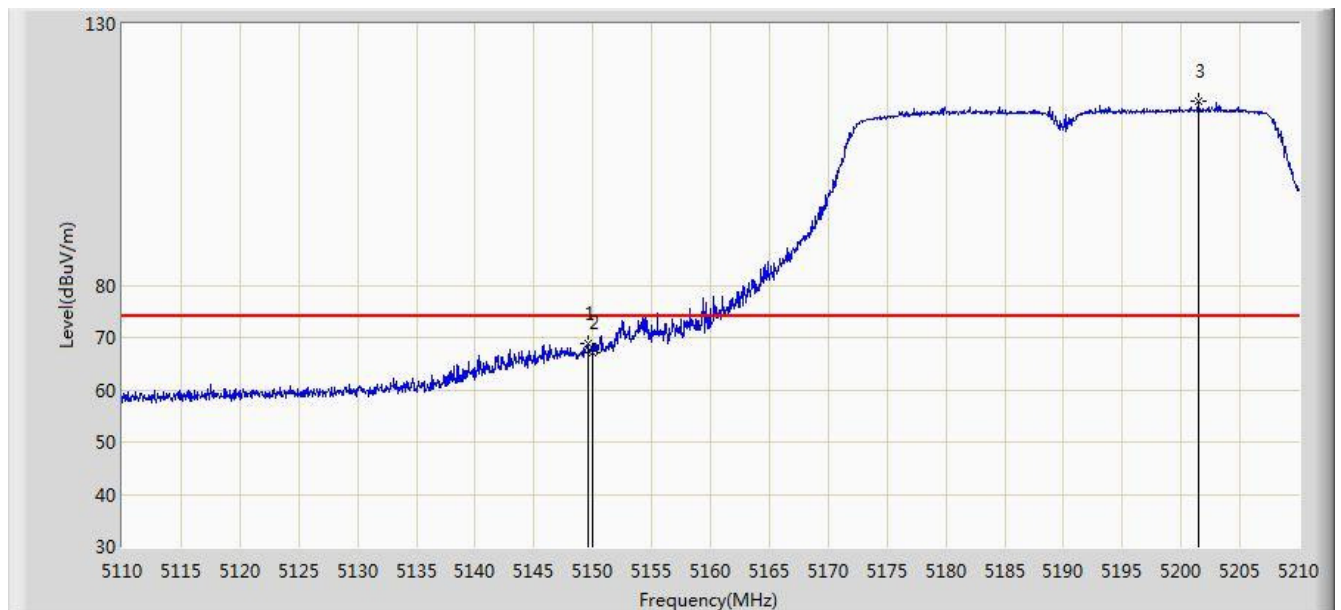


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	68.779	65.470	-5.221	74.000	3.309	PK
2			5150.000	67.114	63.805	-6.886	74.000	3.309	PK
3		*	5201.450	115.120	111.875	N/A	N/A	3.245	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 1 + 2	

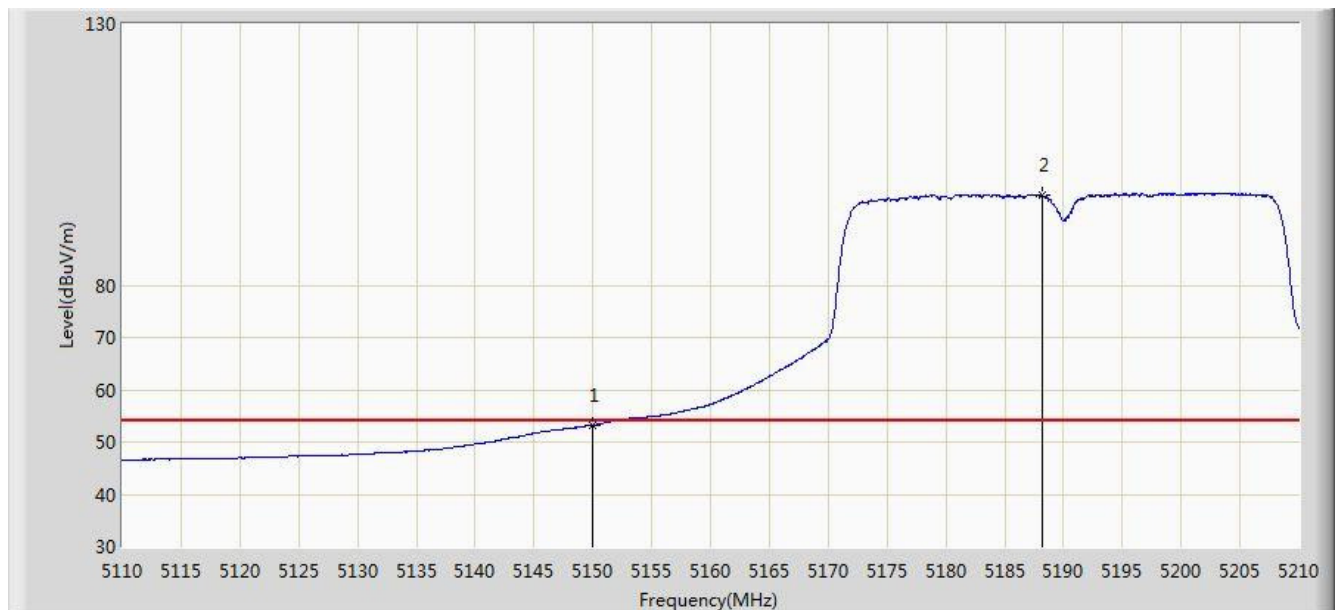


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.275	49.966	-0.725	54.000	3.309	AV
2		*	5188.200	97.246	93.983	N/A	N/A	3.263	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 1 + 2	

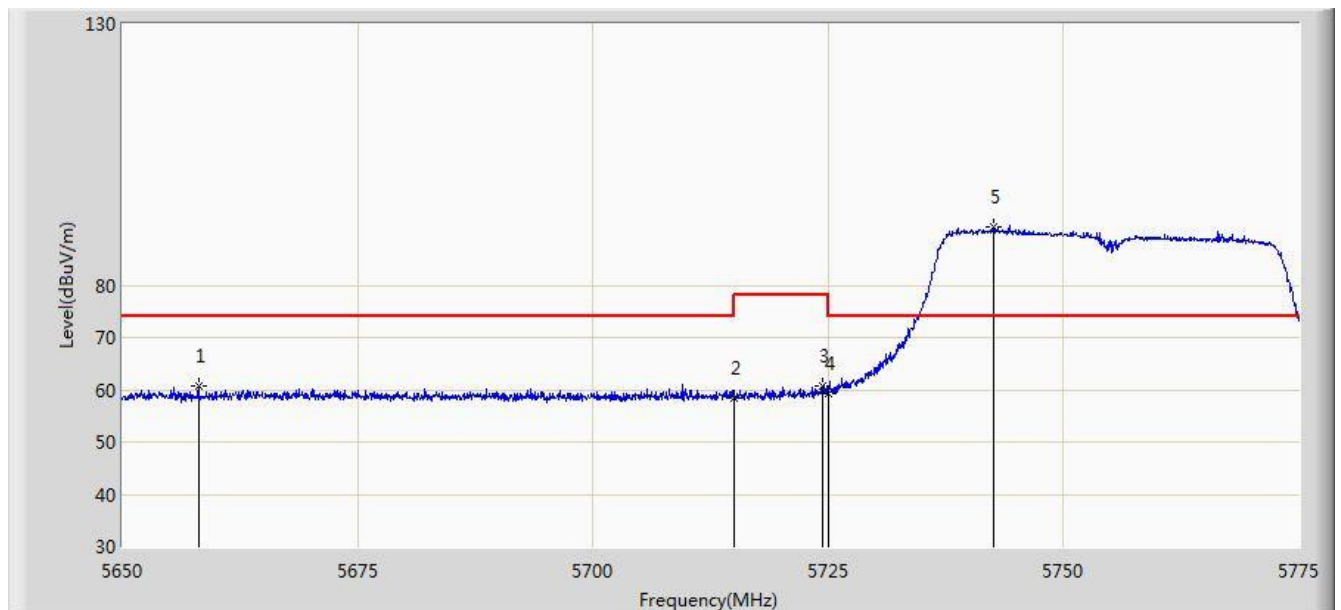


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5658.125	60.702	57.059	-13.298	74.000	3.643	PK
2			5715.000	58.346	54.585	-15.654	74.000	3.761	PK
3			5724.375	60.737	56.948	-17.463	78.200	3.790	PK
4			5725.000	59.227	55.436	-18.973	78.200	3.791	PK
5		*	5742.562	91.045	87.201	N/A	N/A	3.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 1 + 2	

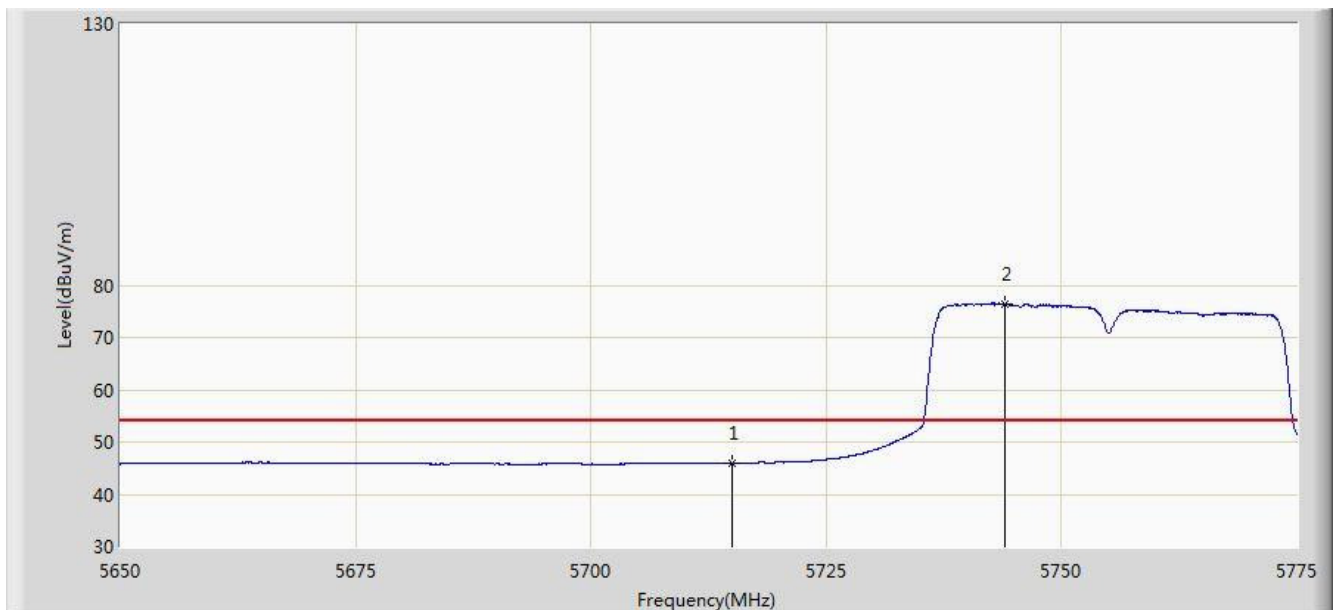


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.037	42.276	-7.963	54.000	3.761	AV
2		*	5744.062	76.432	72.583	N/A	N/A	3.849	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 1 + 2	

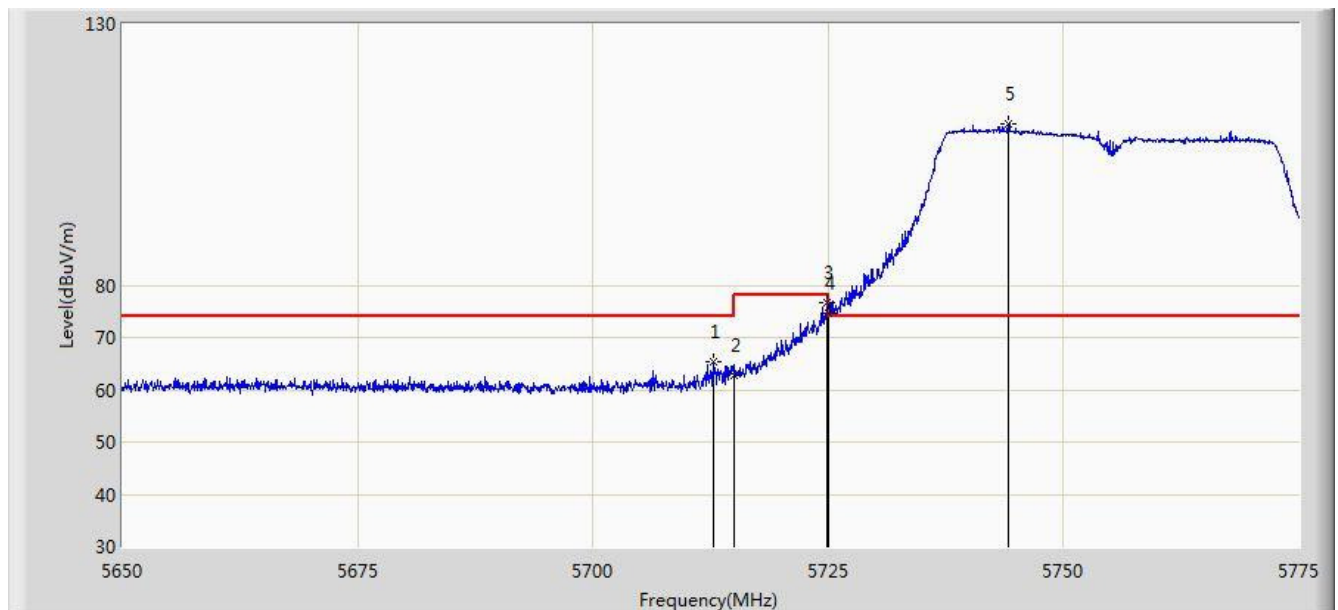


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.812	65.316	61.562	-8.684	74.000	3.755	PK
2			5715.000	62.618	58.857	-11.382	74.000	3.761	PK
3			5724.875	76.708	72.918	-1.492	78.200	3.790	PK
4			5725.000	74.556	70.765	-3.644	78.200	3.791	PK
5		*	5744.125	110.796	106.947	N/A	N/A	3.850	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 15:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 1 + 2	

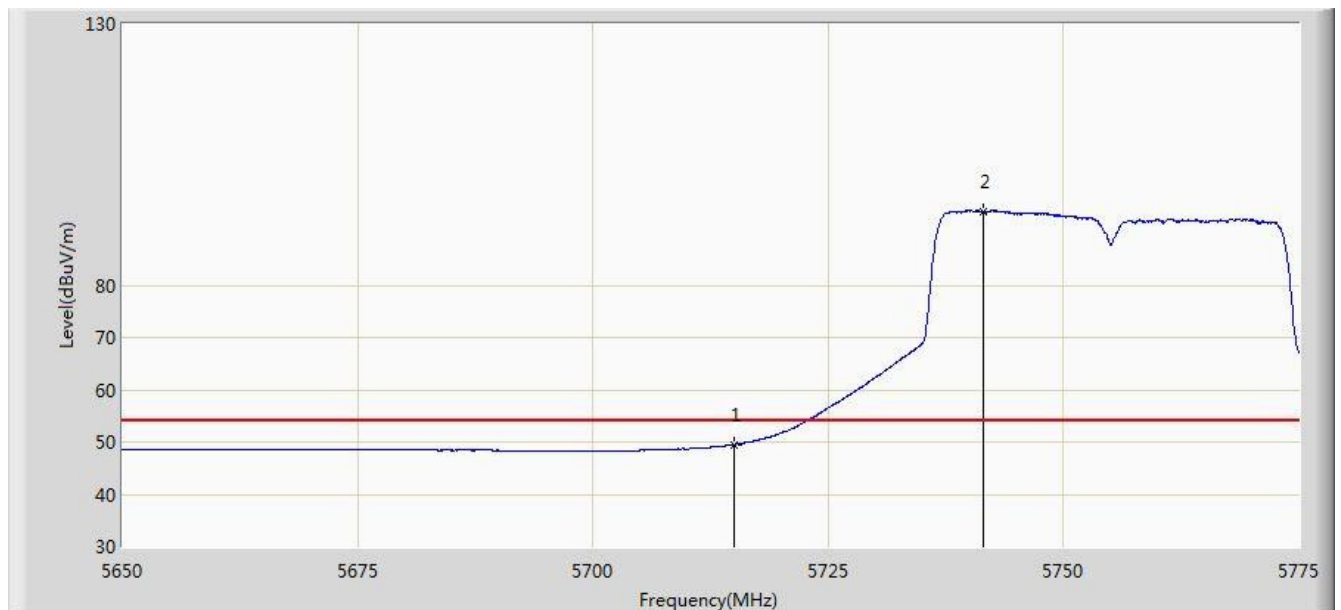


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.548	45.787	-4.452	54.000	3.761	AV
2		*	5741.437	94.156	90.315	N/A	N/A	3.842	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 1 + 2	

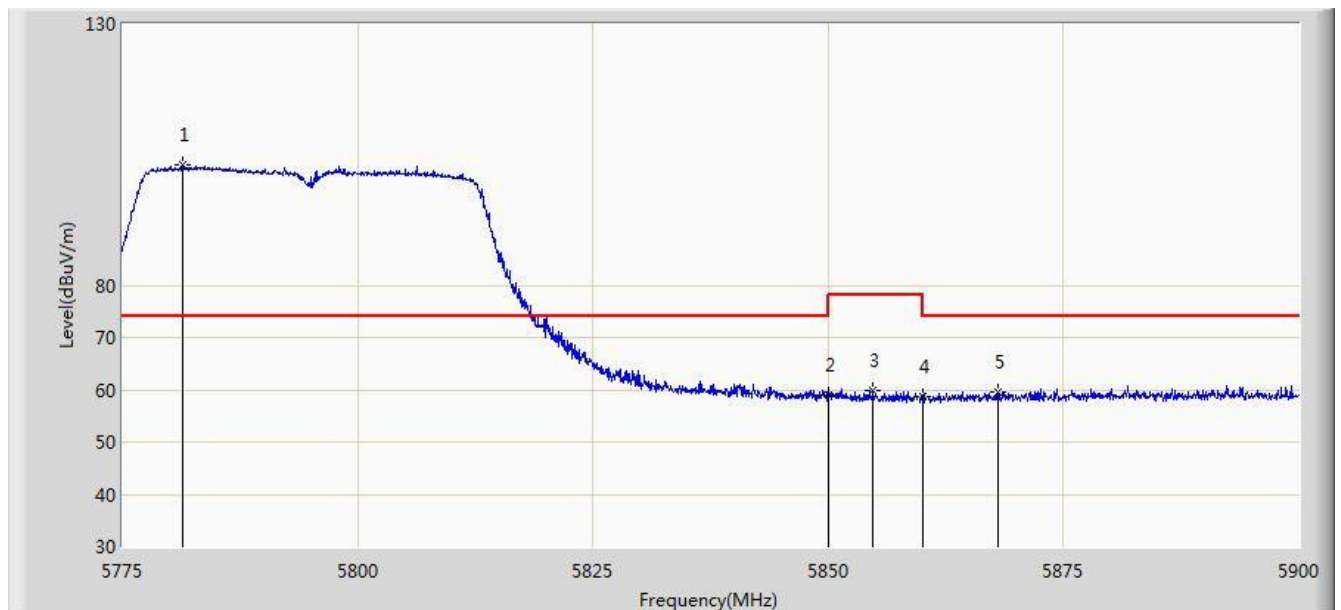


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.500	103.083	99.153	N/A	N/A	3.930	PK
2			5850.000	59.063	55.006	-19.137	78.200	4.058	PK
3			5854.750	59.995	55.935	-18.205	78.200	4.060	PK
4			5860.000	58.625	54.562	-15.375	74.000	4.064	PK
5			5868.000	59.665	55.582	-14.335	74.000	4.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 1 + 2	

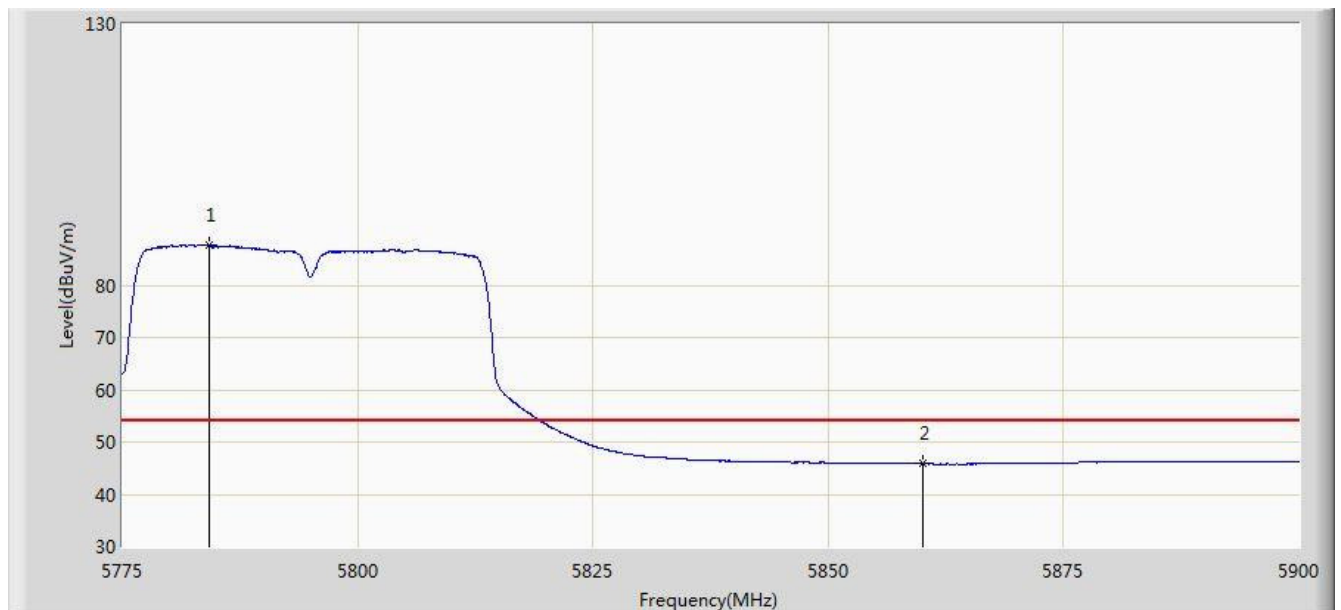


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.312	87.634	83.699	N/A	N/A	3.935	AV
2			5860.000	45.844	41.781	-8.156	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 1 + 2	

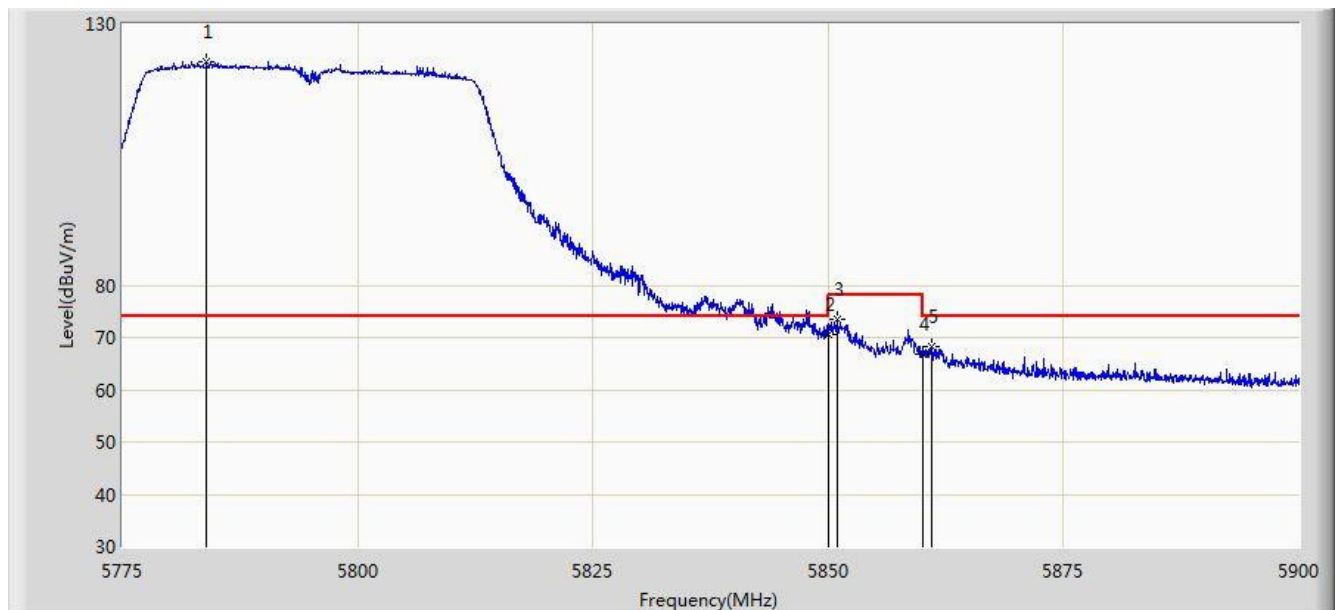


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.000	122.796	118.862	N/A	N/A	3.934	PK
2			5850.000	70.664	66.607	-7.536	78.200	4.058	PK
3			5851.000	73.420	69.362	-4.780	78.200	4.057	PK
4			5860.000	66.931	62.868	-7.069	74.000	4.064	PK
5			5861.062	68.172	64.108	-5.828	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 1 + 2	

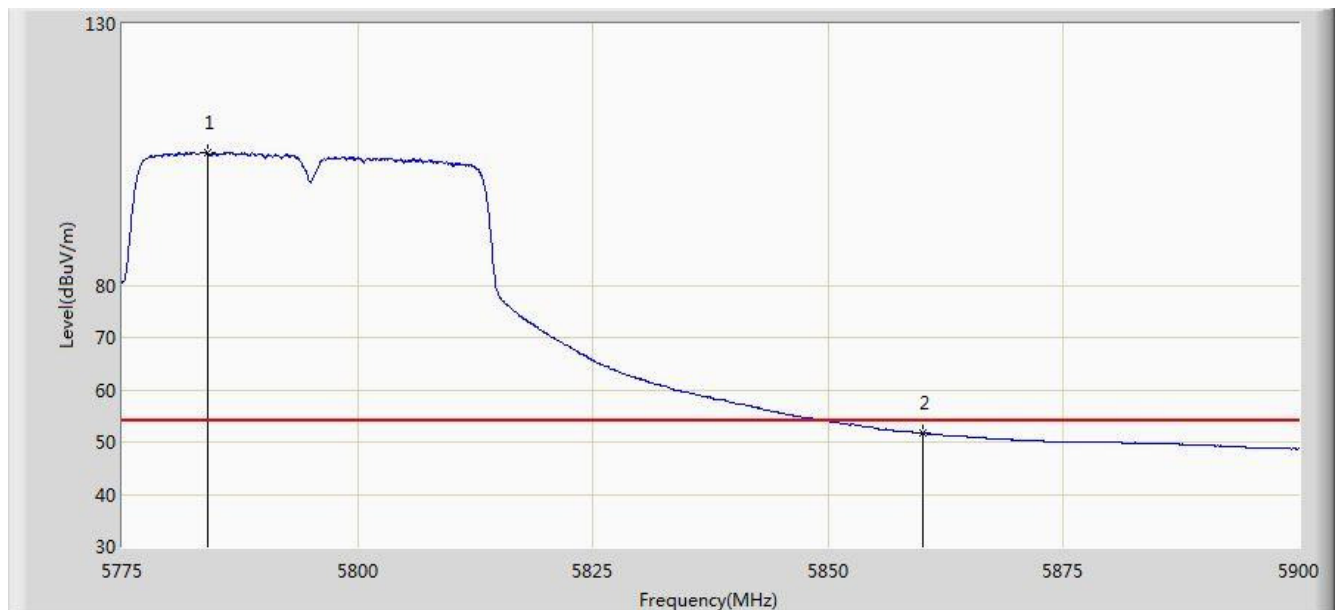


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.062	105.340	101.406	N/A	N/A	3.934	AV
2			5860.000	51.723	47.660	-2.277	54.000	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 1 + 2	

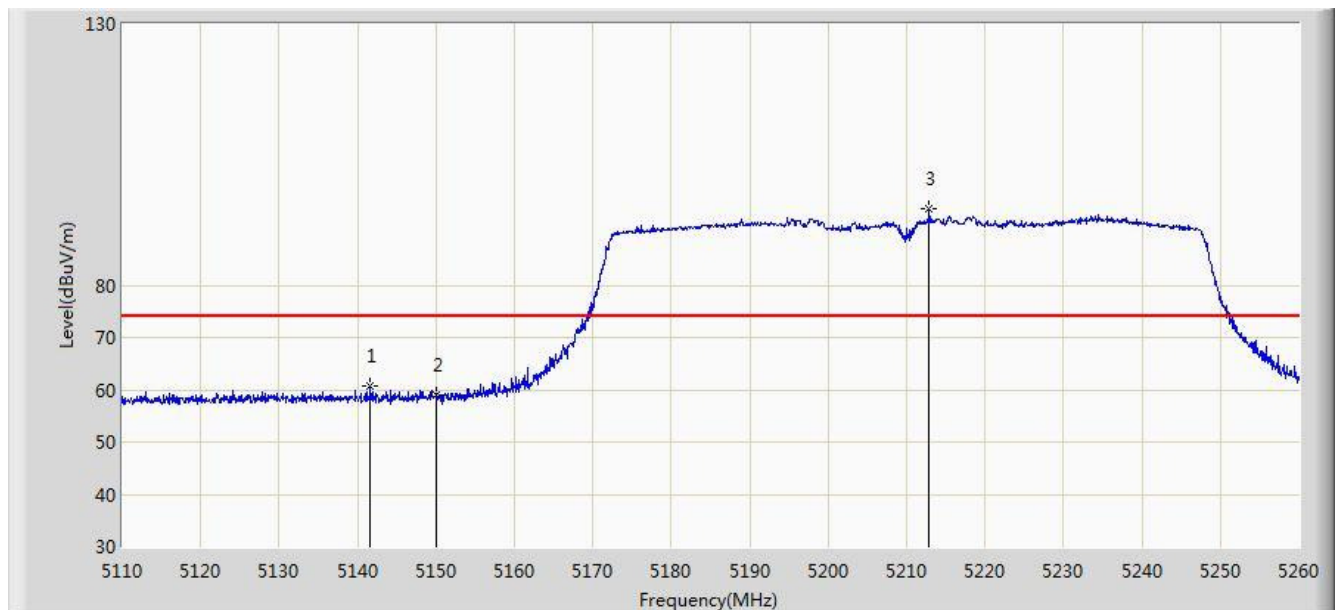


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.650	60.661	57.351	-13.339	74.000	3.310	PK
2			5150.000	59.094	55.785	-14.906	74.000	3.309	PK
3		*	5212.900	94.571	91.350	N/A	N/A	3.221	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 1 + 2	

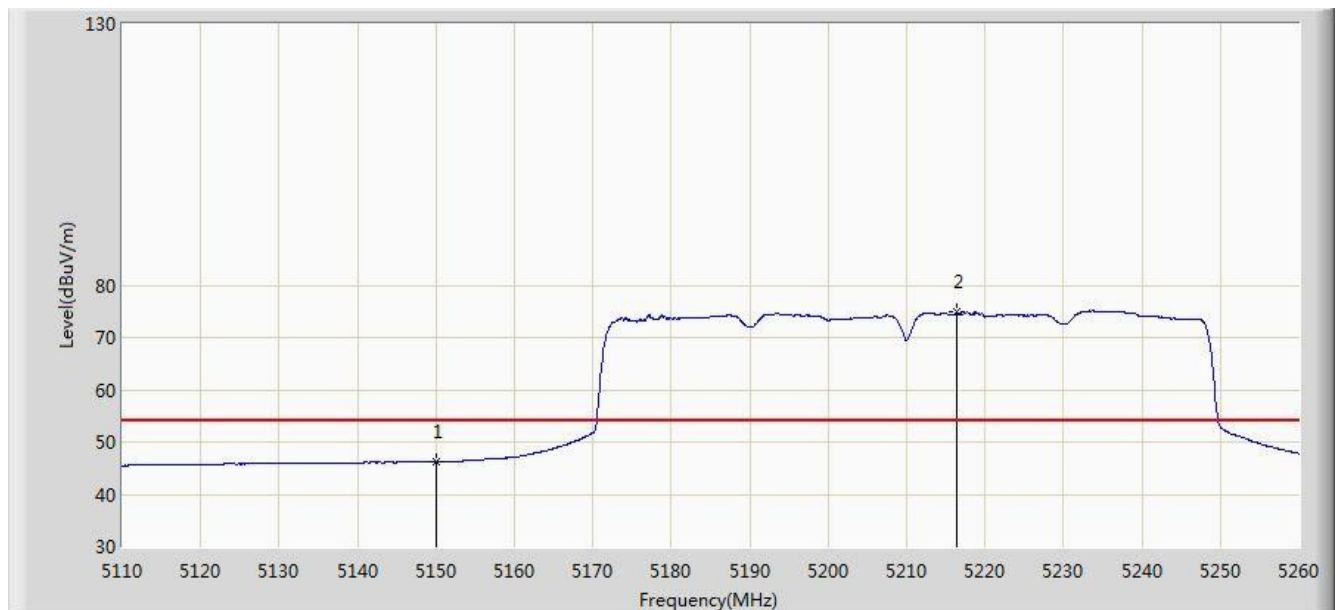


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.202	42.893	-7.798	54.000	3.309	AV
2		*	5216.425	74.901	71.686	N/A	N/A	3.215	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 1 + 2	

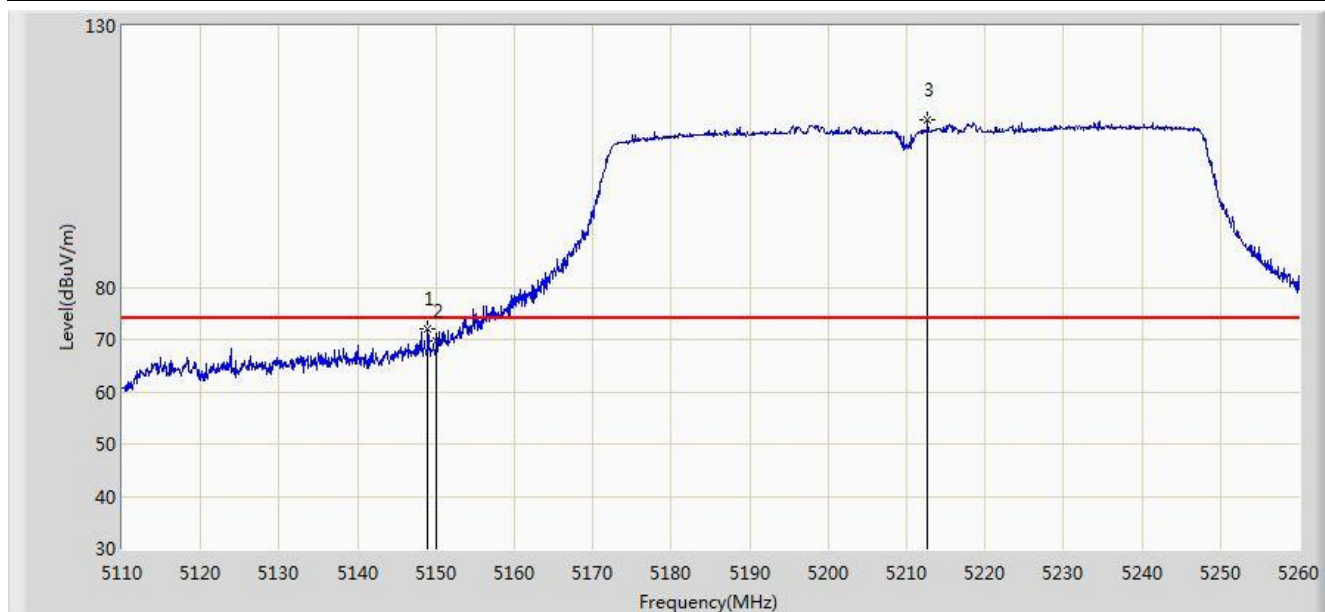


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.925	72.034	68.725	-1.966	74.000	3.308	PK
2			5150.000	69.662	66.353	-4.338	74.000	3.309	PK
3		*	5212.675	111.926	108.704	N/A	N/A	3.222	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 1 + 2	

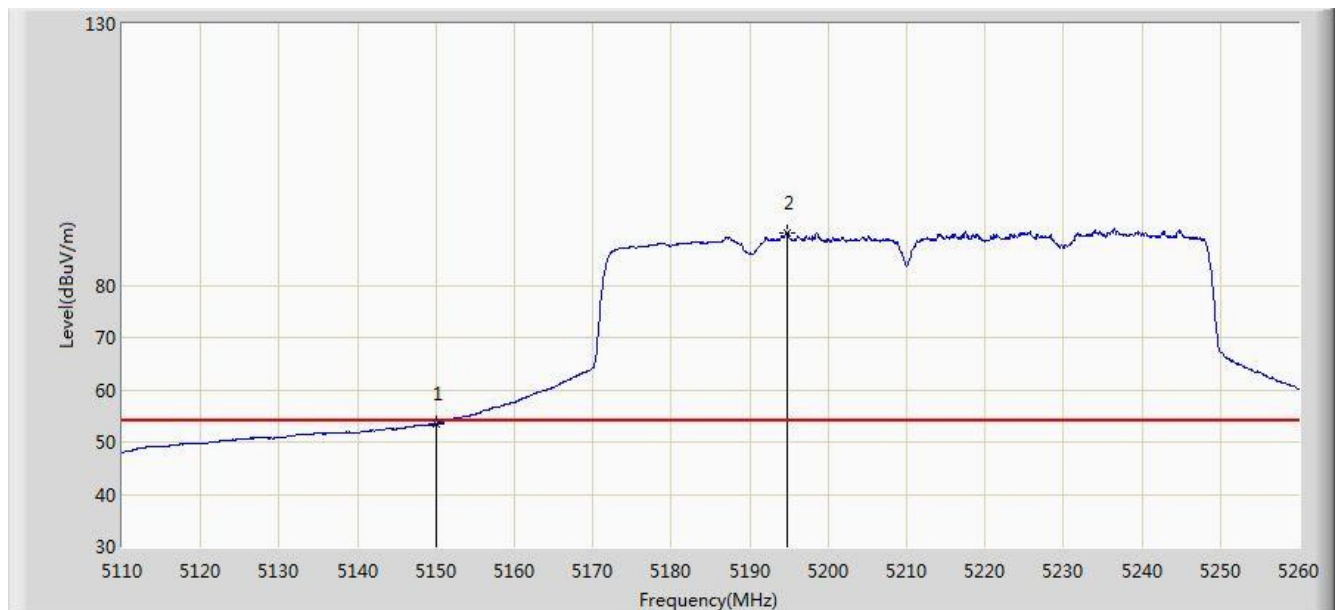


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.429	50.120	-0.571	54.000	3.309	AV
2		*	5194.825	90.134	86.879	N/A	N/A	3.255	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 1 + 2	

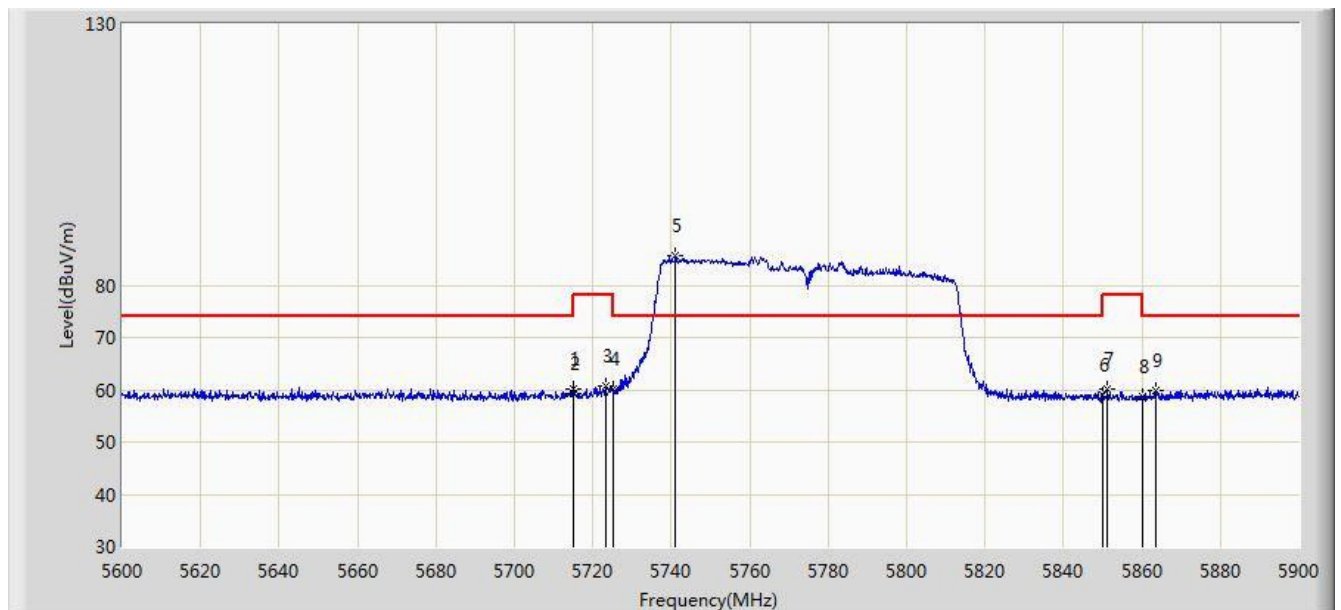


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.900	60.089	56.328	-13.911	74.000	3.760	PK
2			5715.000	59.163	55.402	-14.837	74.000	3.761	PK
3			5723.150	60.692	56.907	-17.508	78.200	3.785	PK
4			5725.000	60.194	56.403	-18.006	78.200	3.791	PK
5		*	5741.150	85.716	81.876	N/A	N/A	3.840	PK
6			5850.000	59.101	55.044	-19.099	78.200	4.058	PK
7			5851.250	60.067	56.009	-18.133	78.200	4.058	PK
8			5860.000	58.615	54.552	-15.385	74.000	4.064	PK
9			5863.550	59.940	55.870	-14.060	74.000	4.069	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 1 + 2	

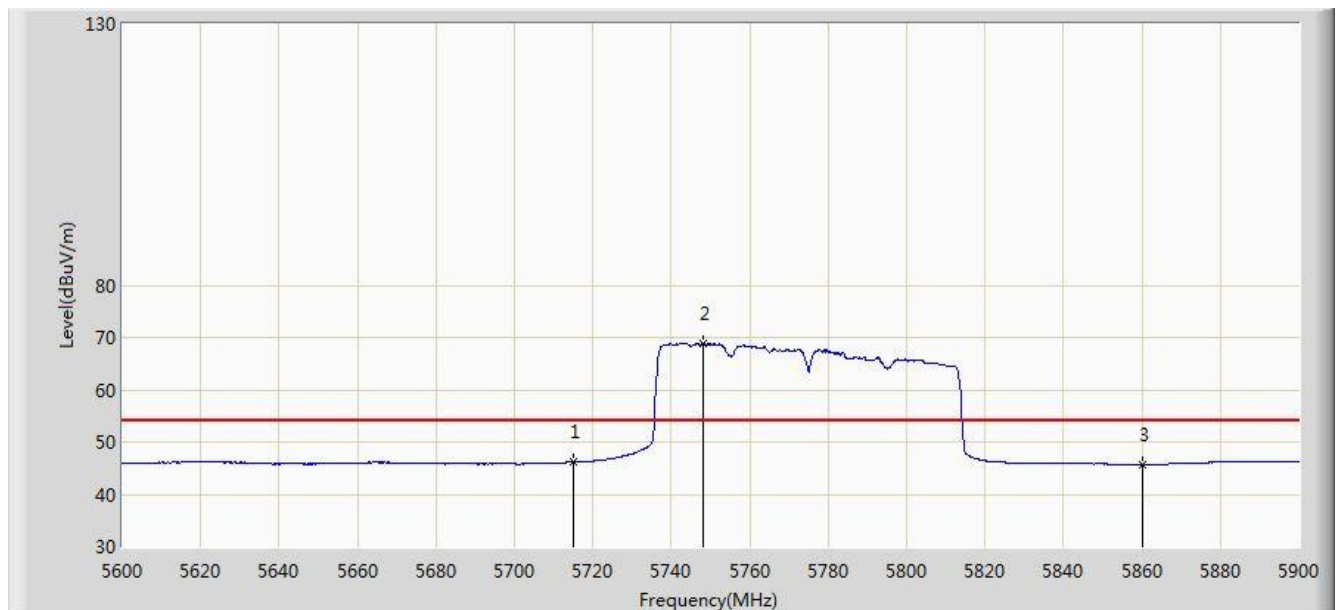


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	46.151	42.390	-7.849	54.000	3.761	AV
2		*	5748.200	68.737	64.872	N/A	N/A	3.864	AV
3			5860.000	45.715	41.652	-8.285	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 1 + 2	

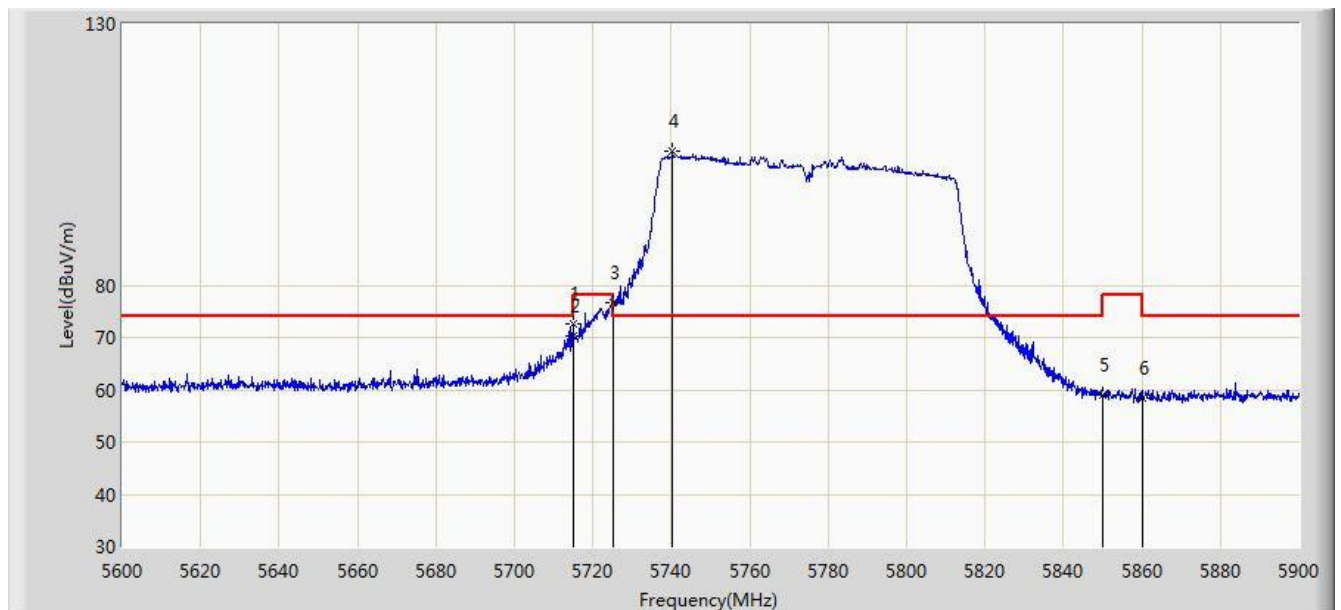


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.900	72.540	68.779	-1.460	74.000	3.760	PK
2			5715.000	70.418	66.657	-3.582	74.000	3.761	PK
3			5725.000	76.671	72.880	-1.529	78.200	3.791	PK
4		*	5740.250	105.723	101.885	N/A	N/A	3.838	PK
5			5850.000	58.990	54.933	-19.210	78.200	4.058	PK
6			5860.000	58.413	54.350	-15.587	74.000	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/06 - 16:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 1 + 2	

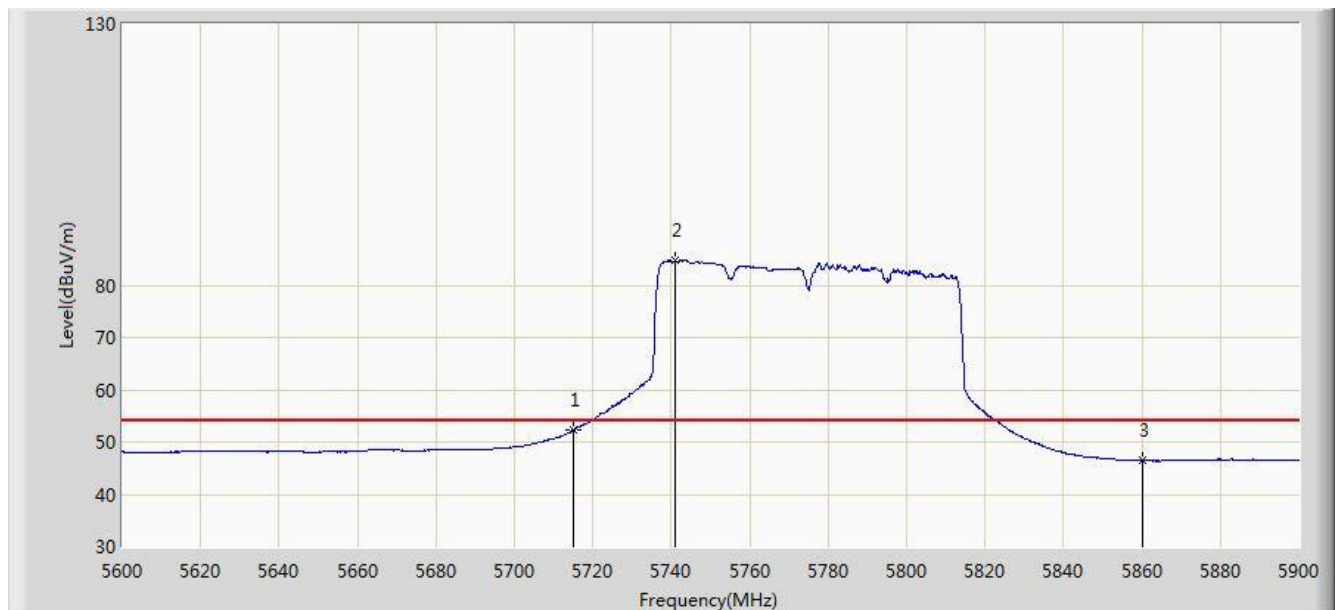


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.230	48.469	-1.770	54.000	3.761	AV
2		*	5741.150	84.650	80.810	N/A	N/A	3.840	AV
3			5860.000	46.513	42.450	-7.487	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

5GHz Card #2 + External Antenna

Site: AC1	Time: 2016/01/07 - 21:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1	

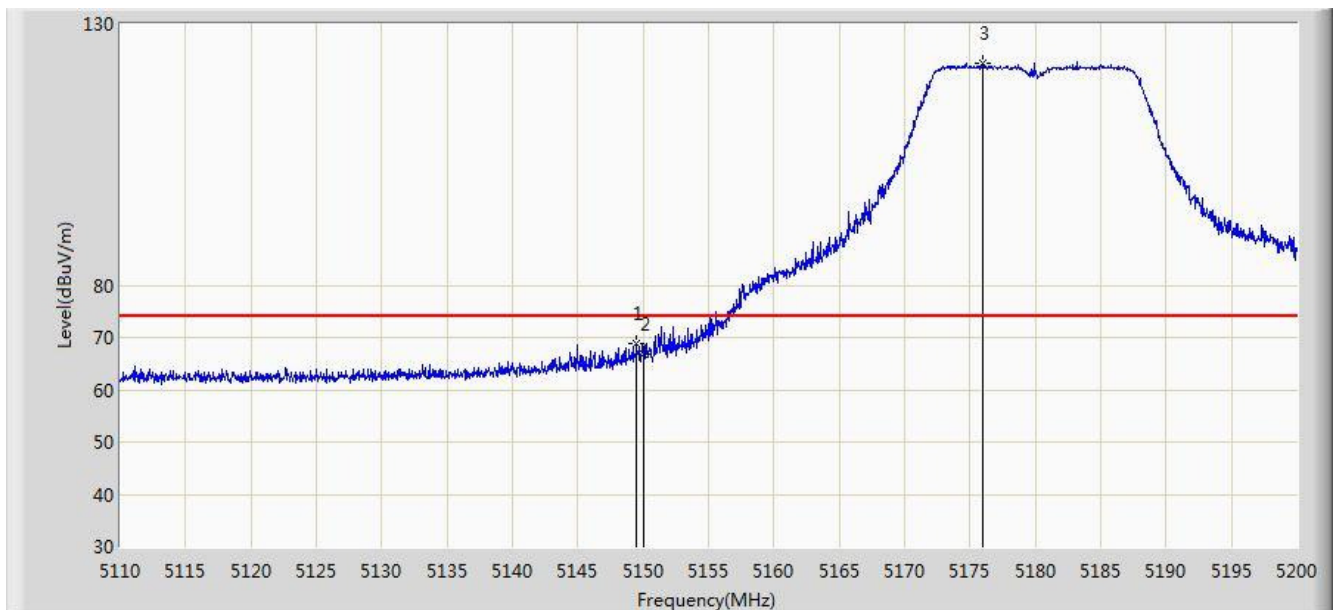


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.465	68.769	65.460	-5.231	74.000	3.309	PK
2			5150.000	66.874	63.565	-7.126	74.000	3.309	PK
3		*	5176.015	122.492	119.216	N/A	N/A	3.277	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/07 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1	

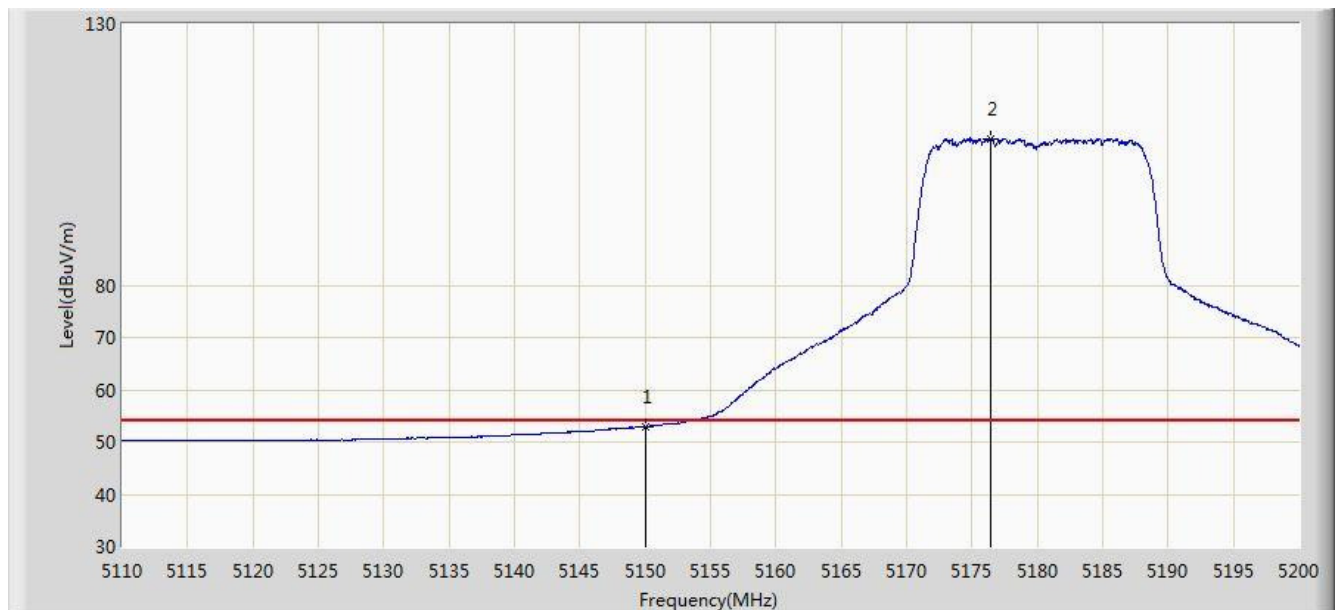


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.875	49.566	-1.125	54.000	3.309	AV
2		*	5176.375	108.109	104.833	N/A	N/A	3.276	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/07 - 21:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1	

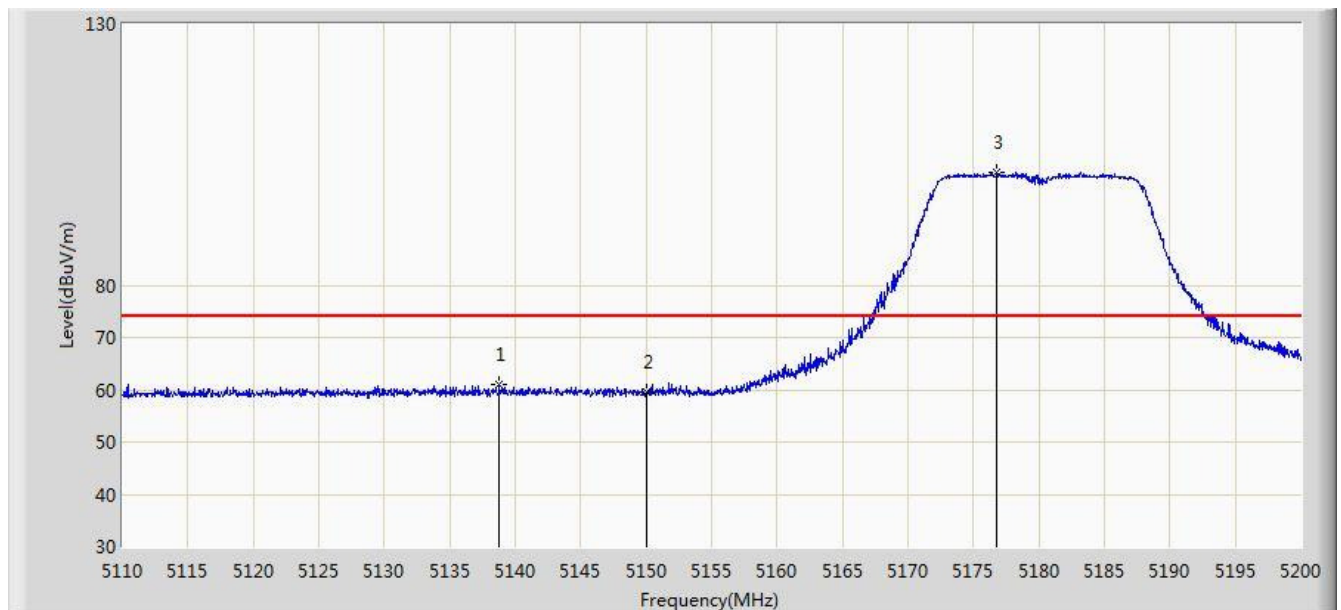


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.800	61.053	57.743	-12.947	74.000	3.310	PK
2			5150.000	59.583	56.274	-14.417	74.000	3.309	PK
3		*	5176.780	101.672	98.396	N/A	N/A	3.276	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/07 - 21:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 1	

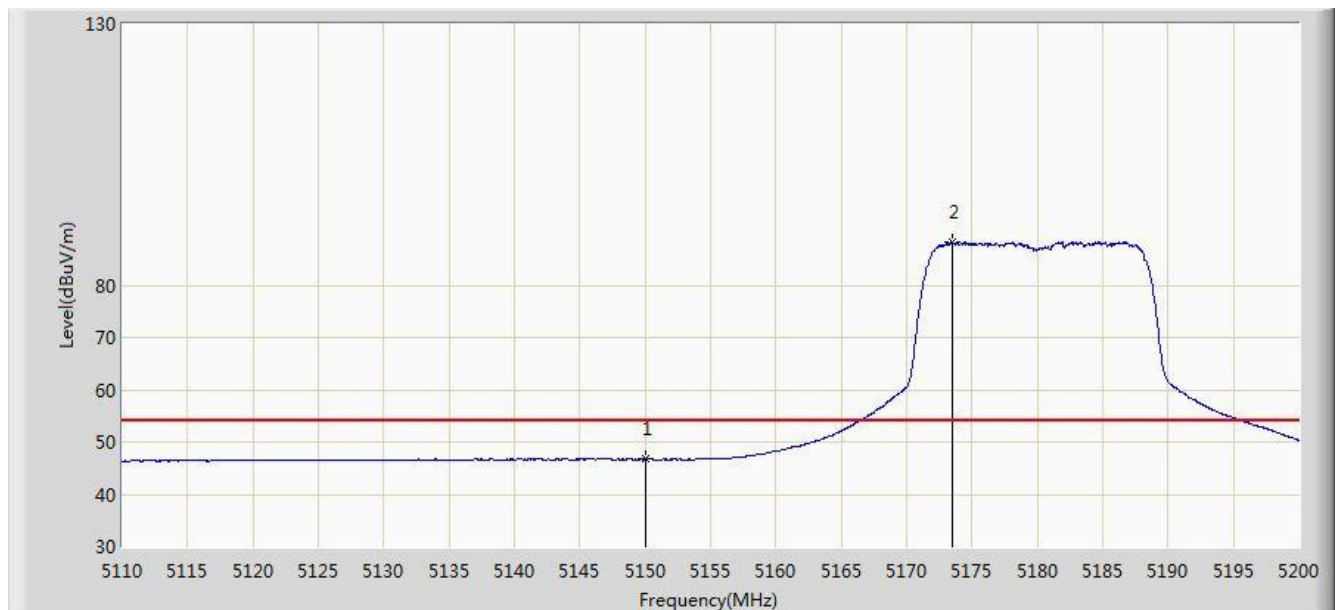


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.698	43.389	-7.302	54.000	3.309	AV
2		*	5173.450	88.262	84.983	N/A	N/A	3.279	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1	

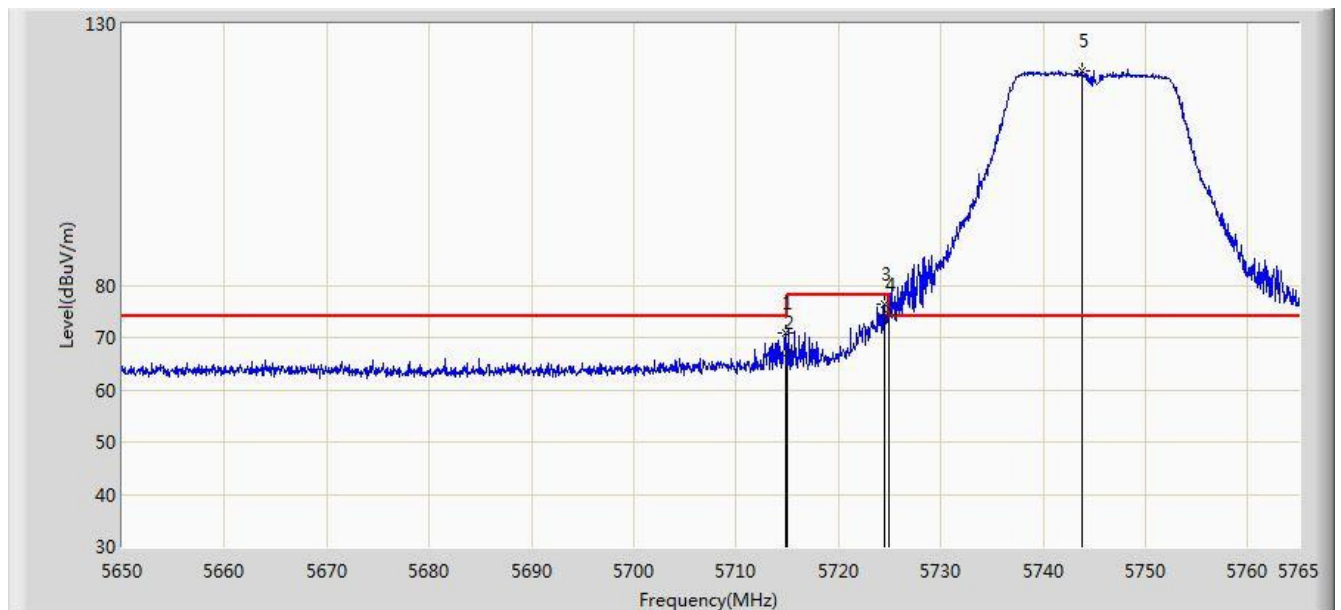


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.860	70.740	66.980	-3.260	74.000	3.760	PK
2			5715.000	66.993	63.232	-7.007	74.000	3.761	PK
3			5724.462	76.383	72.594	-1.817	78.200	3.790	PK
4			5725.000	74.378	70.587	-3.822	78.200	3.791	PK
5		*	5743.783	120.871	117.023	N/A	N/A	3.848	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1	

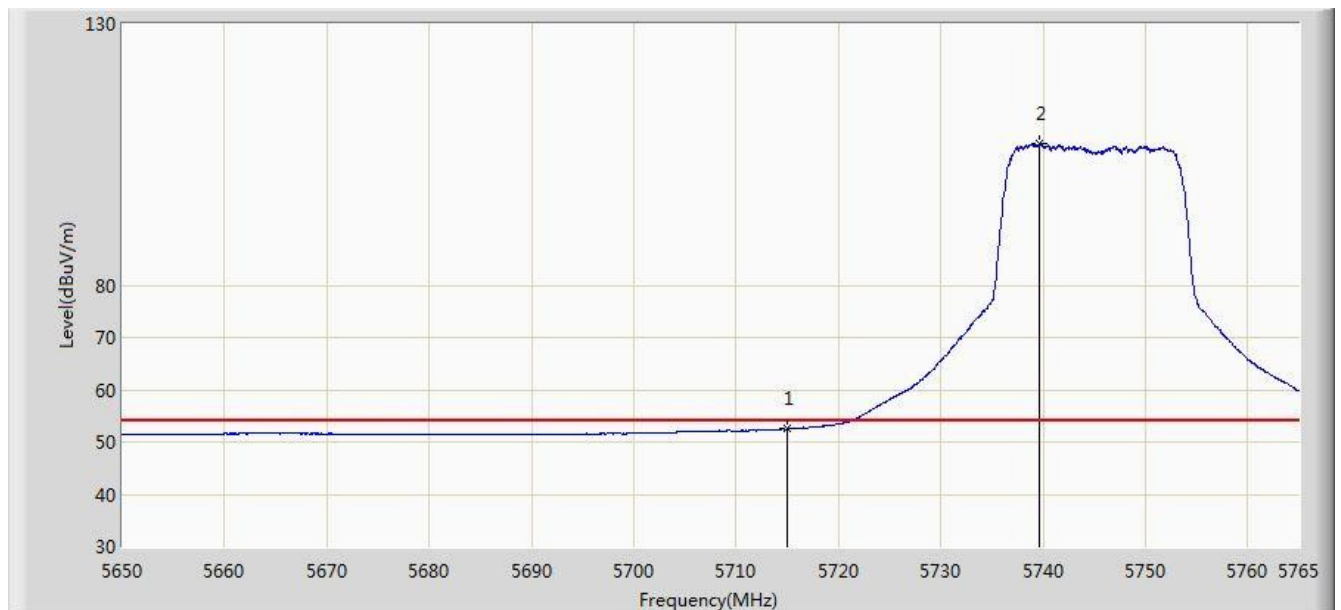


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.510	48.749	-1.490	54.000	3.761	AV
2		*	5739.700	106.962	103.126	N/A	N/A	3.836	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1	

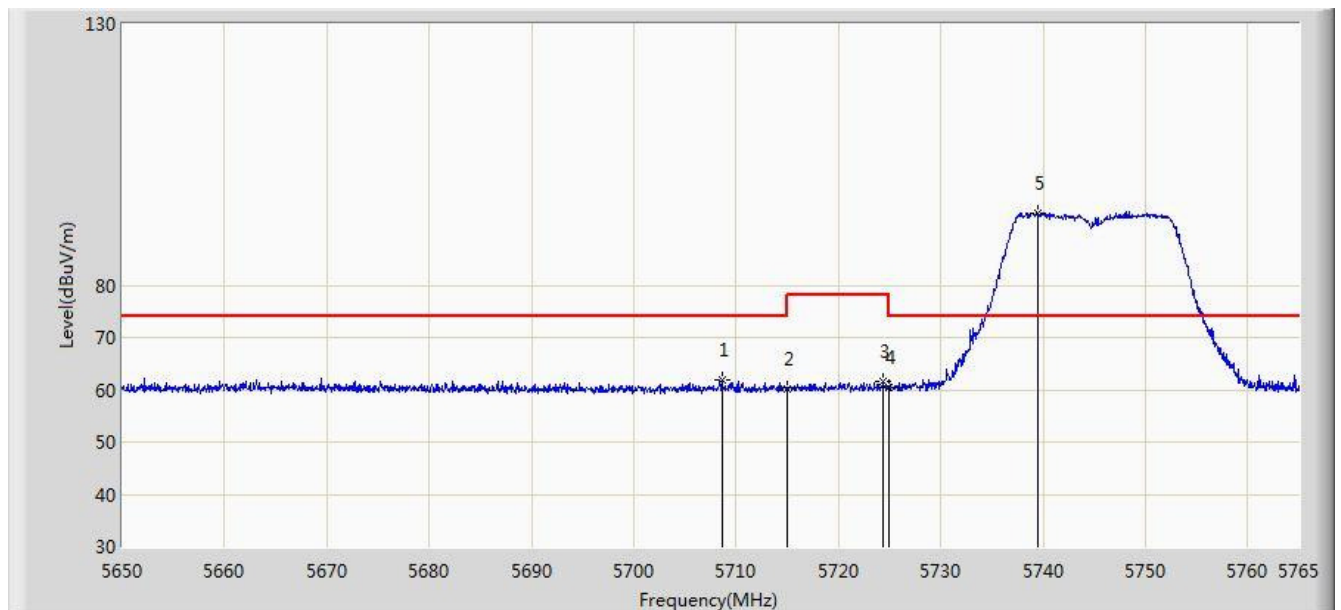


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5708.592	61.917	58.175	-12.083	74.000	3.742	PK
2			5715.000	60.207	56.446	-13.793	74.000	3.761	PK
3			5724.405	61.483	57.694	-16.717	78.200	3.790	PK
4			5725.000	60.527	56.736	-17.673	78.200	3.791	PK
5		*	5739.527	93.705	89.869	N/A	N/A	3.835	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 1	

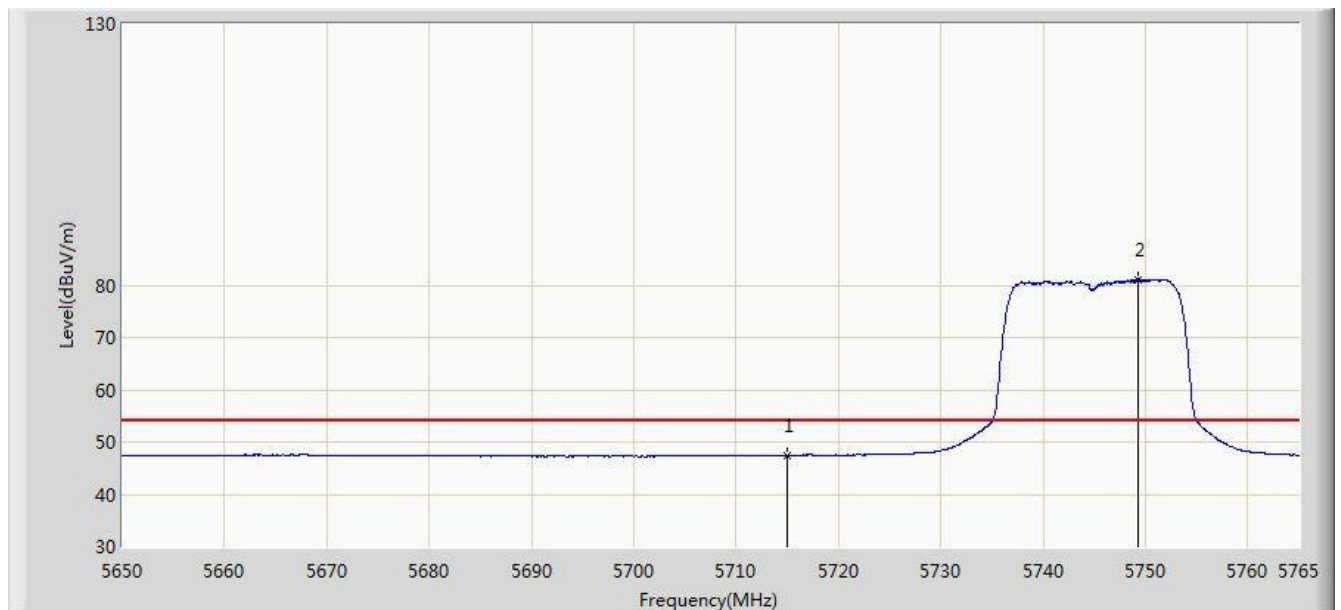


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	47.431	43.670	-6.569	54.000	3.761	AV
2		*	5749.245	81.138	77.269	N/A	N/A	3.868	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1	

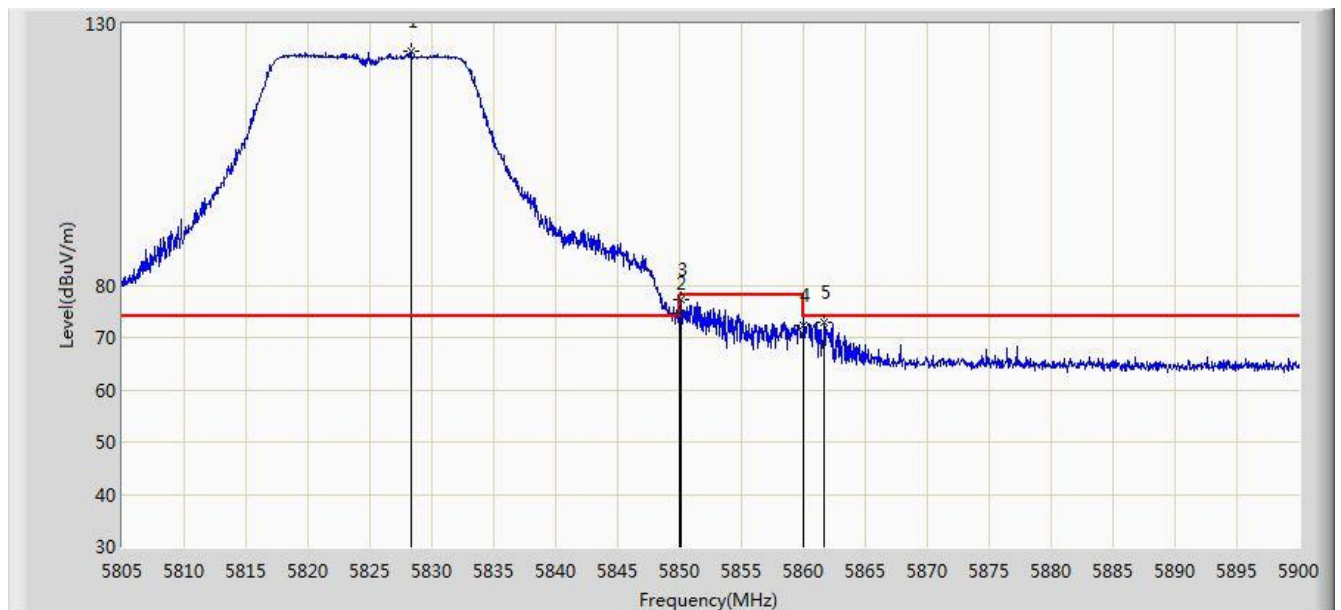


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.275	124.719	120.706	N/A	N/A	4.012	PK
2			5850.000	74.687	70.630	-3.513	78.200	4.058	PK
3			5850.172	77.383	73.326	-0.817	78.200	4.058	PK
4			5860.000	72.258	68.195	-1.742	74.000	4.064	PK
5			5861.667	72.855	68.791	-1.145	74.000	4.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1	

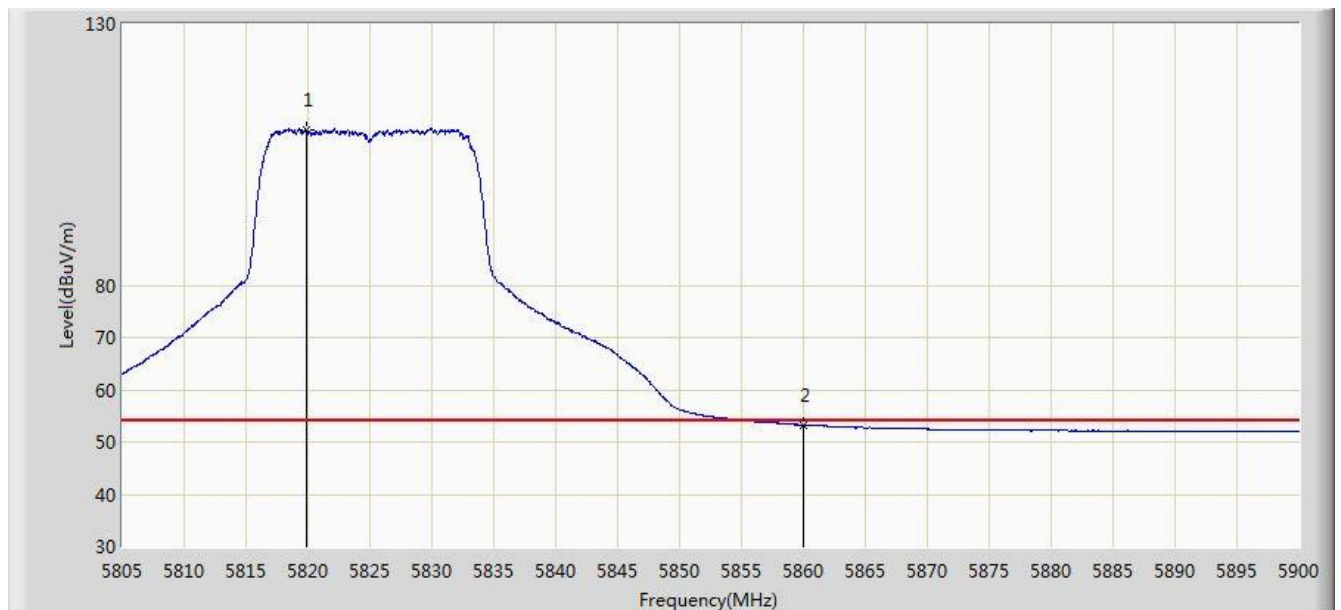


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.915	109.732	105.738	N/A	N/A	3.994	AV
2			5860.000	53.170	49.107	-0.830	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1	

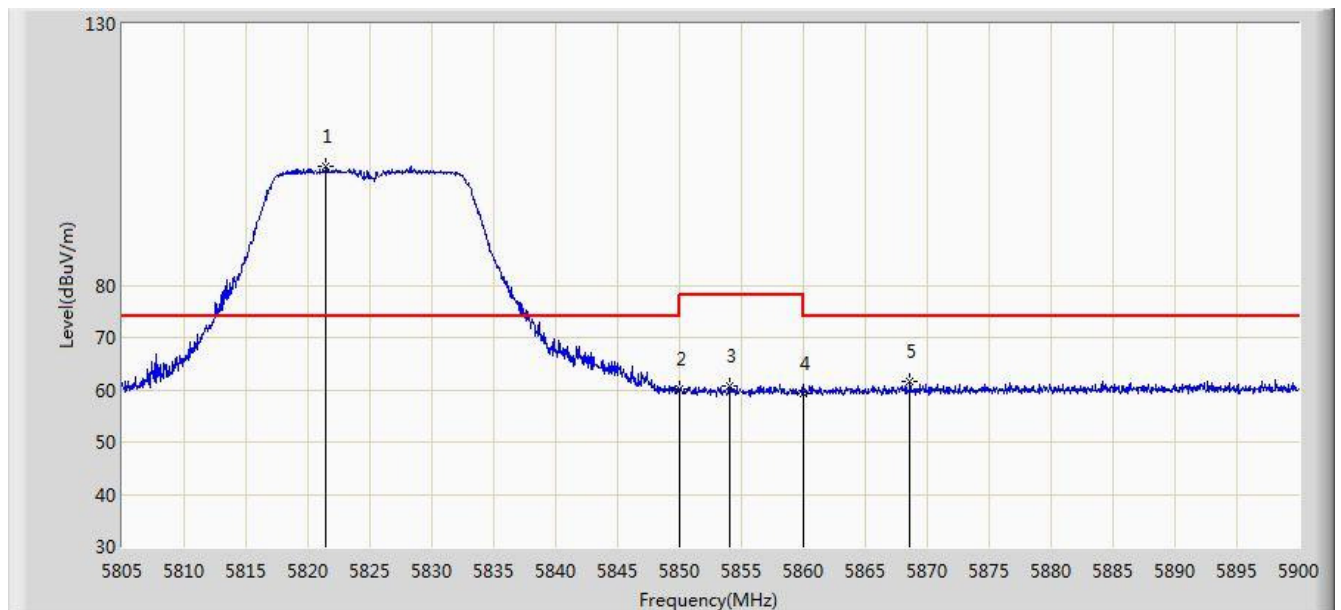


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.482	102.755	98.758	N/A	N/A	3.997	PK
2			5850.000	60.041	55.984	-18.159	78.200	4.058	PK
3			5854.020	60.738	56.678	-17.462	78.200	4.060	PK
4			5860.000	59.186	55.123	-14.814	74.000	4.064	PK
5			5868.603	61.671	57.586	-12.329	74.000	4.085	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2016/01/08 - 10:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Peak Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: MeshRanger X20 Dual 5GHz 802.11ac	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 1	

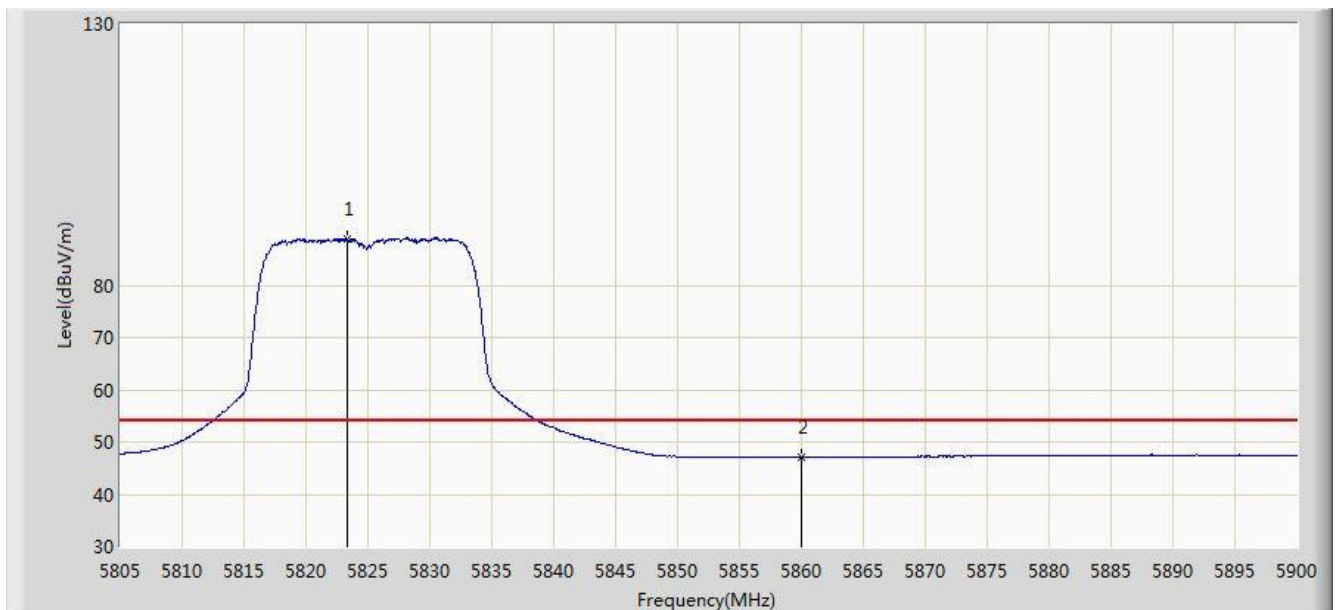

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.288	88.917	84.916	N/A	N/A	4.001	AV
2			5860.000	47.003	42.940	-6.997	54.000	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).