


FCC RF Test Report

APPLICANT : Sun Cupid Technology (HK) Ltd.
EQUIPMENT : 5G Smartphone
BRAND NAME : NUU
MODEL NAME : S6707X
MARKETING NAME : NUU X10 5G, X10 5G
FCC ID : 2ADINS6707X
STANDARD : 47 CFR Part 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Aug. 26, 2024 ~ Aug. 29, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.



Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	7
1.6 Test Software	7
1.7 Applied Standards	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	11
3 Conducted Test Items.....	12
3.1 Measuring Instruments.....	12
3.2 Conducted Output Power	13
3.3 EIRP	14
3.4 Occupied Bandwidth	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability.....	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Measurement Uncertainty	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG471902L	01	Initial issue of report	Sep. 14, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.3	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 11.13 dB at 7152.50 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Sun Cupid Technology (HK) Ltd.

16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong.

1.2 Manufacturer

Suncupid (ShenZhen) Electronic Ltd.

Baolong Industrial City, Longgang District, ShenZhen Hi-Tech Road, Building 1, A7, China.

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	5G Smartphone
Brand Name	NUU
Model Name	S6707X
Marketing Name	NUU X10 5G, X10 5G
FCC ID	2ADINS6707X
Tx/Rx Frequency	5G NR n48/n77/n78: 3550 MHz ~ 3700 MHz
SCS	30kHz
Bandwidth	n48: 10 / 15 / 20 / 30 / 40MHz n77/78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 4> 5G NR n48: -2.1 dBi 5G NR n77: -2 dBi 5G NR n78: -2 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted : 350915160002932/350915160002775 Radiation : 350915160001397
HW Version	V01
SW Version	S6707X-AM-U-MV12804-01.f
EUT Stage	Engineering samples

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The maximum EIRP is calculated from max output power and antenna gain, only the maximum EIRP of Ant. 4 is shown in the report.
3. 5G NR n77 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
4. 5G NR n48/n78 supports SA mode only.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.



1.4 Maximum EIRP Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.1122	8M56G7D	0.0906	8M58W7D
15	3557.52~3692.50	0.1099	13M5G7D	0.0875	13M6W7D
20	3560.01~3690.00	0.1064	18M2G7D	0.0855	18M2W7D
30	3565.02 ~ 3684.99	0.1114	27M8G7D	0.0897	27M8W7D
40	3570.00~3679.98	0.1148	37M8G7D	0.0914	37M9W7D

5G NR n77 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00 ~ 3694.98	0.1466	8M56G7D	0.1178	8M58W7D
15	3557.52 ~ 3692.49	0.1466	13M5G7D	0.1178	13M6W7D
20	3560.01 ~ 3690.00	0.1476	18M2G7D	0.1180	18M2W7D
25	3562.50 ~ 3687.50	0.1449	23M2G7D	0.1167	23M3W7D
30	3565.02 ~ 3684.99	0.1455	27M8G7D	0.1167	27M8W7D
40	3570.00 ~ 3679.98	0.1469	37M8G7D	0.1178	37M9W7D
50	3575.01 ~ 3675.00	0.1455	47M4G7D	0.1172	47M5W7D
60	3580.02 ~ 3669.99	0.1455	57M8G7D	0.1161	57M9W7D
70	3585.00 ~ 3664.98	0.1496	67M4G7D	0.1208	67M6W7D
80	3590.01 ~ 3660.00	0.1514	77M4G7D	0.1216	77M6W7D
90	3595.02 ~ 3654.99	0.1503	87M4G7D	0.1205	87M5W7D
100	3600.00 ~ 3649.98	0.1517	97M3G7D	0.1211	97M7W7D

5G NR n78 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3555.00 ~ 3694.98	0.1409	8M56G7D	0.1138	8M58W7D
15	3557.52 ~ 3692.49	0.1409	13M5G7D	0.1132	13M6W7D
20	3560.01 ~ 3690.00	0.1416	18M2G7D	0.1127	18M2W7D
25	3562.50 ~ 3687.50	0.1400	23M2G7D	0.1132	23M3W7D
30	3565.02 ~ 3684.99	0.1416	27M8G7D	0.1132	27M8W7D
40	3570.00 ~ 3679.98	0.1422	37M8G7D	0.1146	37M9W7D
50	3575.01 ~ 3675.00	0.1413	47M4G7D	0.1148	47M5W7D

60	3580.02 ~ 3669.99	0.1396	57M8G7D	0.1127	57M9W7D
70	3585.00 ~ 3664.98	0.1435	67M4G7D	0.1151	67M6W7D
80	3590.01 ~ 3660.00	0.1449	77M4G7D	0.1164	77M6W7D
90	3595.02 ~ 3654.99	0.1445	87M4G7D	0.1167	87M5W7D
100	3600.00 ~ 3649.98	0.1455	97M3G7D	0.1169	97M7W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n48/n78, and n77 power > n48/n78 power, therefore the conducted test results of n77 provided in this report cover n48/n78.
- All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Test Items	5G NR	Bandwidth (MHz)												Modulation					RB #		Test Channel			
		10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n48	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Adjacent Channel Leakage Ratio	n77	v						v					v	v	v				v	v	v	v	v	
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n77	v						v					v	v	v				v	v	v	v	v	
Conducted Spurious Emission	n77	v						v					v	v	v				v		v	v	v	
Frequency Stability	n77			v											v					v		v		
E.I.R.P	n48	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																				v		
Note	1.	The mark “v ” means that this configuration is chosen for testing																						
	2.	The mark “- ” means that this bandwidth is not supported.																						
	3.	The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																						
	4.	Based on engineering evaluation, only the worst modulations test results are shown in the report.																						
	5.	Frequency Stability : Normal Voltage = 3.80V ; Low Voltage =3.60V. ; High Voltage =4.40V																						

2.2 Connection Diagram of Test System

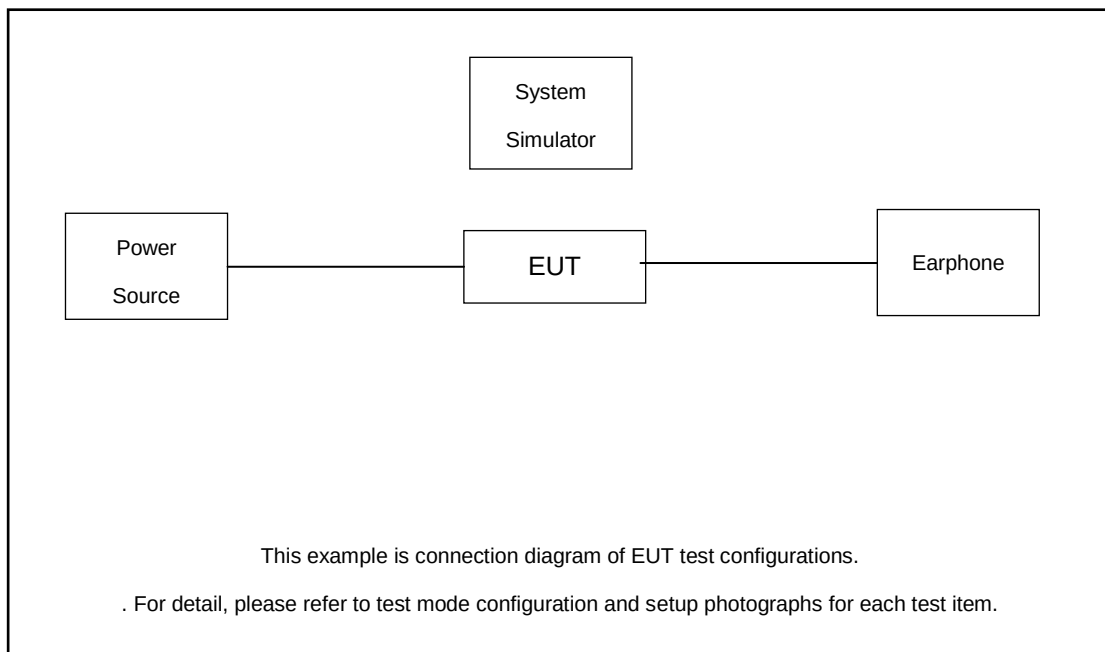

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	Fcc DoC	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.9dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9(\text{dB}) \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637666	641666	645666
	Frequency	3564.99	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98

5G n77/n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	640000	641666	643332
	Frequency	3600	3624.99	3649.98
90	Channel	639668	641666	643666
	Frequency	3595.02	3624.99	3654.99
80	Channel	639334	641666	644000
	Frequency	3590.01	3624.99	3660
70	Channel	639000	641666	644332
	Frequency	3585.00	3624.99	3664.98
60	Channel	638668	641666	644666
	Frequency	3580.02	3624.99	3669.99
50	Channel	638334	641666	645000
	Frequency	3575.01	3624.99	3675
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
25	Channel	637500	641666	645832
	Frequency	3562.5	3624.99	3687.48
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power / ACLR

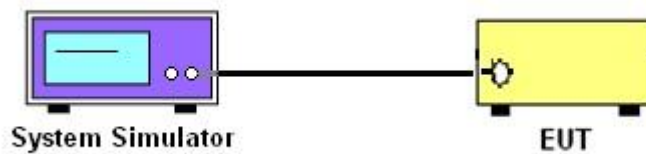

3.1.3 EIRP, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

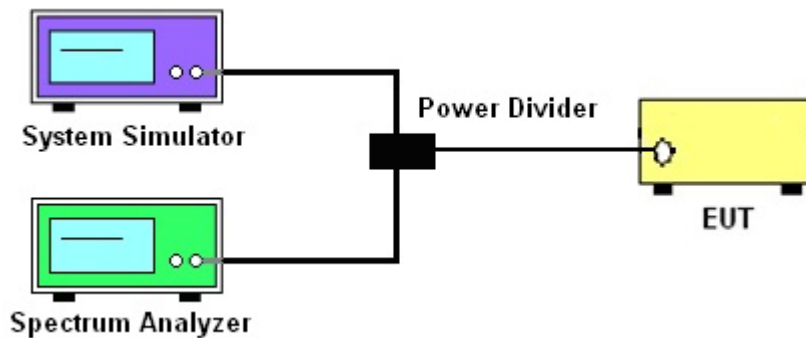

3.1.4 Frequency Stability

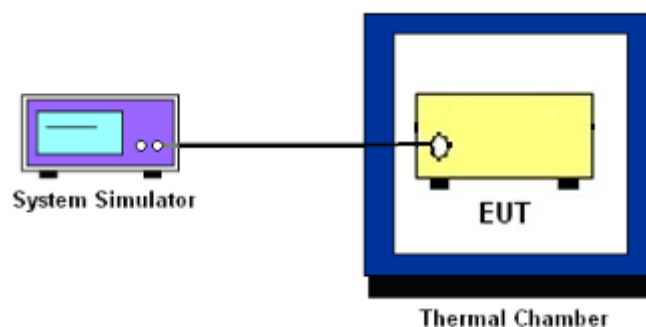

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark:

1. The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$EIRP = P_T + G_T - L_C, ERP = EIRP - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for Band n77. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for Band n77. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is -40dBm/MHz.

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

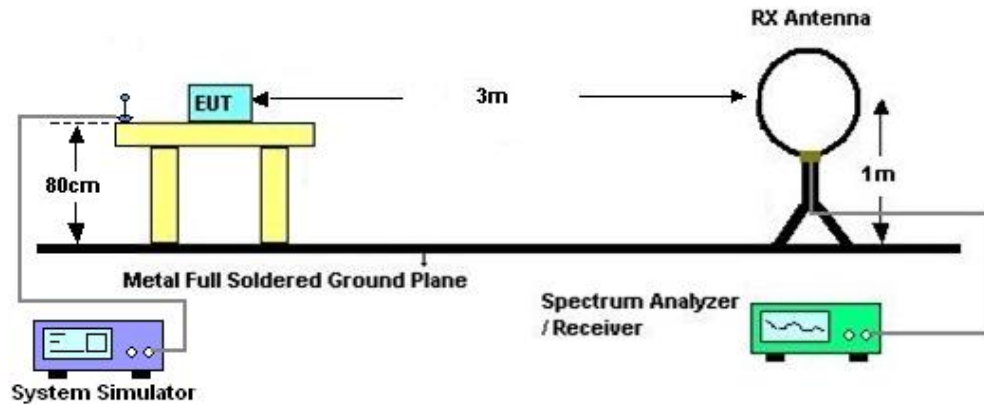

4.2.2 For radiated test from 30MHz to 1GHz

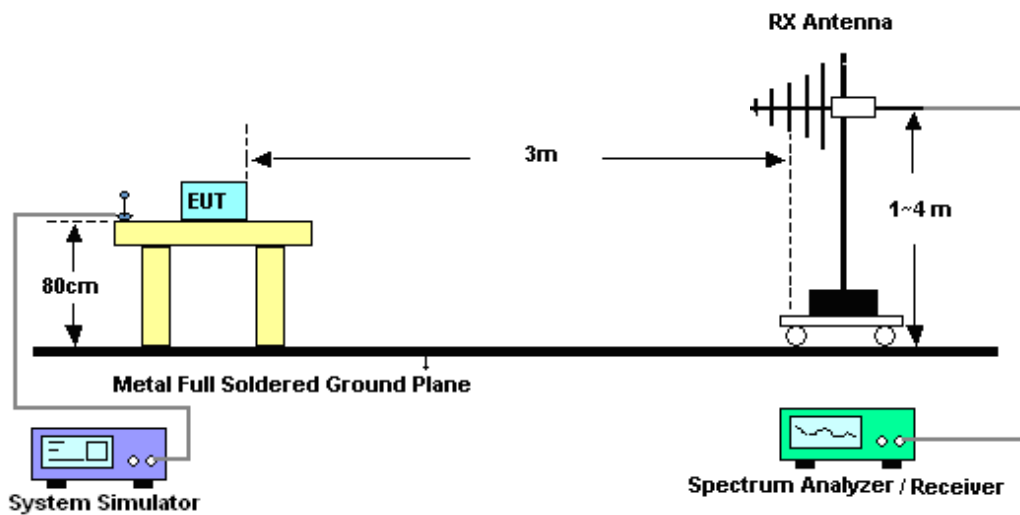

4.2.3 For radiated test above 1GHz

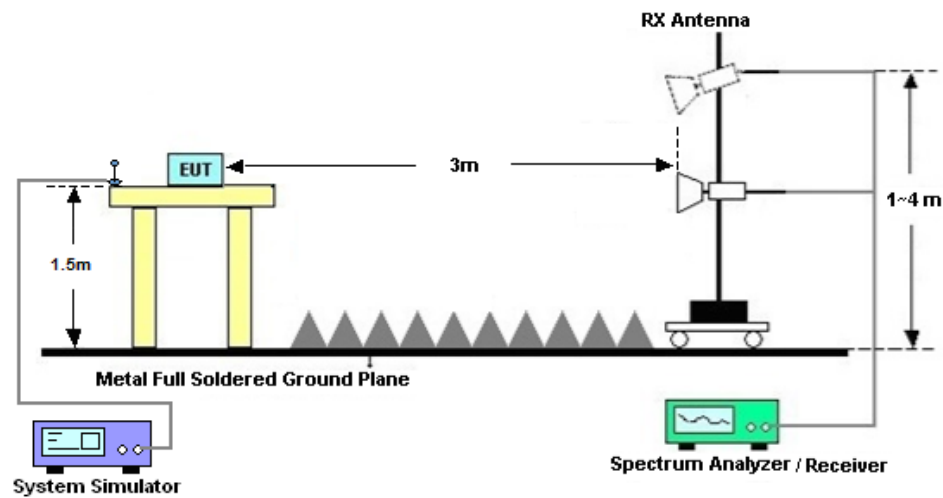

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 26, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 26, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Power Divider	SOLVANG TECHNOLOY	STI08-0055	-	Max 40GHz	Mar. 20, 2024	Aug. 26, 2024	Mar. 19, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Aug. 26, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Aug. 29, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Aug. 29, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Aug. 29, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Aug. 29, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Aug. 29, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Aug. 29, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Aug. 29, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Aug. 29, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Aug. 29, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Aug. 29, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 29, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 29, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Density	±1.32 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	24~26°C
		Relative Humidity :	50~53%



Software Version: 23.06.1602

FR1 N48_ANT4

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-2.1dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@1	21.72	19.62	0.0916
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	20.75	18.65	0.0733
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.33	20.23	0.1054
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.45	19.35	0.0861
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	22.6	20.5	0.1122
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	21.67	19.57	0.0906
48	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@1	21.76	19.66	0.0925
48	30	15	637168	3557.52	DFT-s-OFDM 16 QAM	1@1	20.73	18.63	0.0729
48	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.36	20.26	0.1062
48	30	15	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.39	19.29	0.0849
48	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@1	22.51	20.41	0.1099
48	30	15	646166	3692.49	DFT-s-OFDM 16 QAM	1@1	21.52	19.42	0.0875
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	21.78	19.68	0.0929
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	20.75	18.65	0.0733
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.35	20.25	0.1059
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.38	19.28	0.0847
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	22.37	20.27	0.1064
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	21.42	19.32	0.0855
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	21.88	19.78	0.0951
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	20.89	18.79	0.0757
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.41	20.31	0.1074
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.4	19.3	0.0851
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	22.57	20.47	0.1114
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	21.63	19.53	0.0897
v	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	22.14	20.04	0.1009
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	21.93	19.83	0.0962



48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	22.22	20.12	0.1028
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	22.1	20	0.1000
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	21.95	19.85	0.0966
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	22.23	20.13	0.1030
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	50@25	21.16	19.06	0.0805
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	20.95	18.85	0.0767
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@104	21.25	19.15	0.0822
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	50@25	19.68	17.58	0.0573
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	19.47	17.37	0.0546
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@104	19.72	17.62	0.0578
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	50@25	17.73	15.63	0.0366
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	17.4	15.3	0.0339
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@104	17.73	15.63	0.0366
48	30	40	638000	3570	CP-OFDM QPSK	53@26	20.65	18.55	0.0716
48	30	40	638000	3570	CP-OFDM QPSK	1@1	20.35	18.25	0.0668
48	30	40	638000	3570	CP-OFDM QPSK	1@104	20.68	18.58	0.0721
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	22.55	20.45	0.1109
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	22.38	20.28	0.1067
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	22.6	20.5	0.1122
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	22.54	20.44	0.1107
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.41	20.31	0.1074
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	22.6	20.5	0.1122
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	50@25	21.54	19.44	0.0879
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.4	19.3	0.0851
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@104	21.65	19.55	0.0902
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	50@25	20.1	18	0.0631
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	19.99	17.89	0.0615
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@104	20.16	18.06	0.0640
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	50@25	18.13	16.03	0.0401
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	17.82	15.72	0.0373
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@104	18.05	15.95	0.0394
48	30	40	641666	3624.99	CP-OFDM QPSK	53@26	21.04	18.94	0.0783



48	30	40	641666	3624.99	CP-OFDM QPSK	1@1	20.82	18.72	0.0745
48	30	40	641666	3624.99	CP-OFDM QPSK	1@104	21.06	18.96	0.0787
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	22.56	20.46	0.1112
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	22.52	20.42	0.1102
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	22.66	20.56	0.1138
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	22.61	20.51	0.1125
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	22.54	20.44	0.1107
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	22.7	20.6	0.1148
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	50@25	21.57	19.47	0.0885
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	21.54	19.44	0.0879
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@104	21.71	19.61	0.0914
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	50@25	20.14	18.04	0.0637
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	20.11	18.01	0.0632
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@104	20.26	18.16	0.0655
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	50@25	18.18	16.08	0.0406
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	18.02	15.92	0.0391
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@104	18.17	16.07	0.0405
48	30	40	645332	3679.98	CP-OFDM QPSK	53@26	21.06	18.96	0.0787
48	30	40	645332	3679.98	CP-OFDM QPSK	1@1	21.02	18.92	0.0780
48	30	40	645332	3679.98	CP-OFDM QPSK	1@104	21.13	19.03	0.0800



Software Version: 23.06.1602

FR1 N77_ANT4

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-2.0dB

NR Band	SCS	Band Width	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	10	637000	3555	DFT-s-OFDM QPSK	1@1	23.66	21.66	0.1466
77	30	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	22.71	20.71	0.1178
77	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.33	21.33	0.1358
77	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.37	20.37	0.1089
77	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	23.12	21.12	0.1294
77	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	22.21	20.21	0.1050
77	30	15	637168	3557.52	DFT-s-OFDM QPSK	1@1	23.66	21.66	0.1466
77	30	15	637168	3557.52	DFT-s-OFDM 16 QAM	1@1	22.71	20.71	0.1178
77	30	15	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.39	21.39	0.1377
77	30	15	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.43	20.43	0.1104
77	30	15	646166	3692.49	DFT-s-OFDM QPSK	1@1	23.11	21.11	0.1291
77	30	15	646166	3692.49	DFT-s-OFDM 16 QAM	1@1	22.1	20.1	0.1023
77	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	23.69	21.69	0.1476
77	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	22.72	20.72	0.1180
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.41	21.41	0.1384
77	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.42	20.42	0.1102
77	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	23.08	21.08	0.1282
77	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	22.12	20.12	0.1028
77	30	25	647500	3562.5	DFT-s-OFDM QPSK	1@1	23.61	21.61	0.1449
77	30	25	647500	3562.5	DFT-s-OFDM 16 QAM	1@1	22.67	20.67	0.1167
77	30	25	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.4	21.4	0.1380
77	30	25	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.4	20.4	0.1096
77	30	25	645833	3687.495	DFT-s-OFDM QPSK	1@1	23.01	21.01	0.1262
77	30	25	645833	3687.495	DFT-s-OFDM 16 QAM	1@1	22.07	20.07	0.1016
77	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	23.63	21.63	0.1455
77	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	22.67	20.67	0.1167
77	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.47	21.47	0.1403
77	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.49	20.49	0.1119
77	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	22.99	20.99	0.1256
77	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	22.03	20.03	0.1007
77	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	23.67	21.67	0.1469
77	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	22.71	20.71	0.1178
77	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.47	21.47	0.1403
77	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.52	20.52	0.1127
77	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	23.05	21.05	0.1274



77	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	22.11	20.11	0.1026
77	30	50	638334	3575.01	DFT-s-OFDM QPSK	1@1	23.63	21.63	0.1455
77	30	50	638334	3575.01	DFT-s-OFDM 16 QAM	1@1	22.69	20.69	0.1172
77	30	50	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.48	21.48	0.1406
77	30	50	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.55	20.55	0.1135
77	30	50	645000	3675	DFT-s-OFDM QPSK	1@1	23.13	21.13	0.1297
77	30	50	645000	3675	DFT-s-OFDM 16 QAM	1@1	22.19	20.19	0.1045
77	30	60	638668	3580.02	DFT-s-OFDM QPSK	1@1	23.63	21.63	0.1455
77	30	60	638668	3580.02	DFT-s-OFDM 16 QAM	1@1	22.65	20.65	0.1161
77	30	60	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.47	21.47	0.1403
77	30	60	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.53	20.53	0.1130
77	30	60	644666	3669.99	DFT-s-OFDM QPSK	1@1	23.2	21.2	0.1318
77	30	60	644666	3669.99	DFT-s-OFDM 16 QAM	1@1	22.22	20.22	0.1052
77	30	70	639000	3585	DFT-s-OFDM QPSK	1@1	23.75	21.75	0.1496
77	30	70	639000	3585	DFT-s-OFDM 16 QAM	1@1	22.82	20.82	0.1208
77	30	70	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.61	21.61	0.1449
77	30	70	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.69	20.69	0.1172
77	30	70	644332	3664.98	DFT-s-OFDM QPSK	1@1	23.5	21.5	0.1413
77	30	70	644332	3664.98	DFT-s-OFDM 16 QAM	1@1	22.52	20.52	0.1127
77	30	80	639334	3590.01	DFT-s-OFDM QPSK	1@1	23.8	21.8	0.1514
77	30	80	639334	3590.01	DFT-s-OFDM 16 QAM	1@1	22.85	20.85	0.1216
77	30	80	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.68	21.68	0.1472
77	30	80	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.75	20.75	0.1189
77	30	80	644000	3660	DFT-s-OFDM QPSK	1@1	23.55	21.55	0.1429
77	30	80	644000	3660	DFT-s-OFDM 16 QAM	1@1	22.6	20.6	0.1148
77	30	90	639668	3595.02	DFT-s-OFDM QPSK	1@1	23.77	21.77	0.1503
77	30	90	639668	3595.02	DFT-s-OFDM 16 QAM	1@1	22.81	20.81	0.1205
77	30	90	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.74	21.74	0.1493
77	30	90	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.81	20.81	0.1205
77	30	90	643666	3654.99	DFT-s-OFDM QPSK	1@1	23.61	21.61	0.1449
77	30	90	643666	3654.99	DFT-s-OFDM 16 QAM	1@1	22.69	20.69	0.1172
77	30	100	640000	3600	DFT-s-OFDM PI/2 BPSK	135@67	23.64	21.64	0.1459
77	30	100	640000	3600	DFT-s-OFDM PI/2 BPSK	1@1	23.81	21.81	0.1517
77	30	100	640000	3600	DFT-s-OFDM PI/2 BPSK	1@271	23.04	21.04	0.1271
77	30	100	640000	3600	DFT-s-OFDM QPSK	135@67	23.66	21.66	0.1466
77	30	100	640000	3600	DFT-s-OFDM QPSK	1@1	23.8	21.8	0.1514
77	30	100	640000	3600	DFT-s-OFDM QPSK	1@271	23.03	21.03	0.1268
77	30	100	640000	3600	DFT-s-OFDM 16 QAM	135@67	22.65	20.65	0.1161
77	30	100	640000	3600	DFT-s-OFDM 16 QAM	1@1	22.83	20.83	0.1211
77	30	100	640000	3600	DFT-s-OFDM 16 QAM	1@271	22.05	20.05	0.1012
77	30	100	640000	3600	DFT-s-OFDM 64 QAM	135@67	21.16	19.16	0.0824
77	30	100	640000	3600	DFT-s-OFDM 64 QAM	1@1	21.32	19.32	0.0855
77	30	100	640000	3600	DFT-s-OFDM 64 QAM	1@271	20.55	18.55	0.0716



77	30	100	640000	3600	DFT-s-OFDM 256 QAM	135@67	19.2	17.2	0.0525
77	30	100	640000	3600	DFT-s-OFDM 256 QAM	1@1	19.25	17.25	0.0531
77	30	100	640000	3600	DFT-s-OFDM 256 QAM	1@271	18.47	16.47	0.0444
77	30	100	640000	3600	CP-OFDM QPSK	137@68	22.08	20.08	0.1019
77	30	100	640000	3600	CP-OFDM QPSK	1@1	22.2	20.2	0.1047
77	30	100	640000	3600	CP-OFDM QPSK	1@271	21.5	19.5	0.0891
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	135@67	23.43	21.43	0.1390
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	23.79	21.79	0.1510
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@271	22.86	20.86	0.1219
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	135@67	23.46	21.46	0.1400
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.77	21.77	0.1503
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	1@271	22.86	20.86	0.1219
77	30	100	641666	3624.99	DFT-s-OFDM 16 QAM	135@67	22.48	20.48	0.1117
77	30	100	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.78	20.78	0.1197
77	30	100	641666	3624.99	DFT-s-OFDM 16 QAM	1@271	21.88	19.88	0.0973
77	30	100	641666	3624.99	DFT-s-OFDM 64 QAM	135@67	21.03	19.03	0.0800
77	30	100	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	21.26	19.26	0.0843
77	30	100	641666	3624.99	DFT-s-OFDM 64 QAM	1@271	20.33	18.33	0.0681
77	30	100	641666	3624.99	DFT-s-OFDM 256 QAM	135@67	19.09	17.09	0.0512
77	30	100	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.19	17.19	0.0524
77	30	100	641666	3624.99	DFT-s-OFDM 256 QAM	1@271	18.22	16.22	0.0419
77	30	100	641666	3624.99	CP-OFDM QPSK	137@68	21.92	19.92	0.0982
77	30	100	641666	3624.99	CP-OFDM QPSK	1@1	22.22	20.22	0.1052
77	30	100	641666	3624.99	CP-OFDM QPSK	1@271	21.27	19.27	0.0845
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	135@67	23.26	21.26	0.1337
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	1@1	23.67	21.67	0.1469
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	1@271	23.02	21.02	0.1265
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	135@67	23.3	21.3	0.1349
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	1@1	23.71	21.71	0.1483
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	1@271	23.05	21.05	0.1274
77	30	100	643332	3649.98	DFT-s-OFDM 16 QAM	135@67	22.32	20.32	0.1076
77	30	100	643332	3649.98	DFT-s-OFDM 16 QAM	1@1	22.75	20.75	0.1189
77	30	100	643332	3649.98	DFT-s-OFDM 16 QAM	1@271	22.05	20.05	0.1012
77	30	100	643332	3649.98	DFT-s-OFDM 64 QAM	135@67	20.81	18.81	0.0760
77	30	100	643332	3649.98	DFT-s-OFDM 64 QAM	1@1	21.2	19.2	0.0832
77	30	100	643332	3649.98	DFT-s-OFDM 64 QAM	1@271	20.5	18.5	0.0708
77	30	100	643332	3649.98	DFT-s-OFDM 256 QAM	135@67	18.87	16.87	0.0486
77	30	100	643332	3649.98	DFT-s-OFDM 256 QAM	1@1	19.16	17.16	0.0520
77	30	100	643332	3649.98	DFT-s-OFDM 256 QAM	1@271	18.41	16.41	0.0438
77	30	100	643332	3649.98	CP-OFDM QPSK	137@68	21.67	19.67	0.0927
77	30	100	643332	3649.98	CP-OFDM QPSK	1@1	22.1	20.1	0.1023
77	30	100	643332	3649.98	CP-OFDM QPSK	1@271	21.42	19.42	0.0875



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0044	PASS	NV
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0052	PASS	LV
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0023	PASS	HV
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0036	PASS	-30℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0031	PASS	-20℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0059	PASS	-10℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0052	PASS	0℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0052	PASS	10℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0044	PASS	20℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0033	PASS	30℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0059	PASS	40℃
77	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0052	PASS	50℃



Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	641666	3624.99	CP-OFDM QPSK	24@0	8.5649	9.193
77	30	10	641666	3624.99	CP-OFDM 16 QAM	24@0	8.5775	9.134
77	30	10	641666	3624.99	CP-OFDM 64 QAM	24@0	8.5635	9.018
77	30	10	641666	3624.99	CP-OFDM 256 QAM	24@0	8.553	9.204
77	30	15	641666	3624.99	CP-OFDM QPSK	38@0	13.54	14.27
77	30	15	641666	3624.99	CP-OFDM 16 QAM	38@0	13.606	14.1
77	30	15	641666	3624.99	CP-OFDM 64 QAM	38@0	13.596	14.16
77	30	15	641666	3624.99	CP-OFDM 256 QAM	38@0	13.592	14.37
77	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.209	19.09
77	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.209	19.03
77	30	20	641666	3624.99	CP-OFDM 64 QAM	51@0	18.187	18.95
77	30	20	641666	3624.99	CP-OFDM 256 QAM	51@0	18.158	18.87
77	30	25	641666	3624.99	CP-OFDM QPSK	65@0	23.17	24.28
77	30	25	641666	3624.99	CP-OFDM 16 QAM	65@0	23.249	24.27
77	30	25	641666	3624.99	CP-OFDM 64 QAM	65@0	23.249	24.21
77	30	25	641666	3624.99	CP-OFDM 256 QAM	65@0	23.285	24.2
77	30	30	641666	3624.99	CP-OFDM QPSK	78@0	27.797	28.85
77	30	30	641666	3624.99	CP-OFDM 16 QAM	78@0	27.722	28.91
77	30	30	641666	3624.99	CP-OFDM 64 QAM	78@0	27.816	29.06
77	30	30	641666	3624.99	CP-OFDM 256 QAM	78@0	27.752	28.99
77	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.799	39.26
77	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.776	39.09
77	30	40	641666	3624.99	CP-OFDM 64 QAM	106@0	37.872	39.34
77	30	40	641666	3624.99	CP-OFDM 256 QAM	106@0	37.781	39.17
77	30	50	641666	3624.99	CP-OFDM QPSK	133@0	47.396	49.15
77	30	50	641666	3624.99	CP-OFDM 16 QAM	133@0	47.293	49.27
77	30	50	641666	3624.99	CP-OFDM 64 QAM	133@0	47.494	49.13
77	30	50	641666	3624.99	CP-OFDM 256 QAM	133@0	47.398	48.98
77	30	60	641666	3624.99	CP-OFDM QPSK	162@0	57.789	59.7
77	30	60	641666	3624.99	CP-OFDM	162@0	57.75	59.76




16 QAM								
77	30	60	641666	3624.99	CP-OFDM 64 QAM	162@0	57.886	59.7
77	30	60	641666	3624.99	CP-OFDM 256 QAM	162@0	57.833	59.65
77	30	70	641666	3624.99	CP-OFDM QPSK	189@0	67.399	69.74
77	30	70	641666	3624.99	CP-OFDM 16 QAM	189@0	67.368	69.67
77	30	70	641666	3624.99	CP-OFDM 64 QAM	189@0	67.338	69.67
77	30	70	641666	3624.99	CP-OFDM 256 QAM	189@0	67.591	69.71
77	30	80	641666	3624.99	CP-OFDM QPSK	217@0	77.429	80.0
77	30	80	641666	3624.99	CP-OFDM 16 QAM	217@0	77.499	79.87
77	30	80	641666	3624.99	CP-OFDM 64 QAM	217@0	77.418	79.99
77	30	80	641666	3624.99	CP-OFDM 256 QAM	217@0	77.616	80.02
77	30	90	641666	3624.99	CP-OFDM QPSK	245@0	87.383	90.21
77	30	90	641666	3624.99	CP-OFDM 16 QAM	245@0	87.471	90.32
77	30	90	641666	3624.99	CP-OFDM 64 QAM	245@0	87.489	90.29
77	30	90	641666	3624.99	CP-OFDM 256 QAM	245@0	87.541	90.18
77	30	100	641666	3624.99	CP-OFDM QPSK	273@0	97.334	100.5
77	30	100	641666	3624.99	CP-OFDM 16 QAM	273@0	97.267	100.3
77	30	100	641666	3624.99	CP-OFDM 64 QAM	273@0	97.615	100.4
77	30	100	641666	3624.99	CP-OFDM 256 QAM	273@0	97.69	100.5




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

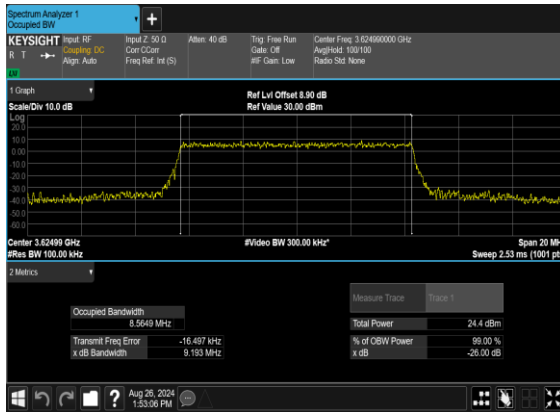


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

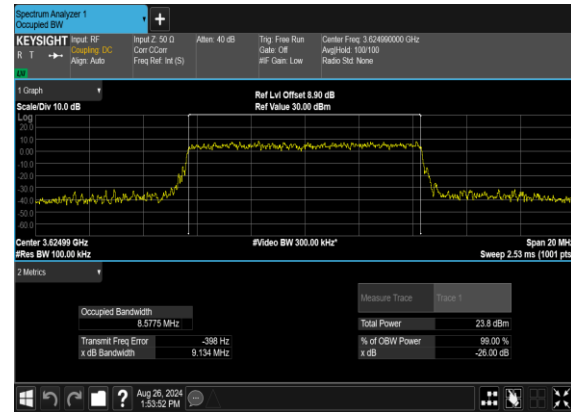

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

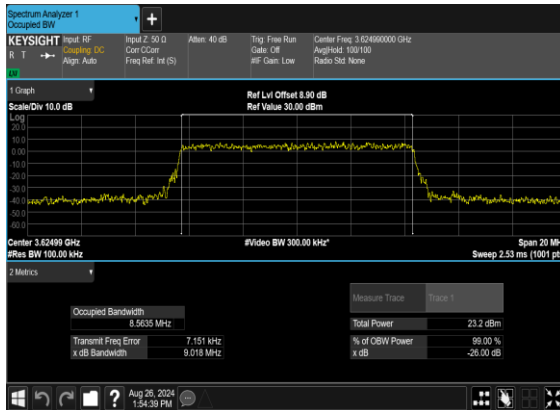


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

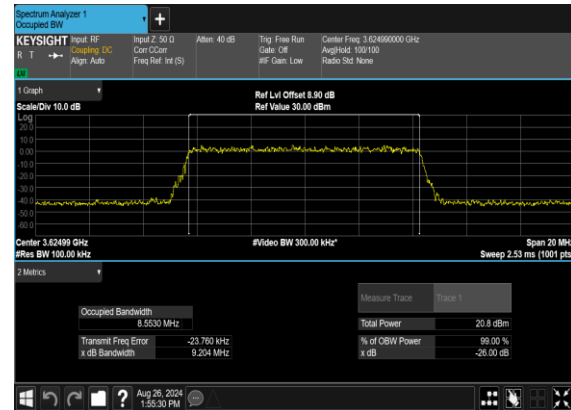





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

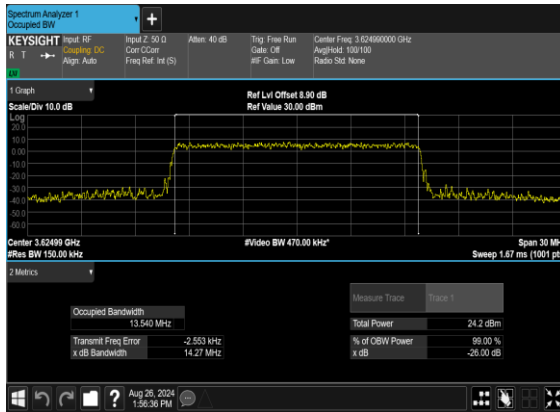


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

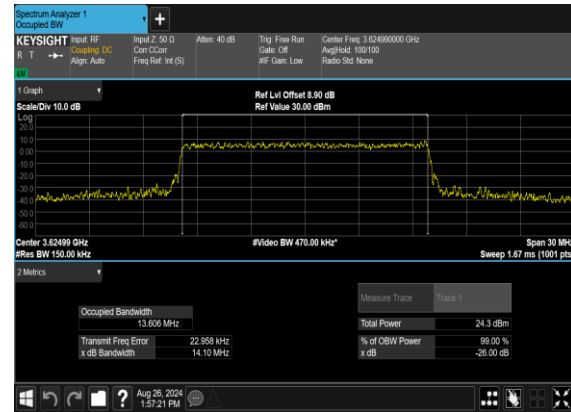

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

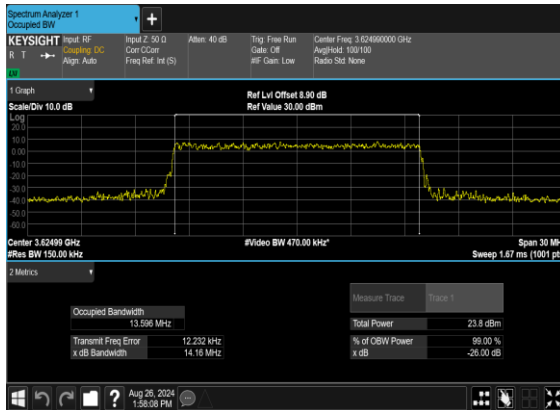


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

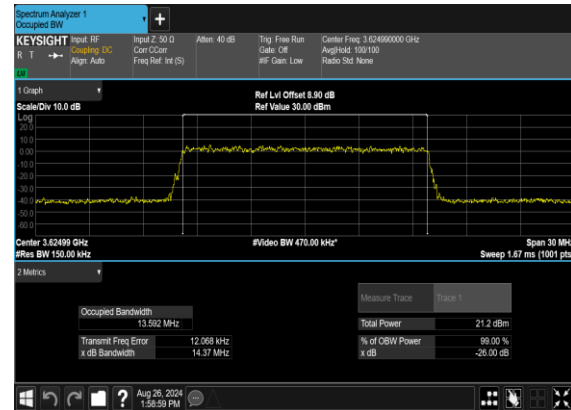





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

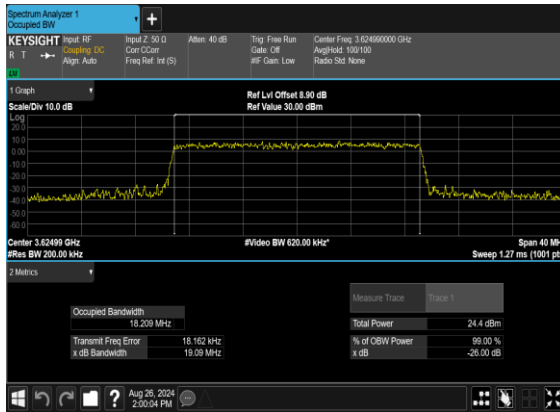


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

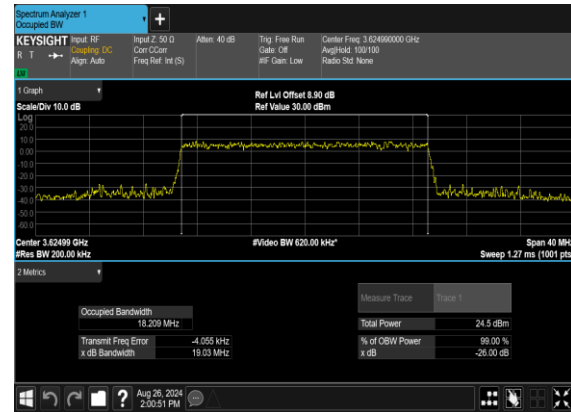

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

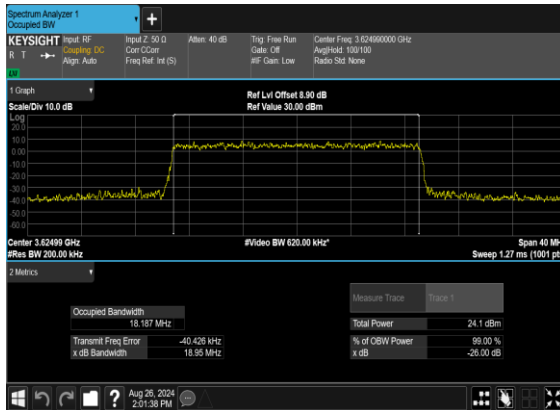


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

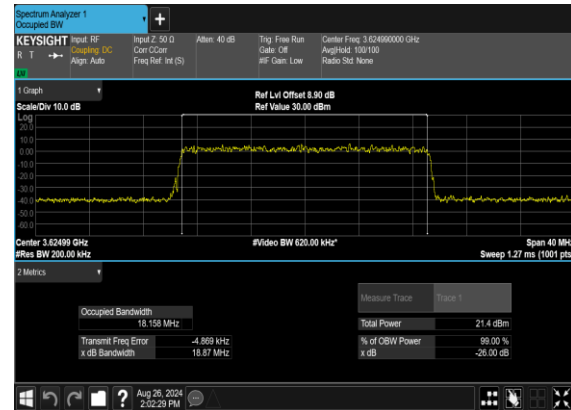





N77(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

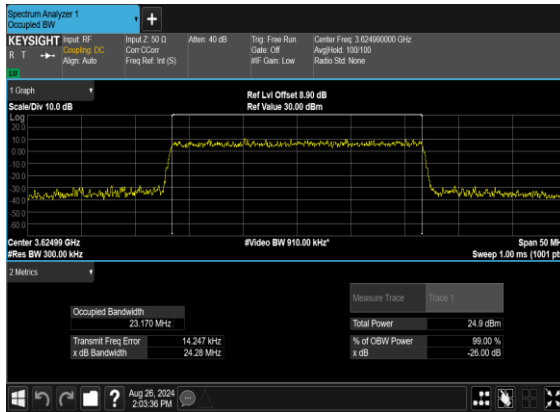


N77(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

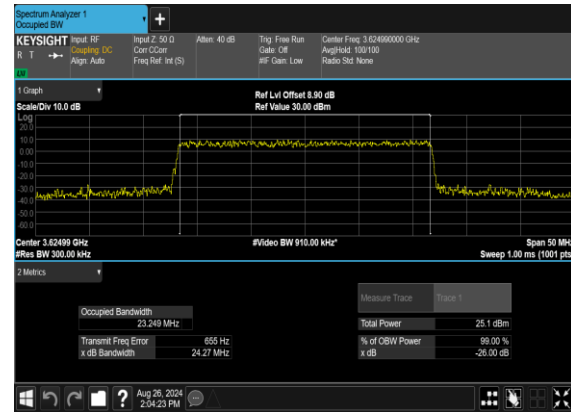

N77(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

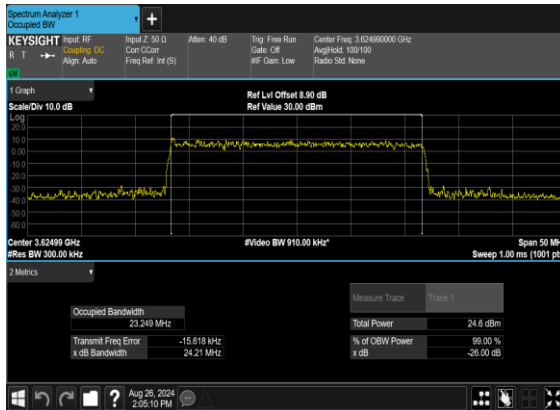


N77(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

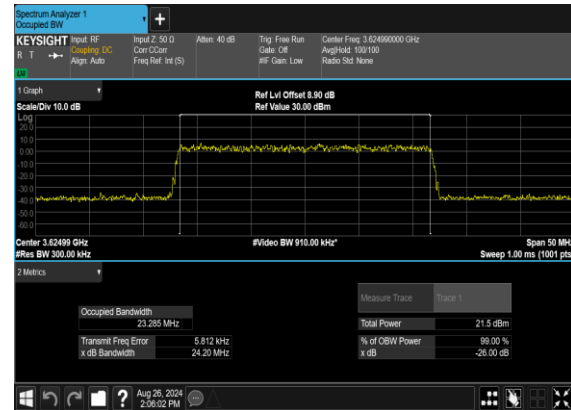





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

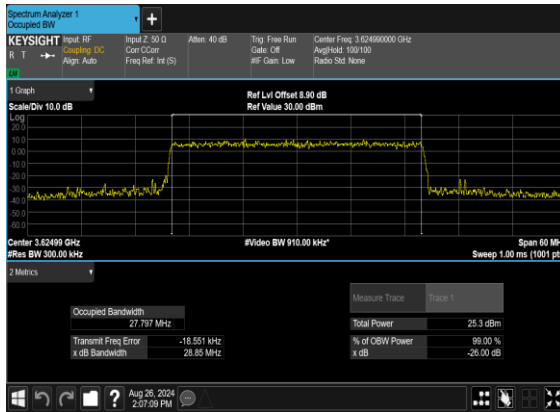


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

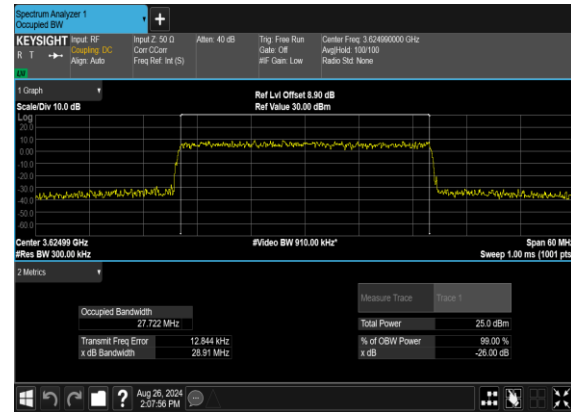

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

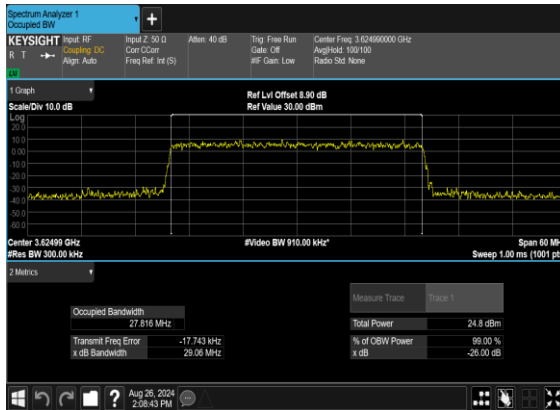


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

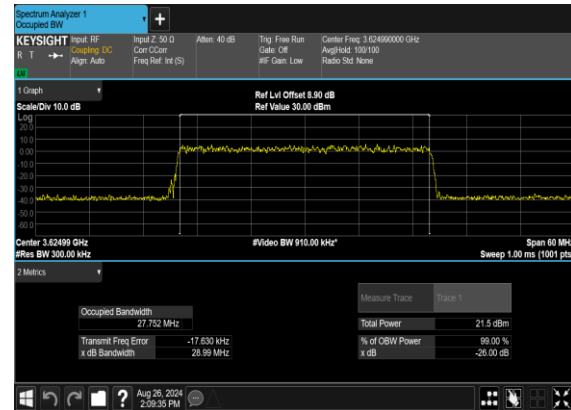





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

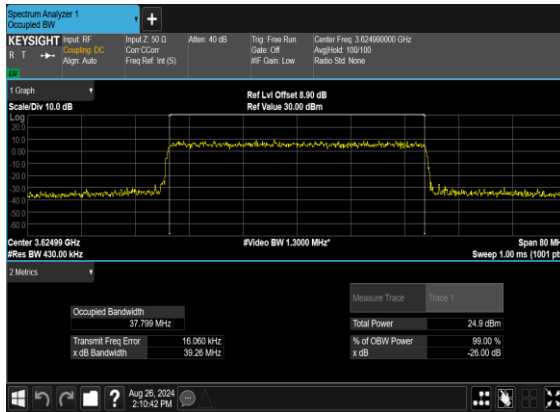


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

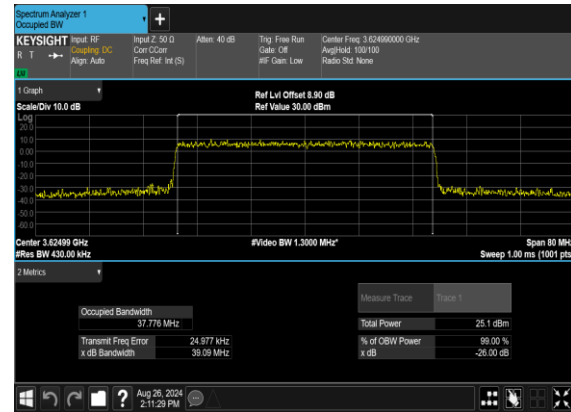

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

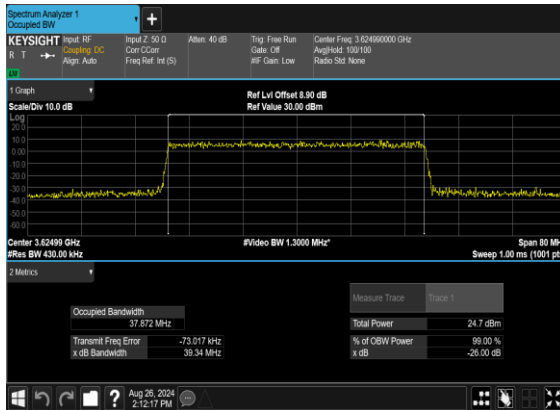


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

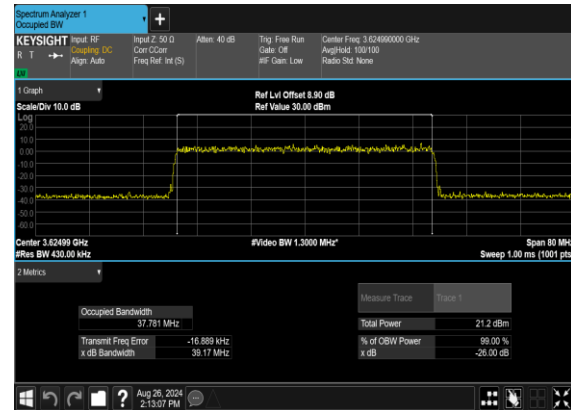





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

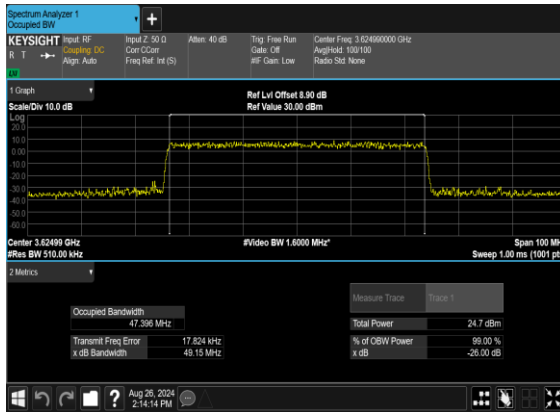


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

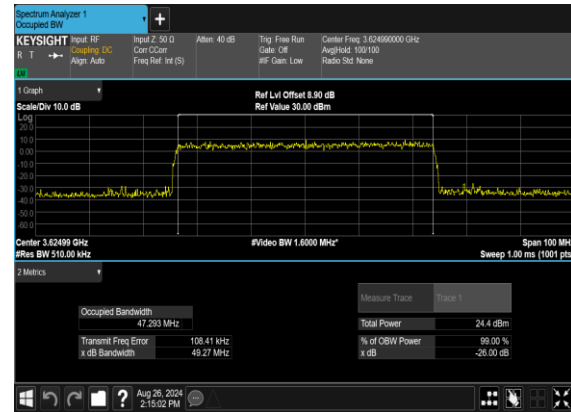

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

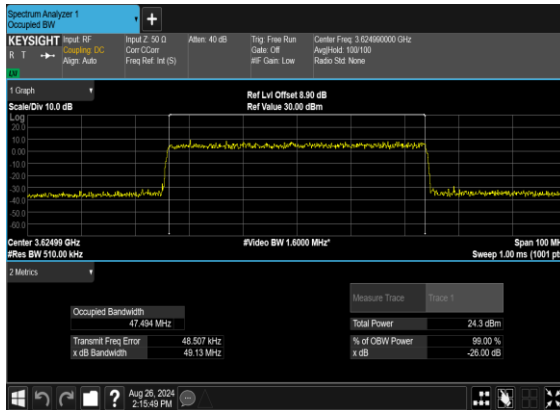


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

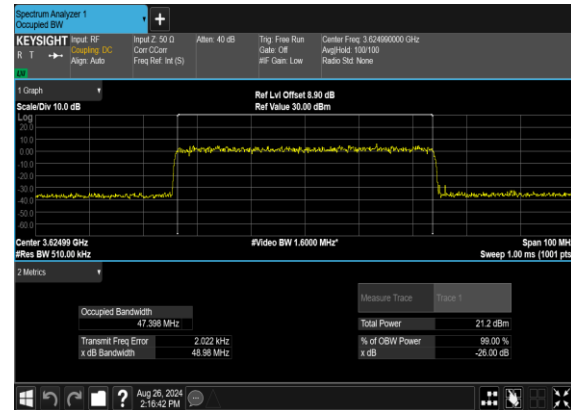





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

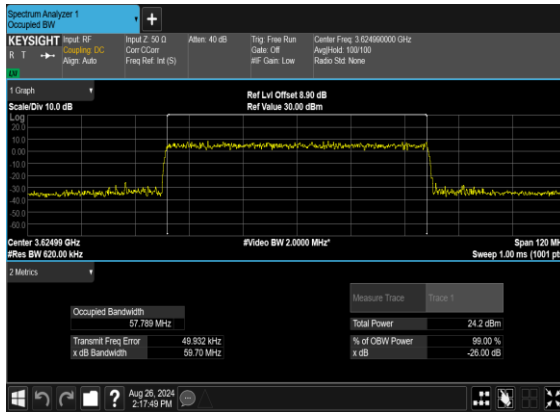


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

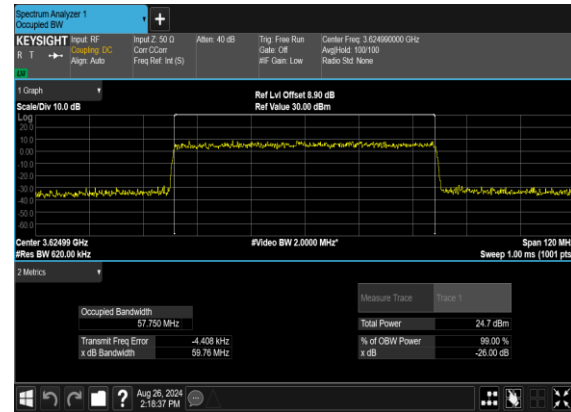

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

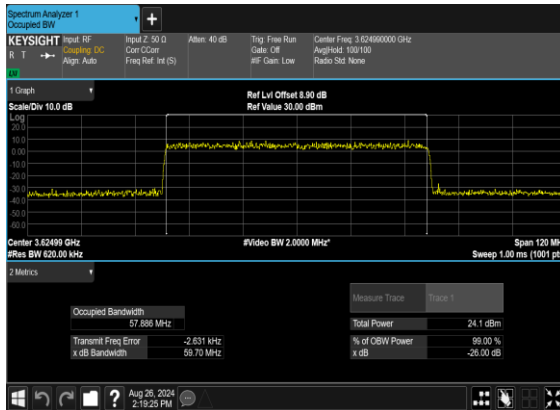


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

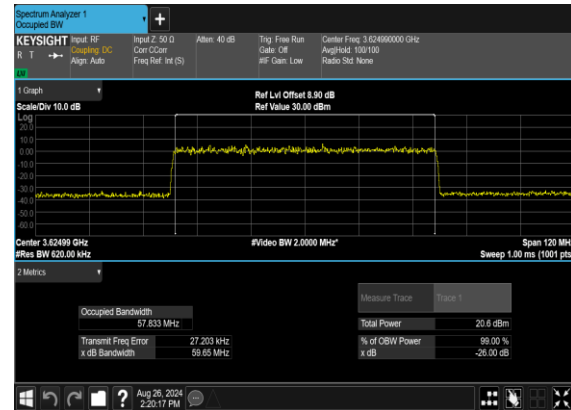





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

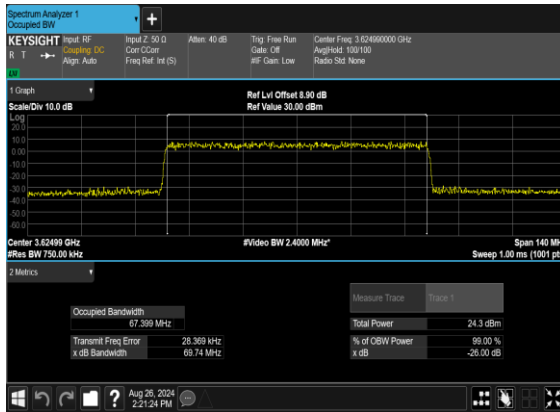


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

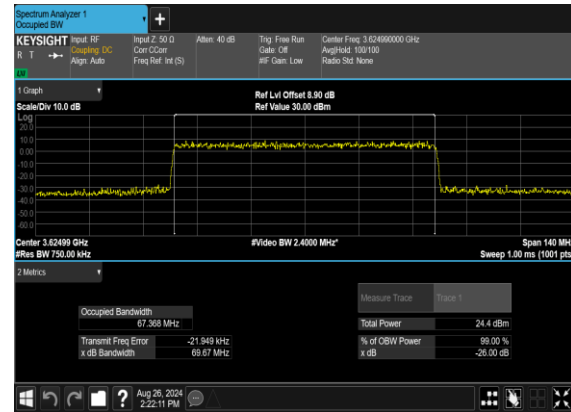

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

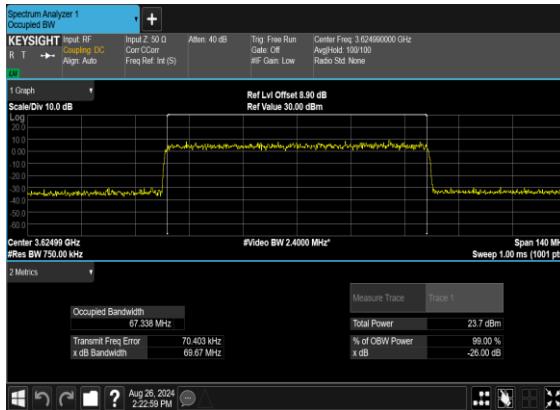


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

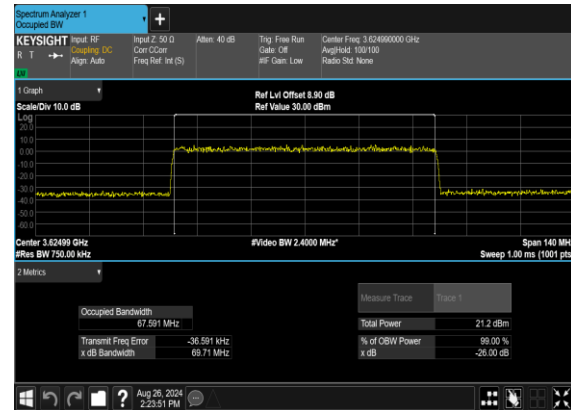





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

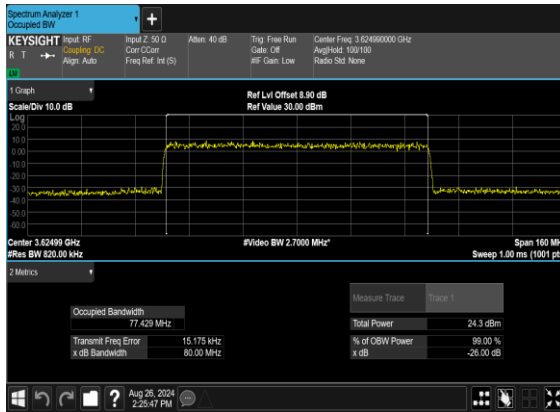


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

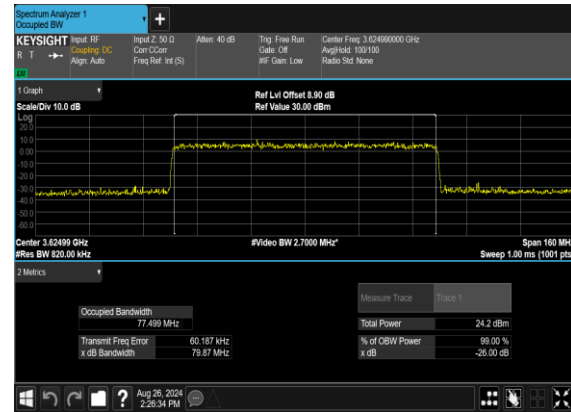

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

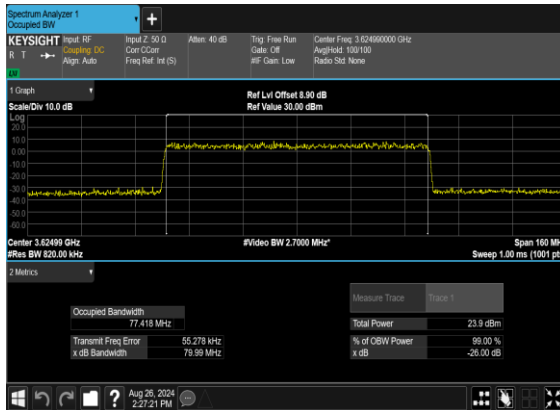


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

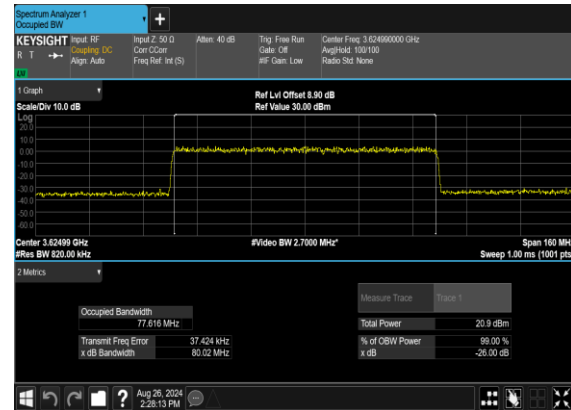





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

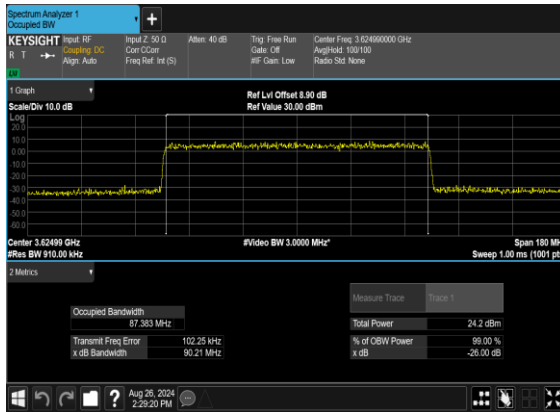


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

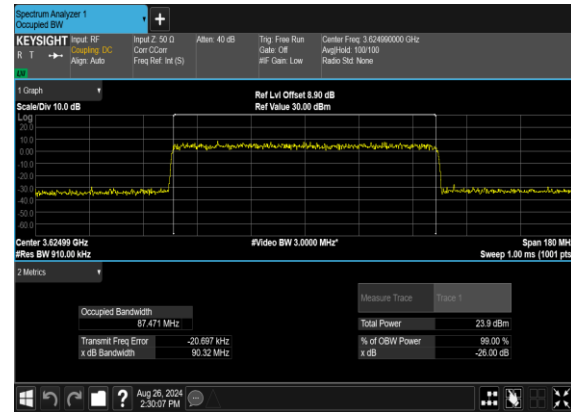

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

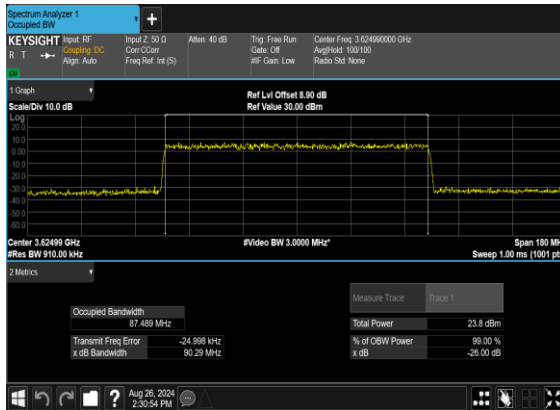


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

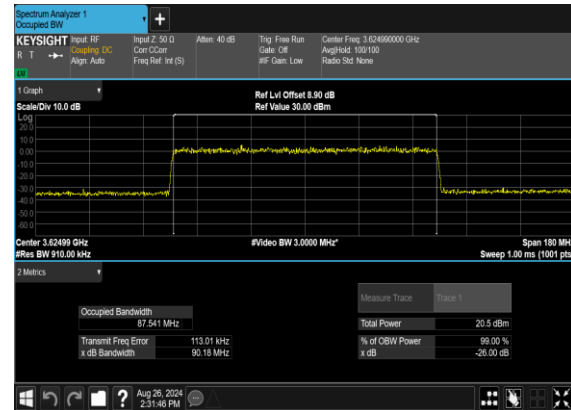





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

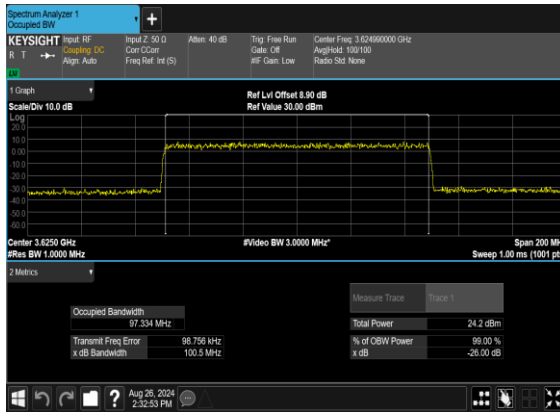


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

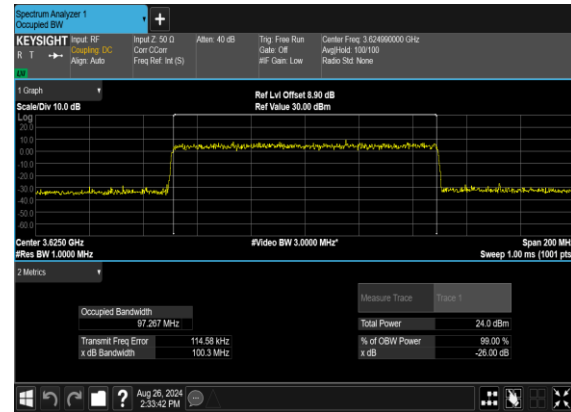

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

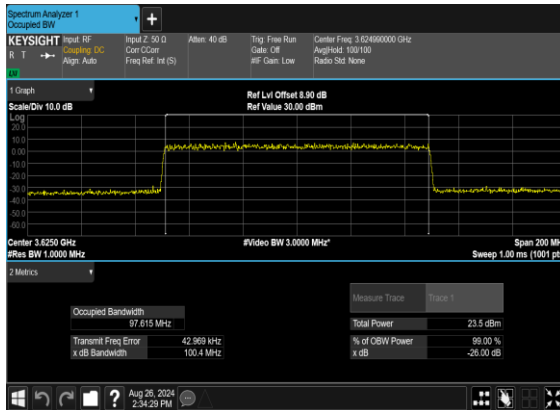

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

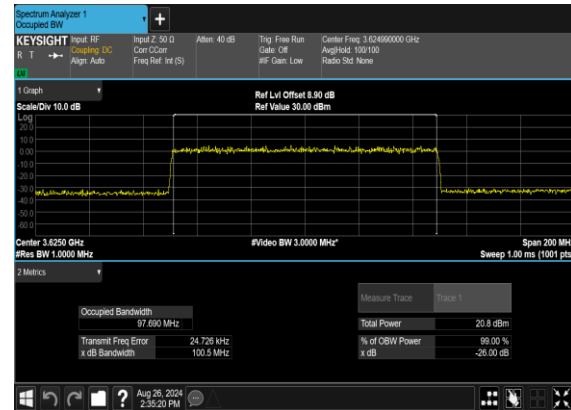



Adjacent Channel Leakage Ratio


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
77	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	24@0	-18.59	-19.64	see graph	PASS
77	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@0	-19.91	-23.36	see graph	PASS
77	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@23	-23.51	-20.08	see graph	PASS
77	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	-16.32	-17.03	see graph	PASS
77	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	-19.63	-23.22	see graph	PASS
77	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	-23.48	-20.28	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	24@0	-19.19	-19.81	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-17.81	-20.37	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@23	-21.67	-19.31	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	-17.0	-17.67	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	-18.68	-22.45	see graph	PASS
77	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	-21.72	-18.66	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	24@0	-19.21	-19.96	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	-18.91	-21.08	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@23	-20.55	-18.42	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	-17.37	-18.28	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	-18.3	-20.66	see graph	PASS
77	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	-20.03	-17.7	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM PI/2 BPSK	128@0	-15.26	-15.42	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM PI/2 BPSK	1@0	-16.41	-16.32	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM PI/2 BPSK	1@132	-15.43	-14.18	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM QPSK	128@0	-14.0	-14.01	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM QPSK	1@0	-15.32	-15.27	see graph	PASS
77	30	50	638334	3575.01	DFT-s-OFDM QPSK	1@132	-15.45	-14.21	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM PI/2 BPSK	128@0	-15.15	-15.45	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-15.3	-14.9	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@132	-15.2	-13.73	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM QPSK	128@0	-14.18	-14.22	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM QPSK	1@0	-15.49	-15.06	see graph	PASS
77	30	50	641666	3624.99	DFT-s-OFDM	1@132	-15.65	-14.01	see	PASS




QPSK										graph
77	30	50	645000	3675.0	DFT-s-OFDM PI/2 BPSK	128@0	-15.05	-15.73	see graph	PASS
77	30	50	645000	3675.0	DFT-s-OFDM PI/2 BPSK	1@0	-14.15	-13.79	see graph	PASS
77	30	50	645000	3675.0	DFT-s-OFDM PI/2 BPSK	1@132	-16.84	-15.29	see graph	PASS
77	30	50	645000	3675.0	DFT-s-OFDM QPSK	128@0	-14.17	-14.71	see graph	PASS
77	30	50	645000	3675.0	DFT-s-OFDM QPSK	1@0	-14.75	-14.06	see graph	PASS
77	30	50	645000	3675.0	DFT-s-OFDM QPSK	1@132	-14.78	-13.33	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM PI/2 BPSK	270@0	-14.59	-13.29	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM PI/2 BPSK	1@0	-14.39	-13.06	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM PI/2 BPSK	1@272	-13.61	-9.93	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM QPSK	270@0	-13.4	-12.21	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM QPSK	1@0	-14.01	-12.75	see graph	PASS
77	30	100	640000	3600.0	DFT-s-OFDM QPSK	1@272	-14.84	-11.14	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	270@0	-14.51	-13.15	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-13.34	-11.25	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@272	-14.2	-10.34	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	270@0	-13.34	-12.21	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	1@0	-13.6	-11.58	see graph	PASS
77	30	100	641666	3624.99	DFT-s-OFDM QPSK	1@272	-14.3	-10.55	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	270@0	-14.11	-13.02	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	1@0	-12.36	-10.36	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM PI/2 BPSK	1@272	-14.66	-10.92	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	270@0	-12.98	-12.25	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	1@0	-12.75	-11.14	see graph	PASS
77	30	100	643332	3649.98	DFT-s-OFDM QPSK	1@272	-14.08	-10.39	see graph	PASS




N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH

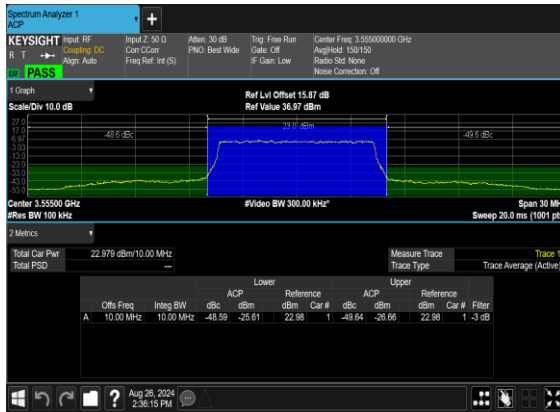


N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH

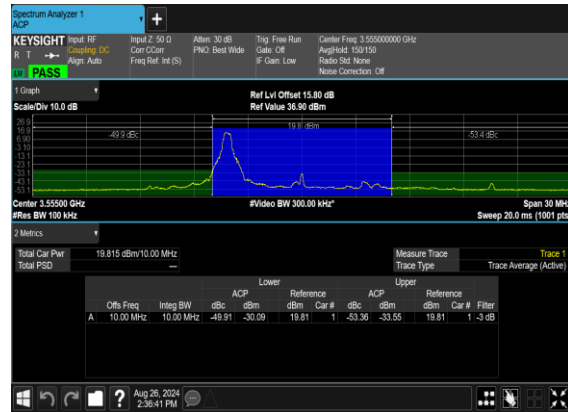

N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Low_CH

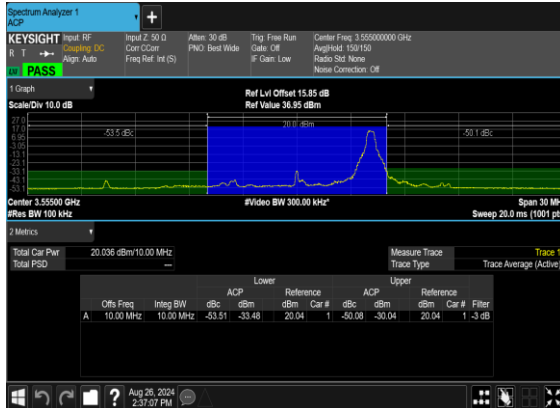


N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

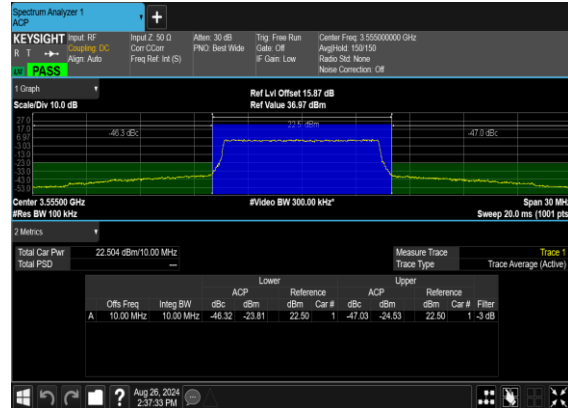





N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

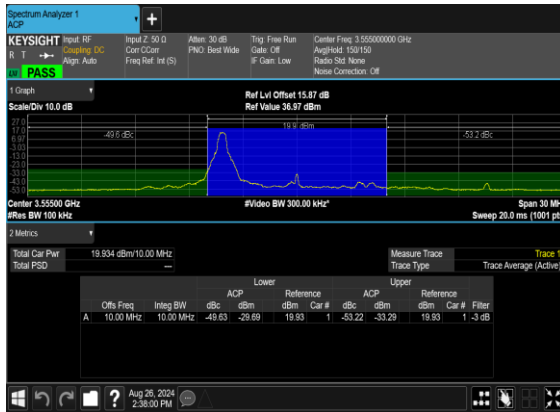


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

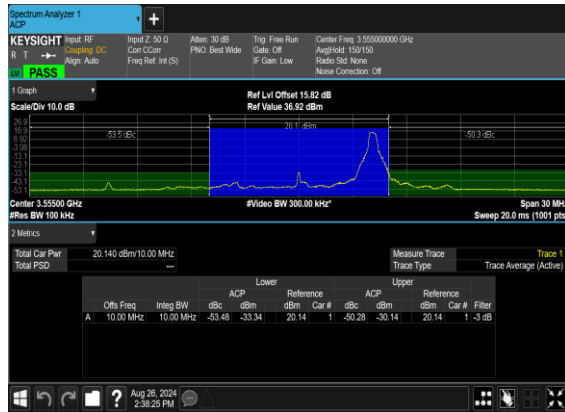

N77(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

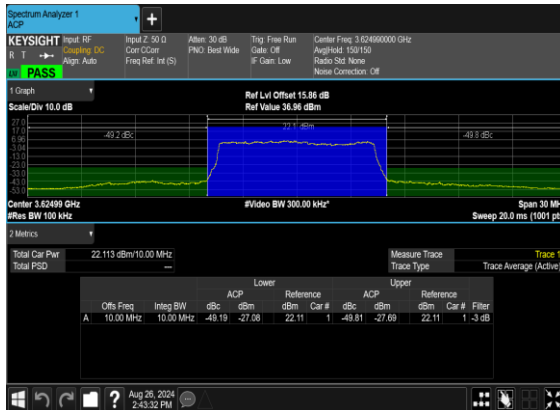


N77(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

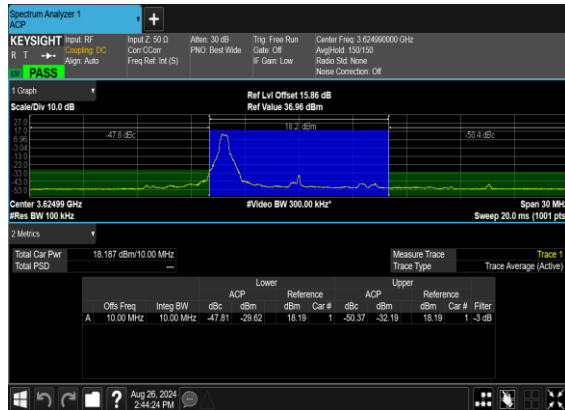





N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Mid_CH

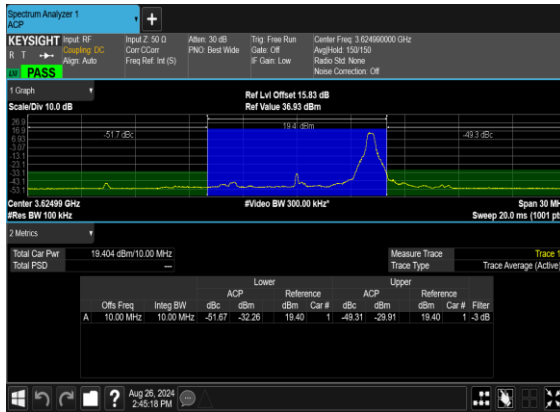


N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

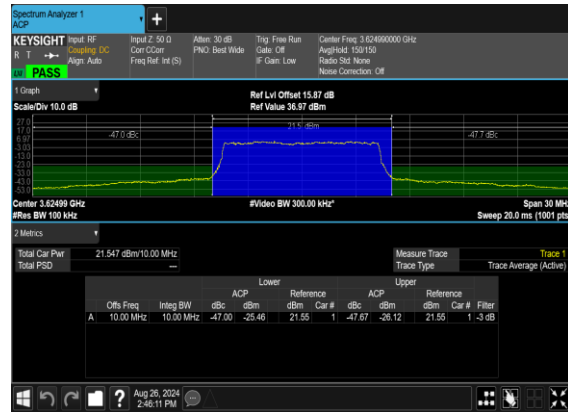

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

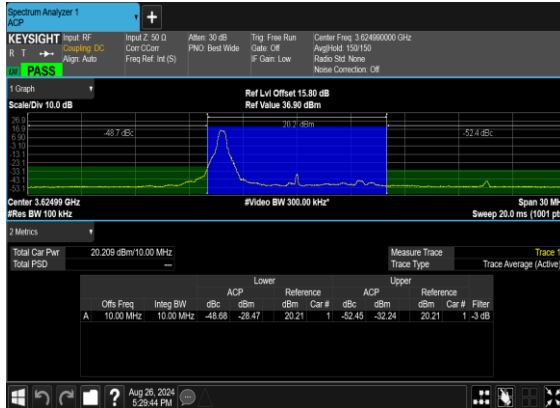


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

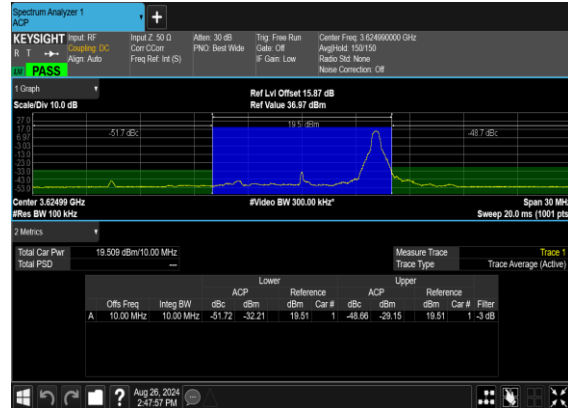





N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH

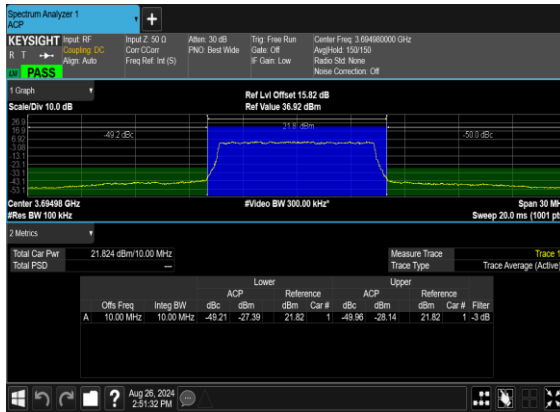


N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH

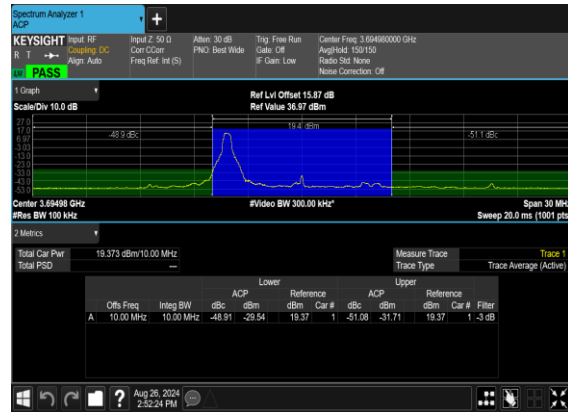

N77(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_High_CH

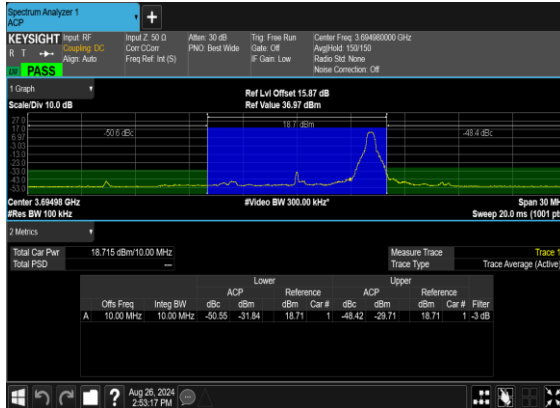


N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

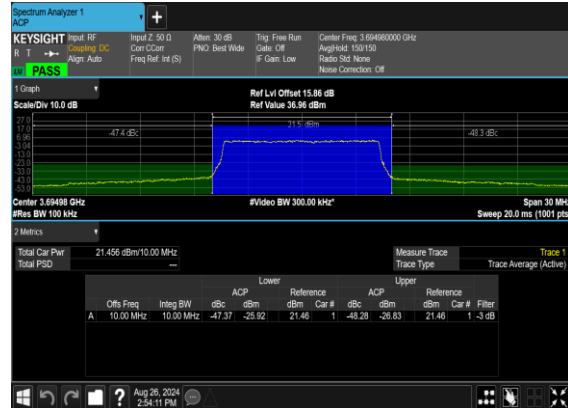





N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

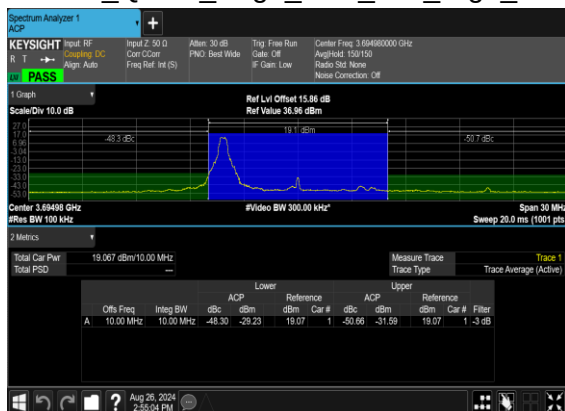


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

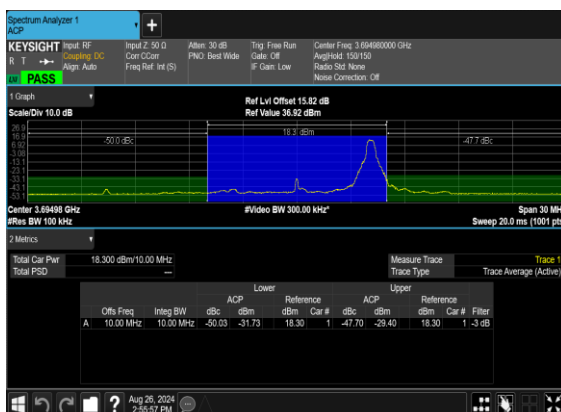

N77(50M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

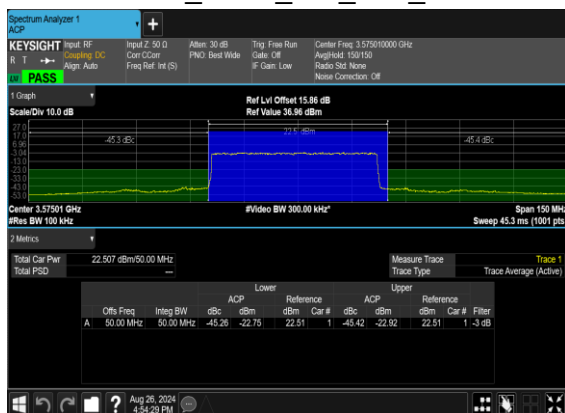


N77(50M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

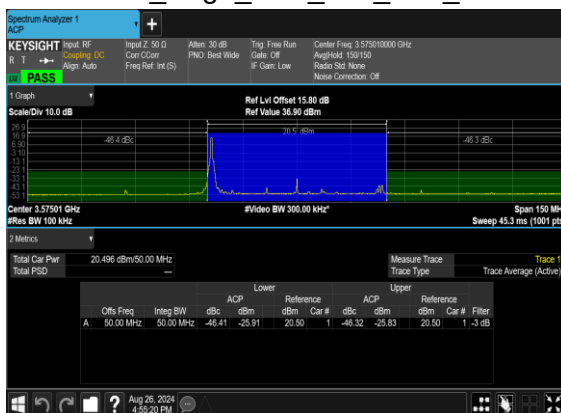





N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Low_CH

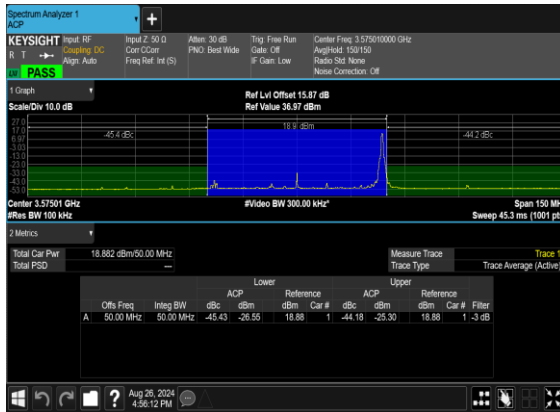


N77(50M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

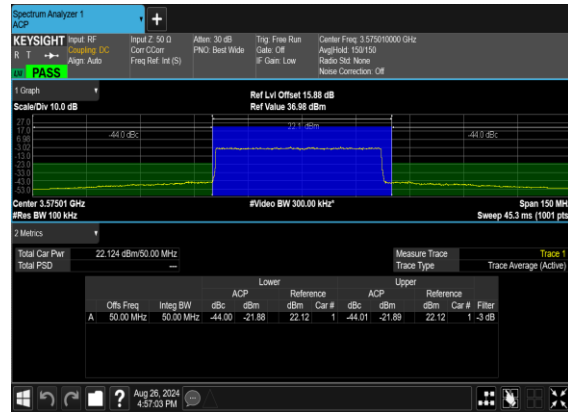

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

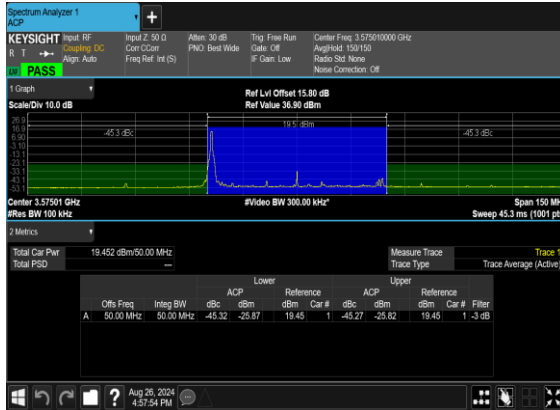


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

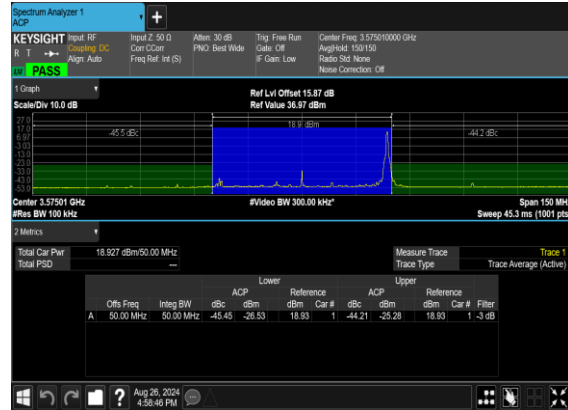




N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

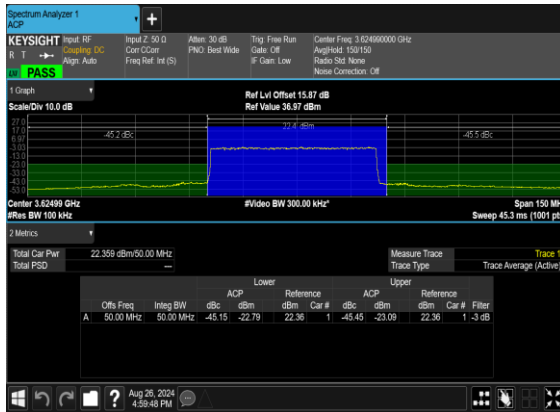


N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH

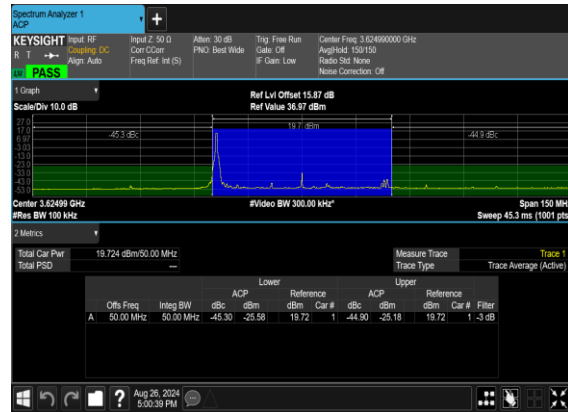

N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Mid_CH




N77(50M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

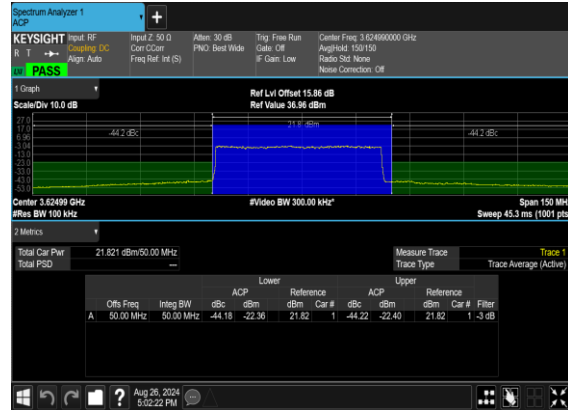





N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

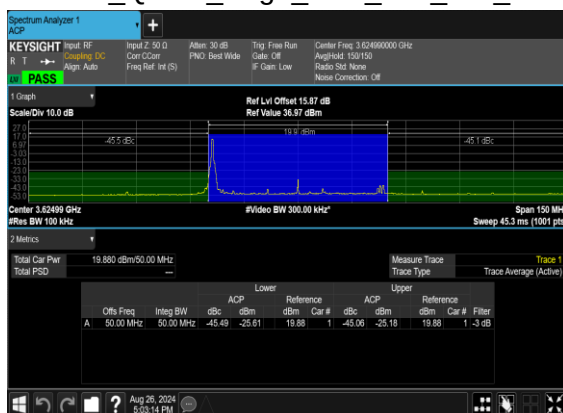


N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

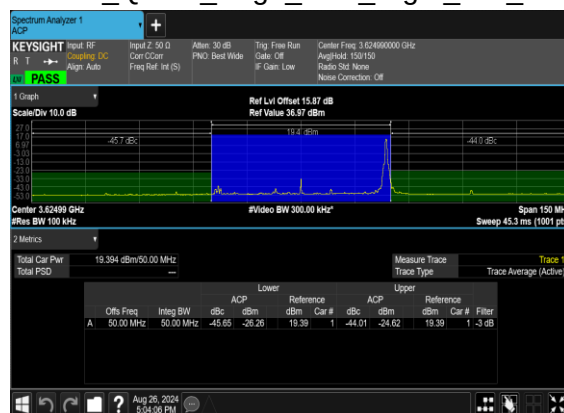

N77(50M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

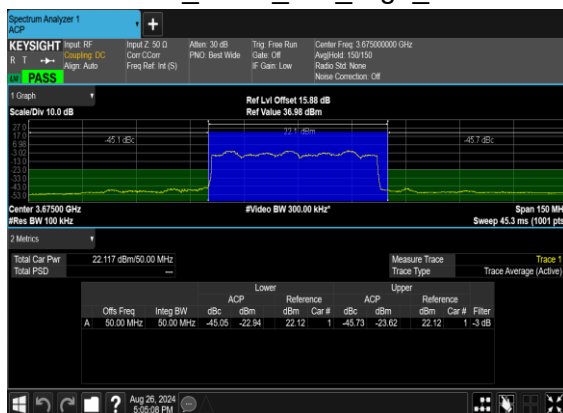

N77(50M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

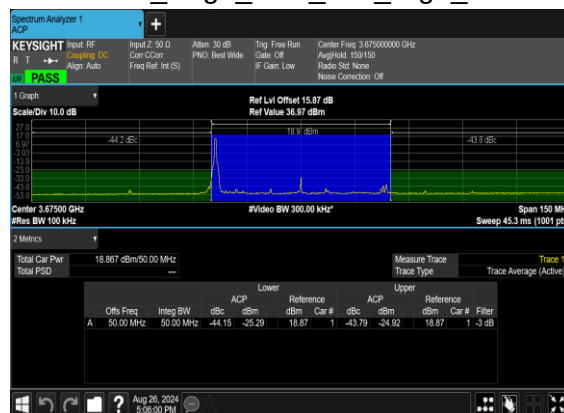





N77(50M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH



N77(50M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

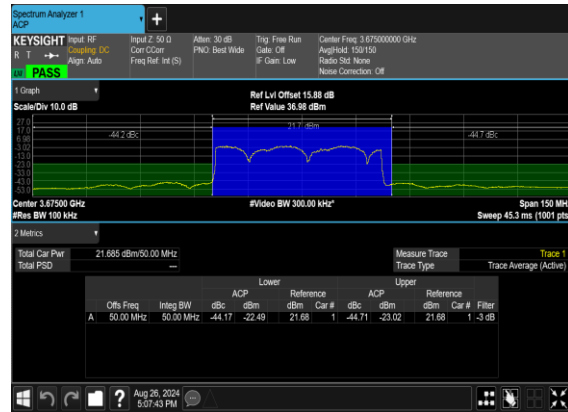

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

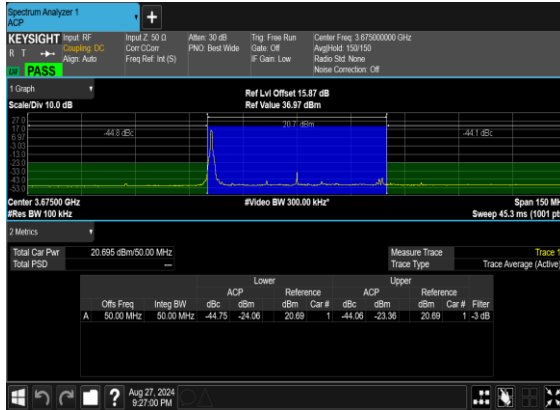

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

