

产品规格书

Product specification book



规格编号 Specification number	20220829005
生效日期 effective date	2022/8/29

客户名称 customer name	东莞市佳家通塑胶模具有限公司 Dongguan jiajiaotong plastic mould Co., Ltd
产品类型 product type	A11线圈/A11 coil
客户料号 Customer Material Numbe	

【新版发行, 版本修订】 【本规范含目录共 3页】 【RoHS Compliant Parts】

编制 authorized strength	审核 audit	批准 ratify

本承认书在客户收到30天内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。
This acknowledgement must be signed and returned to the customer within 30 days after receipt. If overdue, it shall be deemed that the production shall be carried out according to the standards of this acknowledgement.

【客户核准】 【 Customer approval 】

日期/date:

承认状态/Recognition state: 完全承认/make a clean breast of
条件承认/Conditional recognition 拒绝承认/disallow

批准 ratify	审核 audit	复检 recheck	检查 examine

说明/explain:

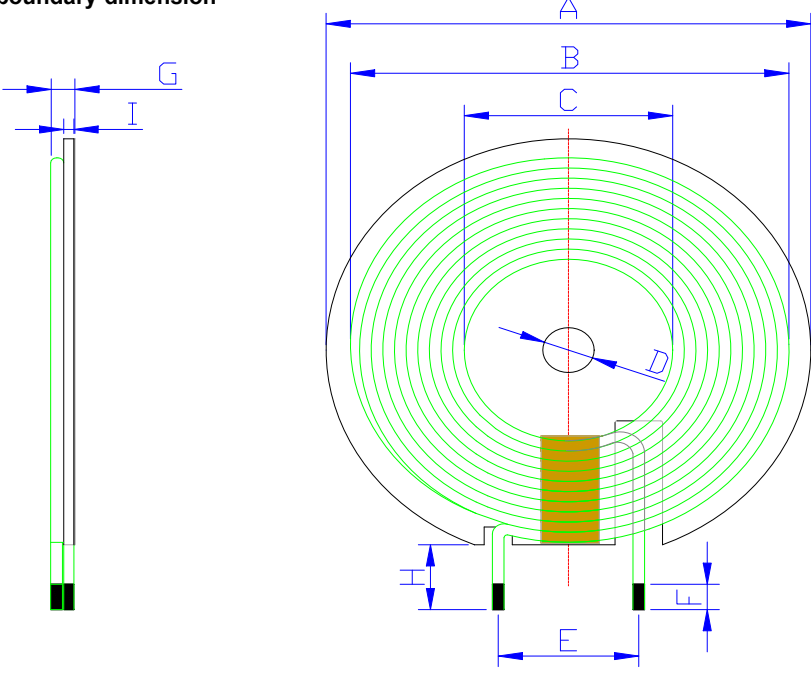
产品规格书

Product specification book

客户名称 customer name	东莞市佳家通塑胶模具有限公司 Dongguan jiajiaotong plastic mould Co., Ltd	客户料号 Customer Material Numbe	
		规格编号 Specification number	20220829005
发行/修订记录 Issue/amendment record			
版本 versions	生效日期 effective date	变更内容/原因 Change content/reason	核准 examine and approve
01	2022/8/29	新规格发行 New specification issue	
编制 authorized strength		审核audit	批准 ratify

产品规格书
Product specification book

客户名称 customer name	东莞市佳家通塑胶模具有限公司 Dongguan jiajiatong plastic mould Co., Ltd	客户料号 Customer Material Number			
		规格编号 Specification number	20220829005	版本 versions	1

◆、外形尺寸/boundary dimension		(单位/unit: mm)			
		A	43.4 ±0.3	B	42.0 ±0.5
		C	20.0 ±0.5	D	5.3Ref ±0.5
		E	10.0 Ref	F	3.0 ±1.0
		G	1.5 ±0.5	H	120.0 ±1.0
		I	±0.2(磁片厚度 /Thickness of magnetic)		0.8
		(1)线径: 0.08*105P 丝包线 (1)wire diameter: 0.08*105Psilk-covered wire			
		(2)绕线圈数: 10TS (2)Number of coils wound: 10TS			
		(3)起尾线是否交叉: 是 (3)Whether the starting and ending lines cross- yes			
		(4)线圈包8mm宽高温胶带 (4)Coil pack 8mm wide high temperature tape			
		(5)线圈与磁片需粘贴居中 (5)The coil and magnetic disk must be centered			
		(6)磁片背43双槽圆双面胶 (6)Magnetic sheet back 43 double slot round double-sided tape			

◆、电气特性/electrical specification:				
参数 parameter	规格/specification	测试条件/test condition	测试仪器/test instrument	
L0	6.3 ±10% μH	100KHz/1V	■TH1816B	
Q	>60 min	100KHz/1V	■TH1816B	
DCR	<50 mΩ	@ 25℃	■CH-502BC	

◆、温度等级/temperature grade:	
操作温度 operating temperature	-40℃~ 125℃

◆、材料清/bill of materials:					
序号 serial number	品名 Trade name	材料规格 material specification	供应商 supplier	备注 remark	
1	磁片 magnetic sheet	43.5*0.8*10T 开双槽 43.5*0.8*10T Double		PC95猛锌 PC95 zinc	
2	铜线 copper wire	0.08*105		丙铜丝包线 Acrylic copper silk covered wire	
3	高温胶带 high temperature tape	8MM		环保胶带 Environmental adhesive tape	
4	锡/tin	107H		千岛环保锡 Thousand Island environmental protection tin	
5	胶/glue	黄胶/Yellow gum		环保胶水 Eco-friendly glue	
6	胶/glue	43双槽双面胶 43 Double-sided tape with two slots		环保 environmental protection	
编制 authorized strength		审核 audit		批准 ratify	