

# TEST REPORT

Product Name: Wireless speaker  
FCC ID: 2ADK3AU030  
Trademark: N/A  
Model Number: XY-AU030, ESP-RV22, PBSK41  
Prepared For: XING DA INTERNATIONAL ELECTRONICS LIMITED  
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China  
Manufacturer: Dongguan Xing Yue Electronic co., Ltd  
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: May. 06, 2023  
Sample tested Date: May. 06, 2023 to May. 16, 2023  
Issue Date: May. 16, 2023  
Report No.: CTB230516001RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. “\*” indicates the testing items were fulfilled by subcontracted lab. “#” indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

	Page
Test Report Declaration	
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	16
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	27
8.1 Block Diagram Of Test Setup .....	27
8.2 Limit .....	27
8.3 Test procedure .....	27
8.4 Test Result .....	28
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	35
9.1 Block Diagram Of Test Setup .....	35
9.2 Limit .....	35
9.3 Test procedure .....	35
9.4 Test Result .....	36
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	40
10.1 Block Diagram Of Test Setup .....	40
10.2 Limit .....	40
10.3 Test procedure .....	40
10.4 Test Result .....	40
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	44
11.1 Block Diagram Of Test Setup .....	44
11.2 Limit .....	44
11.3 Test procedure .....	44
11.4 Test Result .....	44
<b>12. HOPPING CHANNEL NUMBER</b> .....	48
12.1 Block Diagram Of Test Setup .....	48
12.2 Limit .....	48
12.3 Test procedure .....	48
12.4 Test Result .....	48

<b>13. DWELL TIME</b> .....	<b>50</b>
13.1 Block Diagram Of Test Setup .....	50
13.2 Limit .....	50
13.3 Test procedure .....	50
13.4 Test Result .....	51
<b>14. PSEUDORANDOM FREQUENCY</b> .....	<b>55</b>
14.1 Limit .....	55
14.2 Test procedure .....	55
14.3 Test Result .....	56
<b>15. ANTENNA REQUIREMENT</b> .....	<b>57</b>
<b>16. EUT TEST SETUP PHOTOGRAPHS</b> .....	<b>58</b>

*(Note: N/A means not applicable)*



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230516001RFX	May. 16, 2023	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s): XY-AU030, ESP-RV22, PBSK41

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: XY-AU030

Bluetooth Version: Bluetooth 5.3

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 2.878dBm

Type of Modulation: Bluetooth: GFSK,  $\pi/4$  DQPSK, 8DPSK

Antenna installation: Bluetooth: PCB antenna

Antenna Gain: Bluetooth: -0.68dBi

Ratings: DC 5V charging from adapter  
Battery DC 3.7

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19

20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/


Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19



12	EZ-EMC	Frad	EMC-con3A1.1	/	/
----	--------	------	--------------	---	---

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

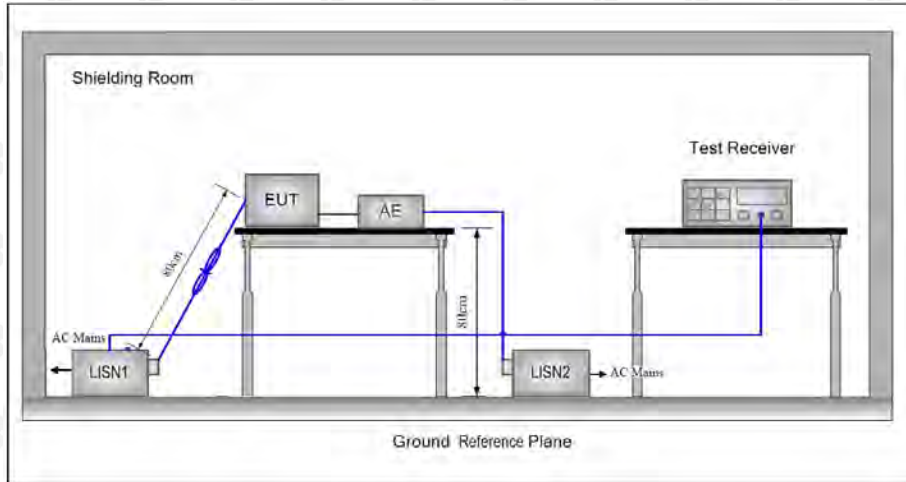

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

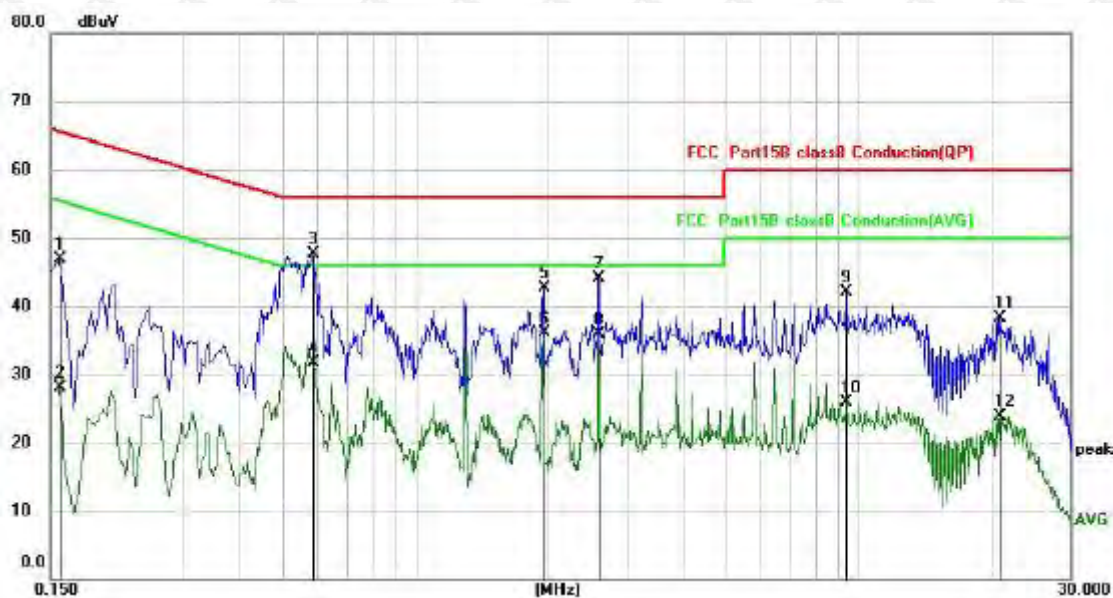


No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Over	Detector
		MHz	dBuV	Factor	dB	dBuV	dB	
1		0.1580	36.85	10.01	46.86	65.57	-18.71	QP
2		0.1580	18.10	10.01	28.11	55.57	-27.46	AVG
3	*	0.5860	37.75	9.97	47.72	56.00	-8.28	QP
4		0.5860	21.82	9.97	31.79	46.00	-14.21	AVG
5		1.9420	32.69	10.02	42.71	56.00	-13.29	QP
6		1.9420	26.18	10.02	36.20	46.00	-9.80	AVG
7		2.5900	34.09	10.06	44.15	56.00	-11.85	QP
8		2.5900	25.80	10.06	35.86	46.00	-10.14	AVG
9		9.3900	31.87	10.33	42.20	60.00	-17.80	QP
10		9.3900	15.59	10.33	25.92	50.00	-24.08	AVG
11		20.7700	27.69	10.58	38.27	60.00	-21.73	QP
12		20.7700	13.40	10.58	23.98	50.00	-26.02	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

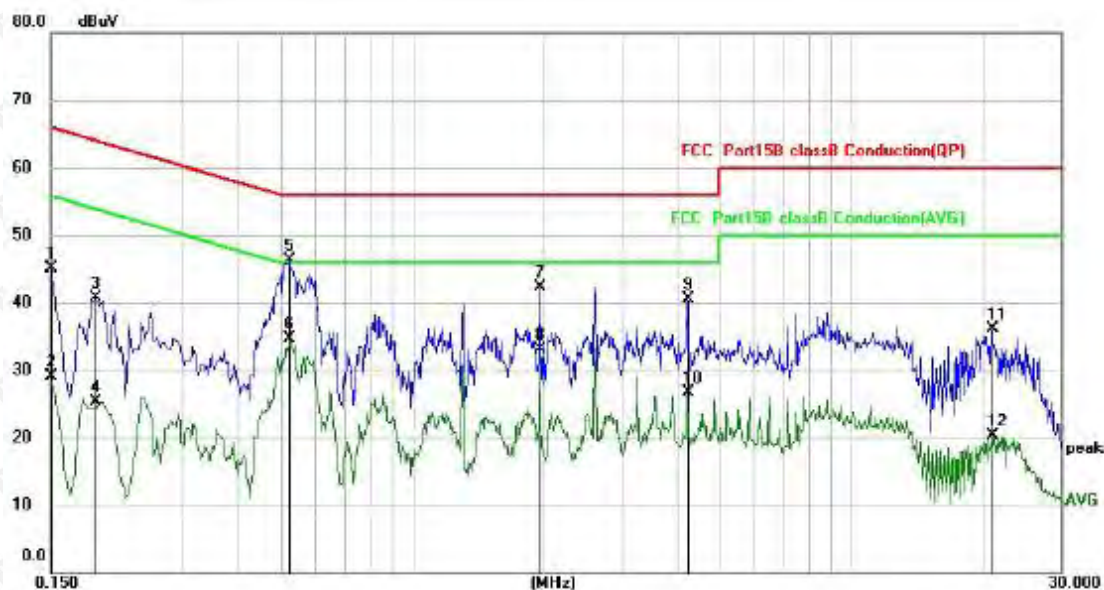

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1500	35.13	10.01	45.14	66.00	-20.86	QP
2		0.1500	19.06	10.01	29.07	56.00	-26.93	AVG
3		0.1900	30.79	10.01	40.80	64.04	-23.24	QP
4		0.1900	15.23	10.01	25.24	54.04	-28.80	AVG
5	*	0.5260	36.31	9.97	46.28	56.00	-9.72	QP
6		0.5260	24.83	9.97	34.80	46.00	-11.20	AVG
7		1.9540	32.27	10.03	42.30	56.00	-13.70	QP
8		1.9540	23.16	10.03	33.19	46.00	-12.81	AVG
9		4.2379	30.45	10.13	40.58	56.00	-15.42	QP
10		4.2379	16.52	10.13	26.65	46.00	-19.35	AVG
11		20.8620	25.56	10.58	36.14	60.00	-23.86	QP
12		20.8620	9.66	10.58	20.24	50.00	-29.76	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

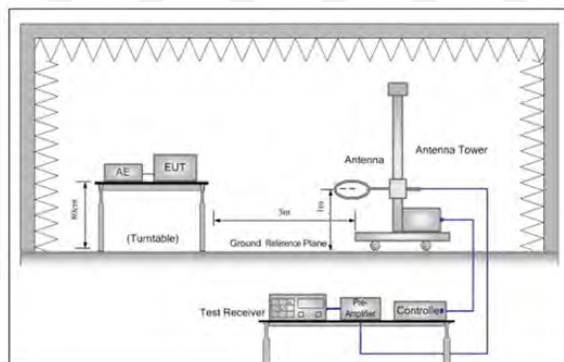


Figure 1. Below 30MHz

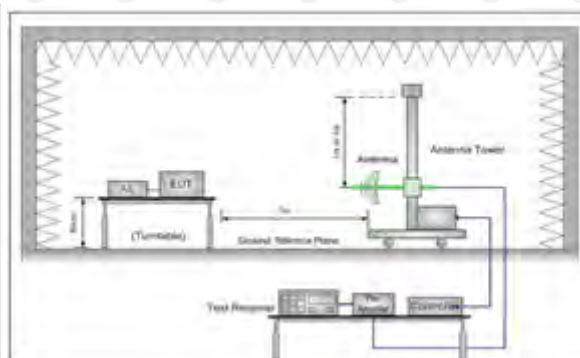


Figure 2. 30MHz to 1GHz

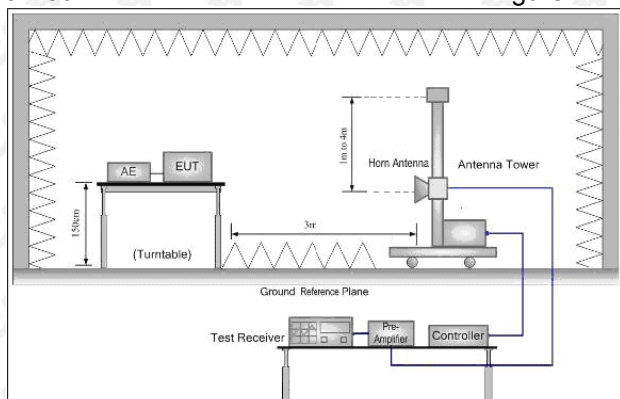


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result

Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		53.5052	29.41	-6.95	22.46	40.00	-17.54	QP
2		161.4742	38.18	-5.65	32.53	43.50	-10.97	QP
3		202.8104	43.82	-9.36	34.46	43.50	-9.04	QP
4	*	266.1419	50.23	-7.06	43.17	46.00	-2.83	QP
5		438.6554	38.91	-1.61	37.30	46.00	-8.70	QP
6		650.7997	30.29	3.17	33.46	46.00	-12.54	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V  
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		31.8986	38.11	-6.81	31.30	40.00	-8.70	QP
2		64.8865	37.58	-8.30	29.28	40.00	-10.72	QP
3	!	161.4742	44.60	-5.65	38.95	43.50	-4.55	QP
4		278.0668	45.54	-6.50	39.04	46.00	-6.96	QP
5	*	398.3312	44.74	-2.69	42.05	46.00	-3.95	QP
6		948.7610	29.56	7.63	37.19	46.00	-8.81	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

## Above 1 GHz Test Results:

 CH Low (2402MHz)  
 Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	58.23	-3.65	54.58	74.00	-19.42	peak
4804	49.52	-3.65	45.87	54.00	-8.13	AVG
7206	59.70	-0.95	58.75	74.00	-15.25	peak
7206	42.33	-0.95	41.38	54.00	-12.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	58.23	-3.65	54.58	74.00	-19.42	peak
4804	48.97	-3.65	45.32	54.00	-8.68	AVG
7206	60.19	-0.95	59.24	74.00	-14.76	peak
7206	42.92	-0.95	41.97	54.00	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	59.37	-3.54	55.83	74.00	-18.17	peak
4882.00	47.70	-3.54	44.16	54.00	-9.84	AVG
7323.00	57.24	-0.81	56.43	74.00	-17.57	peak
7323.00	42.09	-0.81	41.28	54.00	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	58.79	-3.54	55.25	74.00	-18.75	peak
4882.00	50.50	-3.54	46.96	54.00	-7.04	AVG
7323.00	57.98	-0.81	57.17	74.00	-16.83	peak
7323.00	42.20	-0.81	41.39	54.00	-12.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	58.34	-3.43	54.91	74.00	-19.09	peak
4960	47.89	-3.44	44.45	54.00	-9.55	AVG
7440	60.22	-0.77	59.45	74.00	-14.55	peak
7440	42.41	-0.77	41.64	54.00	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	58.05	-3.43	54.62	74.00	-19.38	peak
4960	47.24	-3.44	43.80	54.00	-10.20	AVG
7440	59.11	-0.77	58.34	74.00	-15.66	peak
7440	39.91	-0.77	39.14	54.00	-14.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.86	-5.81	52.05	74.00	-21.95	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.60	-5.84	49.76	74.00	-24.24	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.93	-5.81	50.12	74.00	-23.88	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.59	-5.84	50.75	74.00	-23.25	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.25	-5.81	48.44	74.00	-25.56	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.87	-6.06	48.81	74.00	-25.19	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.19	-5.81	51.38	74.00	-22.62	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.52	-6.06	47.46	74.00	-26.54	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.



NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	54.26	-5.81	48.45	74.00	-25.55	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.88	-5.84	48.04	74.00	-25.96	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.13	-5.81	49.32	74.00	-24.68	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.07	-5.84	49.23	74.00	-24.77	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.91	-5.81	52.10	74.00	-21.90	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.22	-6.06	48.16	74.00	-25.84	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	56.76	-5.81	50.95	74.00	-23.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.33	-6.06	48.27	74.00	-25.73	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

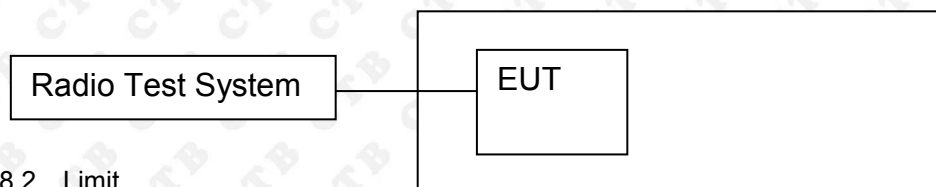


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
 Below 30MHz:  
 RBW = 100kHz, VBW = 300kHz, Sweep = auto  
 Detector function = peak, Trace = max hold  
 Above 30MHz:  
 RBW = 100KHz, VBW = 300KHz, Sweep = auto  
 Detector function = peak, Trace = max hold

## 8.4 Test Result

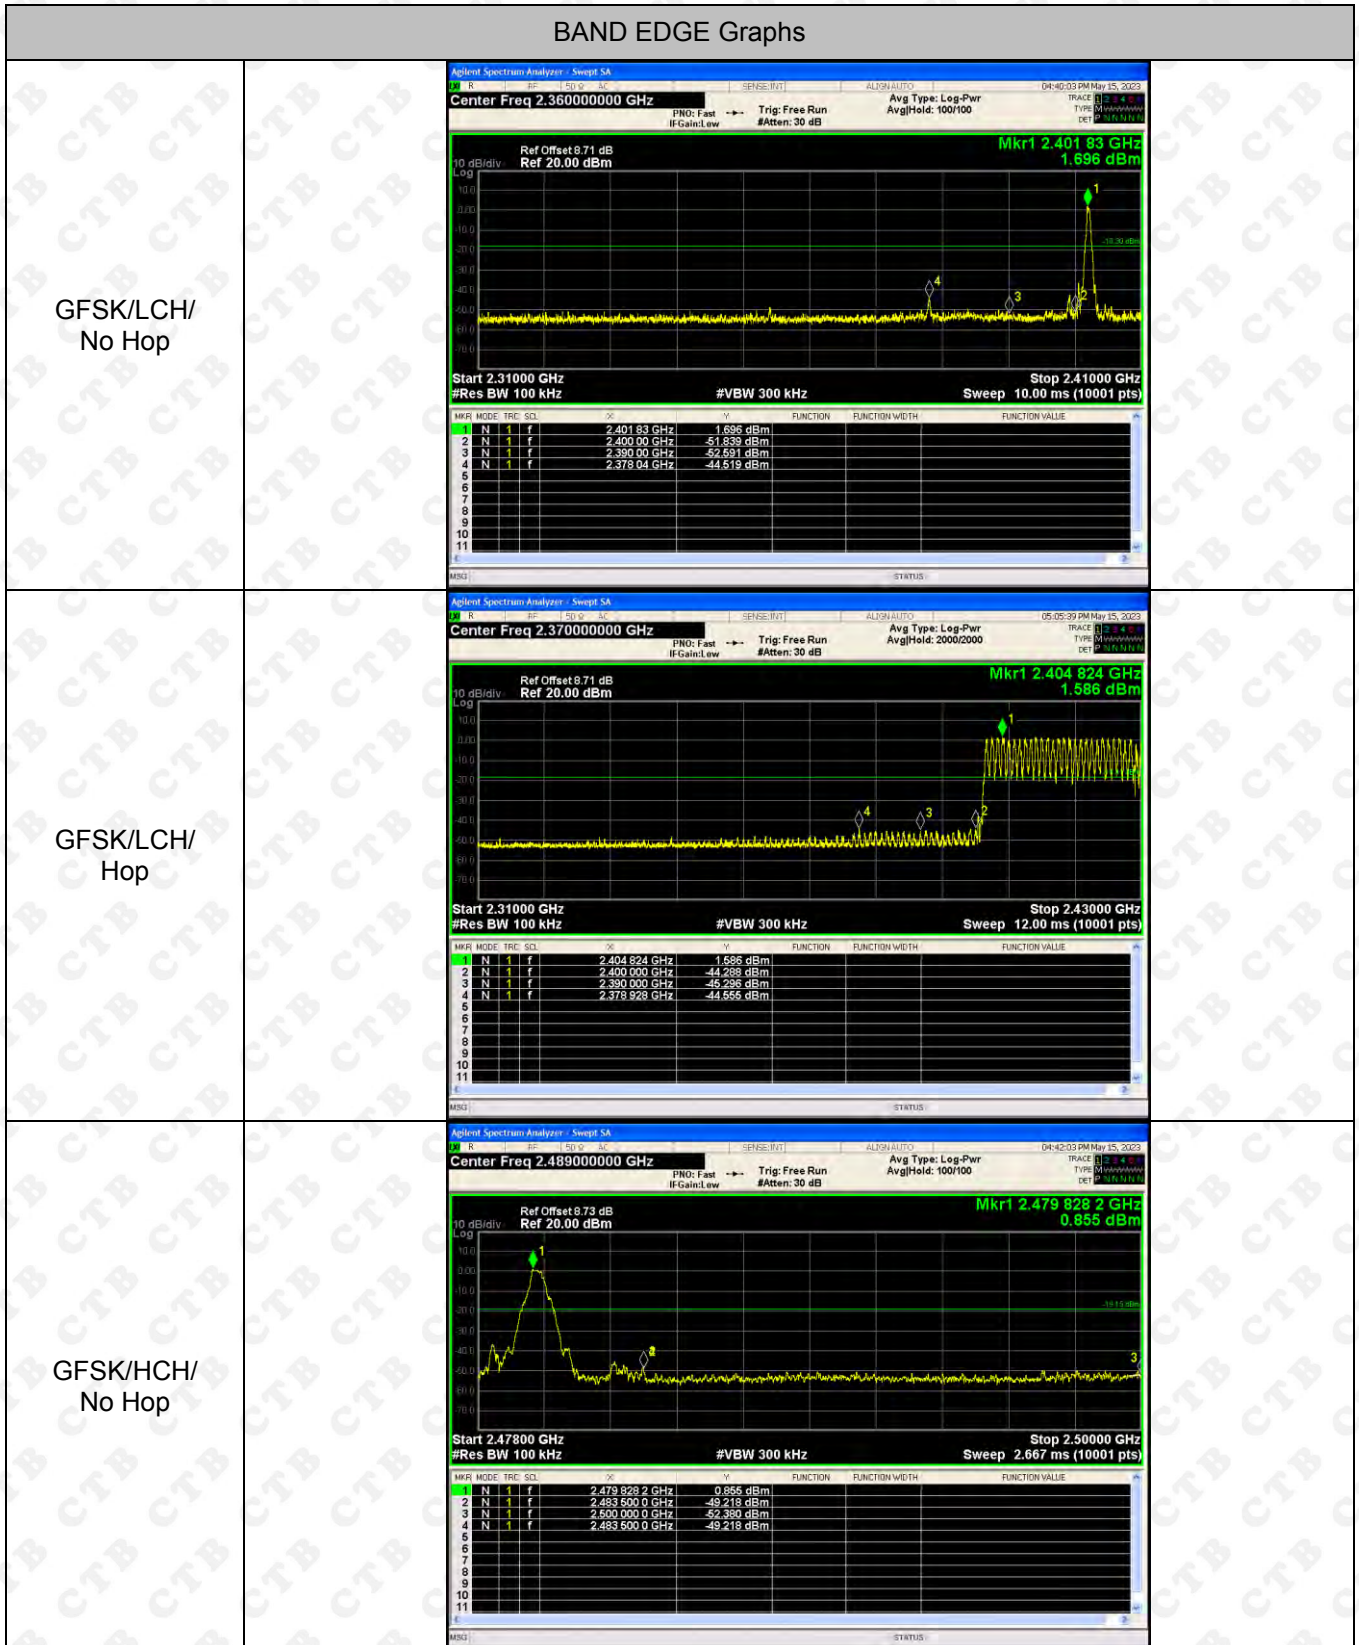


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 8.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.455 831 25 GHz 1.466 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.455 831 25 GHz</td> <td>1.466 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-49.820 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 00 GHz</td> <td>-48.461 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 900 00 GHz</td> <td>-45.985 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 831 25 GHz	1.466 dBm				2	N	1	f	2.483 500 00 GHz	-49.820 dBm				3	N	1	f	2.490 000 00 GHz	-48.461 dBm				4	N	1	f	2.499 900 00 GHz	-45.985 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.455 831 25 GHz	1.466 dBm																																									
2	N	1	f	2.483 500 00 GHz	-49.820 dBm																																									
3	N	1	f	2.490 000 00 GHz	-48.461 dBm																																									
4	N	1	f	2.499 900 00 GHz	-45.985 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 8.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 03 GHz -0.617 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 03 GHz</td> <td>-0.617 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-48.796 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-53.538 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 27 GHz</td> <td>-45.715 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	-0.617 dBm				2	N	1	f	2.400 00 GHz	-48.796 dBm				3	N	1	f	2.390 00 GHz	-53.538 dBm				4	N	1	f	2.378 27 GHz	-45.715 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 03 GHz	-0.617 dBm																																									
2	N	1	f	2.400 00 GHz	-48.796 dBm																																									
3	N	1	f	2.390 00 GHz	-53.538 dBm																																									
4	N	1	f	2.378 27 GHz	-45.715 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 8.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.405 832 GHz 1.521 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.405 832 GHz</td> <td>1.521 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-46.161 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-49.222 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.384 864 GHz</td> <td>-46.024 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405 832 GHz	1.521 dBm				2	N	1	f	2.400 000 GHz	-46.161 dBm				3	N	1	f	2.390 000 GHz	-49.222 dBm				4	N	1	f	2.384 864 GHz	-46.024 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.405 832 GHz	1.521 dBm																																									
2	N	1	f	2.400 000 GHz	-46.161 dBm																																									
3	N	1	f	2.390 000 GHz	-49.222 dBm																																									
4	N	1	f	2.384 864 GHz	-46.024 dBm																																									

<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 8.73 dB Ref 20.00 dBm Mkr1 2.479 975 6 GHz -1.555 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 975 6 GHz</td> <td>-1.555 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-50.686 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-51.841 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 049 6 GHz</td> <td>-48.829 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 975 6 GHz	-1.555 dBm				2	N	1	f	2.483 500 0 GHz	-50.686 dBm				3	N	1	f	2.500 000 0 GHz	-51.841 dBm				4	N	1	f	2.499 049 6 GHz	-48.829 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 975 6 GHz	-1.555 dBm																																									
2	N	1	f	2.483 500 0 GHz	-50.686 dBm																																									
3	N	1	f	2.500 000 0 GHz	-51.841 dBm																																									
4	N	1	f	2.499 049 6 GHz	-48.829 dBm																																									
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 8.73 dB Ref 20.00 dBm Mkr1 2.457 812 5 GHz 1.395 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.457 812 5 GHz</td> <td>1.395 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-50.686 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-50.021 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 875 0 GHz</td> <td>-46.417 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.457 812 5 GHz	1.395 dBm				2	N	1	f	2.483 500 0 GHz	-50.686 dBm				3	N	1	f	2.500 000 0 GHz	-50.021 dBm				4	N	1	f	2.484 875 0 GHz	-46.417 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.457 812 5 GHz	1.395 dBm																																									
2	N	1	f	2.483 500 0 GHz	-50.686 dBm																																									
3	N	1	f	2.500 000 0 GHz	-50.021 dBm																																									
4	N	1	f	2.484 875 0 GHz	-46.417 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 8.71 dB Ref 20.00 dBm Mkr1 2.402 13 GHz 0.998 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 13 GHz</td> <td>0.998 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-50.606 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-52.362 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 37 GHz</td> <td>-46.836 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 13 GHz	0.998 dBm				2	N	1	f	2.400 00 GHz	-50.606 dBm				3	N	1	f	2.390 00 GHz	-52.362 dBm				4	N	1	f	2.378 37 GHz	-46.836 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 13 GHz	0.998 dBm																																									
2	N	1	f	2.400 00 GHz	-50.606 dBm																																									
3	N	1	f	2.390 00 GHz	-52.362 dBm																																									
4	N	1	f	2.378 37 GHz	-46.836 dBm																																									

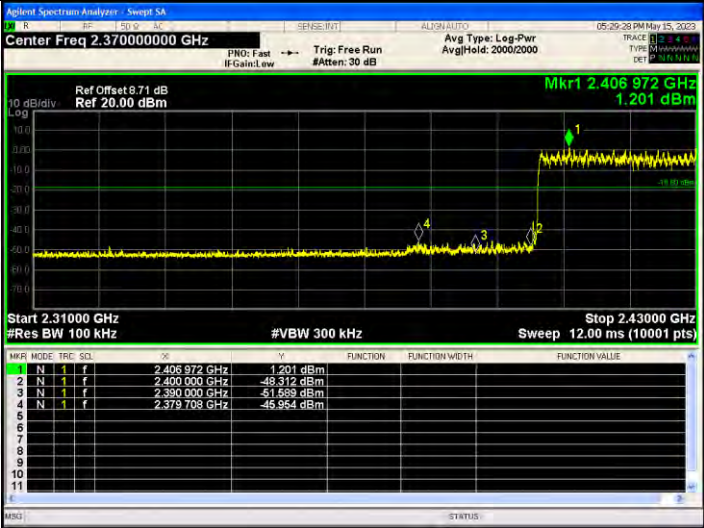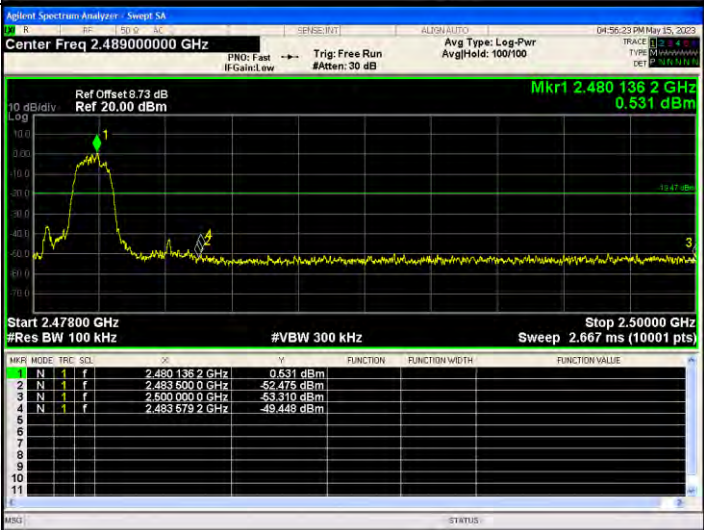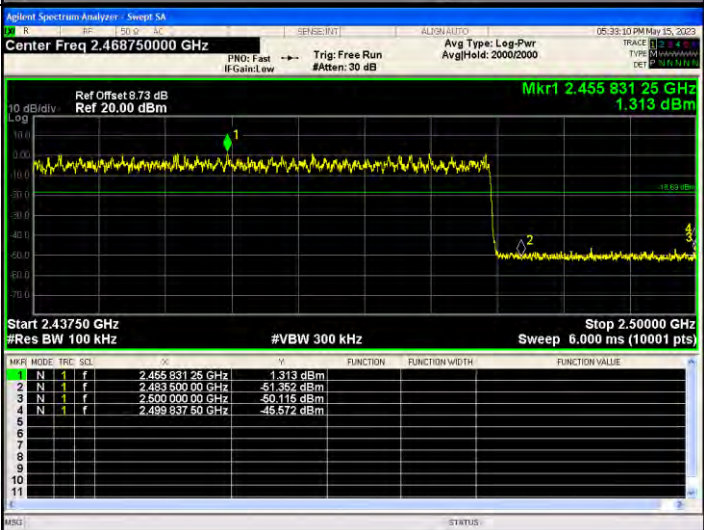
<p>8DPSK /LCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.37000000 GHz</p> <p>Ref Offset 8.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.406 972 GHz 1.201 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.406 972 GHz</td> <td>1.201 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-48.312 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-51.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.379 708 GHz</td> <td>-45.954 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.406 972 GHz	1.201 dBm				2	N	1	f	2.400 000 GHz	-48.312 dBm				3	N	1	f	2.390 000 GHz	-51.659 dBm				4	N	1	f	2.379 708 GHz	-45.954 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.406 972 GHz	1.201 dBm																																									
2	N	1	f	2.400 000 GHz	-48.312 dBm																																									
3	N	1	f	2.390 000 GHz	-51.659 dBm																																									
4	N	1	f	2.379 708 GHz	-45.954 dBm																																									
<p>8DPSK /HCH/No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48900000 GHz</p> <p>Ref Offset 8.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.480 136 2 GHz 0.531 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 136 2 GHz</td> <td>0.531 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.475 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-53.210 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 579 2 GHz</td> <td>-49.448 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 136 2 GHz	0.531 dBm				2	N	1	f	2.483 500 0 GHz	-52.475 dBm				3	N	1	f	2.500 000 0 GHz	-53.210 dBm				4	N	1	f	2.483 579 2 GHz	-49.448 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 136 2 GHz	0.531 dBm																																									
2	N	1	f	2.483 500 0 GHz	-52.475 dBm																																									
3	N	1	f	2.500 000 0 GHz	-53.210 dBm																																									
4	N	1	f	2.483 579 2 GHz	-49.448 dBm																																									
<p>8DPSK /HCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.46875000 GHz</p> <p>Ref Offset 8.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.455 831 25 GHz 1.313 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.455 831 25 GHz</td> <td>1.313 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-51.352 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-50.115 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 537 50 GHz</td> <td>-45.572 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 831 25 GHz	1.313 dBm				2	N	1	f	2.483 500 0 GHz	-51.352 dBm				3	N	1	f	2.500 000 00 GHz	-50.115 dBm				4	N	1	f	2.489 537 50 GHz	-45.572 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.455 831 25 GHz	1.313 dBm																																									
2	N	1	f	2.483 500 0 GHz	-51.352 dBm																																									
3	N	1	f	2.500 000 00 GHz	-50.115 dBm																																									
4	N	1	f	2.489 537 50 GHz	-45.572 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

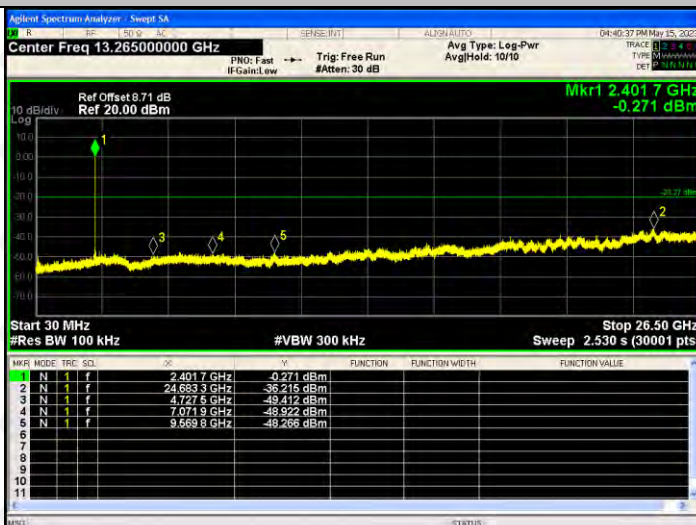



GFSK/MCH

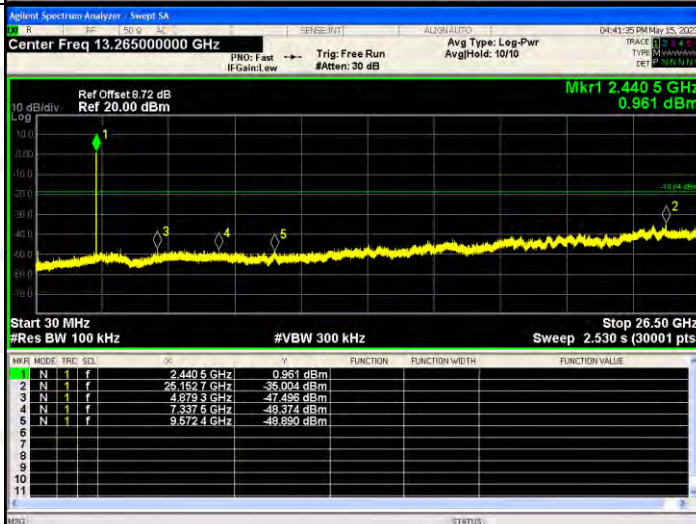

GFSK/HCH

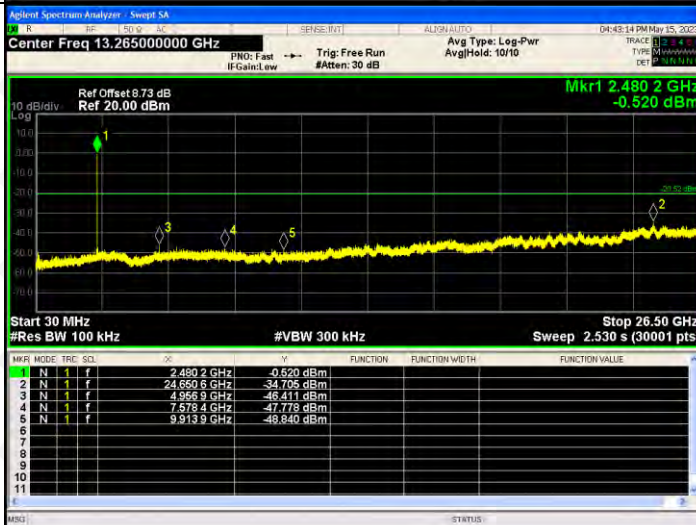

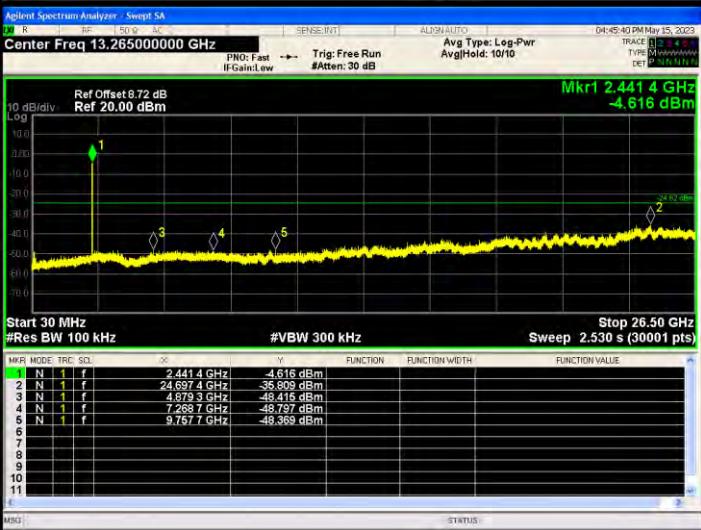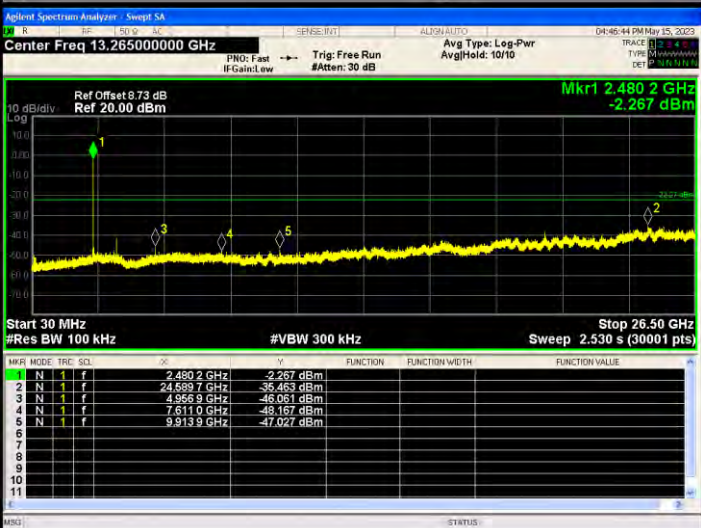


<p><math>\pi/4</math>DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-0.391 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.5730 GHz</td> <td>-35.473 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8009 GHz</td> <td>-48.896 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1487 GHz</td> <td>-48.245 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6283 GHz</td> <td>-48.349 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4017 GHz	-0.391 dBm				2	N	1	f	24.5730 GHz	-35.473 dBm				3	N	1	f	4.8009 GHz	-48.896 dBm				4	N	1	f	7.1487 GHz	-48.245 dBm				5	N	1	f	9.6283 GHz	-48.349 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4017 GHz	-0.391 dBm																																																		
2	N	1	f	24.5730 GHz	-35.473 dBm																																																		
3	N	1	f	4.8009 GHz	-48.896 dBm																																																		
4	N	1	f	7.1487 GHz	-48.245 dBm																																																		
5	N	1	f	9.6283 GHz	-48.349 dBm																																																		
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-4.616 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6974 GHz</td> <td>-35.809 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8783 GHz</td> <td>-48.415 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2687 GHz</td> <td>-48.787 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7577 GHz</td> <td>-48.369 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4414 GHz	-4.616 dBm				2	N	1	f	24.6974 GHz	-35.809 dBm				3	N	1	f	4.8783 GHz	-48.415 dBm				4	N	1	f	7.2687 GHz	-48.787 dBm				5	N	1	f	9.7577 GHz	-48.369 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4414 GHz	-4.616 dBm																																																		
2	N	1	f	24.6974 GHz	-35.809 dBm																																																		
3	N	1	f	4.8783 GHz	-48.415 dBm																																																		
4	N	1	f	7.2687 GHz	-48.787 dBm																																																		
5	N	1	f	9.7577 GHz	-48.369 dBm																																																		
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-2.267 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6897 GHz</td> <td>-35.453 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8669 GHz</td> <td>-48.031 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.6110 GHz</td> <td>-48.107 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9139 GHz</td> <td>-47.027 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4802 GHz	-2.267 dBm				2	N	1	f	24.6897 GHz	-35.453 dBm				3	N	1	f	4.8669 GHz	-48.031 dBm				4	N	1	f	7.6110 GHz	-48.107 dBm				5	N	1	f	9.9139 GHz	-47.027 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4802 GHz	-2.267 dBm																																																		
2	N	1	f	24.6897 GHz	-35.453 dBm																																																		
3	N	1	f	4.8669 GHz	-48.031 dBm																																																		
4	N	1	f	7.6110 GHz	-48.107 dBm																																																		
5	N	1	f	9.9139 GHz	-47.027 dBm																																																		

<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>1.564 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6471 GHz</td> <td>-35.353 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8009 GHz</td> <td>-49.236 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0154 GHz</td> <td>-48.502 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6016 GHz</td> <td>-47.946 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	1.564 dBm				2	N	1	f	24.6471 GHz	-35.353 dBm				3	N	1	f	4.8009 GHz	-49.236 dBm				4	N	1	f	7.0154 GHz	-48.502 dBm				5	N	1	f	9.6016 GHz	-47.946 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	1.564 dBm																																																		
2	N	1	f	24.6471 GHz	-35.353 dBm																																																		
3	N	1	f	4.8009 GHz	-49.236 dBm																																																		
4	N	1	f	7.0154 GHz	-48.502 dBm																																																		
5	N	1	f	9.6016 GHz	-47.946 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-3.174 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6656 GHz</td> <td>-35.116 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8733 GHz</td> <td>-48.182 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1301 GHz</td> <td>-47.109 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7577 GHz</td> <td>-48.159 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-3.174 dBm				2	N	1	f	24.6656 GHz	-35.116 dBm				3	N	1	f	4.8733 GHz	-48.182 dBm				4	N	1	f	7.1301 GHz	-47.109 dBm				5	N	1	f	9.7577 GHz	-48.159 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-3.174 dBm																																																		
2	N	1	f	24.6656 GHz	-35.116 dBm																																																		
3	N	1	f	4.8733 GHz	-48.182 dBm																																																		
4	N	1	f	7.1301 GHz	-47.109 dBm																																																		
5	N	1	f	9.7577 GHz	-48.159 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-2.574 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6789 GHz</td> <td>-35.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9569 GHz</td> <td>-48.720 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3897 GHz</td> <td>-48.732 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9139 GHz</td> <td>-46.983 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.574 dBm				2	N	1	f	24.6789 GHz	-35.657 dBm				3	N	1	f	4.9569 GHz	-48.720 dBm				4	N	1	f	7.3897 GHz	-48.732 dBm				5	N	1	f	9.9139 GHz	-46.983 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.574 dBm																																																		
2	N	1	f	24.6789 GHz	-35.657 dBm																																																		
3	N	1	f	4.9569 GHz	-48.720 dBm																																																		
4	N	1	f	7.3897 GHz	-48.732 dBm																																																		
5	N	1	f	9.9139 GHz	-46.983 dBm																																																		

## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

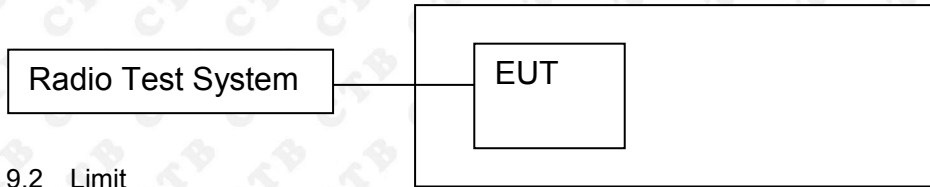

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.




### 9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.735	20.97	PASS
	MCH	1.161	20.97	PASS
	HCH	1.01	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	2.49	20.97	PASS
	MCH	1.939	20.97	PASS
	HCH	1.821	20.97	PASS
EDR mode (8DPSK)	LCH	2.878	20.97	PASS
	MCH	2.348	20.97	PASS
	HCH	2.219	20.97	PASS

Test Graph:

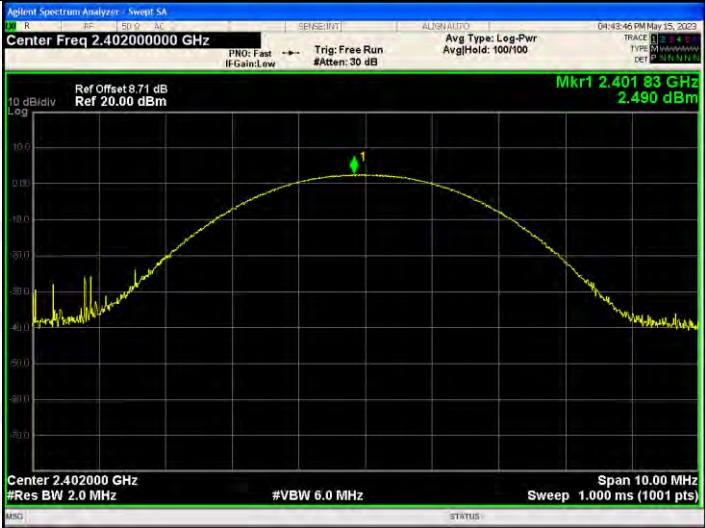
Graphs	
GFSK/LCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 8.71 dB          Ref 20.00 dBm          Mkr1 2.40183 GHz          1.735 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.44100000 GHz          Ref Offset 8.72 dB          Ref 20.00 dBm          Mkr1 2.44081 GHz          1.161 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.48000000 GHz          Ref Offset 8.73 dB          Ref 20.00 dBm          Mkr1 2.47983 GHz          1.010 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq: 2.40200000 GHz          Ref Offset: 8.71 dB, Ref: 20.00 dBm          Mkr1: 2.40193 GHz, 2.878 dBm          Span: 10.00 MHz          Res BW: 6.0 MHz          Sweep: 1.000 ms (1001 pts)</p>	
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq: 2.44100000 GHz          Ref Offset: 8.72 dB, Ref: 20.00 dBm          Mkr1: 2.44095 GHz, 2.348 dBm          Span: 10.00 MHz          Res BW: 2.0 MHz          Sweep: 1.000 ms (1001 pts)</p>	
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq: 2.48000000 GHz          Ref Offset: 8.73 dB, Ref: 20.00 dBm          Mkr1: 2.47987 GHz, 2.219 dBm          Span: 10.00 MHz          Res BW: 2.0 MHz          Sweep: 1.000 ms (1001 pts)</p>	

## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

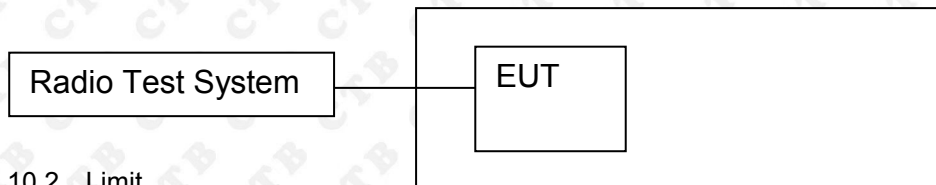

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.866	<b>PASS</b>
	Mid channel	0.866	<b>PASS</b>
	High channel	0.862	<b>PASS</b>
$\pi/4$ DQPSK	Low channel	1.27	<b>PASS</b>
	Mid channel	1.314	<b>PASS</b>
	High channel	1.275	<b>PASS</b>
8DPSK	Low channel	1.302	<b>PASS</b>
	Mid channel	1.294	<b>PASS</b>
	High channel	1.305	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.



Test Graph:


<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 8.71 dB Ref 28.71 dBm Mkr3 2.402402 GHz -21.514 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 812.10 kHz Total Power 8.18 dBm Transmit Freq Error -30.915 kHz OBW Power 99.00 % x dB Bandwidth 865.8 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 8.72 dB Ref 28.72 dBm Mkr3 2.441409 GHz -20.616 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 822.78 kHz Total Power 7.56 dBm Transmit Freq Error -23.827 kHz OBW Power 99.00 % x dB Bandwidth 866.0 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 8.73 dB Ref 28.73 dBm Mkr3 2.4804 GHz -22.149 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 811.56 kHz Total Power 7.49 dBm Transmit Freq Error -30.357 kHz OBW Power 99.00 % x dB Bandwidth 861.5 kHz x dB -20.00 dB</p>

<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 8.71 dB</p> <p>Ref: 28.71 dBm</p> <p>Mkr3: 2.402611 GHz</p> <p>-18.290 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1786 MHz</p> <p>Total Power: 8.08 dBm</p> <p>Transmit Freq Error: -24.508 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.270 MHz</p> <p>x dB: -20.00 dB</p>
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 8.72 dB</p> <p>Ref: 28.72 dBm</p> <p>Mkr3: 2.441636 GHz</p> <p>-23.184 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1874 MHz</p> <p>Total Power: 7.20 dBm</p> <p>Transmit Freq Error: -20.749 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.314 MHz</p> <p>x dB: -20.00 dB</p>
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 8.73 dB</p> <p>Ref: 28.73 dBm</p> <p>Mkr3: 2.480615 GHz</p> <p>-20.205 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1729 MHz</p> <p>Total Power: 7.52 dBm</p> <p>Transmit Freq Error: -22.420 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.275 MHz</p> <p>x dB: -20.00 dB</p>

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 8.71 dB Ref: 28.71 dBm</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Mkr3 2.402627 GHz -20.495 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1859 MHz</p> <p>Total Power: 7.69 dBm</p> <p>Transmit Freq Error: -24.111 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.302 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 8.72 dB Ref: 28.72 dBm</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1949 MHz</p> <p>Total Power: 7.15 dBm</p> <p>Transmit Freq Error: -28.257 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.294 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 8.73 dB Ref: 28.73 dBm</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1840 MHz</p> <p>Total Power: 7.36 dBm</p> <p>Transmit Freq Error: -23.504 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.305 MHz</p> <p>x dB: -20.00 dB</p>

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

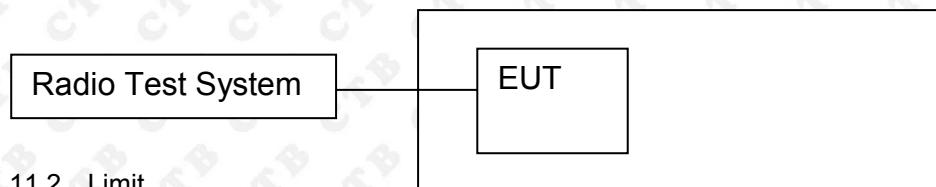

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.577	PASS
GFSK	MCH	1.000	0.577	PASS
GFSK	HCH	1.004	0.575	PASS
$\pi/4$ DQPSK	LCH	1.002	0.847	PASS
$\pi/4$ DQPSK	MCH	1.004	0.876	PASS
$\pi/4$ DQPSK	HCH	1.000	0.850	PASS
8DPSK	LCH	0.998	0.868	PASS
8DPSK	MCH	0.996	0.863	PASS
8DPSK	HCH	1.002	0.870	PASS

## Test Graph

### Graphs

GFSK/LCH




GFSK/MCH



GFSK/HCH




<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.002000000 MHz</p> <p>Ref Offset: 8.71 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz -1.773 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-1.773 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401972 GHz</td> <td></td> <td></td> <td>-1.854 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-1.773 dB	2	F	1	f		2.401972 GHz			-1.854 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-1.773 dB																					
2	F	1	f		2.401972 GHz			-1.854 dBm																					
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.004000000 MHz</p> <p>Ref Offset: 8.72 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.004 MHz 1.525 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.004 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>1.525 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440906 GHz</td> <td></td> <td></td> <td>-3.341 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.004 MHz	( $\Delta$ )		1.525 dB	2	F	1	f		2.440906 GHz			-3.341 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.004 MHz	( $\Delta$ )		1.525 dB																					
2	F	1	f		2.440906 GHz			-3.341 dBm																					
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset: 8.71 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -0.075 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.075 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401814 GHz</td> <td></td> <td></td> <td>-0.744 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.075 dB	2	F	1	f		2.401814 GHz			-0.744 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.075 dB																					
2	F	1	f		2.401814 GHz			-0.744 dBm																					
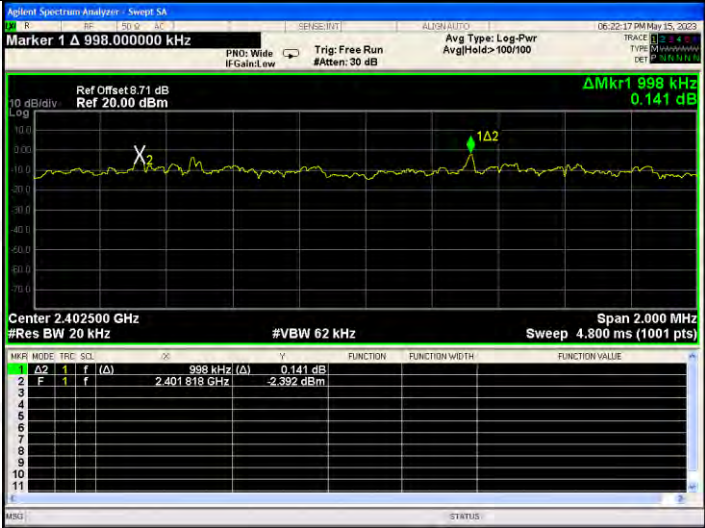
<p>8DPSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 998.000000 kHz</p> <p>Ref Offset: 8.71 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 998 kHz 0.141 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>998 kHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.141 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401818 GHz</td> <td></td> <td></td> <td>-2.392 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz	( $\Delta$ )		0.141 dB	2	F	1	f		2.401818 GHz			-2.392 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz	( $\Delta$ )		0.141 dB																				
2	F	1	f		2.401818 GHz			-2.392 dBm																				
<p>8DPSK /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 996.000000 kHz</p> <p>Ref Offset: 8.72 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 996 kHz 2.966 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>996 kHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>2.966 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440920 GHz</td> <td></td> <td></td> <td>-5.611 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	996 kHz	( $\Delta$ )		2.966 dB	2	F	1	f		2.440920 GHz			-5.611 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	996 kHz	( $\Delta$ )		2.966 dB																				
2	F	1	f		2.440920 GHz			-5.611 dBm																				
<p>8DPSK /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.002000000 MHz</p> <p>Ref Offset: 8.73 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz -0.115 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.115 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478814 GHz</td> <td></td> <td></td> <td>-2.606 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-0.115 dB	2	F	1	f		2.478814 GHz			-2.606 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-0.115 dB																				
2	F	1	f		2.478814 GHz			-2.606 dBm																				

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

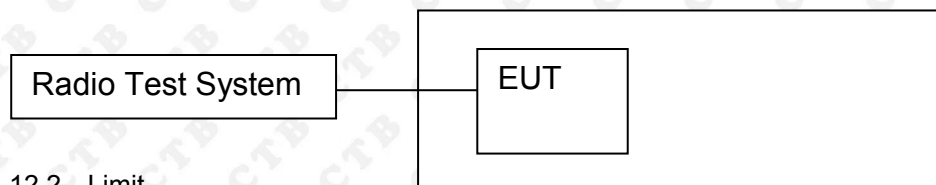

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS
8DPSK	Hop	79	$\geq 15$	PASS




Test Graph

Graphs																												
GFSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>1.424 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4801600 GHz</td> <td>0.622 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	1.424 dBm				2	N	1	f	2.4801600 GHz	0.622 dBm			
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	1.424 dBm																							
2	N	1	f	2.4801600 GHz	0.622 dBm																							
$\pi/4$ DQPSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>1.288 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4803270 GHz</td> <td>-3.963 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	1.288 dBm				2	N	1	f	2.4803270 GHz	-3.963 dBm			
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	1.288 dBm																							
2	N	1	f	2.4803270 GHz	-3.963 dBm																							
8DPSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4015865 GHz</td> <td>-2.556 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4804105 GHz</td> <td>-3.930 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4015865 GHz	-2.556 dBm				2	N	1	f	2.4804105 GHz	-3.930 dBm			
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4015865 GHz	-2.556 dBm																							
2	N	1	f	2.4804105 GHz	-3.930 dBm																							

### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

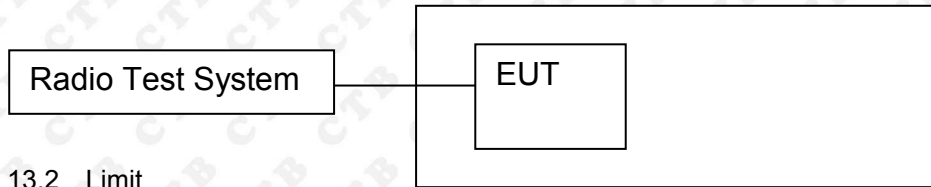

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.376	120.32	400	PASS
	DH1	MCH	0.376	120.32	400	PASS
	DH1	HCH	0.376	120.32	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.888	308.053	400	PASS
	DH5	MCH	2.888	308.053	400	PASS
	DH5	HCH	2.888	308.053	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:  $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3:  $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1:  $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.

## Test Graph

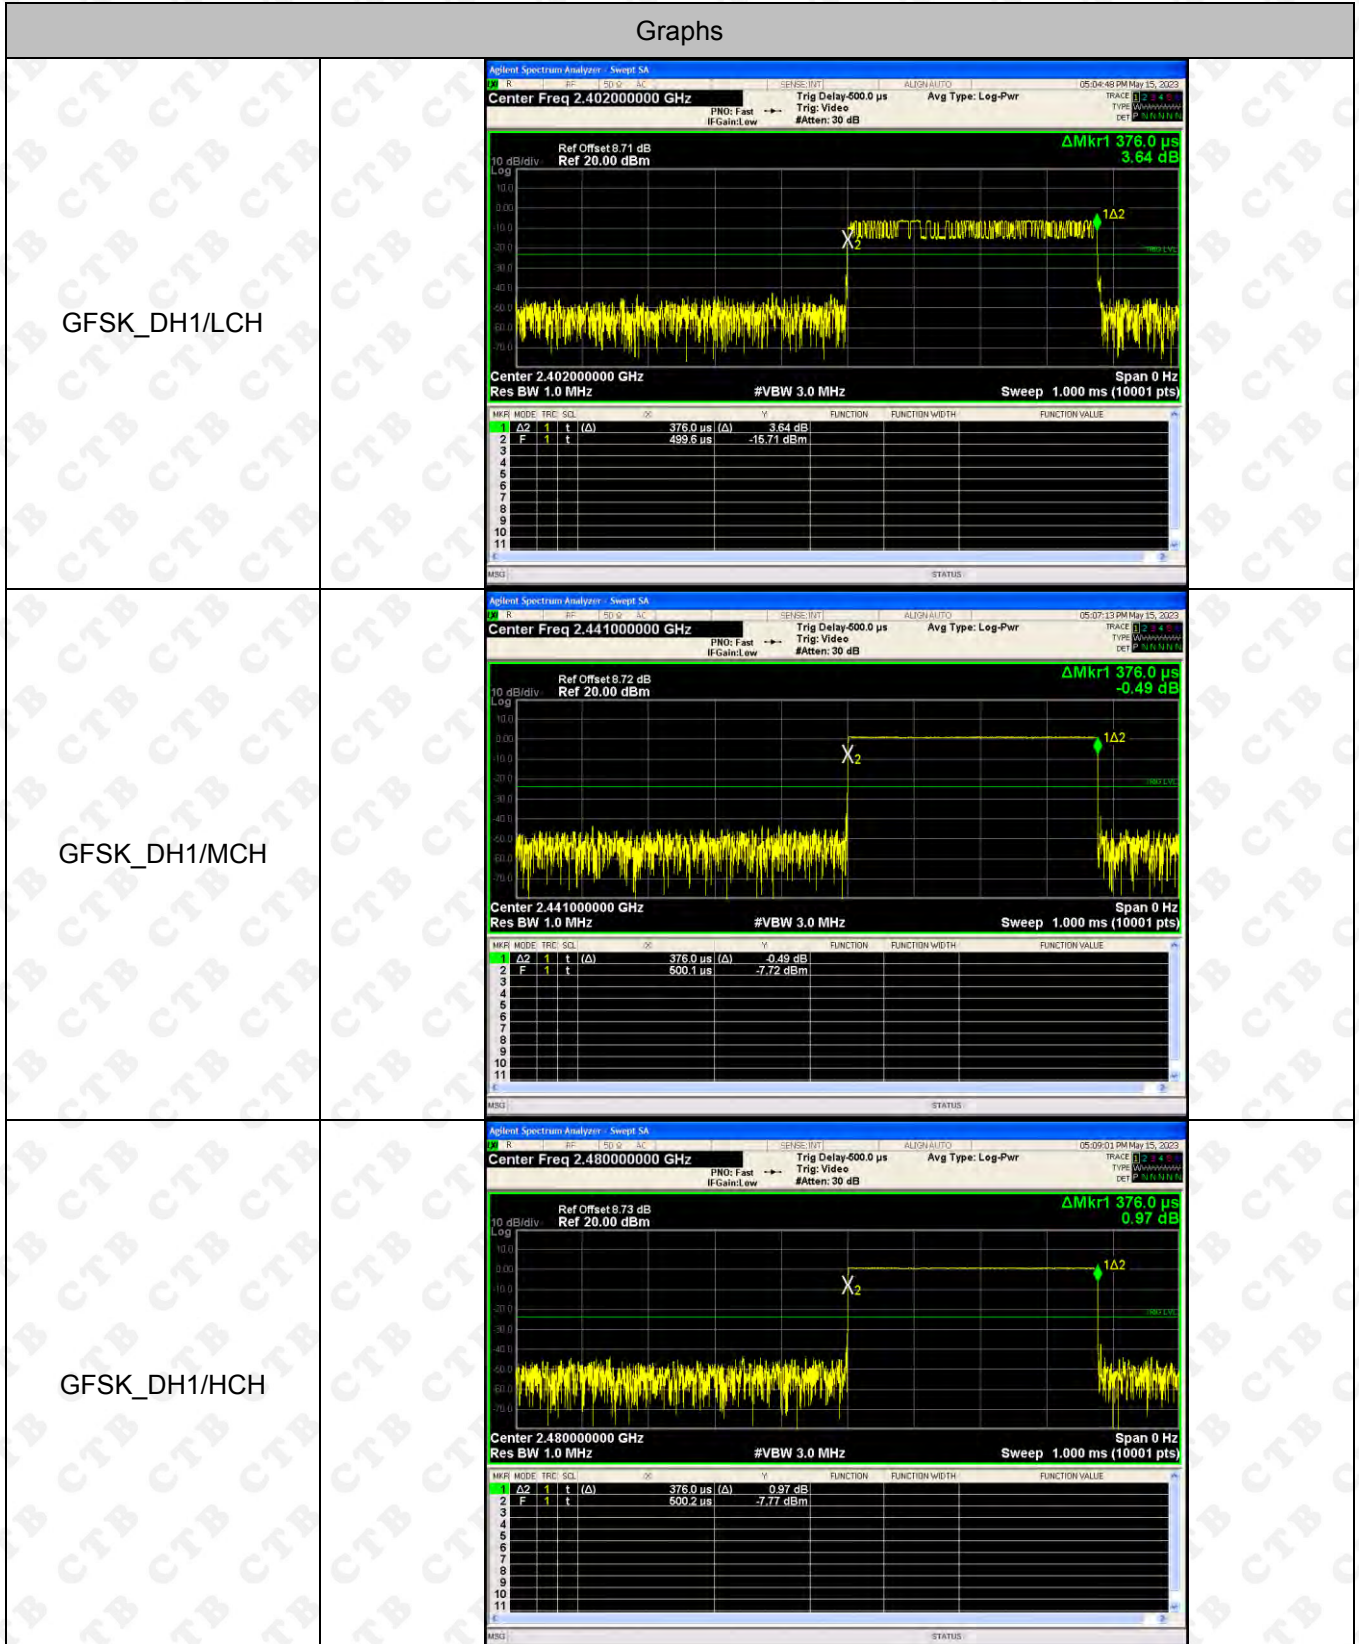

<p>GFSK_DH3/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.402000000 GHz Ref Offset: 8.71 dB Ref: 20.00 dBm Delta Marker 1: 1.637 ms, -3.64 dB Resolution BW: 1.0 MHz Sweep: 3.000 ms</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>DB</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.637 ms</td> <td>(Δ)</td> <td>-3.64 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td></td> <td>-10.83 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.637 ms	(Δ)	-3.64 dB		2	F	1	t		500.1 μs		-10.83 dBm	
MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.637 ms	(Δ)	-3.64 dB																					
2	F	1	t		500.1 μs		-10.83 dBm																					
<p>GFSK_DH3/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.441000000 GHz Ref Offset: 8.72 dB Ref: 20.00 dBm Delta Marker 1: 1.638 ms, -2.55 dB Resolution BW: 1.0 MHz Sweep: 3.000 ms</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>DB</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.638 ms</td> <td>(Δ)</td> <td>-2.55 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td></td> <td>-3.93 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.638 ms	(Δ)	-2.55 dB		2	F	1	t		500.1 μs		-3.93 dBm	
MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.638 ms	(Δ)	-2.55 dB																					
2	F	1	t		500.1 μs		-3.93 dBm																					
<p>GFSK_DH3/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.480000000 GHz Ref Offset: 8.73 dB Ref: 20.00 dBm Delta Marker 1: 1.638 ms, -0.31 dB Resolution BW: 1.0 MHz Sweep: 3.000 ms</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>DB</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.638 ms</td> <td>(Δ)</td> <td>-0.31 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td></td> <td>-5.22 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.638 ms	(Δ)	-0.31 dB		2	F	1	t		500.1 μs		-5.22 dBm	
MKR	MODE	TRC	SCL	DB	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.638 ms	(Δ)	-0.31 dB																					
2	F	1	t		500.1 μs		-5.22 dBm																					

<p>GFSK_DH5/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.71 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.898 ms 5.14 dB</p> <p>Center: 2.402000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.898 ms</td> <td>(Δ)</td> <td>5.14 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-6.67 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.898 ms	(Δ)	5.14 dB		2	F	1	t		499.6 μs		-6.67 dBm	
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.898 ms	(Δ)	5.14 dB																					
2	F	1	t		499.6 μs		-6.67 dBm																					
<p>GFSK_DH5/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.898 ms 6.24 dB</p> <p>Center: 2.441000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.898 ms</td> <td>(Δ)</td> <td>6.24 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-8.00 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.898 ms	(Δ)	6.24 dB		2	F	1	t		499.6 μs		-8.00 dBm	
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.898 ms	(Δ)	6.24 dB																					
2	F	1	t		499.6 μs		-8.00 dBm																					
<p>GFSK_DH5/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.898 ms -0.12 dB</p> <p>Center: 2.480000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.898 ms</td> <td>(Δ)</td> <td>-0.12 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-3.76 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.898 ms	(Δ)	-0.12 dB		2	F	1	t		500.0 μs		-3.76 dBm	
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.898 ms	(Δ)	-0.12 dB																					
2	F	1	t		500.0 μs		-3.76 dBm																					

### 14. PSEUDORANDOM FREQUENCY

#### 14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


#### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

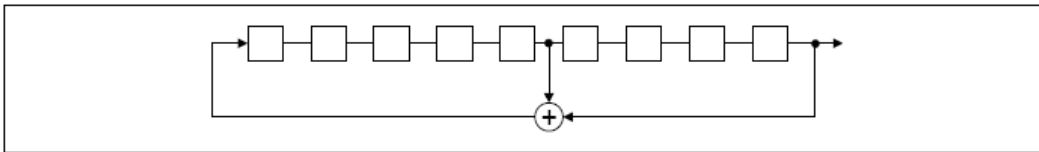

An example of Pseudorandom Frequency Hopping Sequence as follow:

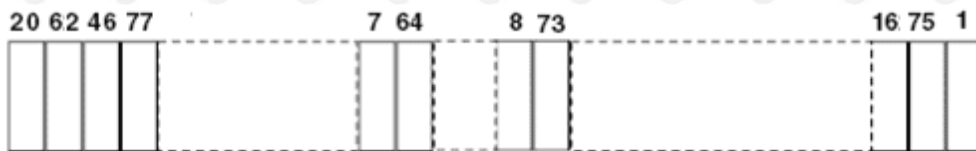

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:



The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.68dBi.

## 16. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

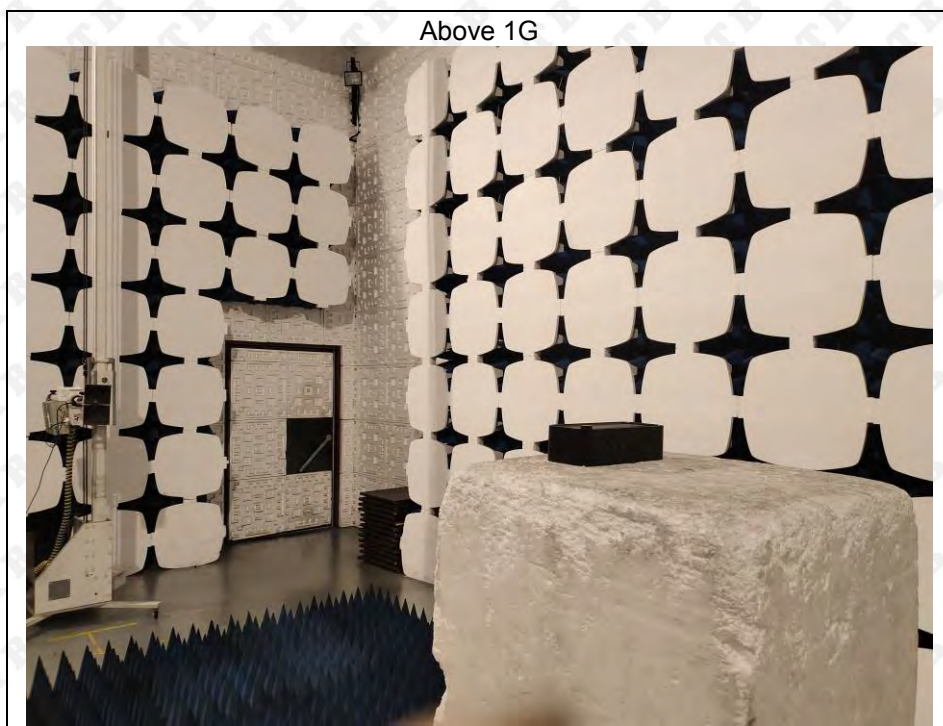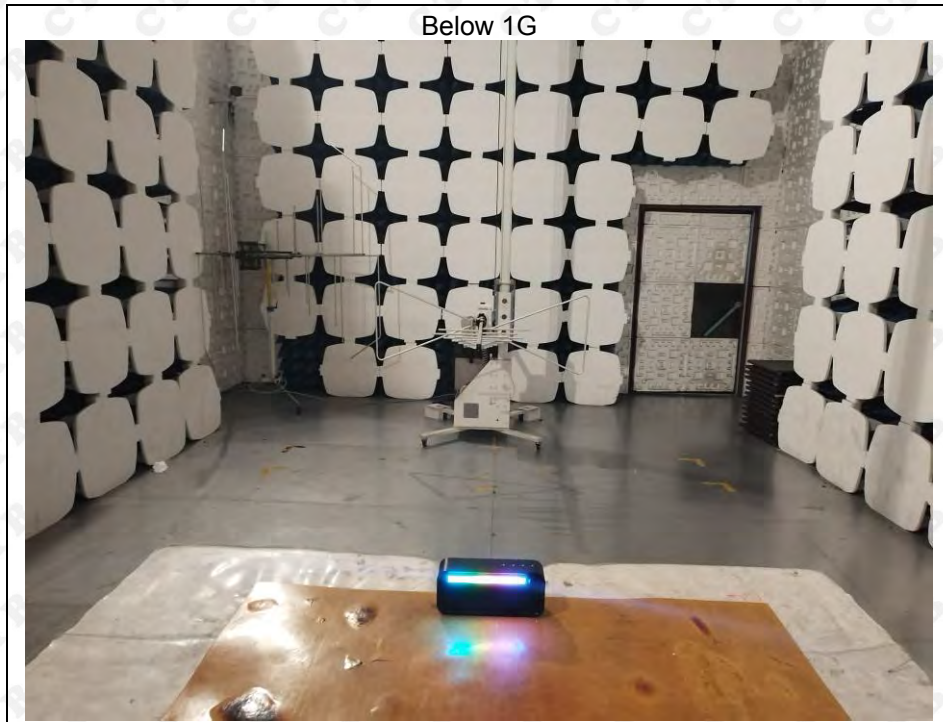

## Conducted emissions



※※※※ END OF REPORT ※※※※