




### 11.5.2. Test Graphs

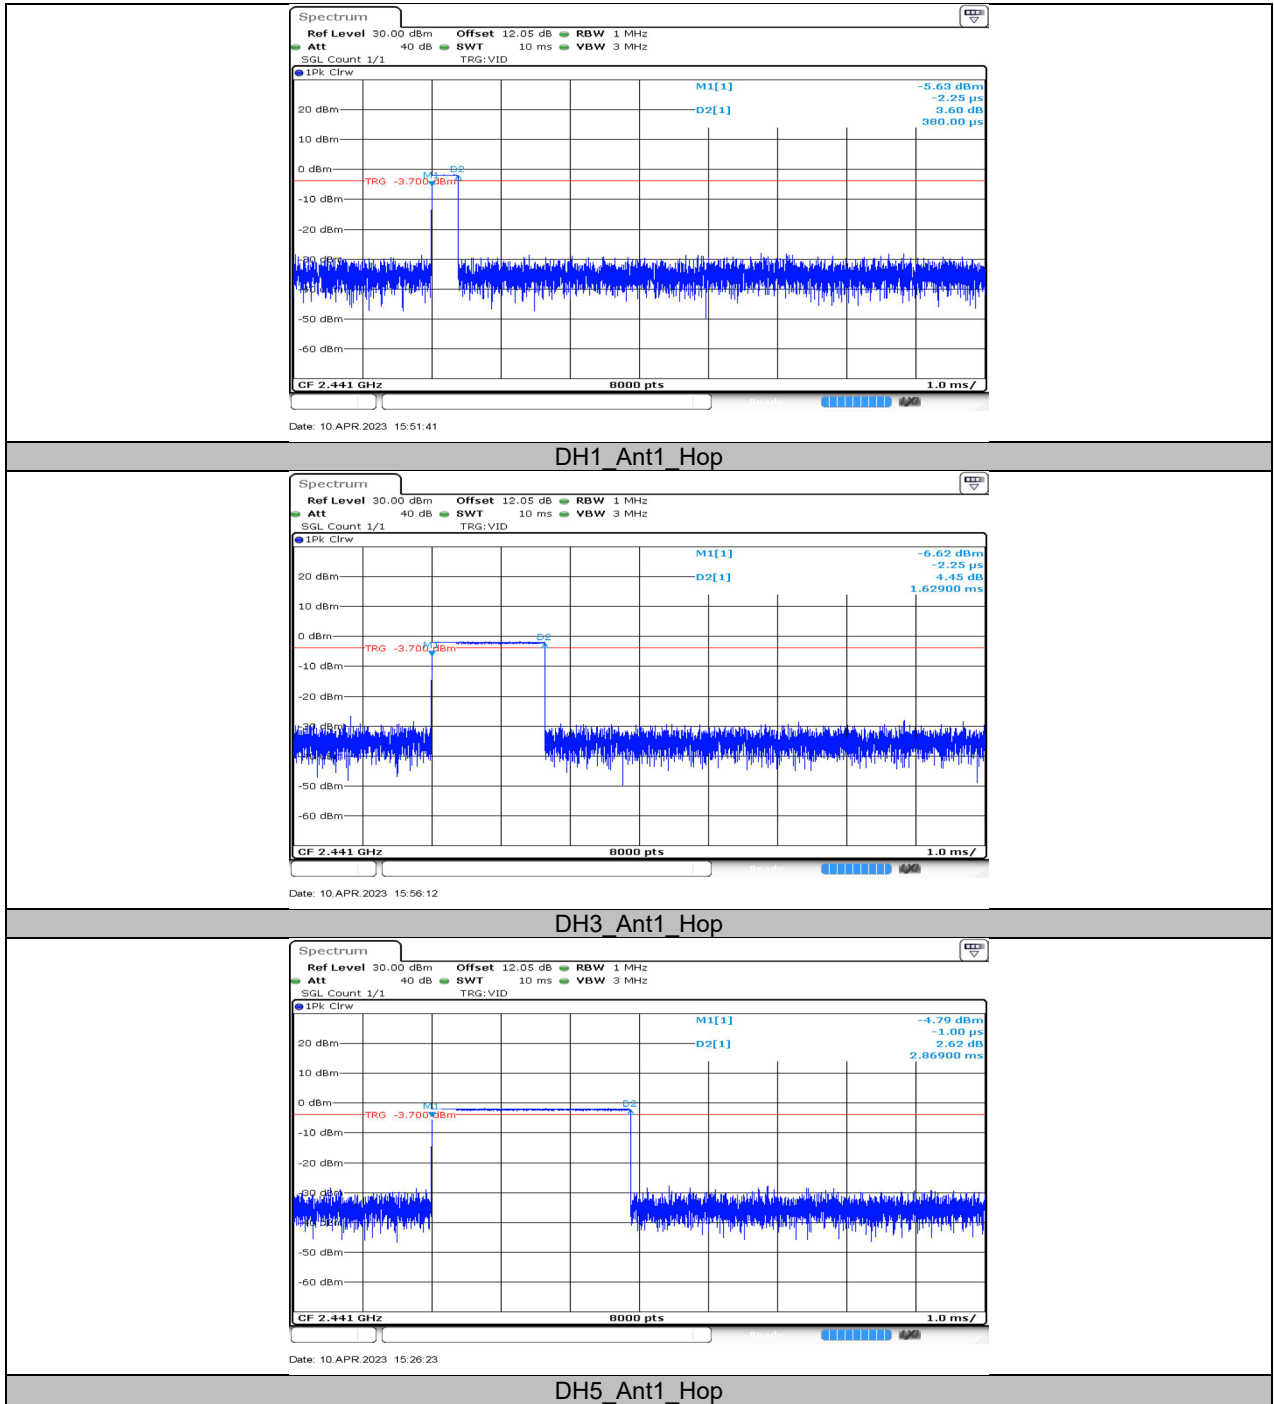


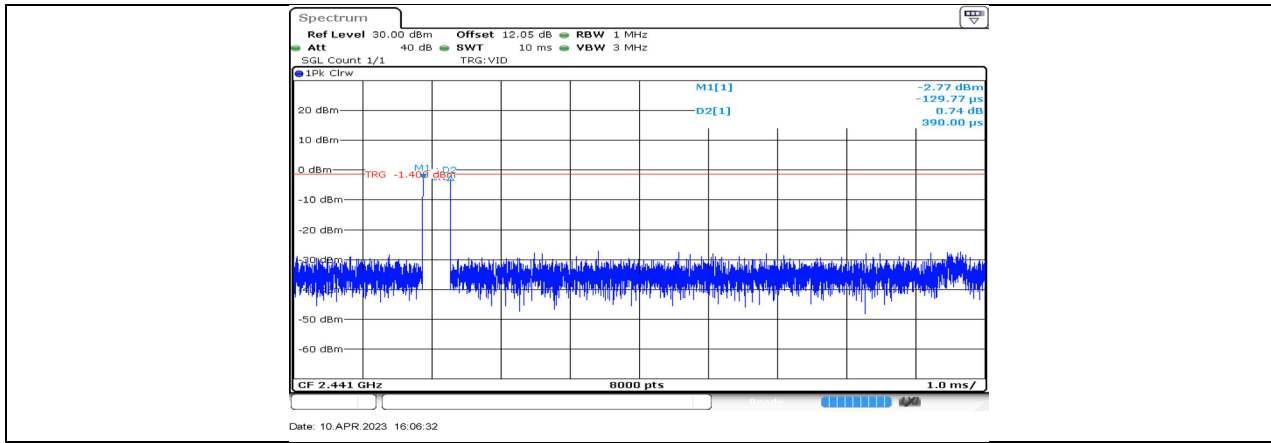

3DH1\_Ant1\_Hop

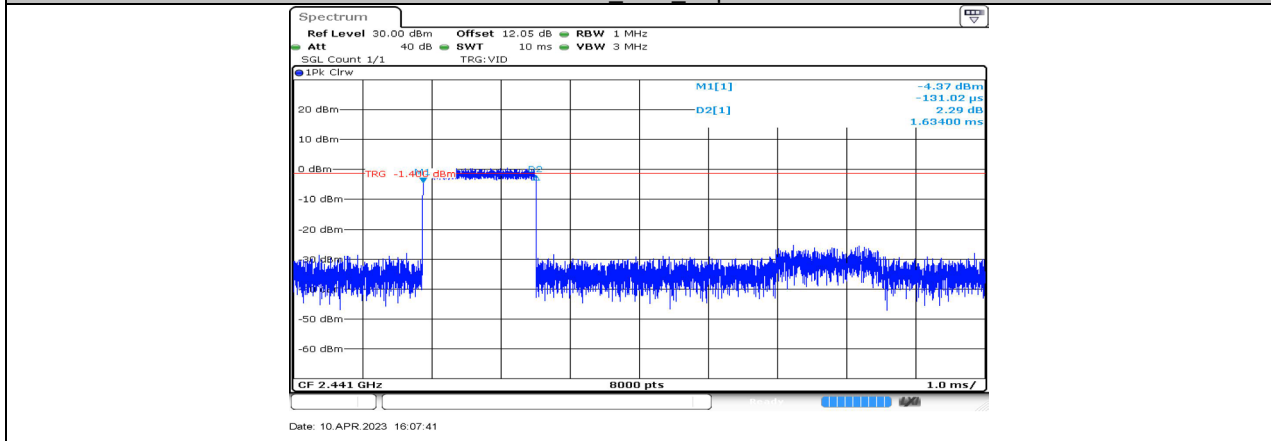

3DH3\_Ant1\_Hop

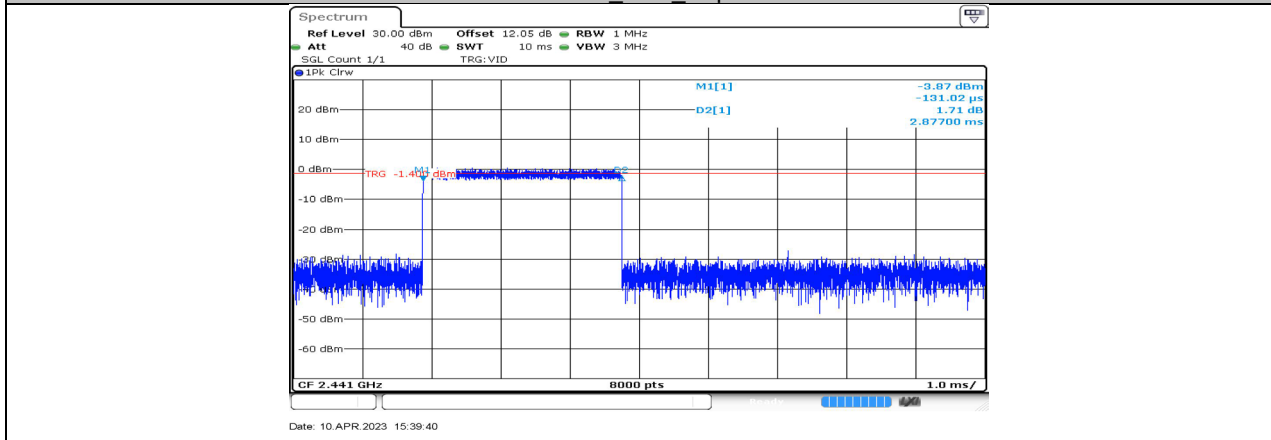


3DH5\_Ant1\_Hop

## 11.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

### 11.6.2. Test Graphs

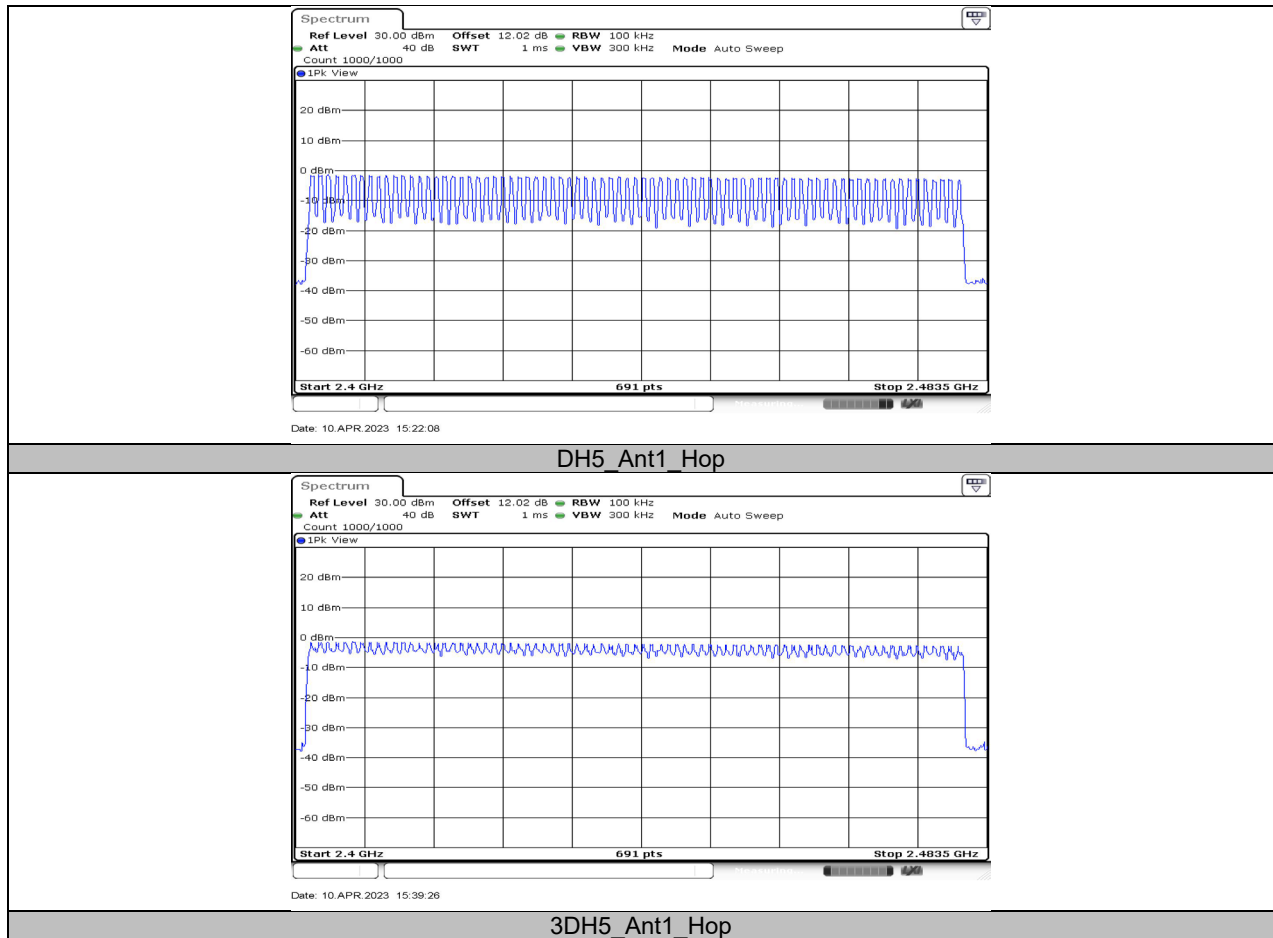



## 11.7. APPENDIX G: BAND EDGE MEASUREMENTS

### 11.7.1. Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-1.22	-46.27	≤-21.22	PASS
		High	2480	-2.87	-45.58	≤-22.87	PASS
		Low	Hop_2402	-1.99	-44.94	≤-21.99	PASS
		High	Hop_2480	-2.70	-45.55	≤-22.7	PASS
3DH5	Ant1	Low	2402	-1.25	-46.59	≤-21.25	PASS
		High	2480	-2.90	-45.82	≤-22.9	PASS
		Low	Hop_2402	-4.60	-47.63	≤-24.6	PASS
		High	Hop_2480	-2.68	-45.79	≤-22.68	PASS

### 11.7.2. Test Graphs

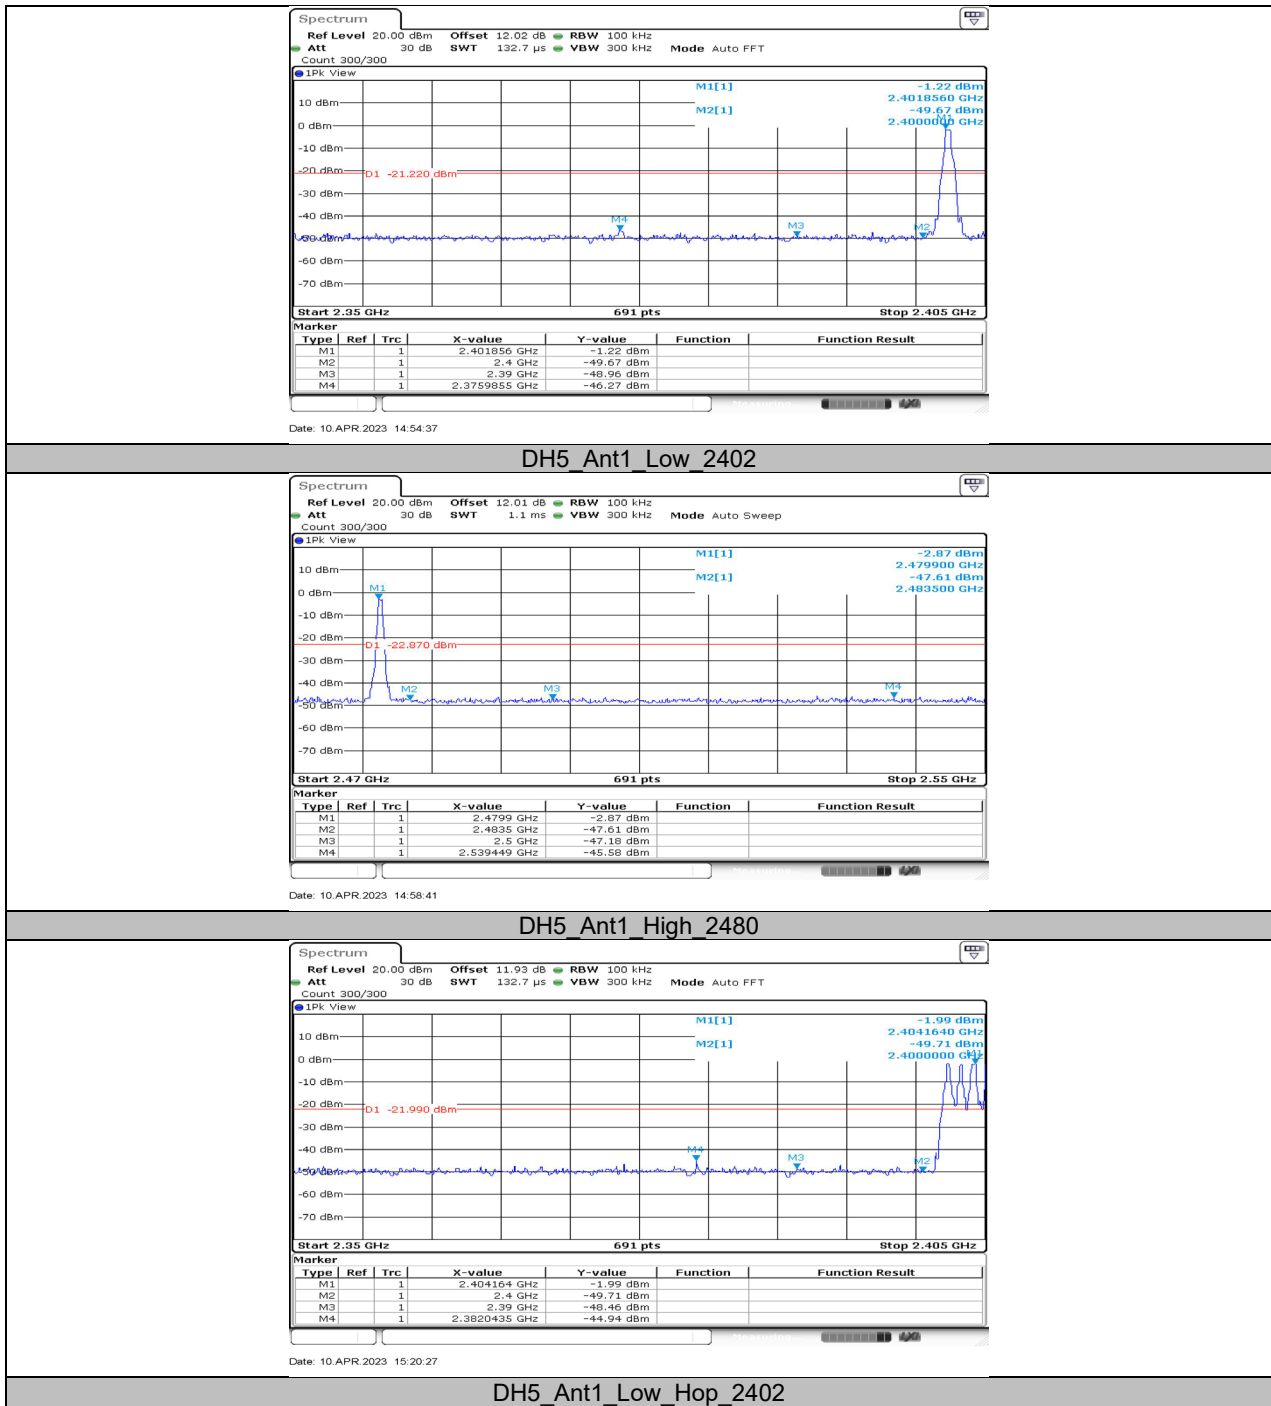


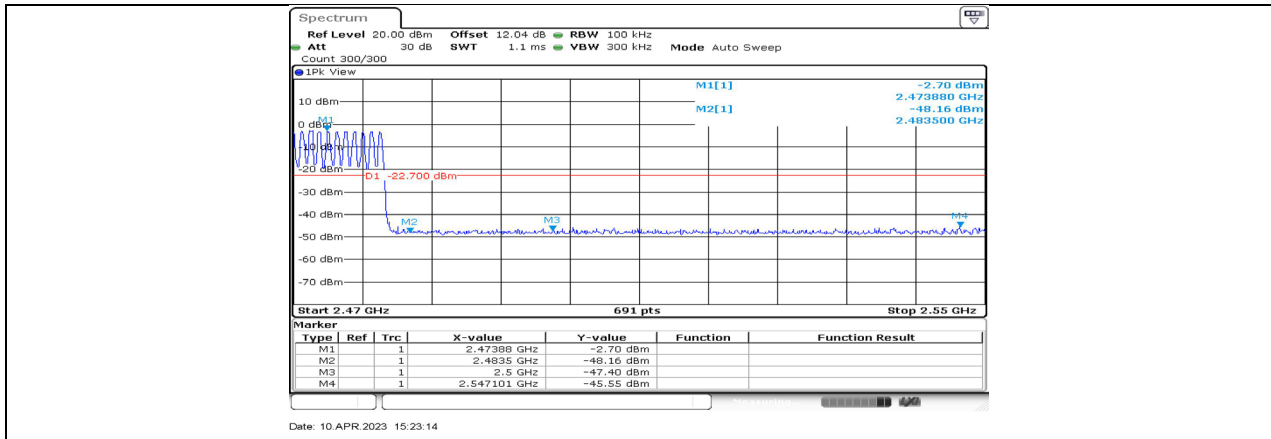


DH5 Ant1 High Hop 2480

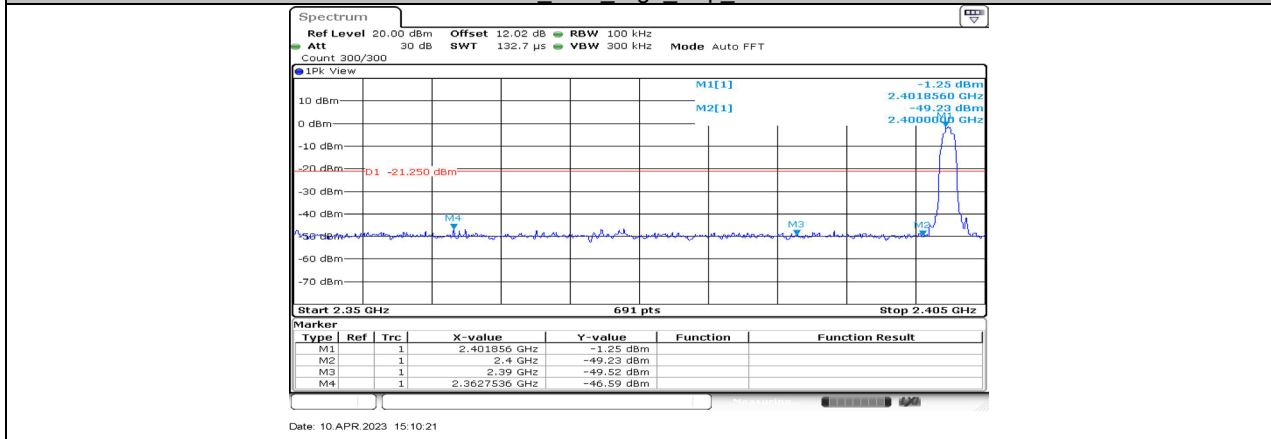


3DH5 Ant1 Low 2402

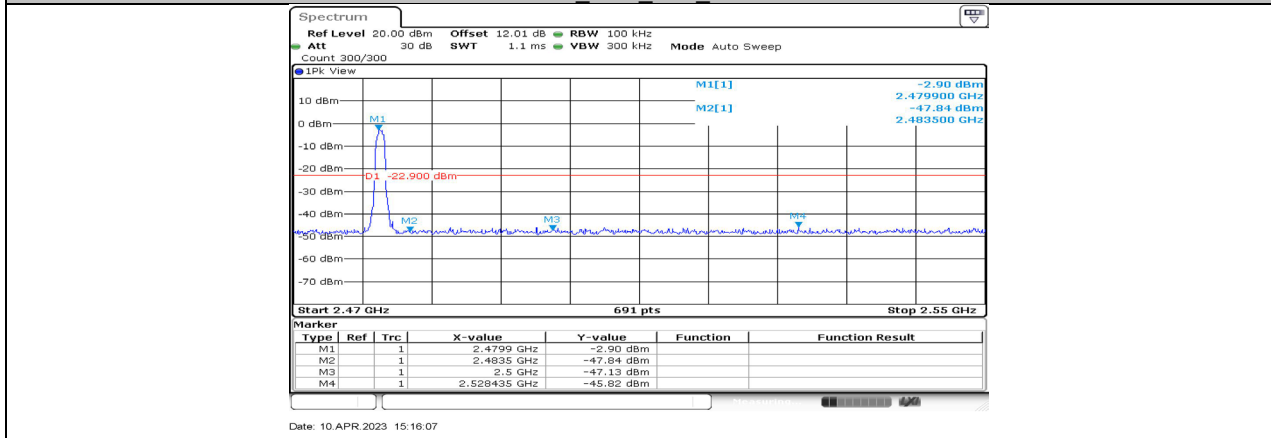

3DH5 Ant1 High 2480

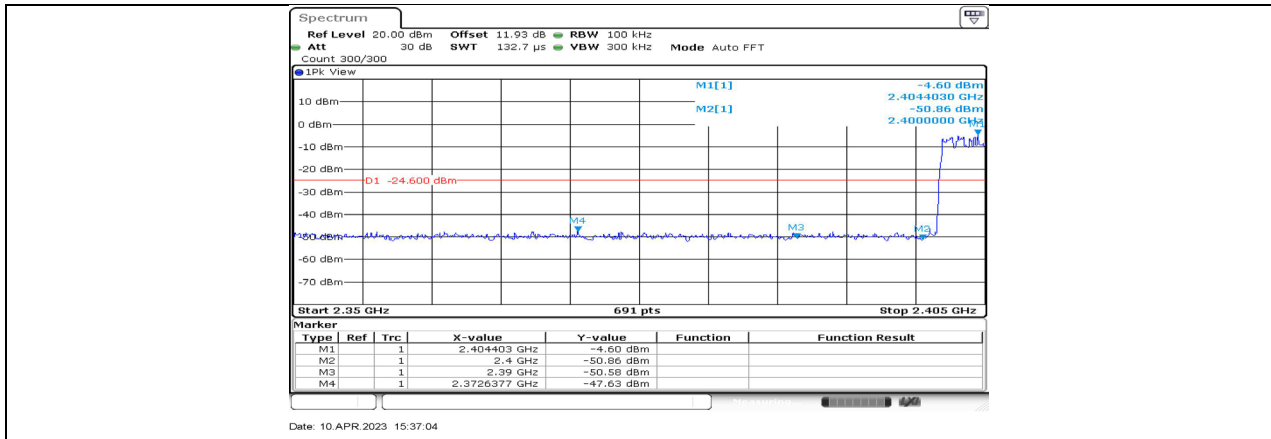

3DH5 Ant1 Low Hop 2402

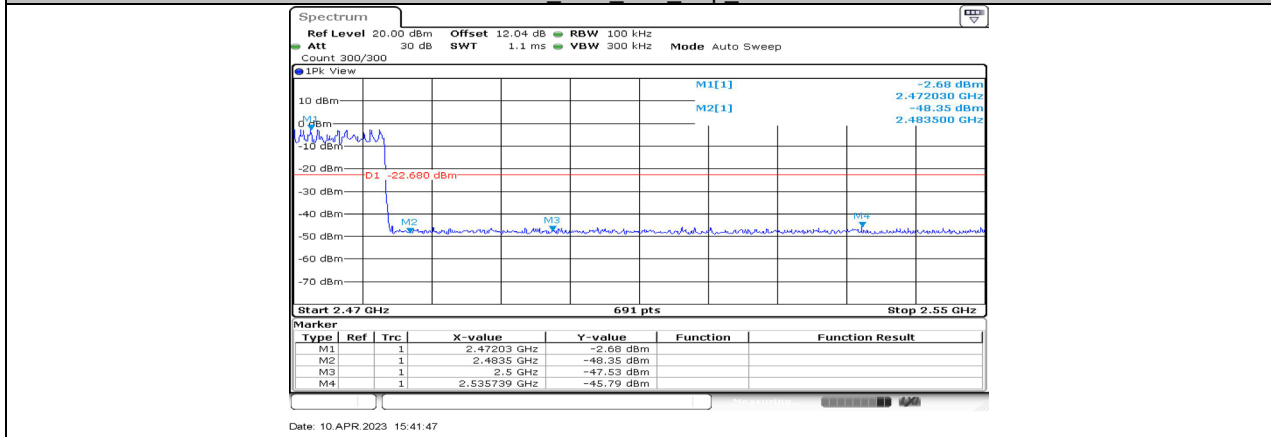

3DH5 Ant1 High Hop 2480





## 11.8. APPENDIX H: CONDUCTED SPURIOUS EMISSION

### 11.8.1. Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-1.24	---	PASS
			30~1000	-55.22	≤-21.24	PASS
			1000~26500	-40.3	≤-21.24	PASS
		2441	Reference	-2.01	---	PASS
			30~1000	-55.39	≤-22.01	PASS
			1000~26500	-40.43	≤-22.01	PASS
		2480	Reference	-2.75	---	PASS
			30~1000	-54.91	≤-22.75	PASS
			1000~26500	-40.25	≤-22.75	PASS
3DH5	Ant1	2402	Reference	-1.27	---	PASS
			30~1000	-55.7	≤-21.27	PASS
			1000~26500	-40.91	≤-21.27	PASS
		2441	Reference	-2.04	---	PASS
			30~1000	-51.91	≤-22.04	PASS
			1000~26500	-40.82	≤-22.04	PASS
		2480	Reference	-2.78	---	PASS
			30~1000	-50.44	≤-22.78	PASS
			1000~26500	-39.41	≤-22.78	PASS

### 11.8.2. Test Graphs

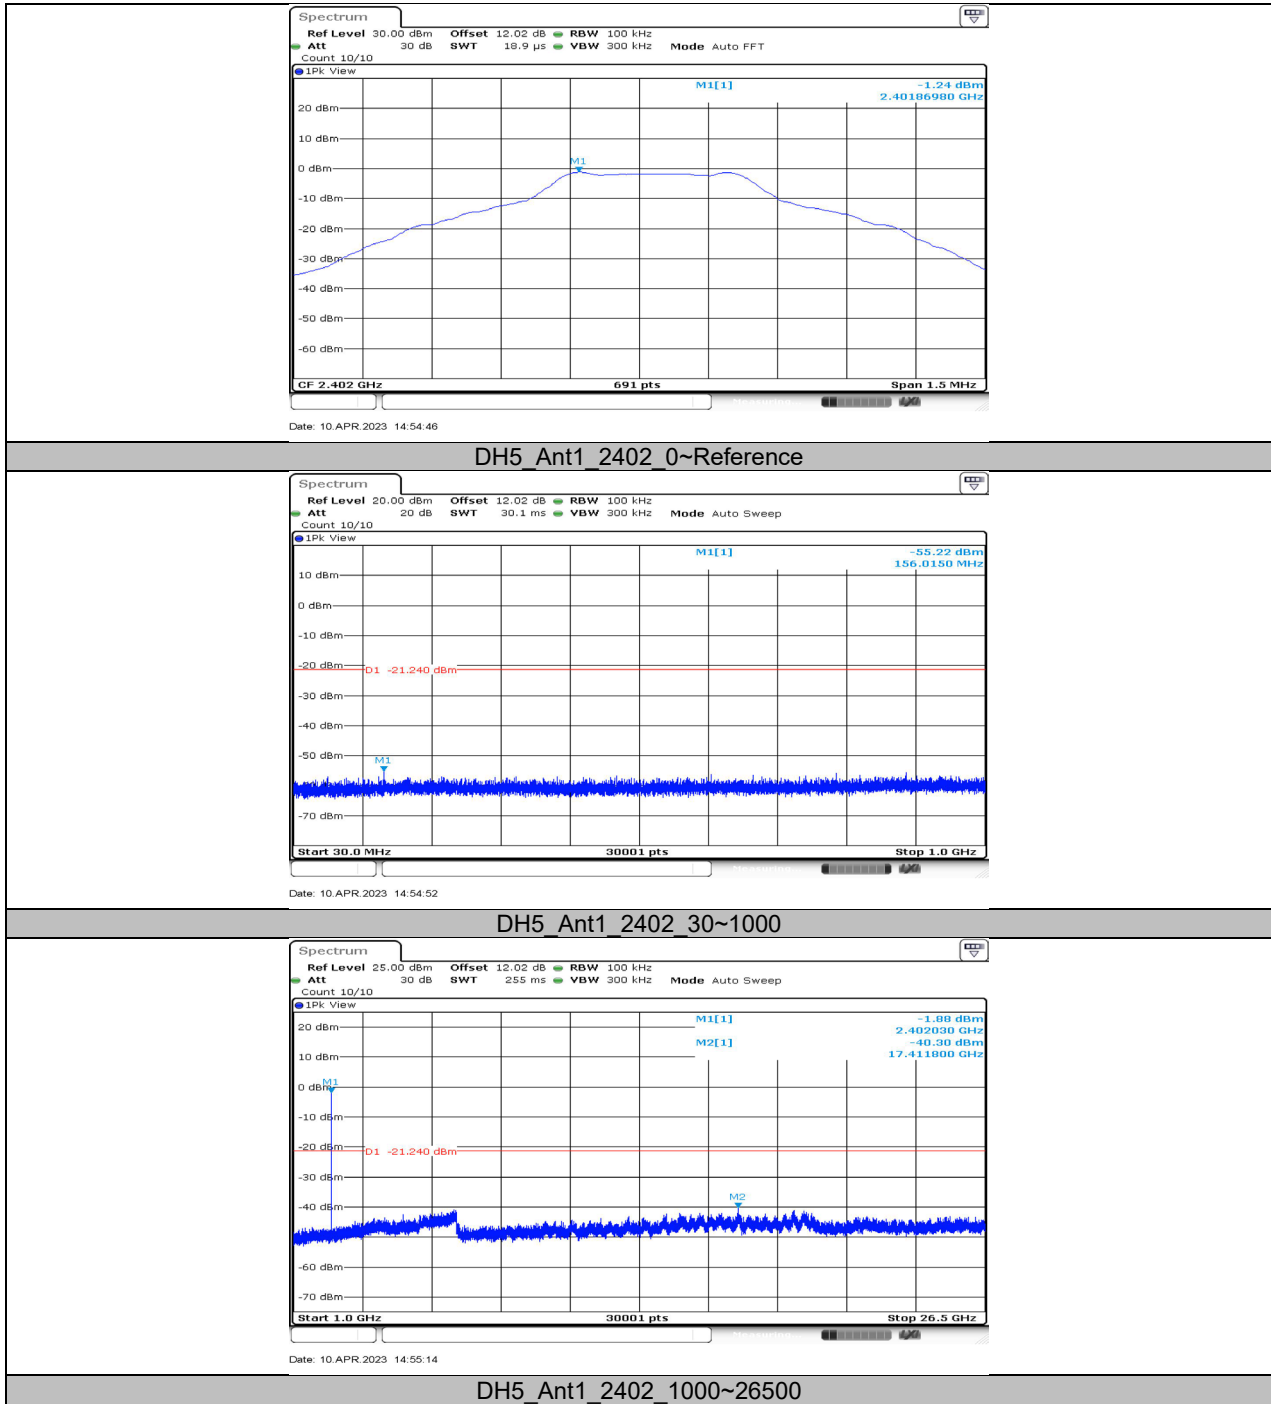


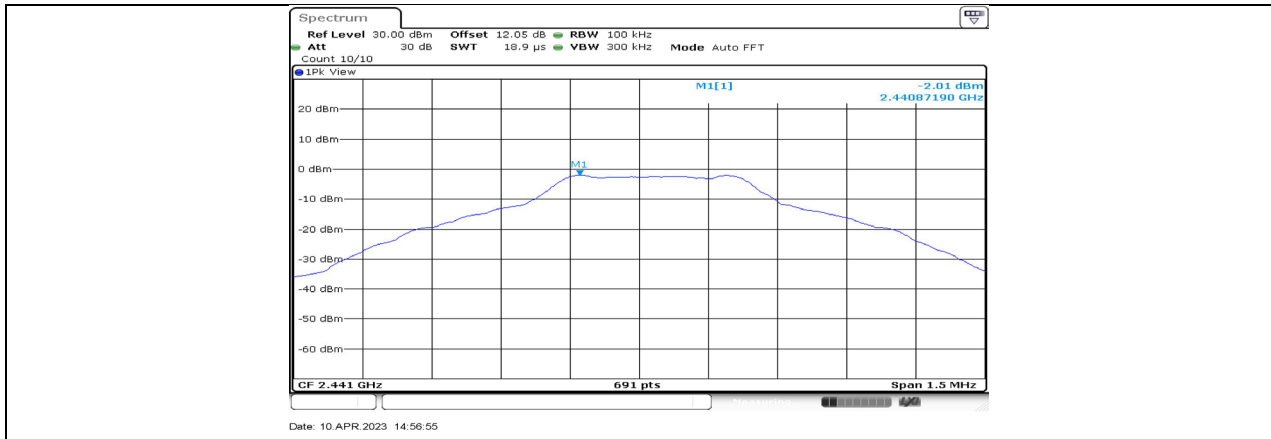


DH5 Ant1 2441 0~Reference

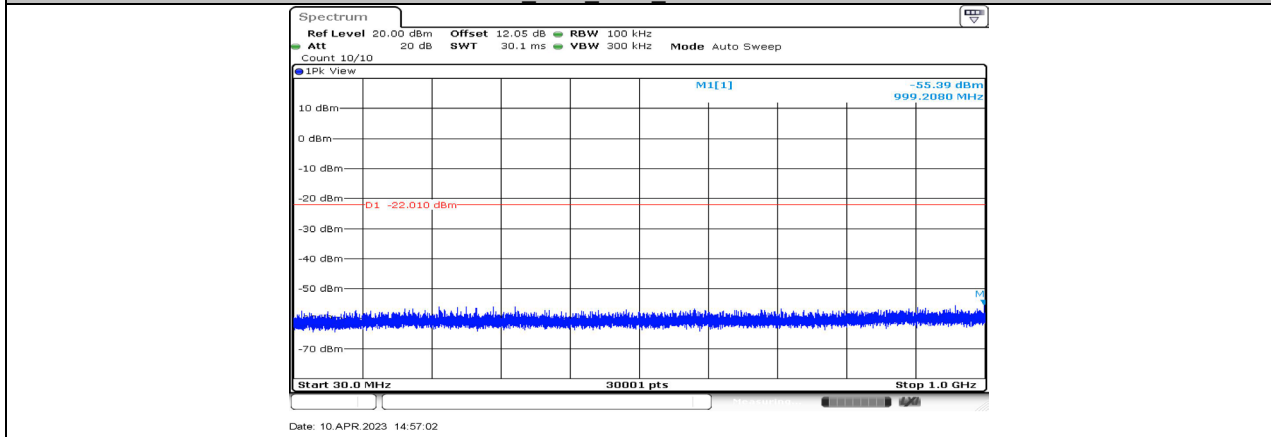


DH5 Ant1 2441 30~1000

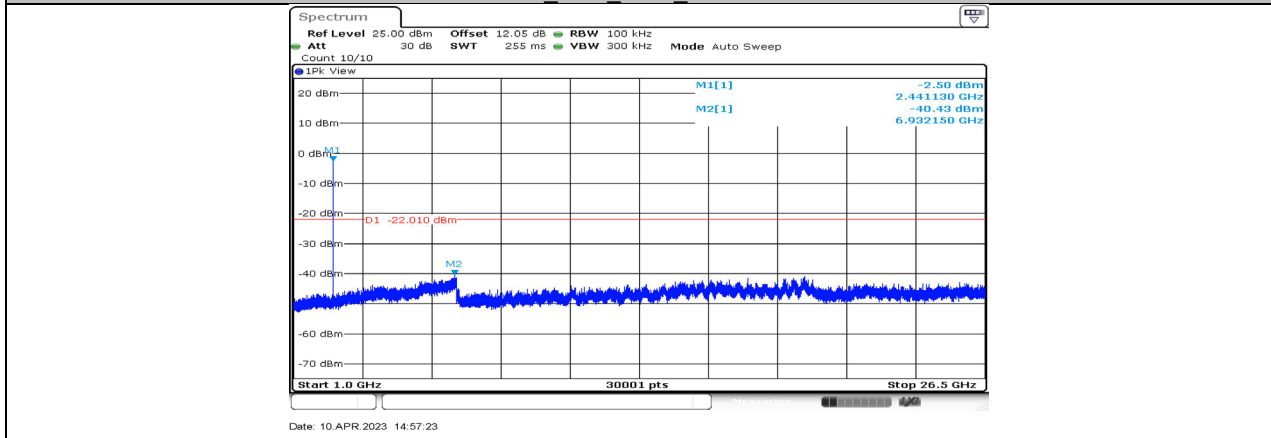


DH5 Ant1 2441 1000~26500

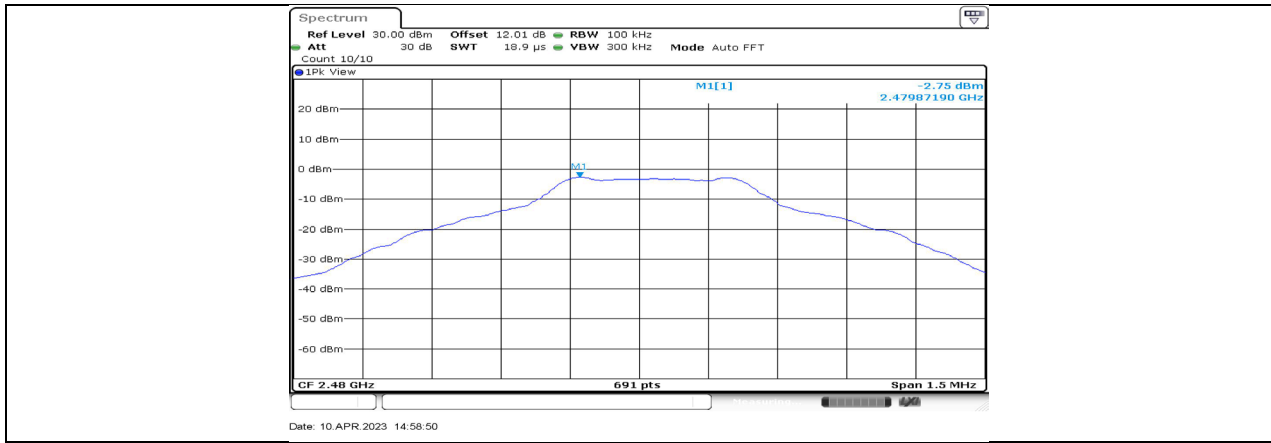

DH5 Ant1 2480 0~Reference

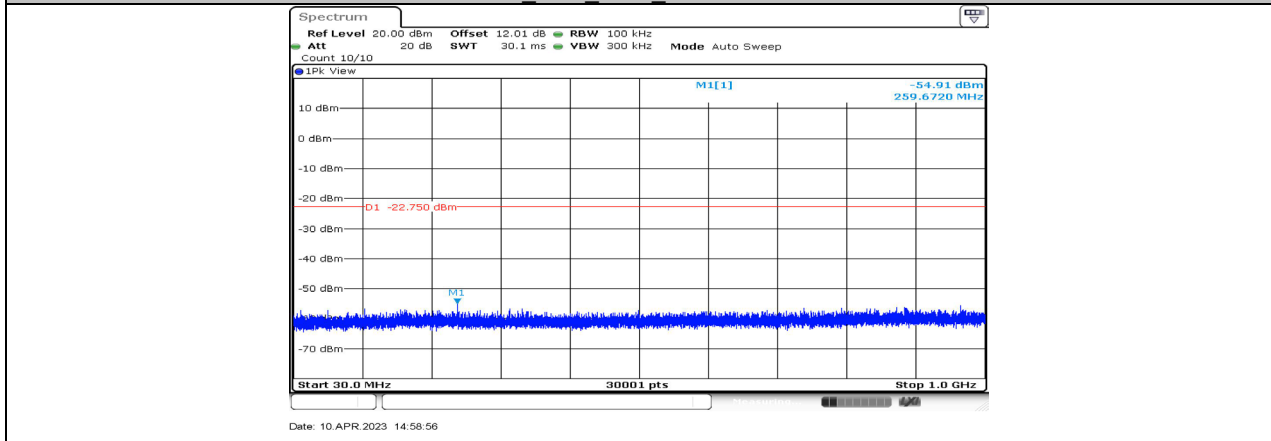

DH5 Ant1 2480 30~1000

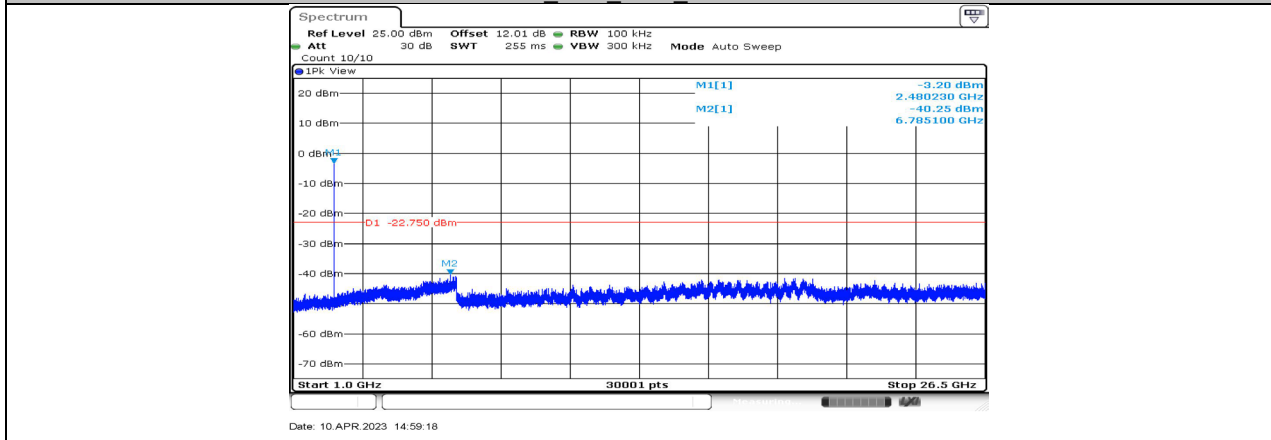

DH5 Ant1 2480 1000~26500