



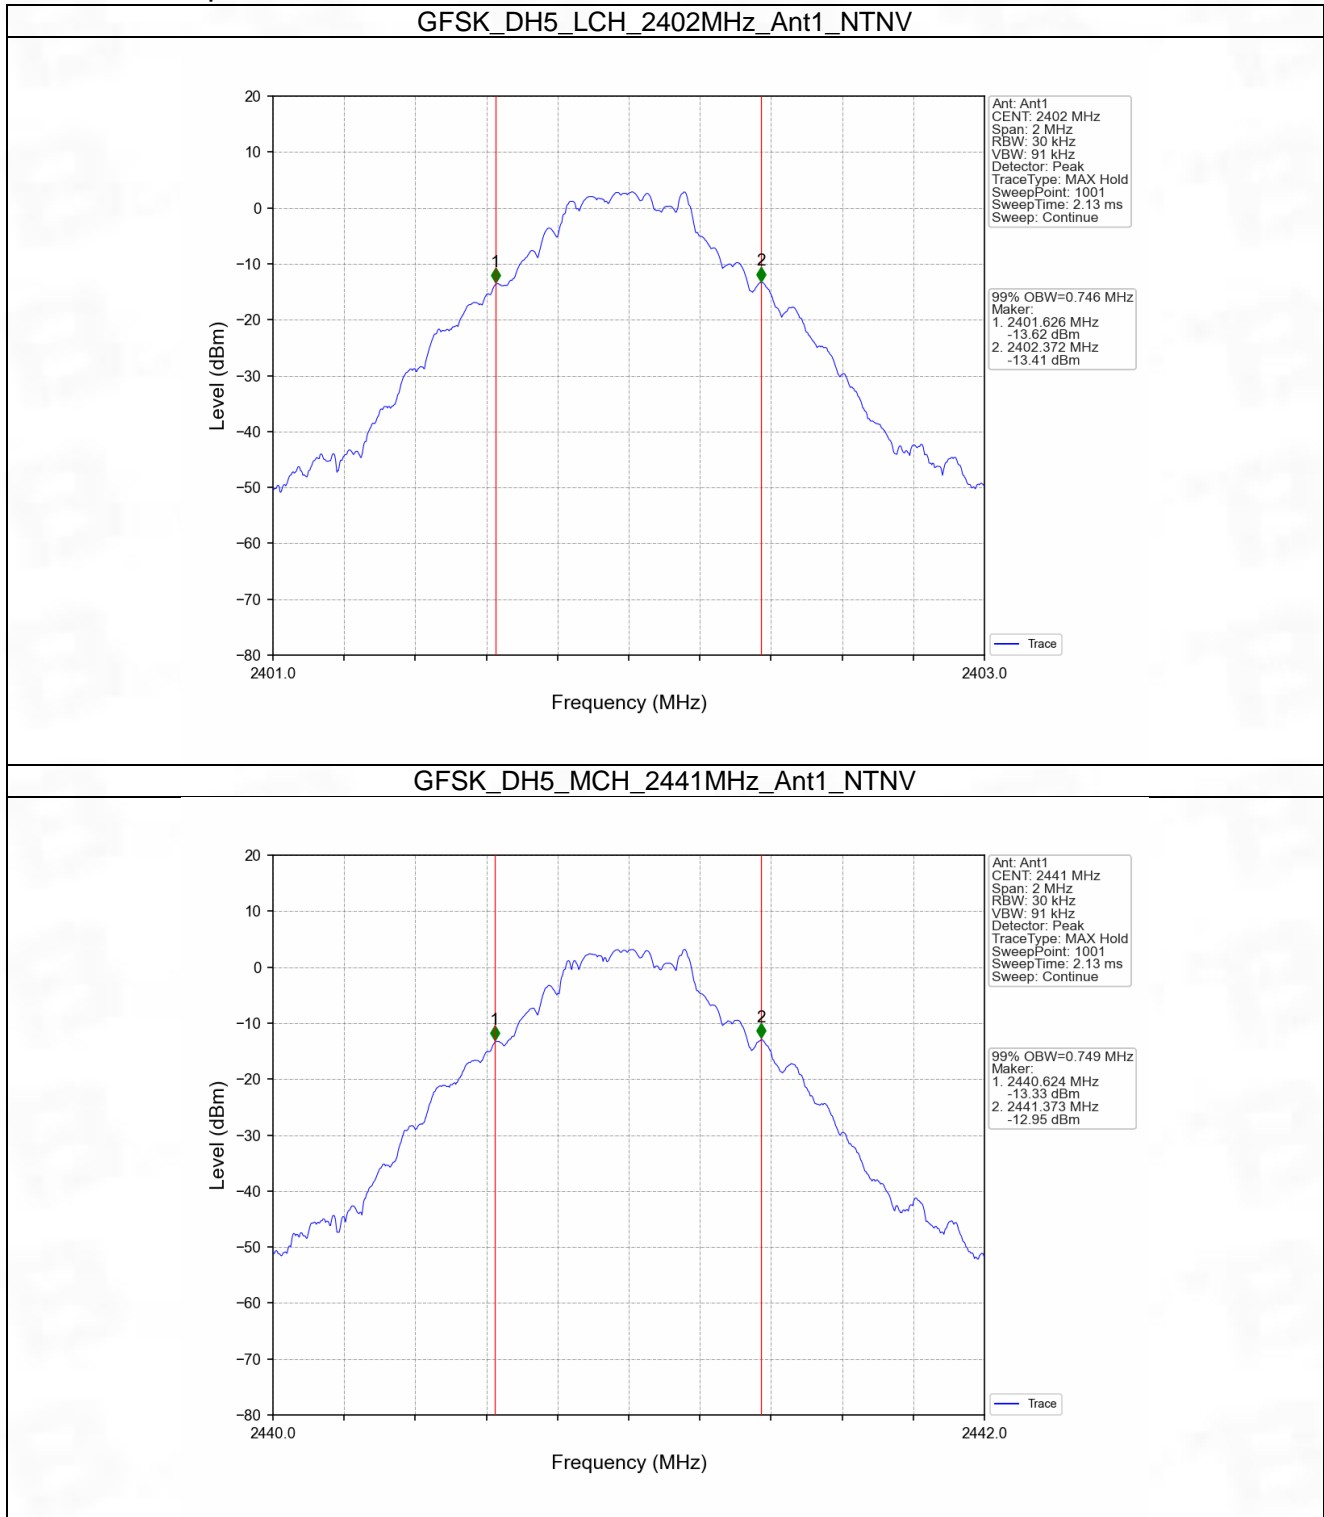
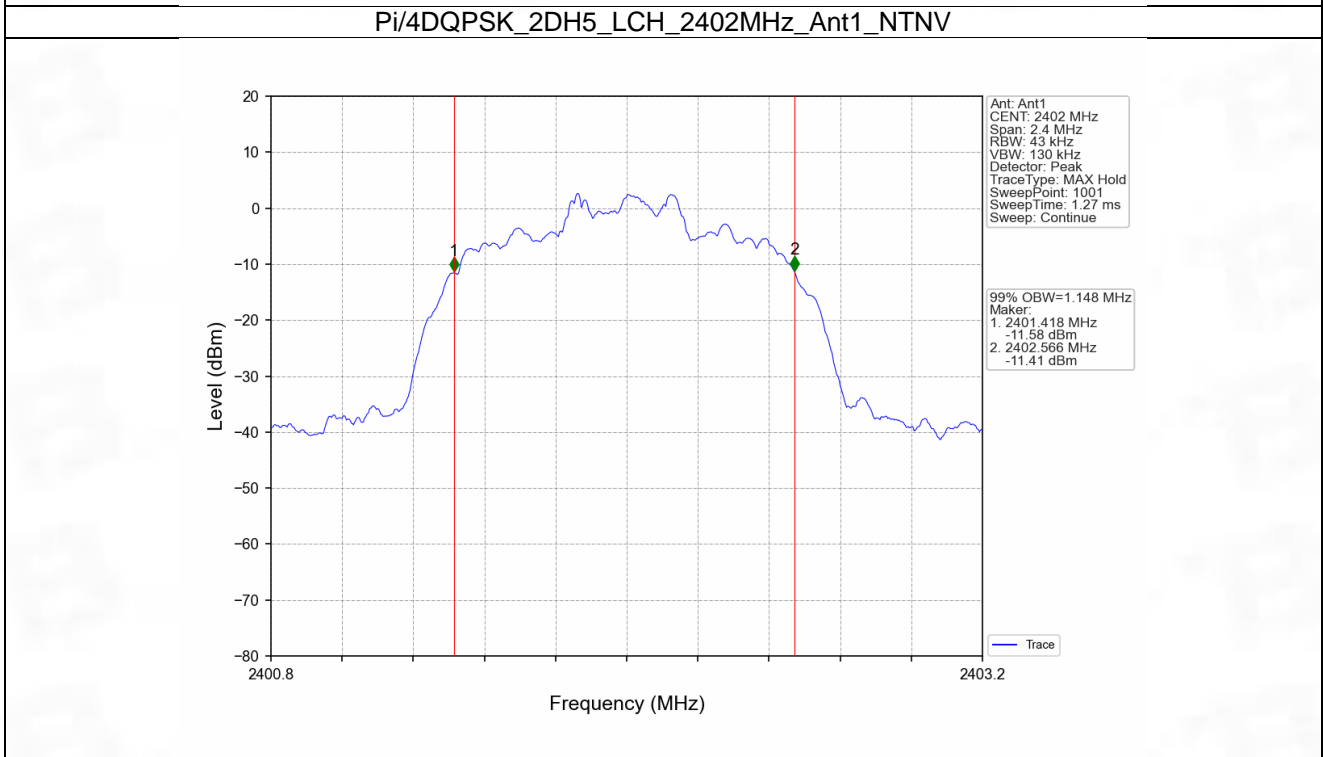
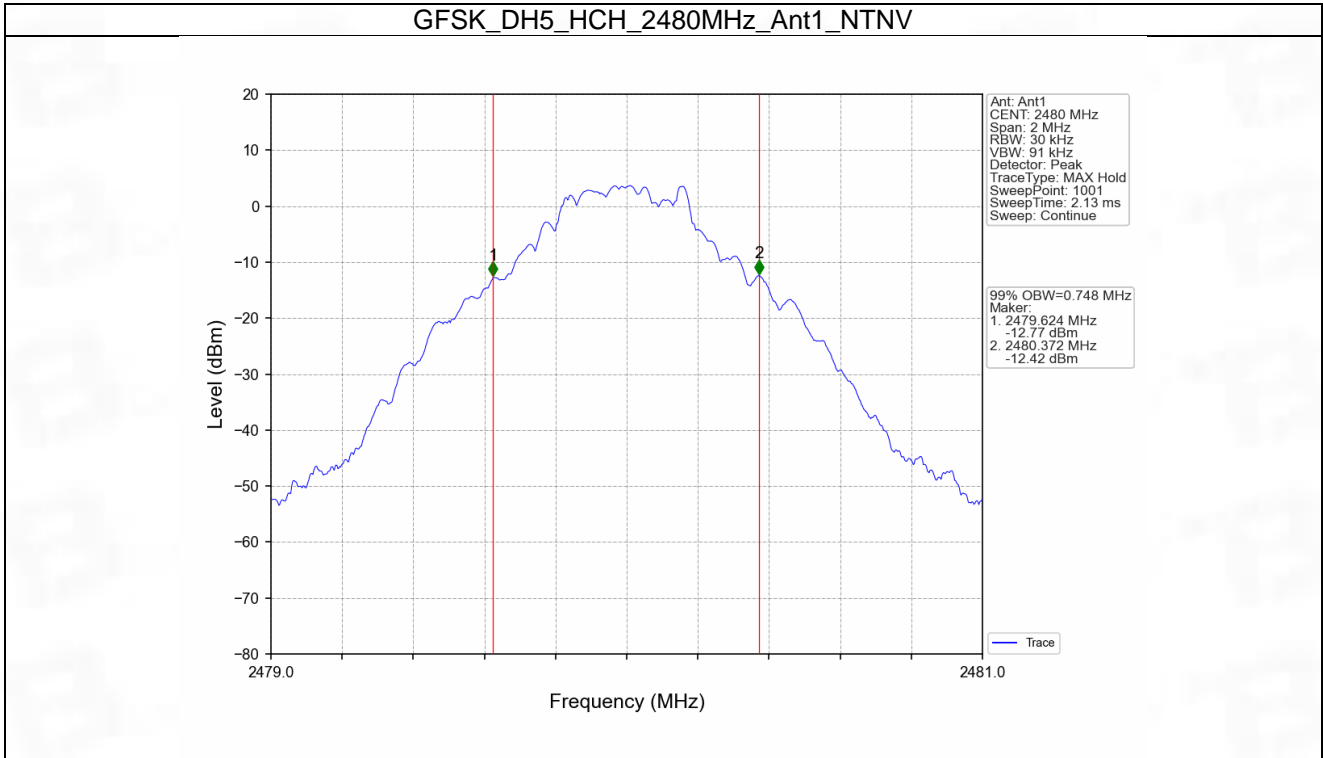



1.1.2 Test Graph

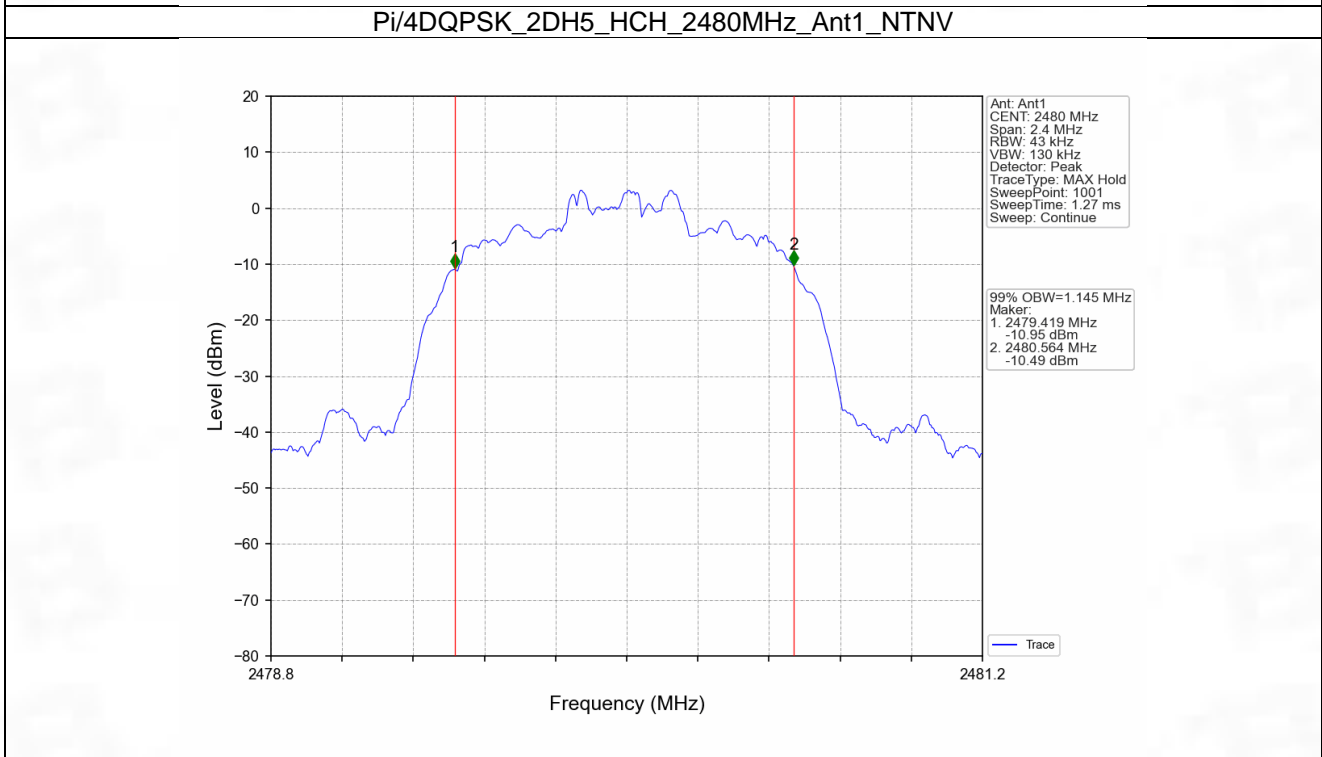

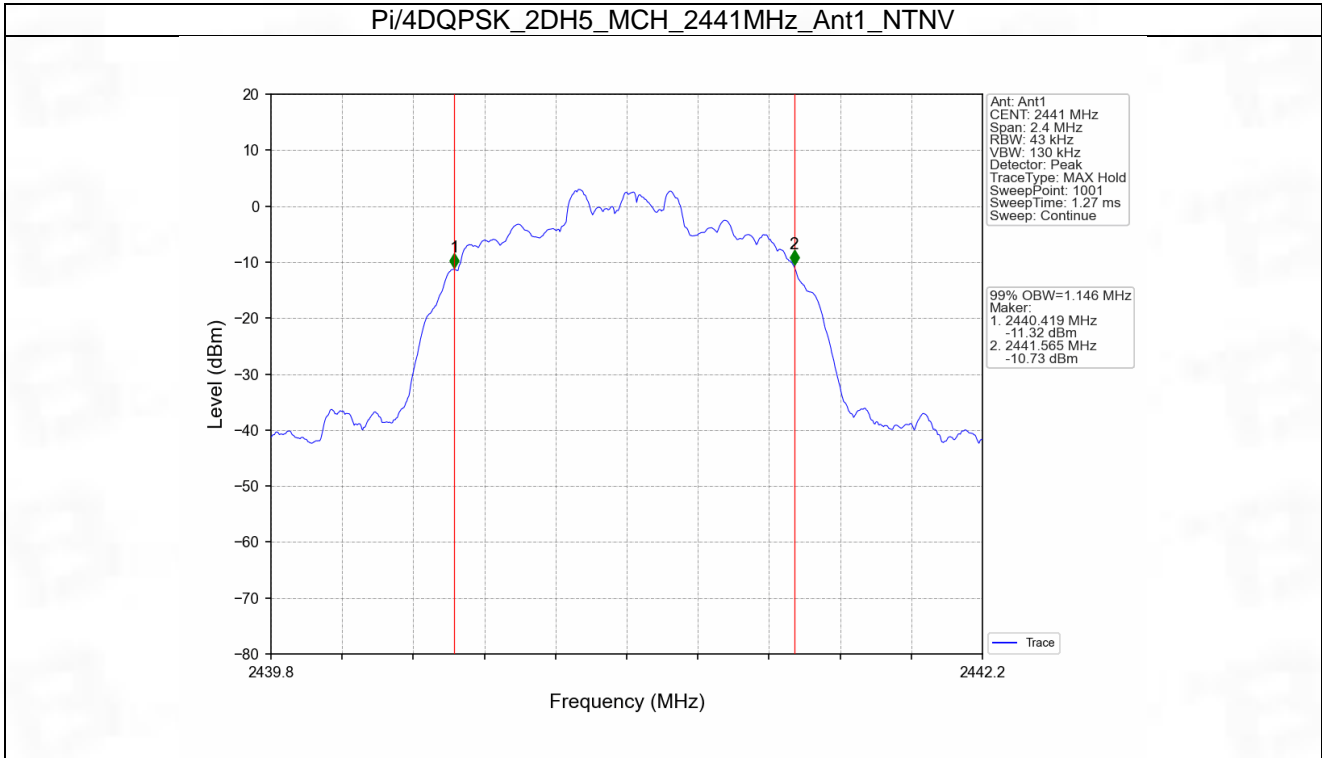

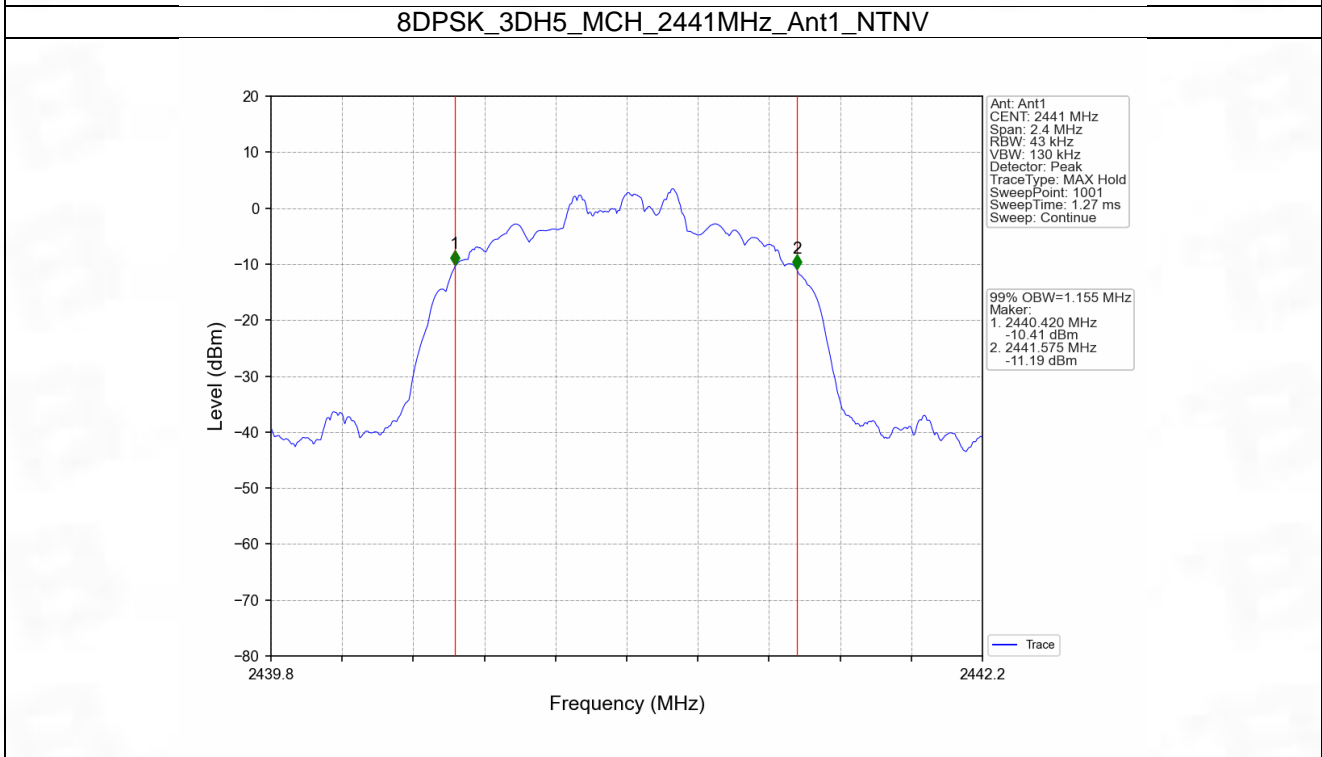

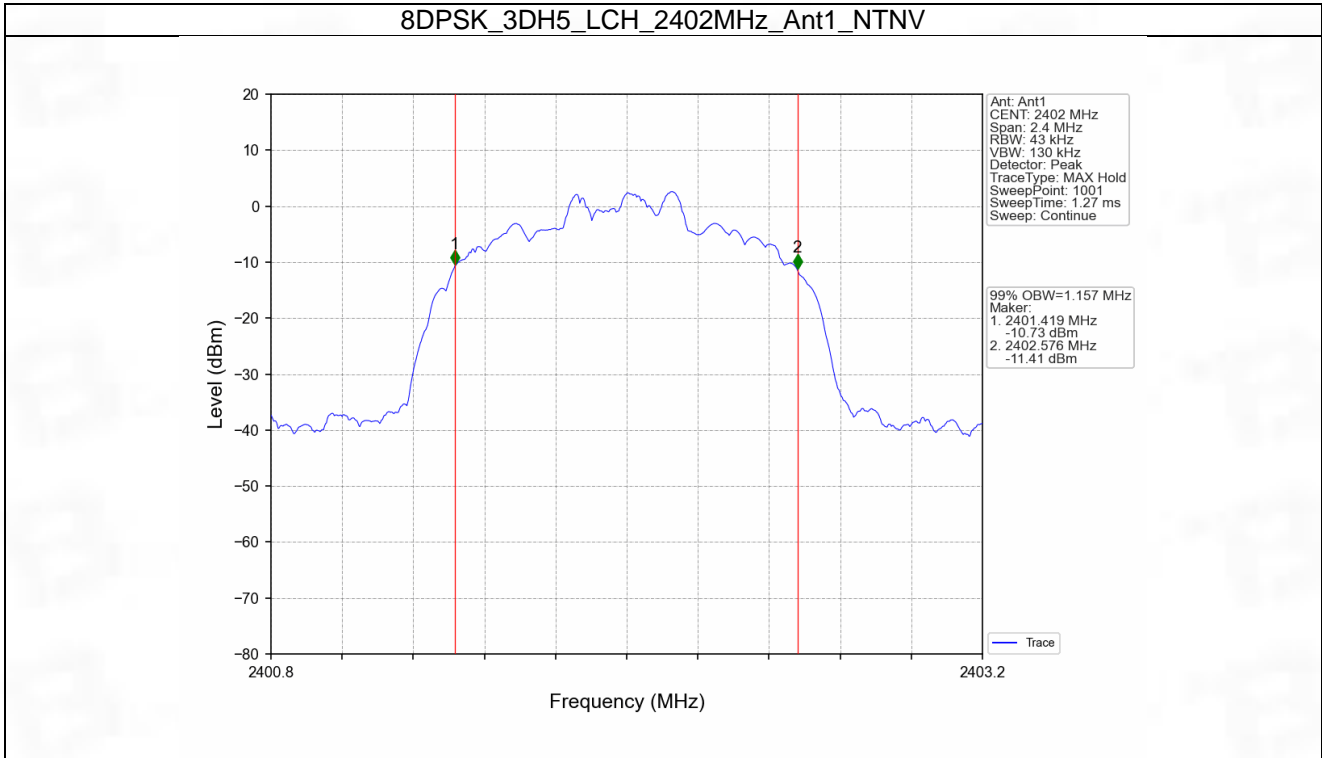

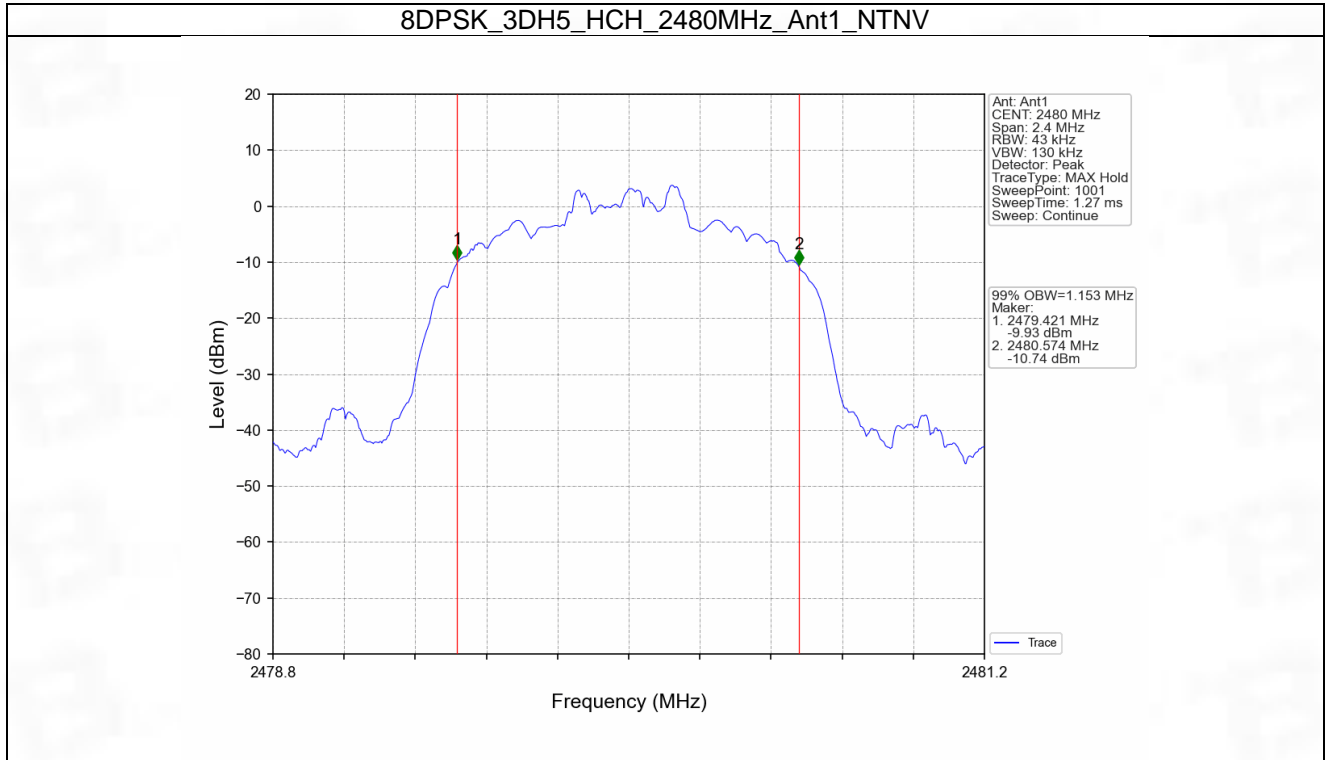




1.2 20dB BW



1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.850	Pass
		2441	DH5	1	0.849	Pass
		2480	DH5	1	0.848	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.285	Pass
		2441	2DH5	1	1.283	Pass
		2480	2DH5	1	1.281	Pass
8DPSK	SISO	2402	3DH5	1	1.303	Pass
		2441	3DH5	1	1.300	Pass
		2480	3DH5	1	1.293	Pass


1.2.2 Test Graph

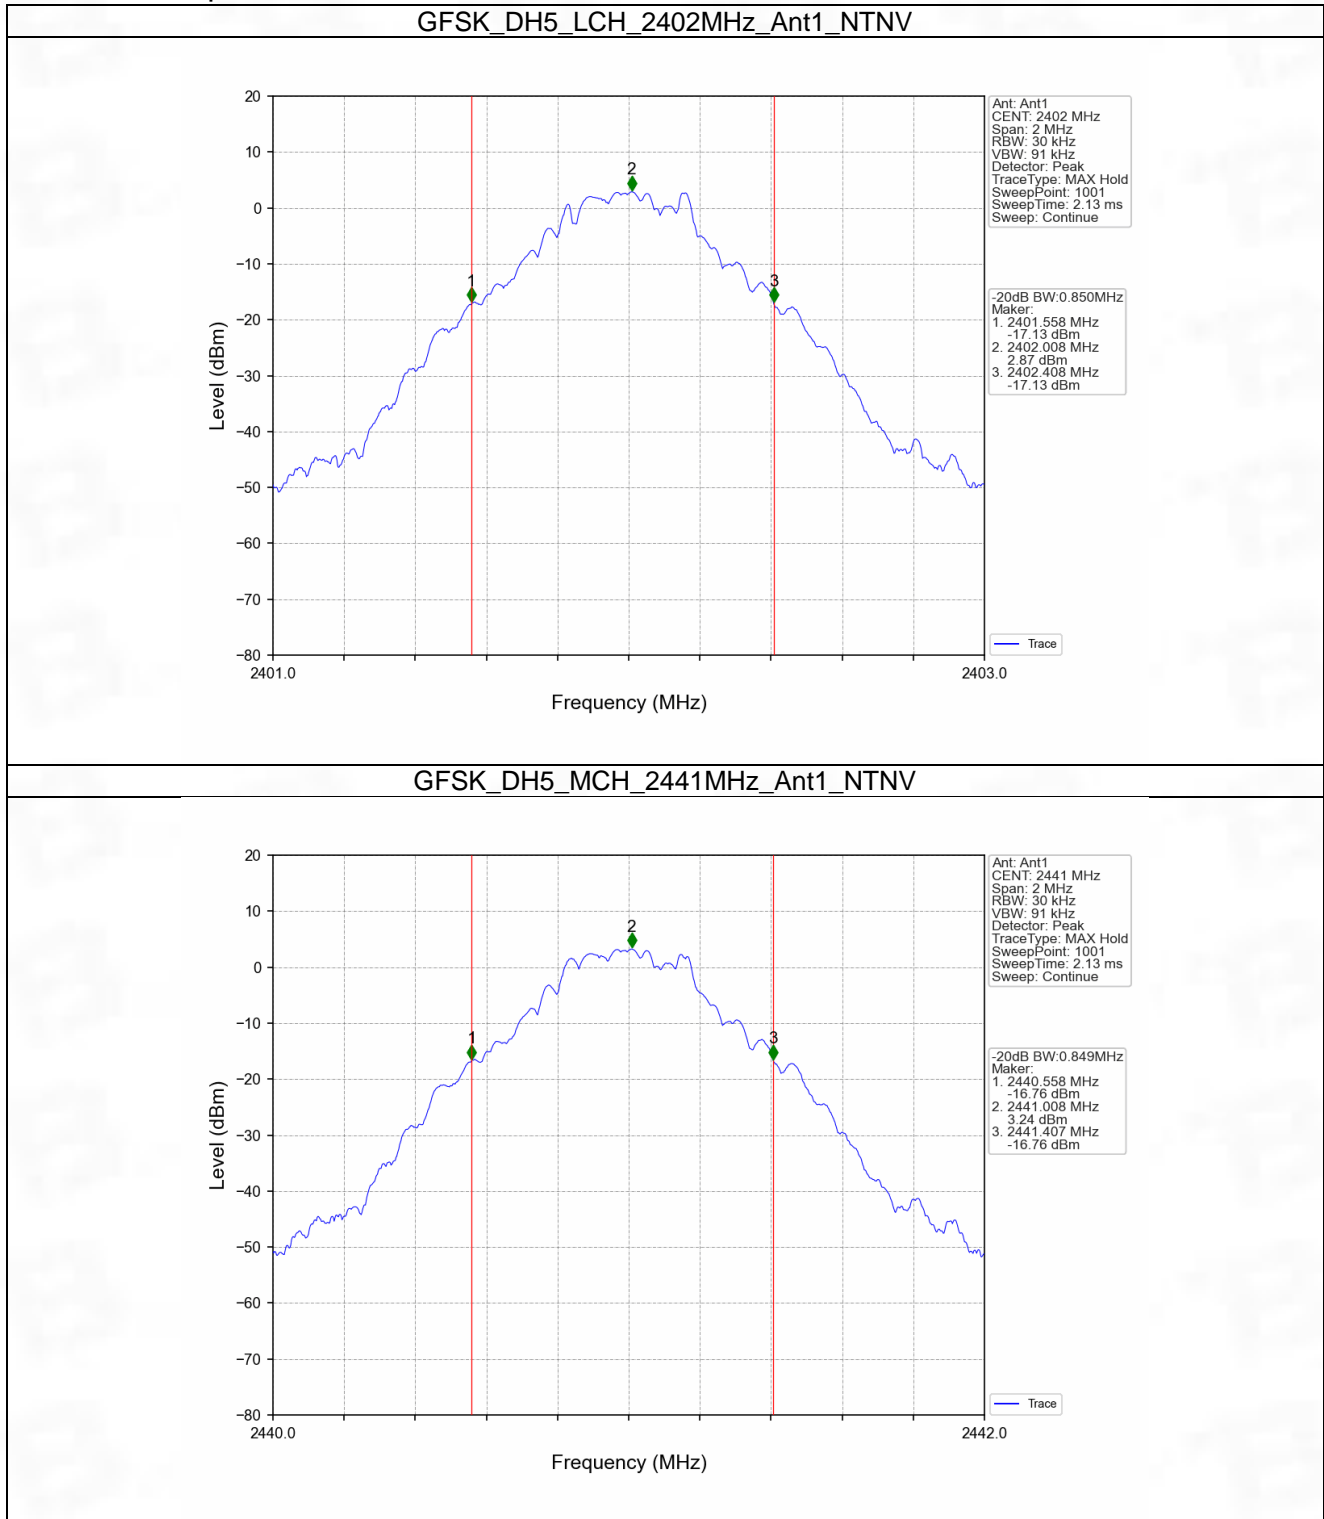

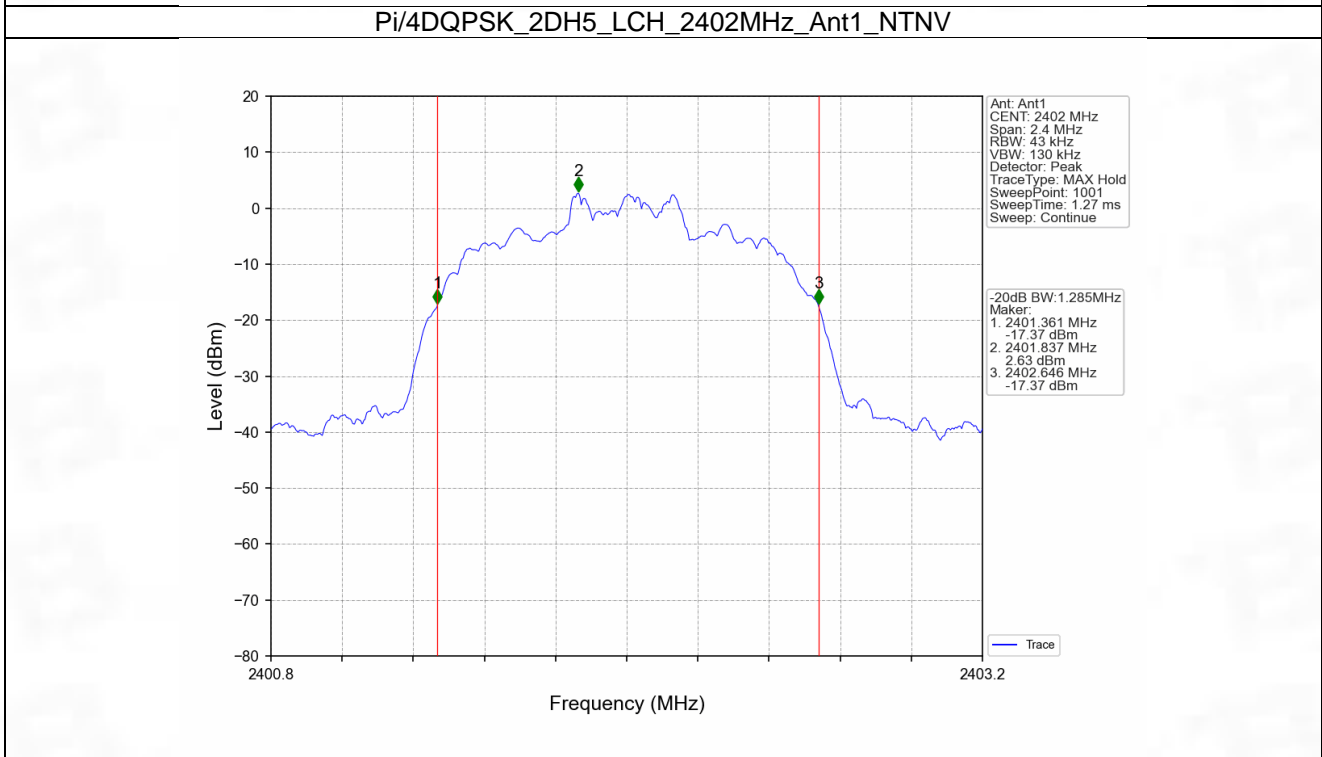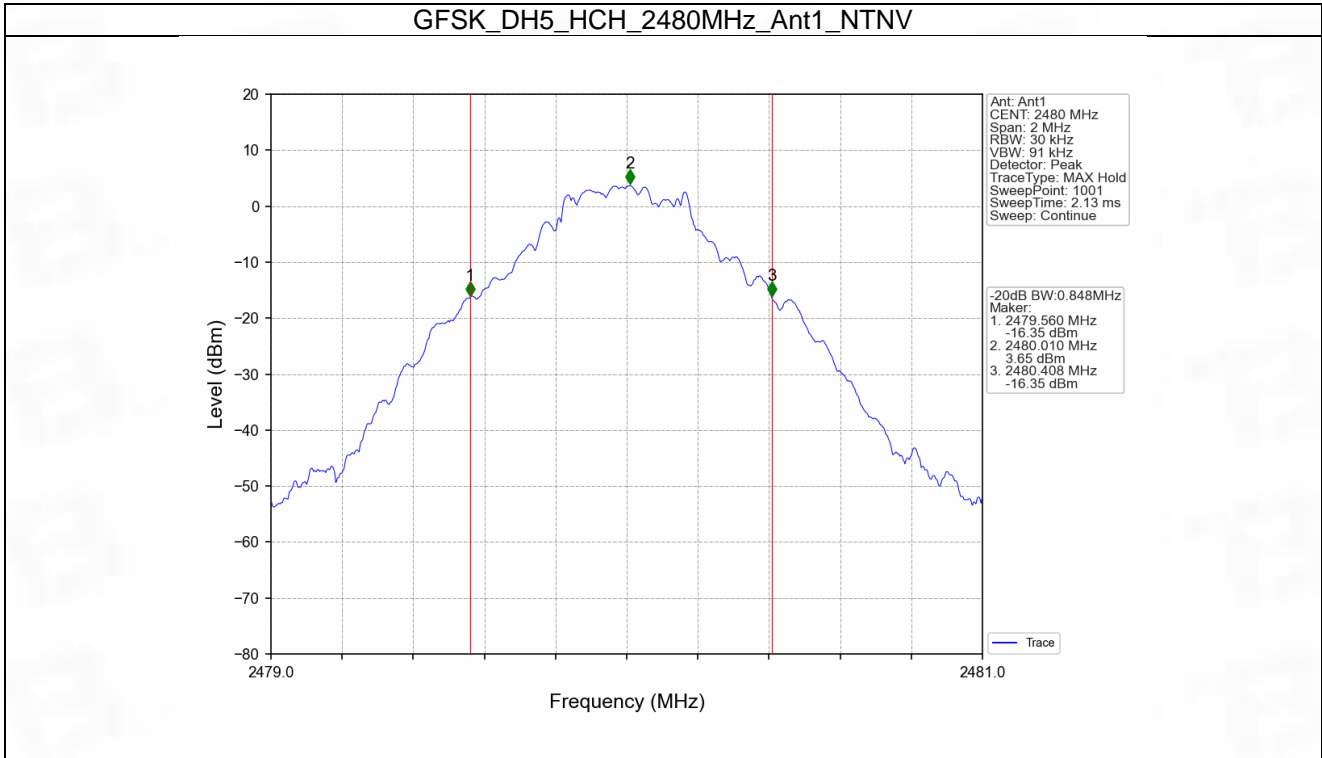


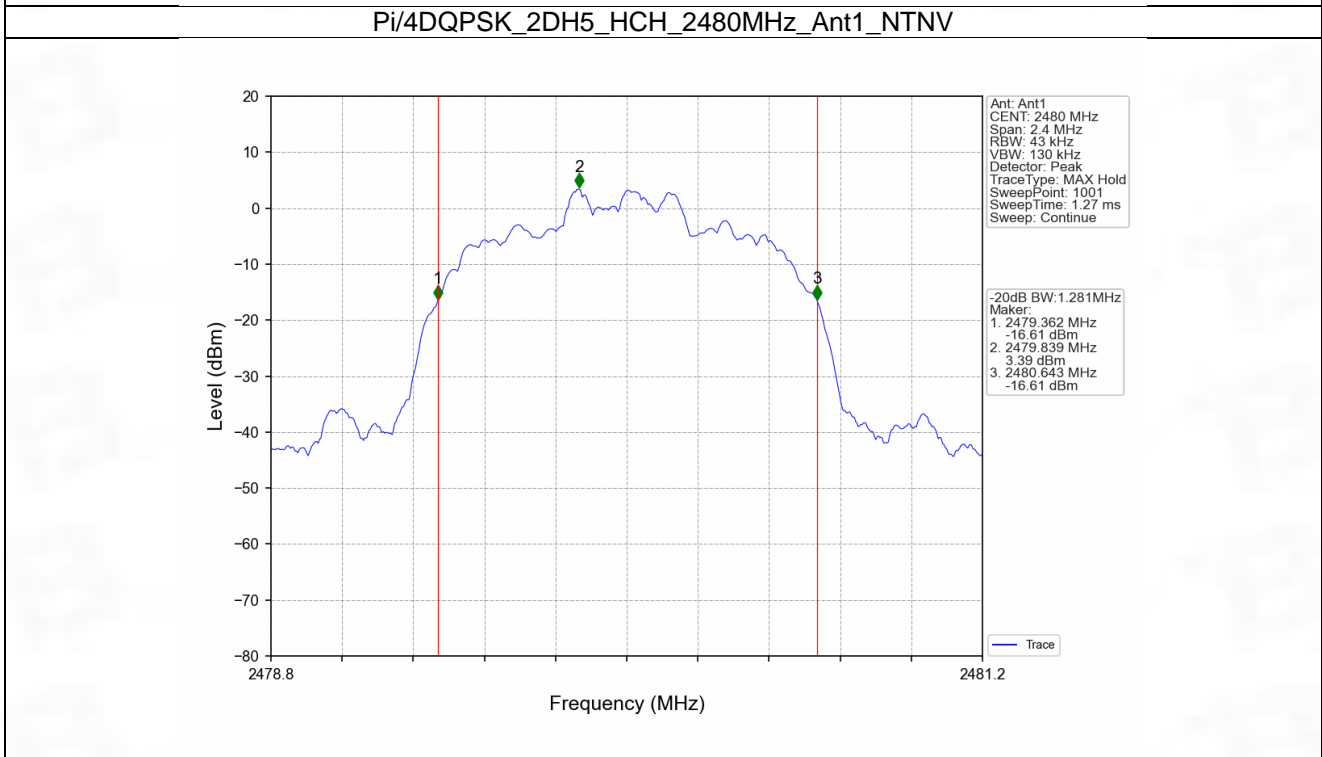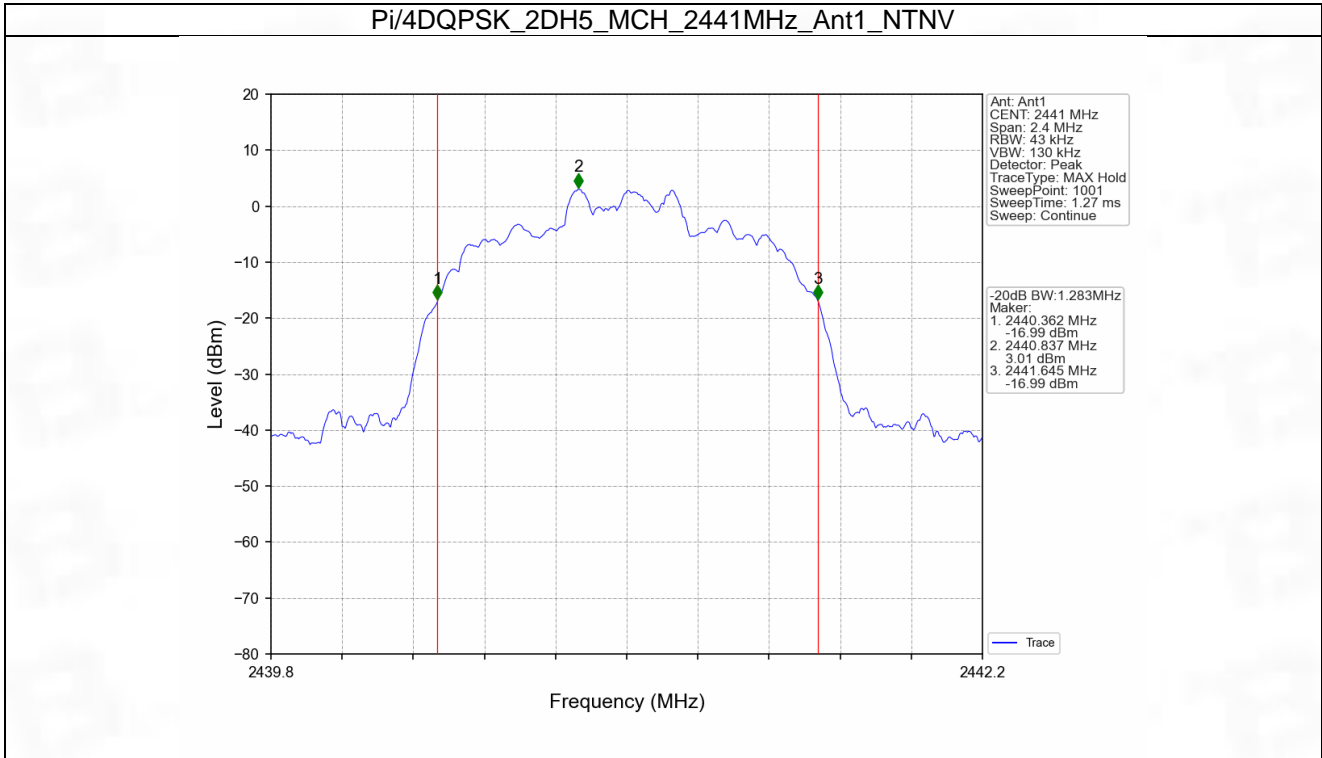


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

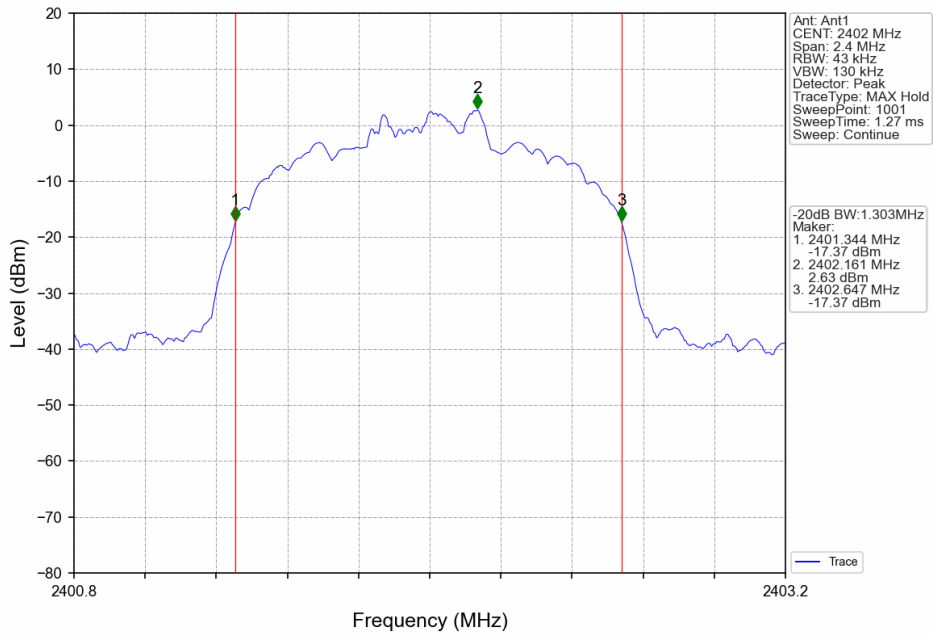

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

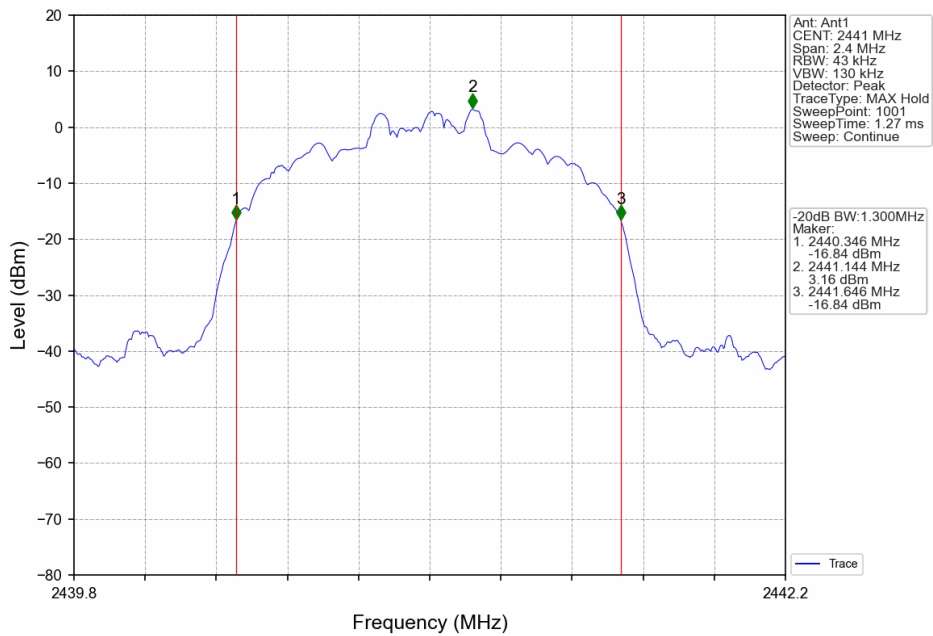

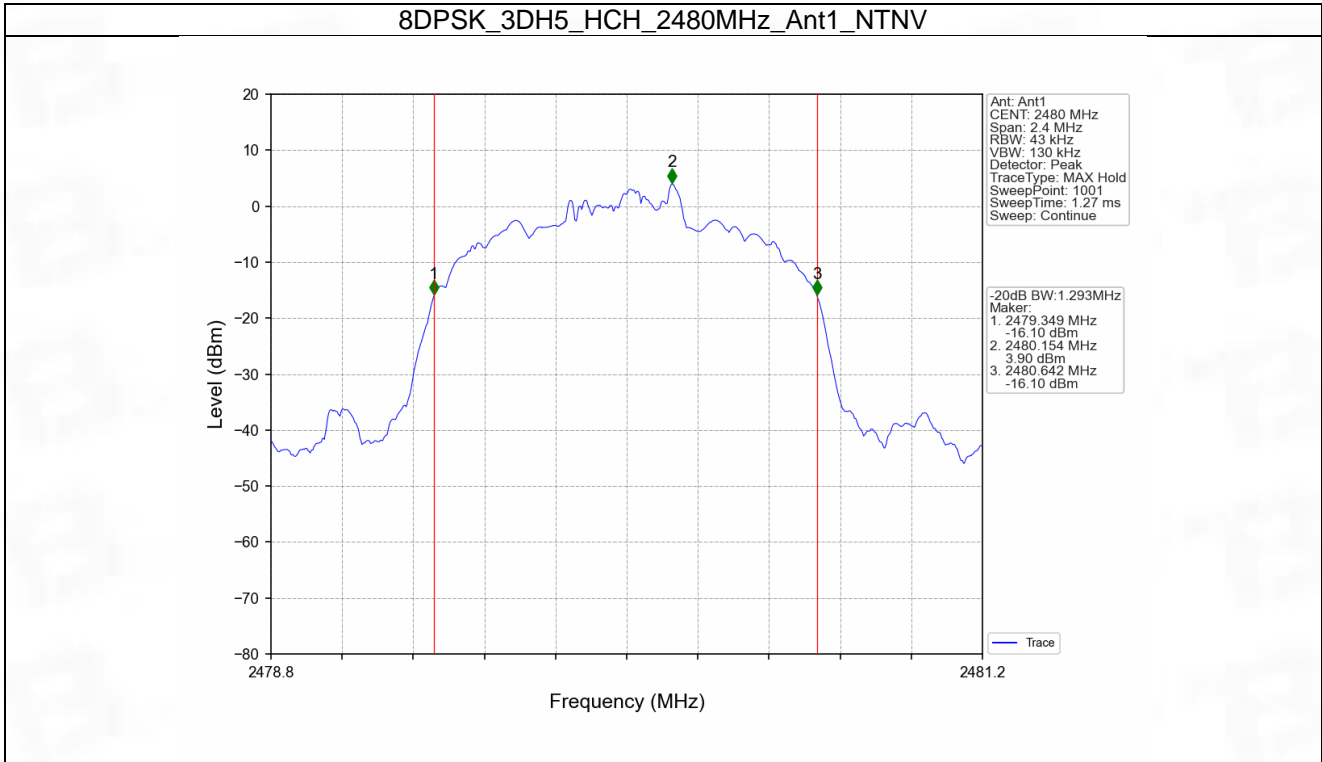

2. Maximum Conducted Output Power


2.1 Power



2.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	5.22	<=30	Pass
		2441	DH5	5.62	<=30	Pass
		2480	DH5	6.13	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	4.71	<=20.97	Pass
		2441	2DH5	5.10	<=20.97	Pass
		2480	2DH5	5.55	<=20.97	Pass
8DPSK	SISO	2402	3DH5	4.69	<=20.97	Pass
		2441	3DH5	5.06	<=20.97	Pass
		2480	3DH5	5.52	<=20.97	Pass



Note1: Antenna Gain: Ant1: 2.41dBi;


2.1.2 Test Graph

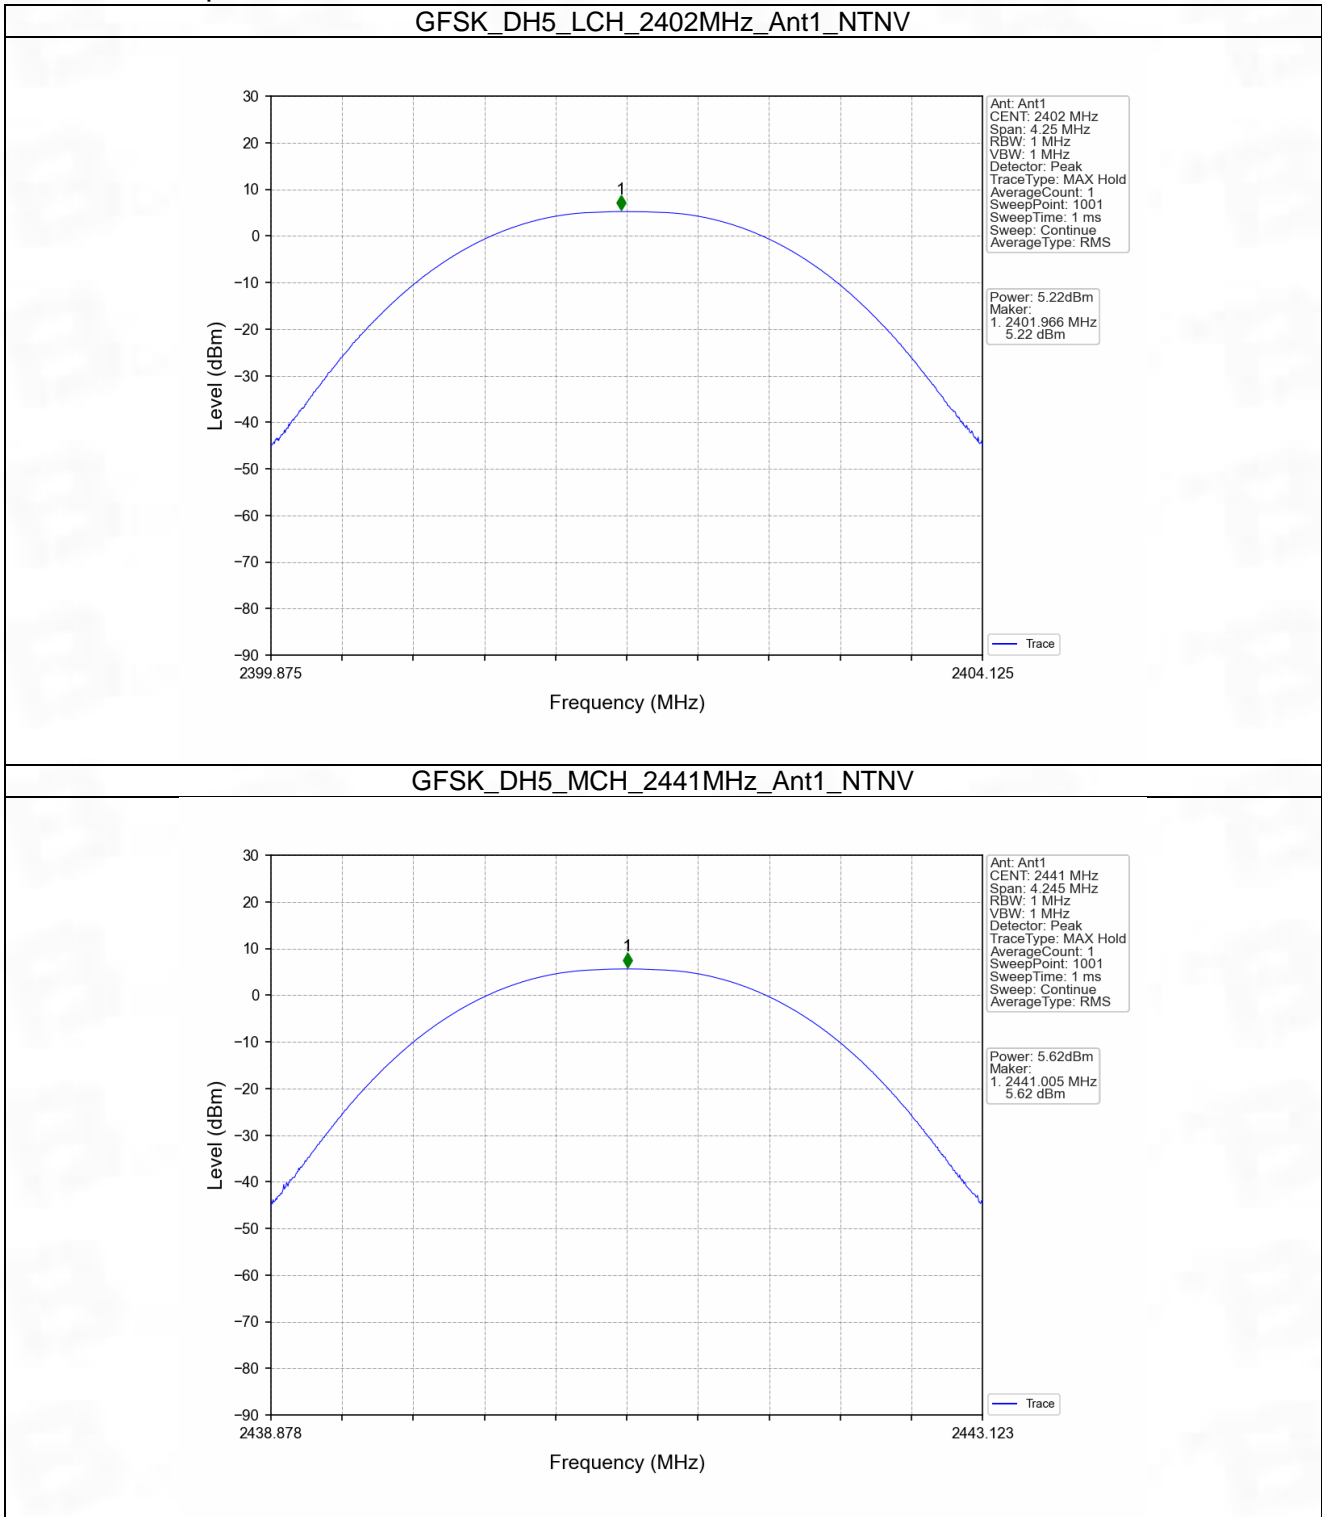

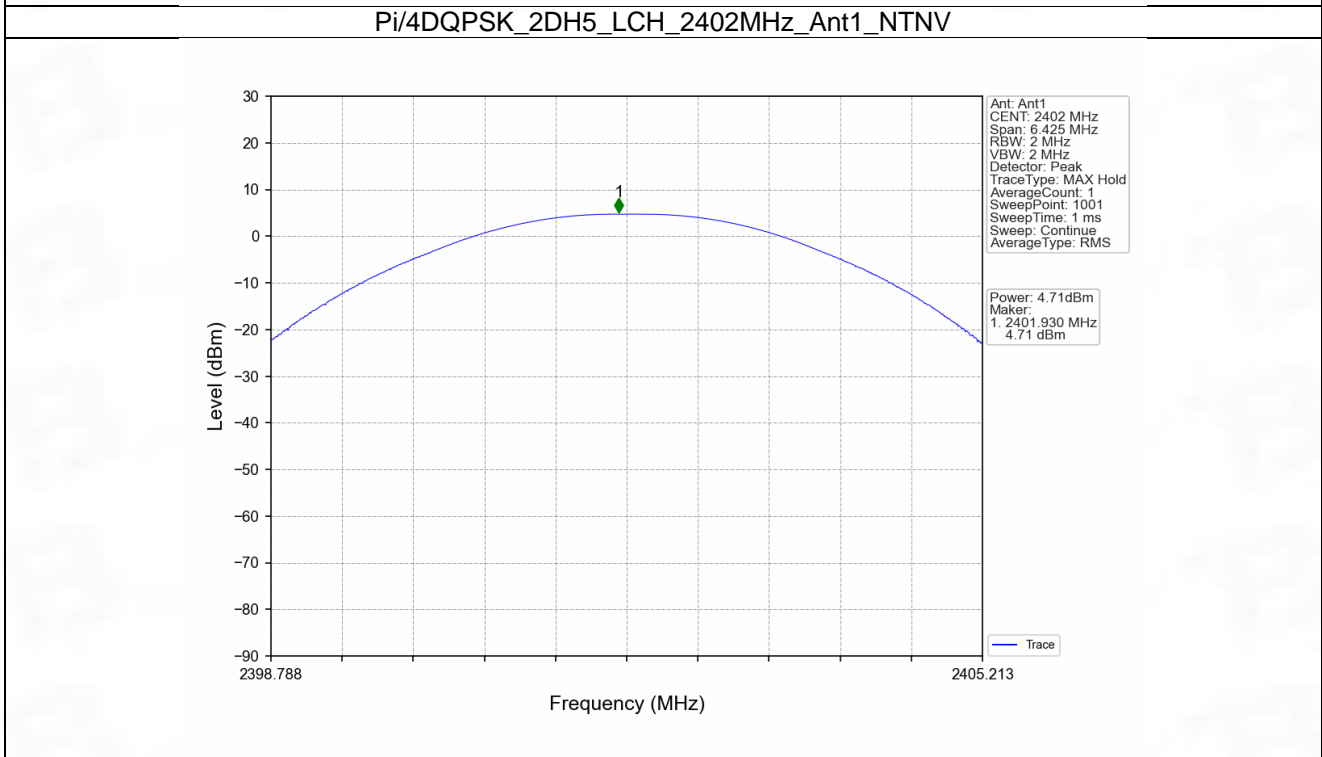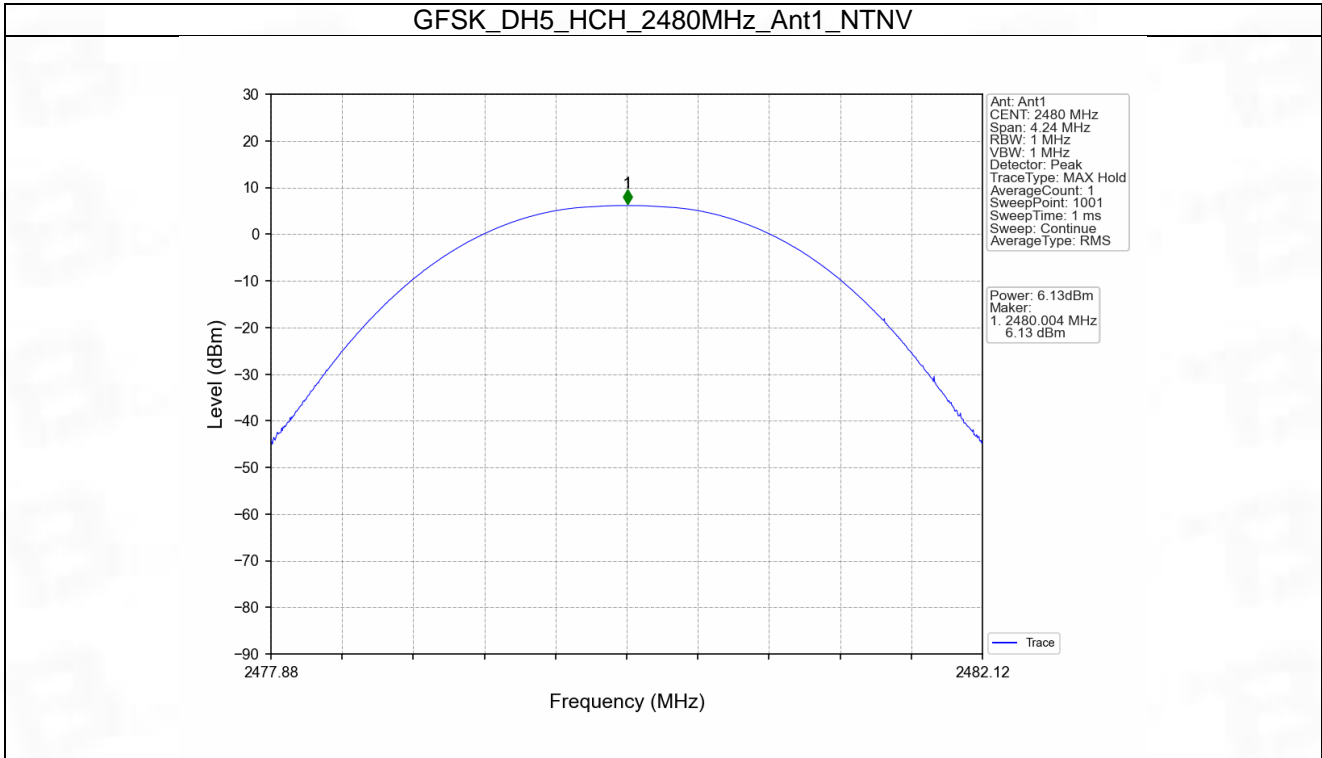

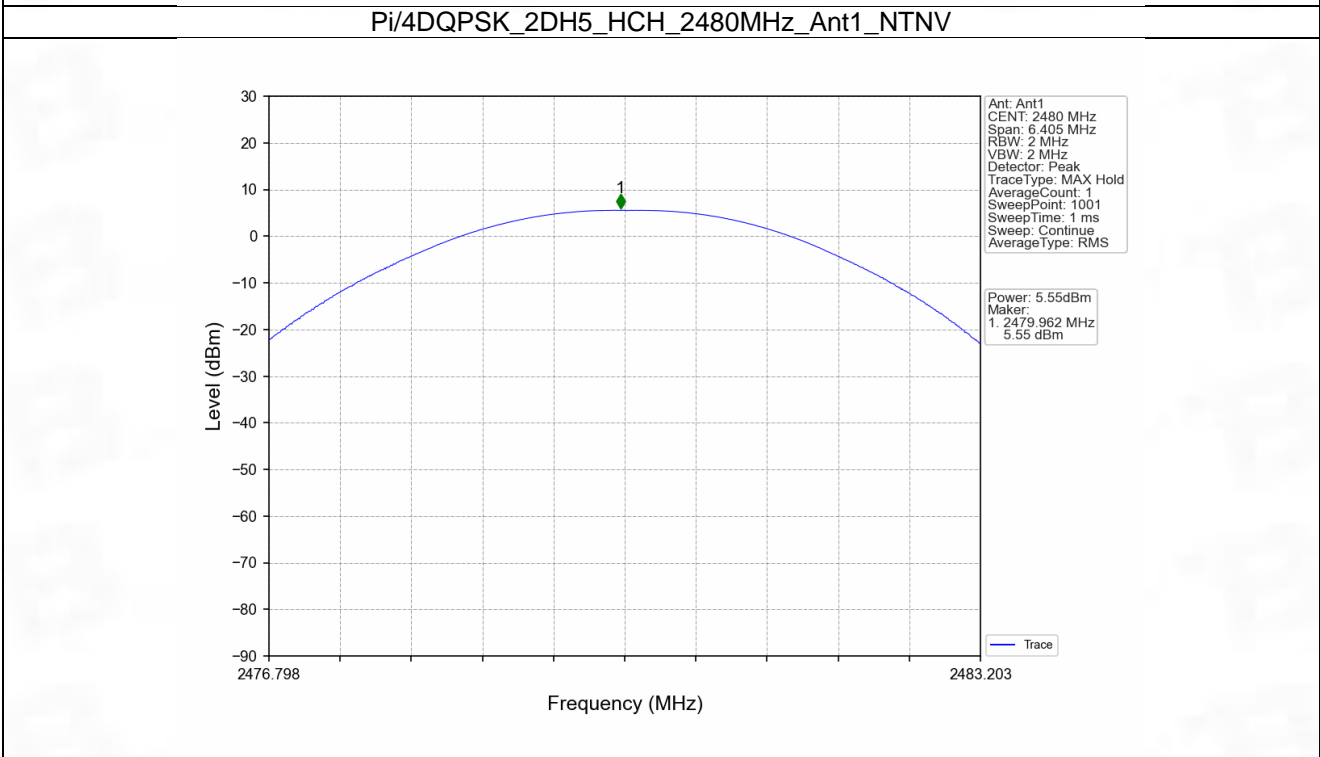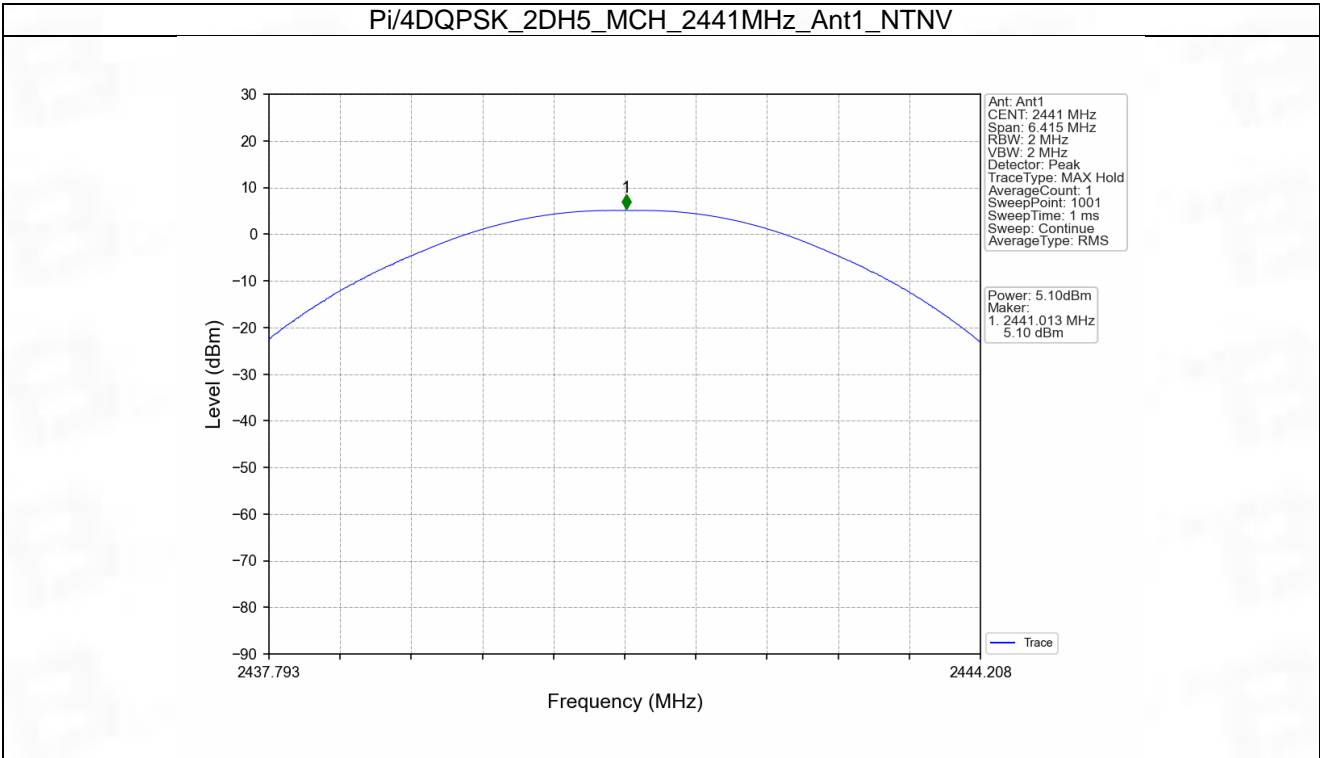

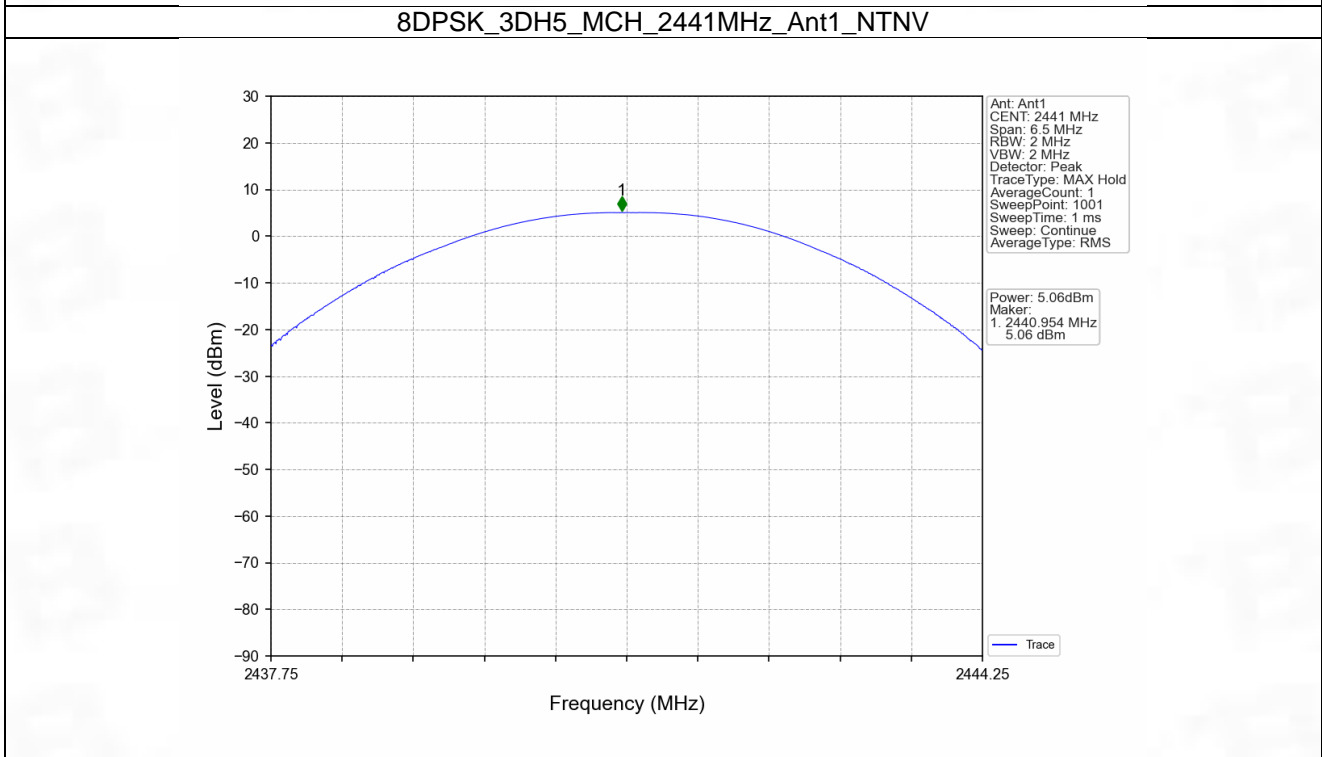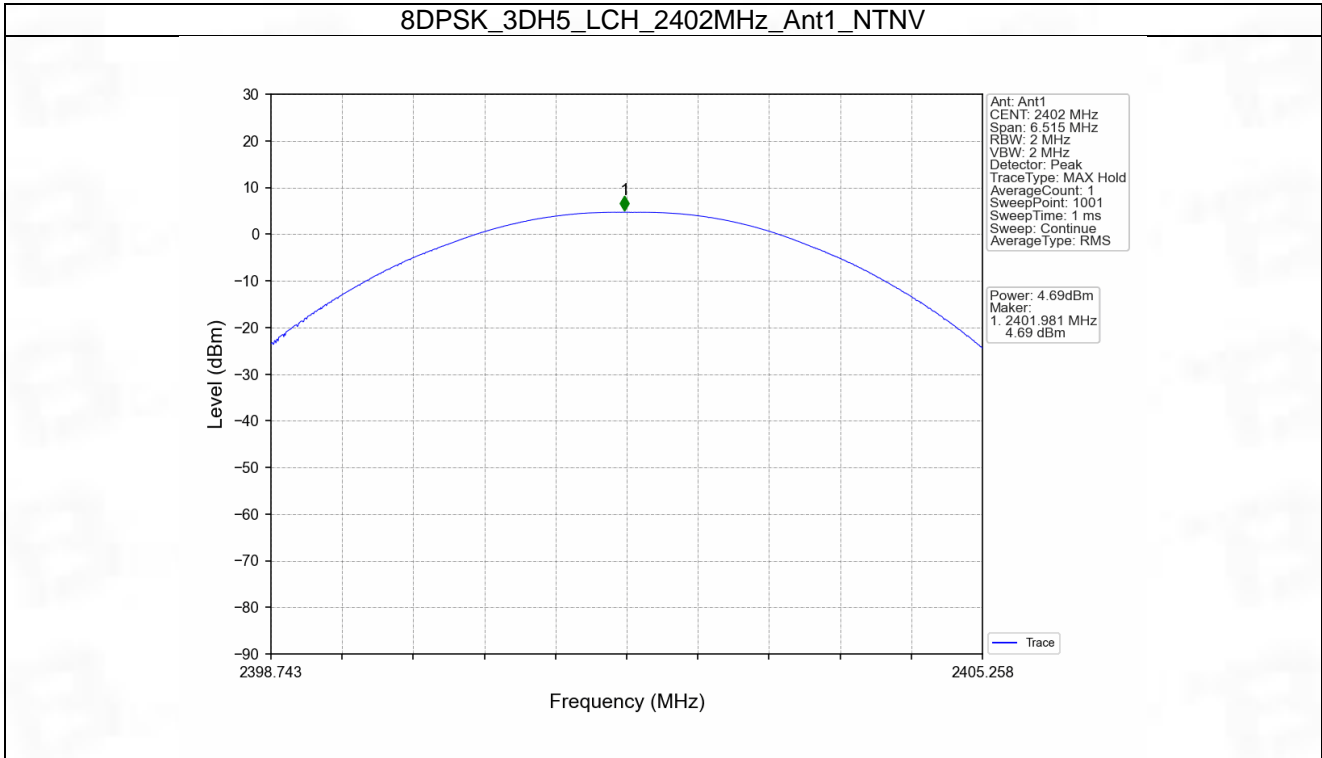

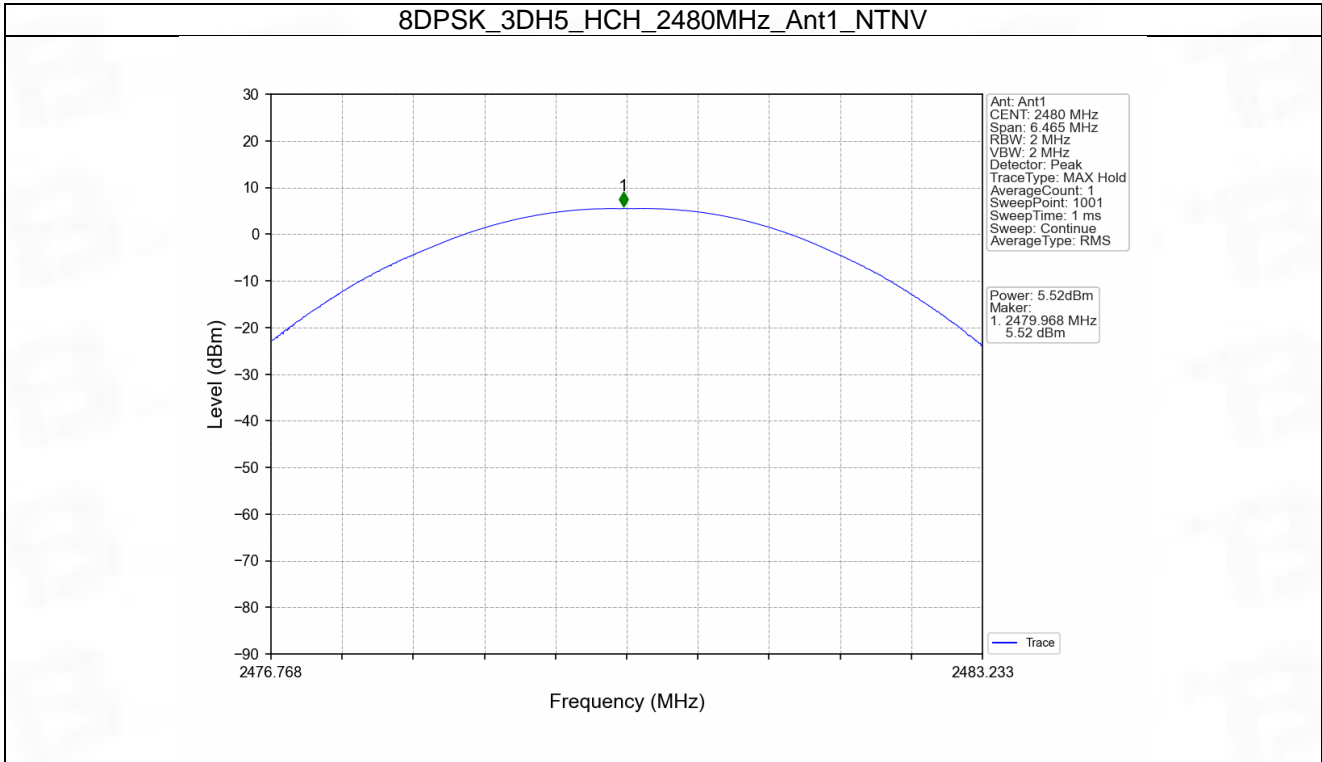


3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.010	0.850	≥ 0.85	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.068	1.285	≥ 0.857	Pass
8DPSK	SISO	HOPP	3DH5	0.953	1.303	≥ 0.869	Pass

3.1.2 Test Graph

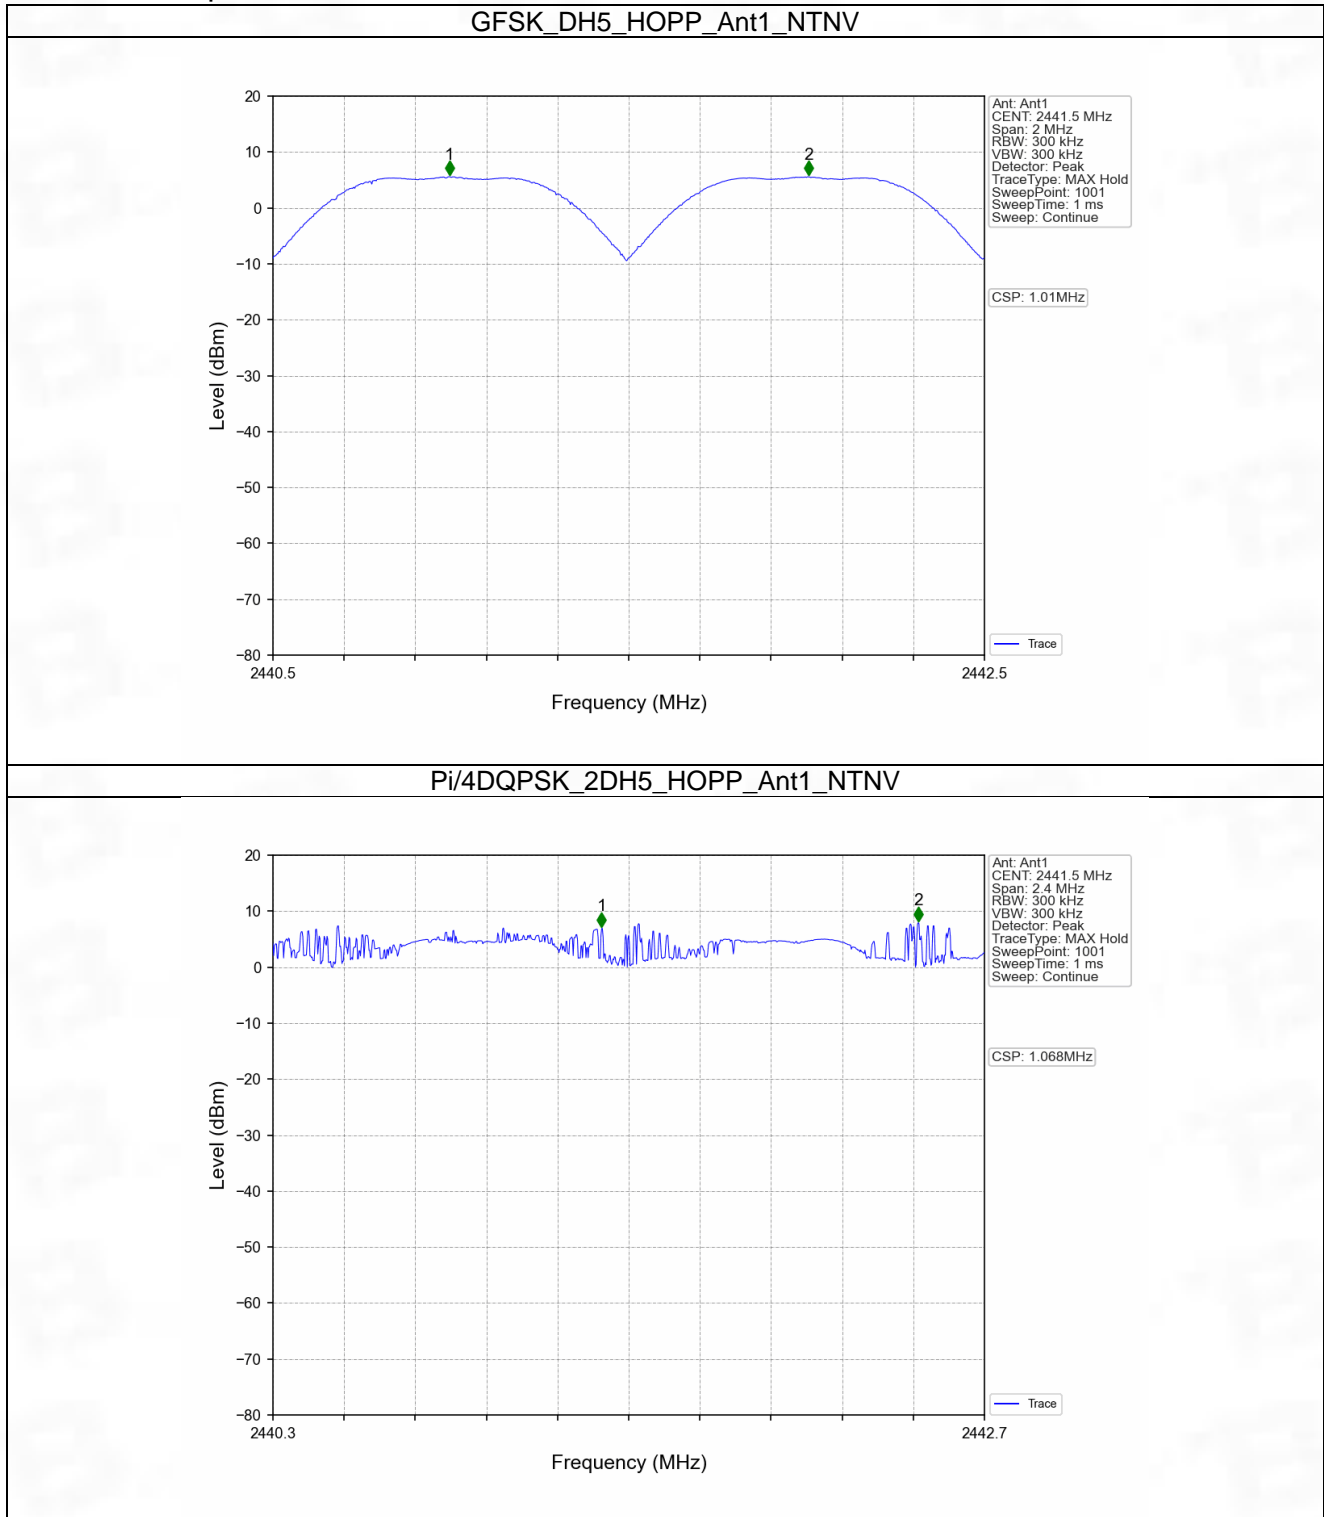

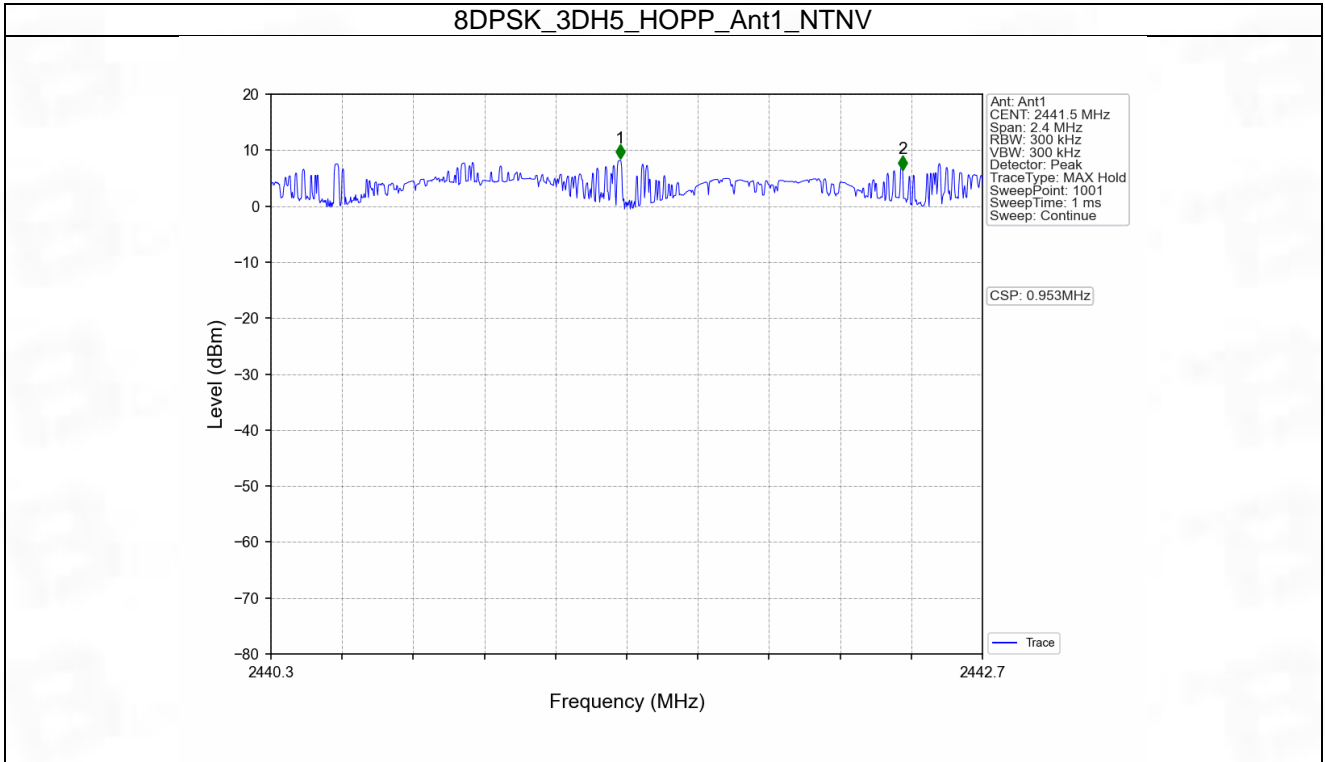


4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

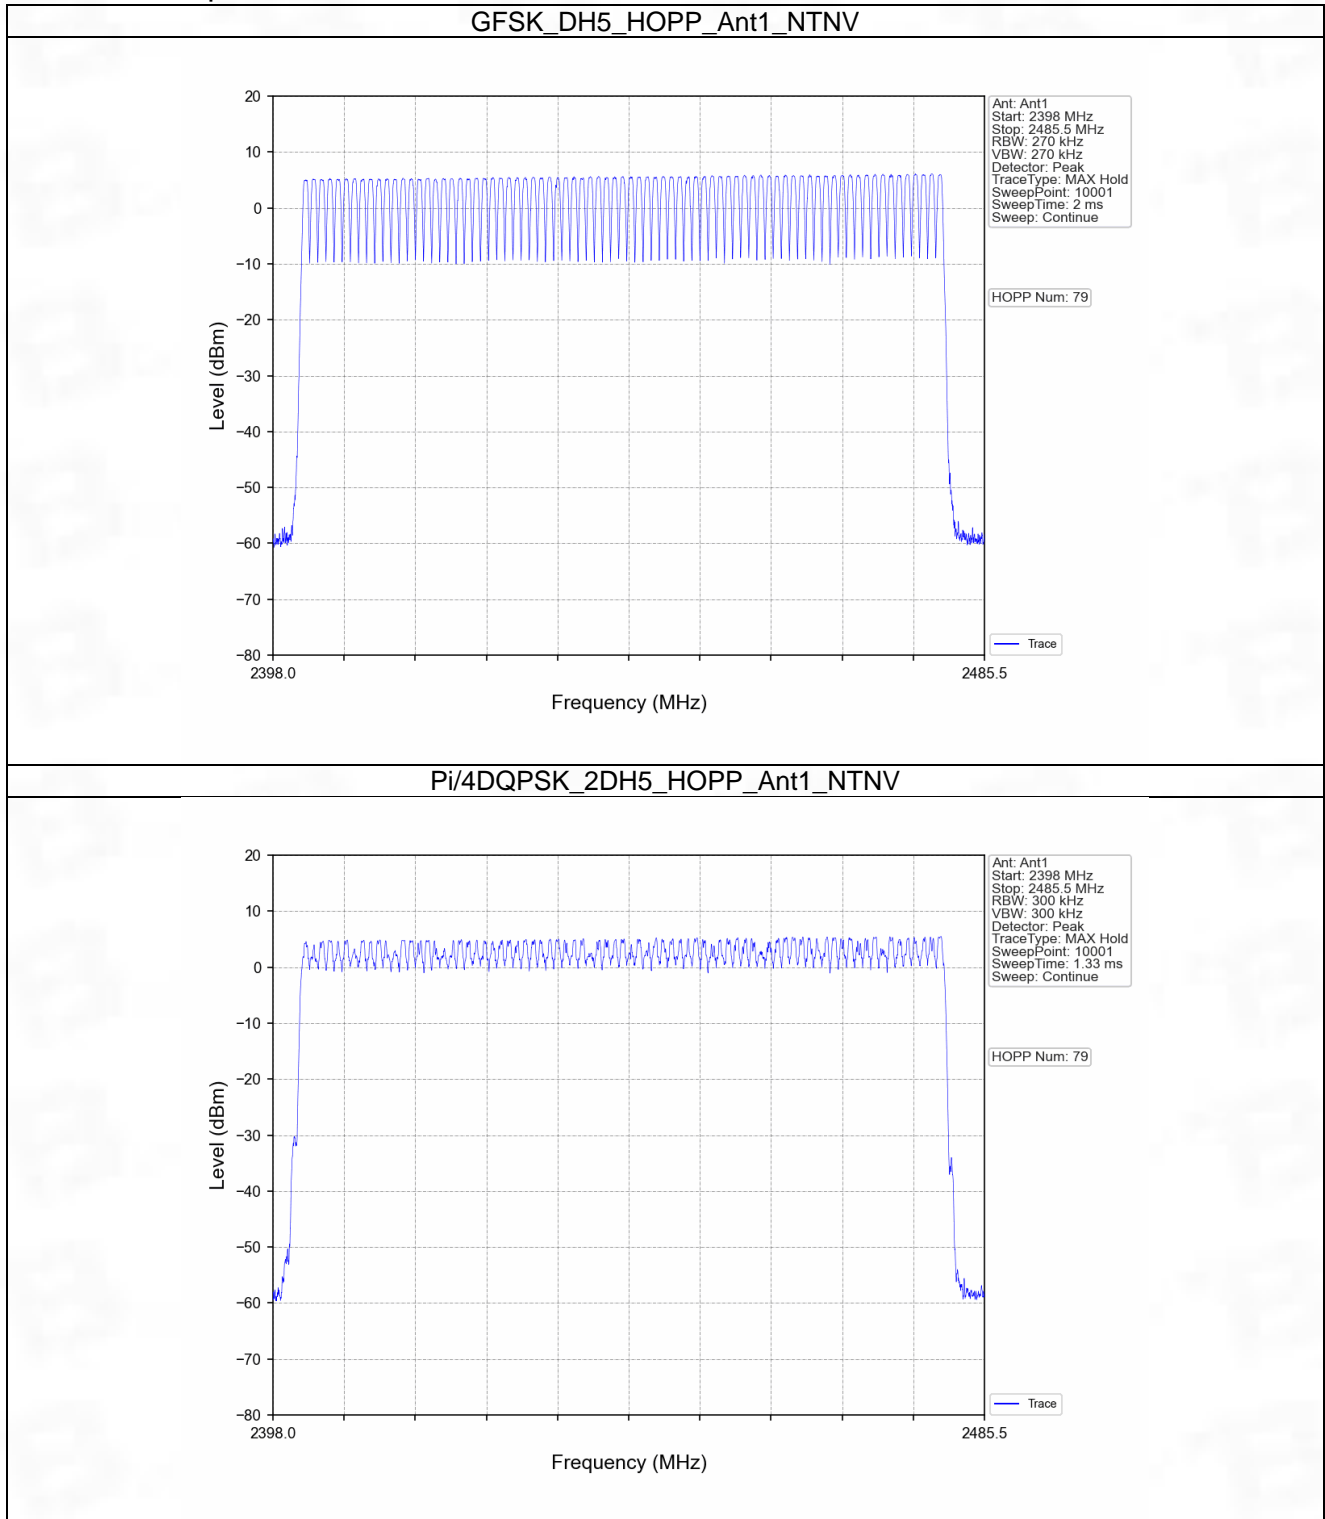

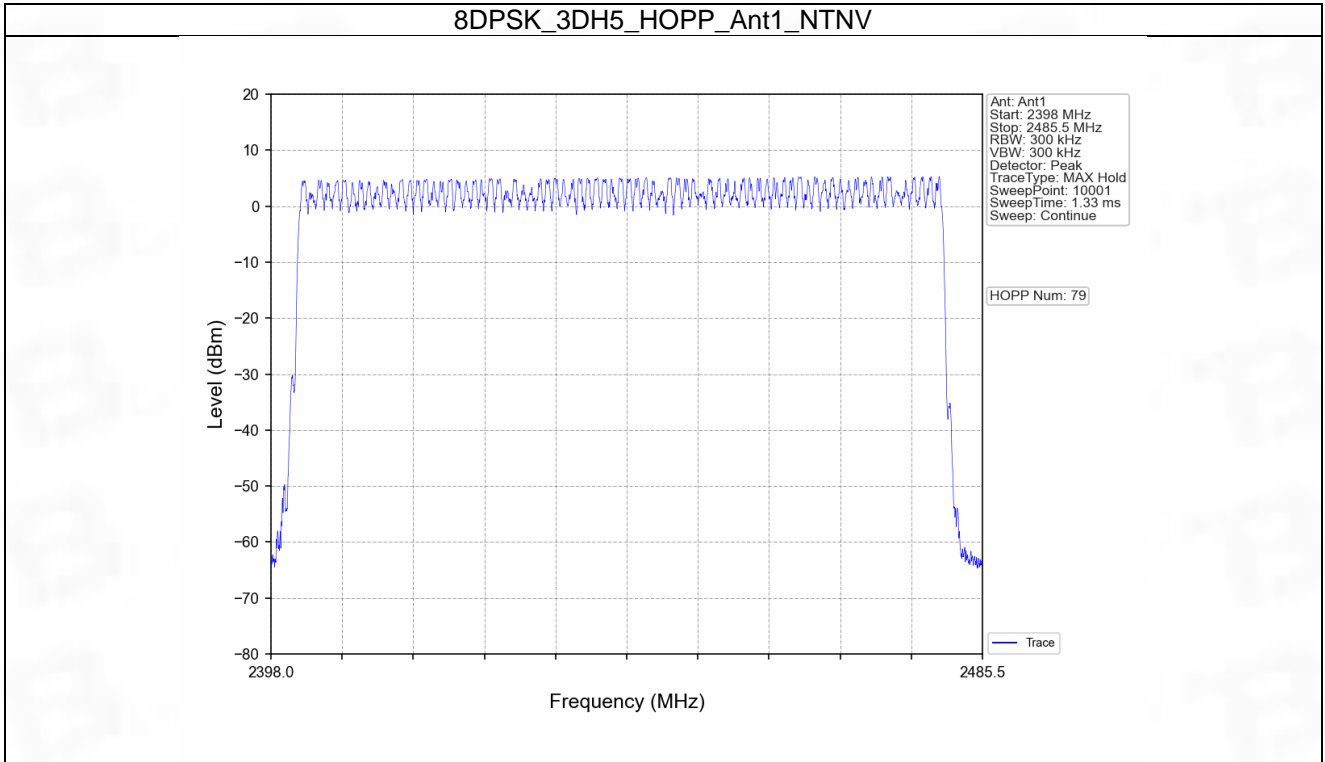


5. Time of Occupancy (Dwell Time)



5.1 Ant1



5.1.1 Test Result



Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.376	31.600	320	120.320	<=400	Pass
			DH3	1.636	31.600	159	260.124	<=400	Pass
			DH5	2.888	31.600	101	291.688	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.388	31.600	320	124.160	<=400	Pass
			2DH3	1.374	31.600	157	215.718	<=400	Pass
			2DH5	2.902	31.600	108	313.416	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.386	31.600	320	123.520	<=400	Pass
			3DH3	1.652	31.600	145	239.540	<=400	Pass
			3DH5	2.902	31.600	106	307.612	<=400	Pass



5.1.2 Test Graph


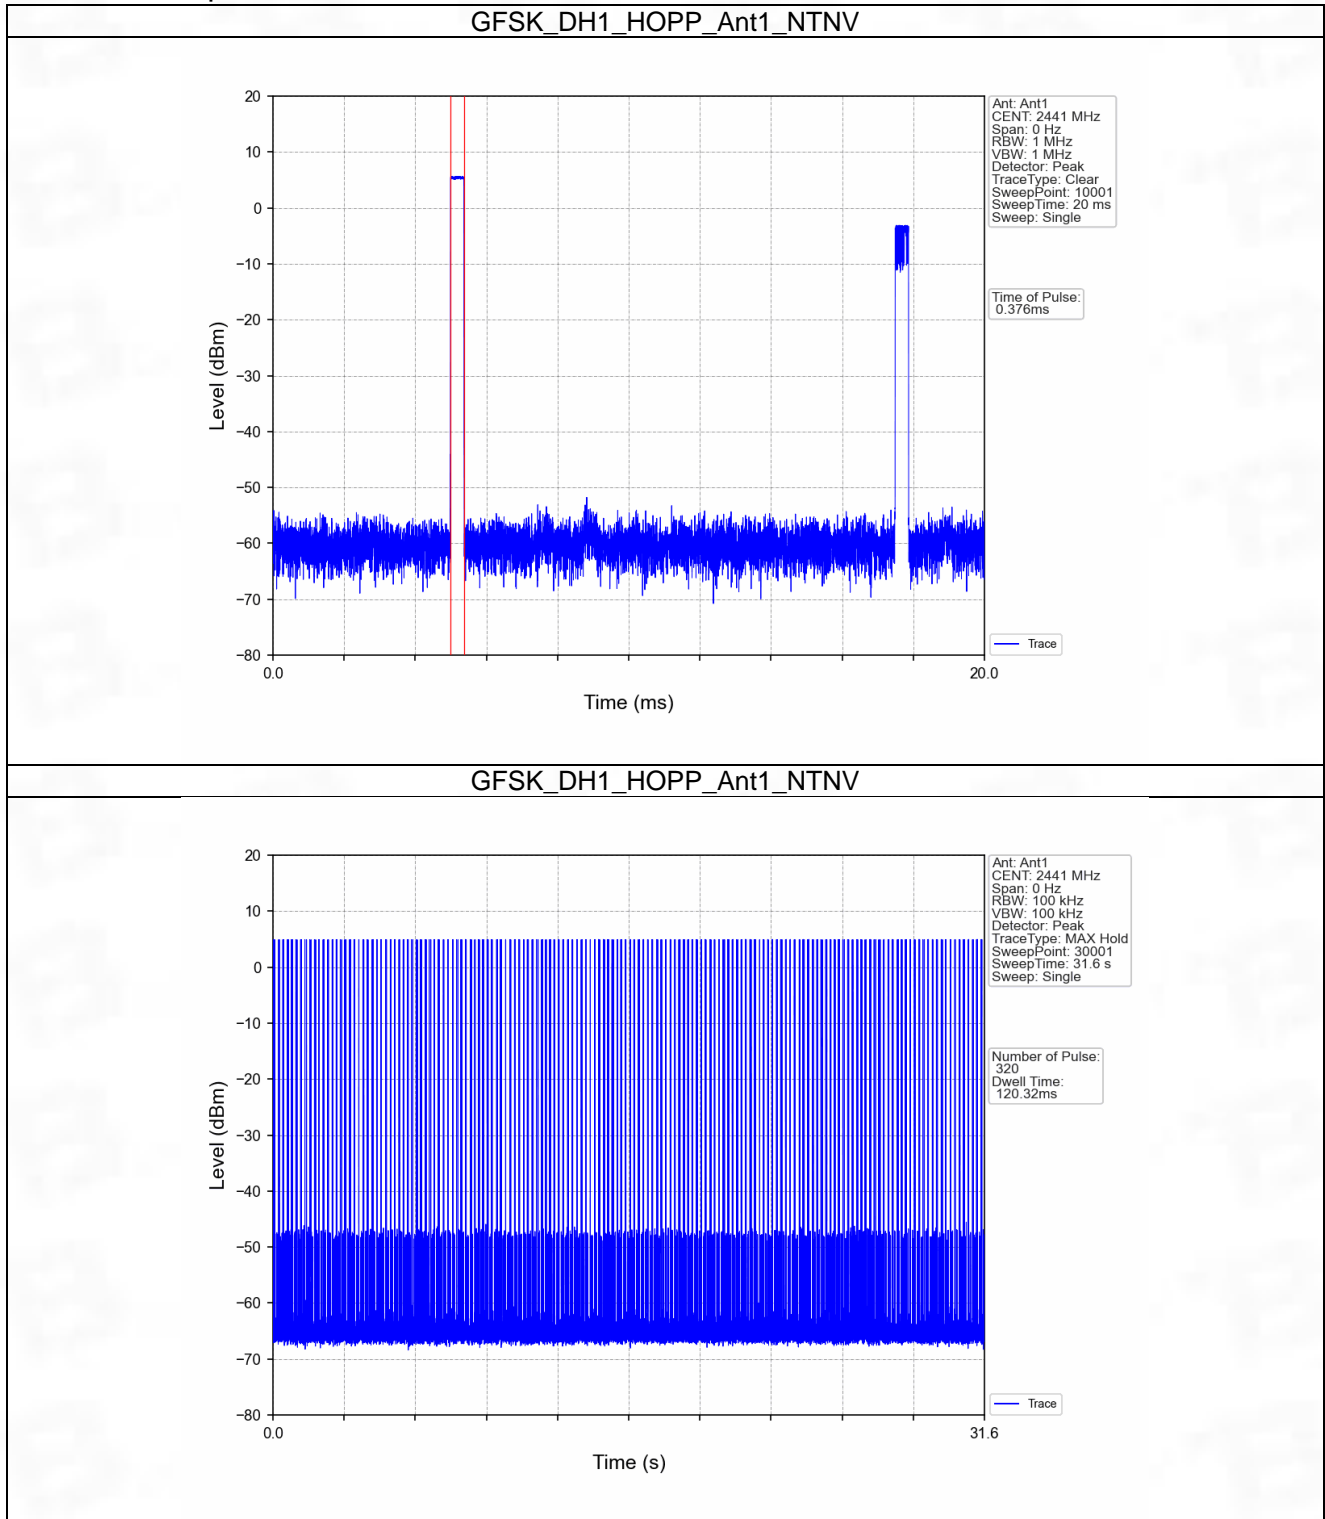


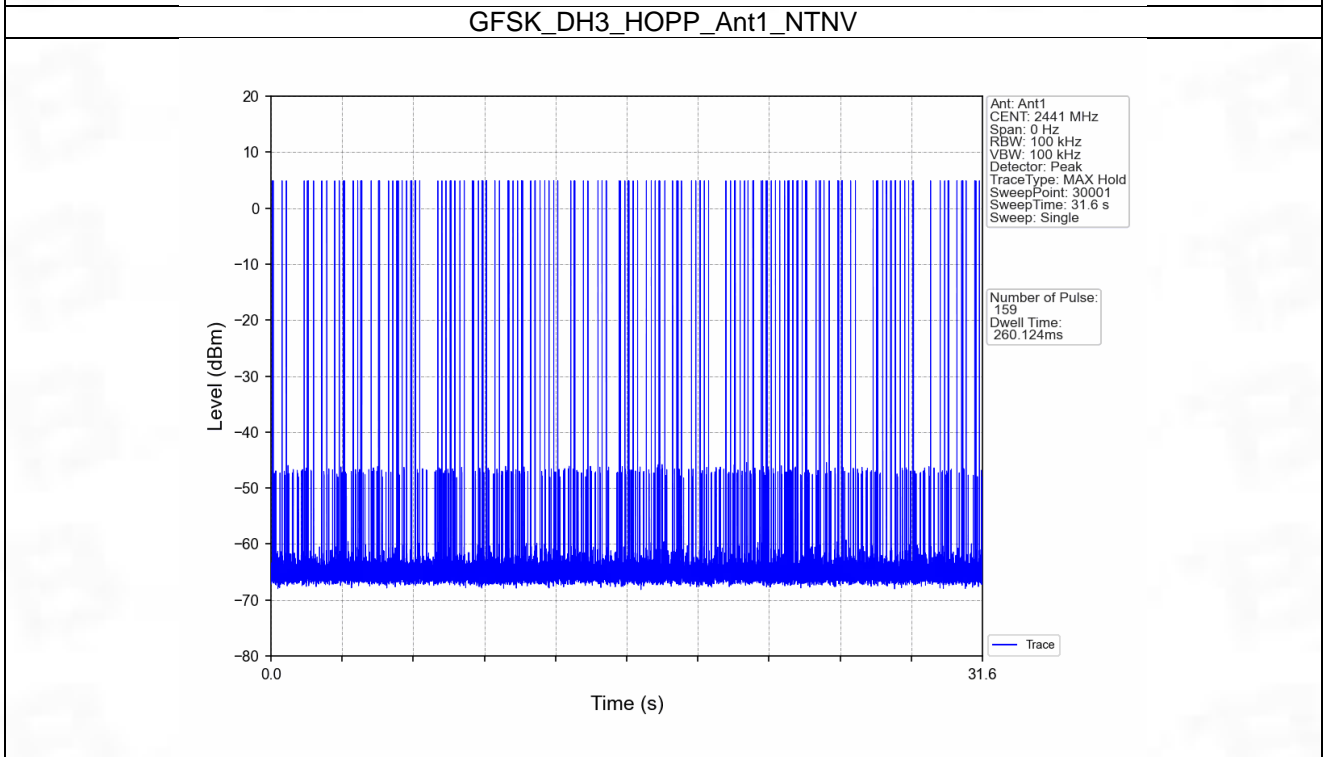
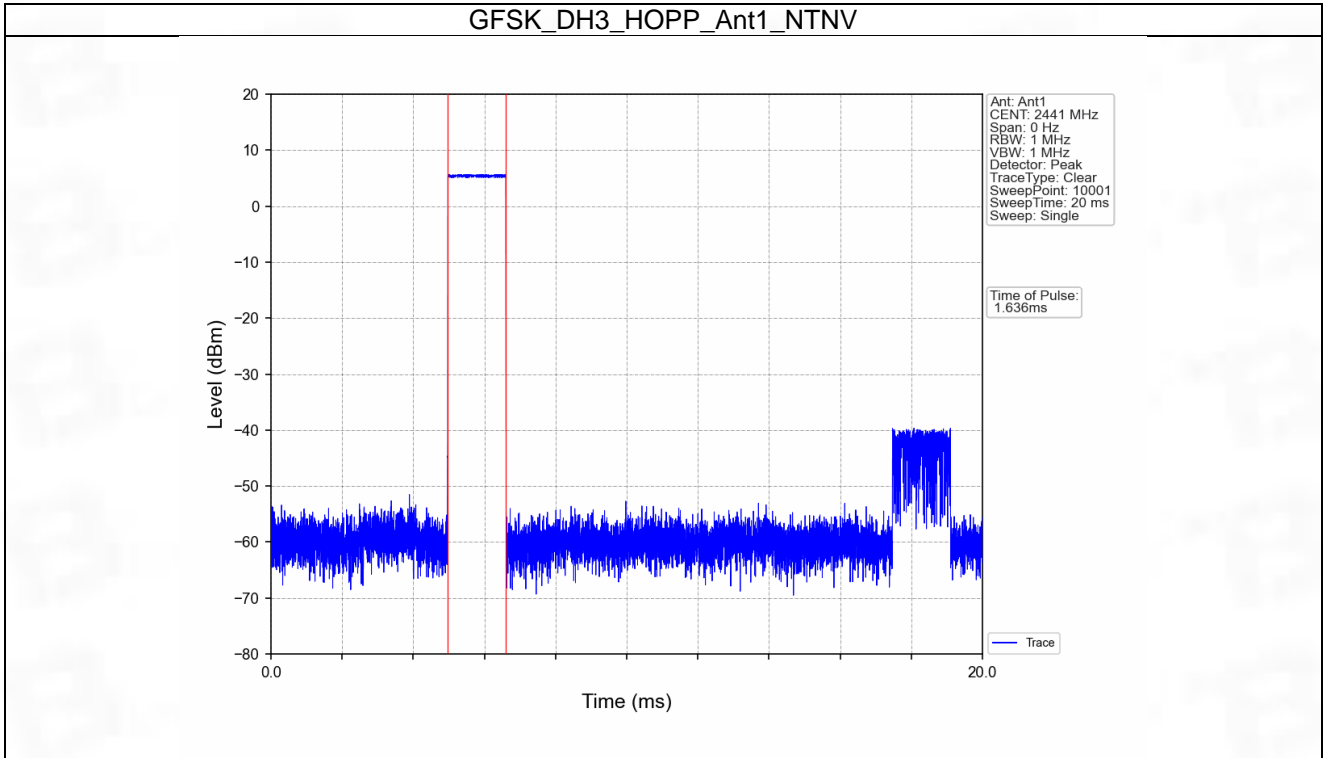


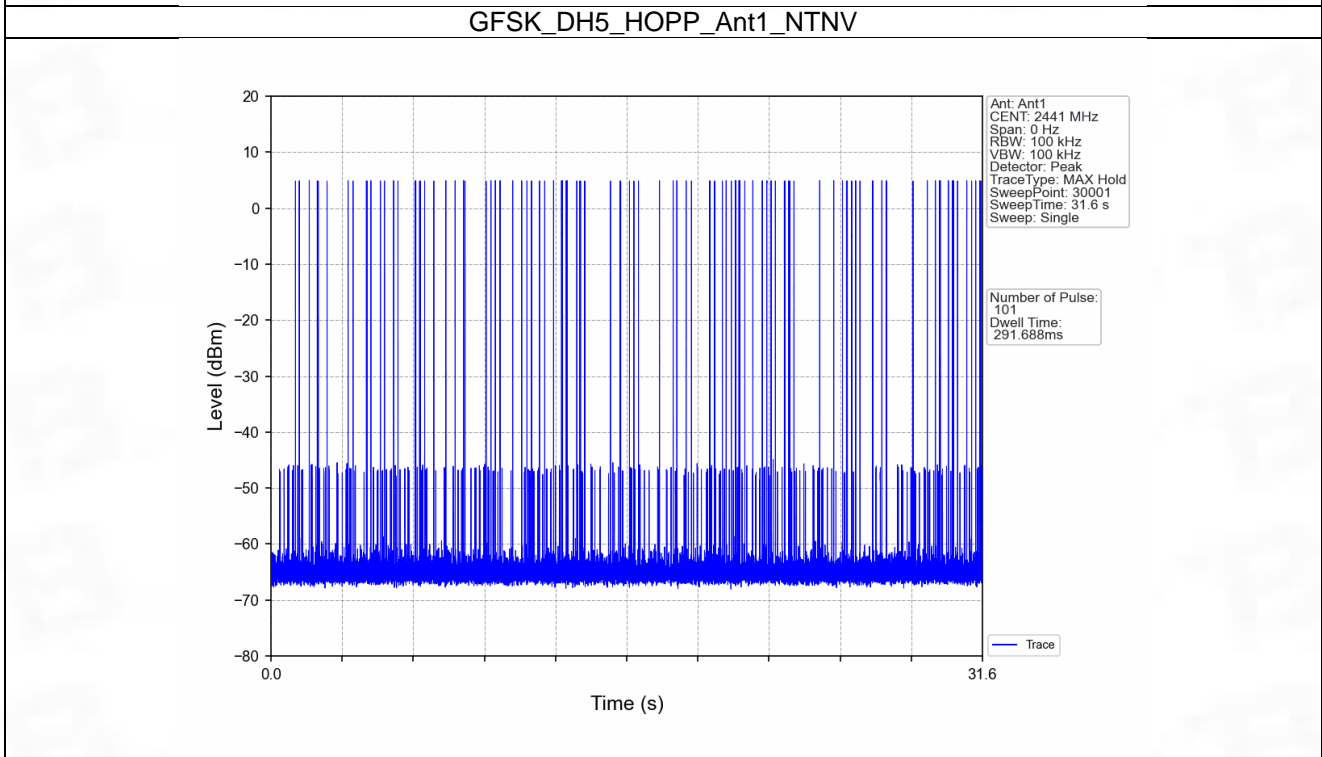
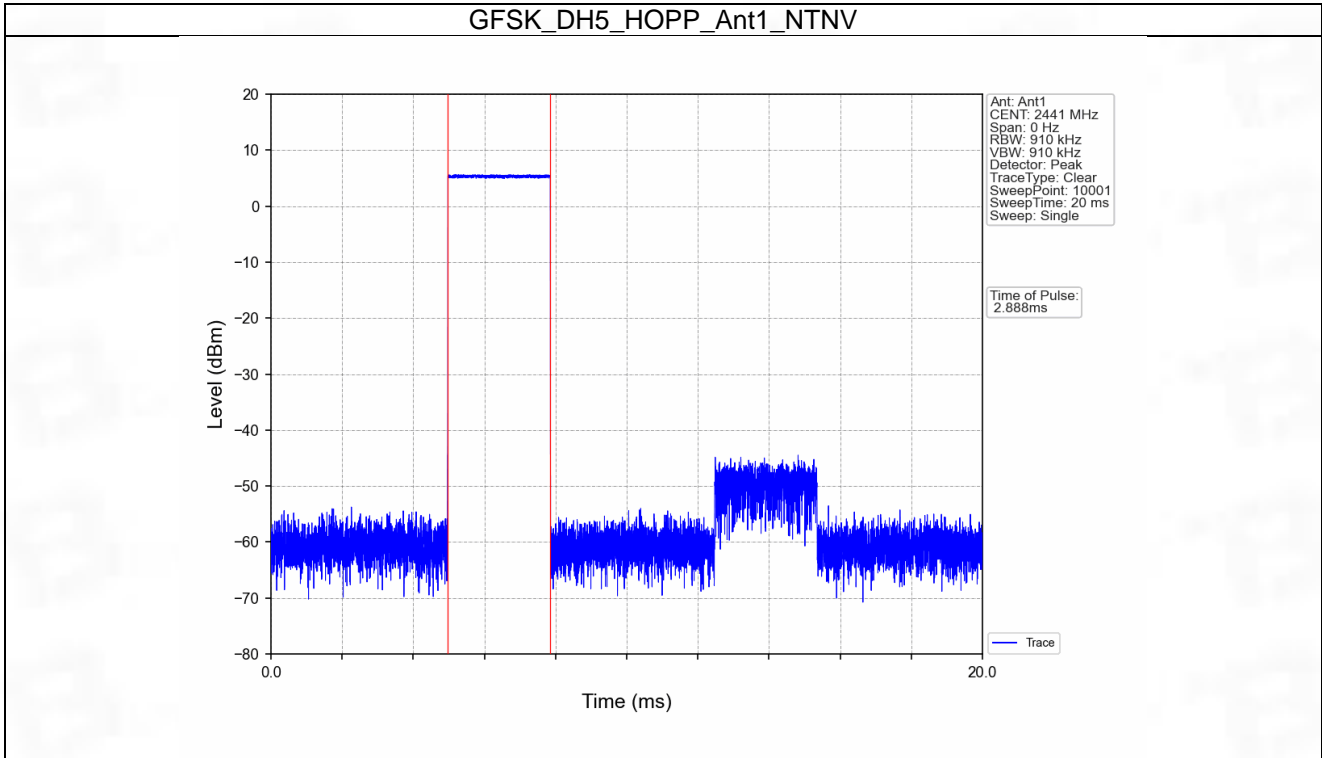


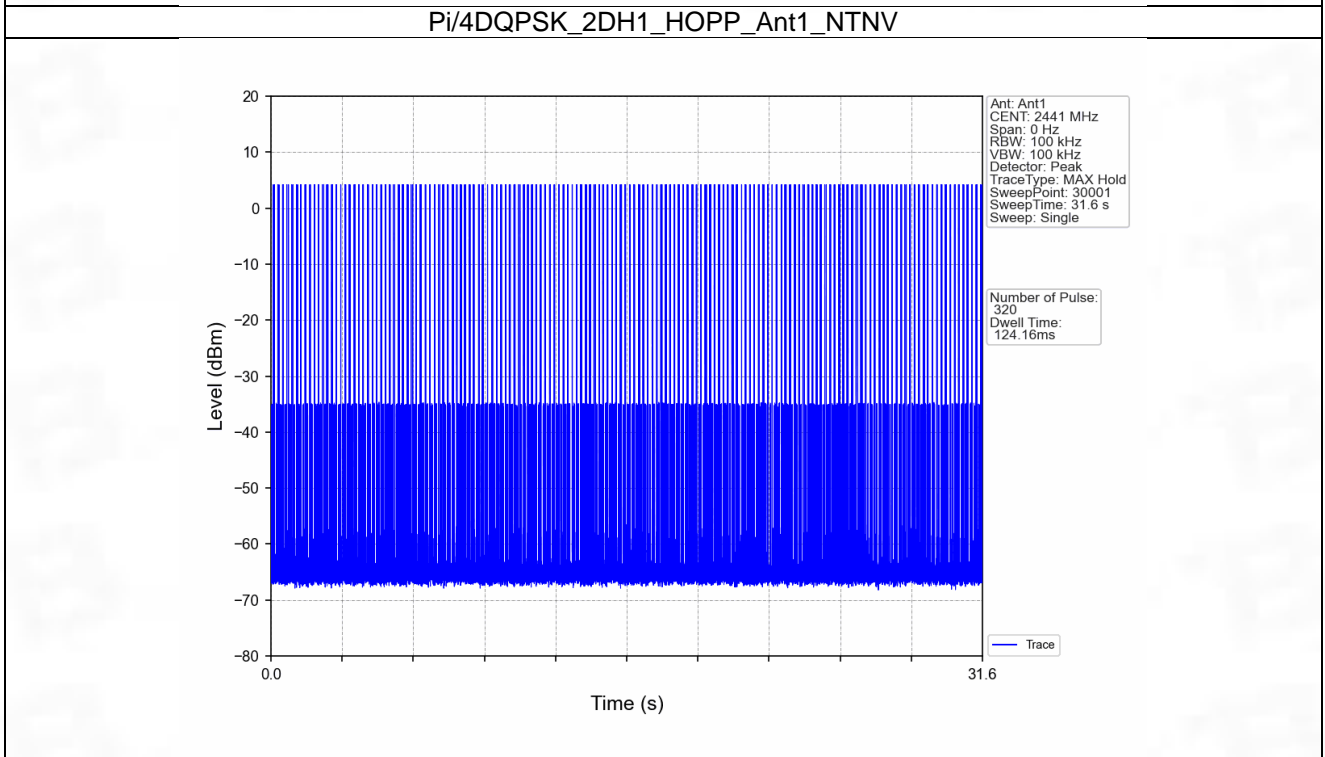
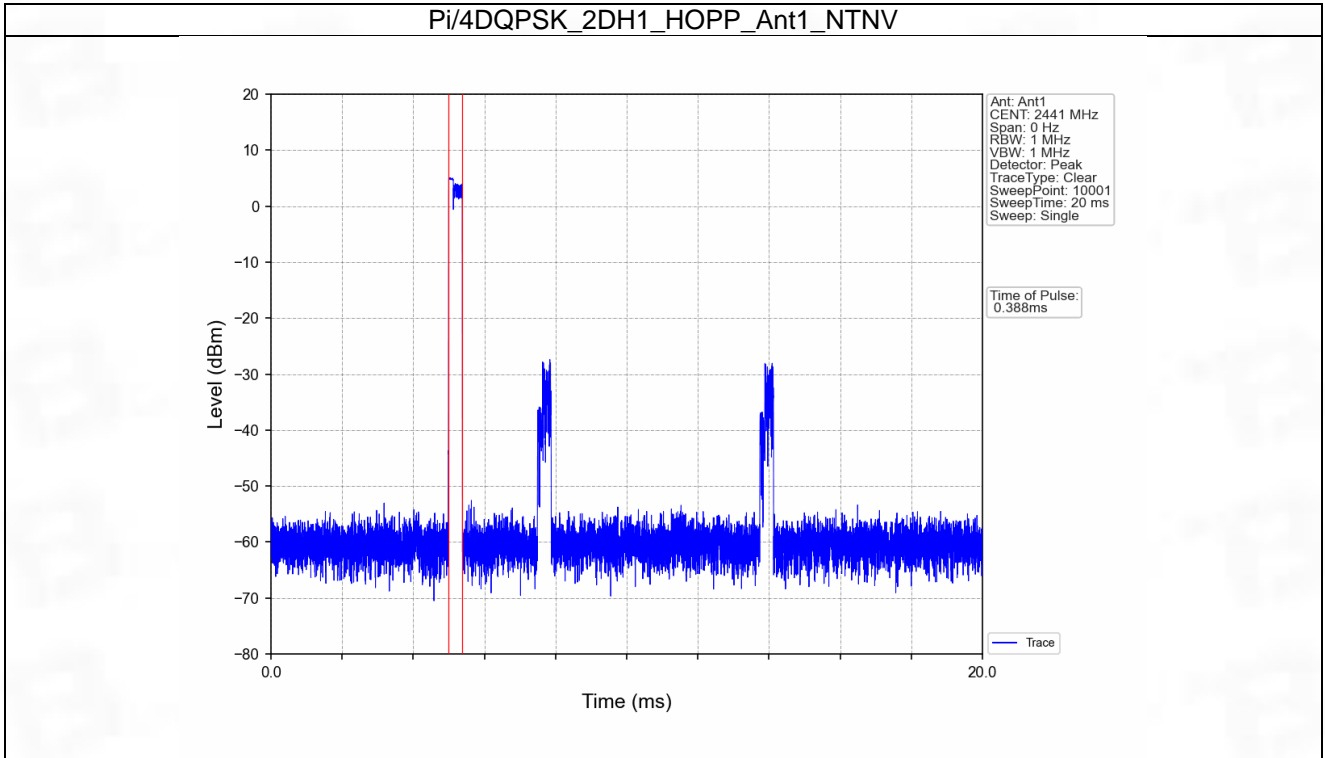


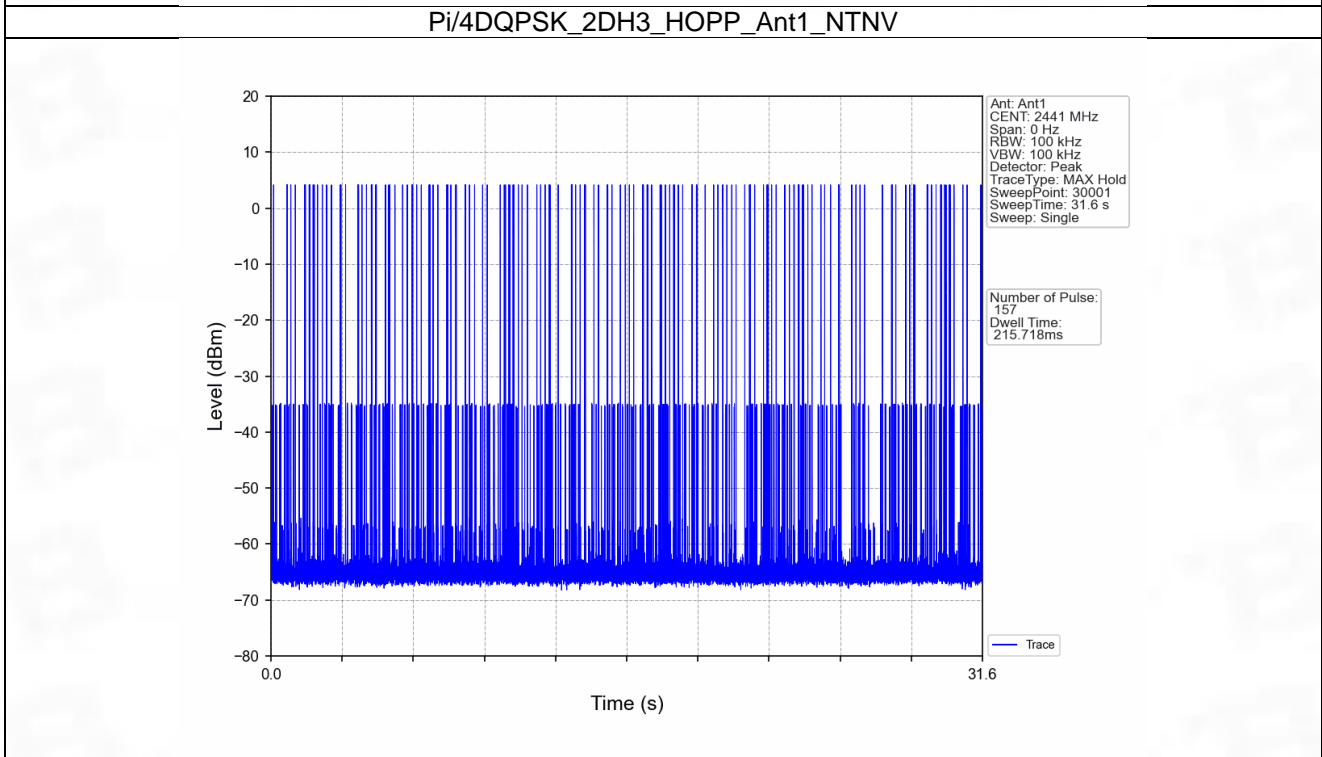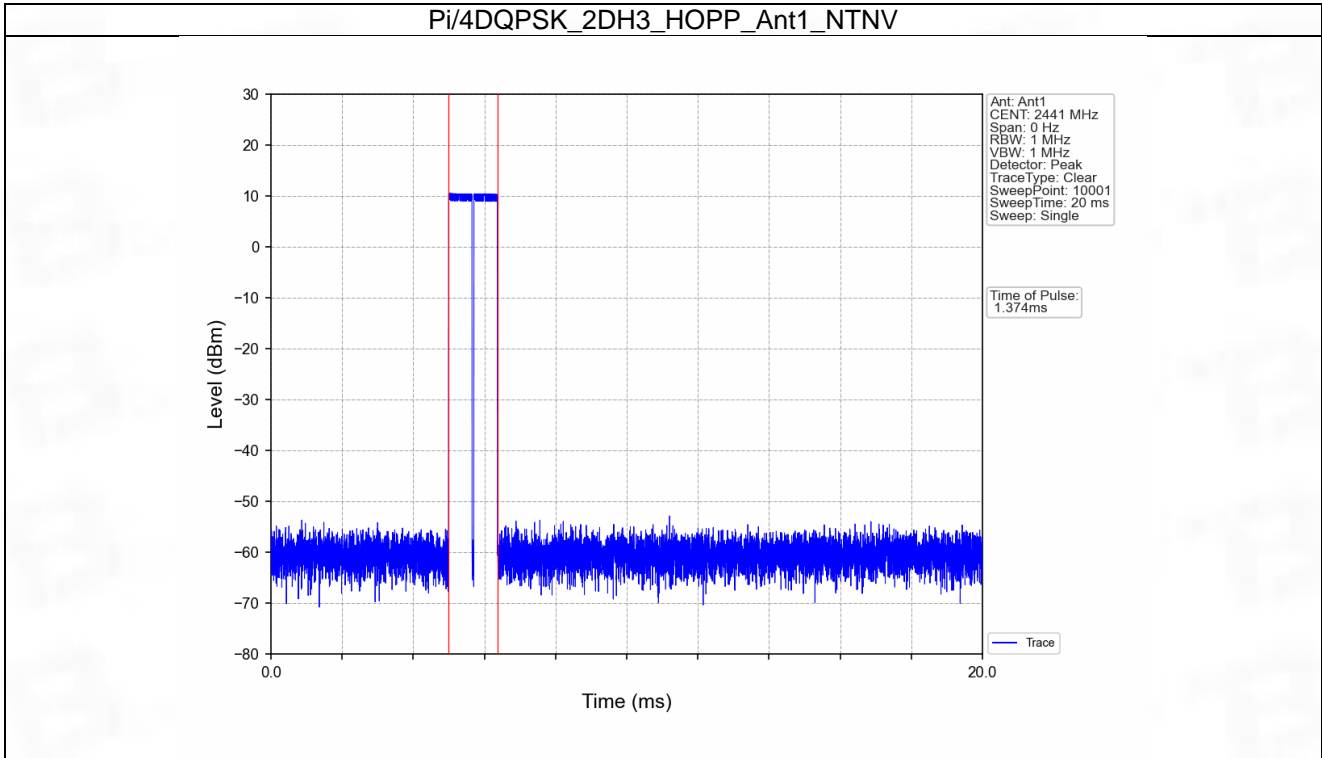

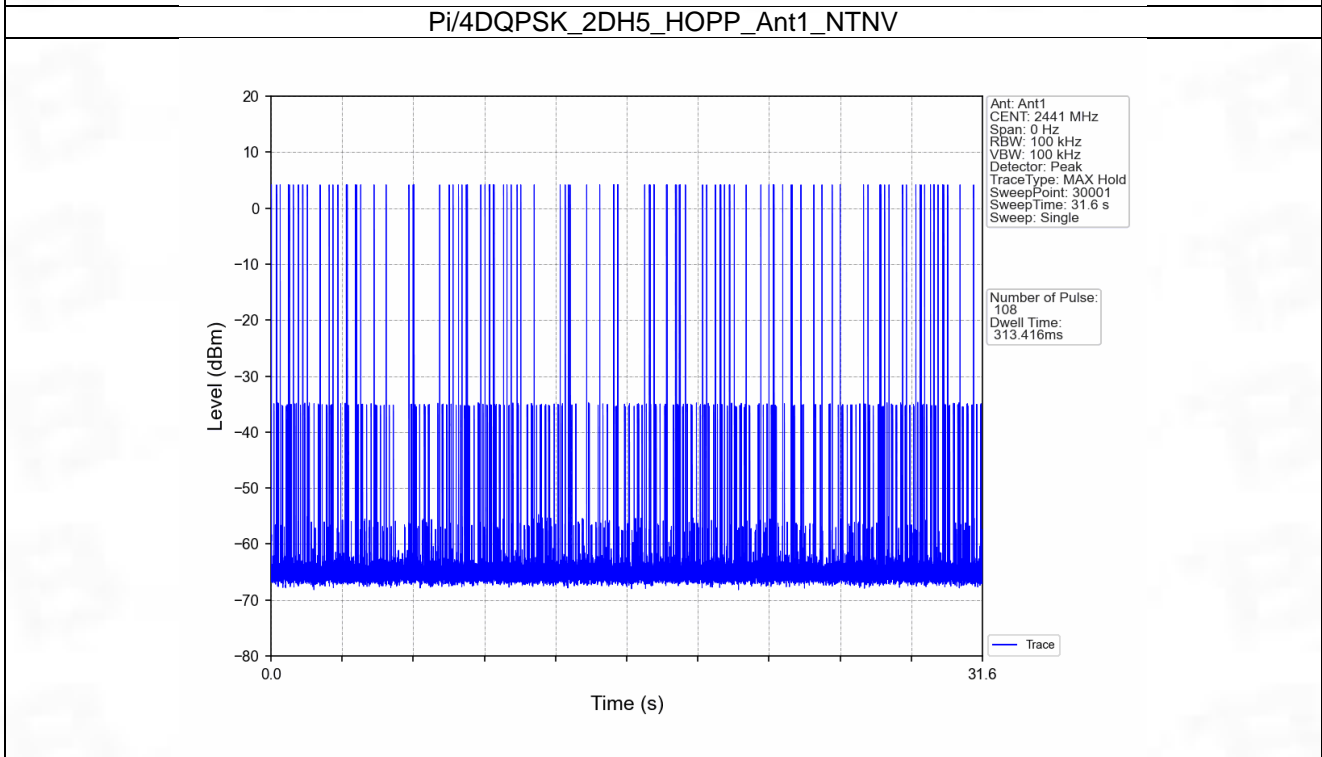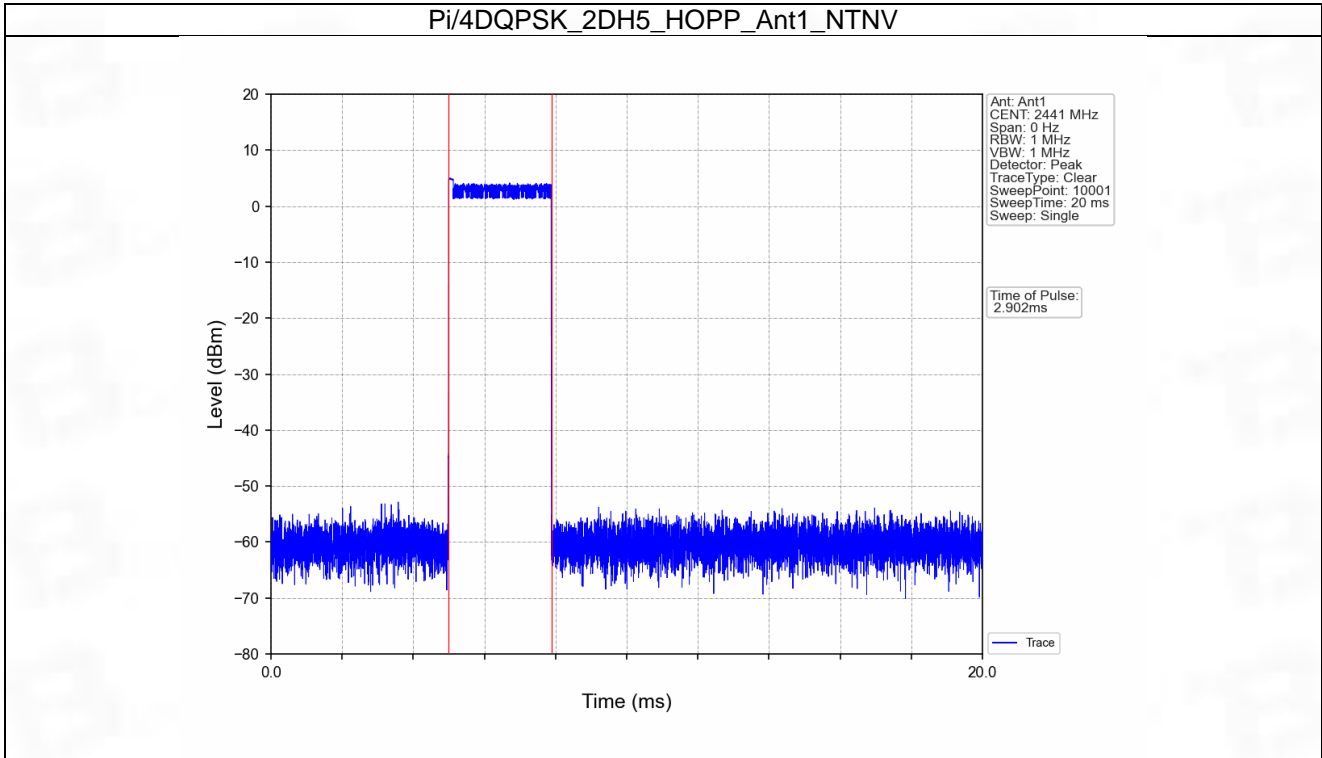

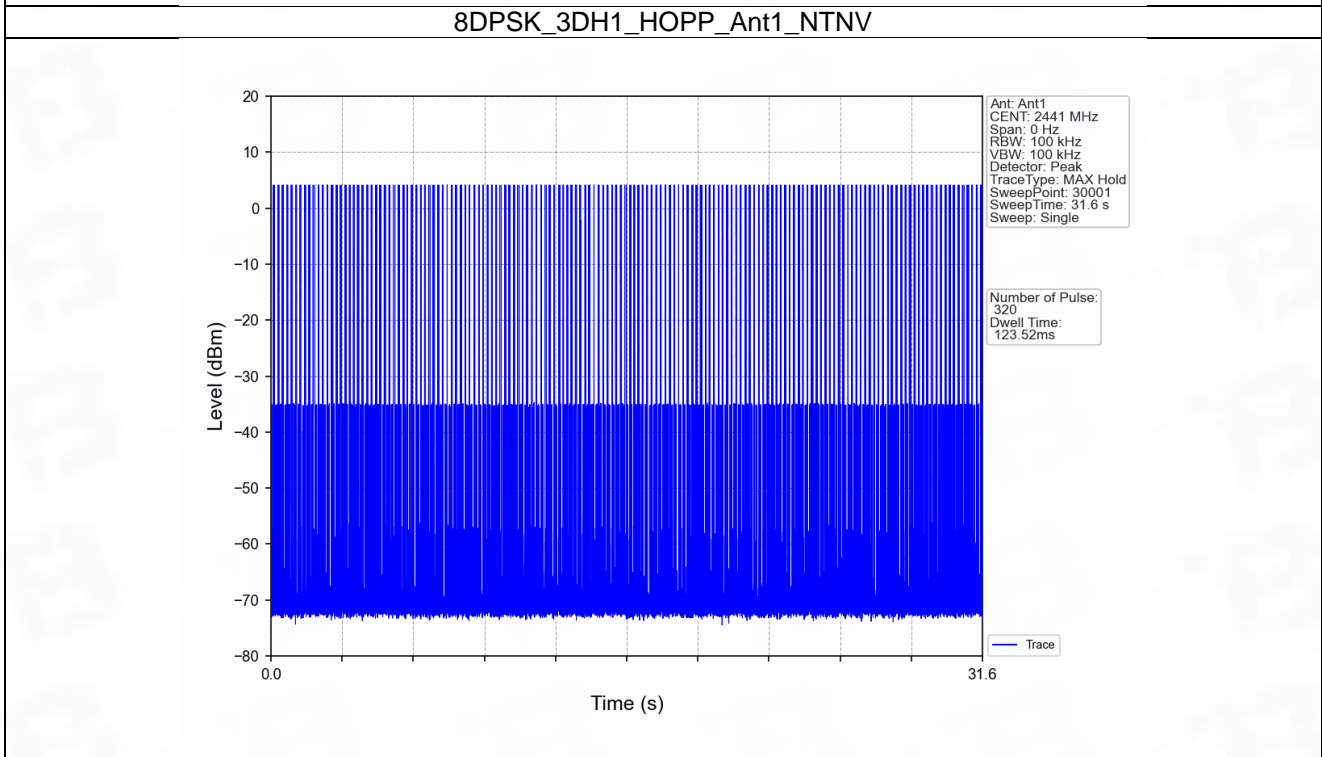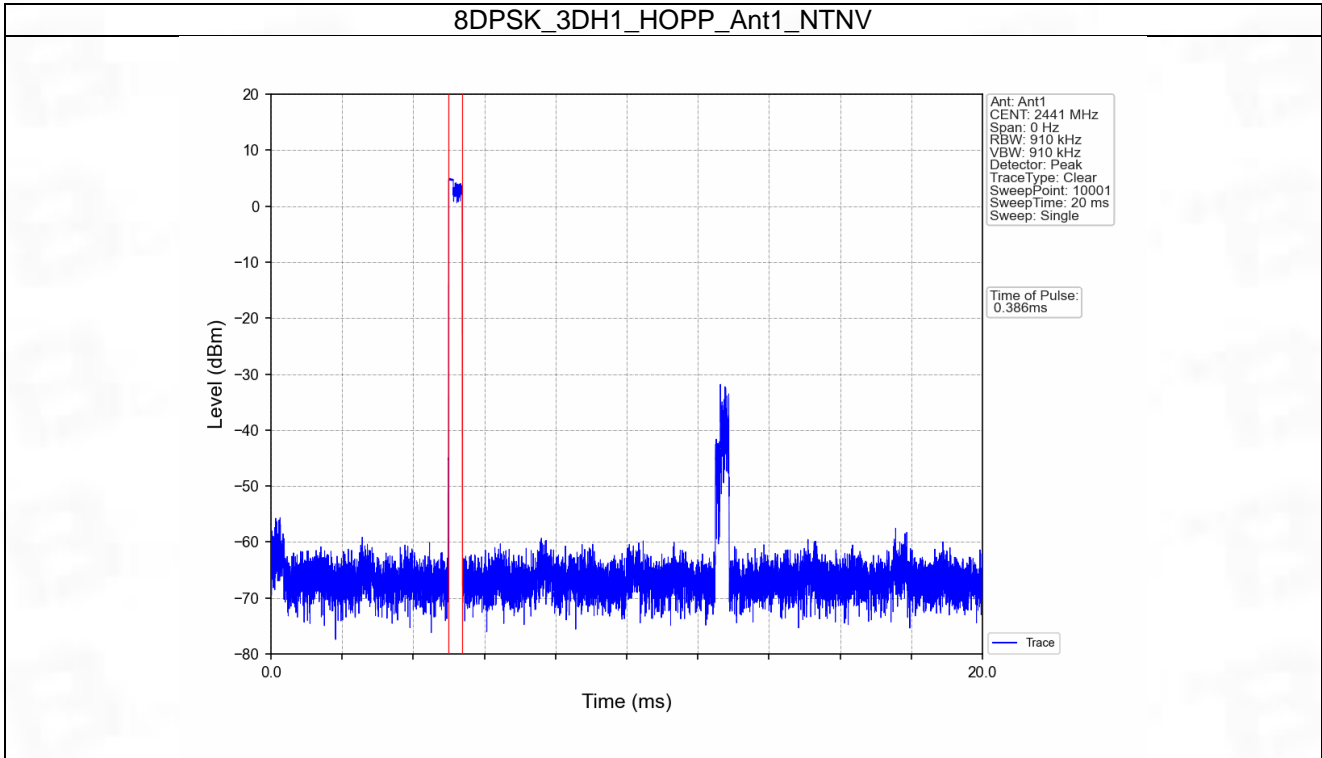

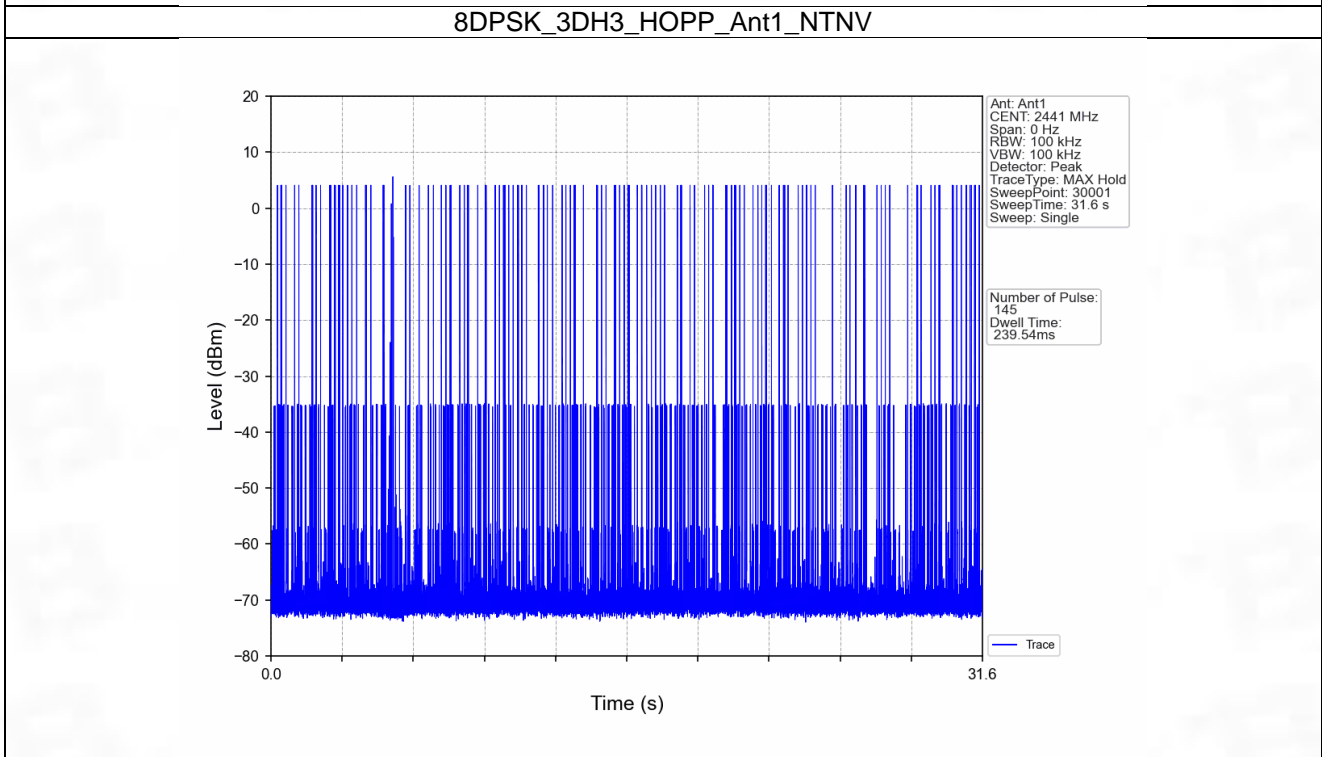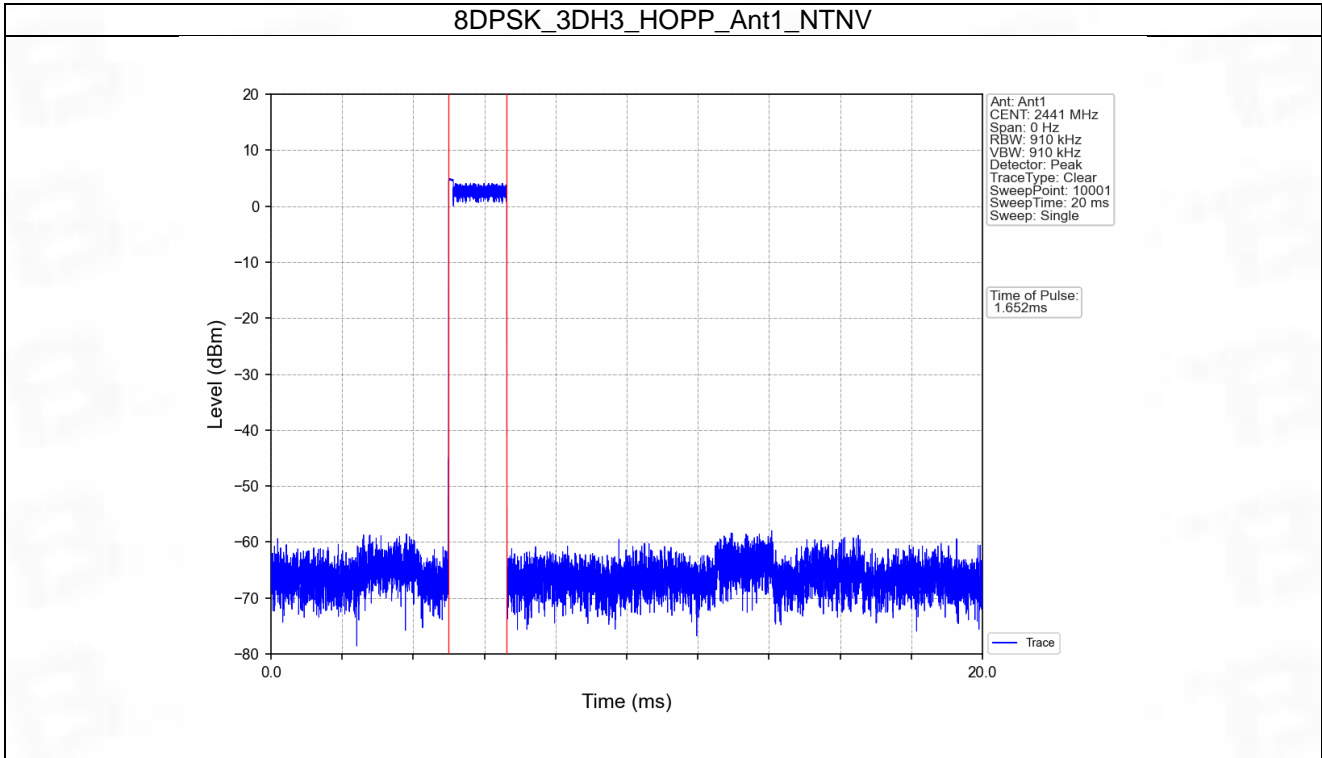

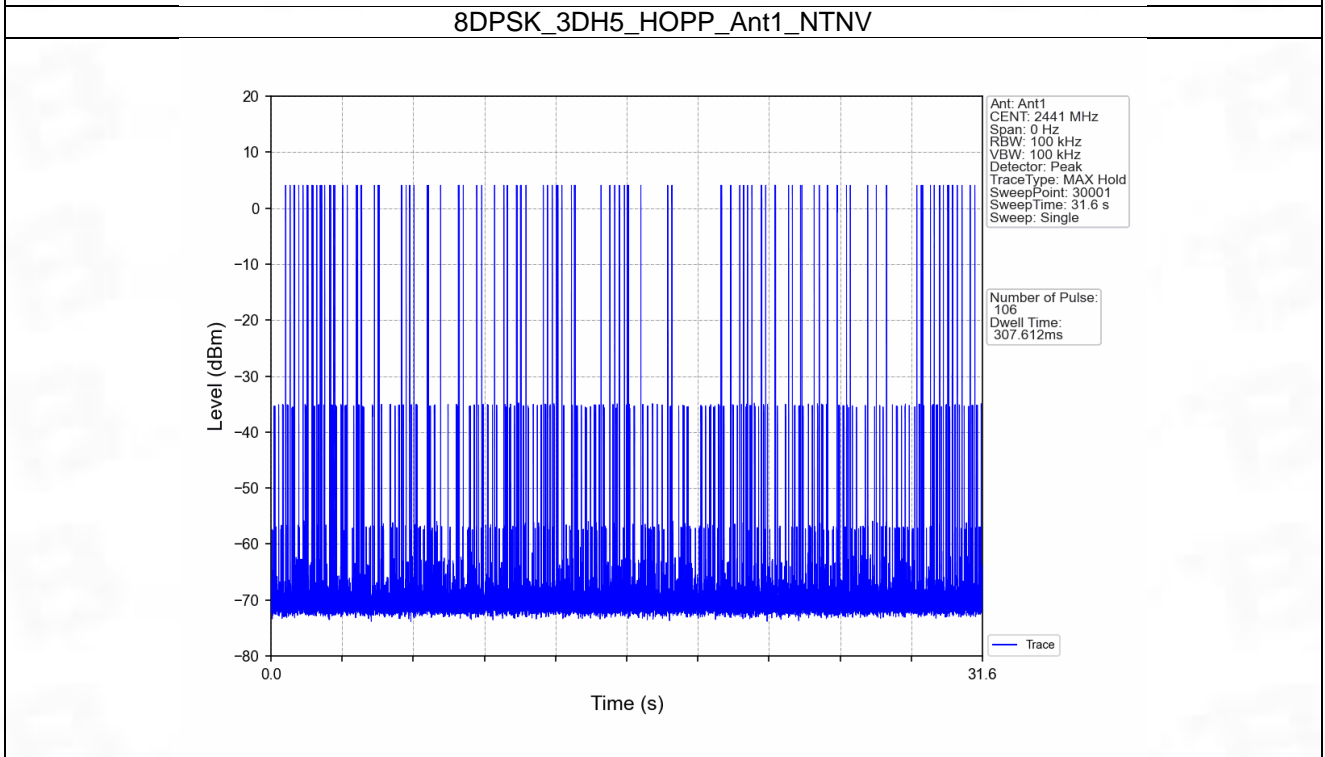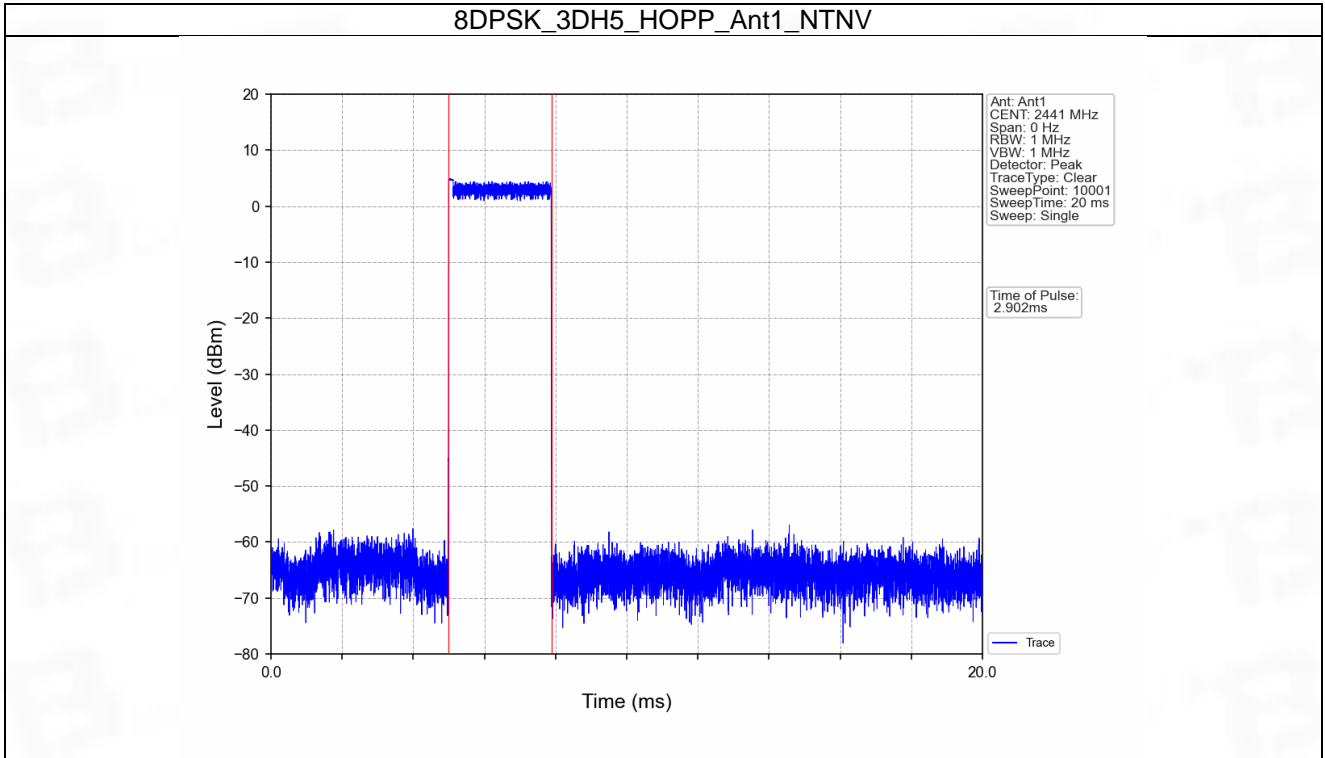

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref



6.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	4.96
		2441	DH5	1	5.31
		2480	DH5	1	5.76
Pi/4DQPSK	SISO	2402	2DH5	1	4.41
		2441	2DH5	1	4.84
		2480	2DH5	1	5.19
8DPSK	SISO	2402	3DH5	1	4.53
		2441	3DH5	1	4.89
		2480	3DH5	1	5.25


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

6.1.2 Test Graph

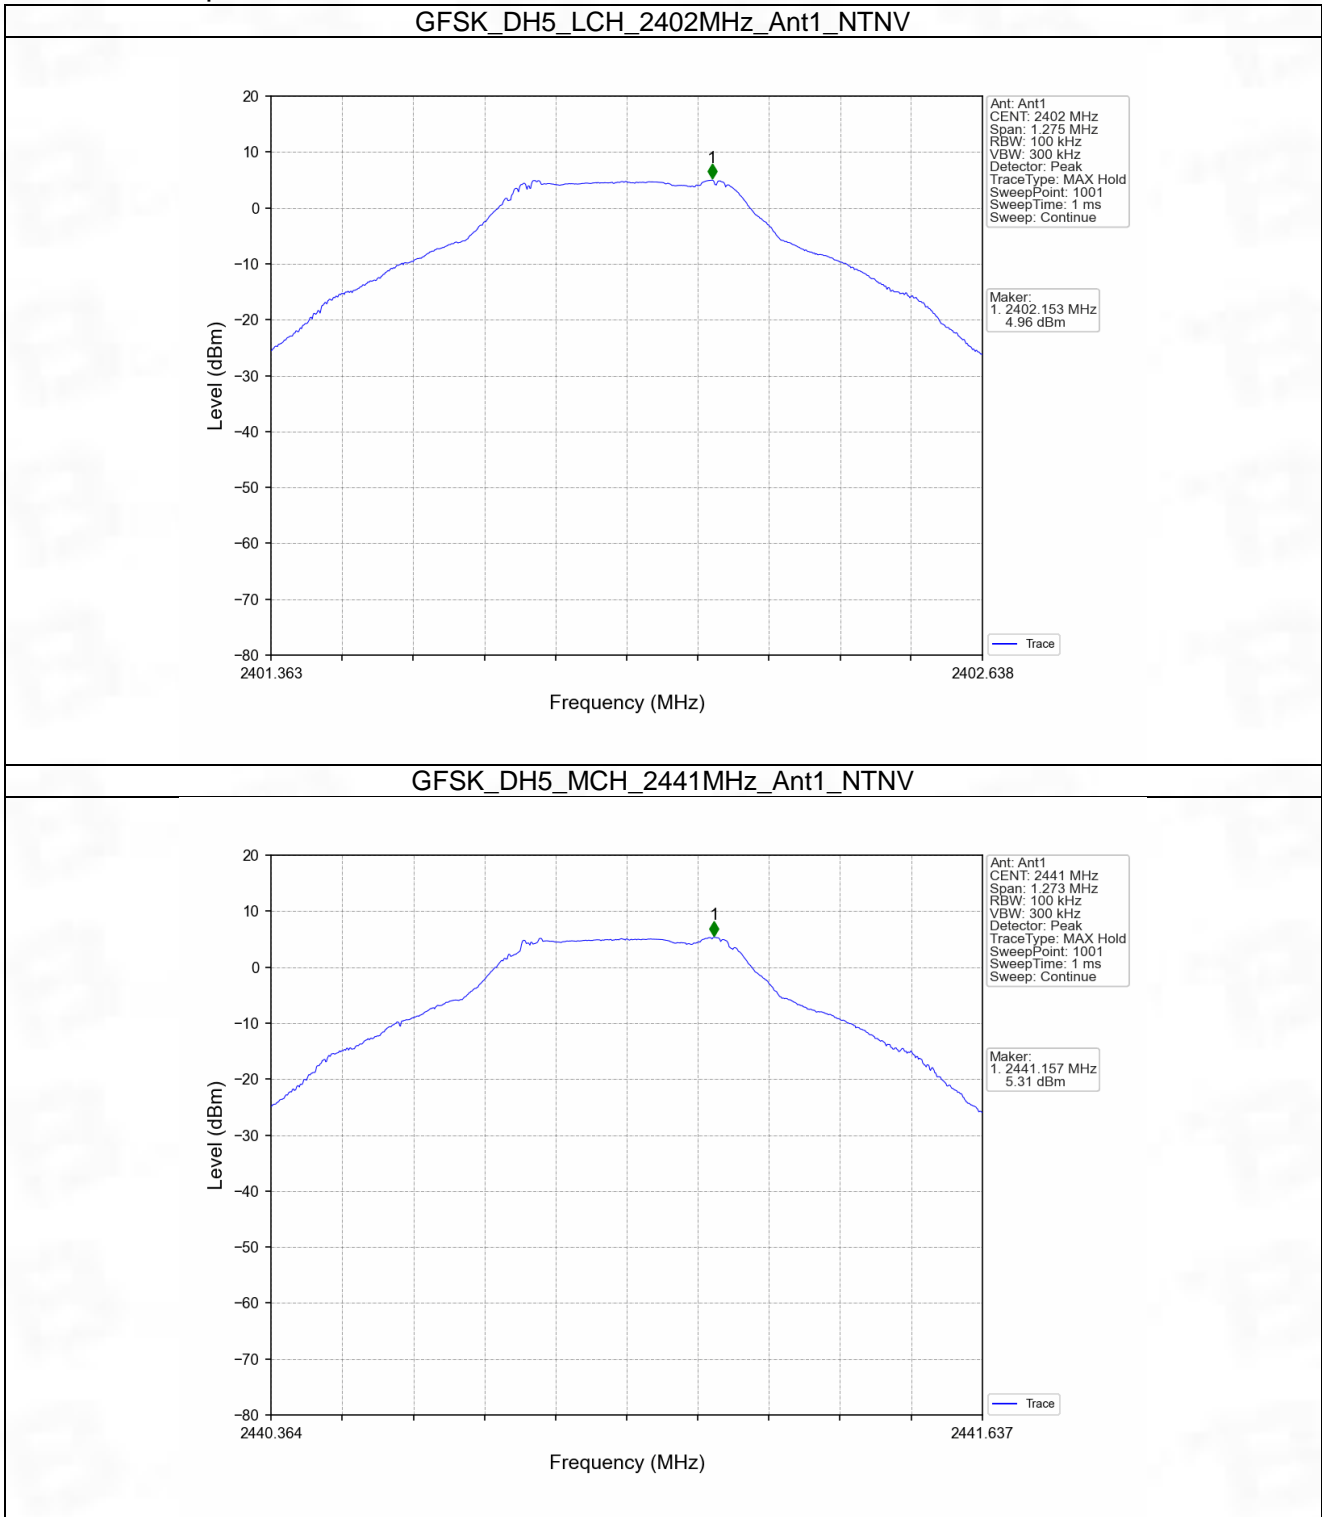


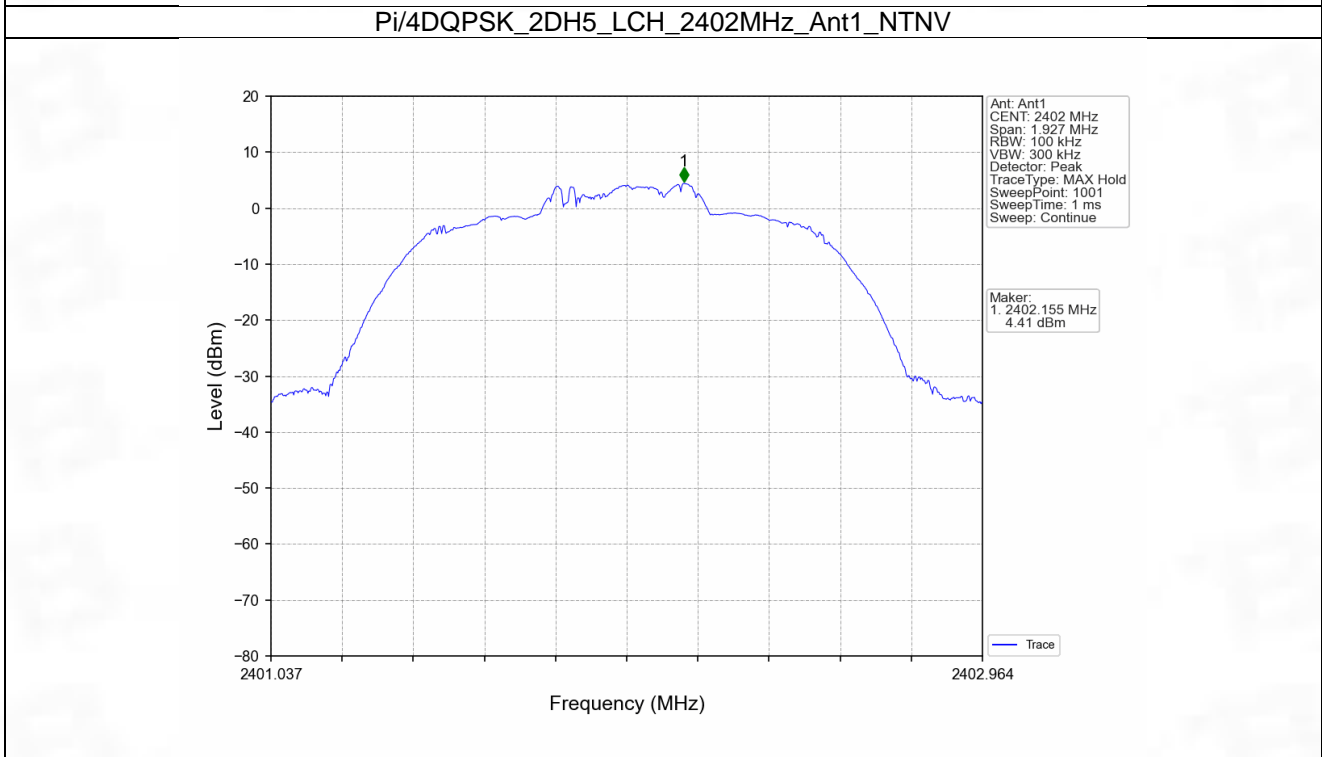
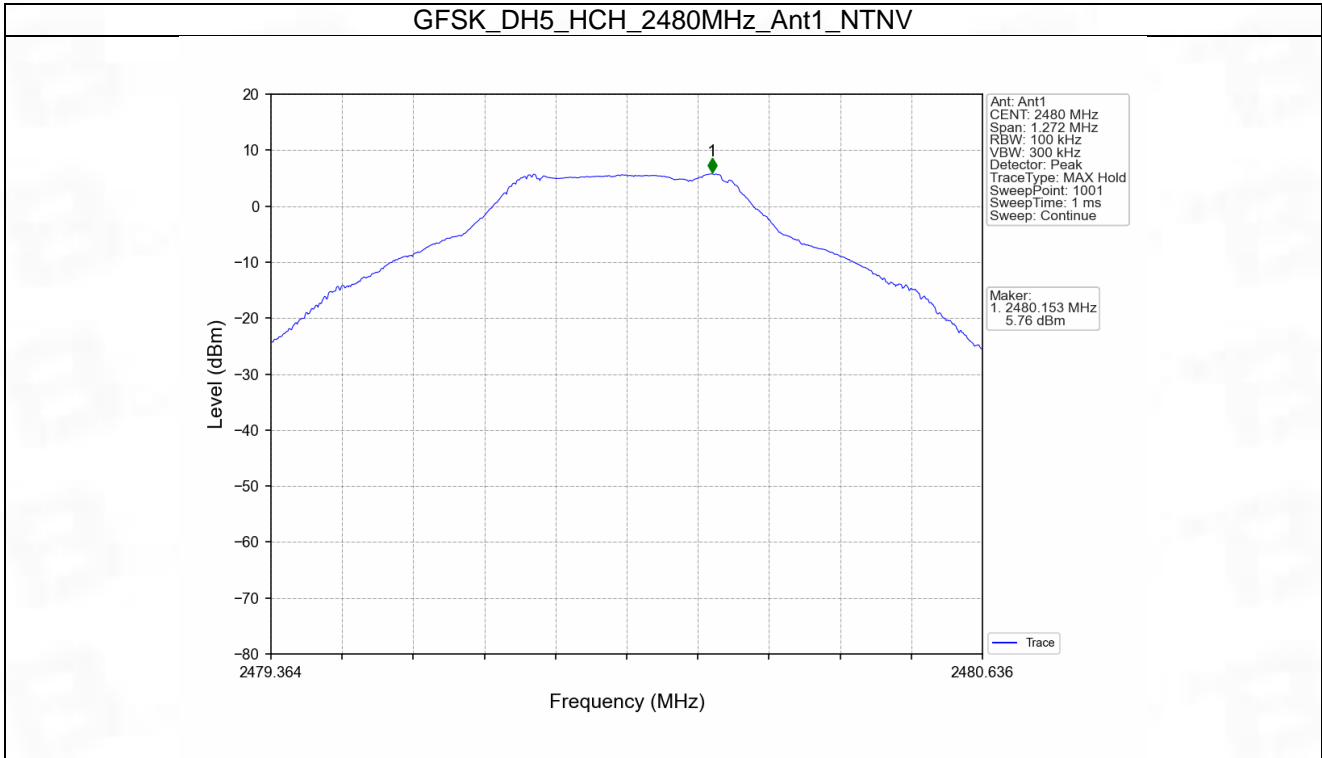



Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

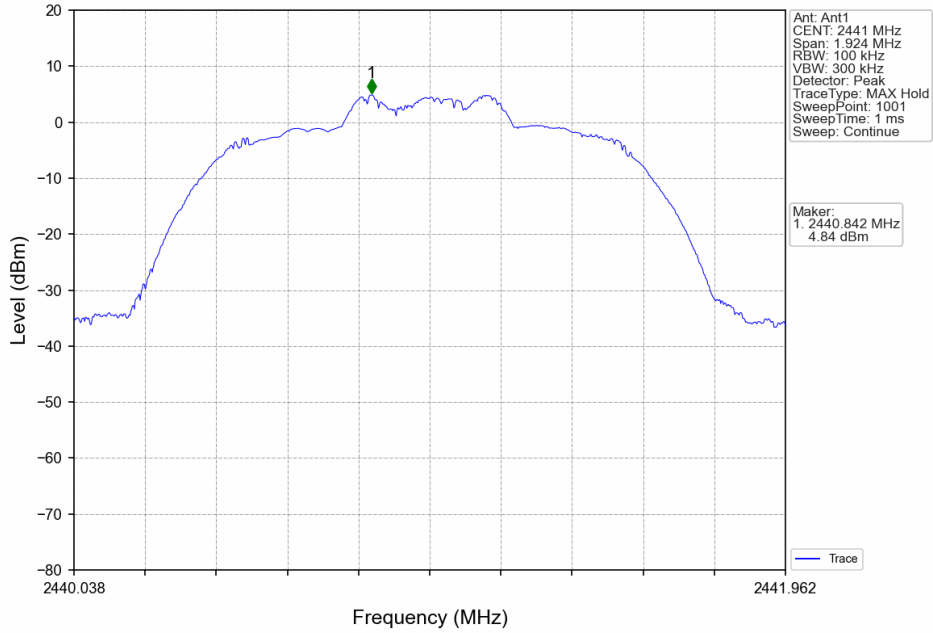

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

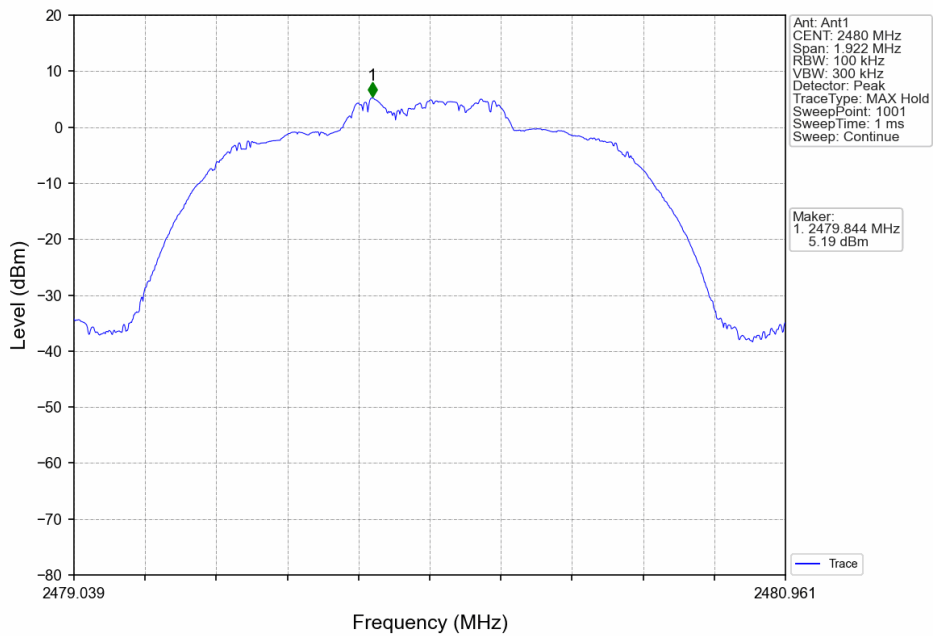

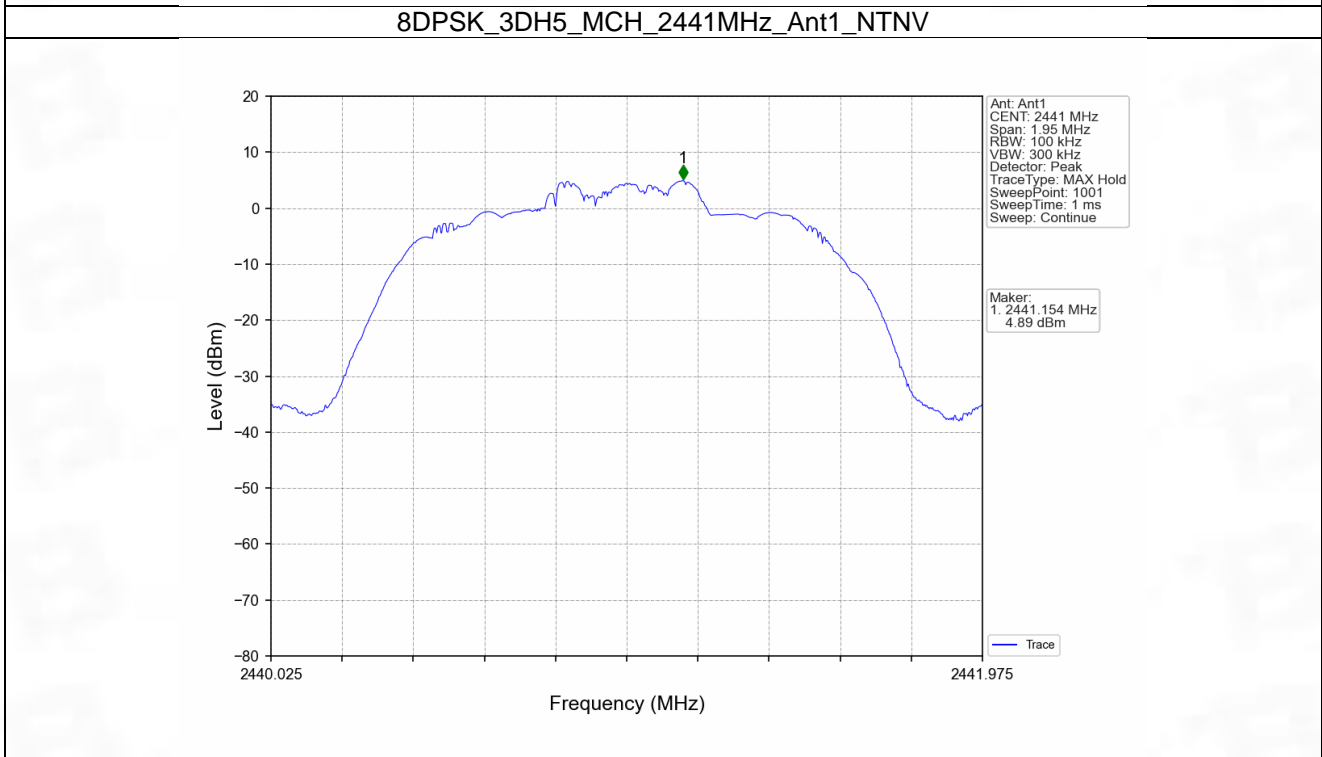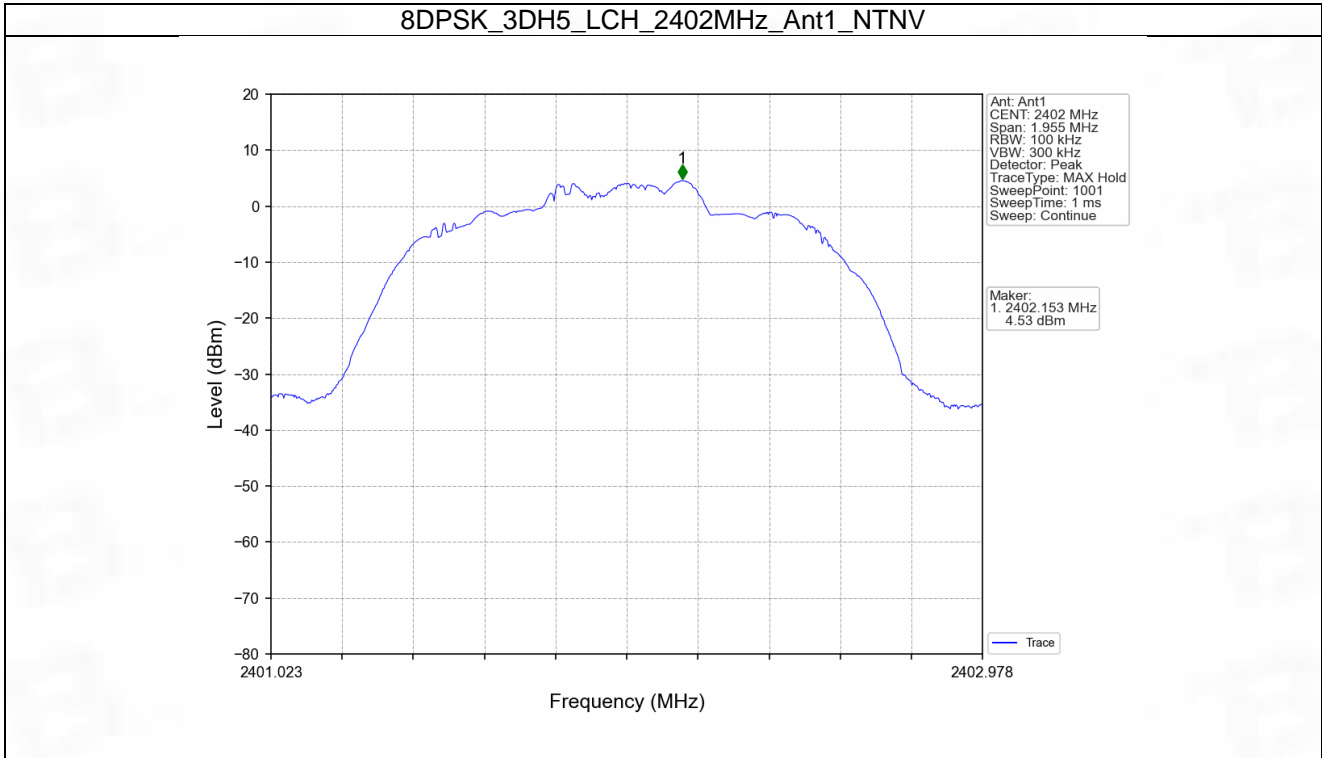

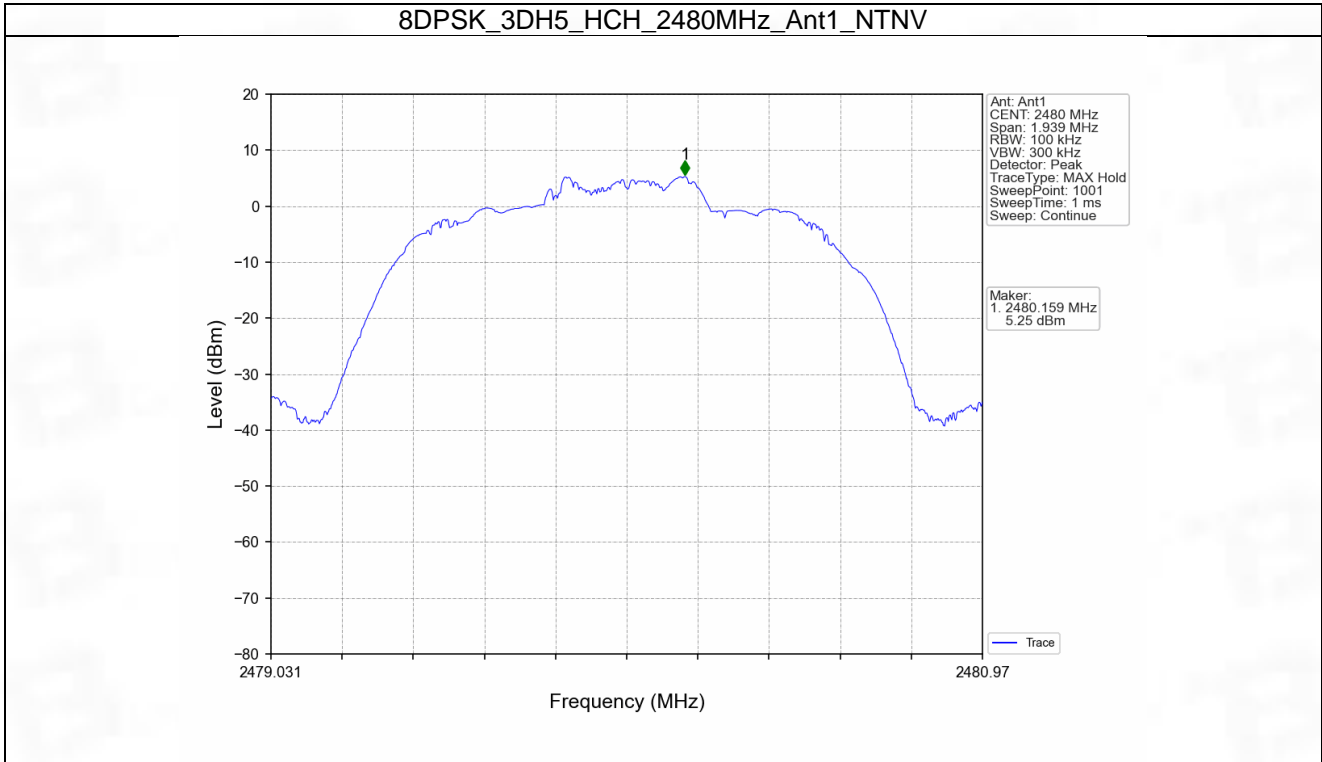



6.2 CSE



6.2.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	5.76	-14.24	Pass
		2441	DH5	1	5.76	-14.24	Pass
		2480	DH5	1	5.76	-14.24	Pass
		HOPP	DH5	1	5.76	-14.24	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	5.19	-14.81	Pass
		2441	2DH5	1	5.19	-14.81	Pass
		2480	2DH5	1	5.19	-14.81	Pass
		HOPP	2DH5	1	5.19	-14.81	Pass
8DPSK	SISO	2402	3DH5	1	5.25	-14.75	Pass
		2441	3DH5	1	5.25	-14.75	Pass
		2480	3DH5	1	5.25	-14.75	Pass
		HOPP	3DH5	1	5.25	-14.75	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.



6.2.2 Test Graph

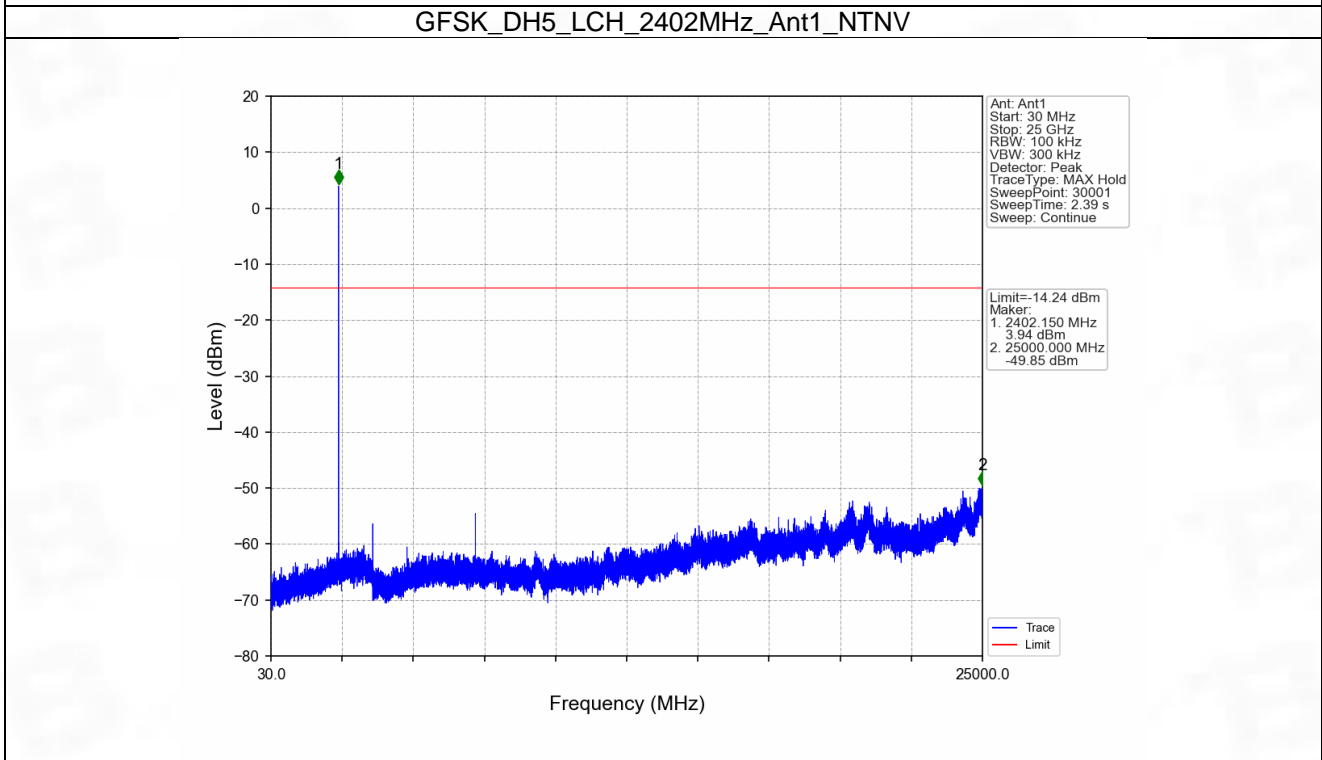
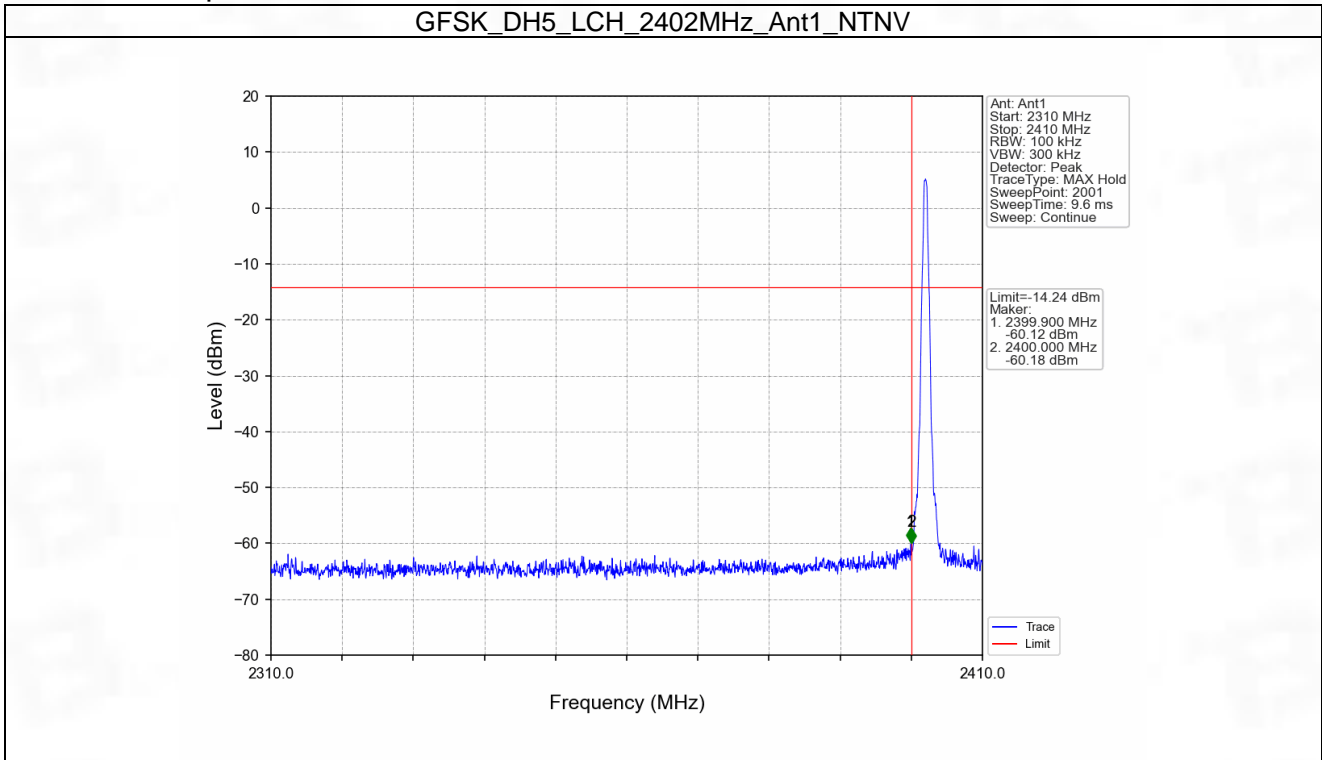


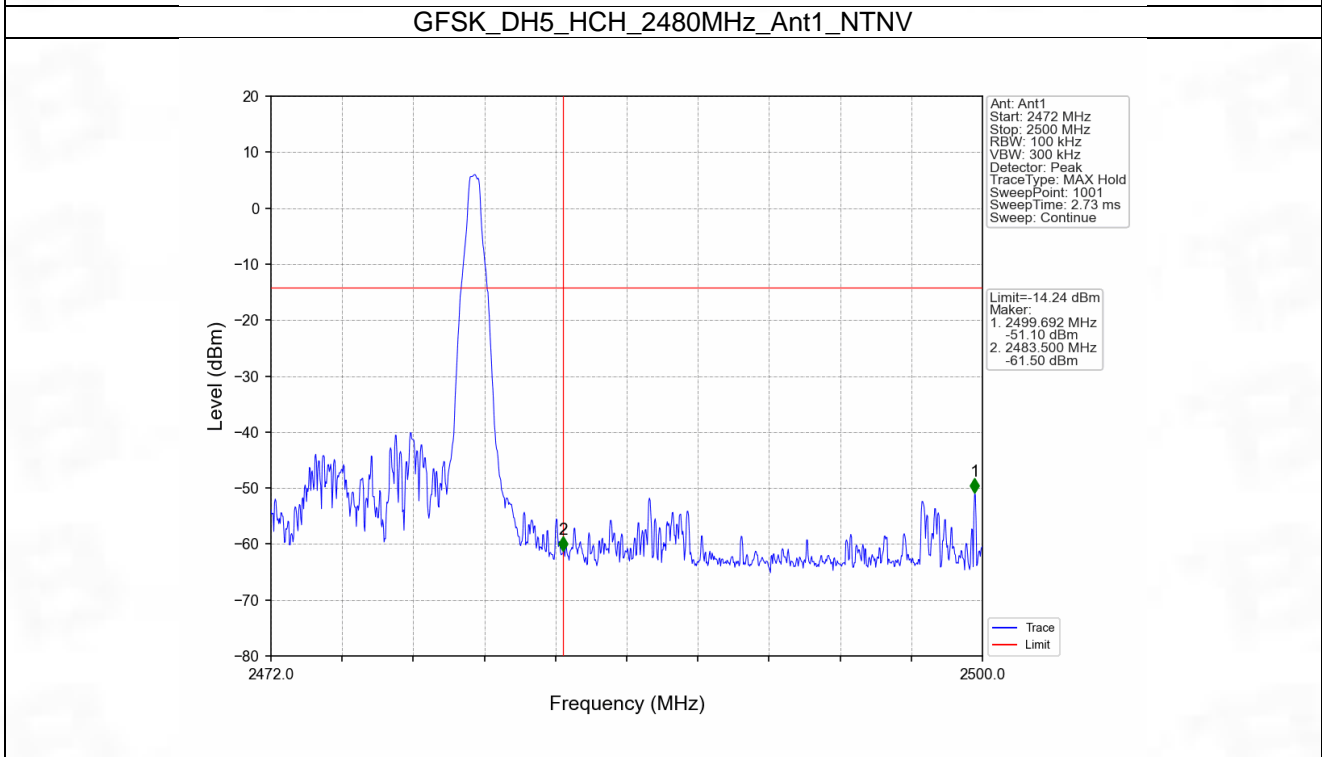
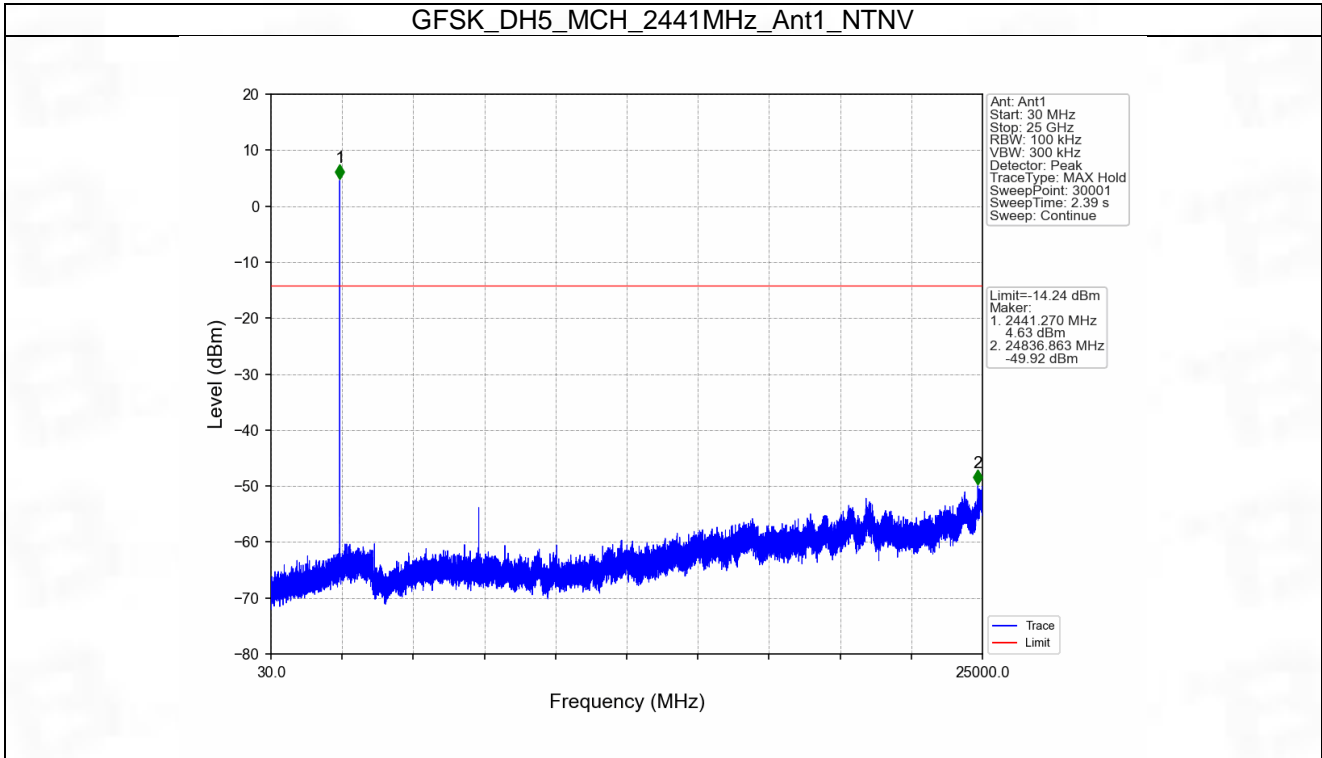


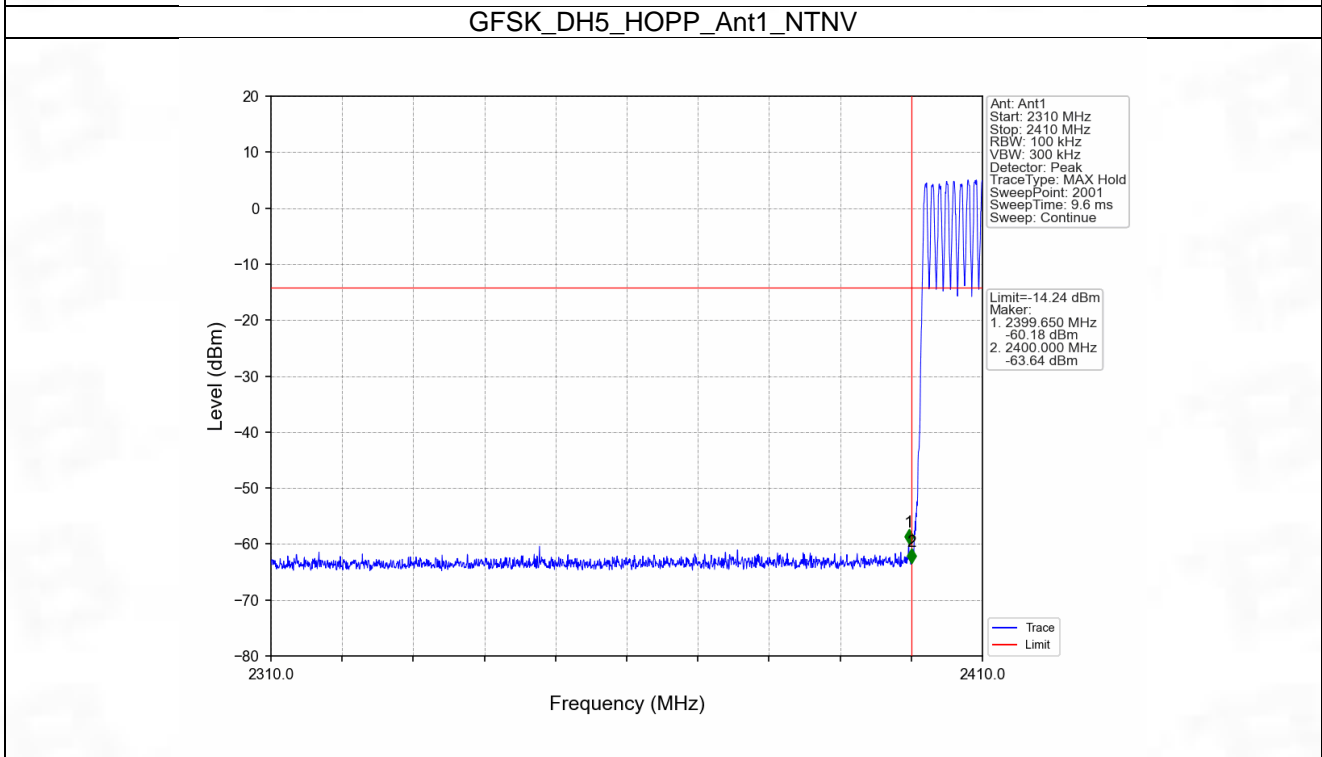
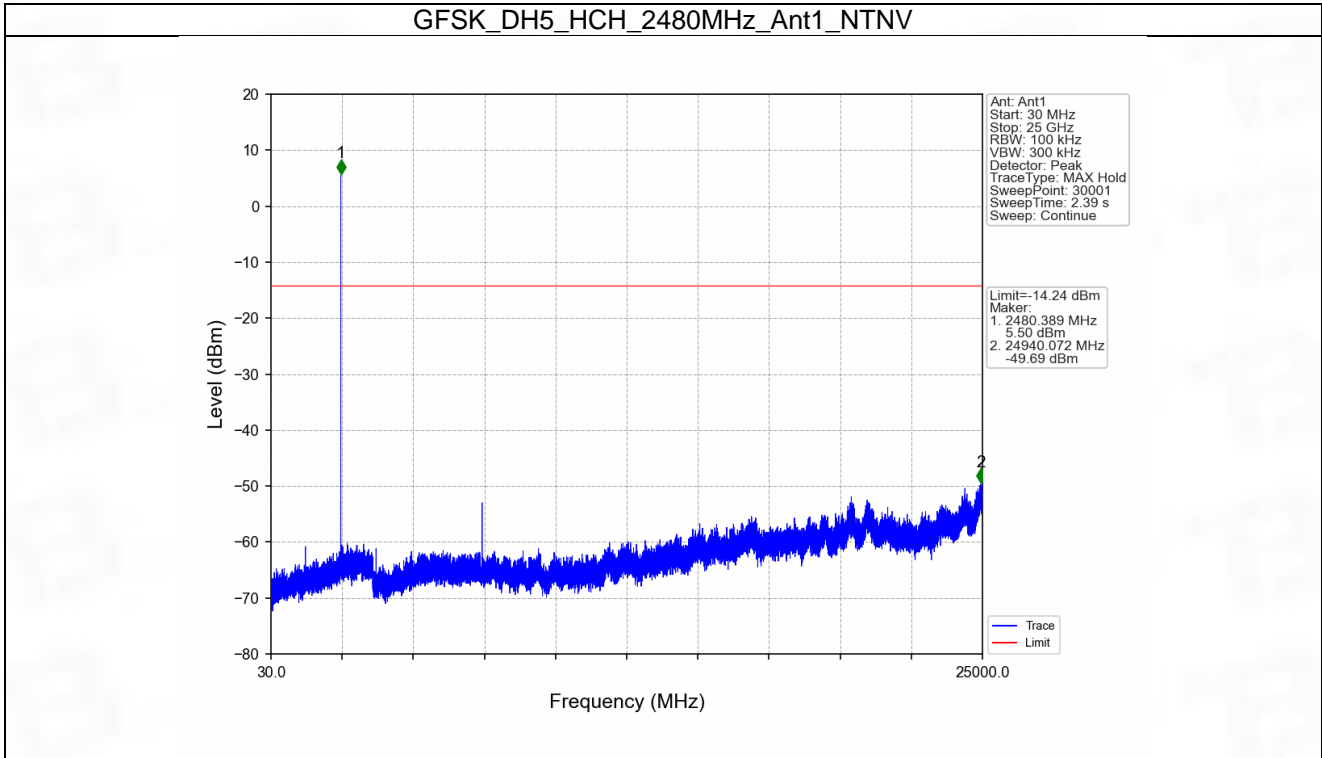


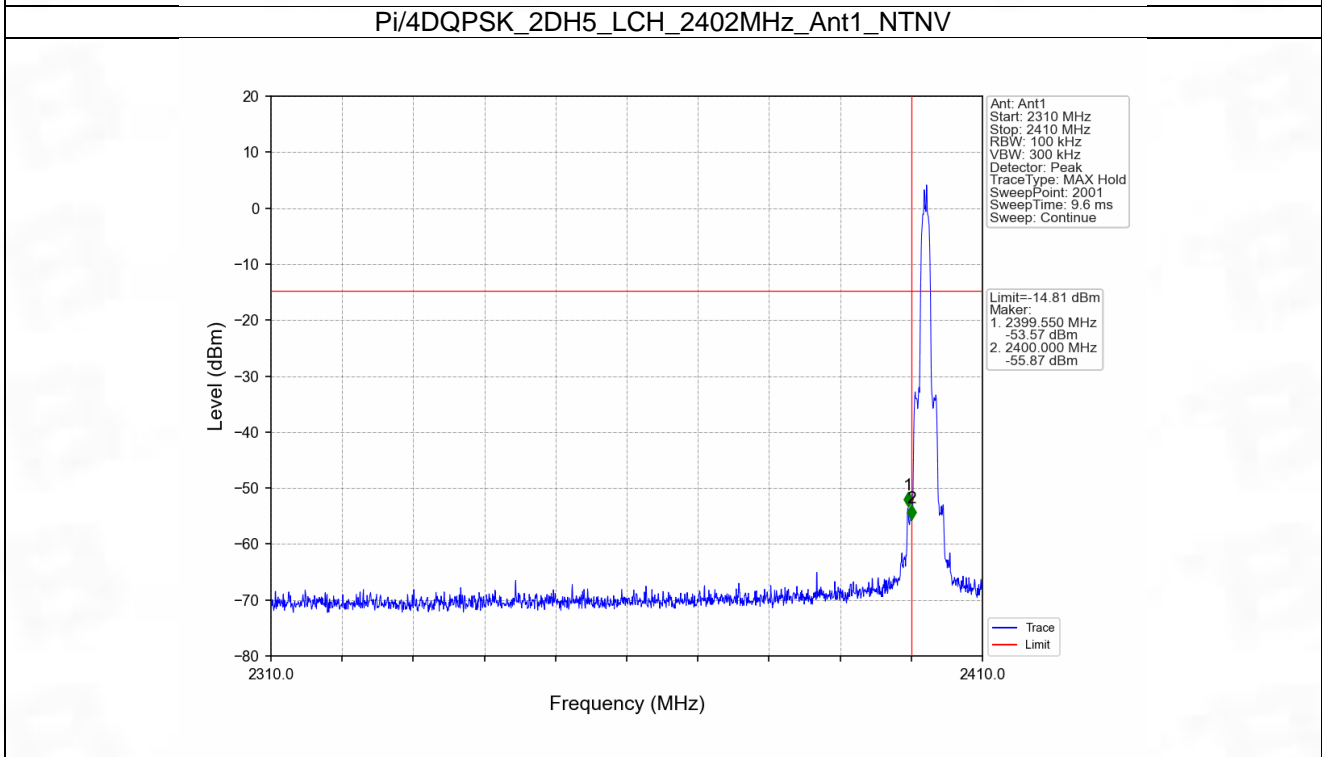
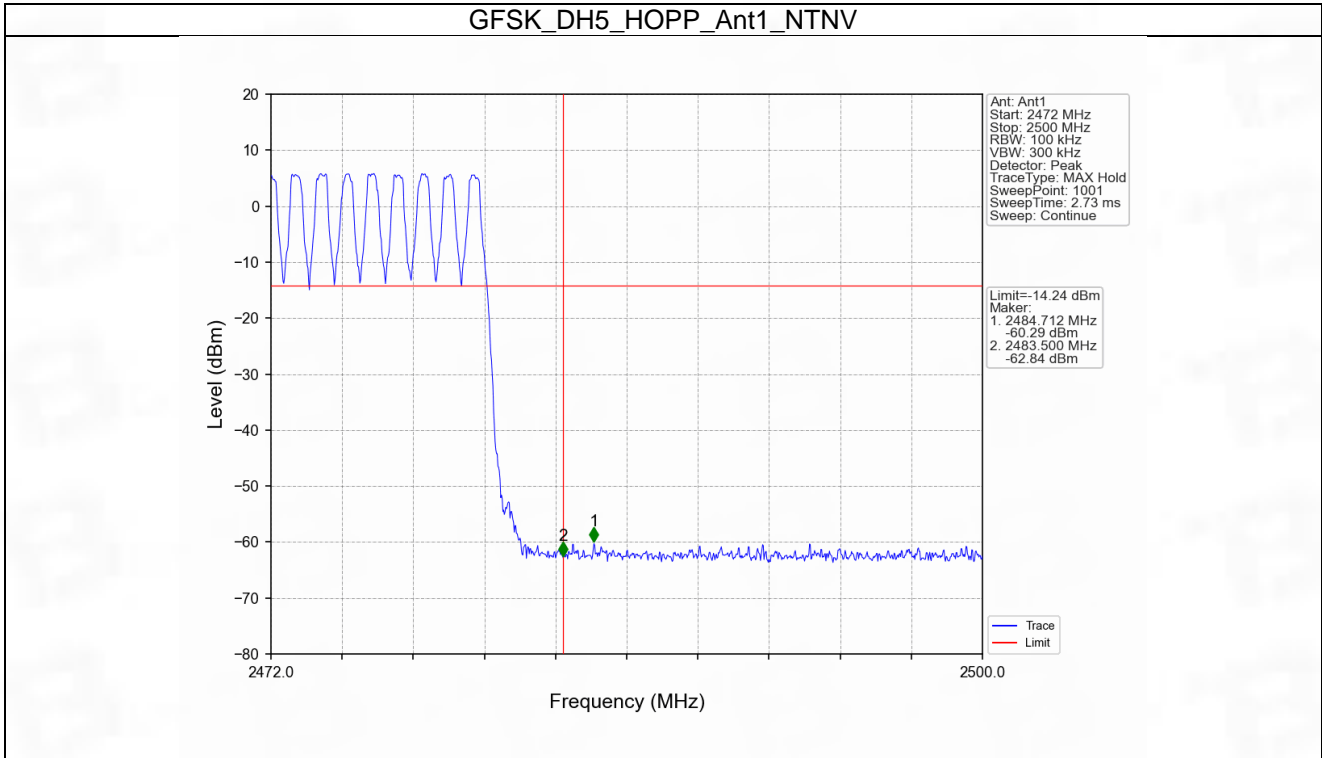


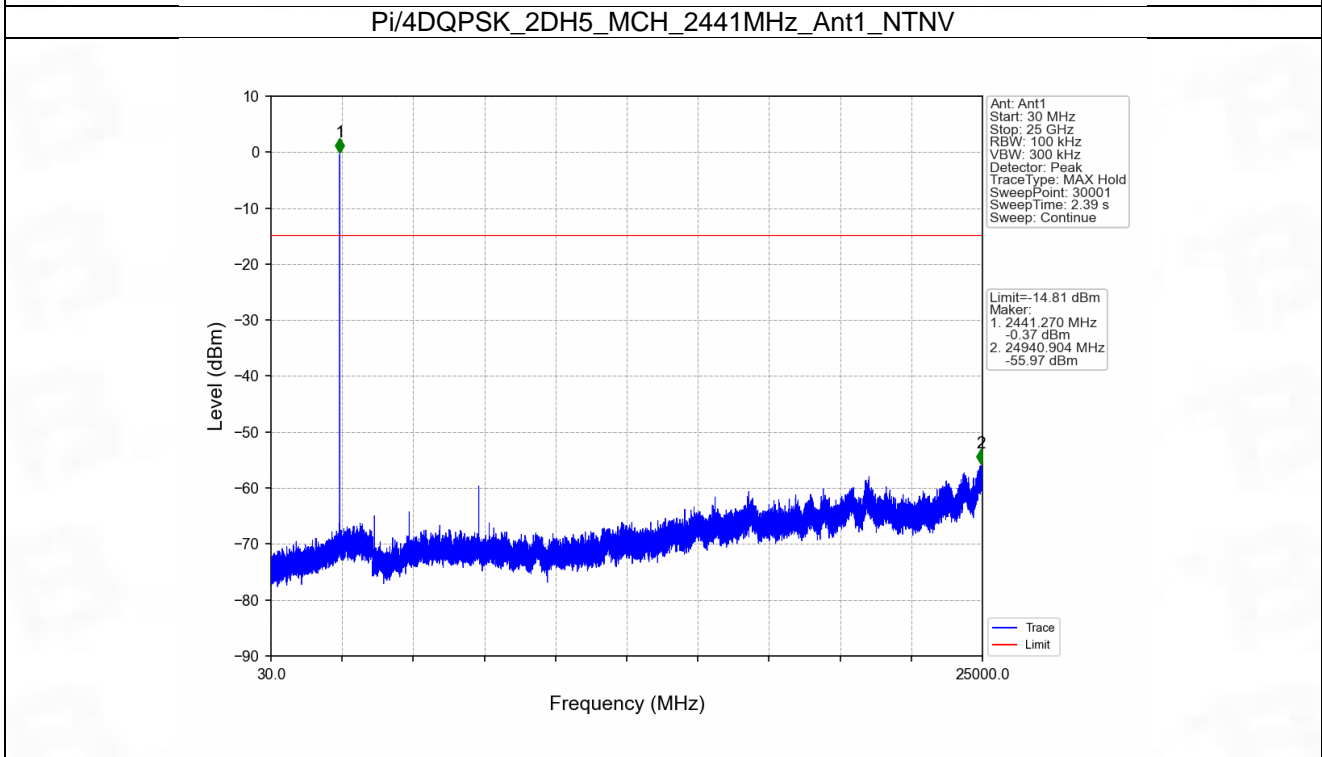
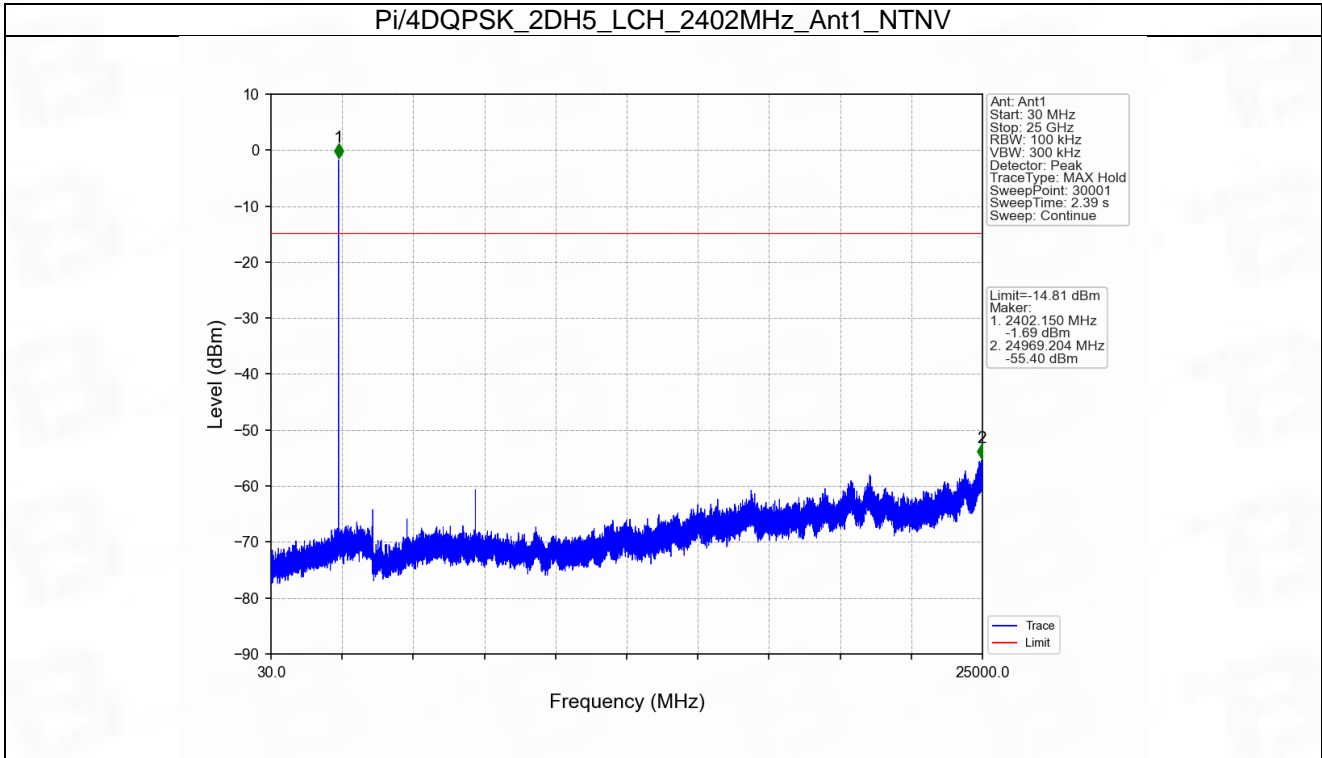


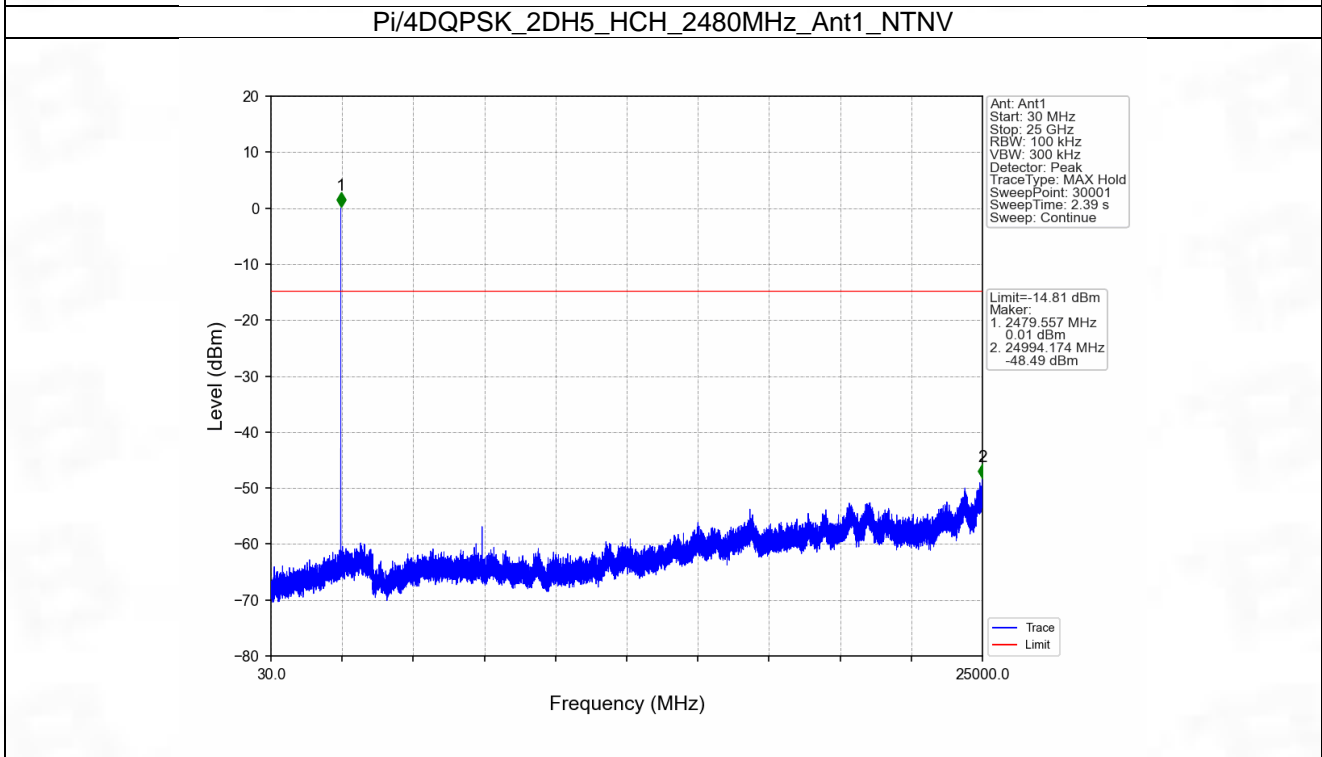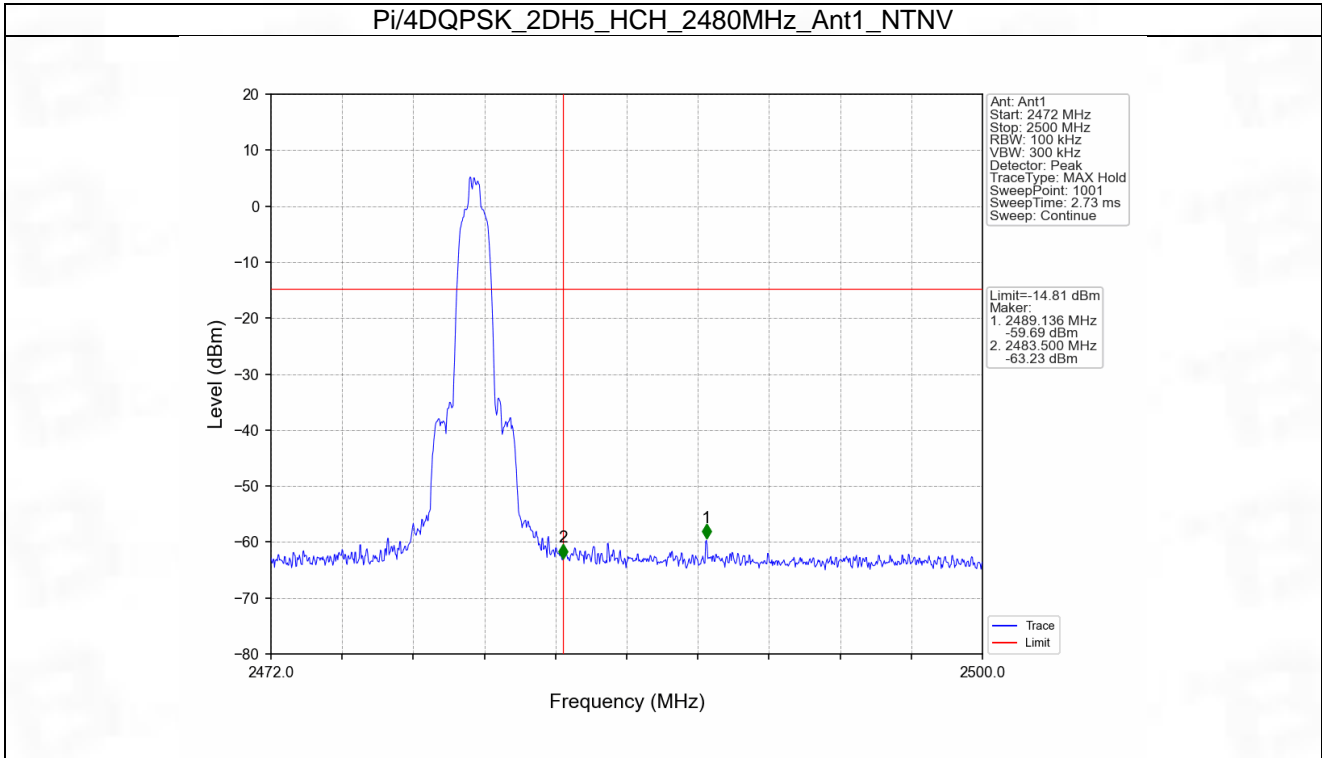


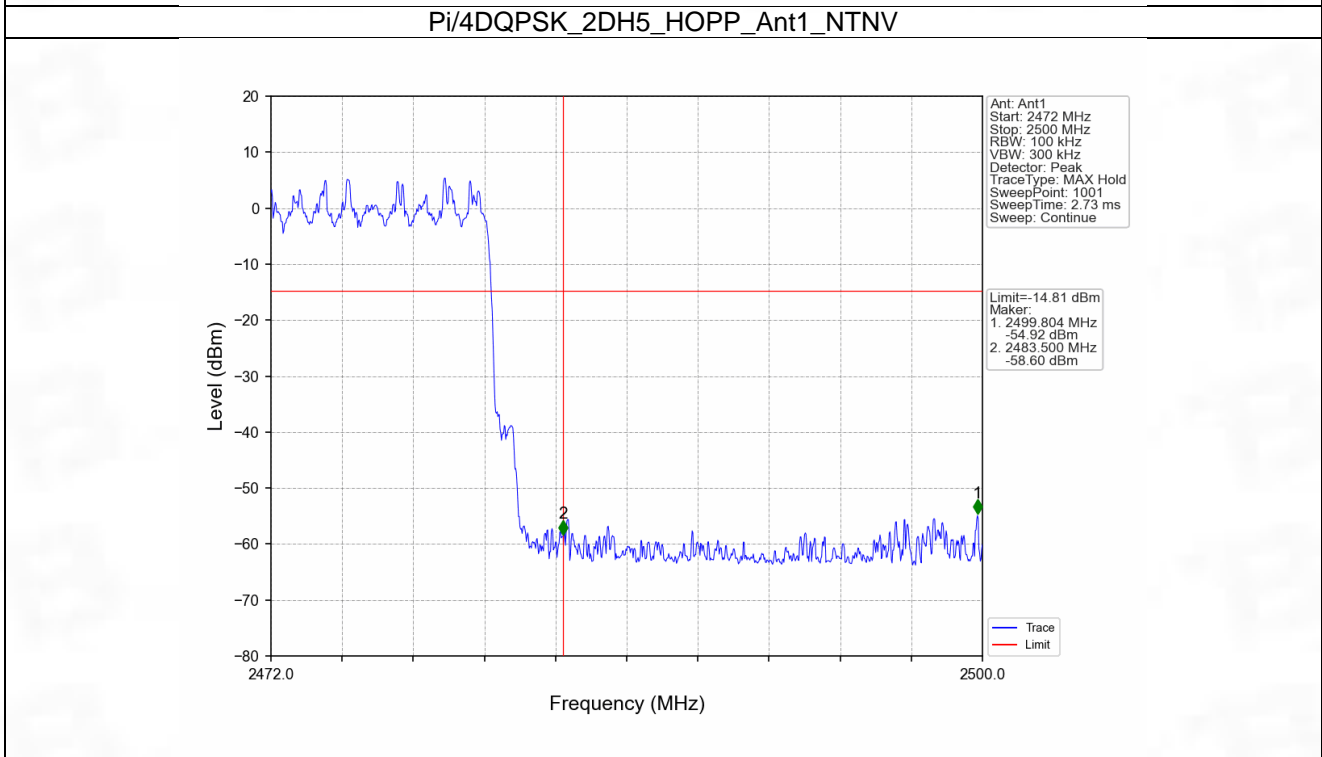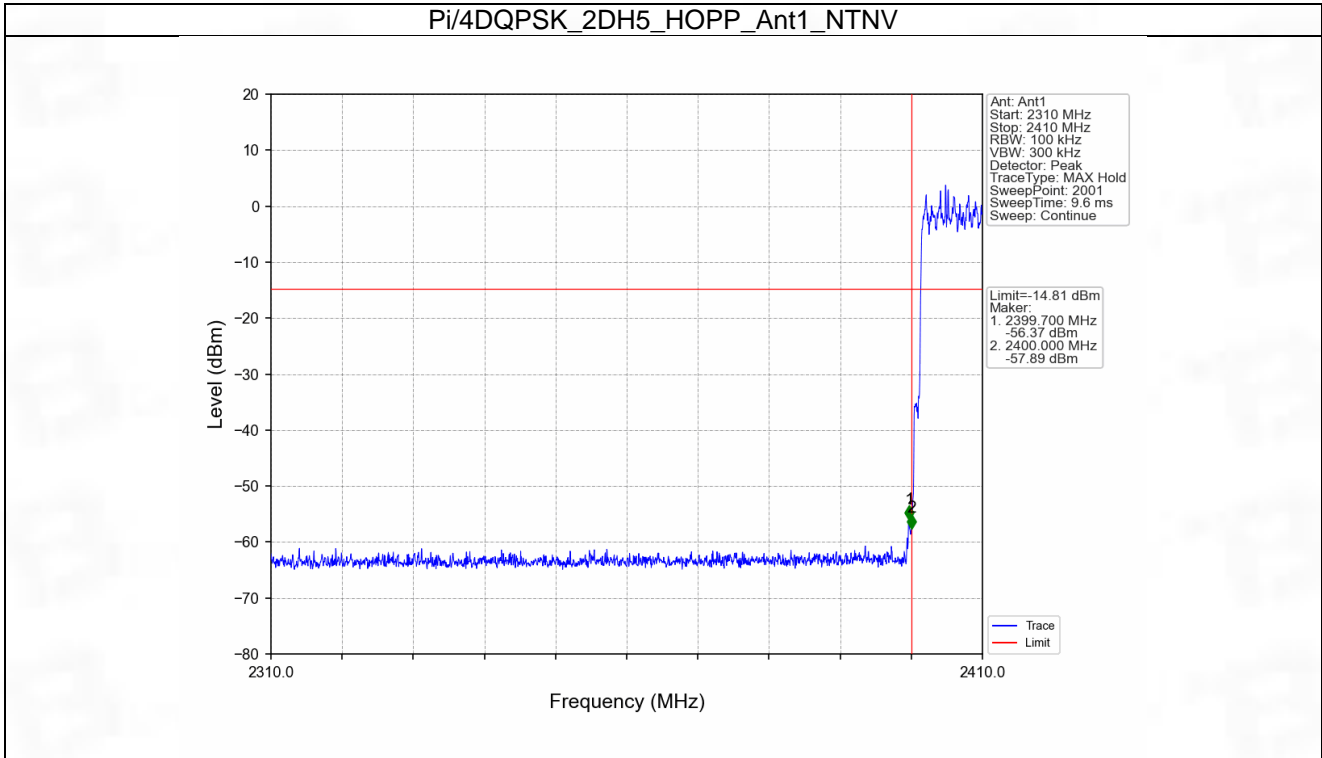

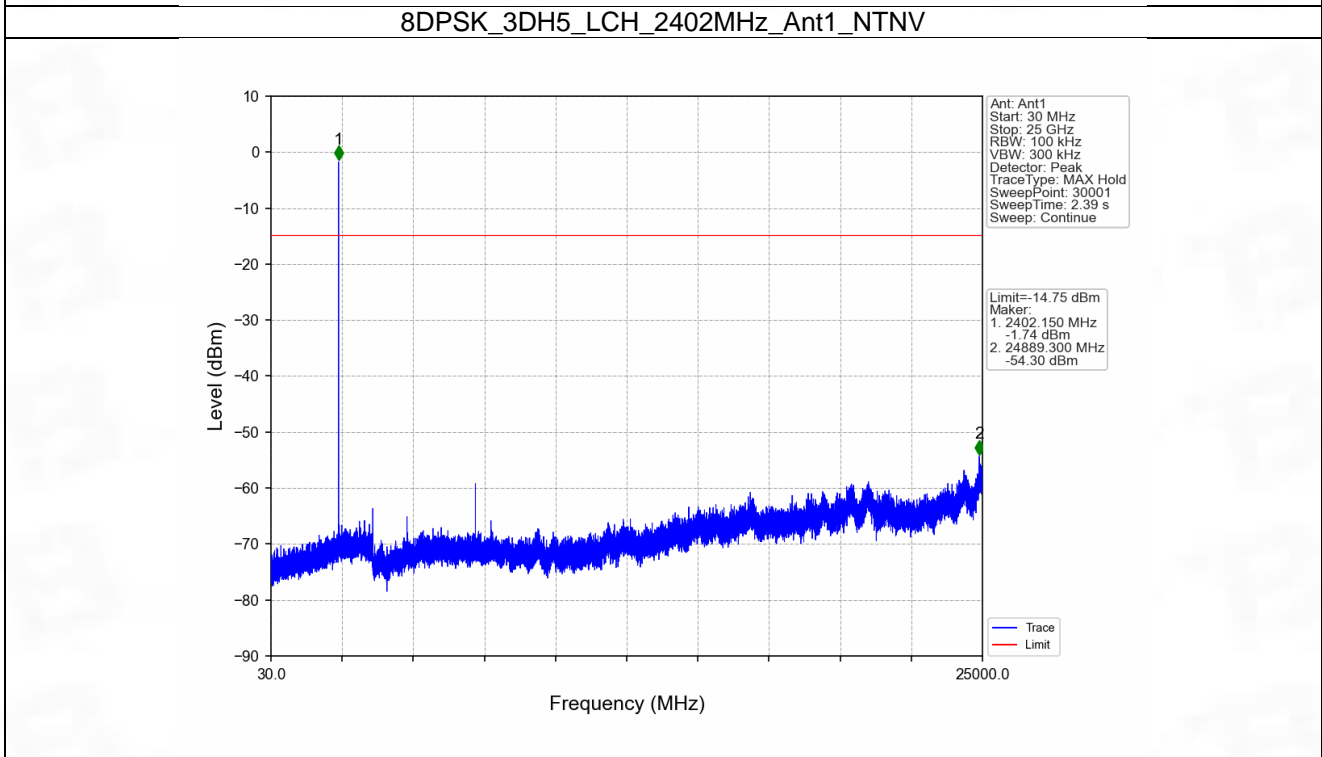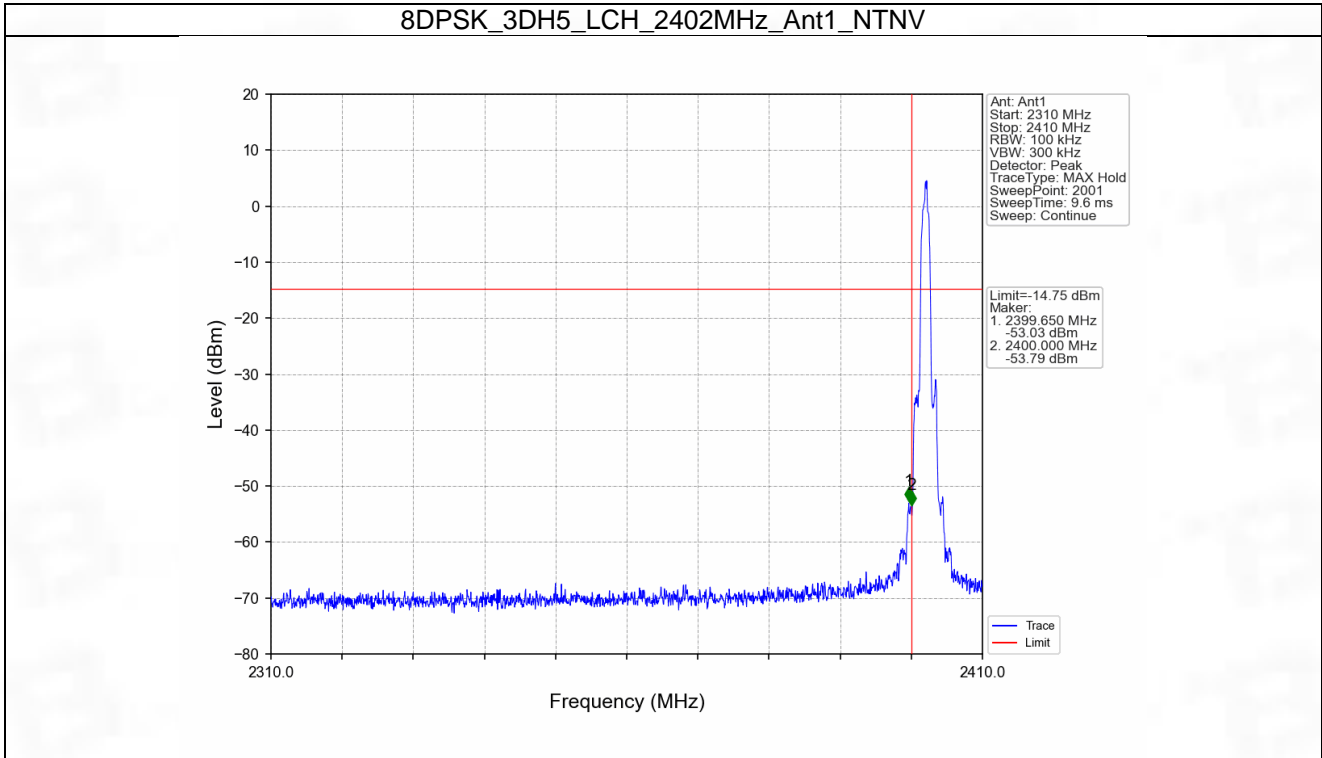

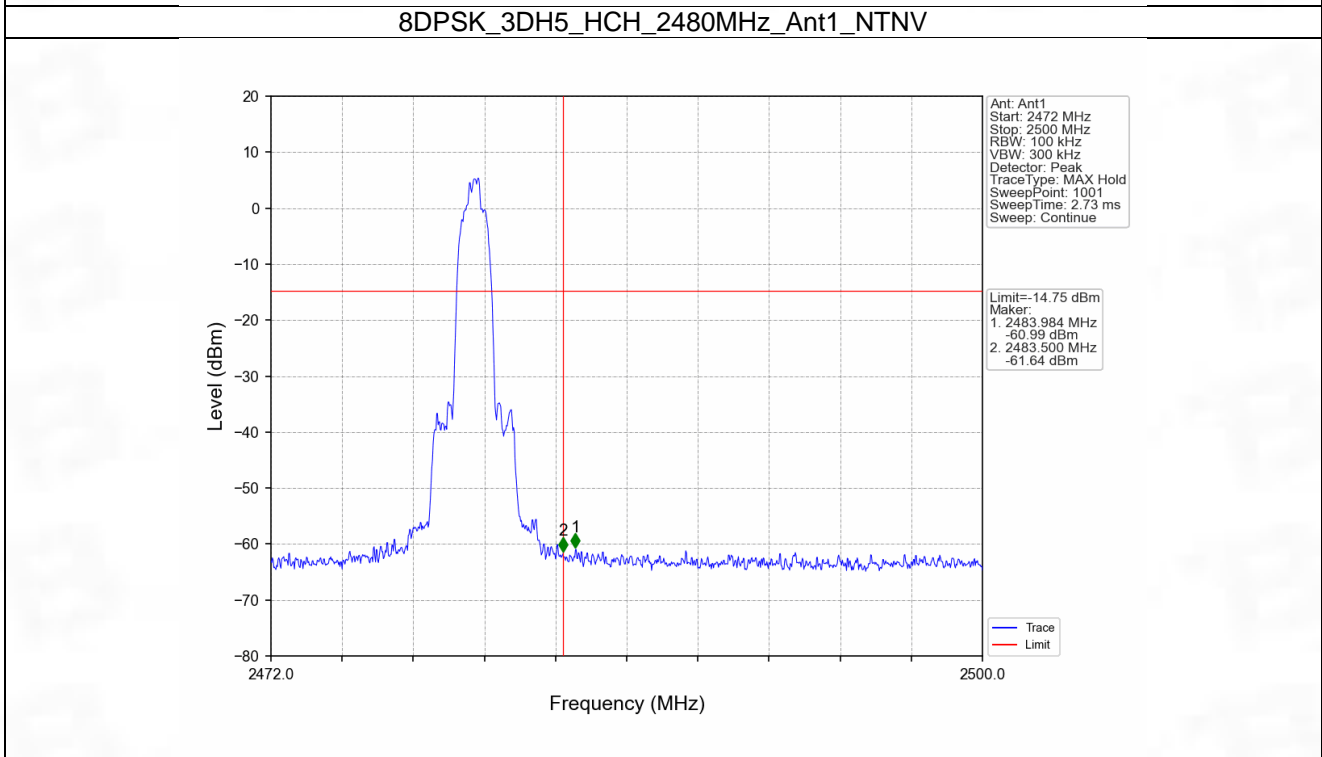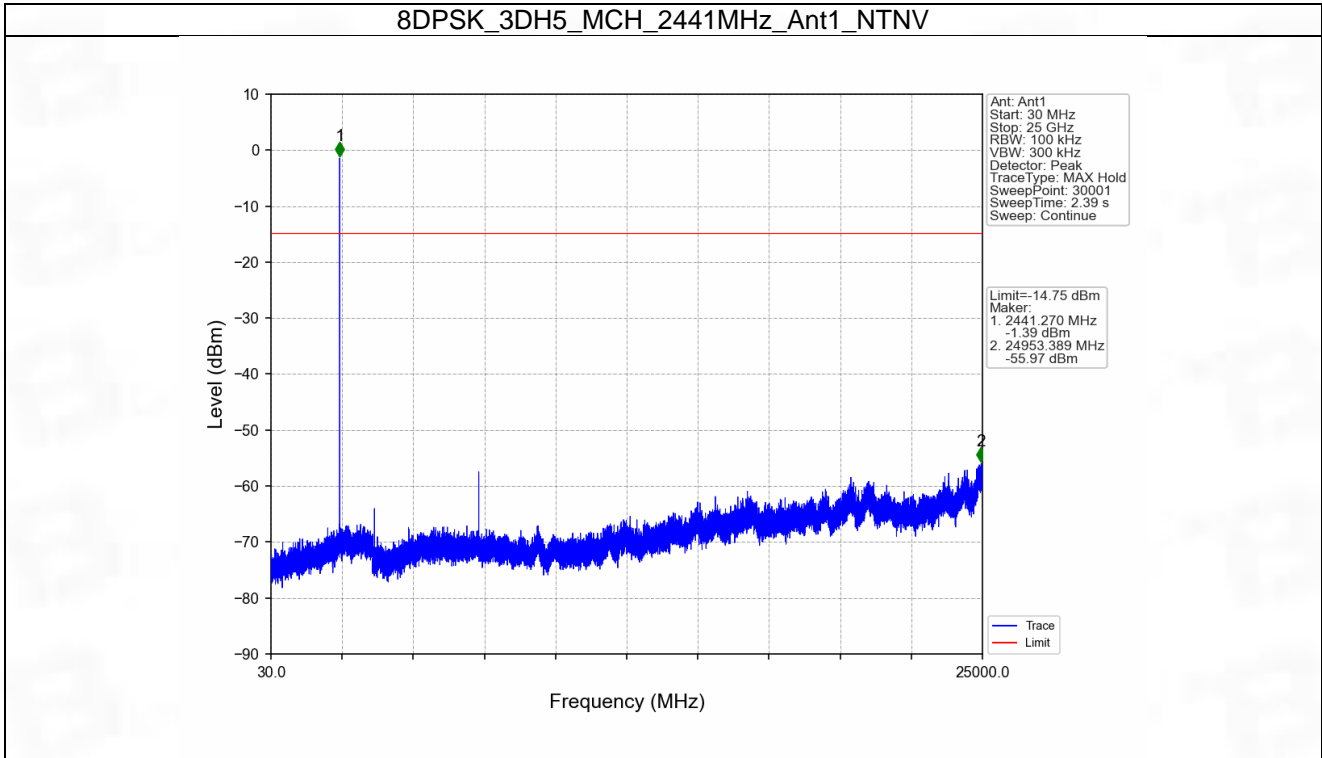

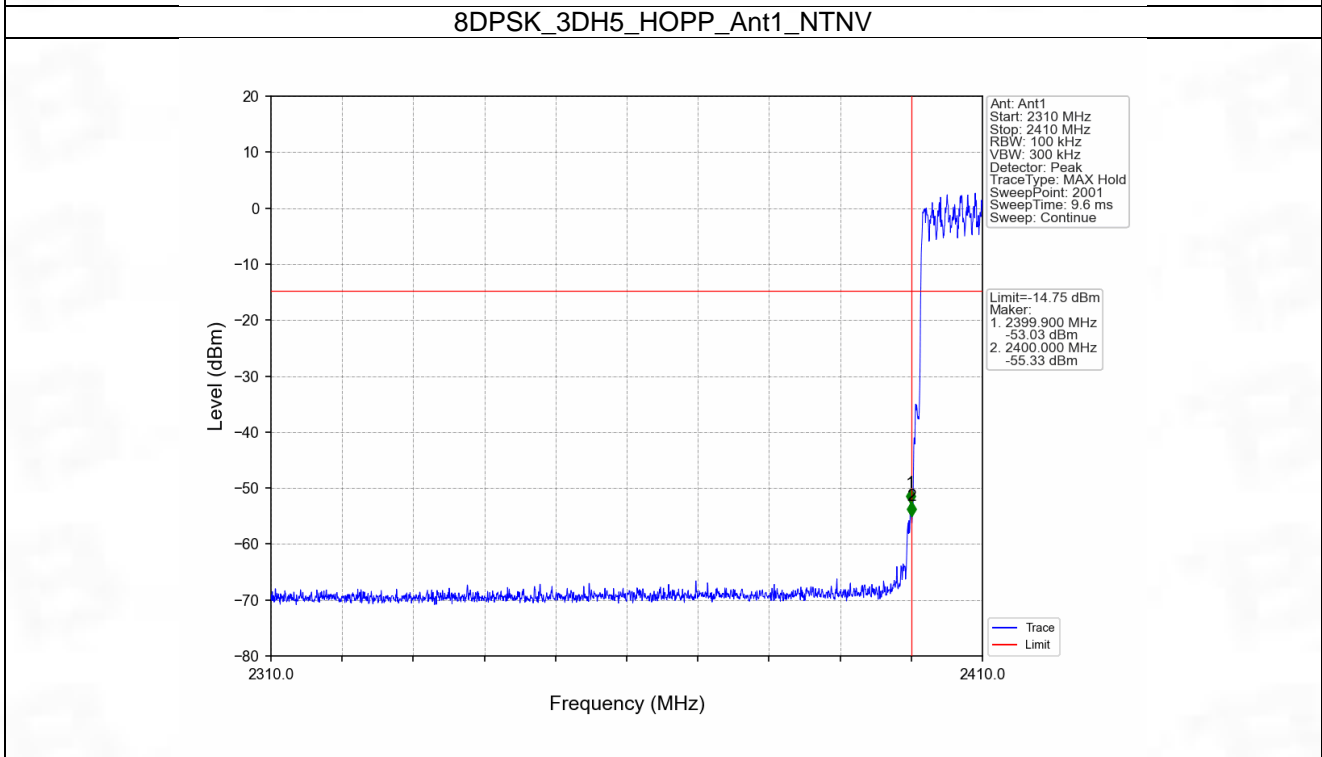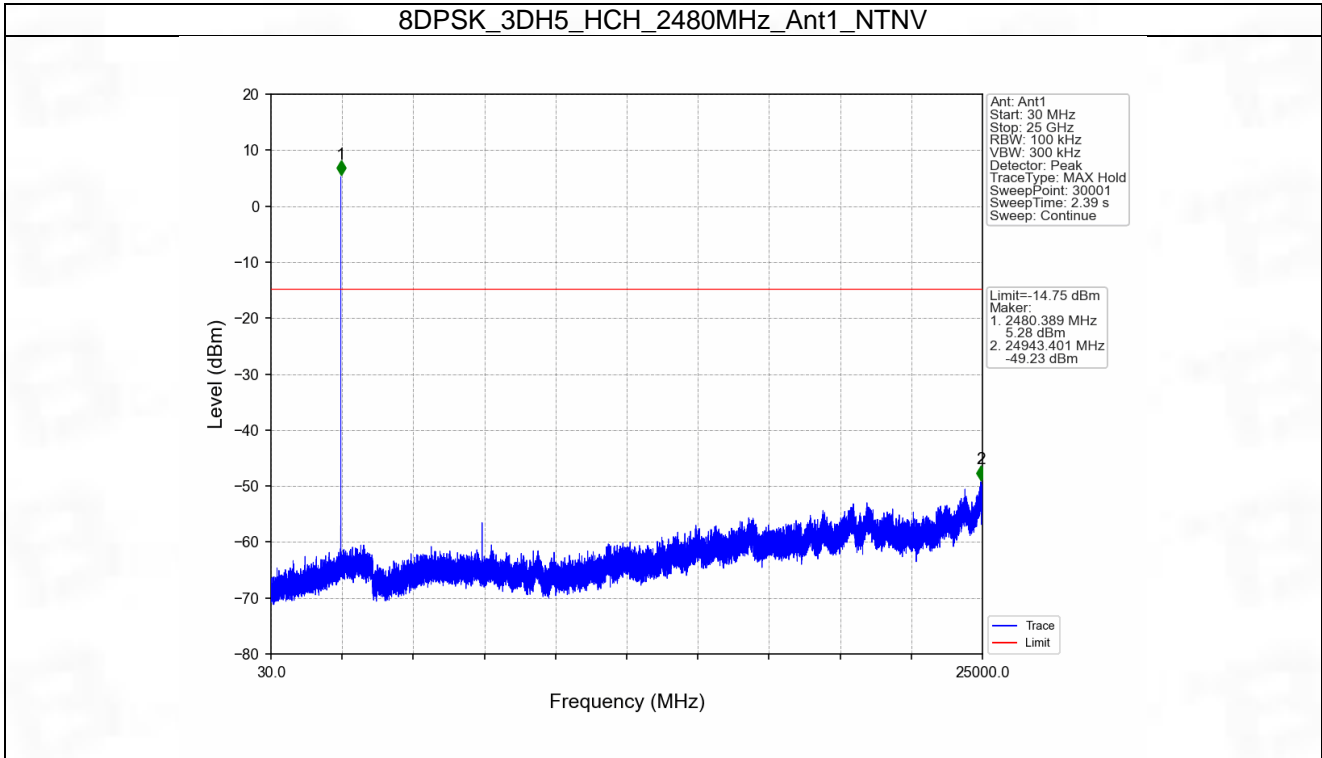

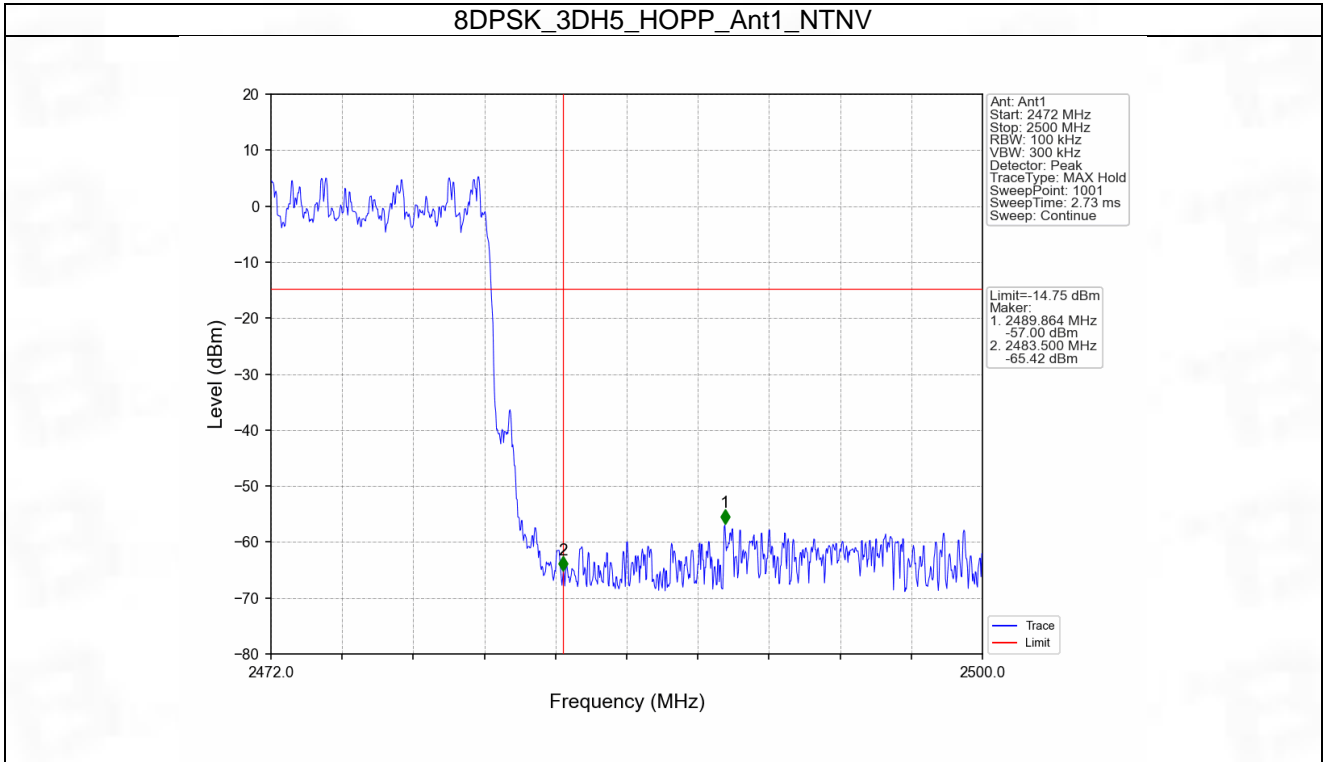

7. Form731

7.1 Form731

7.1.1 Test Result

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0041	6.13



Test Report Number: BTF230512R00201



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --