



Band41\_20MHz\_16QAM\_HCH\_2680MHz\_RB\_1\_99\_NTNV

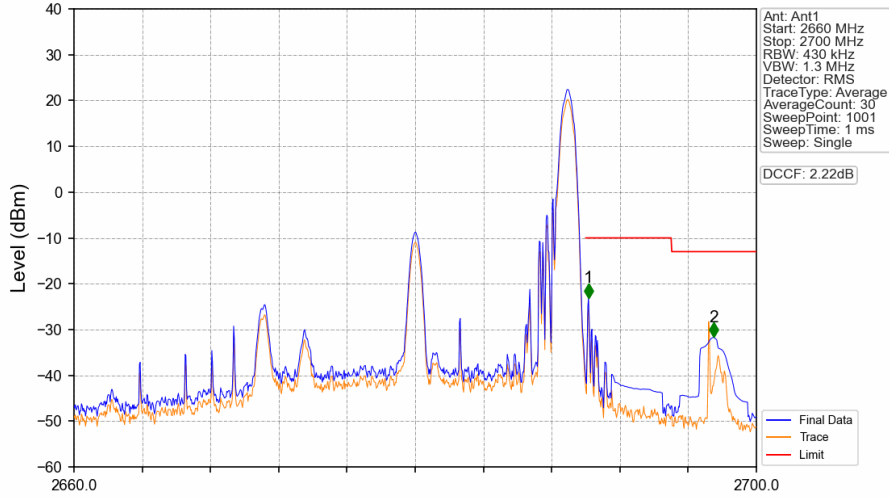

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2660	2690	0.43	/	/	/	/	/	/
2690	2691	0.43	/	1	2690.160	-23.06	-10	Pass
2691	2700	1	CHP	2	2697.480	-31.68	-13	Pass

Band41\_20MHz\_16QAM\_HCH\_2680MHz\_RB\_100\_0\_NTNV

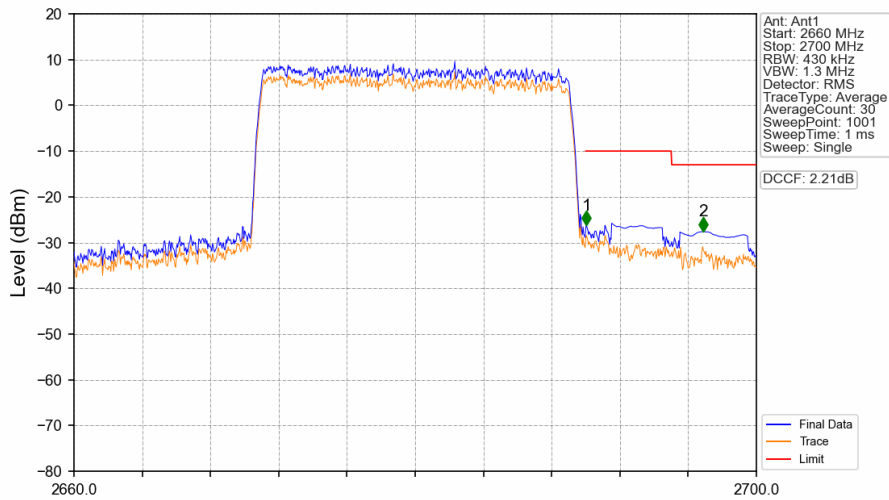

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2660	2690	0.43	/	/	/	/	/	/
2690	2691	0.43	/	1	2690.040	-26.25	-10	Pass
2691	2700	1	CHP	2	2696.880	-27.55	-13	Pass



## 7. Form731

### 7.1 Form731\_Power

#### 7.1.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
41	5	2498.5	2687.5	0.2673	0.0123	ppm	4M54G7D	27M	24.27
41	5	2498.5	2687.5	0.2158	0.0126	ppm	4M54W7D	27M	23.34
41	10	2501	2685	0.2767	0.0091	ppm	9M08G7D	27M	24.42
41	10	2501	2685	0.2239	0.0070	ppm	9M08W7D	27M	23.50
41	15	2503.5	2682.5	0.2655	0.0083	ppm	13M6G7D	27M	24.24
41	15	2503.5	2682.5	0.2158	0.0067	ppm	13M6W7D	27M	23.34
41	20	2506	2680	0.2871	0.0071	ppm	18M1G7D	27M	24.58
41	20	2506	2680	0.2208	0.0078	ppm	18M1W7D	27M	23.44

### 7.2 Form731\_EIRP

#### 7.2.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
41	5	2498.5	2687.5	0.3162	0.0123	ppm	4M54G7D	27M	25.00
41	5	2498.5	2687.5	0.2553	0.0126	ppm	4M54W7D	27M	24.07
41	10	2501	2685	0.3273	0.0091	ppm	9M08G7D	27M	25.15
41	10	2501	2685	0.2649	0.0070	ppm	9M08W7D	27M	24.23
41	15	2503.5	2682.5	0.3141	0.0083	ppm	13M6G7D	27M	24.97
41	15	2503.5	2682.5	0.2553	0.0067	ppm	13M6W7D	27M	24.07
41	20	2506	2680	0.3396	0.0071	ppm	18M1G7D	27M	25.31
41	20	2506	2680	0.2612	0.0078	ppm	18M1W7D	27M	24.17