

FCC REPORT

(LTE)

Applicant: Xwireless LLC

Address of Applicant: 11565 Old Georgetown Road Rockville MD 20852

Equipment Under Test (EUT)

Product Name: Smart phone

Model No.: Sync

Trade mark: Vortex

FCC ID: 2ADLJSYNC

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L
FCC CFR Title 47 Part 27 Subpart H

Date of sample receipt: 30 Sep., 2018

Date of Test: 08 Oct., to 29 Oct., 2018

Date of report issued: 30 Oct., 2018

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful, and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	30 Oct., 2018	Original

Tested by:

Carrey Chen

Date:

30 Oct., 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

30 Oct., 2018

Project Engineer

3. Contents

	Page
1. COVER PAGE	1
2. VERSION	2
3. CONTENTS	3
4. TEST SUMMARY	4
5. GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE.....	10
5.4 DESCRIPTION OF SUPPORT UNITS.....	10
5.5 MEASUREMENT UNCERTAINTY.....	10
5.6 RELATED SUBMITTAL(S) / GRANT (S).....	10
5.7 LABORATORY FACILITY.....	10
5.8 LABORATORY LOCATION.....	10
5.9 TEST INSTRUMENTS LIST.....	11
6. TEST RESULTS	12
6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP.....	12
6.2 PEAK-TO-AVERAGE RATIO.....	21
6.3 OCCUPY BANDWIDTH.....	24
6.4 OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	60
6.5 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	157
6.6 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	174
6.7 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT.....	178
7 TEST SETUP PHOTO	180
8 EUT CONSTRUCTIONAL DETAILS	181

4. Test Summary

Test Items	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 24.232 (c) Part 27.50 (c)(10) Part 27.50 (d)(4)	Pass
Peak-to-Average Ratio	Part 24.232 (d) Part 27.50(d)(5)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 24.238(b) Part 27.53(g) Part 27.53(h)	Pass
Out of band emission at antenna terminals	Part 2.1053 Part 24.238 (a) Part 27.53 (g) Part 27.53 (h)	Pass
Field strength of spurious radiation	Part 24.238 (a) Part 27.53 (g) Part 27.53 (h)	Pass
Frequency stability vs. temperature	Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 24.235 Part 27.54 Part 2.1055(d)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5. General Information

5.1 Client Information

Applicant:	Xwireless LLC
Address:	11565 Old Georgetown Road Rockville MD 20852
Manufacturer/ Factory:	Shenzhen LEAGOO Intelligence Co., Limited
Address:	2nd Floor of Building B, HongLianYing Technology Park, No.286 of SiLi Road, DaBuXiang Community, Longhua New District, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Smart phone
Model No.:	Sync
Operation Frequency range:	LTE Band 2: TX: 1850MHz-1910MHz, RX: 1930MHz-1990MHz LTE Band 4: TX: 1710MHz-1755MHz, RX: 2110MHz-2155MHz LTE Band 12: TX: 699MHz-716MHz, RX: 729MHz-746MHz
Modulation type:	QPSK, 16QAM
Antenna type:	Internal Antenna
Antenna gain:	LTE Band 2: 0 dBi LTE Band 4: 0 dBi LTE Band 12: 0 dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V 2000mAh
AC adapter:	Model: ES007-U050100X0F Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 1000mA
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency List:

LTE Band 2 (1.4MHz)		LTE Band 2 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.70	18615	1851.50
18608	1850.80	18616	1851.60
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19193	1909.20	19185	1908.40
19194	1909.30	19186	1908.50
LTE Band 2 (5MHz)		LTE Band 2 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.50	18650	1855.00
18626	1852.60	18651	1855.10
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19175	1907.40	19150	1904.90
19176	1907.50	19151	1905.00
LTE Band 2 (15MHz)		LTE Band 2 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.50	18700	1860.00
18676	1857.60	18701	1860.10
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19125	1902.40	19100	1899.90
19126	1902.50	19101	1900.00

LTE Band 4 (1.4MHz)		LTE Band 4 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.70	19965	1711.50
19958	1710.80	19966	1711.60
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20392	1754.20	20384	1753.40
20393	1754.30	20385	1753.50
LTE Band 4 (5MHz)		LTE Band 4 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.50	20000	1715.00
19976	1712.60	20001	1715.10
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20374	1752.40	20349	1749.90
20375	1752.50	20350	1750.00
LTE Band 4 (15MHz)		LTE Band 4 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.50	20050	1720.00
20026	1717.60	20051	1720.10
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20324	1747.40	20299	1744.90
20325	1747.50	20300	1745.00

LTE Band 12 (1.4MHz)		LTE Band 12 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23017	699.70	23025	700.50
23756	699.80	23026	700.60
....
23094	707.40	23094	707.40
23095	707.50	23095	707.50
23096	707.60	23096	707.60
...
23172	715.20	23164	714.40
23173	715.30	23165	714.50
LTE Band 12 (5MHz)		LTE Band 12 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23035	701.50	23060	704.00
23036	701.60	23061	704.10
....
23094	707.40	23094	707.40
23095	707.50	23095	707.50
23096	707.60	23096	707.60
...
23154	713.40	23129	710.90
23155	713.50	23130	711.00

Regards to the operating frequency range, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channels as below:

LTE Band 2 (1.4MHz)			LTE Band 2 (3MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18607	1850.70	Lowest channel	18615	1851.50
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19193	1909.30	Highest channel	19185	1908.50
LTE Band 2 (5MHz)			LTE Band 2 (10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18625	1852.50	Lowest channel	18650	1855.00
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19175	1907.50	Highest channel	19150	1905.00
LTE Band 2 (15MHz)			LTE Band 2 (20MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18675	1857.50	Lowest channel	18700	1860.00
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19125	1902.50	Highest channel	19100	1900.00

LTE Band 4 (1.4MHz)			LTE Band 4 (3MHz)		
Channel:	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	19957	1710.70	Lowest channel	19965	1711.50
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20393	1754.30	Highest channel	20385	1753.50
LTE Band 4 (5MHz)			LTE Band 4 (10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	19975	1712.50	Lowest channel	20000	1715.00
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20375	1752.50	Highest channel	20350	1750.00
LTE Band 4 (15MHz)			LTE Band 4 (20MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	20025	1717.50	Lowest channel	20050	1720.00
Middle channel	20175	1732.50	Middle channel	20175	1732.50
Highest channel	20325	1747.50	Highest channel	20300	1745.00

LTE Band 12(1.4MHz)			LTE Band 12(3MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	23017	699.70	Lowest channel	23025	700.50
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23173	715.30	Highest channel	23165	714.50
LTE Band 12(5MHz)			LTE Band 12(10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	23035	701.50	Lowest channel	23060	704.00
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23155	713.50	Highest channel	23130	711.00

5.3 Test environment and mode

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.8Vdc, Extreme: Low 3.5Vdc, High 4.35Vdc
Test mode:	
LTE QPSK mode	Keep the EUT communication with simulated station in QPSK mode
LTE 16-QAM mode	Keep the EUT communication with simulated station in 16-QAM mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±2.76 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.28 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.72 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±2.88 dB (k=2)

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.
--

5.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Registration No.: 727551 Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551. ● IC - Registration No.: 10106A-1 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L6048 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf

5.8 Laboratory Location


<p>Shenzhen Zhongjian Nanfang Testing Co., Ltd. Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com</p>

5.9 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-16-2018	03-15-2019
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2017	11-20-2018
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2018	03-06-2019
Pre-amplifier	CD	PAP-1G18	11804	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-07-2018	03-06-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-07-2018	03-06-2019
Spectrum Analyzer	Agilent	N9020A	MY50510123	10-29-2017	10-28-2018
				10-29-2018	10-28-2019
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-07-2018	03-06-2019
Signal Generator	R&S	SMR20	1008100050	03-07-2018	03-06-2019
RF Switch Unit	MWRFTST	MW200	N/A	N/A	N/A
Test Software	MWRFTST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2018	03-06-2019
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2018	03-06-2019
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2018	03-06-2019
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2017	10-30-2018
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2018	09-23-2019
Simulated Station	Rohde & Schwarz	CMW500	140493	07-16-2018	07-15-2019

6. Test results

6.1 Conducted Output Power, ERP and EIRP

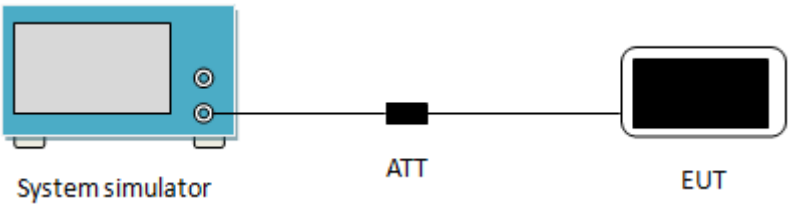Test Requirement:	Part 24.232(c), part 27.50(c)(10), Part 27.50(d)(4),
Test Method:	ANSI/TIA-603-D 2010
Limit:	LTE Band 2: 2W, LTE Band 4: 1W, LTE Band 12: 3W
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A line connects it to a black 'ATT' (attenuator) block. Another line connects the 'ATT' to a black 'EUT' (Equipment Under Test) device.</p>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the CMW500. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					18607	18900	19193		
					1850.7MHz	1880.0MHz	1909.3MHz		
2	1.4	QPSK	1	0	23.79	23.13	23.05		
			1	2	23.82	23.27	23.24		
			1	5	23.68	23.05	23.15		
			3	0	23.28	23.23	23.20		
			3	1	23.24	23.13	23.33		
			3	2	23.39	23.24	23.23		
			6	0	22.81	22.17	22.39		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.82		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	22.81	22.21	22.94		
			1	2	22.94	22.55	22.21		
			1	5	22.79	22.41	22.20		
			3	0	22.82	22.14	22.19		
			3	1	22.97	22.41	22.29		
			3	2	22.67	22.25	22.12		
			6	0	21.82	21.23	21.15		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					22.97		
		EIRP Limit (dBm):					33.00		
LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					18615	18900	19185		
					1851.5MHz	1880.0MHz	1908.5MHz		
2	3	QPSK	1	0	23.87	23.10	23.13		
			1	7	23.76	23.13	23.16		
			1	14	23.67	23.15	23.15		
			8	0	22.81	22.21	22.24		
			8	4	22.85	22.22	22.17		
			8	7	22.77	22.17	22.15		
			15	0	22.76	22.28	22.12		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.87		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	22.82	22.21	22.43		
			1	7	22.80	22.25	22.19		
			1	14	22.73	22.24	22.09		
			8	0	21.73	21.26	21.17		
			8	4	21.74	21.16	21.24		
			8	7	21.83	21.11	21.15		
			15	0	21.79	21.03	21.02		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					22.82		
		EIRP Limit (dBm):					33.00		

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					18625	18900	19175		
					1852.5MHz	1880.0MHz	1907.5MHz		
2	5	QPSK	1	0	23.60	23.07	22.96		
			1	12	23.81	23.25	23.15		
			1	24	23.65	23.03	23.06		
			12	0	22.81	22.18	22.15		
			12	6	22.83	22.27	22.15		
			12	11	22.76	22.24	22.02		
			25	0	22.83	22.17	22.25		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.81		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	22.69	22.17	22.08		
			1	12	22.62	22.21	22.19		
			1	24	22.53	22.18	22.04		
			12	0	21.68	21.22	21.15		
			12	6	21.78	21.18	21.25		
			12	11	21.73	21.26	21.04		
			25	0	21.73	21.29	21.12		
Antenna Gain (dBi):					0.00				
Max. EIRP (dBm):					22.69				
EIRP Limit (dBm):					33.00				
LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					18650	18900	19150		
					1855.0MHz	1880.0MHz	1905.0MHz		
2	10	QPSK	1	0	23.78	23.12	23.05		
			1	24	23.85	23.30	23.15		
			1	49	23.65	23.19	23.16		
			25	0	23.01	22.29	22.34		
			25	12	22.79	22.28	22.20		
			25	24	22.75	22.29	22.16		
			50	0	22.86	22.29	22.23		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.85		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	22.84	22.56	22.16		
			1	24	23.15	22.27	22.08		
			1	49	22.51	22.23	22.33		
			25	0	21.75	21.25	21.07		
			25	12	21.84	21.26	21.13		
			25	24	21.82	21.19	21.12		
			50	0	21.82	21.29	21.04		
Antenna Gain (dBi):					0.00				
Max. EIRP (dBm):					23.15				
EIRP Limit (dBm):					33.00				

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					18675	18900	19125		
					1857.5MHz	1880.0MHz	1902.5MHz		
2	15	QPSK	1	0	23.76	23.12	23.31		
			1	37	23.65	23.15	23.16		
			1	74	23.25	23.41	23.15		
			36	0	22.89	22.30	22.15		
			36	16	22.75	22.21	22.17		
			36	35	22.50	22.20	22.01		
			75	0	22.74	22.28	22.22		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.76		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	23.19	22.36	22.05		
			1	37	23.12	22.50	22.41		
			1	74	22.45	22.11	22.06		
			36	0	21.86	21.31	20.95		
			36	16	21.71	21.29	20.97		
			36	35	21.59	21.25	21.02		
			75	0	21.76	21.21	21.01		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.19		
		EIRP Limit (dBm):					33.00		
		LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
18700	18900						19100		
1860.0MHz	1880.0MHz						1900.0MHz		
2	20	QPSK	1	0	23.56	23.01	22.81		
			1	49	23.86	23.23	23.15		
			1	99	23.15	22.81	22.85		
			50	0	23.74	22.43	22.29		
			50	24	23.63	22.33	22.33		
			50	49	23.27	22.13	22.03		
			100	0	22.69	22.21	22.07		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.86		
		EIRP Limit (dBm):					33.00		
		16QAM	1	0	22.77	22.06	22.01		
			1	49	22.85	22.33	22.08		
			1	99	22.14	22.00	21.86		
			50	0	21.65	21.27	20.94		
			50	24	21.63	21.25	20.98		
			50	49	21.42	21.07	21.02		
			100	0	21.52	21.23	20.90		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					22.85		
		EIRP Limit (dBm):					33.00		

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					19957	20175	20393		
					1710.7MHz	1732.5MHz	1754.3MHz		
4	1.4	QPSK	1	0	23.99	23.83	23.97		
			1	2	24.12	23.87	24.12		
			1	5	24.03	23.82	24.03		
			3	0	22.11	23.12	23.12		
			3	1	22.18	23.14	23.24		
			3	2	23.08	23.14	23.07		
			6	0	23.20	22.96	23.12		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.12		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	23.08	22.84	23.00		
			1	2	23.15	22.90	23.16		
			1	5	23.07	22.91	23.06		
			3	0	23.04	22.95	23.13		
			3	1	23.07	22.94	23.08		
			3	2	23.17	22.88	23.13		
			6	0	22.09	21.67	22.15		
Antenna Gain (dBi):					0.00				
Max. EIRP (dBm):					23.17				
EIRP Limit (dBm):					30.00				
LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					19965	20175	20385		
					1711.5MHz	1732.5MHz	1753.5MHz		
4	3	QPSK	1	0	24.12	23.82	24.03		
			1	7	24.25	23.97	24.07		
			1	14	24.16	23.89	24.03		
			8	0	23.23	22.85	23.06		
			8	4	23.28	22.97	23.09		
			8	7	23.10	22.89	23.03		
			15	0	23.13	22.91	23.13		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.25		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	23.19	22.78	23.06		
			1	7	23.08	22.84	23.11		
			1	14	23.13	22.89	23.35		
			8	0	22.21	21.88	21.98		
			8	4	22.17	21.96	22.25		
			8	7	22.11	21.80	22.04		
			15	0	22.16	21.85	22.08		
Antenna Gain (dBi):					0.00				
Max. EIRP (dBm):					23.35				
EIRP Limit (dBm):					30.00				

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					19975	20175	20375		
					1712.5MHz	1732.5MHz	1752.5MHz		
4	5	QPSK	1	0	24.05	23.87	23.90		
			1	12	24.13	23.96	24.03		
			1	24	24.06	23.75	23.94		
			12	0	23.20	22.98	23.03		
			12	6	23.27	22.92	23.13		
			12	11	23.19	22.82	23.05		
			25	0	23.23	23.00	23.14		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.13		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	22.97	22.81	23.02		
			1	12	23.26	22.92	23.02		
			1	24	23.29	22.78	22.97		
			12	0	22.18	21.90	21.85		
			12	6	22.21	21.86	22.10		
			12	11	22.05	21.88	21.89		
			25	0	22.06	21.86	22.06		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.29		
		EIRP Limit (dBm):					30.00		
		LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
20000	20175						20350		
1715.0MHz	1732.5MHz						1750.0MHz		
4	10	QPSK	1	0	24.13	23.96	23.94		
			1	24	24.13	24.03	24.03		
			1	49	24.09	23.85	24.07		
			25	0	23.12	23.01	23.20		
			25	12	23.27	23.02	23.15		
			25	24	23.25	22.86	23.09		
			50	0	23.18	23.05	23.10		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.13		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	23.14	22.92	23.22		
			1	24	23.09	23.07	23.02		
			1	49	23.41	23.18	23.30		
			25	0	22.12	21.95	21.99		
			25	12	22.07	21.94	22.05		
			25	24	22.12	21.86	22.11		
			50	0	22.08	21.90	22.09		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.41		
		EIRP Limit (dBm):					30.00		

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					20025	20175	20325		
					1717.5MHz	1732.5MHz	1747.5MHz		
4	15	QPSK	1	0	24.13	23.86	23.89		
			1	37	24.16	23.94	24.03		
			1	74	23.89	23.77	23.95		
			36	0	23.06	23.10	23.16		
			36	16	23.19	22.94	23.04		
			36	35	23.10	22.89	23.02		
			75	0	23.20	22.89	23.11		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.16		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	23.34	22.91	23.00		
			1	37	23.23	22.72	23.25		
			1	74	22.90	22.85	23.37		
			36	0	22.12	22.01	22.00		
			36	16	22.05	21.82	22.07		
			36	35	22.05	21.88	21.94		
			75	0	22.11	21.90	22.02		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.37		
		EIRP Limit (dBm):					30.00		
		LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
20050	20175						20300		
1720.0MHz	1732.5MHz						1745.0MHz		
4	20	QPSK	1	0	23.94	23.89	23.68		
			1	49	24.23	23.91	24.13		
			1	99	23.56	23.69	23.96		
			50	0	23.25	23.09	23.13		
			50	24	23.17	23.07	23.09		
			50	49	23.12	22.95	23.10		
			100	0	23.19	22.99	23.01		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					24.13		
		EIRP Limit (dBm):					30.00		
		16QAM	1	0	23.16	23.27	23.22		
			1	49	23.33	23.41	23.11		
			1	99	22.58	22.67	22.90		
			50	0	22.19	22.00	22.01		
			50	24	22.13	21.86	22.07		
			50	49	21.96	21.85	21.97		
			100	0	22.03	21.82	22.06		
		Antenna Gain (dBi):					0.00		
		Max. EIRP (dBm):					23.41		
		EIRP Limit (dBm):					30.00		

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).


LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					23017	23095	23173		
					699.7MHz	707.5MHz	715.3MHz		
12	1.4	QPSK	1	0	23.95	23.95	24.52		
			1	2	24.12	24.12	24.72		
			1	5	24.13	24.13	24.68		
			3	0	23.03	23.20	23.81		
			3	1	23.16	23.14	23.69		
			3	2	23.17	23.15	23.59		
		6	0	23.14	23.20	24.00			
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					22.57		
		ERP Limit (dBm):					34.77		
		16QAM	1	0	23.19	23.08	23.92		
			1	2	23.17	23.12	23.69		
			1	5	23.24	23.14	23.85		
			3	0	23.19	23.14	23.75		
			3	1	23.25	23.02	23.66		
			3	2	23.13	23.21	23.69		
		6	0	22.15	22.16	22.69			
		Antenna Gain(dBi):					0.00		
Max. ERP (dBm):					21.77				
ERP Limit (dBm):					34.77				

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					23025	23095	23165		
					700.5MHz	707.5MHz	714.5MHz		
12	3	QPSK	1	0	24.13	24.13	24.55		
			1	7	24.18	24.03	24.78		
			1	14	24.15	24.22	24.85		
			8	0	23.13	23.15	23.60		
			8	4	23.24	23.19	23.82		
			8	7	23.22	23.24	23.77		
		15	0	23.07	23.10	23.81			
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					22.70		
		ERP Limit (dBm):					34.77		
		16QAM	1	0	23.44	23.42	23.60		
			1	7	23.22	23.20	23.64		
			1	14	23.45	23.29	23.67		
			8	0	22.90	22.34	22.61		
			8	4	22.15	22.15	22.69		
			8	7	22.29	22.13	22.84		
		15	0	22.01	22.12	22.63			
		Antenna Gain(dBi):					0.00		
Max. ERP (dBm):					21.52				
ERP Limit (dBm):					34.77				

Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi).
 ERP (dBm) = EIRP (dBm) - 2.15 (dB).

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					23035	23095	23155		
					701.5MHz	707.5MHz	713.5MHz		
12	5	QPSK	1	0	23.69	23.95	24.20		
			1	12	24.03	24.19	24.56		
			1	24	24.06	24.12	24.78		
			12	0	23.04	23.16	23.45		
			12	6	23.14	23.19	23.72		
			12	11	23.07	23.21	23.65		
			25	0	23.04	23.18	23.65		
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					22.63		
		ERP Limit (dBm):					34.77		
		16QAM	1	0	23.06	23.07	23.28		
			1	12	23.16	23.64	23.48		
			1	24	23.09	23.09	23.65		
			12	0	21.88	22.15	22.44		
			12	6	22.10	22.22	22.60		
			12	11	22.15	22.39	22.53		
			25	0	21.99	22.25	22.48		
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					21.5		
		ERP Limit (dBm):					34.77		
		LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
23060	23095						23130		
704.0MHz	707.5MHz						711.0MHz		
12	10	QPSK	1	0	24.06	24.03	24.09		
			1	24	24.15	24.16	24.45		
			1	49	24.19	23.45	24.72		
			25	0	23.15	23.43	23.22		
			25	12	23.21	23.33	23.45		
			25	24	23.16	23.59	23.60		
			50	0	23.11	23.45	23.41		
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					22.57		
		ERP Limit (dBm):					34.77		
		16QAM	1	0	23.15	22.98	23.49		
			1	24	23.49	23.68	23.52		
			1	49	23.23	23.54	23.69		
			25	0	22.14	22.24	22.12		
			25	12	22.16	22.25	22.43		
			25	24	22.19	22.54	22.63		
			50	0	22.20	22.52	22.30		
		Antenna Gain(dBi):					0.00		
		Max. ERP (dBm):					21.54		
		ERP Limit (dBm):					34.77		
		Note: EIRP (dBm) = Average power (dBm) + Antenna Gain (dBi). ERP (dBm) = EIRP (dBm) - 2.15 (dB).							


6.2 Peak-to-Average Ratio

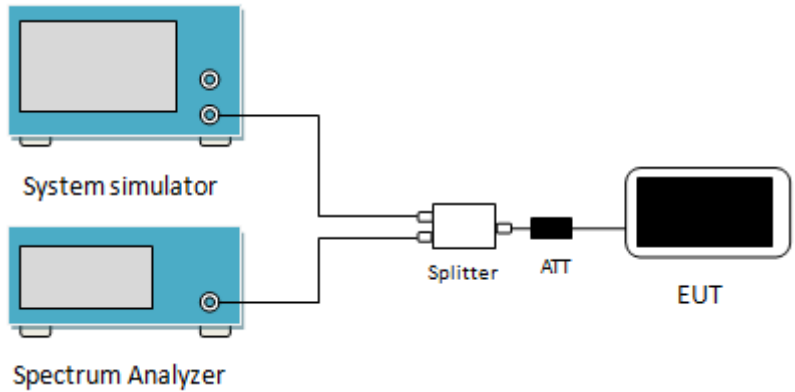Test Requirement:	Part 24.232 (d), Part 27.50(d)(5)
Test Method:	ANSI/TIA-603-D 2010
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 <p>The diagram shows a test setup for measuring Peak-to-Average Ratio (PAR). It consists of a System simulator and a Spectrum Analyzer connected to a Splitter. The Splitter is connected to an ATT (Attenuator) and an EUT (Equipment Under Test).</p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (Worst case):

Bandwidth	Modulation	RB Size	RB Offset	PAPR
LTE Band 2 (Middle Channel)				
20MHz	QPSK	100	0	3.86
	16QAM	100	0	4.70
LTE Band 4 (Middle Channel)				
20MHz	QPSK	100	0	3.42
	16QAM	100	0	4.26
LTE Band 12 (Middle Channel)				
10MHz	QPSK	50	0	3.88
	16QAM	50	0	4.84

Test plots as below:

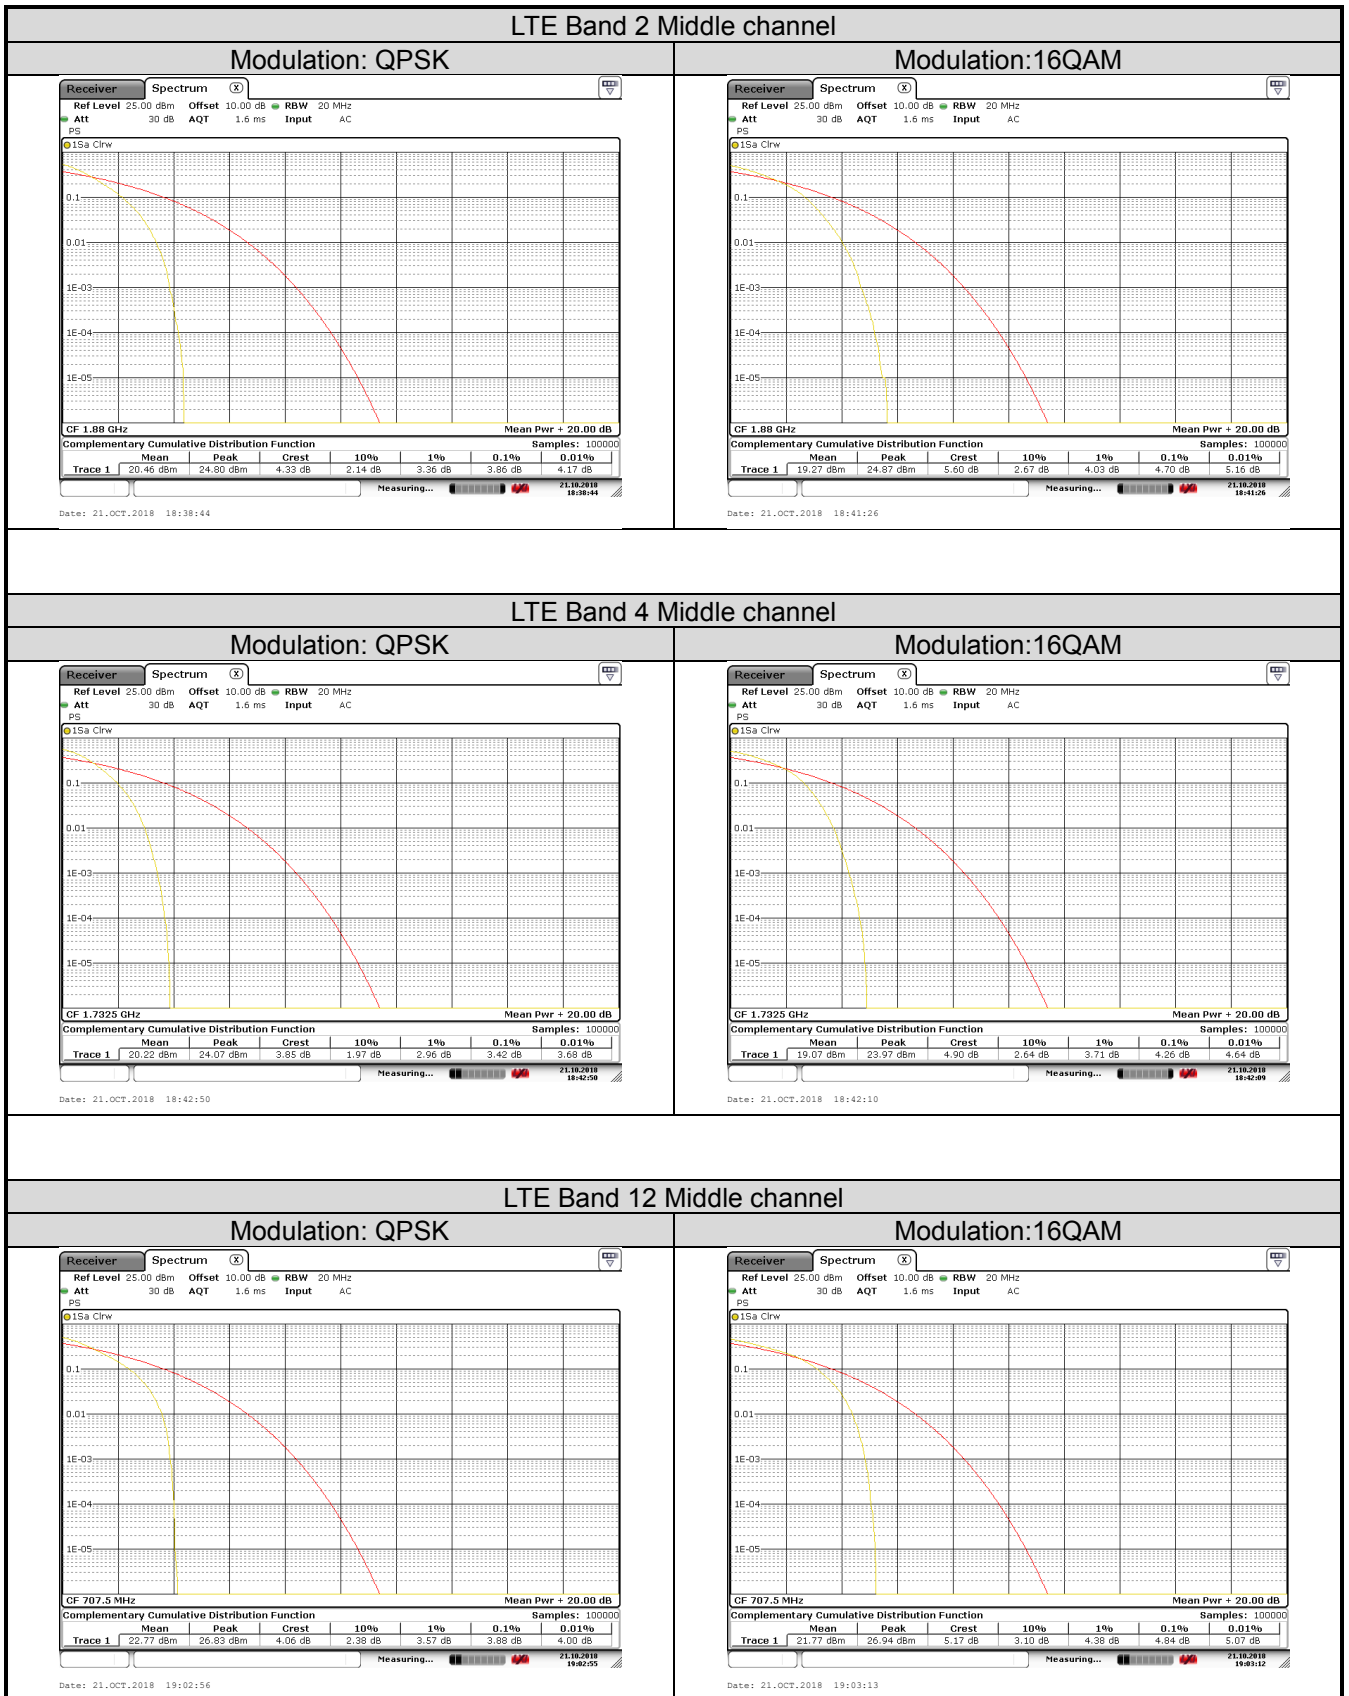

6.3 Occupy Bandwidth

Test Requirement:	Part 24.238(b), Part 27.53(g), Part 27.53(h)
Test Method:	ANSI/TIA-603-D 2010
Test Setup:	<p>The diagram shows a test setup for measuring occupancy bandwidth. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two circular ports on the right side. A white cable connects the top port of the System simulator to the top port of the Spectrum Analyzer. A white cable also connects the bottom port of the System simulator to the top port of a white rectangular 'Splitter'. The bottom port of the Splitter is connected to a black rectangular 'ATT' (Attenuator). The right side of the ATT is connected to the left side of a black rectangular 'EUT' (Equipment Under Test).</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% ~ 5% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

LTE Band 2					
Bandwidth	Channel	Frequency (MHz)	Modulation	99% OBW (kHz)	-26dBcEBW (kHz)
1.4MHz	18607	1850.70	16QAM	1104	1296
			QPSK	1098	1314
	18900	1880.00	16QAM	1086	1248
			QPSK	1098	1308
	19193	1909.30	16QAM	1098	1272
			QPSK	1098	1326
3MHz	18615	1851.50	16QAM	2736	2976
			QPSK	2736	2976
	18900	1880.00	16QAM	2736	2988
			QPSK	2724	3012
	19185	1908.50	16QAM	2724	2976
			QPSK	2748	2988
5MHz	18625	1852.50	16QAM	4520	4920
			QPSK	4540	5020
	18900	1880.00	16QAM	4540	5060
			QPSK	4540	5080
	19175	1907.50	16QAM	4520	5060
			QPSK	4520	5160
10MHz	18650	1855.00	16QAM	9120	10320
			QPSK	9200	10480
	18900	1880.00	16QAM	9120	10200
			QPSK	9120	10280
	19150	1905.00	16QAM	9120	10280
			QPSK	9120	10320
15MHz	18675	1857.50	16QAM	13560	14760
			QPSK	13560	15180
	18900	1880.00	16QAM	13560	14760
			QPSK	13560	15300
	19125	1902.50	16QAM	13560	14940
			QPSK	13560	14880
20MHz	18700	1860.00	16QAM	17920	19600
			QPSK	18000	19680
	18900	1880.00	16QAM	17920	19120
			QPSK	18000	19600
	19100	1900.00	16QAM	18000	19520
			QPSK	18000	19680

LTE Band 4					
Bandwidth	Channel	Frequency (MHz)	Modulation	99% OBW (kHz)	-26dBcEBW (kHz)
1.4MHz	19957	1710.7	16QAM	1098	1284
			QPSK	1092	1290
	20175	1732.5	16QAM	1092	1266
			QPSK	1092	1254
	20393	1754.3	16QAM	1098	1260
			QPSK	1092	1284
3MHz	19965	1711.5	16QAM	2724	2976
			QPSK	2724	2988
	20175	1732.5	16QAM	2748	2976
			QPSK	2736	3000
	20385	1750.5	16QAM	2736	2976
			QPSK	2712	2976
5MHz	19975	1712.5	16QAM	4540	4880
			QPSK	4520	5160
	20175	1732.5	16QAM	4540	4960
			QPSK	4540	5100
	20375	1752.5	16QAM	4500	5060
			QPSK	4540	5040
10MHz	20000	1715.0	16QAM	9120	10240
			QPSK	9160	10240
	20175	1732.5	16QAM	9120	10080
			QPSK	9120	10400
	20350	1750.0	16QAM	9120	10160
			QPSK	9120	10280
15MHz	20025	1717.5	16QAM	13500	14880
			QPSK	13560	15000
	20175	1732.5	16QAM	13500	14940
			QPSK	13500	15000
	20325	1747.5	16QAM	13560	14700
			QPSK	13560	15180
20MHz	20050	1720.0	16QAM	17920	19120
			QPSK	18000	19920
	20175	1732.5	16QAM	17920	19280
			QPSK	17920	19840
	20300	1745.0	16QAM	18000	19360
			QPSK	18000	19760


LTE Band 12					
Bandwidth	Channel	Frequency (MHz)	Modulation	99% OBW (kHz)	-26dBcEBW (kHz)
1.4MHz	23017	699.7	16QAM	1098	1278
			QPSK	1092	1290
	23095	707.5	16QAM	1092	1254
			QPSK	1098	1278
	23173	715.3	16QAM	1098	1320
			QPSK	1098	1272
3MHz	23025	700.5	16QAM	2712	2940
			QPSK	2712	2964
	23095	707.5	16QAM	2724	2976
			QPSK	2736	3000
	23165	714.5	16QAM	2736	2964
			QPSK	2736	3000
5MHz	23035	701.5	16QAM	4500	5000
			QPSK	4500	5100
	23095	707.5	16QAM	4540	4960
			QPSK	4520	5140
	23155	713.5	16QAM	4520	1980
			QPSK	4520	5080
10MHz	23060	704.0	16QAM	9080	10280
			QPSK	9080	10320
	23095	707.5	16QAM	9120	10200
			QPSK	9160	10320
	23130	711.0	16QAM	9080	10120
			QPSK	9080	10280

Test plot as follows:
LTE Band 2 part:

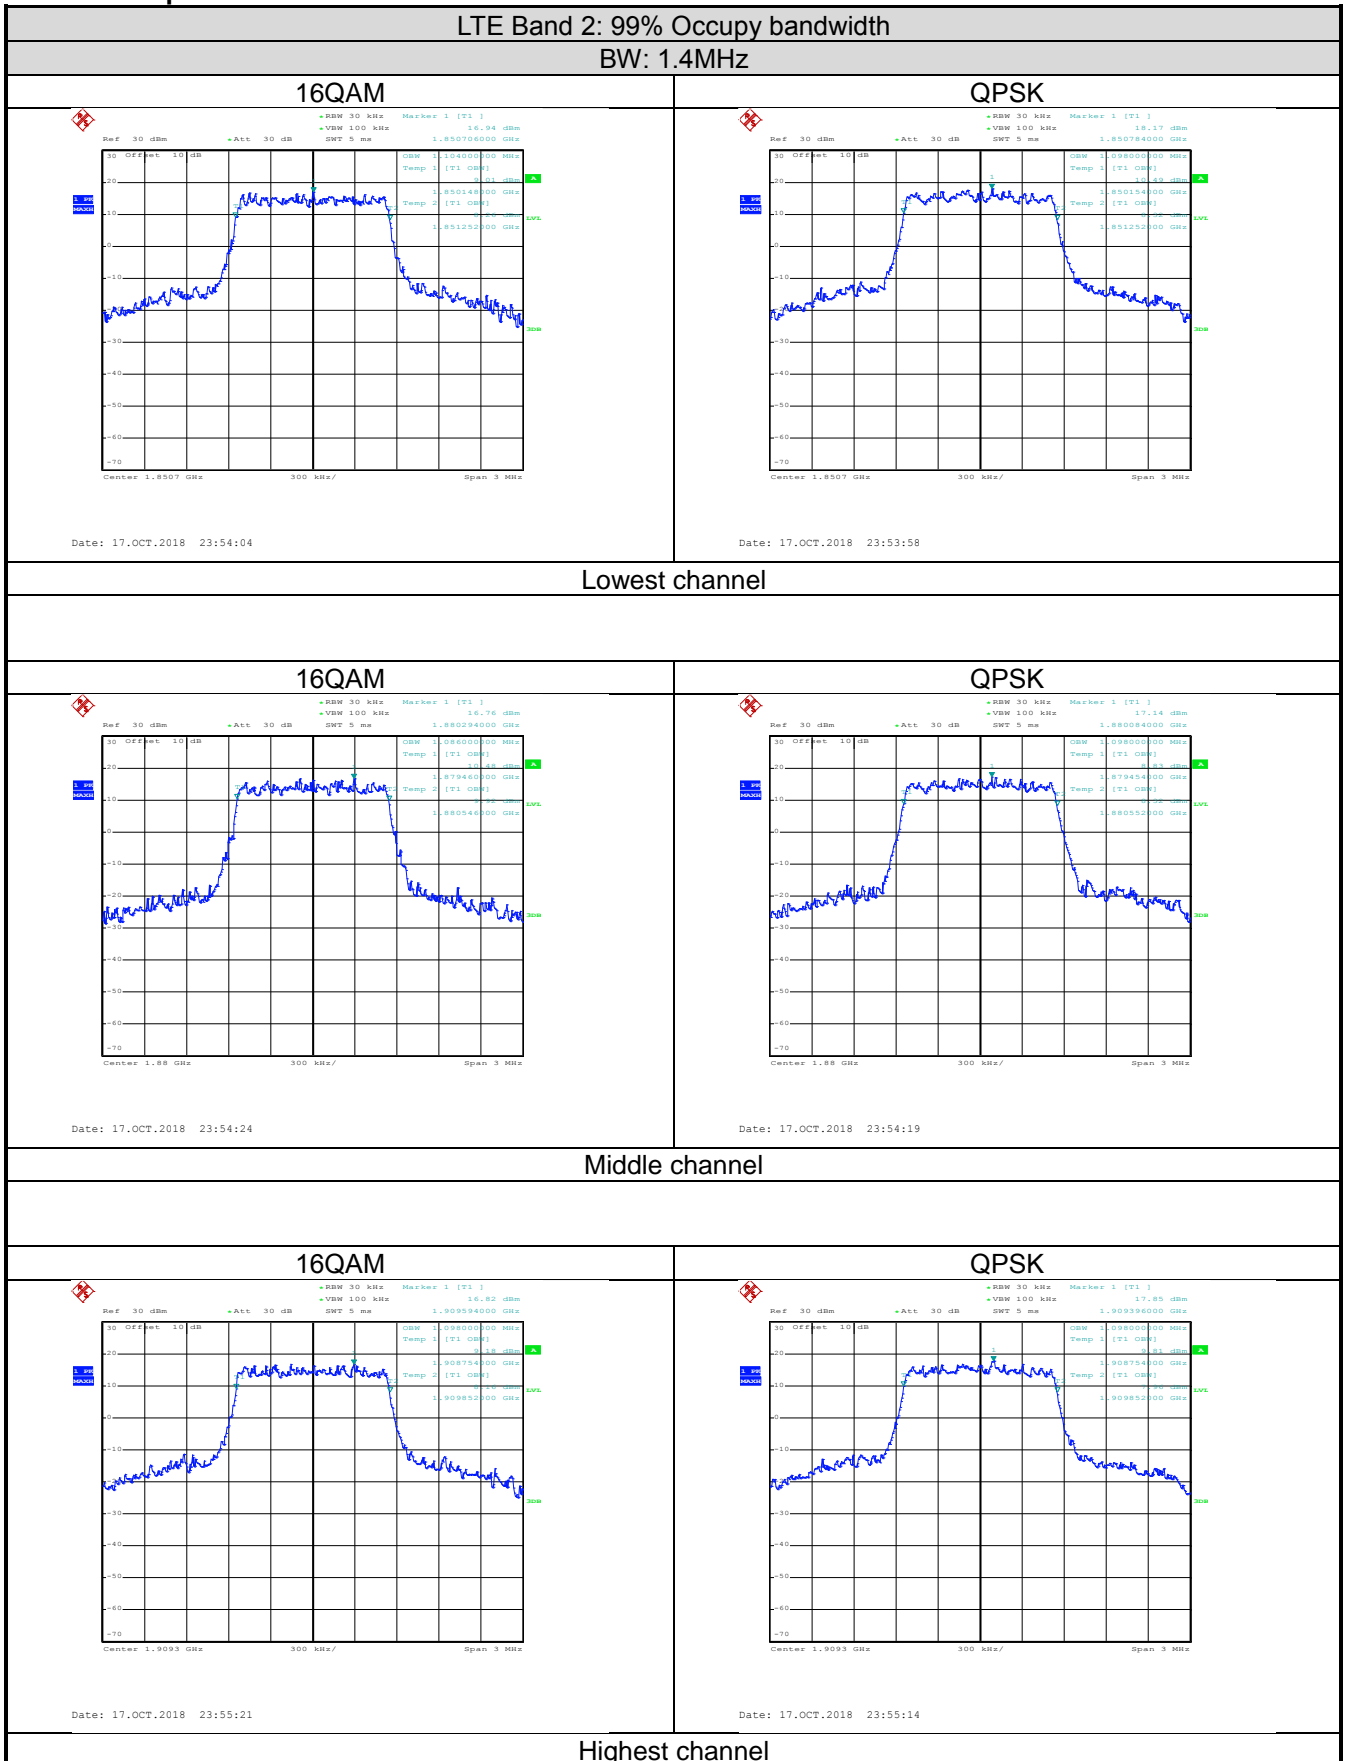


LTE Band 2: 99% Occupancy bandwidth
BW: 3MHz

16QAM

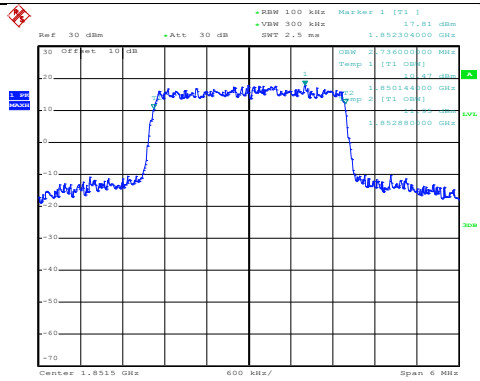

Date: 17.OCT.2018 23:51:49


QPSK

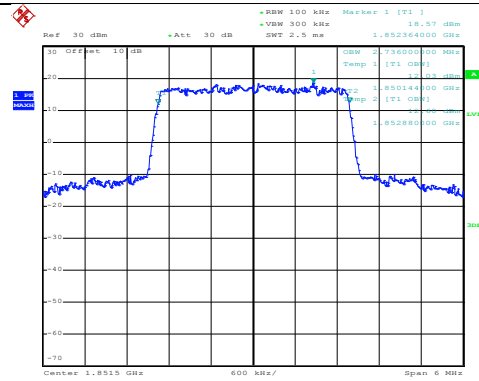

Date: 17.OCT.2018 23:51:44


Lowest channel

16QAM

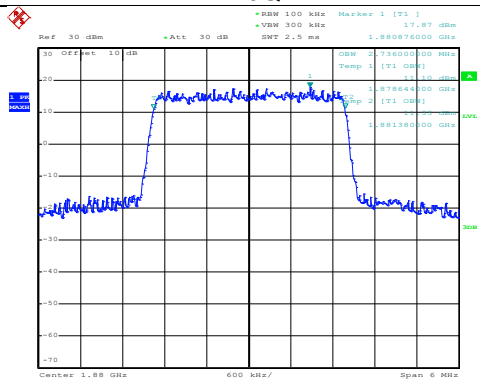

Date: 17.OCT.2018 23:52:32


QPSK

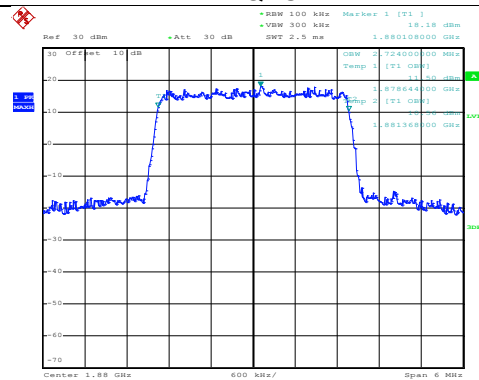

Date: 17.OCT.2018 23:52:28


Middle channel

16QAM

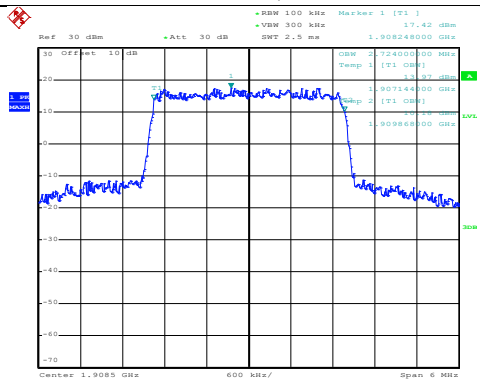

Date: 17.OCT.2018 23:52:55

QPSK

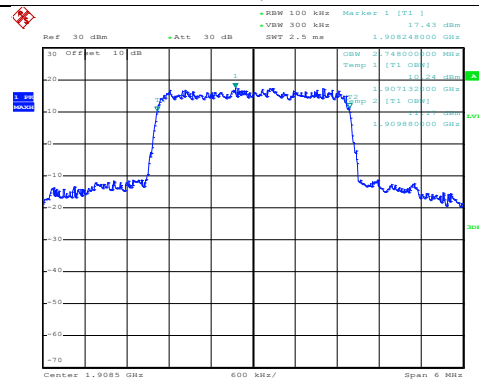


Date: 17.OCT.2018 23:52:48

Highest channel


LTE Band 2: 99% Occupancy bandwidth
BW: 5MHz

16QAM

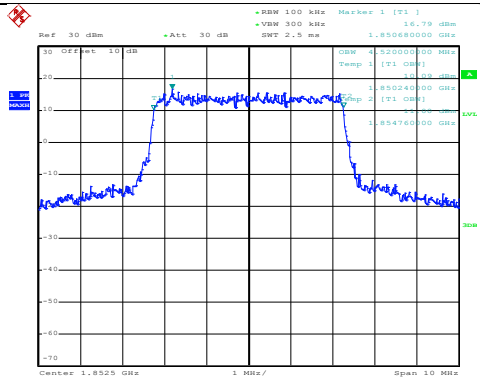

Date: 17.OCT.2018 23:50:06


QPSK

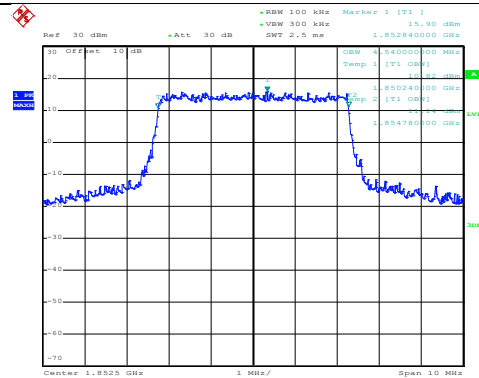

Date: 17.OCT.2018 23:50:01


Lowest channel

16QAM

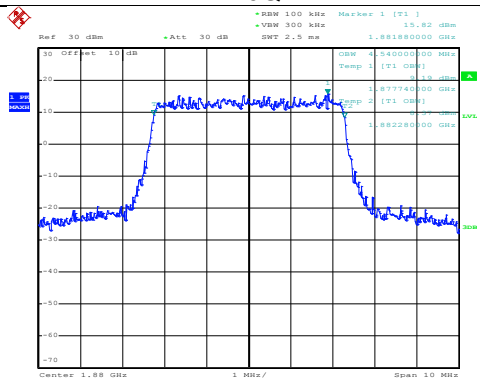

Date: 17.OCT.2018 23:50:22


QPSK

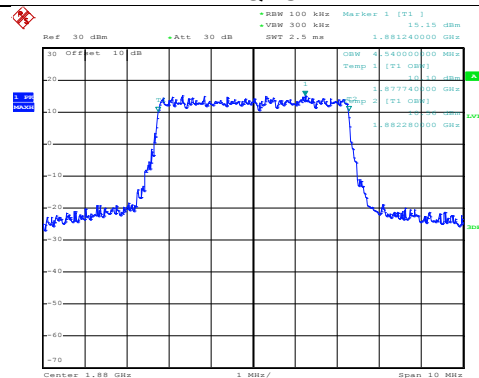

Date: 17.OCT.2018 23:50:17


Middle channel

16QAM

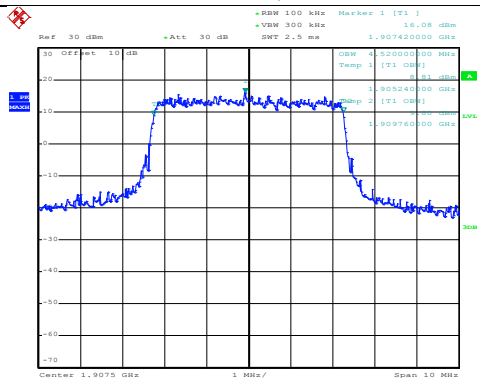

Date: 17.OCT.2018 23:51:13

QPSK

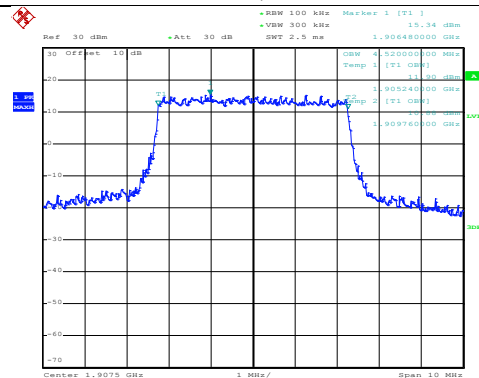


Date: 17.OCT.2018 23:51:07

Highest channel


LTE Band 2: 99% Occupancy bandwidth
BW: 10MHz

16QAM

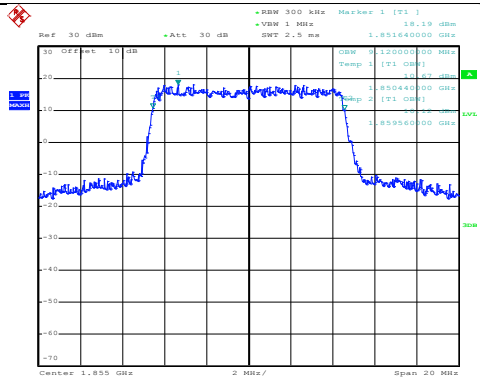

Date: 17.OCT.2018 23:48:04


QPSK

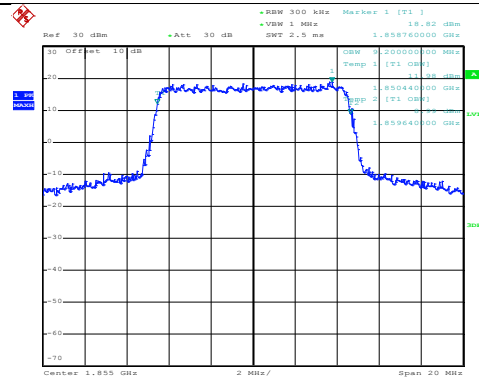

Date: 17.OCT.2018 23:48:01


Lowest channel

16QAM

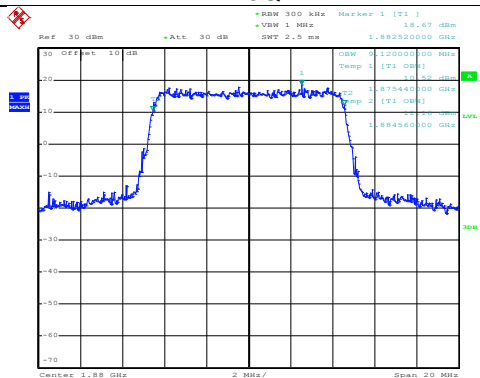

Date: 17.OCT.2018 23:48:46


QPSK

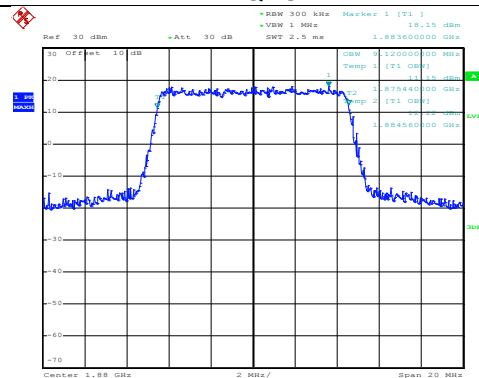

Date: 17.OCT.2018 23:48:41


Middle channel

16QAM

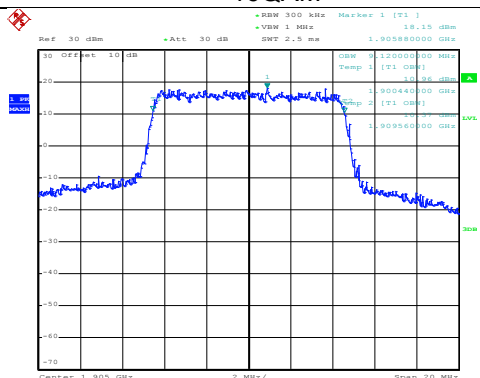

Date: 17.OCT.2018 23:49:02

QPSK

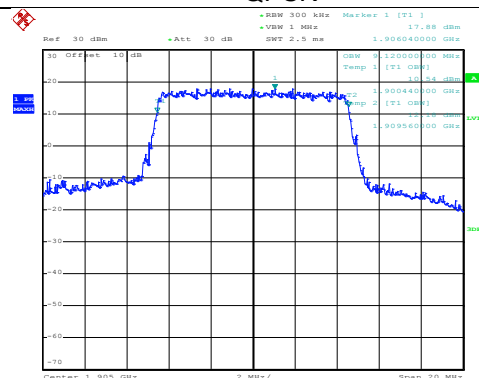


Date: 17.OCT.2018 23:48:58

Highest channel


LTE Band 2: 99% Occupancy bandwidth
BW: 15MHz

16QAM

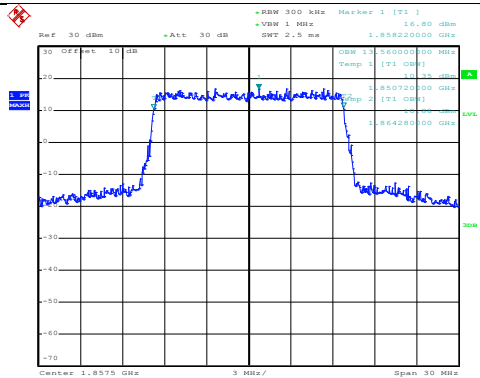

Date: 17.OCT.2018 23:46:25


QPSK

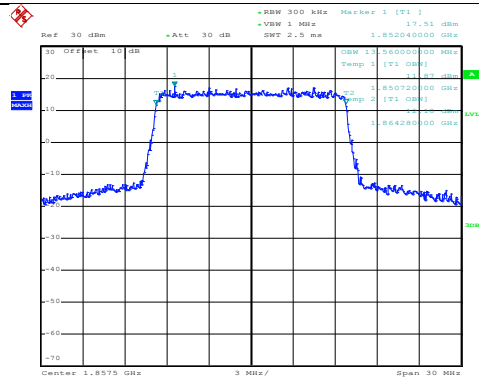

Date: 17.OCT.2018 23:46:20


Lowest channel

16QAM

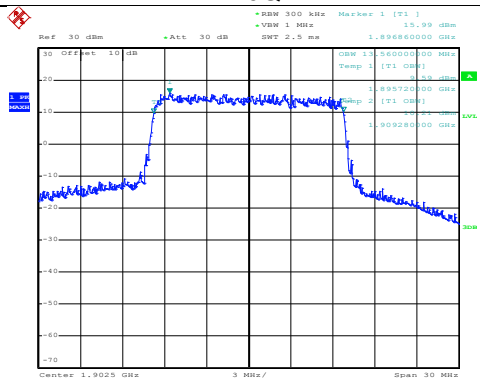

Date: 17.OCT.2018 23:47:36


QPSK

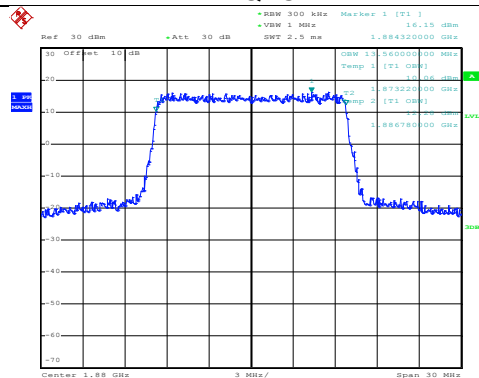

Date: 17.OCT.2018 23:46:35


Middle channel

16QAM

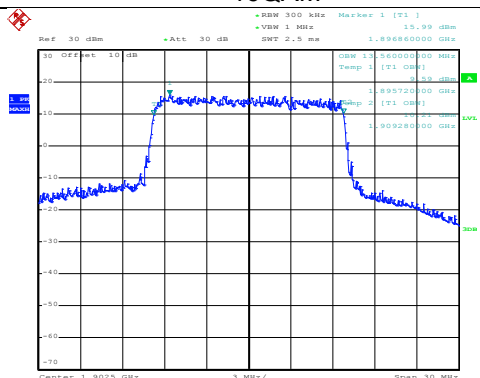


Date: 17.OCT.2018 23:47:36


QPSK

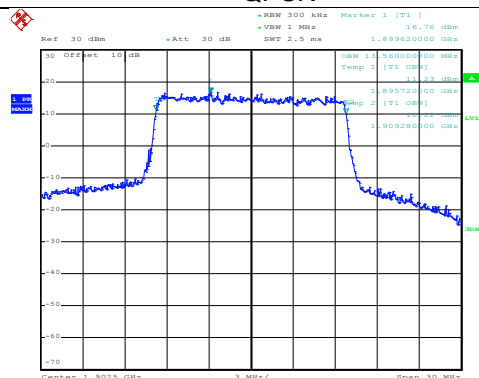



Date: 17.OCT.2018 23:47:32


Highest channel

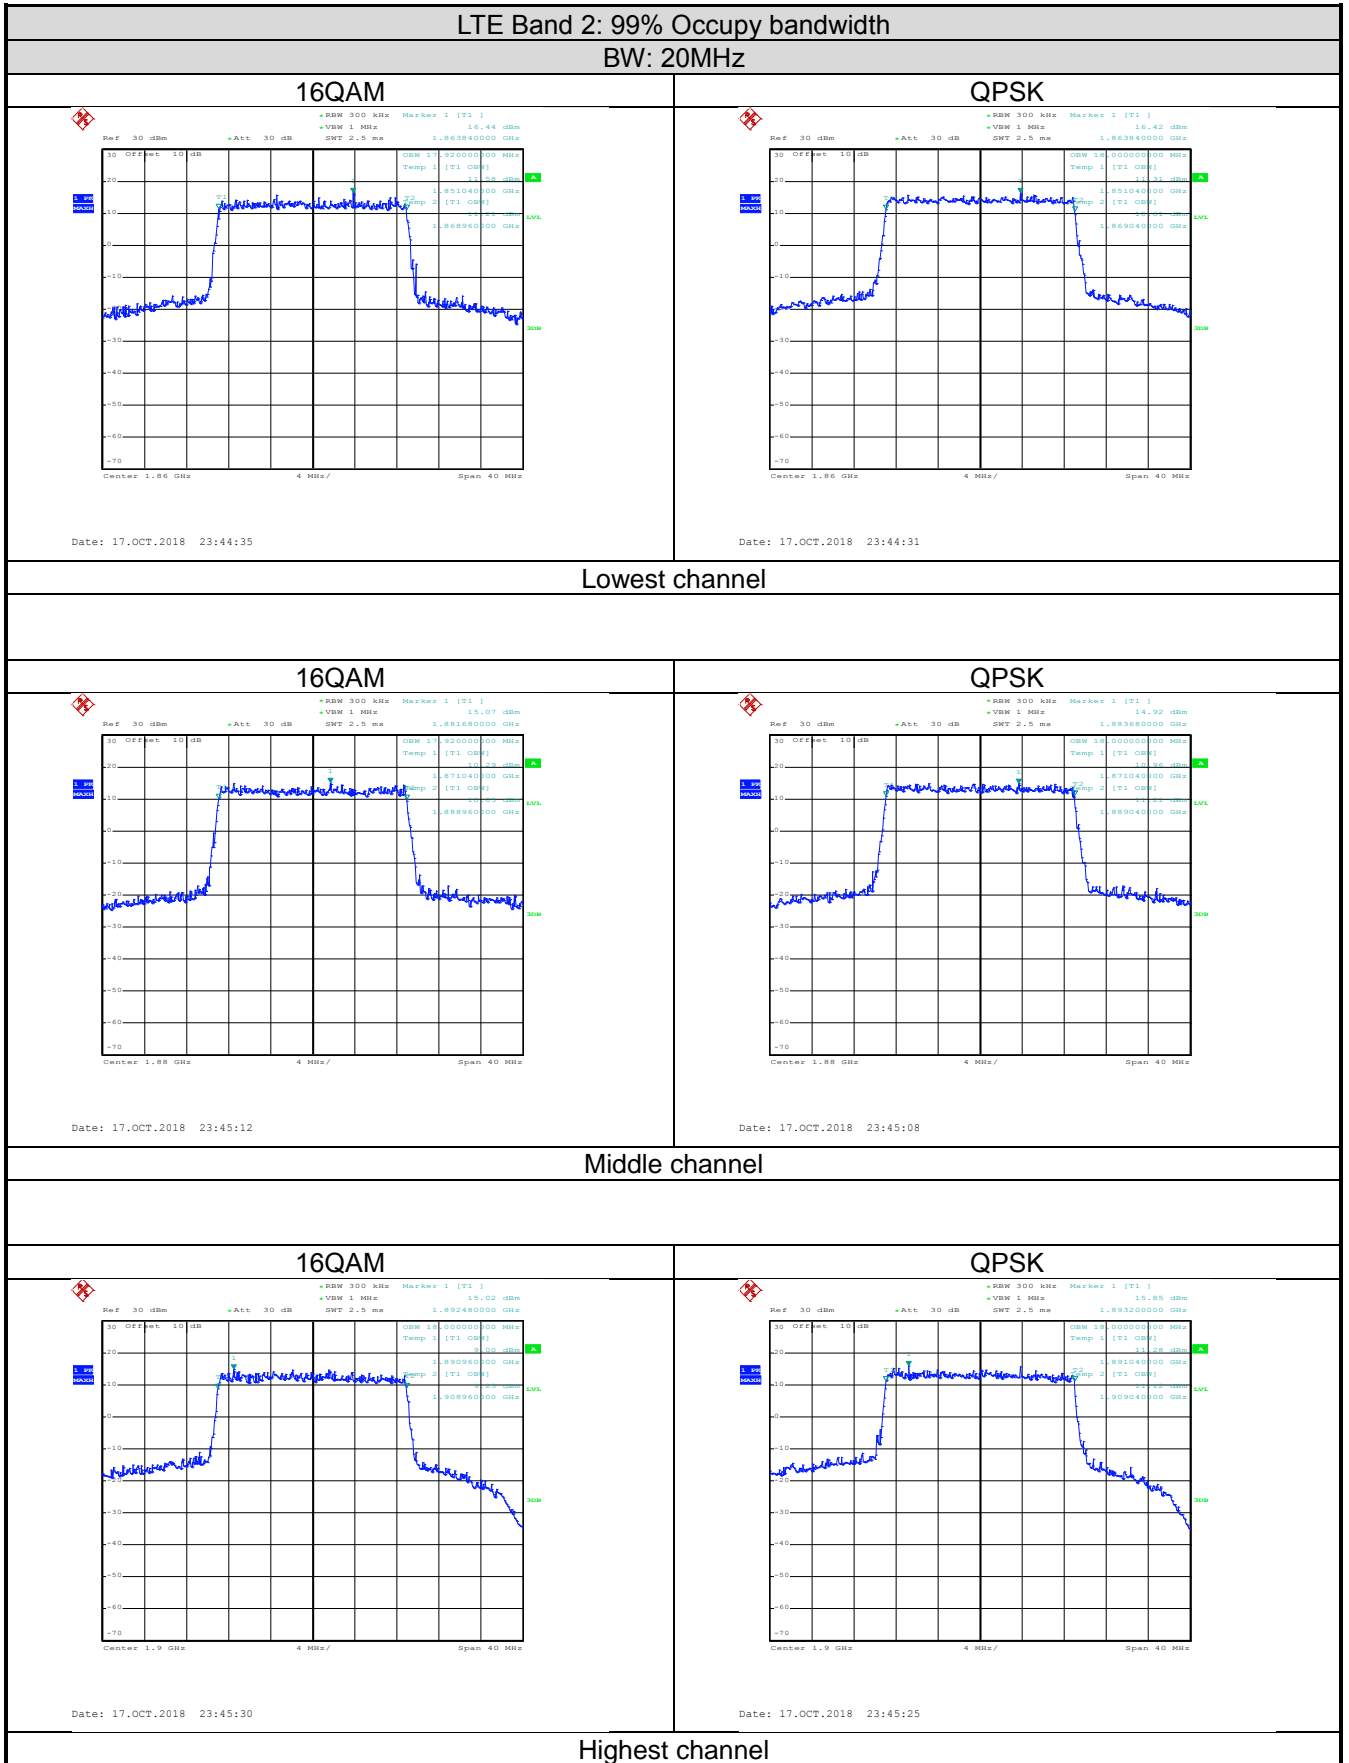


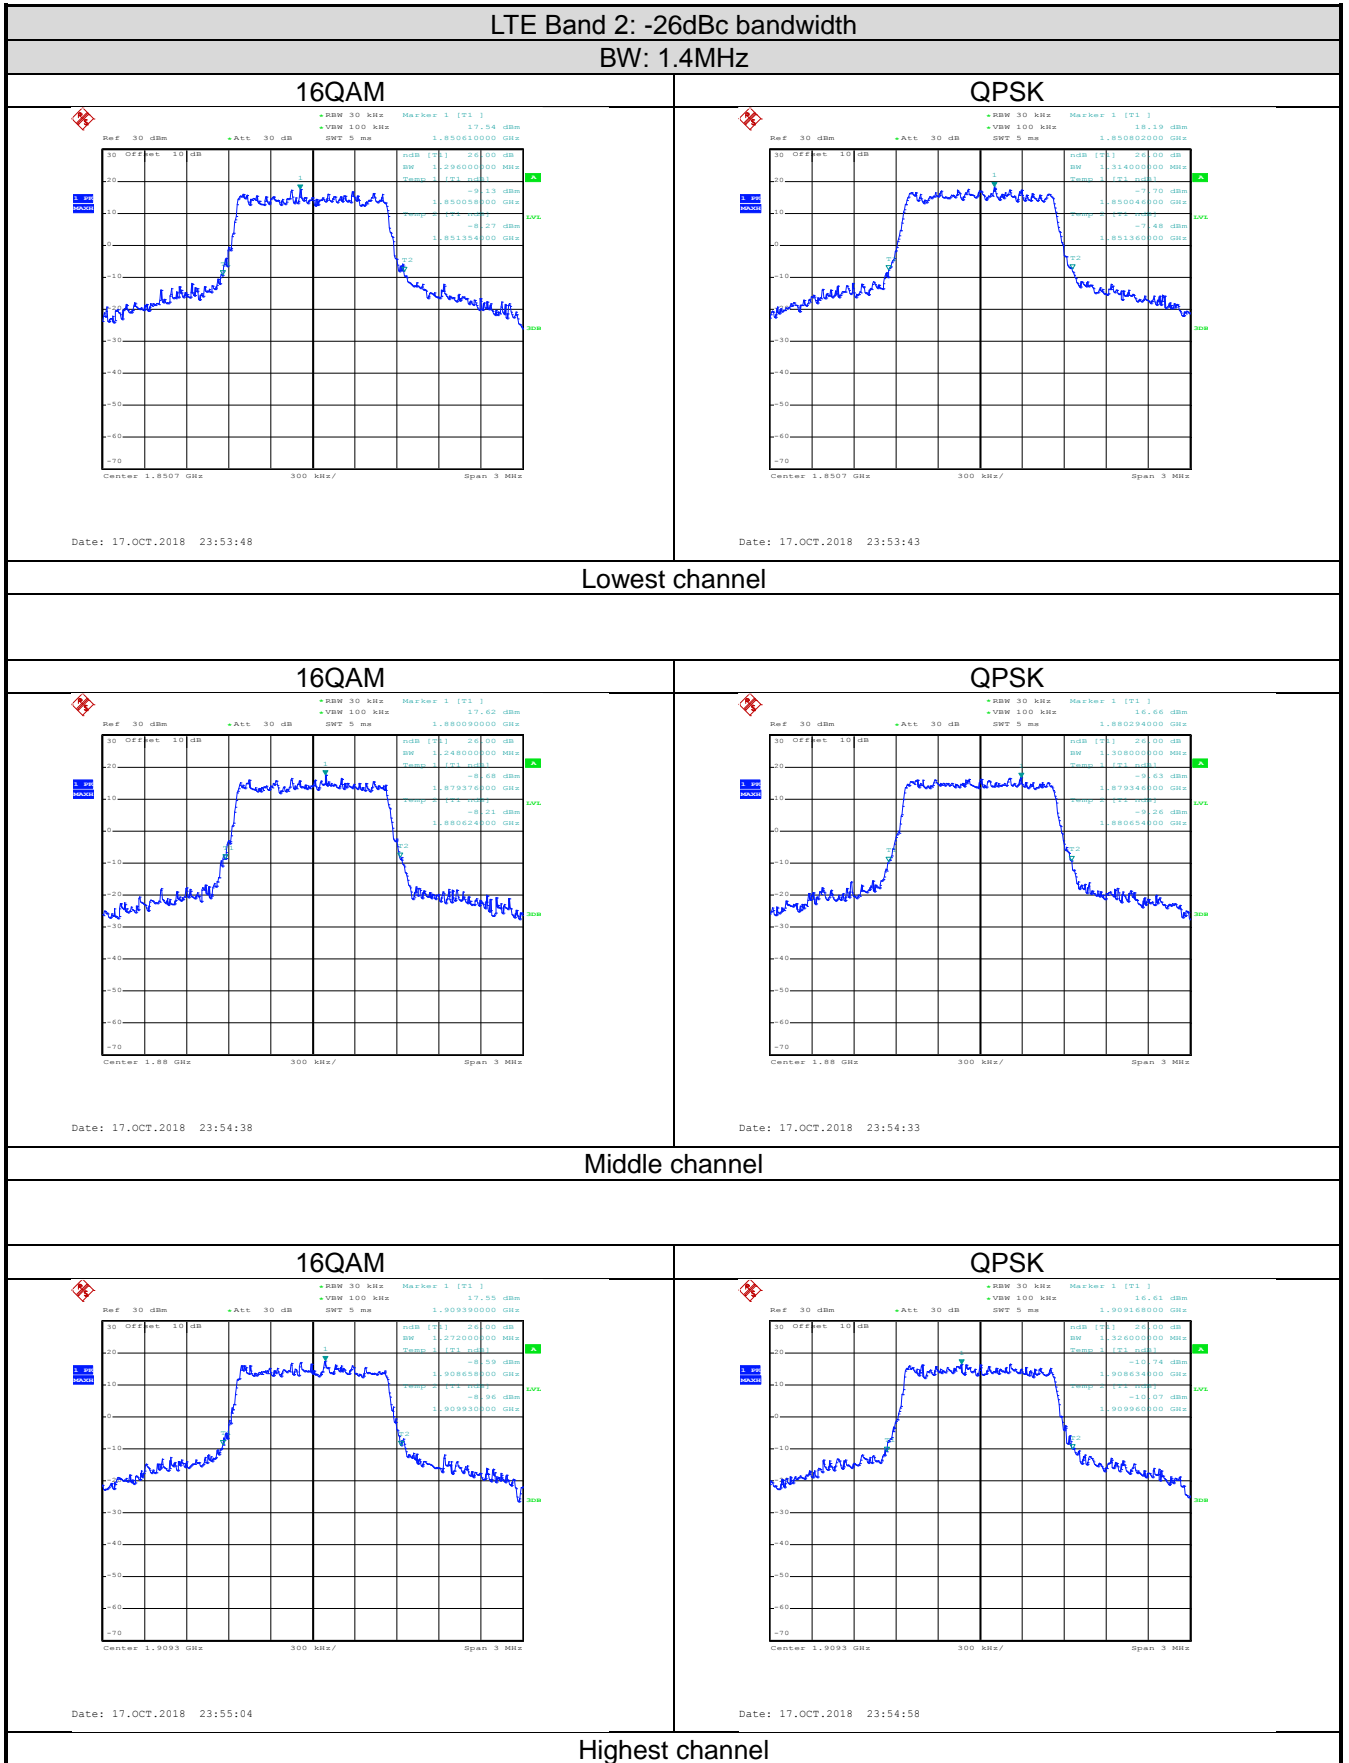


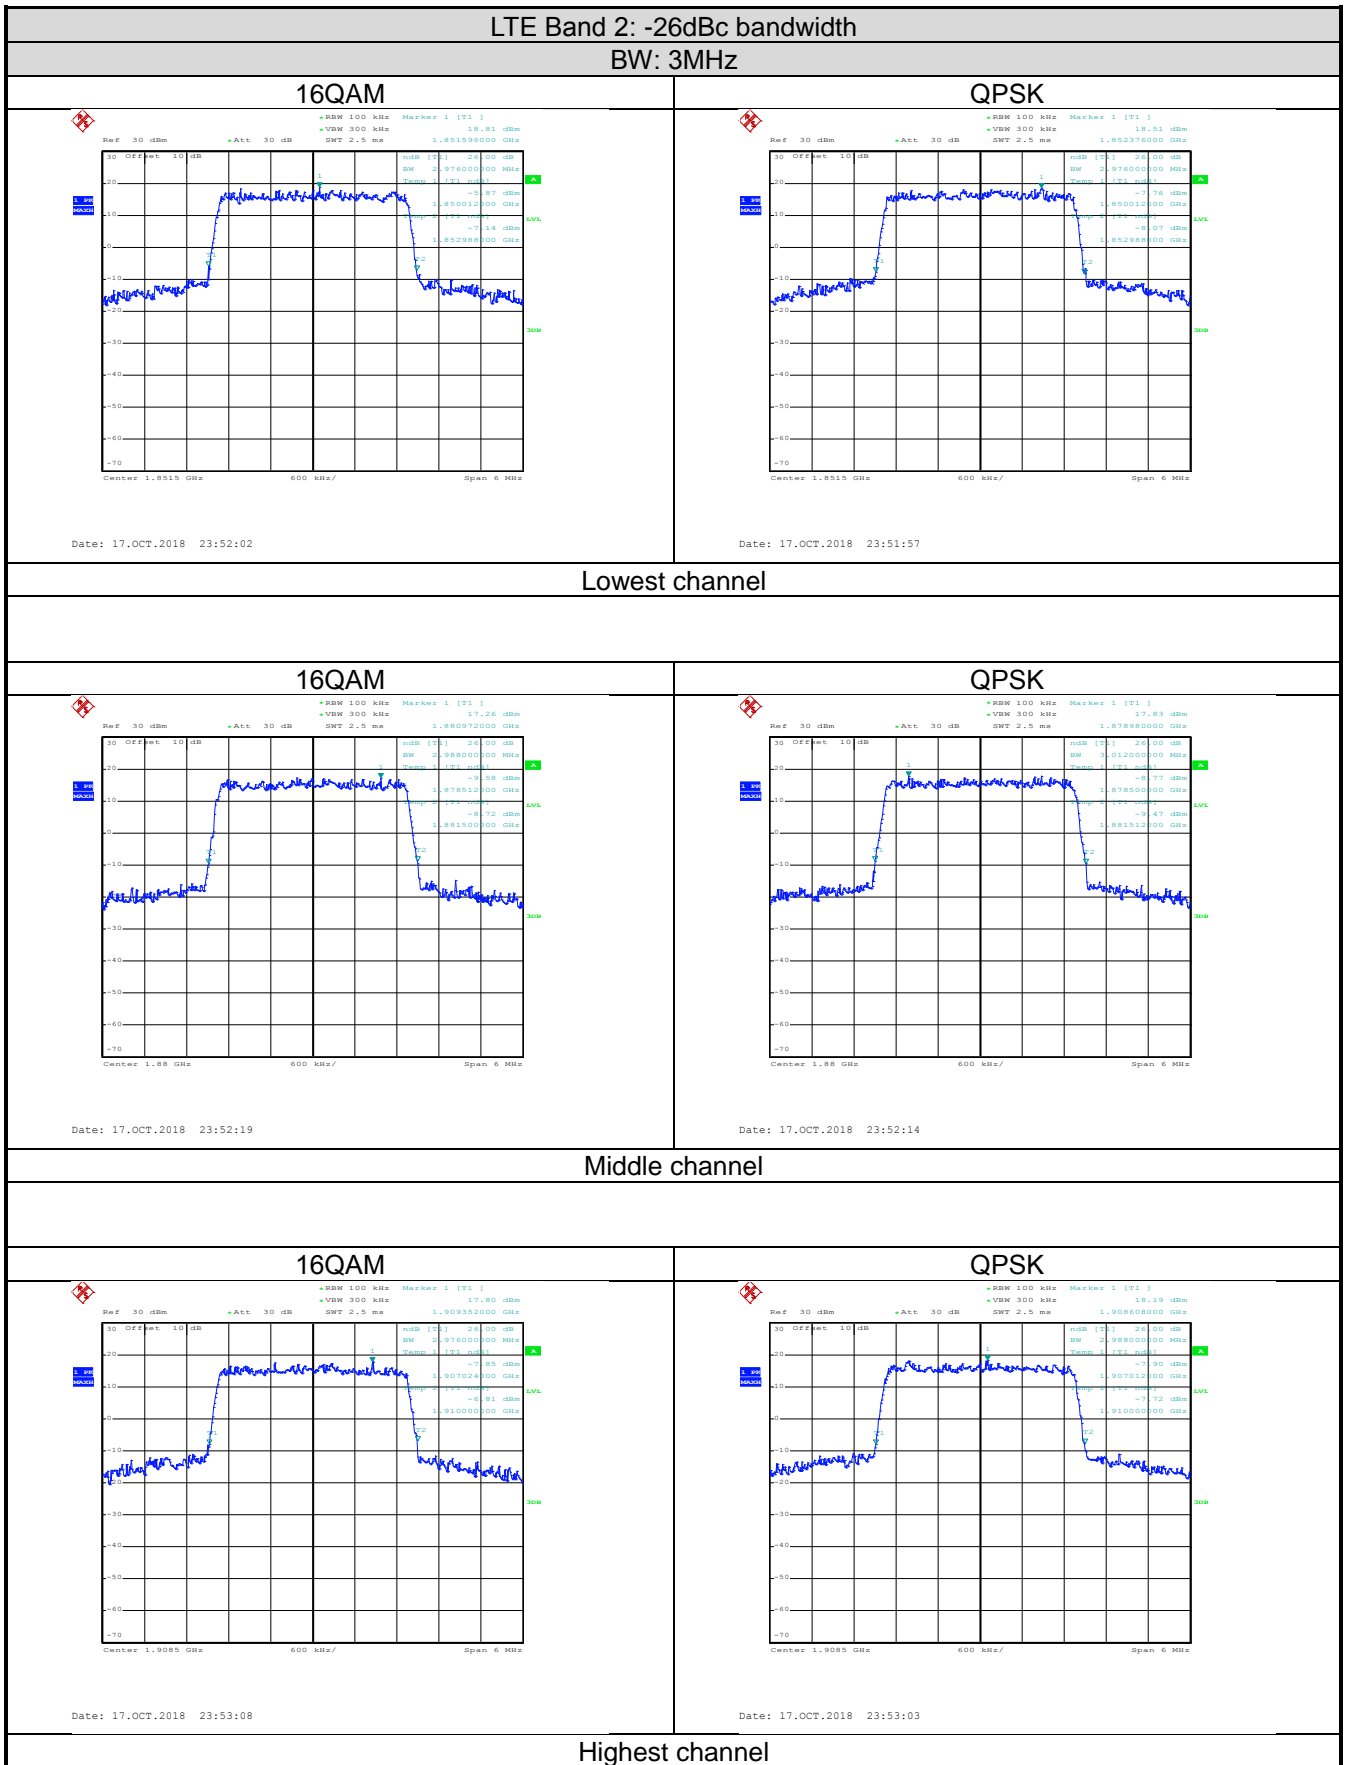

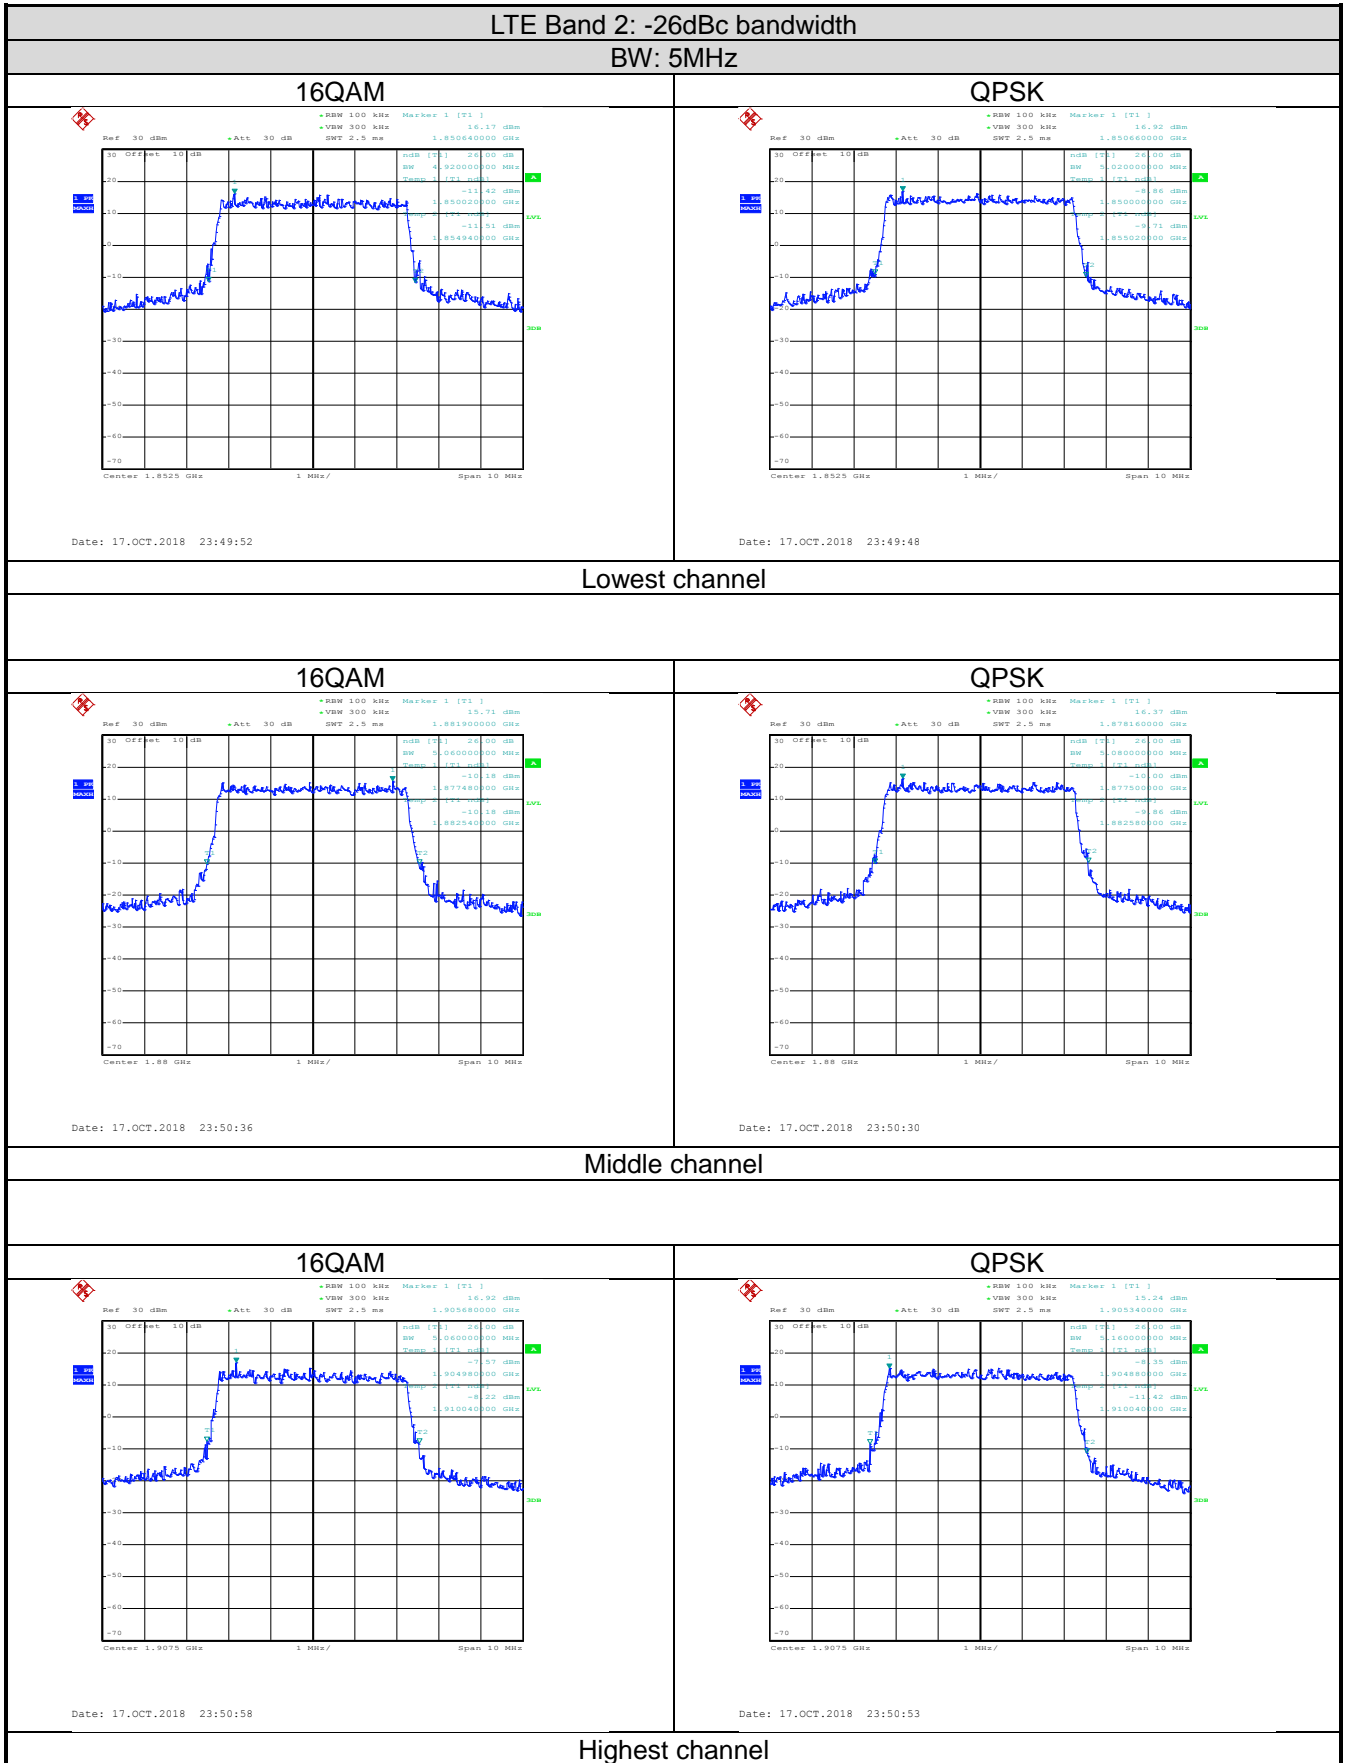


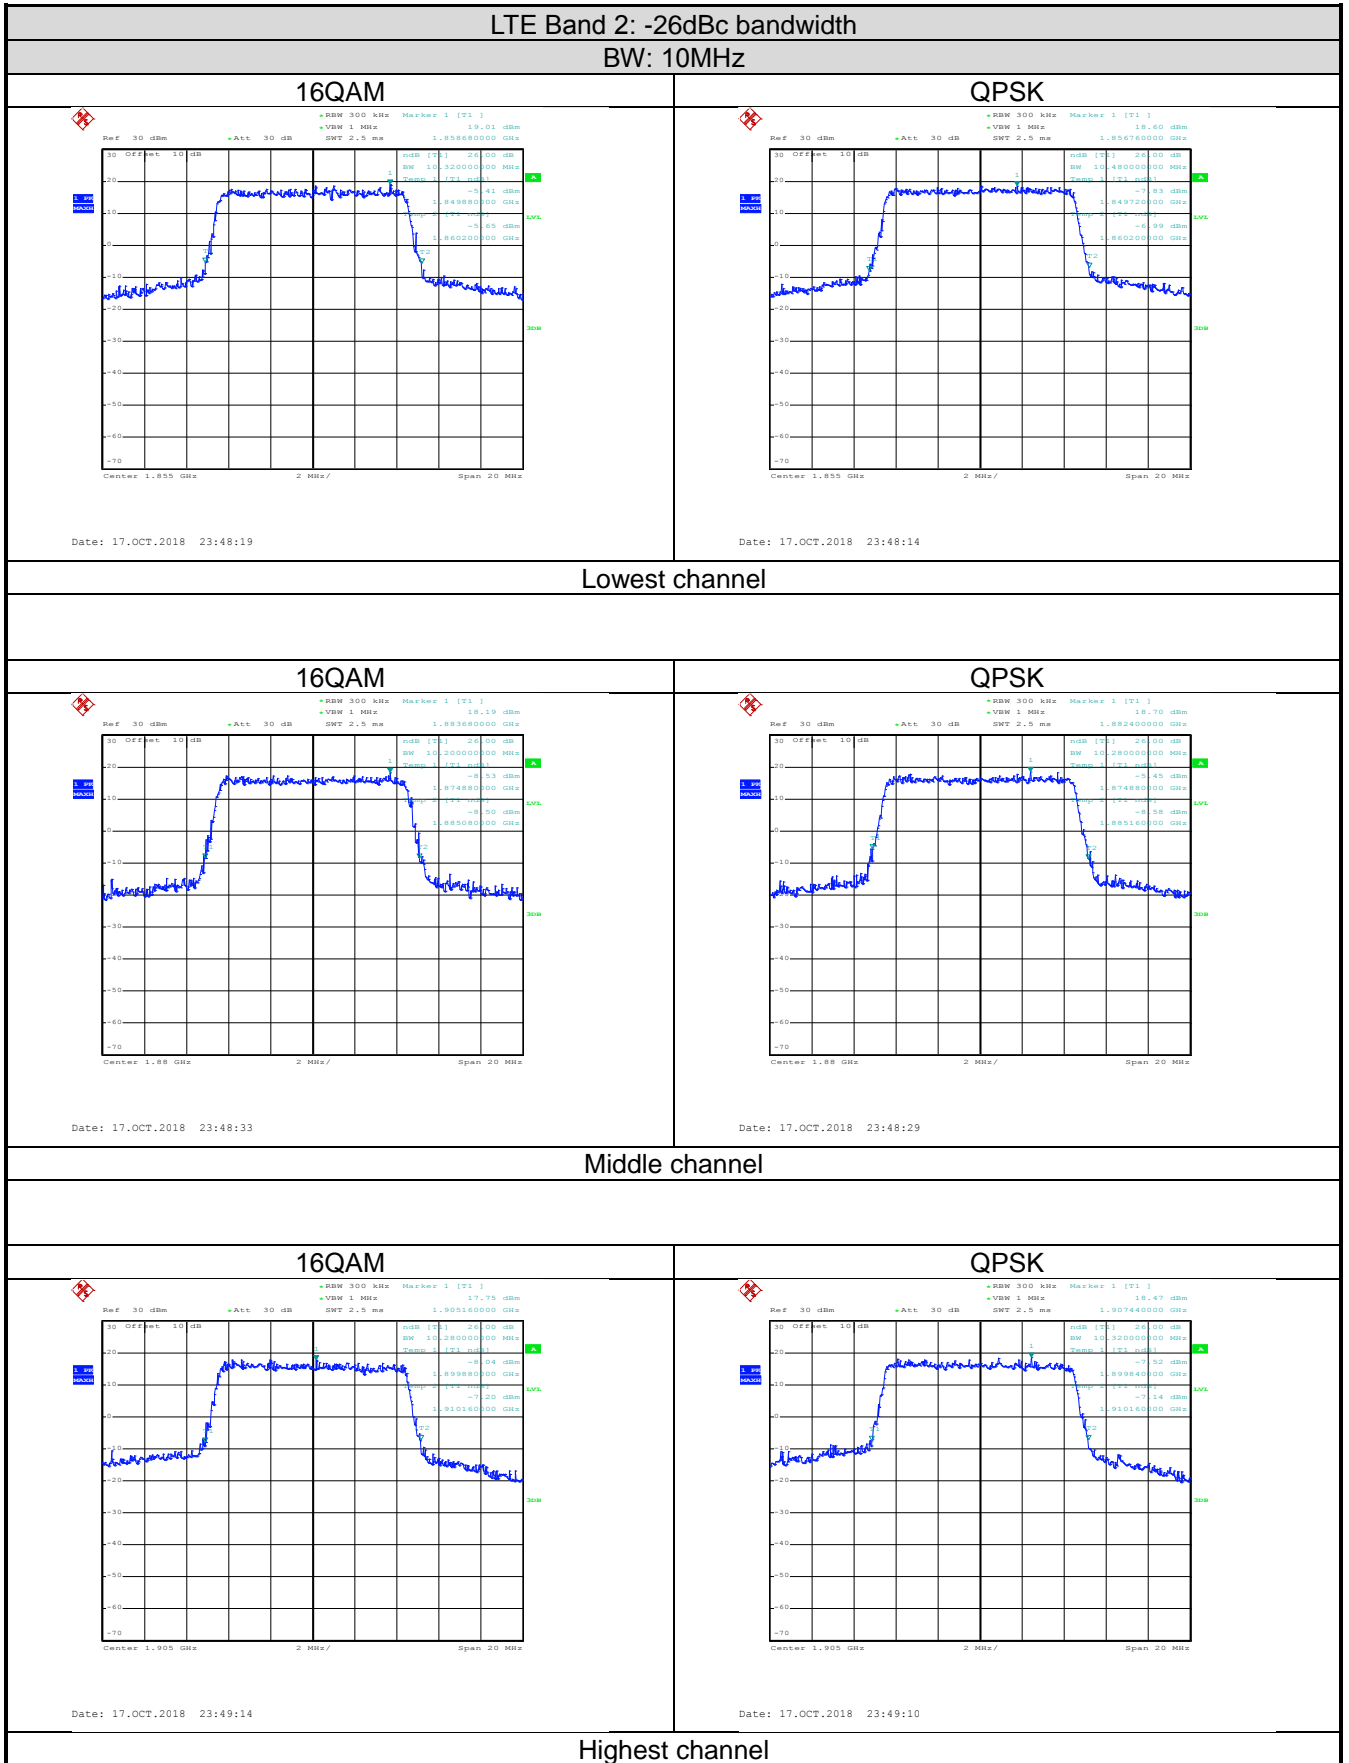

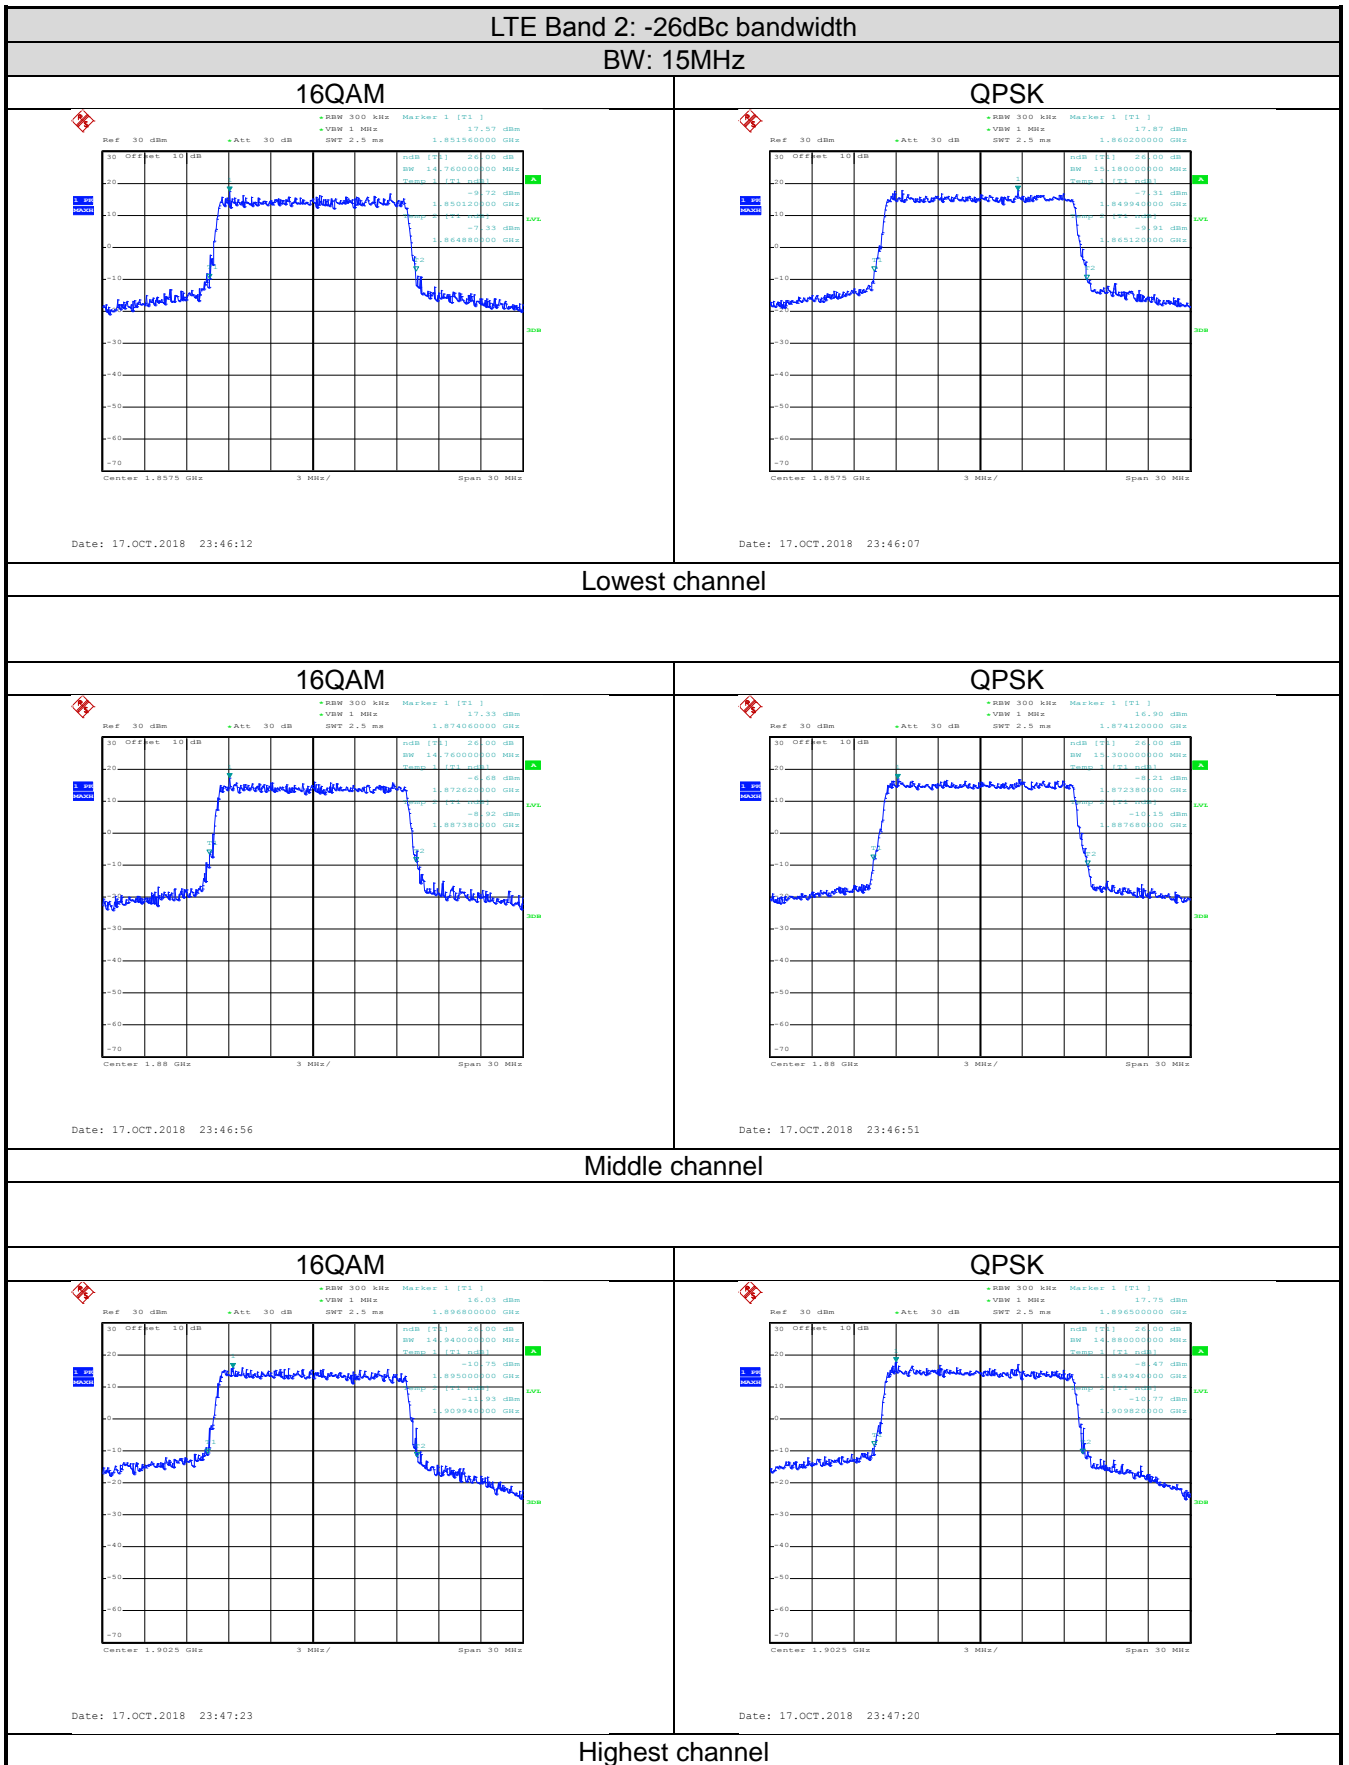

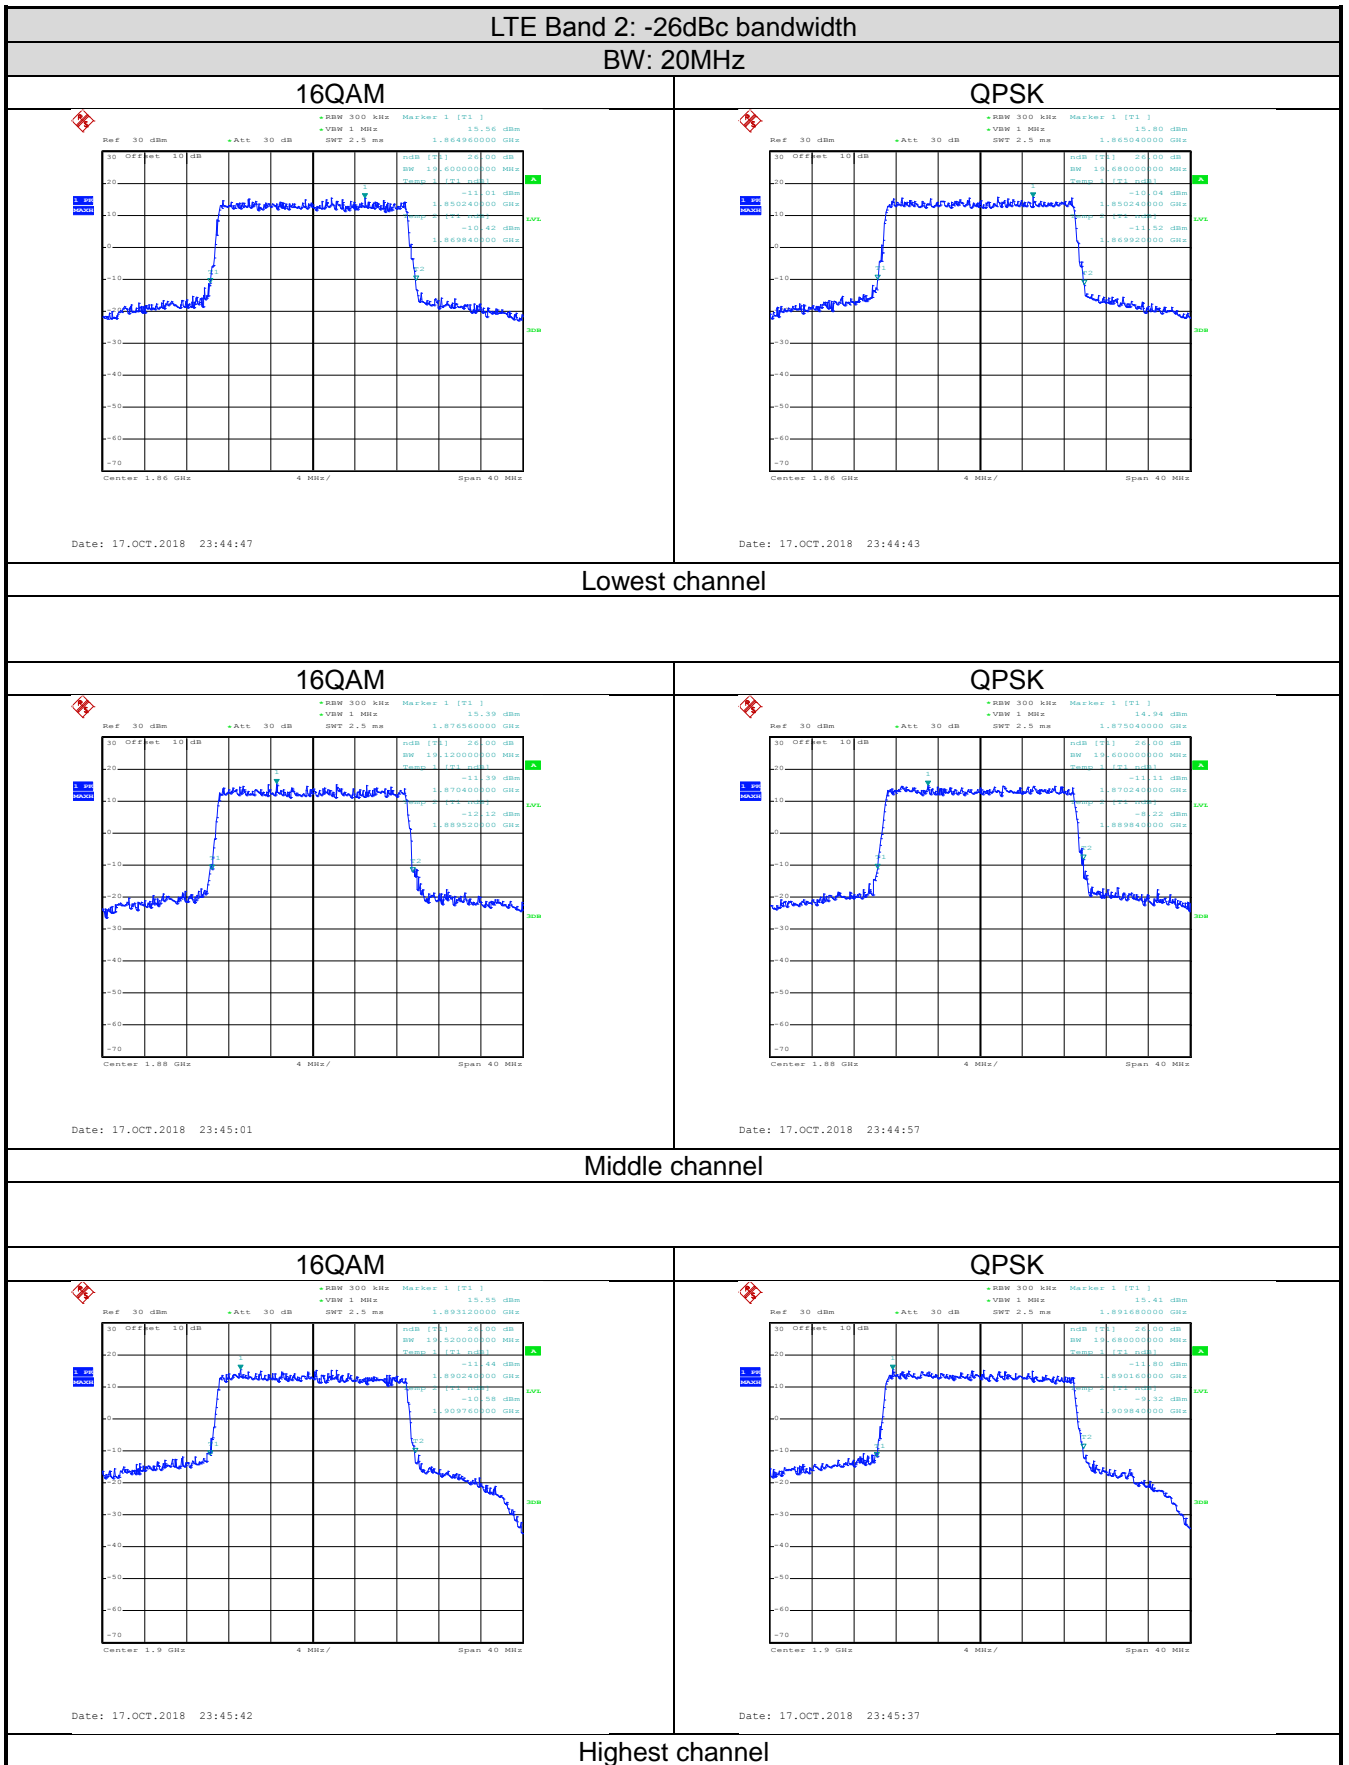


LTE Band 4 part:

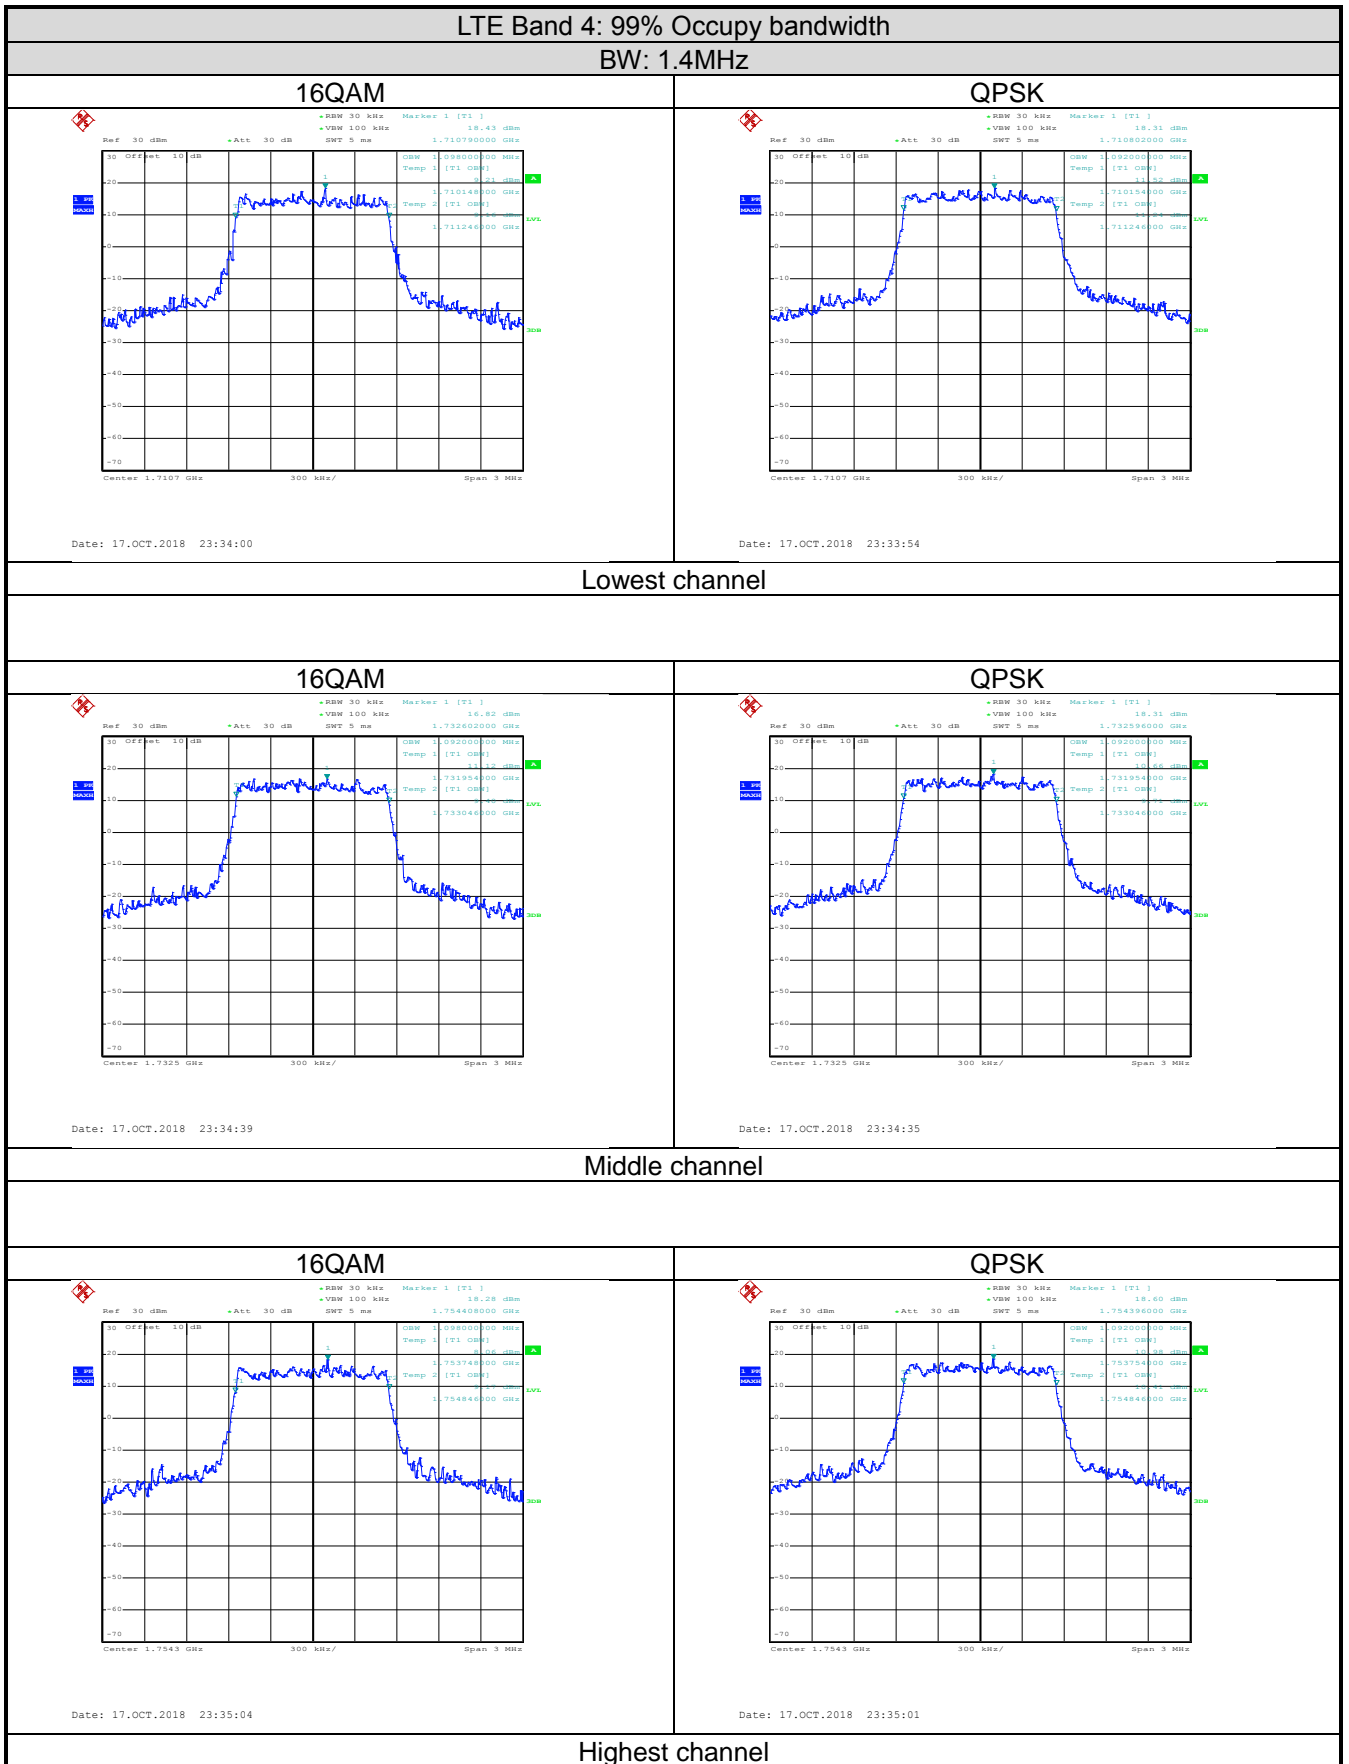


LTE Band 4: 99% Occupancy bandwidth
 BW: 3MHz

16QAM

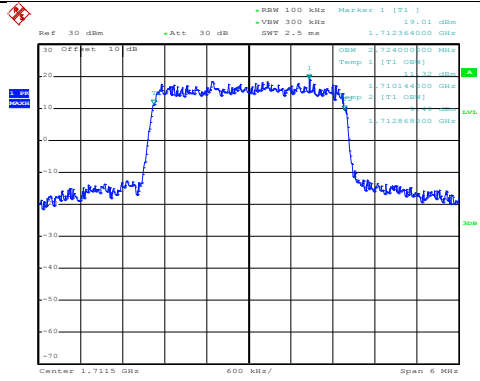

Date: 17.OCT.2018 23:36:02


QPSK

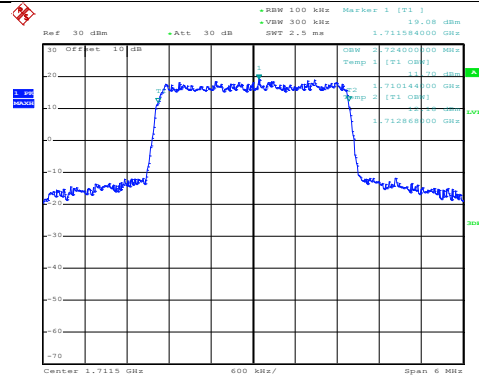

Date: 17.OCT.2018 23:35:58


Lowest channel

16QAM

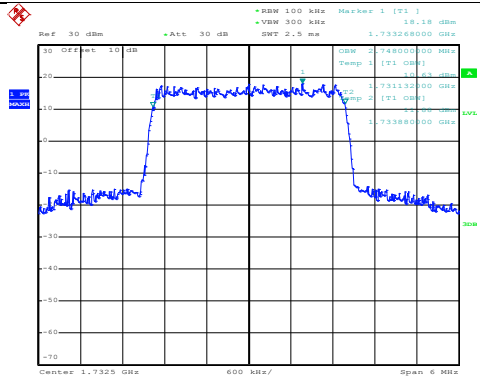

Date: 17.OCT.2018 23:36:17


QPSK

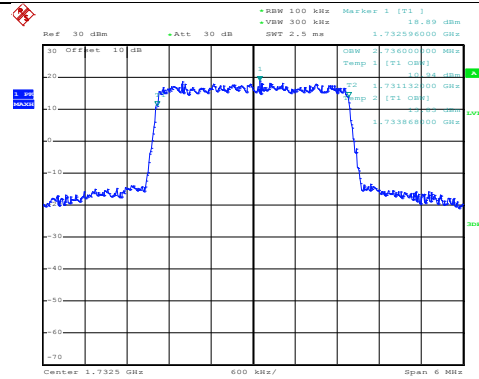

Date: 17.OCT.2018 23:36:14


Middle channel

16QAM

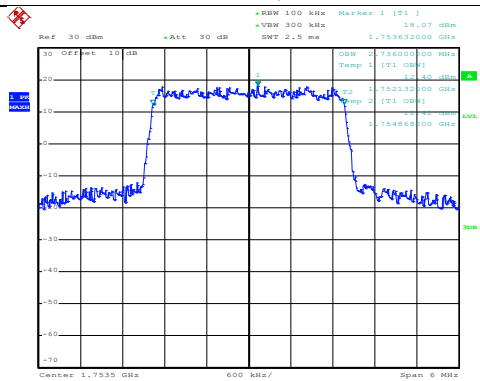

Date: 17.OCT.2018 23:37:00

QPSK

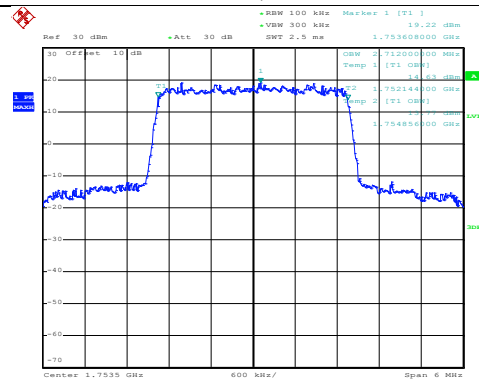


Date: 17.OCT.2018 23:36:56

Highest channel


LTE Band 4: 99% Occupancy bandwidth
BW: 5MHz

16QAM

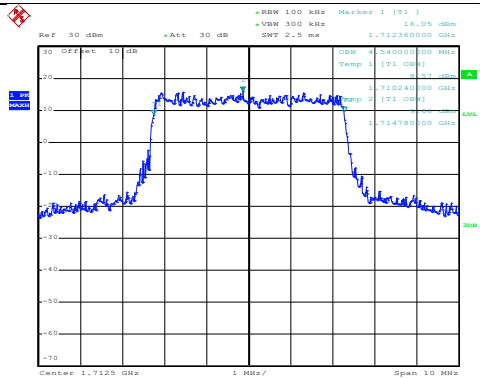

Date: 17.OCT.2018 23:37:31


QPSK

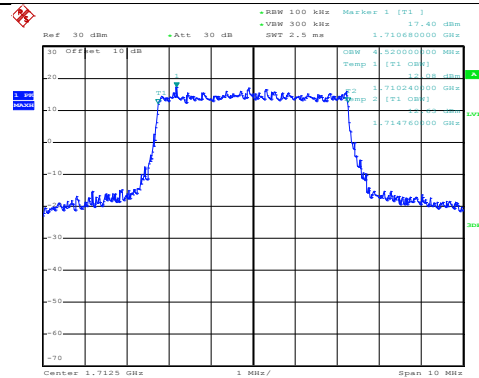

Date: 17.OCT.2018 23:37:27


Lowest channel

16QAM

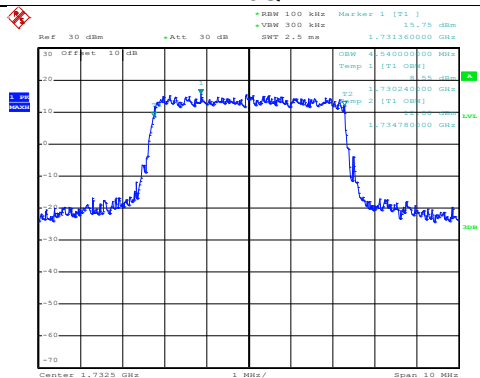

Date: 17.OCT.2018 23:38:12


QPSK

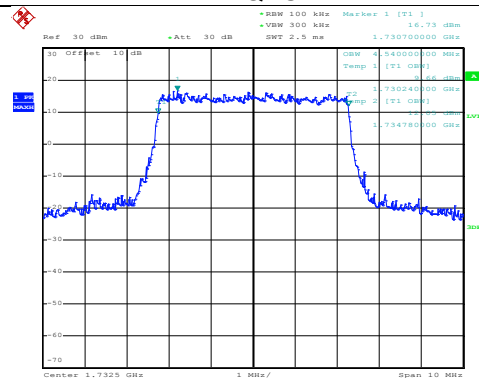

Date: 17.OCT.2018 23:38:08


Middle channel

16QAM

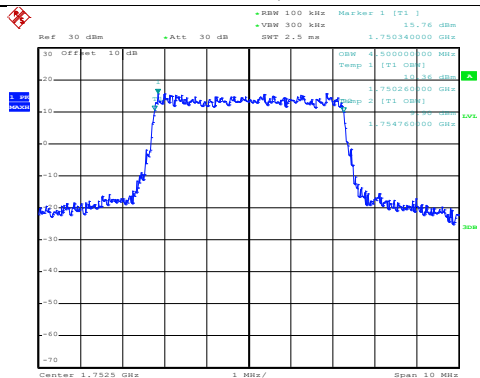

Date: 17.OCT.2018 23:38:26

QPSK

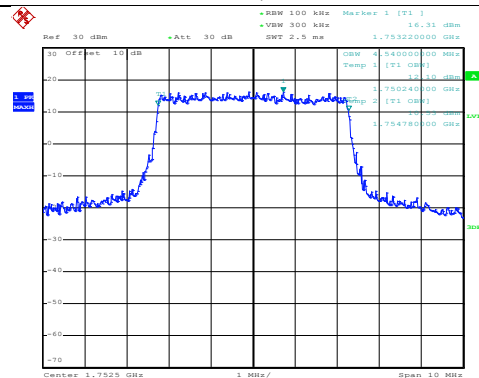


Date: 17.OCT.2018 23:38:22

Highest channel


LTE Band 4: 99% Occupy bandwidth
BW: 10MHz

16QAM

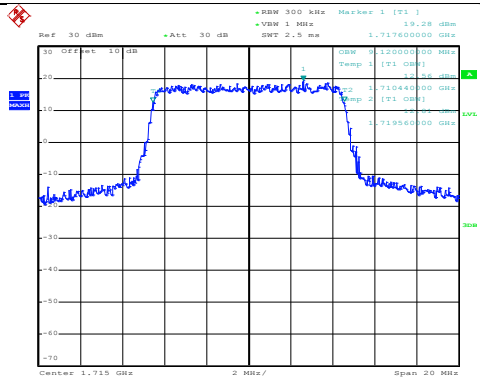

Date: 17.OCT.2018 23:39:34


QPSK

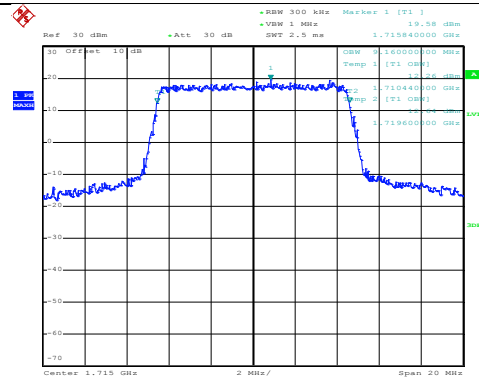

Date: 17.OCT.2018 23:39:30


Lowest channel

16QAM

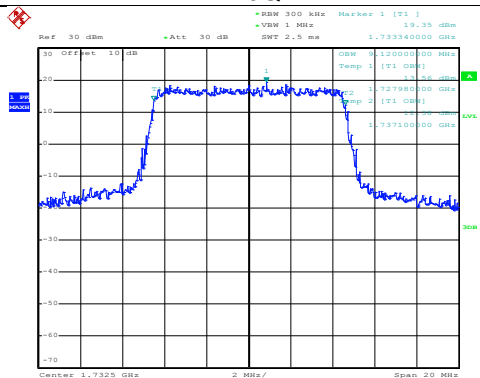

Date: 17.OCT.2018 23:39:49


QPSK

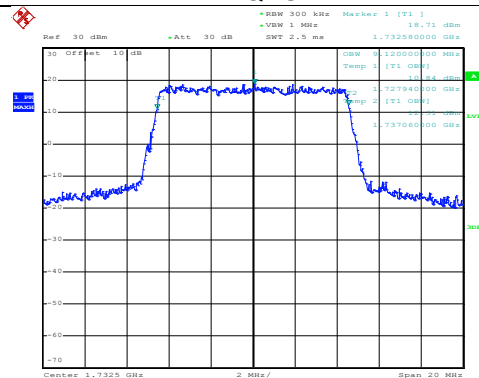

Date: 17.OCT.2018 23:39:45


Middle channel

16QAM

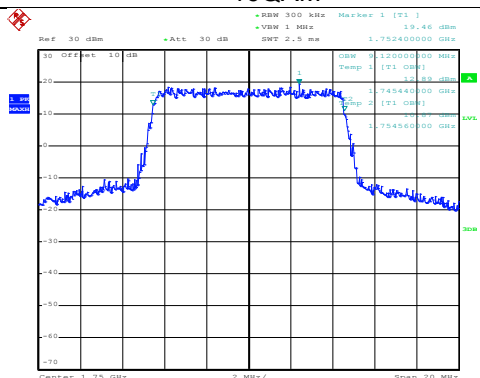


Date: 17.OCT.2018 23:40:26

QPSK

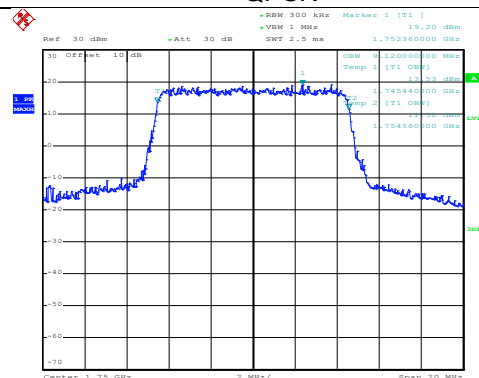


Date: 17.OCT.2018 23:40:22

Highest channel

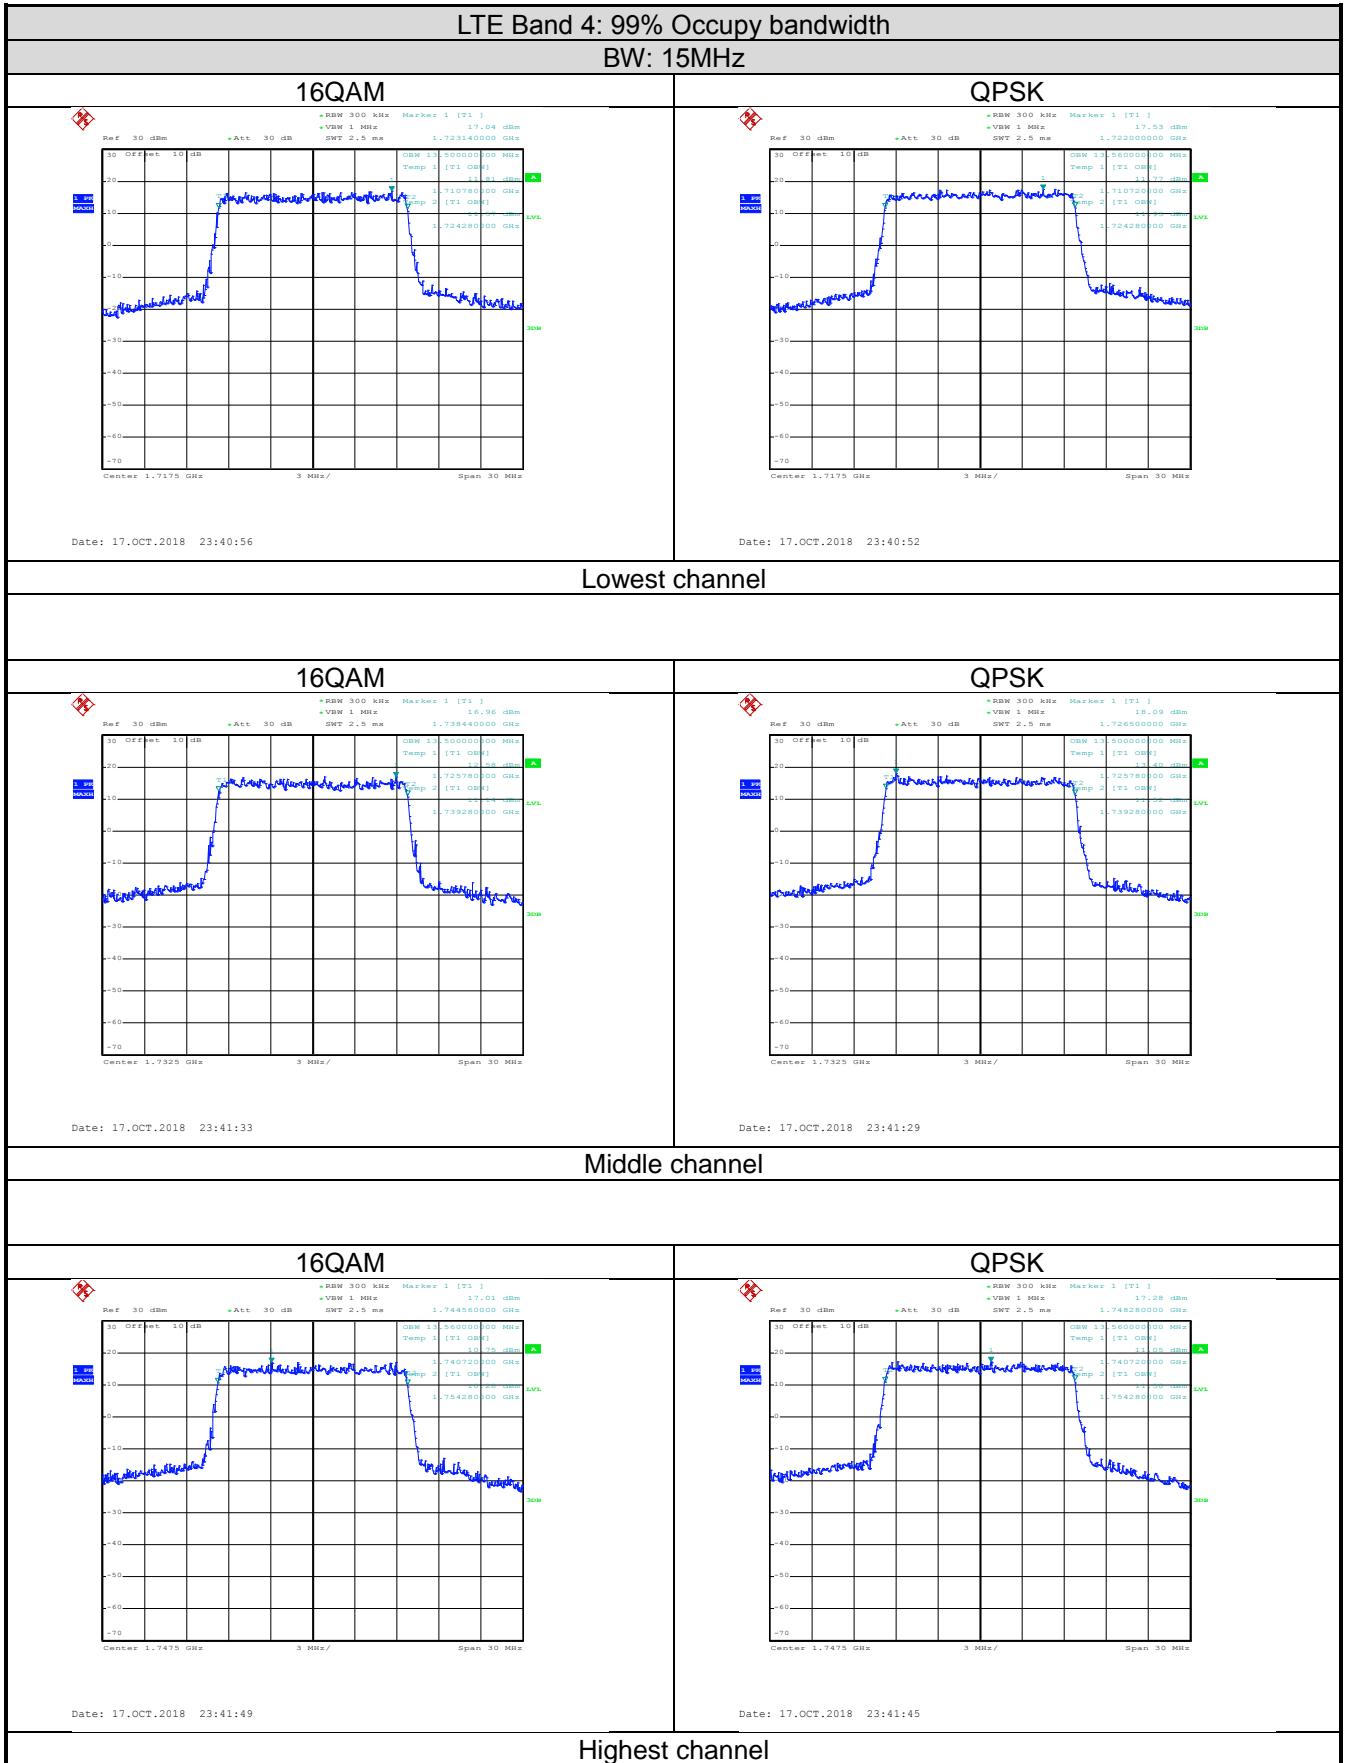


LTE Band 4: 99% Occupy bandwidth
BW: 20MHz

16QAM

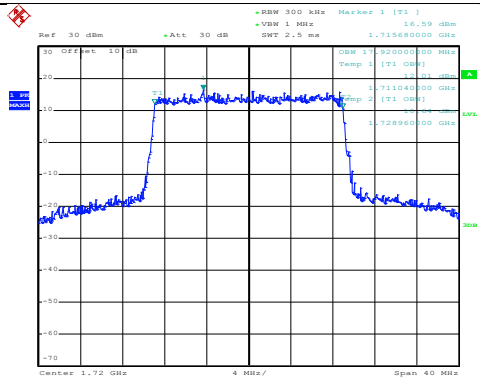

Date: 17.OCT.2018 23:42:46


QPSK

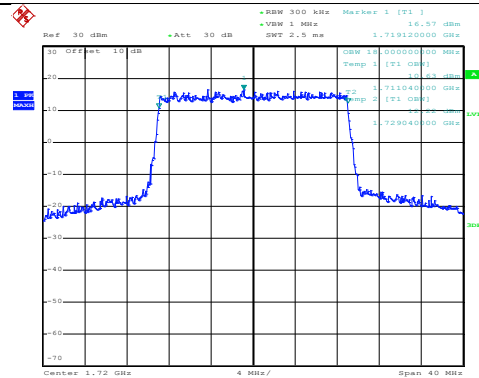

Date: 17.OCT.2018 23:42:41


Lowest channel

16QAM

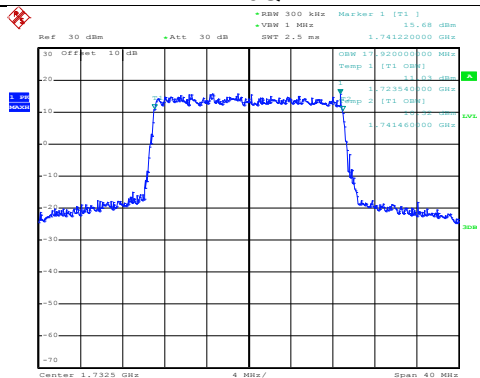

Date: 17.OCT.2018 23:43:01


QPSK

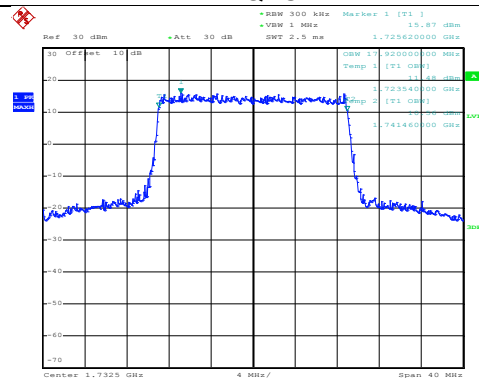

Date: 17.OCT.2018 23:42:56


Middle channel

16QAM

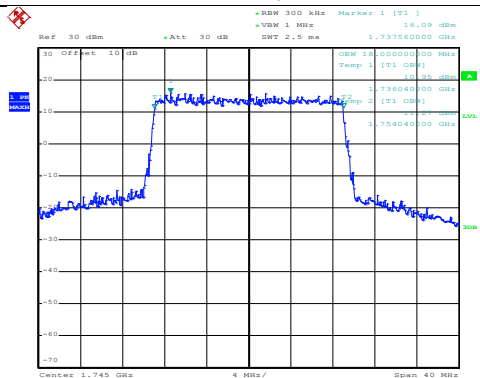


Date: 17.OCT.2018 23:43:51


QPSK

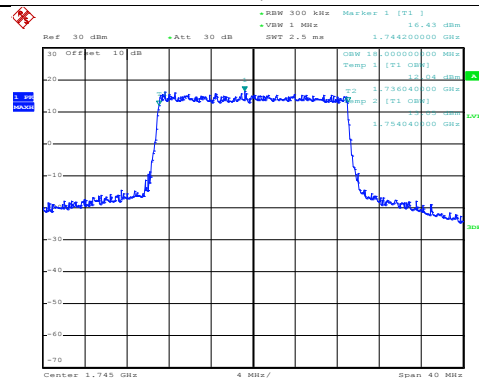



Date: 17.OCT.2018 23:43:46


Highest channel

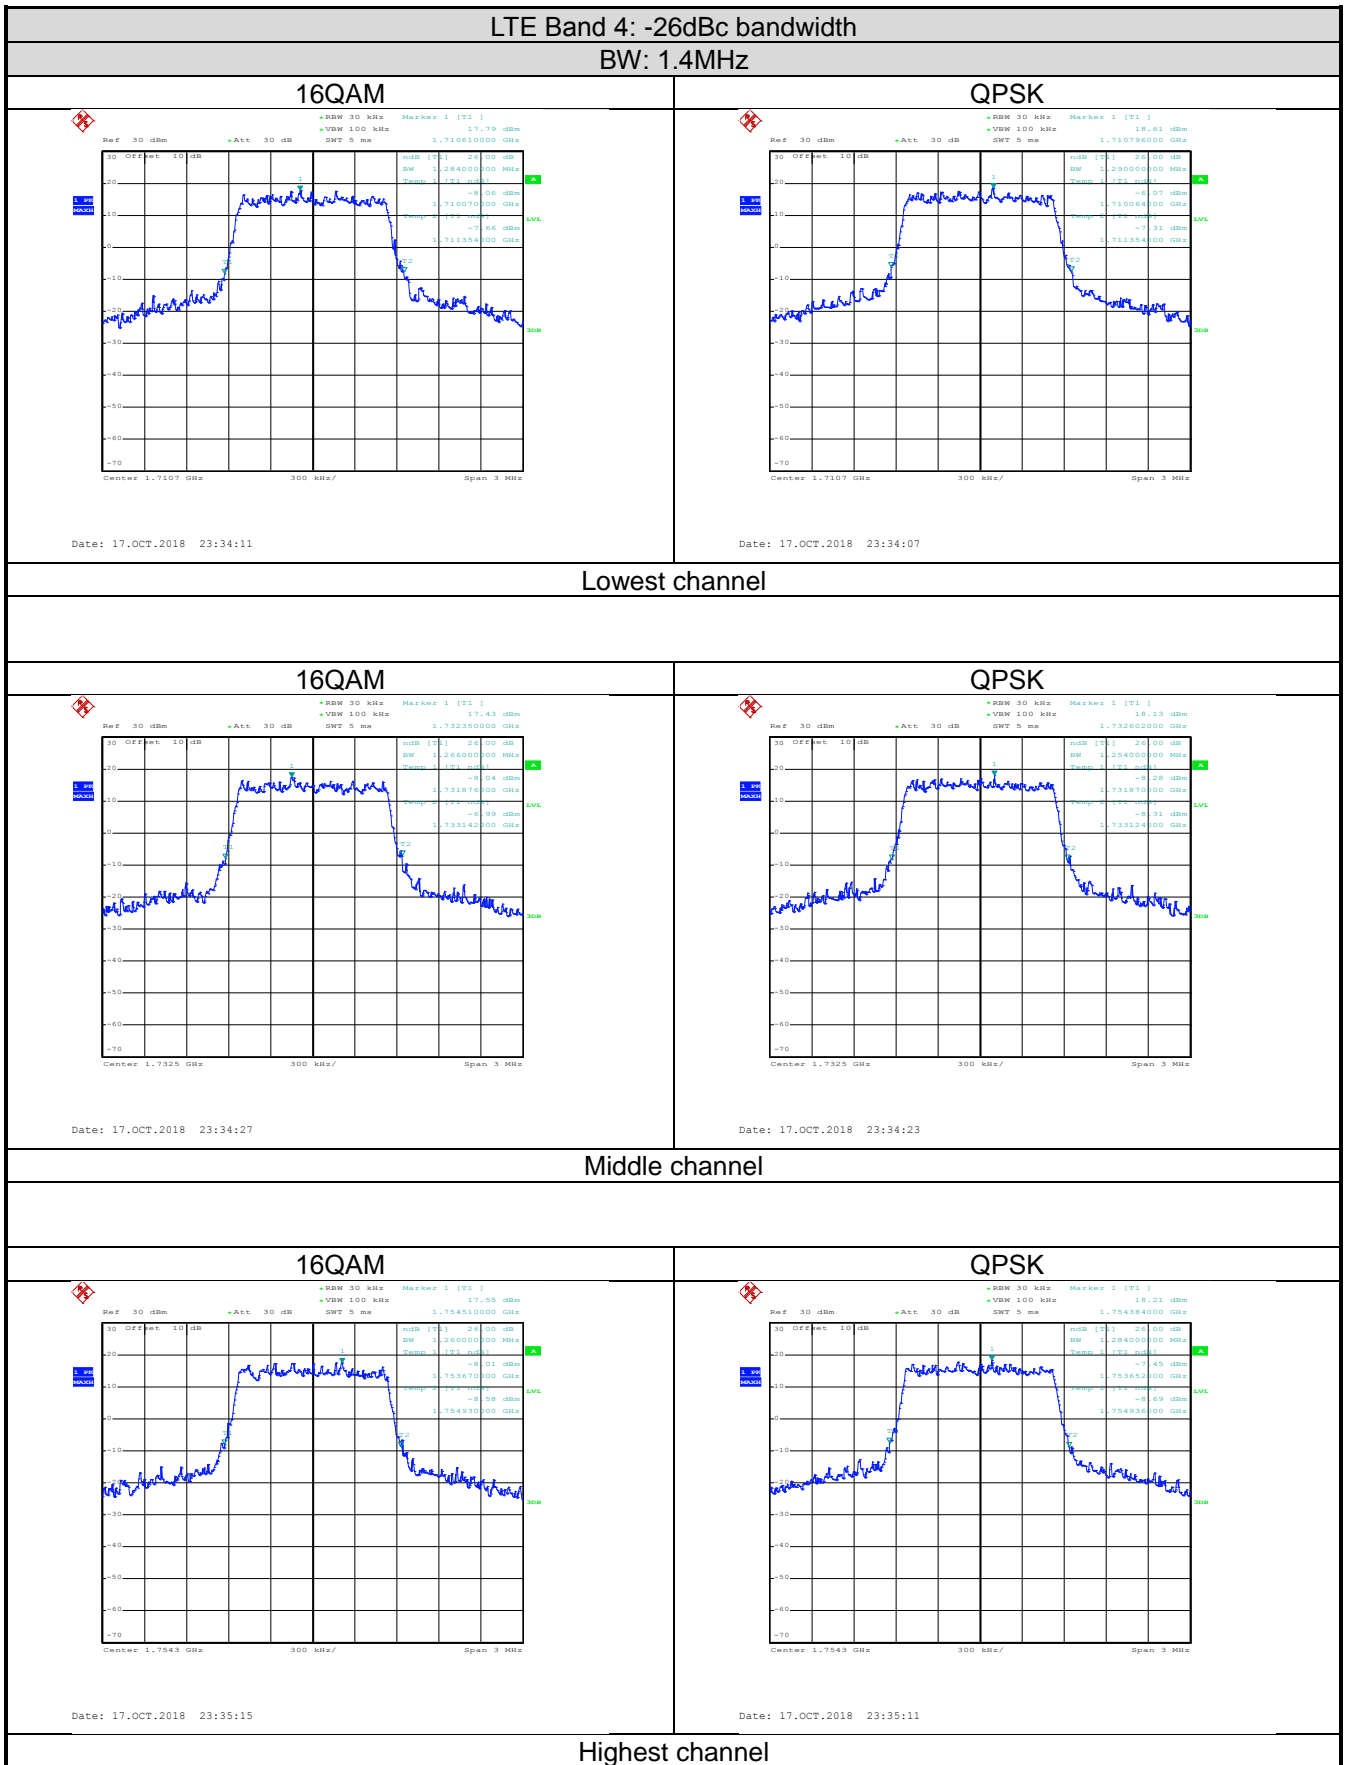


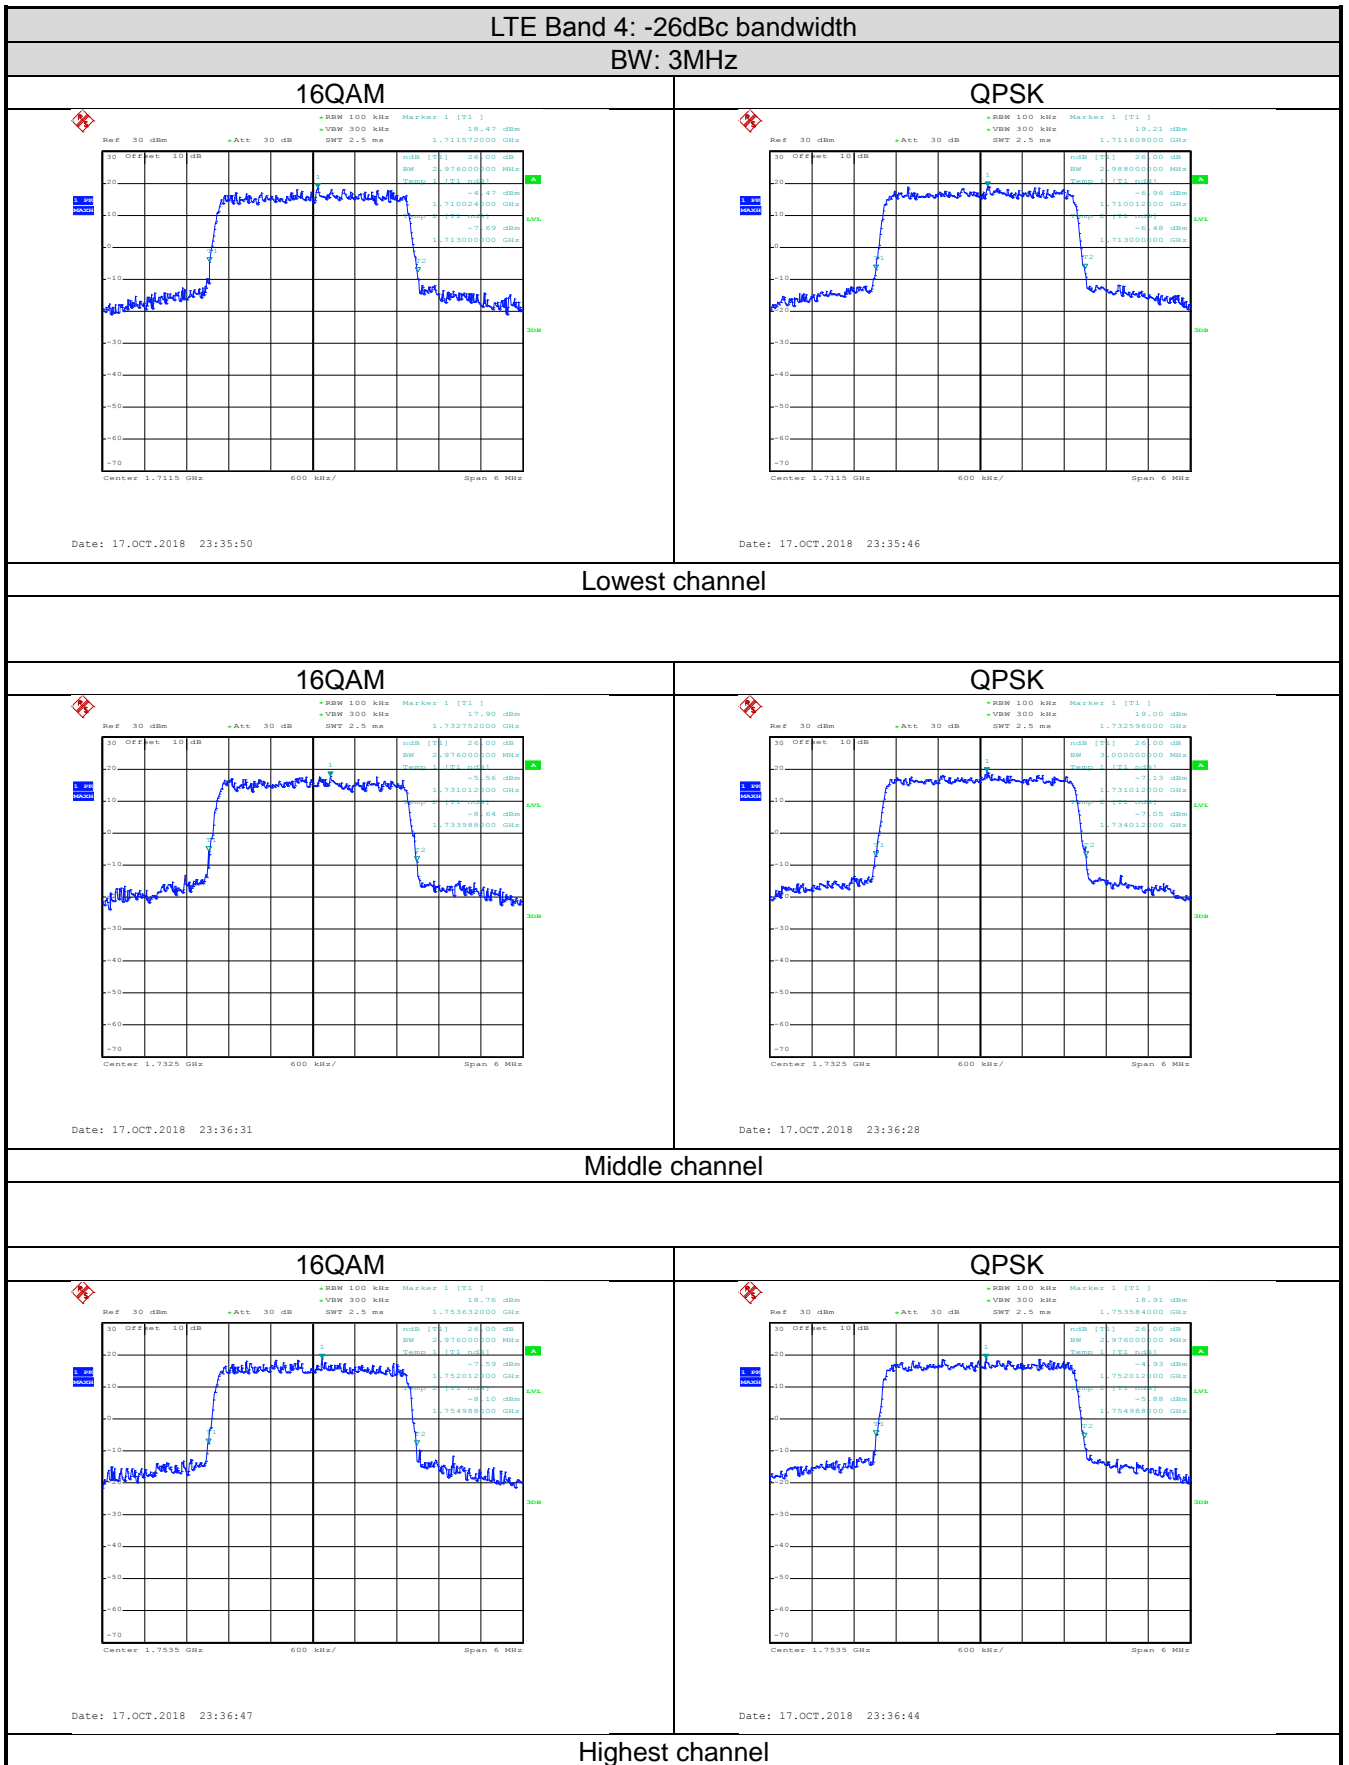

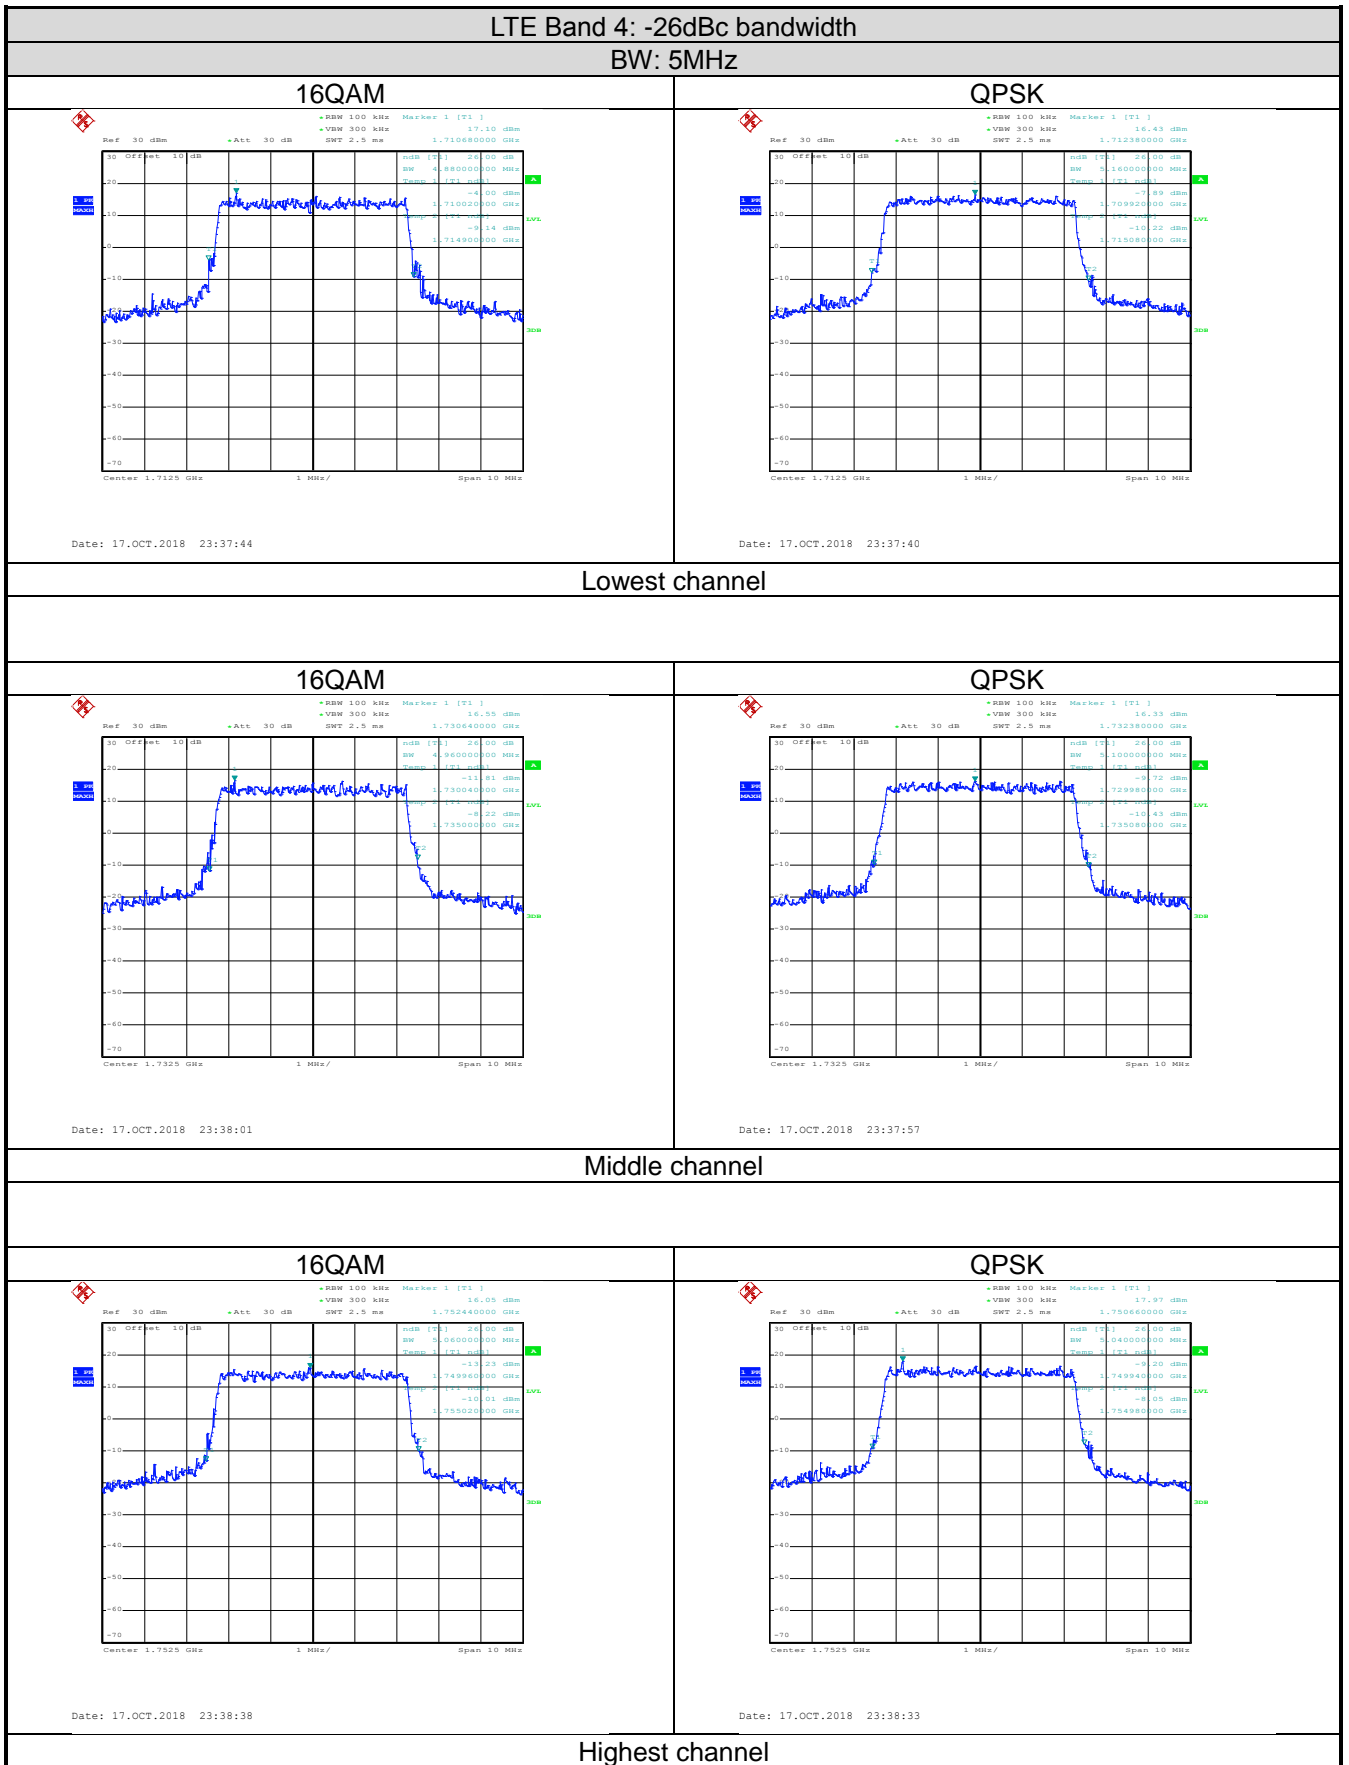


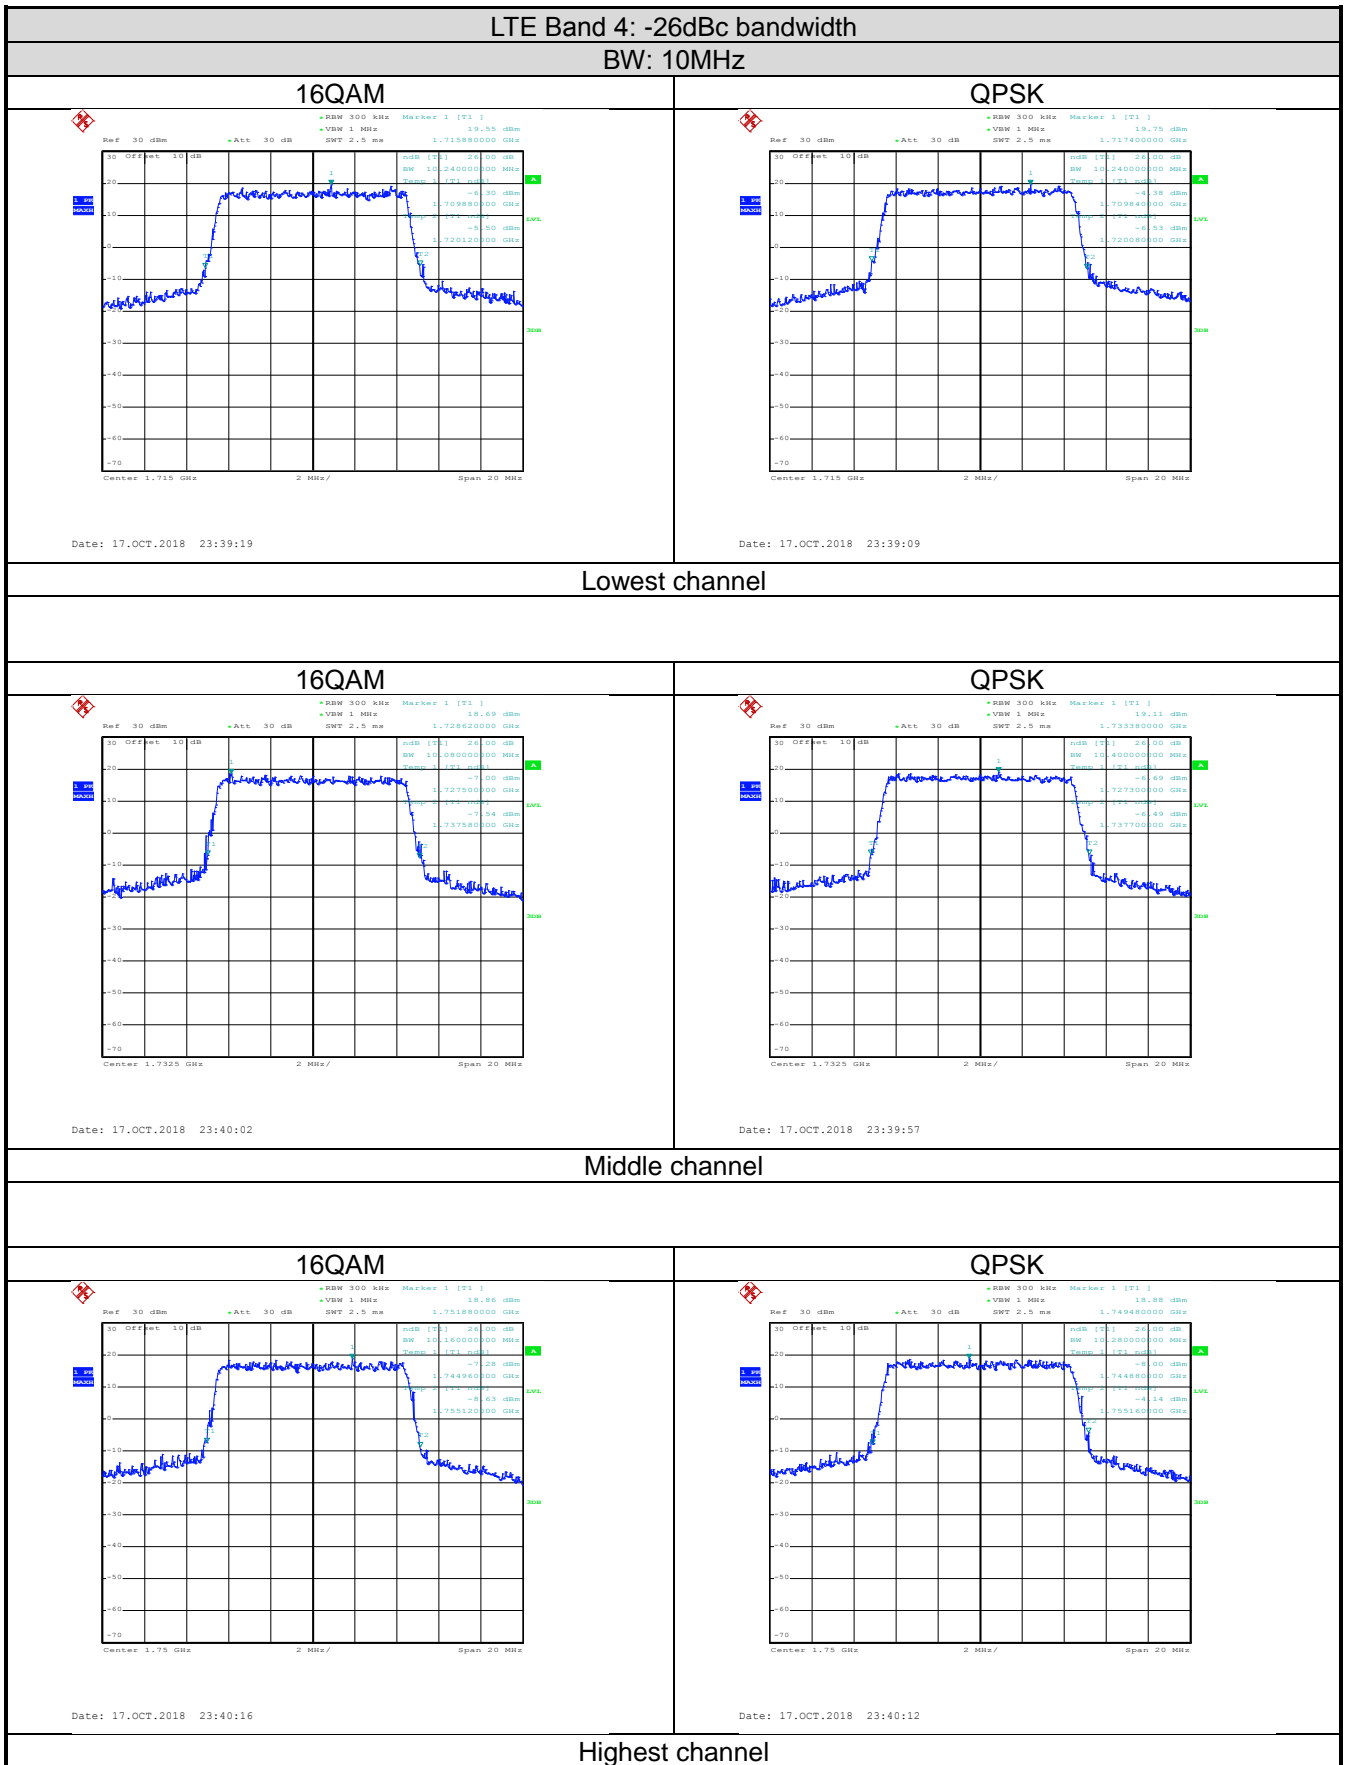

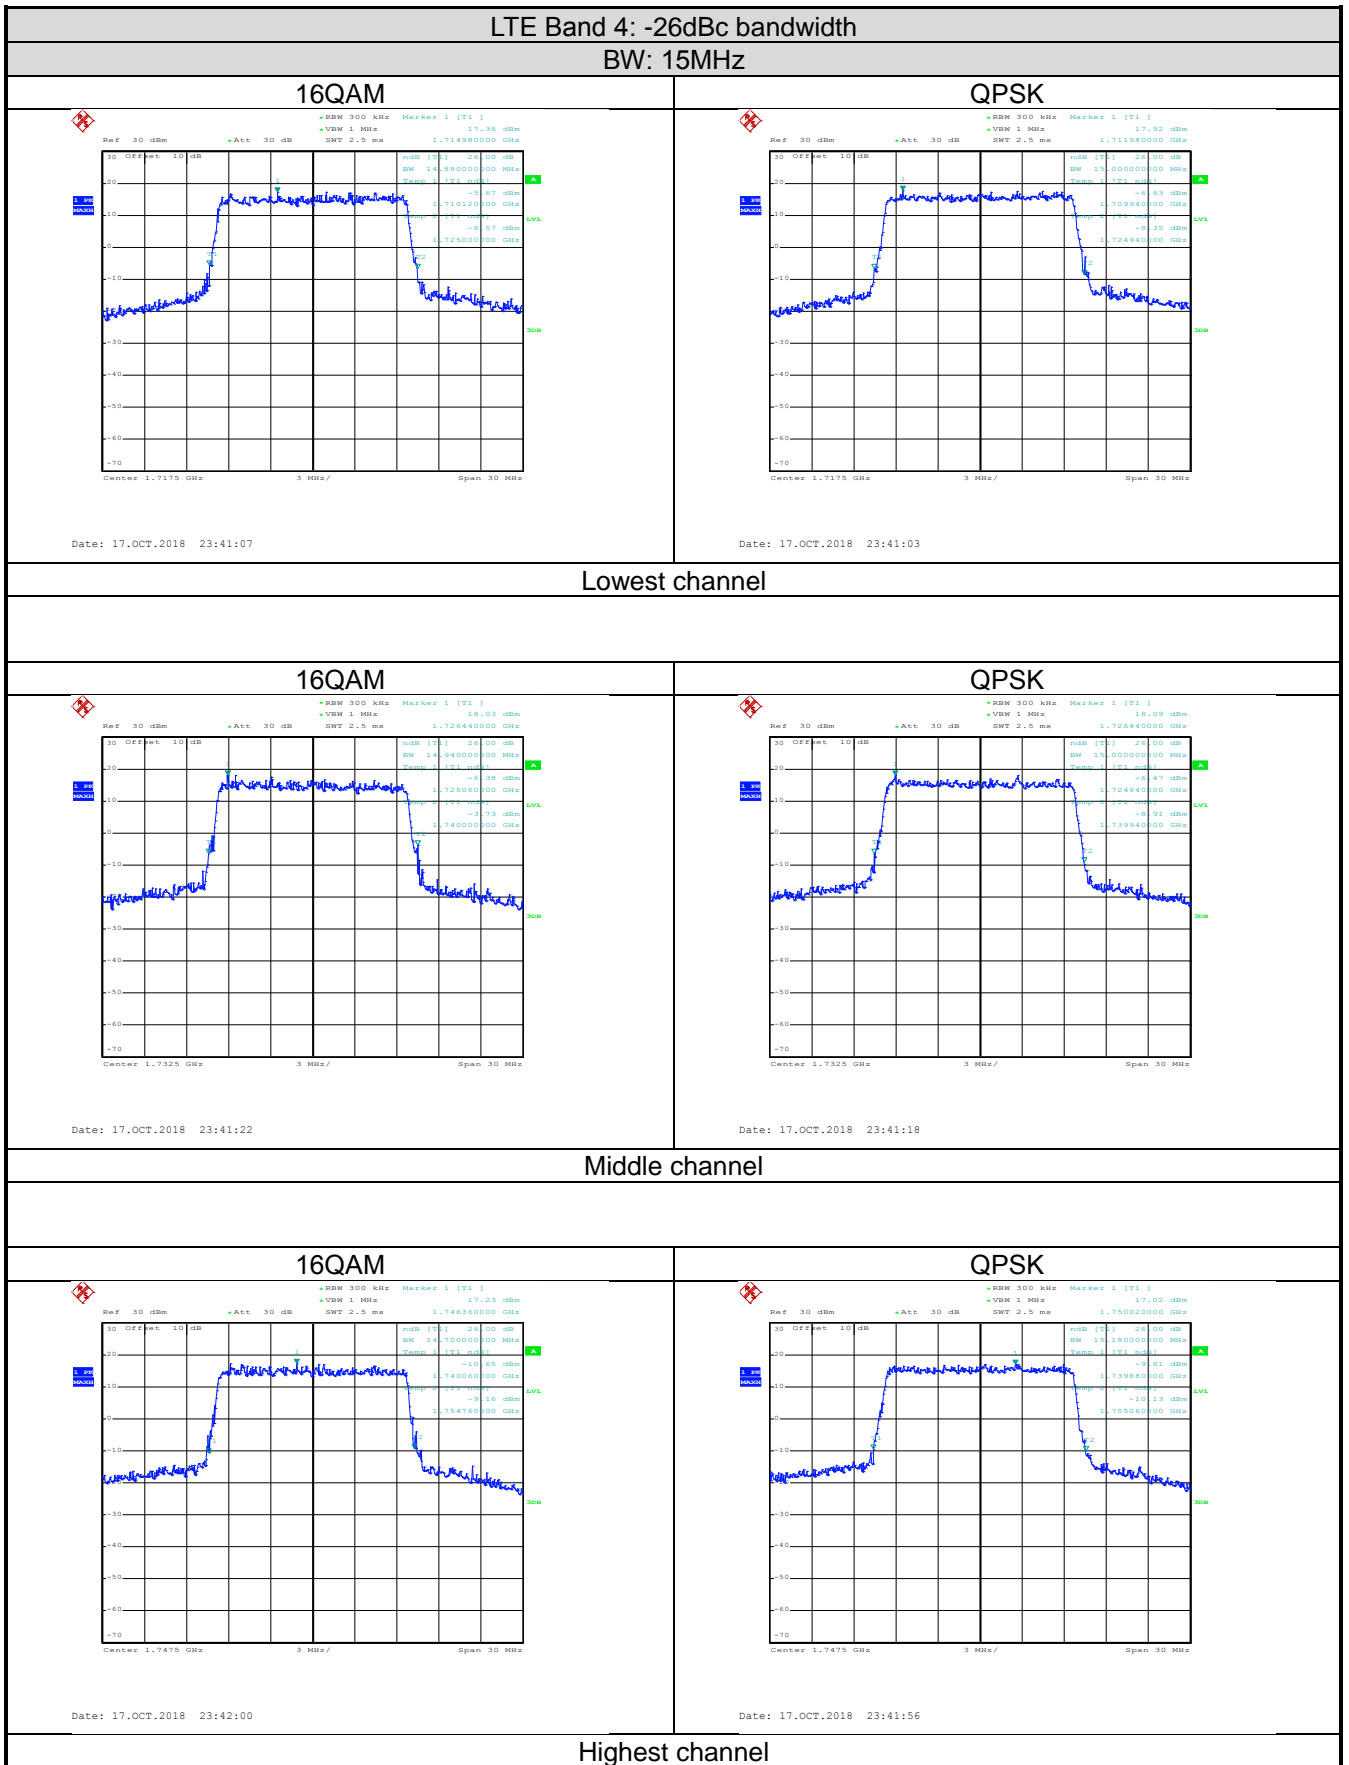

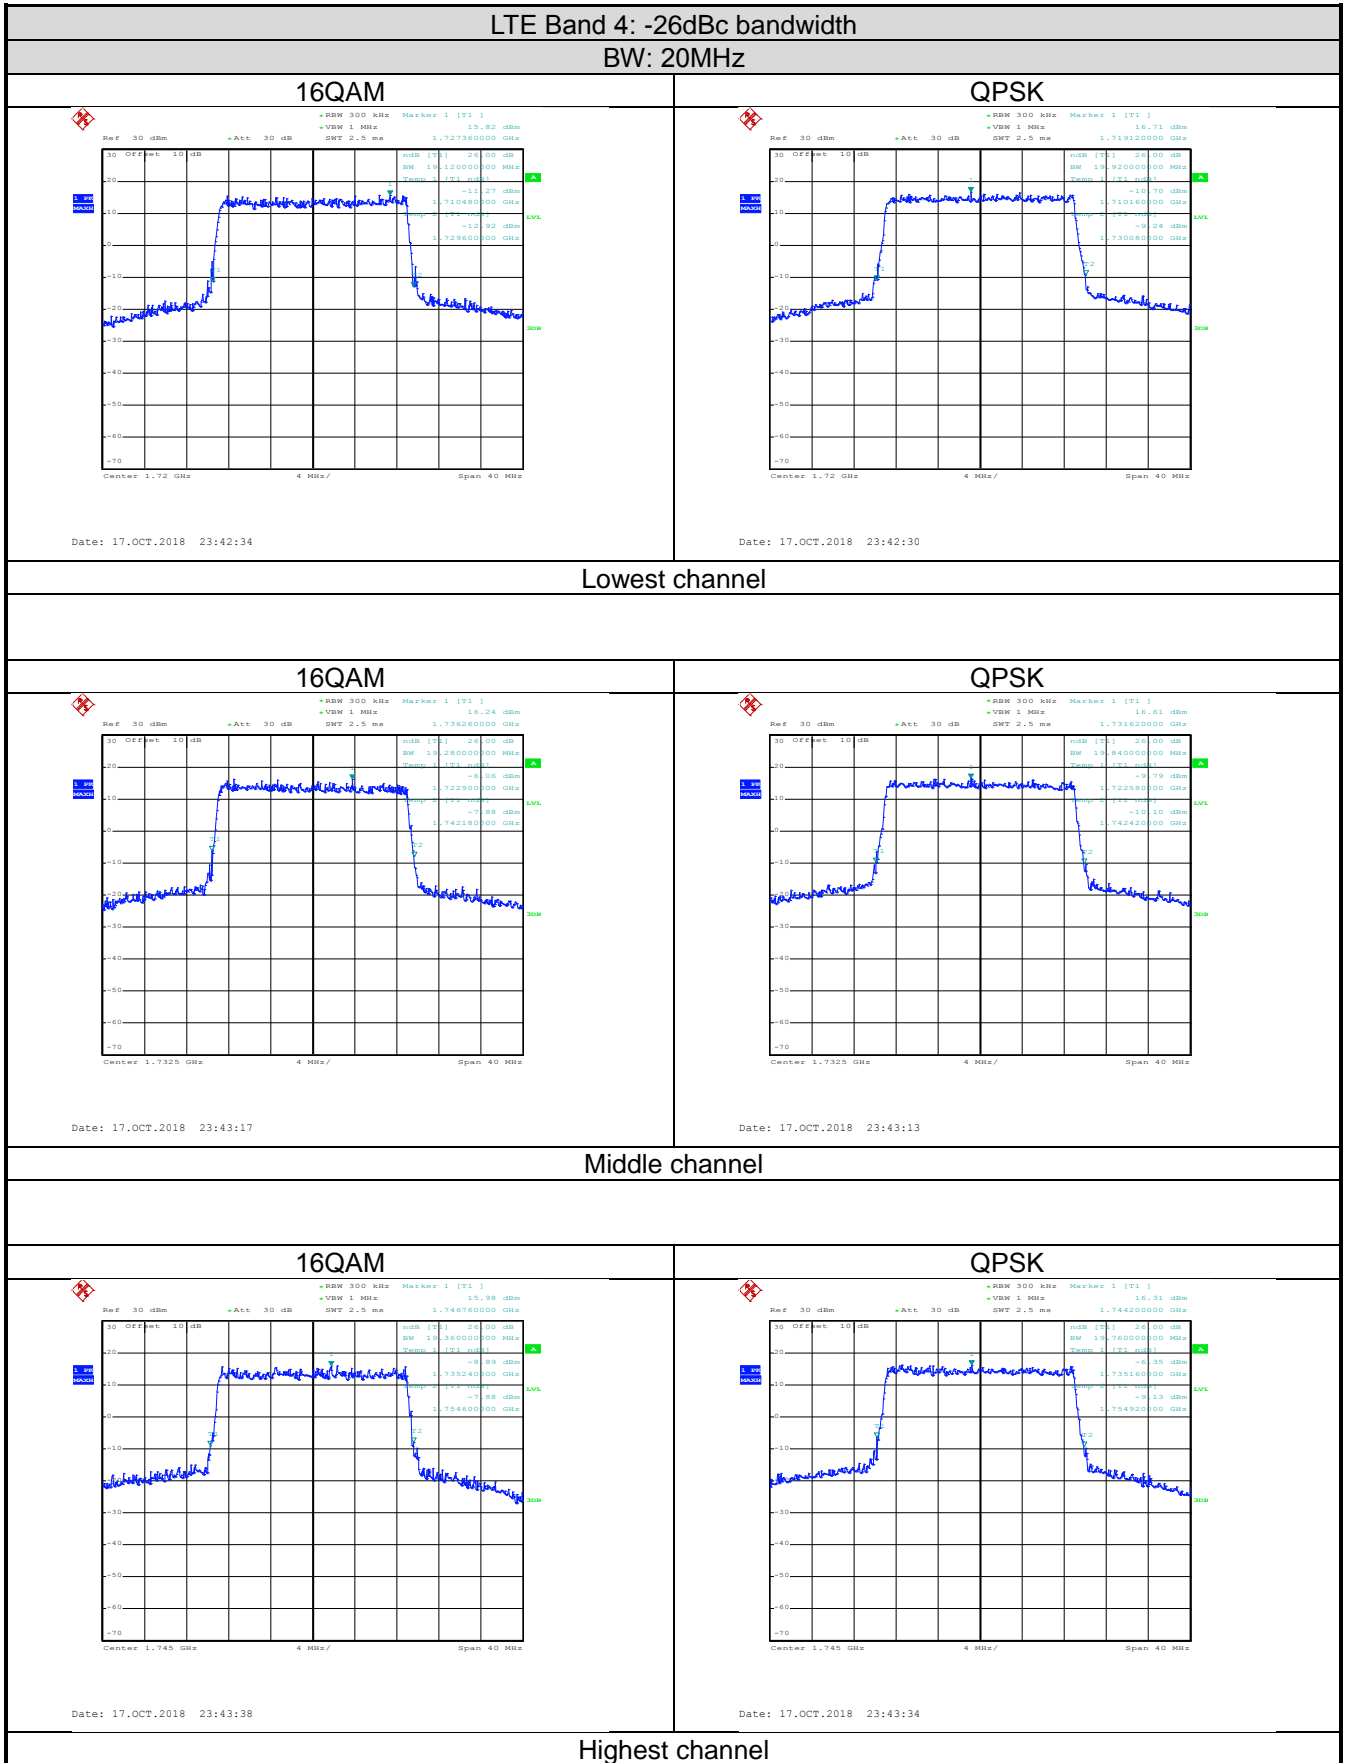


LTE Band 12 part:

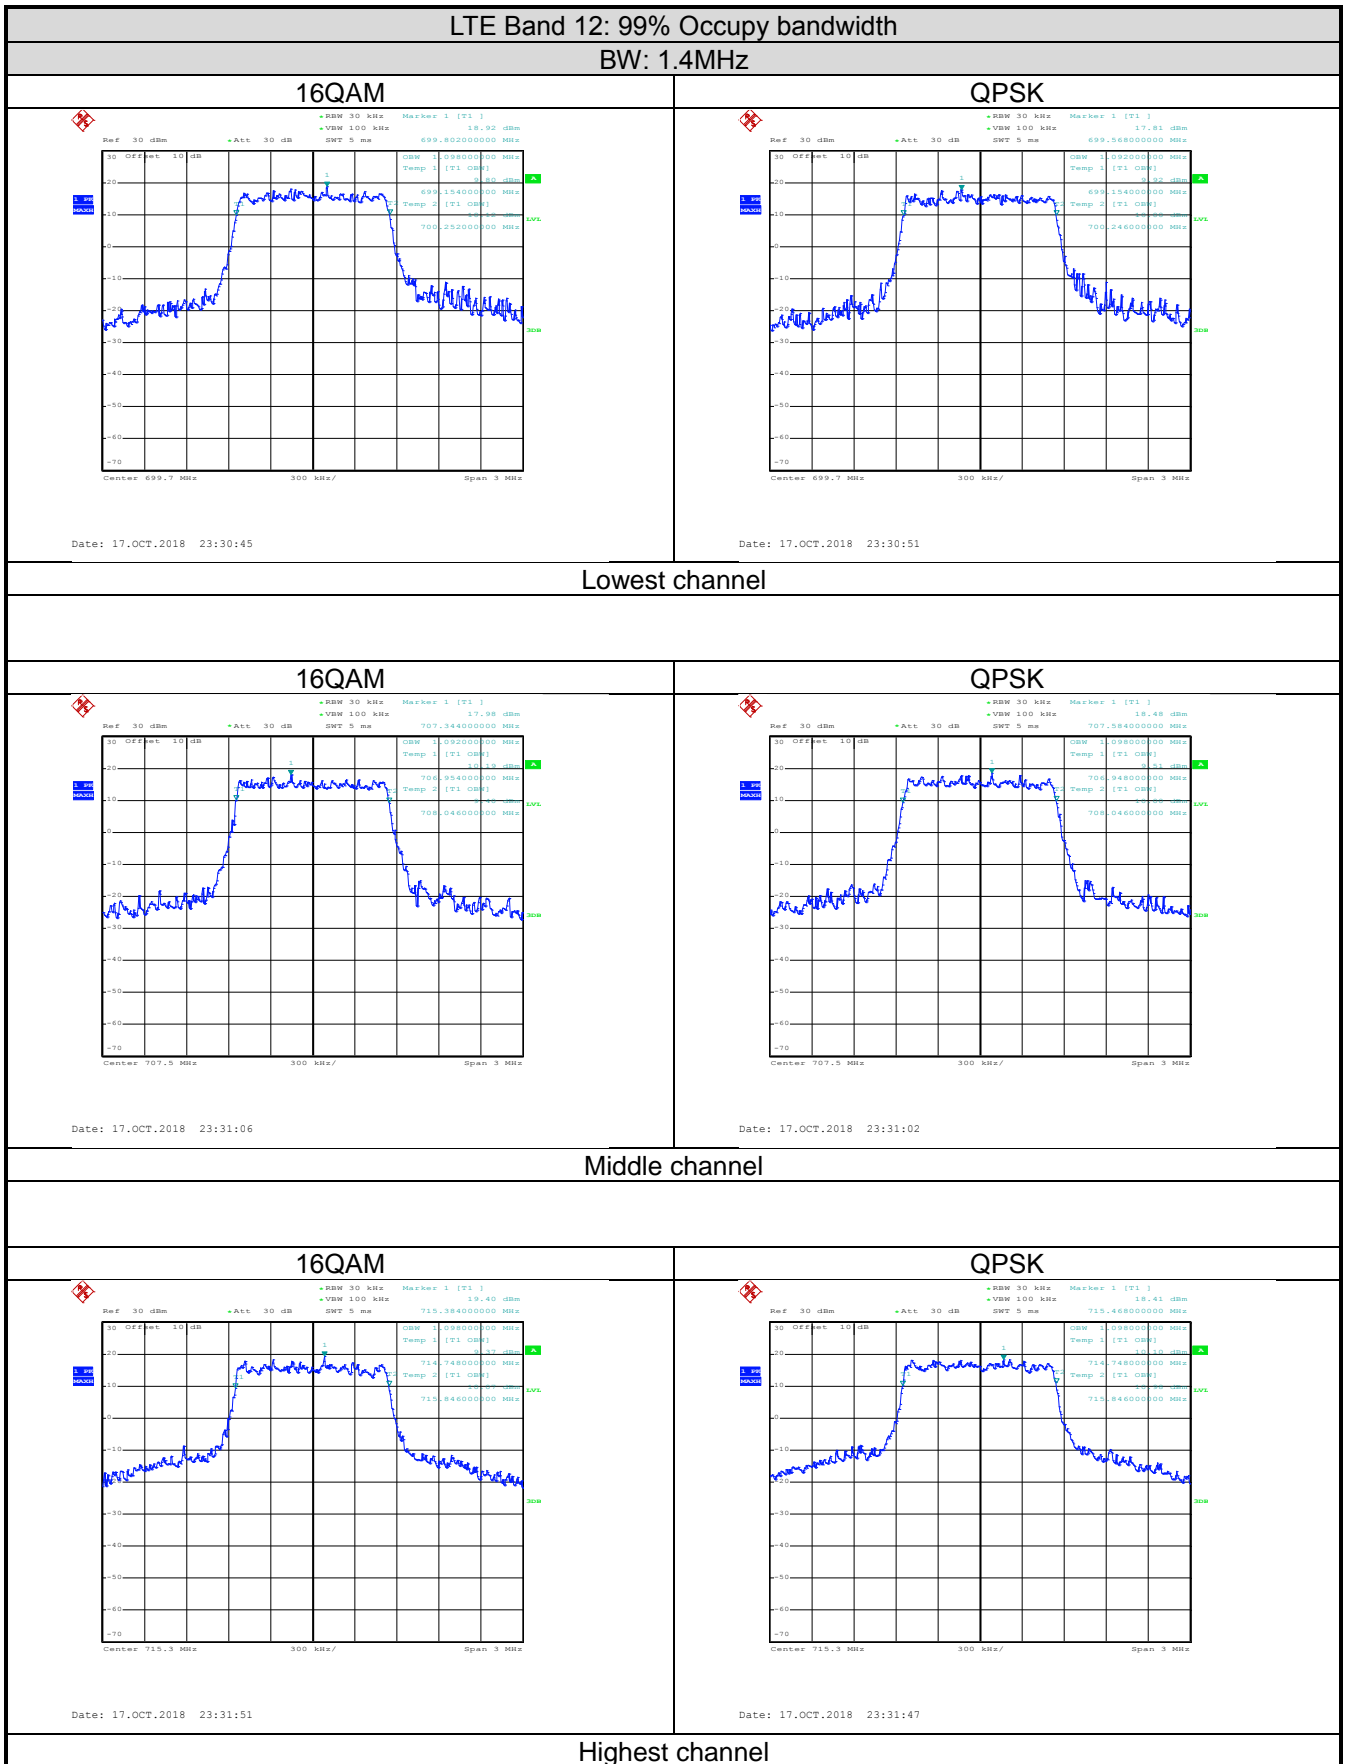


LTE Band 12: 99% Occupy bandwidth
BW: 3MHz

16QAM

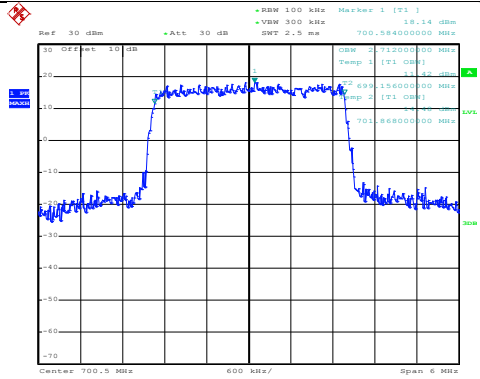

Date: 17.OCT.2018 23:28:44


QPSK

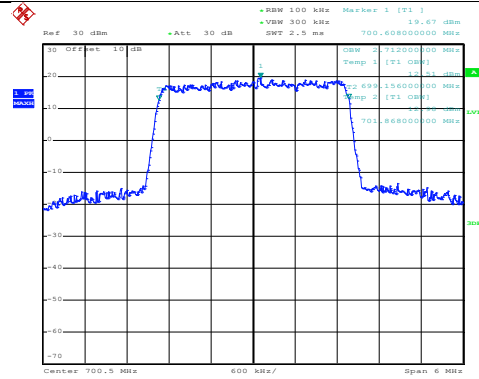

Date: 17.OCT.2018 23:28:40


Lowest channel

16QAM

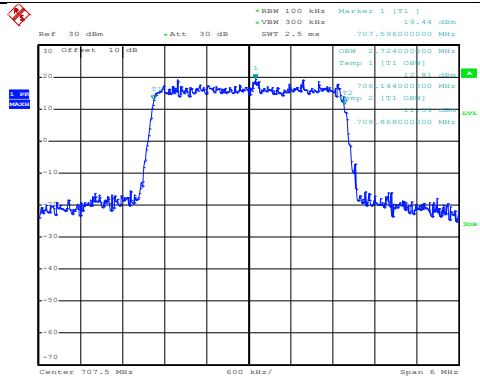

Date: 17.OCT.2018 23:29:24


QPSK

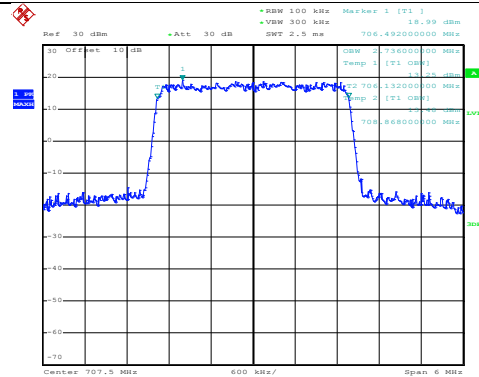

Date: 17.OCT.2018 23:29:20


Middle channel

16QAM

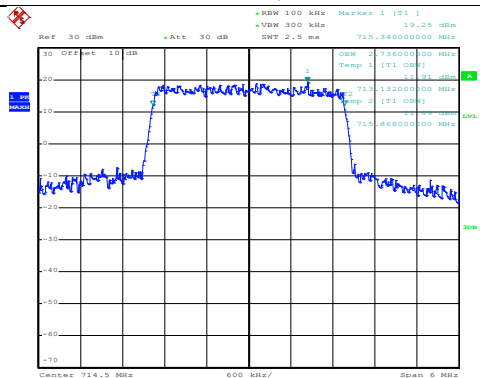

Date: 17.OCT.2018 23:29:42

QPSK

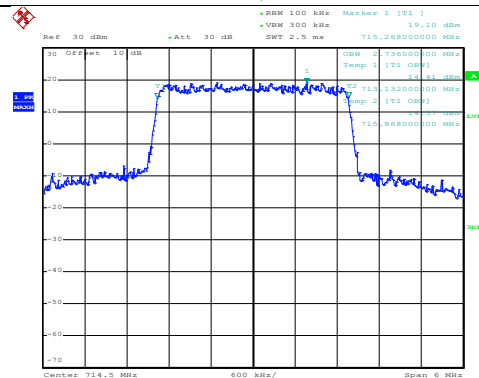


Date: 17.OCT.2018 23:29:38

Highest channel


LTE Band 12: 99% Occupy bandwidth
BW: 5MHz

16QAM

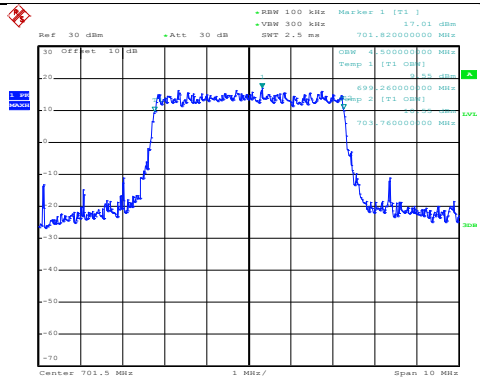

Date: 17.OCT.2018 23:26:48


QPSK

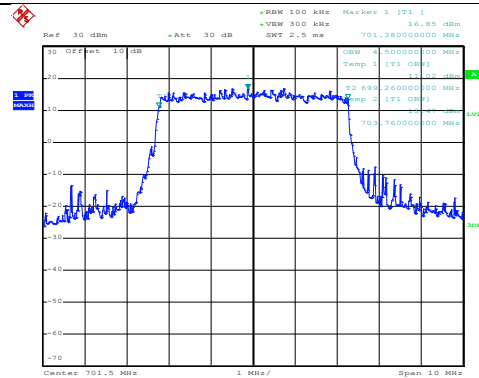

Date: 17.OCT.2018 23:26:43


Lowest channel

16QAM

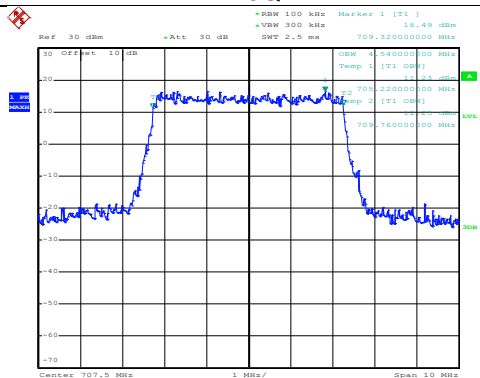

Date: 17.OCT.2018 23:27:13


QPSK

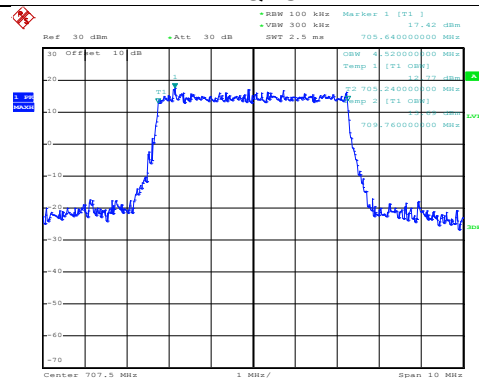

Date: 17.OCT.2018 23:27:08


Middle channel

16QAM

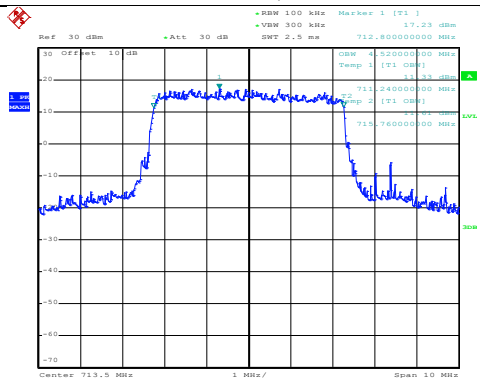

Date: 17.OCT.2018 23:28:00

QPSK

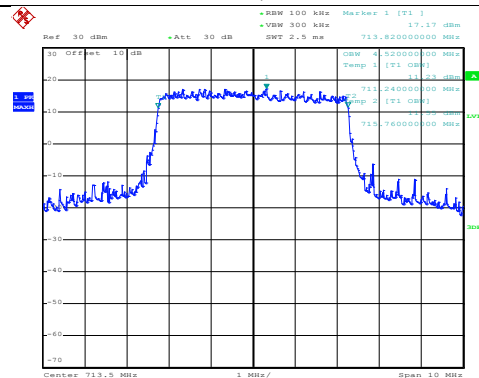


Date: 17.OCT.2018 23:27:51

Highest channel


LTE Band 12: 99% Occupancy bandwidth BW: 10MHz

16QAM

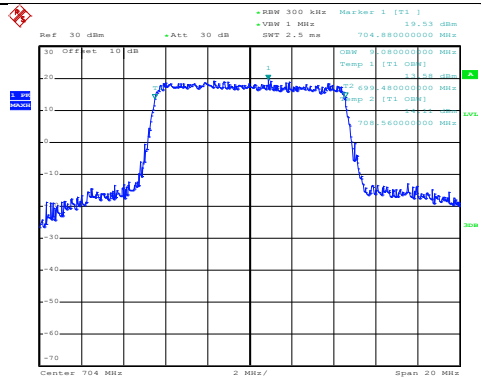

Date: 17.OCT.2018 23:25:30


QPSK

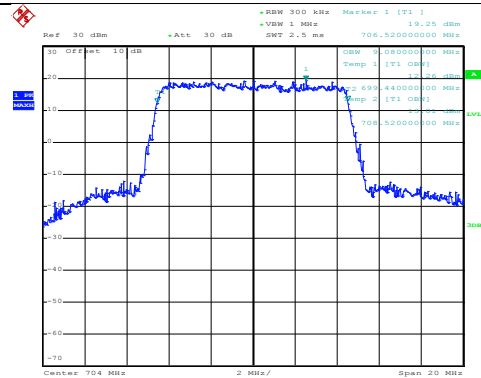

Date: 17.OCT.2018 23:25:24


Lowest channel

16QAM

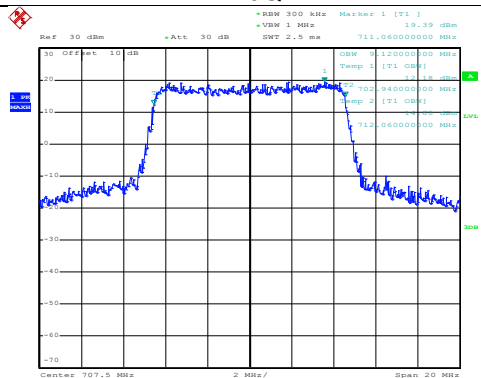

Date: 17.OCT.2018 23:25:11


QPSK

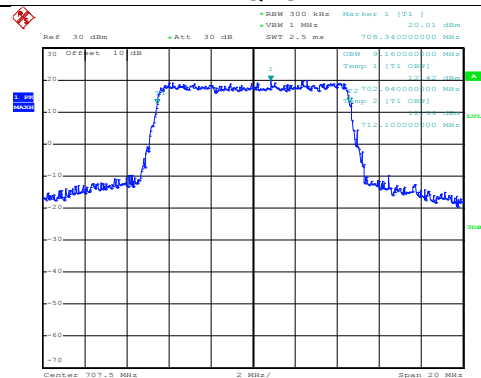

Date: 17.OCT.2018 23:25:07


Middle channel

16QAM

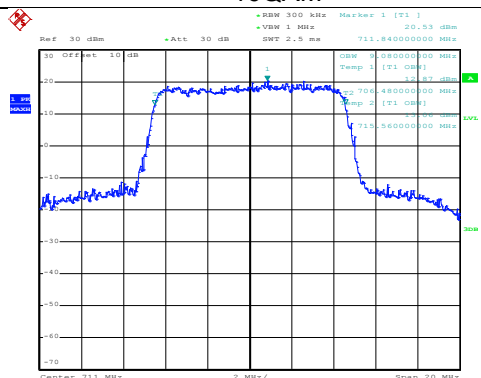


Date: 17.OCT.2018 23:24:14


QPSK

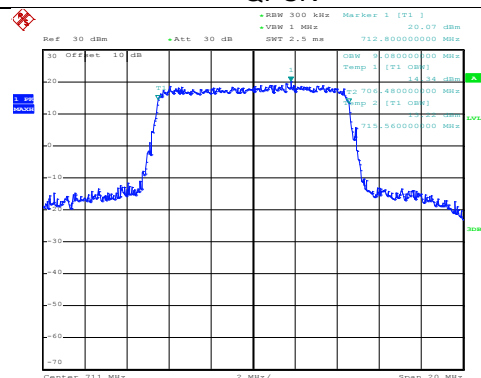



Date: 17.OCT.2018 23:24:29

Highest channel

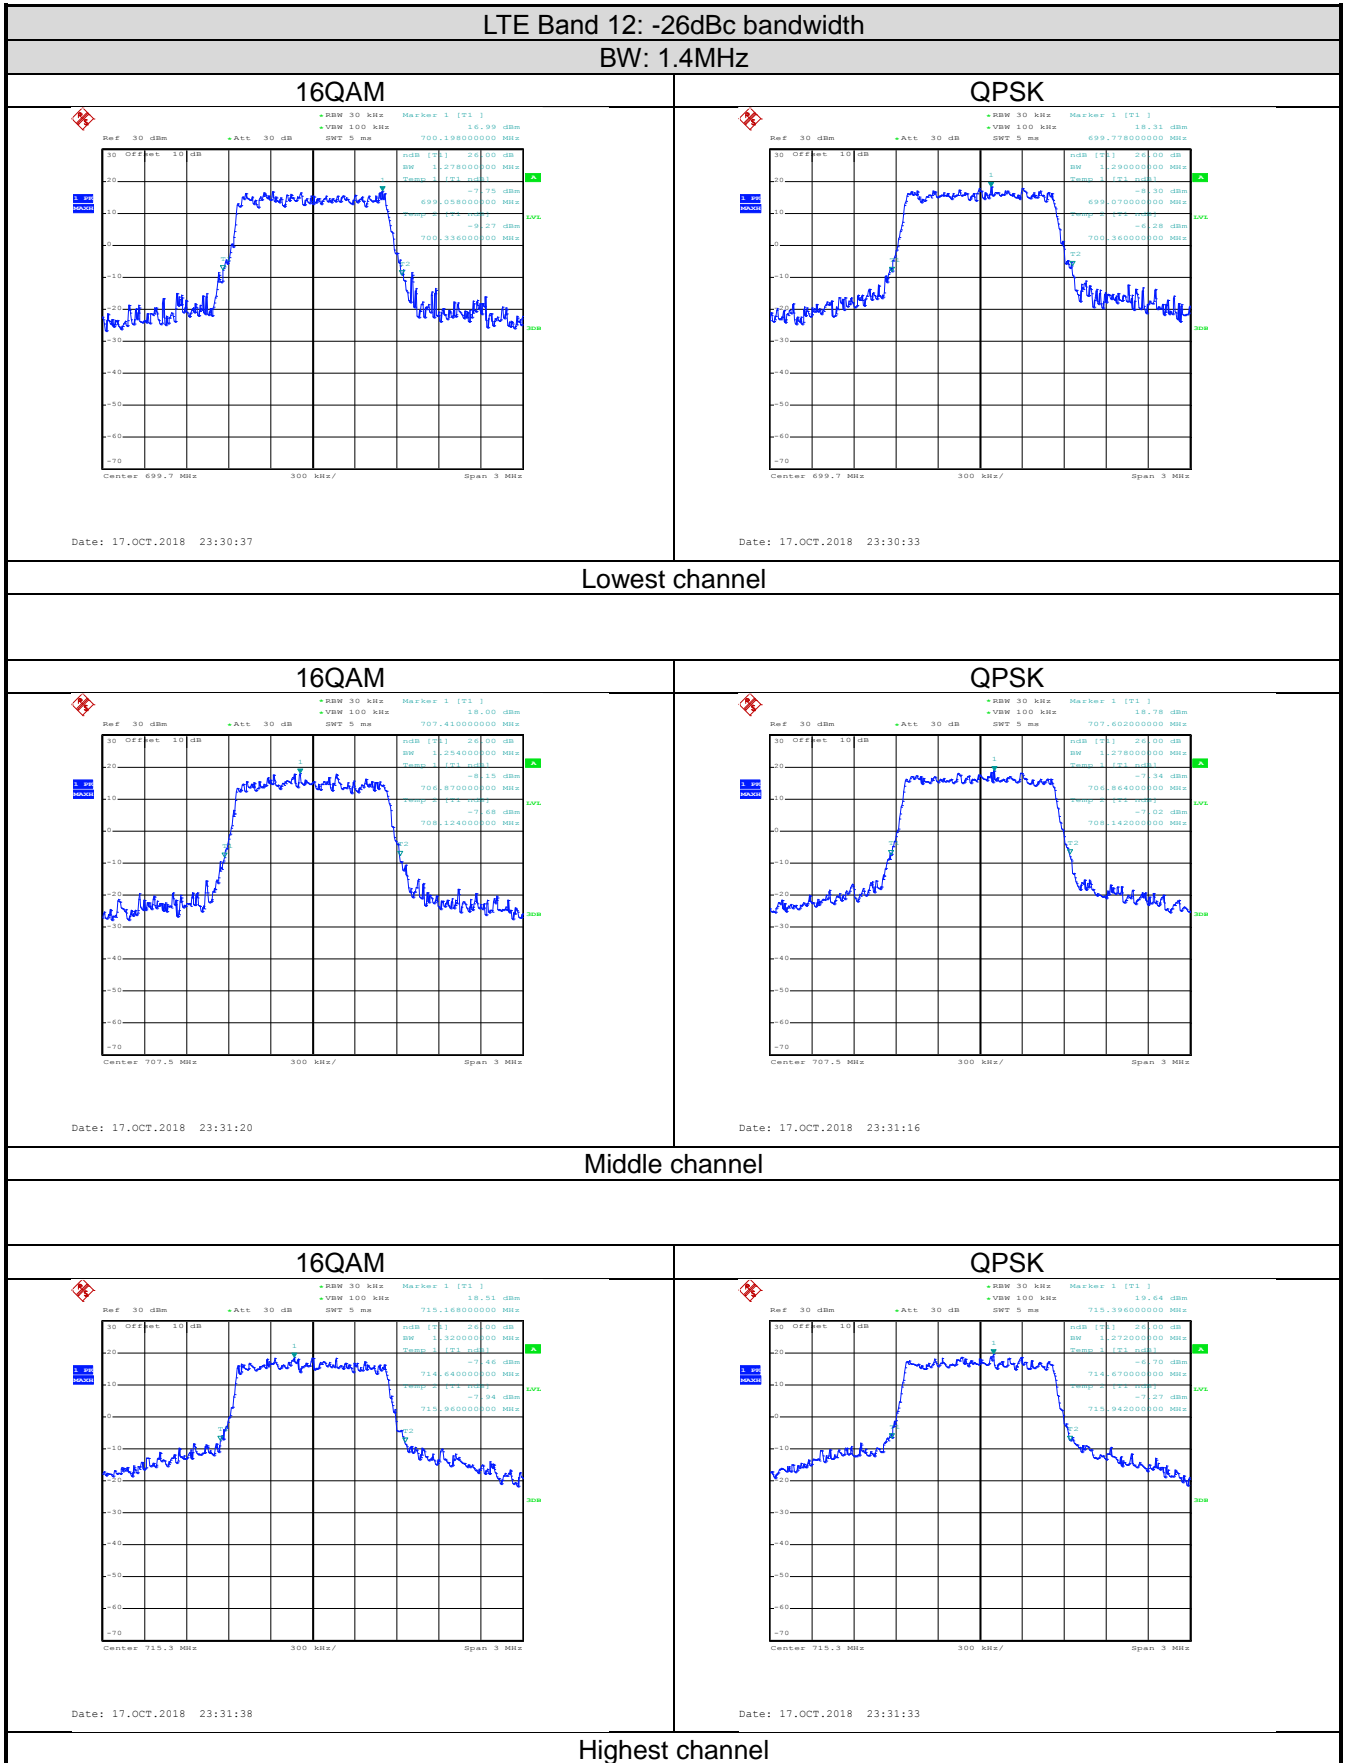


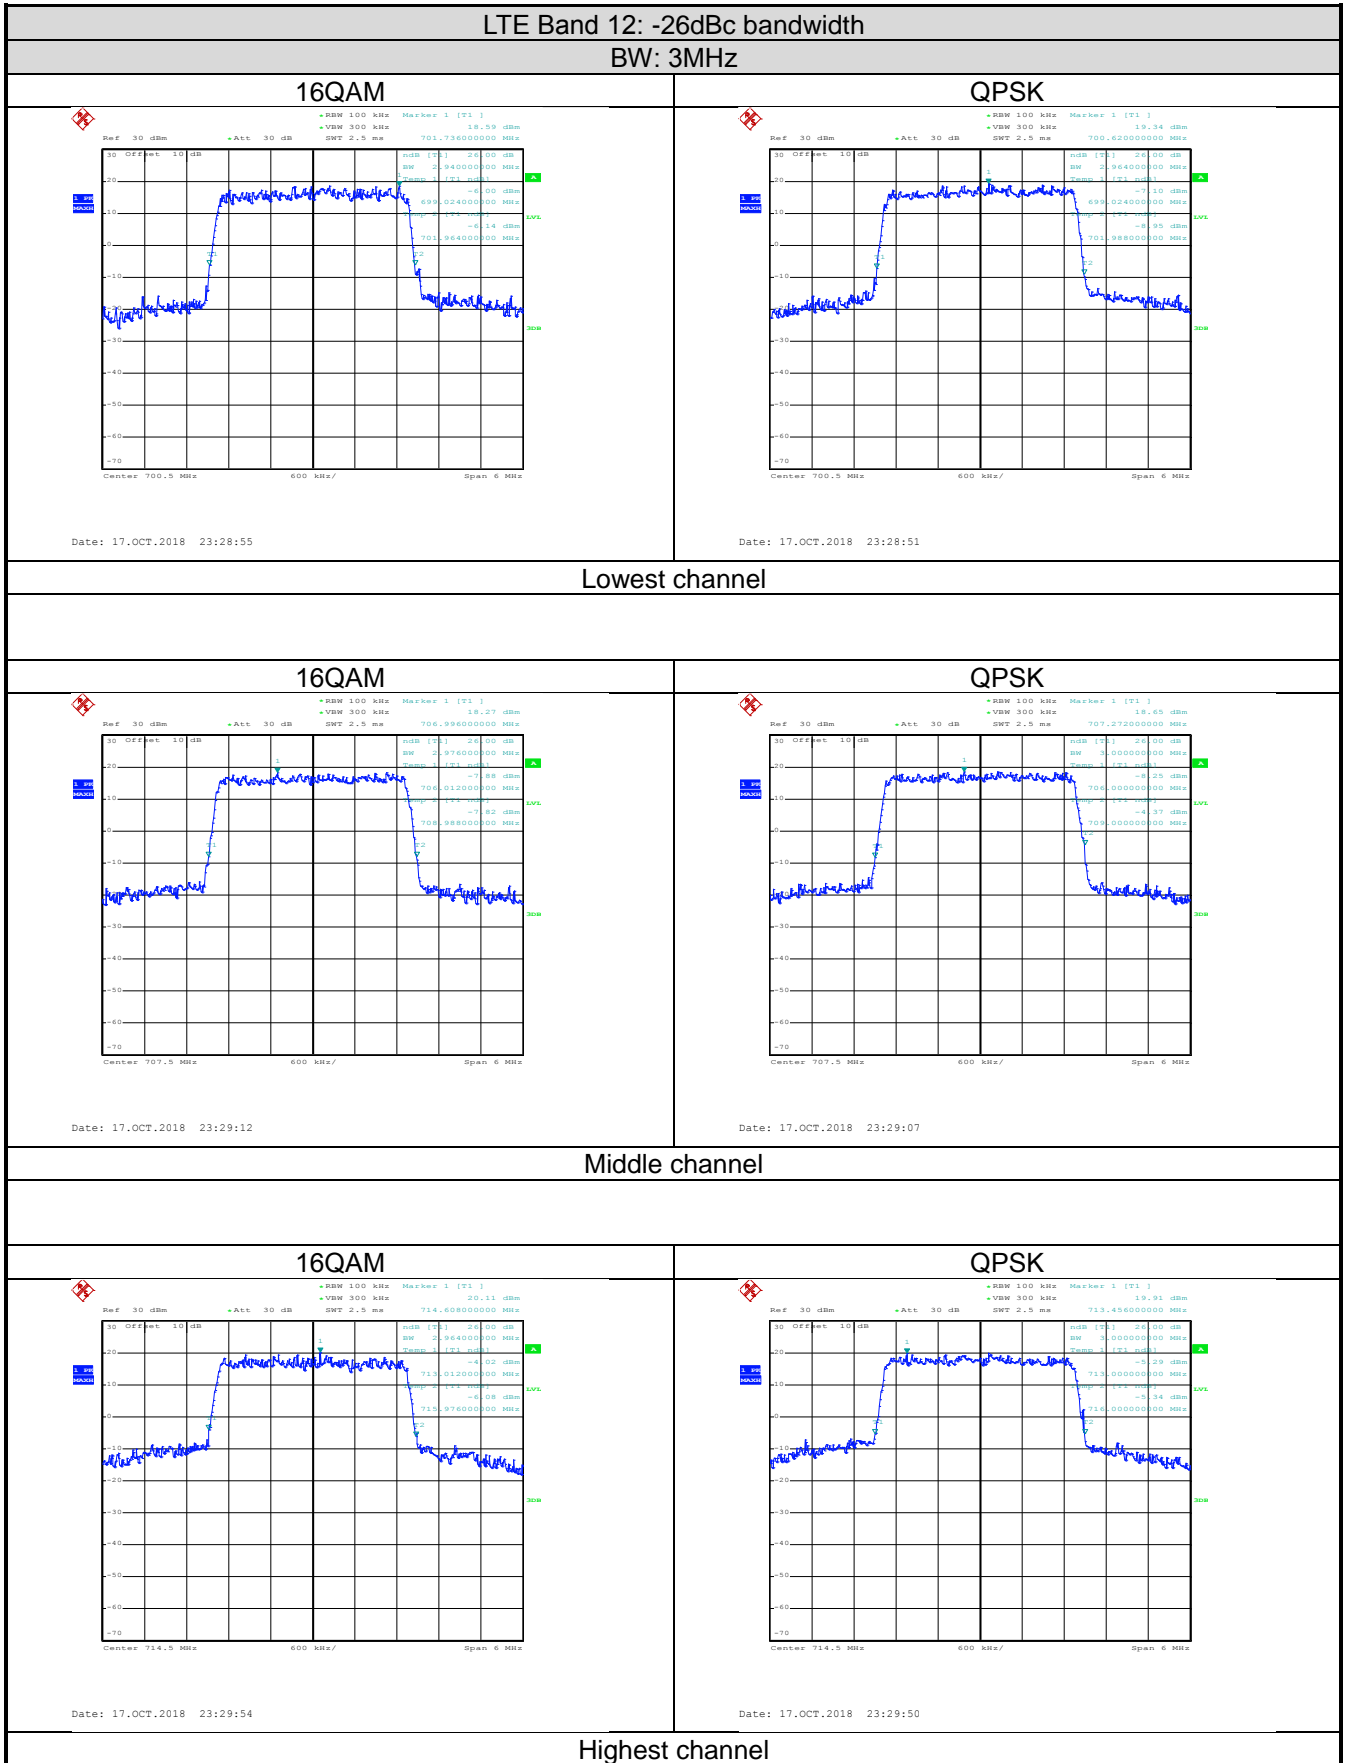

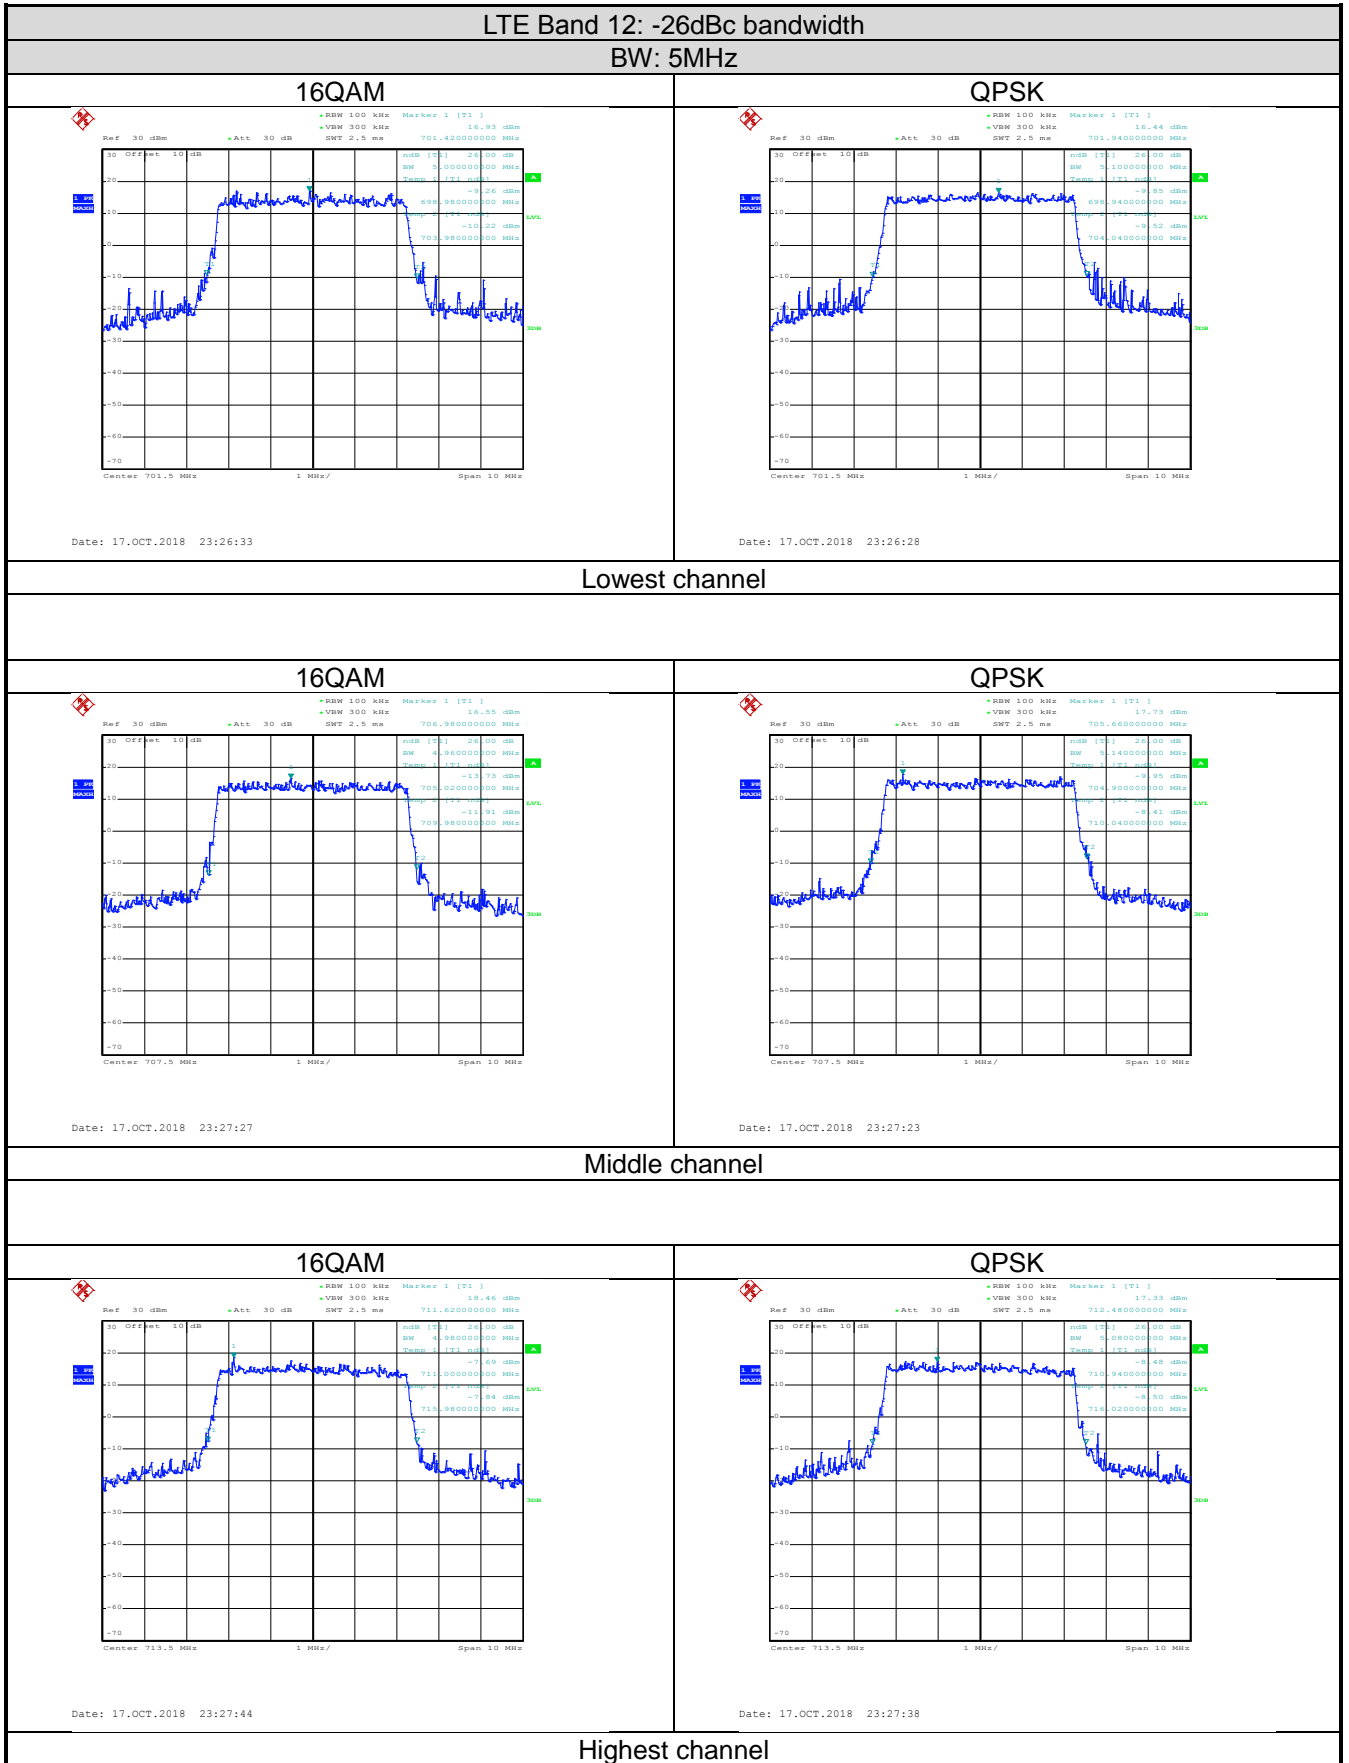

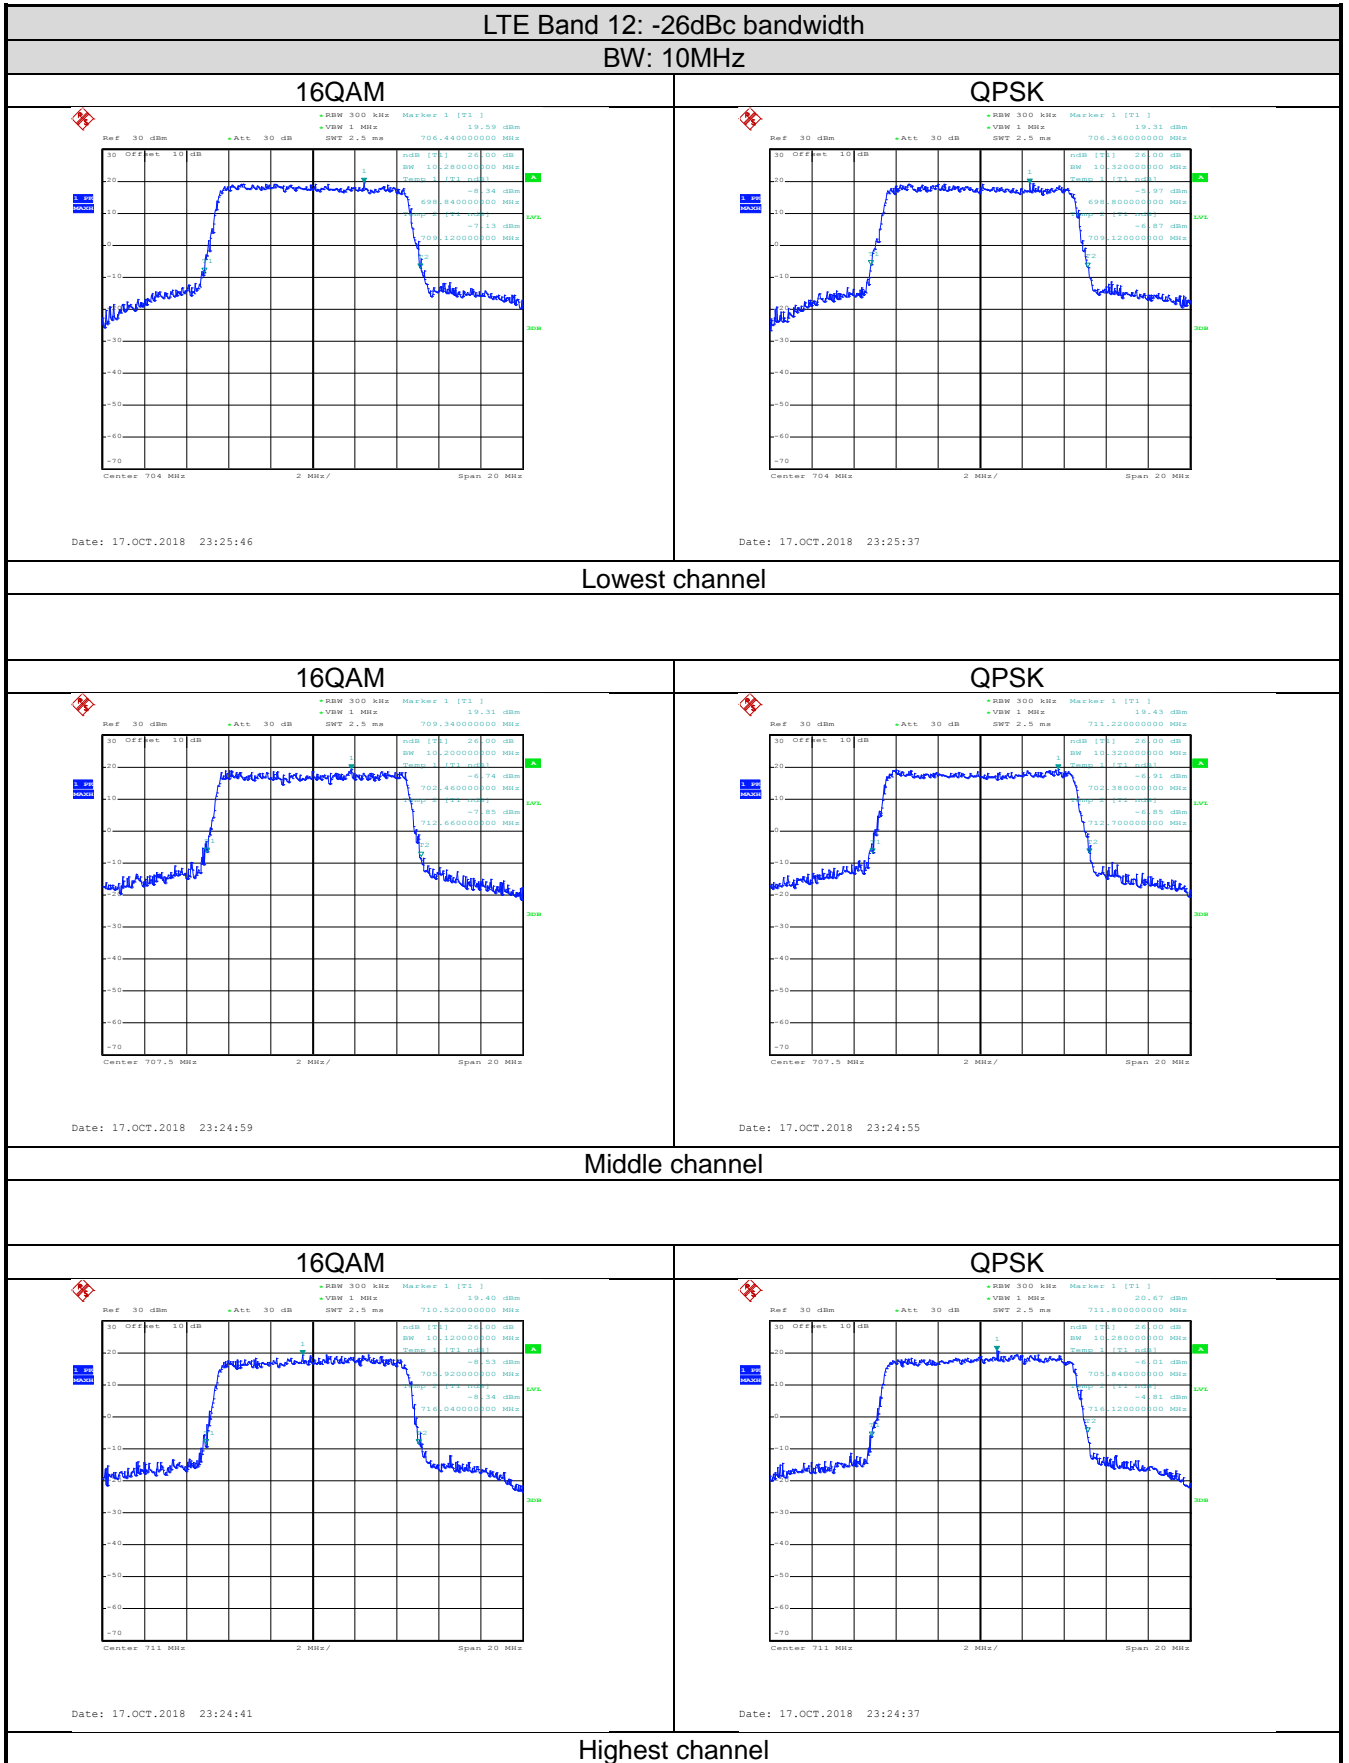

6.4 Out of band emission at antenna terminals

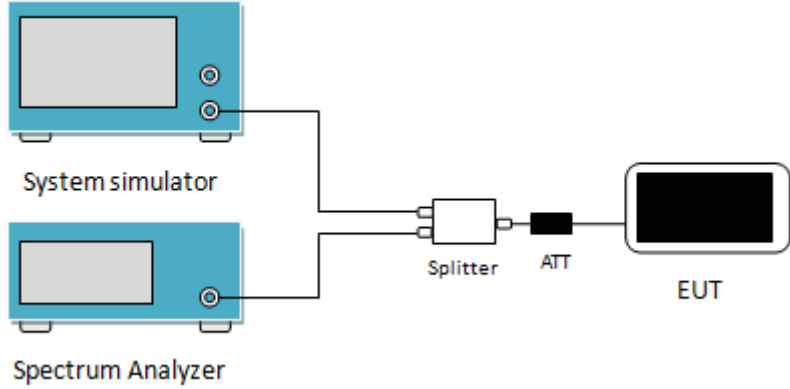Test Requirement:	Part 24.238 (a), part 27.53(g), part 27.53(h),
Test Method:	ANSI/TIA-603-D 2010
Limit:	The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB (-13 dBm).
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	Pre-scan all RB Size and offset, and found the RB Size and offset of worst case, so the report shows only the worst case test data.