


Date: 12.JAN.2017 14:00:49


Channel 251- HIGH BAND EDGE BLOCK

GSM 1900

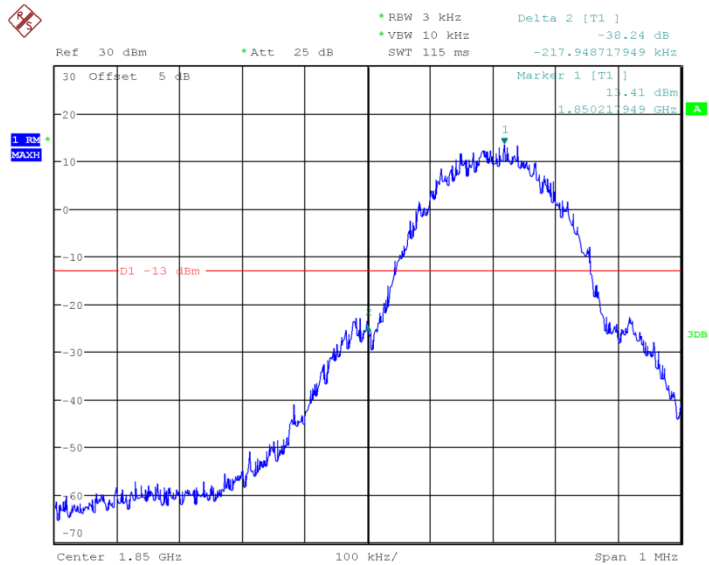

Date: 12.JAN.2017 14:05:07


Channel 512- LOW BAND EDGE BLOCK

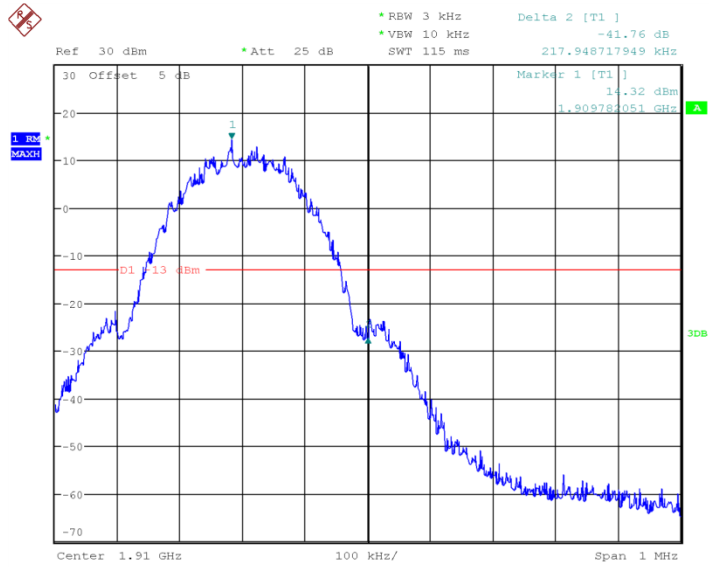

Date: 12.JAN.2017 14:10:54


Channel 810- HIGH BAND EDGE BLOCK

EDGE 1900

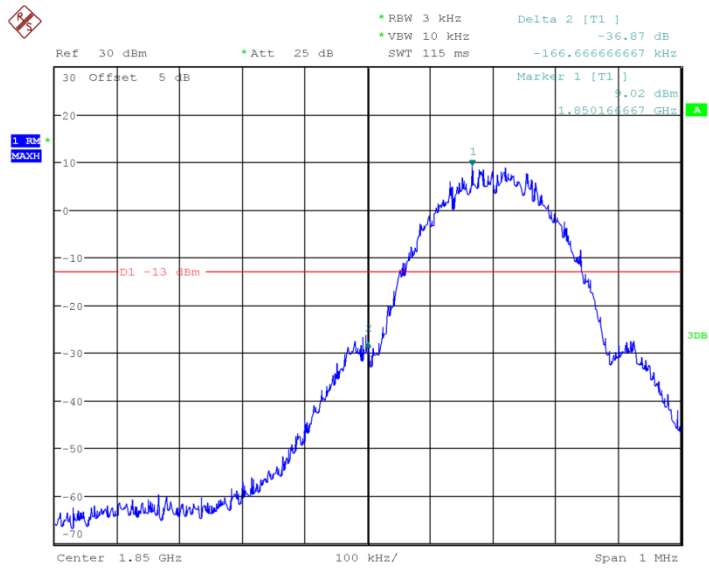

Date: 12.JAN.2017 14:16:32


Channel 512- LOW BAND EDGE BLOCK

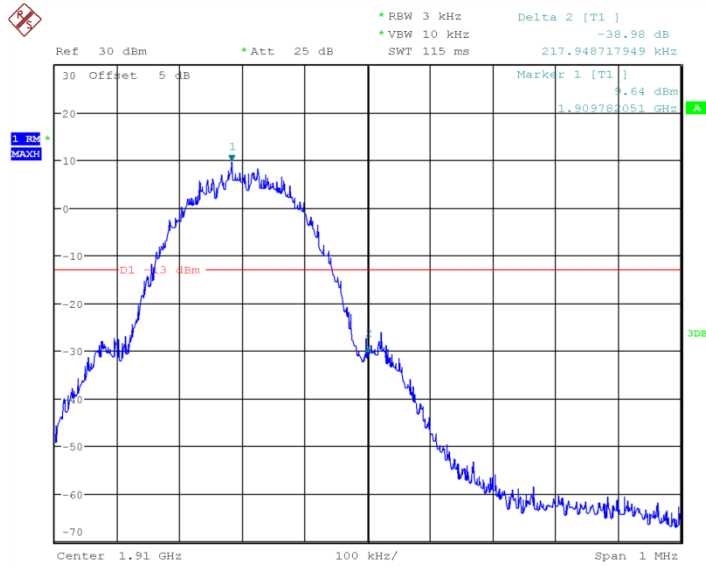

Date: 12.JAN.2017 14:17:53


Channel 810- HIGH BAND EDGE BLOCK

WCDMA BAND II

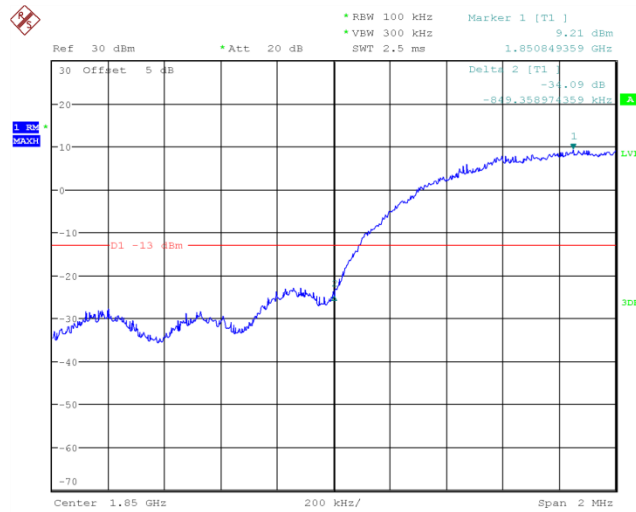

Date: 12.JAN.2017 09:36:47


Channel 9262- LOW BAND EDGE BLOCK

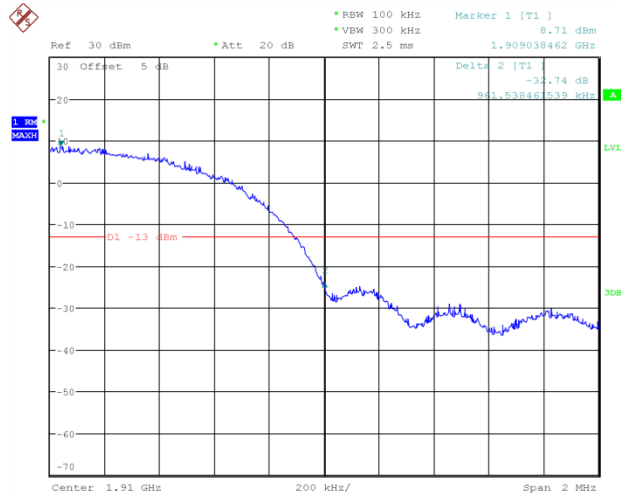

Date: 12.JAN.2017 09:37:41

Channel 9538- HIGH BAND EDGE BLOCK

WCDMA BAND IV

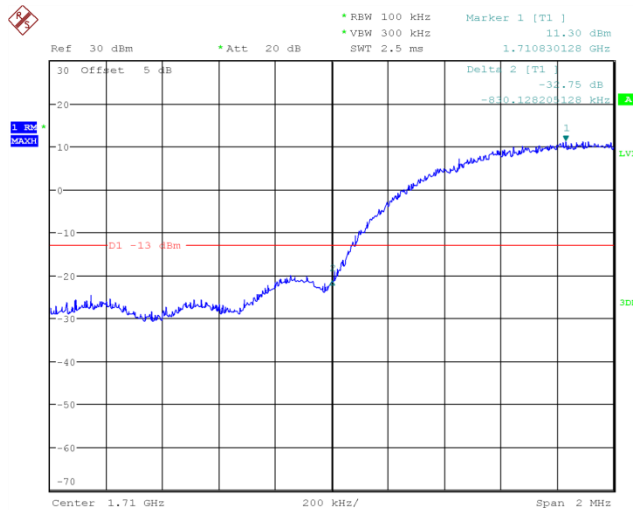

Date: 12.JAN.2017 09:38:57

Channel 1312- LOW BAND EDGE BLOCK

ANNEX A.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 D01 v02r02 clause 3.8

A.5.1. Method of Measurement and test procedures

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.5.2. Measurement Limit**A.5.2.1. For Hand carried battery powered equipment**

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.

A.5.2.2. For equipment powered by primary supply voltage

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.5.3 Test results
GSM850Mid Channel/fc(MHz) 189/836.4
Frequency Error VS Temperature

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	35	2091
3.8	-20	21	2091
3.8	-10	-32	2091
3.8	0	15	2091
3.8	10	19	2091
3.8	20	-28	2091
3.8	30	33	2091
3.8	40	7	2091
3.8	50	13	2091

Frequency Error VS Voltage

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	24	2091
3.8	25	21	2091
4.3	25	28	2091

PCS1900 Mid Channel/fc(MHz) 661/1880**Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	29	4700
3.8	-20	37	4700
3.8	-10	23	4700
3.8	0	17	4700
3.8	10	4	4700
3.8	20	7	4700
3.8	30	-32	4700
3.8	40	-7	4700
3.8	50	25	4700

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	13	4700
3.8	25	21	4700
4.3	25	27	4700

WCDMA BAND II Mid Channel/fc(MHz) 9400 /1880
Frequency Error VS Temperature

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-32	4700
3.8	-20	-17	4700
3.8	-10	22	4700
3.8	0	-3	4700
3.8	10	31	4700
3.8	20	27	4700
3.8	30	14	4700
3.8	40	-27	4700
3.8	50	4	4700

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	12	4700
3.8	25	21	4700
4.3	25	19	4700

WCDMA BAND IV Mid Channel/fc(MHz) 1413 /1732.6
Frequency Error VS Temperature

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	8	4700
3.8	-20	27	4700
3.8	-10	32	4700
3.8	0	9	4700
3.8	10	-32	4700
3.8	20	1	4700
3.8	30	33	4700

3.8	40	-10	4700
3.8	50	27	4700

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	20	4700
3.8	25	33	4700
4.3	25	25	4700

WCDMA BAND V Mid Channel/fc(MHz) 4183/836.6
Frequency Error VS Temperature

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-13	2091.5
3.8	-20	23	2091.5
3.8	-10	24	2091.5
3.8	0	19	2091.5
3.8	10	8	2091.5
3.8	20	16	2091.5
3.8	30	21	2091.5
3.8	40	18	2091.5
3.8	50	9	2091.5

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.6	25	-10	2091.5
3.8	25	9	2091.5
4.3	25	-13	2091.5

Conclusion: PASS

ANNEX A.7. CONDUCTED SPURIOUS EMISSION**A.7.1. GSM Measurement Method and test procedures**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.

2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.

3. The procedure to get the conducted spurious emission is as follows:

The trace mode is set to MaxHold to get the highest signal at each frequency;

Wait 25 seconds;Get the result.

4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM 850 Transmitter

Channel	Frequency(MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency(MHz)
512	1850.2
661	1880.0
810	1909.8

A.7.1.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A7.1.2. Measurement result

Spurious emission limit -13dBm.


Note: peak above the limit line is the carrier frequency.

A7.1.2.1. GSM850

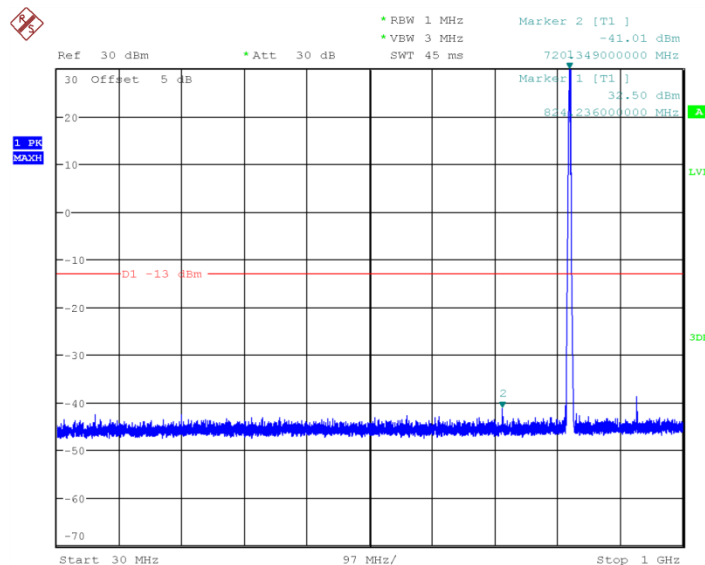


Date: 12.JAN.2017 09:09:55

Channel 128: 30MHz~1GHz

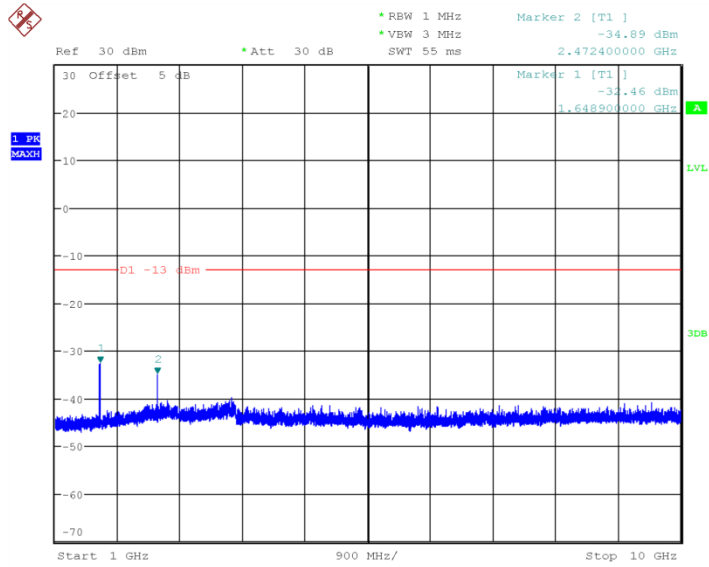


Date: 12.JAN.2017 13:36:02

Channel 128: 1GHz~10GHz

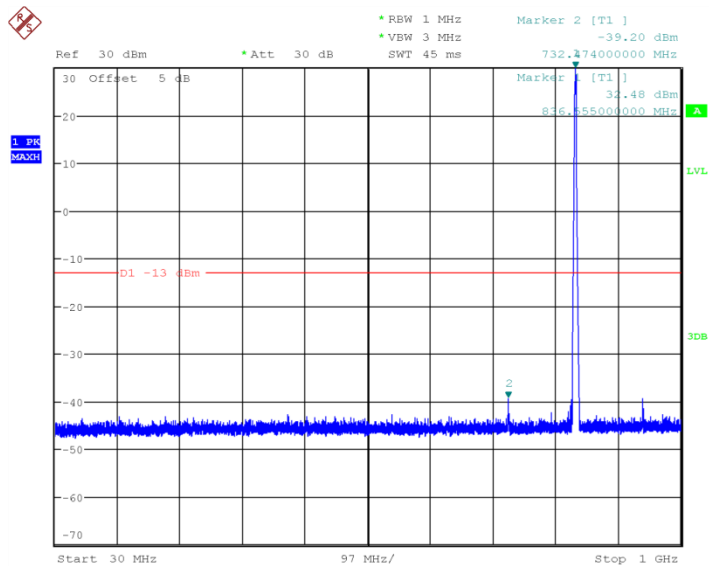


Date: 12.JAN.2017 09:09:15

Channel 190: 30MHz~1GHz

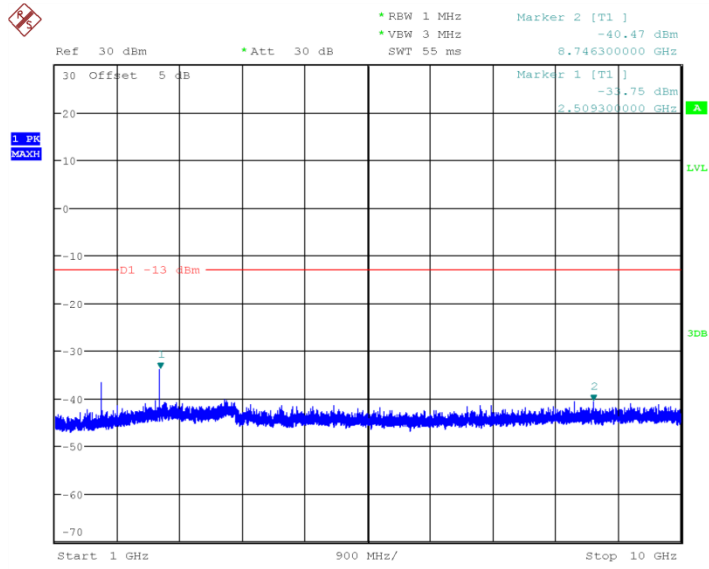


Date: 12.JAN.2017 13:35:21

Channel 190: 1GHz~10GHz

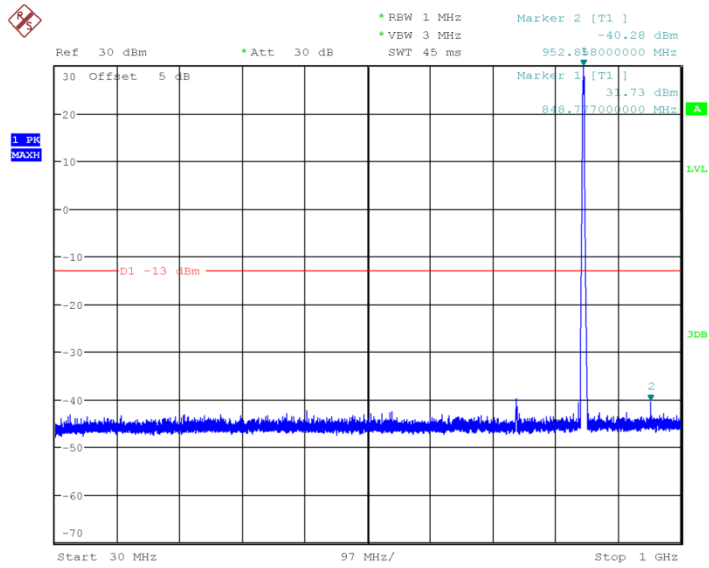

Date: 12.JAN.2017 09:10:36


Channel 251: 30MHz~1GHz

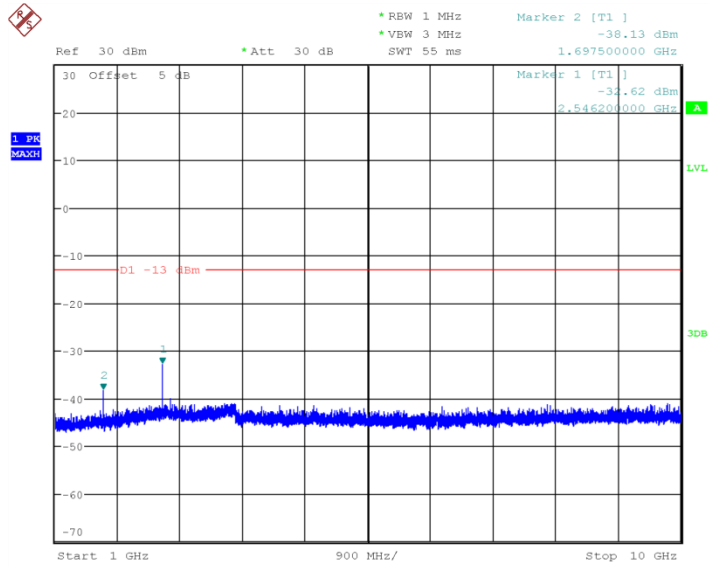

Date: 12.JAN.2017 13:36:42


Channel 251: 1GHz~10GHz

A7.1.2.2. GSM1900

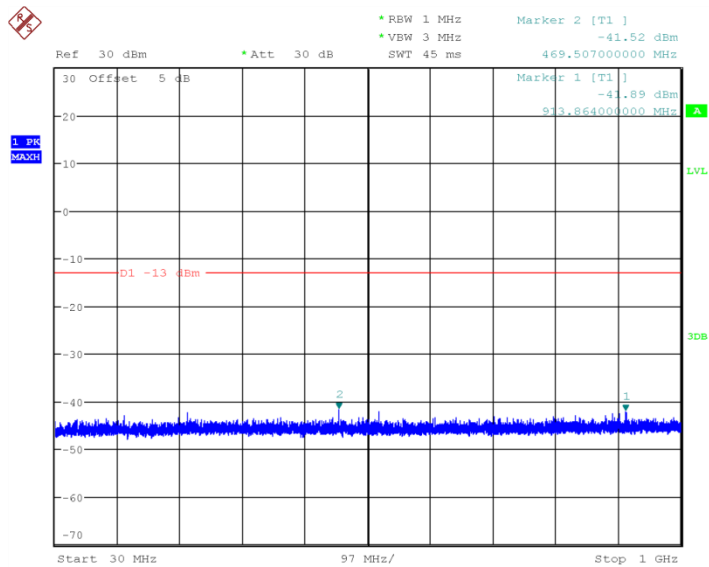


Date: 12.JAN.2017 13:22:39

Channel 512: 30MHz~1GHz

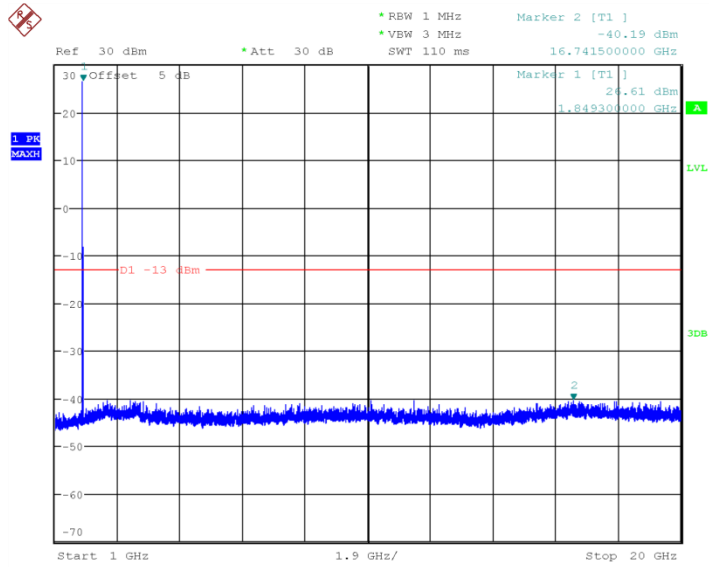


Date: 12.JAN.2017 13:28:21

Channel 512: 1GHz~20GHz

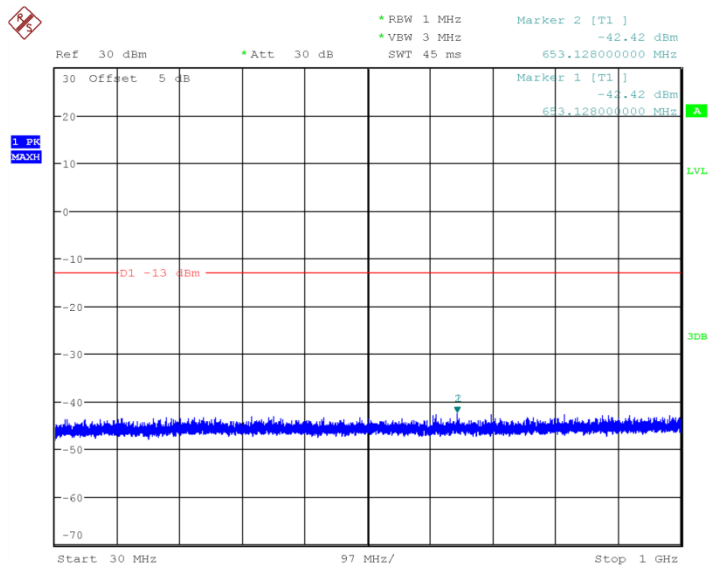


Date: 12.JAN.2017 13:21:58

Channel 661: 30MHz~1GHz

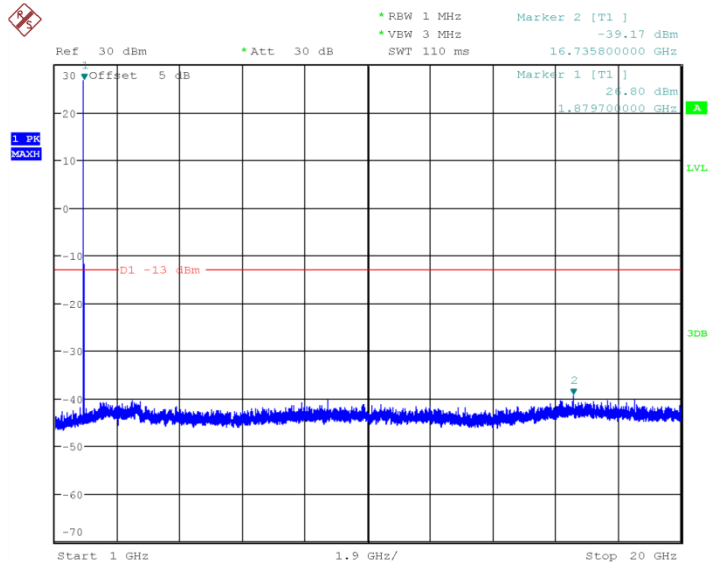


Date: 12.JAN.2017 13:27:41

Channel 661: 1GHz~20GHz

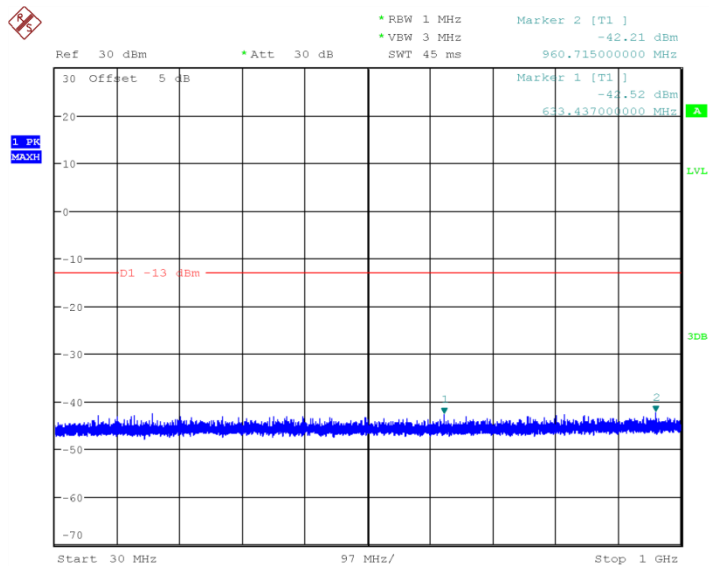

Date: 12.JAN.2017 13:23:20

Channel 810: 30MHz~1GHz

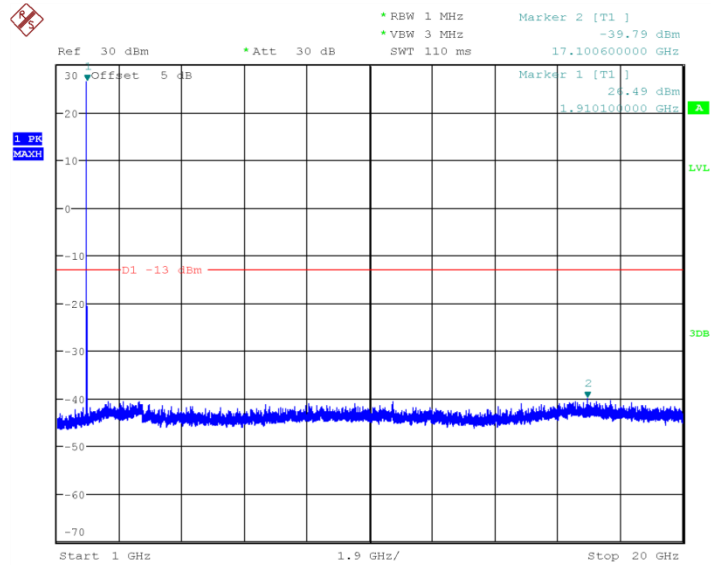

Date: 12.JAN.2017 13:29:02

Channel 810: 1GHz~20GHz

Conclusion: PASS

A7.2. WCDMA Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00

9538	1907.60
------	---------

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.4
1413	1732.6
1513	1752.6

A 7.2.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A 7.2.2. Measurement result

Spurious emission limit -13dBm.


Note: peak above the limit line is the carrier frequency.

A 7.2.2.1. WCDMA Band II

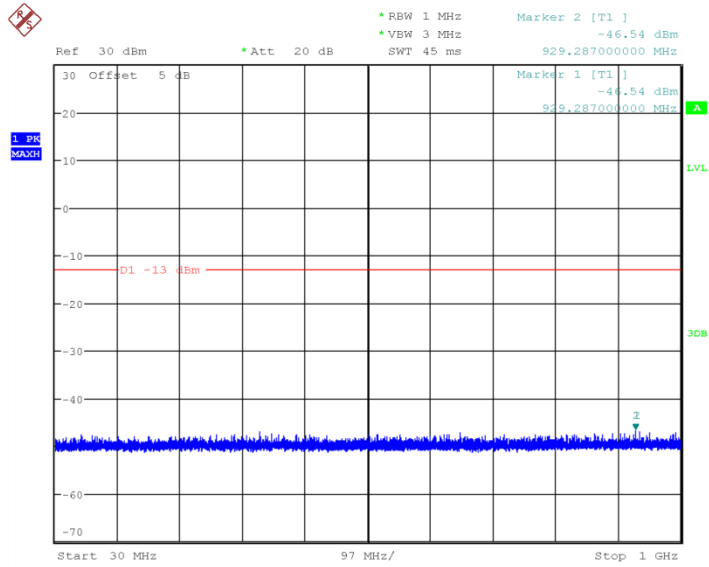


Date: 12.JAN.2017 11:00:34

Channel 9262: 30MHz~1GHz

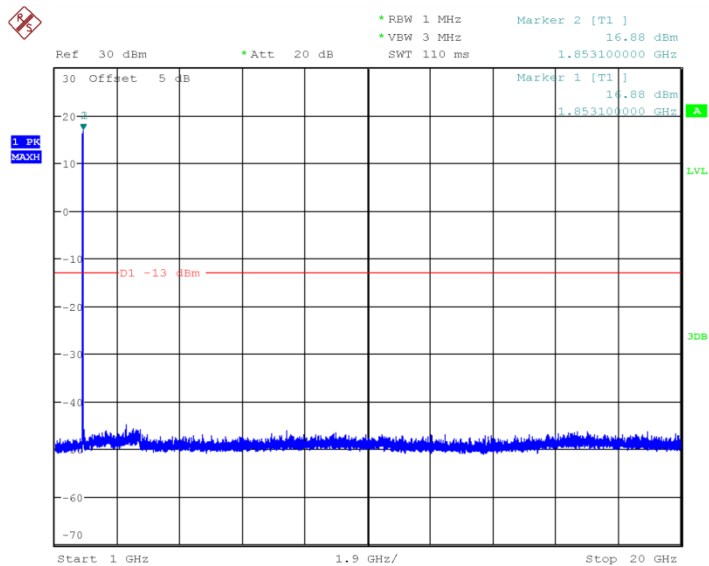


Date: 12.JAN.2017 13:05:31

Channel 9262:1GHz~20GHz

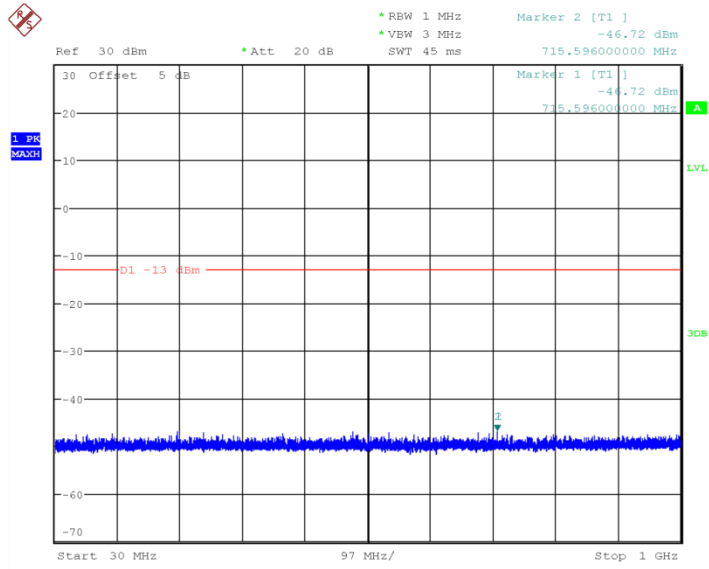


Date: 12.JAN.2017 10:59:54

Channel 9400: 30MHz~1GHz

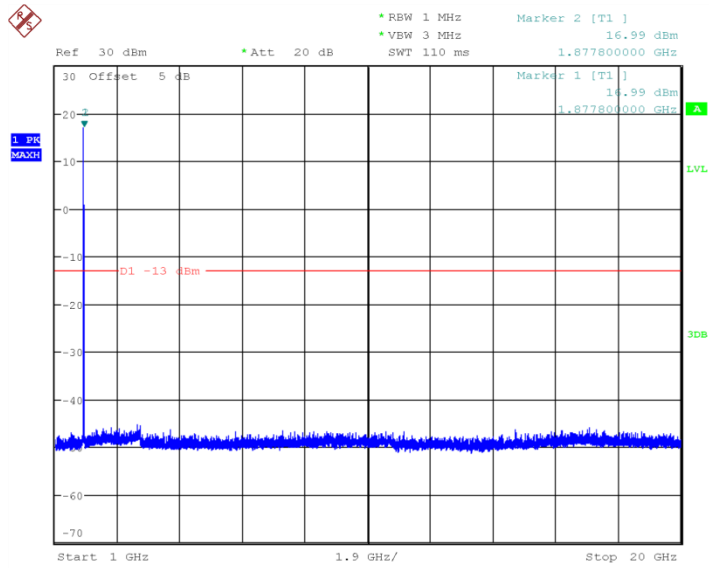


Date: 12.JAN.2017 13:04:51

Channel 9400:1GHz~20GHz

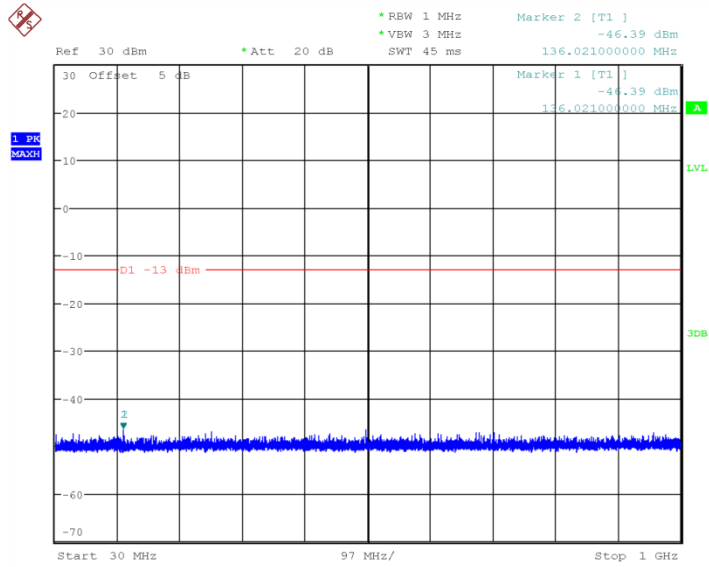

Date: 12.JAN.2017 11:01:15


Channel 9538: 30MHz~1GHz

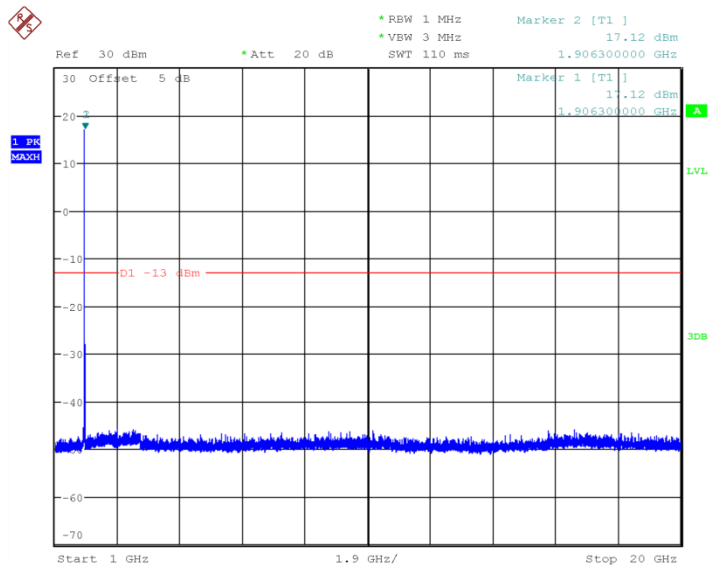

Date: 12.JAN.2017 13:06:12


Channel 9538:1GHz~20GHz

A 7.2.2.2. WCDMA Band IV

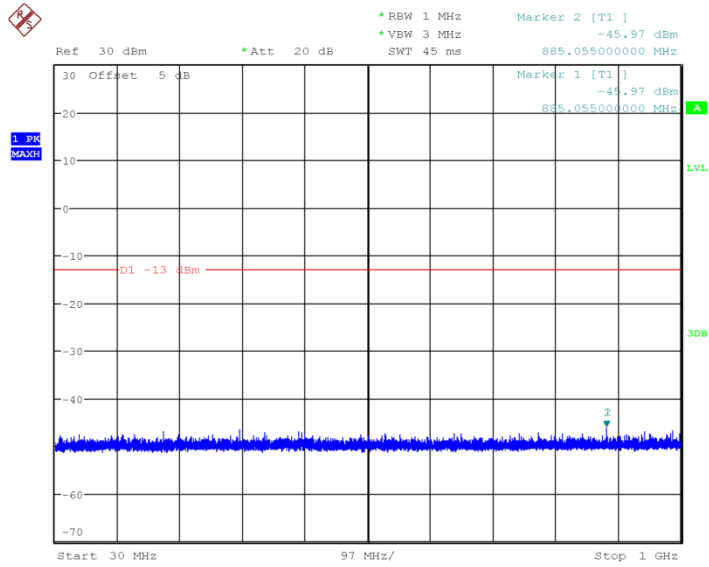


Date: 12.JAN.2017 11:03:01

Channel 1312: 30MHz~1GHz

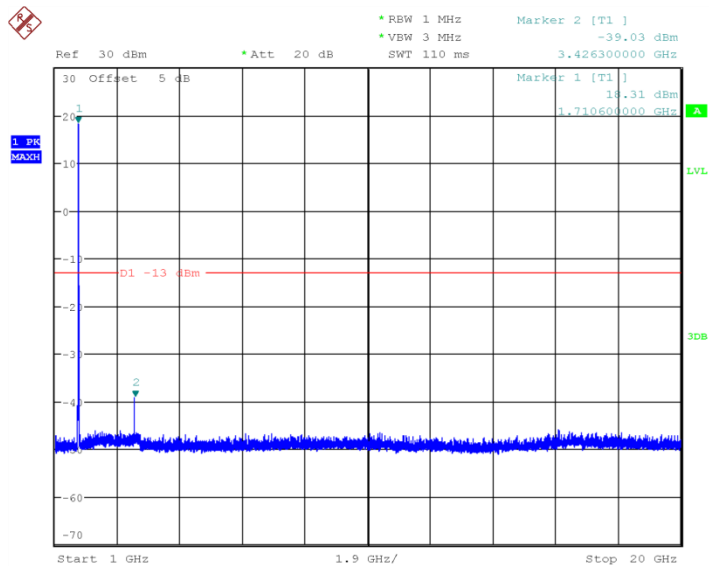


Date: 12.JAN.2017 13:07:58

Channel 1312:1GHz~20GHz

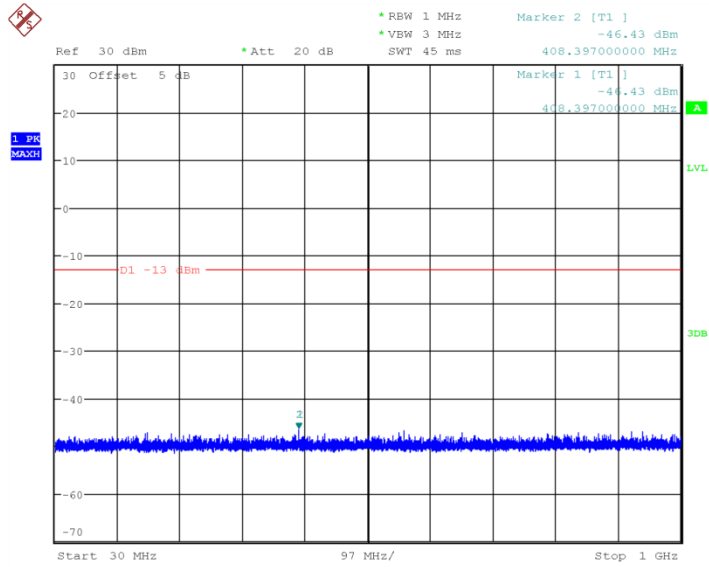


Date: 12.JAN.2017 11:02:20

Channel 1413: 30MHz~1GHz

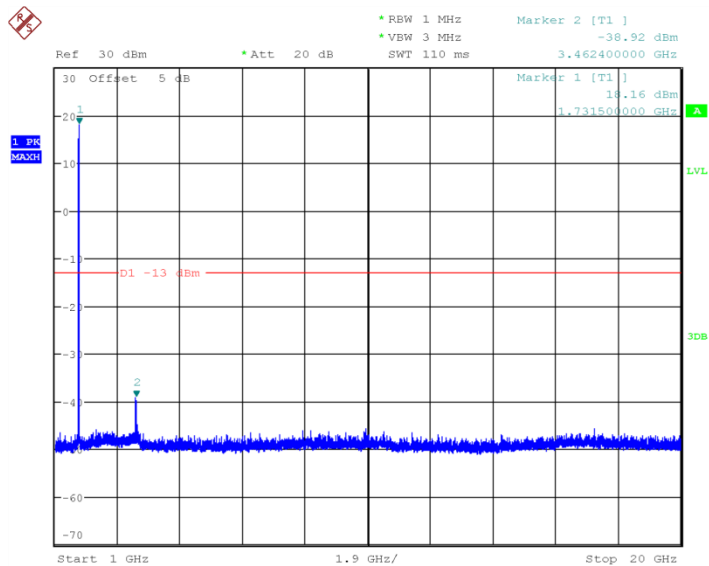


Date: 12.JAN.2017 13:07:18

Channel 1413:1GHz~20GHz

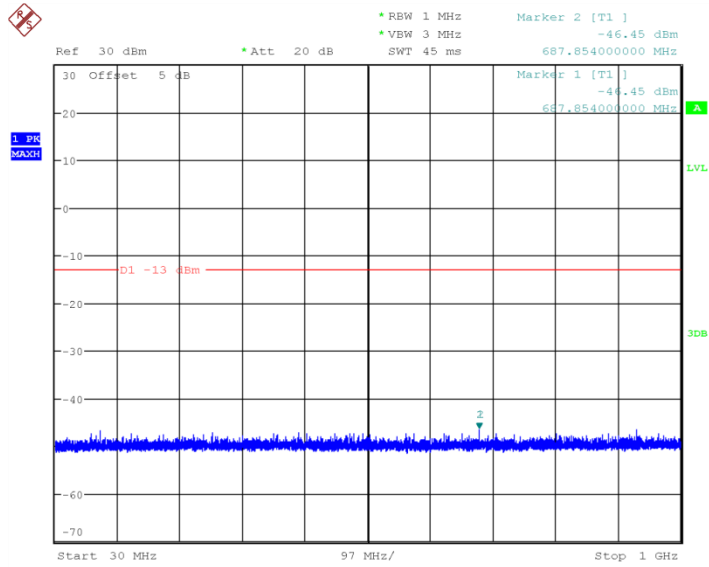

Date: 12.JAN.2017 11:03:41


Channel 1513: 30MHz~1GHz

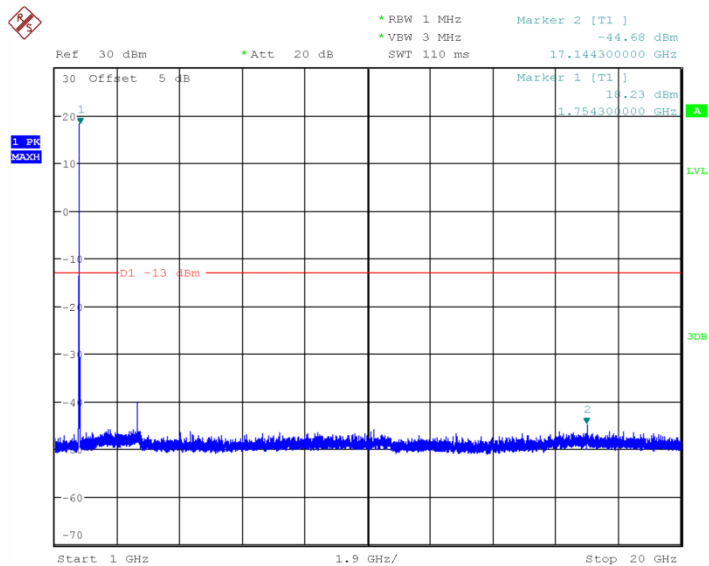

Date: 12.JAN.2017 13:08:38


Channel 1513:1GHz~20GHz

A 7.2.2.3. WCDMA Band V

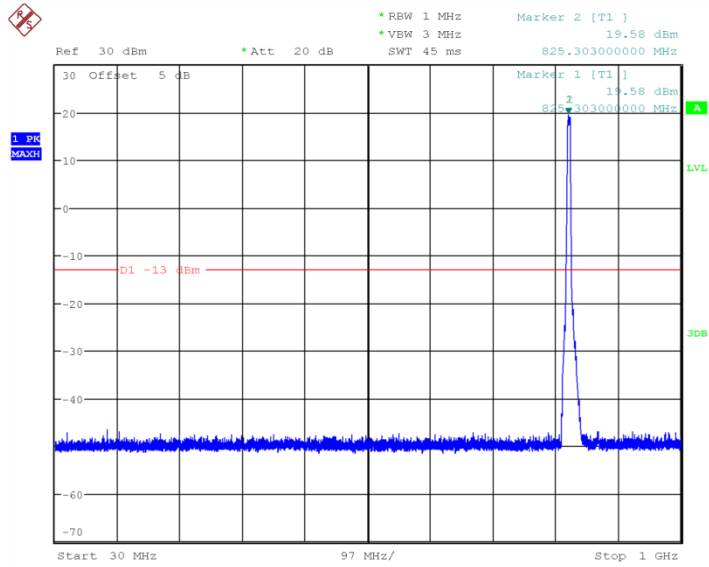


Date: 12.JAN.2017 11:05:27

Channel 4132: 30MHz~1GHz

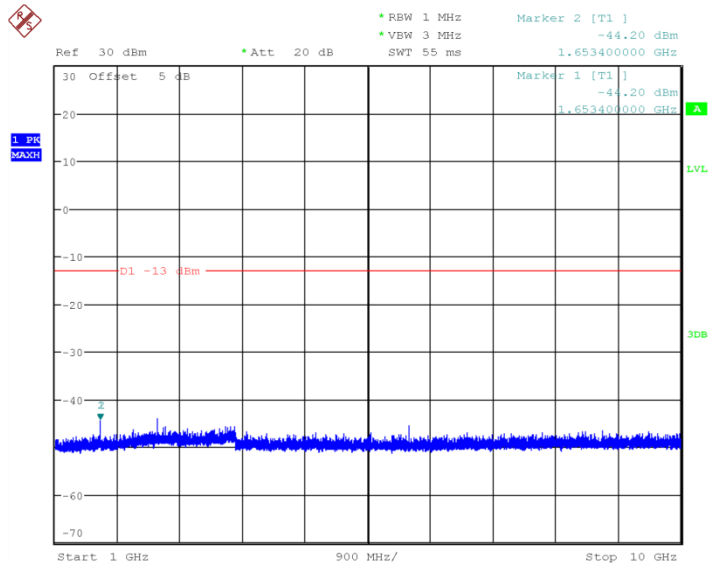


Date: 12.JAN.2017 13:00:43

Channel 4132:1GHz~10GHz

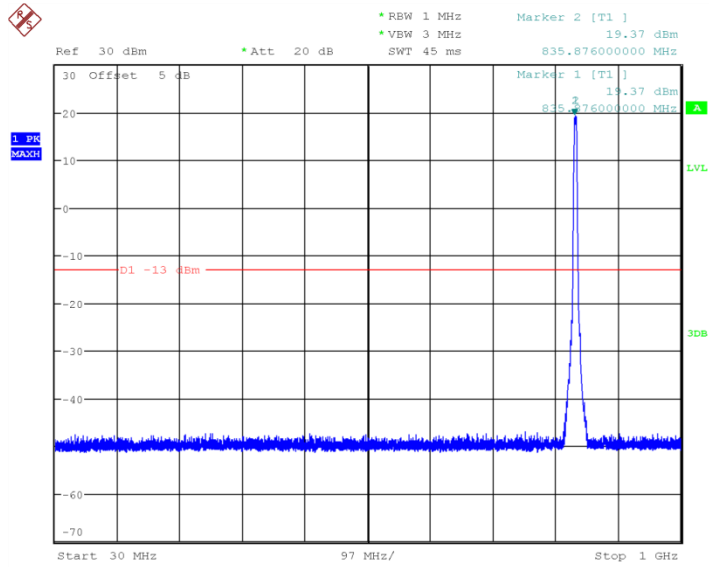


Date: 12.JAN.2017 11:04:47

Channel 4183: 30MHz~1GHz

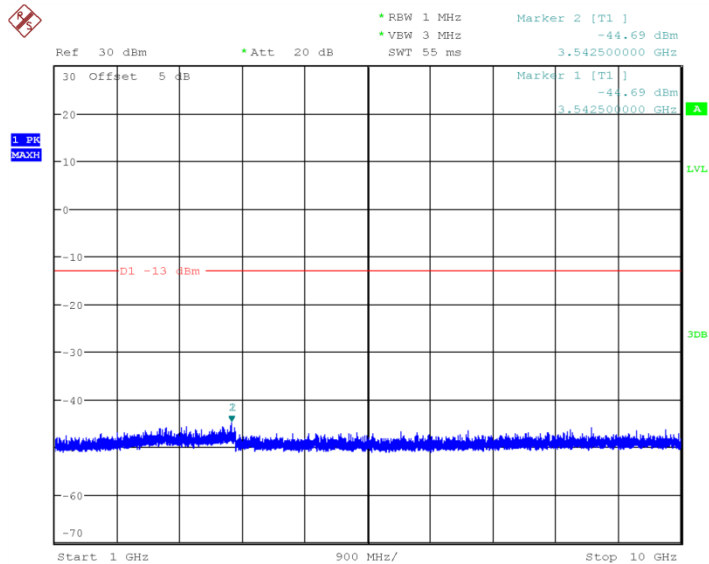


Date: 12.JAN.2017 13:00:03

Channel 4183:1GHz~10GHz

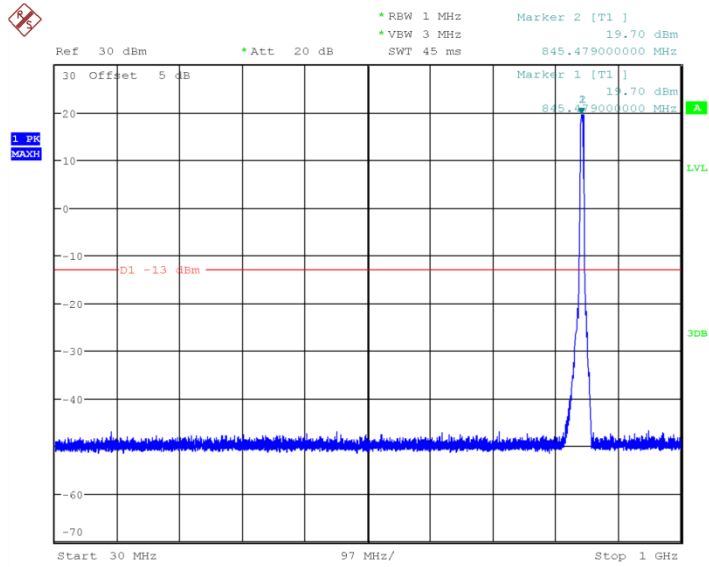

Date: 12.JAN.2017 11:06:08

Channel 4233: 30MHz~1GHz

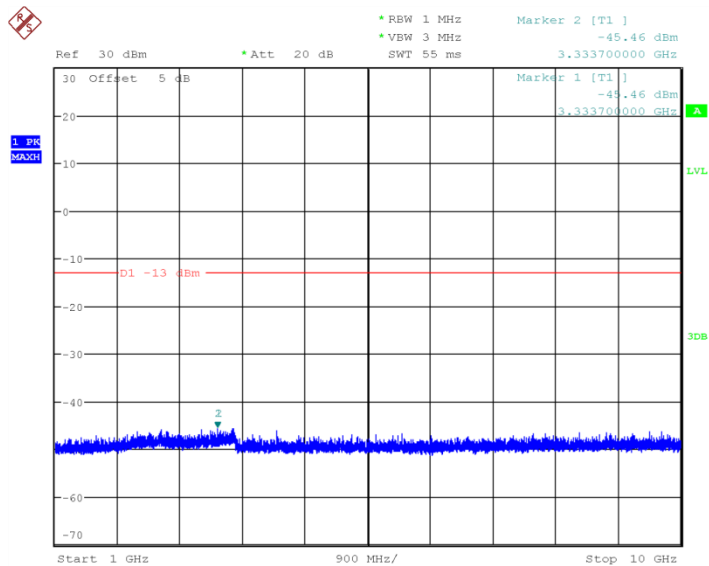

Date: 12.JAN.2017 13:01:24

Channel 4233:1GHz~10GHz

Conclusion: PASS

ANNEX A.8. RADIATED

A.8.1. ERP

A.8.1.1. GSM ERP

A.8.1.1.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power"and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.8.1.1.2. Method of Measurement


The measurements procedures in TIA-603D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

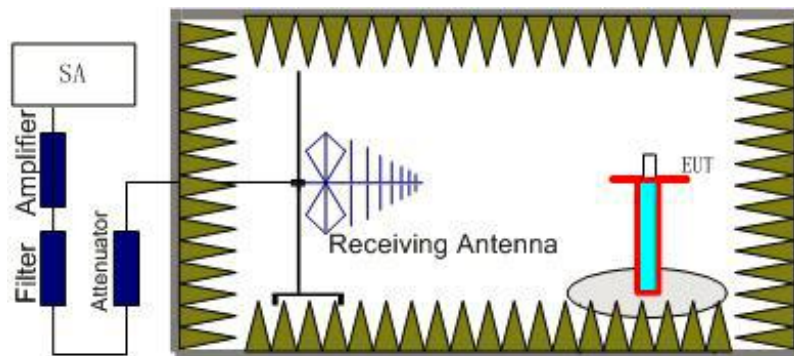

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

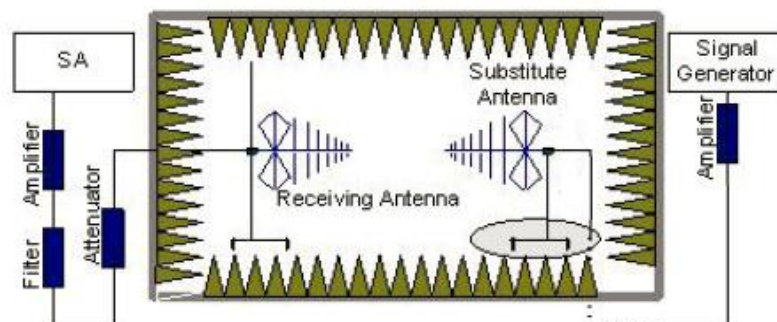

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.8.1.1.3 GSM 850-ERP 22.913(a)

A.8.1.1.3.1 Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EDGE	6	≤38.45dBm (7W)

A.8.1.1.3.2 Measurement result

First Supply

GSM(GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a Antenna Gain (dBd)	PeakERP (dBm)	Polarization
824.2	-6.75	3.1	37	3.11	30.26	H
836.6	-6.11	3.1	37	3.11	30.90	H
848.8	-6.75	3.1	37	3.11	30.26	H

GPRS(GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-6.68	3.1	37	3.11	30.33	H

836.6	-6.42	3.1	37	3.11	30.59	H
848.8	-4.31	3.1	37	3.11	32.70	H

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-12.14	3.1	37	3.11	24.87	H
836.6	-12.9	3.1	37	3.11	24.11	H
848.8	-11.3	3.1	37	3.11	25.71	H

Frequency: 824.2MHz

$$\text{Peak ERP(dBm)} = P_{\text{Mea}}(-12.04\text{dBm}) - P_{\text{cl}}(3.1\text{dB}) + P_{\text{Ag}}(37\text{dB}) + G_{\text{a}}(3.11\text{dBd}) = 24.87\text{dBm}$$

Note: ANALYZER SETTINGS: RBW = VBW = 3MHz

Second Supply

GSM (GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain (dBd)	PeakERP (dBm)	Polarization
824.2	-7.5	3.1	37	3.11	29.51	H
836.6	-6.6	3.1	37	3.11	30.41	H
848.8	-6.38	3.1	37	3.11	30.63	H

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-13.04	3.1	37	3.11	23.97	H
836.6	-12.03	3.1	37	3.11	24.98	H
848.8	-11.56	3.1	37	3.11	25.45	H

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-13.49	3.1	37	3.11	23.52	H
836.6	-12.84	3.1	37	3.11	24.17	H
848.8	-11.52	3.1	37	3.11	25.49	H

Frequency: 848.8MHz

Peak ERP(dBm)= P_{Mea}(-11.52dBm) - P_{cl}(3.1dB) +P_{Ag}(37dB) + G_a(3.11dBd)
= 25.49dBm

Note: ANALYZER SETTINGS: RBW = VBW = 3MHz

A.8.1.1.4 PCS 1900-EIRP 24.232(c)

A.8.1.1.4.1 Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
EDGE	5	≤33dBm (2W)
GPRS	3	≤33dBm (2W)

A.8.1.1.4.2 Measurement result

GSM(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-6.37	4.6	36	4.7	29.73	V
1880.0	-8.25	4.6	35.6	4.7	27.45	H
1909.8	-7.83	4.7	36	4.7	28.17	V

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-7.47	4.6	36	4.7	28.63	H
1880.0	-8.39	4.6	35.6	4.7	27.31	V
1909.8	-9.91	4.7	36	4.7	26.09	V

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-11.66	4.6	36	4.7	24.44	V
1880.0	-11.68	4.6	35.6	4.7	24.02	V
1909.8	-13.45	4.7	36	4.7	22.55	V

Frequency: 1850.2MHz

Peak EIRP(dBm)= $P_{Mea}(-11.66dBm) - P_{cl}(4.6dB) + P_{Ag}(36dB) + G_a(4.7dB) = 24.44dBm$

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.8.1.2. WCDMA ERP

A.8.1.2.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.8.1.2.2. Method of Measurement


The measurement procedures in TIA-603D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of the receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

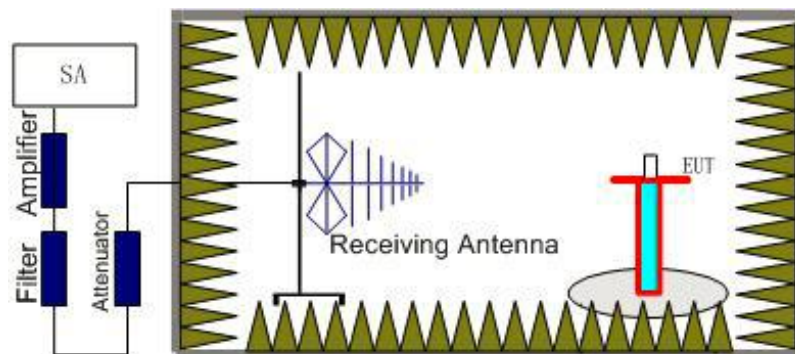

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

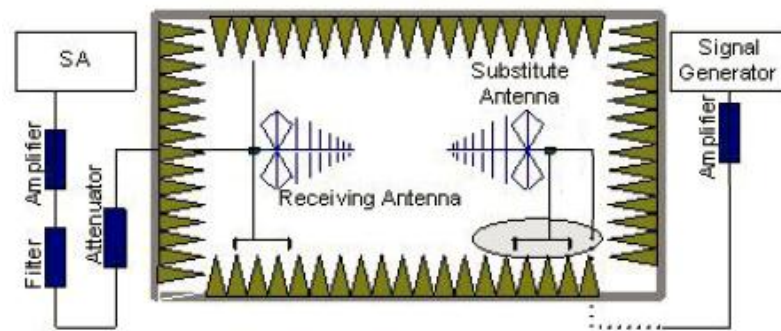

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitute Antenna.

The cable loss (P_{cl}), the Substitute Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.8.1.2.3 WCDMA Band II-EIRP

A.8.1.2.3.1 Limit

	Burst Peak EIRP (dBm)
WCDMA Band II	$\leq 33\text{dBm}$ (2W)

A.8.1.2.3.2 Measurement result

First Supply

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1852.4	-15.06	4.6	36	4.7	21.04	H
1880.0	-14.29	4.6	35.6	4.7	21.41	H
1907.6	-16.21	4.7	36	4.7	19.79	V

Frequency: 1852.40MHz

Peak EIRP(dBm)= P_{Mea}(-15.06dBm)- P_{cl}(4.6dB)+ P_{Ag}(36dB)+G_a(4.7dBi) =21.04dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz

Second Supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakEIRP(dBm)	Polarization
1852.4	-17.09	4.6	36	4.7	19.01	H
1880.0	-14.85	4.6	35.6	4.7	20.85	H
1907.6	-16.39	4.7	36	4.7	19.61	V

Frequency: 1852.4 MHz

Peak EIRP(dBm)= P_{Mea}(-17.09dBm)- P_{cl}(4.6dB)+P_{Ag}(36dB)+G_a(4.7idB)=19.01dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz

A.8.1.2.4 WCDMA Band IV-ERP

A.8.1.2.4.1 Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤38.45dBm (7W)

A.8.1.2.4.2 Measurement result

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1713.0	-12.75	4.4	36.25	4.7	23.80	V
1731.2	-12.75	4.5	35.88	4.7	23.33	V
1754.0	-11.39	4.5	36.44	4.7	25.25	H

Frequency: 1713.0 MHz

Peak ERP(dBm)= P_{Mea}(-12.75dBm)- P_{cl}(4.4dB)+P_{Ag}(36.25dB)+G_a(4.7dB)=23.08dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz

A.8.1.2.5 WCDMA Band V-ERP

A.8.1.2.5.1 Limits

	Burst Peak EIRP (dBm)
WCDMA Band V	≤38.45dBm (7W)

A.8.1.2.5.2 Measurement result

Frequency	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna	PeakERP(d	Polarizati
-----------	------------------------	----------------------	----------------------	------------------------	-----------	------------

826.4	-12.37	3.1	37	2.9	24.43	H
836.6	-12.17	3.1	37	2.9	24.63	H
846.6	-12.04	3.1	37	2.9	24.76	H

Frequency: 826.4 MHz

Peak ERP(dBm)= $P_{Mea}(-12.37\text{dBm}) - P_{cl}(3.1\text{dB}) + P_{Ag}(37\text{dB}) + G_a(2.9\text{dB}) = 24.43\text{dBm}$

ANALYZER SETTINGS: RBW = VBW = 5MHz

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.8.2 EMISSION LIMIT (§2.1051/§22.917§24.238)


A.8.2.1 GSM Measurement Method

The measurement procedures in TIA-603D-2010 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.


A.8.2.2 The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

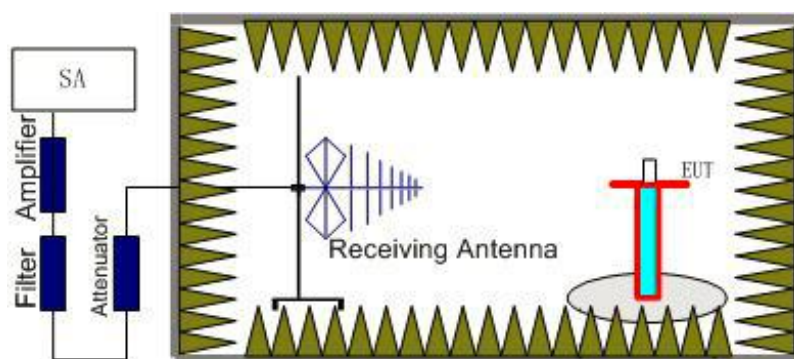

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

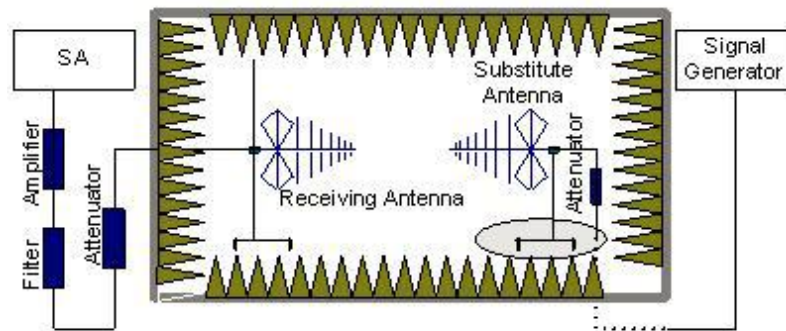

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_p) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_p) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_p + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$

A.8.2.3 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.2.4 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a

carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.2.5 Measurement Results

Measurements results:

Frequency	Channel	Frequency Range	Result
GSM850	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
GSM1900	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

GSM Mode Channel 128

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1647.8571 43	-44.68	4.3	2.9	-46.08	-13	H
2722.5000 00	-35.3	5.7	4.1	-36.90	-13	H
3941.5384 62	-48.67	6.8	7.2	-48.27	-13	H
5431.1538 46	-48.21	8.1	9.5	-46.81	-13	V
6592.3076 92	-42.65	9	11.5	-40.15	-13	V
8081.5384 62	-52.18	9.9	16.6	-45.48	-13	H

Note:

GSM850, CH128

Power(ERP)= Pmea-Pcl+Ga=-44.68-4.3+2.9=-46.08dbm

This method Applicable to the following table.

GSM Mode Channel 190

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
2548.928571	-37.64	5.5	3.7	-39.44	-13	V
3571.153846	-47.43	6.4	6	-47.83	-13	H
4549.615385	-47.18	7.4	7.3	-47.28	-13	V
5725.384615	-49.85	8.5	10.5	-47.85	-13	V
6692.307692	-48.19	9.1	12.3	-44.99	-13	V
8303.076923	-51.52	10.1	17.3	-44.32	-13	H

GSM Mode Channel 251

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1697.142857	-42.11	4.4	2.9	-43.61	-13	H
2906.785714	-35.35	5.8	4.7	-36.45	-13	V
3531.923077	-47.91	6.4	6	-48.31	-13	H
4243.846154	-48.33	7.1	7.7	-47.73	-13	H
4803.461539	-47.37	7.6	7.9	-47.07	-13	H
5941.153846	-45.74	8.5	10.4	-43.84	-13	H

GSM1900 Mode Channel 512

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
-----------------	------------	-----------	----------	----------------	-------------	--------------

3700.2000 00	-49.15	6.6	6.2	-49.55	-13	V
5550.6000 00	-40.23	8.2	9.5	-38.93	-13	V
7400.4000 00	-49.51	9.7	14.6	-44.61	-13	H
11101.2000 00	-47.68	12.1	18.6	-41.18	-13	V
14802.000 000	-46.47	14.3	24.4	-36.37	-13	V
16652.400 000	-37.13	14.9	20.1	-31.93	-13	H

GSM1900 Mode Channel 661

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3760.2000 00	-47.16	6.6	6.2	-47.56	-13	H
4521.6000 00	-50.7	7.3	7.3	-50.7	-13	H
5640.0000 00	-39.07	8.3	9.5	-37.87	-13	H
7520.4000 00	-50.44	9.7	14.6	-45.54	-13	V
9399.6000 00	-53.41	10.7	18.6	-45.51	-13	V
11280.000 000	-45.41	12.1	18.5	-39.01	-13	V

GSM1900 Mode Channel 810

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3819.6000 00	-47.71	6.7	6.2	-48.21	-13	H
5730.0000 00	-44.09	8.5	10.5	-42.09	-13	H
7638.0000 00	-49.81	9.7	14.6	-44.91	-13	H

9549.6000 00	-49.97	10.7	18.6	-42.07	-13	V
11458.800 000	-45.38	12.1	18.1	-39.38	-13	H
17188.800 000	-33.94	16	19.6	-30.34	-13	H

Second Supply

GSM 850 Mode Channel 128

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1647.8571 43	-44.38	4.3	3.4	-45.28	-13	H
2455.7142 86	-37.46	5.3	3.7	-39.06	-13	H
3570.0000 00	-47.78	6.4	6.0	-48.18	-13	H
4547.3076 92	-46.96	7.3	7.3	-46.96	-13	H
6275.3846 15	-48.6	8.8	10.8	-46.60	-13	V
8278.4615 39	-52.71	10.1	17.3	-45.51	-13	H

Note:

GSM850, CH128

Power(ERP)= Pmea-Pcl+Ga=-44.38-4.3+3.4=-45.28dbm

This method Applicable to the following table.

GSM 850 Mode Channel 190

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1672.5000 00	-42.63	4.3	2.9	-44.03	-13	H
2483.5714 29	-38	5.4	3.7	-39.70	-13	V

3346.1538 46	-46.4	6.2	4.9	-47.70	-13	H
5855.7692 31	-47.57	8.4	10.5	-45.47	-13	V
7916.9230 77	-50.33	9.9	15	-45.23	-13	H
9272.3076 92	-51.37	10.7	18.5	-43.57	-13	V

GSM 850 Mode Channel 251

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1696.0714 29	-39.37	4.4	2.9	-40.87	-13	H
2545.7142 86	-34.65	5.4	3.7	-36.35	-13	H
3576.9230 77	-47.31	6.4	6.0	-47.71	-13	H
5486.5384 62	-48.47	8.1	9.5	-47.07	-13	V
6790.7692 31	-48.04	9.2	12.3	-44.94	-13	V
8203.0769 23	-51.82	10.1	17.3	-44.62	-13	V

Conclusion: PASS

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.7.2.2. WCDMA Measurement Method

The measurements procedures in TIA-603D-2010 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

The procedure of radiated spurious emissions is the same like GSM.

A.7.2.2.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.2.2.2. Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) and WCDMA Band

V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks.

The

equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.7.2.2.3. Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band IV	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band V	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P

WCDMA BAND II Mode Channel 9262

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization

4522.8000 00	-58.26	7.4	7.3	-58.36	-13	H
5554.0000 00	-48.13	8.2	9.5	-46.83	-13	V
6366.8000 00	-58.55	8.8	10.8	-56.55	-13	V
7412.8000 00	-55.93	9.7	14.6	-51.03	-13	V
10131.200 000	-57.89	11.3	17.4	-51.79	-13	V
12092.000 000	-53.7	12.6	17.1	-49.2	-13	H

WCDMA BAND II Mode Channel 9400
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3761.2	-56.75	6.6	6.2	-57.15	-13	H
5643.2	-47.69	8.3	9.5	-46.49	-13	H
6373.6	-57.75	8.8	10.8	-55.75	-13	V
7515.2	-58.39	9.4	14.6	-53.19	-13	V
9382	-60.72	10.7	18.5	-52.92	-13	H
10827.2	-56.78	11.7	18.1	-50.38	-13	V

WCDMA BAND II Mode Channel 9538
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3816.4	-58.06	6.7	6.2	-58.56	-13	H
4532.8	-57.86	7.4	7.3	-57.96	-13	H

5726	-44.48	8.5	10.5	-42.48	-13	V
7633.2	-59.78	9.8	15.3	-54.28	-13	V
9774.8	-59.69	11	18.3	-52.39	-13	V
12310.05	-52.7	12.7	17.5	-47.9	-13	V

WCDMA BAND IV Mode Channel1312
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5140.8	-54.37	7.9	9	-53.27	-13	H
6846.8	-50.78	9.2	12.3	-47.68	-13	H
8613.6	-63.71	10.3	18.1	-55.91	-13	V
10764	-55.73	11.7	17.3	-50.13	-13	V
13222.5	-57.23	13	21.8	-48.43	-13	H
17545.35	-47.87	15.1	20.1	-42.87	-13	V

WCDMA BAND IV Mode Channel 1413
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5201.6	-56.86	8.0	8.7	-56.16	-13	H
6933.6	-56.22	9.3	12.9	-52.62	-13	H
9064.8	-62.76	10.4	18.3	-54.86	-13	V

10900.4	-57.21	11.8	18.1	-50.91	-13	V
13409.4	-57.64	13.7	23.4	-47.94	-13	V
16285.35	-51.47	14.7	20.9	-45.27	-13	H

WCDMA BAND IV Mode Channel 1513
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5260.4	-54.61	8.0	8.7	-53.91	-13	H
7015.6	-57.64	7.3	12.9	-52.04	-13	H
9403.6	-60.08	10.7	18.6	-52.18	-13	V
13356.9	-55.36	13.6	21.8	-47.16	-13	H
15793.95	-51.74	14.9	22.2	-44.44	-13	H
17581.05	-48.58	15.5	20.6	-43.48	-13	V

WCDMA BAND V Mode Channel 4132
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
2455	-46.45	5.3	3.7	-48.05	-13	H
4866.8	-58.25	7.6	7.9	-57.95	-13	H
5650	-59.18	8.3	9.5	-57.98	-13	H
6780	-60.77	9.2	12.3	-57.67	-13	H
7710.4	-61.59	9.8	15.3	-56.09	-13	V

9256	-61.69	10.7	18.5	-53.89	-13	V
------	--------	------	------	--------	-----	---

WCDMA BAND V Mode Channel 4183
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1513.214286	-61.01	4.1	3.4	-61.71	-13	V
1865.357143	-56.83	4.6	2.8	-58.63	-13	H
2686.923077	-50.98	5.5	4.1	-52.38	-13	V
3634.4	-58.79	6.6	6	-59.39	-13	H
4904	-58.55	7.7	9	-57.25	-13	H
6897.2	-60.33	9.3	12.9	-56.73	-13	H

WCDMA BAND V Mode Channel 4233
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1510.357143	-60.66	4.1	3.4	-61.36	-13	V
1870	-56.85	4.6	2.8	-58.65	-13	H
2453.846154	-48.99	5.3	3.7	-50.59	-13	H
3864	-59.72	6.7	7.2	-59.22	-13	V
5085.2	-59.67	7.8	9	-58.47	-13	V
6385.6	-59.6	8.8	11.5	-56.9	-13	H

Second Supply

WCDMA BAND II Mode Channel 9262
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5555.200000	-45.38	8.2	9.5	-44.08	-13	V
7409.600000	-57.28	9.7	14.6	-52.38	-13	V
9735.600000	-60.36	10.9	18.3	-52.96	-13	H
11827.050000	-54.28	12.5	17.6	-49.18	-13	V
14606.400000	-56.06	12.6	22.7	-45.96	-13	H
17569.500000	-47.58	15.5	20.1	-42.98	-13	V

WCDMA BAND II Mode Channel 9400
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5643.200000	-46.26	8.3	10	-44.56	-13	V
9721.200000	-60.39	10.9	18.3	-52.99	-13	V
11714.700000	-54.65	12.4	17.6	-49.45	-13	H
13456.650000	-58.15	13.7	23.4	-48.45	-13	H
15751.950000	-52.41	14.4	22.2	-44.61	-13	H
17922.300000	-48.82	16.3	22.5	-42.62	-13	H

WCDMA BAND II Mode Channel 9538
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5726.400000	-45.18	8.5	10.5	-43.18	-13	V
7626.000000	-59.14	9.7	15	-53.84	-13	V
9632.000000	-60.73	10.8	18.3	-53.23	-13	V
12120.000000	-53.55	12.6	17.1	-49.05	-13	V
13515.450000	-58.07	13.7	23.4	-48.37	-13	V
16123.650000	-51.53	15	22.4	-44.13	-13	V

Conclusion: PASS

Note: the EUT was displayed in several different direction, the worst cases were shown.

ANNEX B. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

ANNEX C. Accreditation Certificate



Accredited Laboratory

A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the field of Electrical. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 10th day of December 2014.



President & CEO
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2017

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****End The Report*****