

RF Exposure Evaluation

Client Information:

Applicant: Hamedata Technology Co., Limited
Applicant add.: 1-3F & 6-8F, BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen
Manufacturer: Jupiter Technology Co., Limited
Manufacturer add.: 1-4F, BLDG#9, 1/F, BLDG#5, West Industrial Park, South of the Intersection of Ma'anshan Tunnel and Zhangshe Avenue, Xiangxi High-tech Zone, Hunan Province, China

Product Information:

Product Name: Power Bank
Model No.: P246W5
Brand Name: N/A
FCC ID: 2ADOW-P246W5

Applicable standards: FCC CFR 47 PART 1, § 1.1310
KDB 680106 D01 Wireless Power Transfer v04

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan,
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: May 31, 2024 Date of Test: May 31, 2024 ~ Jun.07, 2024
Date of Issue: Jun.07, 2024 Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: Emiya Lin

Emiya Lin

Simba Huang

Approved by: _____

Simba Huang



TABLE OF CONTENTS

| | | |
|-----|---|----|
| 1 | TEST FACILITY | 4 |
| 1.1 | Deviation from standard | 4 |
| 1.2 | Abnormalities from standard conditions | 4 |
| 1.3 | Test Location | 4 |
| 2 | GENERAL INFORMATION | 5 |
| 3 | TEST METHODOLOGY | 7 |
| 3.1 | Measuring Standard | 7 |
| 3.2 | Requirements | 7 |
| 3.3 | Test Setup | 8 |
| 3.4 | Test Procedure | 8 |
| 4 | Equipment Approval Considerations | 9 |
| 4.1 | Description of the test mode | 10 |
| 4.2 | Peripheral List | 10 |
| 4.3 | Test Instruments list | 11 |
| 4.4 | Duty Cycle: | 12 |
| 4.5 | Compliance Location: Center vs Tip-Surface of the Probe | 13 |
| 4.6 | Test Result | 15 |
| 5 | Test Setup photo | 26 |

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|--------------|---------------|-------------|
| 00 | Jun.07, 2024 | Initial Issue | Simba Huang |
| | | | |
| | | | |

1 TEST FACILITY

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on April 17, 2022

FCC-Registration No.: 703111 Designation Number: CN1313

Dongguan Yaxu (AiT) technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 6819A CAB identifier: CN0122

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

A2LA-Lab Cert. No.: 6317.01

Dongguan Yaxu (AiT) technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.1 Deviation from standard

None

1.2 Abnormalities from standard conditions

None

1.3 Test Location

Dongguan Yaxu (AiT) Technology Limited

Address: No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495


2 GENERAL INFORMATION

| | |
|------------------------|--|
| EUT Name: | Power Bank |
| Model No: | P246W5 |
| Serial Model: | N/A |
| Test sample(s) ID: | AIT24053016001 |
| Sample(s) Status: | Engineer sample |
| Operation frequency: | 111kHz-205kHz |
| Modulation Technology: | ASK |
| Antenna Type: | loop coil Antenna |
| Antenna gain: | 0dBi |
| Hardware version.: | N/A |
| Software version.: | N/A |
| Power supply: | Battery Capacity: 5000mAh/3.7V 18.5Wh Type-C Input: 5V=3A,9V=2.22A,12V=1.67A Type-C Output: 5V=3A,9V=2.22A,12V=1.67A Wireless: 15W (Max) Output (Max): 20W |
| Model different: | N/A |
| Note: | For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |

Coil Specifications:

| Item | Parameter |
|---------------------------|--|
| Input inductance: | LOA(Individual coil): 3.8uH±20% LOA(Coil+diskette): 6.3uH±10% |
| Material of enclosure(s): | Hot Air stranded Wire |
| Number of turns: | Transmitter 1: 11 turns |

Coil Size:

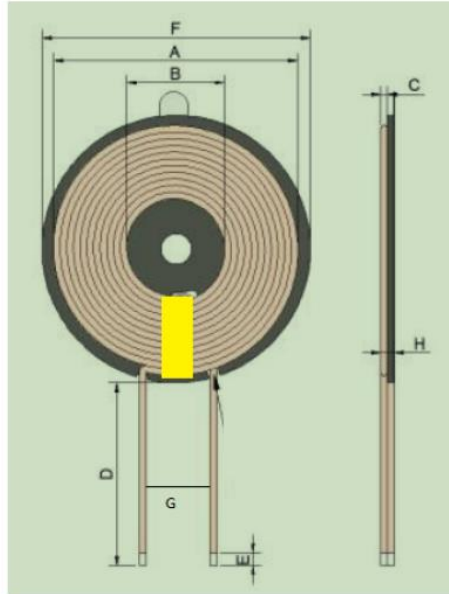

| 标准 | A | B | C | D | E | F | H | G |
|-----|------|----------|---------|------|-----|-------|--------|------|
| STD | 40±1 | 16.5±1.5 | 0.7±0.1 | 16±2 | 2-5 | 44Max | 2.2Max | 5MAX |

3 TEST METHODOLOGY

3.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

3.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the top surface.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100,000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |


F=frequency in MHz
 *Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

Note 1: f = frequency in MHz; *Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

3.3 Test Setup

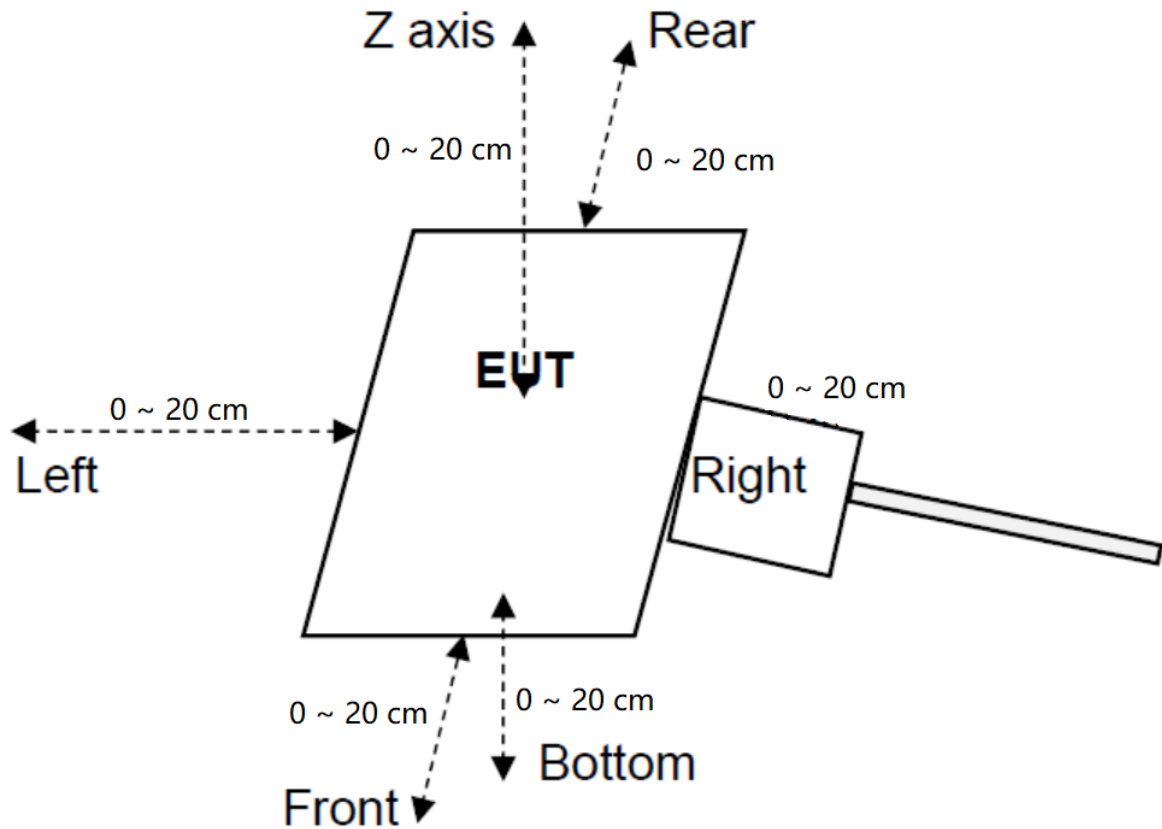

3.4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (2cm increments from 0 ~ 20 cm for all sides) which is between the edge of the charger and the geometric edge of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

4 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

| Requirements of section 5 of KDB 680106 D01 | Yes / No | Description |
|--|----------|---|
| Power transfer frequency is less than 1 MHz | Yes | The device operated in the frequency range 111-205KHz. |
| Output power from each primary coil is less than or equal to 15 watts | Yse | The maximum output power of the primary coil is 15W. |
| The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time | Yes | The transfer system includes 1 primary coils. |
| Client device is placed directly in contact with the transmitter | Yes | Client device is placed directly in contact with the transmitter |
| Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion) | No | EUT is a portable power bank |
| The aggregate E-field and H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit. | No | H-field and E-field measurement taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions. |

4.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

| Test Mode | Description | |
|-----------|----------------------------|------------|
| Mode 1 | Adapter + EUT + phone | Record |
| Mode 2 | Test the EUT in idle mode. | Pre-tested |

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

4.2 Peripheral List

| No. | Equipment | Manufacturer | Model No. | Serial No. | Power cord | signal cable |
|-----|-----------|--------------|-----------|------------|------------|--------------|
| 1 | phone | XIAOMI | MI11 | N/A | N/A | N/A |
| 2 | Adapter | HNT | HNT-QC530 | N/A | N/A | N/A |


4.3 Test Instruments list

| Test Equipment | Manufacturer | Model No. | SN. | Cal. Date (cm-dd-yy) | Cal. Due date (cm-dd-yy) |
|--|--------------|----------------------------------|-----------------|----------------------|--------------------------|
| Magnetic Amplitude and Gradient Probe System | SPEAG | MAGPy-8H3D+E3D V2 & MAGPy-DAS V2 | SZ186-06 & 3061 | 04.13.2024 | 04.12.2025 |

| Parameter | Specs |
|-------------------------------------|---|
| PROBE DESIGN | |
| Diameter | 60 mm |
| 8 isotropic <i>H</i> -field sensors | concentric loops of 1 cm ² arranged at the corner of a cube of 22 mm side length |
| 1 isotropic <i>E</i> -field sensor | orthogonal dipole/monopole (arm length: 50 mm) |
| Measurement center | 18.5 mm from the probe tip |
| Temperature range | 0–40 °C |
| Dimensions | 110 × 635 × 35 mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2) |
| <i>H</i>-FIELD SPECIFICATION | |
| Frequency range | 3 kHz–10 MHz |
| Measurement range | 0.1–3200 A/m, 0.12 μT–4 mT |
| Gradient range | 0–80 T/m/T |
| <i>E</i>-FIELD SPECIFICATION | |
| Frequency range | 3 kHz–10 MHz |
| Measurement range | 0.08–2000 V/m |

4.4 Duty Cycle:

| Mode | ON Time(ms) | Period(ms) | Duty Cycle(%) |
|--------------------------|-------------|------------|---------------|
| Operating(111kHz-205kHz) | / | / | 100 |

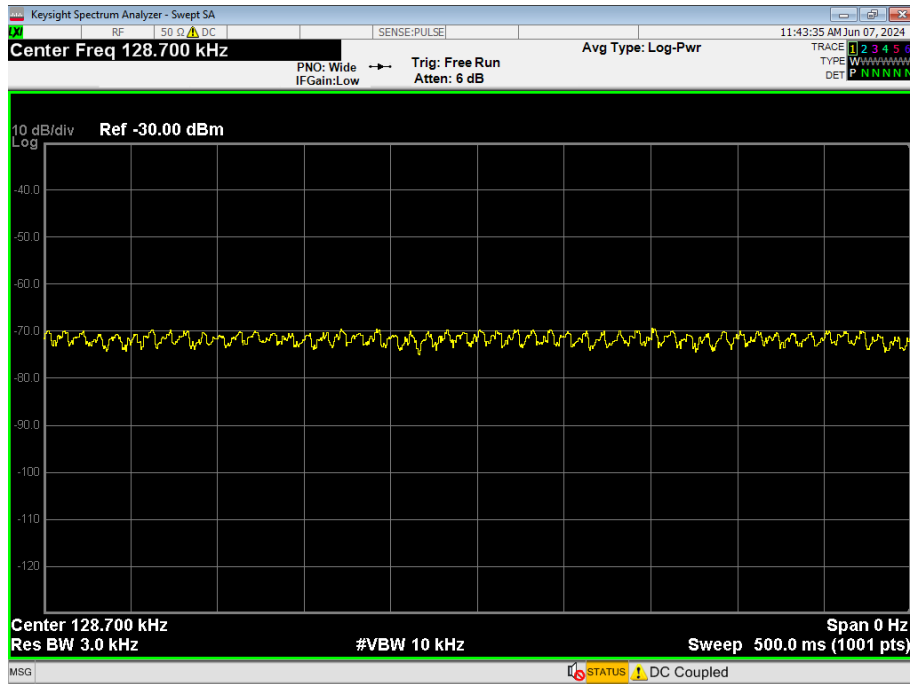

4.5 Compliance Location: Center vs Tip-Surface of the Probe

The following information is from the equipment manual:



Figure 2.1: MAGPy-8H3D+E3D V2 probe, without the casing

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

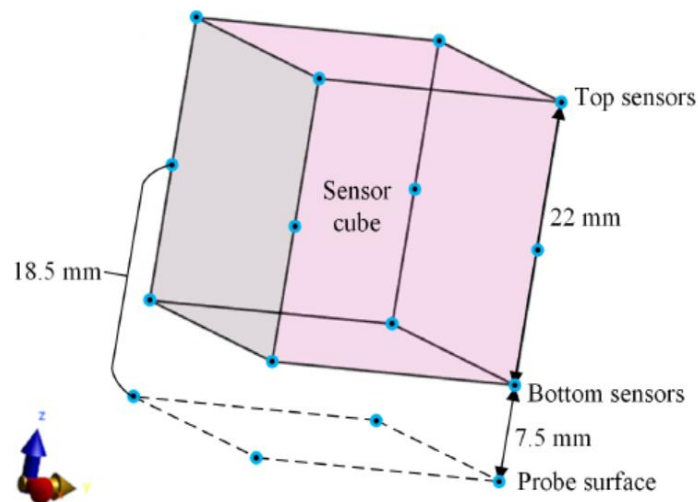


Figure 2.5: Extrapolation of the total H -field at the probe surface is made at each pair of sensors (i.e., bottom and top sensors) around the sensor cube

The total H -field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H -field measured at the top and bottom sensors (Figure 2.5), H_{top} and H_{bottom} , as well as the normalized H -field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm) [7].

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i \tag{1.6}$$

The polynomial coefficients c_i are given in Table 2.2. They have been determined from simulations of 70 coils covering normalized gradients up to 80 for the 97.5th percentile (Figure 2.6). This provides a conservative estimate of the total H -field at the tip-surface without large overestimation.

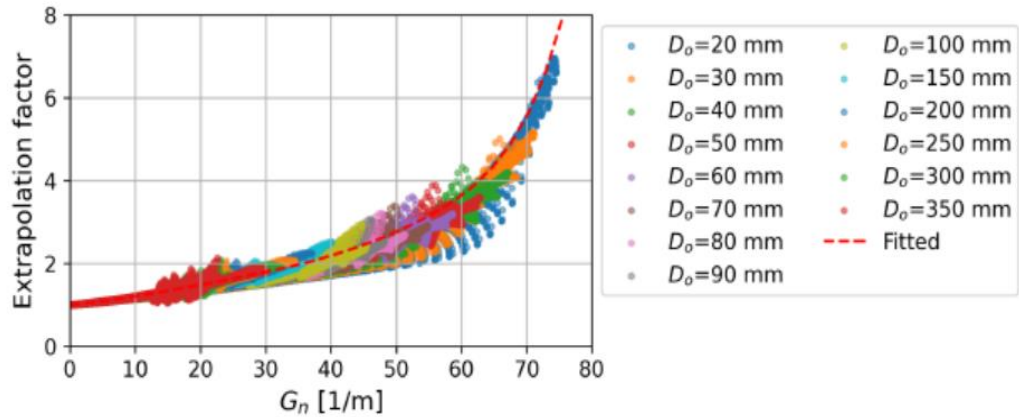


Figure 2.6: Extrapolation factors (i.e., ratios between the simulated results of $H_{tip-surface}$ and $\frac{H_{bottom}+H_{top}}{2}$) plotted as a function of the normalized H -field gradient. The data are from simulations of 70 coils with varying outer diameters D_o and filling ratios (0.1–0.9). The predication of the polynomial function $\sum_{i=0}^7 c_i (G_n \Delta d)^i$ with coefficients fitted for 97.5th percentile (i.e., the red dashed line) is also shown.

| Coefficient | Value |
|-------------|-------|
| c_0 | 1.00 |
| c_1 | 1.00 |
| c_2 | -1.01 |
| c_3 | 15.9 |
| c_4 | -50.8 |
| c_5 | 74.7 |
| c_6 | -51.4 |
| c_7 | 13.7 |

Table 2.2: Coefficients of the polynomial function for the H-field extrapolation to the tip-surface of the probe, determined with 0.975 quantile regression (i.e., the 97.5th percentile)

4.6 Test Result

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm | < 1% | Top | 16.31 | 1.18 |
| 0cm | < 1% | Bottom | 16.16 | 1.27 |
| 0cm | < 1% | Left | 16.28 | 1.15 |
| 0cm | < 1% | Right | 16.31 | 1.11 |
| 0cm | < 1% | Front | 16.18 | 1.11 |
| 0cm | < 1% | Rear | 16.21 | 1.17 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.66% | 77.91% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm | < 50% | Top | 16.28 | 1.14 |
| 0cm | < 50% | Bottom | 16.13 | 1.18 |
| 0cm | < 50% | Left | 16.25 | 1.11 |
| 0cm | < 50% | Right | 16.26 | 1.07 |
| 0cm | < 50% | Front | 16.15 | 1.01 |
| 0cm | < 50% | Rear | 16.17 | 1.10 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.65% | 72.39% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 0cm | < 99% | Top | 16.19 | 1.12 |
| 0cm | < 99% | Bottom | 16.12 | 1.14 |
| 0cm | < 99% | Left | 16.17 | 1.10 |
| 0cm | < 99% | Right | 16.25 | 1.03 |
| 0cm | < 99% | Front | 16.13 | 1.00 |
| 0cm | < 99% | Rear | 16.17 | 1.01 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.65% | 69.94% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm | < 1% | Top | 14.99 | 1.06 |
| 2cm | < 1% | Bottom | 15.09 | 1.07 |
| 2cm | < 1% | Left | 14.99 | 1.04 |
| 2cm | < 1% | Right | 14.83 | 1.01 |
| 2cm | < 1% | Front | 14.91 | 0.97 |
| 2cm | < 1% | Rear | 14.84 | 1.00 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.46% | 65.64% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm | < 50% | Top | 14.94 | 0.97 |
| 2cm | < 50% | Bottom | 15.02 | 1.00 |
| 2cm | < 50% | Left | 14.90 | 0.96 |
| 2cm | < 50% | Right | 14.74 | 0.99 |
| 2cm | < 50% | Front | 14.83 | 0.95 |
| 2cm | < 50% | Rear | 14.80 | 0.91 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.45% | 61.35% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 2cm | < 99% | Top | 14.89 | 0.88 |
| 2cm | < 99% | Bottom | 14.97 | 0.94 |
| 2cm | < 99% | Left | 14.80 | 0.88 |
| 2cm | < 99% | Right | 14.69 | 0.95 |
| 2cm | < 99% | Front | 14.74 | 0.85 |
| 2cm | < 99% | Rear | 14.74 | 0.84 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.44% | 58.28% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm | < 1% | Top | 14.51 | 0.95 |
| 4cm | < 1% | Bottom | 14.52 | 0.97 |
| 4cm | < 1% | Left | 14.46 | 0.88 |
| 4cm | < 1% | Right | 14.35 | 0.88 |
| 4cm | < 1% | Front | 14.33 | 0.90 |
| 4cm | < 1% | Rear | 14.41 | 0.93 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.36% | 59.51% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm | < 50% | Top | 14.46 | 0.92 |
| 4cm | < 50% | Bottom | 14.46 | 0.92 |
| 4cm | < 50% | Left | 14.45 | 0.86 |
| 4cm | < 50% | Right | 14.34 | 0.78 |
| 4cm | < 50% | Front | 14.25 | 0.83 |
| 4cm | < 50% | Rear | 14.40 | 0.90 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.36% | 56.44% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 4cm | < 99% | Top | 14.36 | 0.92 |
| 4cm | < 99% | Bottom | 14.43 | 0.85 |
| 4cm | < 99% | Left | 14.42 | 0.77 |
| 4cm | < 99% | Right | 14.30 | 0.71 |
| 4cm | < 99% | Front | 14.22 | 0.78 |
| 4cm | < 99% | Rear | 14.39 | 0.86 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.35% | 56.44% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm | < 1% | Top | 13.97 | 0.82 |
| 6cm | < 1% | Bottom | 14.10 | 0.80 |
| 6cm | < 1% | Left | 13.95 | 0.77 |
| 6cm | < 1% | Right | 13.94 | 0.78 |
| 6cm | < 1% | Front | 13.95 | 0.82 |
| 6cm | < 1% | Rear | 13.83 | 0.82 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.30% | 50.31% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm | < 50% | Top | 13.95 | 0.73 |
| 6cm | < 50% | Bottom | 14.00 | 0.76 |
| 6cm | < 50% | Left | 13.90 | 0.77 |
| 6cm | < 50% | Right | 13.87 | 0.71 |
| 6cm | < 50% | Front | 13.87 | 0.79 |
| 6cm | < 50% | Rear | 13.74 | 0.79 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.28% | 48.47% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 6cm | < 99% | Top | 13.92 | 0.63 |
| 6cm | < 99% | Bottom | 13.96 | 0.71 |
| 6cm | < 99% | Left | 13.80 | 0.70 |
| 6cm | < 99% | Right | 13.86 | 0.66 |
| 6cm | < 99% | Front | 13.82 | 0.70 |
| 6cm | < 99% | Rear | 13.73 | 0.75 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.27% | 46.01% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm | < 1% | Top | 13.12 | 0.76 |
| 8cm | < 1% | Bottom | 13.28 | 0.82 |
| 8cm | < 1% | Left | 13.30 | 0.85 |
| 8cm | < 1% | Right | 13.23 | 0.83 |
| 8cm | < 1% | Front | 13.30 | 0.77 |
| 8cm | < 1% | Rear | 13.30 | 0.76 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.17% | 52.15% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm | < 50% | Top | 13.06 | 0.76 |
| 8cm | < 50% | Bottom | 13.25 | 0.81 |
| 8cm | < 50% | Left | 13.25 | 0.84 |
| 8cm | < 50% | Right | 13.22 | 0.78 |
| 8cm | < 50% | Front | 13.29 | 0.67 |
| 8cm | < 50% | Rear | 13.25 | 0.70 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.16% | 51.53% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 8cm | < 99% | Top | 13.05 | 0.74 |
| 8cm | < 99% | Bottom | 13.22 | 0.73 |
| 8cm | < 99% | Left | 13.21 | 0.78 |
| 8cm | < 99% | Right | 13.13 | 0.78 |
| 8cm | < 99% | Front | 13.27 | 0.58 |
| 8cm | < 99% | Rear | 13.16 | 0.70 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.16% | 47.85% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm | < 1% | Top | 12.47 | 0.64 |
| 10cm | < 1% | Bottom | 12.51 | 0.64 |
| 10cm | < 1% | Left | 12.44 | 0.57 |
| 10cm | < 1% | Right | 12.27 | 0.61 |
| 10cm | < 1% | Front | 12.32 | 0.63 |
| 10cm | < 1% | Rear | 12.32 | 0.63 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.04% | 39.26% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm | < 50% | Top | 12.44 | 0.56 |
| 10cm | < 50% | Bottom | 12.50 | 0.56 |
| 10cm | < 50% | Left | 12.41 | 0.52 |
| 10cm | < 50% | Right | 12.22 | 0.60 |
| 10cm | < 50% | Front | 12.23 | 0.58 |
| 10cm | < 50% | Rear | 12.31 | 0.61 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.04% | 37.42% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 10cm | < 99% | Top | 12.38 | 0.47 |
| 10cm | < 99% | Bottom | 12.48 | 0.55 |
| 10cm | < 99% | Left | 12.38 | 0.52 |
| 10cm | < 99% | Right | 12.16 | 0.52 |
| 10cm | < 99% | Front | 12.19 | 0.48 |
| 10cm | < 99% | Rear | 12.30 | 0.59 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 2.03% | 36.20% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm | < 1% | Top | 11.63 | 0.55 |
| 12cm | < 1% | Bottom | 11.70 | 0.52 |
| 12cm | < 1% | Left | 11.55 | 0.47 |
| 12cm | < 1% | Right | 11.45 | 0.52 |
| 12cm | < 1% | Front | 11.53 | 0.49 |
| 12cm | < 1% | Rear | 11.54 | 0.46 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.91% | 33.74% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm | < 50% | Top | 11.56 | 0.51 |
| 12cm | < 50% | Bottom | 11.70 | 0.49 |
| 12cm | < 50% | Left | 11.50 | 0.43 |
| 12cm | < 50% | Right | 11.37 | 0.49 |
| 12cm | < 50% | Front | 11.44 | 0.48 |
| 12cm | < 50% | Rear | 11.47 | 0.41 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.91% | 31.29% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 12cm | < 99% | Top | 11.52 | 0.47 |
| 12cm | < 99% | Bottom | 11.61 | 0.41 |
| 12cm | < 99% | Left | 11.50 | 0.42 |
| 12cm | < 99% | Right | 11.36 | 0.47 |
| 12cm | < 99% | Front | 11.44 | 0.44 |
| 12cm | < 99% | Rear | 11.43 | 0.39 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.89% | 28.83% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm | < 1% | Top | 10.92 | 0.49 |
| 14cm | < 1% | Bottom | 10.90 | 0.44 |
| 14cm | < 1% | Left | 10.80 | 0.45 |
| 14cm | < 1% | Right | 10.76 | 0.44 |
| 14cm | < 1% | Front | 10.77 | 0.43 |
| 14cm | < 1% | Rear | 10.86 | 0.49 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.78% | 30.06% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm | < 50% | Top | 10.90 | 0.48 |
| 14cm | < 50% | Bottom | 10.87 | 0.35 |
| 14cm | < 50% | Left | 10.79 | 0.35 |
| 14cm | < 50% | Right | 10.71 | 0.36 |
| 14cm | < 50% | Front | 10.67 | 0.43 |
| 14cm | < 50% | Rear | 10.84 | 0.47 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.78% | 29.45% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 14cm | < 99% | Top | 10.82 | 0.42 |
| 14cm | < 99% | Bottom | 10.87 | 0.35 |
| 14cm | < 99% | Left | 10.71 | 0.29 |
| 14cm | < 99% | Right | 10.66 | 0.27 |
| 14cm | < 99% | Front | 10.57 | 0.37 |
| 14cm | < 99% | Rear | 10.76 | 0.42 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.77% | 25.77% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm | < 1% | Top | 9.11 | 0.34 |
| 18cm | < 1% | Bottom | 9.04 | 0.35 |
| 18cm | < 1% | Left | 8.97 | 0.24 |
| 18cm | < 1% | Right | 8.92 | 0.28 |
| 18cm | < 1% | Front | 9.07 | 0.28 |
| 18cm | < 1% | Rear | 8.92 | 0.28 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.48% | 21.47% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm | < 50% | Top | 9.08 | 0.34 |
| 18cm | < 50% | Bottom | 9.01 | 0.31 |
| 18cm | < 50% | Left | 8.91 | 0.14 |
| 18cm | < 50% | Right | 8.82 | 0.28 |
| 18cm | < 50% | Front | 9.00 | 0.24 |
| 18cm | < 50% | Rear | 8.85 | 0.25 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.48% | 20.86% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 18cm | < 99% | Top | 9.02 | 0.26 |
| 18cm | < 99% | Bottom | 8.94 | 0.29 |
| 18cm | < 99% | Left | 8.89 | 0.10 |
| 18cm | < 99% | Right | 8.78 | 0.22 |
| 18cm | < 99% | Front | 8.94 | 0.15 |
| 18cm | < 99% | Rear | 8.84 | 0.18 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.47% | 17.79% |


| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm | < 1% | Top | 8.05 | 0.22 |
| 20cm | < 1% | Bottom | 8.11 | 0.21 |
| 20cm | < 1% | Left | 7.95 | 0.20 |
| 20cm | < 1% | Right | 8.00 | 0.17 |
| 20cm | < 1% | Front | 7.90 | 0.21 |
| 20cm | < 1% | Rear | 8.04 | 0.16 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.32% | 13.50% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm | < 50% | Top | 7.96 | 0.15 |
| 20cm | < 50% | Bottom | 8.02 | 0.21 |
| 20cm | < 50% | Left | 7.93 | 0.12 |
| 20cm | < 50% | Right | 7.91 | 0.10 |
| 20cm | < 50% | Front | 7.88 | 0.11 |
| 20cm | < 50% | Rear | 7.94 | 0.07 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.31% | 12.88% |

| MPE | | | | |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm | < 99% | Top | 7.92 | 0.07 |
| 20cm | < 99% | Bottom | 8.00 | 0.07 |
| 20cm | < 99% | Left | 7.85 | 0.03 |
| 20cm | < 99% | Right | 7.85 | 0.11 |
| 20cm | < 99% | Front | 7.84 | 0.02 |
| 20cm | < 99% | Rear | 7.91 | 0.02 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 1.30% | 6.75% |

5 Test Setup photo

0cm-Botton

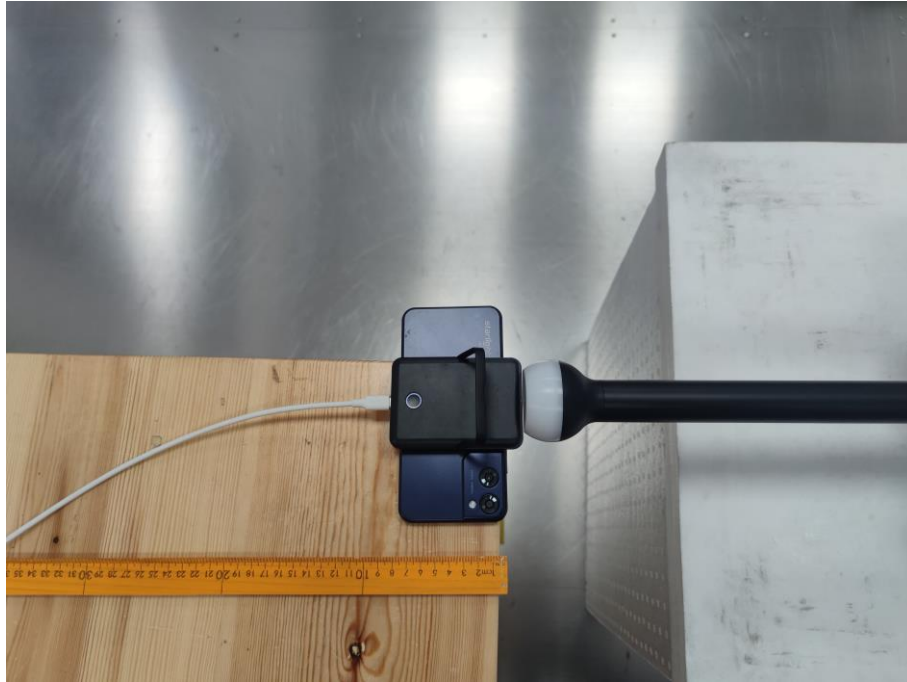

0cm-Front



. 0cm-Left



. 0cm-Rear



. 0cm-Right



. 0cm-Top



End of report