

FCC Part 15.247

TEST REPORT

For

Shanghai Xiangcheng Communication

Technology Co., Ltd

6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District,
Shanghai, China

FCC ID: 2A2UU-A1


Report Type:
Original Report

Product Type:
80mm Receipt Printer

Report Producer : Coco Lin

Report Number : RLK231024085RF02

Report Date : 2024-03-20

Reviewed By: Rory Cheng 

Prepared By:

Bay Area Compliance Laboratories Corp.(Linkou Laboratory)

No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382,

Taiwan (R.O.C.)

Tel: +886 (3)3961072; Fax: +886 (3) 3961027

www.bacl.com.tw

Revision History

| Revision | No. | Report Number | Issue Date | Description | Author/ Revised by |
|----------|--------------|------------------|------------|-----------------|-----------------------|
| 0.0 | RLK231024085 | RLK231024085RF02 | 2024-03-20 | Original Report | Coco Lin |

TABLE OF CONTENTS

| | | |
|-----------|---|-----------|
| 1 | General Information | 5 |
| 1.1 | Product Description for Equipment under Test (EUT) | 5 |
| 1.2 | Objective | 5 |
| 1.3 | Test Methodology | 6 |
| 1.4 | Statement of Compliance | 6 |
| 1.5 | Measurement Uncertainty | 6 |
| 1.6 | Environmental Conditions | 7 |
| 1.7 | Test Facility | 7 |
| 2 | System Test Configuration | 8 |
| 2.1 | Description of Test Configuration | 8 |
| 2.2 | Equipment Modifications | 8 |
| 2.3 | EUT Exercise Software | 8 |
| 2.4 | Test Mode | 8 |
| 2.5 | Support Equipment List and Details | 8 |
| 2.6 | External Cable List and Details | 9 |
| 2.7 | Block Diagram of Test Setup | 9 |
| 2.8 | Duty Cycle | 12 |
| 3 | Summary of Test Results | 13 |
| 4 | Test Equipment List and Details | 14 |
| 5 | FCC §15.247(i), §1.1307(b)(3), §2.1091 - RF Exposure | 15 |
| 5.1 | Applicable Standard | 15 |
| 5.2 | RF Exposure Evaluation Result | 16 |
| 6 | FCC §15.203 – Antenna Requirements | 17 |
| 6.1 | Applicable Standard | 17 |
| 6.2 | Antenna List and Details | 17 |
| 7 | FCC §15.207(a) – AC Line Conducted Emissions | 18 |
| 7.1 | Applicable Standard | 18 |
| 7.2 | EUT Setup | 18 |
| 7.3 | EMI Test Receiver Setup | 19 |
| 7.4 | Test Procedure | 19 |
| 7.5 | Corrected Factor & Over Limit Calculation | 19 |
| 7.6 | Test Results | 20 |
| 8 | FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions | 21 |
| 8.1 | Applicable Standard | 21 |
| 8.2 | EUT Setup | 22 |
| 8.3 | EMI Test Receiver & Spectrum Analyzer Setup | 24 |
| 8.4 | Test Procedure | 24 |
| 8.5 | Corrected Factor & Over Limit Calculation | 24 |
| 8.6 | Test Results | 25 |
| 9 | FCC §15.247(a)(2) – 6 dB Emission Bandwidth | 35 |
| 9.1 | Applicable Standard | 35 |
| 9.2 | Test Procedure | 35 |
| 9.3 | Test Results | 35 |
| 10 | FCC §15.247(b)(3) – Maximum Output Power | 38 |

10.1 Applicable Standard 38
10.2 Test Procedure..... 38
10.3 Test Results 38
11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge 39
11.1 Applicable Standard 39
11.2 Test Procedure..... 39
11.3 Test Results 39
12 FCC §15.247(e) – Power Spectral Density 41
12.1 Applicable Standard 41
12.2 Test Procedure..... 41
12.3 Test Results 41

1 General Information

1.1 Product Description for Equipment under Test (EUT)

| | |
|------------------------------------|---|
| Applicant | Shanghai Xiangcheng Communication Technology Co., Ltd |
| | 6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China |
| Manufacturer | Shanghai Xiangcheng Communication Technology Co., Ltd |
| | 6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China |
| Brand(Trade) Name | Shanghai Xiangcheng Communication Technology Co., Ltd |
| Product (Equipment) | 80mm Receipt Printer |
| Main Model Name | A1 |
| Frequency Range | BLE(1M) : 2402 ~ 2480 MHz |
| Transmit Power | BLE(1M) Mode : -2.87 dBm |
| Modulation Technique | IBLE(1M) : GFSK |
| Power Operation (Voltage Range) | <input checked="" type="checkbox"/> DC 24V <input type="checkbox"/> Battery <input type="checkbox"/> DC Power Supply <input type="checkbox"/> External from USB Cable <input checked="" type="checkbox"/> External DC Adapter |
| | <input type="checkbox"/> Host System |
| Received Date | 2023/10/24 |
| Date of Test | 2023/10/31 ~ 2024/03/20 |

*All measurement and test data in this report was gathered from production sample serial number: RLK231024085-01 (Assigned by BACL, Linkou Laboratory).

1.2 Objective

This report is prepared on behalf of Shanghai Xiangcheng Communication Technology Co., Ltd in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05r02.

1.4 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

The measurement results in this report were performed at Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification. Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.5 Measurement Uncertainty

| Parameter | | Uncertainty |
|-----------------------------------|---------------|-------------|
| AC Mains | | ±3.38 (dB) |
| RF output power, conducted | | ±3.74 (dB) |
| Power Spectral Density, conducted | | ±0.69 (dBm) |
| Occupied Bandwidth | | ±0.09 (%) |
| Unwanted Emissions, conducted | | ±1.13 (dB) |
| Emissions, radiated | 9kHz~30 MHz | ±4.13 (dB) |
| | 30 MHz~1GHz | ±5.34 (dB) |
| | 1 GHz~18 GHz | ±5.89 (dB) |
| | 18 GHz~40 GHz | ±5.52 (dB) |
| Temperature | | ±0.44 (%) |
| Humidity | | ±0.78 (°C) |

1.6 Environmental Conditions

| Test Site | Test Data | Temperature (°C) | Relative Humidity (%) | ATM Pressure (hPa) | Test Engineer |
|--|---------------------------|------------------|-----------------------|--------------------|---------------|
| AC Line Conducted Emissions | 2023/11/17 | 25.5 | 58 | 1010 | Jean Lu |
| Radiation Spurious Emissions | 2023/11/01~ 2024/03/20 | 22~25 | 42~51 | 1010 | Allen Cheng |
| Conducted Spurious Emissions | 2023/11/02 | 23.4 | 53 | 1010 | Kevin Chou |
| 6 dB Emission Bandwidth | 2023/11/02 | 23.4 | 53 | 1010 | Kevin Chou |
| Maximum Output Power | 2023/11/02 | 23.4 | 53 | 1010 | Kevin Chou |
| 100 kHz Bandwidth of Frequency Band Edge | 2023/11/02 | 23.4 | 53 | 1010 | Kevin Chou |
| Power Spectral Density | 2023/11/02 | 23.4 | 53 | 1010 | Kevin Chou |

1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW1119. The Test Firm Registration No.: 311381.

2 System Test Configuration

2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 20 | 2442 |
| 1 | 2404 | -- | -- |
| 2 | 2406 | -- | -- |
| 3 | 2408 | 37 | 2476 |
| -- | -- | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

For BLE Modes were tested with channel 0, 19 and 39.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

The test software was used "FCC_Test_Tool-v2.3"

| Test Frequency | | Low | Mid | High |
|---------------------|--------|-----|-----|------|
| Power Level Setting | BLE 1M | -3 | -3 | -3 |

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

BLE 1M : 1 Mbps

2.4 Test Mode

Mode 1: Full System (model: A1) for all test item.

2.5 Support Equipment List and Details

| Description | Manufacturer | Model Number | Serial Number |
|---------------|------------------------------|----------------|---------------|
| Notebook | DELL | E6410 | 8W66SM1 |
| Adapter | Shenzhen Flypower Technology | PS65E240Y2500H | NA |
| Fixture 1 | N/A | N/A | NA |
| Cash Register | N/A | N/A | NA |
| Fixture 2 | N/A | N/A | NA |

2.6 External Cable List and Details


| Cable Description | Length (m) | From | To |
|----------------------------|------------|------|---------------|
| Power Cable | 1.2 | EUT | Charger |
| RJ45 Cable | 0.9 | EUT | Notebook |
| USB Type C Cable | 0.9 | EUT | Notebook |
| RJ11 Cable | 0.9 | EUT | Cash Register |
| USB Type A extension cable | 1.5 | NB | Fixture 1 |
| Mini USB cable | 0.2 | NB | Fixture 2 |

2.7 Block Diagram of Test Setup

See test photographs attached in setup photos for the actual connections between EUT and support equipment.


Radiation:

Below 1GHz:

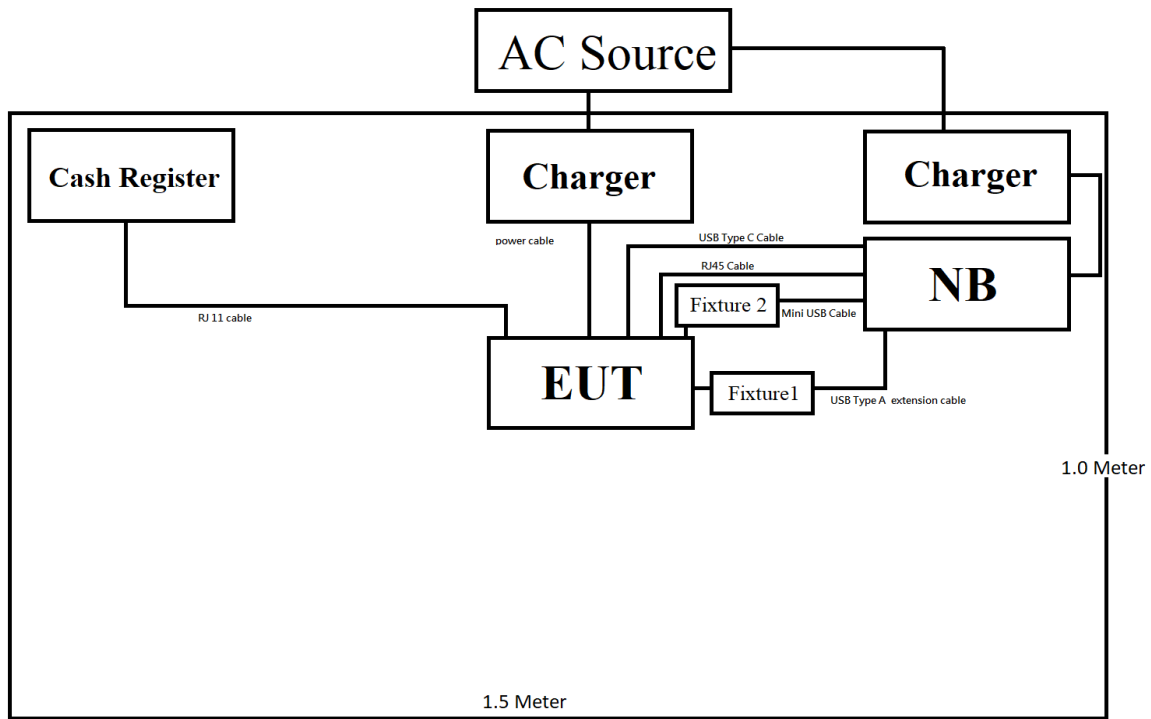


Non-Conductive Table 80cm above Ground Plane

Above 1GHz:

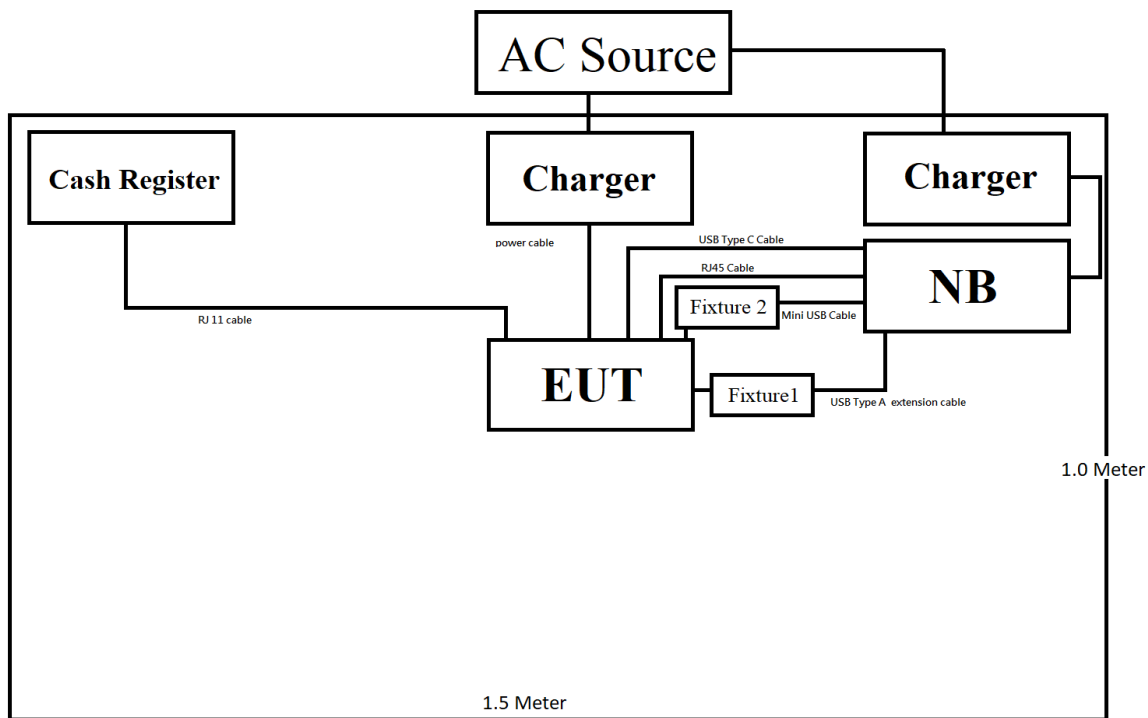


Non-Conductive Table 150cm above Ground Plane

Conduction:

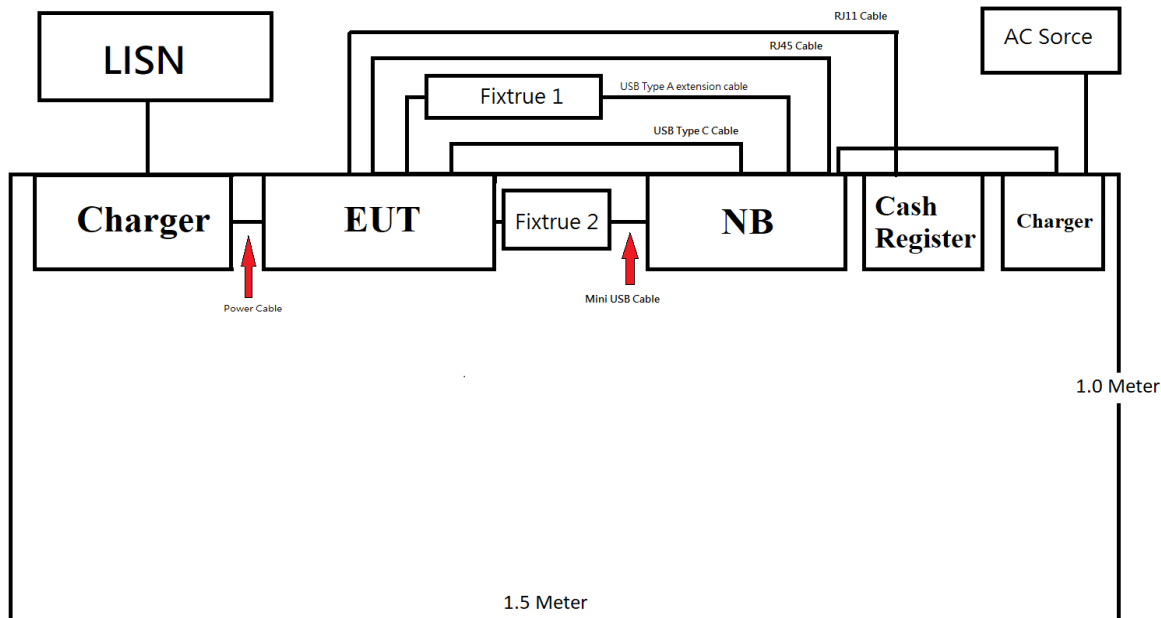

Non-Conductive Table 150cm above Ground Plane

Conducted:

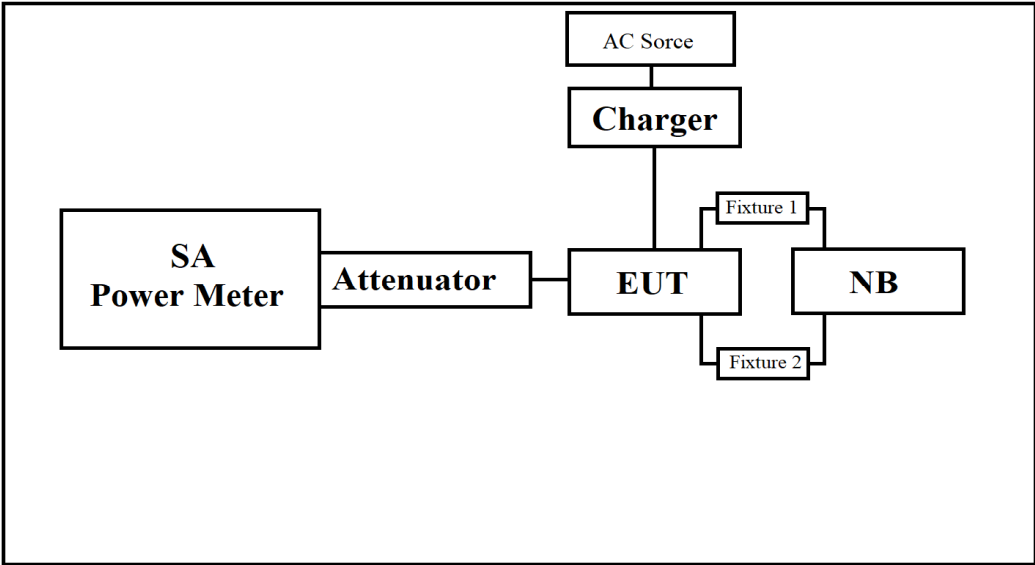

2.8 Duty Cycle


The duty cycle as below:

| Radio Mode | On Time (ms) | Off Time (ms) | Duty Cycle (%) | Duty Cycle Correction Factor(dB) | VBW Setting (kHz) |
|------------|--------------|---------------|----------------|----------------------------------|-------------------|
| BLE(1M) | 2.81 | 0.24 | 92 | 0.36 | 1 |

Please refer to t

Please refer to the following plots.

BLE (1M) Mode

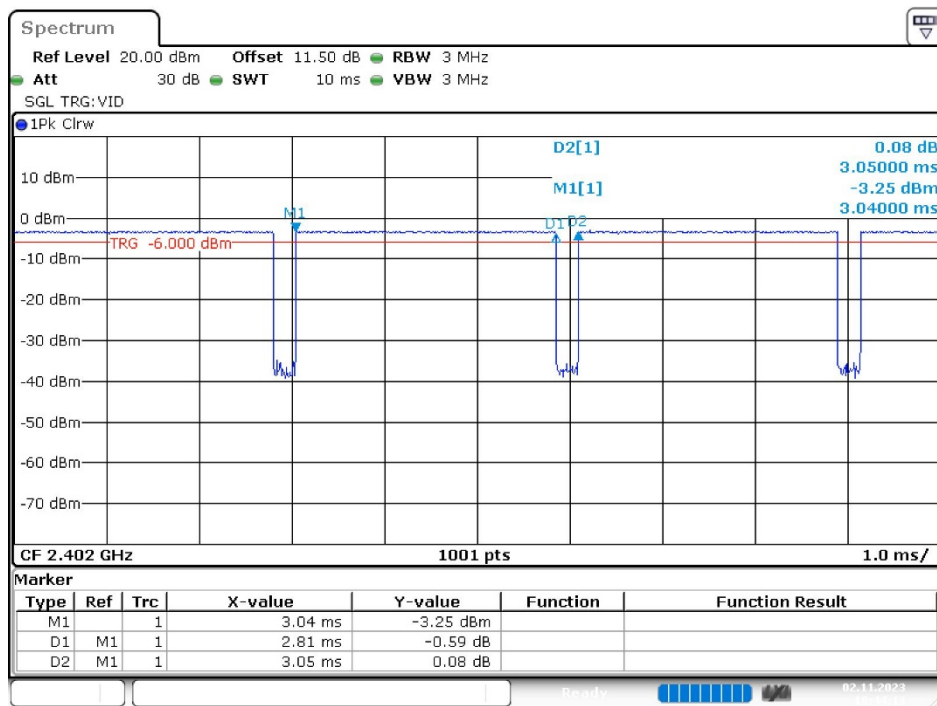

Date: 2.NOV.2023 18:44:13

3 Summary of Test Results

| FCC Rules | Description of Test | Results |
|------------------------------|--|------------|
| §15.247(i), §1.1310, §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | AC Line Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliance |
| §15.247(a)(2) | 6 dB Emission Bandwidth | Compliance |
| §15.247(b)(3) | Maximum Peak Output Power | Compliance |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |

4 Test Equipment List and Details

| Description | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|-----------------------------|------------------------------|-------------------------|------------------|----------------------|
| AC Line Conduction Room (CON-A) | | | | | |
| Two-Line-V- Network | Rohde & Schwarz | ENV216 | 100037 | 2023/09/13 | 2024/09/11 |
| EMI Test Receiver | Rohde & Schwarz | ESCI 7 | 100769 | 2023/03/09 | 2024/03/07 |
| Pulse Limiter | SCHWARZBECK | VTSD 9561-F | 00432 | 2023/08/14 | 2024/08/12 |
| RF Cable | EMCI | EMCCFD300 -BM-BM- 3000 | 221013 | 2023/10/17 | 2024/10/15 |
| Software | Audix | e3 v9 | E3LK-03 | N.C.R | N.C.R |
| Radiation 3M Room (966-B) | | | | | |
| Bilog Antenna | SUNOL SCIENCES & EMCI | JB3 & N-6-06 | A071318 & AT-N0670 | 2023/08/24 | 2024/08/22 |
| Active Loop Antenna | ETS-Lindgren | 6502 | 0001-3322 | 2023/03/23 | 2024/03/22 |
| Horn Antenna | ETS-Lindgren | 3115 | 40736 | 2023/04/06 | 2024/04/04 |
| Horn Antenna | ETS-Lindgren | 3160-09 | 00123853 | 2023/08/29 | 2024/08/27 |
| Horn Antenna | ETS-Lindgren | 3160-10 | 00123856 | 2023/08/29 | 2024/08/27 |
| Amplifier | Sonoma | 310N | 250609 | 2023/09/13 | 2024/09/11 |
| Preamplifier | A.H. Systems | PAM-0118P | 479 | 2023/09/07 | 2024/09/05 |
| ESR EMI Test Receiver | Rohde & Schwarz | ESR3 | 102430 | 2023/04/20 | 2024/04/18 |
| Signal and Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101456 | 2023/05/23 | 2024/05/21 |
| Microflex Cable (1m) | EMCI | EMCI02-KM- KM-1000 | 180524 | 2023/08/03 | 2024/08/01 |
| Microflex Cable (2m) | EMCI | EMCI06-SM- SM-2000 | 180516 | 2023/08/03 | 2024/08/01 |
| Microflex Cable (8m) | UTIFLEX | UFA210A-1- 3149-300300 | MFR 64639 232490-002 | 2023/08/03 | 2024/08/01 |
| Band Reject Filter | Xi'an Xingbo | XBLBQ- DZA81 | 190329-1-07 | 2023/04/06 | 2024/04/05 |
| High Pass Filter | Xi'an Xingbo | XBLBQ- GTA54 | 190329-1-27 | 2023/04/06 | 2024/04/05 |
| Band Reject Filter | Xi'an Xingbo | XBLBQ- DTD10 | 200121-3-28 | 2023/04/06 | 2024/04/05 |
| Software | AUDIX | E3 V9 | E3LK-02 | N.C.R | N.C.R |
| Conducted Room | | | | | |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101938 | 2022/12/7 | 2023/12/6 |
| Cable | MTJ | MT40S | 620620- MT40S-100 | 2022/12/23 | 2023/12/22 |
| USB Wideband Power Sensor | AGILENT | U2021XA | MY54080011 | 2023/08/30 | 2024/08/28 |
| 10dB Attenuator | MCL | BW-S10W5+ | 605 | 2023/03/22 | 2024/03/20 |

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.247(i), §1.1307(b)(3), §2.1091 - RF Exposure

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §2.1091, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

For single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

| RF Source frequency (MHz) | Threshold ERP (watts) |
|---------------------------|--|
| 0.3-1.34 | 1,920 R ² . |
| 1.34-30 | 3,450 R ² /f ² . |
| 30-300 | 3.83 R ² . |
| 300-1,500 | 0.0128 R ² f. |
| 1,500-100,000 | 19.2R ² . |

For multiple RF sources: Multiple RF sources are exempt if: in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

5.2 RF Exposure Evaluation Result

Project info

| Band | Freq (MHz) | Tune up Power (dBm) | Distances (mm) | Duty (%) | Tune up Power (mW) | ERP (dBm) | ERP (mW) |
|-----------|------------|---------------------|----------------|----------|--------------------|-----------|----------|
| BLE | 2402 | -2.5 | 200 | 100% | 0.56 | -3.05 | 0.50 |
| 2.4G WIFI | 2462 | 15.53 | 200 | 100% | 35.73 | 17.15 | 51.88 |

§ 1.1307(b)(3)(i)(A) method is not applicable.

| Band | Freq (MHz) | Result |
|-----------|------------|------------|
| BLE | 2402 | exempt |
| 2.4G WIFI | 2462 | not exempt |

§ 1.1307(b)(3)(i)(C)

| Band | Freq (MHz) | $\lambda/2\pi$ (mm) | Distances applies | ERP Limit (mW) | Result |
|-----------|------------|---------------------|-------------------|----------------|--------|
| BLE | 2402 | 19.88 | apply | 768.00 | exempt |
| 2.4G WIFI | 2462 | 19.39 | apply | 768.00 | exempt |

The minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates

ERP (watts) is no more than the calculated value prescribed for that frequency

R must be at least $\lambda / 2\pi$

λ is the free-space operating wavelength in meters

Simultaneous Analysis

| Band | Freq (MHz) | Simultaneous TX | Ratio |
|---------------------------------|------------|-----------------|-------|
| BLE | 2402 | O | 0.001 |
| 2.4G WIFI | 2462 | O | 0.068 |
| Simultaneous Analysis (Limit 1) | | | 0.068 |

The Wi-Fi data in the report comes form RXA1709-0323RF02R3 and FCC ID: 2AC7Z-ESPWROOM02D, issued by TA Technology (Shanghai) Co., Ltd.

The BLE and Wi-Fi can transmit simultaneously.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{BT}/limit + ERP_{Wi-Fi}/limit = 0.5/768 + 51.88/768 = 0.068 < 1.0$

So simultaneous exposure is compliant.

Result: The device compliant.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

6.2 Antenna List and Details

| Manufacturer | Type | Antenna Gain | Impedance |
|---------------------------------|-------------|--------------|-----------|
| Gan zhou Sun&Lynn Circuits.,Ltd | PCB Antenna | 1.6 dBi | 50Ω |

Result: Compliance

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard

According to §15.207


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|--------------------------------|------------------------|-----------------|
| | Quasi-Peak | Average |
| 0.15-0.5 | 66 to 56 Note 1 | 56 to 46 Note 2 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

7.2 EUT Setup

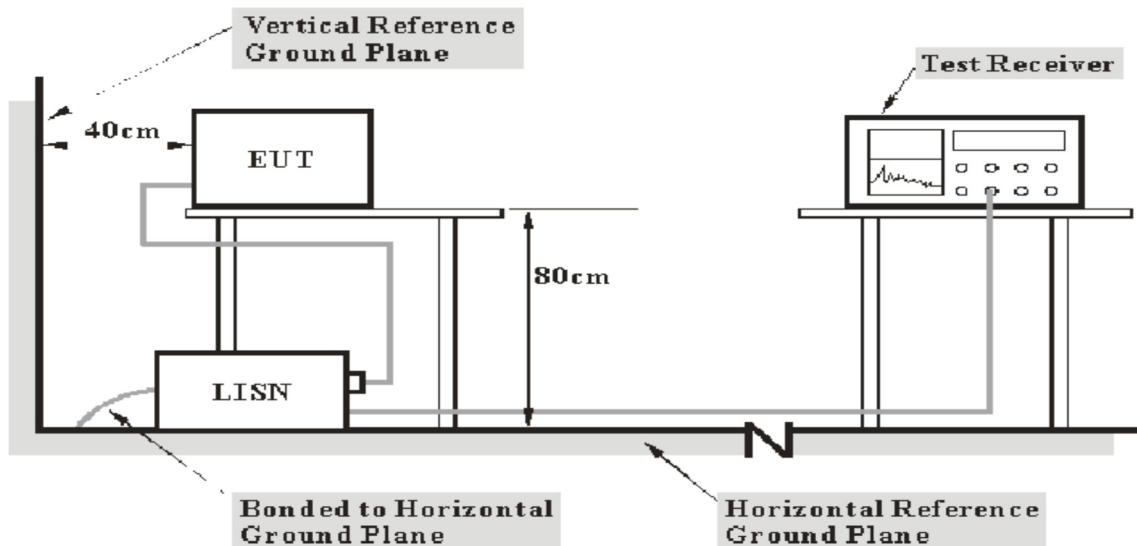

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

| Frequency Range | IF B/W |
|-----------------|--------|
| 150kHz – 30MHz | 9kHz |

7.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.5 Corrected Factor & Over Limit Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:


$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

7.6 Test Results

Test Mode: Transmitting

Main: AC120 V, 60 Hz

worst case is BLE mode Middle channel

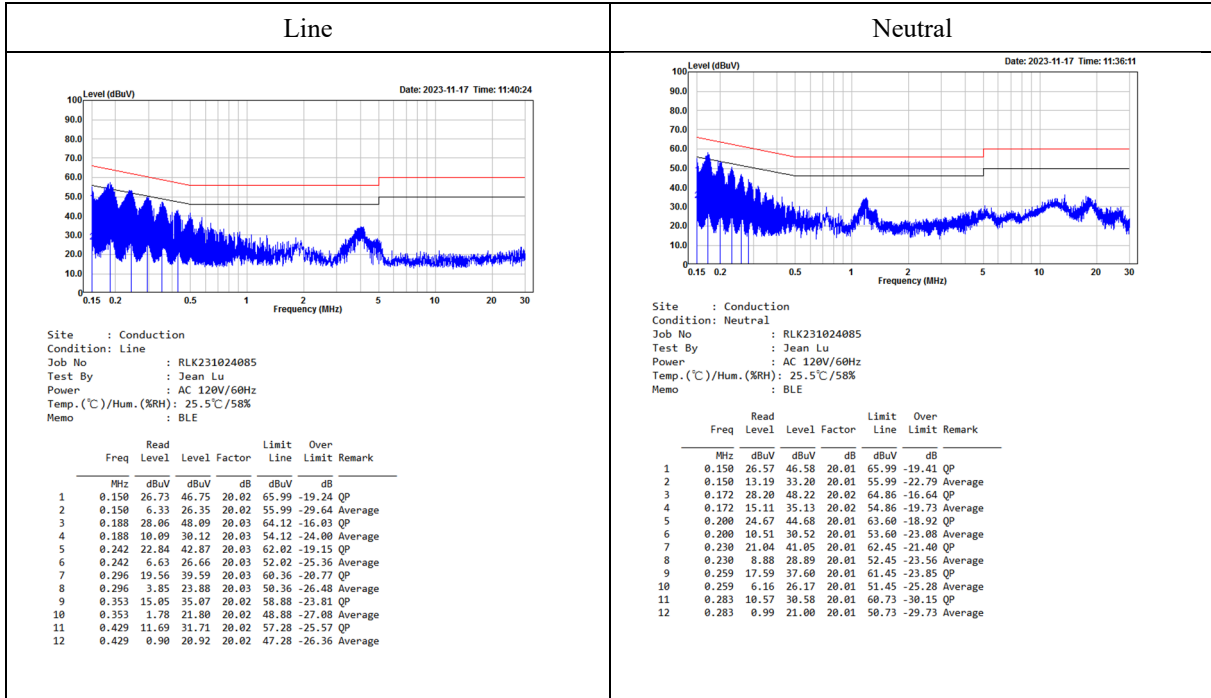

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110 | 16.42 – 16.423 | 608 – 614 | 4. 5 – 5. 15 |
| 0.495 – 0.505 | 16.69475 – 16.69525 | 960 – 1240 | 5. 35 – 5. 46 |
| 2.1735 – 2.1905 | 16.80425 – 16.80475 | 1300 – 1427 | 7.25 – 7.75 |
| 4.125 – 4.128 | 25.5 – 25.67 | 1435 – 1626.5 | 8.025 – 8.5 |
| 4.17725 – 4.17775 | 37.5 – 38.25 | 1645.5 – 1646.5 | 9.0 – 9.2 |
| 4.20725 – 4.20775 | 73 – 74.6 | 1660 – 1710 | 9.3 – 9.5 |
| 6.215 – 6.218 | 74.8 – 75.2 | 1718.8 – 1722.2 | 10.6 – 12.7 |
| 6.26775 – 6.26825 | 108 – 121.94 | 2200 – 2300 | 13.25 – 13.4 |
| 6.31175 – 6.31225 | 123 – 138 | 2310 – 2390 | 14.47 – 14.5 |
| 8.291 – 8.294 | 149.9 – 150.05 | 2483.5 – 2500 | 15.35 – 16.2 |
| 8.362 – 8.366 | 156.52475 – 156.52525 | 2690 – 2900 | 17.7 – 21.4 |
| 8.37625 – 8.38675 | 156.7 – 156.9 | 3260 – 3267 | 22.01 – 23.12 |
| 8.41425 – 8.41475 | 162.0125 – 167.17 | 3.332 – 3.339 | 23.6 – 24.0 |
| 12.29 – 12.293 | 167.72 – 173.2 | 3 3458 – 3 358 | 31.2 – 31.8 |
| 12.51975 – 12.52025 | 240 – 285 | 3.600 – 4.400 | 36.43 – 36.5 |
| 12.57675 – 12.57725 | 322 – 335.4 | | Above 38.6 |
| 13.36 – 13.41 | 399.9 – 410 | | |

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to ANSI C63.10-2013, section 5.3.3


Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field, and the emissions to be measured can be detected by the measurement equipment (see 4.3.4).

Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. Measurements from 18 GHz to 40 GHz are typically made at distances significantly less than 3 m from the EUT. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements or inverse of linear distance-squared for power-density measurements).


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 EUT Setup


9kHz-30MHz:

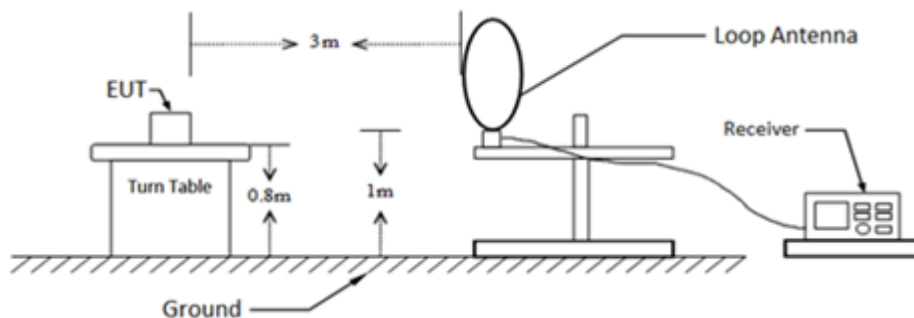


30MHz to 1 GHz:

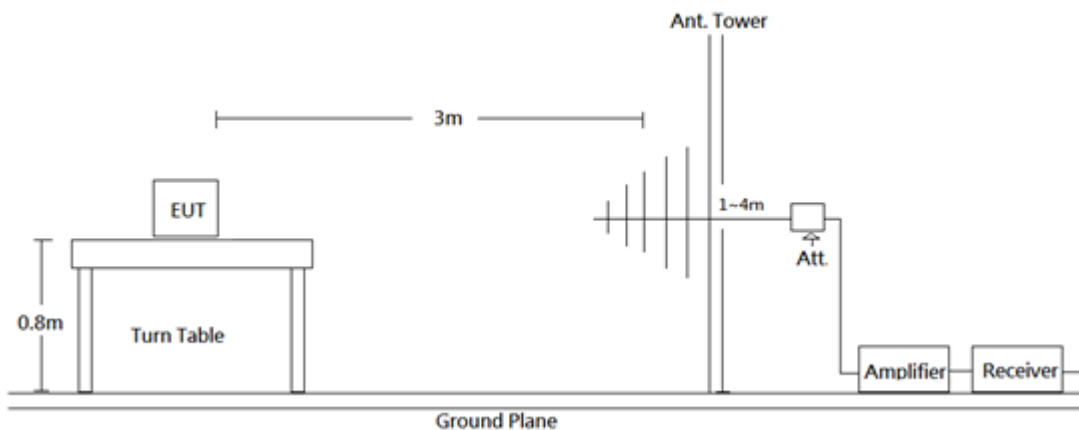

1-18 GHz:

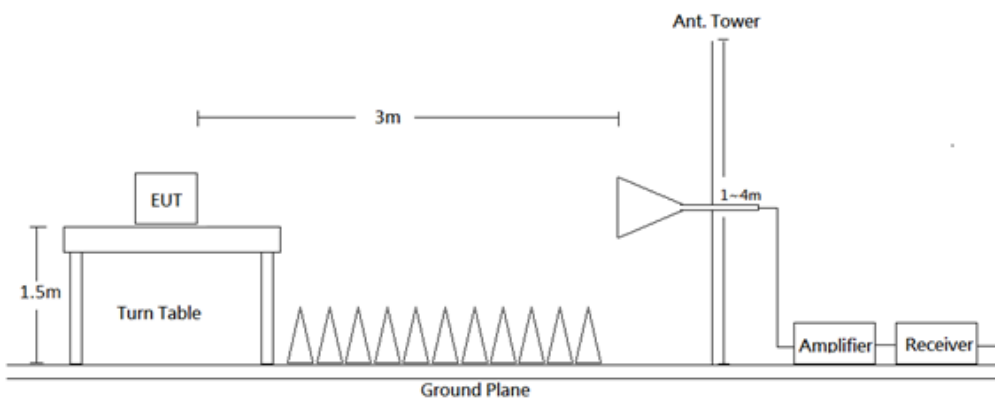

18-26.5 GHz:

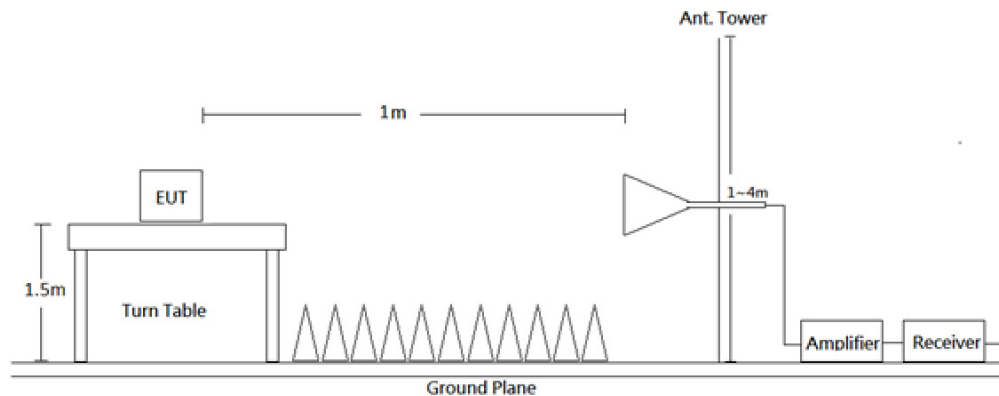

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

| Frequency Range | RBW | VBW | Measurement method |
|------------------|---------|--------|--------------------|
| 9 kHz - 150 kHz | 300 Hz | 1 kHz | QP/AV |
| 150 kHz - 30 MHz | 10 kHz | 30 kHz | QP/AV |
| 30-1000 MHz | 120 kHz | / | QP |
| Above 1 GHz | 1 MHz | 3 MHz | PK |
| | 1 MHz | 10 Hz | Ave |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.5 Corrected Factor & Over Limit Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Over Limit} = \text{Result} - \text{Limit}$$

8.6 Test Results

Test Mode: Transmitting


(Loop Antenna Pre-scan with three orthogonal axis, and worse case as Y axis.)

9kHz-30MHz(worst case is BLE mode Middle channel)

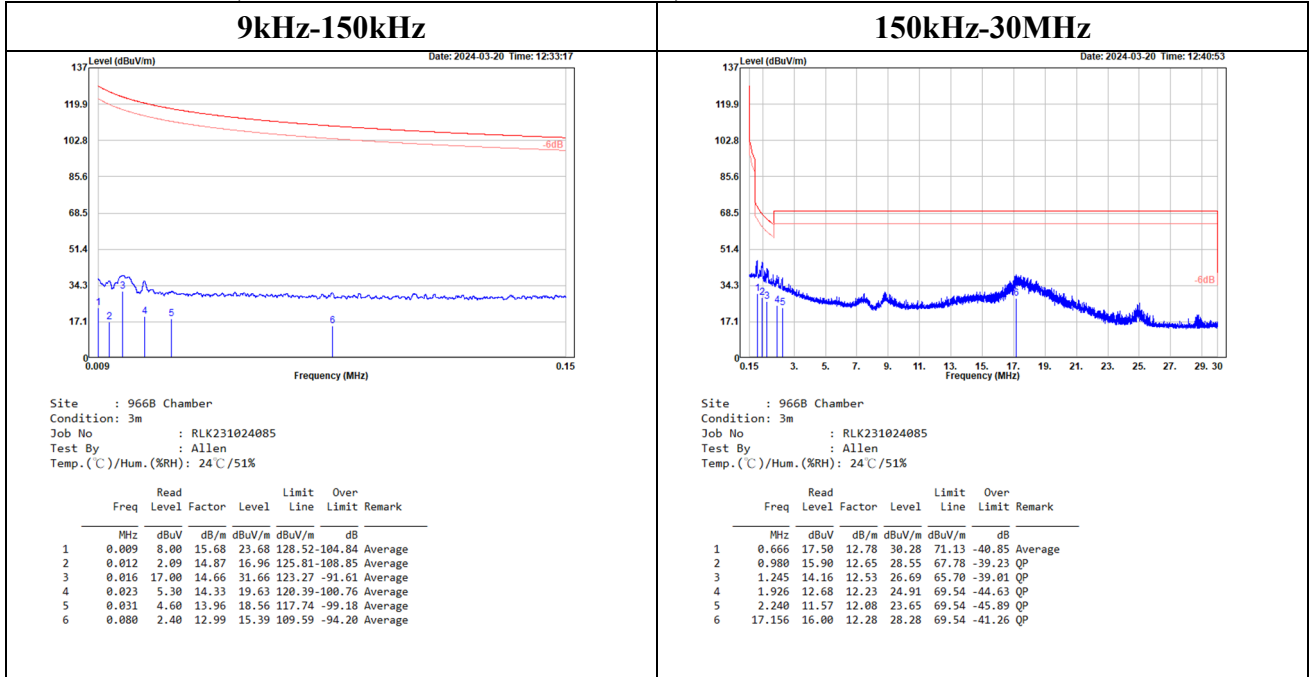


30MHz-1GHz:

Low channel

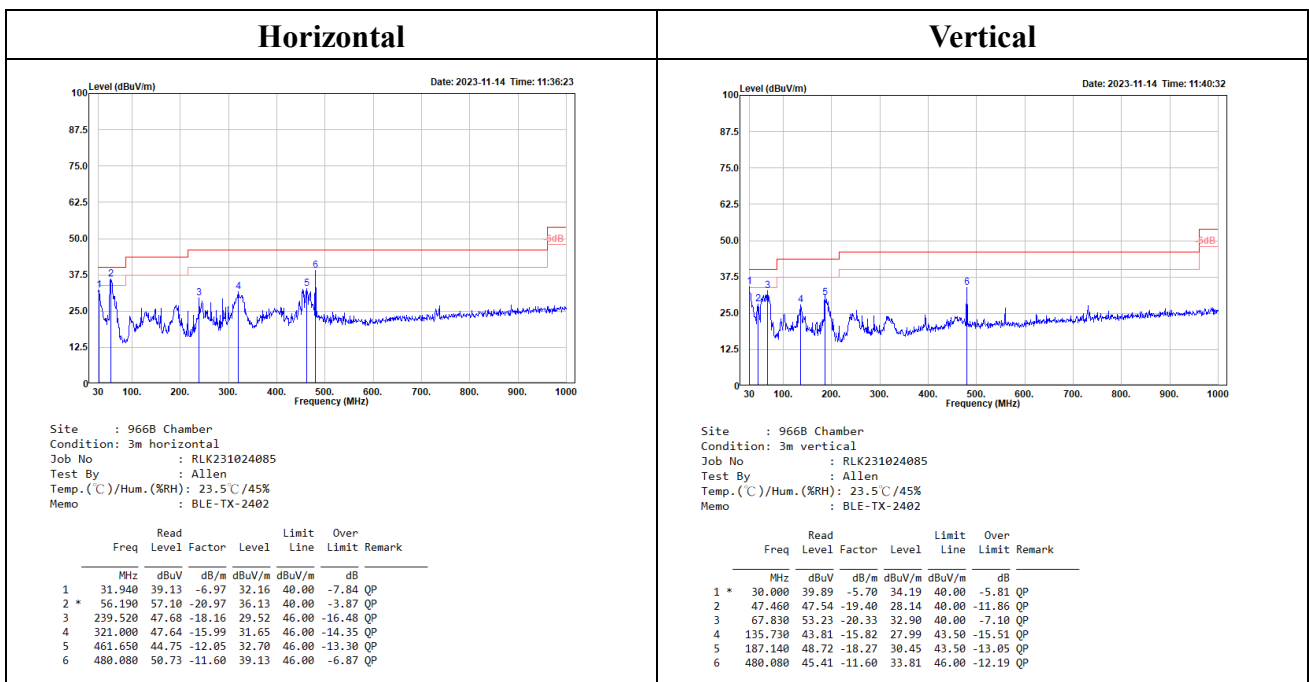


Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Middle channel

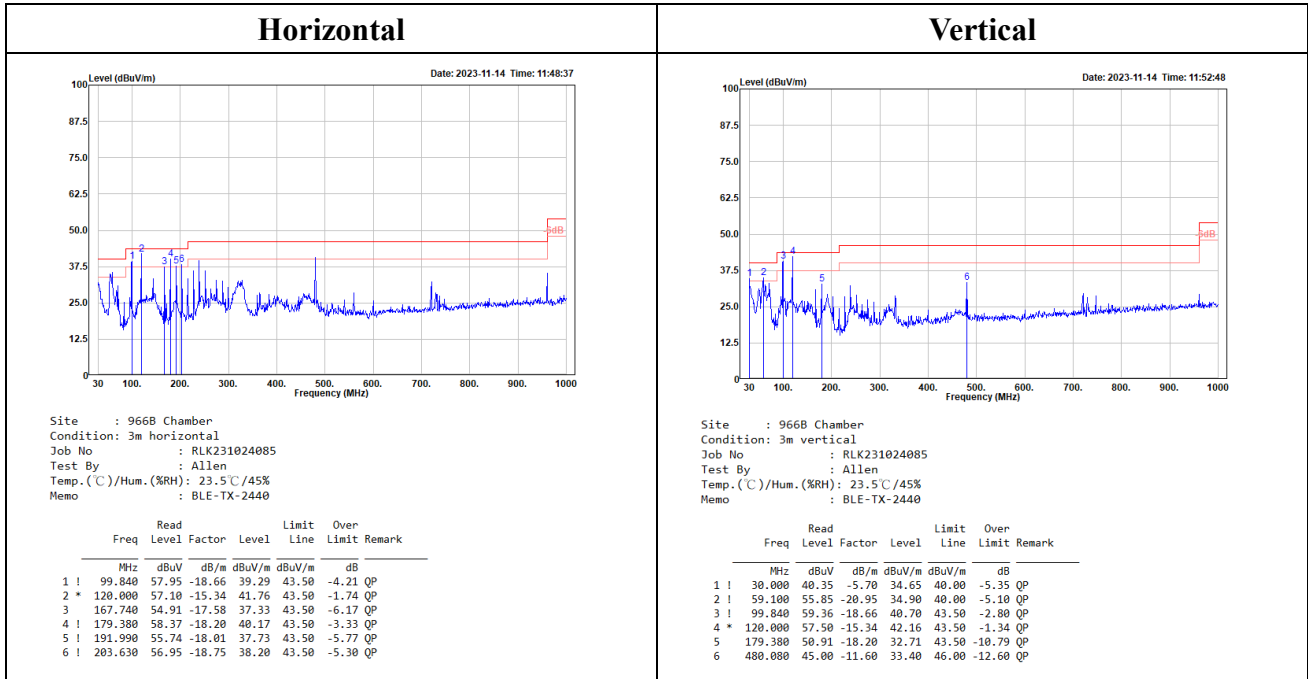

High channel

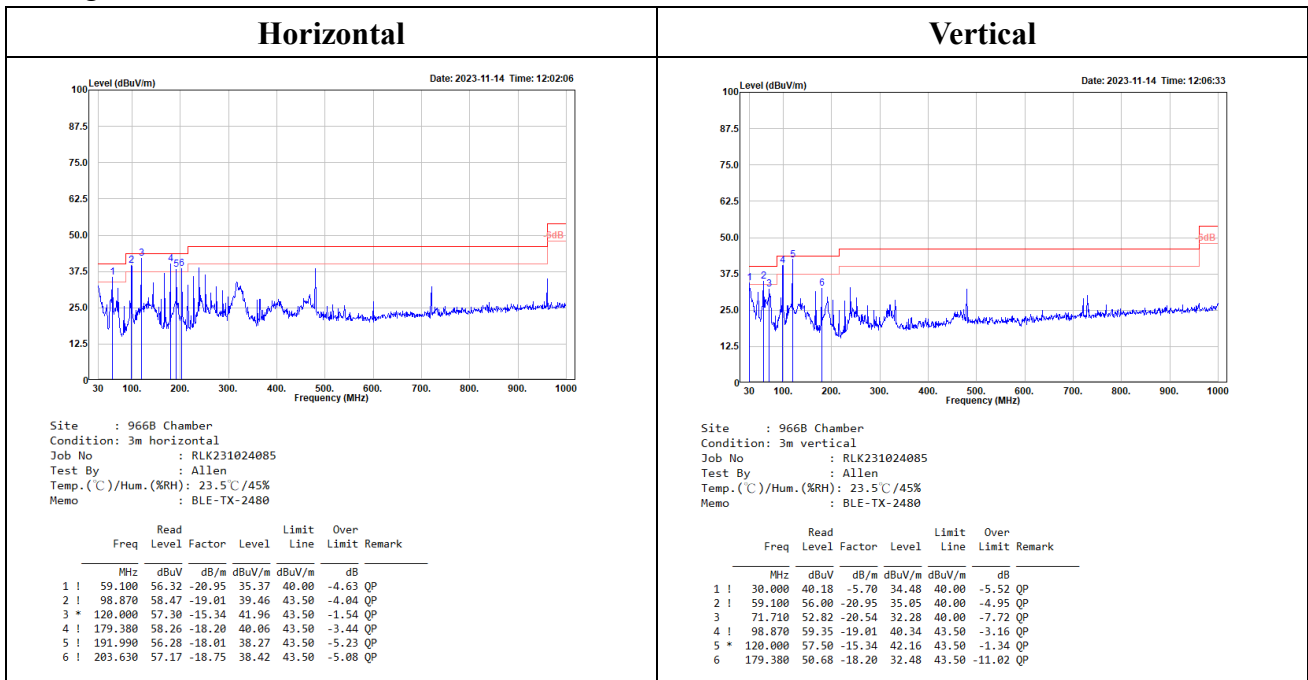


Level (Result) = Reading + Factor.

Over Limit = Level – Limit.


Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.


Band-Edge:
Low channel

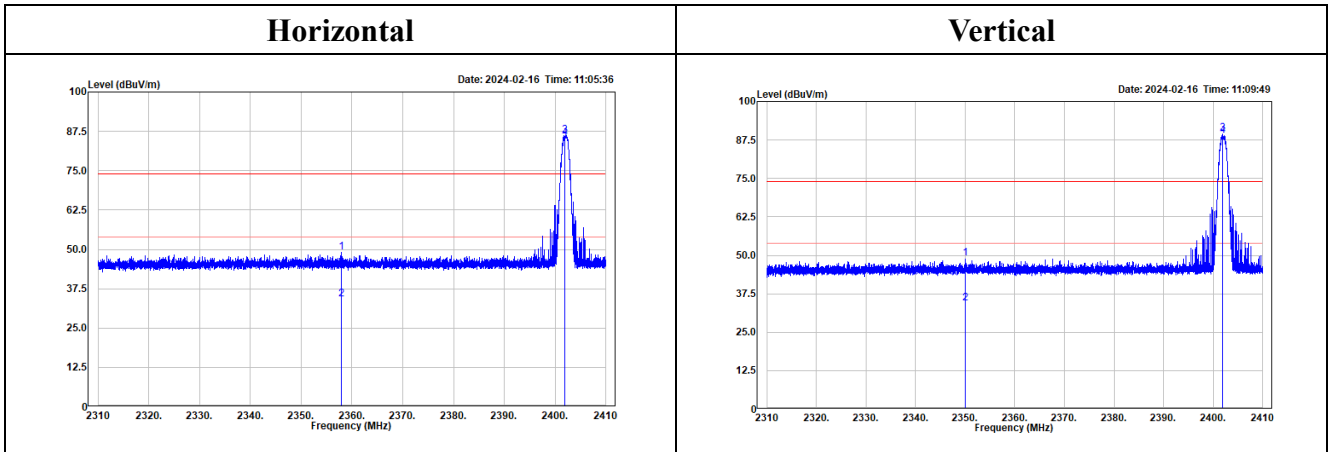


Middle channel

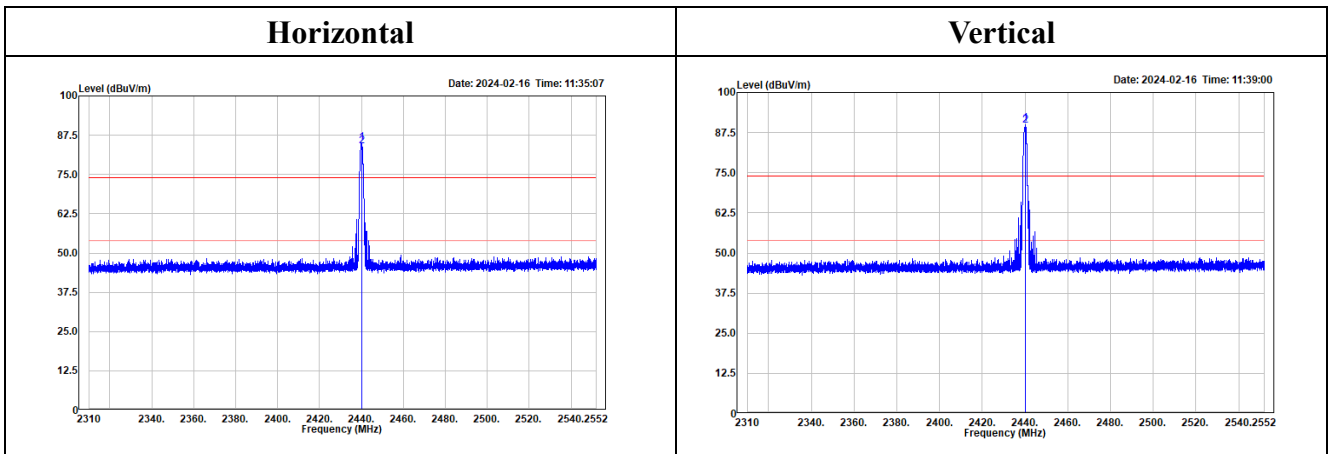


High channel

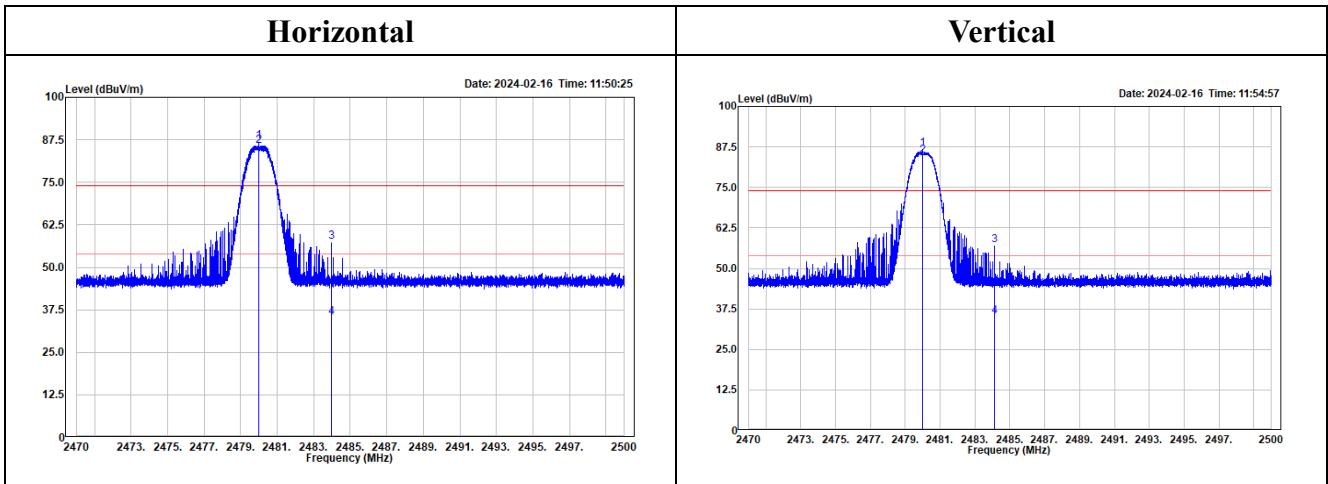

1GHz-18GHz: (worst case is BLE mode Middle channel)

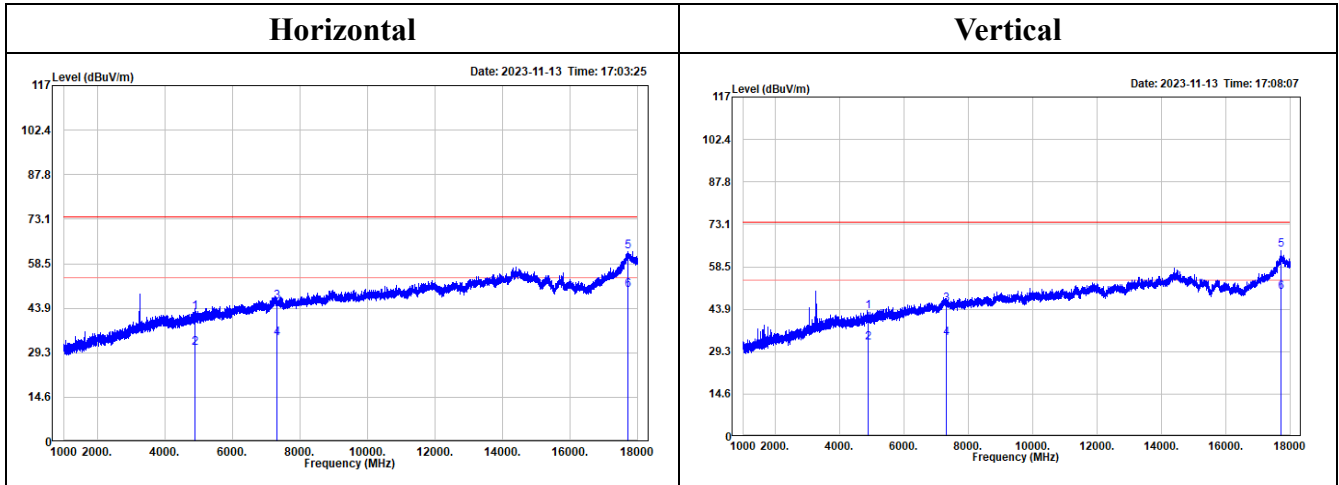

18GHz-26.5GHz:

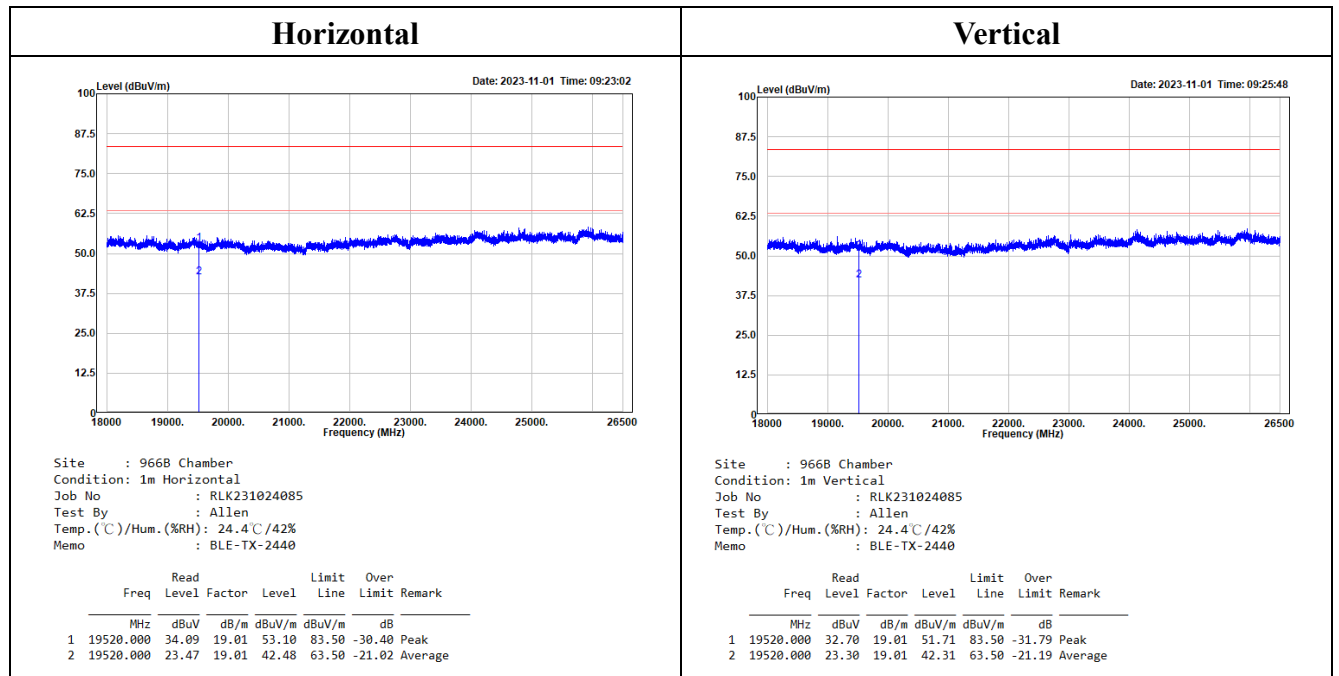

Site : 966B Chamber
 Condition: 1m Horizontal
 Job No : RLK231024085
 Test By : Allen
 Temp. (°C)/Hum. (%RH): 24.4°C /42%
 Memo : BLE-TX-2440

| | Read | | Limit | Over | |
|------|-----------|--------|--------|--------|----------------------|
| Freq | Level | Factor | Level | Line | Limit Remark |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB |
| 1 | 19520.000 | 34.09 | 19.01 | 53.10 | 83.50 -30.40 Peak |
| 2 | 19520.000 | 23.47 | 19.01 | 42.48 | 63.50 -21.02 Average |

Site : 966B Chamber
 Condition: 1m Vertical
 Job No : RLK231024085
 Test By : Allen
 Temp. (°C)/Hum. (%RH): 24.4°C /42%
 Memo : BLE-TX-2440

| | Read | | Limit | Over | |
|------|-----------|--------|--------|--------|----------------------|
| Freq | Level | Factor | Level | Line | Limit Remark |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB |
| 1 | 19520.000 | 32.70 | 19.01 | 51.71 | 83.50 -31.79 Peak |
| 2 | 19520.000 | 23.30 | 19.01 | 42.31 | 63.50 -21.19 Average |

Above 1GHz

Horizontal

| Low channel | | | | | | | |
|--------------------|-----------|-------|--------|--------|--------|--------|---------|
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2357.960 | 52.65 | -3.68 | 48.97 | 74.00 | -25.03 | Peak |
| 2 | 2357.960 | 37.88 | -3.68 | 34.20 | 54.00 | -19.80 | Average |
| 3 | 2402.000 | 90.09 | -3.78 | 86.31 | ----- | ----- | Peak |
| 4 | 2402.000 | 89.12 | -3.78 | 85.34 | ----- | ----- | Average |
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4804.000 | 35.36 | 3.69 | 39.05 | 74.00 | -34.95 | Peak |
| 2 | 4804.000 | 25.36 | 3.69 | 29.05 | 54.00 | -24.95 | Average |
| 3 | 7206.000 | 35.69 | 9.62 | 45.31 | 74.00 | -28.69 | Peak |
| 4 | 7206.000 | 24.24 | 9.62 | 33.86 | 54.00 | -20.14 | Average |
| 5 | 17715.600 | 36.11 | 26.65 | 62.76 | 74.00 | -11.24 | Peak |
| 6 | 17715.600 | 23.09 | 26.65 | 49.74 | 54.00 | -4.26 | Average |

| Middle channel | | | | | | | |
|-----------------------|-----------|-------|--------|--------|--------|--------|---------|
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2440.000 | 88.77 | -3.58 | 85.19 | ----- | ----- | Peak |
| 2 | 2440.000 | 87.55 | -3.58 | 83.97 | ----- | ----- | Average |
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4880.000 | 38.32 | 4.01 | 42.33 | 74.00 | -31.67 | Peak |
| 2 | 4880.000 | 26.76 | 4.01 | 30.77 | 54.00 | -23.23 | Average |
| 3 | 7320.000 | 36.07 | 10.04 | 46.11 | 74.00 | -27.89 | Peak |
| 4 | 7320.000 | 23.80 | 10.04 | 33.84 | 54.00 | -20.16 | Average |
| 5 | 17724.000 | 35.86 | 26.66 | 62.52 | 74.00 | -11.48 | Peak |
| 6 | 17724.000 | 23.08 | 26.66 | 49.74 | 54.00 | -4.26 | Average |

| High channel | | | | | | | |
|---------------------|-----------|-------|--------|--------|--------|--------|---------|
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2480.000 | 90.35 | -3.43 | 86.92 | ----- | ----- | Peak |
| 2 | 2480.000 | 89.16 | -3.43 | 85.73 | ----- | ----- | Average |
| 3 | 2483.983 | 60.90 | -3.41 | 57.49 | 74.00 | -16.51 | Peak |
| 4 | 2483.983 | 38.76 | -3.41 | 35.35 | 54.00 | -18.65 | Average |
| | Read | | | | Limit | Over | |
| | Freq | Level | Factor | Level | Line | Limit | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4960.000 | 37.26 | 4.11 | 41.37 | 74.00 | -32.63 | Peak |
| 2 | 4960.000 | 25.24 | 4.11 | 29.35 | 54.00 | -24.65 | Average |
| 3 | 7440.000 | 36.11 | 10.08 | 46.19 | 74.00 | -27.81 | Peak |
| 4 | 7440.000 | 22.04 | 10.08 | 32.12 | 54.00 | -21.88 | Average |
| 5 | 17686.800 | 36.24 | 26.51 | 62.75 | 74.00 | -11.25 | Peak |
| 6 | 17686.800 | 22.27 | 26.51 | 48.78 | 54.00 | -5.22 | Average |

Level = Reading + Factor.

Over Limit = Level – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

| Low channel | | | | | | | |
|-------------|-----------|-------|-------|--------|--------|--------|---------|
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2350.020 | 52.65 | -3.66 | 48.99 | 74.00 | -25.01 | Peak |
| 2 | 2350.020 | 37.95 | -3.66 | 34.29 | 54.00 | -19.71 | Average |
| 3 | 2402.000 | 93.36 | -3.78 | 89.58 | ----- | ----- | Peak |
| 4 | 2402.000 | 92.78 | -3.78 | 89.00 | ----- | ----- | Average |
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4804.000 | 42.04 | 3.69 | 45.73 | 74.00 | -28.27 | Peak |
| 2 | 4804.000 | 32.10 | 3.69 | 35.79 | 54.00 | -18.21 | Average |
| 3 | 7206.000 | 36.16 | 9.62 | 45.78 | 74.00 | -28.22 | Peak |
| 4 | 7206.000 | 24.27 | 9.62 | 33.89 | 54.00 | -20.11 | Average |
| 5 | 17680.800 | 36.92 | 26.46 | 63.38 | 74.00 | -10.62 | Peak |
| 6 | 17680.800 | 22.30 | 26.46 | 48.76 | 54.00 | -5.24 | Average |

| Middle channel | | | | | | | |
|----------------|-----------|-------|-------|--------|--------|--------|---------|
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2440.000 | 93.80 | -3.58 | 90.22 | ----- | ----- | Peak |
| 2 | 2440.000 | 93.21 | -3.58 | 89.63 | ----- | ----- | Average |
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4880.000 | 39.02 | 4.01 | 43.03 | 74.00 | -30.97 | Peak |
| 2 | 4880.000 | 28.39 | 4.01 | 32.40 | 54.00 | -21.60 | Average |
| 3 | 7320.000 | 35.76 | 10.04 | 45.80 | 74.00 | -28.20 | Peak |
| 4 | 7320.000 | 23.75 | 10.04 | 33.79 | 54.00 | -20.21 | Average |
| 5 | 17716.000 | 37.68 | 26.65 | 64.33 | 74.00 | -9.67 | Peak |
| 6 | 17716.000 | 23.13 | 26.65 | 49.78 | 54.00 | -4.22 | Average |

| High channel | | | | | | | |
|--------------|-----------|-------|-------|--------|--------|--------|---------|
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2480.000 | 90.43 | -3.43 | 87.00 | ----- | ----- | Peak |
| 2 | 2480.000 | 88.28 | -3.43 | 84.85 | ----- | ----- | Average |
| 3 | 2484.112 | 60.68 | -3.41 | 57.27 | 74.00 | -16.73 | Peak |
| 4 | 2484.112 | 38.76 | -3.41 | 35.35 | 54.00 | -18.65 | Average |
| | Freq | Read | | Level | Limit | Over | Remark |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 4960.000 | 38.54 | 4.11 | 42.65 | 74.00 | -31.35 | Peak |
| 2 | 4960.000 | 25.60 | 4.11 | 29.71 | 54.00 | -24.29 | Average |
| 3 | 7440.000 | 35.41 | 10.08 | 45.49 | 74.00 | -28.51 | Peak |
| 4 | 7440.000 | 23.33 | 10.08 | 33.41 | 54.00 | -20.59 | Average |
| 5 | 17726.400 | 36.39 | 26.67 | 63.06 | 74.00 | -10.94 | Peak |
| 6 | 17726.400 | 23.09 | 26.67 | 49.76 | 54.00 | -4.24 | Average |

Level = Reading + Factor.


Over Limit = Level - Limit.

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Test Mode: simultaneous transmissions(WIFI 2.4G+BLE)

30MHz-1GHz:

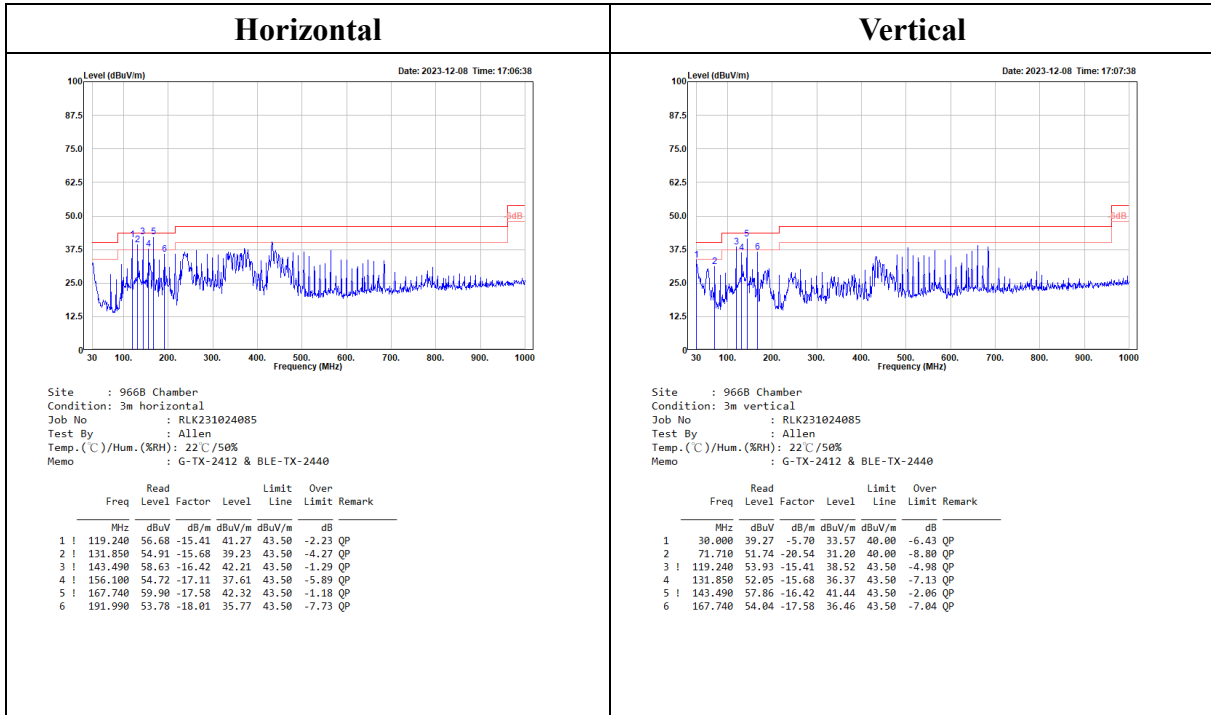


Level (Result) = Reading + Factor.

Over Limit = Level – Limit.


Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

1GHz-18GHz:

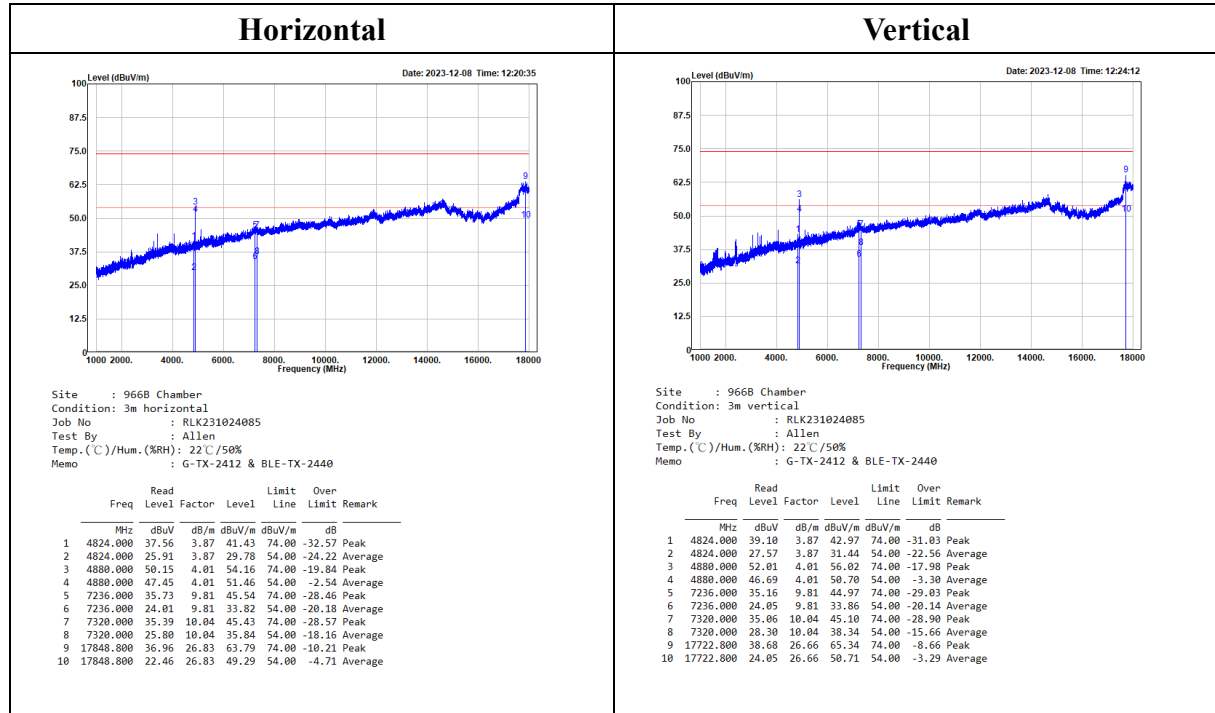

18GHz-26.5GHz:

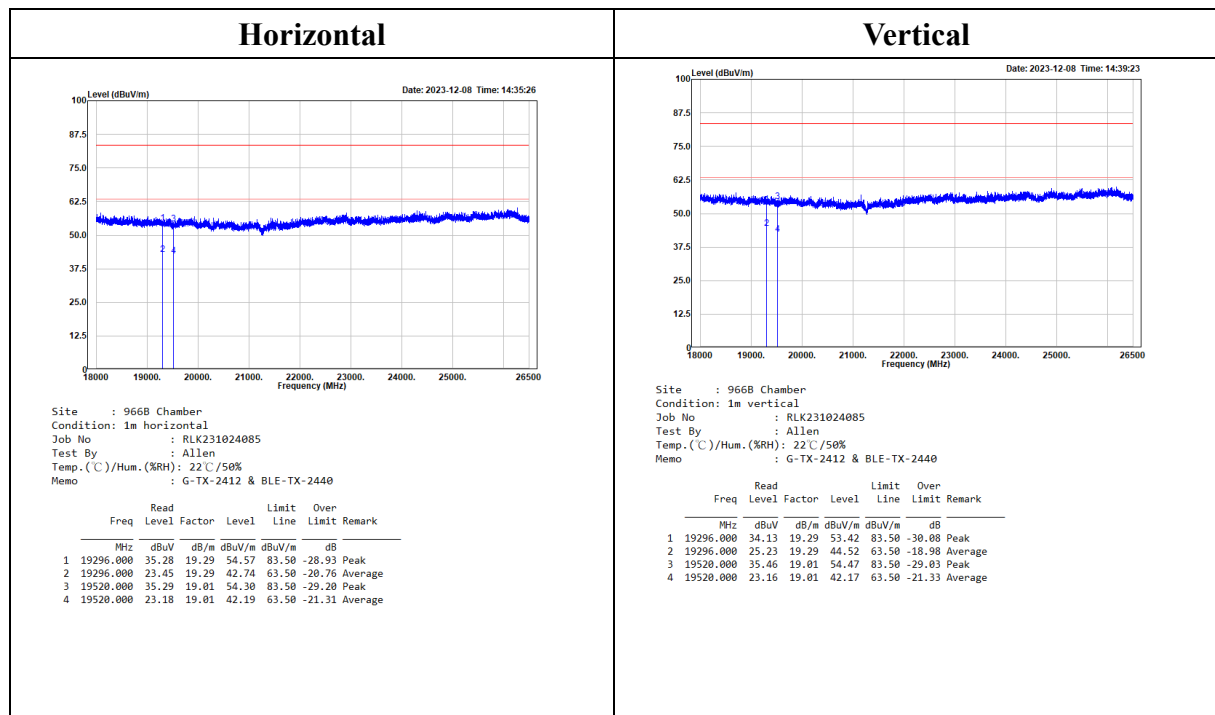

Level (Result) = Reading + Factor.

Over Limit = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.


Conducted Spurious Emissions:

BLE(1M) Mode


| Channel | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|--------------|-----------------|-----------------------------------|-------------|--------|
| BLE(1M) Mode | | | | |
| Low | 2402 | 35.93 | ≥ 20 | PASS |
| Mid | 2440 | 35.42 | ≥ 20 | PASS |
| High | 2480 | 34.85 | ≥ 20 | PASS |

BLE (1M) Mode

Low Channel

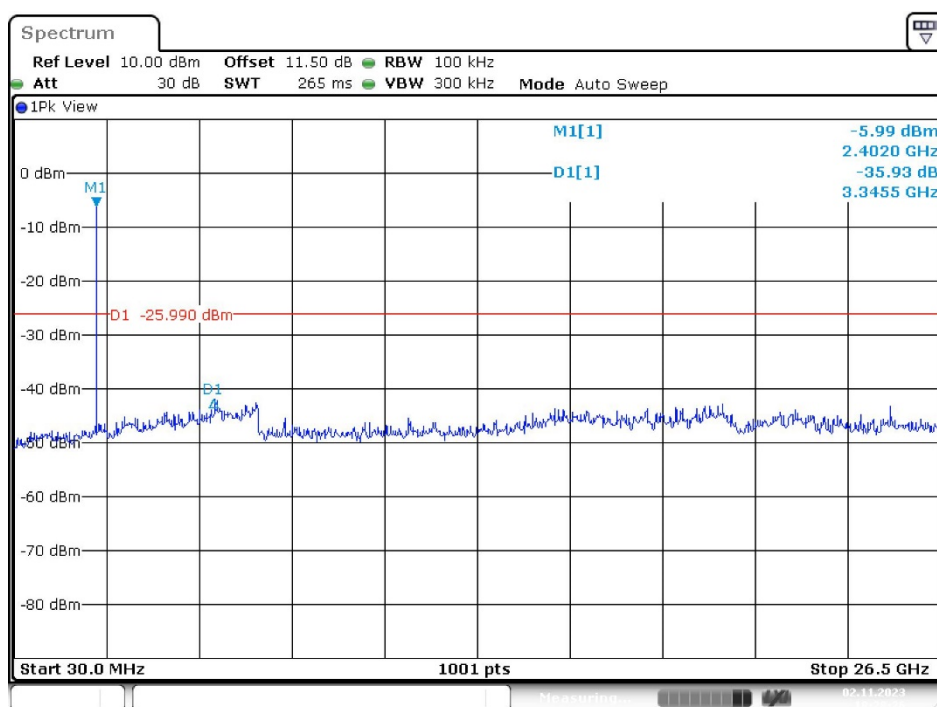


Middle Channel

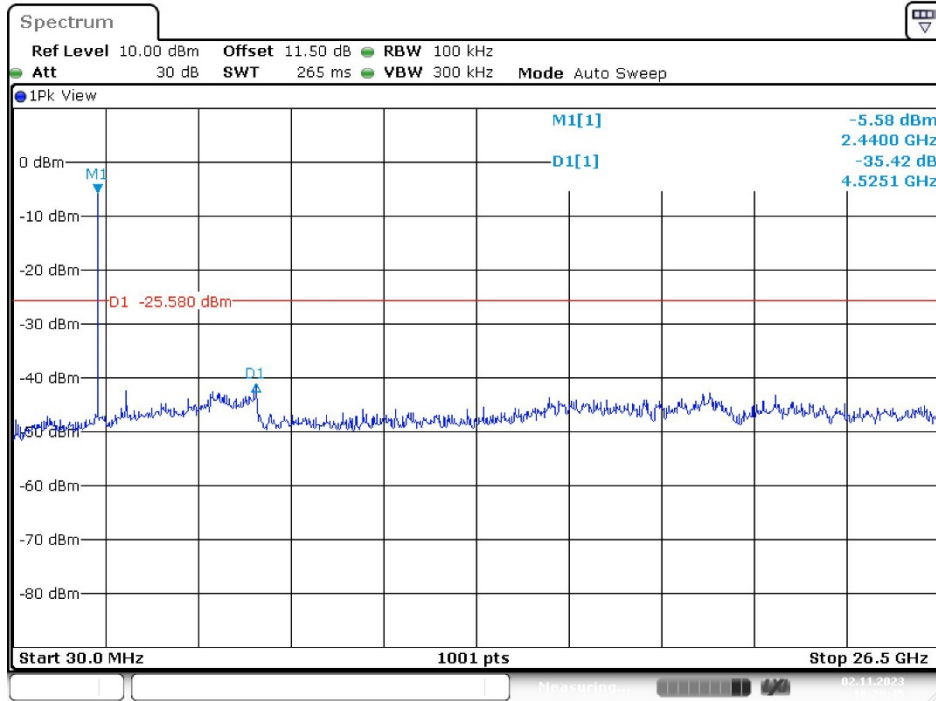

Date: 2.NOV.2023 18:29:45

High Channel

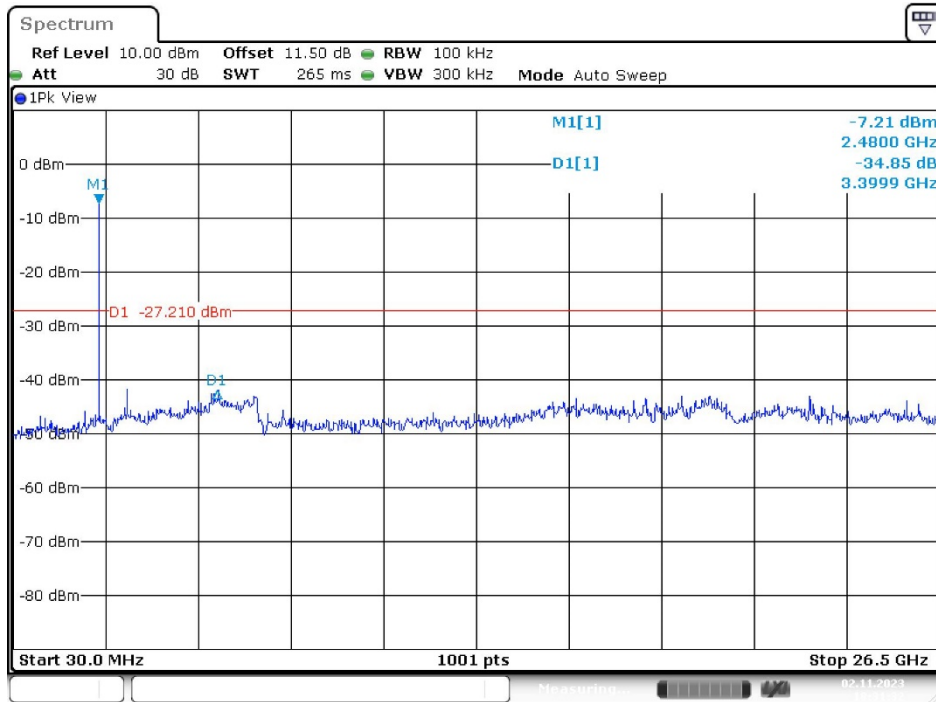

Date: 2.NOV.2023 18:31:32

9 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Test Procedure

The steps for the first option are as follows:


- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.3 Test Results


| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (kHz) | Result |
|--------------|-----------------|-------------------------------|-------------|------------|
| BLE(1M) Mode | | | | |
| Low | 2402 | 0.73 | > 500 | Compliance |
| Middle | 2440 | 0.73 | > 500 | Compliance |
| High | 2480 | 0.73 | > 500 | Compliance |

Please refer to the following plots


BLE (1M) Mode Low Channel

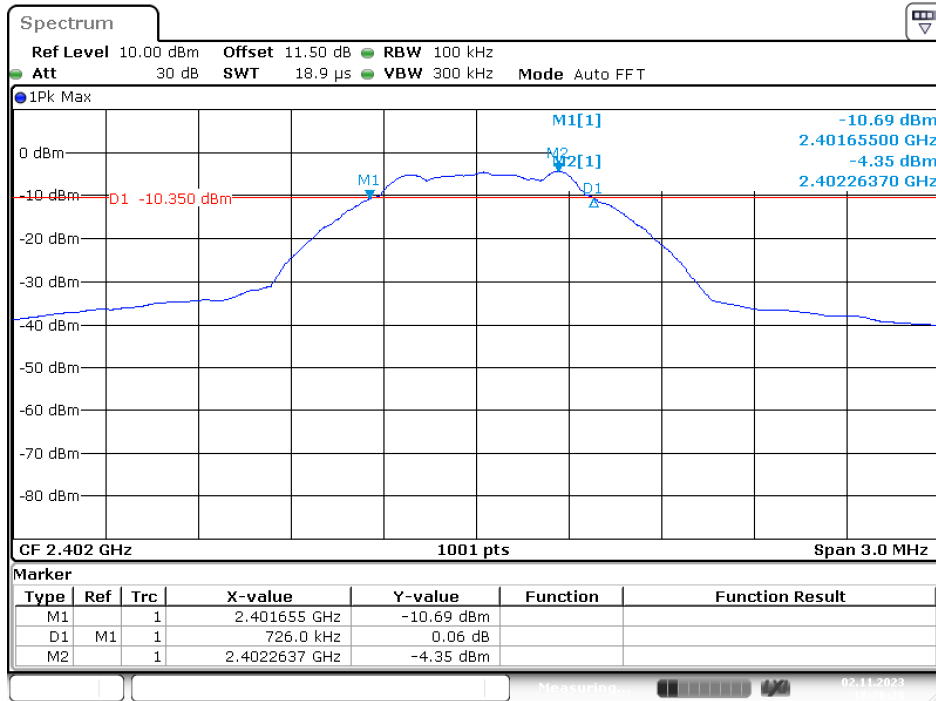

Middle Channel

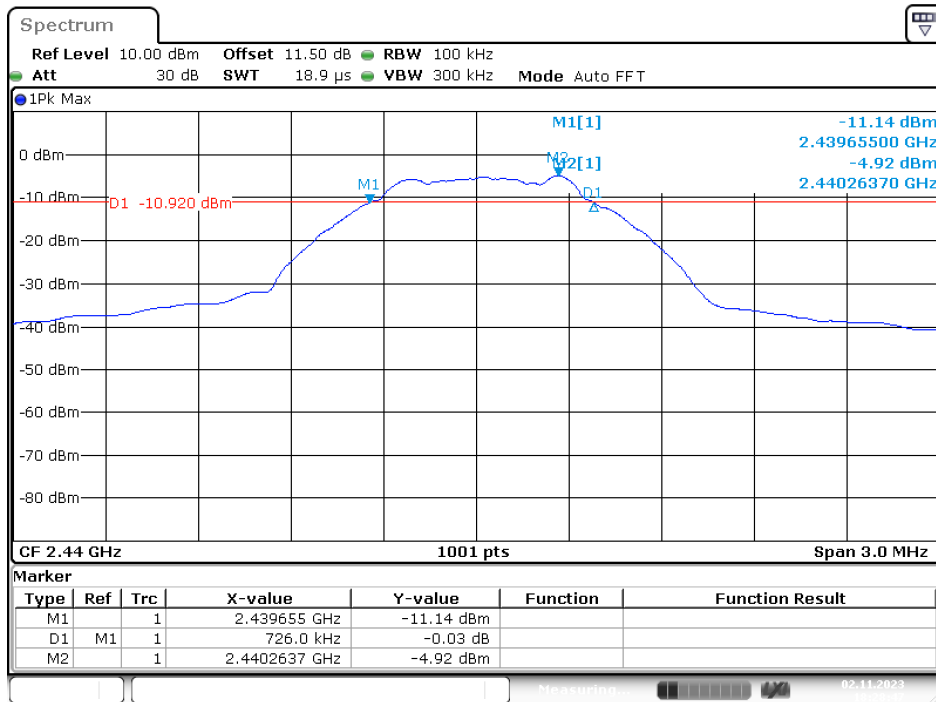

High Channel

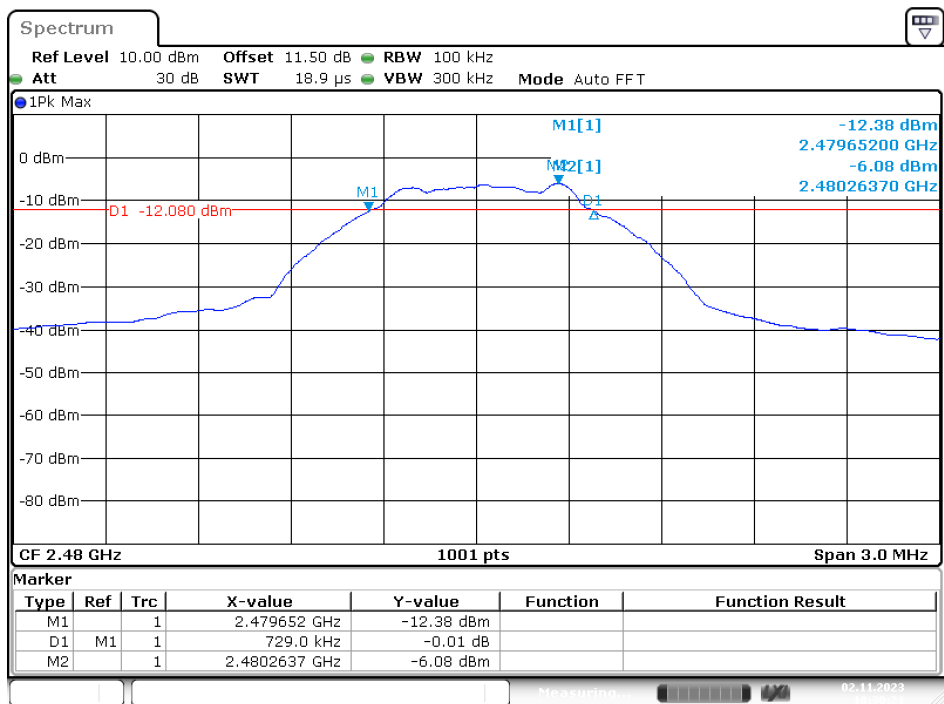

Date: 2.NOV.2023 18:30:21

10 FCC §15.247(b)(3) – Maximum Output Power

10.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

10.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

10.3 Test Results

Conducted Peak Output Power

| Channel | Frequency | Maximum peak Conducted Output Power | | Limit | Result |
|--------------|-----------|--|---------|-------|--------|
| | (MHz) | (dBm) | (W) | (W) | |
| BLE(1M) Mode | | | | | |
| Low | 2402 | -2.87 | 0.00052 | 1 | PASS |
| Middle | 2440 | -3.37 | 0.00046 | 1 | PASS |
| High | 2480 | -4.43 | 0.00036 | 1 | PASS |

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band

Edge

11.1 Applicable Standard

According to FCC §15.247(d).

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Results

| Channel | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|--------------|-----------------|-----------------------------------|-------------|--------|
| BLE(1M) Mode | | | | |
| Low | 2402 | 35.79 | ≥ 20 | PASS |
| High | 2480 | 40.53 | ≥ 20 | PASS |


Please refer to the following plots.

BLE (1M) Mode Band Edge, Left Side

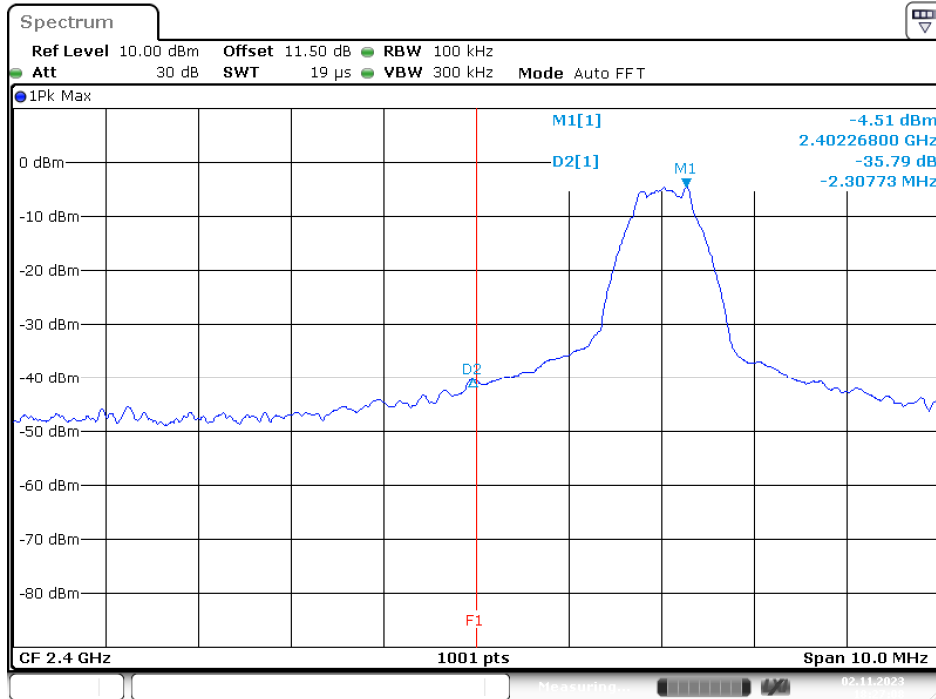

Date: 2.NOV.2023 18:27:08

Band Edge, Right Side

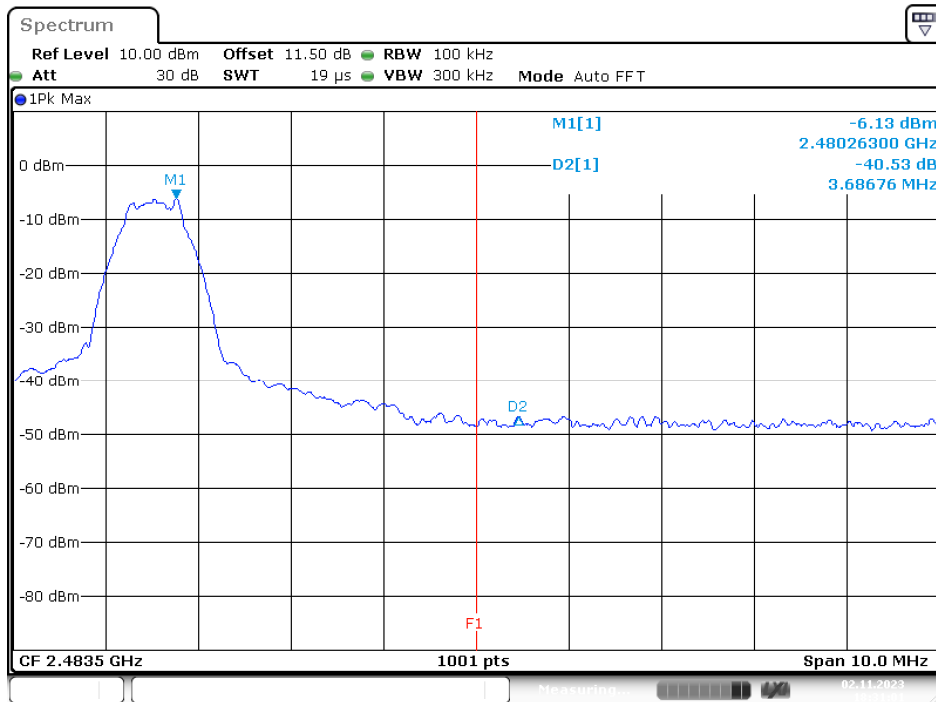

Date: 2.NOV.2023 18:31:01

12 FCC §15.247(e) – Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Test Procedure

According to ANSI C63.10-2013


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

12.3 Test Results

| Channel | Frequency (MHz) | Power Spectral Density (dBm/3 kHz) | Limit (dBm/3 kHz) | Result |
|--------------|-----------------|------------------------------------|-------------------|------------|
| BLE(1M) Mode | | | | |
| Low | 2402 | -20.32 | 8 | Compliance |
| Middle | 2440 | -20.75 | 8 | Compliance |
| High | 2480 | -21.93 | 8 | Compliance |


Please refer to the following plots

BLE (1M) Mode Low Channel

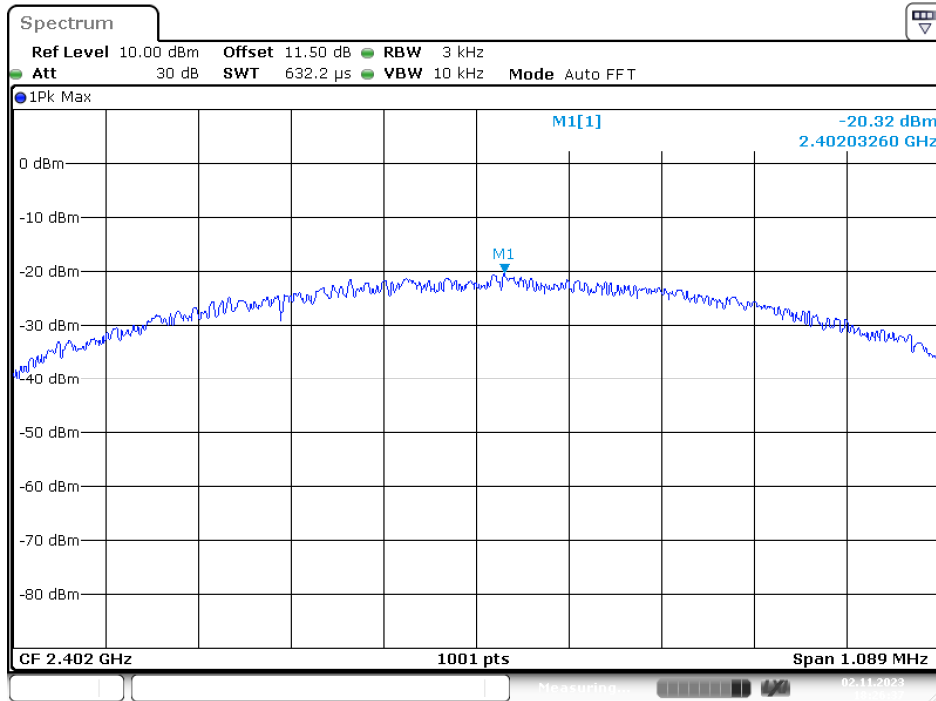


Date: 2.NOV.2023 18:26:37

Middle Channel

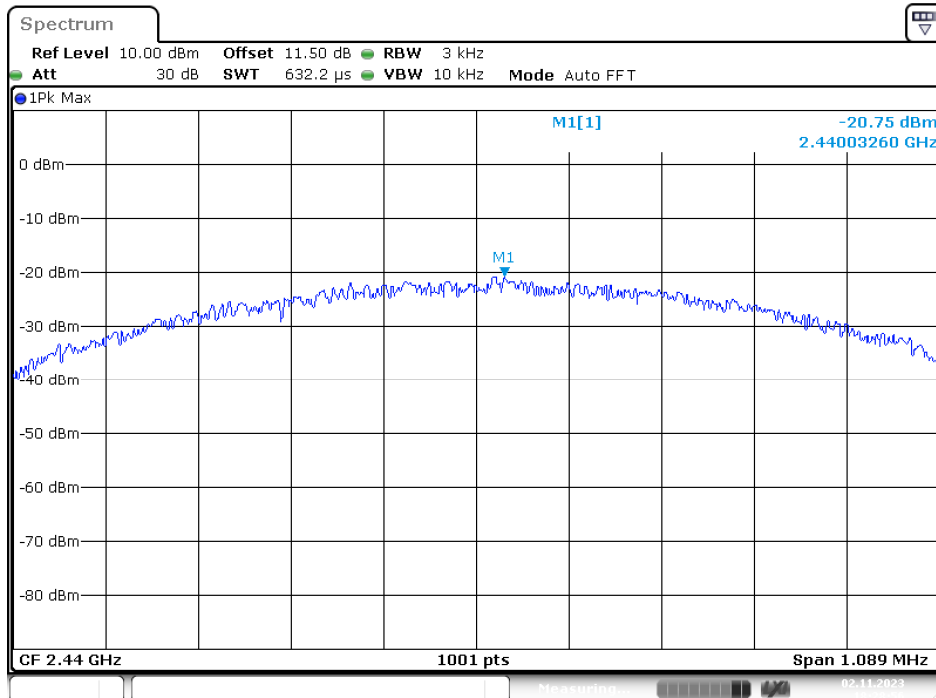

Date: 2.NOV.2023 18:28:56

High Channel

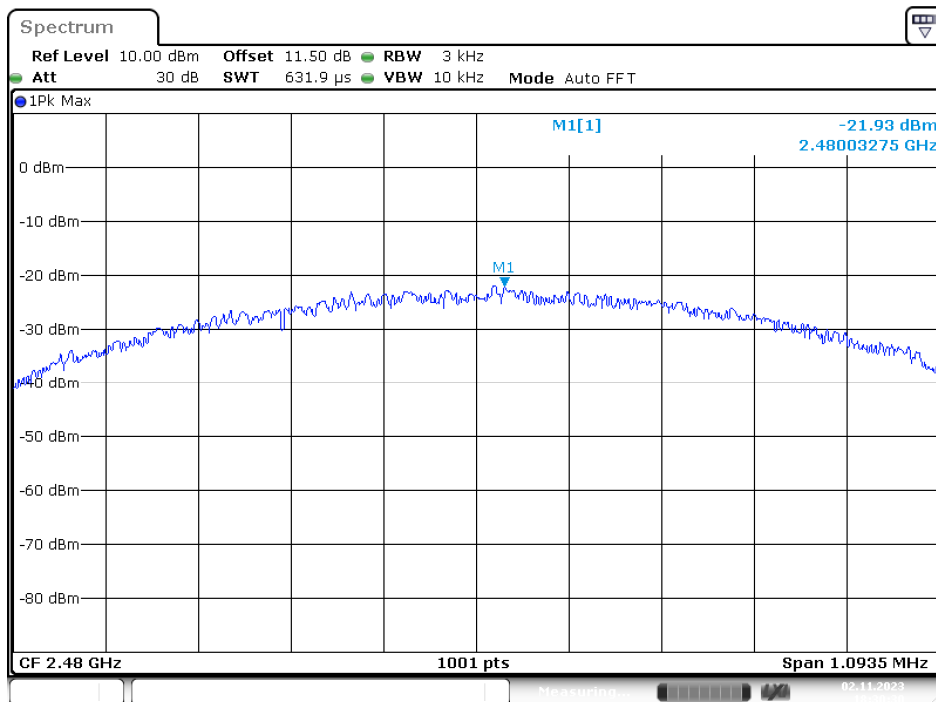

Date: 2.NOV.2023 18:30:30

***** END OF REPORT *****