




LTE Band XII (Part 27)

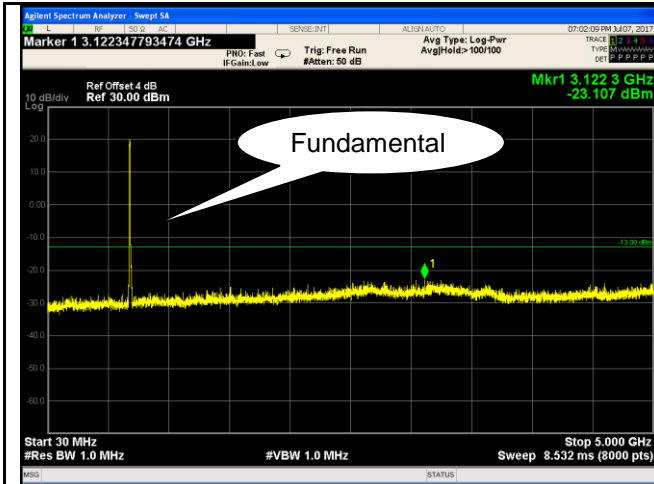


LTE Band XII - Low Channel-1

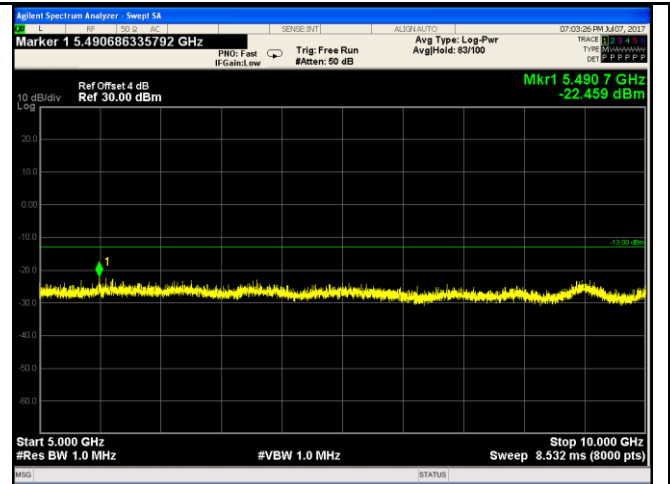


LTE Band XII - Low Channel-2

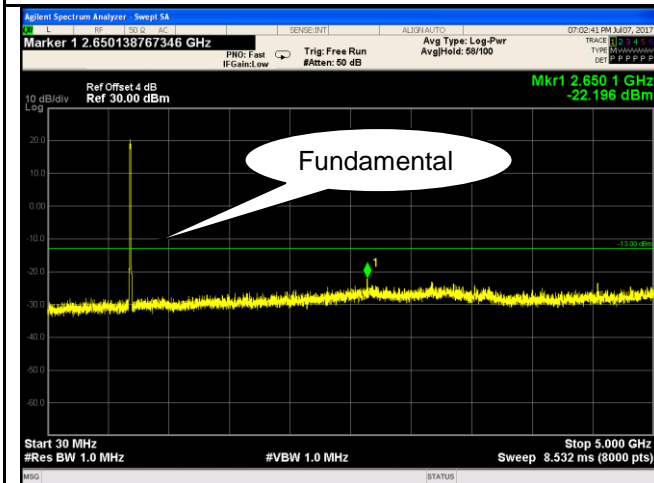


LTE Band XII - Middle Channel-1

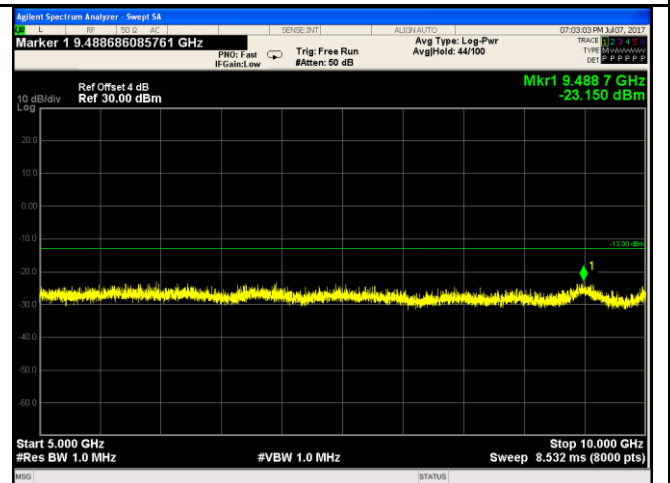

LTE Band XII - Middle Channel-2

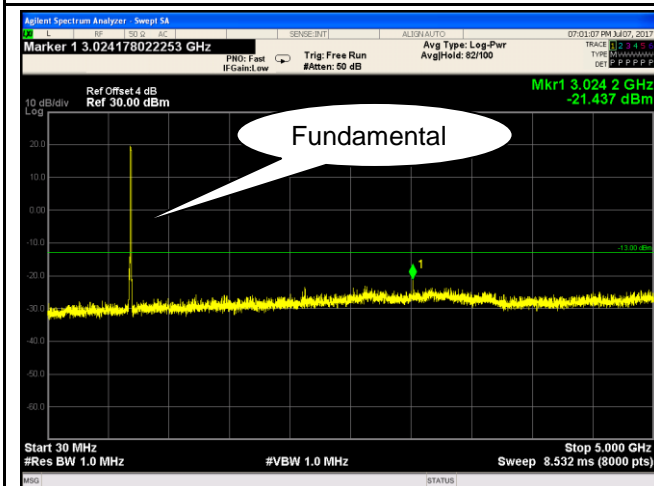


LTE Band XII - High Channel-1

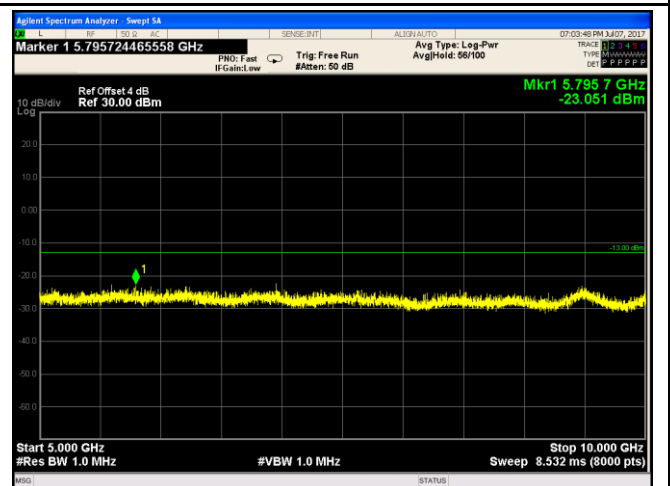


LTE Band XII - High Channel-2


### LTE Band XVII (Part 27)

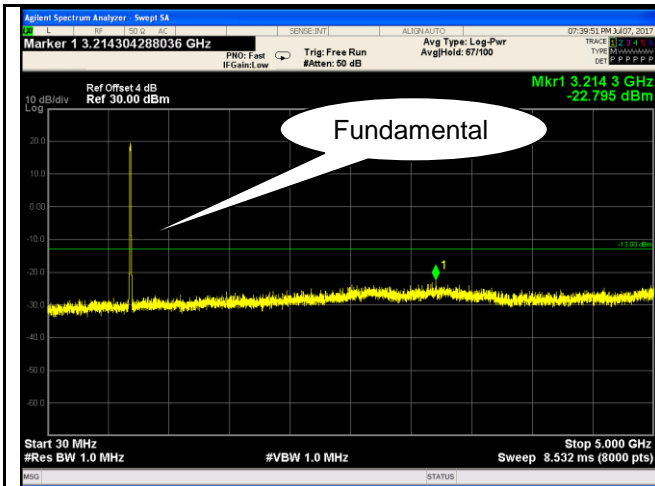


LTE Band XVII - Low Channel-1

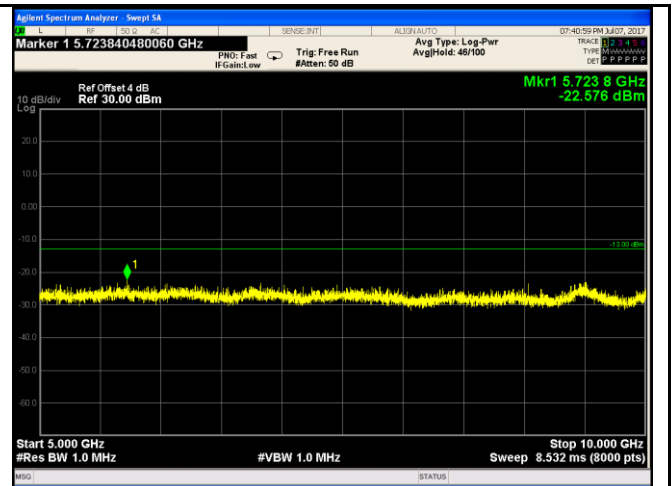


LTE Band XVII - Low Channel-2

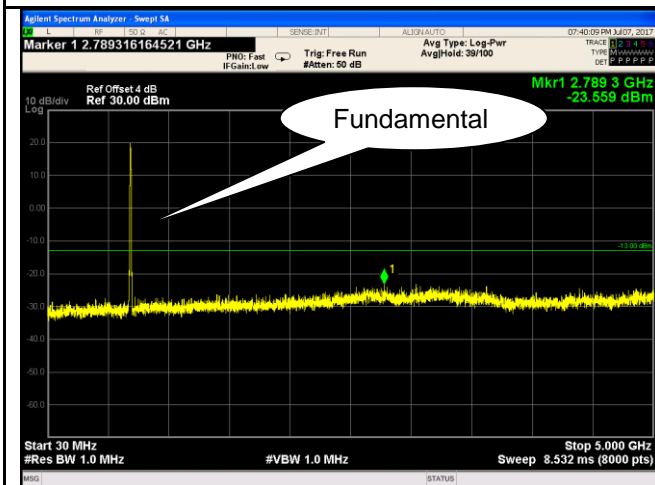


LTE Band XVII - Middle Channel-1

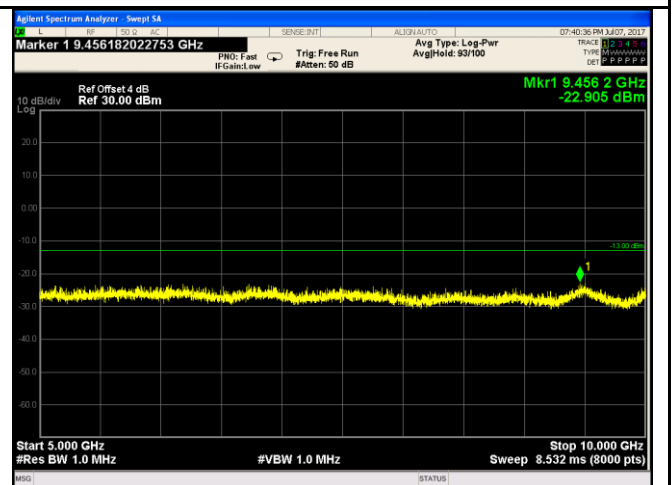

LTE Band XVII - Middle Channel-2

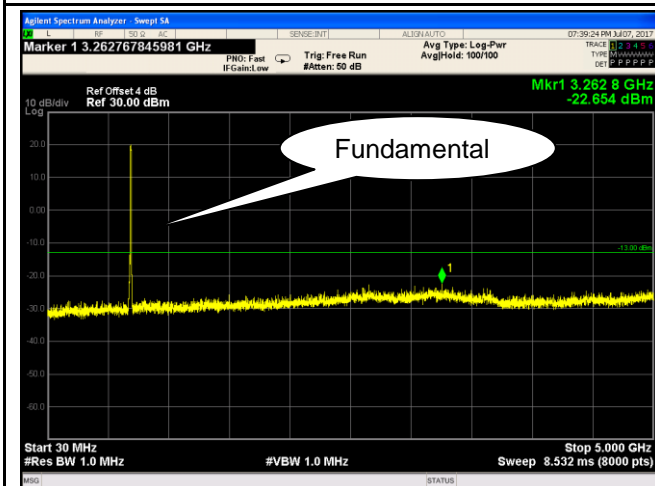

LTE Band XVII - High Channel-1

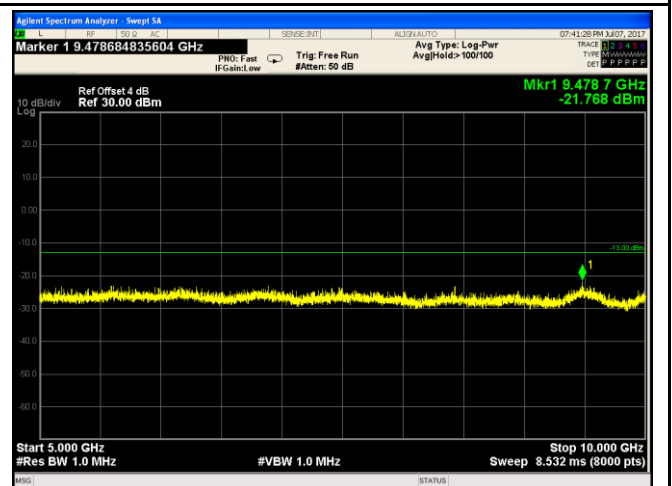


LTE Band XVII - High Channel-2

## 6.6 Spurious Radiated Emissions

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	August 07, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238 § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	<input checked="" type="checkbox"/>

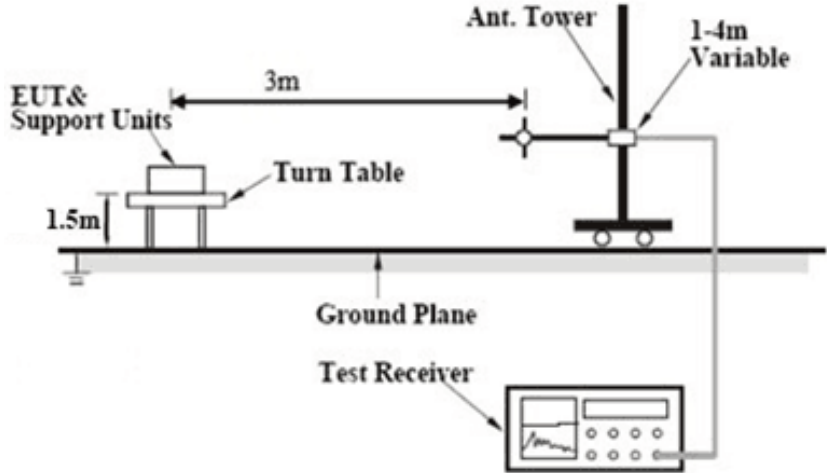Test setup	
------------	--

Test Procedure	<ol style="list-style-type: none"> <li>The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBµV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)</li> </ol>
----------------	---

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

## LTE Band II (Part 24E) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3720	-46.98	V	10.25	2.73	-39.46	-13	-26.46
3720	-45.21	H	10.25	2.73	-37.69	-13	-24.69
51.2	-46.87	V	-4.4	0.11	-51.38	-13	-38.38
203.9	-45.32	H	3.7	0.18	-41.8	-13	-28.8

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-46.99	V	10.25	2.73	-39.47	-13	-26.47
3760	-46.21	H	10.25	2.73	-38.69	-13	-25.69
59.8	-44.38	V	-1.7	0.11	-46.19	-13	-33.19
154.2	-49.51	H	1	0.19	-48.7	-13	-35.7

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3800	-47.25	V	10.36	2.73	-39.62	-13	-26.62
3800	-46.84	H	10.36	2.73	-39.21	-13	-26.21
60.8	-43.15	V	-1.7	0.11	-44.96	-13	-31.96
199.8	-49.87	H	3.7	0.18	-46.35	-13	-33.35

#### Note:

- 1, The testing has been conformed to  $10 \times 1907.5 \text{ MHz} = 19,075 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

## LTE Band IV (Part27) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3440	-46.75	V	10.06	2.52	-39.21	-13	-26.21
3440	-48.23	H	10.06	2.52	-40.69	-13	-27.69
40.6	-46.11	V	-12.2	0.1	-58.41	-13	-45.41
251.9	-47.35	H	6	0.24	-41.59	-13	-28.59

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3465	-45.38	V	10.09	2.52	-37.81	-13	-24.81
3465	-44.27	H	10.09	2.52	-36.7	-13	-23.7
69.7	-45.13	V	-1	0.12	-46.25	-13	-33.25
298.3	-42.03	H	5.6	0.25	-36.68	-13	-23.68

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3490	-46.28	V	10.09	2.52	-38.71	-13	-25.71
3490	-45.37	H	10.09	2.52	-37.8	-13	-24.8
51.4	-49.11	V	-4.4	0.11	-53.62	-13	-40.62
311.5	-47.53	H	5.6	0.25	-42.18	-13	-29.18

#### Note:

- 1, The testing has been conformed to  $10 \times 1752.5 \text{ MHz} = 17,525 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z- Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

## LTE Band V (Part22H) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1658	-46.25	V	7.95	0.78	-39.08	-13	-26.08
1658	-45.83	H	7.95	0.78	-38.66	-13	-25.66
49.6	-49.13	V	-4.4	0.11	-53.64	-13	-40.64
498.6	-46.27	H	6.1	0.34	-40.51	-13	-27.51

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673	-45.87	V	7.95	0.78	-38.7	-13	-25.7
1673	-45.62	H	7.95	0.78	-38.45	-13	-25.45
70.4	-48.53	V	-1	0.12	-49.65	-13	-36.65
146.2	-41.03	H	1	0.19	-40.22	-13	-27.22

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1688	-43.59	V	7.95	0.78	-36.42	-13	-23.42
1688	-43.27	H	7.95	0.78	-36.1	-13	-23.1
102.5	-46.18	V	-0.1	0.16	-46.44	-13	-33.44
305.7	-47.29	H	5.6	0.25	-41.94	-13	-28.94

#### Note:

- 1, The testing has been conformed to  $10 \times 846.5 \text{ MHz} = 8,465 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z- Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

## LTE Band VII (Part27) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5020	-48.16	V	10.29	0.98	-38.85	-13	-25.85
5020	-47.65	H	10.29	0.98	-38.34	-13	-25.34
68.4	-48.32	V	-1	0.12	-49.44	-13	-36.44
203.9	-44.19	H	3.7	0.18	-40.67	-13	-27.67

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5070	-47.52	V	10.3	0.99	-38.21	-13	-25.21
5070	-46.38	H	10.3	0.99	-37.07	-13	-24.07
89.6	-44.19	V	1.4	0.13	-42.92	-13	-29.92
302.7	-49.92	H	5.6	0.25	-44.57	-13	-31.57

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5120	-46.23	V	10.32	1	-36.91	-13	-23.91
5120	-45.17	H	10.32	1	-35.85	-13	-22.85
99.3	-46.98	V	-0.1	0.16	-47.24	-13	-34.24
406.1	-45.11	H	6	0.3	-39.41	-13	-26.41

#### Note:

- 1, The testing has been conformed to  $10 \times 2567.5 \text{MHz} = 25,675 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z – Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.



## LTE Band XII (Part27) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1408	-46.25	V	7.65	0.75	-39.35	-13	-26.35
1408	-45.31	H	7.65	0.75	-38.41	-13	-25.41
553.6	-49.75	V	6.4	0.35	-43.7	-13	-30.7
849.7	-48.31	H	6.2	0.44	-42.55	-13	-29.55

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1415	-46.28	V	7.65	0.75	-39.38	-13	-26.38
1415	-45.33	H	7.65	0.75	-38.43	-13	-25.43
497.5	-48	V	6.1	0.34	-42.24	-13	-29.24
803.5	-47.11	H	6.1	0.44	-41.45	-13	-28.45

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-46.85	V	7.65	0.75	-39.95	-13	-26.95
1422	-47.32	H	7.65	0.75	-40.42	-13	-27.42
456.3	-50.31	V	6	0.29	-44.6	-13	-31.6
748.3	-48.13	H	6.4	0.43	-42.16	-13	-29.16

#### Note:

- 1, The testing has been conformed to  $10 \times 2567.5 \text{MHz} = 25,675 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z – Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

## LTE Band XVII (Part27) result

### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1418	-46.52	V	7.65	0.75	-39.62	-13	-26.62
1418	-45.37	H	7.65	0.75	-38.47	-13	-25.47
50.6	-49.82	V	-4.4	0.11	-54.33	-13	-41.33
310.9	-50.13	H	5.6	0.25	-44.78	-13	-31.78

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1420	-44.32	V	7.65	0.75	-37.42	-13	-24.42
1420	-43.75	H	7.65	0.75	-36.85	-13	-23.85
60.7	-46.87	V	-1.7	0.11	-48.68	-13	-35.68
402.8	-42.56	H	6	0.3	-36.86	-13	-23.86

### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-44.65	V	7.65	0.75	-37.75	-13	-24.75
1422	-44.35	H	7.65	0.75	-37.45	-13	-24.45
90.1	-47.13	V	1.4	0.13	-45.86	-13	-32.86
553.7	-49.28	H	6.4	0.35	-43.23	-13	-30.23


#### Note:

- 1, The testing has been conformed to  $10 \times 2567.5 \text{MHz} = 25,675 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z – Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

## 6.7 Band Edge

Temperature	25 °C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	July 12, 2017
Tested By :	Loren Luo

### Requirement(s):

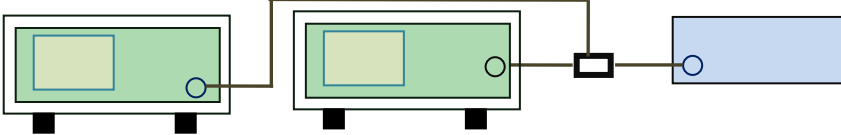Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
Test setup			
Procedure	<ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

### LTE Band II (Part 24E) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	18607	1850	QPSK	-20.980	-13
			16QAM	-20.896	-13
1.4	18900	1910	QPSK	-17.669	-13
			16QAM	-17.165	-13
3	18615	1850	QPSK	-22.271	-13
			16QAM	-20.918	-13
3	19185	1910	QPSK	-15.888	-13
			16QAM	-17.452	-13
5	18625	1850	QPSK	-18.051	-13
			16QAM	-17.822	-13
5	19175	1910	QPSK	-17.450	-13
			16QAM	-16.341	-13
10	18650	1850	QPSK	-20.810	-13
			16QAM	-20.526	-13
10	19150	1910	QPSK	-17.302	-13
			16QAM	-18.000	-13
15	18675	1850	QPSK	-21.003	-13
			16QAM	-22.368	-13
15	19125	1910	QPSK	-17.377	-13
			16QAM	-17.264	-13
20	18700	1850	QPSK	-23.218	-13
			16QAM	-23.008	-13
20	19100	1910	QPSK	-18.463	-13
			16QAM	-18.482	-13

### LTE Band IV (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	19957	1709.9	QPSK	-21.07	-13
			16QAM	-21.67	-13
1.4	20393	1755	QPSK	-16.39	-13
			16QAM	-16.39	-13
3	19965	1709.9	QPSK	-16.17	-13
			16QAM	-16.39	-13
3	20385	1755	QPSK	-14.85	-13
			16QAM	-14.02	-13
5	19975	1709.9	QPSK	-16.57	-13
			16QAM	-15.81	-13
5	20375	1755	QPSK	-16.19	-13
			16QAM	-14.42	-13
10	20000	1709.9	QPSK	-15.99	-13
			16QAM	-16.25	-13
10	20350	1755	QPSK	-14.19	-13
			16QAM	-14.41	-13
15	20025	1709.9	QPSK	-17.26	-13
			16QAM	-16.89	-13
15	20325	1755	QPSK	-16.87	-13
			16QAM	-16.24	-13
20	20050	1709.9	QPSK	-18.38	-13
			16QAM	-17.73	-13
20	20300	1755	QPSK	-16.93	-13
			16QAM	-16.00	-13

**LTE Band V (Part 22H) result**

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	20407	823.9	QPSK	-20.533	-13
			16QAM	-20.069	-13
1.4	20643	849	QPSK	-15.285	-13
			16QAM	-15.167	-13
3	20415	824	QPSK	-18.816	-13
			16QAM	-19.671	-13
3	20635	849	QPSK	-13.693	-13
			16QAM	-13.775	-13
5	20425	824	QPSK	-18.646	-13
			16QAM	-18.593	-13
5	20625	849	QPSK	-14.909	-13
			16QAM	-15.196	-13
10	20450	824	QPSK	-16.707	-13
			16QAM	-16.163	-13
10	20800	849	QPSK	-16.186	-13
			16QAM	-15.706	-13

### LTE Band XII (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	23017	699	QPSK	-27.715	-13
			16QAM	-27.783	-13
1.4	23173	716	QPSK	-26.890	-13
			16QAM	-26.940	-13
3	23025	699	QPSK	-18.843	-13
			16QAM	-19.090	-13
3	23165	716	QPSK	-19.829	-13
			16QAM	-19.161	-13
5	23035	699	QPSK	-17.049	-13
			16QAM	-15.226	-13
5	23155	716	QPSK	-18.490	-13
			16QAM	-17.370	-13
10	23060	698	QPSK	-17.240	-13
			16QAM	-18.478	-13
10	23130	716	QPSK	-17.358	-13
			16QAM	-15.070	-13

### LTE Band XVII (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	23755	704	QPSK	-15.702	-13
			16QAM	-16.246	-13
5	23825	716	QPSK	-18.108	-13
			16QAM	-17.775	-13
10	23780	704	QPSK	-17.736	-13
			16QAM	-16.019	-13
10	23800	716	QPSK	-16.788	-13
			16QAM	-16.049	-13

Test Plots

LTE Band II (Part 24E)

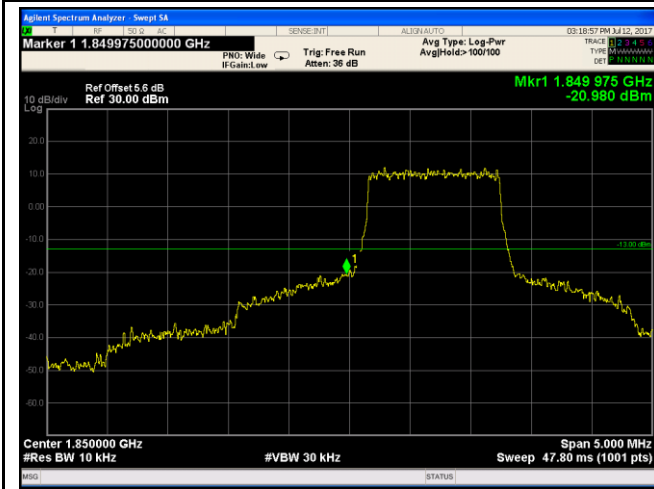


LTE Band II - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
(12.89/10)=4.5+1.1=5.6dB




LTE Band II - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
(13.03/10)=4.5+1.1=5.6dB

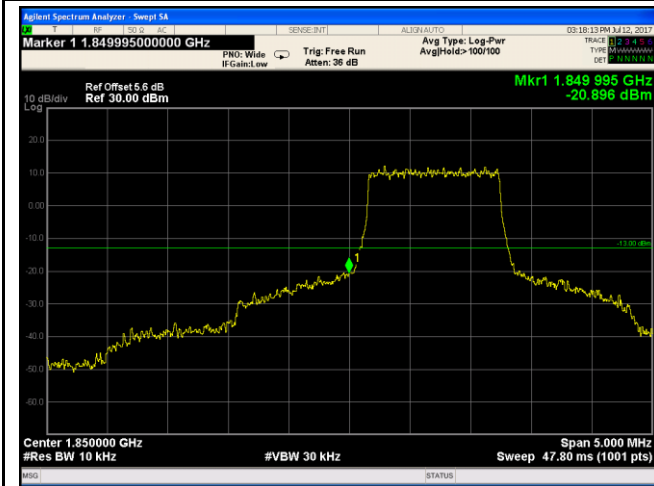

LTE Band II - Low Channel 16QAM-1.4


Note: Offset=Cable loss (4.5) + 10log  
(12.94/10)=4.5+1.1=5.6 dB

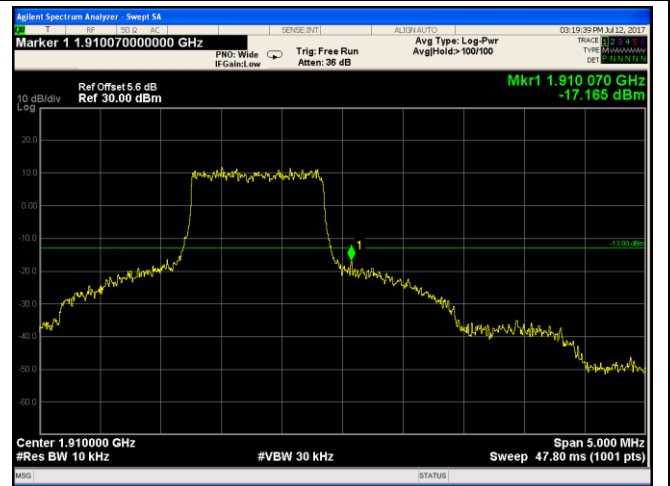

LTE Band II - High Channel 16QAM-1.4


Note: Offset=Cable loss (4.5) + 10log  
(13.01/10)=4.5+1.1=5.6 dB



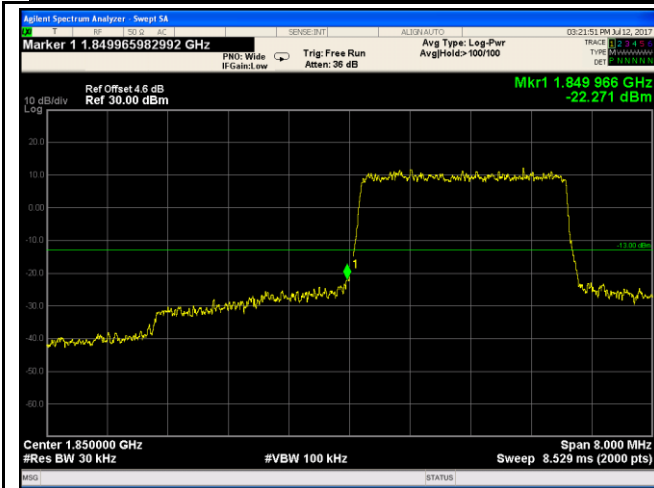


LTE Band II - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.43/30)=4.5+0.1=4.6 dB

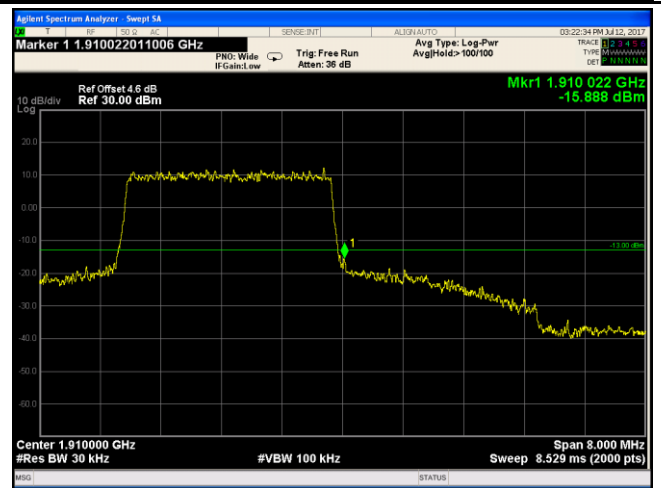


LTE Band II - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.70/30)=4.5+0.1=4.6 dB

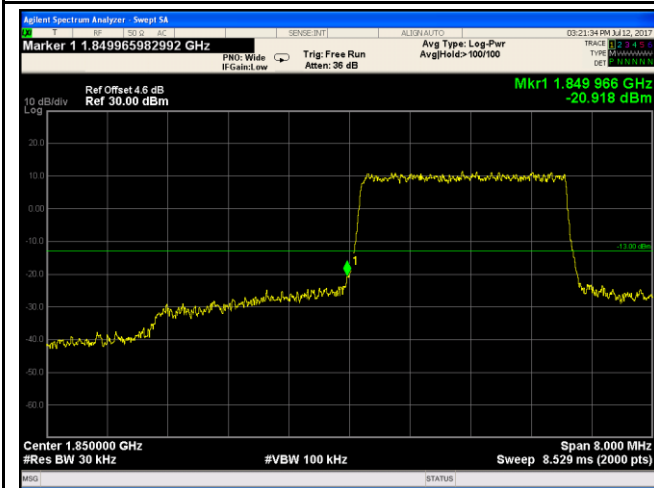


LTE Band II - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.49/30)=4.5+0.1=4.6 dB

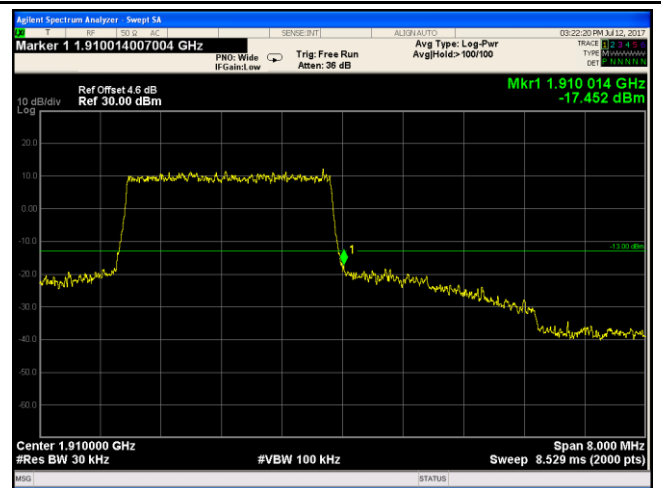


LTE Band II - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.61/30)=4.5+0.1=4.6 dB

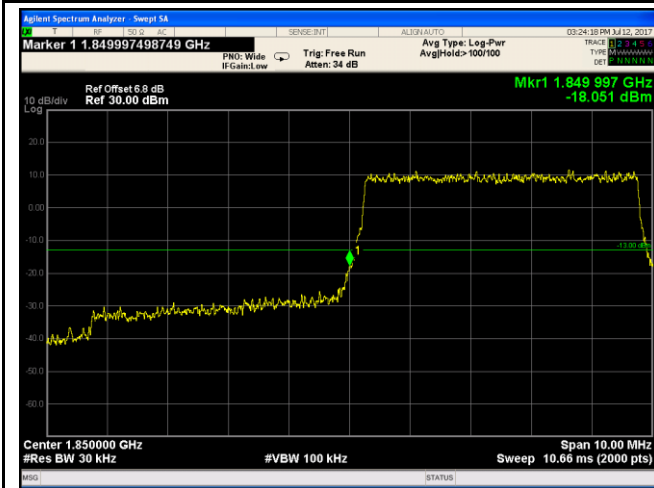


LTE Band II - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.83/30)=4.5+2.3=6.8 dB

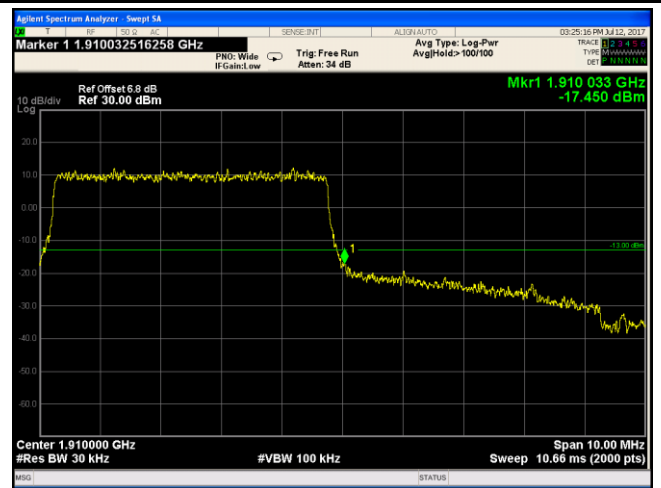


LTE Band II - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.83/30)=4.5+2.3=6.8 dB

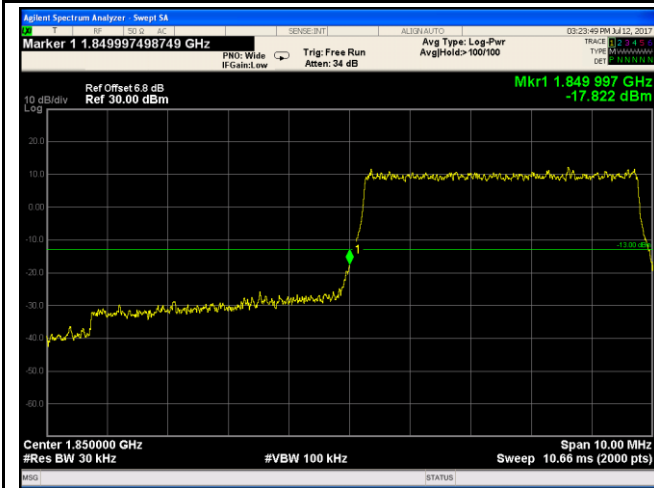


LTE Band II - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log  
(50.92/30)=4.5+2.3=6.8 dB

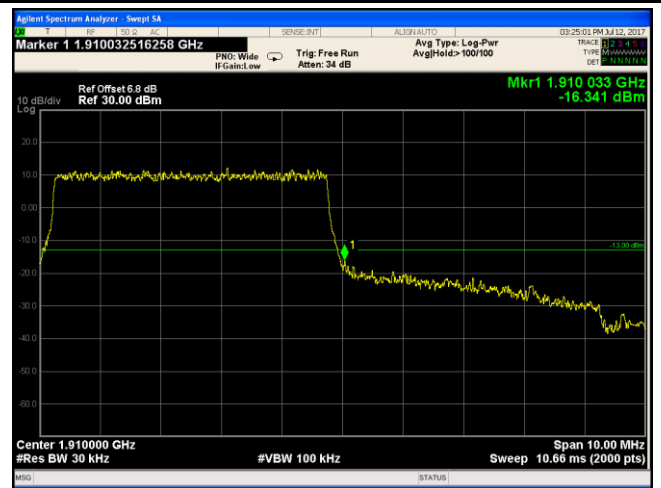


LTE Band II - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log  
(50.91/30)=4.5+2.3=6.8 dB

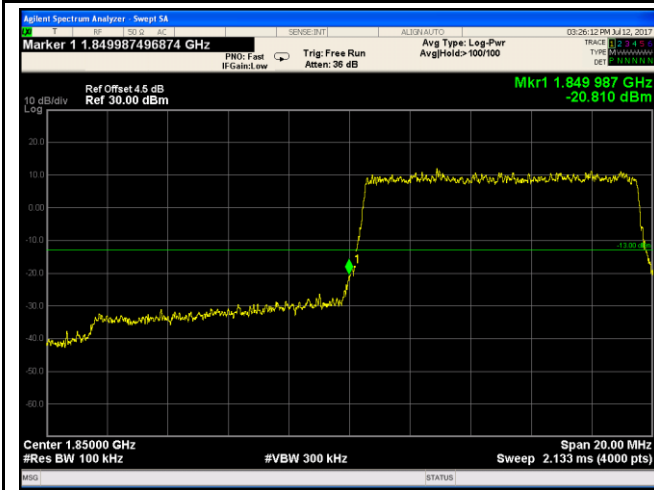


LTE Band II - Low Channel QPSK-10

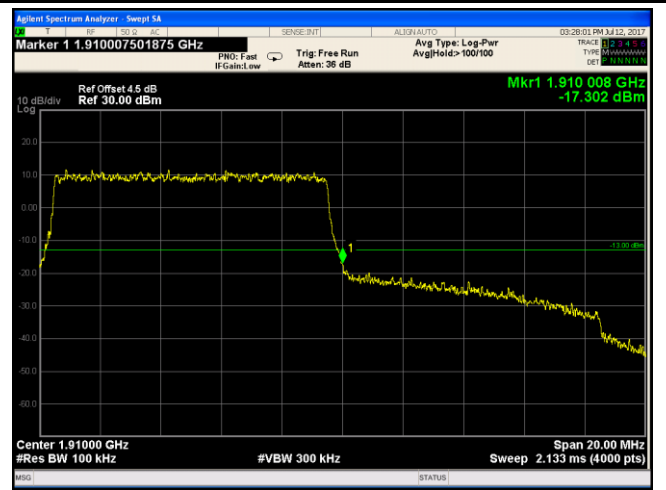

LTE Band II - High Channel QPSK-10

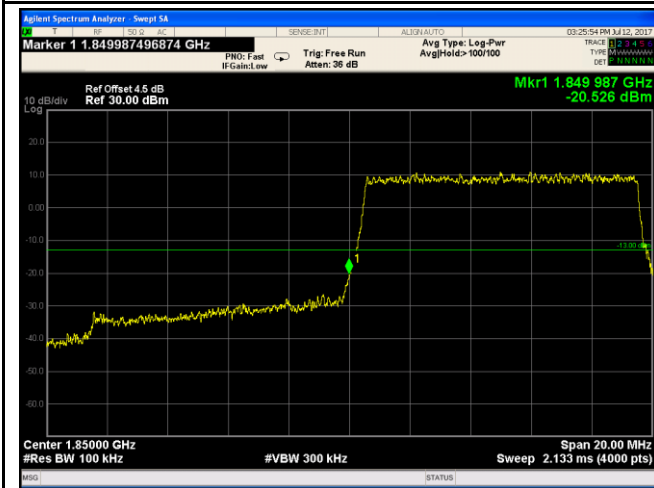


LTE Band II - Low Channel 16QAM-10

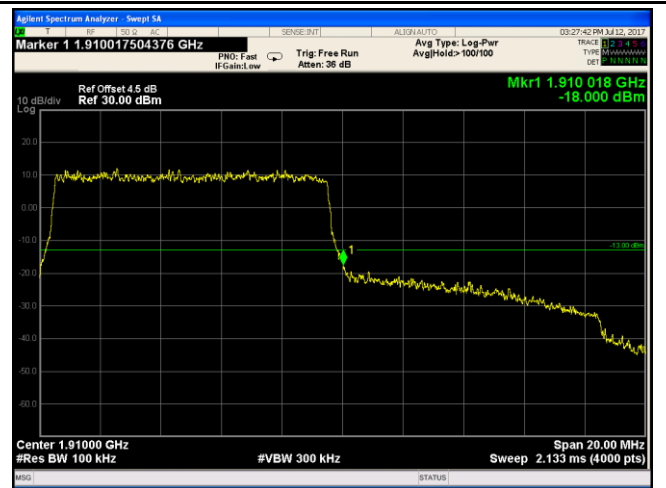

LTE Band II - High Channel 16QAM-10


Note: Offset=Cable loss (4.5) + 10log  
(100.4/100)=4.5+0.0=4.5 dB

Note: Offset=Cable loss (4.5) + 10log  
(101.5/100)=4.5+0.1=4.6 dB

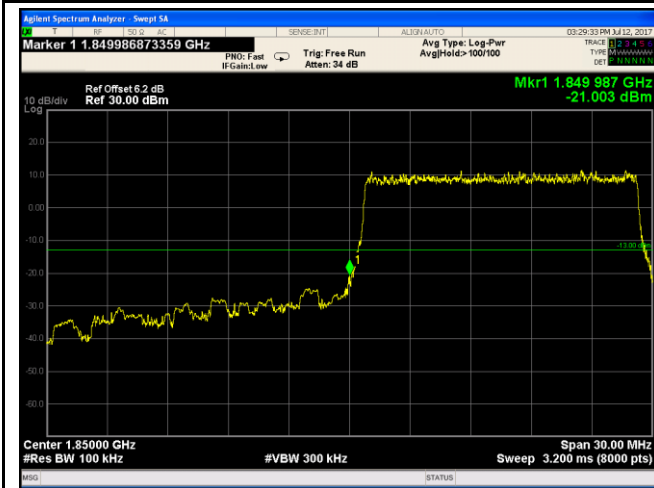


LTE Band II - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log  
(148.2/100)=4.5+1.7=6.2 dB

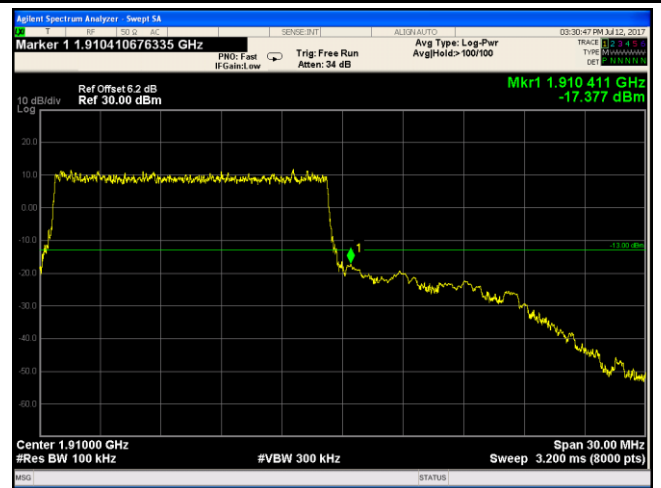


LTE Band II - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log  
(148.0/100)=4.5+1.7=6.2 dB

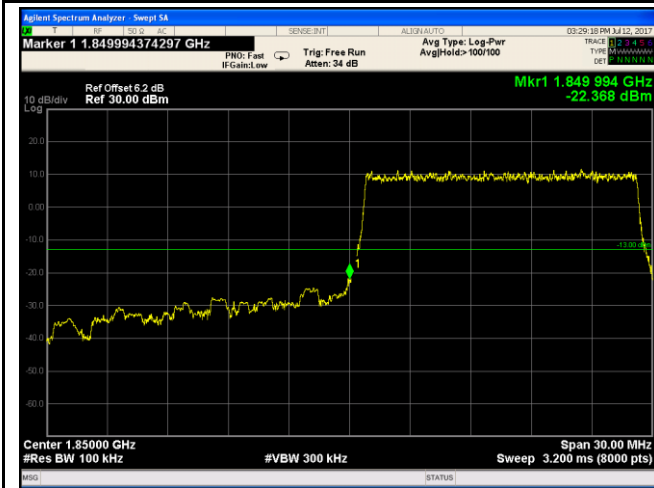


LTE Band II - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log  
(148.4/100)=4.5+1.7=6.2 dB

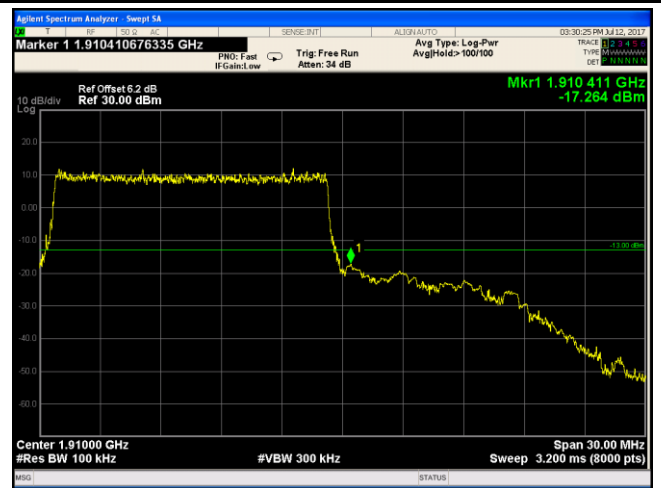


LTE Band II - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log  
(148.6/100)=4.5+1.7=6.2 dB

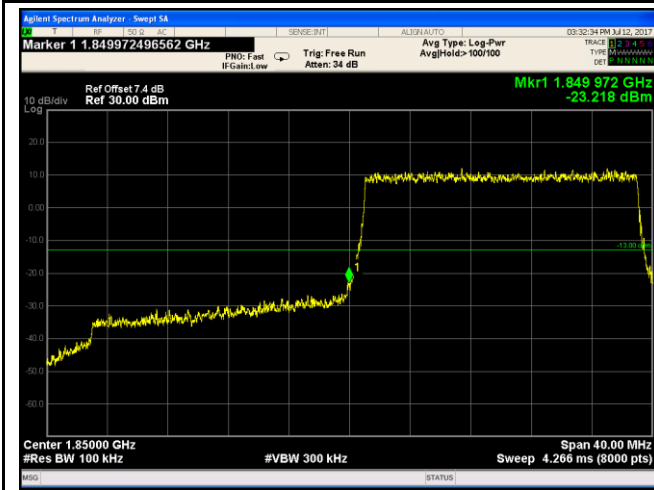


LTE Band II - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log  
(194.6/100)=4.5+2.9=7.4 dB

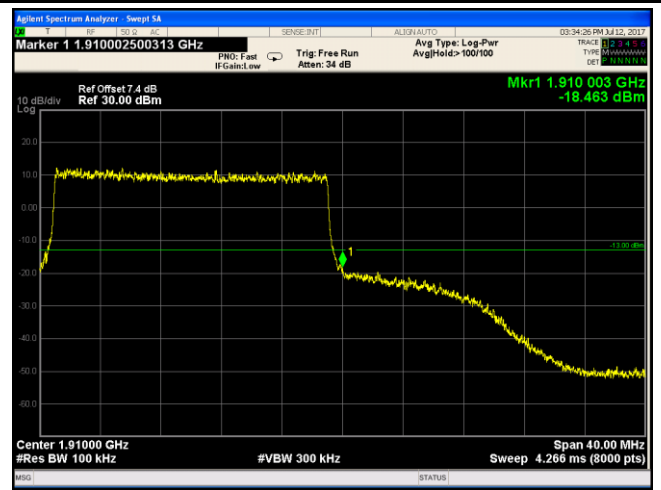


LTE Band II - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log  
(194.8/100)=4.5+2.9=7.4 dB

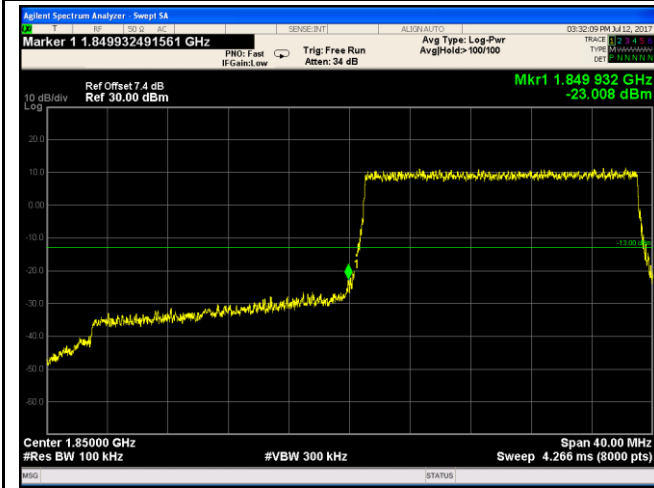

LTE Band II - Low Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log  
(195.2/100)=4.5+2.9=7.4 dB

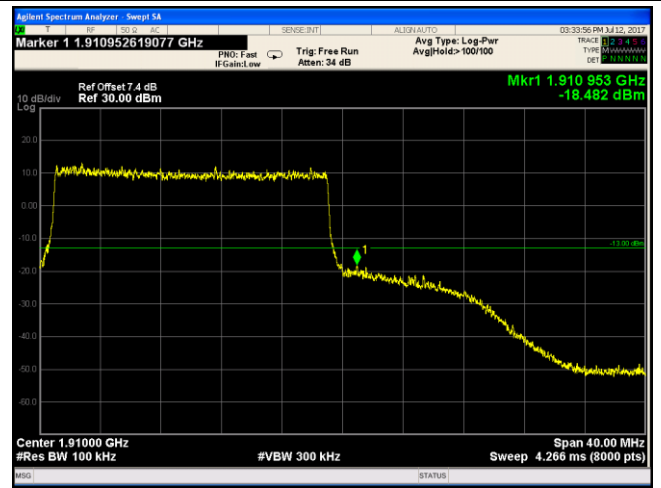

LTE Band II - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log  
(194.8/100)=4.5+2.9=7.4 dB

### LTE Band IV (Part 27)

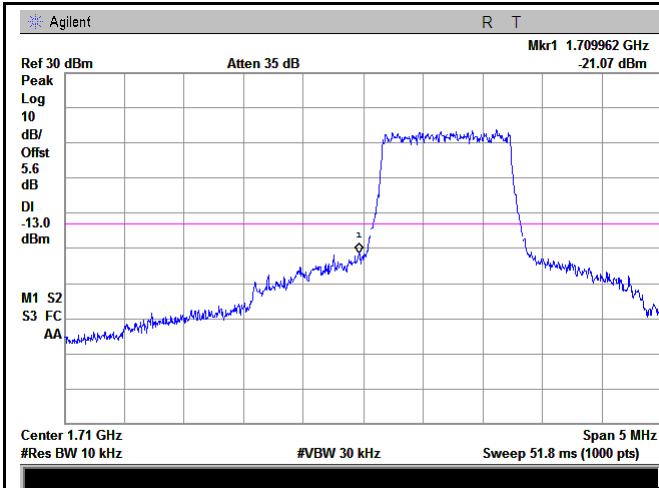


LTE Band IV - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 $(12.86/10)=4.5+1.1=5.6$  dB

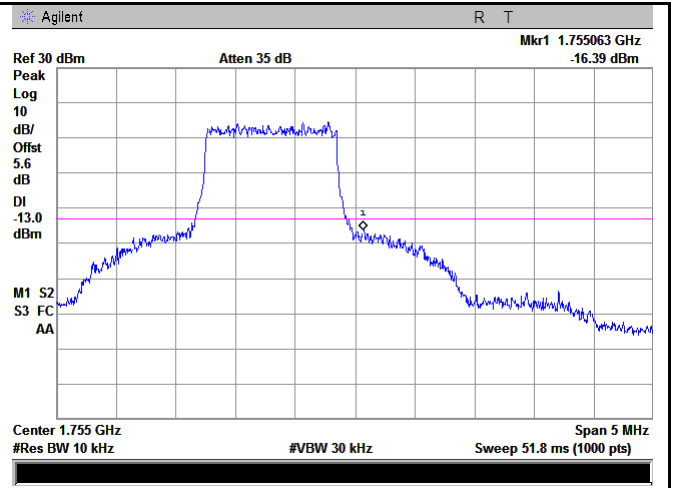


LTE Band IV - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 $(12.92/10)=4.5+1.1=5.6$  dB

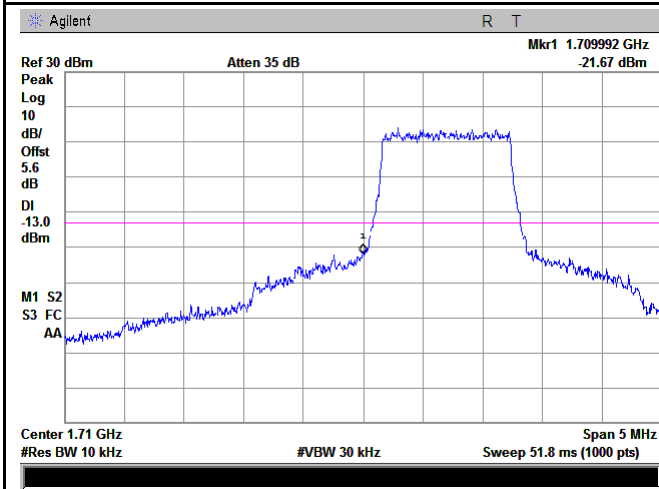


LTE Band IV - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log  
 $(12.86/10)=4.5+1.1=5.6$  dB

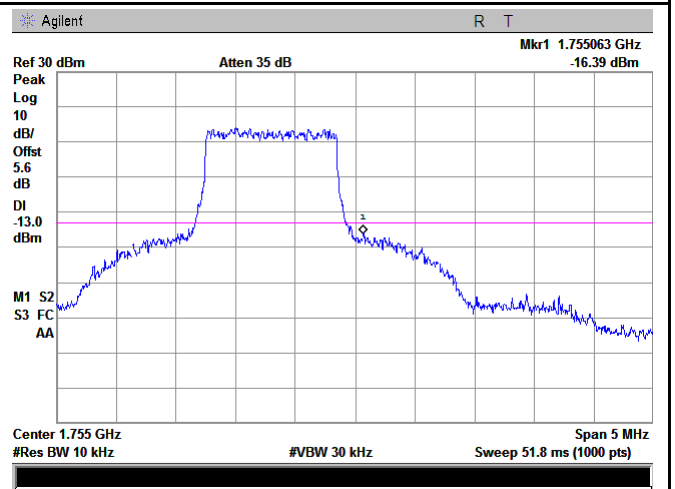


LTE Band IV - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log  
 $(12.84/10)=4.5+1.1=5.6$  dB

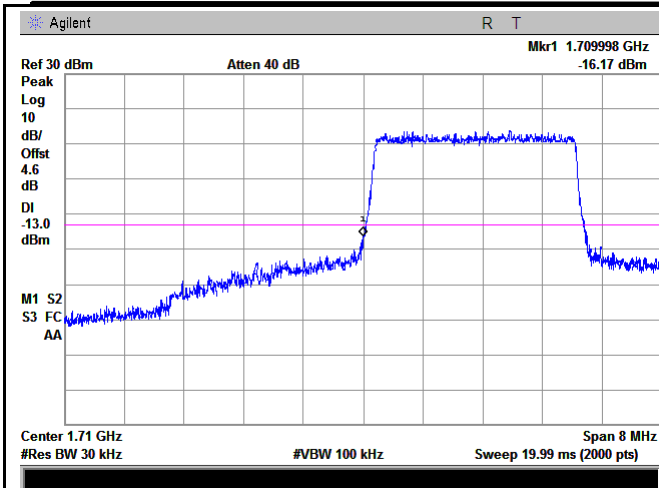


LTE Band IV - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
 (30.93/30)=4.5+0.1=4.6 dB

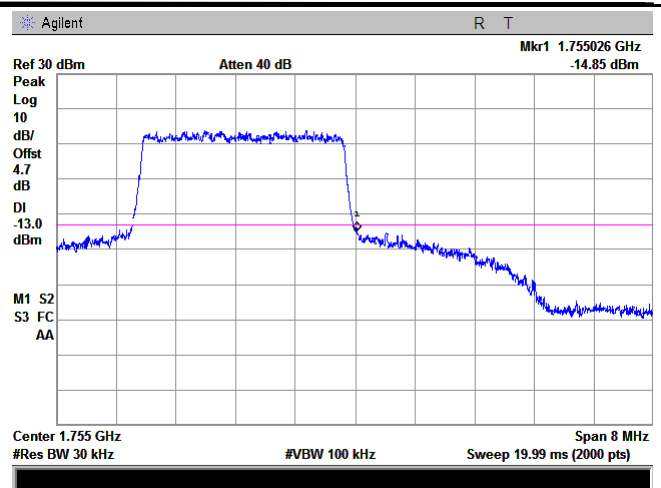


LTE Band IV - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
 (31.21/30)=4.5+0.2=4.7 dB

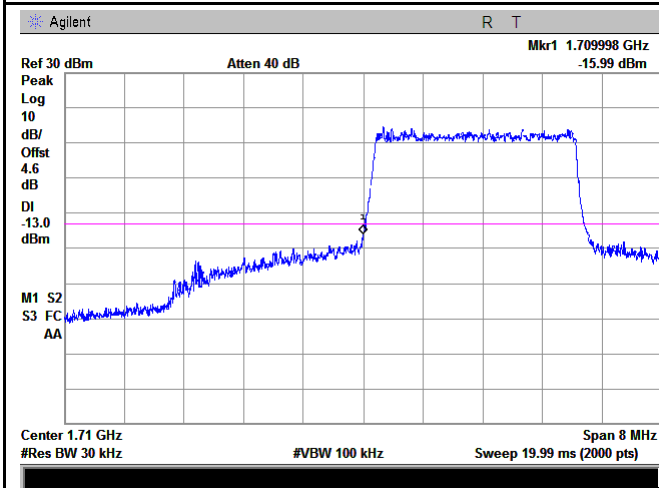


LTE Band IV - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
 (30.94/30)=4.5+0.1=4.6 dB

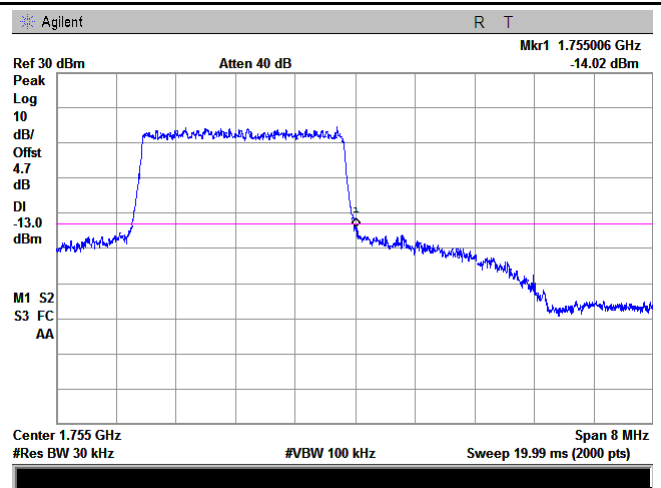


LTE Band IV - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
 (31.17/30)=4.5+0.2=4.7 dB

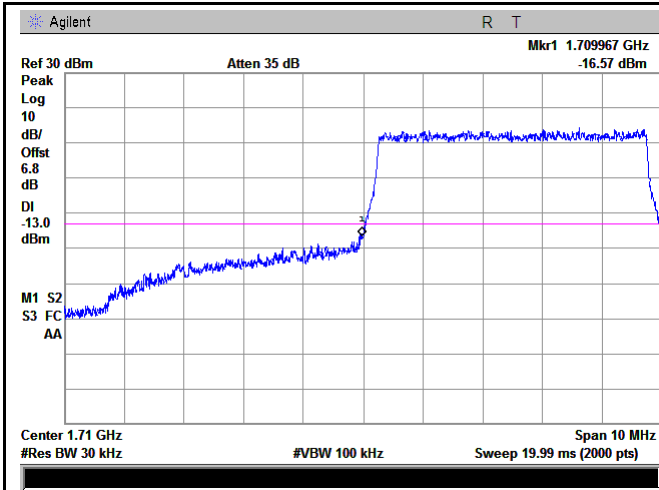


LTE Band IV - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.96/30)=4.5+2.3=6.8 dB

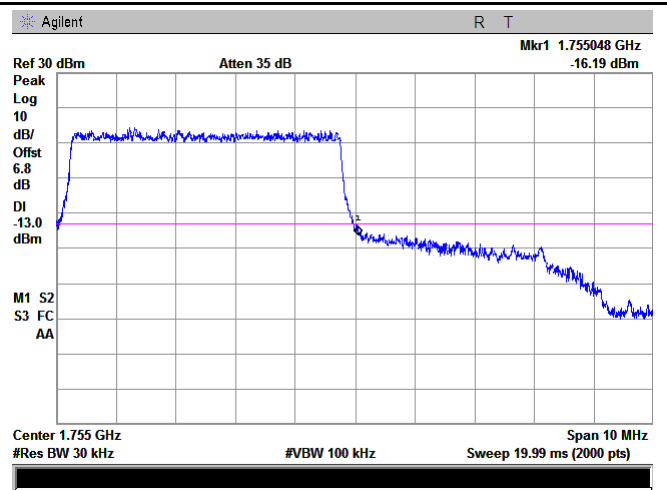


LTE Band IV - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.91/30)=4.5+2.3=6.8 dB

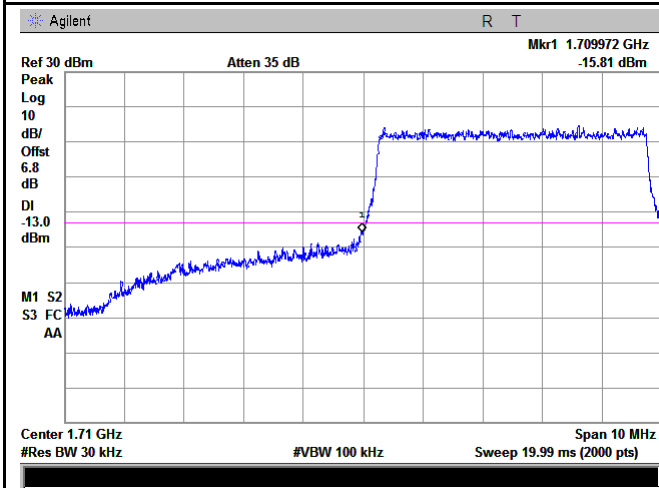

LTE Band IV - Low Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log  
(50.99/30)=4.5+2.3=6.8 dB

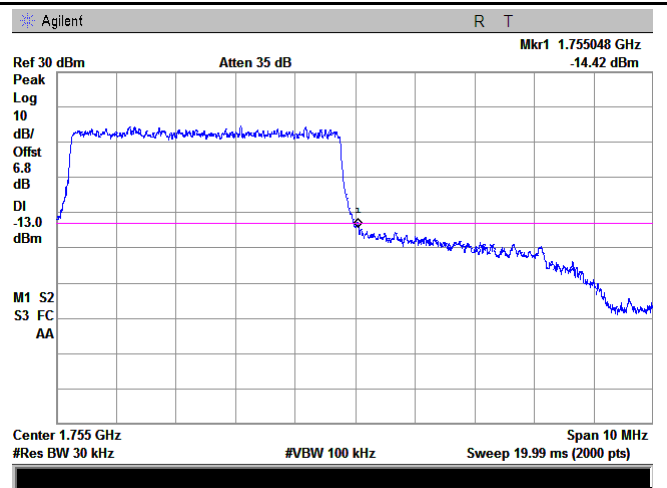


LTE Band IV - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log  
(50.93/30)=4.5+2.3=6.8 dB




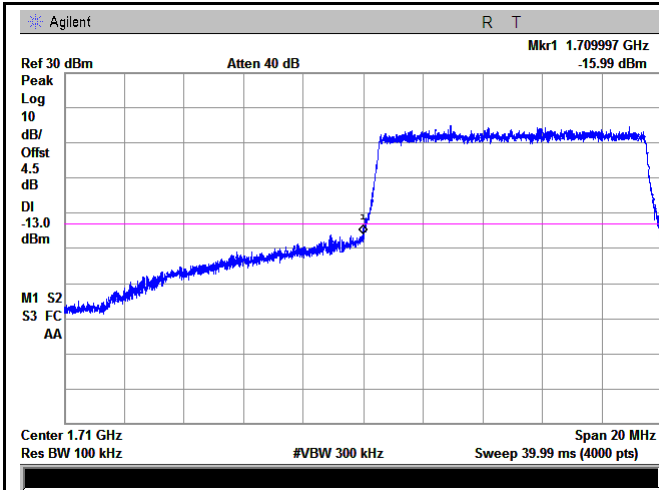


LTE Band IV - Low Channel QPSK-10

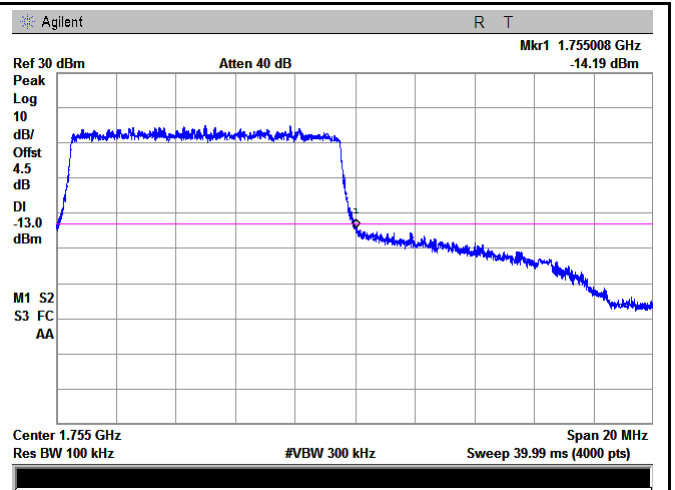


LTE Band IV - High Channel QPSK-10

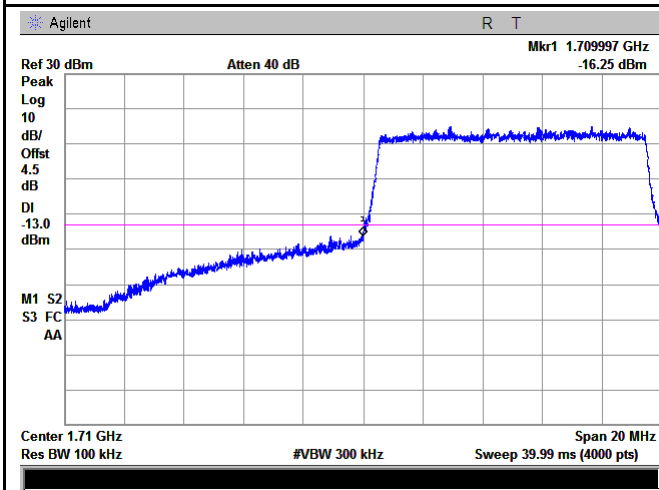


LTE Band IV - Low Channel 16QAM-10

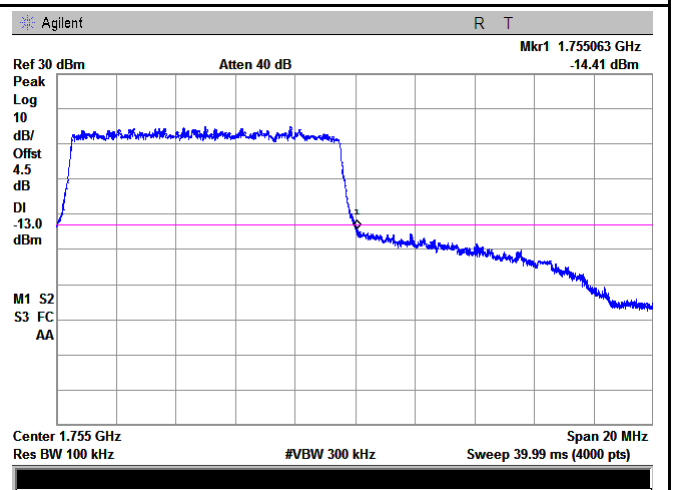

LTE Band IV - High Channel 16QAM-10

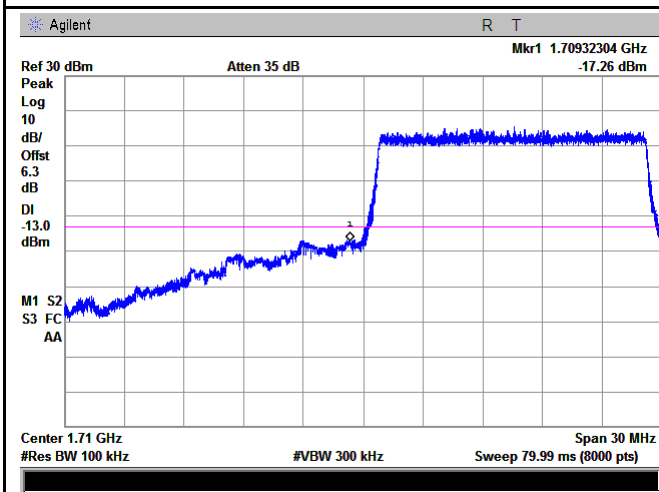


LTE Band IV - Low Channel QPSK-15

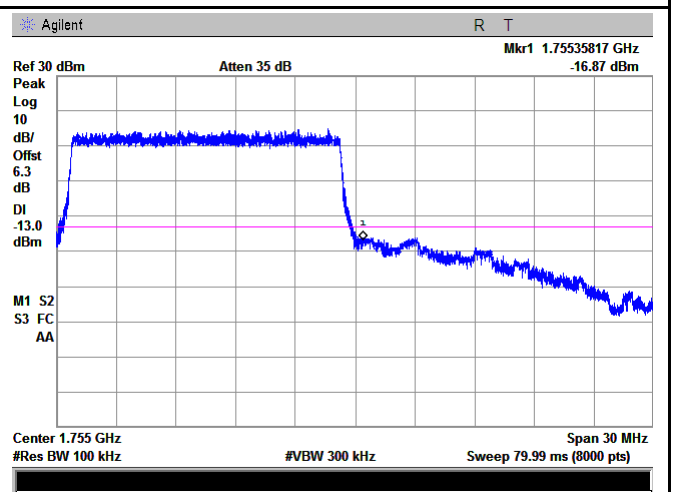

LTE Band IV - High Channel QPSK-15


Note: Offset=Cable loss (4.5) + 10log  
(150.23/100)=4.5+1.8=6.3 dB

Note: Offset=Cable loss (4.5) + 10log  
(150.24/100)=4.5+1.8=6.3 dB

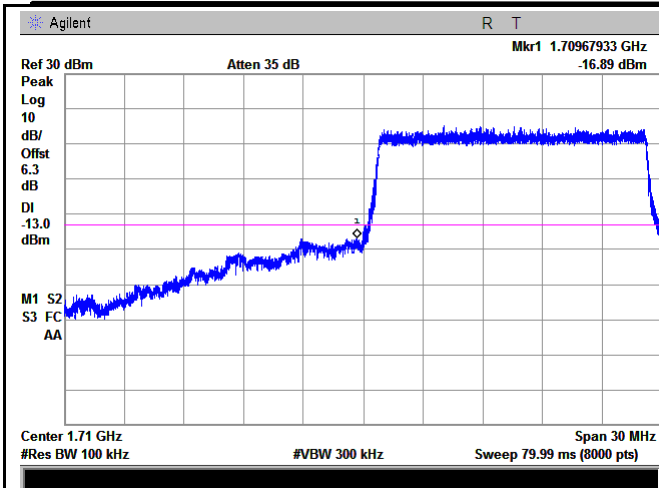


LTE Band IV - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log  
(150.59/100)=4.5+1.8=6.3 dB

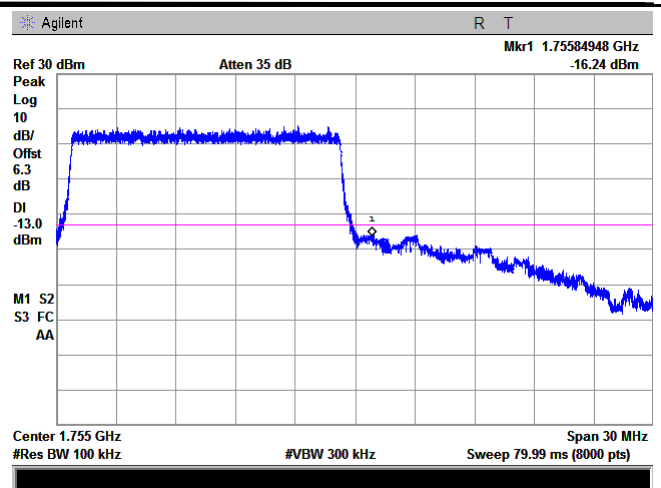


LTE Band IV - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log  
(150.51/100)=4.5+1.8=6.3 dB

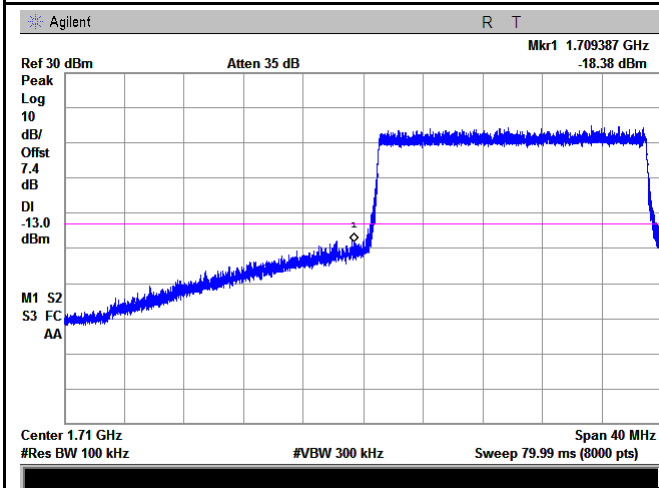



LTE Band IV - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log  
(195.45/100)=4.5+2.9=7.4 dB

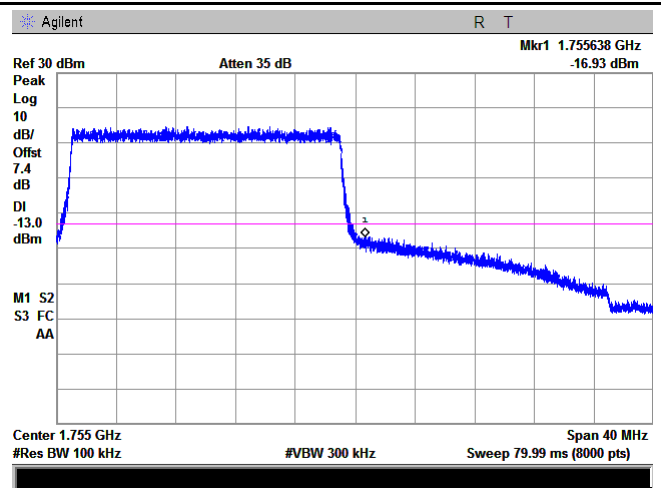

LTE Band IV - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log  
(195.15/100)=4.5+2.9=7.4 dB

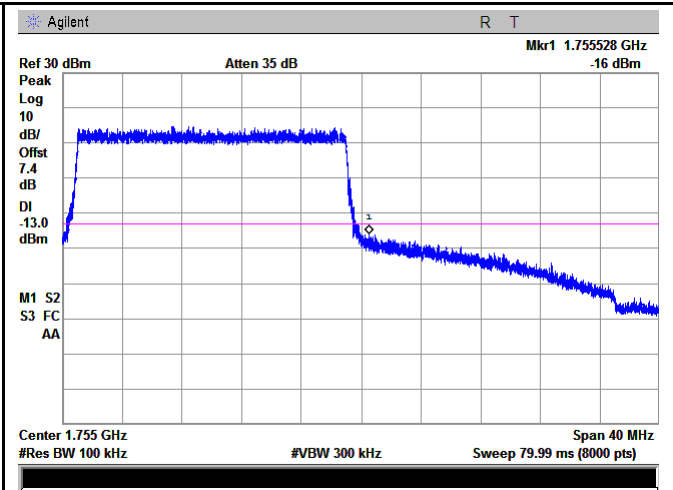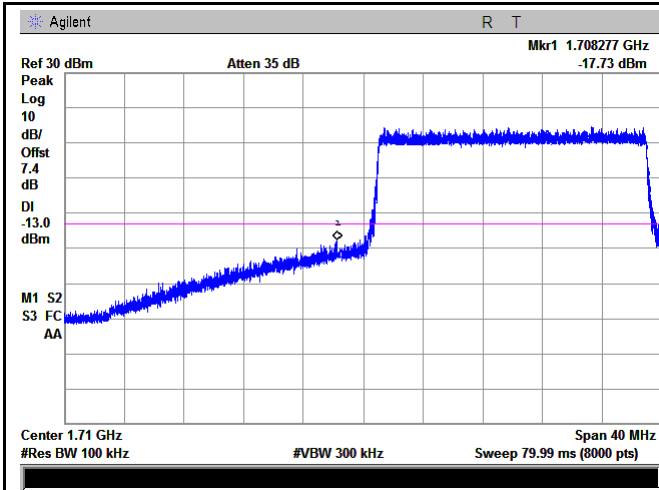


LTE Band IV - Low Channel 16QAM-20

LTE Band IV - High Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log  
 (195.52/100)=4.5+2.9=7.4dB


Note: Offset=Cable loss (4.5) + 10log  
 (195.49/100)=4.5+2.9=7.4 dB

### LTE Band V (Part 22H)

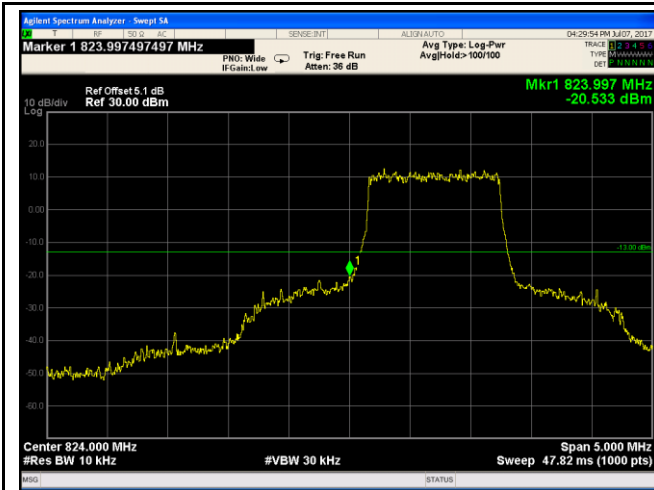


LTE Band V - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (12.97/10)=4.0+1.1=5.1 dB

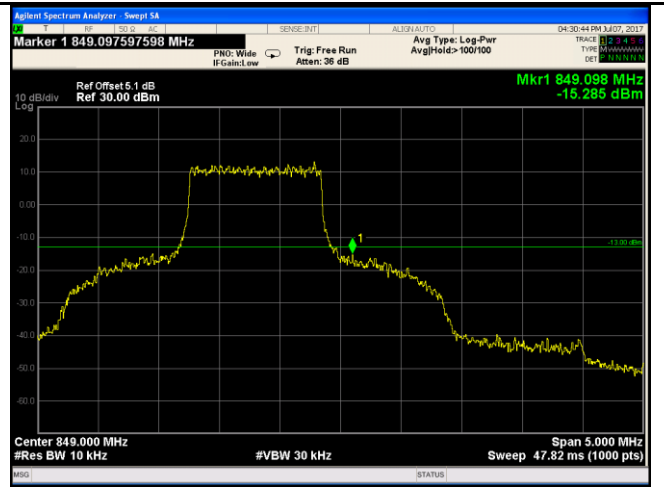


LTE Band V - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (12.91/10)=4.0+1.1=5.1 dB

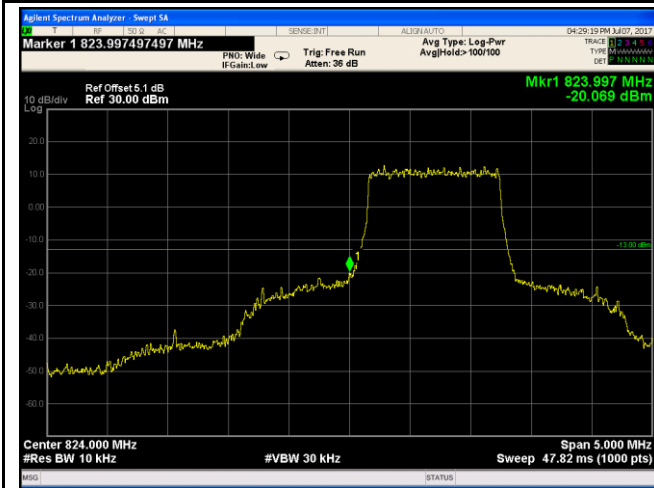


LTE Band V - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (13.02/10)=4.0+1.1=5.1dB

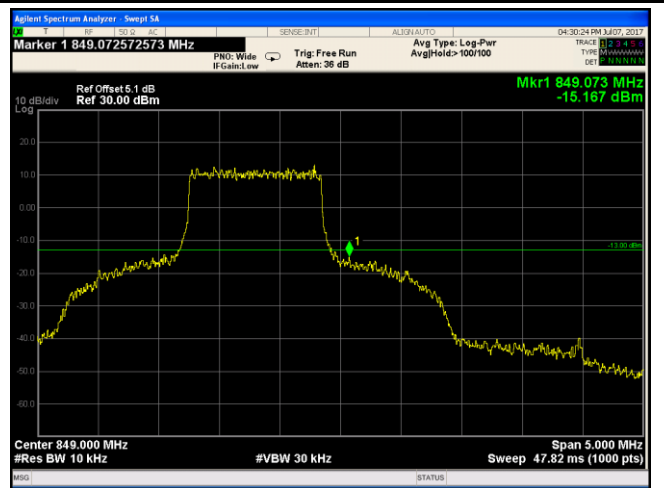


LTE Band V - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (12.95/10)=4.0+1.1=5.1 dB

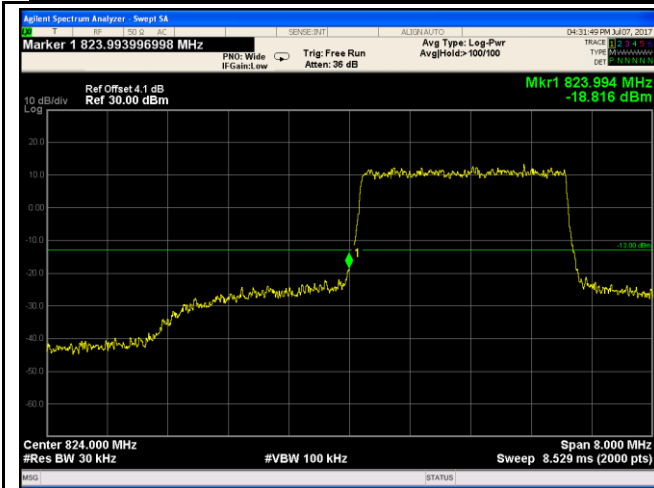


LTE Band V - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.72/30)=4.0+0.1=4.1 dB

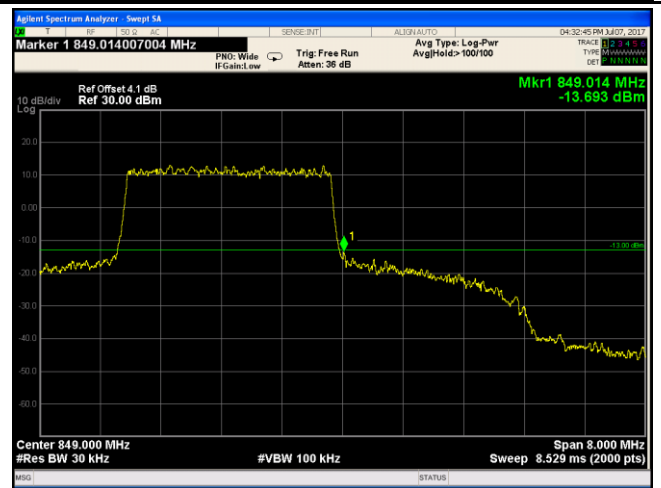


LTE Band V - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.73/30)=4.0+0.1=4.1 dB

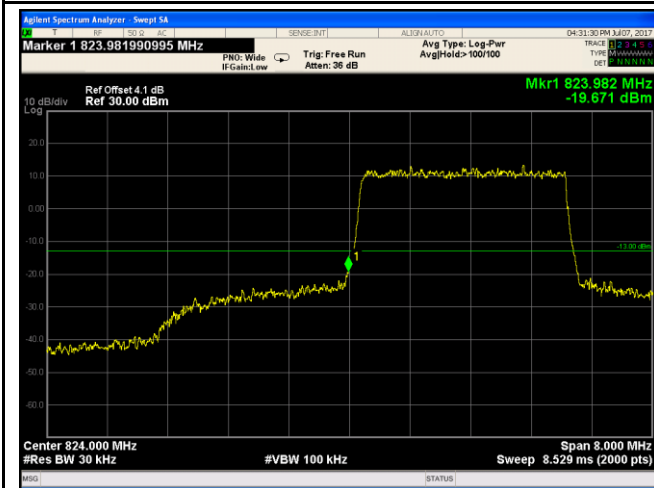


LTE Band V - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.73/30)=4.0+0.1=4.1 dB

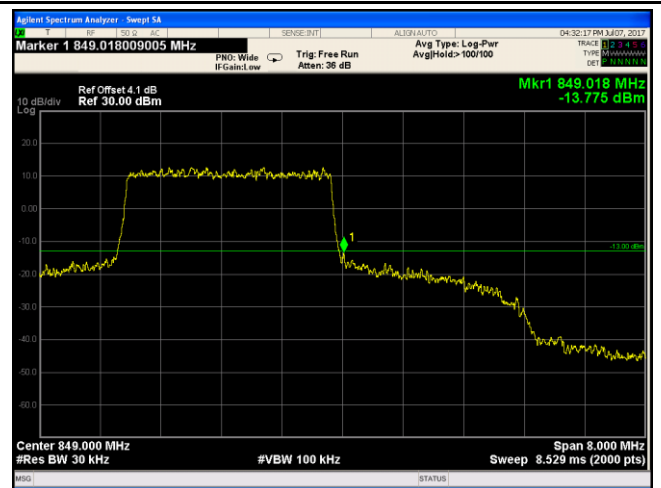


LTE Band V - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.73/30)=4.0+0.1=4.1 dB

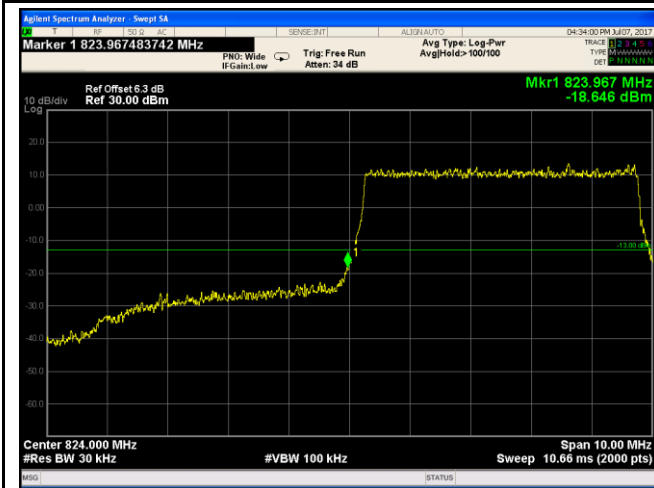


LTE Band V - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.95/30)=4.0+2.3=6.3 dB

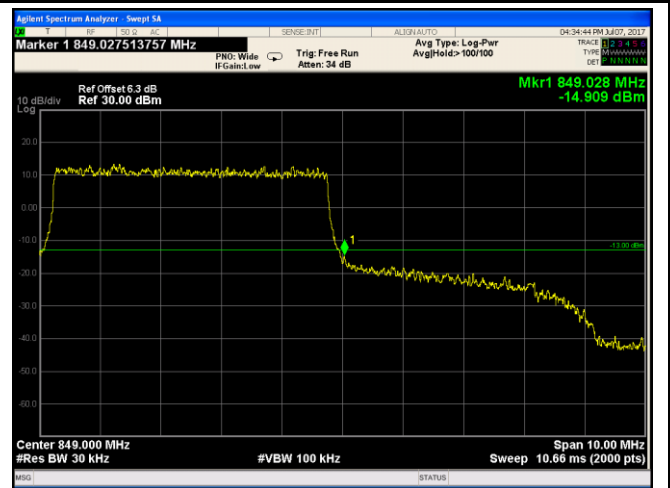


LTE Band V - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.96/30)=4.0+2.3=6.3 dB

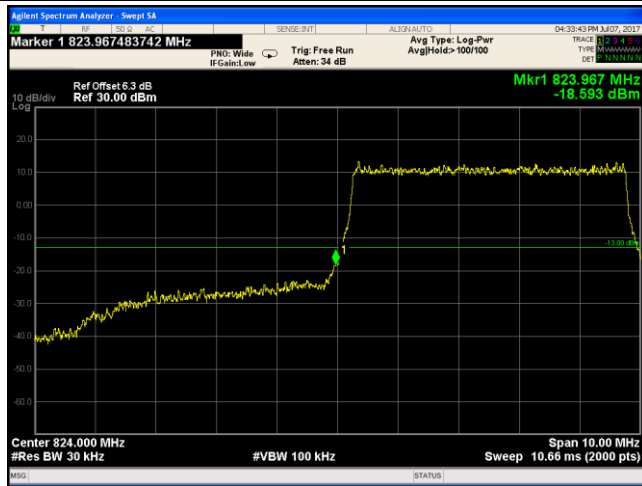


LTE Band V - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log  
(51.08/30)=4.0+2.3=6.3 dB

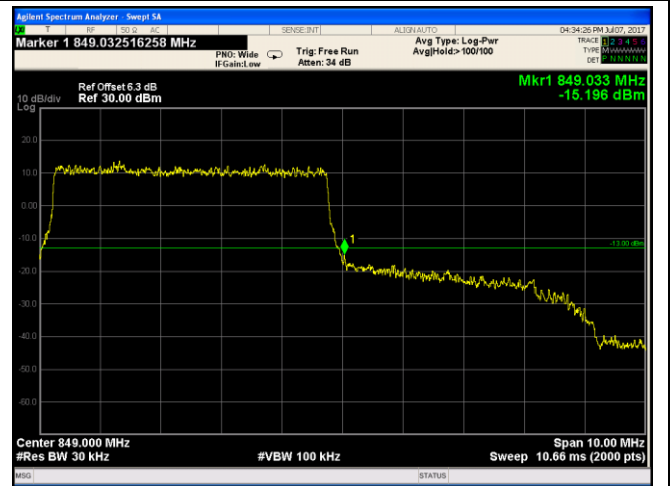


LTE Band V - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log  
(50.91/30)=4.0+2.3=6.3dB

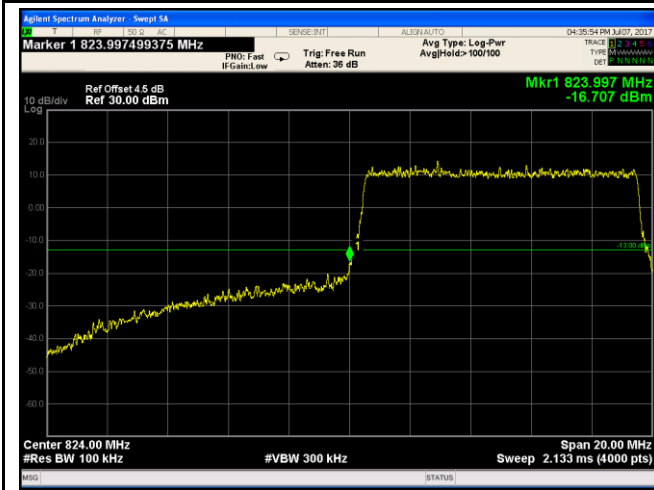


LTE Band V - Low Channel QPSK-10

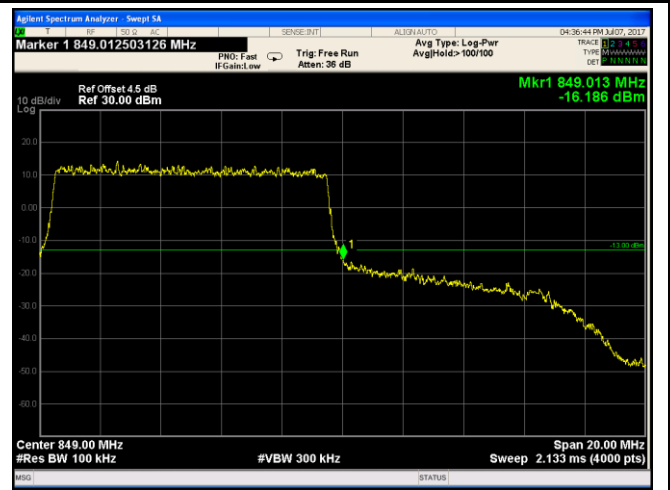

LTE Band V - High Channel QPSK-10

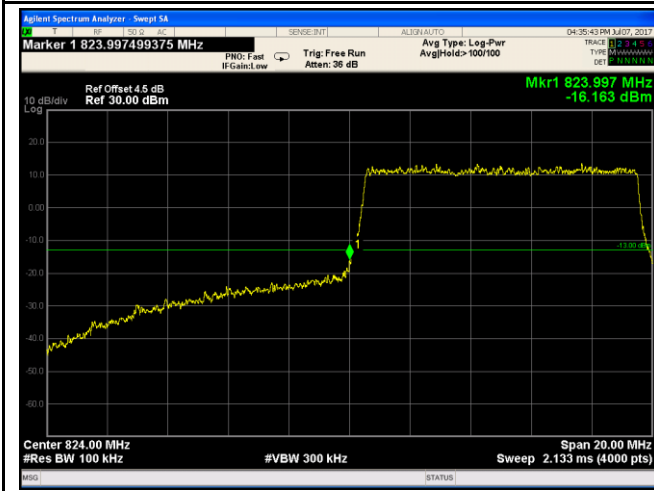


LTE Band V - Low Channel 16QAM-10

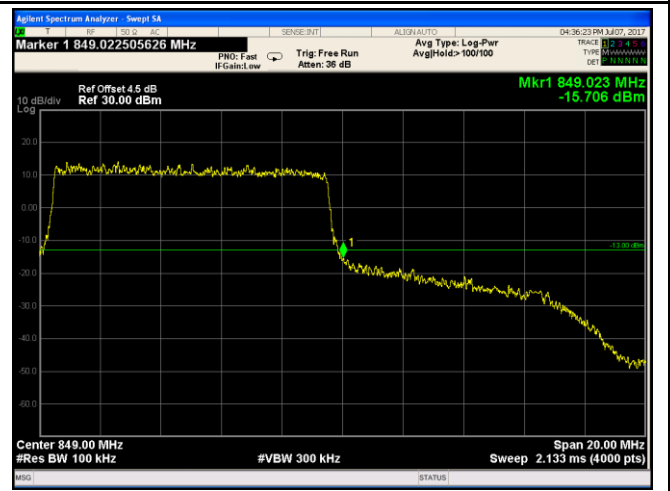


LTE Band V - High Channel 16QAM-10

### LTE Band XII (Part 27)

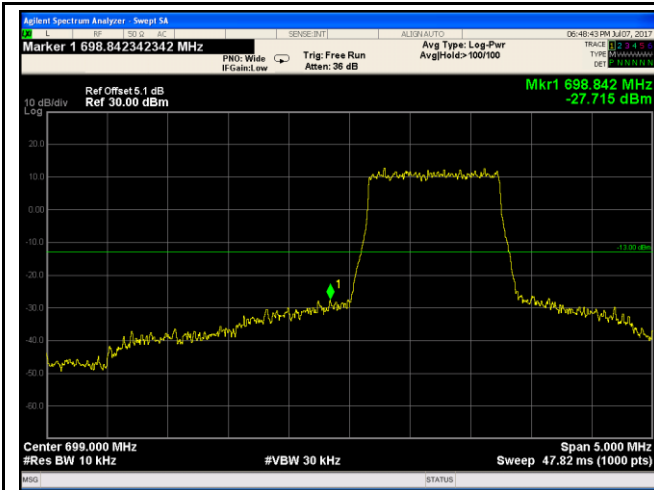


LTE Band XII - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (12.90/10)=4.0+1.1=5.1 dB

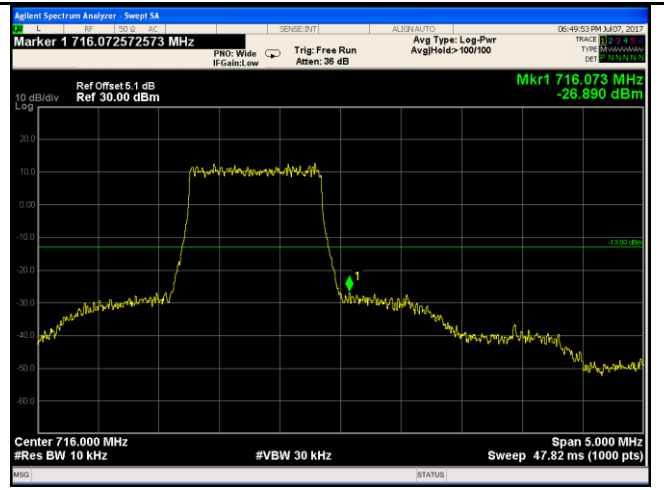


LTE Band XII - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log  
 (12.98/10)=4.0+1.1=5.1 dB

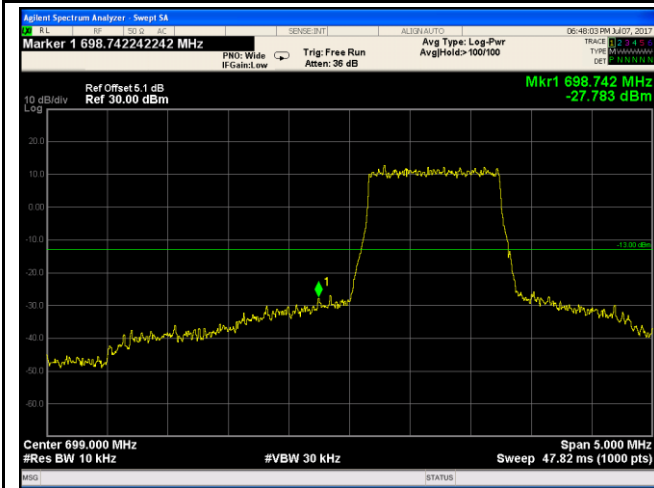

LTE Band XII - Low Channel 16QAM-1.4


Note: Offset=Cable loss (4.5) + 10log  
 (12.99/10)=4.0+1.1=5.1 dB

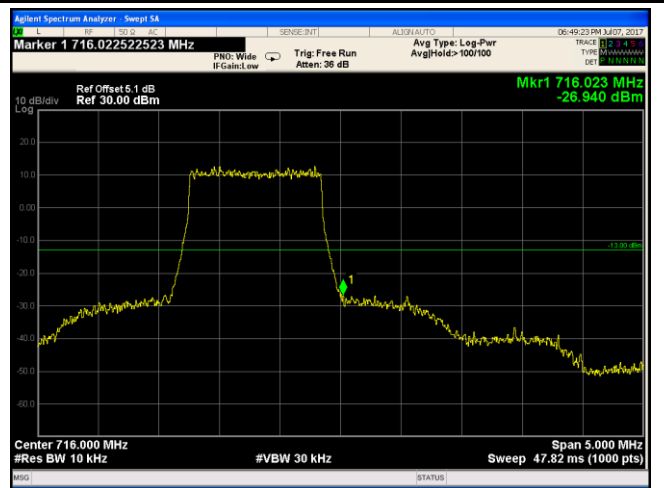

LTE Band XII - High Channel 16QAM-1.4


Note: Offset=Cable loss (4.5) + 10log  
 (12.99/10)=4.0+1.1=5.1 dB



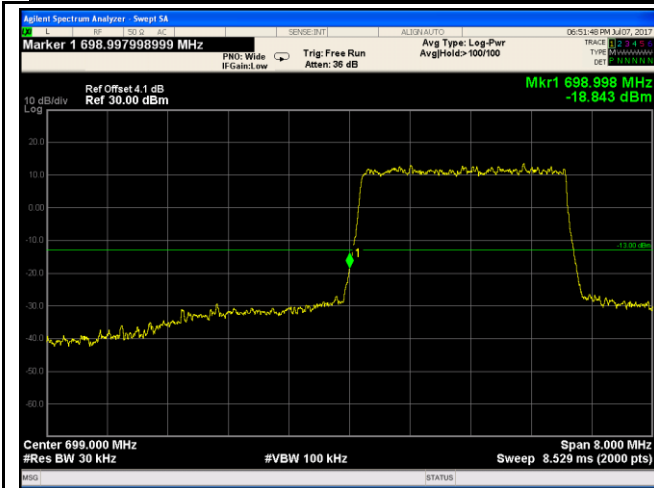


LTE Band XII - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.49/30)=4.0+0.1=4.1 dB

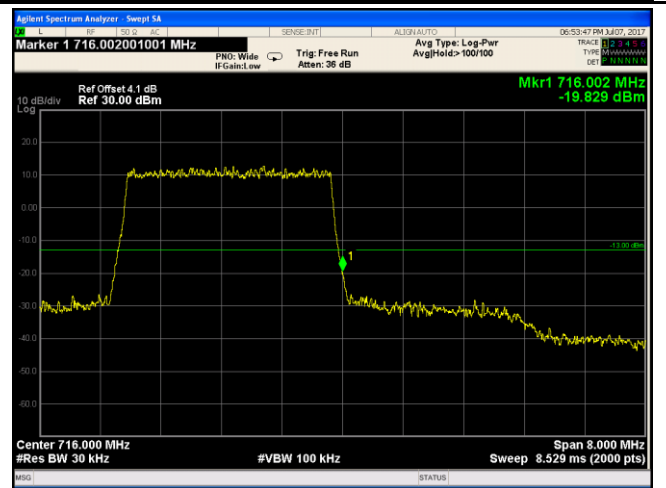


LTE Band XII - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log  
(30.65/30)=4.0+0.1=4.1 dB

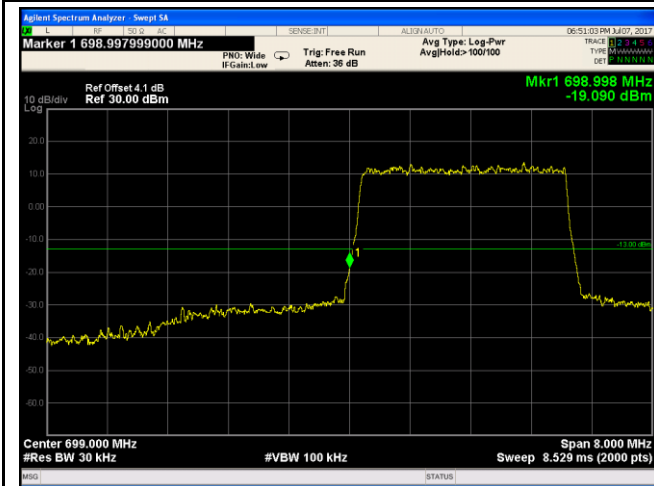


LTE Band XII - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.52/30)=4.0+0.1=4.1 dB

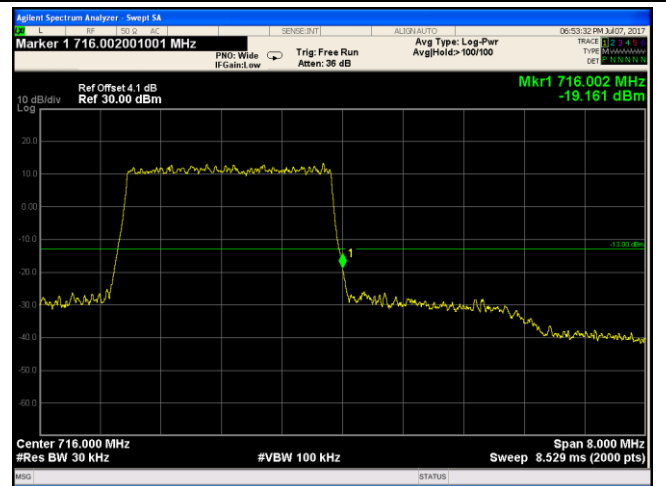


LTE Band XII - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log  
(30.54/30)=4.0+0.1=4.1 dB

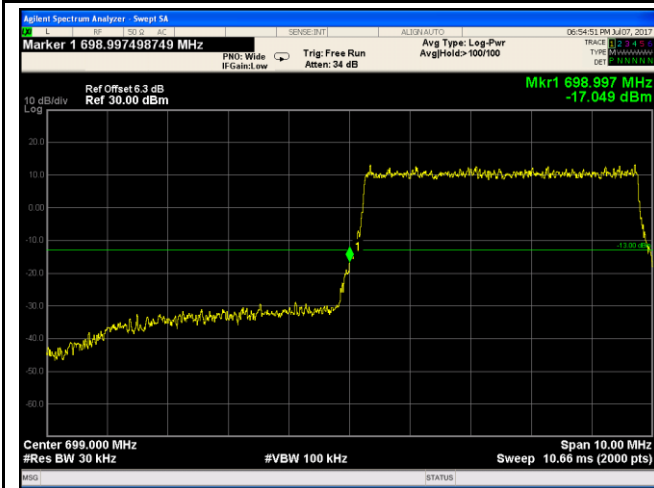


LTE Band XII - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(51.96/30)=4.0+2.3=6.3 dB

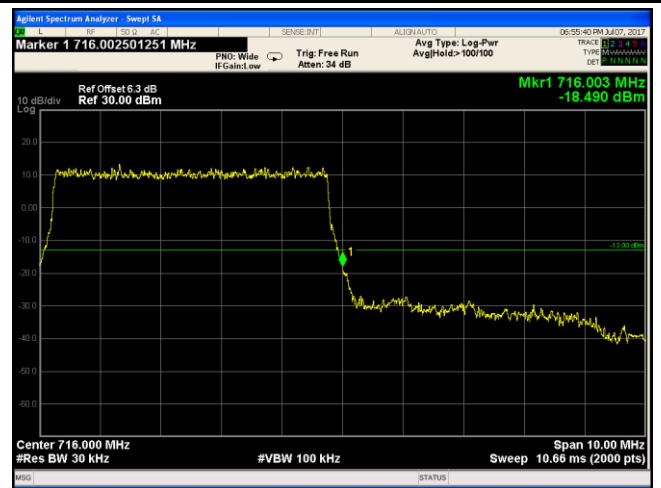


LTE Band XII - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log  
(50.86/30)=4.0+2.3=6.3 dB

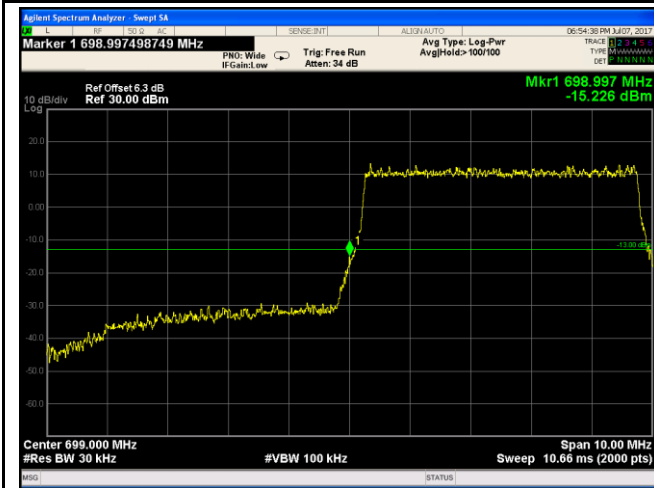


LTE Band XII - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log  
(51.06/30)=4.0+2.3=6.3 dB

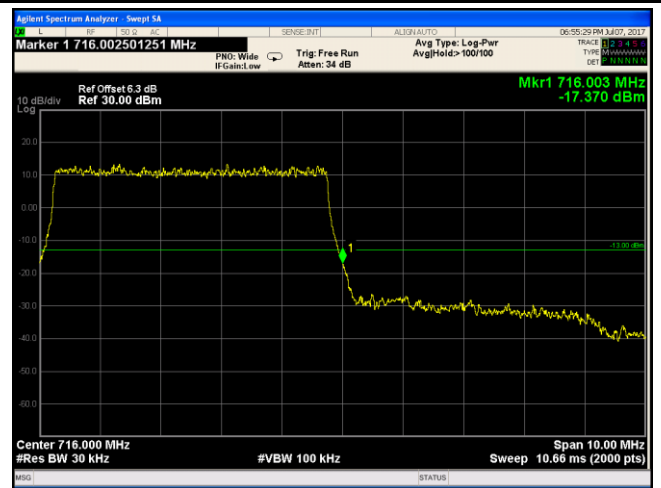


LTE Band XII - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log  
(50.79/30)=4.0+2.3=6.3 dB

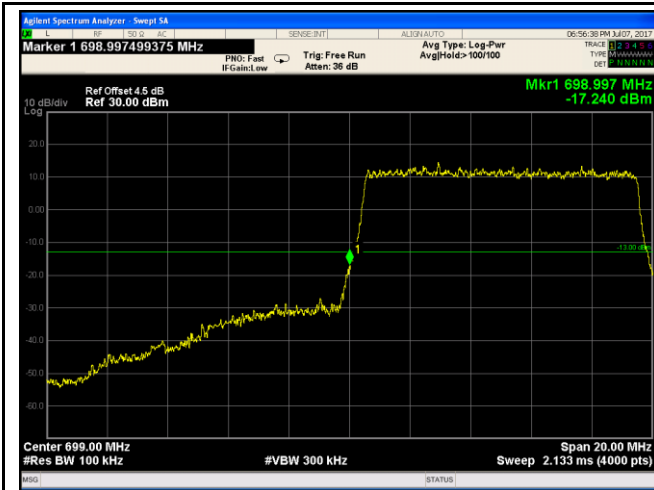


LTE Band XII - Low Channel QPSK-10

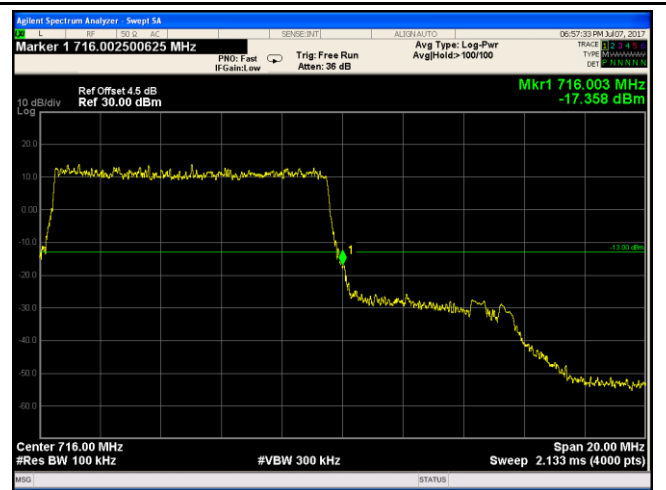

LTE Band XII - High Channel QPSK-10

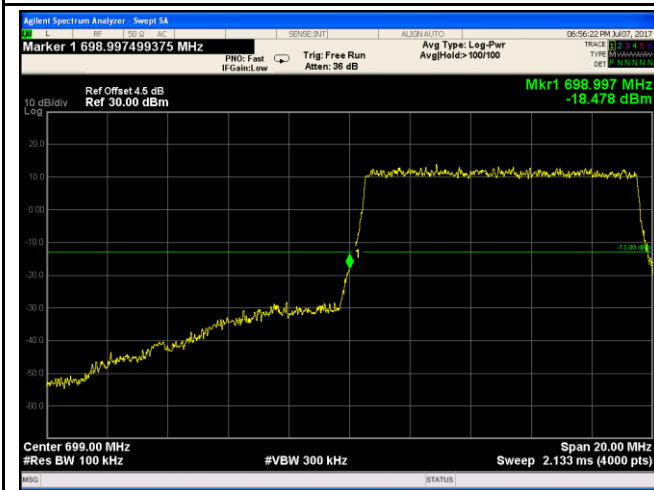

LTE Band XII - Low Channel 16QAM-10

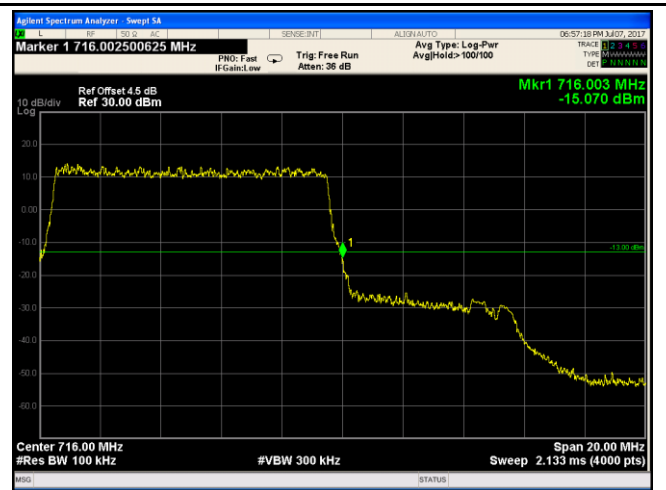

LTE Band XII - High Channel 16QAM-10