


TEST REPORT

Applicant: Shanghai Xiangcheng Communication Technology Co.,Ltd
Address: 6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai
Equipment Type: P18 Smart Desktop Terminal
Model Name: P18
Brand Name: KOZEN
FCC ID: 2A2UU-P1861
Test Standard: 47 CFR Part 2.1093
KDB 447498 D04 v01
Sample Arrival Date: Aug. 06, 2024
Test Date: Nov. 06, 2024
Date of Issue: Nov. 20, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Lining**Checked by:** Xu Rui**Approved by:** Tolan Tu
(Testing Director)

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Nov. 20, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information.....	4
2.2	Manufacturer Information	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Technical Information	4
3	SUMMARY OF TEST RESULT	5
3.1	Test Standards.....	5
3.2	Limit Standards	5
4	DEVICE CATEGORY AND LEVELS LIMITS	6
5	ASSESSMENT RESULT	8
5.1	Output Power	8
5.2	RF Exposure Evaluation Result.....	9
5.3	Highest Total Exposure Ratio of Simultaneous Transmission.....	9
5.4	Conclusion	9

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shanghai Xiangcheng Communication Technology Co.,Ltd
Address	6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai

2.2 Manufacturer Information

Manufacturer	Shanghai Xiangcheng Communication Technology Co.,Ltd
Address	6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai

2.3 General Description for Equipment under Test (EUT)

EUT Name	P18 Smart Desktop Terminal
Model Name Under Test	P18
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	P18714071110000
Software Version	p1861_tekpal_a3
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12 LTE TDD Band 38/41 Bluetooth(BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) 5.8G SRD, GPS, GLONASS, BDS, Galileo, NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	NFC	
Frequency Range	NFC	13.56 MHz
Antenna Type	NFC	Coil Antenna
Exposure Category	General Population/Uncontrolled Exposure	
Product Type	Portable Device	

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	KDB 447498 D04 v01	KDB 447498 D04 Interim General RF Exposure Guidance v01

3.2 Limit Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices

4 DEVICE CATEGORY AND LEVELS LIMITS

Portable Devices:

CFR Title 47 §2.1093(b)

(b) For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

FCC KDB 447498 Devices:

1. According to the 2022.04 TCBC Workshop meeting, the power threshold is $\leq 100\text{MHz}$, refer to P6s.



$$P_{7X}(d_{mm}, f_{MHz}) := \begin{cases} P_{6S}(d_{mm}, f_{MHz}) & f_{MHz} \leq 100 \\ P_{6to7}(d_{mm}, f_{MHz}) & 100 < f_{MHz} \leq 300 \\ P_7(d_{mm}, f_{MHz}) & 300 < f_{MHz} \end{cases}$$

2. For portable products, when using a distance of $\leq 50\text{mm}$, such as mobile phone NFC, P6s is calculated with the following formula calculate.

$$S_f(f_{MHz}) \cdot P_{431a}(d_{mm}, f_{MHz}) + (1 - S_f(f_{MHz})) \cdot S_d(d_{mm}) \cdot P_{431b1}(50., 100.) \cdot \left(1 + \log_{10}\left(\frac{100.}{f_{MHz}}\right)\right) \quad d_{mm} \leq 50 \text{ and } f_{MHz} \leq 100$$

3. The smoothing functions Sf and Sd in P6s calculate the limits based on KDB 447498 V06 and are calculated as follows.

$$S_f(f_{MHz}) := \exp\left(-10 \frac{(f_{MHz} - f_{max})^2}{\Delta f^2}\right) \quad S_d(d_{mm}) := 0.5 + 0.5 \cdot \exp\left(-10 \frac{(d_{mm} - d_{max})^2}{\Delta d^2}\right)$$

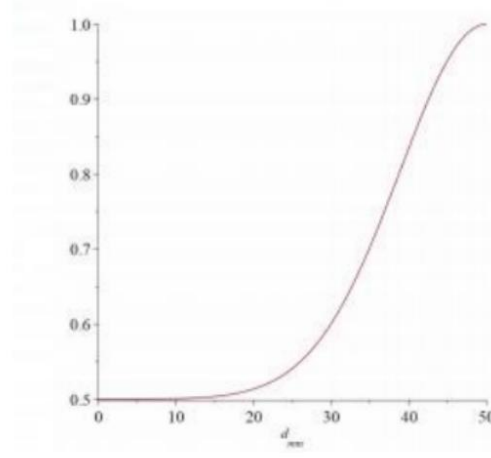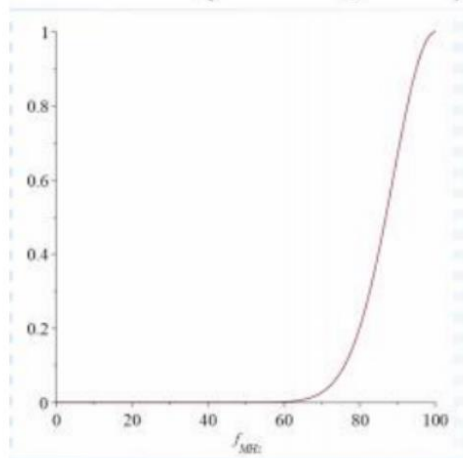

d≤50mm				
f Max(MHz)	100		d Max(mm)	50
f MHz	13.56		d(mm)	5
△f(MHz)	100		△d	50
S _f (f _{MHz})	0.000568861		S _d (d _{mm})	0.50015177
P6s(mW)	443.1257378			
Note: SAR testing is required when the distance is 5mm and the power is greater than 443.13mW.				

5 ASSESSMENT RESULT

5.1 Output Power

According to the ANSI C63.10 clause 11.12.2.2:

The value of maximum peak output power is according to the method described in ANSI C63.10 clause 11.12.2.2 General procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies $\leq$ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship: $E = \text{EIRP} - 20\log D + 104.8$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

Mode	f (MHz)	Max. E-Field strength (dB μ V/m)	D (m)	Ground reflection factor (dB)	ERP (dBm)
NFC (13.56MHz)	13.56	70.20	10	6	-8.60
Note: 1. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies $\leq$ 30 MHz). 2. ERP = $70.20 + 20 \cdot \log(10) - 104.8 + 6 = -8.60$ (dBm)					

5.2 RF Exposure Evaluation Result

According to the FCC KDB 447498 D04

Estimated SAR: SAR test = 1.6 · Pant / Pth [W/kg]

Estimated SAR	1.6 · Pant / Pth [W/kg]		
Pmeas.(dBm)	-8.60	Pmeas.(mW)	0.14
Pth.(mW)	443.13		
NFC Estimated 1g SAR [W/kg]	<0.001		

5.3 Highest Total Exposure Ratio of Simultaneous Transmission

NFC multi-transmit requires the use of the TER formula:

$$TER = \sum_{k=1}^{N_s} \left(\frac{SAR_k}{SAR_{lim}} \right) + \sum_{k=1}^{N_f} \left(\frac{MPE_{field, k}}{MPE_{field, lim}} \right)^2 + \sum_{k=1}^{N_{PD}} \left(\frac{MPE_{PD, k}}{MPE_{PD, lim}} \right)$$

Mode	1gSAR [W/kg]	TER (Total Exposure Ratio)	TER Limit	Verdict
NFC Estimated	0.001	0.977	1.00	Pass
Max Simultaneous transmission SAR	1.562			

5.4 Conclusion

This EUT is deemed to comply with the reference level limits, therefore the basic restrictions are compliant with human exposure limits.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--