


Test Data

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.717	30	Pass
NVNT	BLE	2442	Ant1	-2.587	30	Pass
NVNT	BLE	2480	Ant1	-3.555	30	Pass

Test Graphs


Power NVNT BLE 2402MHz Ant1

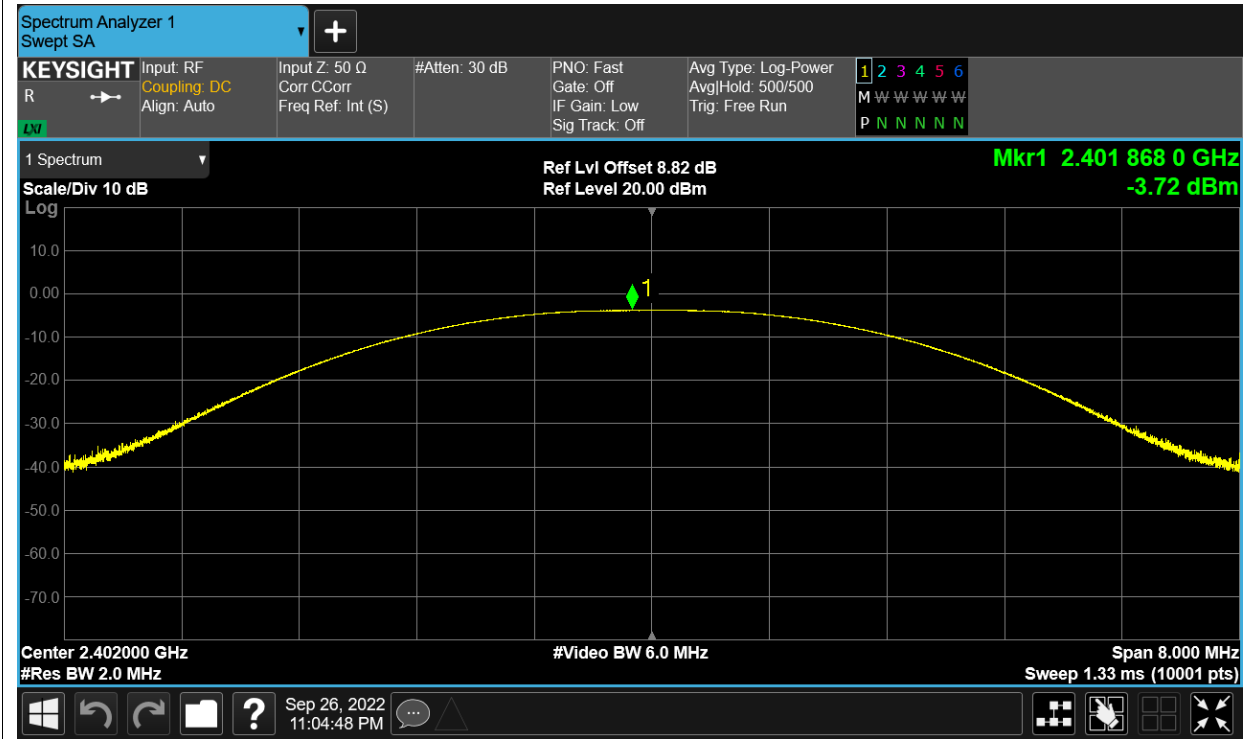

Power NVNT BLE 2442MHz Ant1


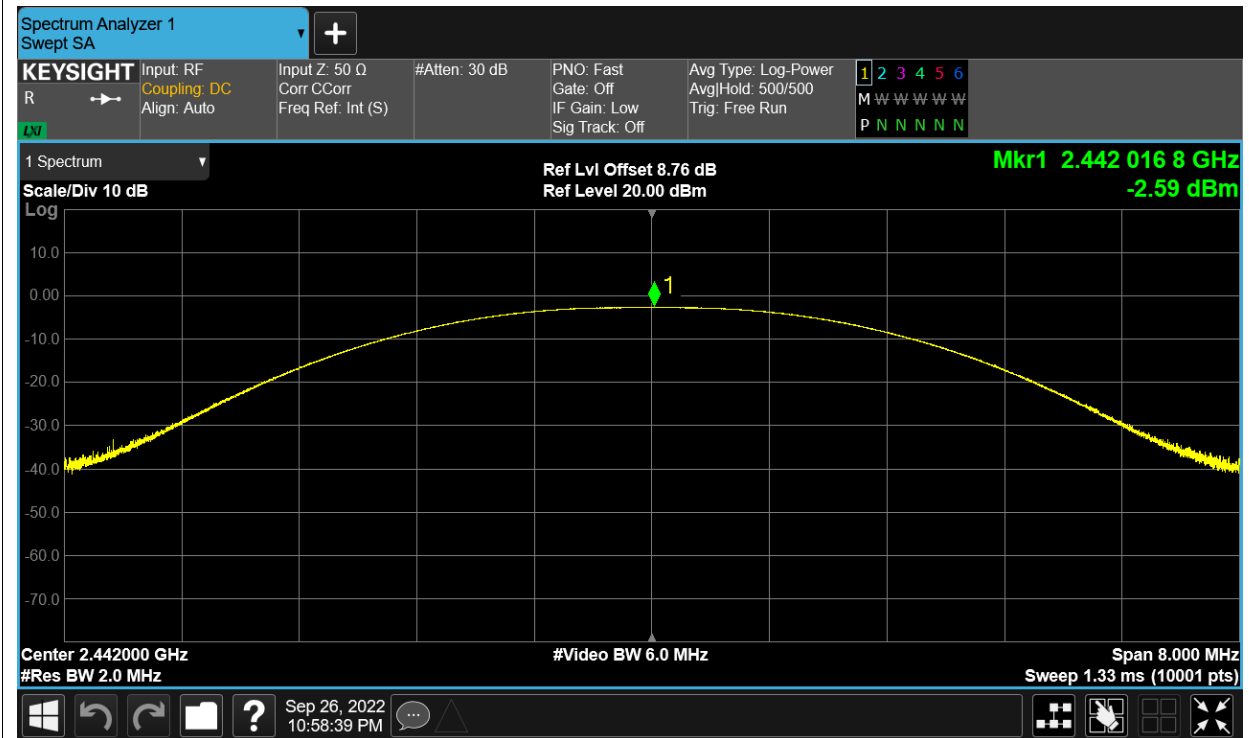



Power NVNT BLE 2480MHz Ant1

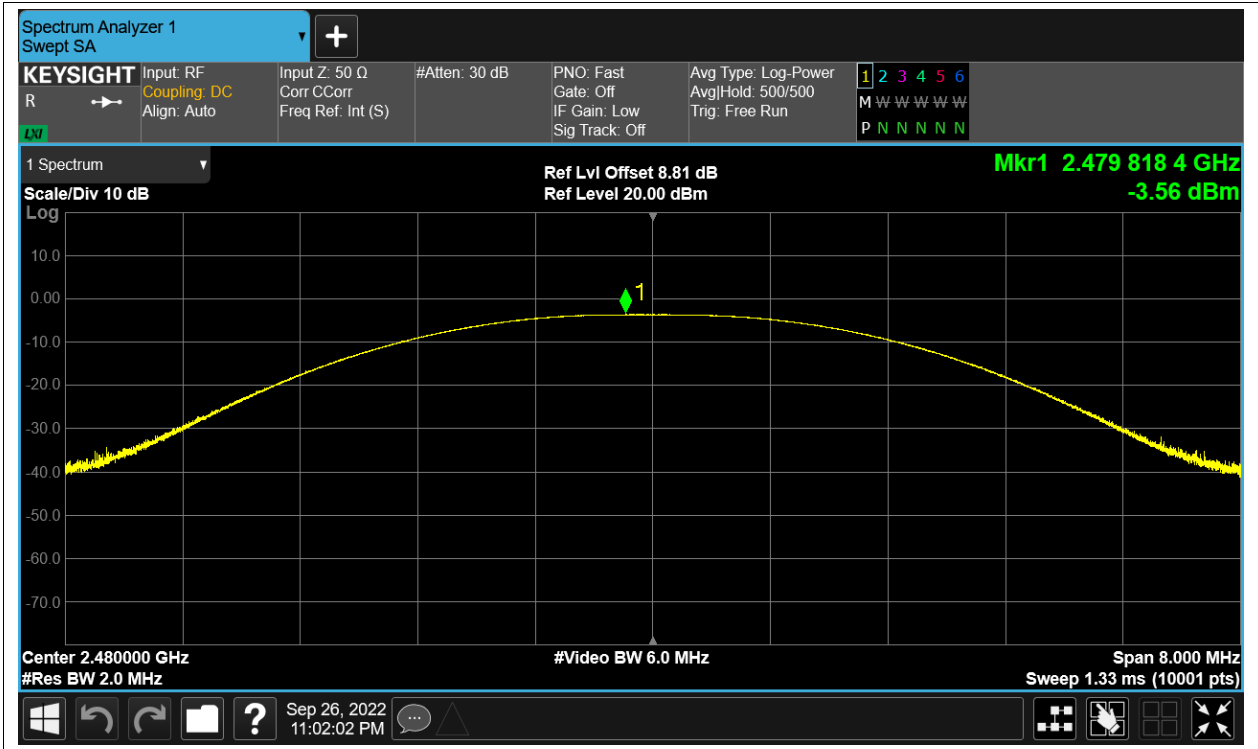

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.663	0.5	Pass
NVNT	BLE	2442	Ant1	0.665	0.5	Pass
NVNT	BLE	2480	Ant1	0.662	0.5	Pass

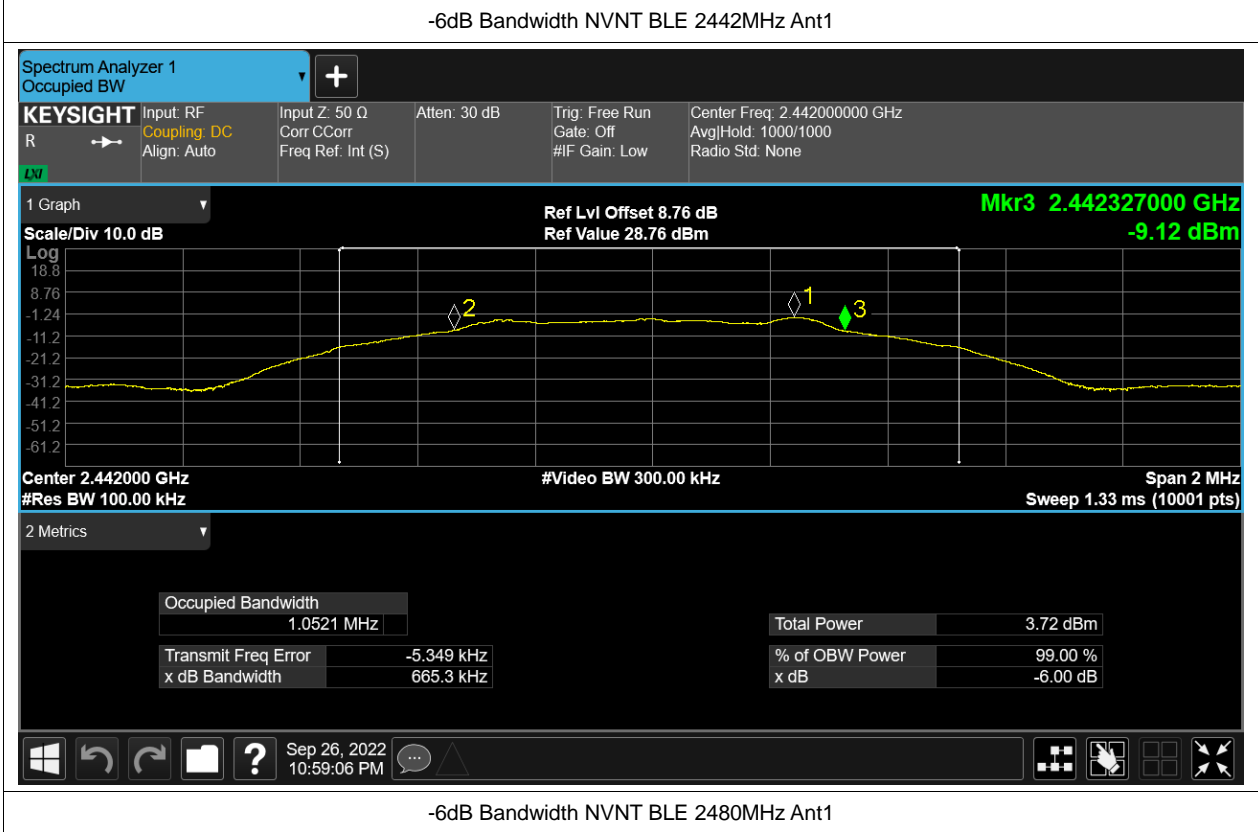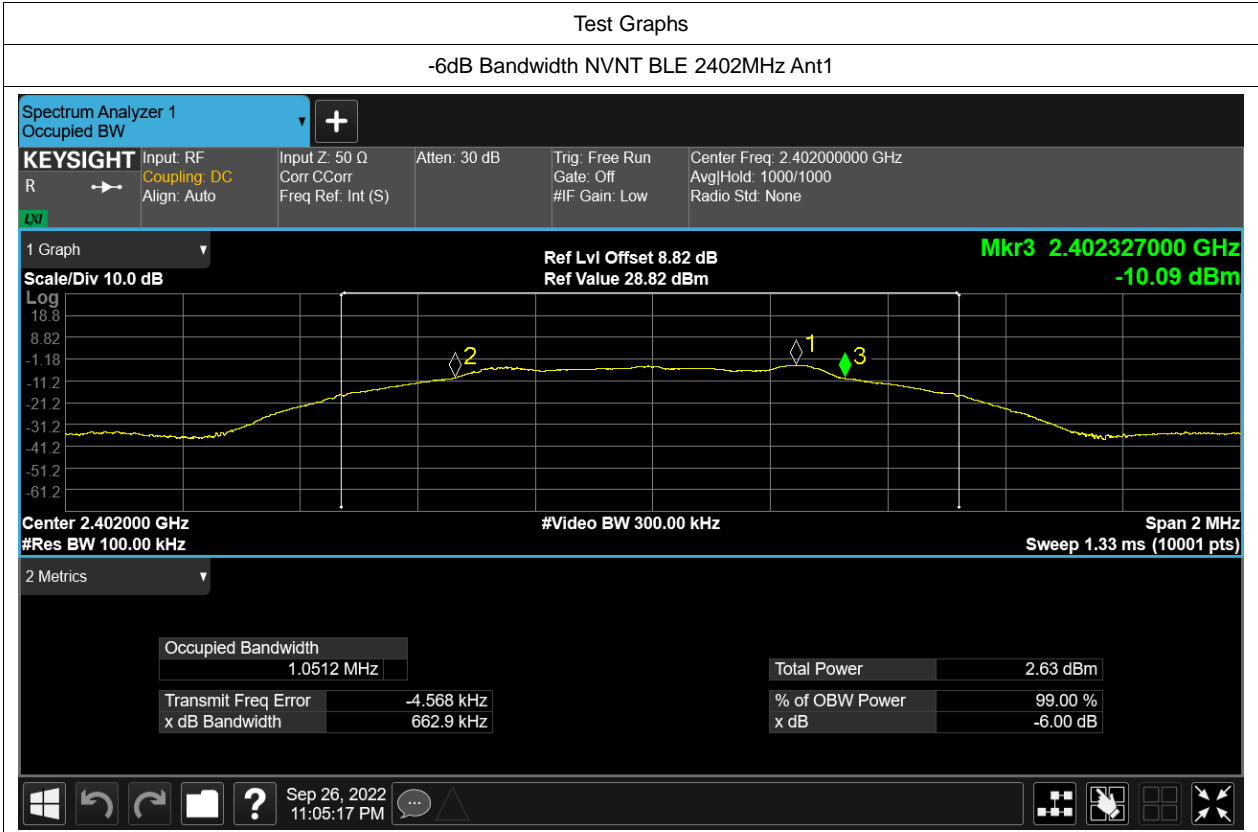

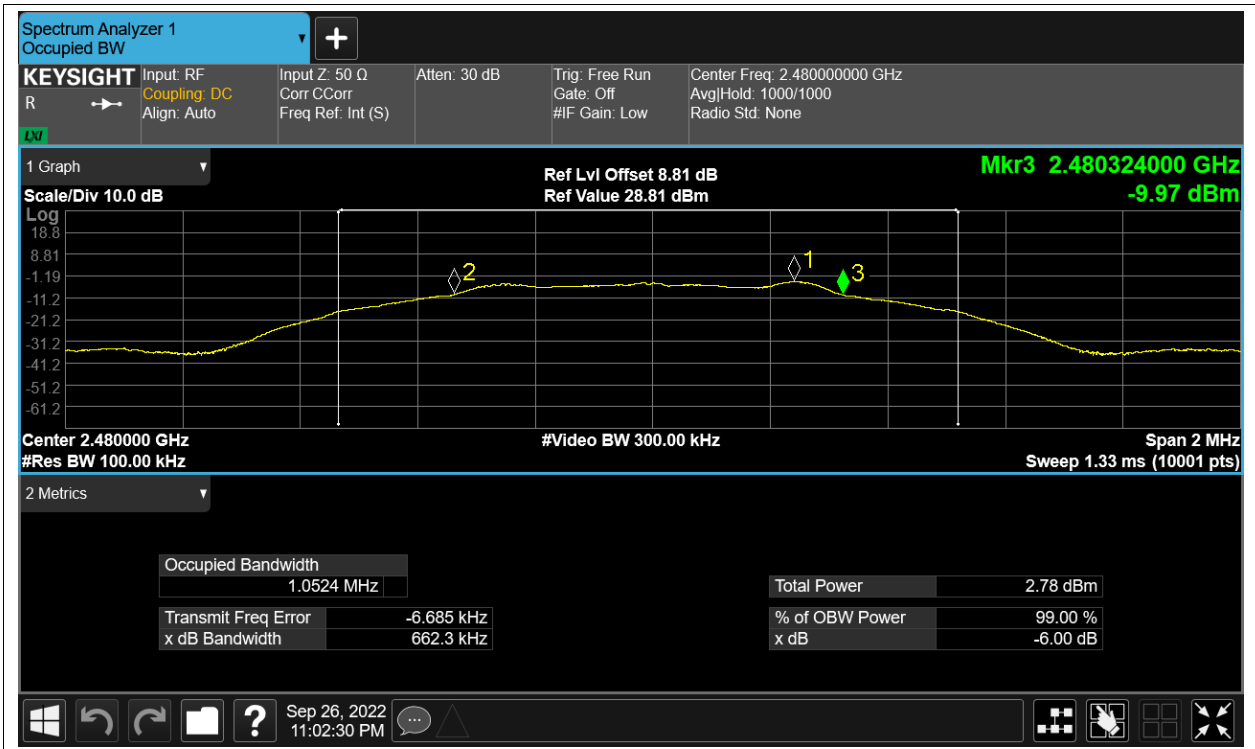

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.038817875
NVNT	BLE	2442	Ant1	1.038367031
NVNT	BLE	2480	Ant1	1.039835408

Test Graphs


OBW NVNT BLE 2402MHz Ant1



OBW NVNT BLE 2442MHz Ant1

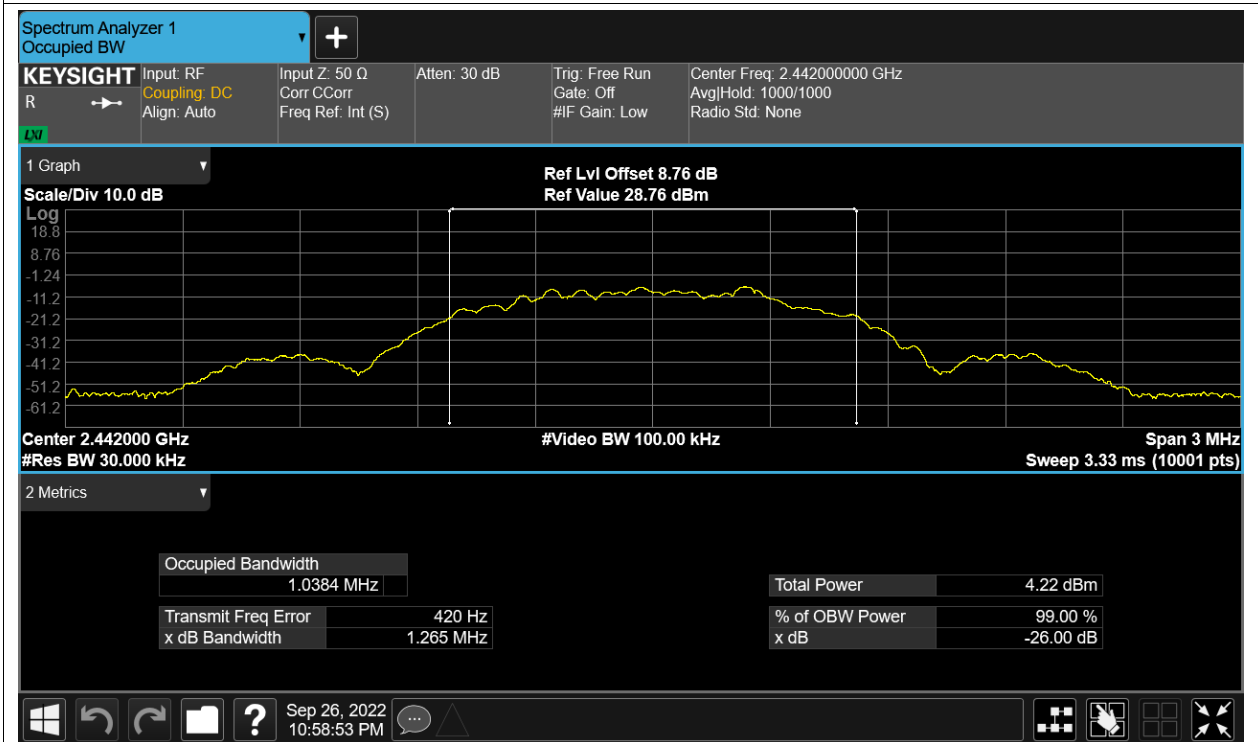

OBW NVNT BLE 2480MHz Ant1

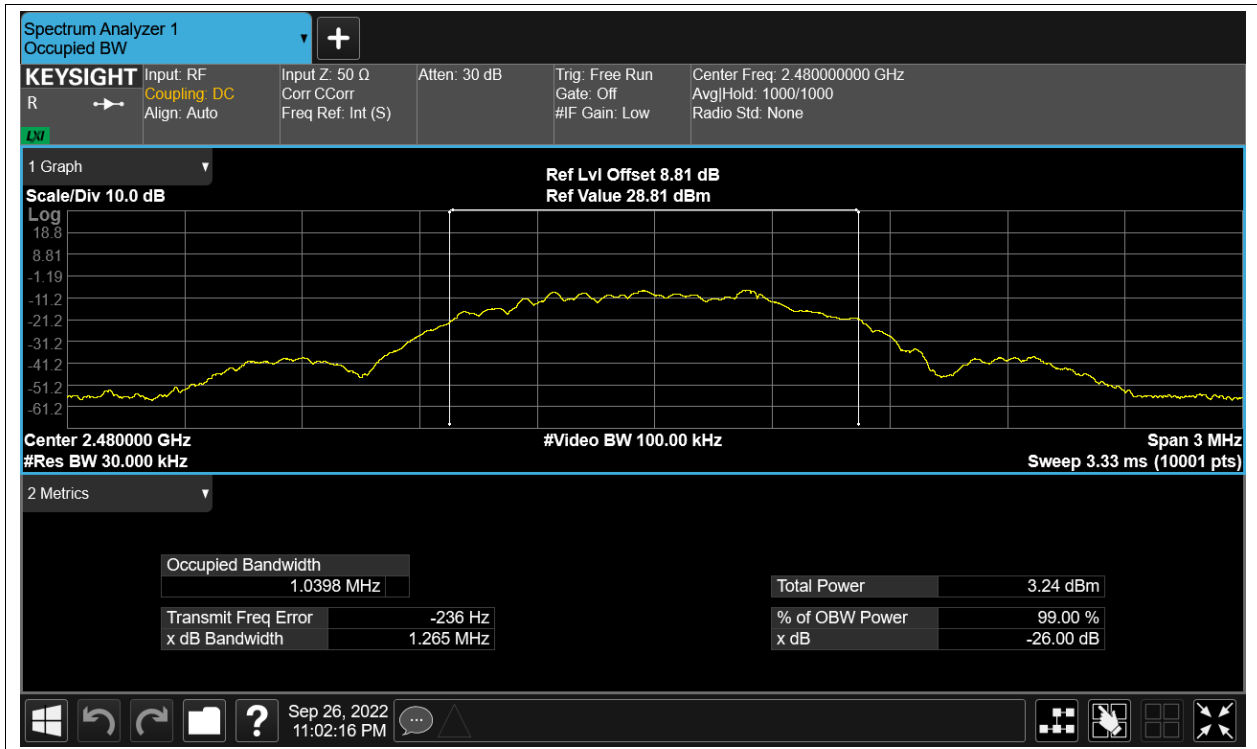


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-20.049	8	Pass
NVNT	BLE	2442	Ant1	-18.919	8	Pass
NVNT	BLE	2480	Ant1	-19.904	8	Pass

Test Graphs


PSD NVNT BLE 2402MHz Ant1

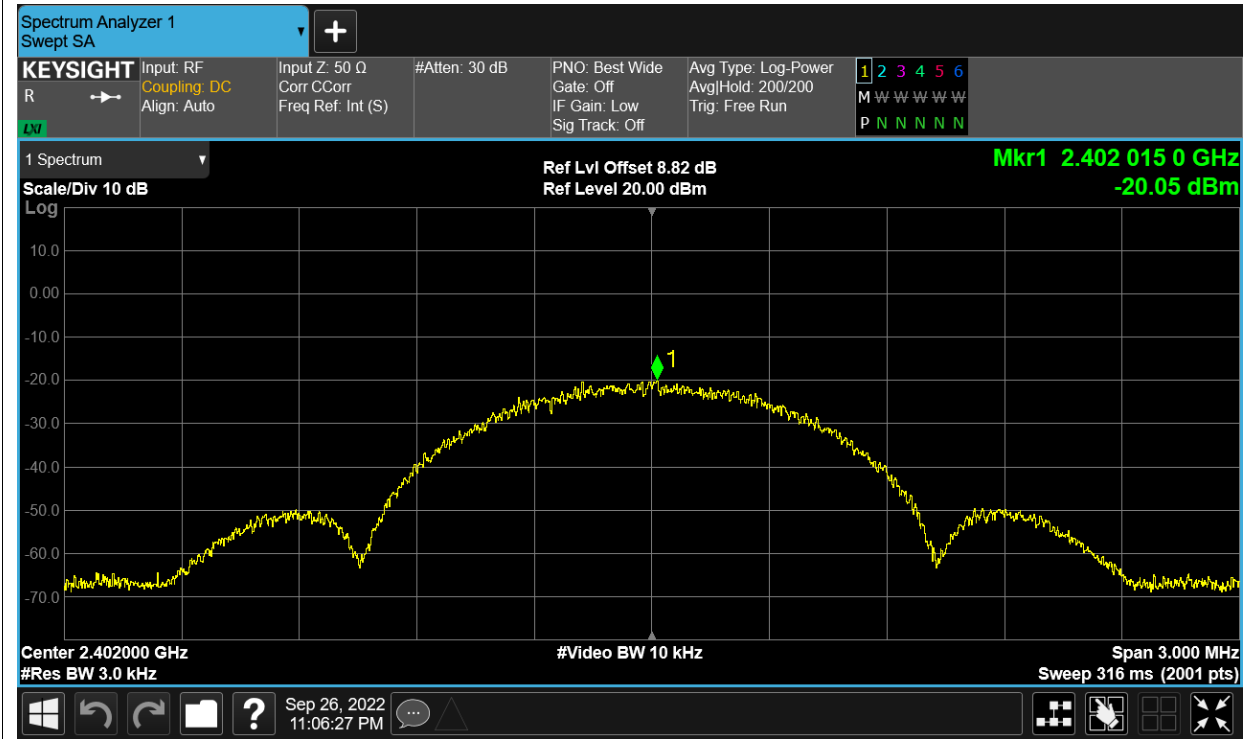

PSD NVNT BLE 2442MHz Ant1


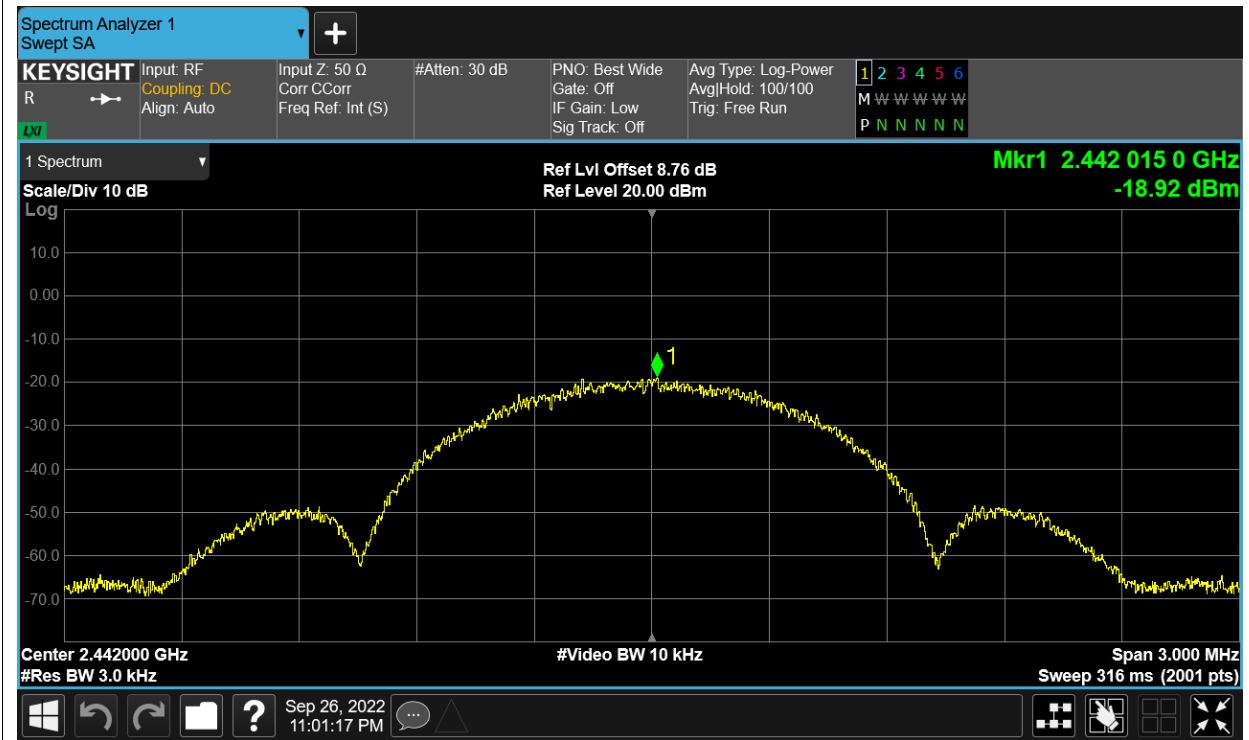


PSD NVNT BLE 2480MHz Ant1

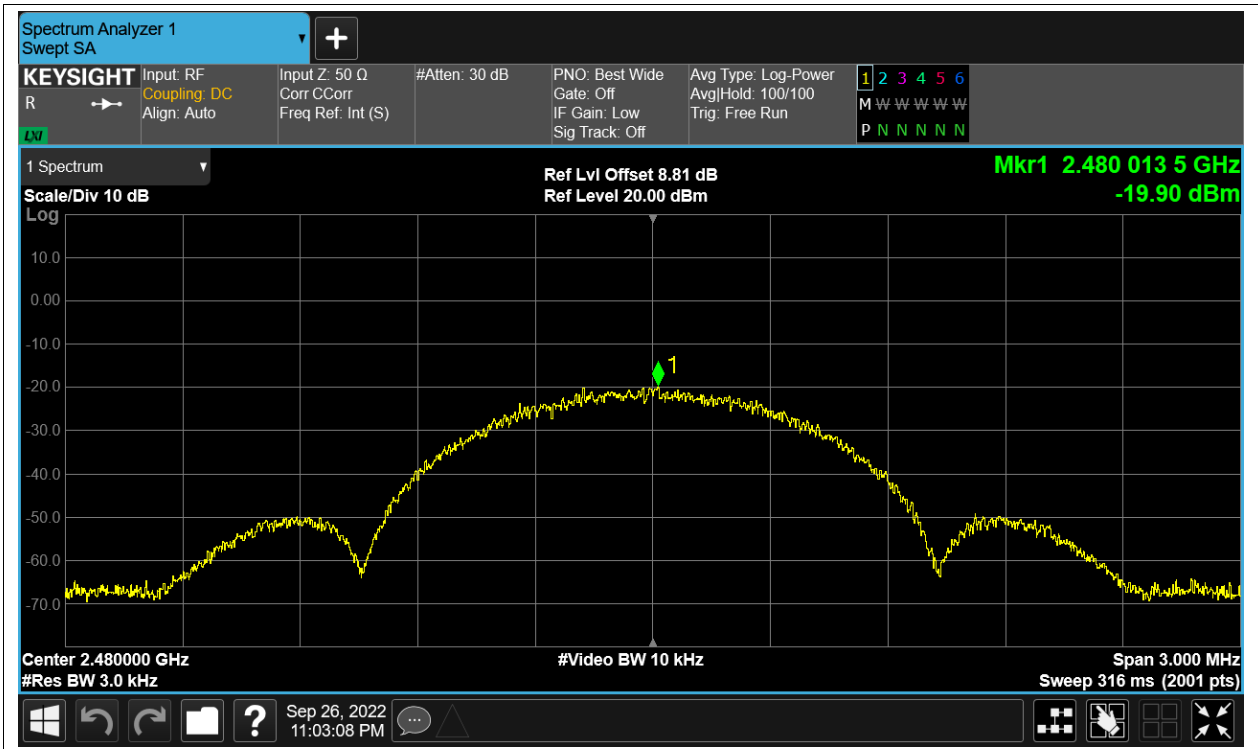


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.89	-20	Pass
NVNT	BLE	2480	Ant1	-45.27	-20	Pass

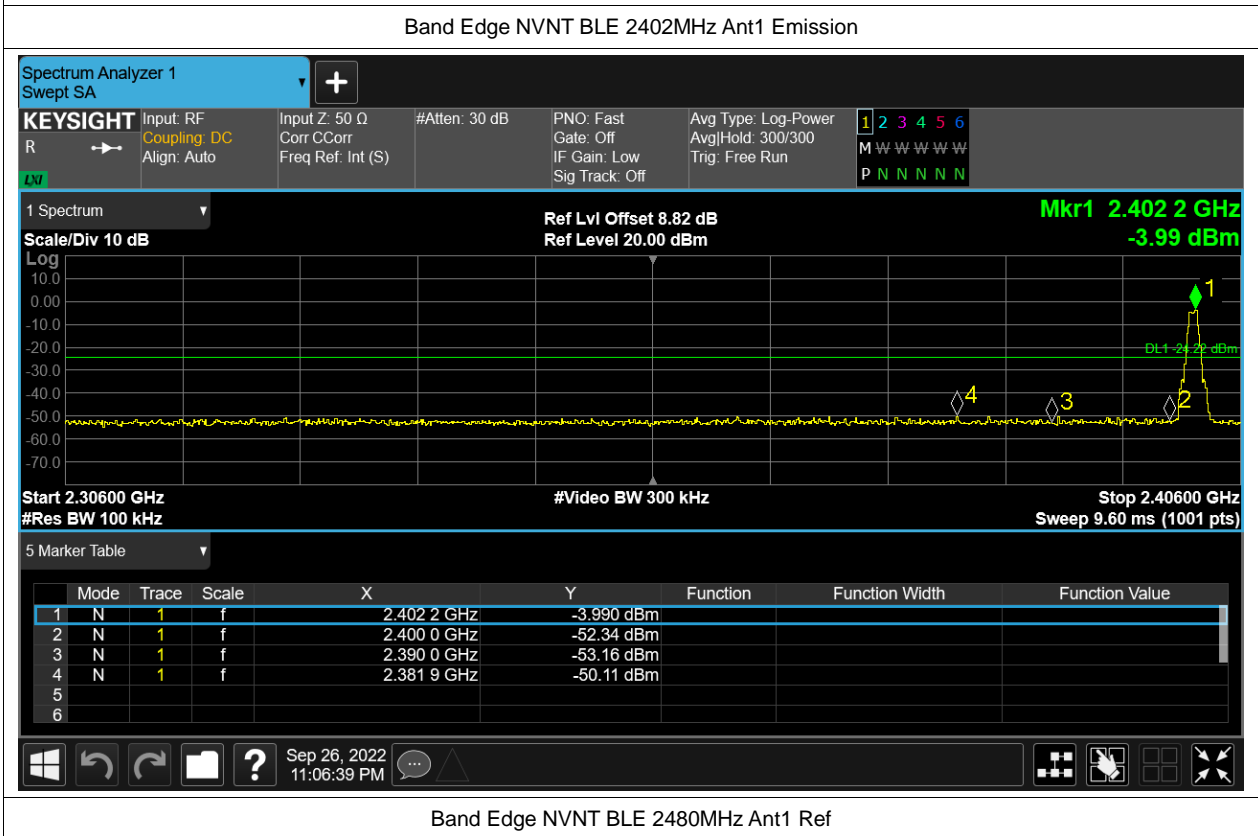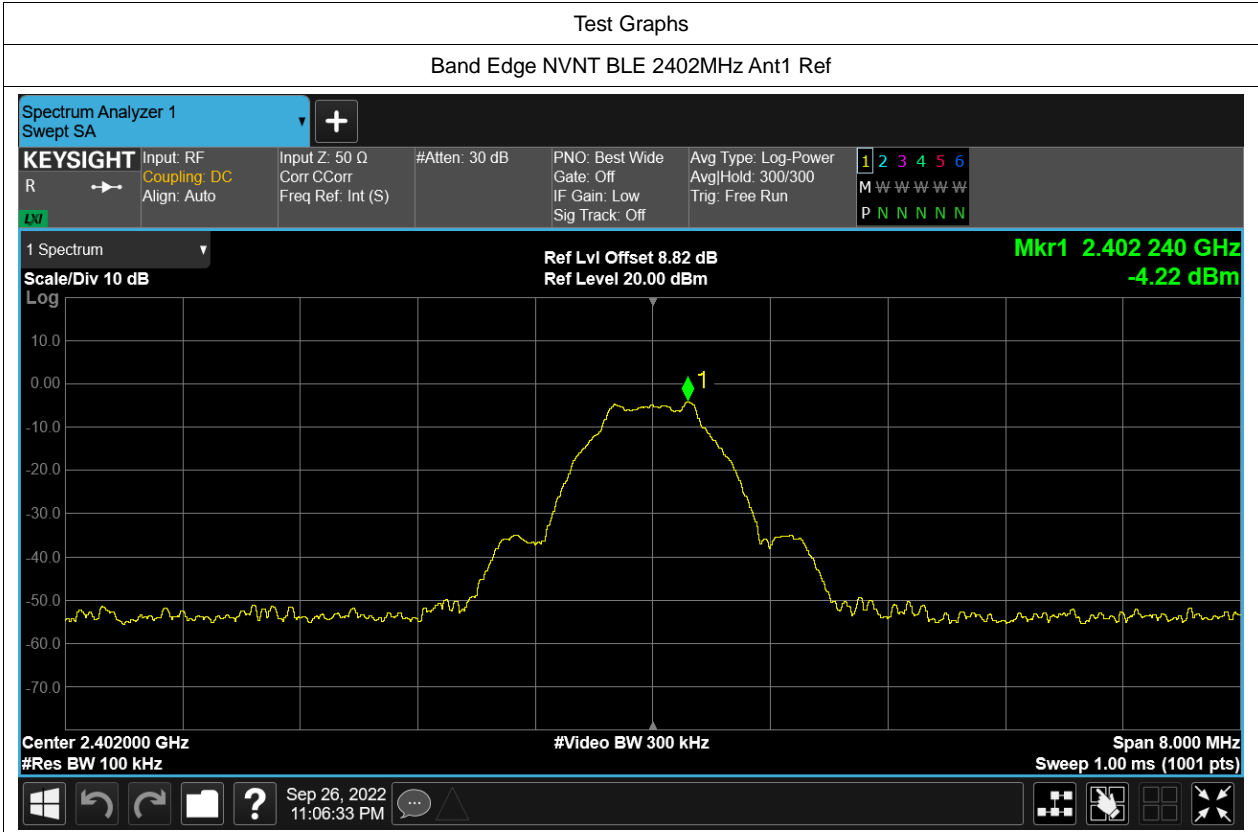

Band Edge NVNT BLE 2480MHz Ant1 Ref

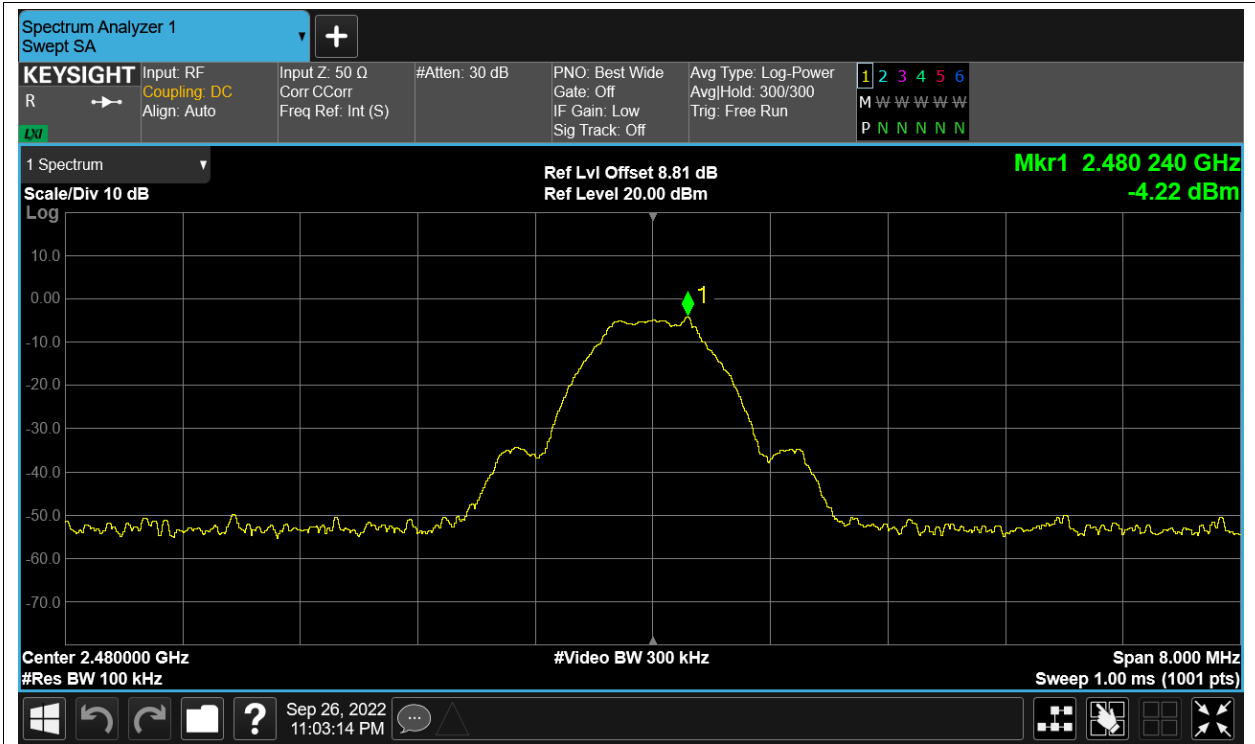

Band Edge NVNT BLE 2480MHz Ant1 Emission

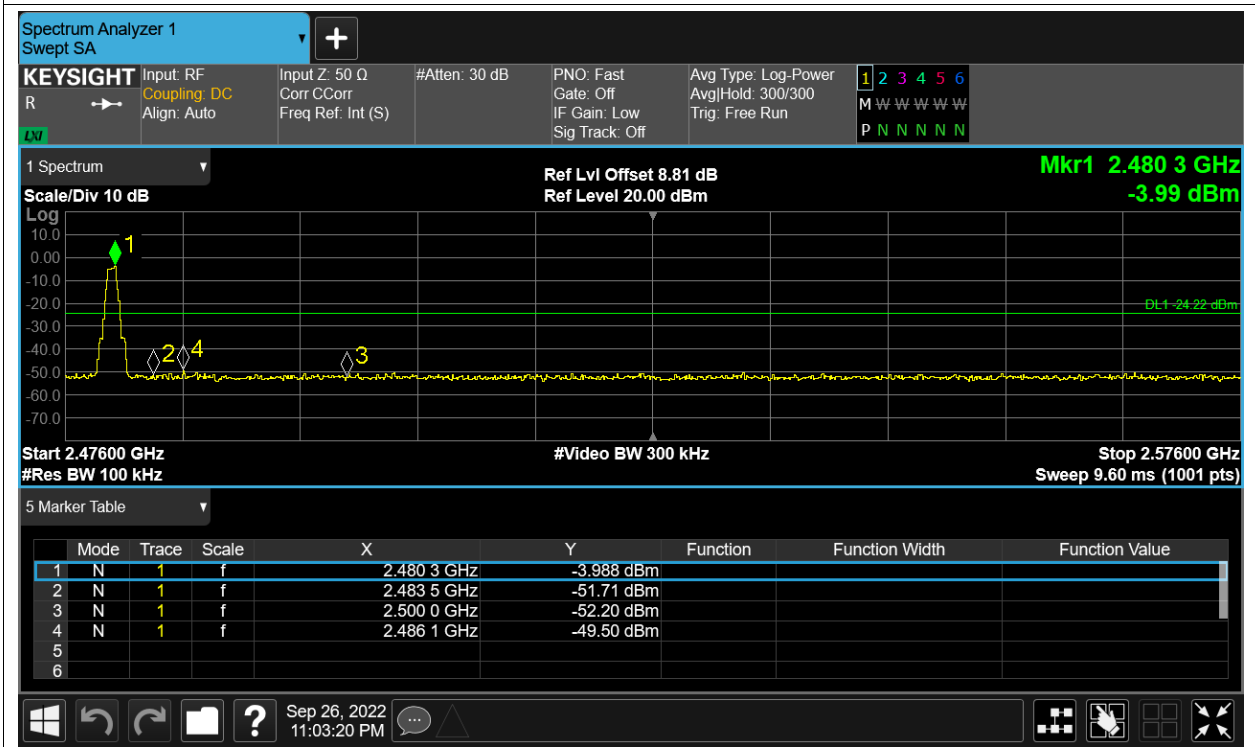


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-39.53	-20	Pass
NVNT	BLE	2442	Ant1	-40.91	-20	Pass
NVNT	BLE	2480	Ant1	-39.33	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

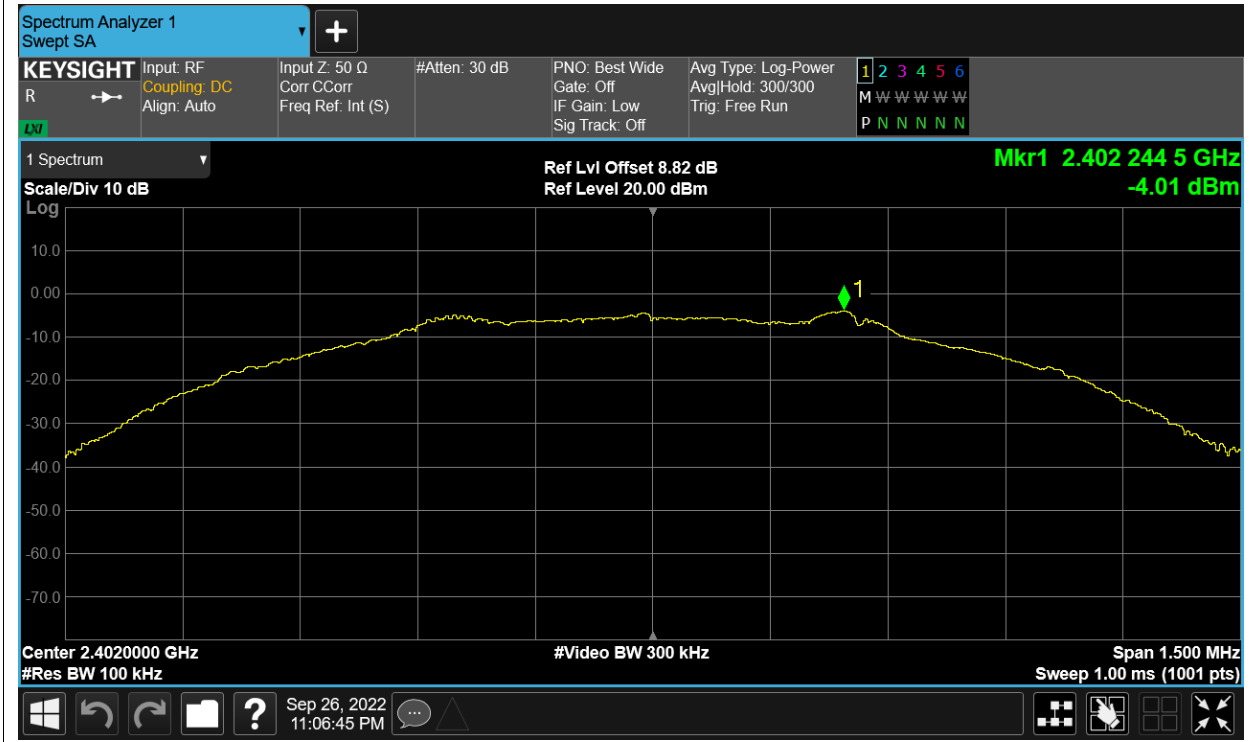


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

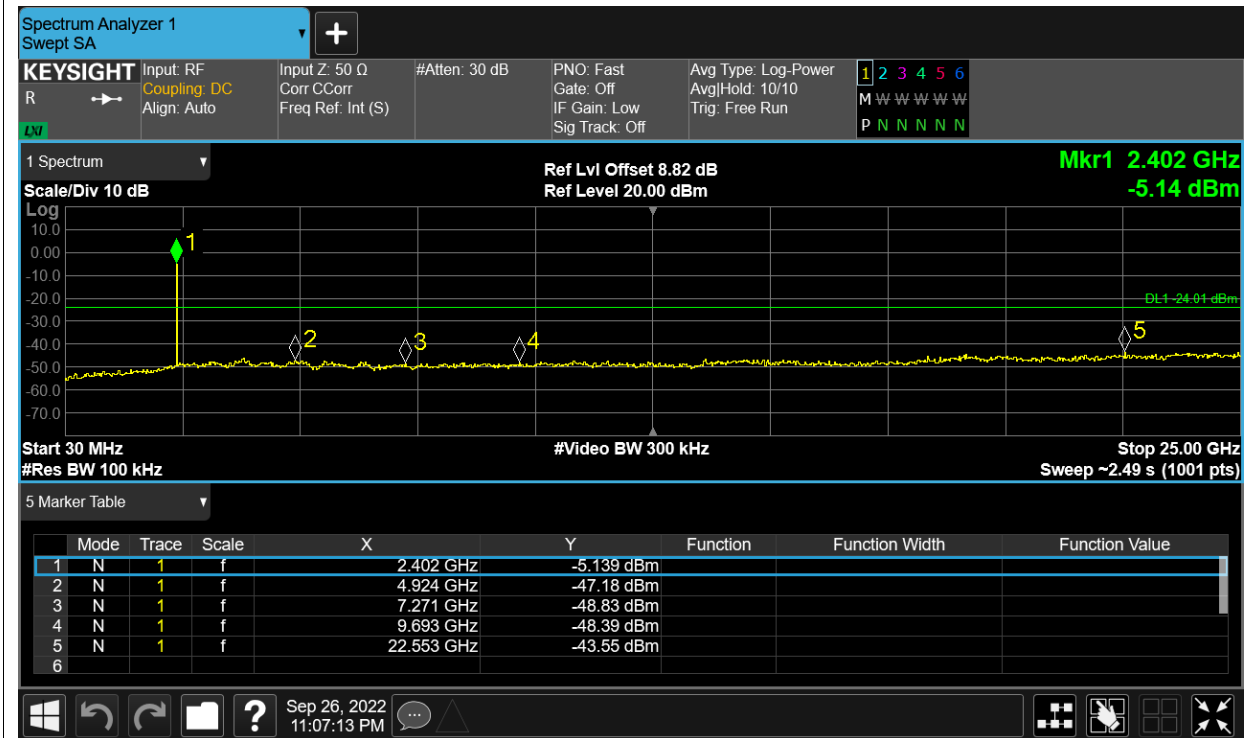


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

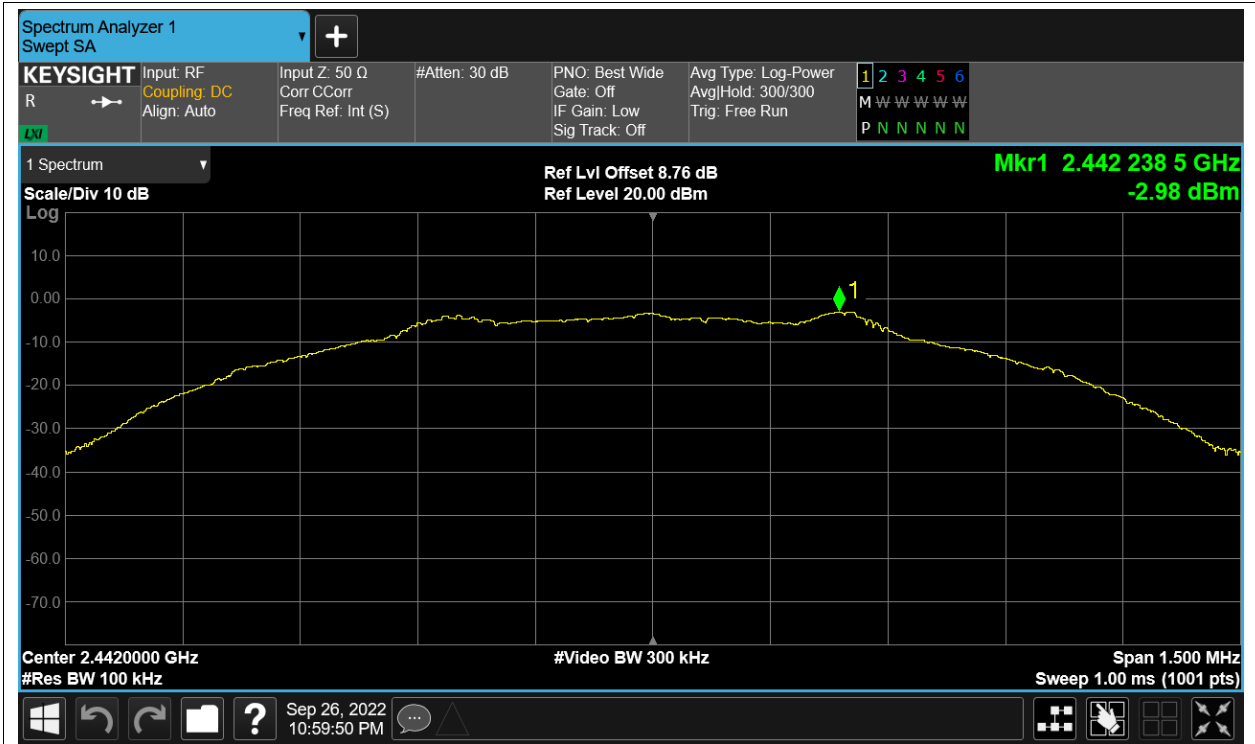

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

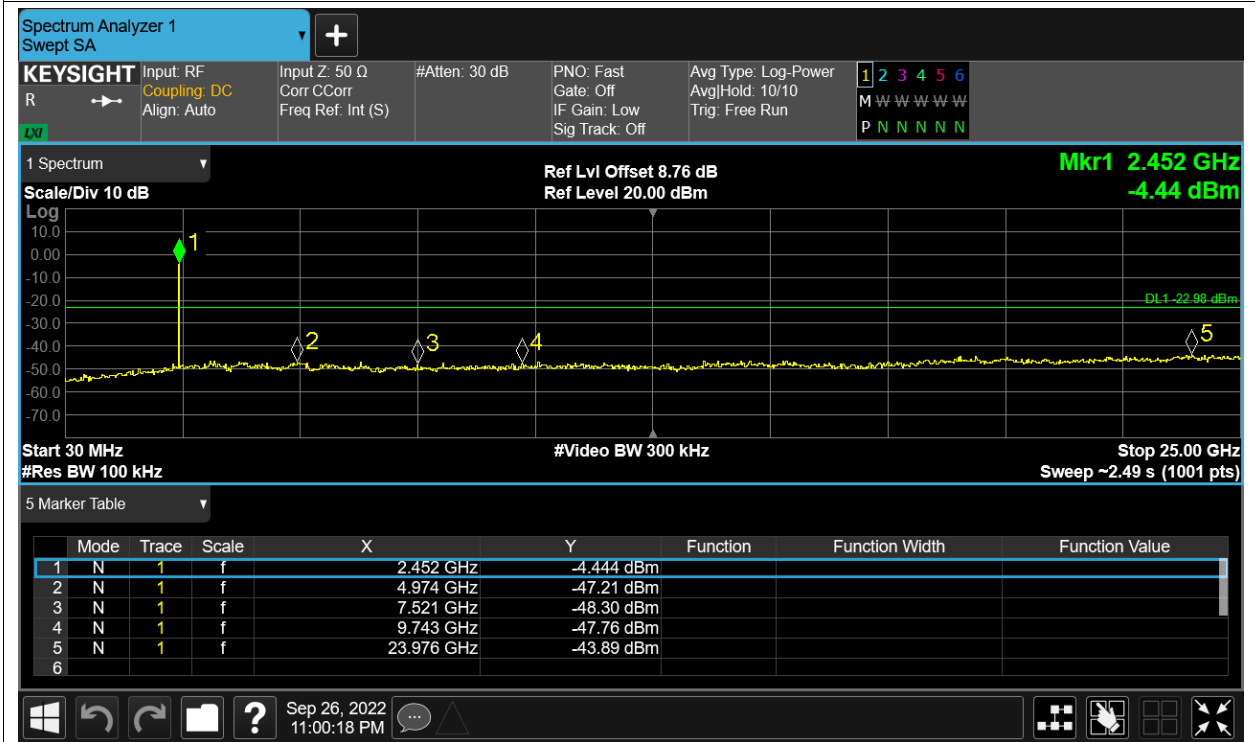

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

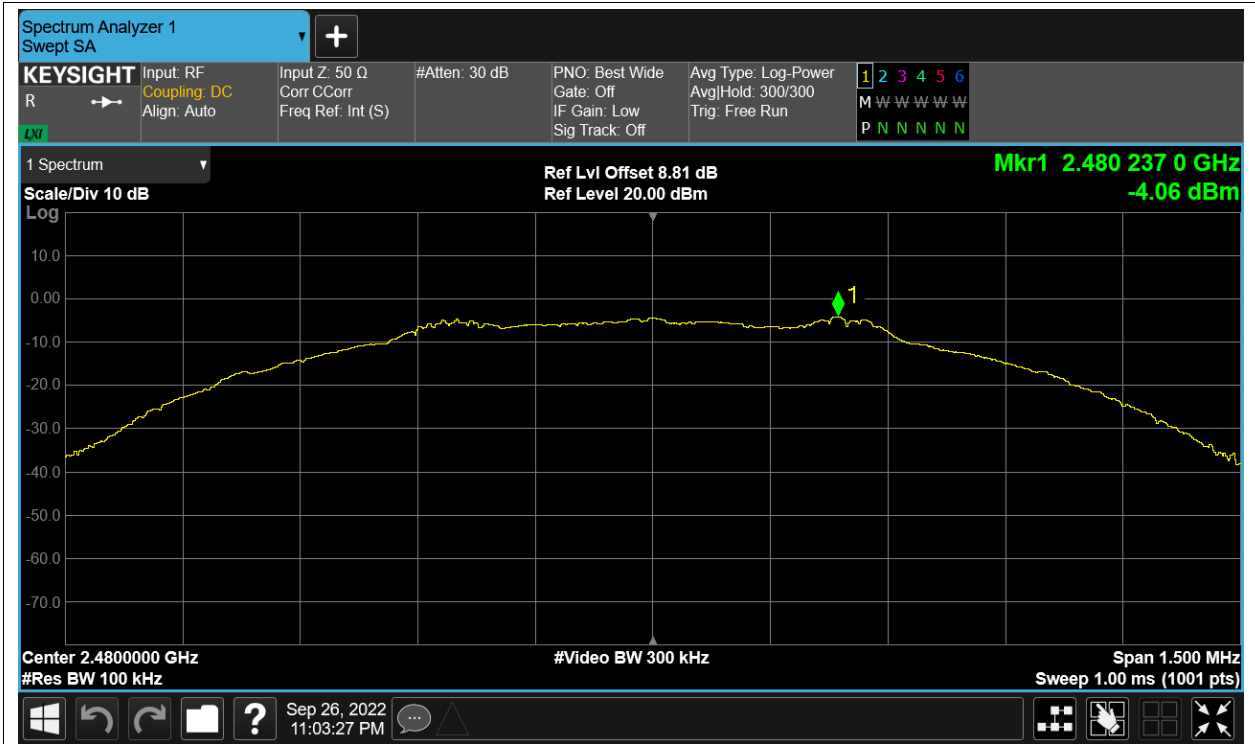

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

