

# **FCC Test Report**

Report No.: AGC01689240814FR04

FCC ID : 2A2UU-P8NEO

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: AI POS Terminal

**BRAND NAME** : KOZEN

MODEL NAME : P8 Neo

**APPLICANT**: Shanghai Xiangcheng Communication Technology Co., Ltd

**DATE OF ISSUE** : Oct. 30, 2024

**STANDARD(S)** : FCC Part 15 Subpart E §15.407

**REPORT VERSION**: V1.0

Attestation of Global Conciliance (Shenzhen) Co., Ltd



Page 2 of 157


# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 30, 2024	Valid	Initial Release




## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	9
2.4 Related Submittal(S) / Grant (S)	10
2.5 Test Methodology	10
2.6 Special Accessories	10
2.7 Equipment Modifications	10
2.8 Antenna Requirement	10
2.9 Description of Test Software	11
3. Test Environment	13
3.1 Address of The Test Laboratory	13
3.2 Test Facility	13
3.3 Environmental Conditions	14
3.4 Measurement Uncertainty	14
3.5 List of Equipment Used	15
4.System Test Configuration	17
4.1 EUT Configuration	17
4.2 EUT Exercise	17
4.3 Configuration of Tested System	17
4.4 Equipment Used in Tested System	17
4.5 Summary of Test Results	18
5. Description of Test Modes	19
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	26
7.4 Measurement Result	27
8. 6dB&26dB Bandwidth Measurement	29
8.1 Provisions Applicable	29
8.2 Measurement Procedure	29
8.3 Measurement Setup (Block Diagram of Configuration)	29
8.4 Measurement Results	30





9. Power Spectral Density Measurement	60
9.1 Provisions Applicable	60
9.2 Measurement Procedure	60
9.3 Measurement Setup (Block Diagram of Configuration)	60
9.4 Measurement Result	61
10. Conducted Band Edge and Out-of-Band Emissions	84
10.1 Provisions Applicable	84
10.2 Measurement Procedure	84
10.3 Measurement Setup (Block Diagram of Configuration)	85
10.4 Measurement Results	86
11. Radiated Spurious Emission	126
11.1 Measurement Limit	126
11.2 Measurement Procedure	127
11.3 Measurement Setup (Block Diagram of Configuration)	129
11.4 Measurement Result	130
12. AC Power Line Conducted Emission Test	153
12.1 Measurement limit	153
12.2 Block Diagram of Line Conducted Emission Test	153
12.3 Preliminary Procedure of Line Conducted Emission Test	154
12.4 Final Procedure of Line Conducted Emission Test	154
12.5 Test Result of Line Conducted Emission Test	155
Appendix I: Photographs of Test Setup	157
Appendix II: Photographs of EUT	157





# 1. General Information

Applicant	Shanghai Xiangcheng Communication Technology Co., Ltd	
Address	6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China	
Manufacturer	Sichuan Xiangcheng Intelligent Technology Co., Ltd.	
Address	Factory No. 2 and 7 Zone A, Intelligent Terminal Demonstration Park, West Section of Gangyuan Road, Lingang Economic Development Zone, Yibin City, Sichuan Province China	
Factory	Sichuan Xiangcheng Intelligent Technology Co., Ltd.	
Address	Factory No. 2 and 7 Zone A, Intelligent Terminal Demonstration Park, West Section of Gangyuan Road, Lingang Economic Development Zone, Yibin City, Sichuan Province China	
Product Designation	AI POS Terminal	
Brand Name	KOZEN	
Test Model	P8 Neo	
Date of receipt of test item	Aug. 29, 2024	
Date of Test	Aug. 29, 2024~Oct. 30, 2024	
Deviation from Standard	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Test Report Form No	AGCER-FCC-5G WLAN-V1	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Oct. 30, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Oct. 30, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Oct. 30, 2024



Page 6 of 157

# 2. Product Information

# 2.1 Product Technical Description

Equipment Type	<ul><li>☐ Outdoor access points</li><li>☐ Fixed P2P access points</li><li>☐ Client devices</li></ul>		
Operation Frequency	☑ U-NII 1:5150MHz~5250MHz       ☑ U-NII 2A: 5250MHz~5350MHz         ☑ U-NII 2C:5470MHz~5725MHz       ☑ U-NII 3: 5725MHz~5850MHz		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes ☐ No		
Hardware Version	V1.0		
Software Version	p0816_kozen_combo		
Test Frequency Range	For 802.11a/n-HT20/ac: 5180~5240MHz/5260~5320MHz/5500~5720MHz/5745~5825MHz; For 802.11n-HT40/ac: 5190~5230MHz/5270~5310MHz/5510~5710MHz/5755~5795MHz; For 802.11ac-VHT80: 5210MHz/5290MHz/5530~5690MHz/5775MHz		
RF Output Power	802.11a: 13.77dBm,802.11n(HT20): 12.42dBm; 802.11n(HT40): 10.42dBm; 802.11ac (VHT20): 12.30dBm;802.11ac (VHT40): 10.40dBm		
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM		
Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 866.6Mbps		
Number of channels	7 channels of U-NII-1 Band;7 channels of U- NII-2A Band 8 channels of U- NII 3 Band		
Antenna Designation	PIFA Antenna		
Antenna Gain	U-NII 1: 2.77dBi, U-NII 2A: 2.74dBi, U-NII 3:2.32dBi		
Power Supply	DC 7.6V by battery or DC 5V from adapter		



Page 7 of 157

# 2.2 Table of Carrier Frequency

## For 5180~5240MHz:

# 4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

# 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

#### For 5260~5320MHz:

# 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

# 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
58	5290 MHz		



Page 8 of 157

# For 5745~5825MHz:

# 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	153 5765 MHz		5825 MHz
157	5785 MHz		

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency	
151	5755 MHz	159	5795 MHz	

# 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency	
155	5775 MHz			



Page 9 of 157

# 2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	N <sub>BPSC</sub>	N <sub>CBPS</sub>		N <sub>D</sub>	BPS	Data (Mb 800)	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation		
NSS	Number of spatial streams		
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI	Guard interval		



Page 10 of 157

# 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2A2UU-P8NEO** filing to comply with the FCC Part 15 requirements.

## 2.5 Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

#### 2.6 Special Accessories

Refer to section 4.4.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.

# 2.8 Antenna Requirement

# Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## **EUT Antenna:**


The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is U-NII 1: 2.77dBi, U-NII 2A: 2.74dBi, U-NII 3:2.32dBi




# 2.9 Description of Test Software

# For IEEE 802.11 mode:

# Software Setting Diagram

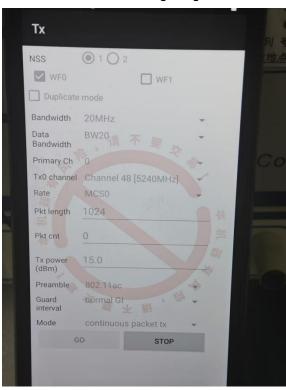





Test Mode 5150MHz~5250MHz	Channel	Power Index
802.11a	L/M/H	19
802.11n(HT20)	L/M/H	18
802.11n(HT40)	L/M/H	16
802.11ac(VHT20)	L/M/H	18
802.11ac(VHT40)	L/M/H	16
802.11ac(VHT80)	L/M/H	16
Test Mode 5250MHz~5350MHz	Channel	Power Index
802.11a	L/M/H	19
802.11n(HT20)	L/M/H	18
802.11n(HT40)	L/M/H	16
802.11ac(VHT20)	L/M/H	18
802.11ac(VHT40)	L/M/H	16
802.11ac(VHT80)	L/M/H	16
Test Mode 5725MHz~5850MHz	Channel	Power Index
802.11a	L/M/H	19
802.11n(HT20)	L/M/H	18
802.11n(HT40)	L/M/H	18
802.11ac(VHT20)	L/M/H	18
802.11ac(VHT40)	L/M/H	18
802.11ac(VHT80)	L/M/H	18



Page 13 of 157

## 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 14 of 157


# 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	DC 7.6V

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Measurement Uncertainty
$U_c = \pm 2.9 \text{ dB}$
$U_c = \pm 3.9 \text{ dB}$
$U_c = \pm 4.9 \text{ dB}$
$U_c = \pm 0.8 \text{ dB}$
$U_c = \pm 2.6 \text{ dB}$
U <sub>c</sub> = ±2 %
$U_c = \pm 2.7 \%$






# 3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

<ul><li>A</li></ul>	AC Power Line Conducted Emission								
Used	Used Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-DD)								
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		





• Tes	Test Software								
Used	Equipment No.	quipment No. Test Equipment		Model No.	Version Information				
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



Page 17 of 157

# 4. System Test Configuration


## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

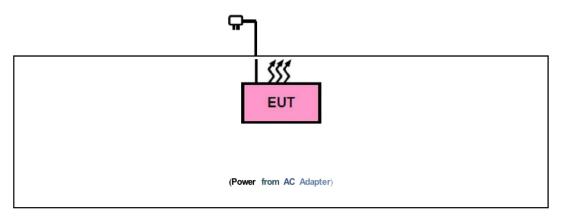

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

Ν	. Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	Chongqing Lianmao Electronics Co.,Ltd.	LM-603E-06020 0U02CE	Input: AC 100-240V 50/60Hz, 0.35A Output: DC 5V 2A	1.0m unshielded
2	Battery	Guangdong Fenghua New Energy Co.,Ltd.	F50114MA	DC 7.6V 2500mAh	



Page 18 of 157

# 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2/3)	RF Output Power	Pass
3	§15.407(e)	6 dB Bandwidth	Pass
4	§2.1049	99% Occupied Bandwidth	Pass
5	§15.407(a/1/2/3)	Power Spectral Density	Pass
6	§15.407(g)	Frequency Stability	Pass (See Note 1)
7	§15.407(c)	Transmission Discontinuation Requirement	Pass (See Note 2)
8	§15.407(b)(1/2/4)	Conducted Band Edge and Out-of-Band Emissions	Pass
9	§15.209,§15.407(b)(1/2/4)	Radiated Spurious Emission	Pass
10	§15.207	AC Power Line Conducted Emission	Pass

#### Note:

- 1. Refer to the manufacturer's declaration in the user manual.
- 2. The device operates without the transmission of information.



Page 19 of 157

# 5. Description of Test Modes

EUT Configure Mode		Applic	cable To	Description	
201 Comigaro Mode	RE > 1G	RE < 1G	PLC	APCM	Bookiption
Α	$\boxtimes$	$\boxtimes$	$\boxtimes$		Powered by Adapter with WIFI(5G) Link
В	$\boxtimes$		$\boxtimes$	$\boxtimes$	Powered by Battery with WIFI(5G) Link
С					Powered by USB with WIFI(5G) Link

Where. RE > 1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

NOTE 2: "--"means no effect.

# • Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).

Support 802.11ax, device debugging is tested in Full RU state

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n (20MHz)	5180-5240	36 to 48	36, 40, 48	OFDM	MCS0
В	802.11n (20MHz)	5260-5320	52 to 64	52, 60, 64	OFDM	MCS0
В	802.11n (20MHz)	5745-5825	149 to 165	149, 157, 165	OFDM	MCS0



Page 20 of 157

# Radiated Emission Test (Below 1GHz):

$\boxtimes$	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be I	Meer
	available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).	

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

□ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	MCS0

# Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	MCS0

## Band edge Measurement:

$\boxtimes$	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations I	be Meen
	available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).	

Support 802.11ax, device debugging is tested in Full RU state

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11n (20MHz)		36 to 48	36	OFDM	MCS0
В	802.11n (40MHz)	5180-5240	38 to 46	38	OFDM	MCS0
В	802.11ac (80MHz)		42	42	OFDM	MCS0
В	802.11n (20MHz)		52 to 64	52	OFDM	MCS0
В	802.11n (40MHz)	5260-5320	54 to 62	54	OFDM	MCS0
В	802.11ac (80MHz)		58	58	OFDM	MCS0

Note: Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.



Page 21 of 157

# • Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11a		36 to 48	36, 40, 48	OFDM	6.0
В	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
В	802.11n (40MHz)	5180-5240	38 to 46	38, 46	OFDM	MCS0
В	802.11ac (20MHz)	3160-3240	36 to 48	36, 40, 48	OFDM	MCS0
В	802.11ac (40MHz)		38 to 46	38, 46	OFDM	MCS0
В	802.11ac (80MHz)		42	42	OFDM	MCS0
В	802.11a		52 to 64	52, 60, 64	OFDM	6.0
В	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
В	802.11n (40MHz)	F000 F000	54 to 62	54, 62	OFDM	MCS0
В	802.11ac (20MHz)	5260-5320	52 to 64	52, 60, 64	OFDM	MCS0
В	802.11ac (40MHz)		54 to 62	54, 62	OFDM	MCS0
В	802.11ac (80MHz)		58	58	OFDM	MCS0
В	802.11a		149 to 165	149, 157, 165	OFDM	6.0
В	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
В	802.11n (40MHz)	F74F F00F	151 to 159	151, 159	OFDM	MCS0
В	802.11ac (20MHz)	5745-5825	149 to 165	149, 157, 165	OFDM	MCS0
В	802.11ac (40MHz)		151 to 159	151, 159	OFDM	MCS0
В	802.11ac (80MHz)		155	155	OFDM	MCS0



Page 22 of 157


# 6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)				
Band U-NII1:5150MHz-5250MHz							
802.11a	6	97	18.24				
802.11n_HT20	MCS0	97	18.24				
802.11n_HT40	MCS0	94	18.24				
802.11ac_VHT20	MCS0	97	18.24				
802.11ac_VHT40	MCS0	94	18.24				
802.11ac_VHT80	MCS0	88	18.24				
	Band U-NII 2A:5250N	ИHz-5350MHz					
802.11a	6	97	18.24				
802.11n_HT20	MCS0	97	18.24				
802.11n_HT40	MCS0	94	18.24				
802.11ac_VHT20	MCS0	97	18.24				
802.11ac_VHT40	MCS0	94	18.24				
802.11ac_VHT80	MCS0	88	18.24				
	Band U-NII 3: 5725M	IHz~5850MHz					
802.11a	6	97	18.24				
802.11n_HT20	MCS0	97	18.24				
802.11n_HT40	MCS0	94	18.24				
802.11ac_VHT20	MCS0	97	18.24				
802.11ac_VHT40	MCS0	94	18.24				
802.11ac_VHT80	MCS0	88	18.24				


# Remark:


- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.







# The test plots as follows:

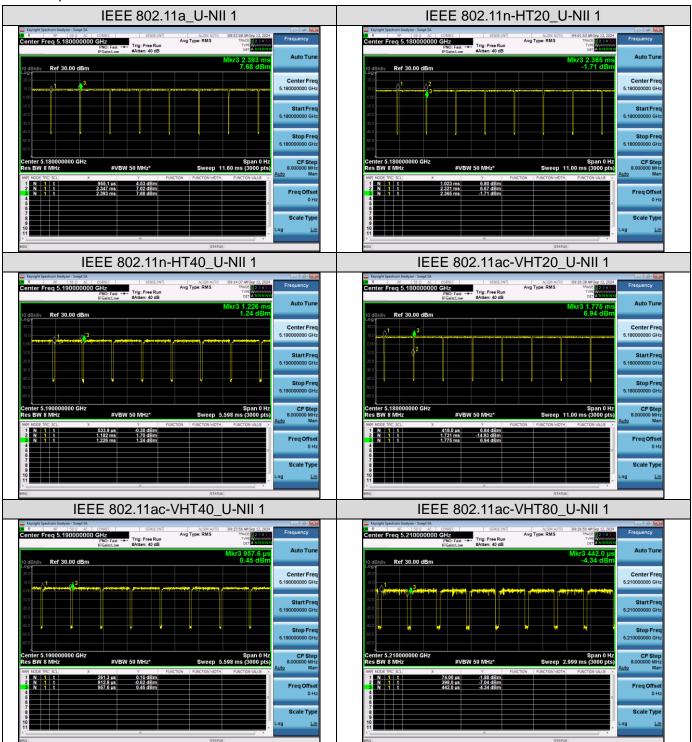






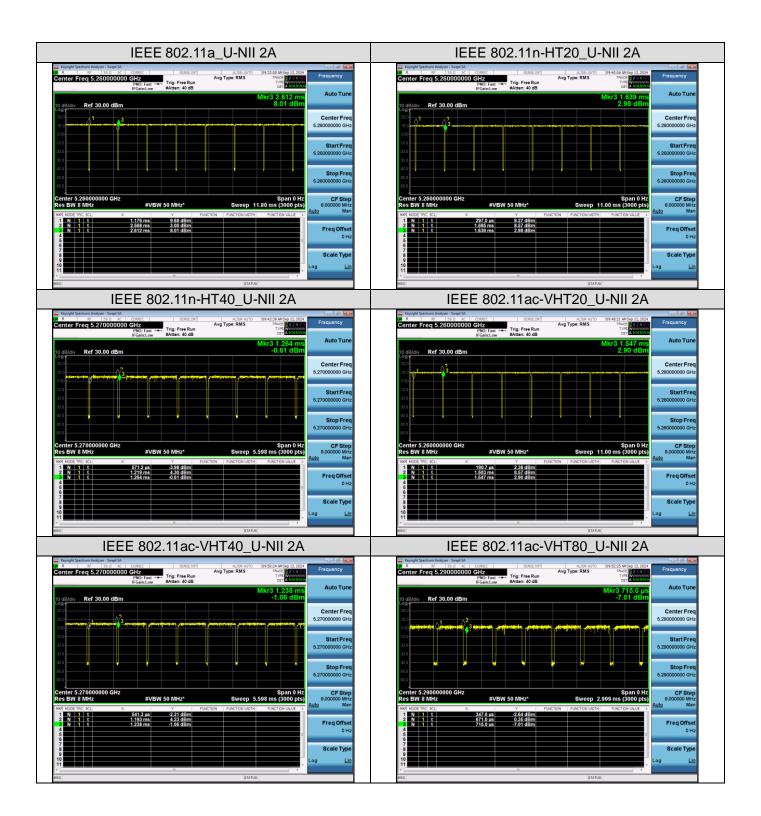





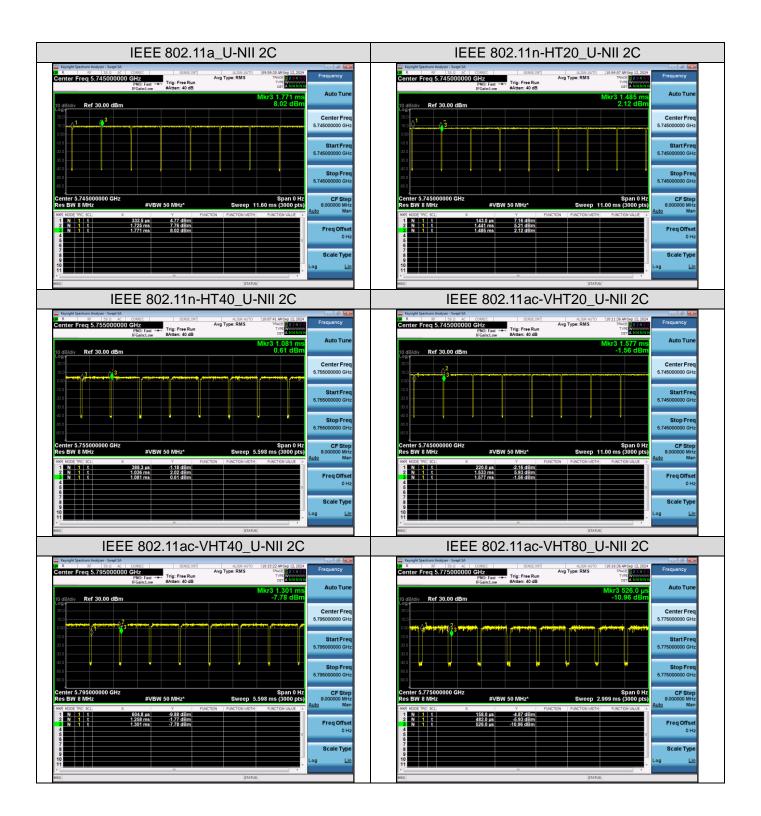



Page 26 of 157

# 7. RF Output Power Measurement

## 7.1 Provisions Applicable

Operation Band	EUT Category		LIMIT	
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)	
0		Fixed point-to-point Access Point	1 Watt (30 dBm)	
		Indoor Access Point	1 Watt (30 dBm)	
	$\boxtimes$	Client devices	250mW (23.98 dBm)	
U-NII-2A	/		250mW (23.98 dBm) or 11 dBm+10 log B'	
U-NII-2C	/		250mW (23.98 dBm) or 11 dBm+10 log B*	
U-NII-3	/		1 Watt (30 dBm)	


Note: Where B is the 26dB emission bandwidth in MHz.


#### 7.2 Measurement Procedure

☑Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. The final test results have been increased by the duty cycle factor and recorded in the report.

# 7.3 Measurement Setup (Block Diagram of Configuration)

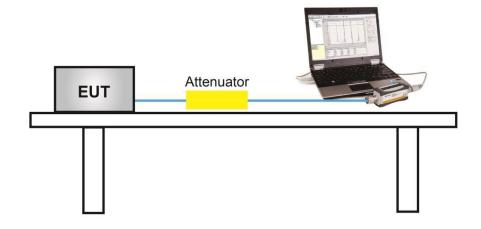






## 7.4 Measurement Result

Test Data of Conducted Output Power for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5180	11.12	23.98	Pass		
802.11a	5200	11.72	23.98	Pass		
	5240	12.80	23.98	Pass		
	5180	10.36	23.98	Pass		
802.11n20	5200	5200 10.83		Pass		
	5240	12.05	23.98	Pass		
802.11n40	5190	9.48	23.98	Pass		
002.111140	5230	9.89	23.98	Pass		
	5180	10.61	23.98	Pass		
802.11ac20	5200	11.12	23.98	Pass		
	5240	12.28	23.98	Pass		
802.11ac40	5190	8.98	23.98	Pass		
	5230	10.06	23.98	Pass		
802.11ac80	5210	9.55	23.98	Pass		

Test Data of Conducted Output Power for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	nel Average Power (dBm)		Pass or Fail	
	5260	13.77	23.98	Pass	
802.11a	5300	13.14	23.98	Pass	
	5320	12.70	23.98	Pass	
	5260	12.42	23.98	Pass	
802.11n20	5300 11.94		23.98	Pass	
	5320	11.13	23.98	Pass	
802.11n40	5270	10.42	23.98	Pass	
602.111140	5310	9.73	23.98	Pass	
	5260	12.30	23.98	Pass	
802.11ac20	5300	12.00	23.98	Pass	
	5320	11.24	23.98	Pass	
802.11ac40	5270	10.40	23.98	Pass	
002.11ac40	5310	9.50	23.98	Pass	
802.11ac80	5290	10.19	23.98	Pass	





Test Data of Conducted Output Power for band 5.725-5.850 GHz					
Test Mode	Test Channel Average Power (MHz) (dBm)		Limits (dBm)	Pass or Fail	
	5745	11.47	30	Pass	
802.11a	5785	10.70	30	Pass	
	5825	10.54	30	Pass	
	5745	9.76	30	Pass	
802.11n20	5785	9.52	30	Pass	
	5825	9.59	30	Pass	
802.11n40	5755	9.83	30	Pass	
602.111140	5795	9.56	30	Pass	
	5745	9.90	30	Pass	
802.11ac20	5785	9.54	30	Pass	
	5825	9.49	30	Pass	
902 110040	5755	9.86	30	Pass	
802.11ac40	5795	9.53	30	Pass	
802.11ac80	5775	9.70	30	Pass	



Page 29 of 157

#### 8. 6dB&26dB Bandwidth Measurement

## 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

#### **8.2 Measurement Procedure**

# ◆ -6dB bandwidth (DTS bandwidth) Test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW  $\geq 3*RBW$ . Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

## ♦ 99% occupied bandwidth test setting:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


## -26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

# 8.3 Measurement Setup (Block Diagram of Configuration)

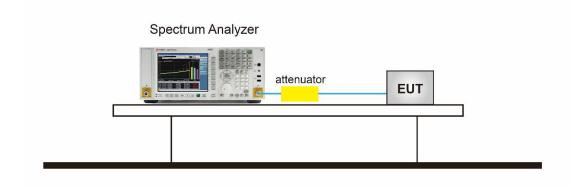






## 8.4 Measurement Results


Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5180	16.484	21.039	N/A	Pass	
802.11a	5200	16.619	25.009	N/A	Pass	
	5240	16.557	24.255	N/A	Pass	
	5180	17.610	22.287	N/A	Pass	
802.11n20	5200	17.681	23.258	N/A	Pass	
	5240	17.630	24.216	N/A	Pass	
902 11540	5190	36.059	44.750	N/A	Pass	
802.11n40	5230	36.045	40.123	N/A	Pass	
802.11ac20	5180	17.644	20.833	N/A	Pass	
	5200	17.624	22.164	N/A	Pass	
	5240	17.591	21.495	N/A	Pass	
802.11ac40	5190	36.000	40.383	N/A	Pass	
	5230	35.916	40.435	N/A	Pass	
802.11ac80	5210	75.254	80.964	N/A	Pass	

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5260	16.523	14.238	N/A	Pass
802.11a	5300	16.510	15.122	N/A	Pass
	5320	16.559	15.674	N/A	Pass
	5260	17.619	15.086	N/A	Pass
802.11n20	5300	17.623	15.157	N/A	Pass
	5320	17.622	15.142	N/A	Pass
902 11540	5270	36.115	35.163	N/A	Pass
802.11n40	5310	36.078	35.137	N/A	Pass
	5260	17.602	15.128	N/A	Pass
802.11ac20	5300	17.603	15.158	N/A	Pass
	5320	17.591	15.351	N/A	Pass
802.11ac40	5270	36.048	34.442	N/A	Pass
	5310	36.019	35.153	N/A	Pass
802.11ac80	5290	75.418	75.286	N/A	Pass







Те	Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
	5745	16.523	14.238	0.5	Pass		
802.11a	5785	16.510	15.122	0.5	Pass		
	5825	16.559	15.674	0.5	Pass		
	5745	17.619	15.086	0.5	Pass		
802.11n20	5785	17.623	15.157	0.5	Pass		
	5825	17.622	15.142	0.5	Pass		
902 11 - 10	5755	36.115	35.163	0.5	Pass		
802.11n40	5795	36.078	35.137	0.5	Pass		
	5745	17.602	15.128	0.5	Pass		
802.11ac20	5785	17.603	15.158	0.5	Pass		
	5825	17.591	15.351	0.5	Pass		
802.11ac40	5755	36.048	34.442	0.5	Pass		
	5795	36.019	35.153	0.5	Pass		
802.11ac80	5775	75.418	75.286	0.5	Pass		







## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

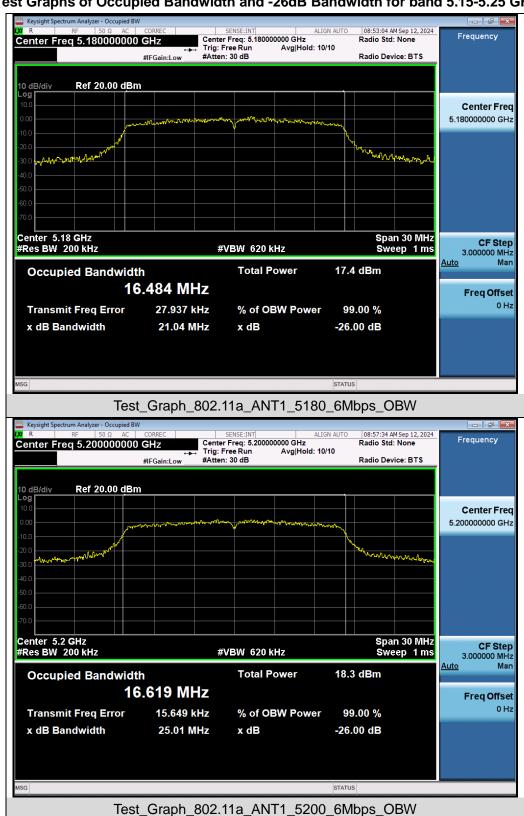







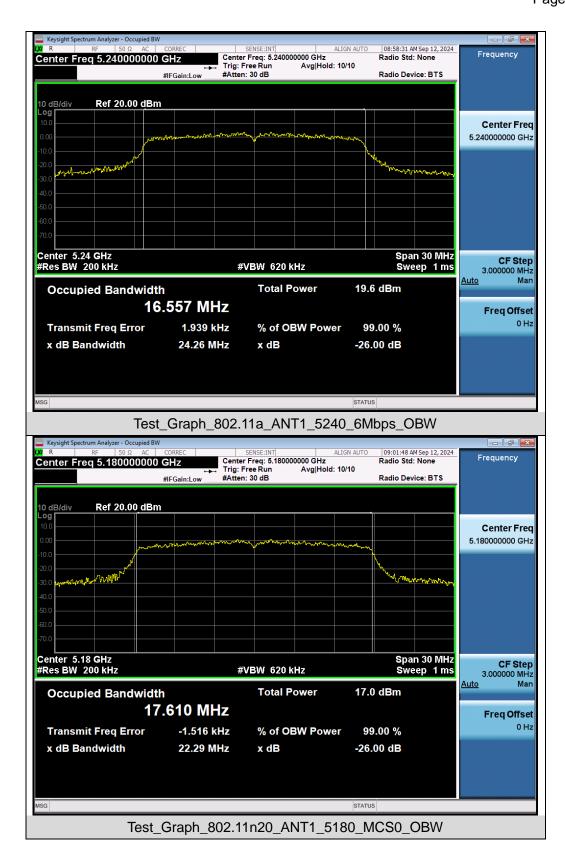







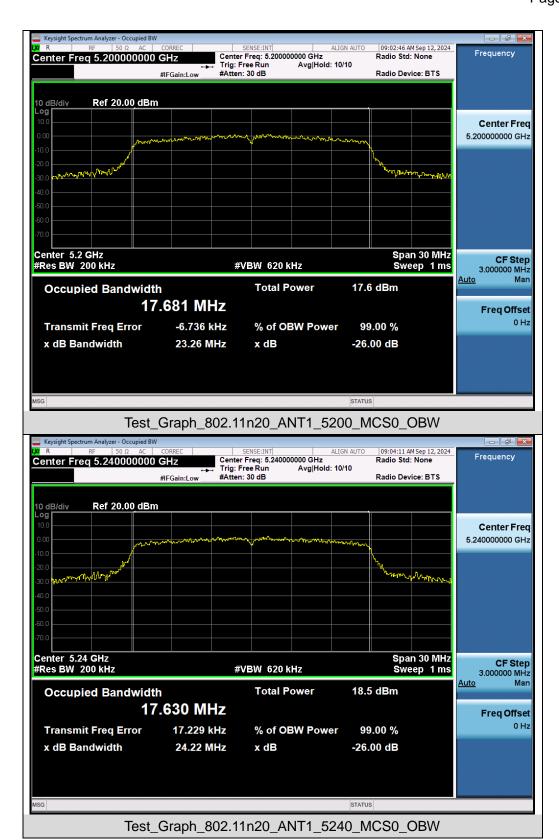







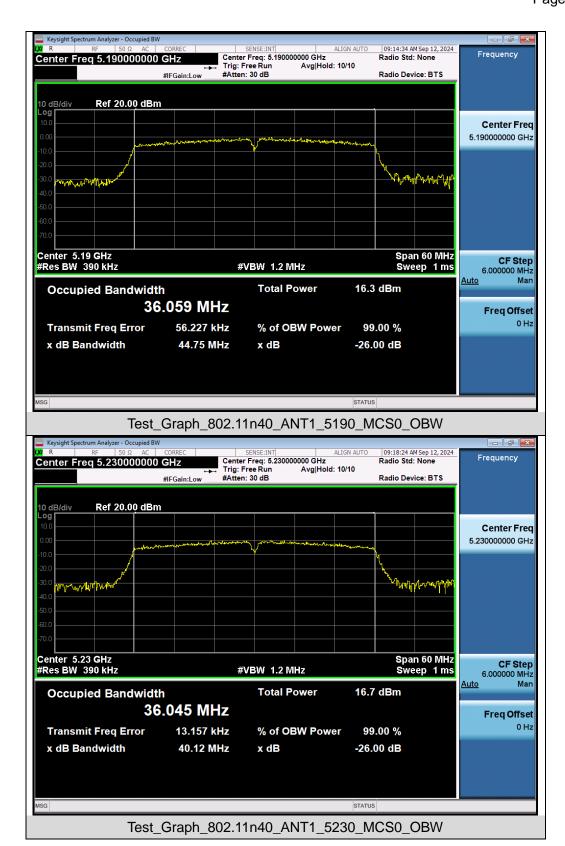







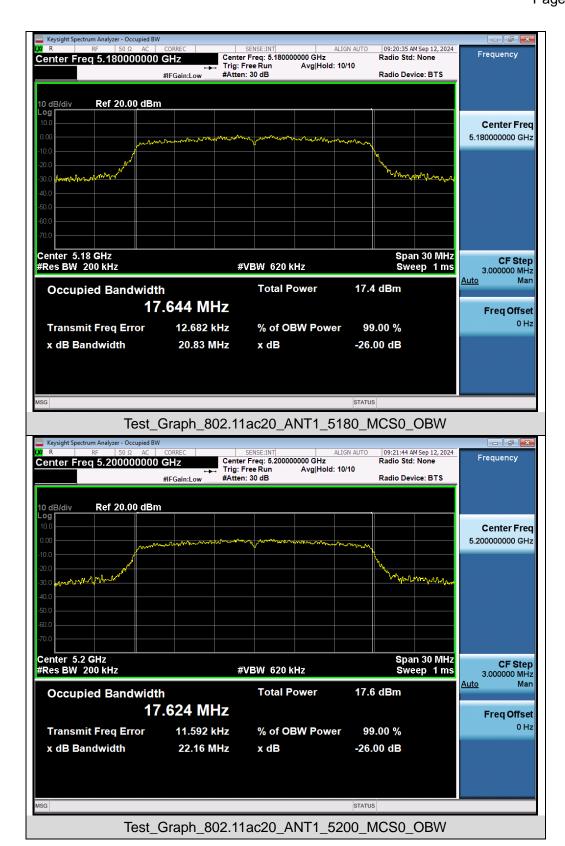







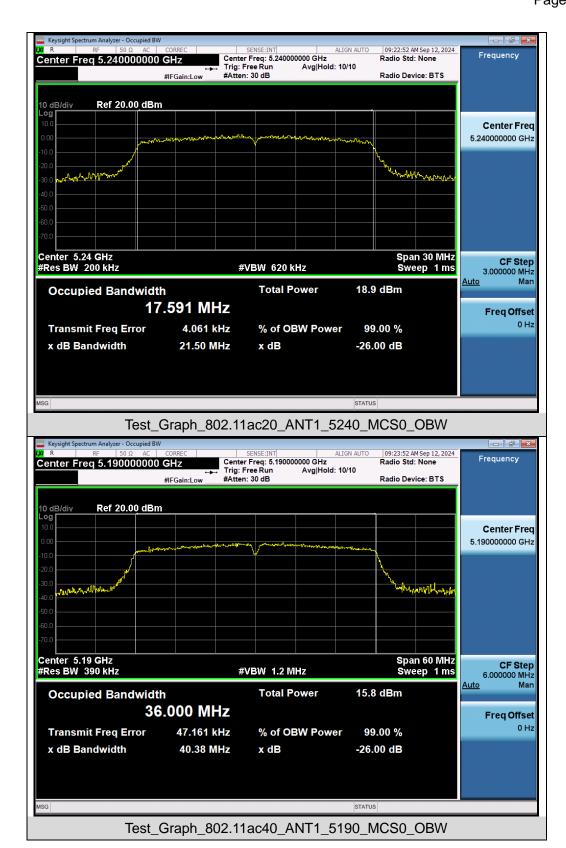






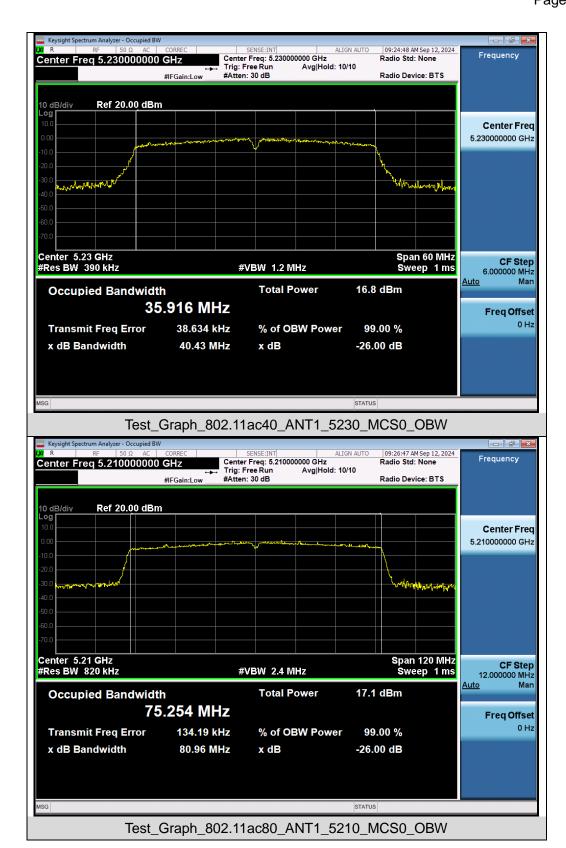








## Test Graphs of Occupied Bandwidth for band 5.25-5.35 GHz

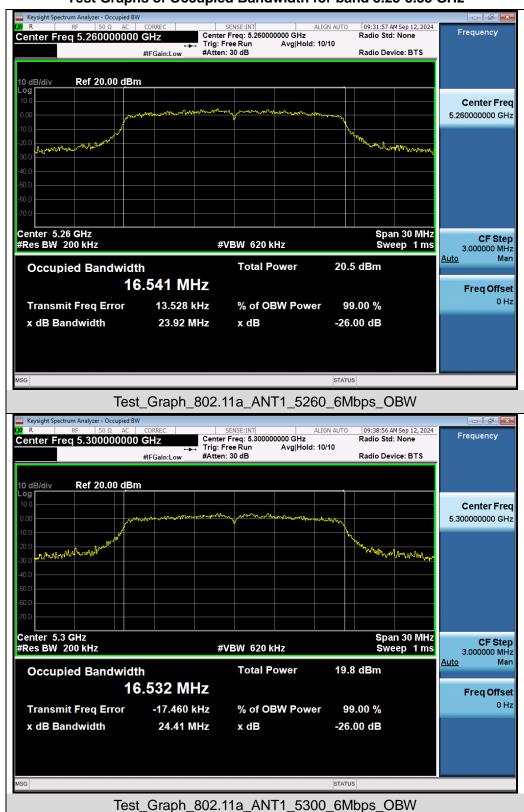







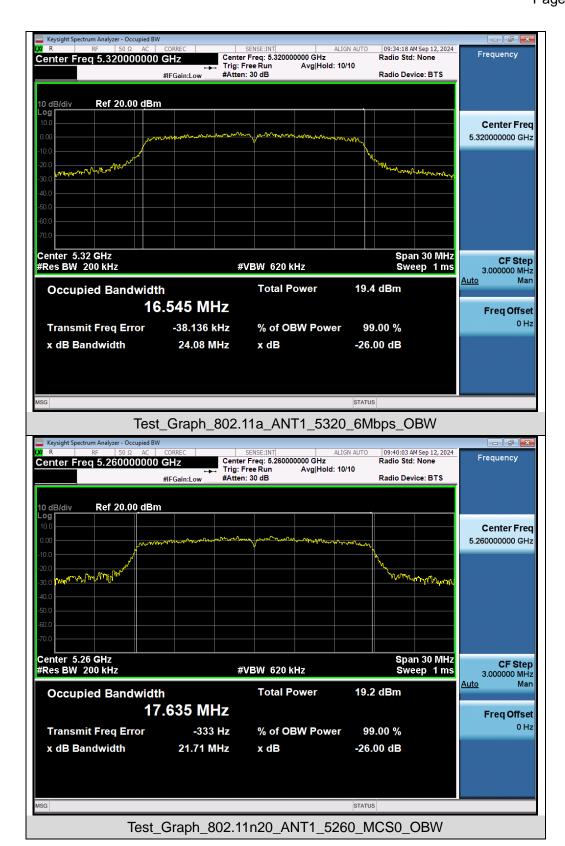







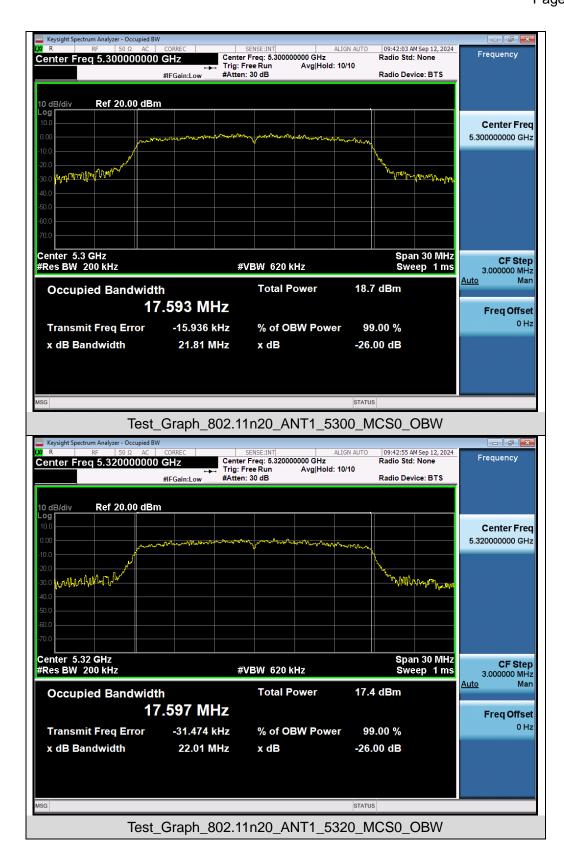







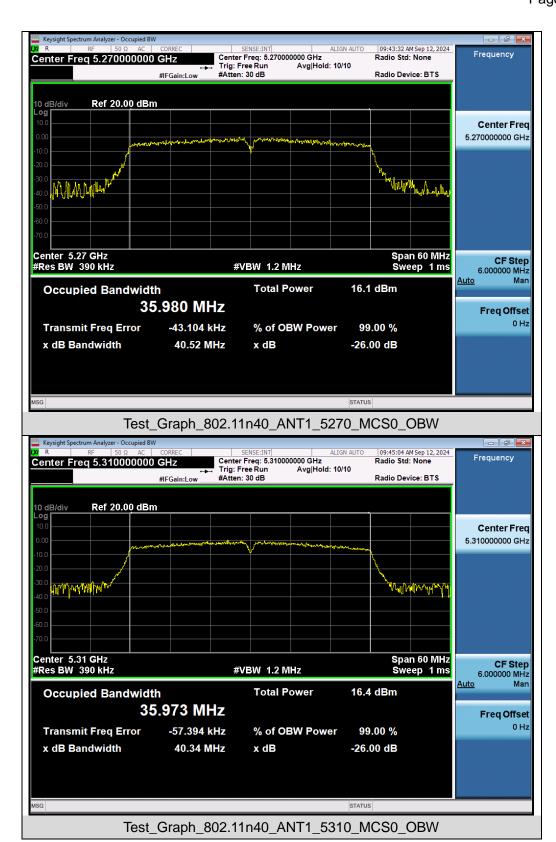







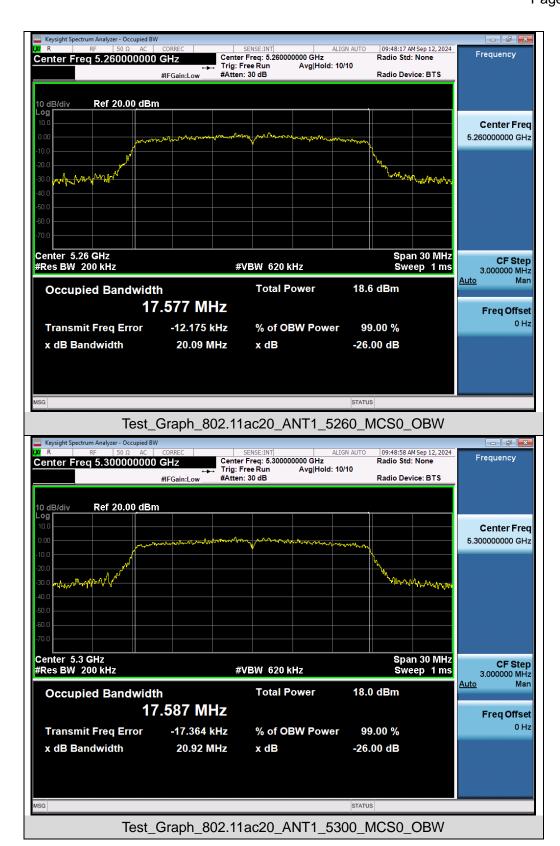







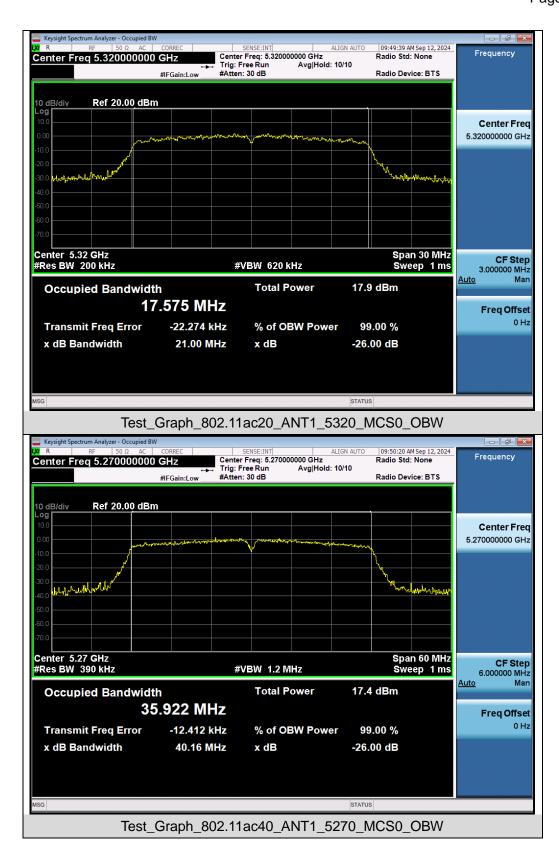






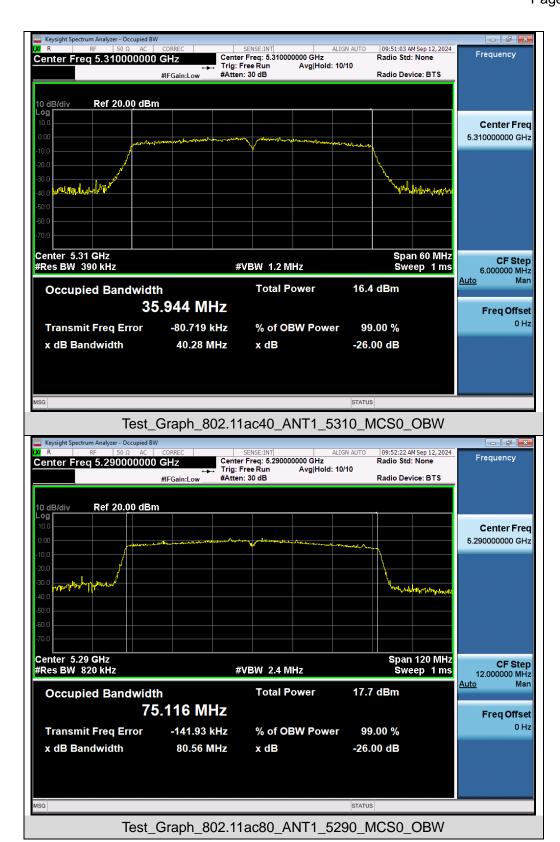








## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.745-5.825 GHz

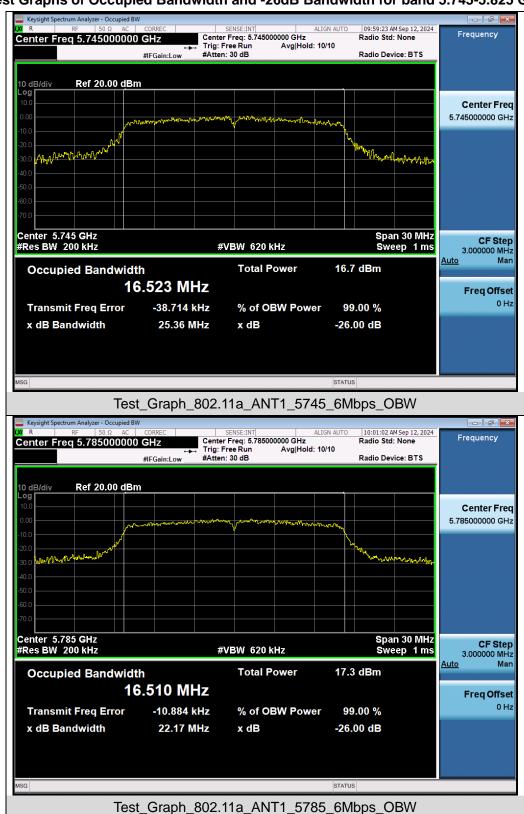







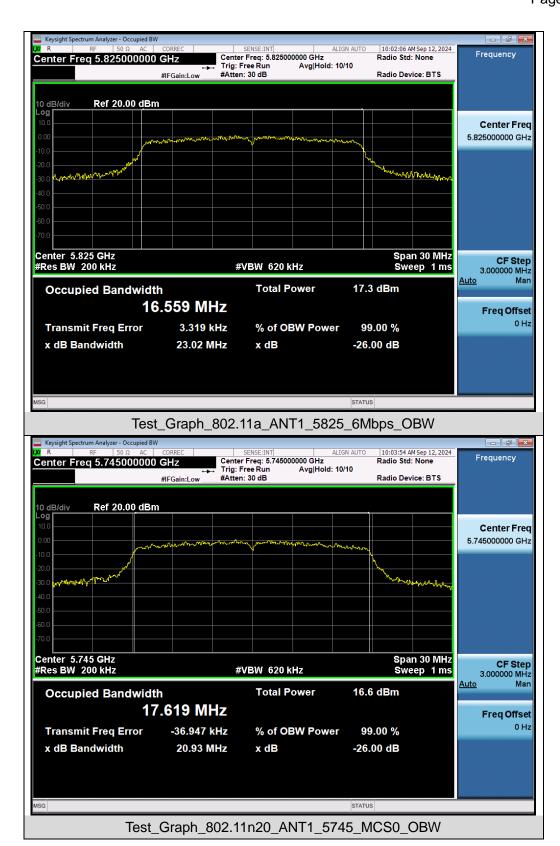







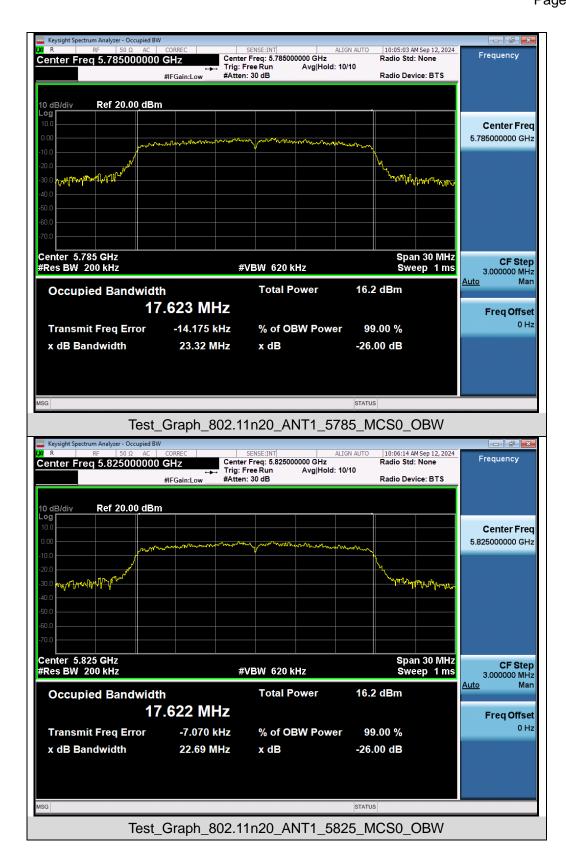







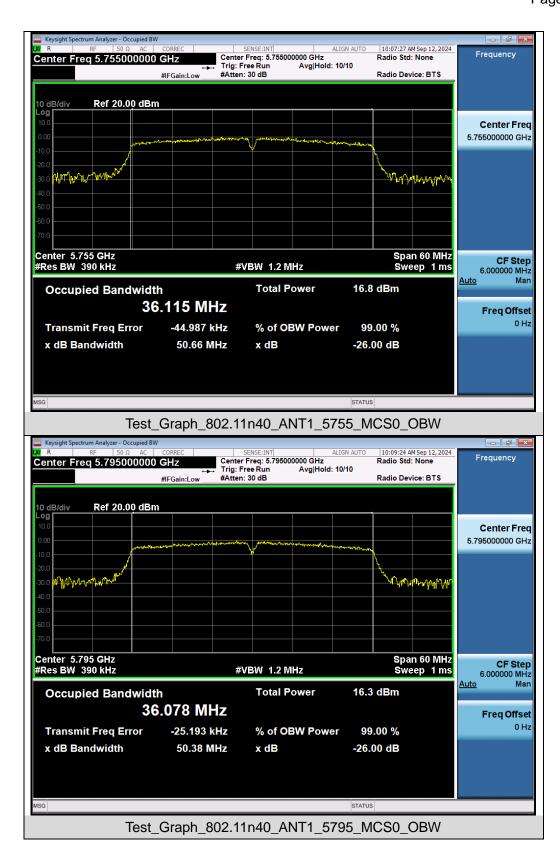







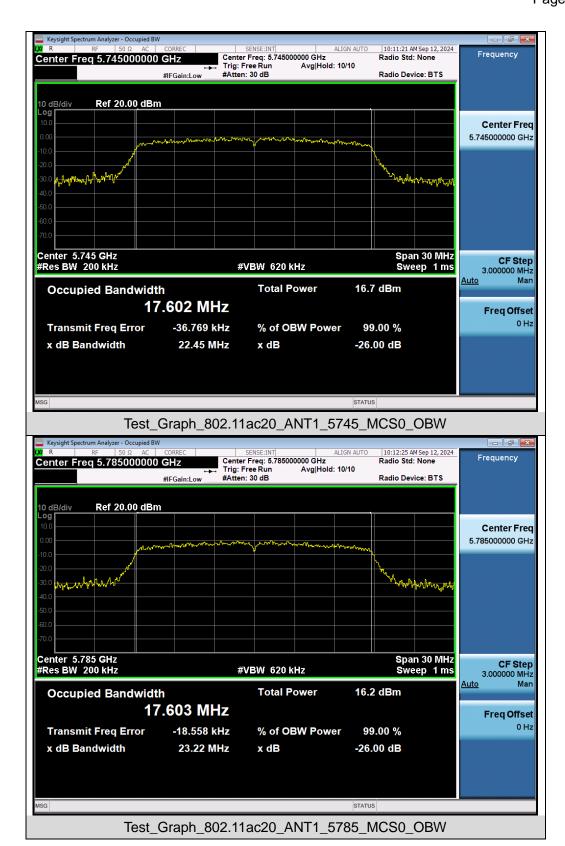







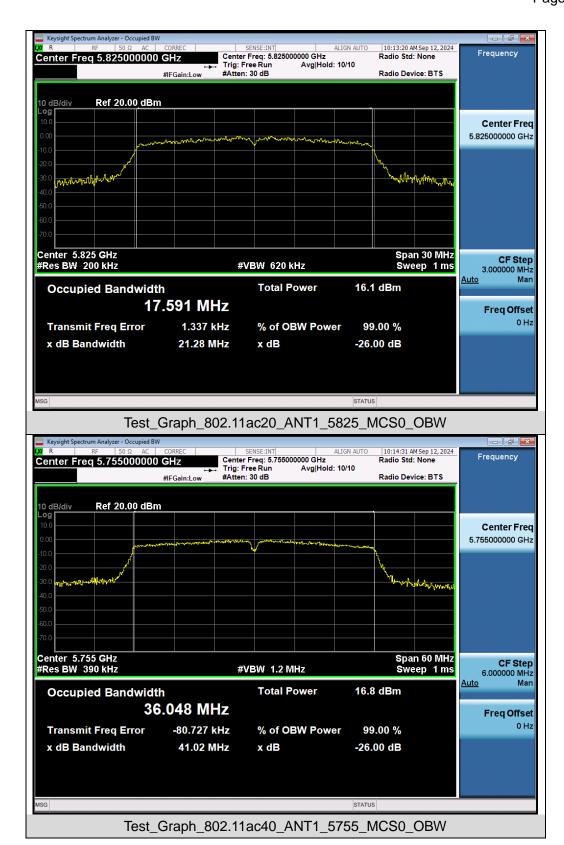






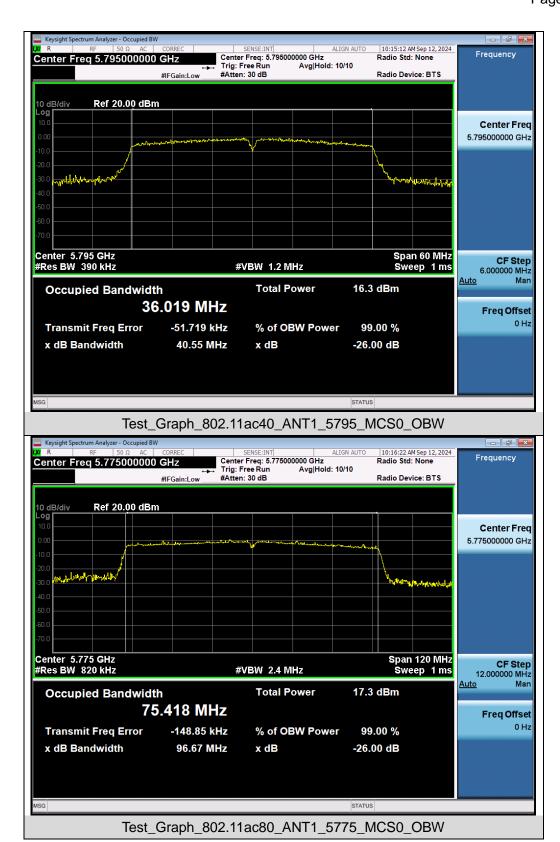





## Test Graphs of DTS Bandwidth for band 5.725-5.85 GHz

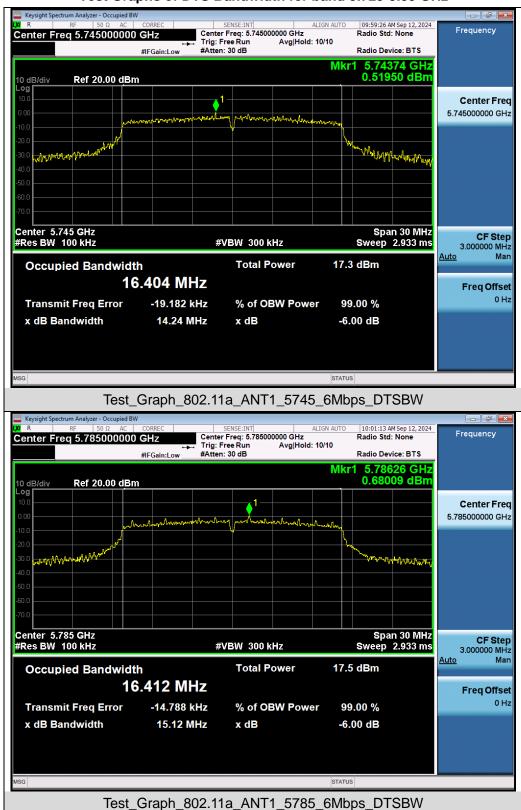

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

