

## Test Data


### Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
HVNT	a	5745	Ant13	5744.9882	-2.05	Within authorized band	Pass
LVNT	a	5745	Ant13	5744.9884	-2.02		Pass
NVHT	a	5745	Ant13	5744.9884	-2.02		Pass
NVLT	a	5745	Ant13	5744.9888	-1.95		Pass
NVNT	a	5745	Ant13	5744.9892	-1.88		Pass
HVNT	ac80	5775	Ant13	5774.987	-2.25		Pass
LVNT	ac80	5775	Ant13	5774.9872	-2.22		Pass
NVHT	ac80	5775	Ant13	5774.9874	-2.18		Pass
NVLT	ac80	5775	Ant13	5774.9874	-2.18		Pass
NVNT	ac80	5775	Ant13	5774.9878	-2.11		Pass
HVNT	n40	5755	Ant13	5754.9884	-2.02		Pass
LVNT	n40	5755	Ant13	5754.9888	-1.95		Pass
NVHT	n40	5755	Ant13	5754.9888	-1.95		Pass
NVLT	n40	5755	Ant13	5754.9892	-1.88		Pass
NVNT	n40	5755	Ant13	5754.9898	-1.77		Pass


Remark: "NTNV" means Normal Temperature Normal Voltage, "NVHT" means Normal Voltage High Temperature, "NVLT" means Normal Voltage Low Temperature, "LVNT" means Low Voltage Normal Temperature, "HVNT" means High Voltage Normal Temperature

Test Graphs


Freq. Stability HVNT a 5745MHz Ant13

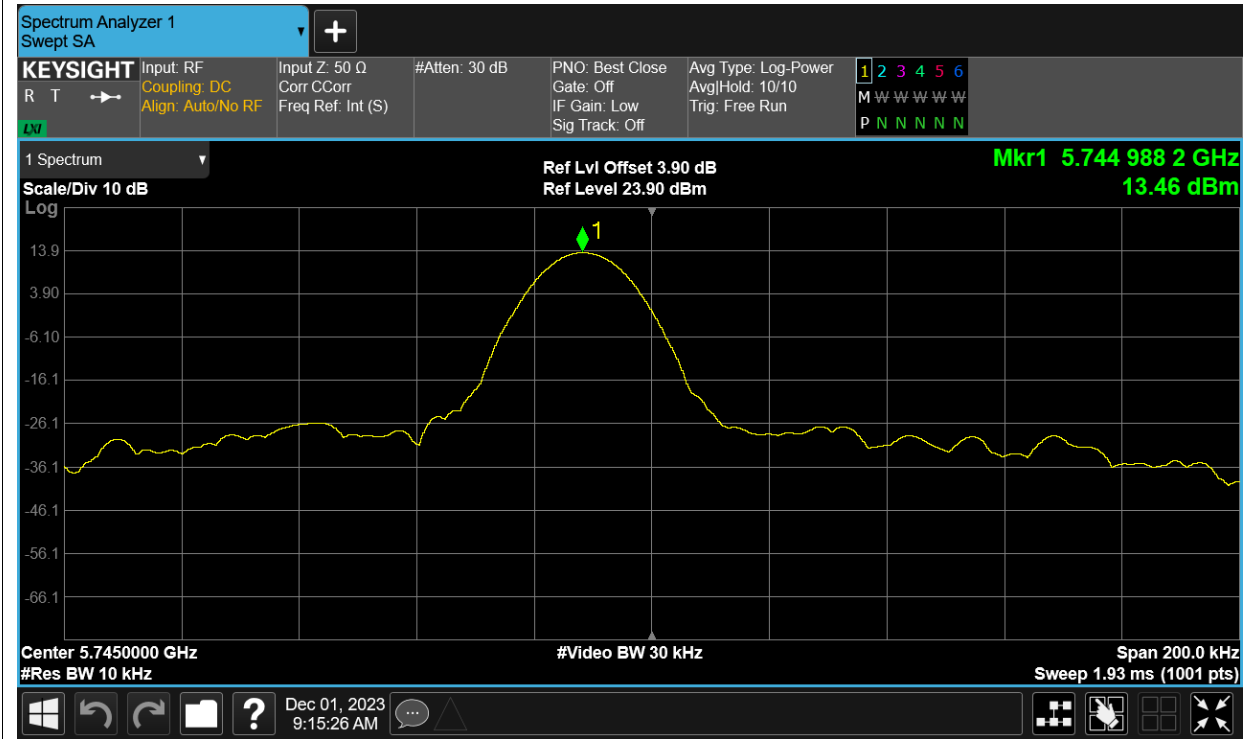


Freq. Stability LVNT a 5745MHz Ant13

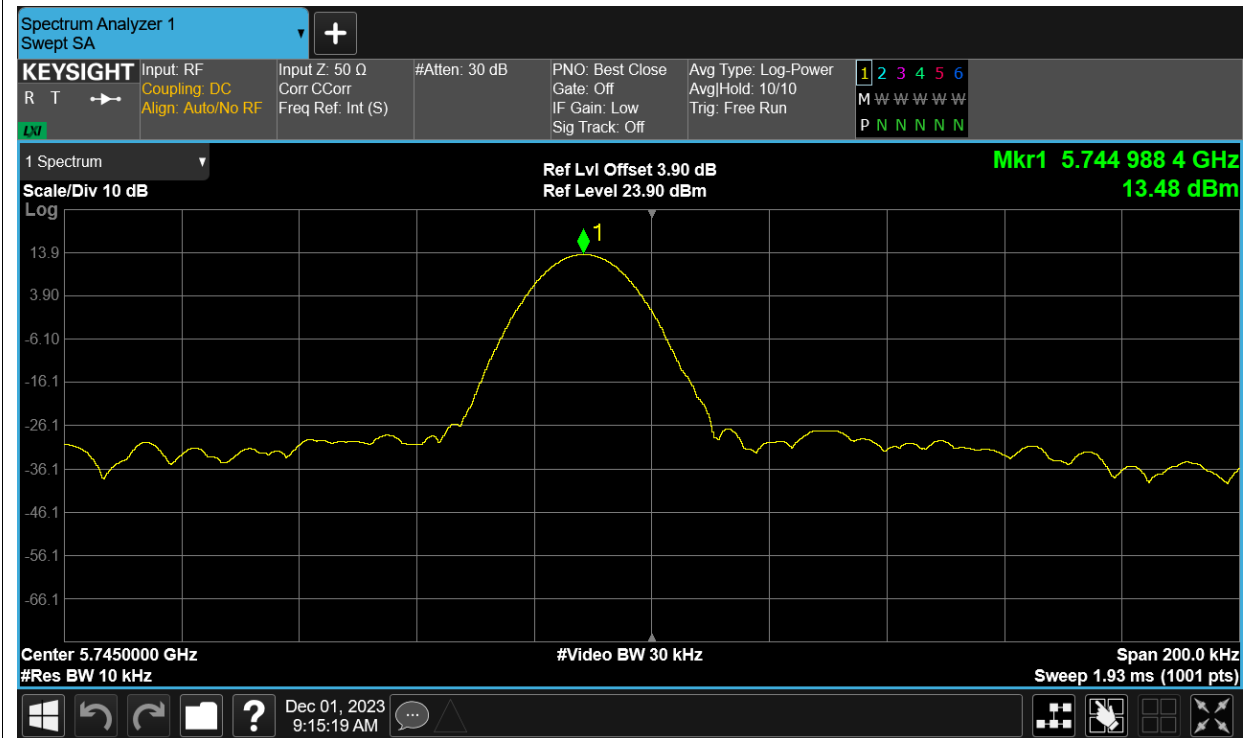


Freq. Stability NVHT a 5745MHz Ant13

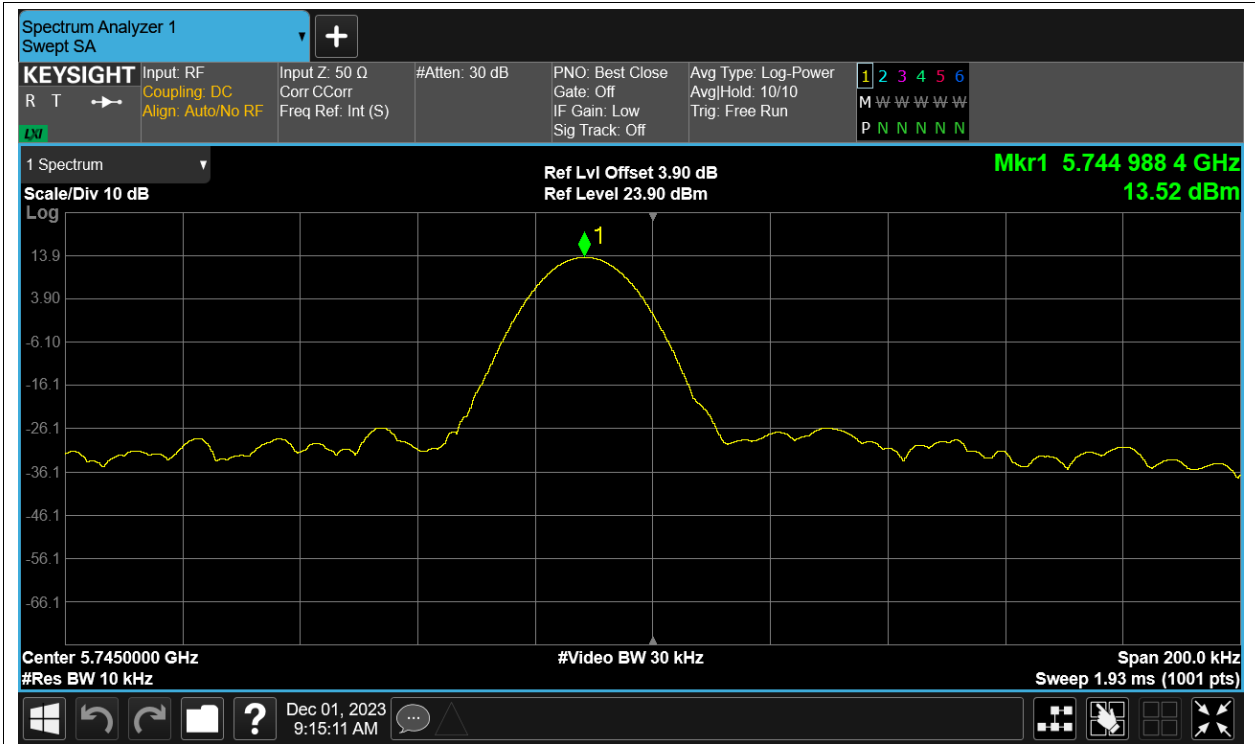


Freq. Stability NVLT a 5745MHz Ant13

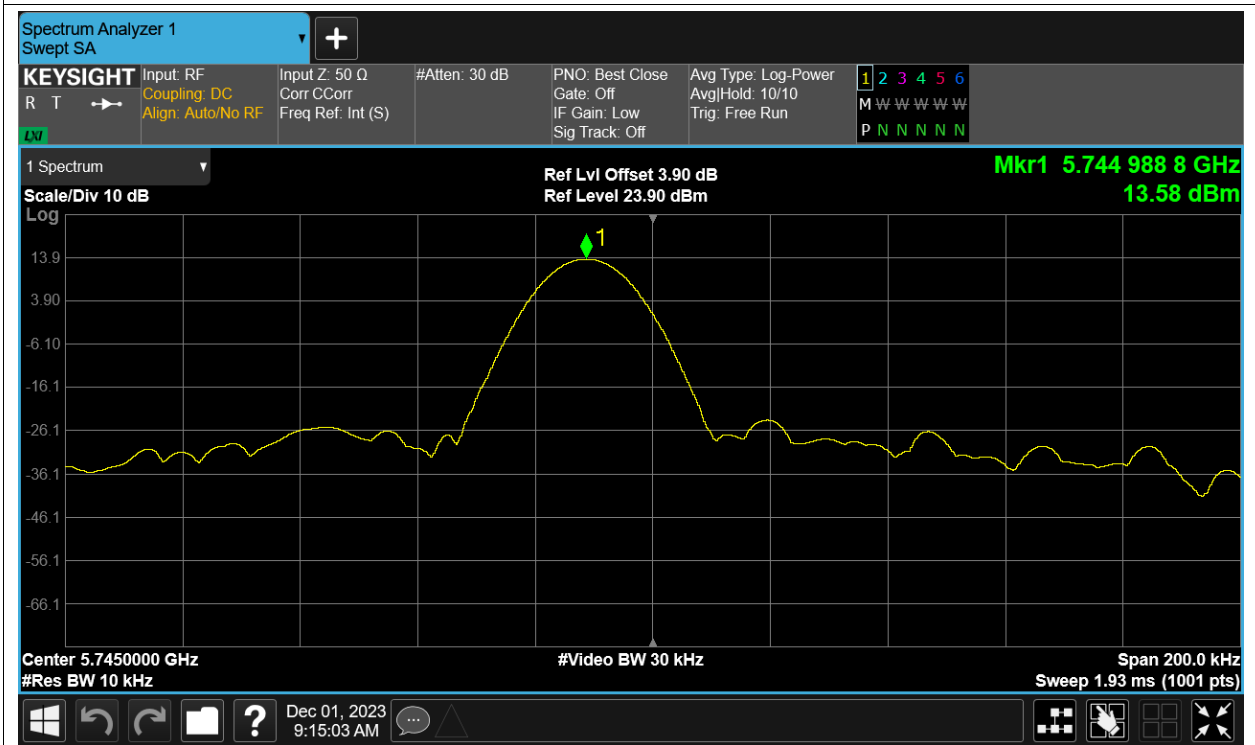


Freq. Stability NVNT a 5745MHz Ant13

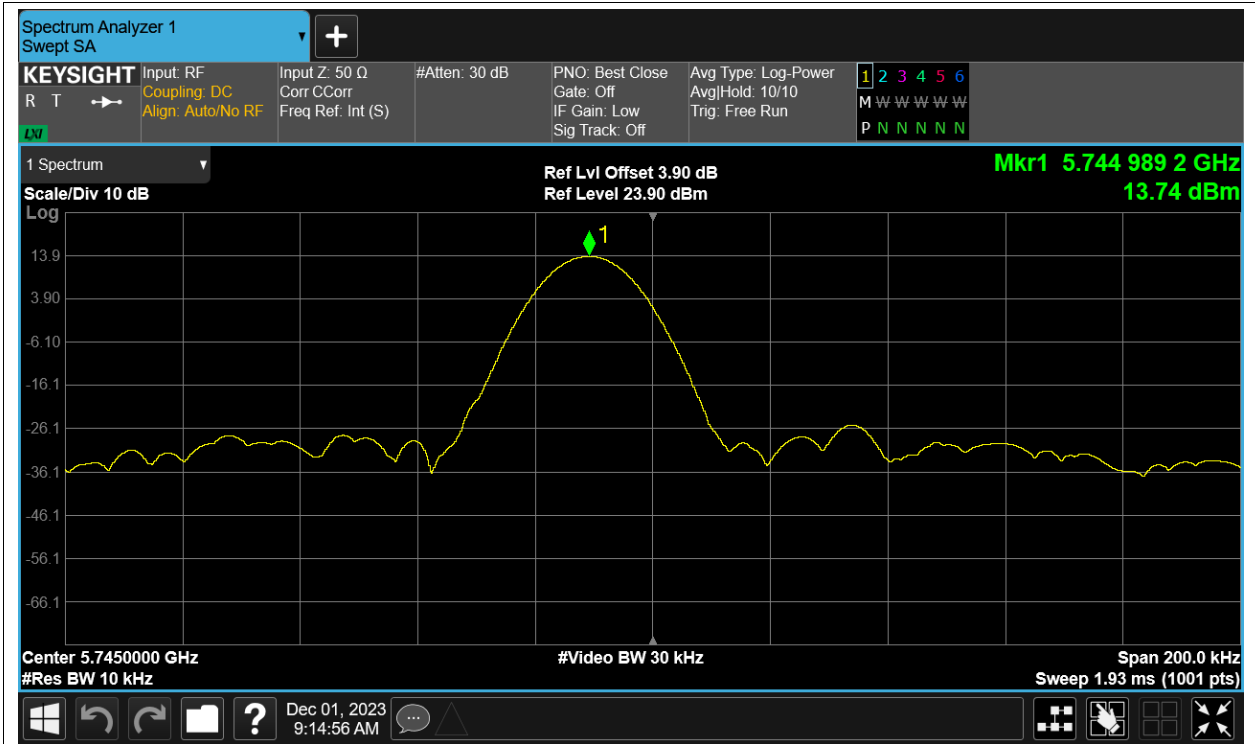


Freq. Stability HVNT ac80 5775MHz Ant13

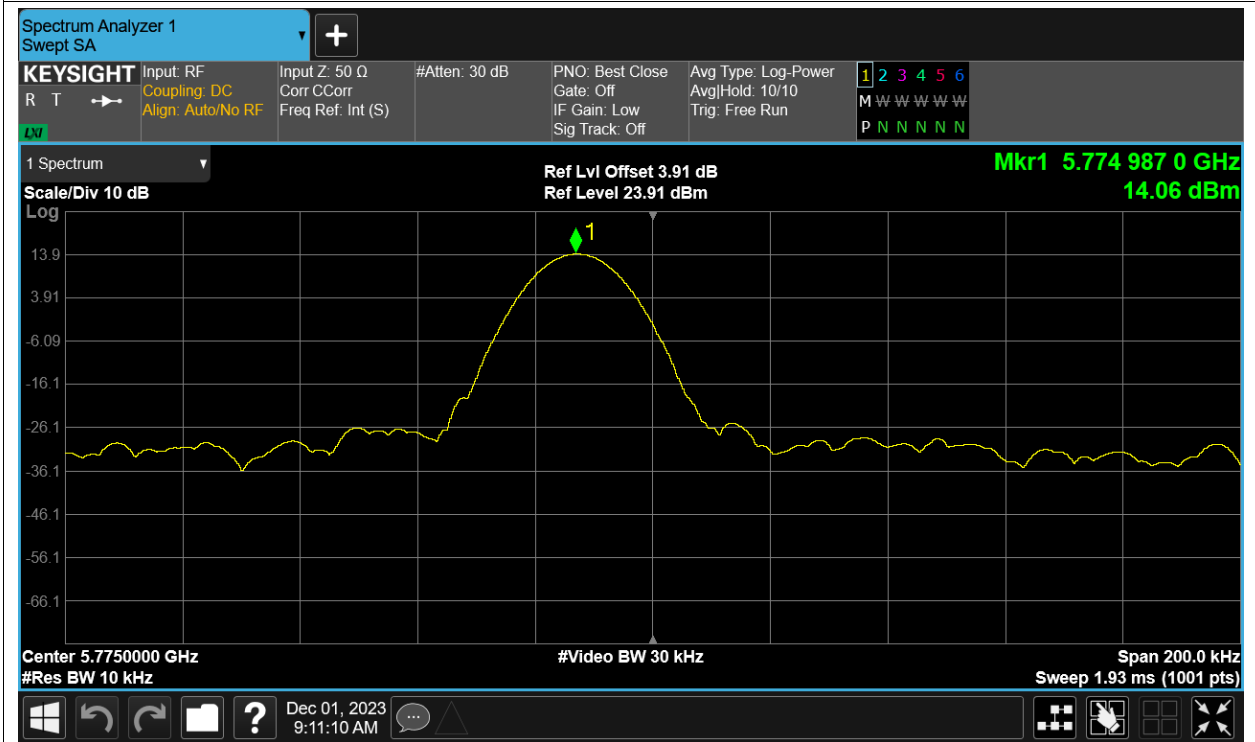


Freq. Stability LVNT ac80 5775MHz Ant13

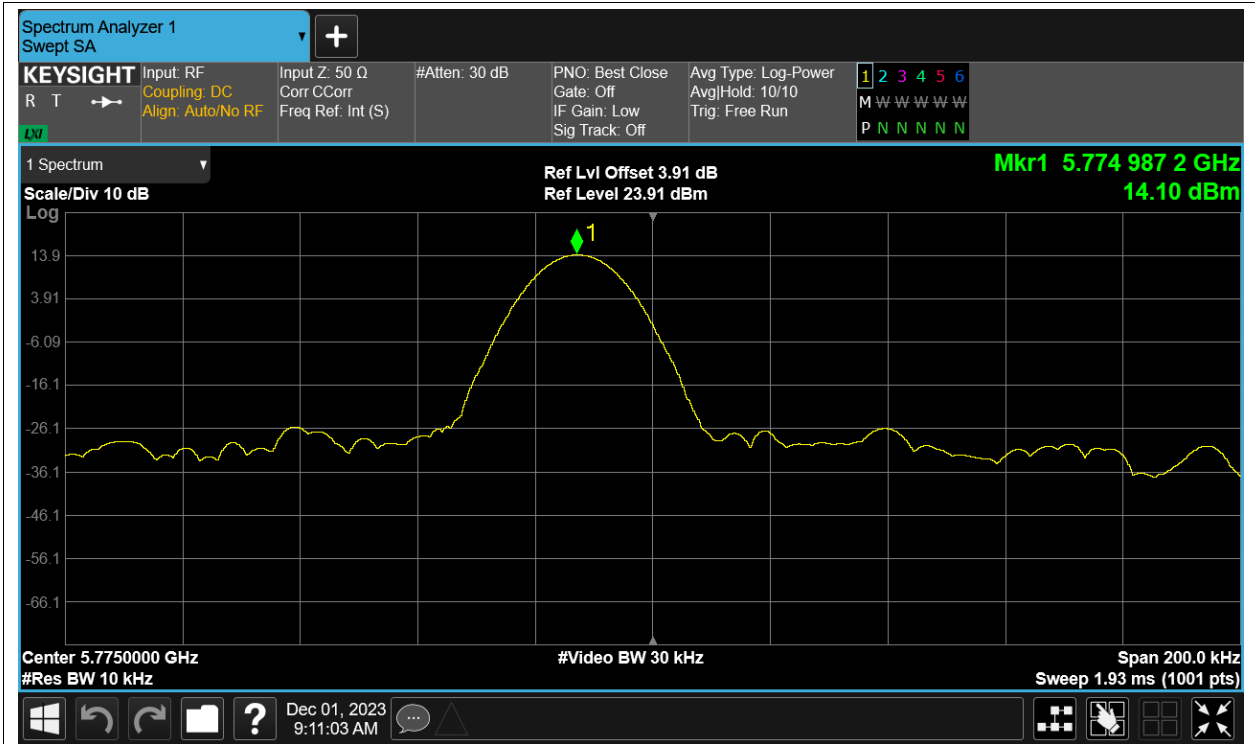


Freq. Stability NVHT ac80 5775MHz Ant13

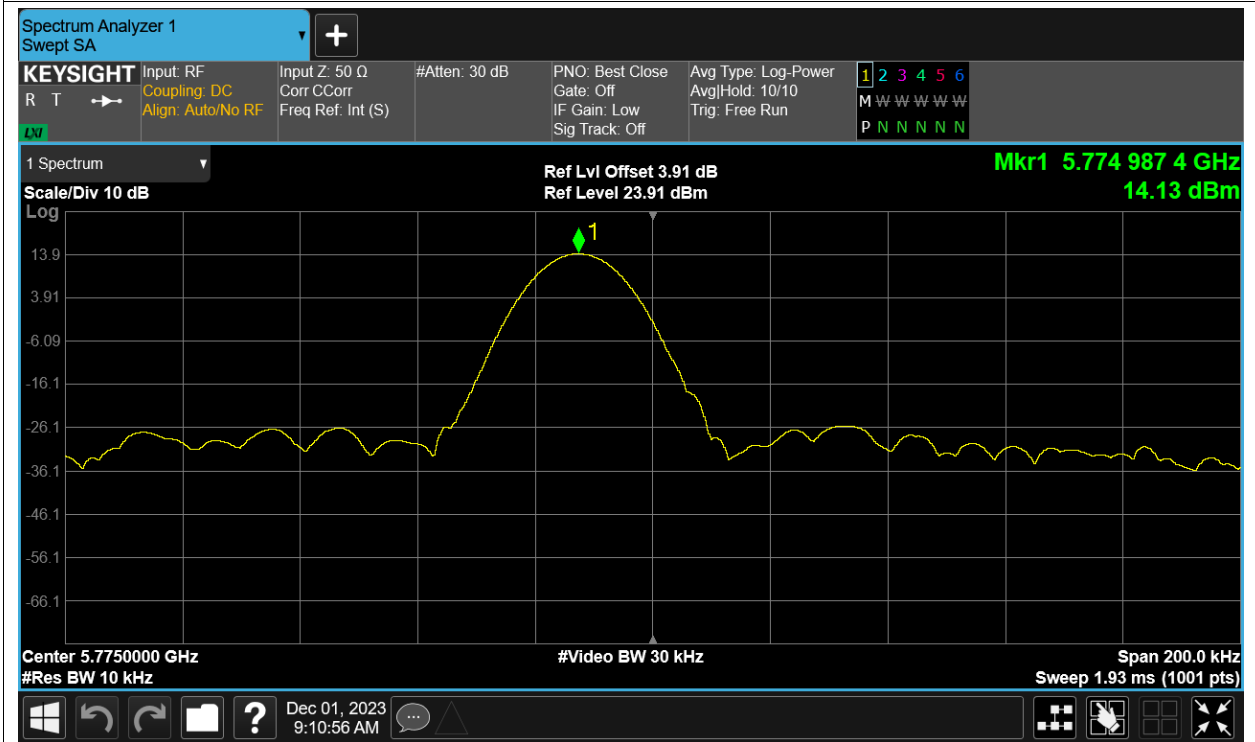


Freq. Stability NVLT ac80 5775MHz Ant13

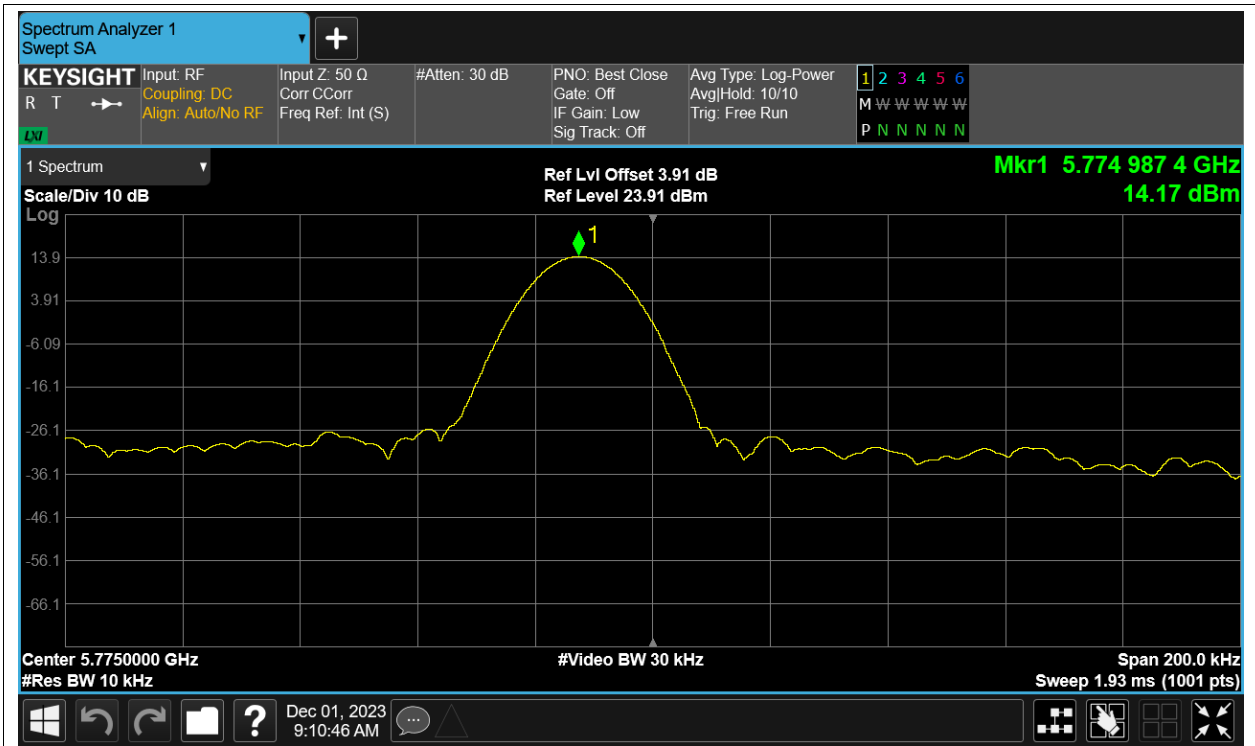


Freq. Stability NVNT ac80 5775MHz Ant13

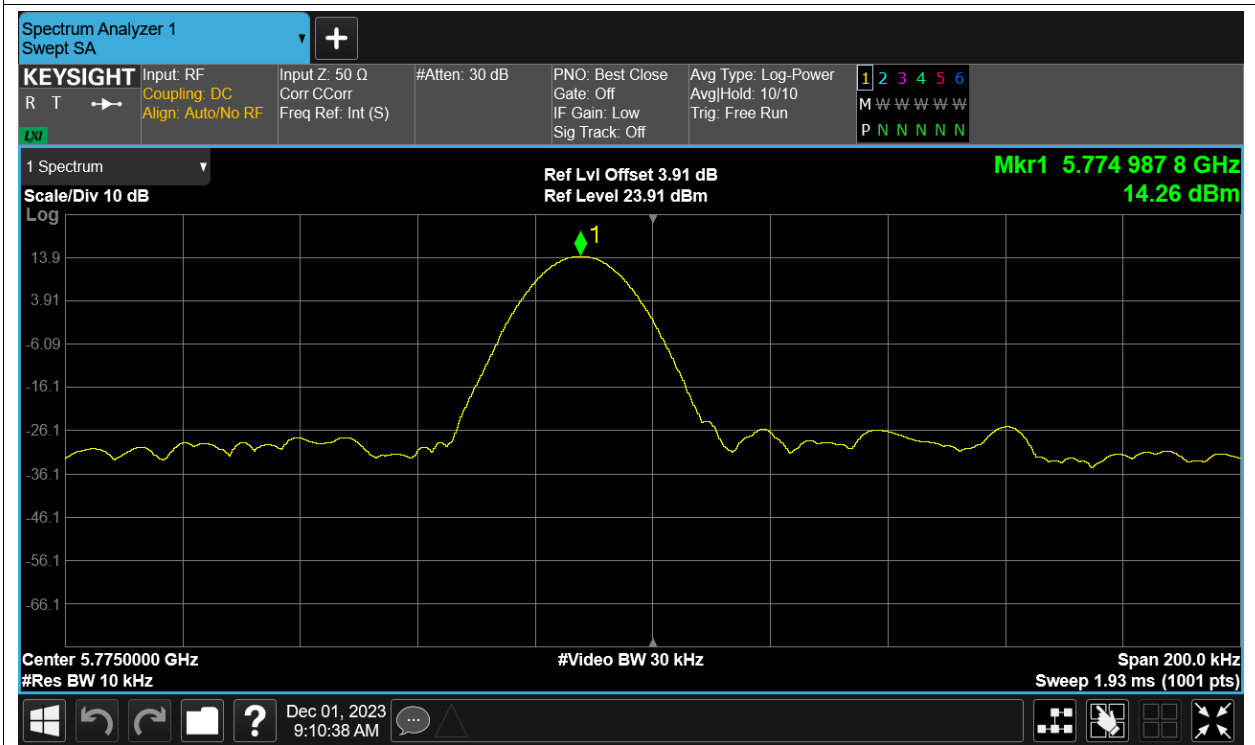


Freq. Stability HVNT n40 5755MHz Ant13

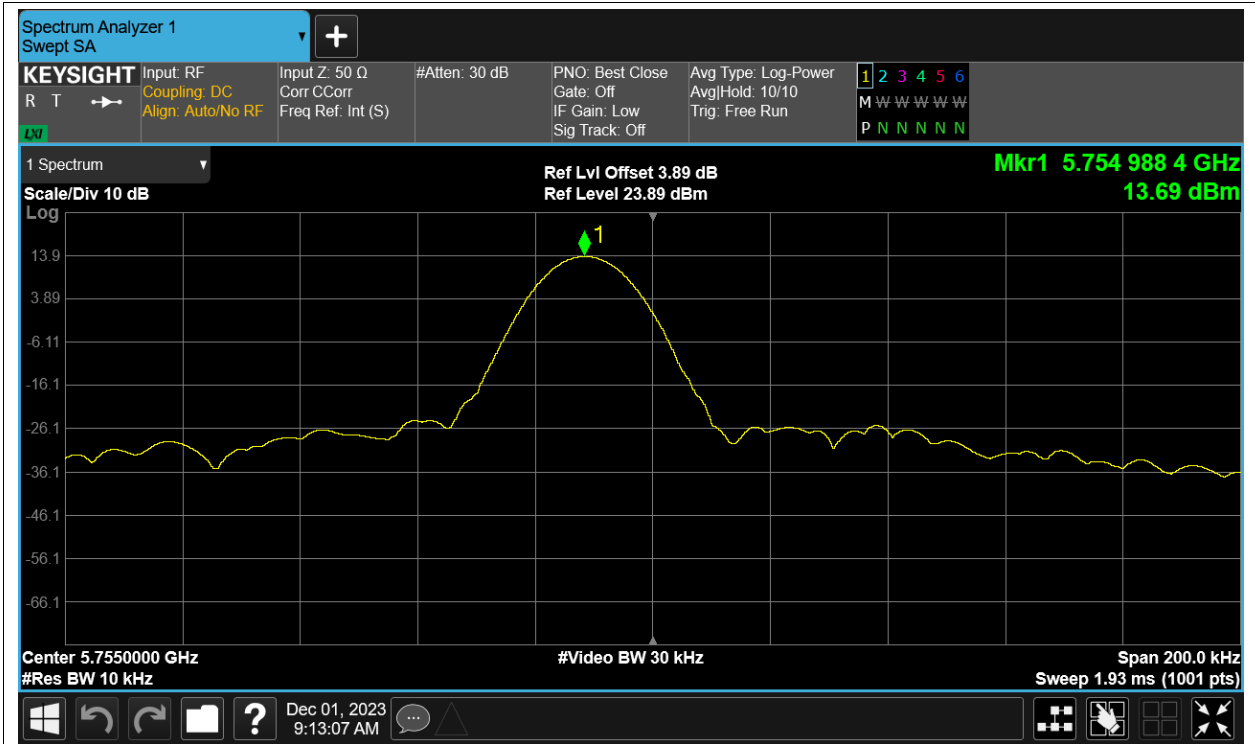


Freq. Stability LVNT n40 5755MHz Ant13

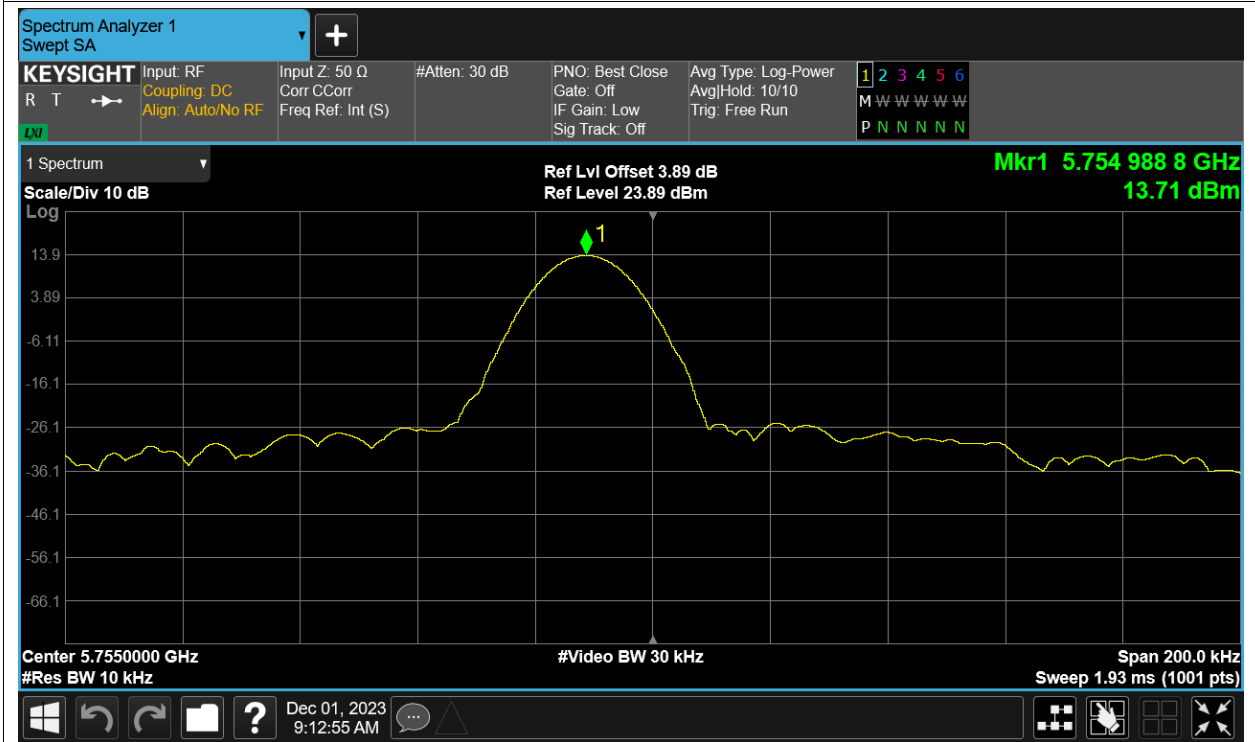

Freq. Stability NVHT n40 5755MHz Ant13

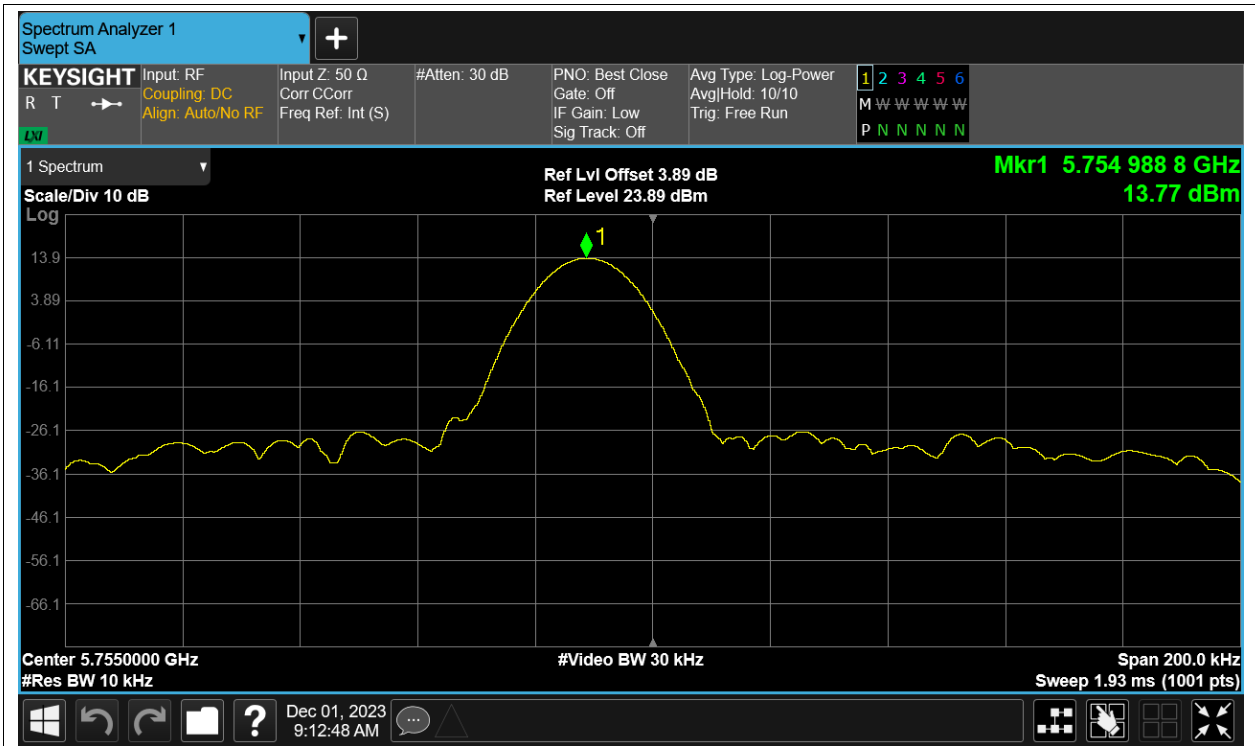


Freq. Stability NVLT n40 5755MHz Ant13

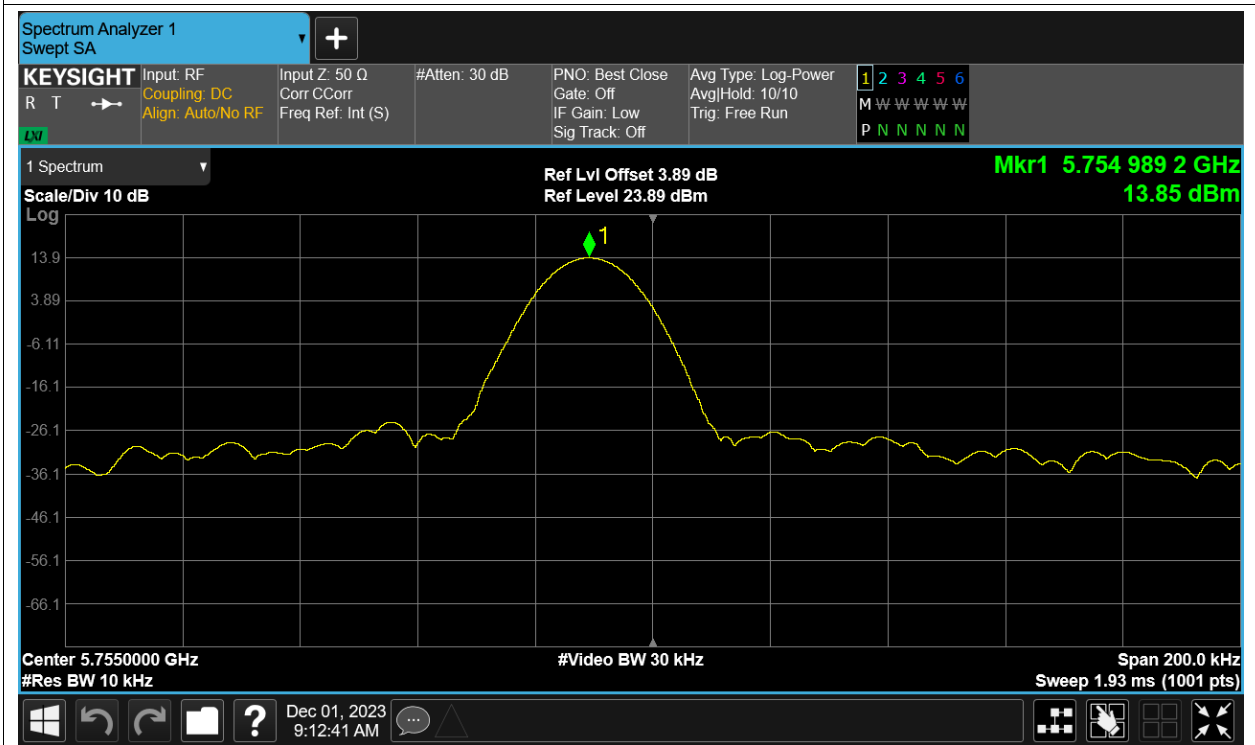

Freq. Stability NVNT n40 5755MHz Ant13



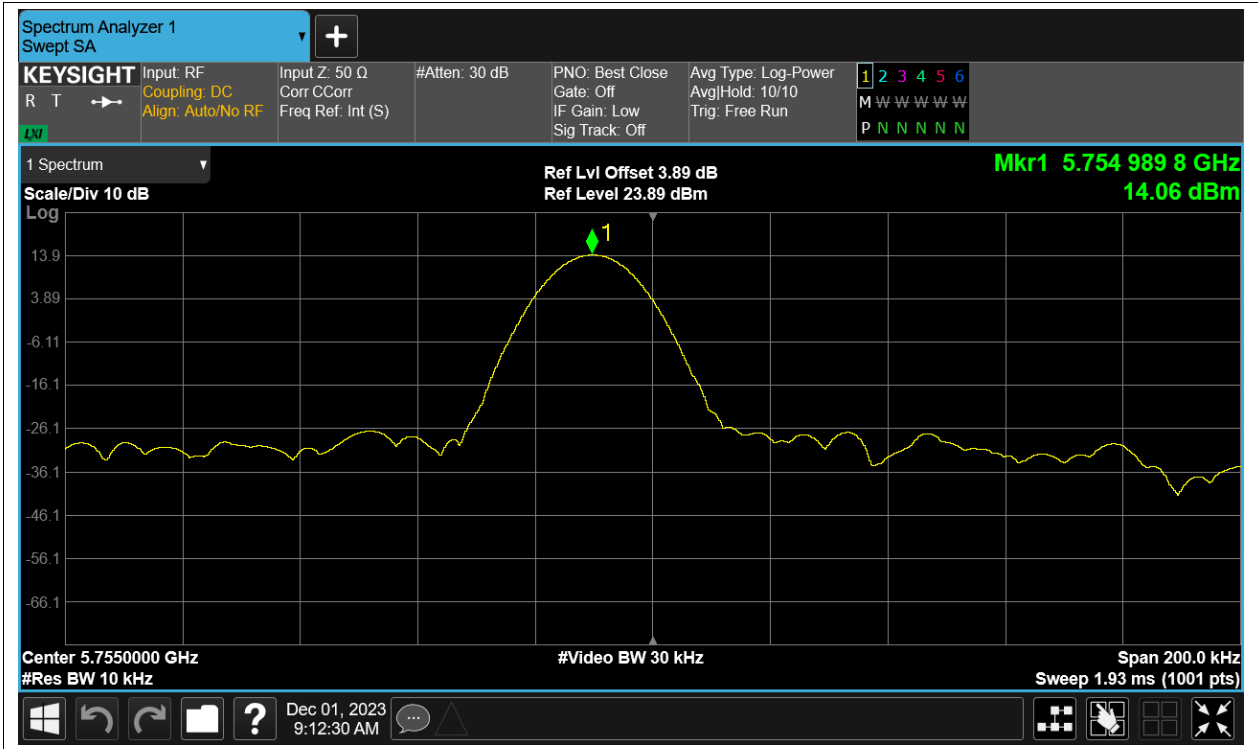


## Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant13	100	0
NVNT	a	5785	Ant13	100	0
NVNT	a	5825	Ant13	100	0
NVNT	ac20	5745	Ant13	100	0
NVNT	ac20	5785	Ant13	100	0
NVNT	ac20	5825	Ant13	100	0
NVNT	ac40	5755	Ant13	100	0
NVNT	ac40	5795	Ant13	100	0
NVNT	ac80	5775	Ant13	100	0
NVNT	n20	5745	Ant13	100	0
NVNT	n20	5785	Ant13	100	0
NVNT	n20	5825	Ant13	100	0
NVNT	n40	5755	Ant13	100	0
NVNT	n40	5795	Ant13	100	0

Test Graphs


Duty Cycle NVNT a 5745MHz Ant13

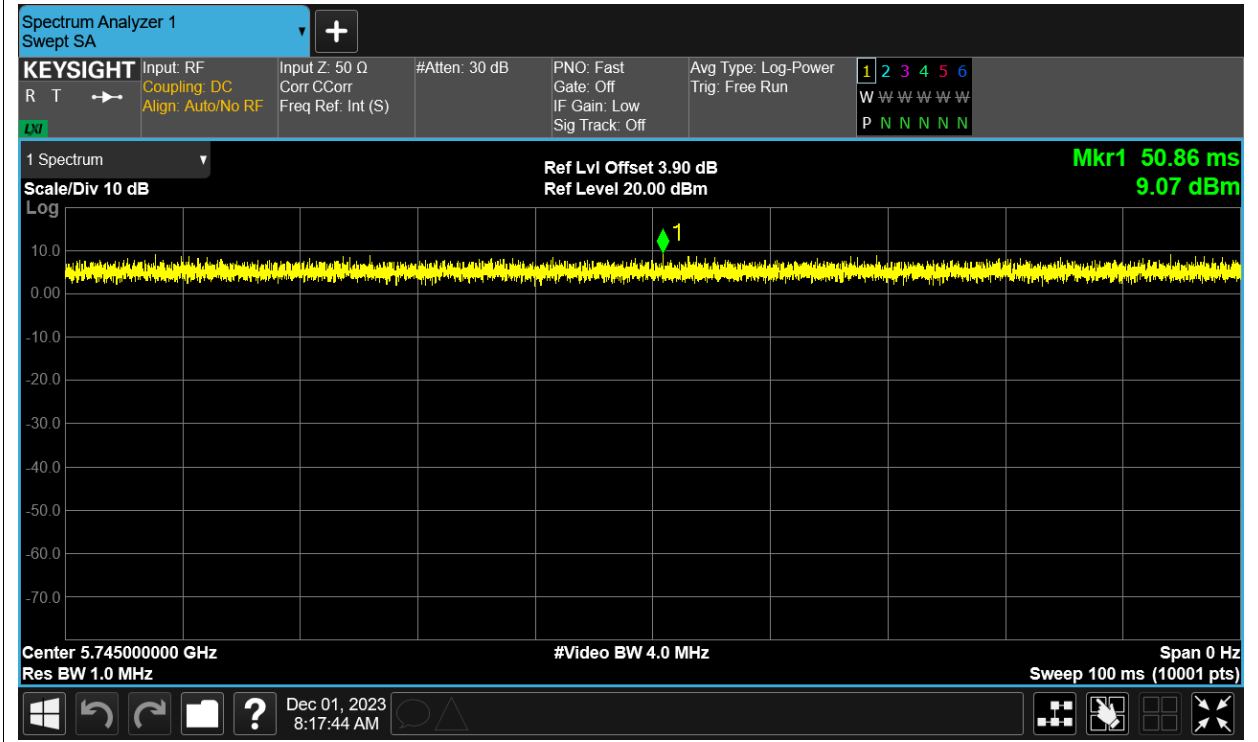


Duty Cycle NVNT a 5785MHz Ant13

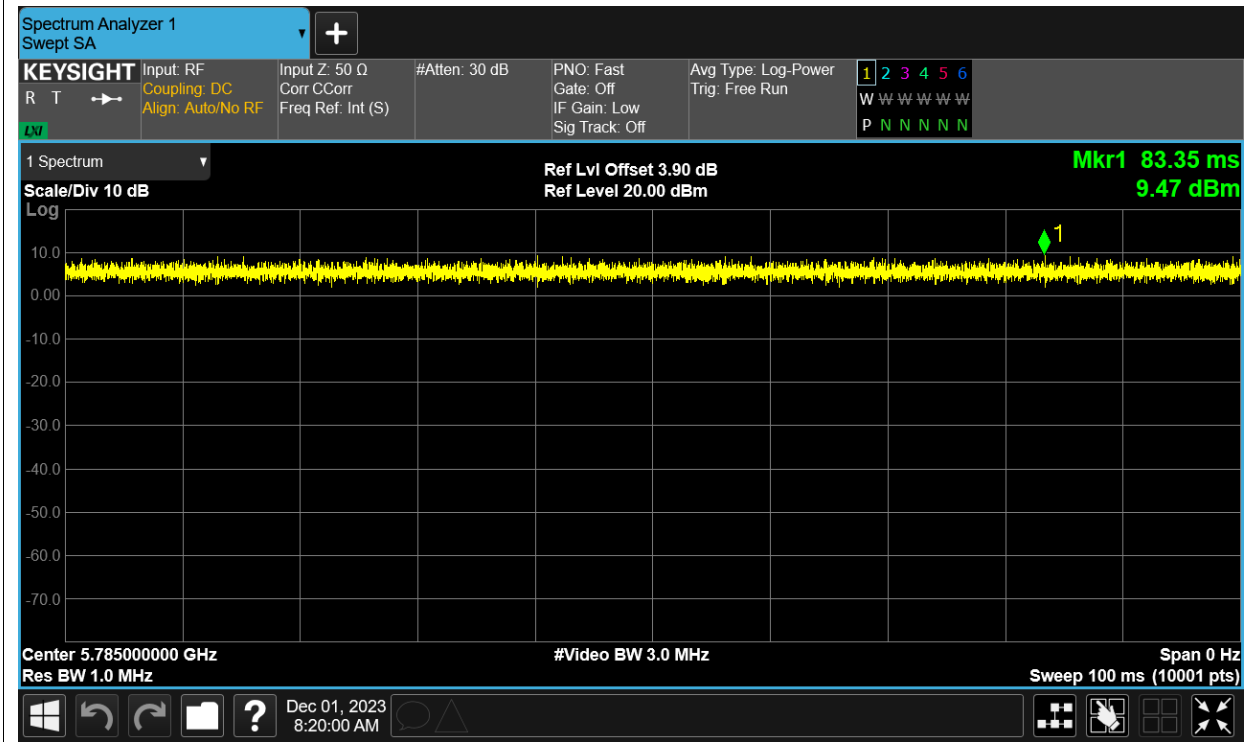


Duty Cycle NVNT a 5825MHz Ant13

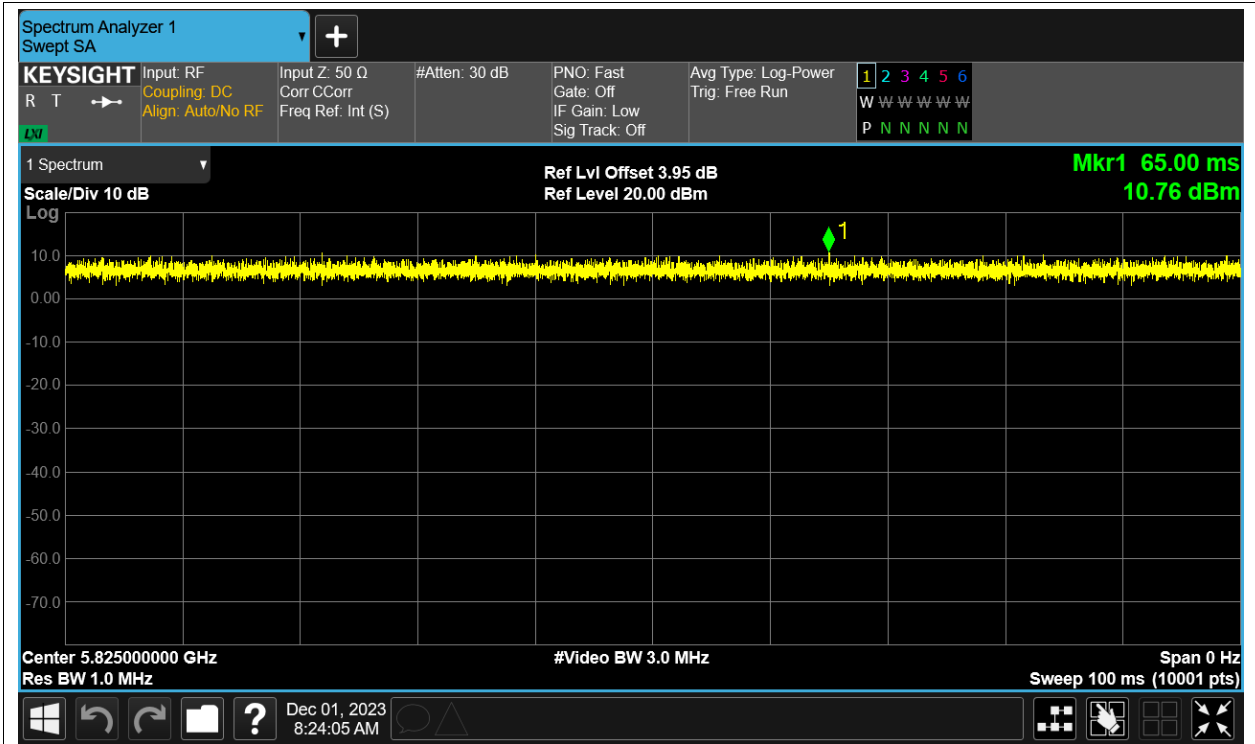


Duty Cycle NVNT ac20 5745MHz Ant13

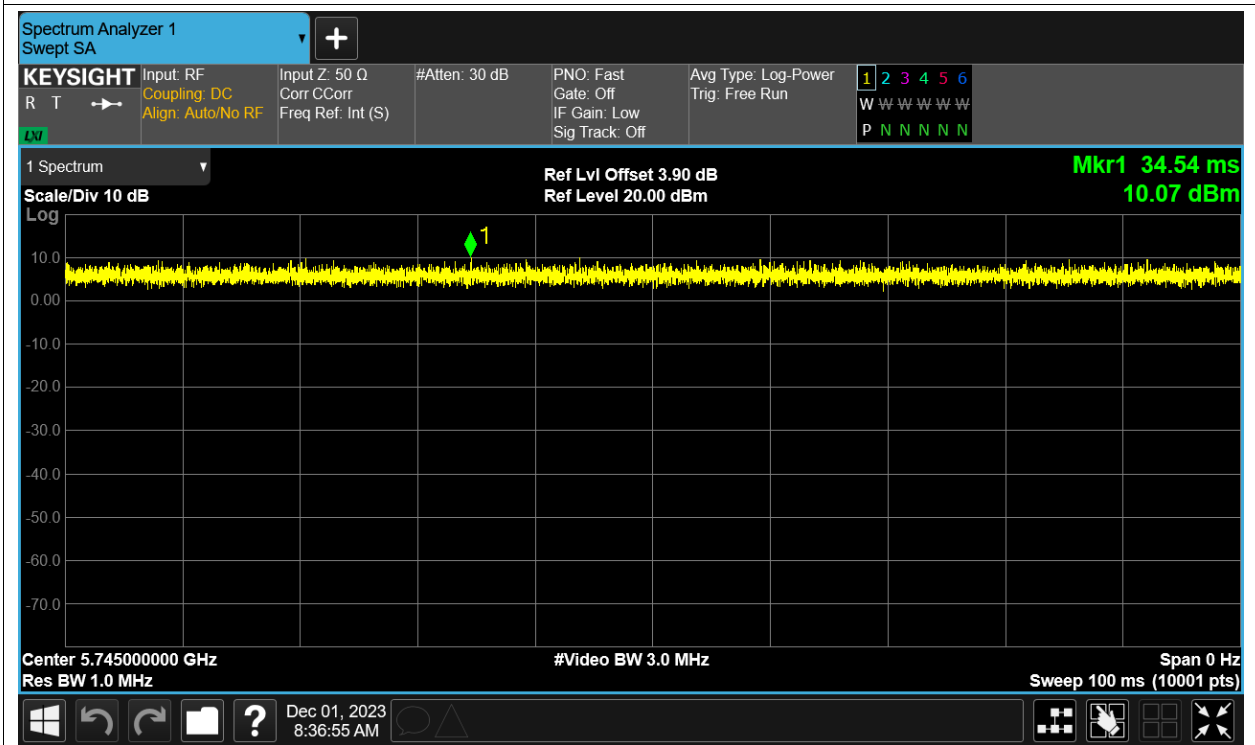


Duty Cycle NVNT ac20 5785MHz Ant13

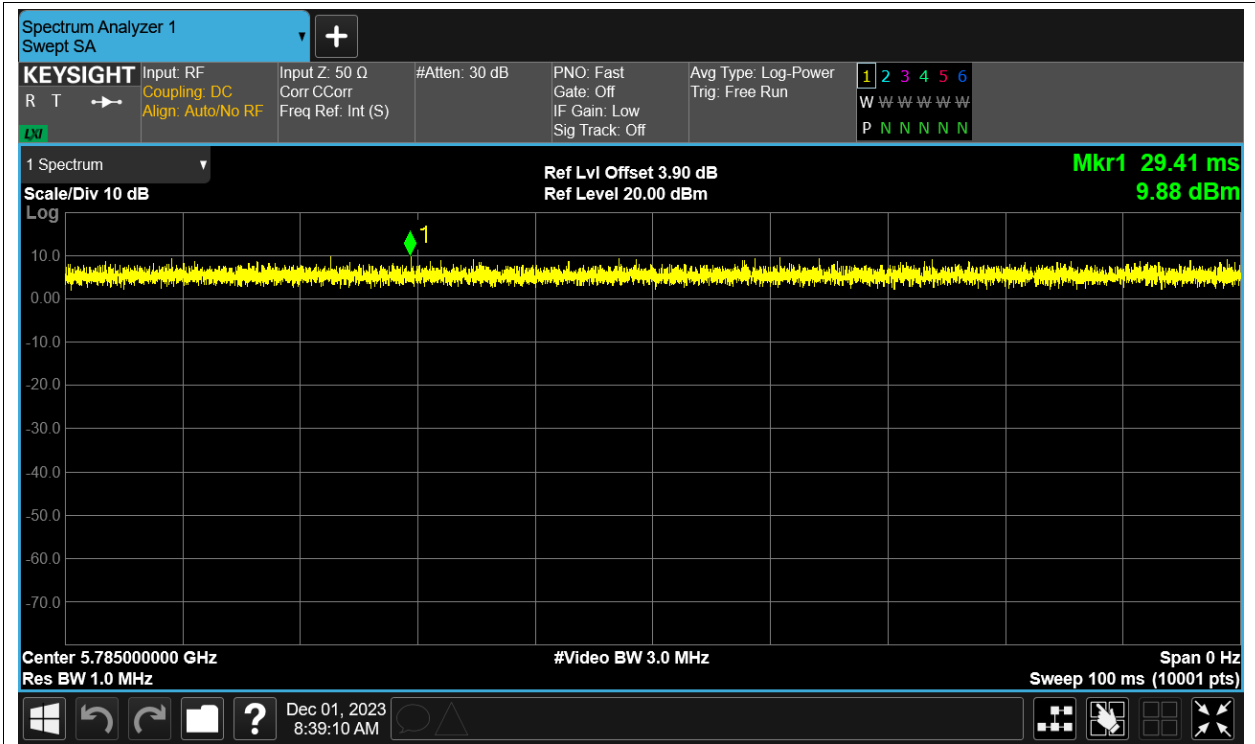


Duty Cycle NVNT ac20 5825MHz Ant13

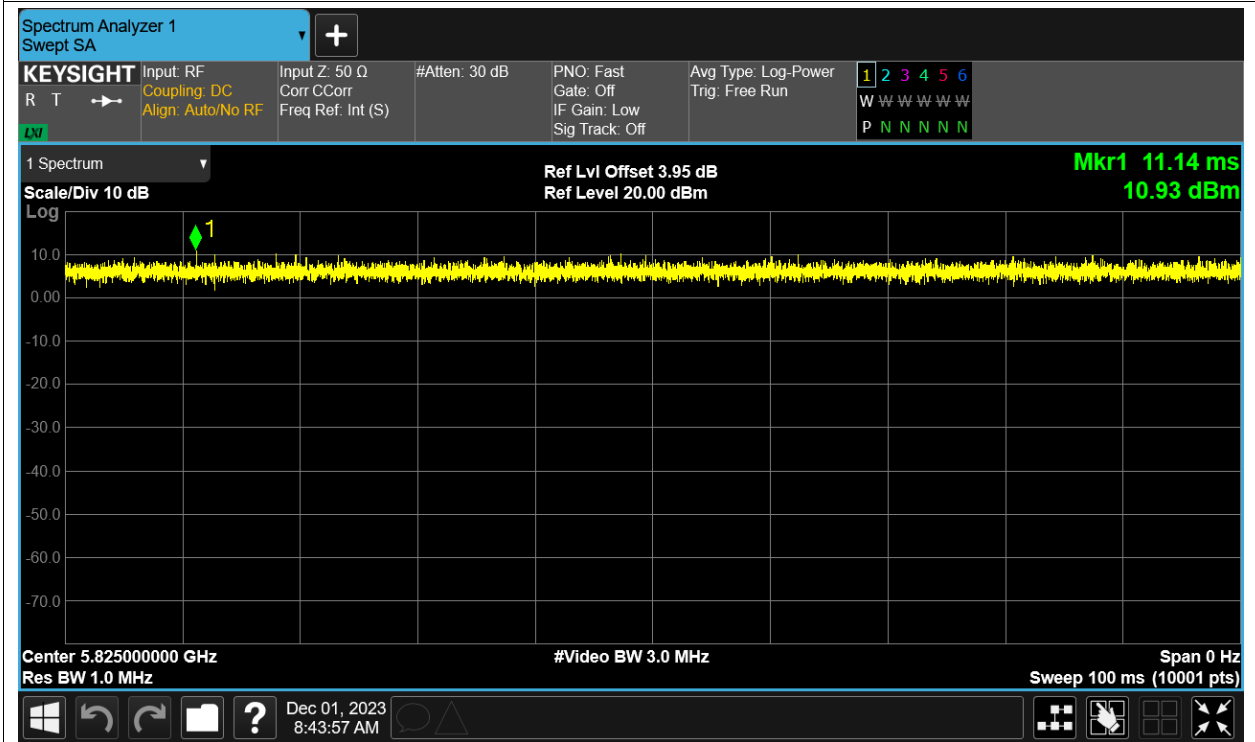


Duty Cycle NVNT ac40 5755MHz Ant13

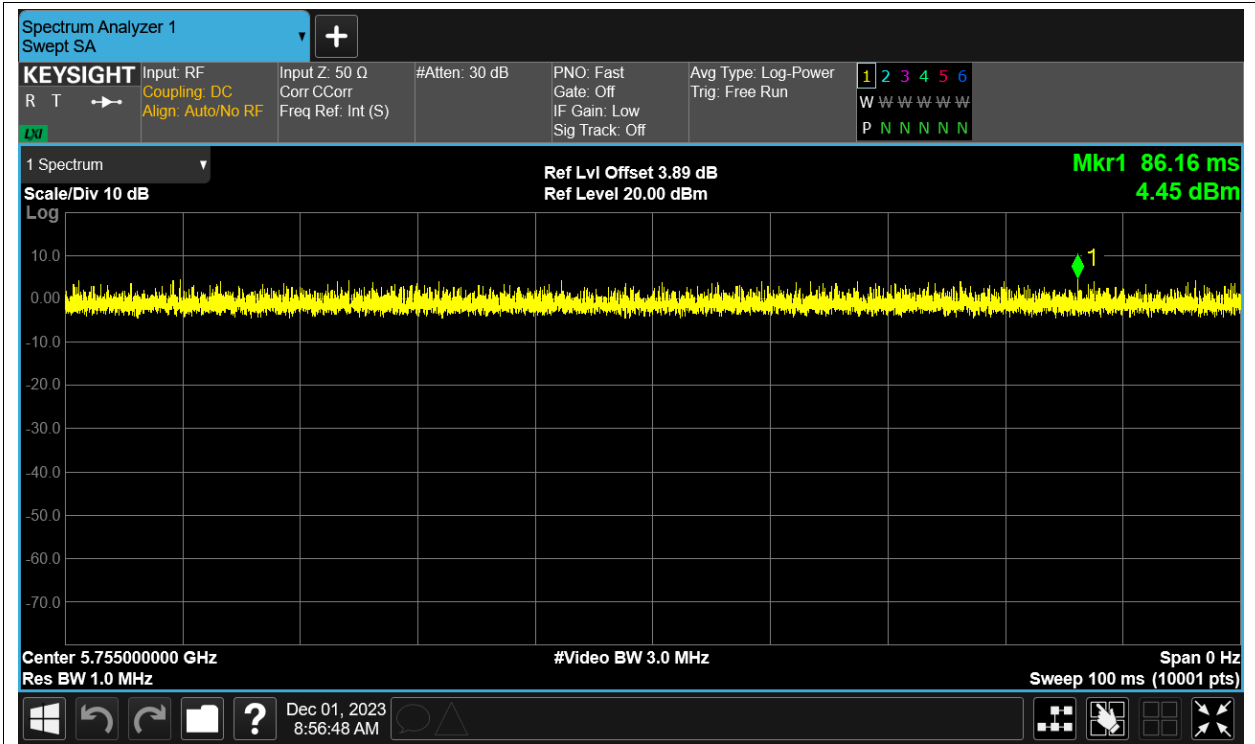


Duty Cycle NVNT ac40 5795MHz Ant13

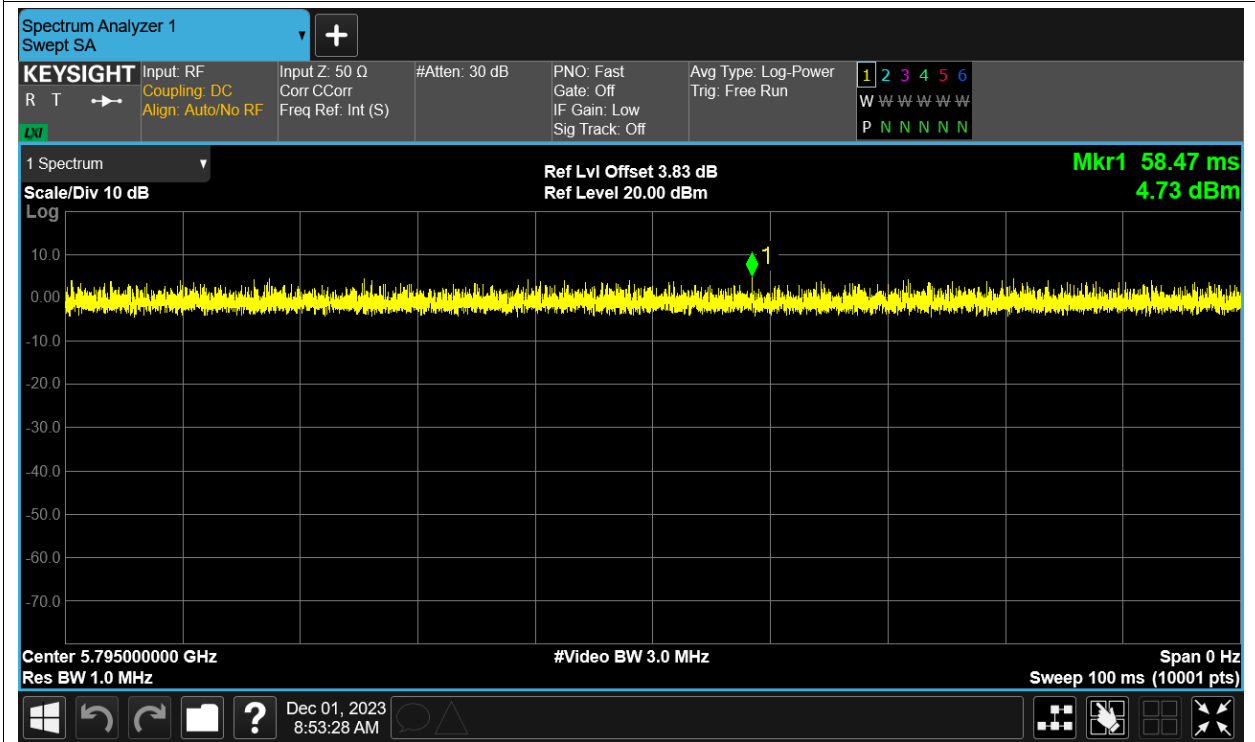


Duty Cycle NVNT ac80 5775MHz Ant13

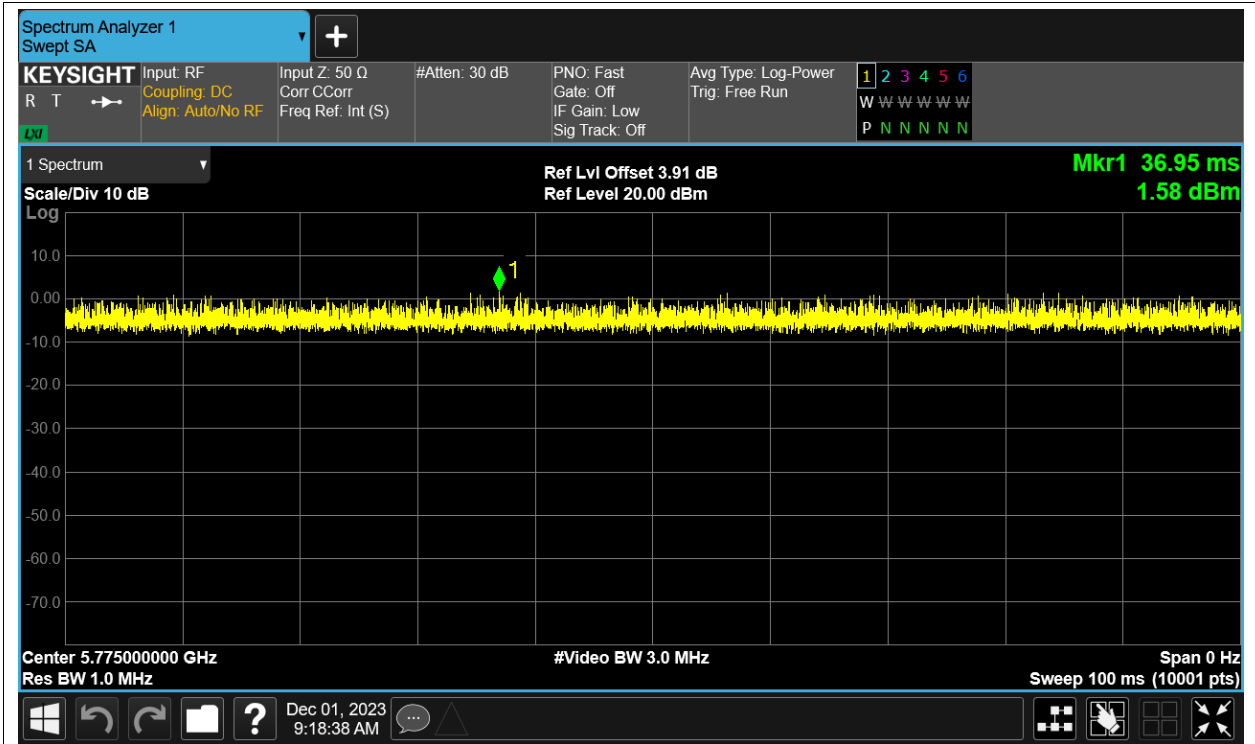


Duty Cycle NVNT n20 5745MHz Ant13

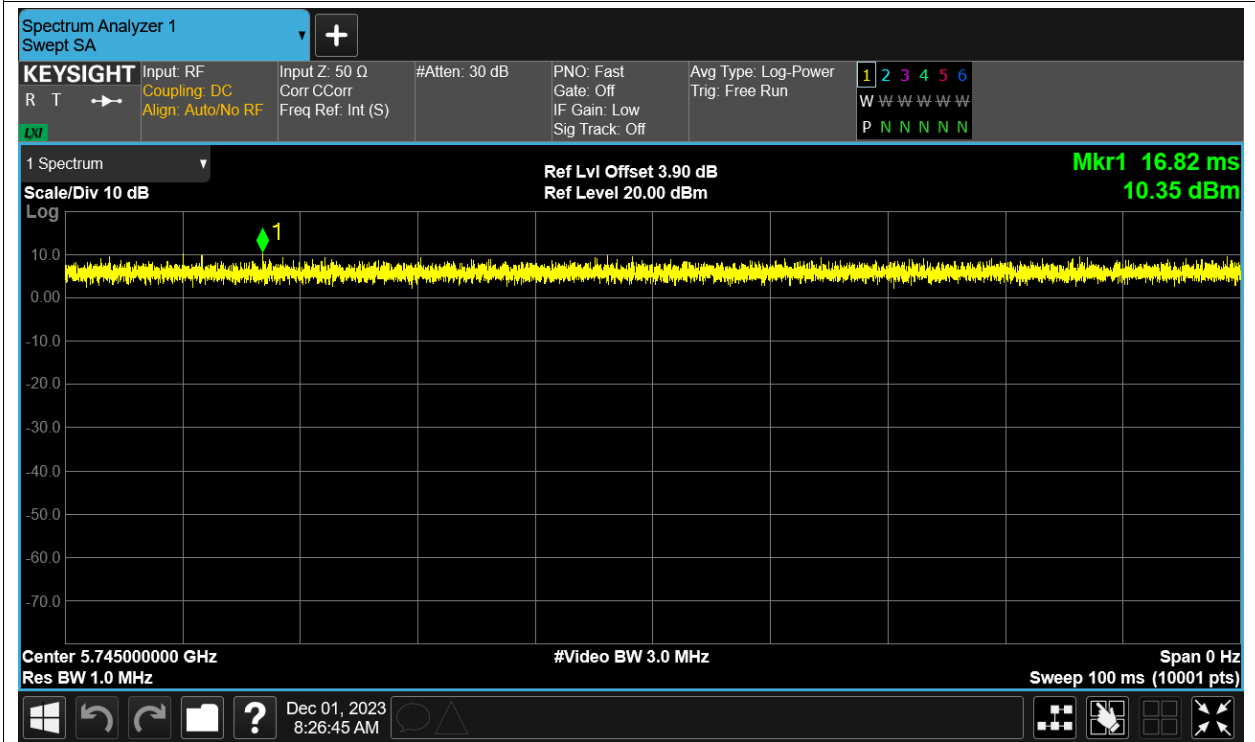

Duty Cycle NVNT n20 5785MHz Ant13

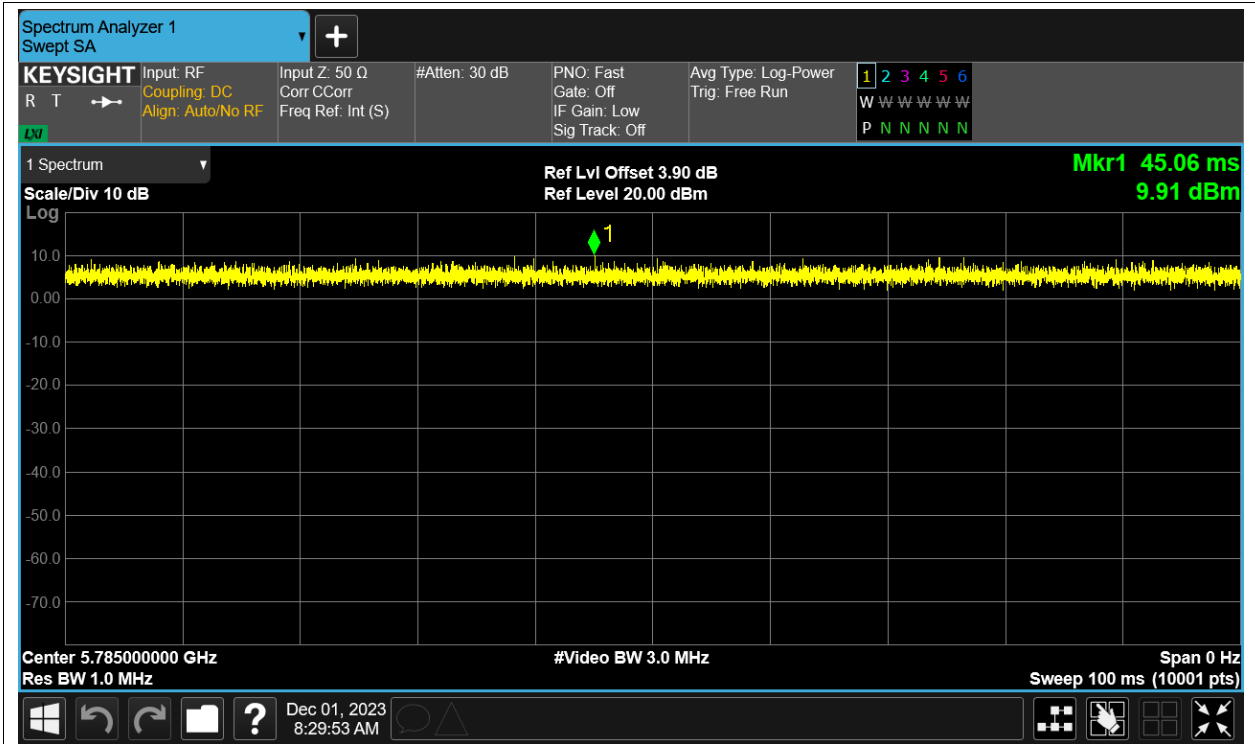

Duty Cycle NVNT n20 5825MHz Ant13

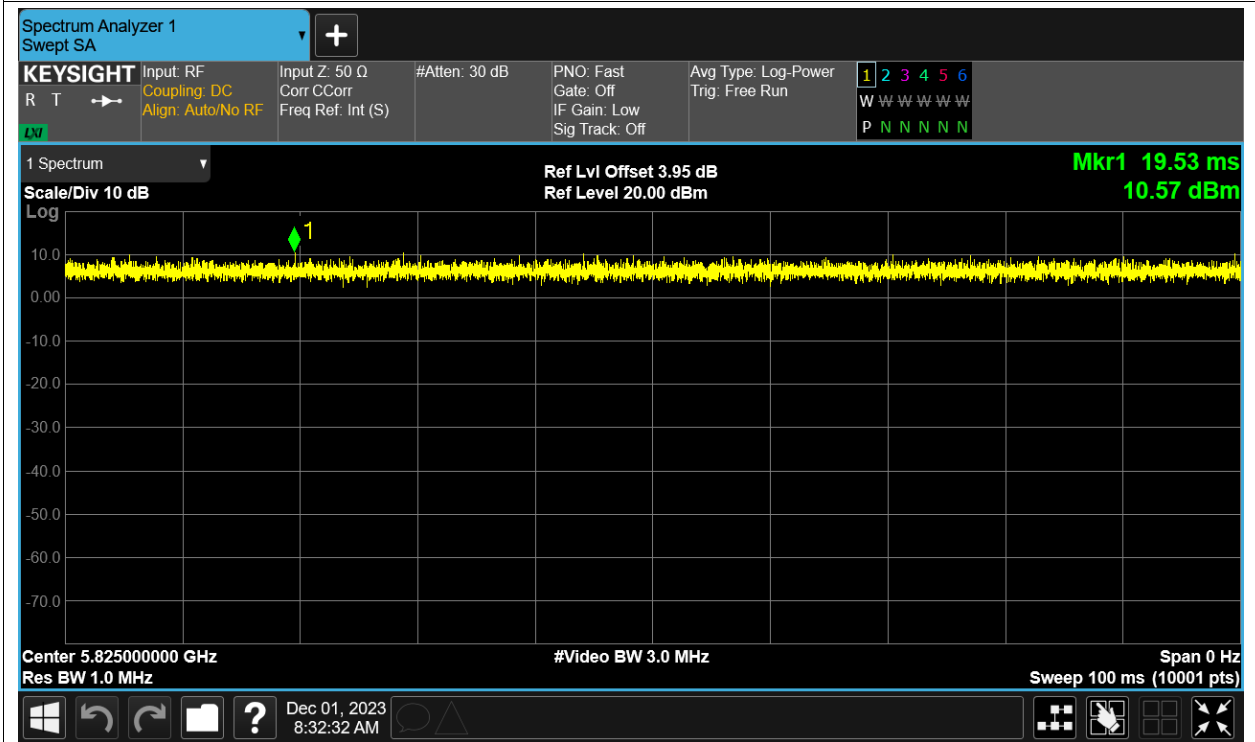


Duty Cycle NVNT n40 5755MHz Ant13





Duty Cycle NVNT n40 5795MHz Ant13

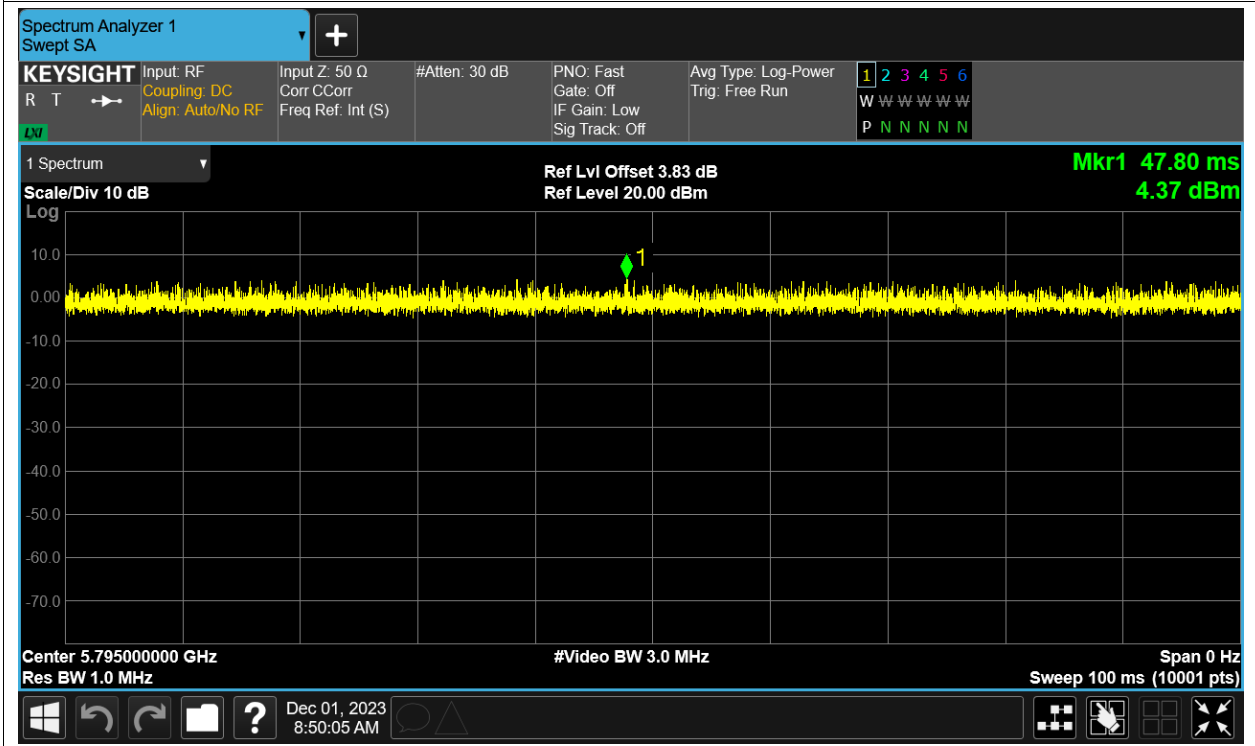



## Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant13	12.07	0	12.07	30	Pass
NVNT	a	5785	Ant13	12.68	0	12.68	30	Pass
NVNT	a	5825	Ant13	13.9	0	13.9	30	Pass
NVNT	ac20	5745	Ant13	12.69	0	12.69	30	Pass
NVNT	ac20	5785	Ant13	12.71	0	12.71	30	Pass
NVNT	ac20	5825	Ant13	13.74	0	13.74	30	Pass
NVNT	ac40	5755	Ant13	12.22	0	12.22	30	Pass
NVNT	ac40	5795	Ant13	12.18	0	12.18	30	Pass
NVNT	ac80	5775	Ant13	12.22	0	12.22	30	Pass
NVNT	n20	5745	Ant13	12.75	0	12.75	30	Pass
NVNT	n20	5785	Ant13	12.73	0	12.73	30	Pass
NVNT	n20	5825	Ant13	13.62	0	13.62	30	Pass
NVNT	n40	5755	Ant13	12.88	0	12.88	30	Pass
NVNT	n40	5795	Ant13	12.12	0	12.12	30	Pass


## -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	a	5745	Ant13	16.347	0.5	Pass
NVNT	a	5785	Ant13	16.356	0.5	Pass
NVNT	a	5825	Ant13	16.309	0.5	Pass
NVNT	ac20	5745	Ant13	17.589	0.5	Pass
NVNT	ac20	5785	Ant13	17.597	0.5	Pass
NVNT	ac20	5825	Ant13	17.543	0.5	Pass
NVNT	ac40	5755	Ant13	36.116	0.5	Pass
NVNT	ac40	5795	Ant13	35.94	0.5	Pass
NVNT	ac80	5775	Ant13	76.299	0.5	Pass
NVNT	n20	5745	Ant13	17.582	0.5	Pass
NVNT	n20	5785	Ant13	17.318	0.5	Pass
NVNT	n20	5825	Ant13	17.567	0.5	Pass
NVNT	n40	5755	Ant13	35.275	0.5	Pass
NVNT	n40	5795	Ant13	36.289	0.5	Pass

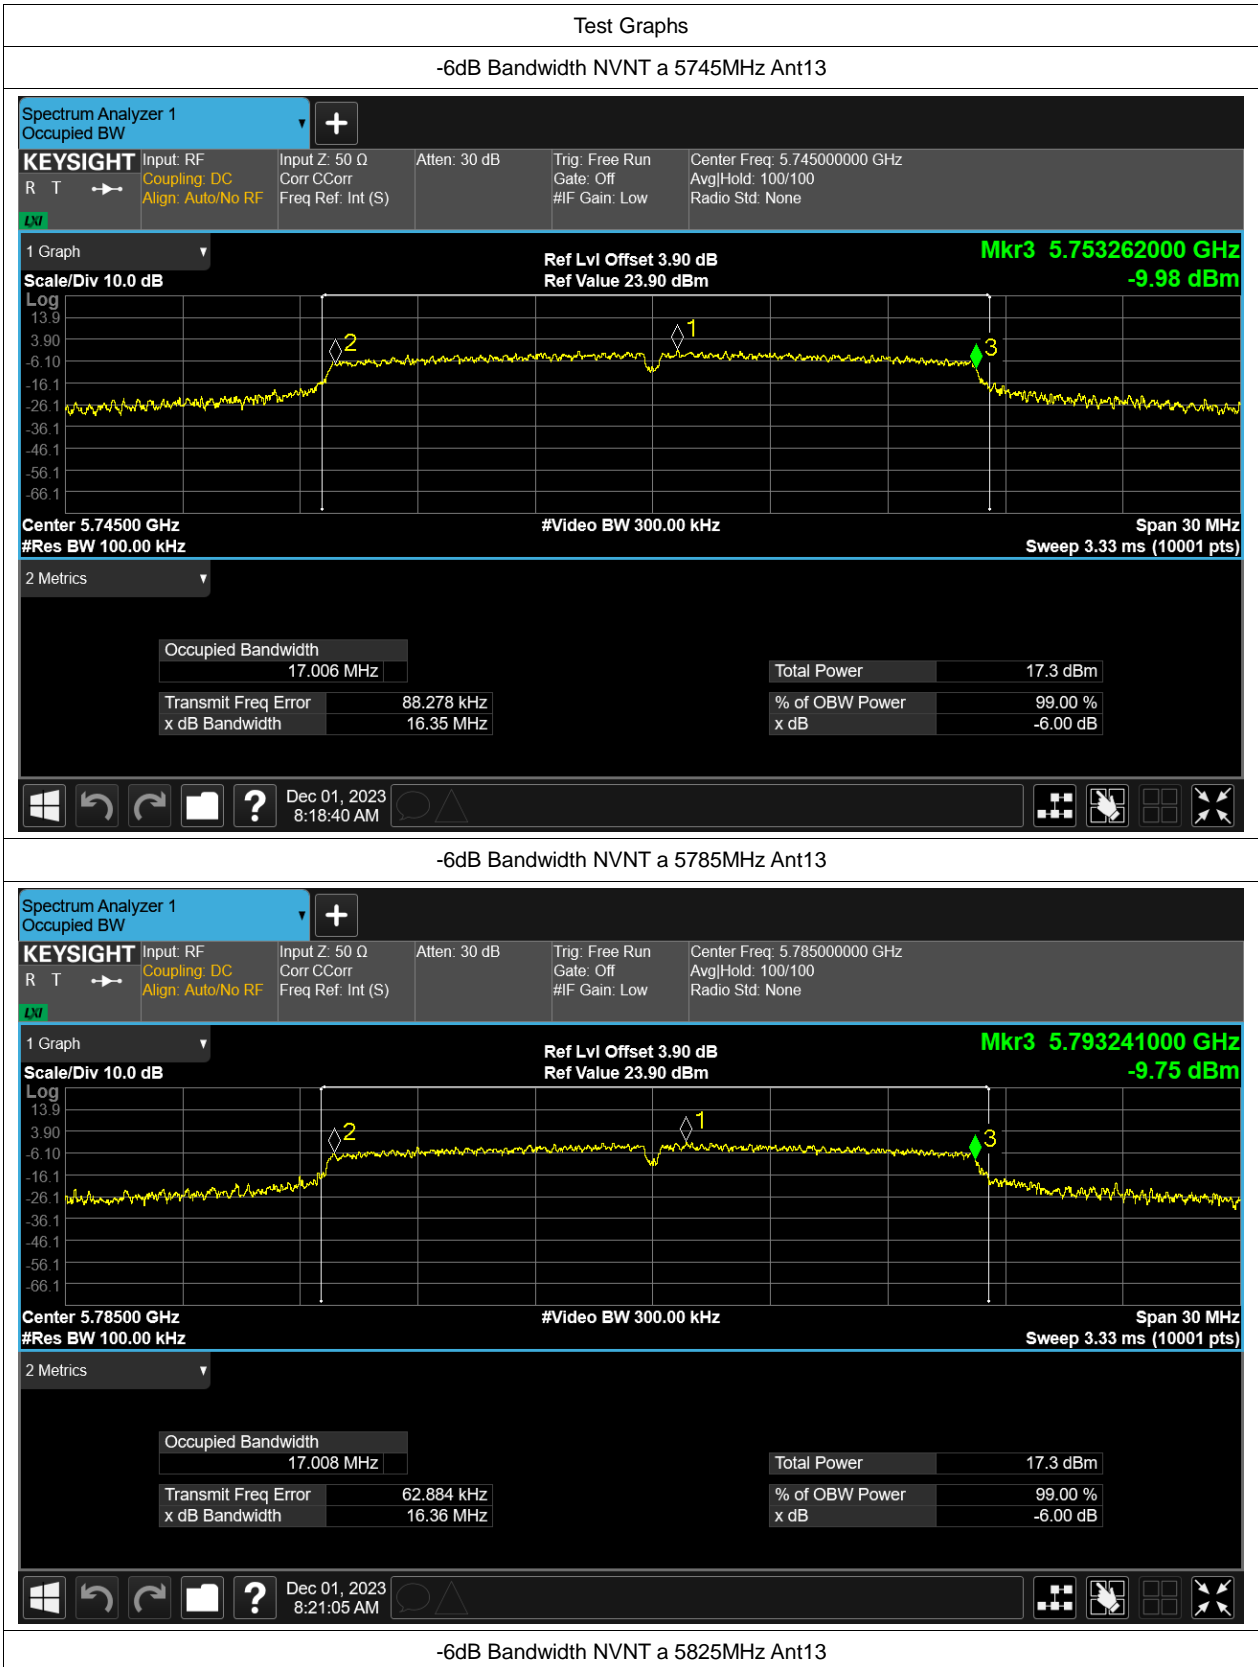


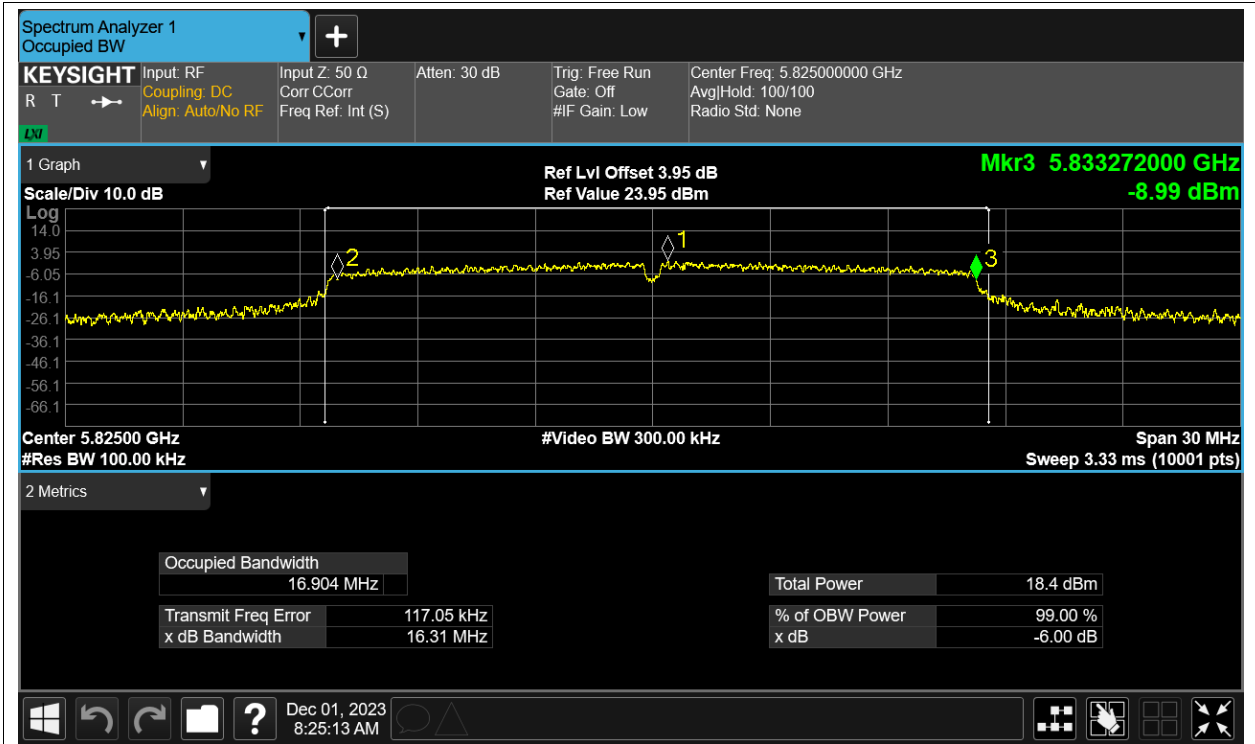


-6dB Bandwidth NVNT ac20 5745MHz Ant13

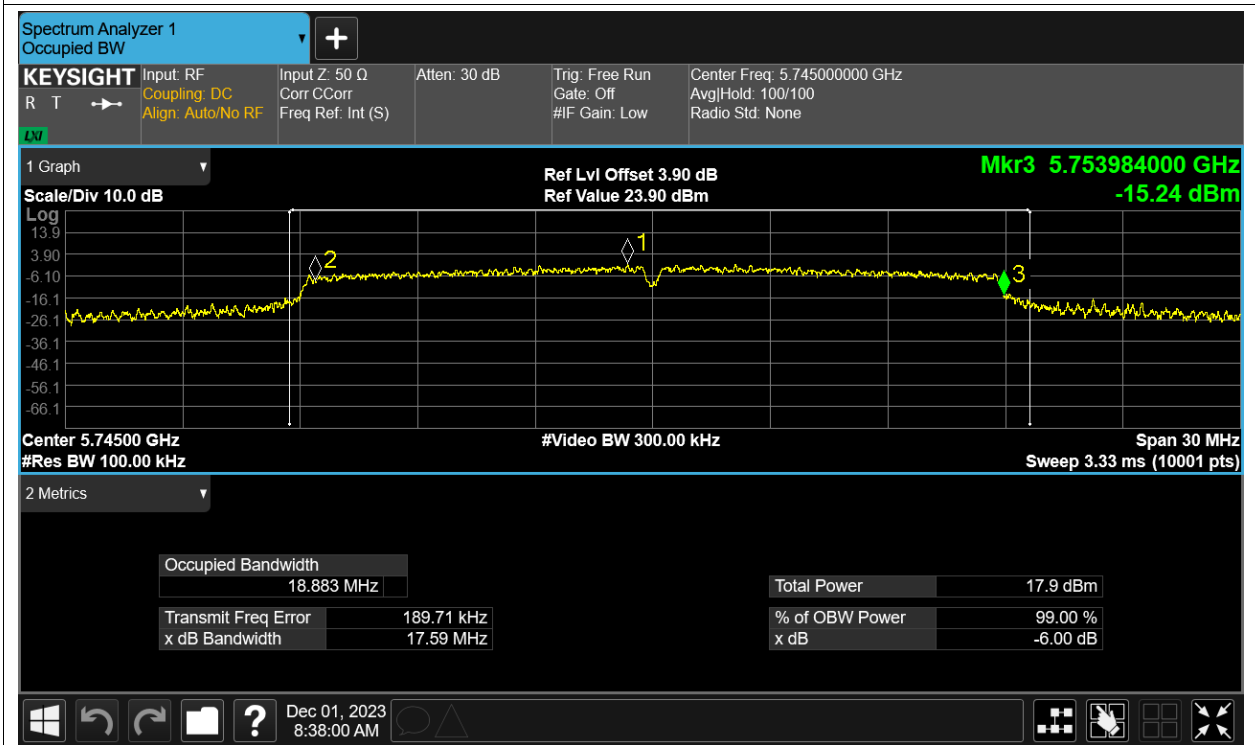


-6dB Bandwidth NVNT ac20 5785MHz Ant13

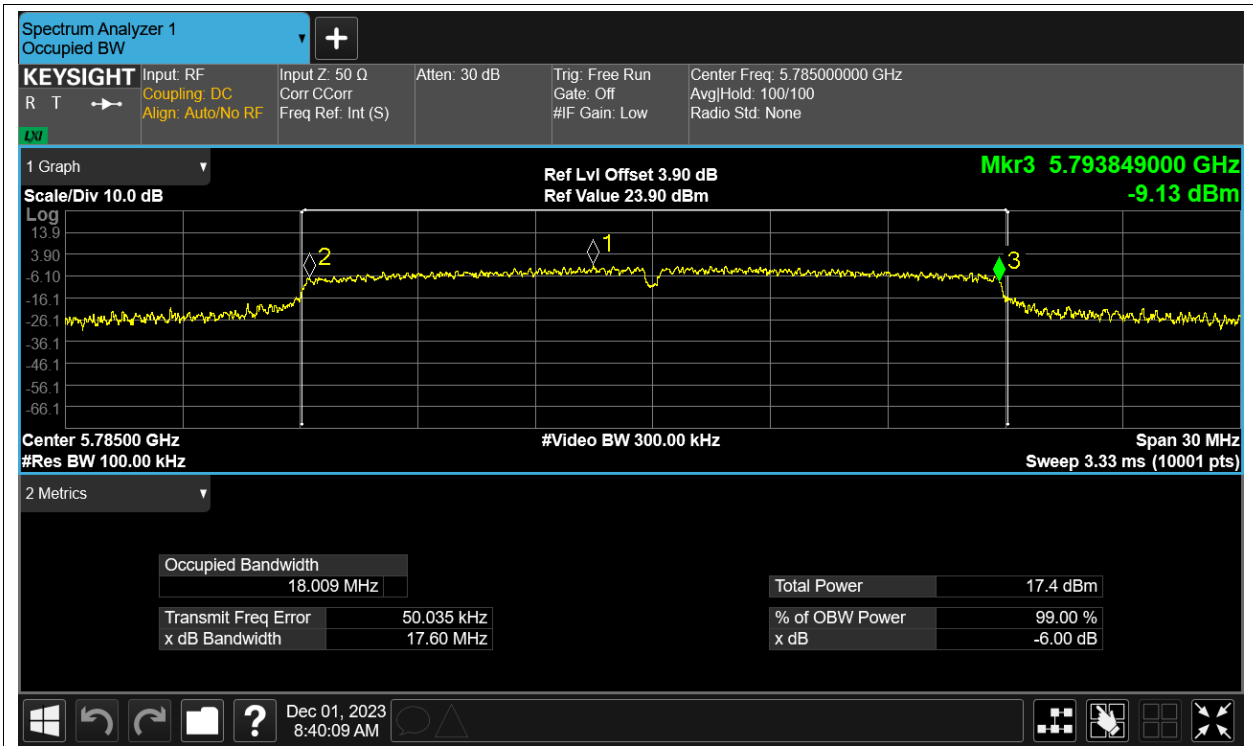


-6dB Bandwidth NVNT ac20 5825MHz Ant13

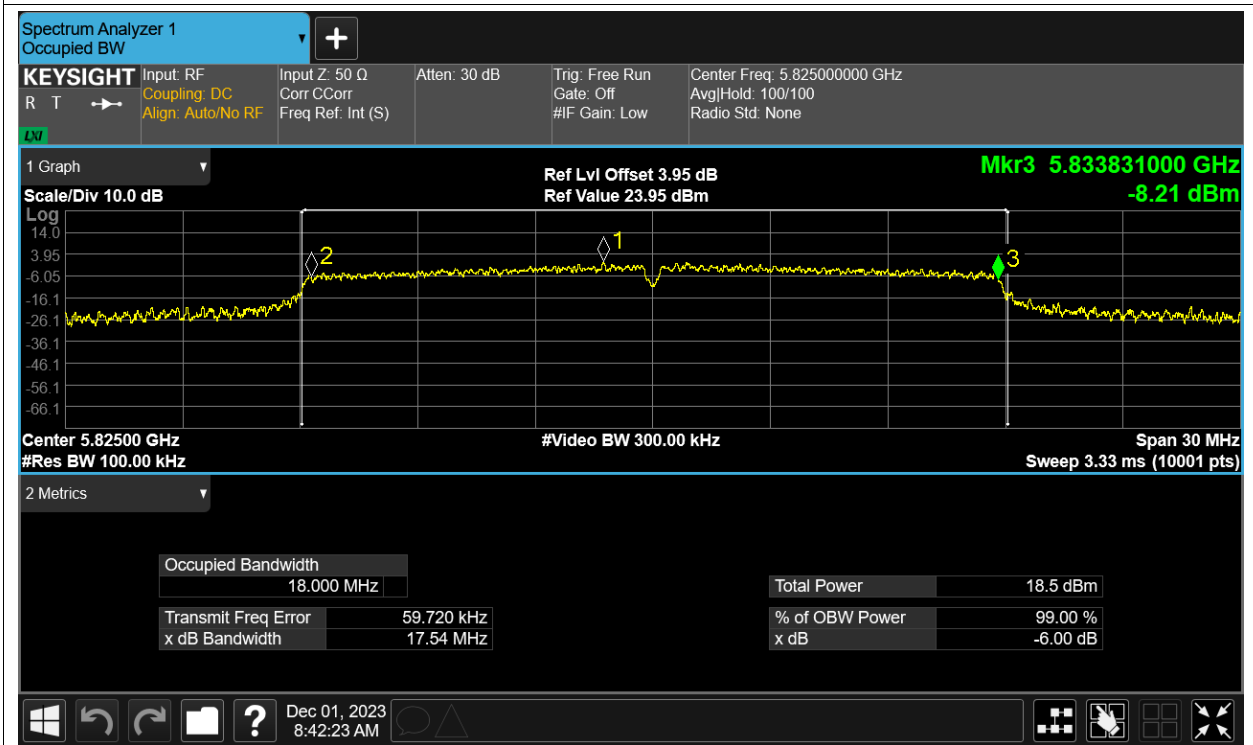

-6dB Bandwidth NVNT ac40 5755MHz Ant13

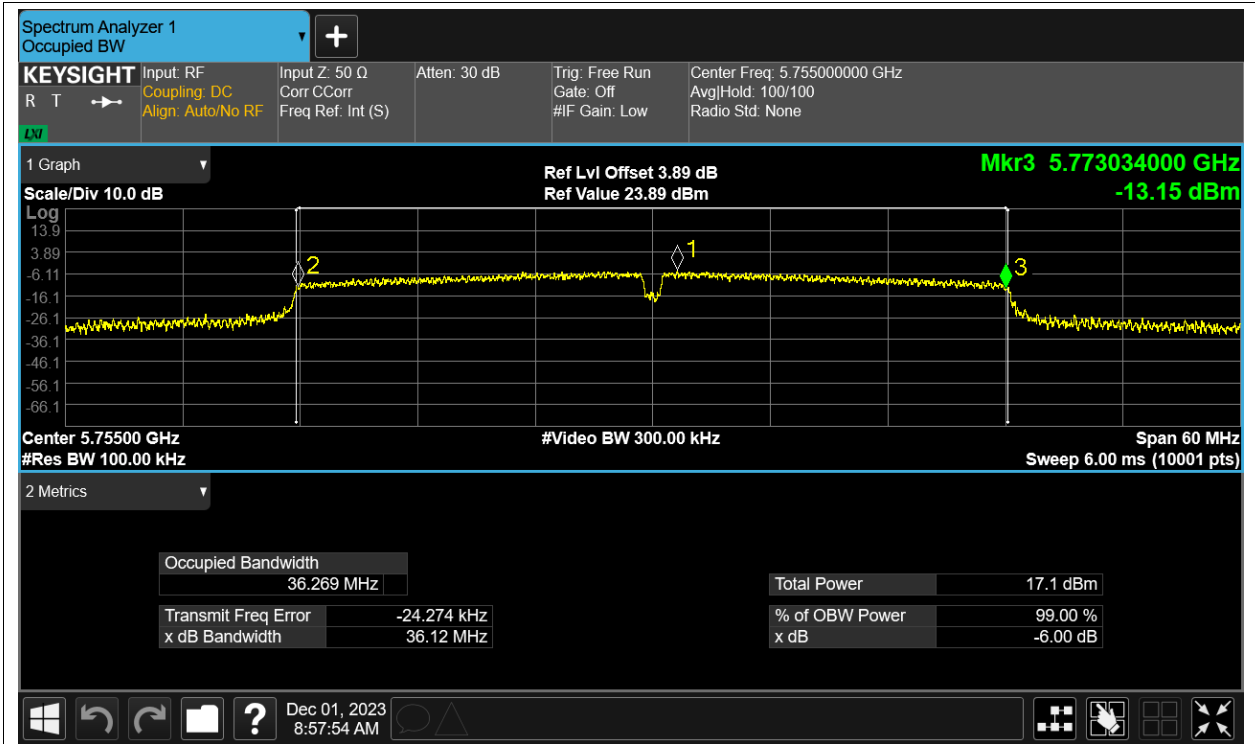


-6dB Bandwidth NVNT ac40 5795MHz Ant13

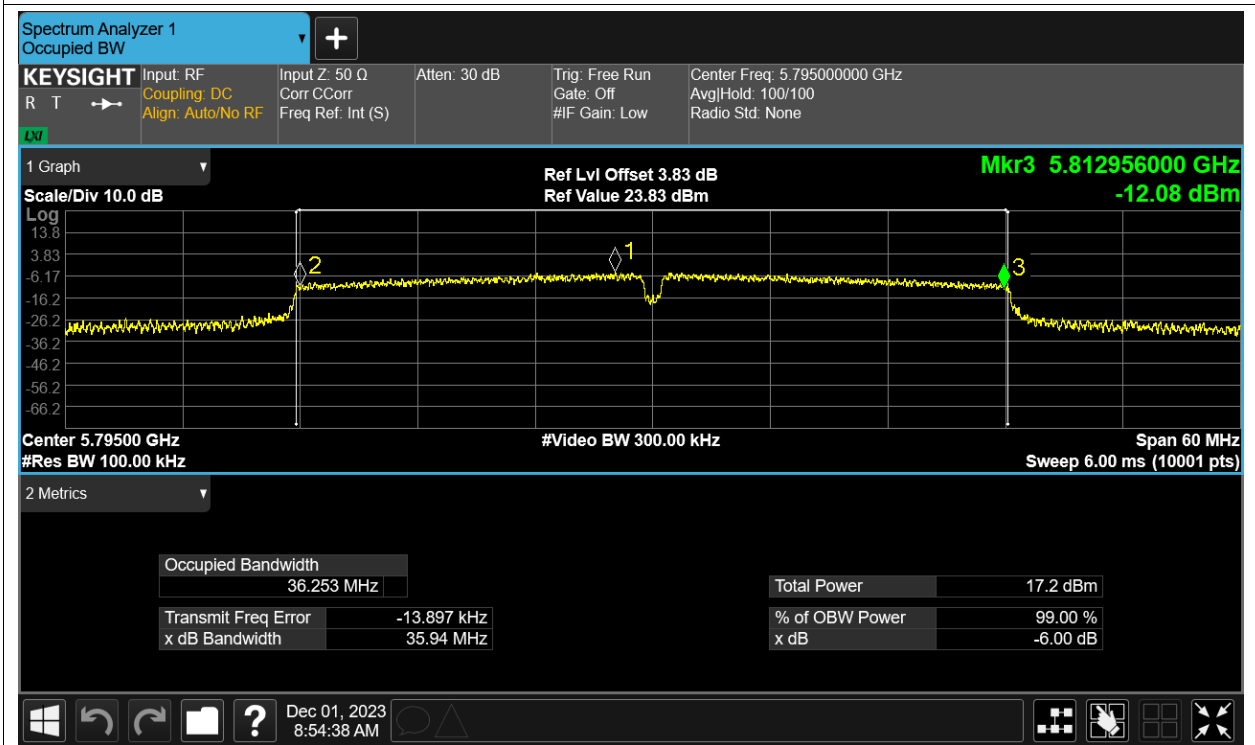

-6dB Bandwidth NVNT ac80 5775MHz Ant13




-6dB Bandwidth NVNT n20 5745MHz Ant13

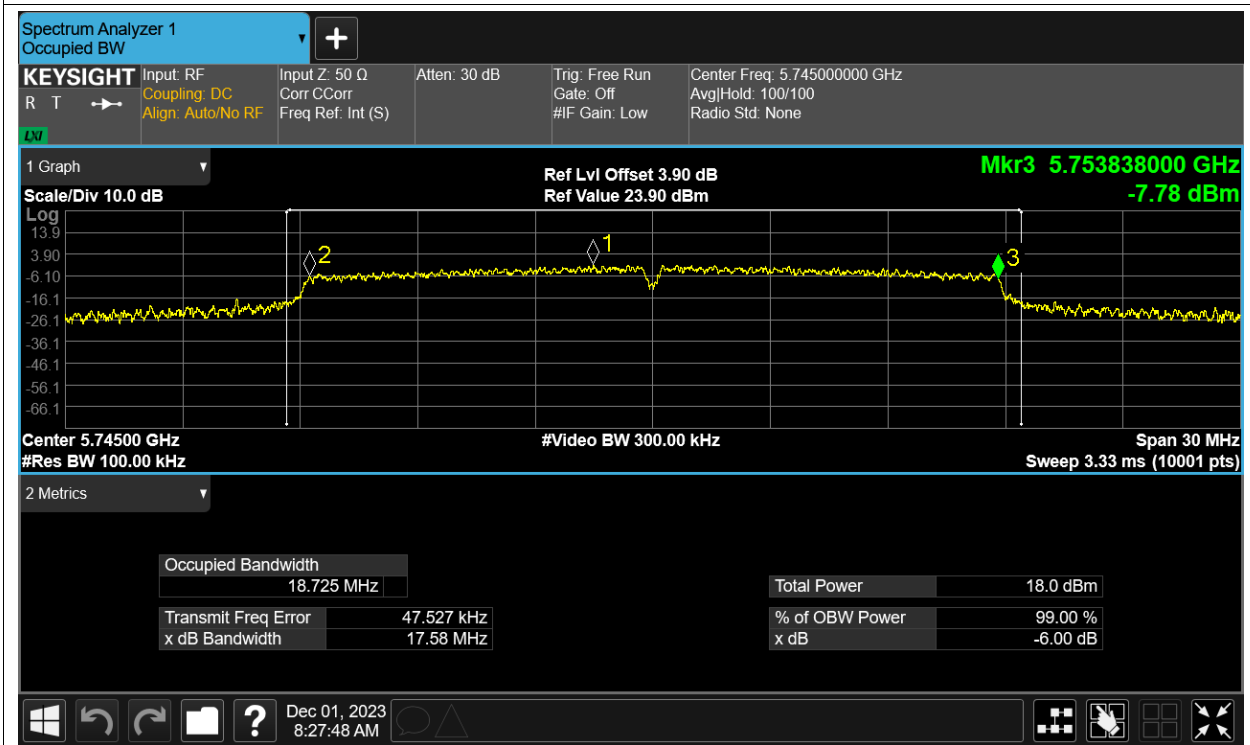


-6dB Bandwidth NVNT n20 5785MHz Ant13




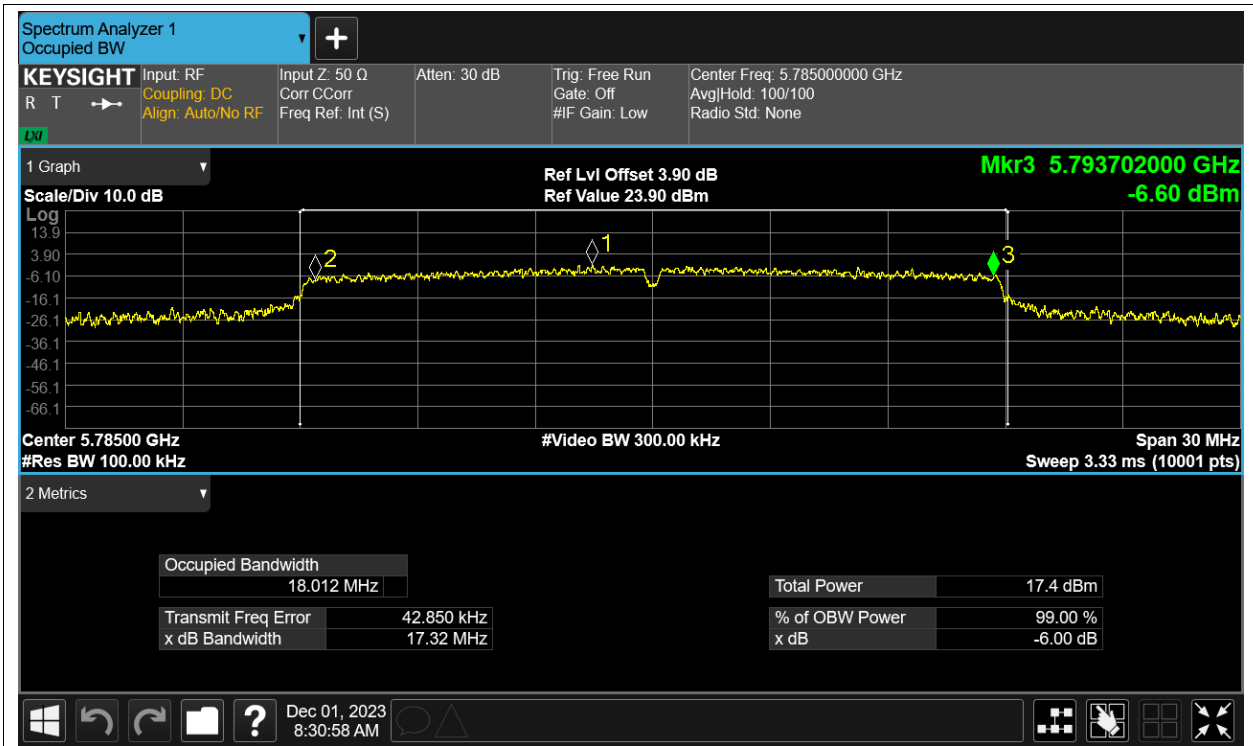


-6dB Bandwidth NVNT n20 5825MHz Ant13

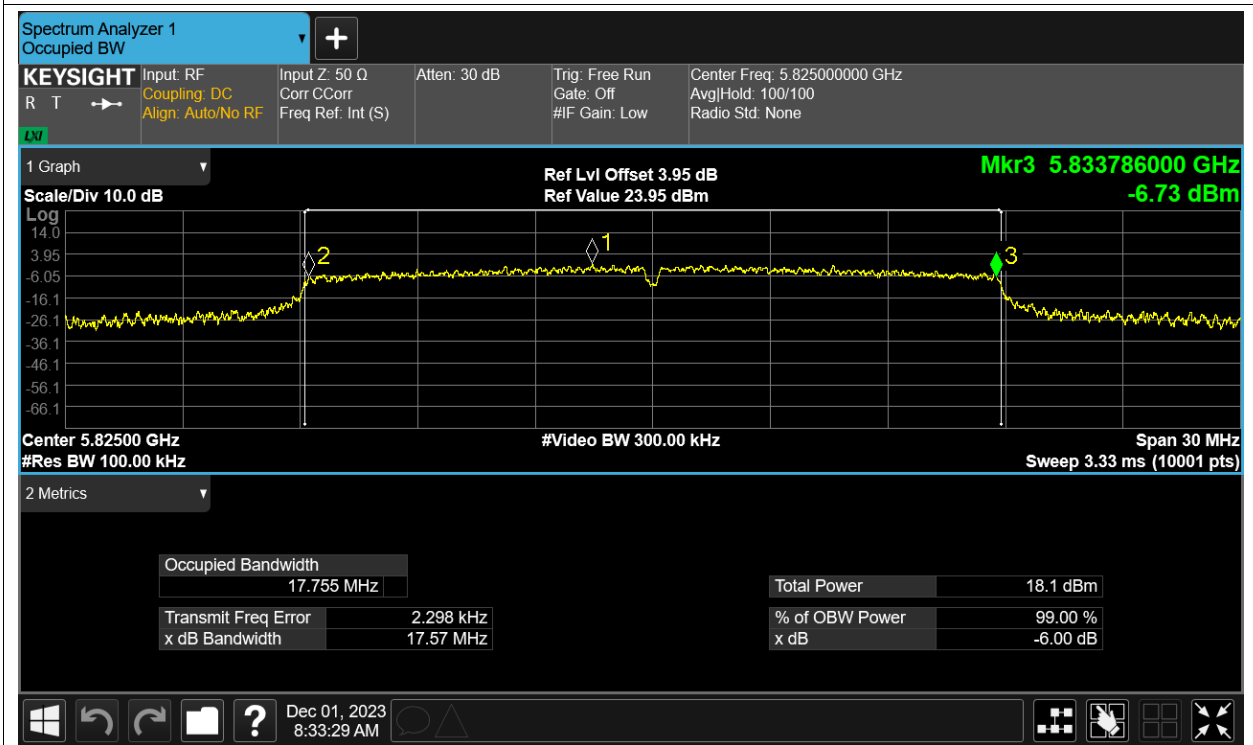

-6dB Bandwidth NVNT n40 5755MHz Ant13

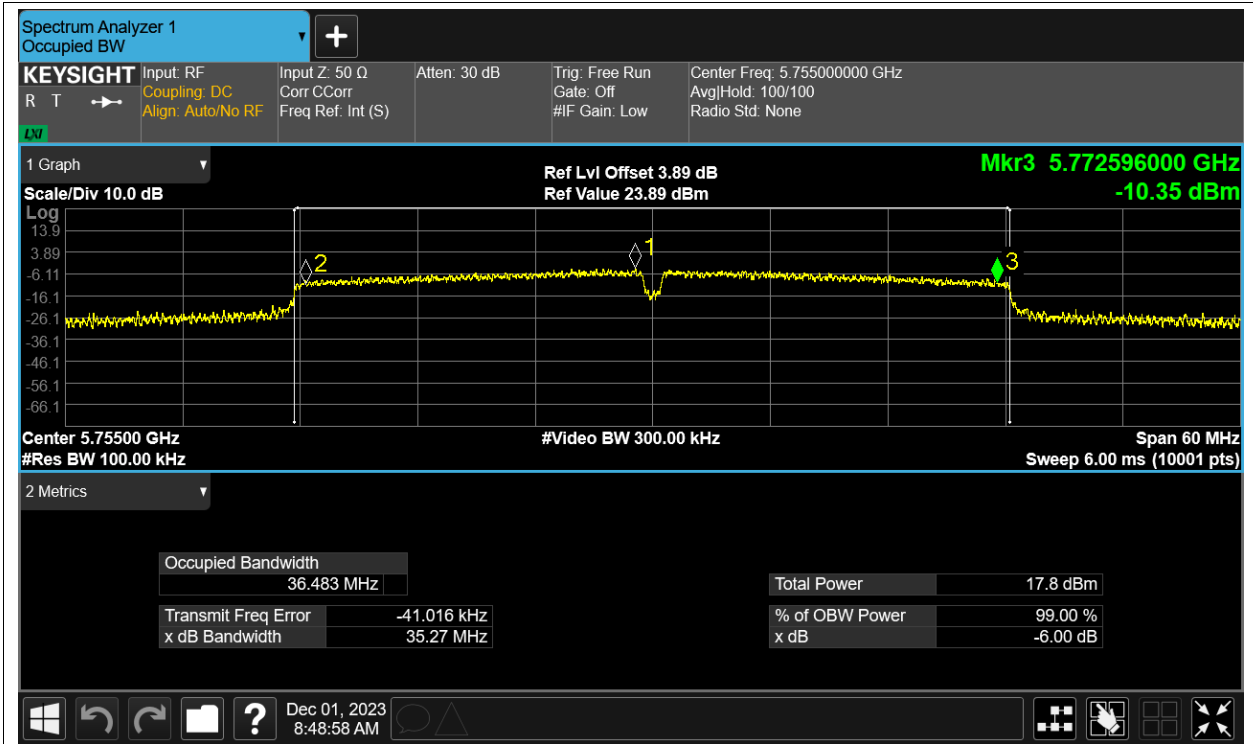

-6dB Bandwidth NVNT n40 5795MHz Ant13

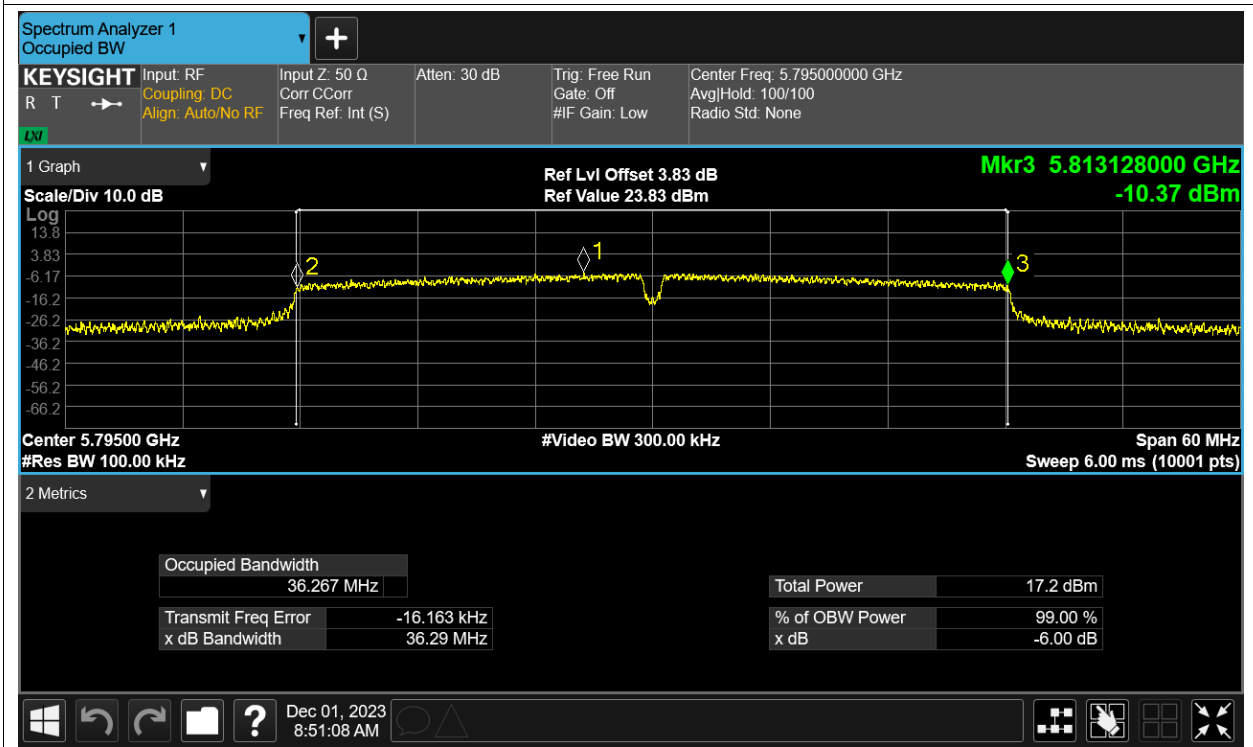


## Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant13	17.743
NVNT	a	5785	Ant13	17.234
NVNT	a	5825	Ant13	17.096
NVNT	ac20	5745	Ant13	19.083
NVNT	ac20	5785	Ant13	18.17
NVNT	ac20	5825	Ant13	18.246
NVNT	ac40	5755	Ant13	36.37
NVNT	ac40	5795	Ant13	36.364
NVNT	ac80	5775	Ant13	75.862
NVNT	n20	5745	Ant13	19.064
NVNT	n20	5785	Ant13	18.23
NVNT	n20	5825	Ant13	17.875
NVNT	n40	5755	Ant13	36.769
NVNT	n40	5795	Ant13	36.415

Test Graphs


OBW NVNT a 5745MHz Ant13

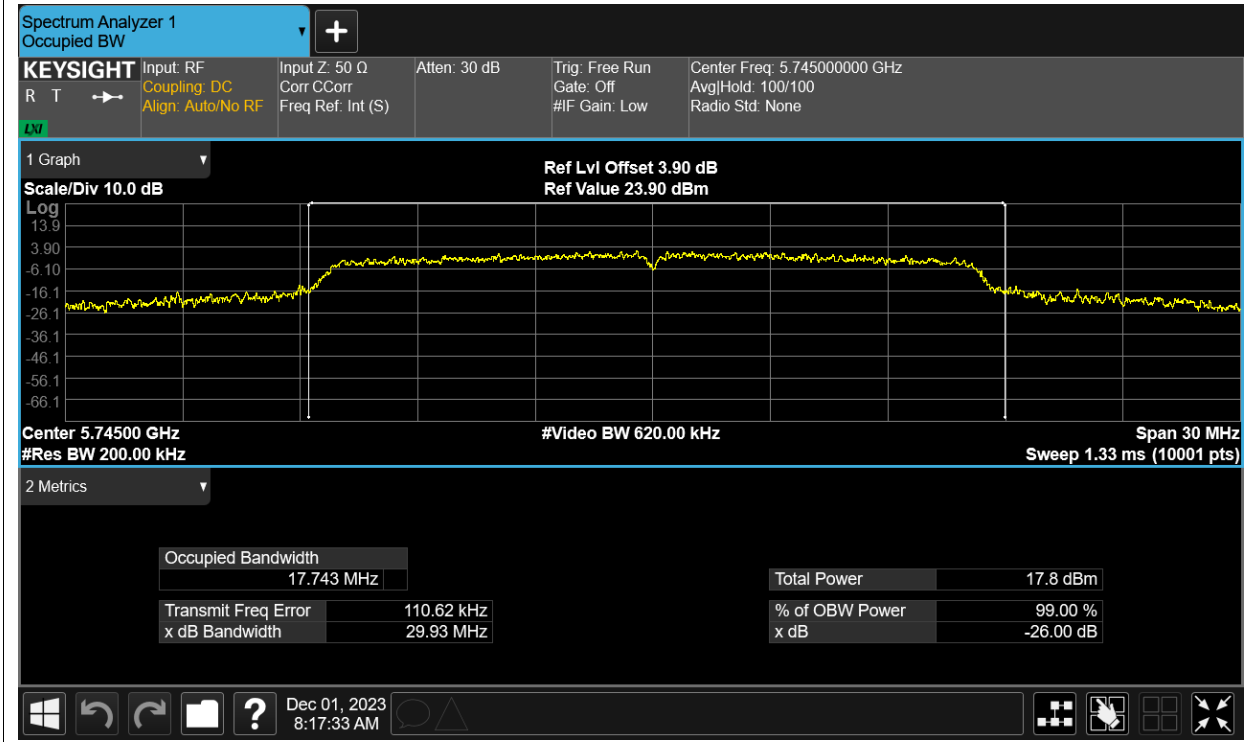


OBW NVNT a 5785MHz Ant13

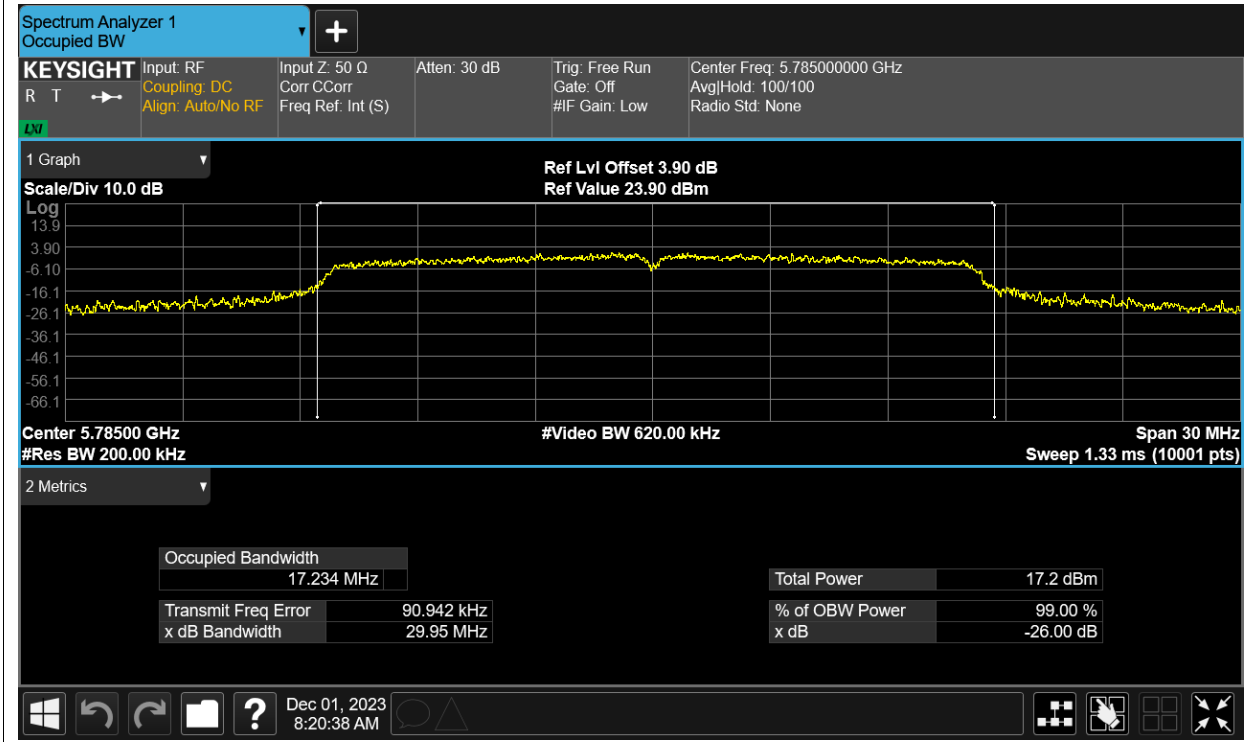


OBW NVNT a 5825MHz Ant13

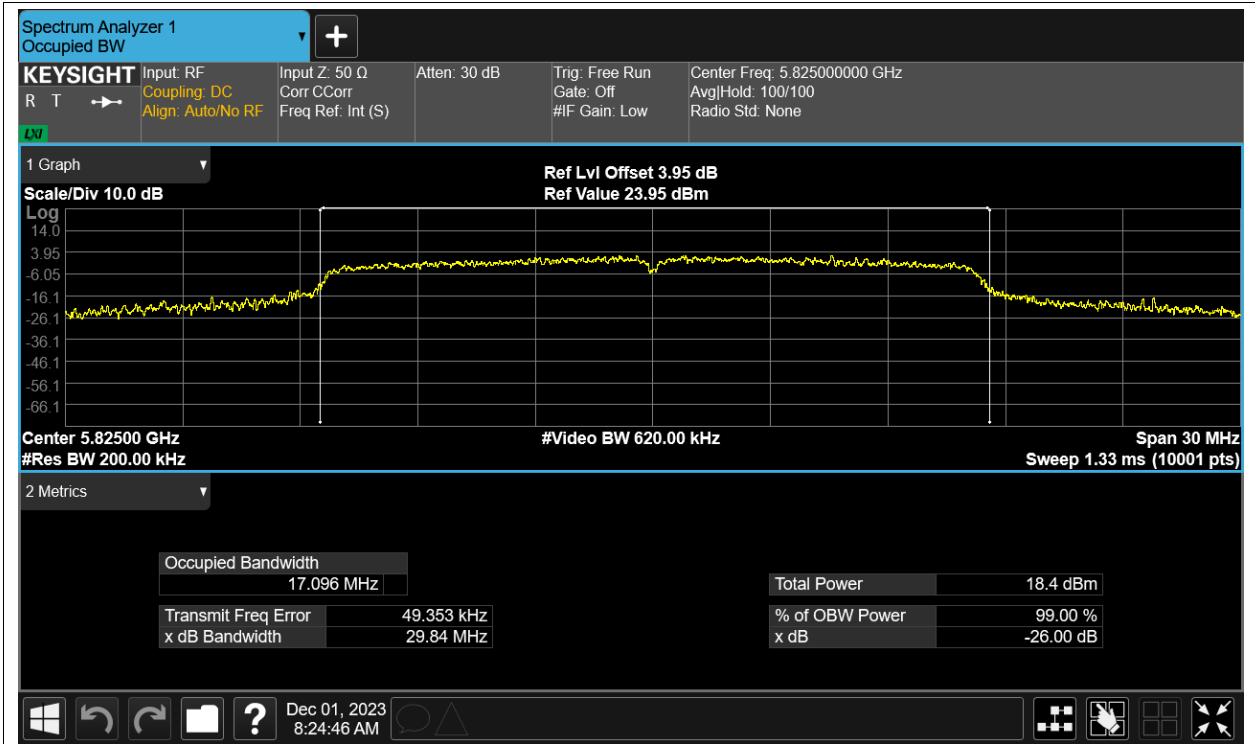


OBW NVNT ac20 5745MHz Ant13

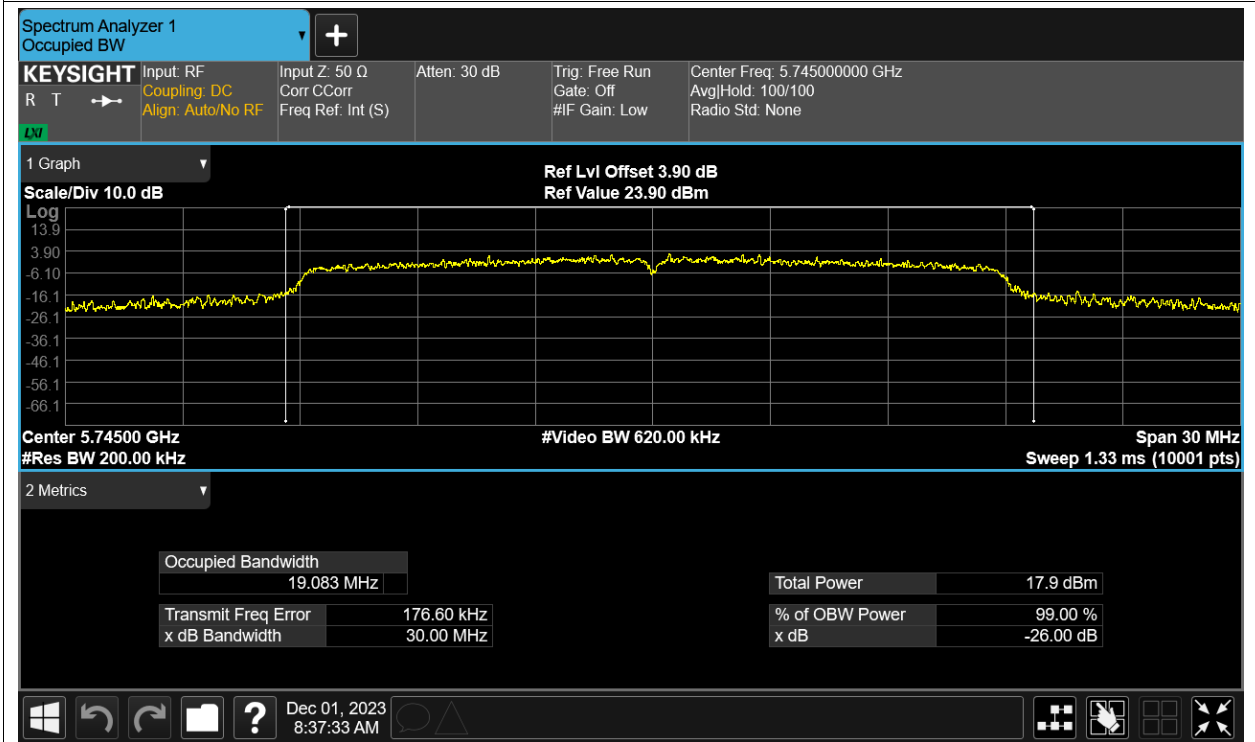


OBW NVNT ac20 5785MHz Ant13

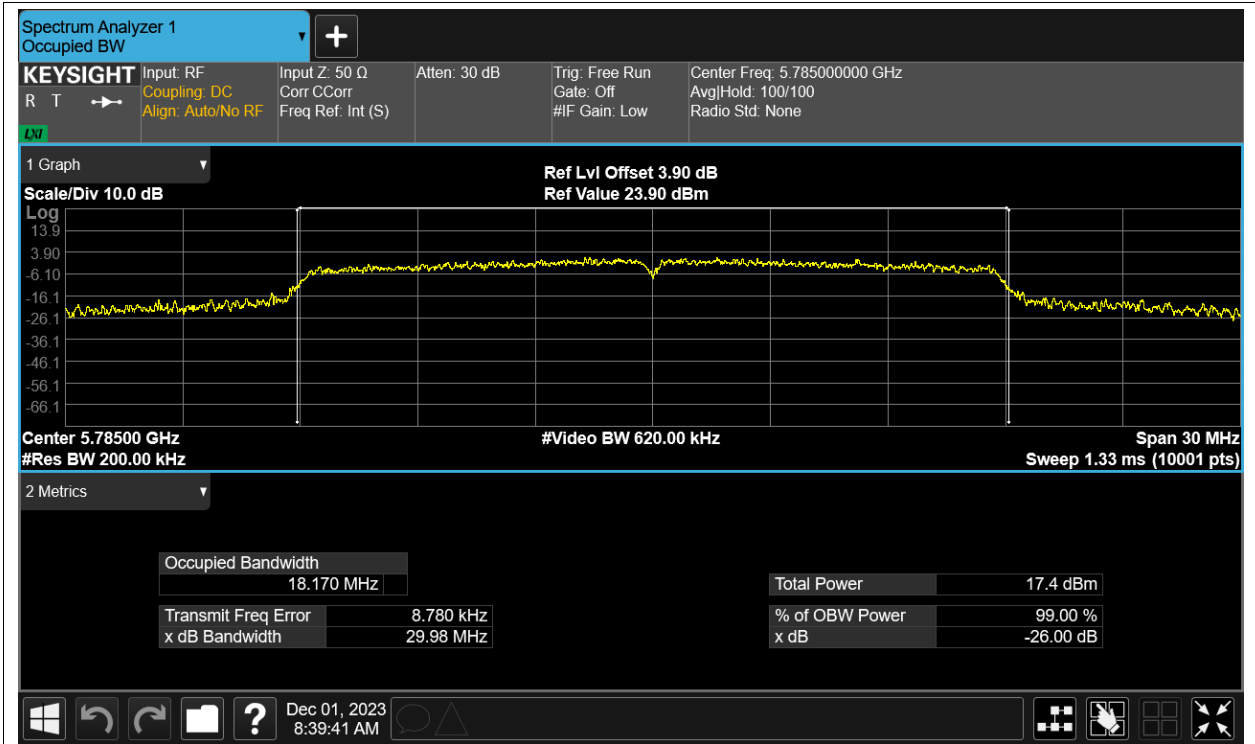


OBW NVNT ac20 5825MHz Ant13

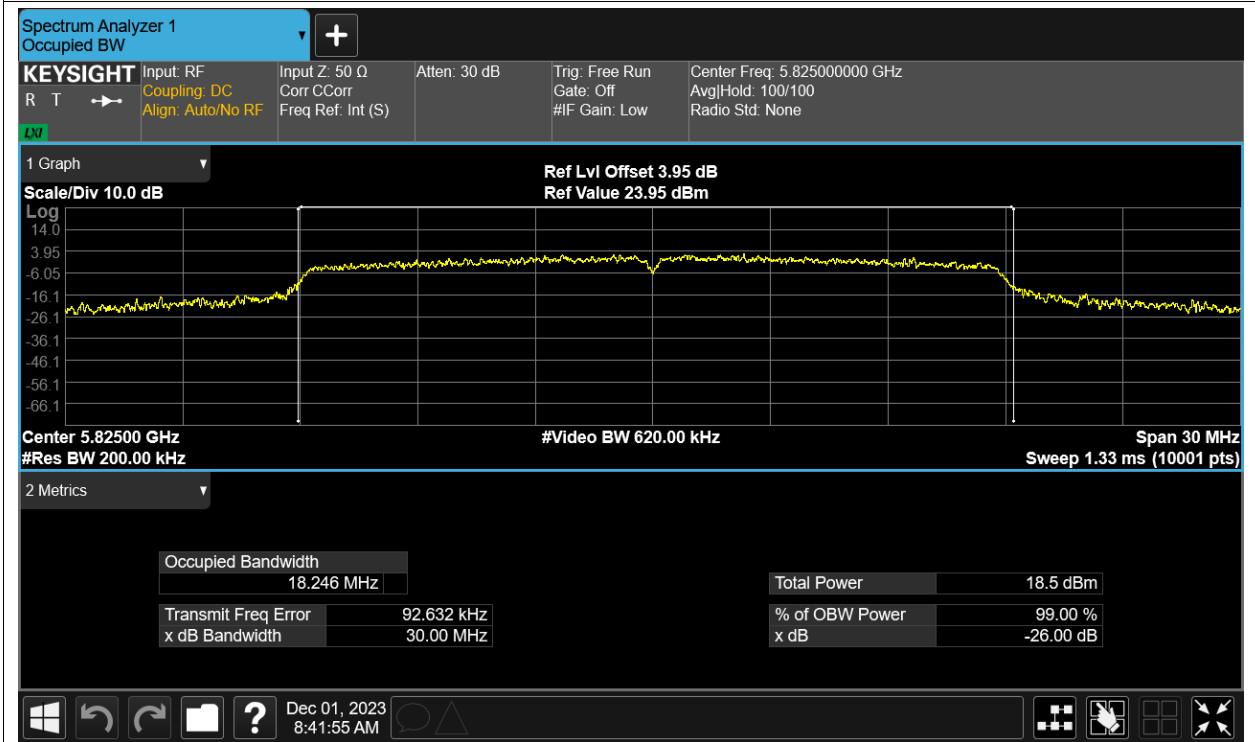


OBW NVNT ac40 5755MHz Ant13

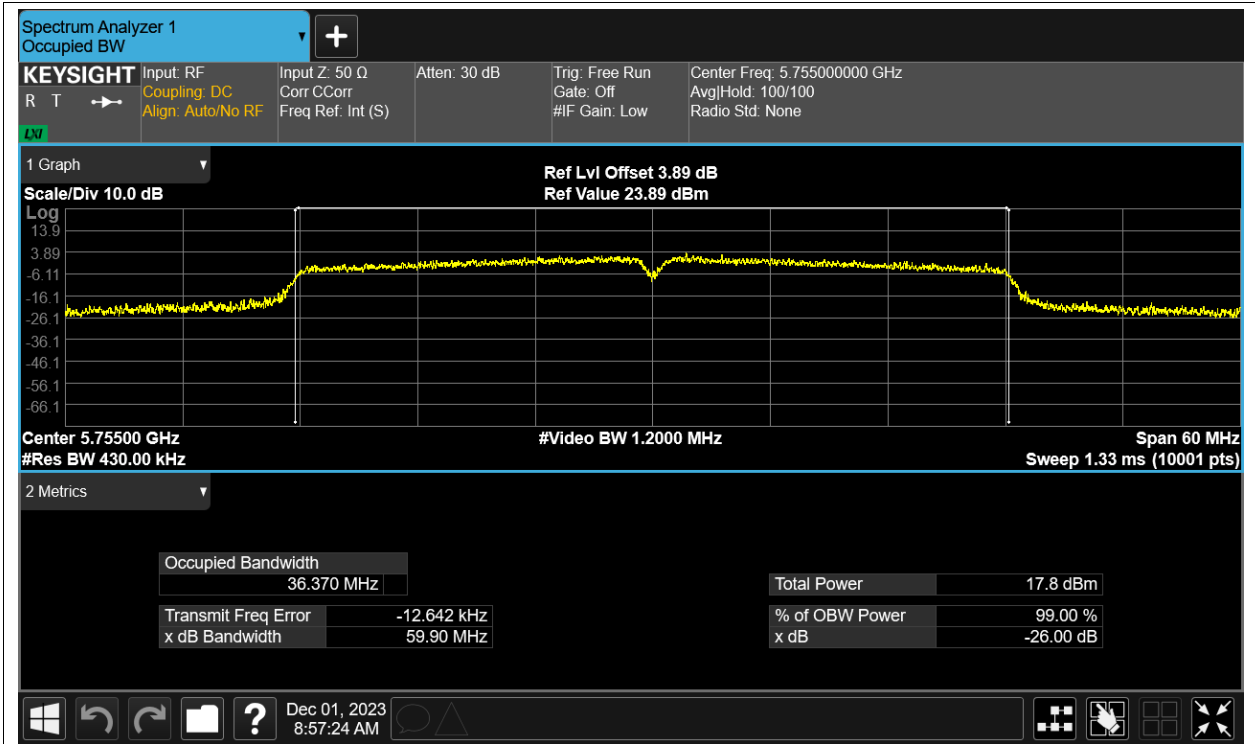

OBW NVNT ac40 5795MHz Ant13

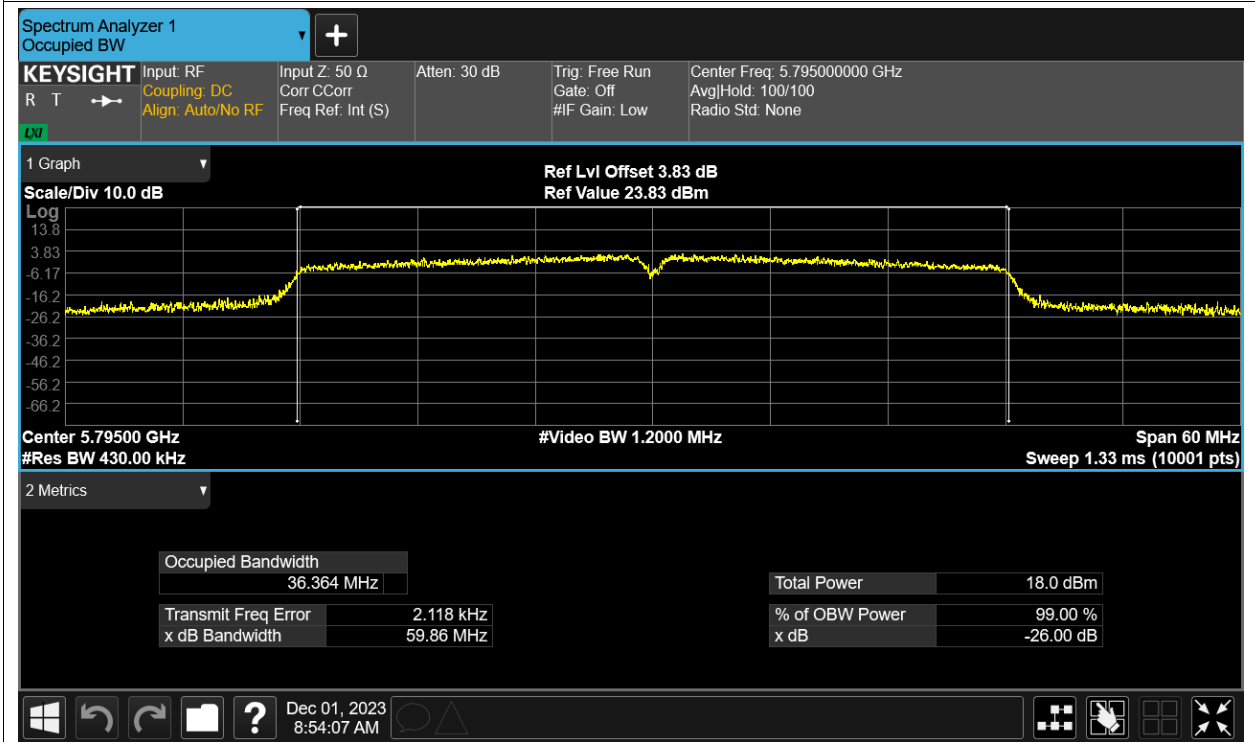

OBW NVNT ac80 5775MHz Ant13

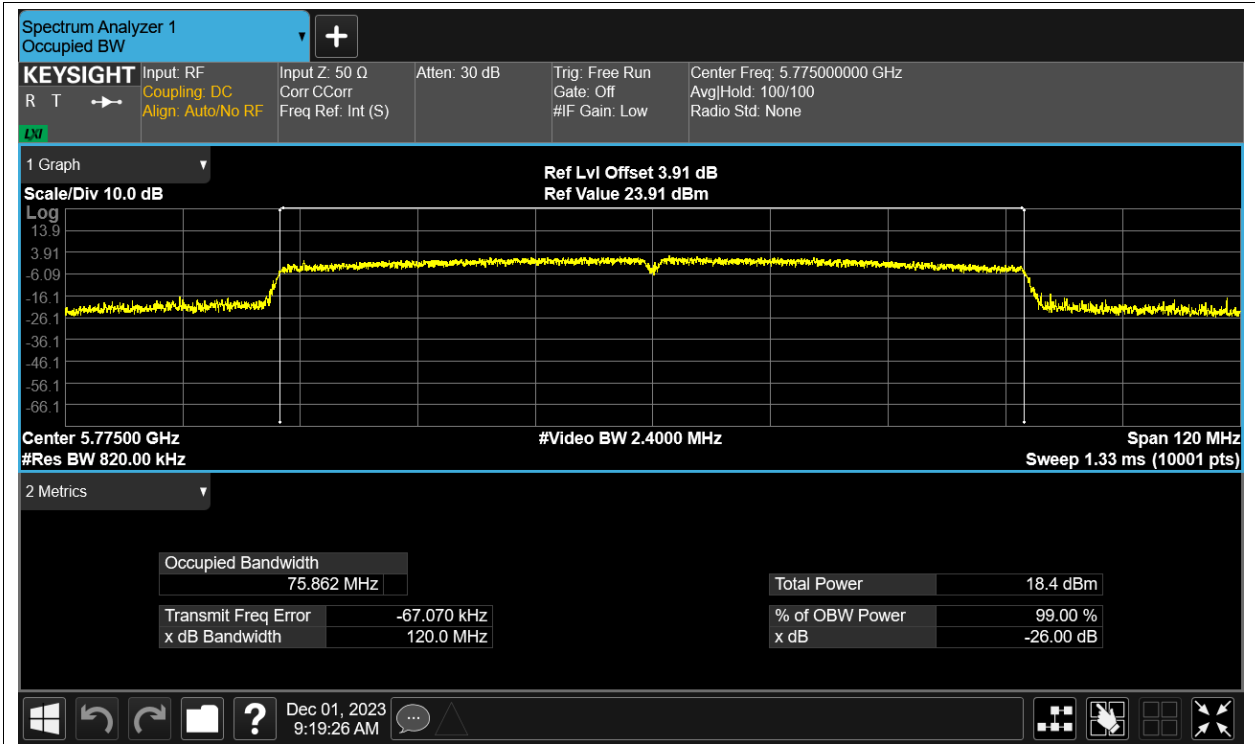


OBW NVNT n20 5745MHz Ant13




OBW NVNT n20 5785MHz Ant13




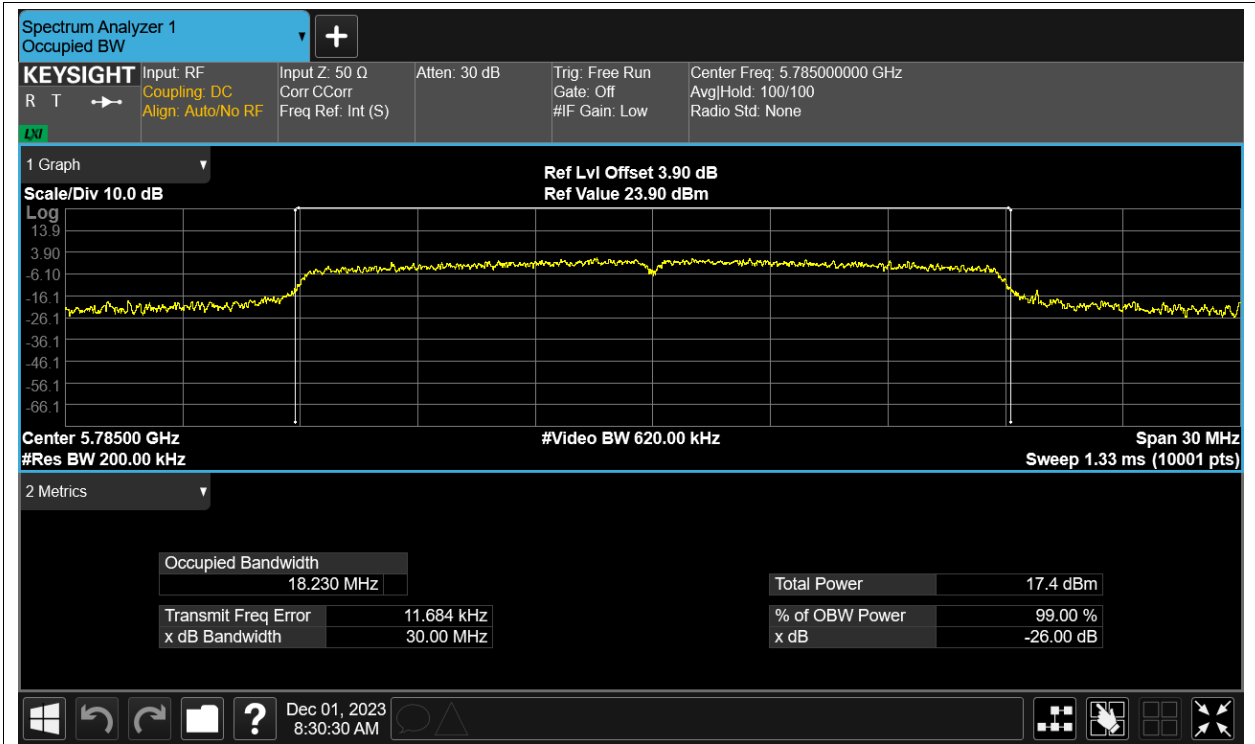


OBW NVNT n20 5825MHz Ant13

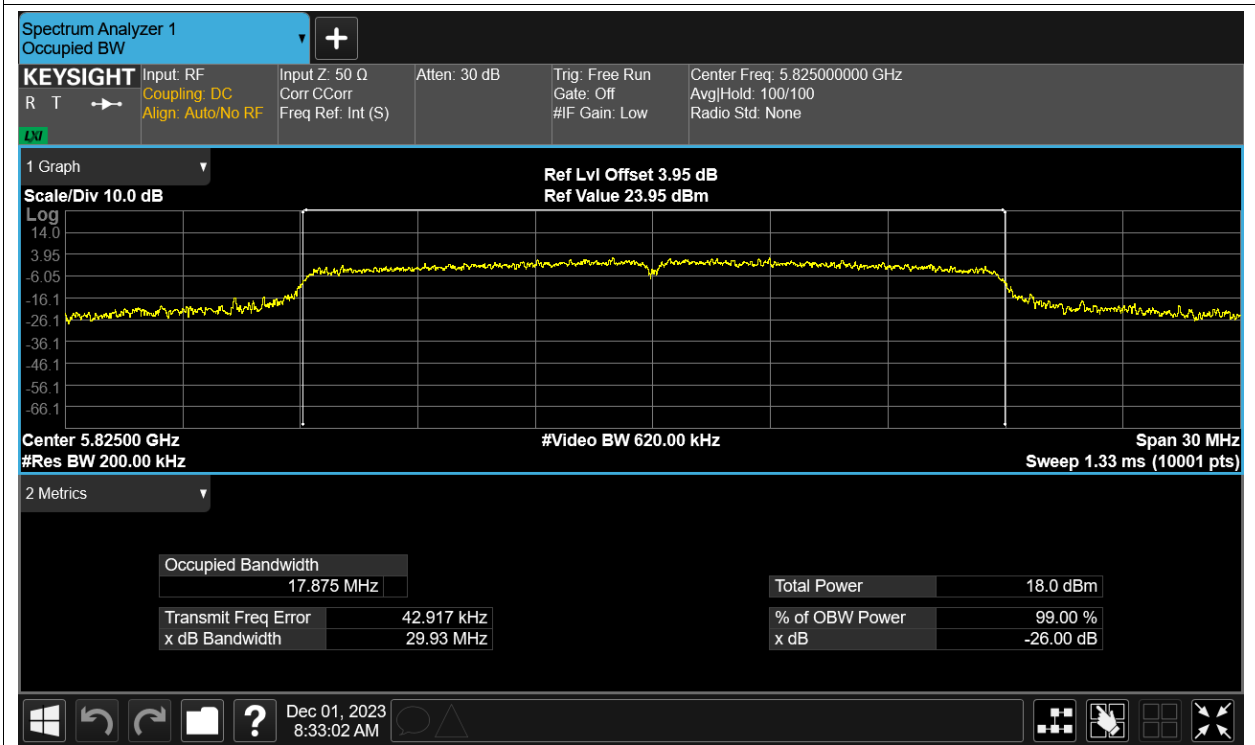

OBW NVNT n40 5755MHz Ant13

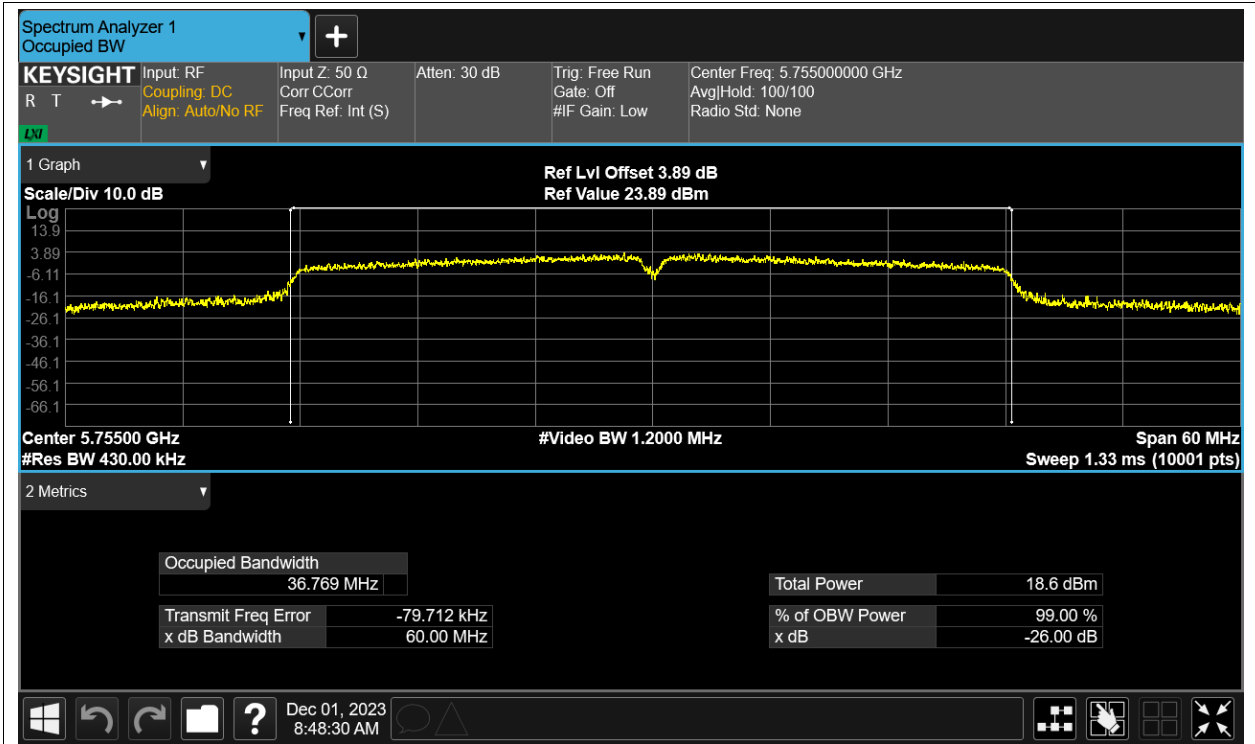

OBW NVNT n40 5795MHz Ant13

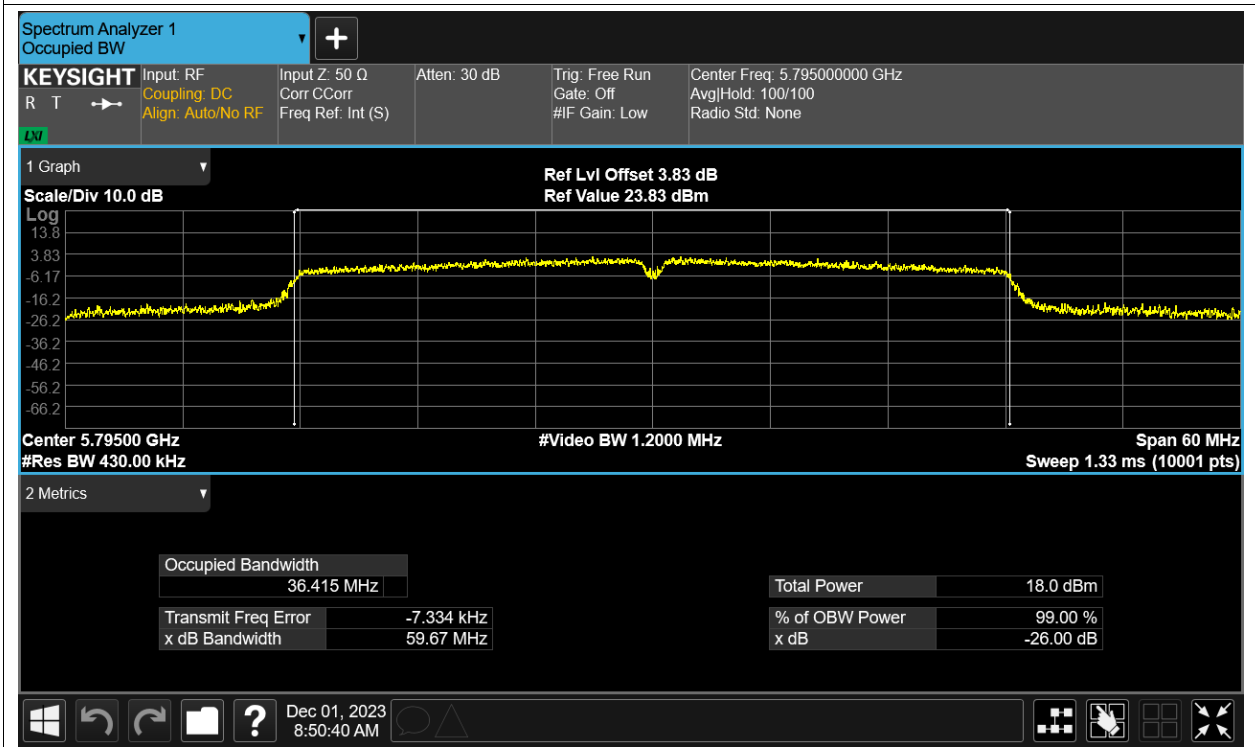


## Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant13	-1.101	30	Pass
NVNT	a	5785	Ant13	-0.898	30	Pass
NVNT	a	5825	Ant13	-0.176	30	Pass
NVNT	ac20	5745	Ant13	-0.979	30	Pass
NVNT	ac20	5785	Ant13	-1.362	30	Pass
NVNT	ac20	5825	Ant13	-0.244	30	Pass
NVNT	ac40	5755	Ant13	-3.678	30	Pass
NVNT	ac40	5795	Ant13	-3.501	30	Pass
NVNT	ac80	5775	Ant13	-7.483	30	Pass
NVNT	n20	5745	Ant13	-0.701	30	Pass
NVNT	n20	5785	Ant13	-1.451	30	Pass
NVNT	n20	5825	Ant13	-0.765	30	Pass
NVNT	n40	5755	Ant13	-2.928	30	Pass
NVNT	n40	5795	Ant13	-3.508	30	Pass

Test Graphs


PSD NVNT a 5745MHz Ant13

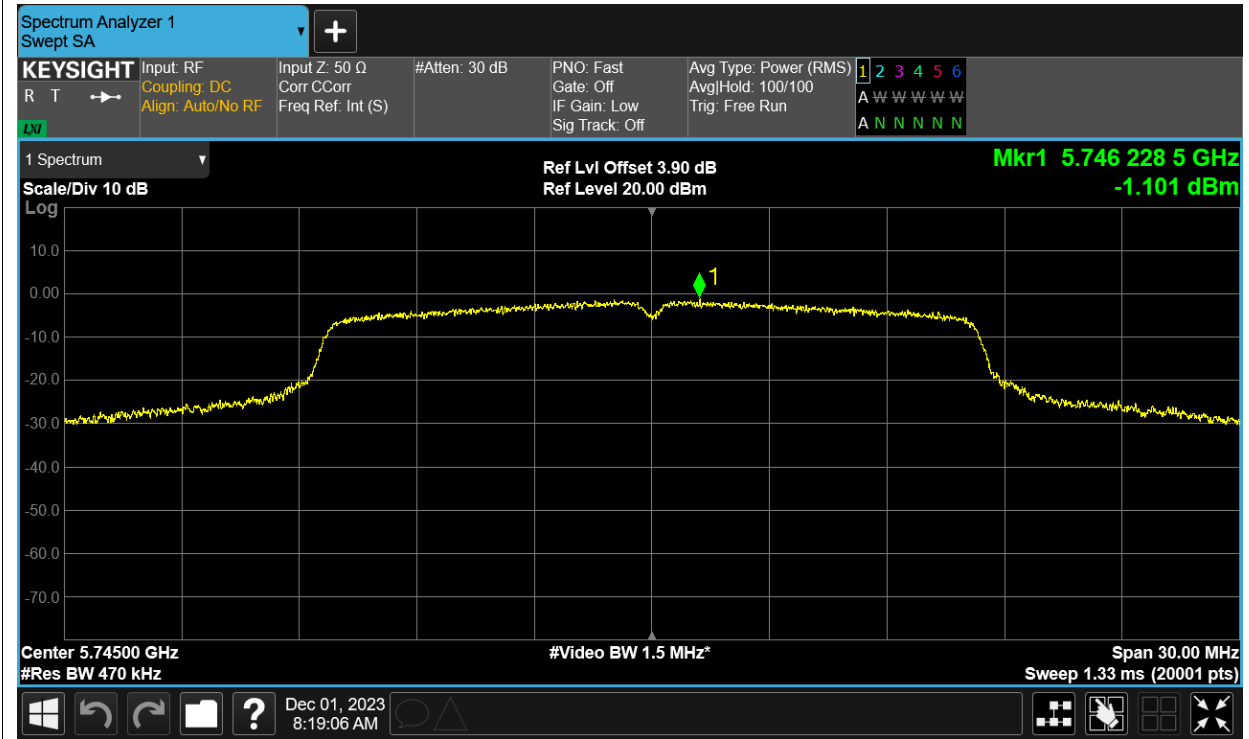


PSD NVNT a 5785MHz Ant13

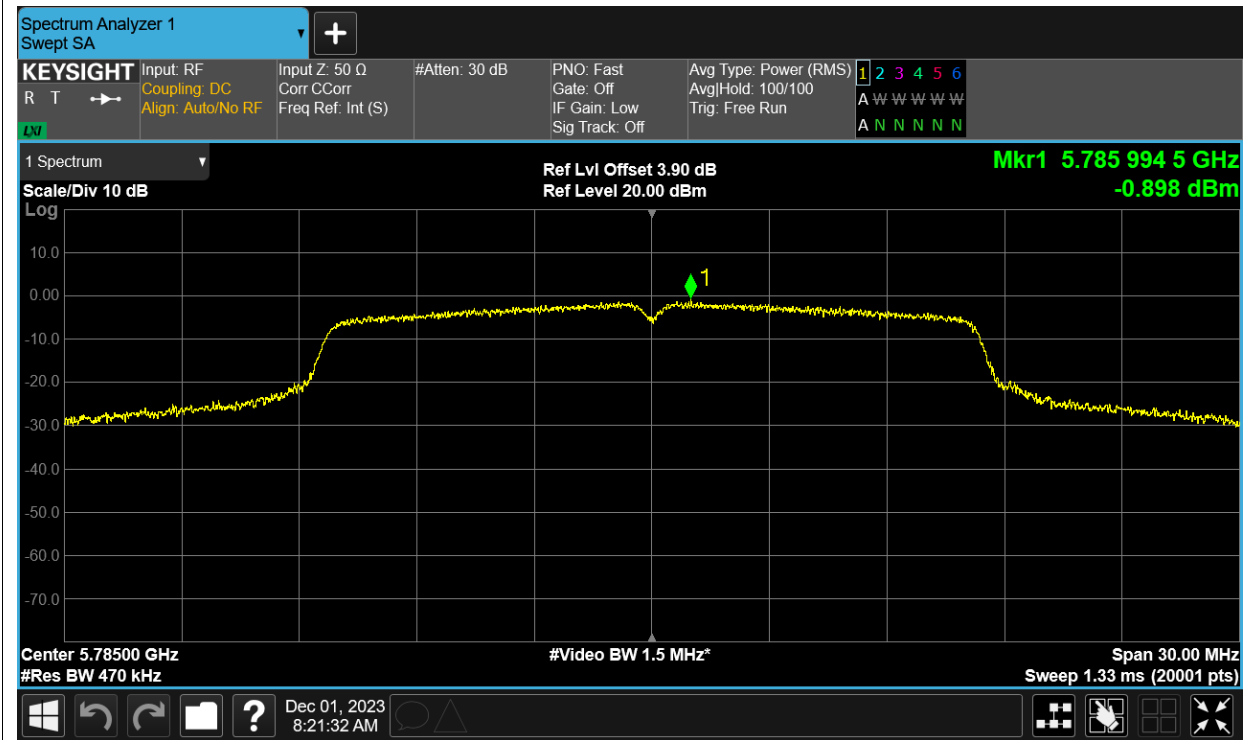


PSD NVNT a 5825MHz Ant13

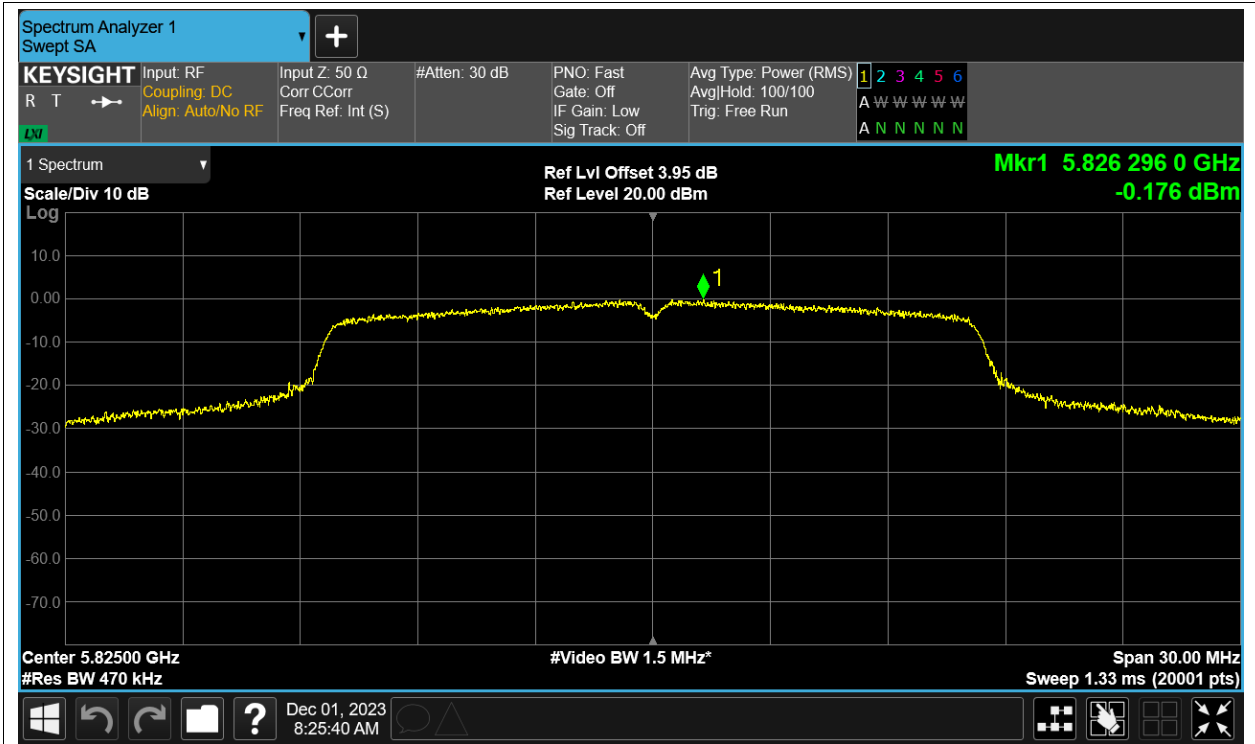


PSD NVNT ac20 5745MHz Ant13

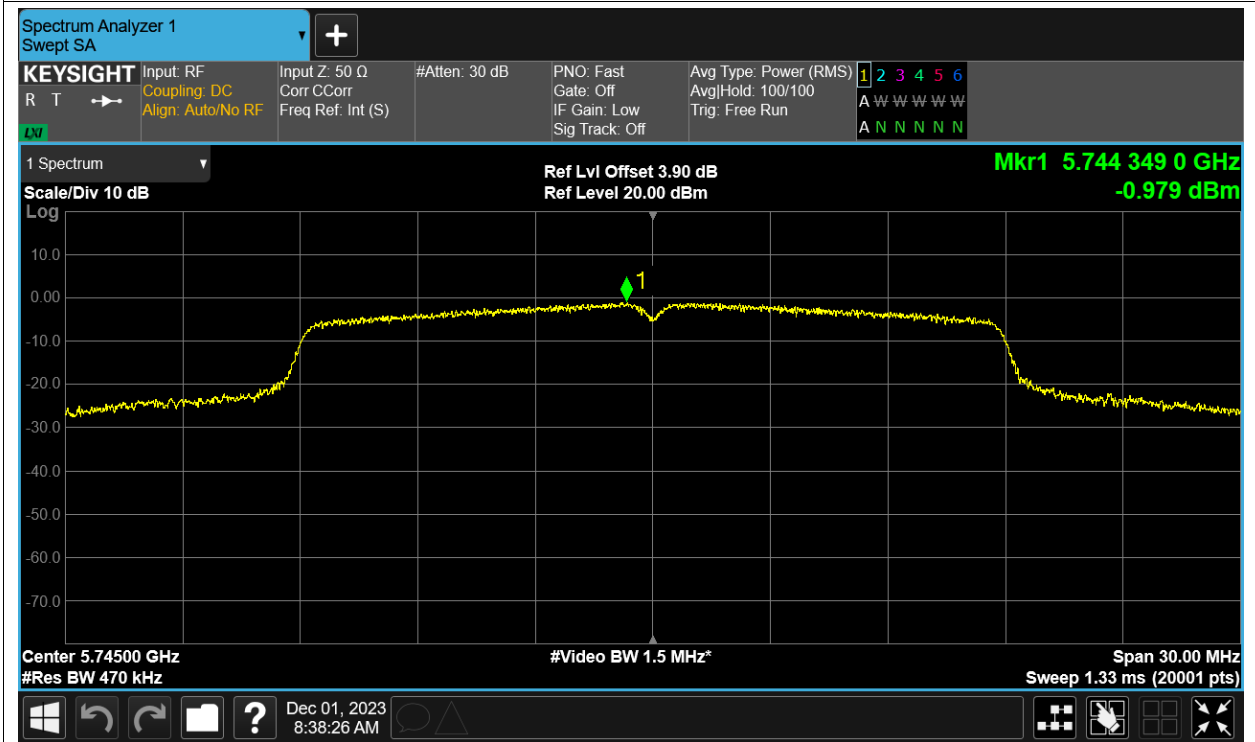


PSD NVNT ac20 5785MHz Ant13

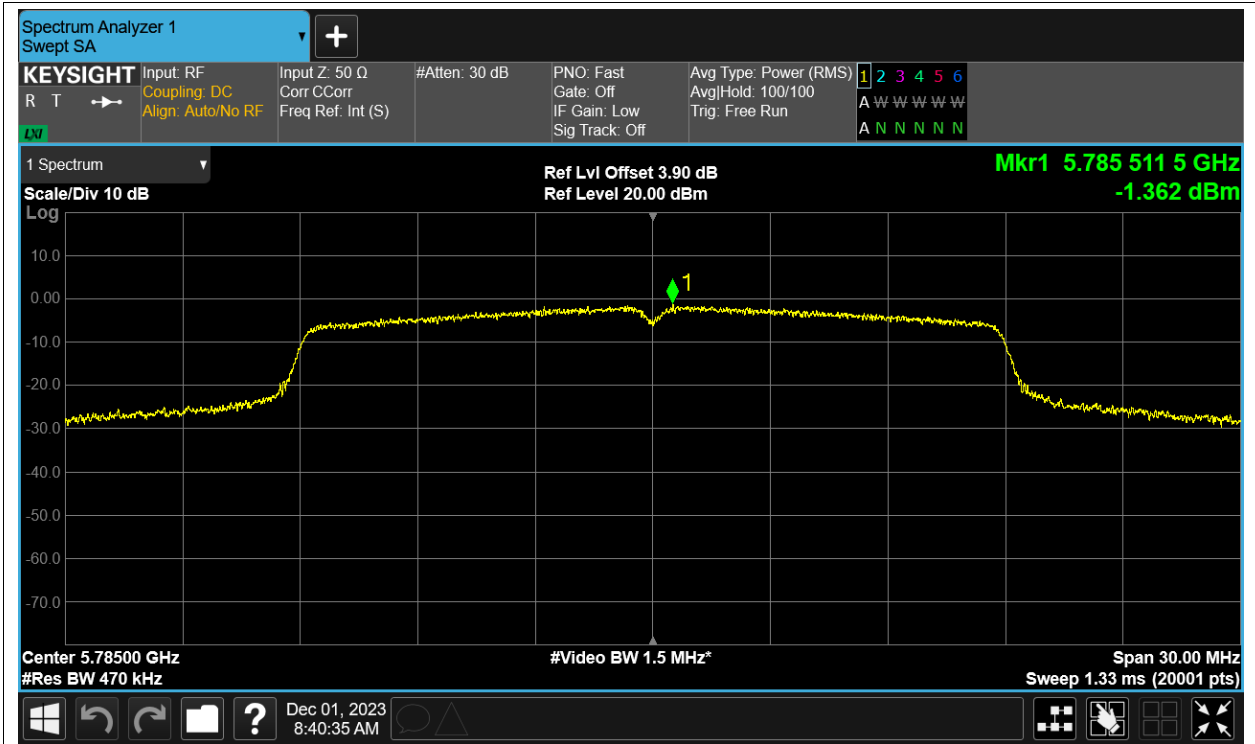


PSD NVNT ac20 5825MHz Ant13

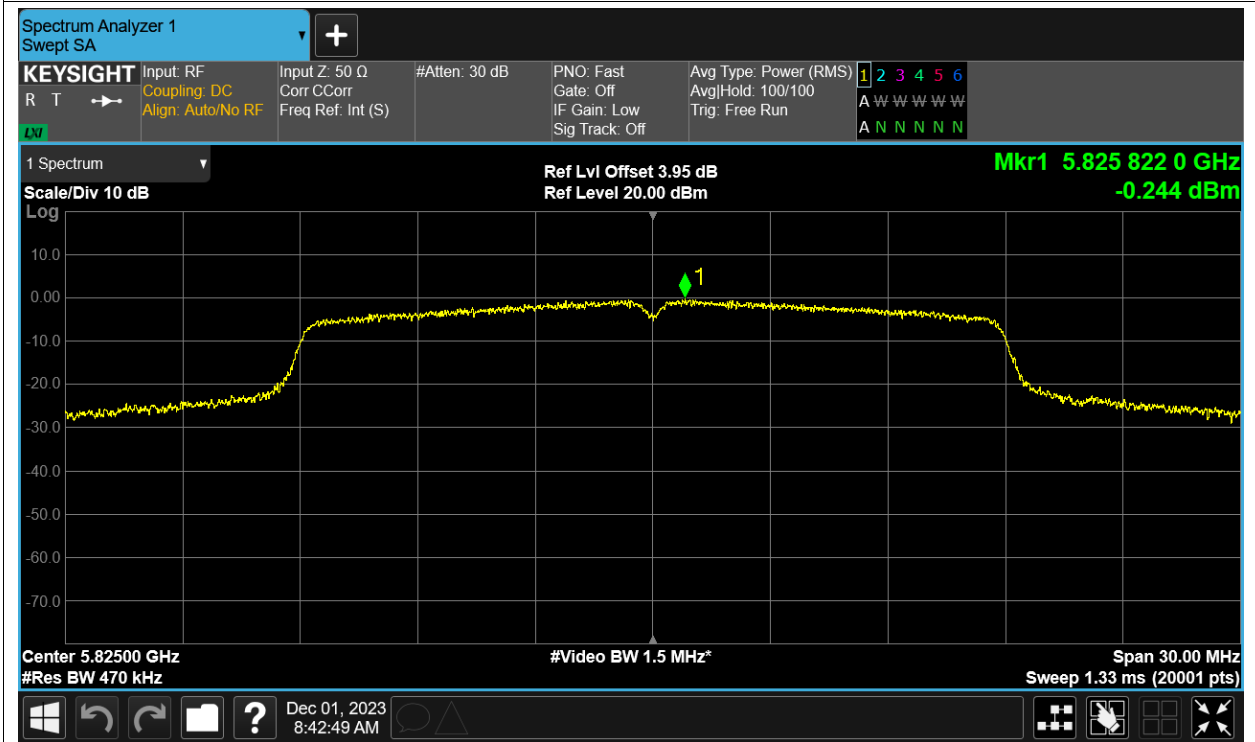


PSD NVNT ac40 5755MHz Ant13

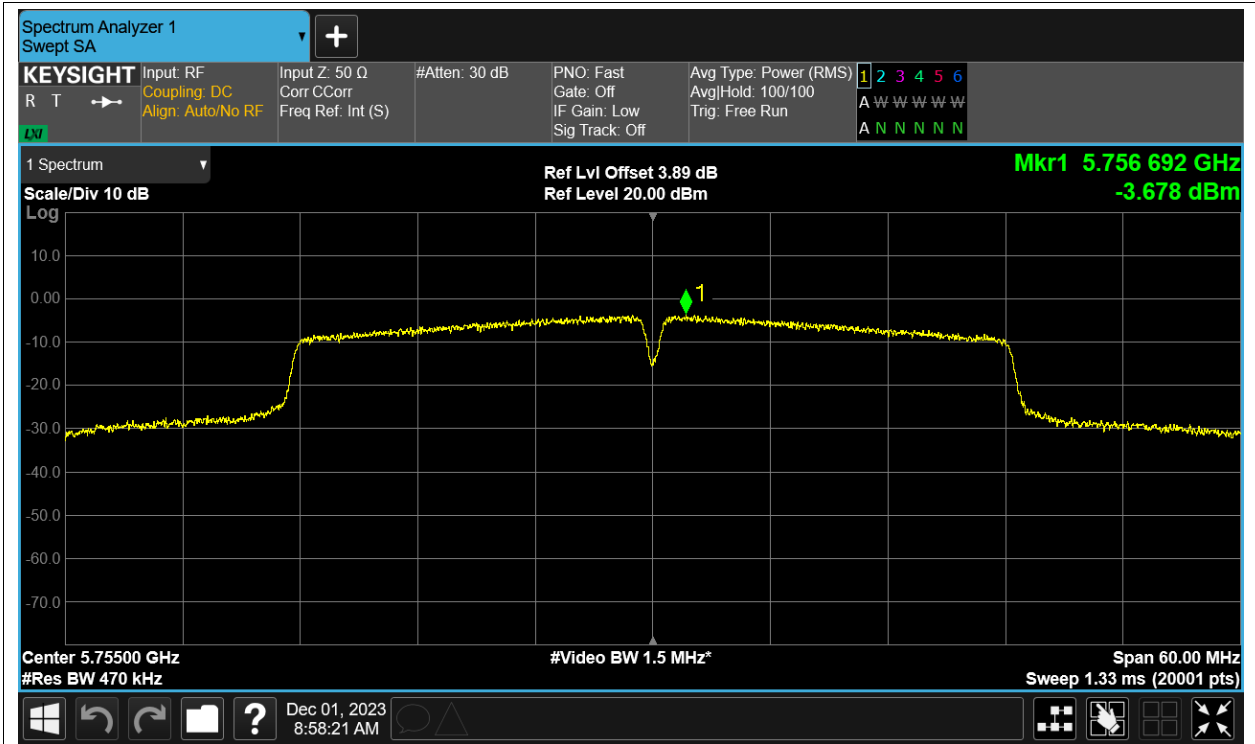


PSD NVNT ac40 5795MHz Ant13

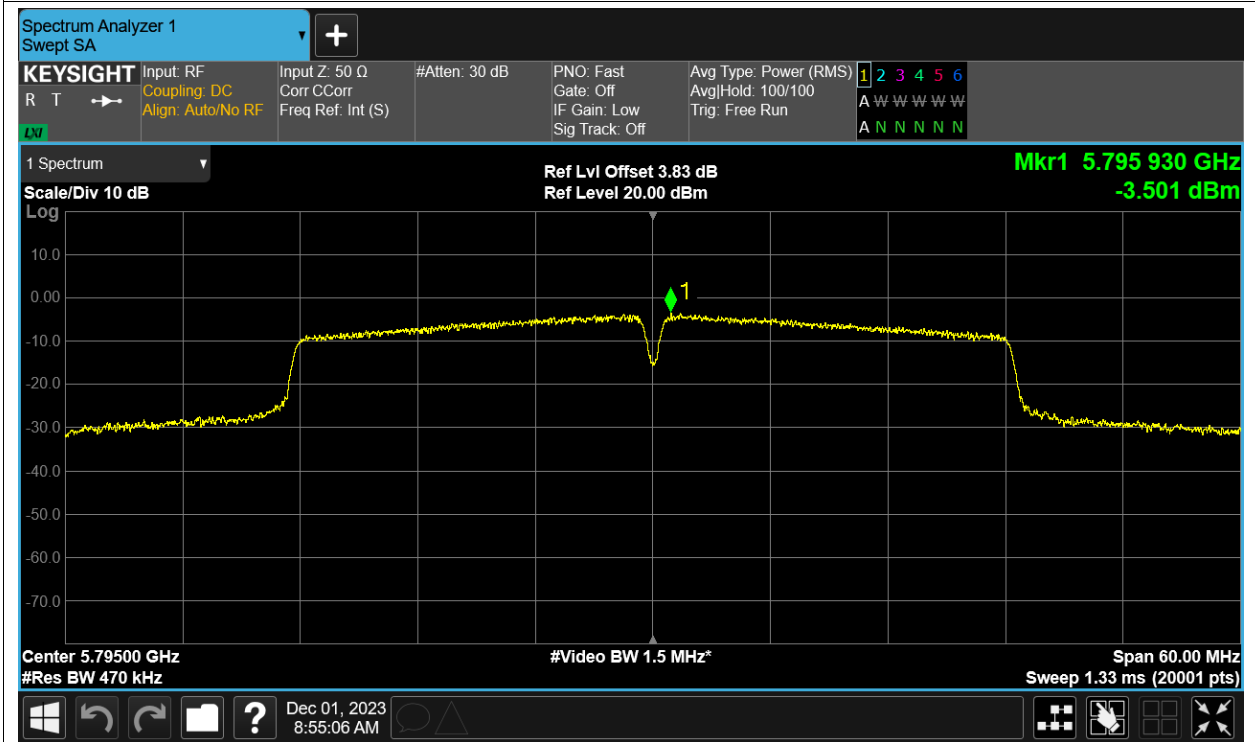

PSD NVNT ac80 5775MHz Ant13

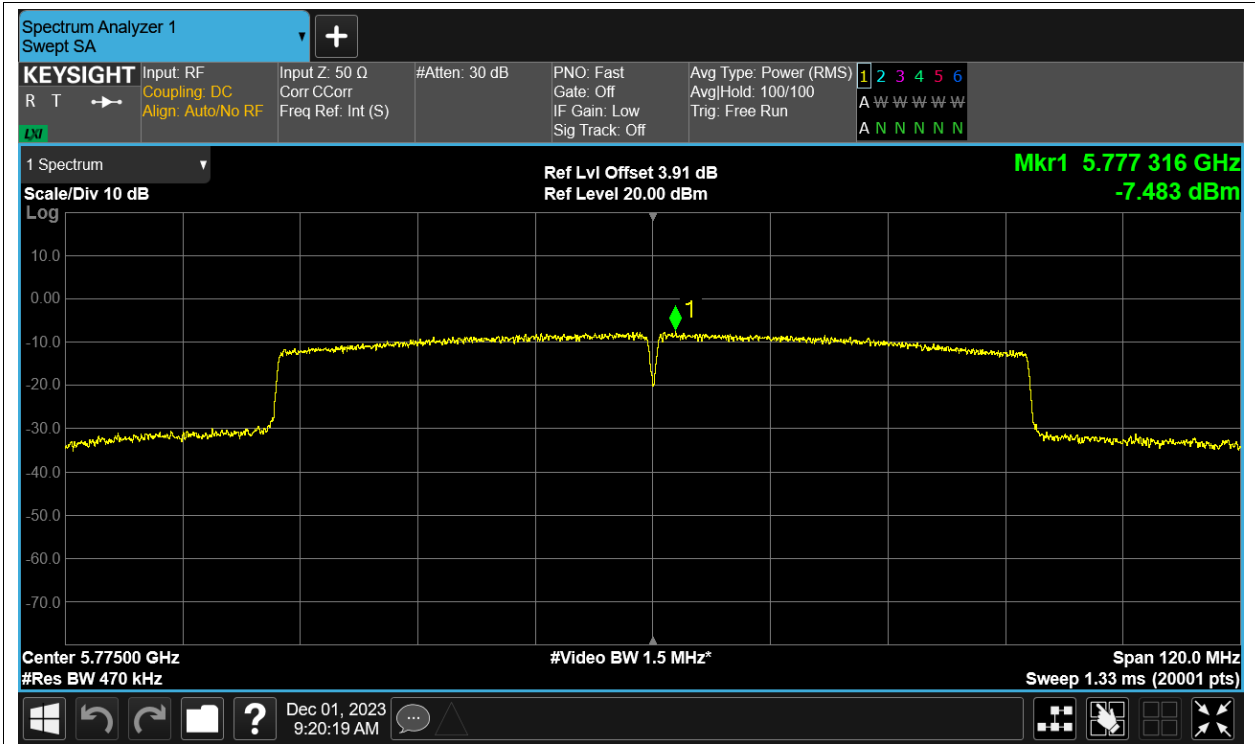


PSD NVNT n20 5745MHz Ant13

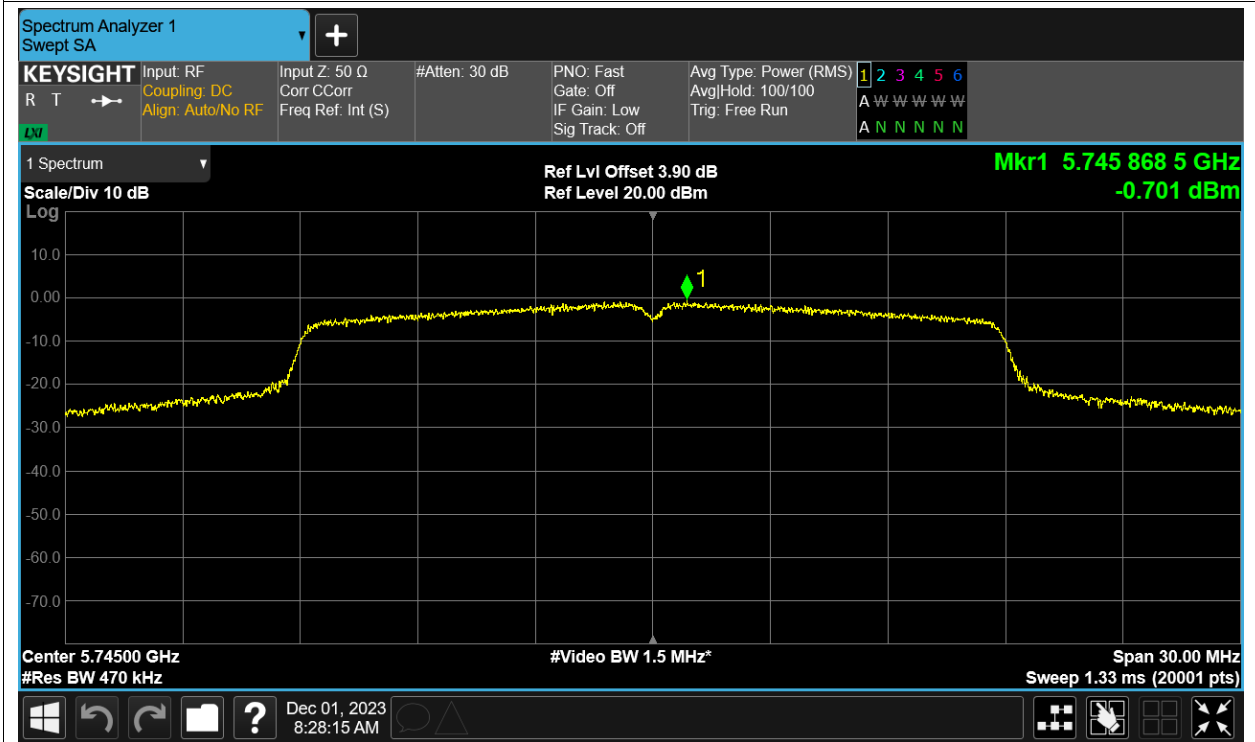


PSD NVNT n20 5785MHz Ant13




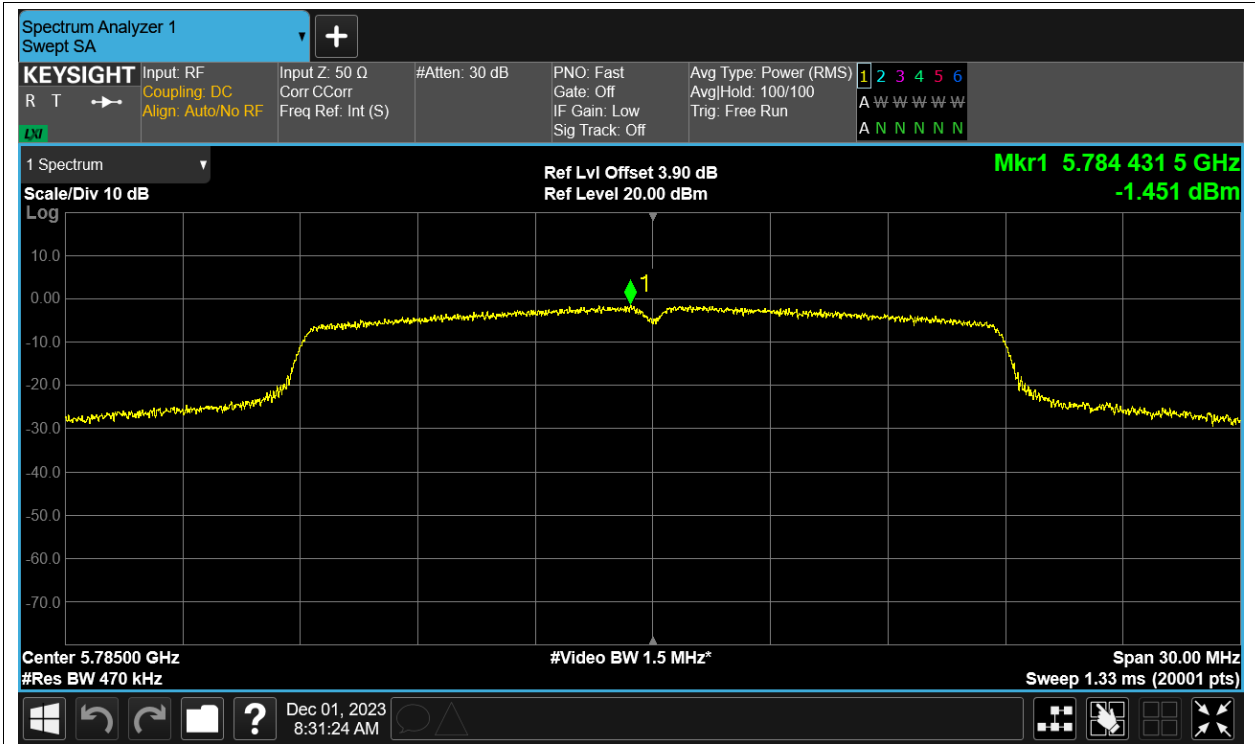

PSD NVNT n20 5825MHz Ant13

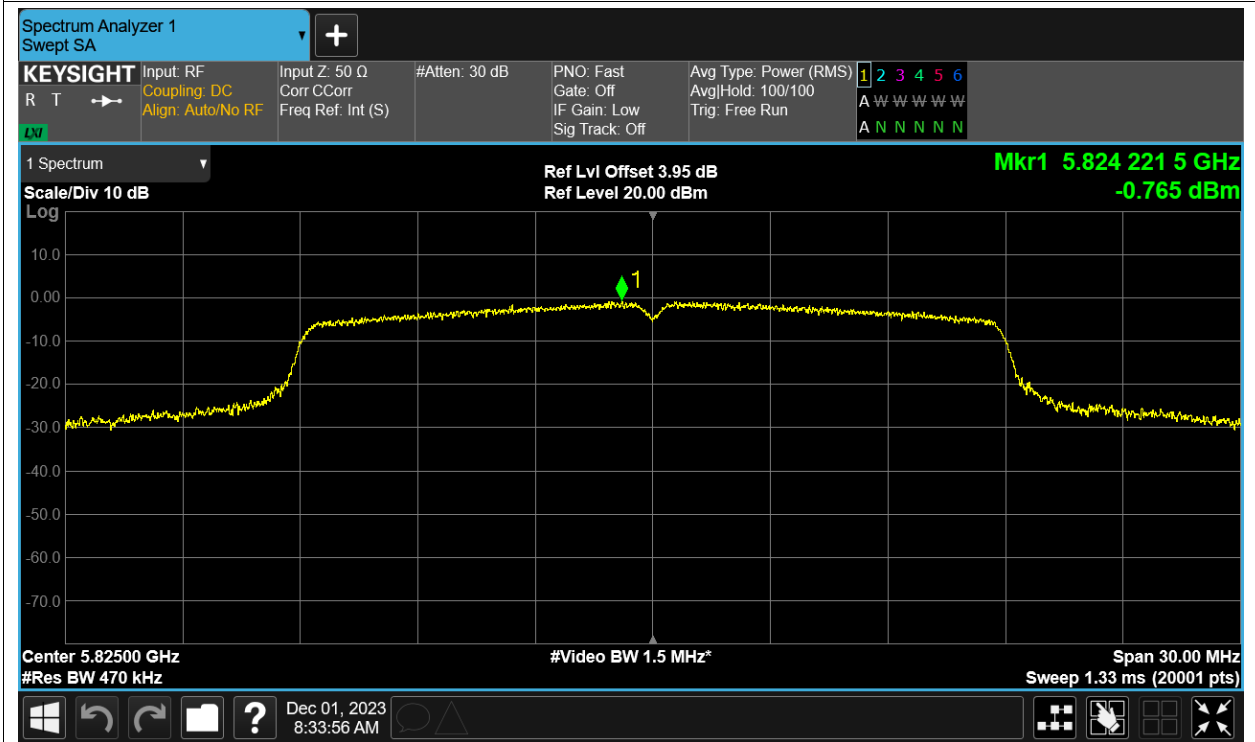

PSD NVNT n40 5755MHz Ant13

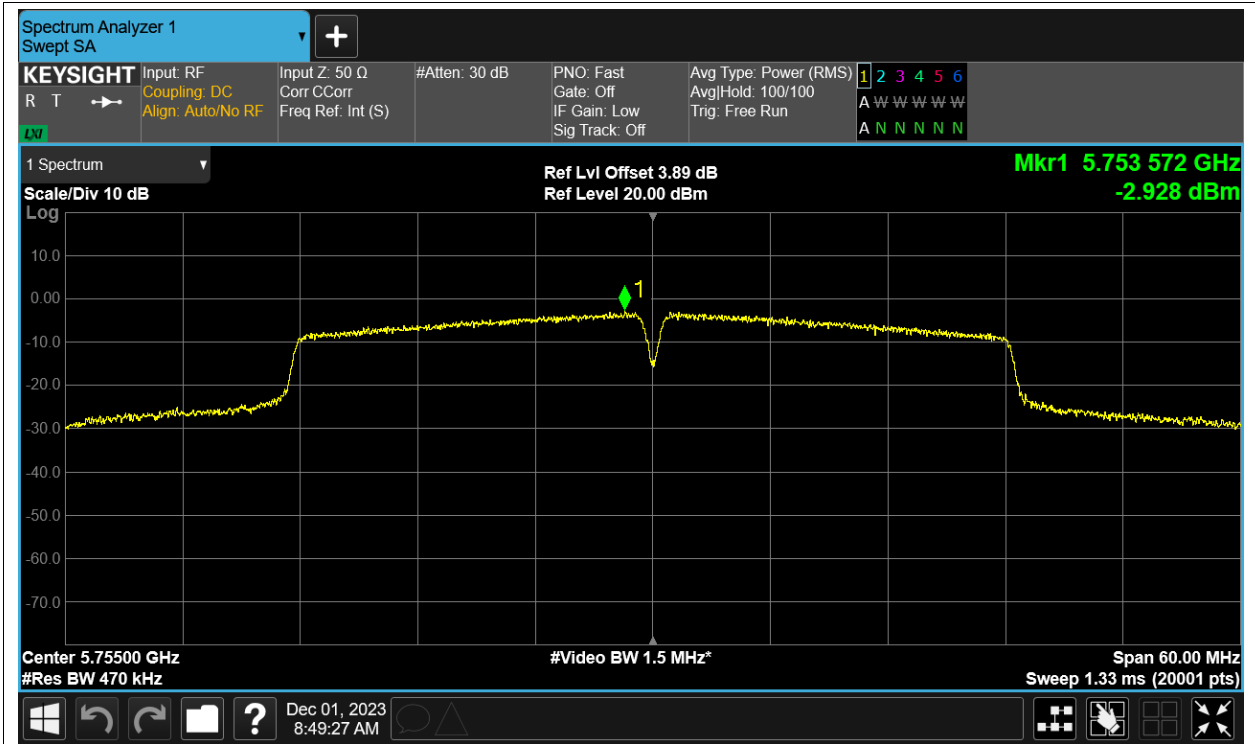

PSD NVNT n40 5795MHz Ant13

