


**Test Data****Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.063	0	-5.063	30	Pass
NVNT	BLE	2442	Ant1	-4.75	0	-4.75	30	Pass
NVNT	BLE	2480	Ant1	-6.945	0	-6.945	30	Pass

Test Graphs


Power NVNT BLE 2402MHz Ant1

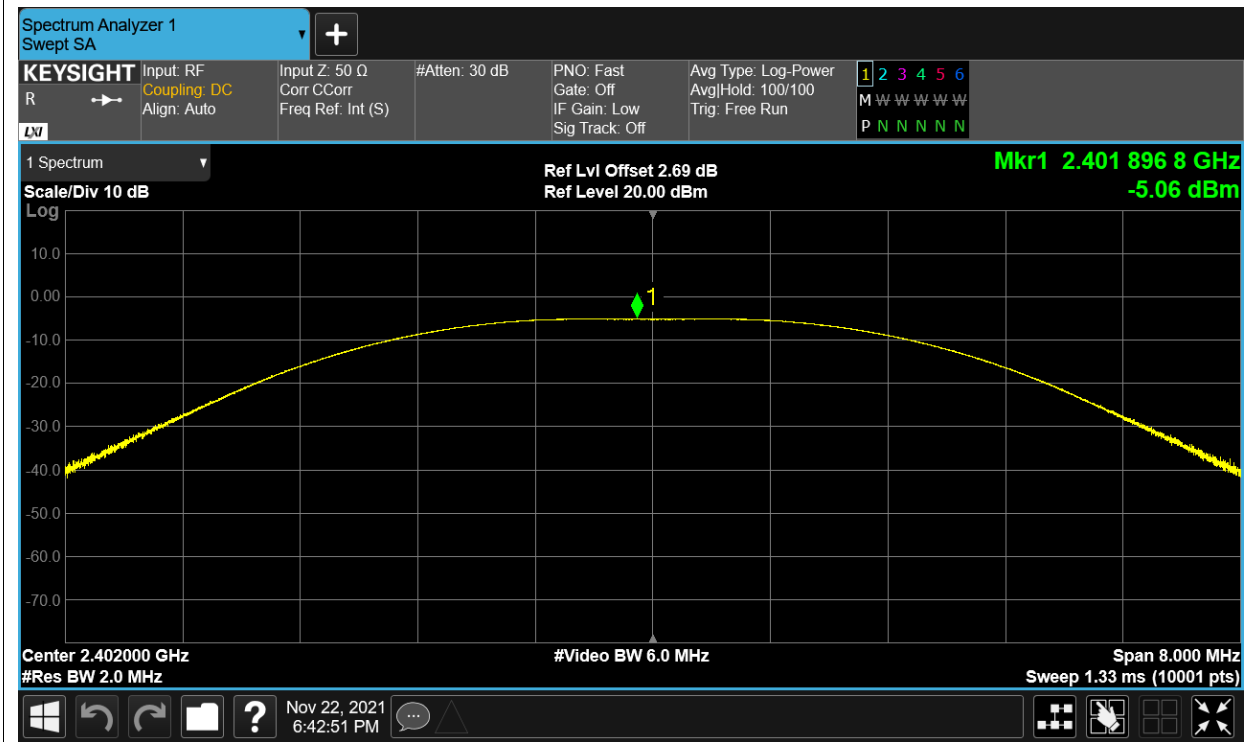

Power NVNT BLE 2442MHz Ant1

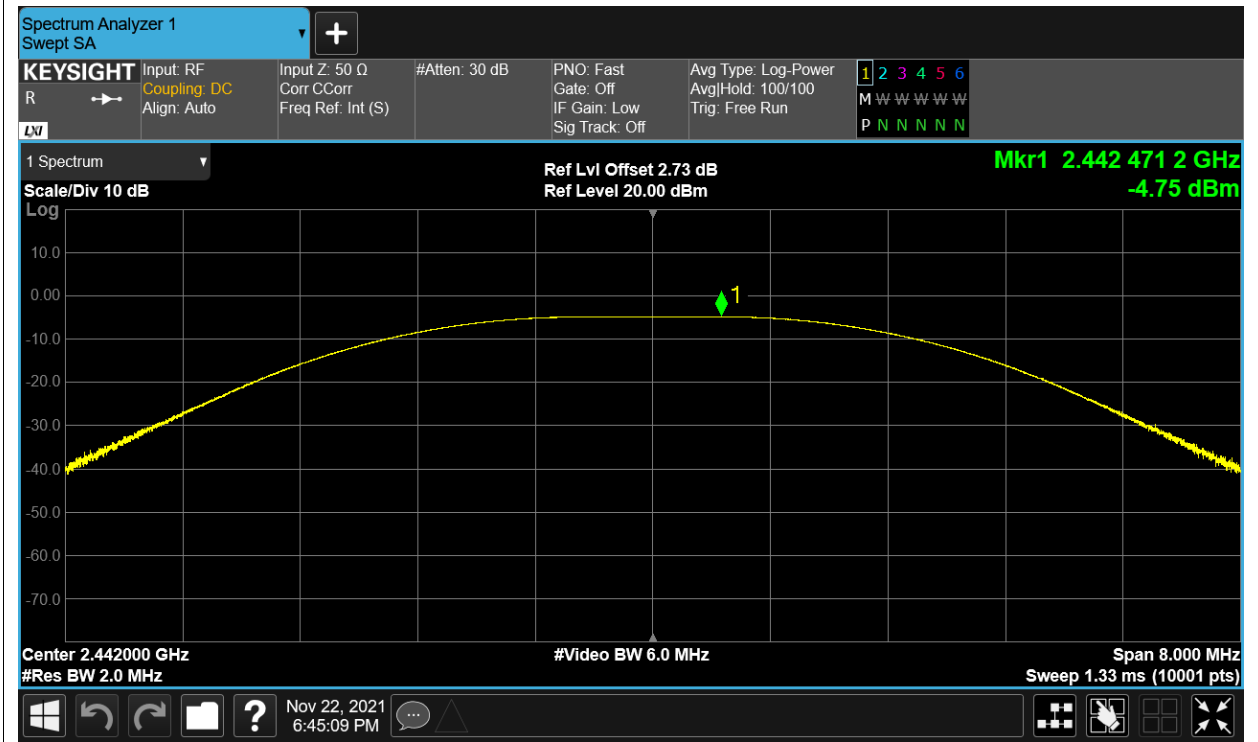


Power NVNT BLE 2480MHz Ant1

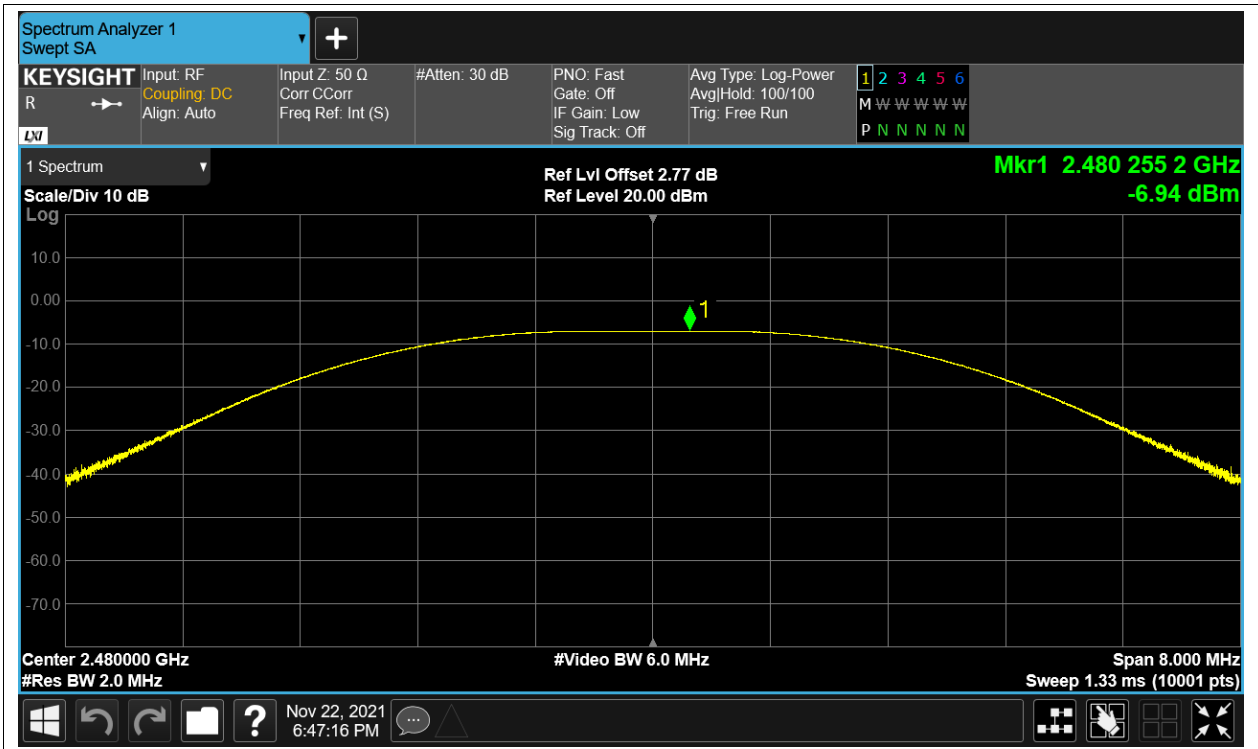

## -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.151	0.5	Pass
NVNT	BLE	2442	Ant1	1.174	0.5	Pass
NVNT	BLE	2480	Ant1	1.174	0.5	Pass

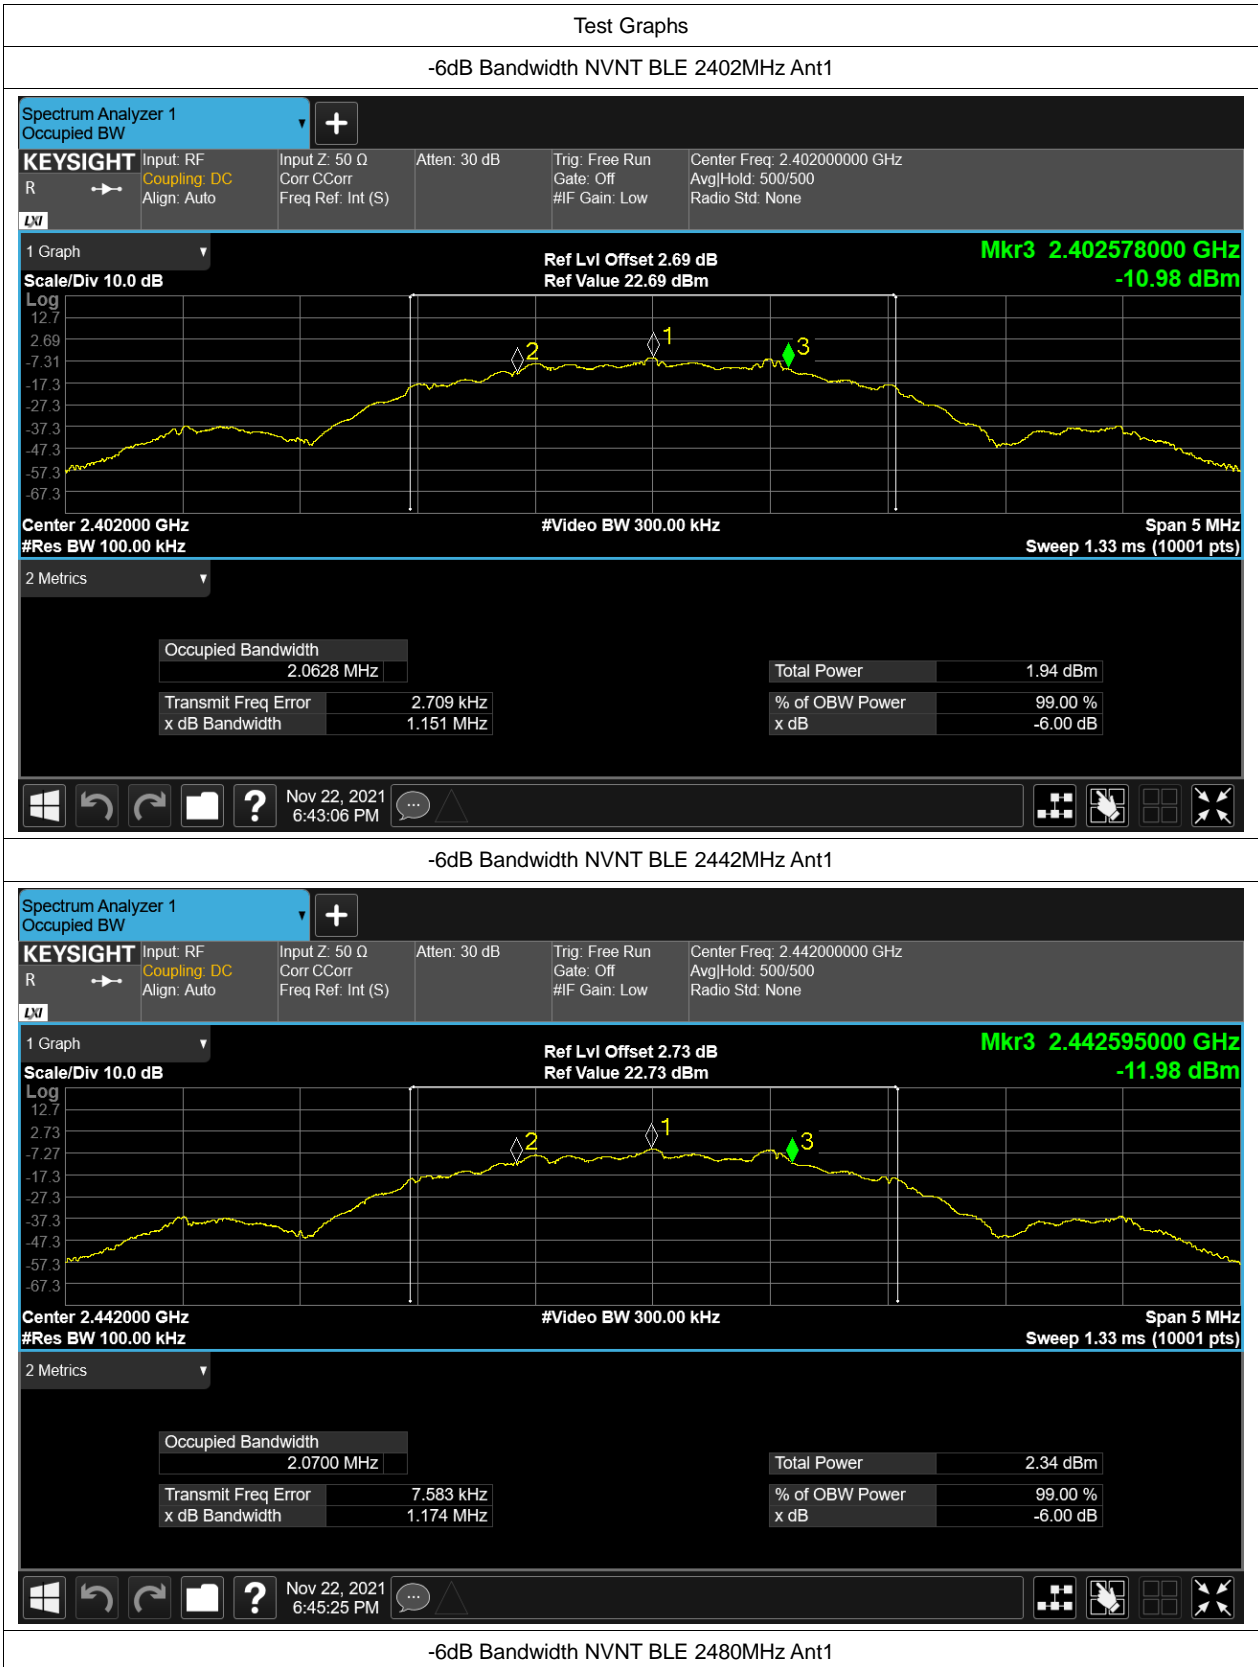




## Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.083331978
NVNT	BLE	2442	Ant1	2.075119807
NVNT	BLE	2480	Ant1	2.083298013







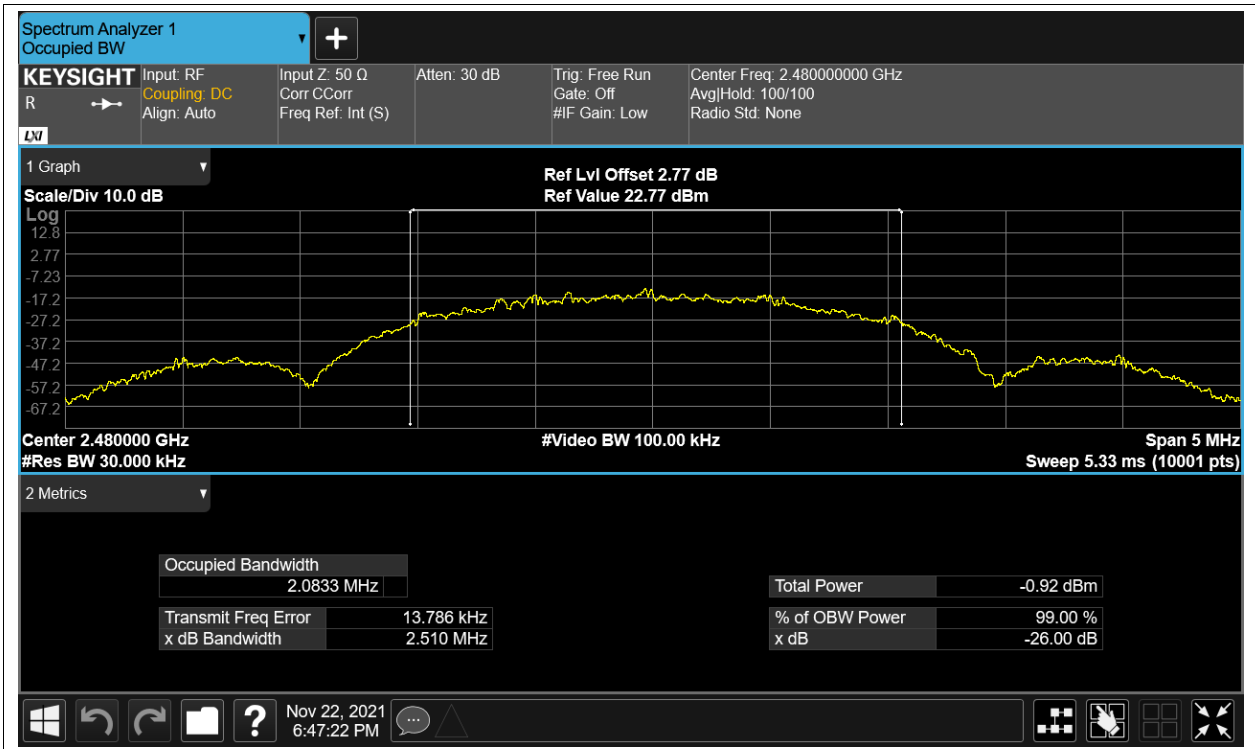

## Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-23.762	8	Pass
NVNT	BLE	2442	Ant1	-23.396	8	Pass
NVNT	BLE	2480	Ant1	-25.64	8	Pass

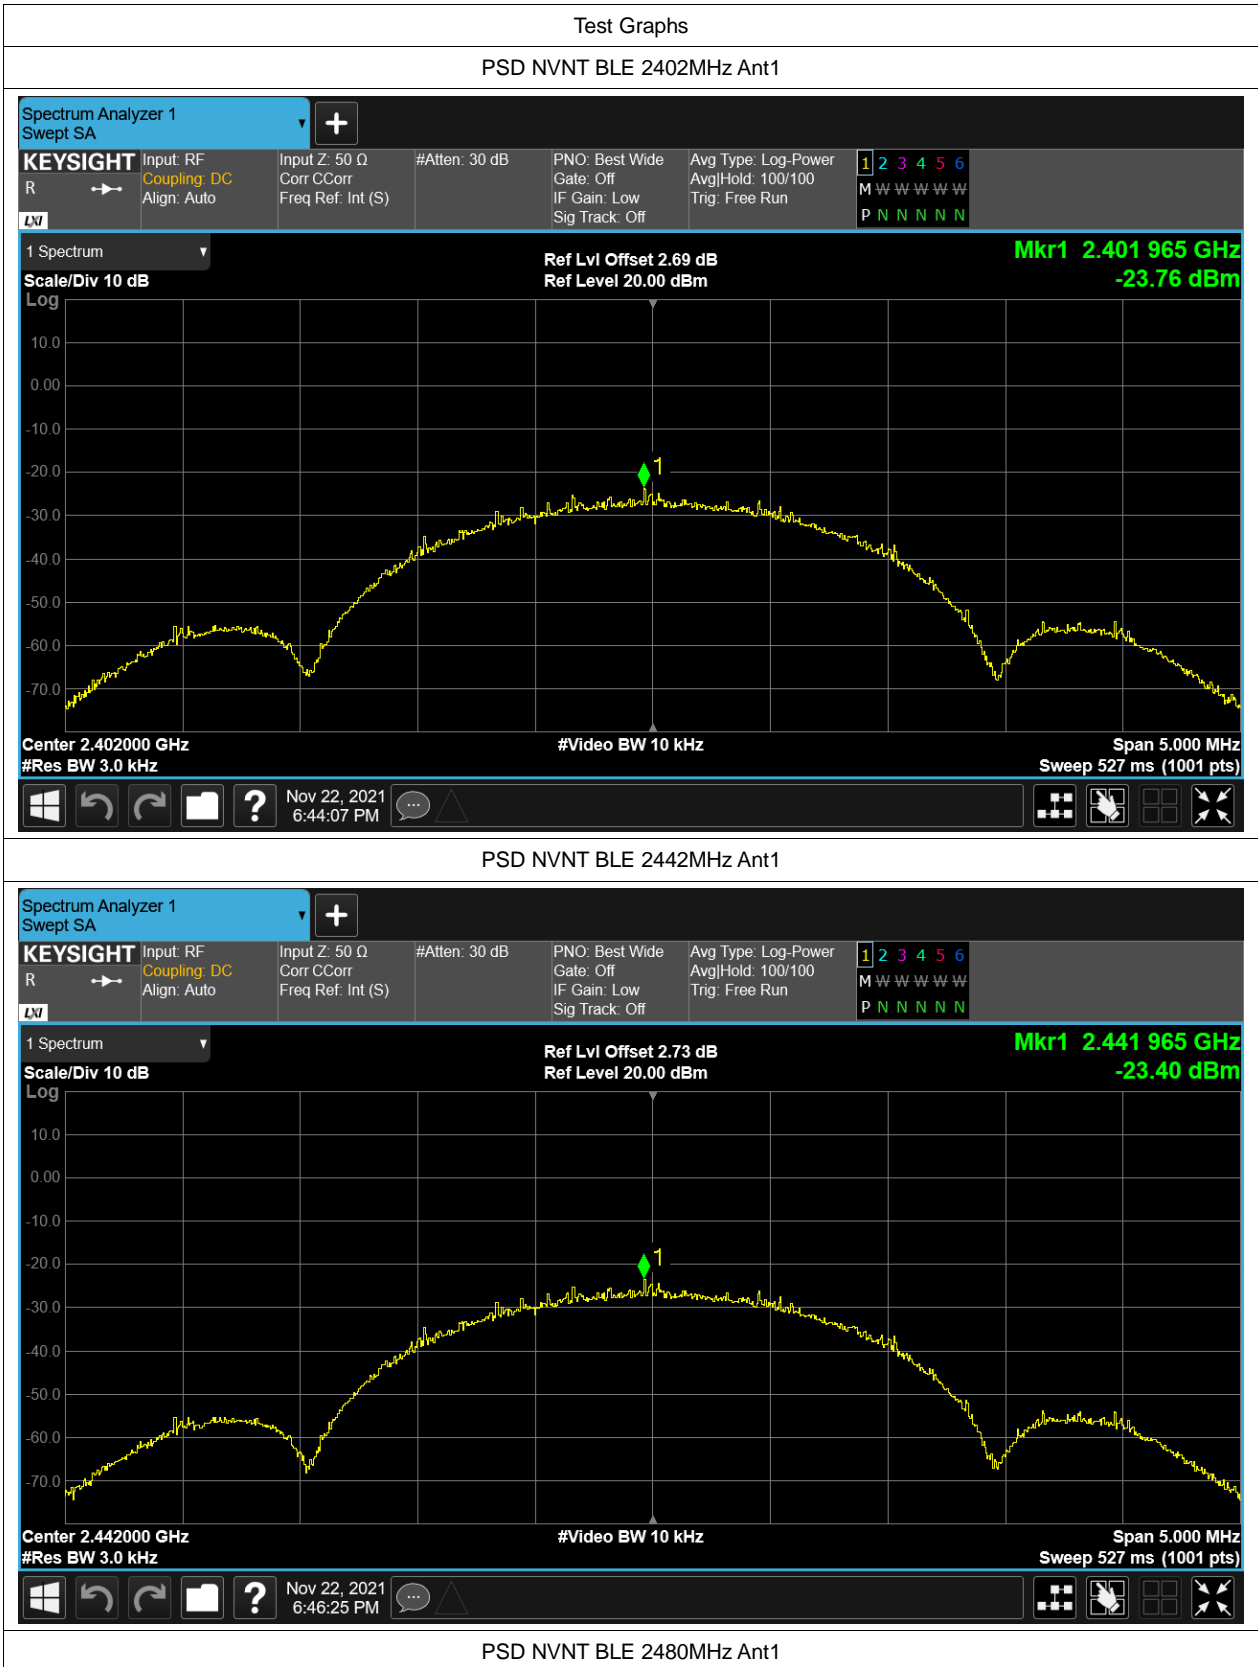

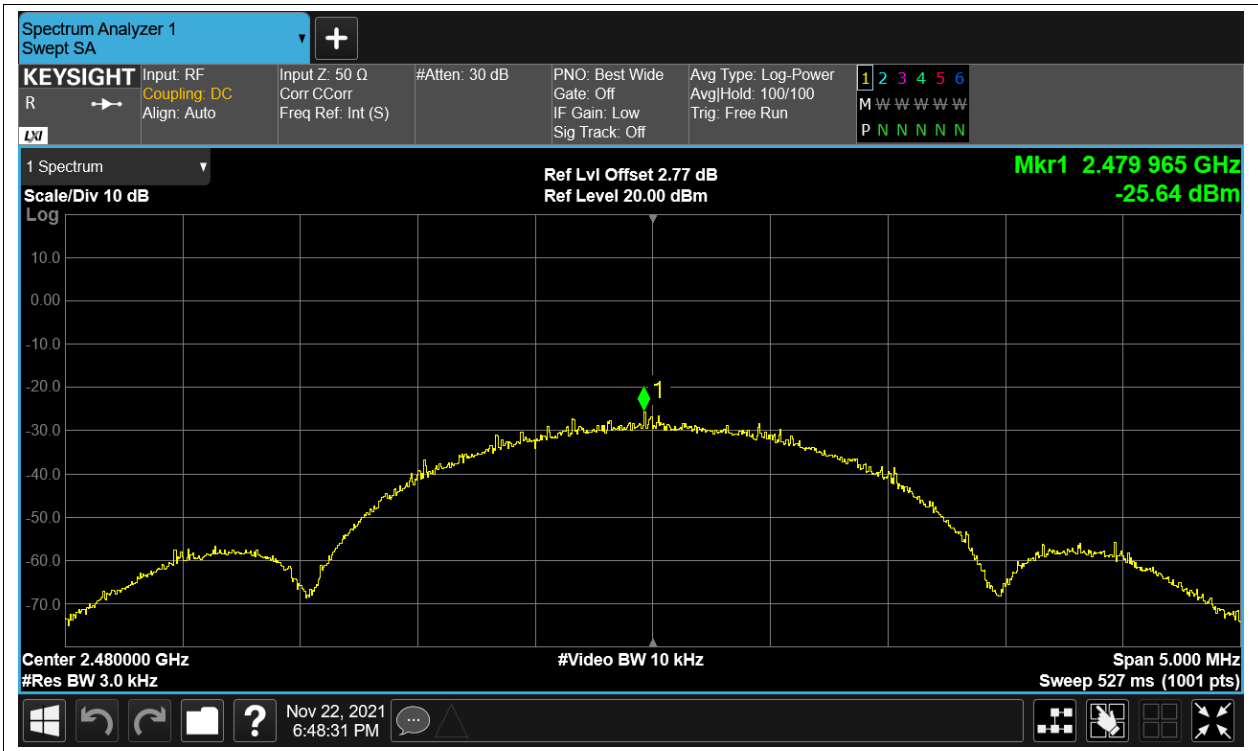


## Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-51.16	-20	Pass
NVNT	BLE	2480	Ant1	-47.47	-20	Pass

Test Graphs


Band Edge NVNT BLE 2402MHz Ant1 Ref

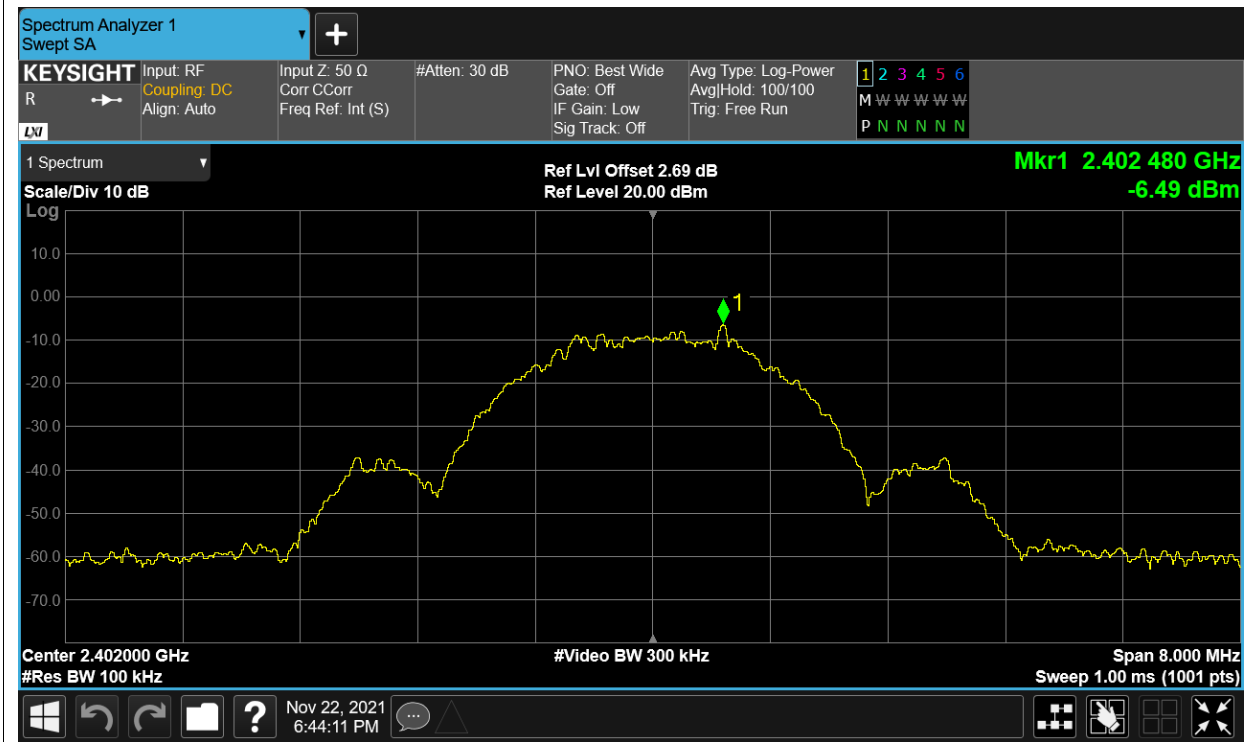


Band Edge NVNT BLE 2402MHz Ant1 Emission

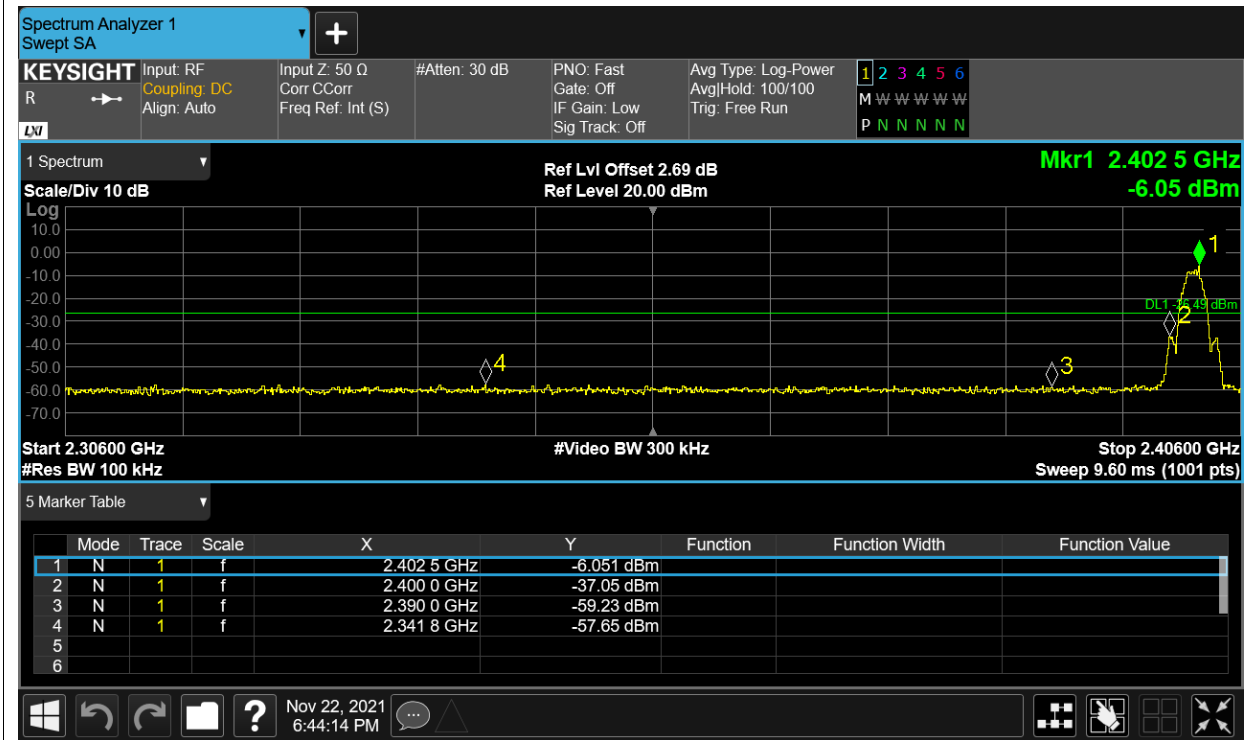

Band Edge NVNT BLE 2480MHz Ant1 Ref

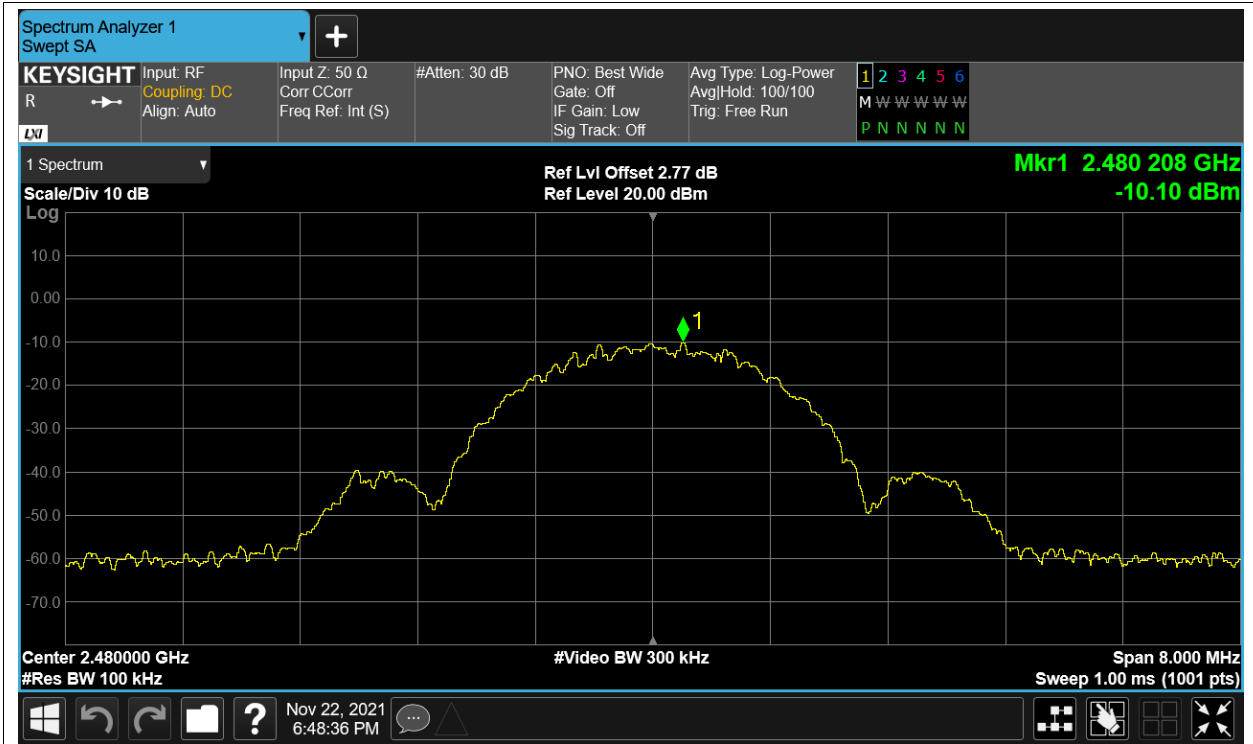

Band Edge NVNT BLE 2480MHz Ant1 Emission

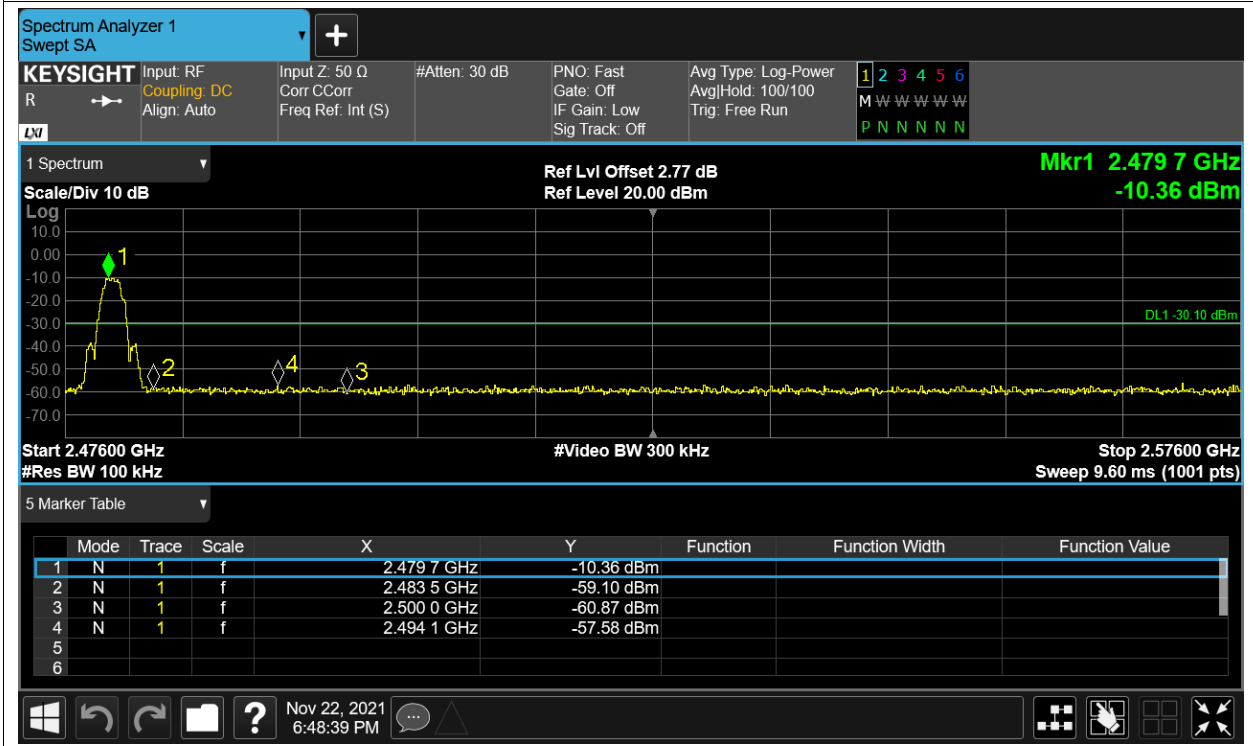


## Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-29.69	-20	Pass
NVNT	BLE	2442	Ant1	-40.29	-20	Pass
NVNT	BLE	2480	Ant1	-38.42	-20	Pass




Test Graphs


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

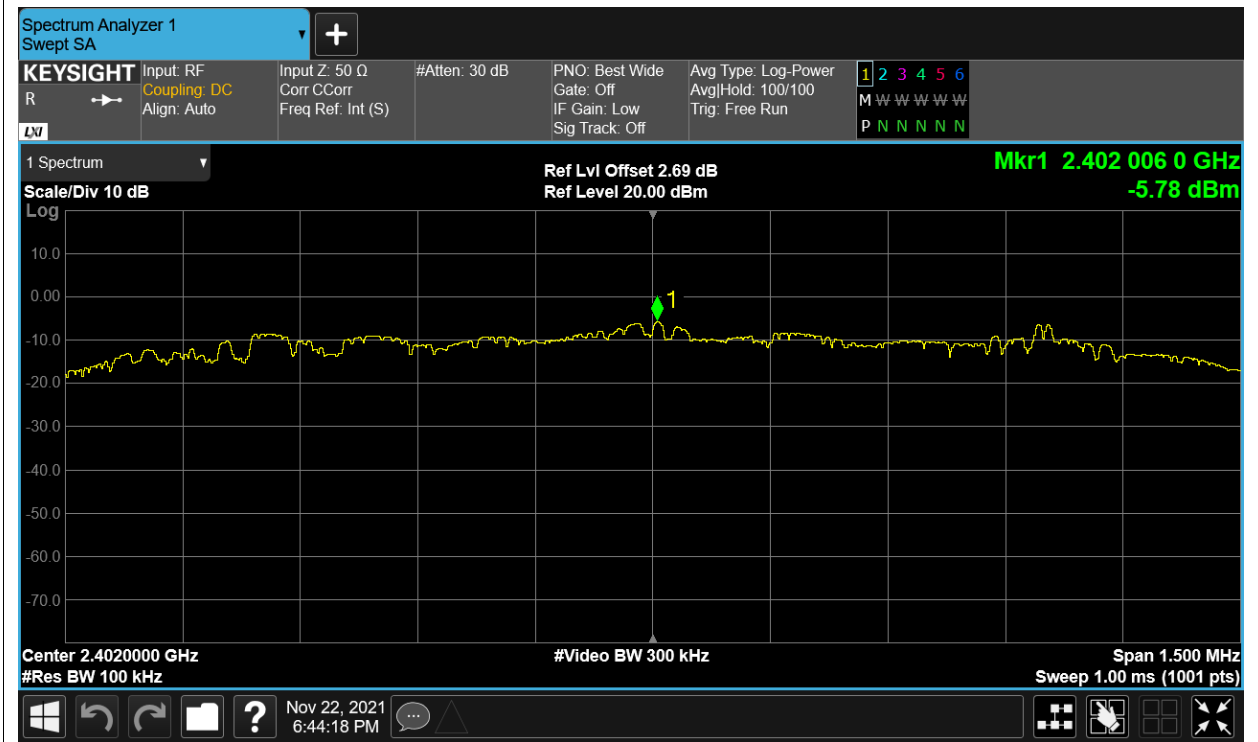


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

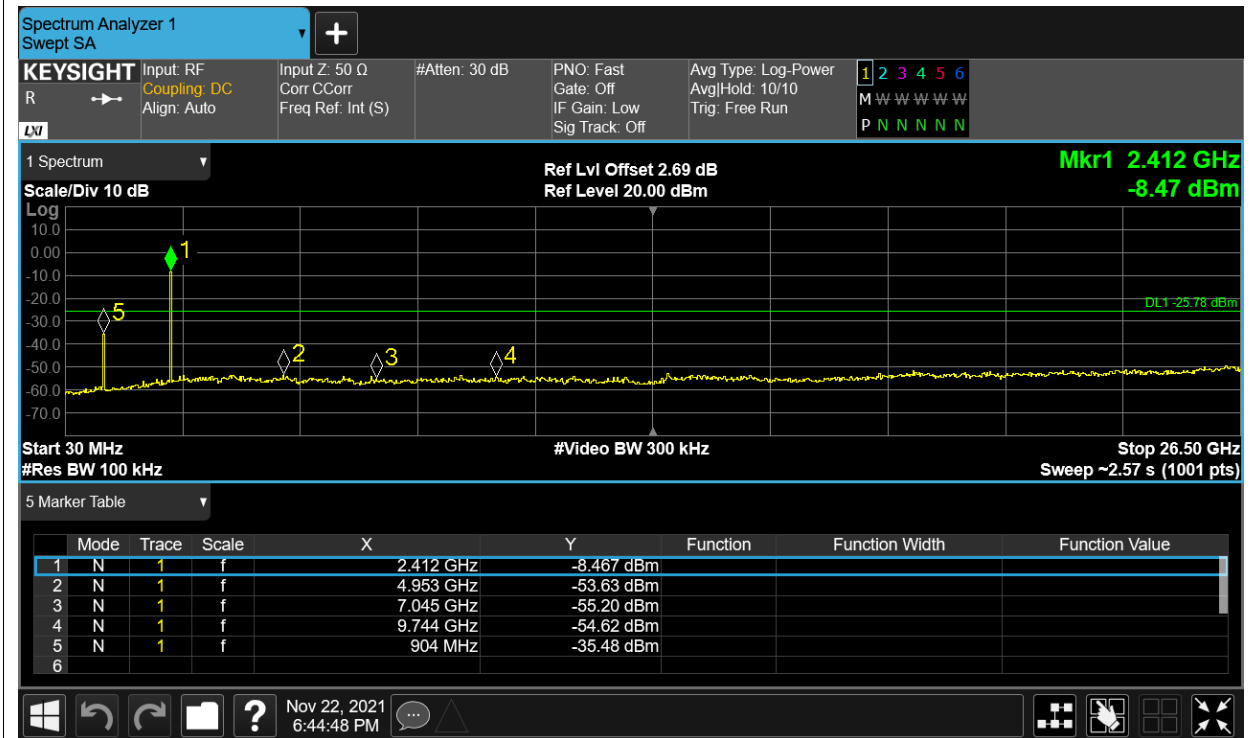


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

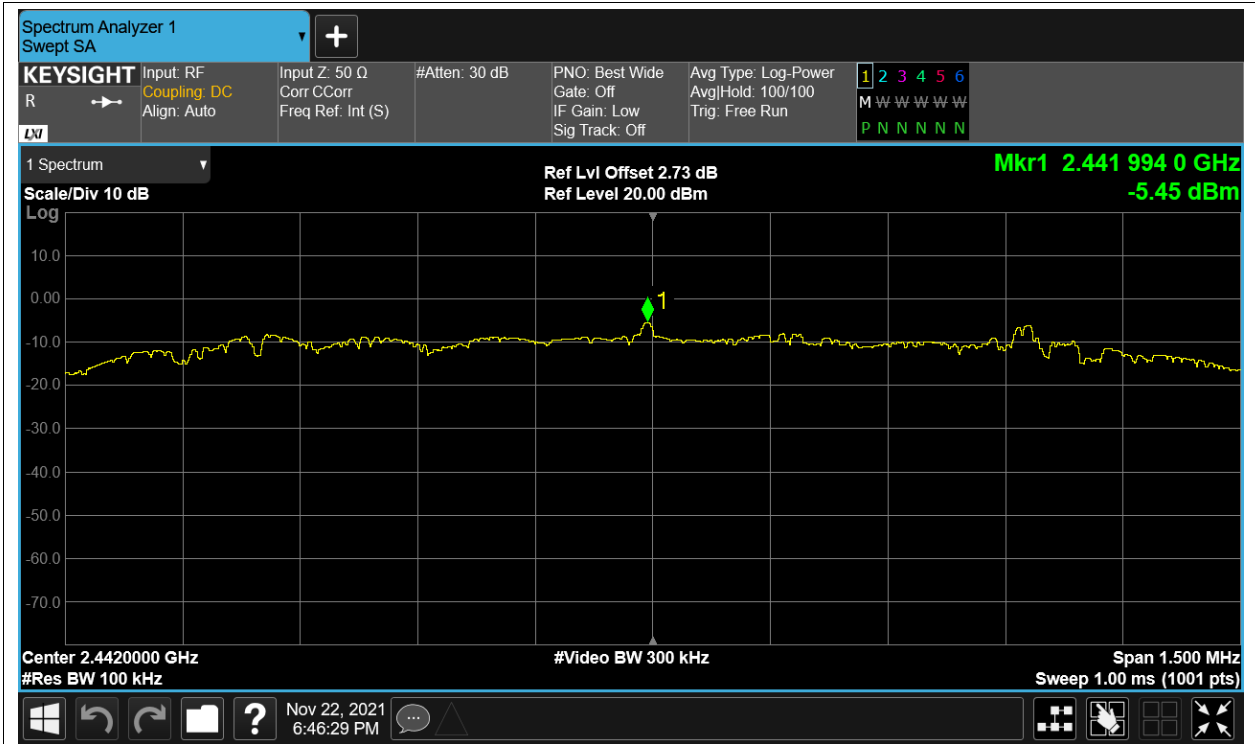

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

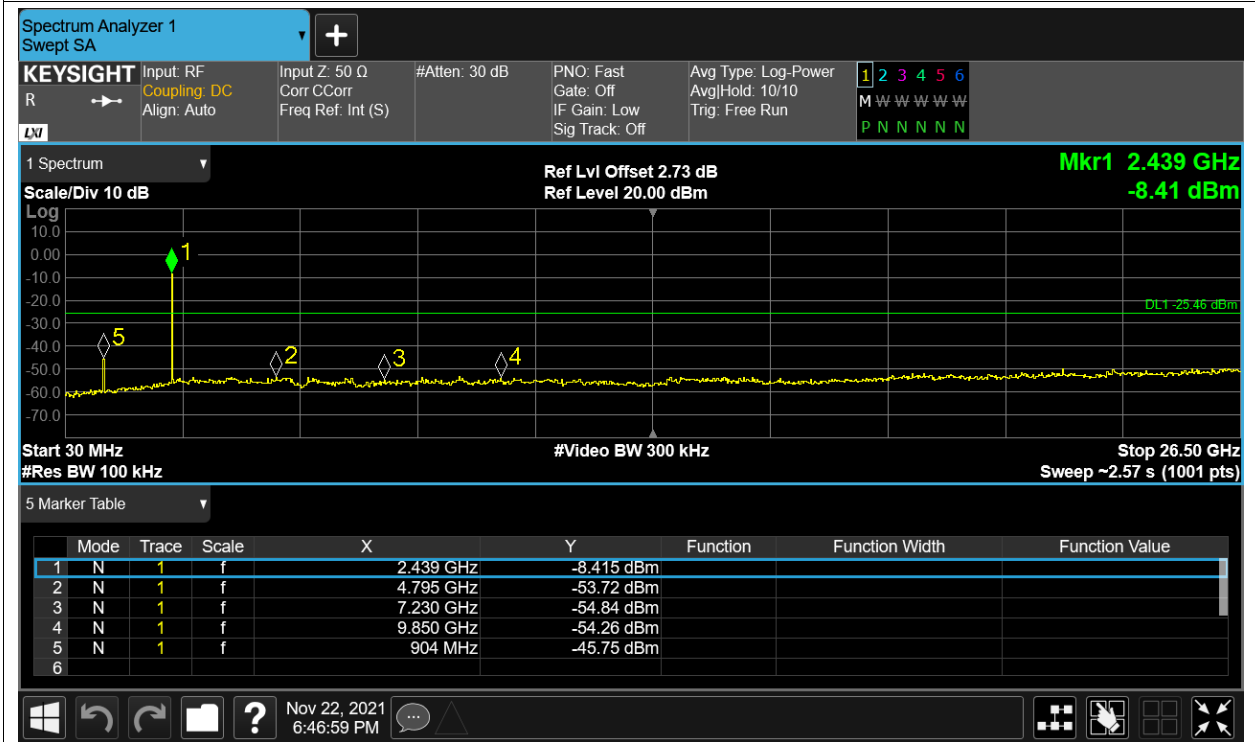

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

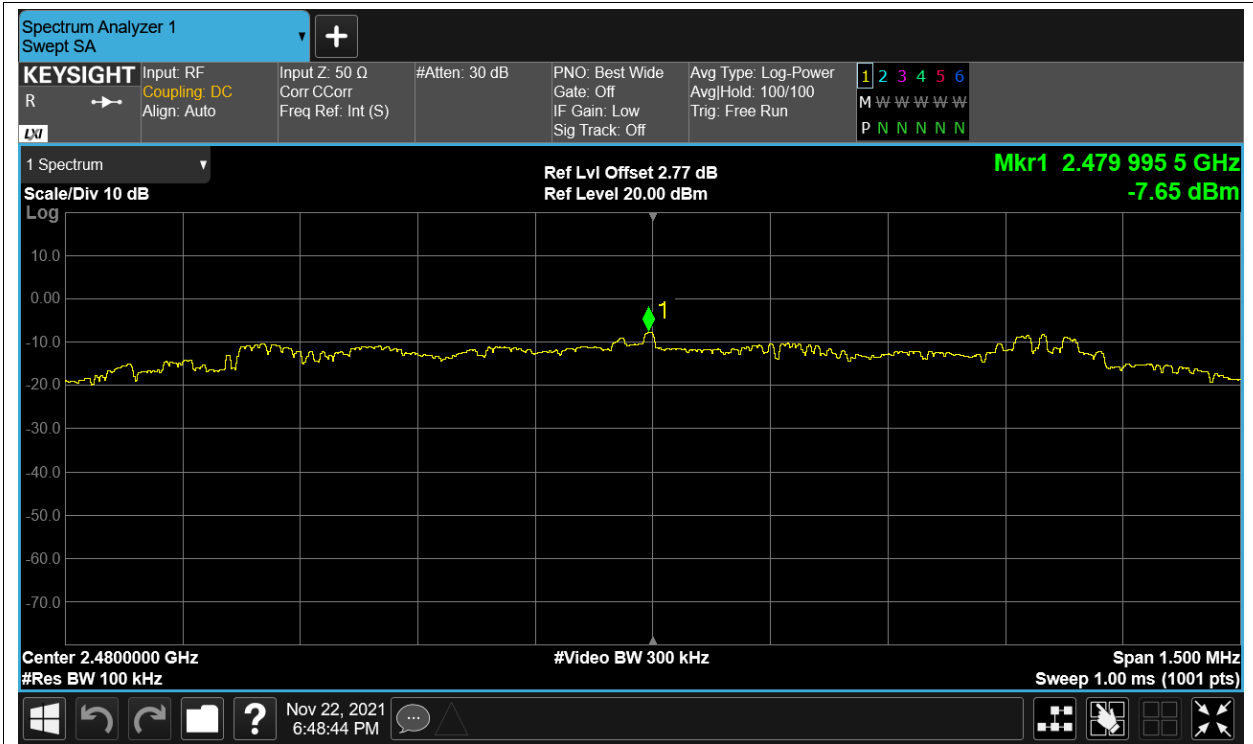

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

