



**Test Data****Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.847	0	-4.847	30	Pass
NVNT	BLE	2442	Ant1	-4.682	0	-4.682	30	Pass
NVNT	BLE	2480	Ant1	-6.863	0	-6.863	30	Pass

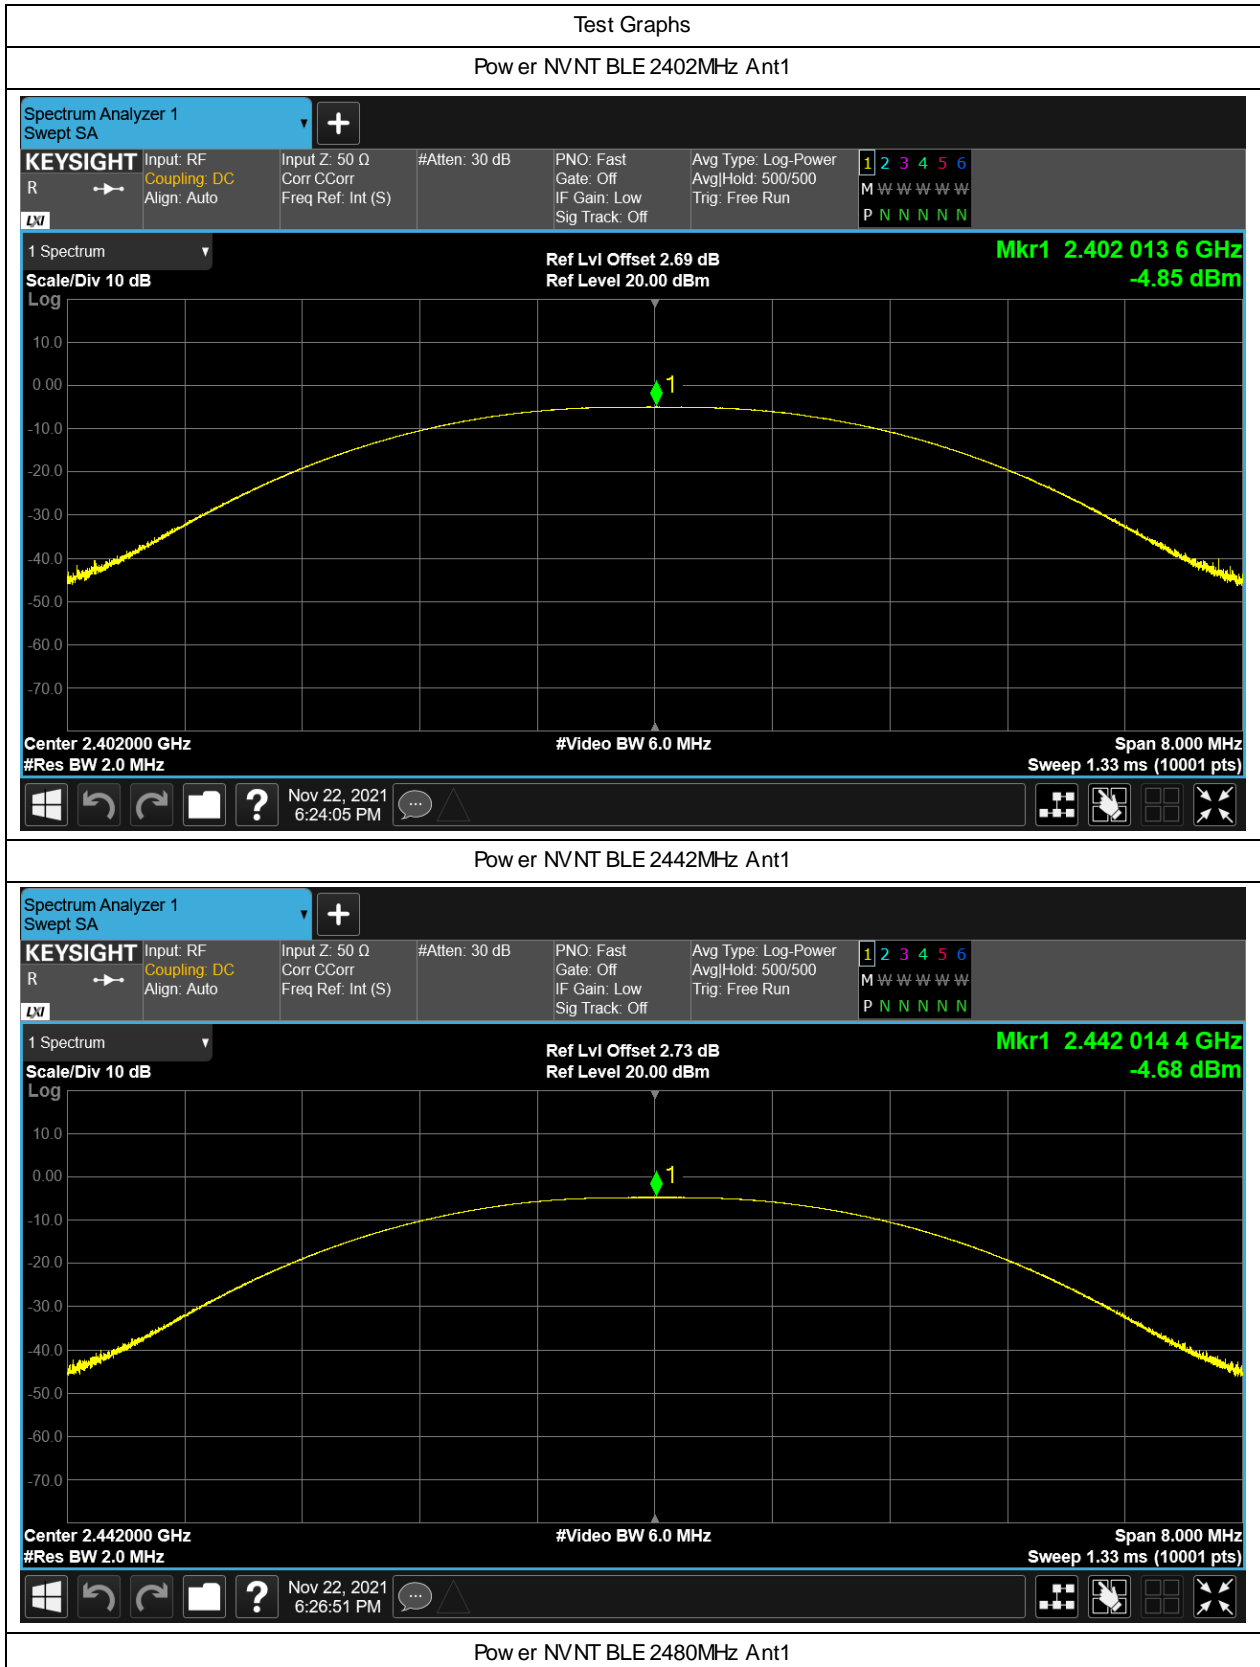


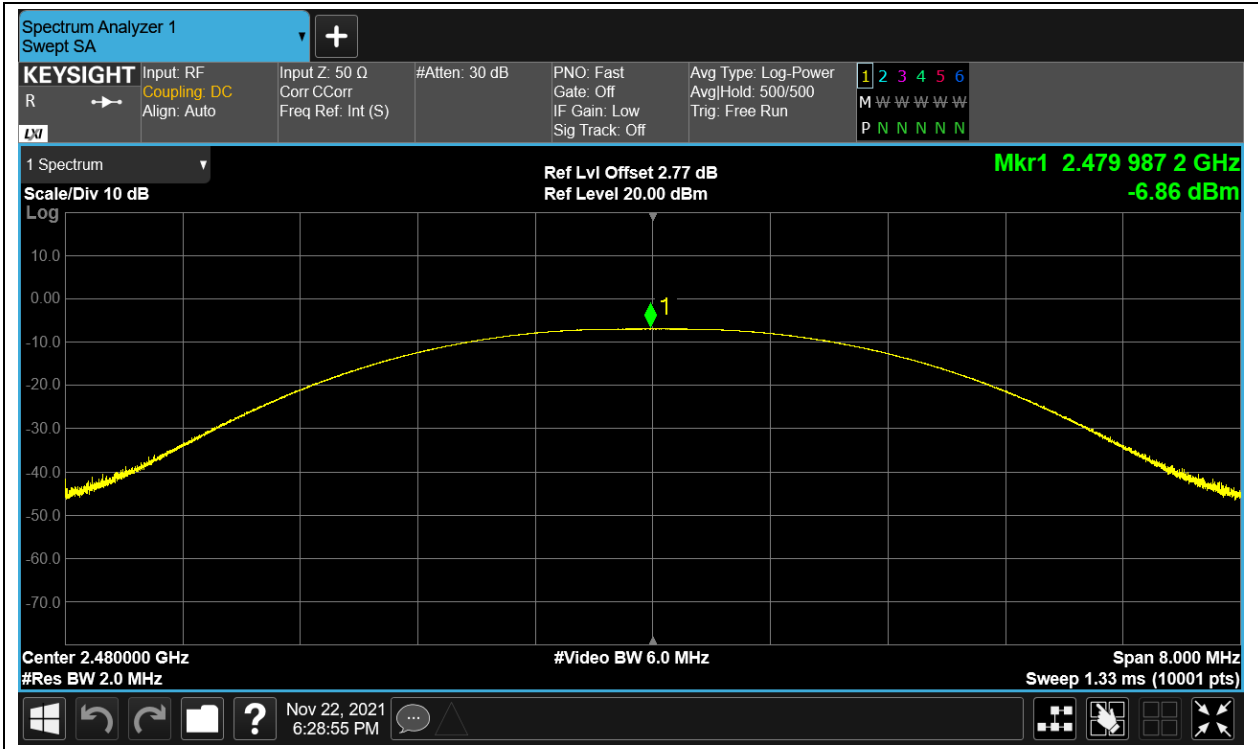

## -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.685	0.5	Pass
NVNT	BLE	2442	Ant1	0.684	0.5	Pass
NVNT	BLE	2480	Ant1	0.683	0.5	Pass

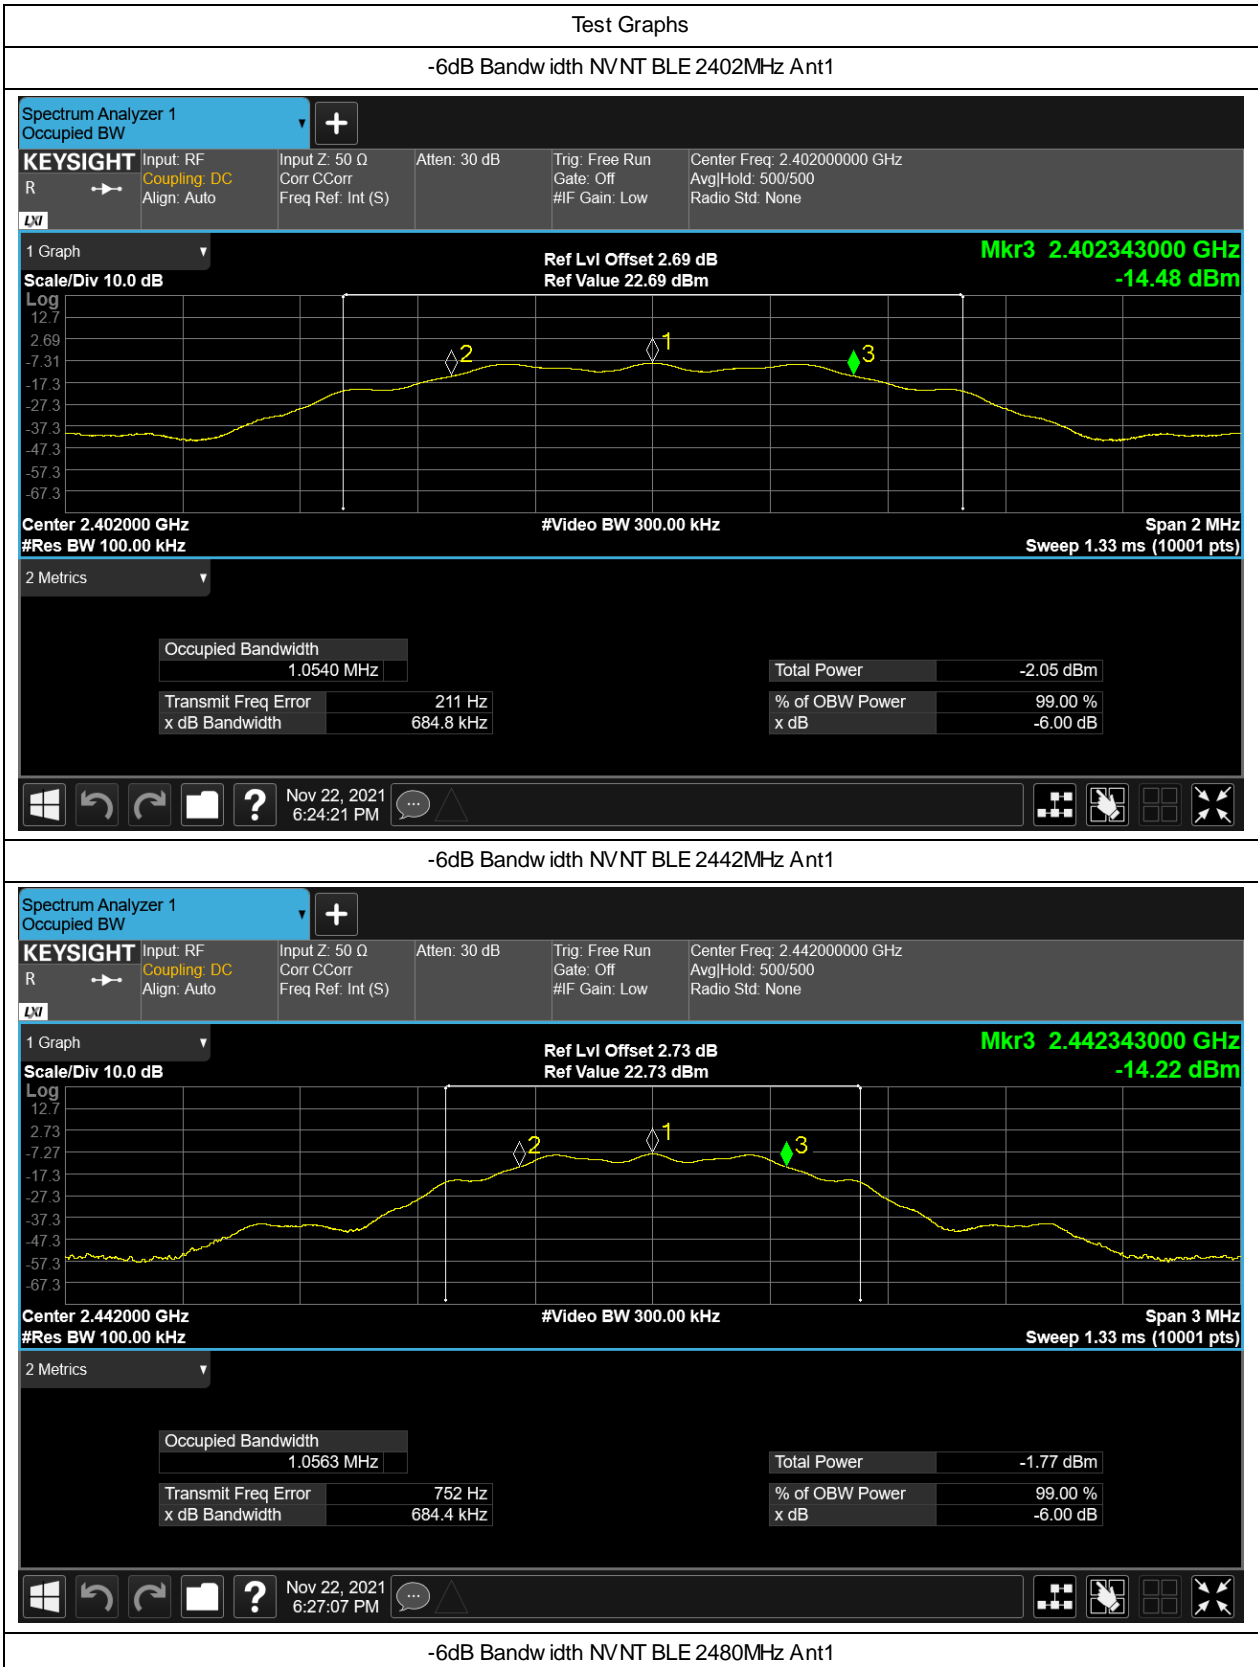

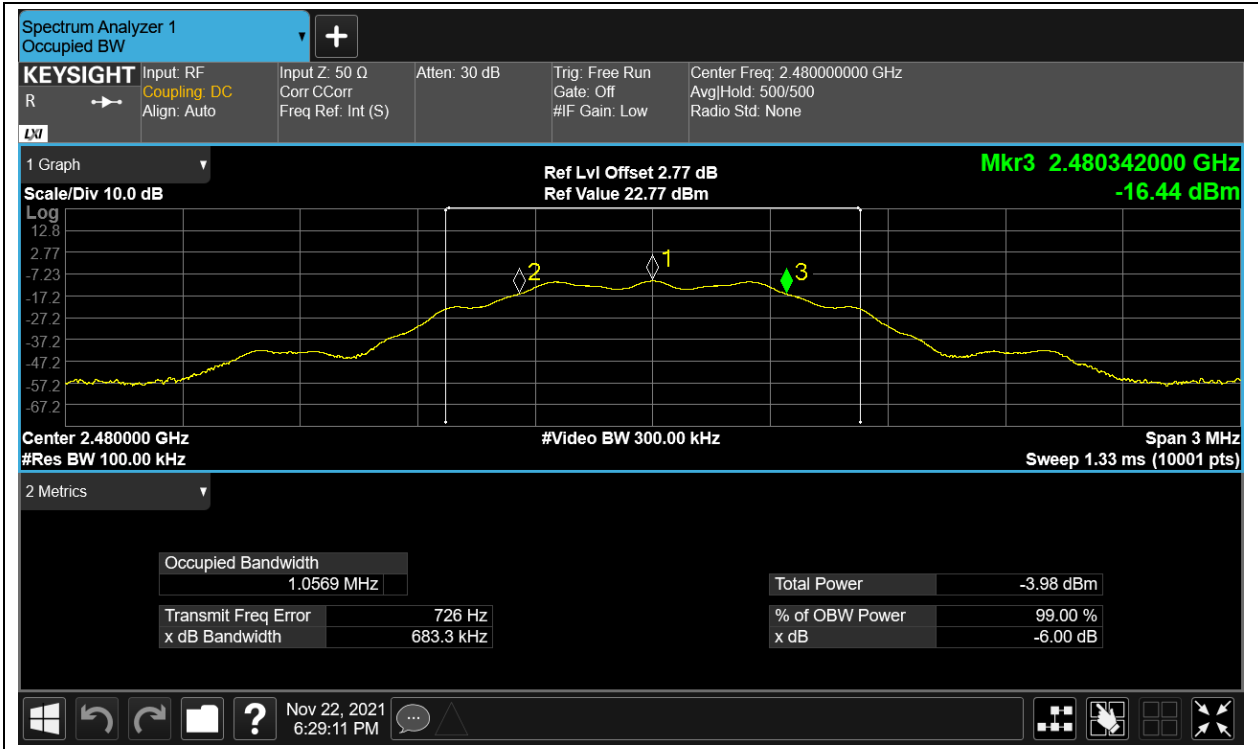

## Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.044859361
NVNT	BLE	2442	Ant1	1.054648158
NVNT	BLE	2480	Ant1	1.053392117








## Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-11.267	8	Pass
NVNT	BLE	2442	Ant1	-11.005	8	Pass
NVNT	BLE	2480	Ant1	-13.235	8	Pass

Test Graphs


PSD NV/NT BLE 2402MHz Ant1

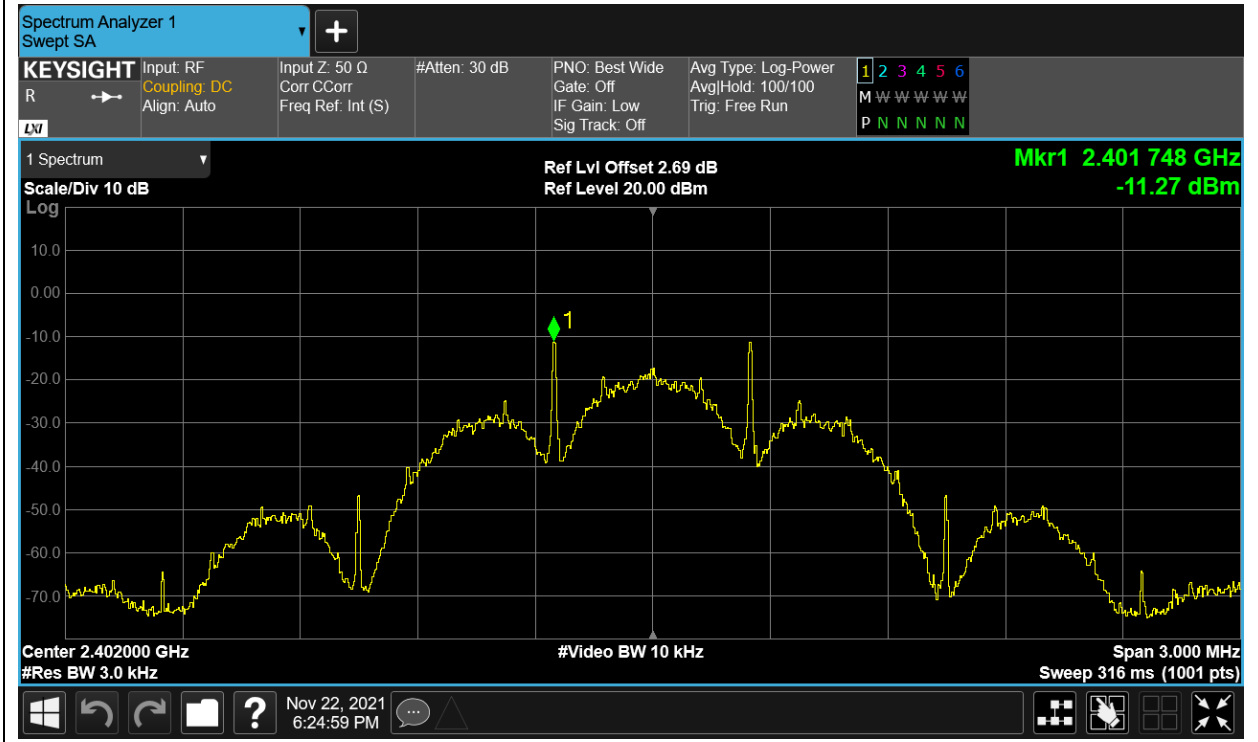

PSD NV/NT BLE 2442MHz Ant1

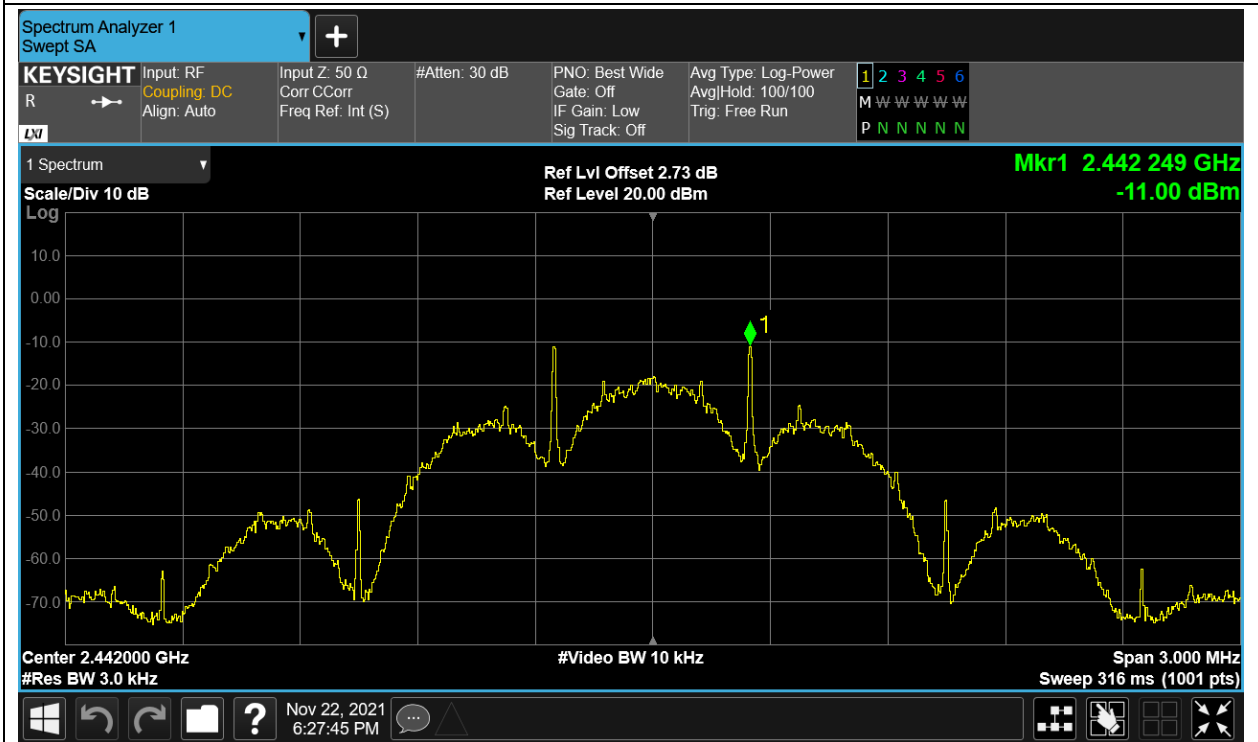



PSD NV/NT BLE 2480MHz Ant1

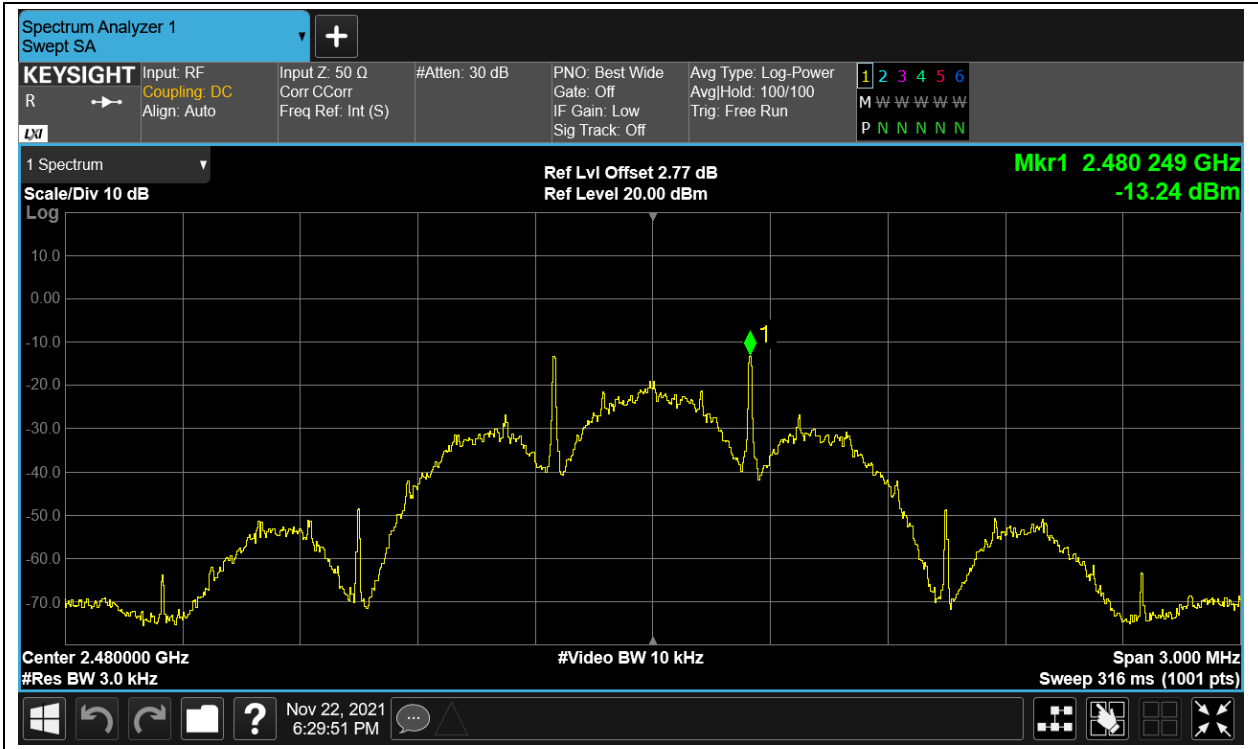


**Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-48.68	-20	Pass
NVNT	BLE	2480	Ant1	-46.22	-20	Pass

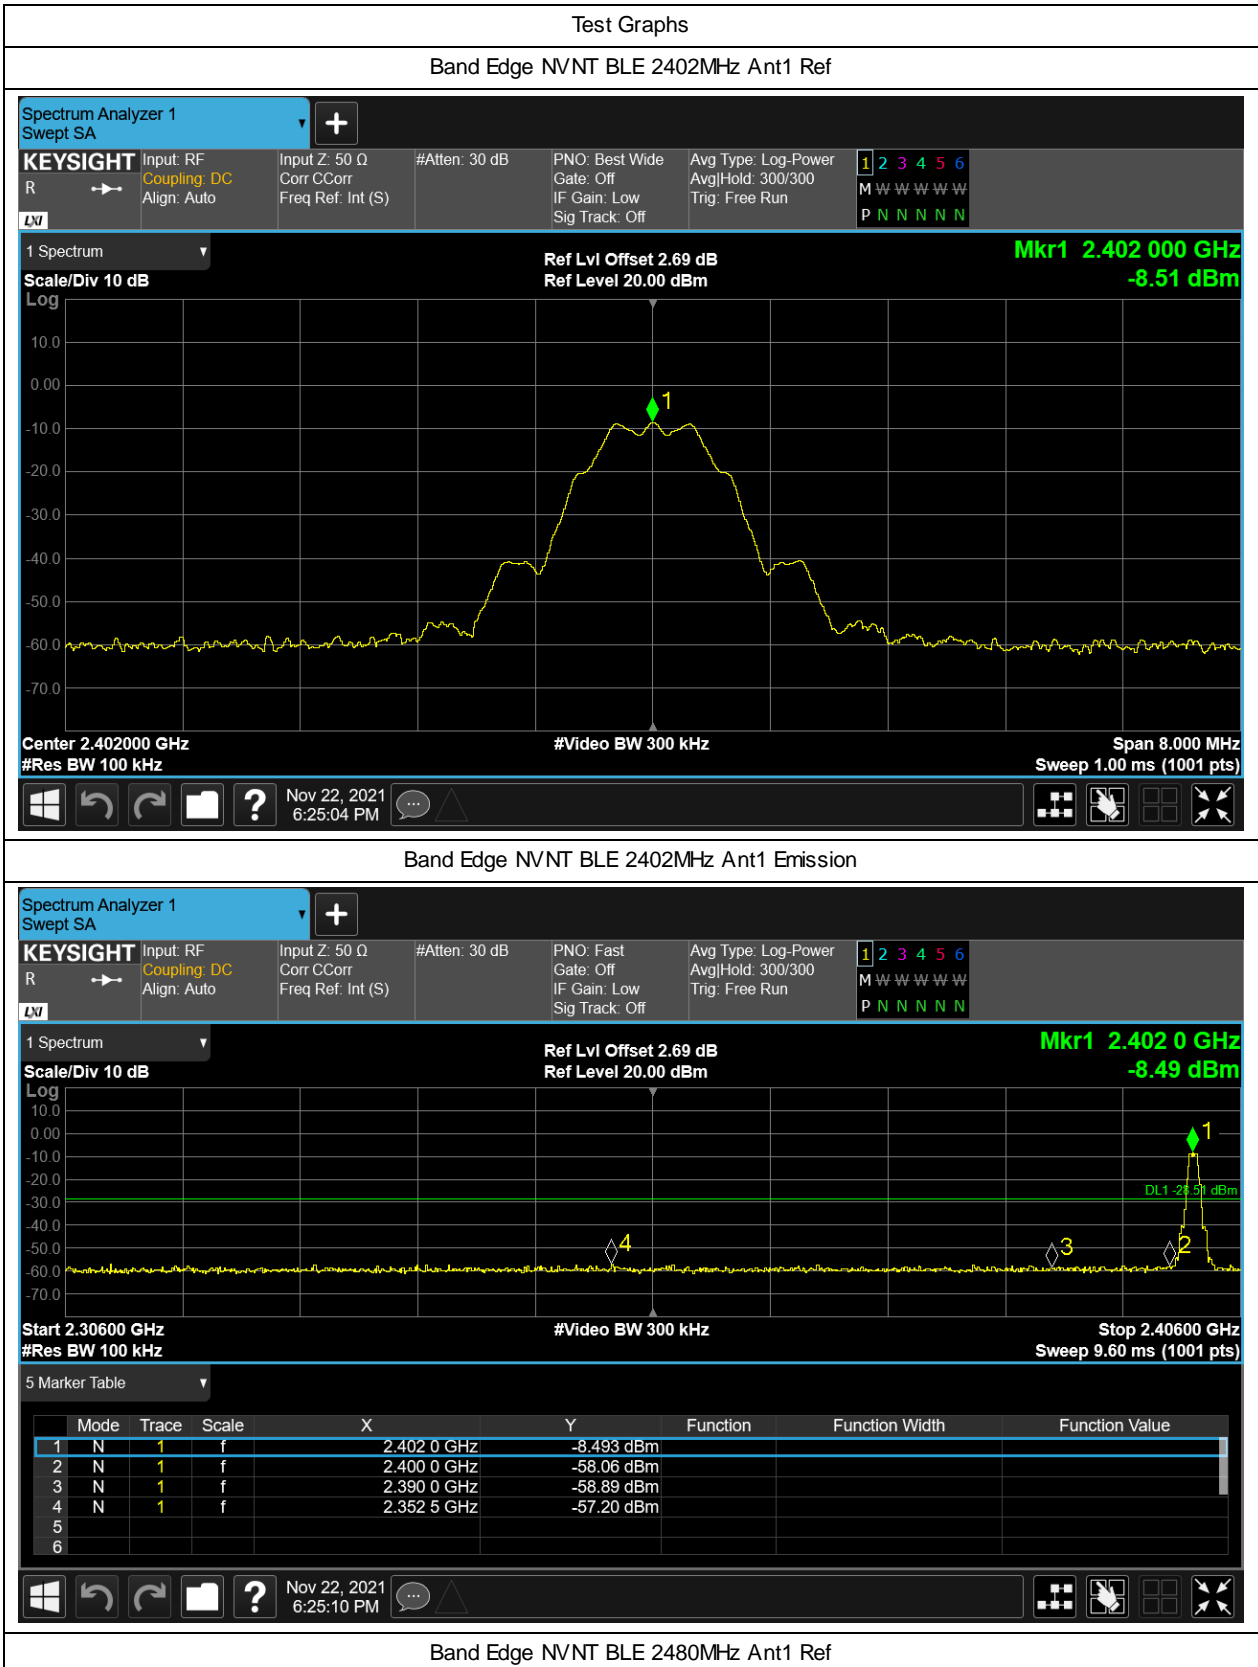

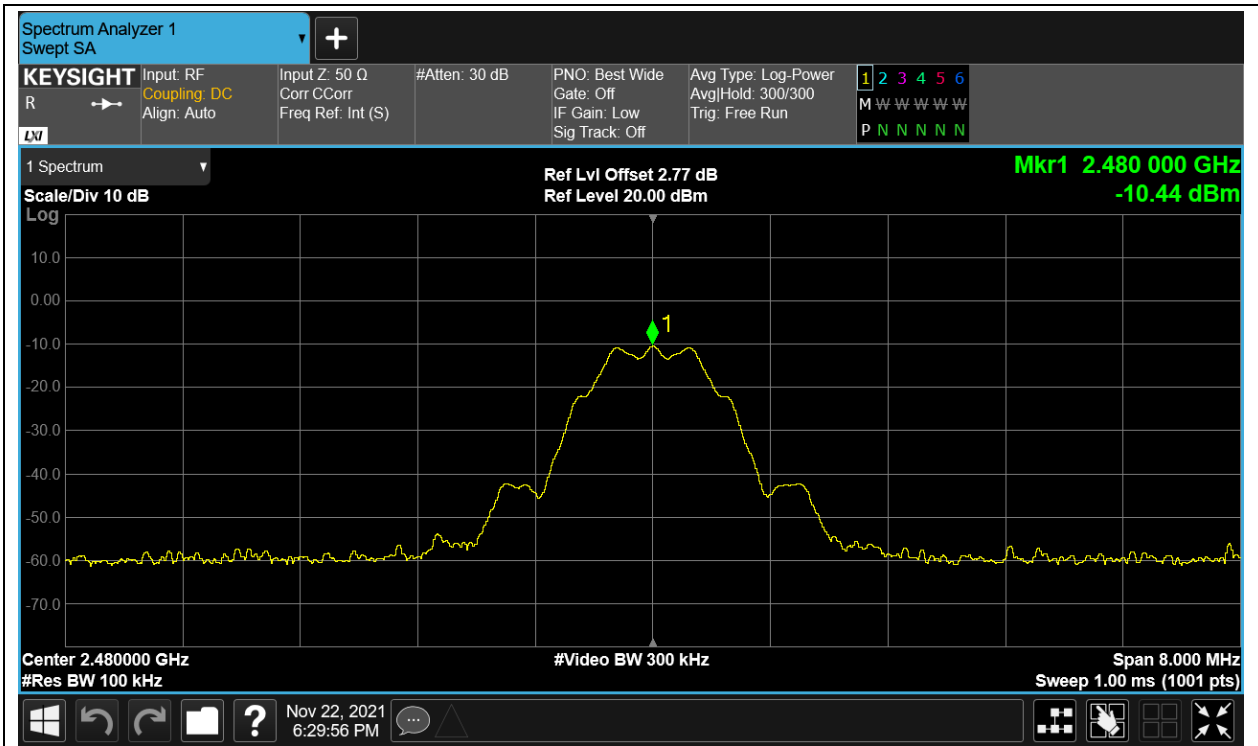



Band Edge NV/NT BLE 2480MHz Ant1 Emission

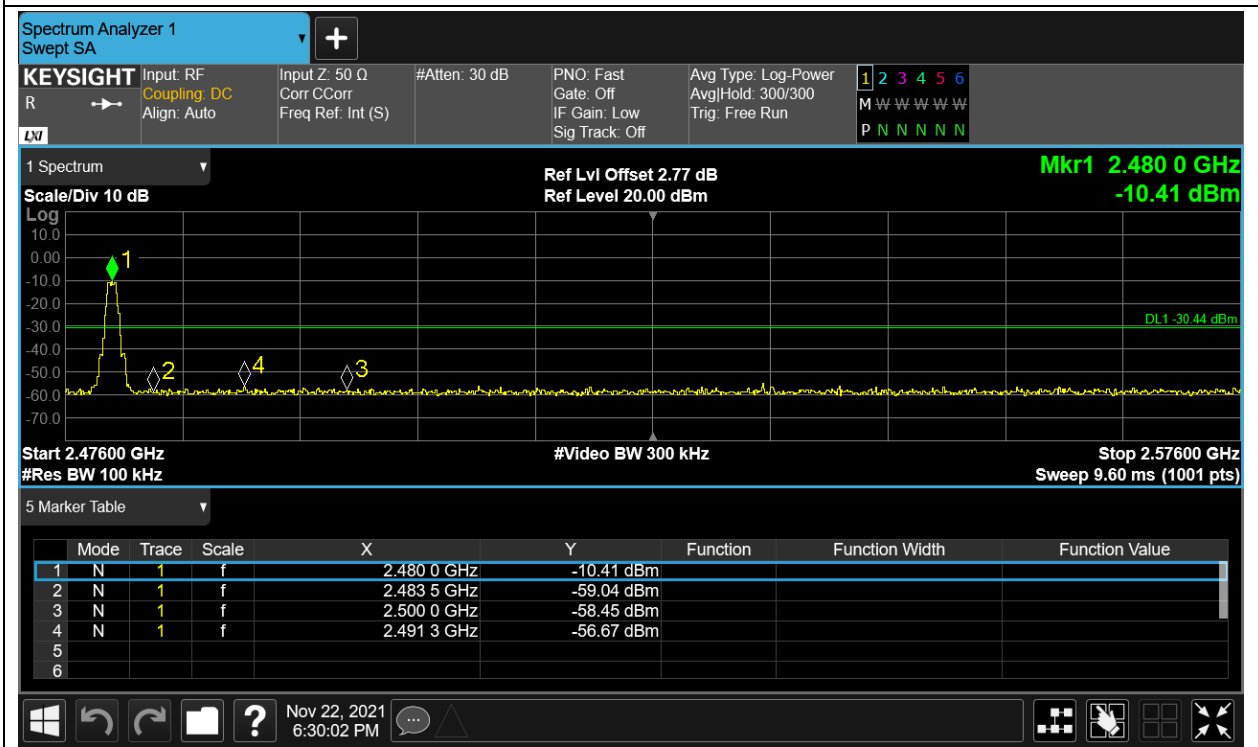


## Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.04	-20	Pass
NVNT	BLE	2442	Ant1	-42.48	-20	Pass
NVNT	BLE	2480	Ant1	-40.31	-20	Pass




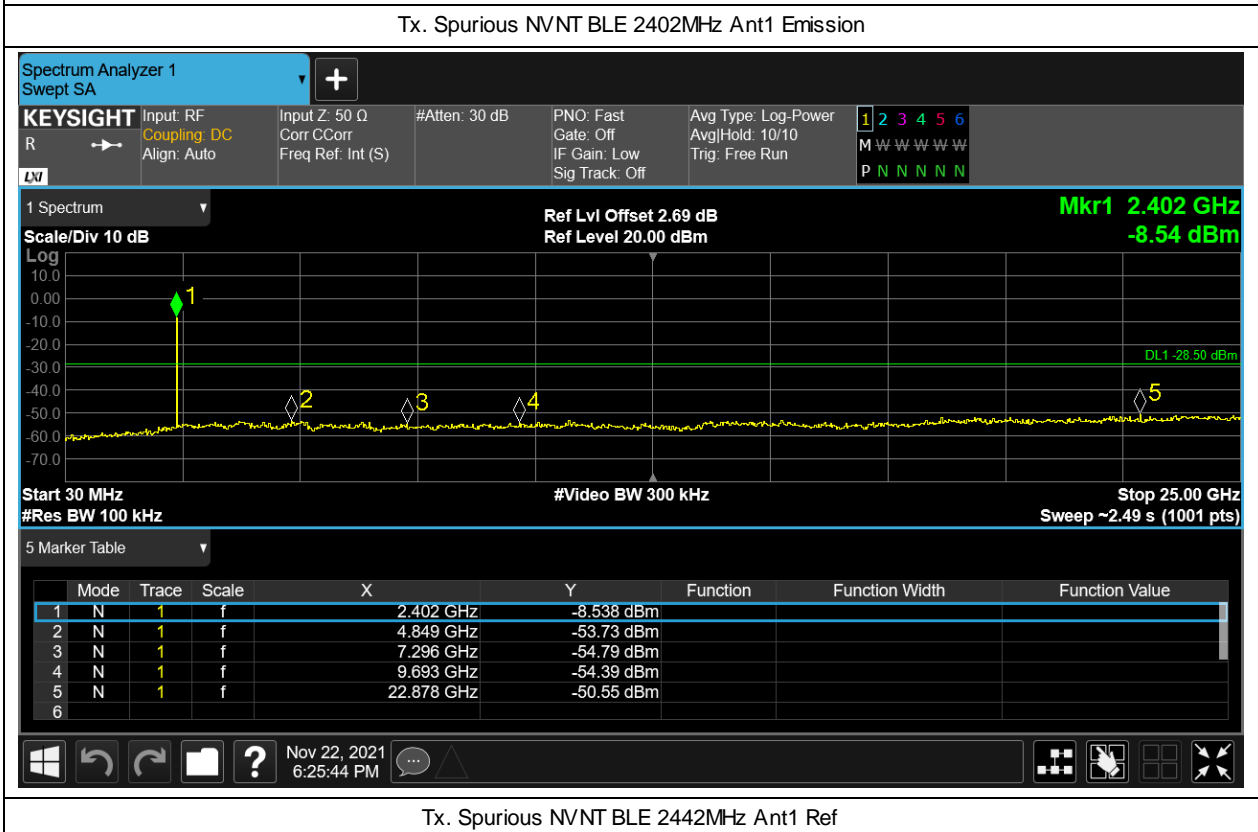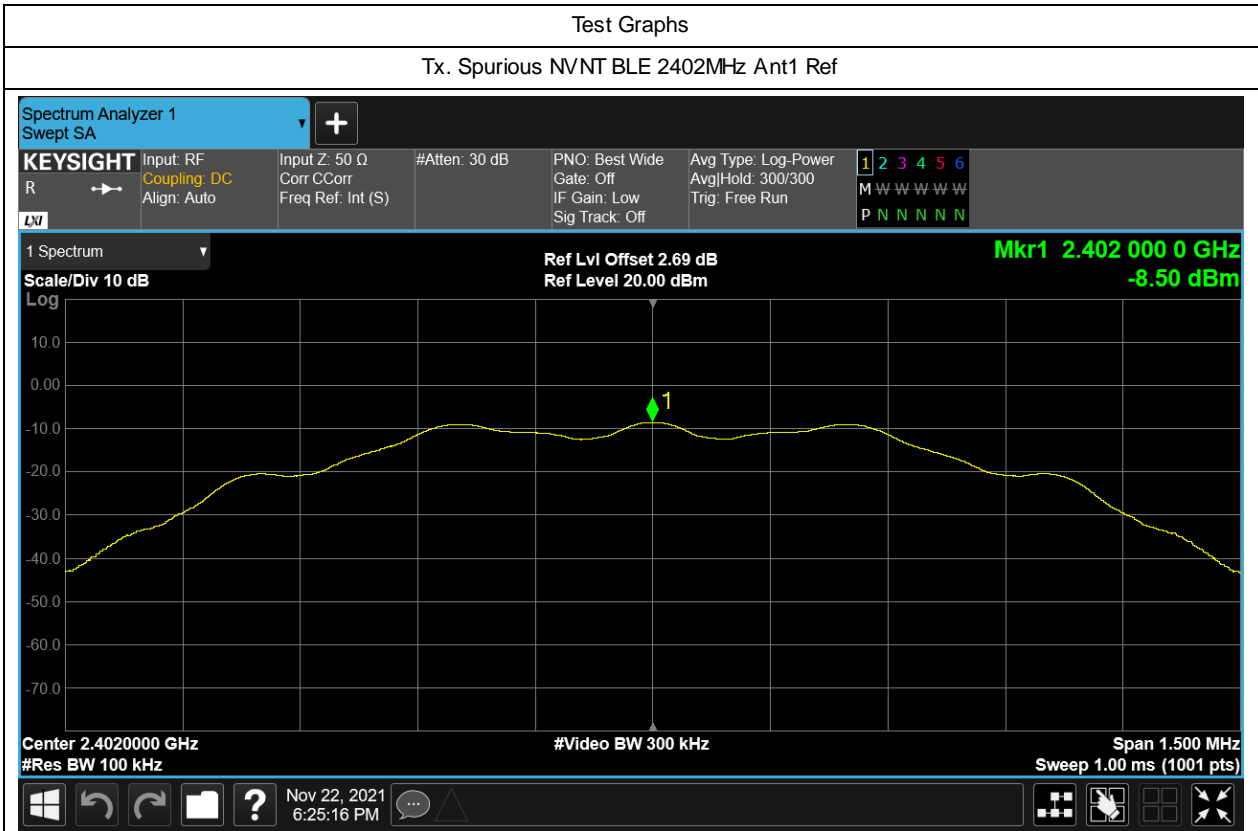


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

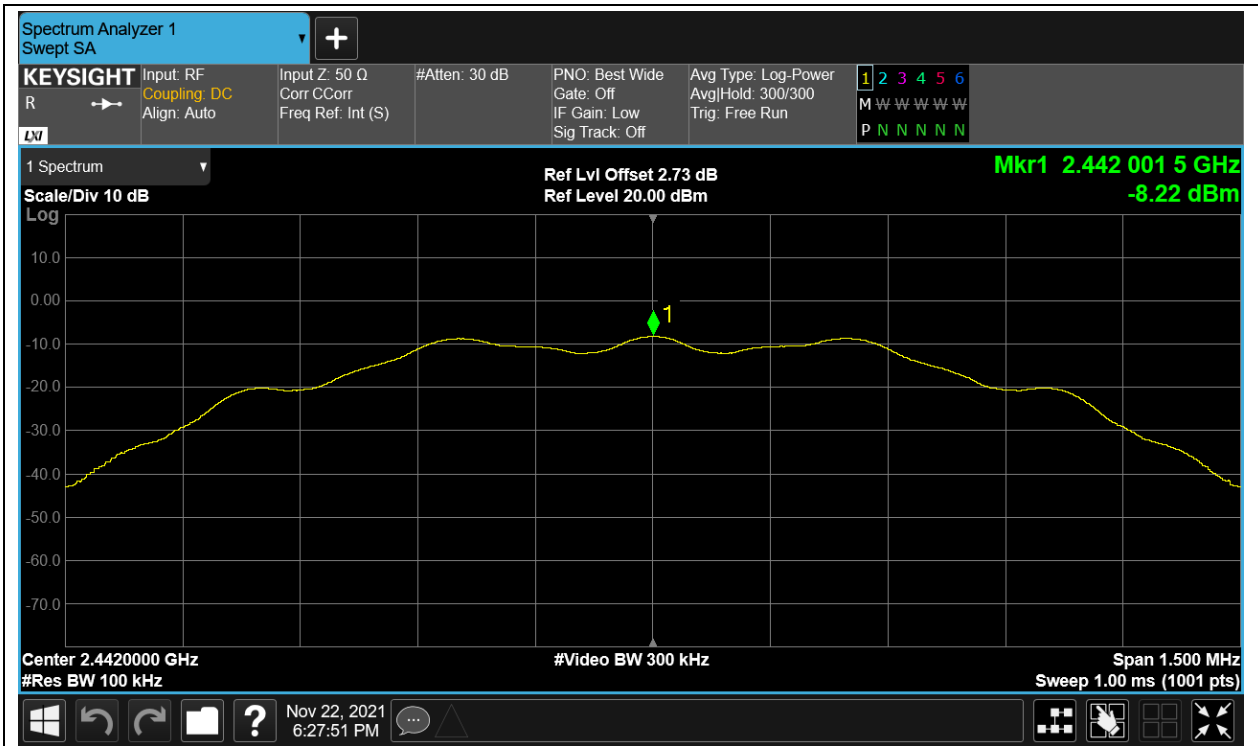

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

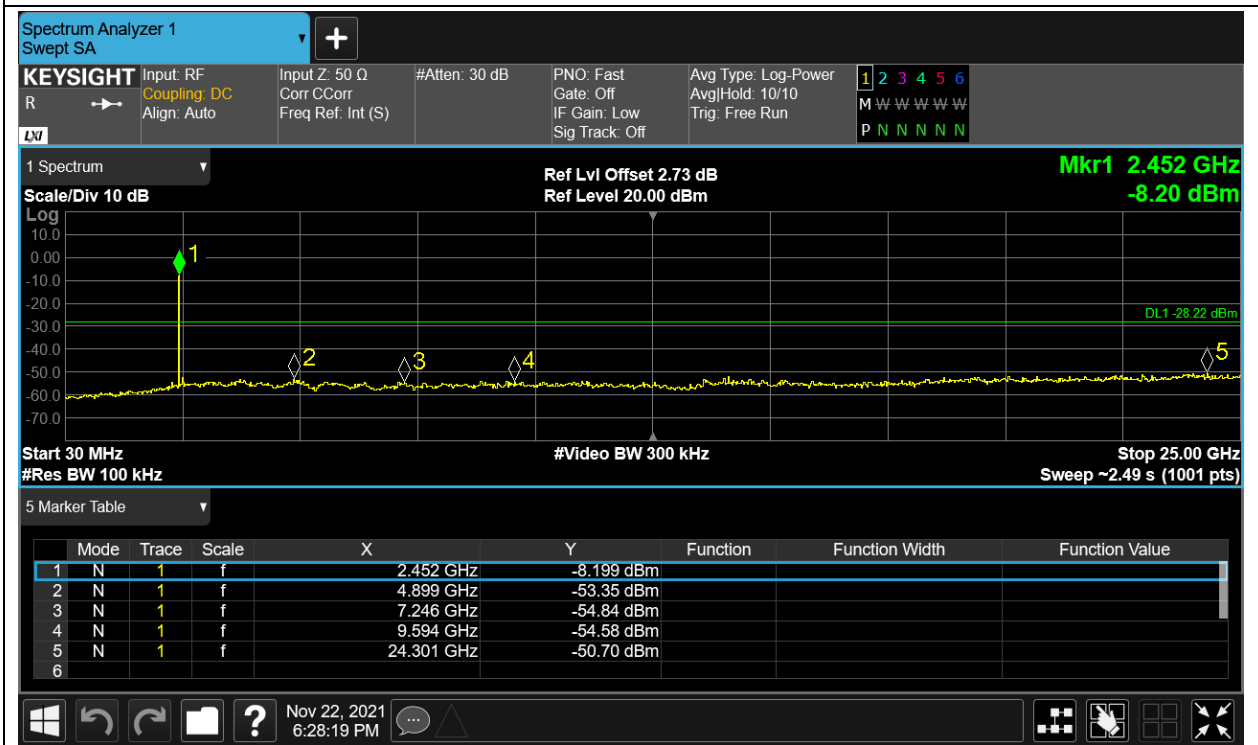

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

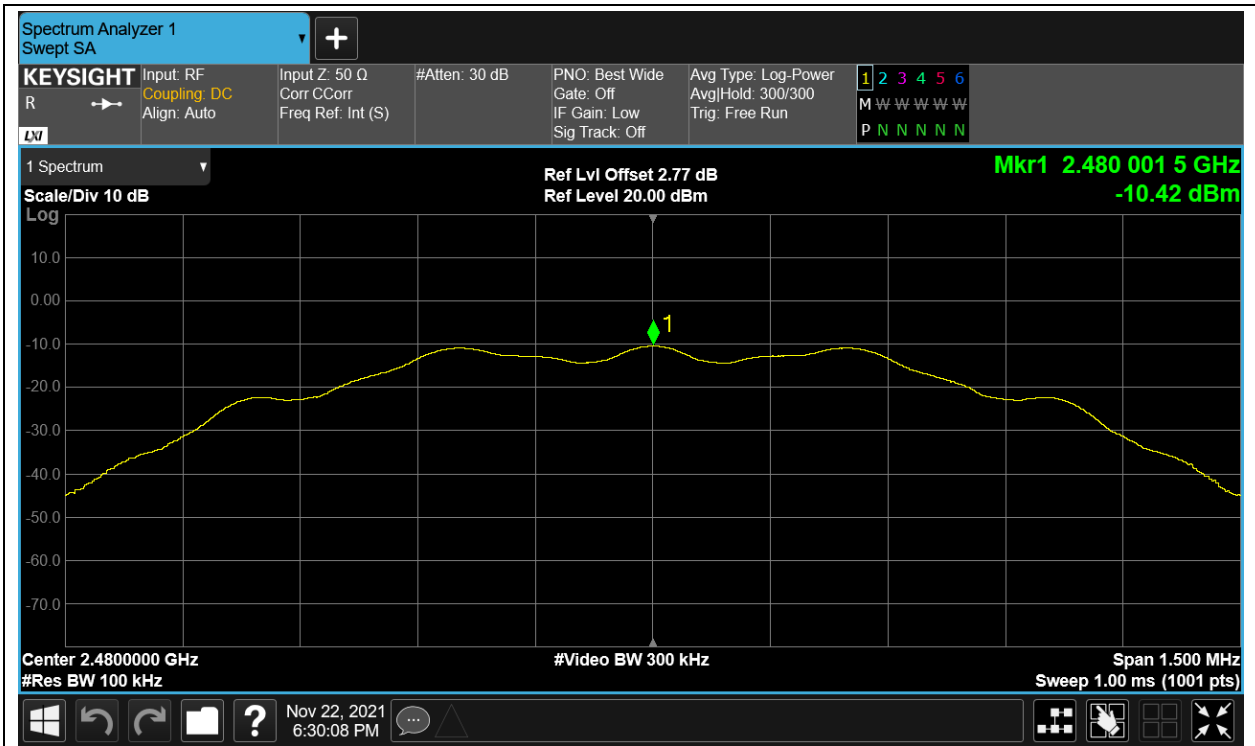

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

