




#### **Test Data**


# **Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	4.614	30	Pass
NVNT	BLE	2442	Ant12	4.885	30	Pass
NVNT	BLE	2478	Ant12	4.928	30	Pass



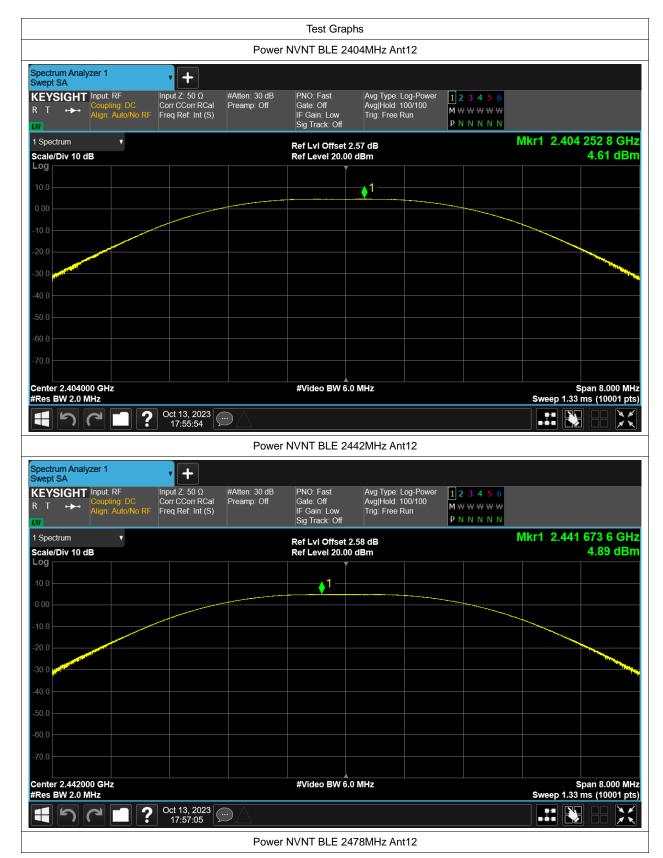



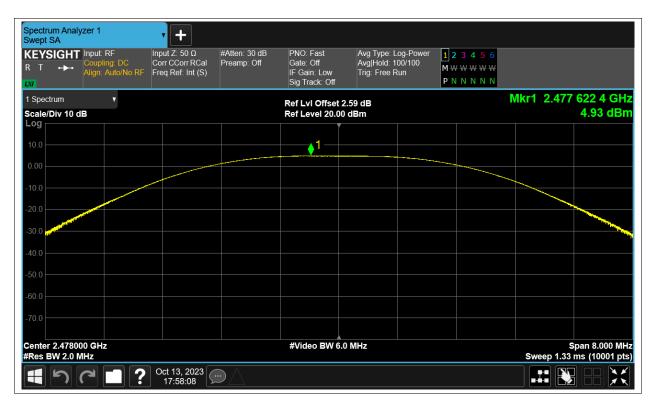

Tel: +86-755-23118282, Fax: +86-755-23116366





#### -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant12	1.137	0.5	Pass
NVNT	BLE	2442	Ant12	1.254	0.5	Pass
NVNT	BLE	2478	Ant12	1.213	0.5	Pass














## **Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2404	Ant12	2.054	
NVNT	BLE	2442	Ant12	2.064	
NVNT	BLE	2478	Ant12	2.061	

Project No.: JYTSZR2310020



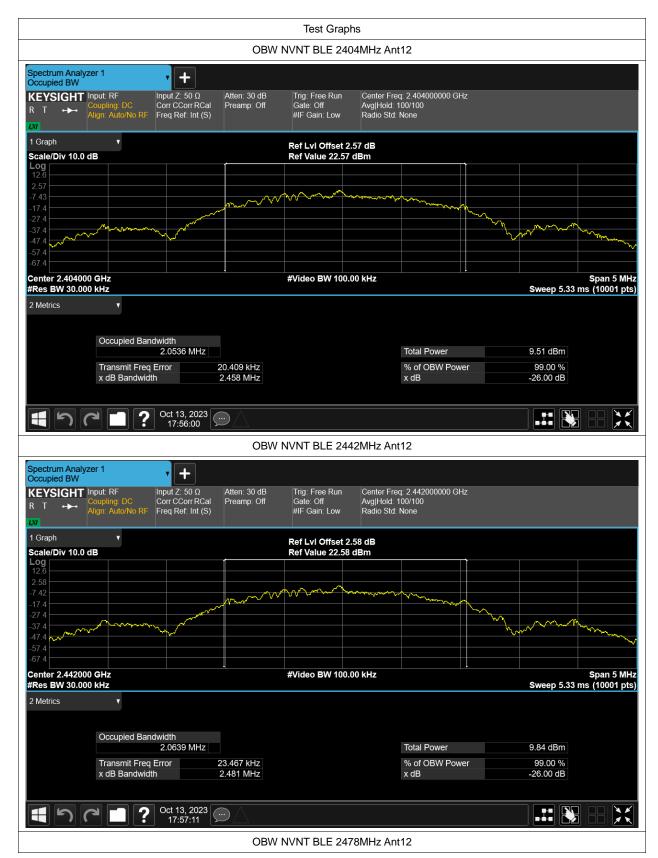





Tel: +86-755-23118282, Fax: +86-755-23116366







# **Maximum Power Spectral Density Level**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	-12.666	8	Pass
NVNT	BLE	2442	Ant12	-12.365	8	Pass
NVNT	BLE	2478	Ant12	-12.507	8	Pass



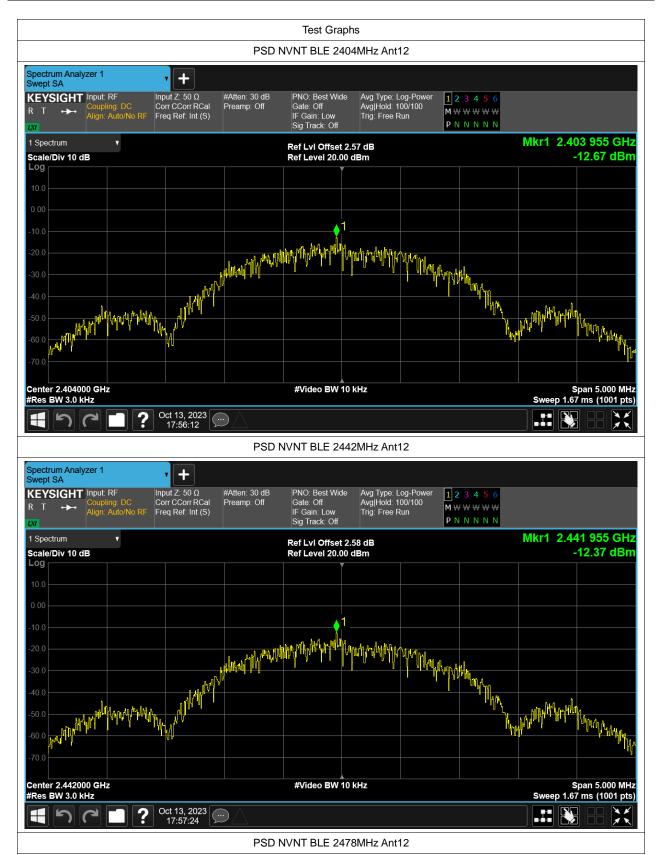



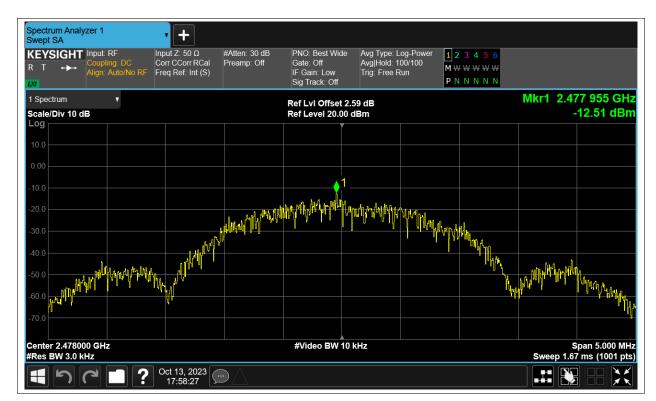

Tel: +86-755-23118282, Fax: +86-755-23116366





## **Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-60.42	-20	Pass
NVNT	BLE	2478	Ant12	-60.6	-20	Pass













# **Conducted RF Spurious Emission**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-51.25	-20	Pass
NVNT	BLE	2442	Ant12	-52.09	-20	Pass
NVNT	BLE	2478	Ant12	-50.83	-20	Pass







