

1 Conducted output power for NR FR1

| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Power (dBm) | Gain (dBm) | EIRP (dBm) | EIRP Limit (dBm) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|-------------|------------|------------|------------------|---------|
| n66 | 30 | 10 | 343000 | 12@6 | DFT_BPSK | 22.62 | -0.15 | 22.47 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | DFT_BPSK | 22.54 | -0.15 | 22.39 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | DFT_BPSK | 22.62 | -0.15 | 22.47 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | DFT_QPSK | 22.72 | -0.15 | 22.57 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | DFT_QPSK | 22.48 | -0.15 | 22.33 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | DFT_QPSK | 22.51 | -0.15 | 22.36 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | DFT_QAM16 | 21.71 | -0.15 | 21.56 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | DFT_QAM16 | 21.65 | -0.15 | 21.50 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | DFT_QAM16 | 21.60 | -0.15 | 21.45 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | DFT_QAM64 | 20.31 | -0.15 | 20.16 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | DFT_QAM64 | 20.45 | -0.15 | 20.30 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | DFT_QAM64 | 20.29 | -0.15 | 20.14 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | DFT_QAM256 | 18.20 | -0.15 | 18.05 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | DFT_QAM256 | 18.73 | -0.15 | 18.58 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | DFT_QAM256 | 18.72 | -0.15 | 18.57 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | CP_QPSK | 21.20 | -0.15 | 21.05 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | CP_QPSK | 21.11 | -0.15 | 20.96 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | CP_QPSK | 21.06 | -0.15 | 20.91 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | CP_QAM16 | 20.78 | -0.15 | 20.63 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | CP_QAM16 | 20.86 | -0.15 | 20.71 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | CP_QAM16 | 21.19 | -0.15 | 21.04 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | CP_QAM64 | 19.15 | -0.15 | 19.00 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | CP_QAM64 | 19.00 | -0.15 | 18.85 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | CP_QAM64 | 19.44 | -0.15 | 19.29 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 12@6 | CP_QAM256 | 16.28 | -0.15 | 16.13 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@1 | CP_QAM256 | 15.89 | -0.15 | 15.74 | 33 | PASS |
| n66 | 30 | 10 | 343000 | 1@22 | CP_QAM256 | 15.89 | -0.15 | 15.74 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | DFT_BPSK | 22.47 | -0.15 | 22.32 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | DFT_BPSK | 22.44 | -0.15 | 22.29 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | DFT_BPSK | 22.49 | -0.15 | 22.34 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | DFT_QPSK | 22.52 | -0.15 | 22.37 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | DFT_QPSK | 22.36 | -0.15 | 22.21 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | DFT_QPSK | 22.37 | -0.15 | 22.22 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | DFT_QAM16 | 21.58 | -0.15 | 21.43 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | DFT_QAM16 | 21.85 | -0.15 | 21.70 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | DFT_QAM16 | 21.57 | -0.15 | 21.42 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | DFT_QAM64 | 20.25 | -0.15 | 20.10 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | DFT_QAM64 | 20.40 | -0.15 | 20.25 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|------|------------|-------|-------|-------|----|------|
| n66 | 30 | 10 | 349000 | 1@22 | DFT_QAM64 | 20.34 | -0.15 | 20.19 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | DFT_QAM256 | 18.20 | -0.15 | 18.05 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | DFT_QAM256 | 18.04 | -0.15 | 17.89 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | DFT_QAM256 | 18.59 | -0.15 | 18.44 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | CP_QPSK | 21.06 | -0.15 | 20.91 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | CP_QPSK | 20.98 | -0.15 | 20.83 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | CP_QPSK | 21.15 | -0.15 | 21.00 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | CP_QAM16 | 20.62 | -0.15 | 20.47 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | CP_QAM16 | 20.86 | -0.15 | 20.71 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | CP_QAM16 | 21.04 | -0.15 | 20.89 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | CP_QAM64 | 19.03 | -0.15 | 18.88 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | CP_QAM64 | 19.08 | -0.15 | 18.93 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | CP_QAM64 | 19.36 | -0.15 | 19.21 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 12@6 | CP_QAM256 | 16.02 | -0.15 | 15.87 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@1 | CP_QAM256 | 15.83 | -0.15 | 15.68 | 33 | PASS |
| n66 | 30 | 10 | 349000 | 1@22 | CP_QAM256 | 15.83 | -0.15 | 15.68 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | DFT_BPSK | 22.52 | -0.15 | 22.37 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | DFT_BPSK | 22.37 | -0.15 | 22.22 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | DFT_BPSK | 22.45 | -0.15 | 22.30 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | DFT_QPSK | 22.56 | -0.15 | 22.41 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | DFT_QPSK | 22.29 | -0.15 | 22.14 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | DFT_QPSK | 22.36 | -0.15 | 22.21 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | DFT_QAM16 | 21.55 | -0.15 | 21.40 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | DFT_QAM16 | 21.76 | -0.15 | 21.61 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | DFT_QAM16 | 21.86 | -0.15 | 21.71 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | DFT_QAM64 | 20.27 | -0.15 | 20.12 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | DFT_QAM64 | 20.28 | -0.15 | 20.13 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | DFT_QAM64 | 20.27 | -0.15 | 20.12 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | DFT_QAM256 | 18.03 | -0.15 | 17.88 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | DFT_QAM256 | 18.49 | -0.15 | 18.34 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | DFT_QAM256 | 18.62 | -0.15 | 18.47 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | CP_QPSK | 21.09 | -0.15 | 20.94 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | CP_QPSK | 21.03 | -0.15 | 20.88 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | CP_QPSK | 21.10 | -0.15 | 20.95 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | CP_QAM16 | 20.71 | -0.15 | 20.56 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | CP_QAM16 | 20.87 | -0.15 | 20.72 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | CP_QAM16 | 20.87 | -0.15 | 20.72 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | CP_QAM64 | 19.20 | -0.15 | 19.05 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | CP_QAM64 | 18.77 | -0.15 | 18.62 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | CP_QAM64 | 18.90 | -0.15 | 18.75 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 12@6 | CP_QAM256 | 16.13 | -0.15 | 15.98 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@1 | CP_QAM256 | 15.80 | -0.15 | 15.65 | 33 | PASS |
| n66 | 30 | 10 | 355000 | 1@22 | CP_QAM256 | 16.31 | -0.15 | 16.16 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 18@9 | DFT_BPSK | 22.60 | -0.15 | 22.45 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|------|------------|-------|-------|-------|----|------|
| n66 | 30 | 15 | 343500 | 1@1 | DFT_BPSK | 22.54 | -0.15 | 22.39 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | DFT_BPSK | 22.43 | -0.15 | 22.28 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 18@9 | DFT_QPSK | 22.58 | -0.15 | 22.43 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | DFT_QPSK | 22.47 | -0.15 | 22.32 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | DFT_QPSK | 22.31 | -0.15 | 22.16 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 18@9 | DFT_QAM16 | 21.58 | -0.15 | 21.43 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | DFT_QAM16 | 21.55 | -0.15 | 21.40 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | DFT_QAM16 | 21.80 | -0.15 | 21.65 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 18@9 | DFT_QAM64 | 20.30 | -0.15 | 20.15 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | DFT_QAM64 | 20.03 | -0.15 | 19.88 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | DFT_QAM64 | 19.95 | -0.15 | 19.80 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 18@9 | DFT_QAM256 | 18.19 | -0.15 | 18.04 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | DFT_QAM256 | 18.15 | -0.15 | 18.00 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | DFT_QAM256 | 18.04 | -0.15 | 17.89 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 19@9 | CP_QPSK | 21.29 | -0.15 | 21.14 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | CP_QPSK | 21.08 | -0.15 | 20.93 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | CP_QPSK | 21.03 | -0.15 | 20.88 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 19@9 | CP_QAM16 | 20.78 | -0.15 | 20.63 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | CP_QAM16 | 20.98 | -0.15 | 20.83 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | CP_QAM16 | 20.84 | -0.15 | 20.69 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 19@9 | CP_QAM64 | 19.16 | -0.15 | 19.01 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | CP_QAM64 | 19.34 | -0.15 | 19.19 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | CP_QAM64 | 19.06 | -0.15 | 18.91 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 19@9 | CP_QAM256 | 16.16 | -0.15 | 16.01 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@1 | CP_QAM256 | 15.84 | -0.15 | 15.69 | 33 | PASS |
| n66 | 30 | 15 | 343500 | 1@36 | CP_QAM256 | 15.74 | -0.15 | 15.59 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 18@9 | DFT_BPSK | 22.51 | -0.15 | 22.36 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | DFT_BPSK | 22.44 | -0.15 | 22.29 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | DFT_BPSK | 22.41 | -0.15 | 22.26 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 18@9 | DFT_QPSK | 22.52 | -0.15 | 22.37 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | DFT_QPSK | 22.36 | -0.15 | 22.21 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | DFT_QPSK | 22.31 | -0.15 | 22.16 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 18@9 | DFT_QAM16 | 21.51 | -0.15 | 21.36 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | DFT_QAM16 | 21.48 | -0.15 | 21.33 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | DFT_QAM16 | 21.38 | -0.15 | 21.23 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 18@9 | DFT_QAM64 | 20.16 | -0.15 | 20.01 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | DFT_QAM64 | 20.15 | -0.15 | 20.00 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | DFT_QAM64 | 20.31 | -0.15 | 20.16 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 18@9 | DFT_QAM256 | 18.08 | -0.15 | 17.93 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | DFT_QAM256 | 18.25 | -0.15 | 18.10 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | DFT_QAM256 | 18.50 | -0.15 | 18.35 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 19@9 | CP_QPSK | 21.17 | -0.15 | 21.02 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | CP_QPSK | 20.82 | -0.15 | 20.67 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | CP_QPSK | 20.89 | -0.15 | 20.74 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|-------|------------|-------|-------|-------|----|------|
| n66 | 30 | 15 | 349000 | 19@9 | CP_QAM16 | 20.64 | -0.15 | 20.49 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | CP_QAM16 | 21.07 | -0.15 | 20.92 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | CP_QAM16 | 20.80 | -0.15 | 20.65 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 19@9 | CP_QAM64 | 19.12 | -0.15 | 18.97 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | CP_QAM64 | 19.19 | -0.15 | 19.04 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | CP_QAM64 | 19.21 | -0.15 | 19.06 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 19@9 | CP_QAM256 | 16.05 | -0.15 | 15.90 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@1 | CP_QAM256 | 15.79 | -0.15 | 15.64 | 33 | PASS |
| n66 | 30 | 15 | 349000 | 1@36 | CP_QAM256 | 16.16 | -0.15 | 16.01 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 18@9 | DFT_BPSK | 22.46 | -0.15 | 22.31 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | DFT_BPSK | 22.48 | -0.15 | 22.33 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | DFT_BPSK | 22.43 | -0.15 | 22.28 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 18@9 | DFT_QPSK | 22.42 | -0.15 | 22.27 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | DFT_QPSK | 22.24 | -0.15 | 22.09 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | DFT_QPSK | 22.30 | -0.15 | 22.15 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 18@9 | DFT_QAM16 | 21.45 | -0.15 | 21.30 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | DFT_QAM16 | 21.63 | -0.15 | 21.48 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | DFT_QAM16 | 21.80 | -0.15 | 21.65 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 18@9 | DFT_QAM64 | 20.21 | -0.15 | 20.06 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | DFT_QAM64 | 19.89 | -0.15 | 19.74 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | DFT_QAM64 | 20.31 | -0.15 | 20.16 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 18@9 | DFT_QAM256 | 18.07 | -0.15 | 17.92 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | DFT_QAM256 | 17.93 | -0.15 | 17.78 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | DFT_QAM256 | 18.58 | -0.15 | 18.43 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 19@9 | CP_QPSK | 21.10 | -0.15 | 20.95 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | CP_QPSK | 21.04 | -0.15 | 20.89 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | CP_QPSK | 21.05 | -0.15 | 20.90 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 19@9 | CP_QAM16 | 20.58 | -0.15 | 20.43 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | CP_QAM16 | 20.88 | -0.15 | 20.73 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | CP_QAM16 | 20.95 | -0.15 | 20.80 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 19@9 | CP_QAM64 | 19.11 | -0.15 | 18.96 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | CP_QAM64 | 19.23 | -0.15 | 19.08 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | CP_QAM64 | 19.03 | -0.15 | 18.88 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 19@9 | CP_QAM256 | 15.96 | -0.15 | 15.81 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@1 | CP_QAM256 | 16.19 | -0.15 | 16.04 | 33 | PASS |
| n66 | 30 | 15 | 354500 | 1@36 | CP_QAM256 | 16.28 | -0.15 | 16.13 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | DFT_BPSK | 22.56 | -0.15 | 22.41 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | DFT_BPSK | 22.48 | -0.15 | 22.33 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | DFT_BPSK | 22.38 | -0.15 | 22.23 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | DFT_QPSK | 22.59 | -0.15 | 22.44 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | DFT_QPSK | 22.36 | -0.15 | 22.21 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | DFT_QPSK | 22.30 | -0.15 | 22.15 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | DFT_QAM16 | 21.59 | -0.15 | 21.44 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | DFT_QAM16 | 21.53 | -0.15 | 21.38 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|-------|------------|-------|-------|-------|----|------|
| n66 | 30 | 20 | 344000 | 1@49 | DFT_QAM16 | 21.38 | -0.15 | 21.23 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | DFT_QAM64 | 20.25 | -0.15 | 20.10 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | DFT_QAM64 | 20.31 | -0.15 | 20.16 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | DFT_QAM64 | 19.89 | -0.15 | 19.74 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | DFT_QAM256 | 18.13 | -0.15 | 17.98 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | DFT_QAM256 | 18.64 | -0.15 | 18.49 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | DFT_QAM256 | 17.92 | -0.15 | 17.77 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | CP_QPSK | 21.26 | -0.15 | 21.11 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | CP_QPSK | 20.96 | -0.15 | 20.81 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | CP_QPSK | 20.87 | -0.15 | 20.72 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | CP_QAM16 | 20.83 | -0.15 | 20.68 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | CP_QAM16 | 20.72 | -0.15 | 20.57 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | CP_QAM16 | 20.77 | -0.15 | 20.62 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | CP_QAM64 | 19.23 | -0.15 | 19.08 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | CP_QAM64 | 19.33 | -0.15 | 19.18 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | CP_QAM64 | 18.95 | -0.15 | 18.80 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 25@12 | CP_QAM256 | 16.12 | -0.15 | 15.97 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@1 | CP_QAM256 | 16.31 | -0.15 | 16.16 | 33 | PASS |
| n66 | 30 | 20 | 344000 | 1@49 | CP_QAM256 | 15.69 | -0.15 | 15.54 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | DFT_BPSK | 22.53 | -0.15 | 22.38 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | DFT_BPSK | 22.32 | -0.15 | 22.17 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | DFT_BPSK | 22.30 | -0.15 | 22.15 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | DFT_QPSK | 22.49 | -0.15 | 22.34 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | DFT_QPSK | 22.22 | -0.15 | 22.07 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | DFT_QPSK | 22.17 | -0.15 | 22.02 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | DFT_QAM16 | 21.49 | -0.15 | 21.34 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | DFT_QAM16 | 21.35 | -0.15 | 21.20 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | DFT_QAM16 | 21.70 | -0.15 | 21.55 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | DFT_QAM64 | 20.21 | -0.15 | 20.06 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | DFT_QAM64 | 20.06 | -0.15 | 19.91 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | DFT_QAM64 | 19.99 | -0.15 | 19.84 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | DFT_QAM256 | 18.10 | -0.15 | 17.95 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | DFT_QAM256 | 18.42 | -0.15 | 18.27 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | DFT_QAM256 | 18.36 | -0.15 | 18.21 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | CP_QPSK | 21.11 | -0.15 | 20.96 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | CP_QPSK | 20.76 | -0.15 | 20.61 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | CP_QPSK | 20.79 | -0.15 | 20.64 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | CP_QAM16 | 20.70 | -0.15 | 20.55 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | CP_QAM16 | 20.94 | -0.15 | 20.79 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | CP_QAM16 | 20.68 | -0.15 | 20.53 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | CP_QAM64 | 19.18 | -0.15 | 19.03 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@1 | CP_QAM64 | 19.09 | -0.15 | 18.94 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | CP_QAM64 | 19.08 | -0.15 | 18.93 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 25@12 | CP_QAM256 | 15.93 | -0.15 | 15.78 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|-------|------------|-------|-------|-------|----|------|
| n66 | 30 | 20 | 349000 | 1@1 | CP_QAM256 | 16.12 | -0.15 | 15.97 | 33 | PASS |
| n66 | 30 | 20 | 349000 | 1@49 | CP_QAM256 | 16.06 | -0.15 | 15.91 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | DFT_BPSK | 22.45 | -0.15 | 22.30 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | DFT_BPSK | 22.39 | -0.15 | 22.24 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | DFT_BPSK | 22.44 | -0.15 | 22.29 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | DFT_QPSK | 22.47 | -0.15 | 22.32 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | DFT_QPSK | 22.24 | -0.15 | 22.09 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | DFT_QPSK | 22.23 | -0.15 | 22.08 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | DFT_QAM16 | 21.41 | -0.15 | 21.26 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | DFT_QAM16 | 21.75 | -0.15 | 21.60 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | DFT_QAM16 | 21.40 | -0.15 | 21.25 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | DFT_QAM64 | 20.11 | -0.15 | 19.96 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | DFT_QAM64 | 20.19 | -0.15 | 20.04 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | DFT_QAM64 | 20.26 | -0.15 | 20.11 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | DFT_QAM256 | 18.00 | -0.15 | 17.85 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | DFT_QAM256 | 18.43 | -0.15 | 18.28 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | DFT_QAM256 | 18.47 | -0.15 | 18.32 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | CP_QPSK | 21.07 | -0.15 | 20.92 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | CP_QPSK | 20.84 | -0.15 | 20.69 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | CP_QPSK | 20.87 | -0.15 | 20.72 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | CP_QAM16 | 20.74 | -0.15 | 20.59 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | CP_QAM16 | 20.72 | -0.15 | 20.57 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | CP_QAM16 | 20.80 | -0.15 | 20.65 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | CP_QAM64 | 19.11 | -0.15 | 18.96 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | CP_QAM64 | 18.80 | -0.15 | 18.65 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | CP_QAM64 | 19.18 | -0.15 | 19.03 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 25@12 | CP_QAM256 | 15.93 | -0.15 | 15.78 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@1 | CP_QAM256 | 15.62 | -0.15 | 15.47 | 33 | PASS |
| n66 | 30 | 20 | 354000 | 1@49 | CP_QAM256 | 15.76 | -0.15 | 15.61 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 50@25 | DFT_BPSK | 22.40 | -0.15 | 22.25 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | DFT_BPSK | 22.18 | -0.15 | 22.03 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | DFT_BPSK | 22.16 | -0.15 | 22.01 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 50@25 | DFT_QPSK | 22.48 | -0.15 | 22.33 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | DFT_QPSK | 22.07 | -0.15 | 21.92 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | DFT_QPSK | 21.93 | -0.15 | 21.78 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 50@25 | DFT_QAM16 | 21.51 | -0.15 | 21.36 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | DFT_QAM16 | 21.52 | -0.15 | 21.37 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | DFT_QAM16 | 21.38 | -0.15 | 21.23 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 50@25 | DFT_QAM64 | 20.12 | -0.15 | 19.97 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | DFT_QAM64 | 19.94 | -0.15 | 19.79 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | DFT_QAM64 | 19.92 | -0.15 | 19.77 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 50@25 | DFT_QAM256 | 18.11 | -0.15 | 17.96 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | DFT_QAM256 | 17.81 | -0.15 | 17.66 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | DFT_QAM256 | 17.74 | -0.15 | 17.59 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|-------|------------|-------|-------|-------|----|------|
| n66 | 30 | 40 | 346000 | 53@26 | CP_QPSK | 20.97 | -0.15 | 20.82 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | CP_QPSK | 20.53 | -0.15 | 20.38 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | CP_QPSK | 20.66 | -0.15 | 20.51 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 53@26 | CP_QAM16 | 20.52 | -0.15 | 20.37 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | CP_QAM16 | 20.41 | -0.15 | 20.26 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | CP_QAM16 | 20.48 | -0.15 | 20.33 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 53@26 | CP_QAM64 | 19.05 | -0.15 | 18.90 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | CP_QAM64 | 18.70 | -0.15 | 18.55 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | CP_QAM64 | 18.90 | -0.15 | 18.75 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 53@26 | CP_QAM256 | 16.00 | -0.15 | 15.85 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@1 | CP_QAM256 | 15.34 | -0.15 | 15.19 | 33 | PASS |
| n66 | 30 | 40 | 346000 | 1@104 | CP_QAM256 | 15.38 | -0.15 | 15.23 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 22.49 | -0.15 | 22.34 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | DFT_BPSK | 22.15 | -0.15 | 22.00 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | DFT_BPSK | 22.15 | -0.15 | 22.00 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 22.46 | -0.15 | 22.31 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | DFT_QPSK | 21.92 | -0.15 | 21.77 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | DFT_QPSK | 22.04 | -0.15 | 21.89 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QAM16 | 21.56 | -0.15 | 21.41 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | DFT_QAM16 | 21.64 | -0.15 | 21.49 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | DFT_QAM16 | 21.42 | -0.15 | 21.27 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QAM64 | 20.07 | -0.15 | 19.92 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | DFT_QAM64 | 19.87 | -0.15 | 19.72 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | DFT_QAM64 | 19.88 | -0.15 | 19.73 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QAM256 | 17.98 | -0.15 | 17.83 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | DFT_QAM256 | 17.67 | -0.15 | 17.52 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | DFT_QAM256 | 18.37 | -0.15 | 18.22 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 53@26 | CP_QPSK | 21.01 | -0.15 | 20.86 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | CP_QPSK | 20.42 | -0.15 | 20.27 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | CP_QPSK | 20.55 | -0.15 | 20.40 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 53@26 | CP_QAM16 | 20.60 | -0.15 | 20.45 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | CP_QAM16 | 20.55 | -0.15 | 20.40 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | CP_QAM16 | 20.58 | -0.15 | 20.43 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 53@26 | CP_QAM64 | 19.14 | -0.15 | 18.99 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | CP_QAM64 | 18.54 | -0.15 | 18.39 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | CP_QAM64 | 18.55 | -0.15 | 18.40 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 53@26 | CP_QAM256 | 16.03 | -0.15 | 15.88 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@1 | CP_QAM256 | 15.75 | -0.15 | 15.60 | 33 | PASS |
| n66 | 30 | 40 | 349000 | 1@104 | CP_QAM256 | 15.85 | -0.15 | 15.70 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 50@25 | DFT_BPSK | 22.38 | -0.15 | 22.23 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | DFT_BPSK | 22.19 | -0.15 | 22.04 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | DFT_BPSK | 22.13 | -0.15 | 21.98 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 50@25 | DFT_QPSK | 22.45 | -0.15 | 22.30 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | DFT_QPSK | 21.93 | -0.15 | 21.78 | 33 | PASS |

| | | | | | | | | | | |
|-----|----|----|--------|-------|------------|-------|-------|-------|----|------|
| n66 | 30 | 40 | 352000 | 1@104 | DFT_QPSK | 21.96 | -0.15 | 21.81 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 50@25 | DFT_QAM16 | 21.44 | -0.15 | 21.29 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | DFT_QAM16 | 21.34 | -0.15 | 21.19 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | DFT_QAM16 | 21.41 | -0.15 | 21.26 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 50@25 | DFT_QAM64 | 20.07 | -0.15 | 19.92 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | DFT_QAM64 | 19.80 | -0.15 | 19.65 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | DFT_QAM64 | 19.84 | -0.15 | 19.69 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 50@25 | DFT_QAM256 | 18.07 | -0.15 | 17.92 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | DFT_QAM256 | 17.59 | -0.15 | 17.44 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | DFT_QAM256 | 17.73 | -0.15 | 17.58 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 53@26 | CP_QPSK | 20.98 | -0.15 | 20.83 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | CP_QPSK | 20.45 | -0.15 | 20.30 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | CP_QPSK | 20.65 | -0.15 | 20.50 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 53@26 | CP_QAM16 | 20.55 | -0.15 | 20.40 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | CP_QAM16 | 20.33 | -0.15 | 20.18 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | CP_QAM16 | 20.68 | -0.15 | 20.53 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 53@26 | CP_QAM64 | 19.08 | -0.15 | 18.93 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | CP_QAM64 | 18.46 | -0.15 | 18.31 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | CP_QAM64 | 18.55 | -0.15 | 18.40 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 53@26 | CP_QAM256 | 15.94 | -0.15 | 15.79 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@1 | CP_QAM256 | 15.28 | -0.15 | 15.13 | 33 | PASS |
| n66 | 30 | 40 | 352000 | 1@104 | CP_QAM256 | 15.41 | -0.15 | 15.26 | 33 | PASS |

2 Frequency stability for NR FR1

NT:

| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Voltage (Vdc) | Result(Hz) | Result (ppm) | Limit (ppm) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|---------------|------------|--------------|--------------------------------------|---------|
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 3.89 | -3.19 | 0.00 | Within authorized band for 5G NR n66 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 3.45 | -6.46 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 4.48 | -6.09 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 3.89 | -1.79 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 3.45 | -11.06 | -0.01 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 4.48 | -4.92 | 0.00 | | PASS |

Note: Only the worst case shown in the report.

NV:


| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Temperature(°C) | Result(Hz) | Result (ppm) | Limit (ppm) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|-----------------|------------|--------------|--------------------------------------|---------|
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | -30 | -2.46 | 0.00 | Within authorized band for 5G NR n66 | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | -20 | -2.98 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | -10 | -1.91 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 0 | -3.99 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 10 | -4.62 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 20 | -3.44 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 30 | -2.99 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 40 | -6.57 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_BPSK | 50 | -5.49 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | -30 | -3.96 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | -20 | -6.87 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | -10 | -6.16 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 0 | -3.34 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 10 | -3.51 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 20 | -6.93 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 30 | -4.61 | 0.00 | | PASS |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 40 | -7.01 | 0.00 | PASS | |
| n66 | 30 | 40 | 349000 | 50@25 | DFT_QPSK | 50 | -3.8 | 0.00 | PASS | |

Note: Only the worst case shown in the report.


3 Peak-to-Average Ratio for NR FR1

| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Result (dB) | high Limit (dB) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|-------------|-----------------|---------|
| n66 | 30 | 10 | 349000 | 24@0 | DFT_BPSK | 4.80 | 13 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QPSK | 5.80 | 13 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM16 | 6.48 | 13 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM64 | 6.74 | 13 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM256 | 7.18 | 13 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_BPSK | 4.78 | 13 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QPSK | 5.92 | 13 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM16 | 6.60 | 13 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM64 | 6.90 | 13 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM256 | 7.22 | 13 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_BPSK | 4.74 | 13 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QPSK | 6.05 | 13 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM16 | 6.72 | 13 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM64 | 6.94 | 13 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM256 | 7.11 | 13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_BPSK | 4.73 | 13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QPSK | 5.74 | 13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM16 | 6.59 | 13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM64 | 6.86 | 13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM256 | 7.02 | 13 | PASS |


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=349000 RB=24@0

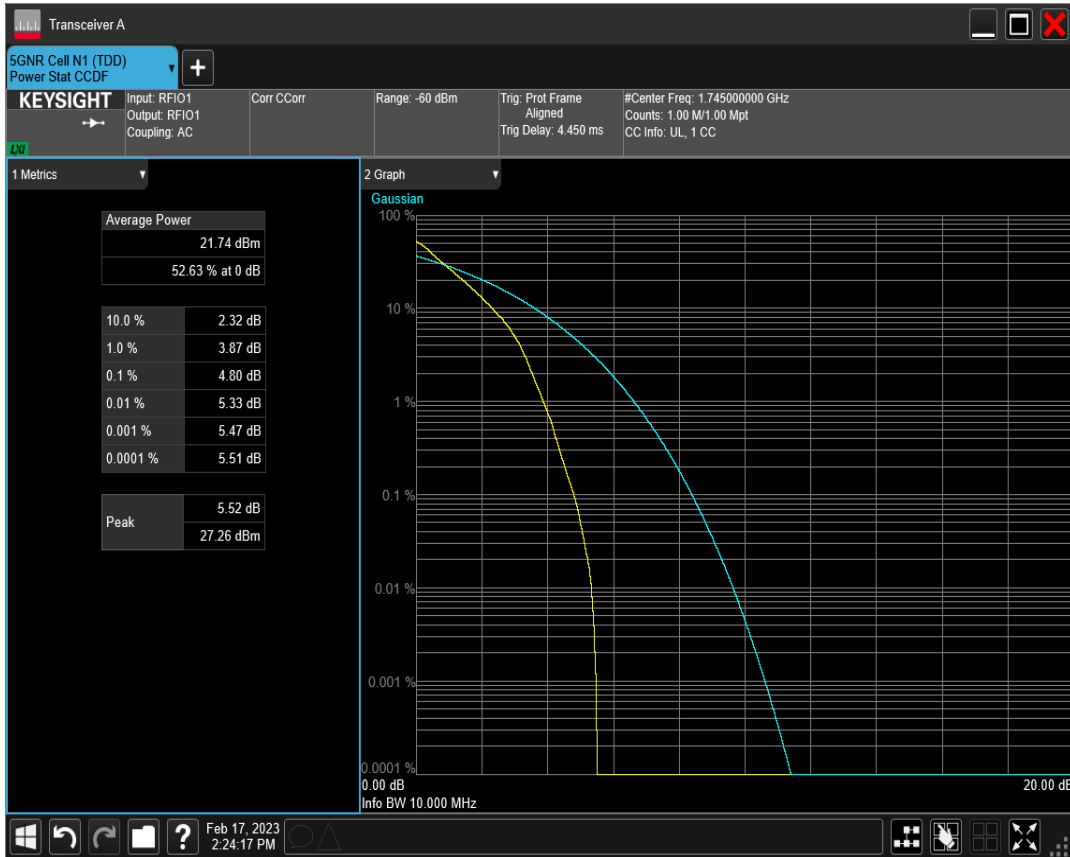


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=349000 RB=24@0

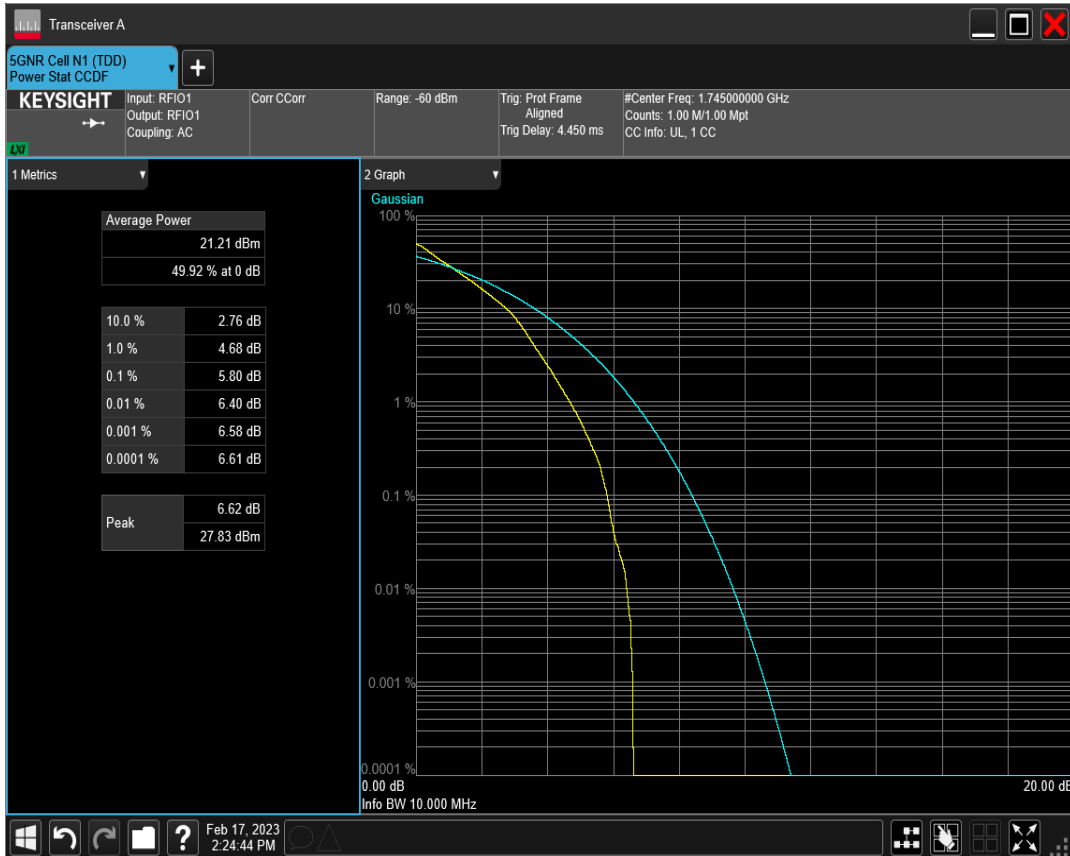


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=349000 RB=24@0

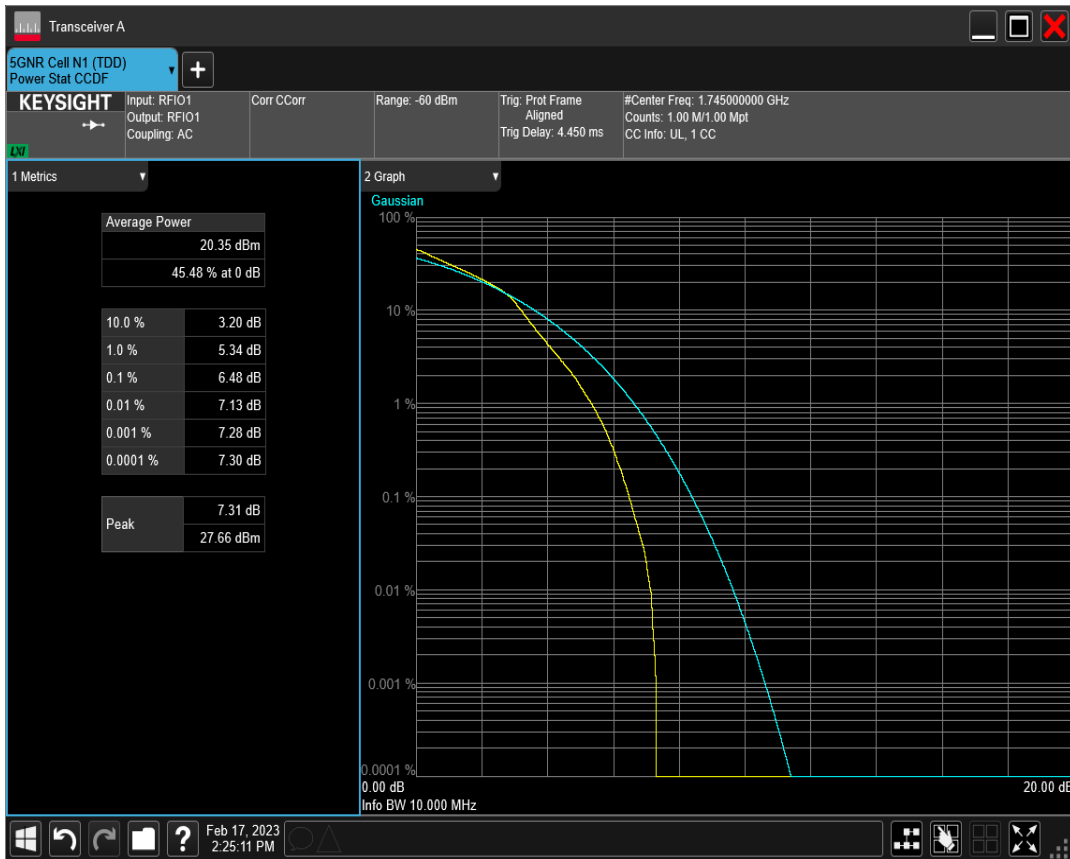


n66 SCS=30kHz DFT_QAM64 BW=10MHz Channel=349000 RB=24@0

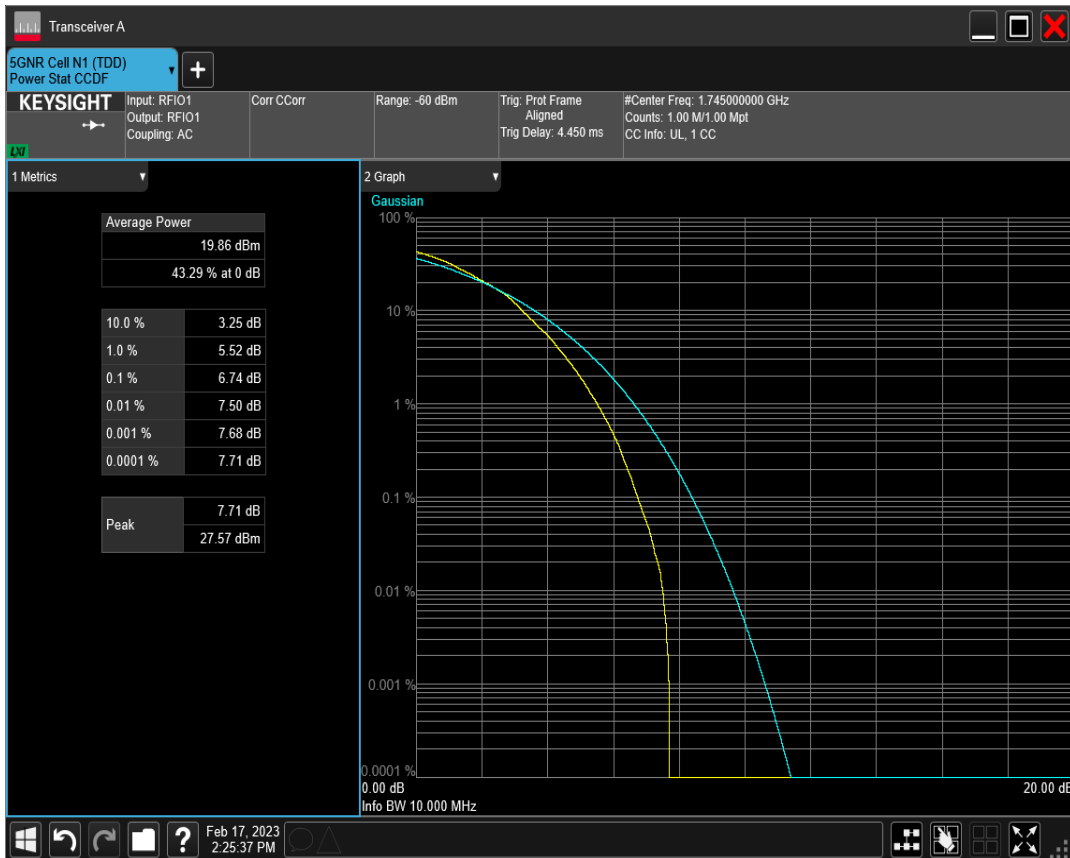


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=349000 RB=24@0

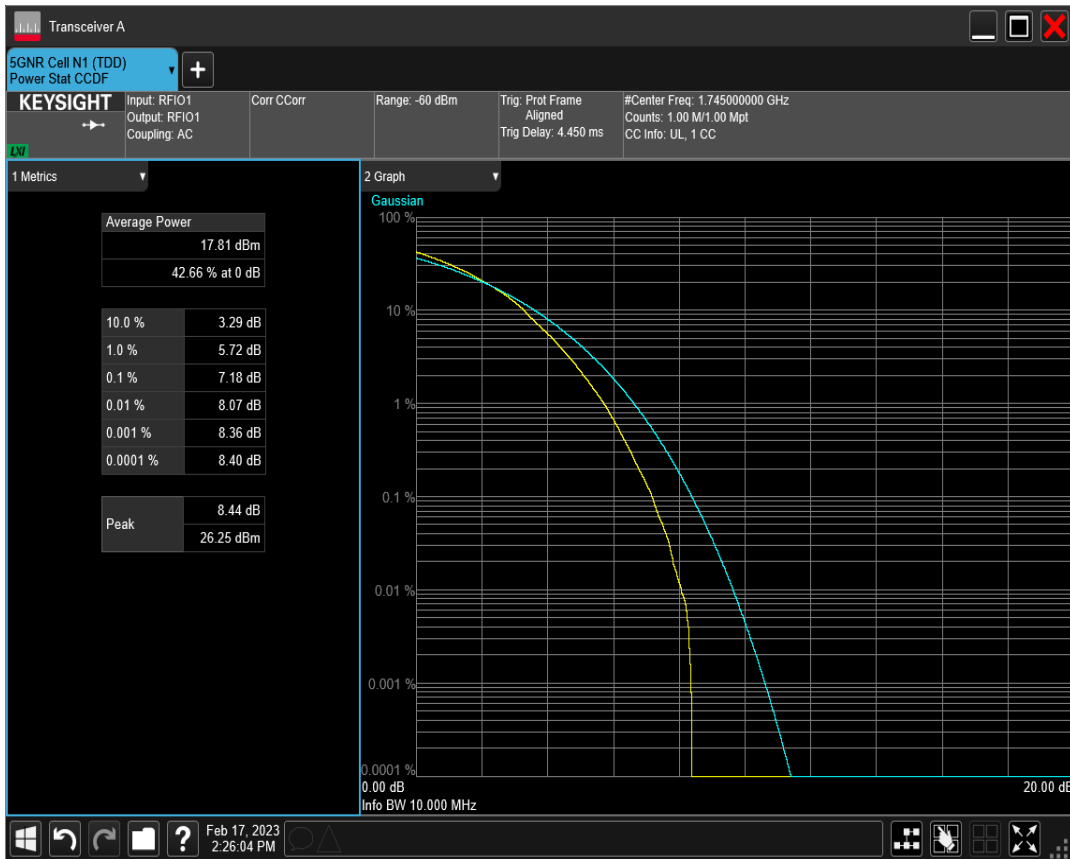


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=349000 RB=36@0

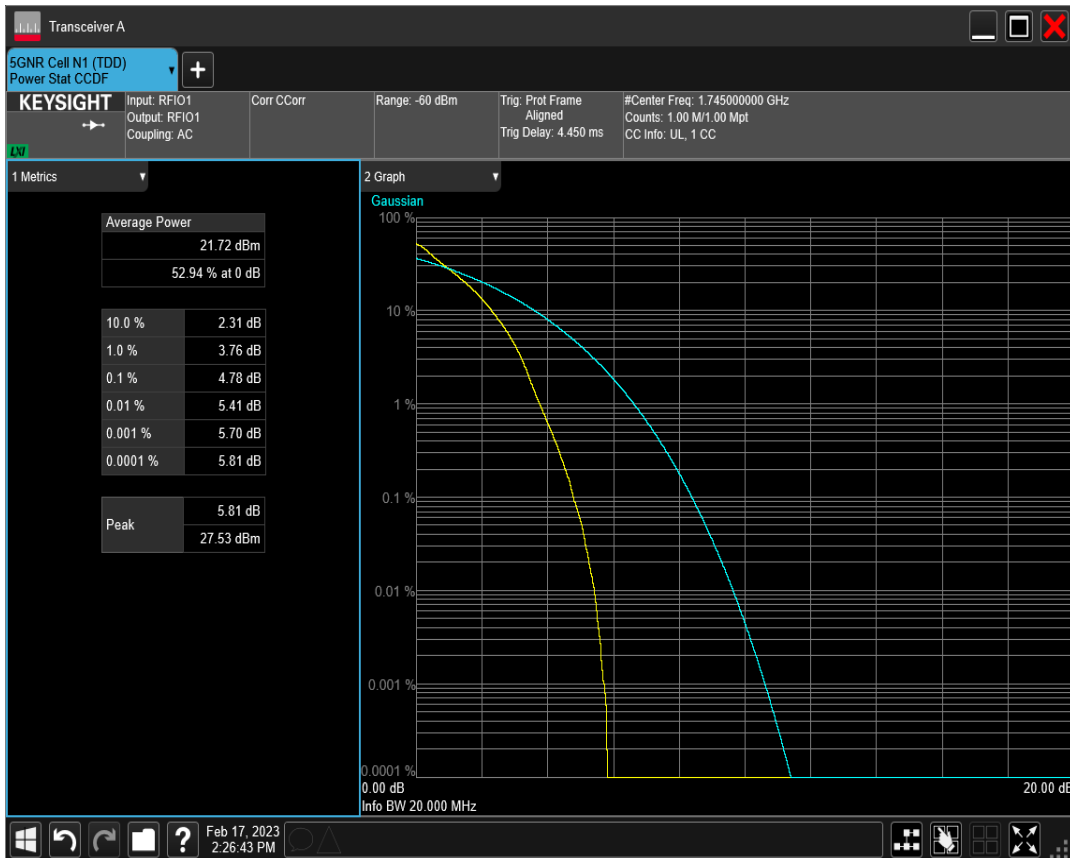


n66 SCS=30kHz DFT_QPSK BW=15MHz Channel=349000 RB=36@0

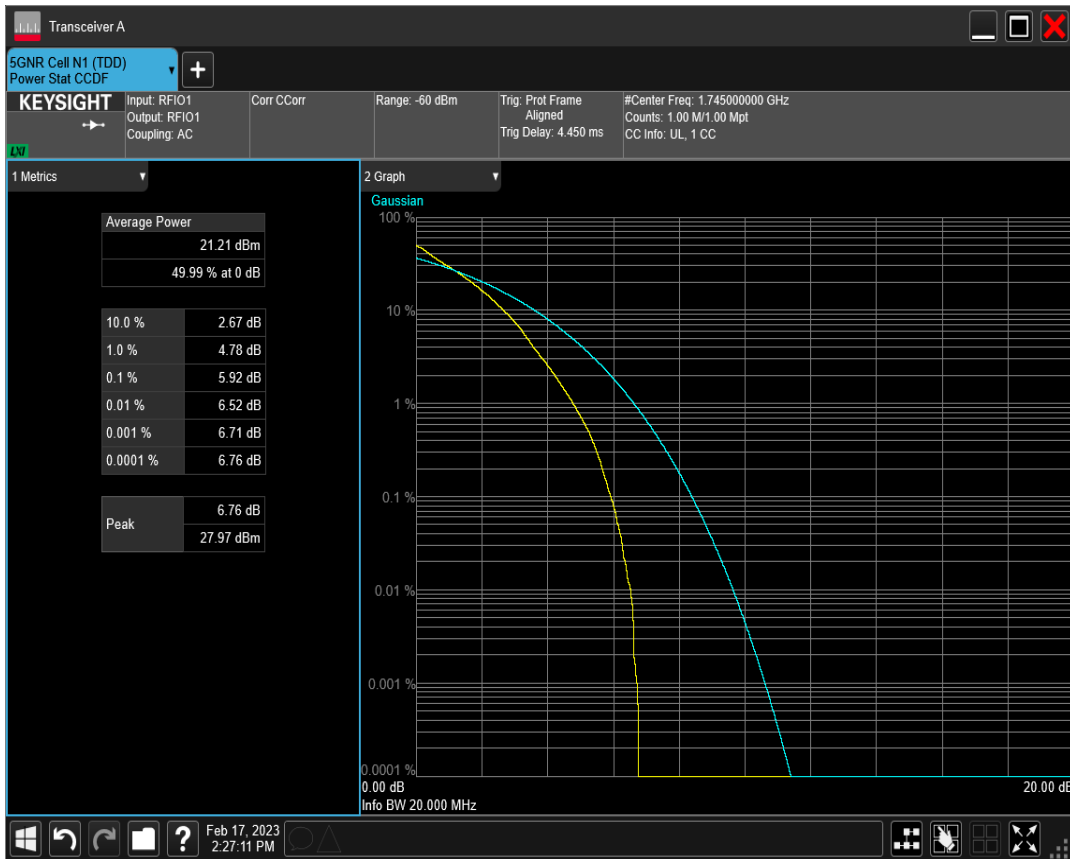


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=349000 RB=36@0

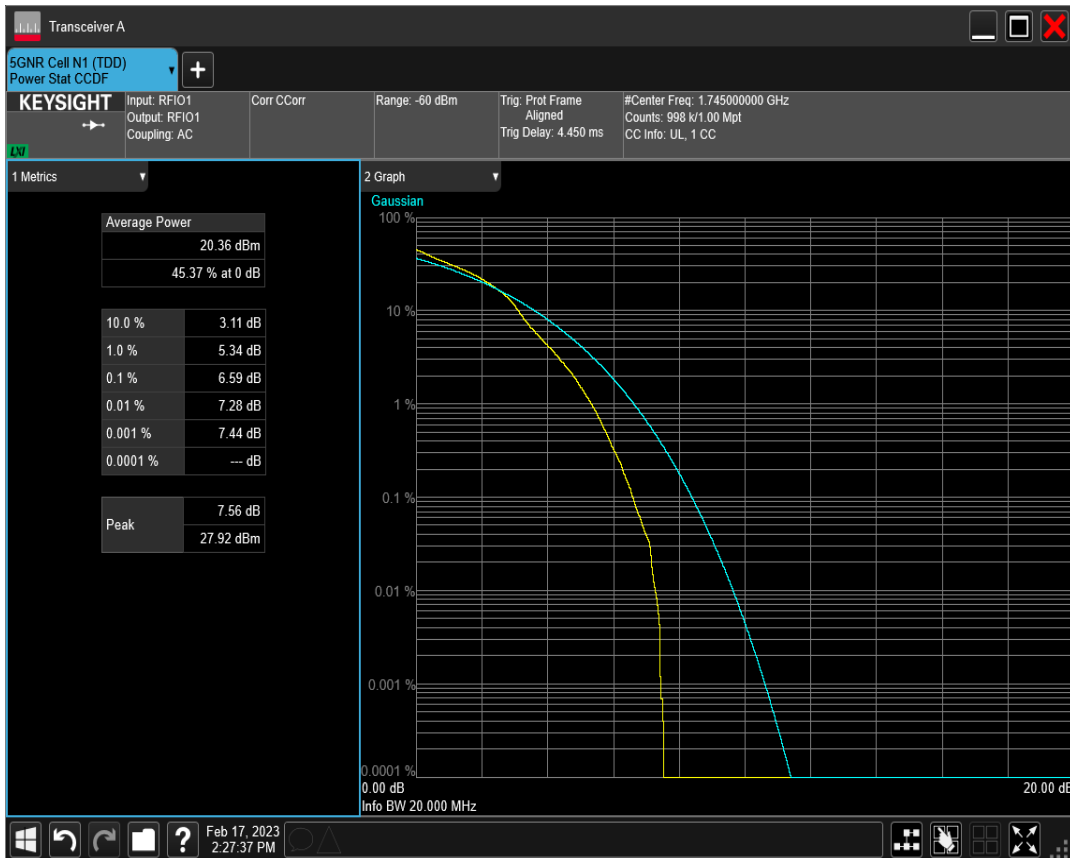


n66 SCS=30kHz DFT_QAM64 BW=15MHz Channel=349000 RB=36@0

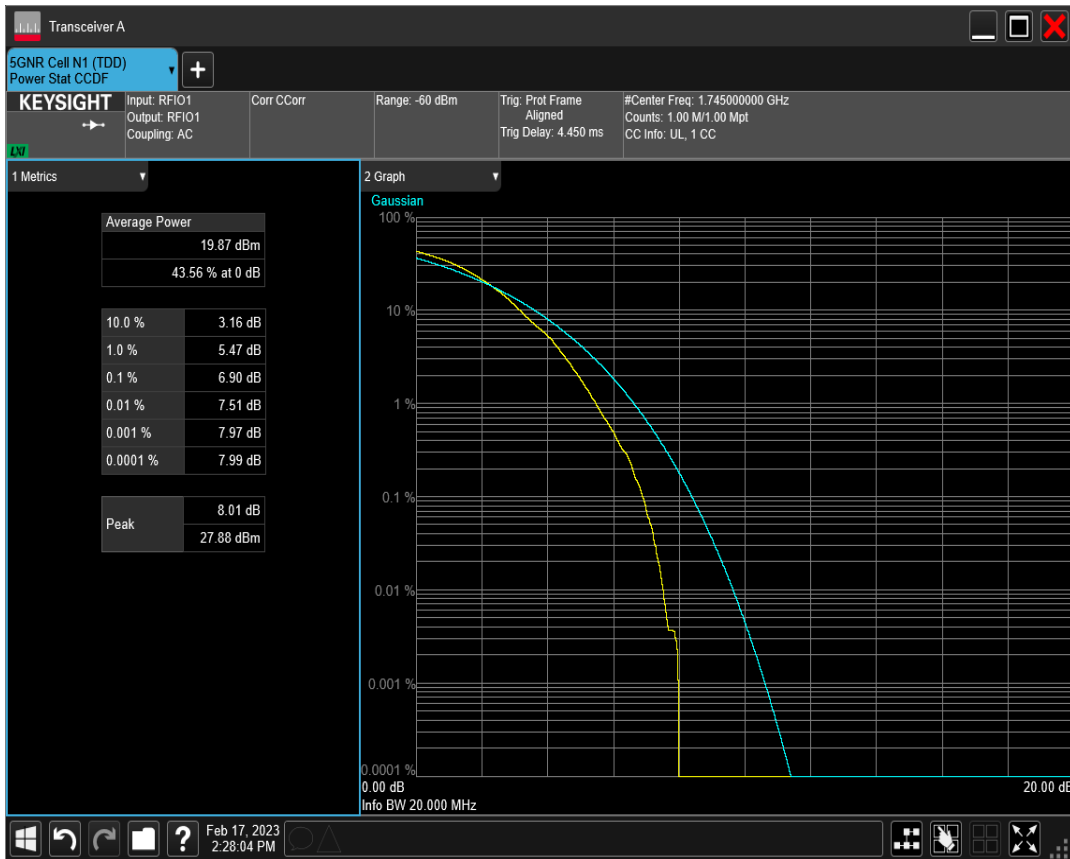


n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=349000 RB=36@0

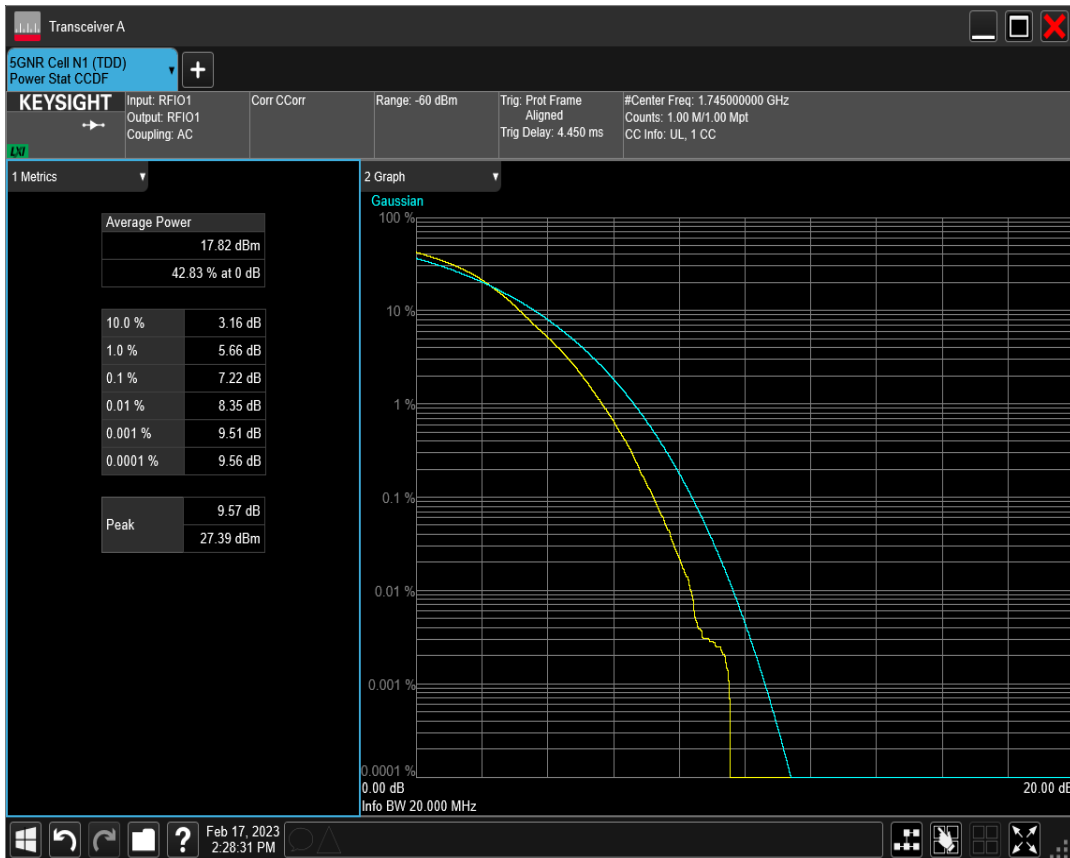


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=349000 RB=50@0

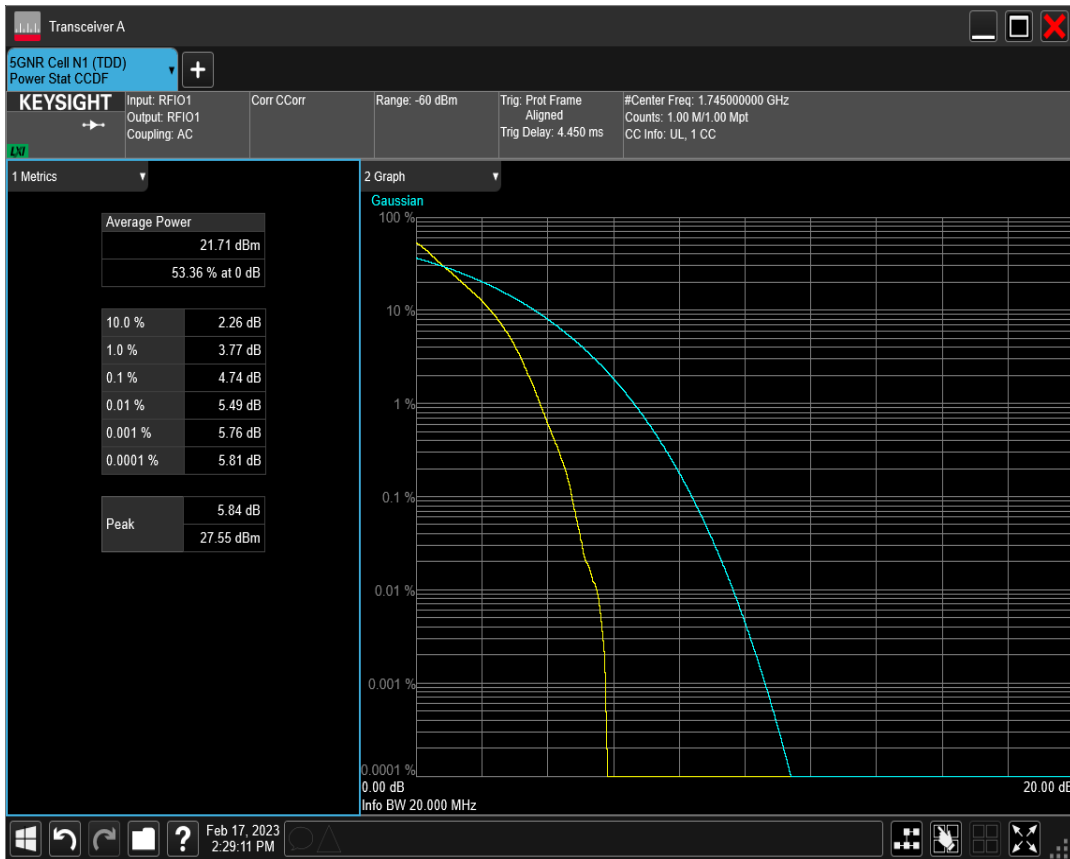


n66 SCS=30kHz DFT_QPSK BW=20MHz Channel=349000 RB=50@0

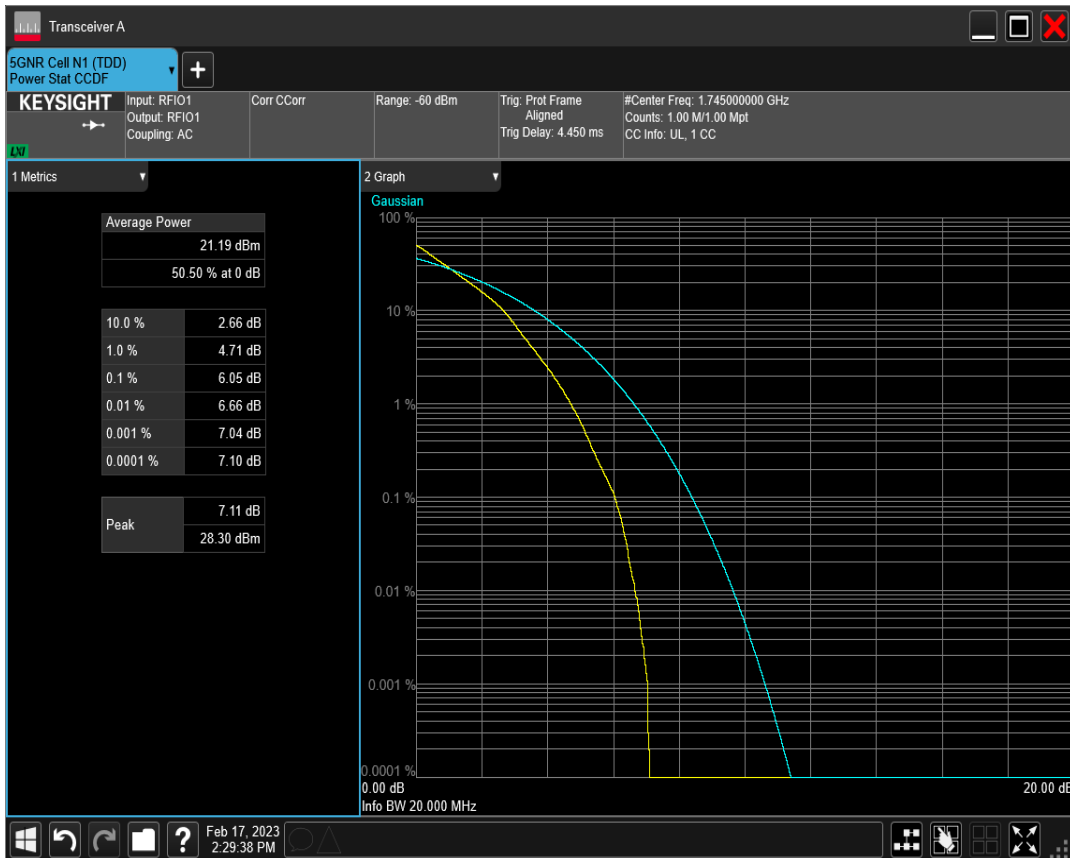


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=349000 RB=50@0

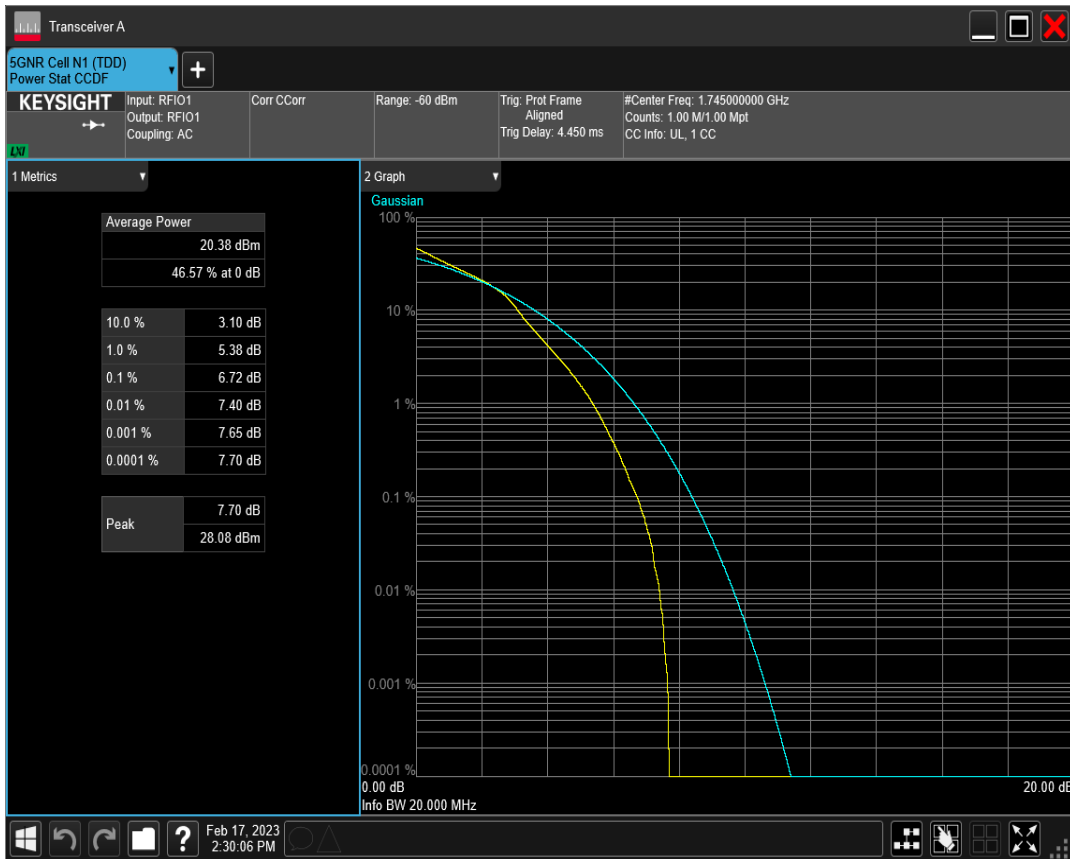


n66 SCS=30kHz DFT_QAM64 BW=20MHz Channel=349000 RB=50@0

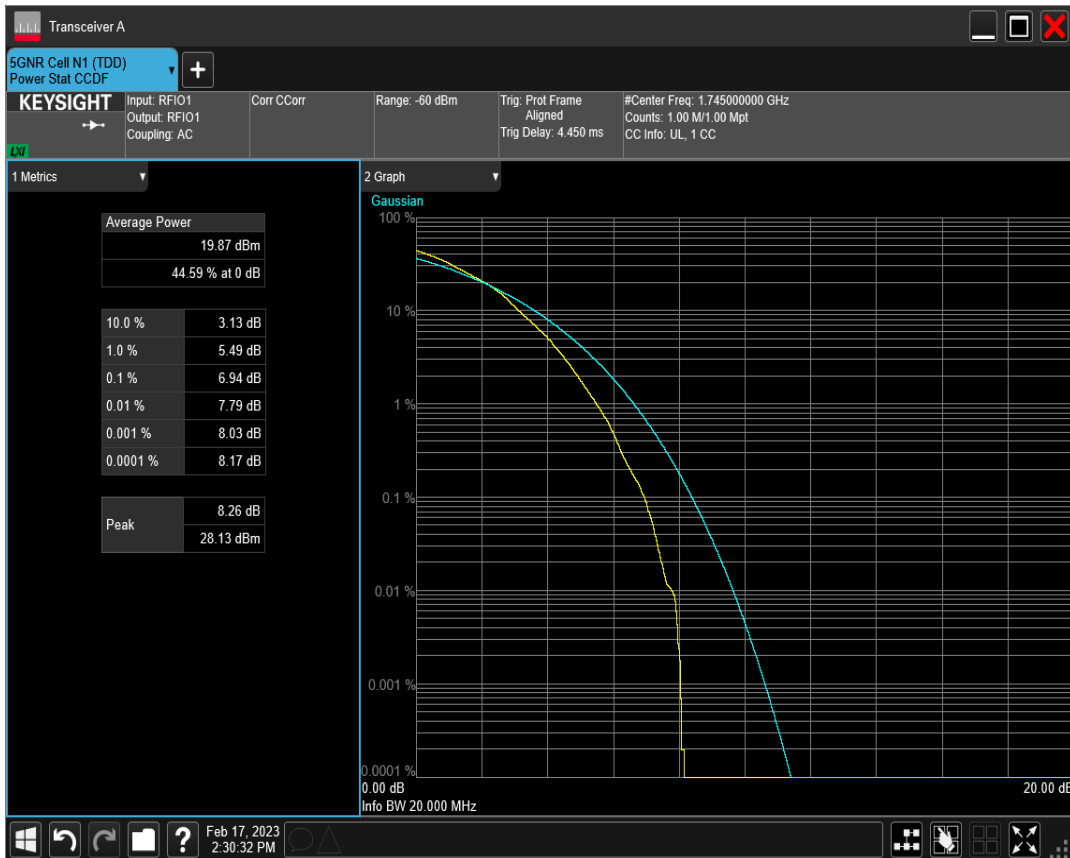


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=349000 RB=50@0

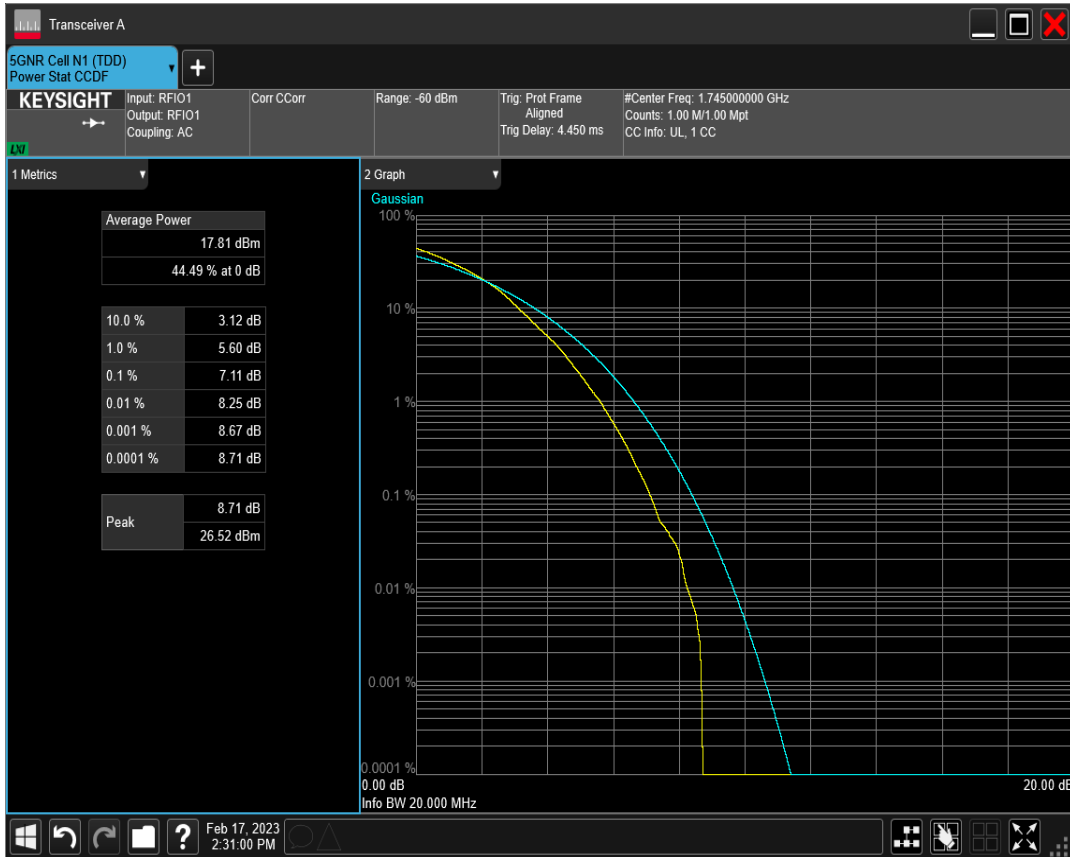


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=349000 RB=100@0

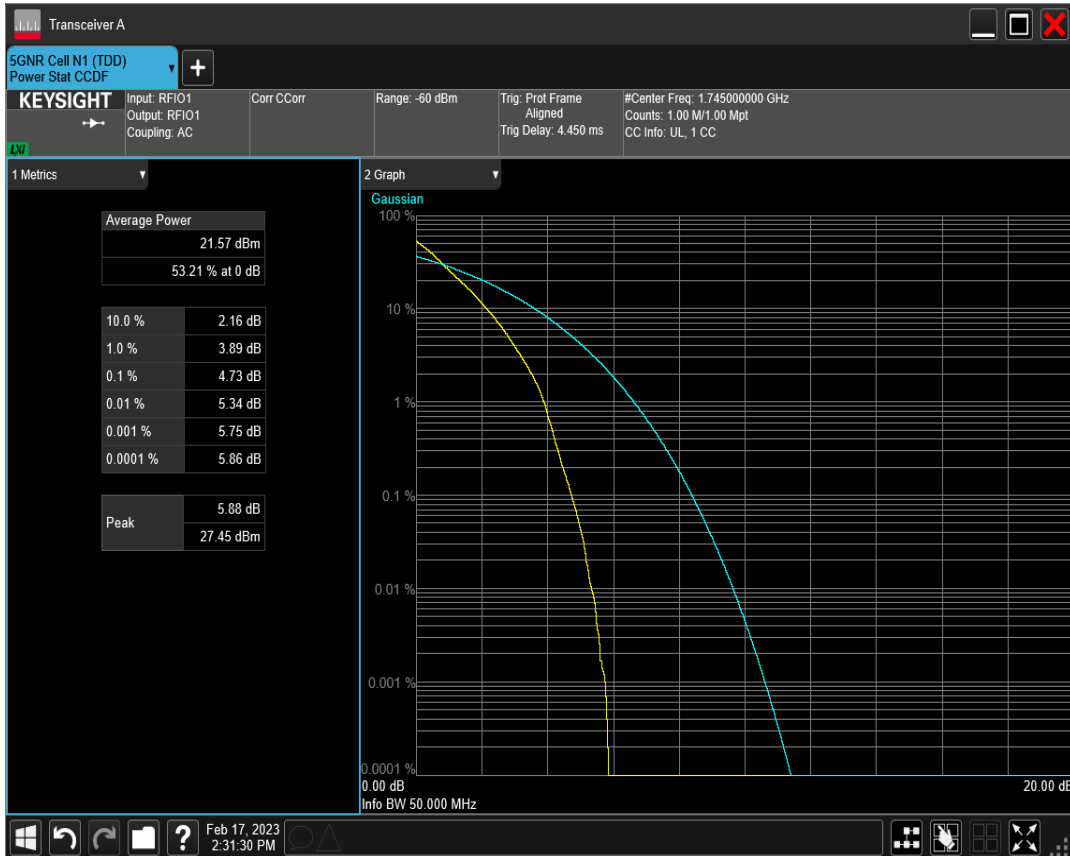


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=349000 RB=100@0

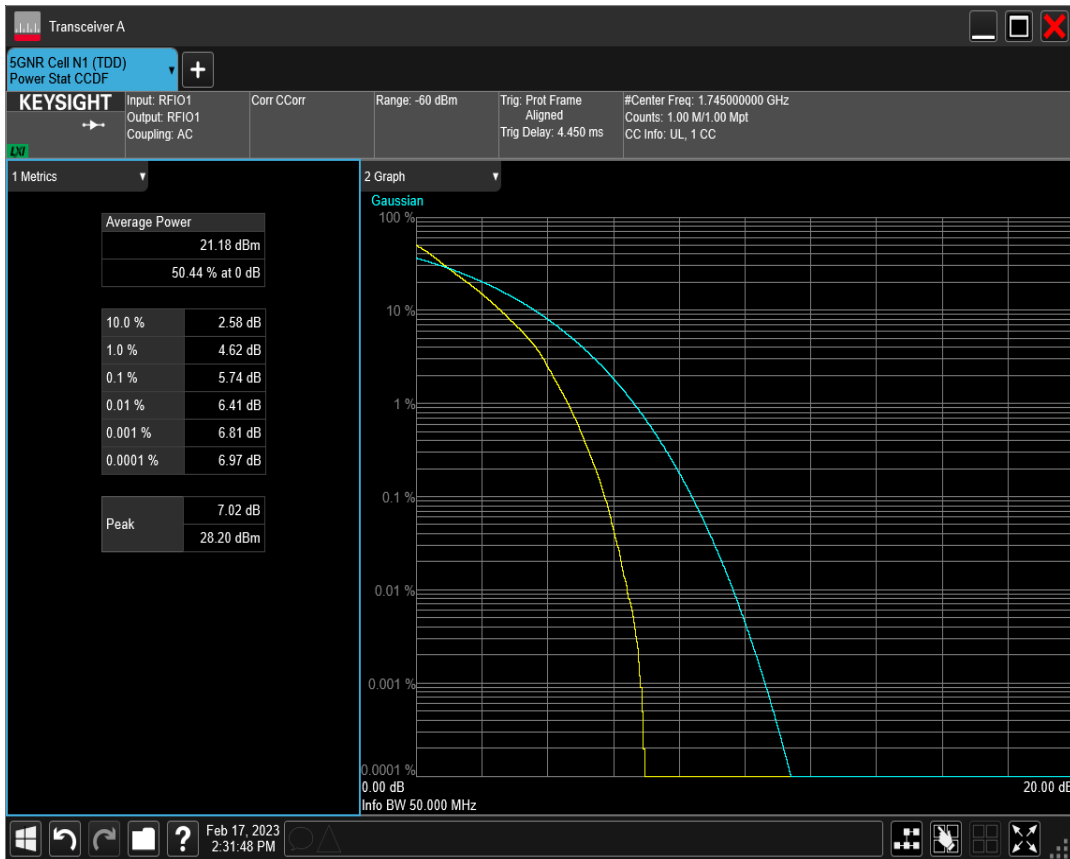


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=349000 RB=100@0

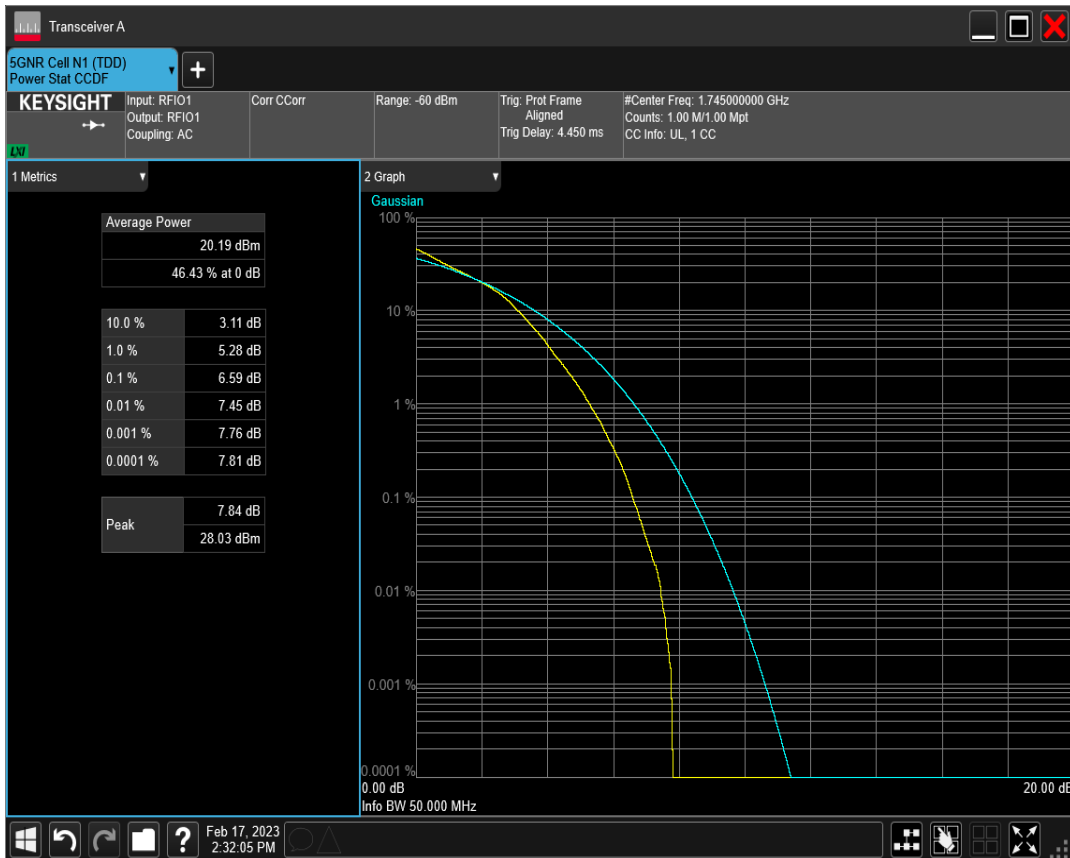

n66 SCS=30kHz DFT_QAM64 BW=40MHz Channel=349000 RB=100@0

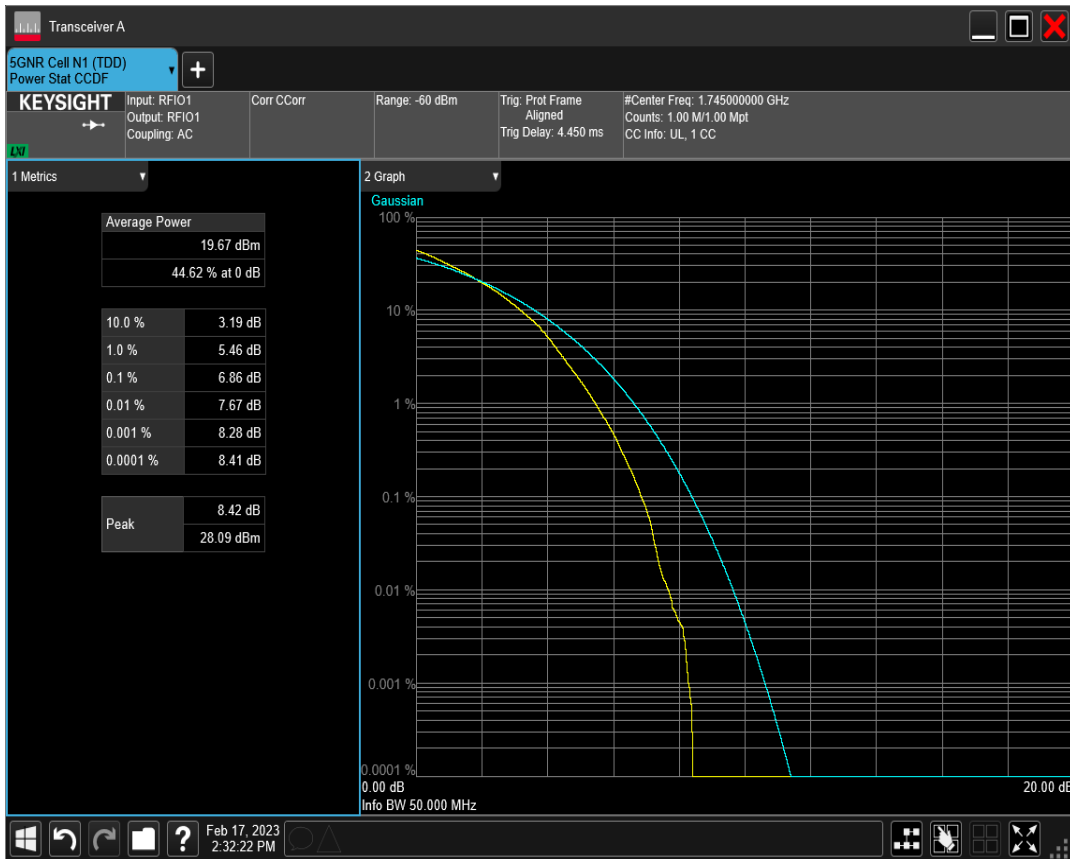

n66 SCS=30kHz DFT_QAM256 BW=40MHz Channel=349000 RB=100@0

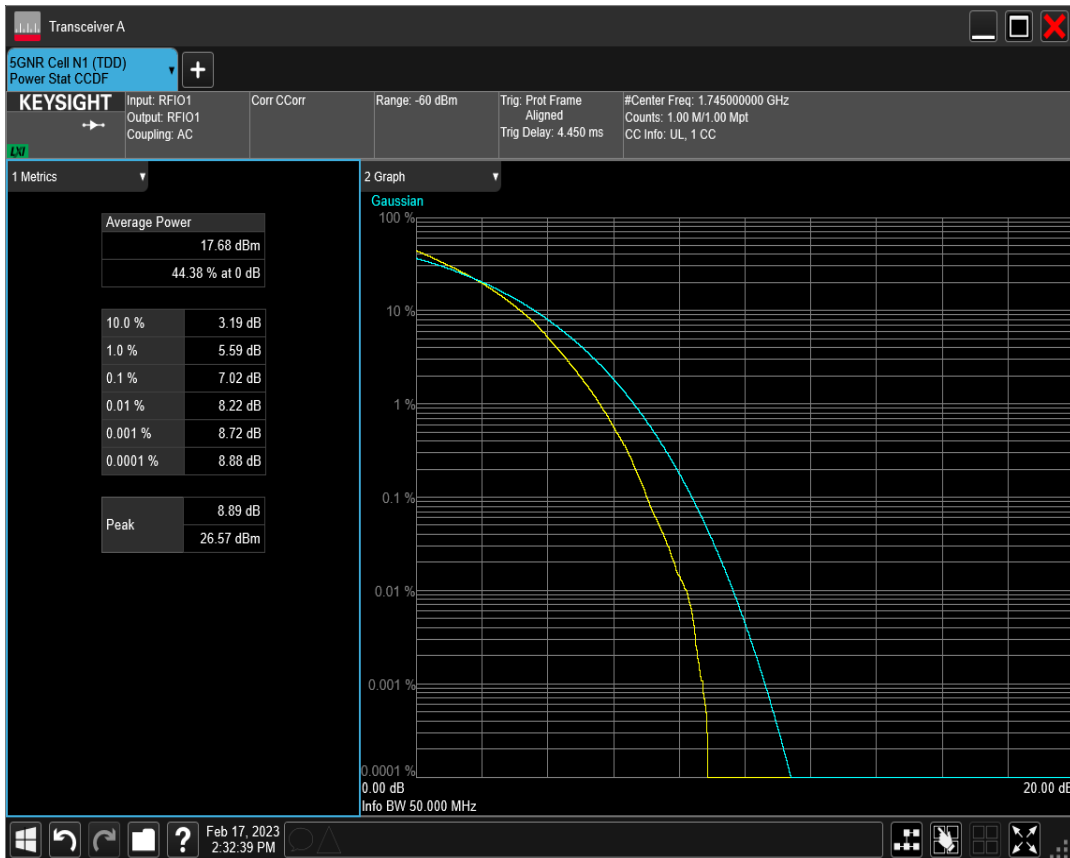


4 Occupied bandwidth for NR FR1


| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | 99% OBW (MHz) | -26dB EBW (MHz) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|---------------|-----------------|---------|
| n66 | 30 | 10 | 343000 | 24@0 | DFT_BPSK | 8.640 | 9.220 | PASS |
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QPSK | 8.610 | 9.220 | PASS |
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QAM16 | 8.650 | 9.240 | PASS |
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QAM64 | 8.610 | 9.200 | PASS |
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QAM256 | 8.620 | 9.200 | PASS |
| n66 | 30 | 10 | 343000 | 24@0 | CP_QPSK | 8.620 | 9.230 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_BPSK | 8.610 | 9.200 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QPSK | 8.620 | 9.210 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM16 | 8.650 | 9.260 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM64 | 8.610 | 9.180 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QAM256 | 8.640 | 9.220 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | CP_QPSK | 8.620 | 9.180 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_BPSK | 8.610 | 9.190 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QPSK | 8.620 | 9.170 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QAM16 | 8.650 | 9.250 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QAM64 | 8.620 | 9.180 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QAM256 | 8.620 | 9.200 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | CP_QPSK | 8.620 | 9.200 | PASS |
| n66 | 30 | 15 | 343500 | 36@0 | DFT_BPSK | 13.460 | 13.710 | PASS |
| n66 | 30 | 15 | 343500 | 36@0 | DFT_QPSK | 13.460 | 13.710 | PASS |
| n66 | 30 | 15 | 343500 | 36@0 | DFT_QAM16 | 13.470 | 13.710 | PASS |
| n66 | 30 | 15 | 343500 | 36@0 | DFT_QAM64 | 13.510 | 13.760 | PASS |
| n66 | 30 | 15 | 343500 | 36@0 | DFT_QAM256 | 13.500 | 13.710 | PASS |
| n66 | 30 | 15 | 343500 | 38@0 | CP_QPSK | 13.640 | 14.460 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_BPSK | 13.510 | 13.720 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QPSK | 13.500 | 13.720 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM16 | 13.510 | 13.700 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM64 | 13.530 | 13.740 | PASS |
| n66 | 30 | 15 | 349000 | 36@0 | DFT_QAM256 | 13.520 | 13.690 | PASS |
| n66 | 30 | 15 | 349000 | 38@0 | CP_QPSK | 13.640 | 14.430 | PASS |
| n66 | 30 | 15 | 354500 | 36@0 | DFT_BPSK | 13.510 | 13.740 | PASS |
| n66 | 30 | 15 | 354500 | 36@0 | DFT_QPSK | 13.530 | 13.710 | PASS |
| n66 | 30 | 15 | 354500 | 36@0 | DFT_QAM16 | 13.460 | 13.730 | PASS |
| n66 | 30 | 15 | 354500 | 36@0 | DFT_QAM64 | 13.460 | 13.690 | PASS |
| n66 | 30 | 15 | 354500 | 36@0 | DFT_QAM256 | 13.520 | 13.680 | PASS |
| n66 | 30 | 15 | 354500 | 38@0 | CP_QPSK | 13.640 | 14.400 | PASS |
| n66 | 30 | 20 | 344000 | 50@0 | DFT_BPSK | 18.080 | 18.930 | PASS |
| n66 | 30 | 20 | 344000 | 50@0 | DFT_QPSK | 18.040 | 18.910 | PASS |
| n66 | 30 | 20 | 344000 | 50@0 | DFT_QAM16 | 18.040 | 18.920 | PASS |

| | | | | | | | | |
|-----|----|----|--------|-------|------------|--------|--------|------|
| n66 | 30 | 20 | 344000 | 50@0 | DFT_QAM64 | 18.030 | 18.910 | PASS |
| n66 | 30 | 20 | 344000 | 50@0 | DFT_QAM256 | 18.020 | 18.910 | PASS |
| n66 | 30 | 20 | 344000 | 51@0 | CP_QPSK | 18.280 | 19.310 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_BPSK | 18.110 | 18.920 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QPSK | 18.110 | 18.940 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM16 | 18.090 | 18.920 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM64 | 18.100 | 18.900 | PASS |
| n66 | 30 | 20 | 349000 | 50@0 | DFT_QAM256 | 18.040 | 18.910 | PASS |
| n66 | 30 | 20 | 349000 | 51@0 | CP_QPSK | 18.280 | 19.300 | PASS |
| n66 | 30 | 20 | 354000 | 50@0 | DFT_BPSK | 18.110 | 18.920 | PASS |
| n66 | 30 | 20 | 354000 | 50@0 | DFT_QPSK | 18.110 | 18.930 | PASS |
| n66 | 30 | 20 | 354000 | 50@0 | DFT_QAM16 | 18.100 | 18.920 | PASS |
| n66 | 30 | 20 | 354000 | 50@0 | DFT_QAM64 | 18.100 | 18.900 | PASS |
| n66 | 30 | 20 | 354000 | 50@0 | DFT_QAM256 | 18.090 | 18.890 | PASS |
| n66 | 30 | 20 | 354000 | 51@0 | CP_QPSK | 18.270 | 19.290 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_BPSK | 37.470 | 37.860 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QPSK | 37.480 | 37.830 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QAM16 | 37.490 | 37.850 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QAM64 | 37.470 | 37.840 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QAM256 | 37.500 | 37.840 | PASS |
| n66 | 30 | 40 | 346000 | 106@0 | CP_QPSK | 37.960 | 40.020 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_BPSK | 37.610 | 37.860 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QPSK | 37.620 | 37.850 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM16 | 37.630 | 37.860 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM64 | 37.650 | 37.880 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QAM256 | 37.640 | 37.860 | PASS |
| n66 | 30 | 40 | 349000 | 106@0 | CP_QPSK | 37.970 | 40.020 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_BPSK | 37.630 | 37.860 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QPSK | 37.640 | 37.840 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QAM16 | 37.630 | 37.880 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QAM64 | 37.630 | 37.870 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QAM256 | 37.760 | 37.880 | PASS |
| n66 | 30 | 40 | 352000 | 106@0 | CP_QPSK | 37.970 | 40.020 | PASS |


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=343000 RB=24@0

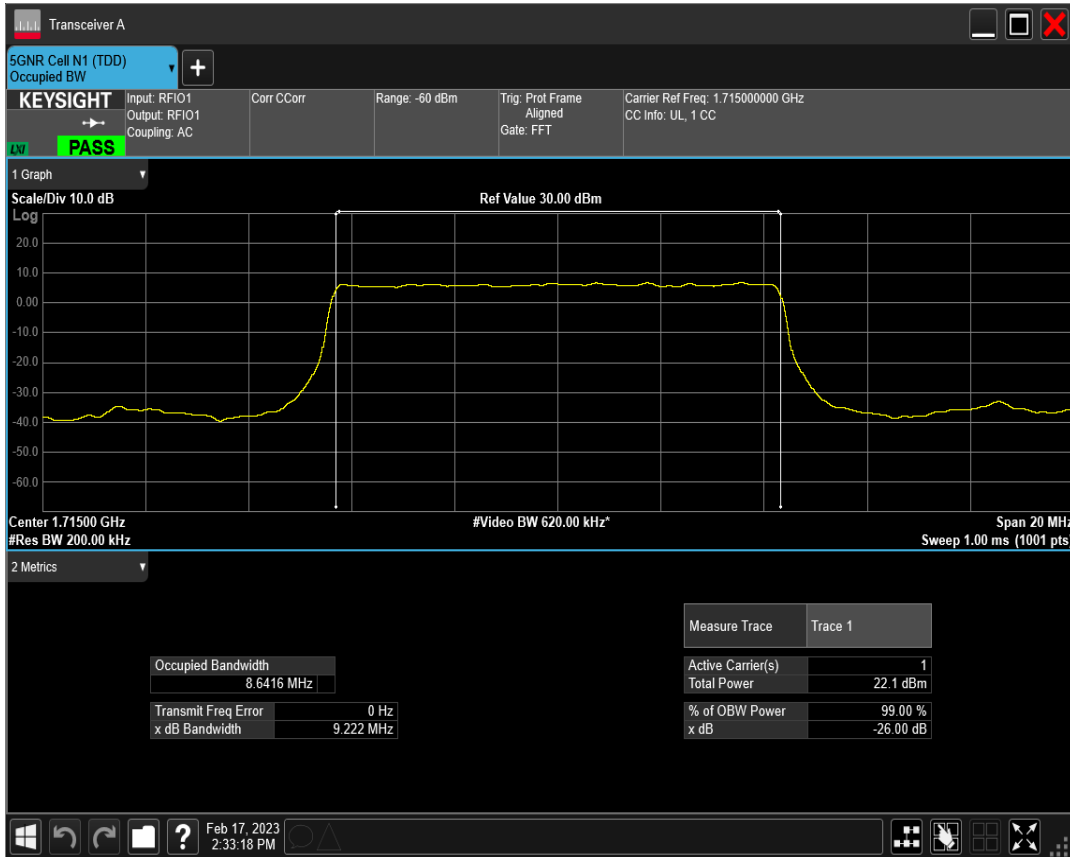


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=24@0

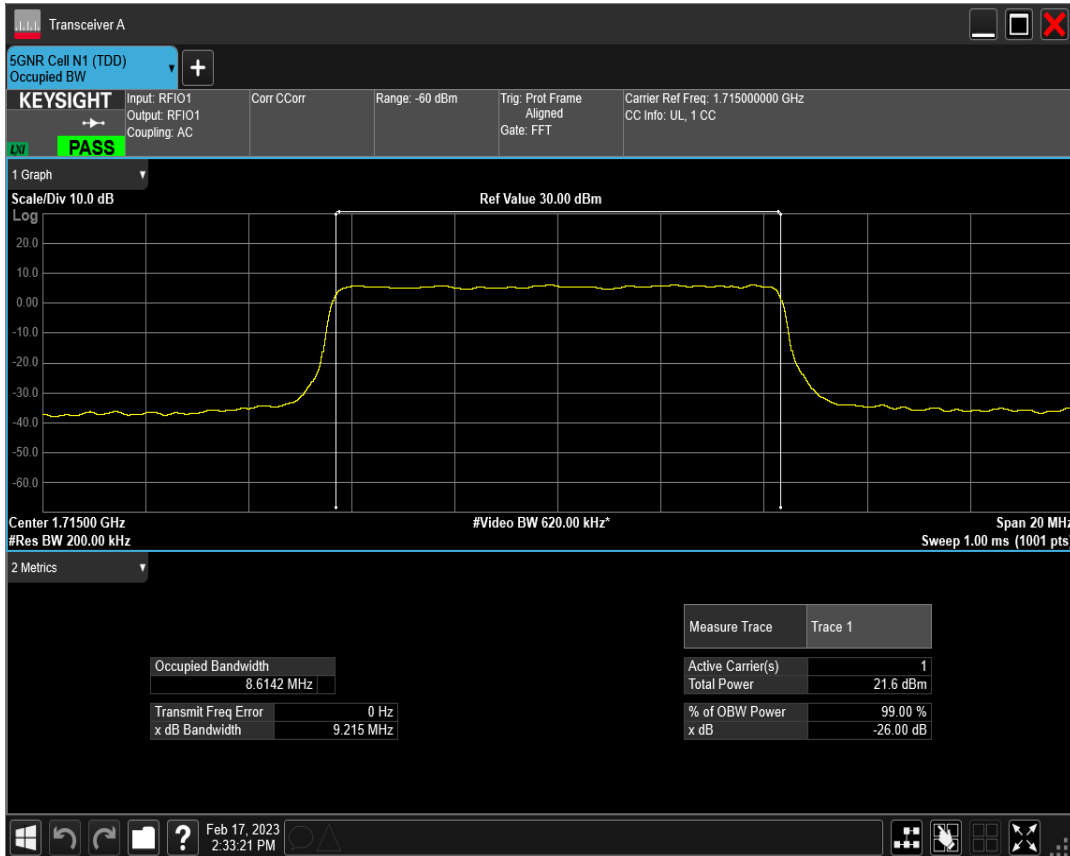


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=343000 RB=24@0

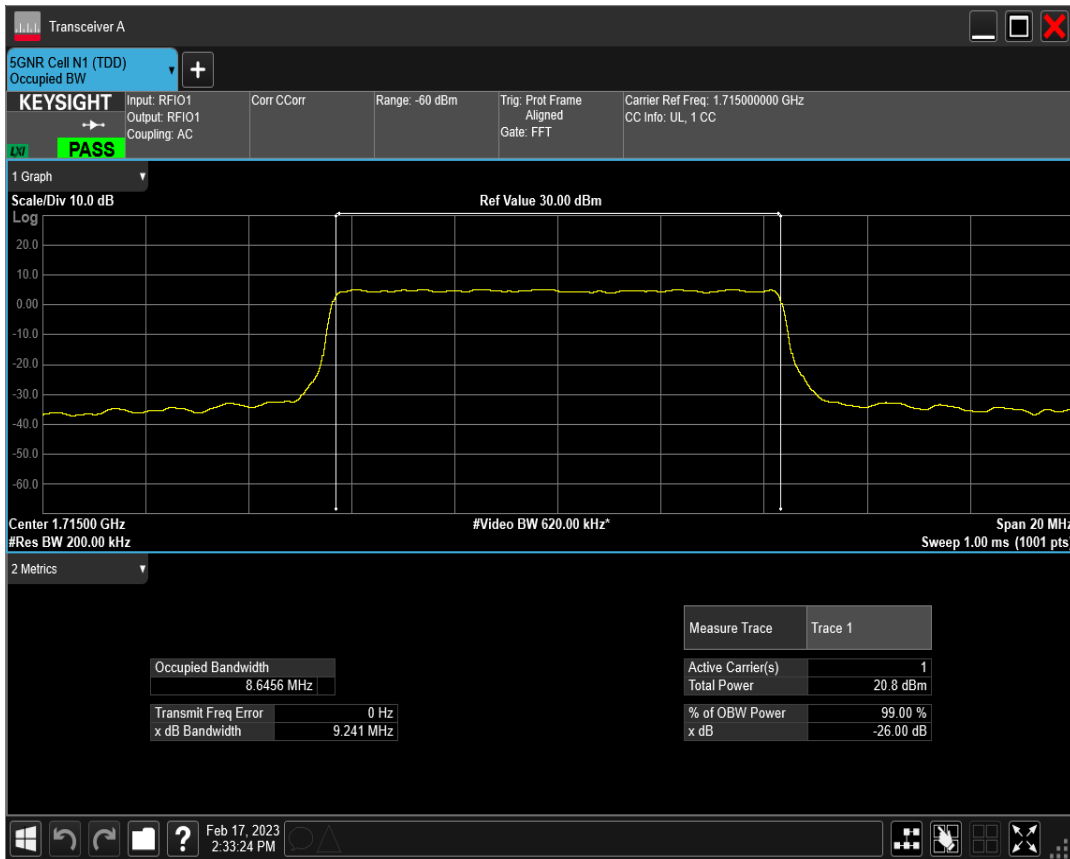


n66 SCS=30kHz DFT_QAM64 BW=10MHz Channel=343000 RB=24@0

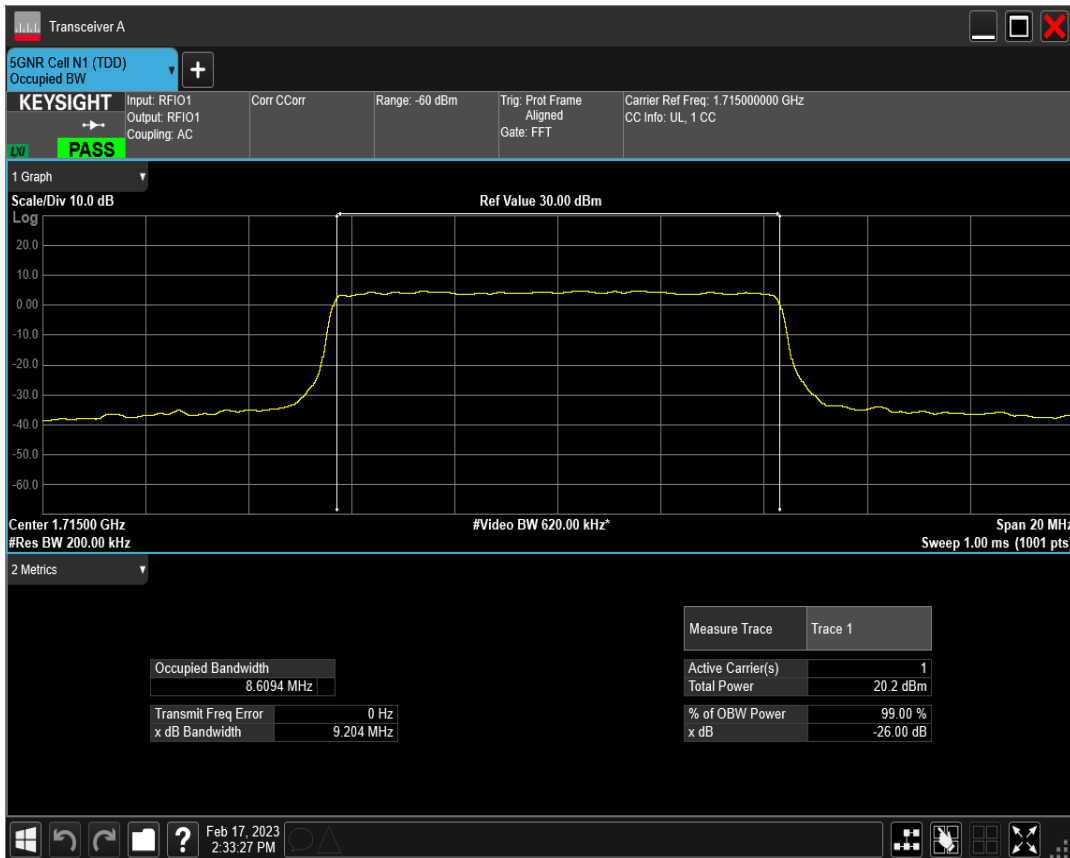


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=343000 RB=24@0

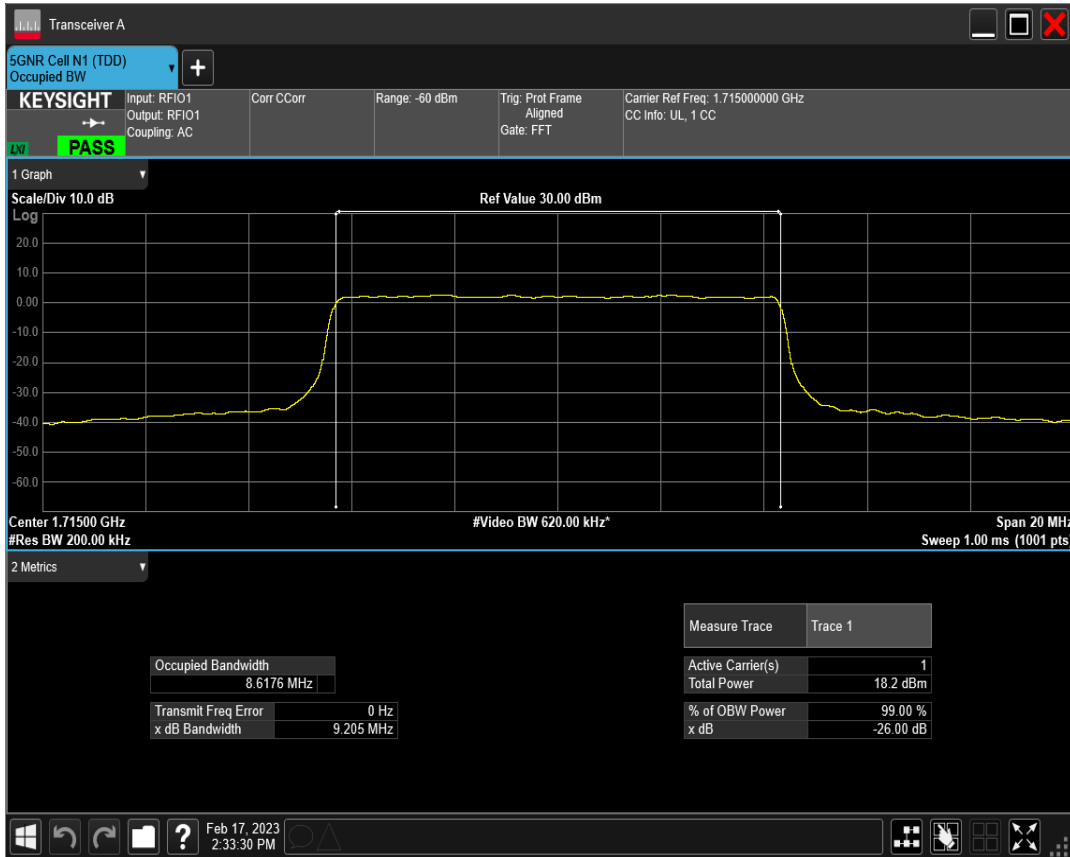


n66 SCS=30kHz CP_QPSK BW=10MHz Channel=343000 RB=24@0

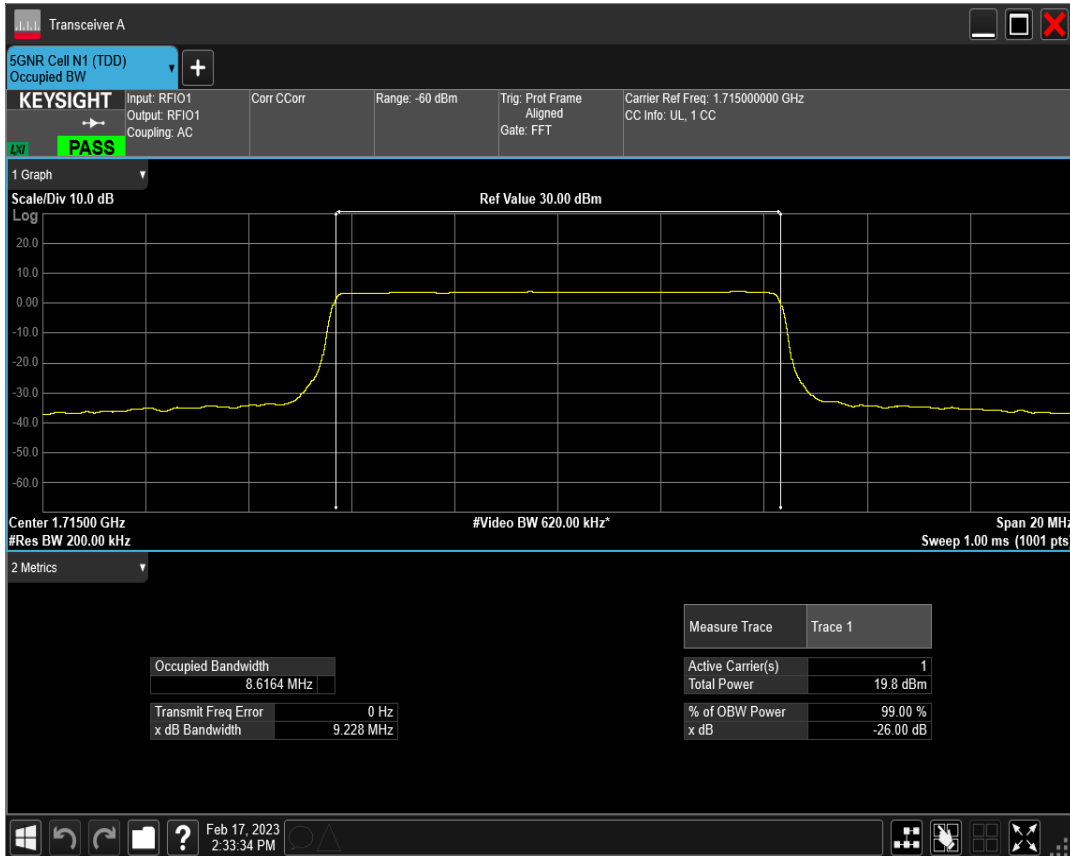


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=349000 RB=24@0

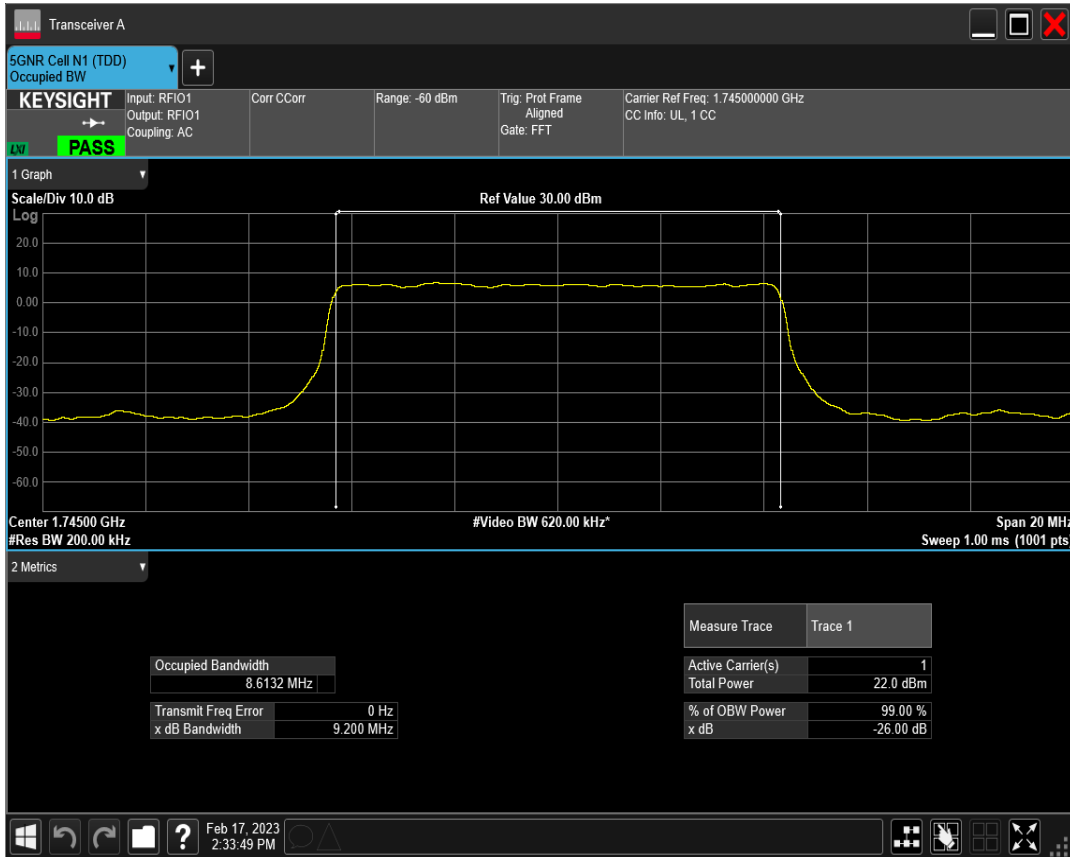


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=349000 RB=24@0

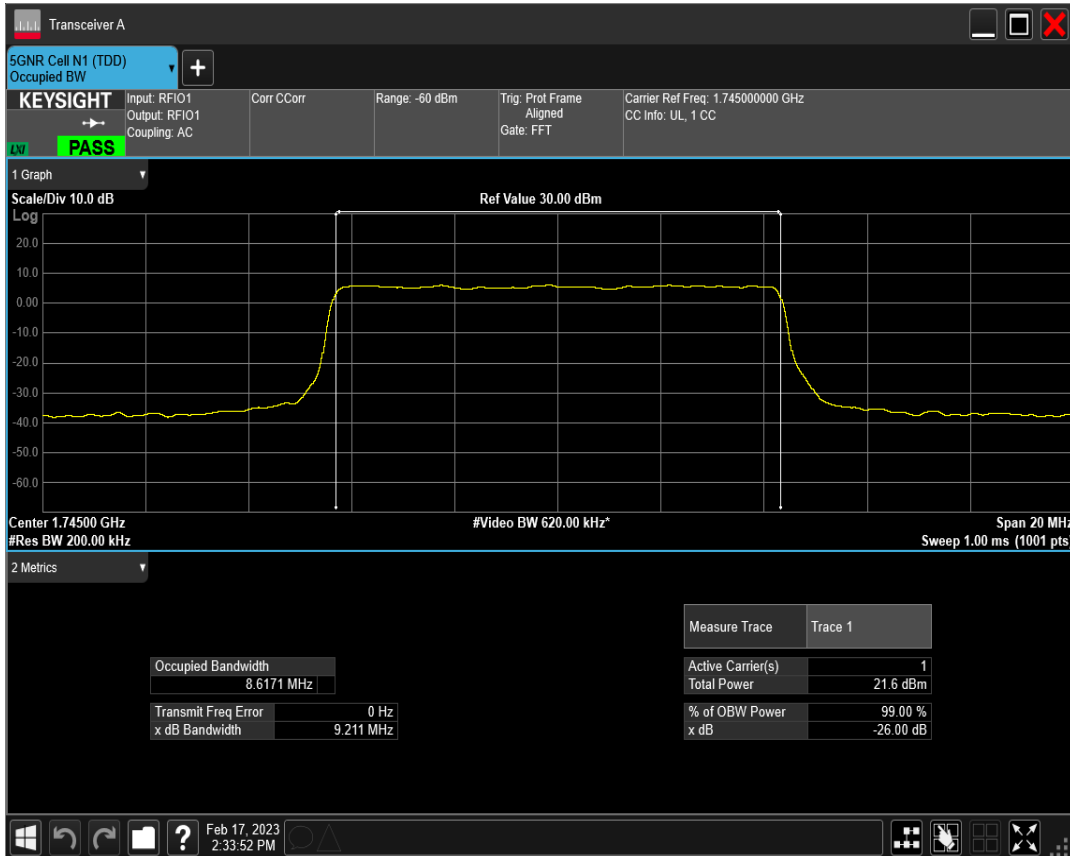


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=349000 RB=24@0

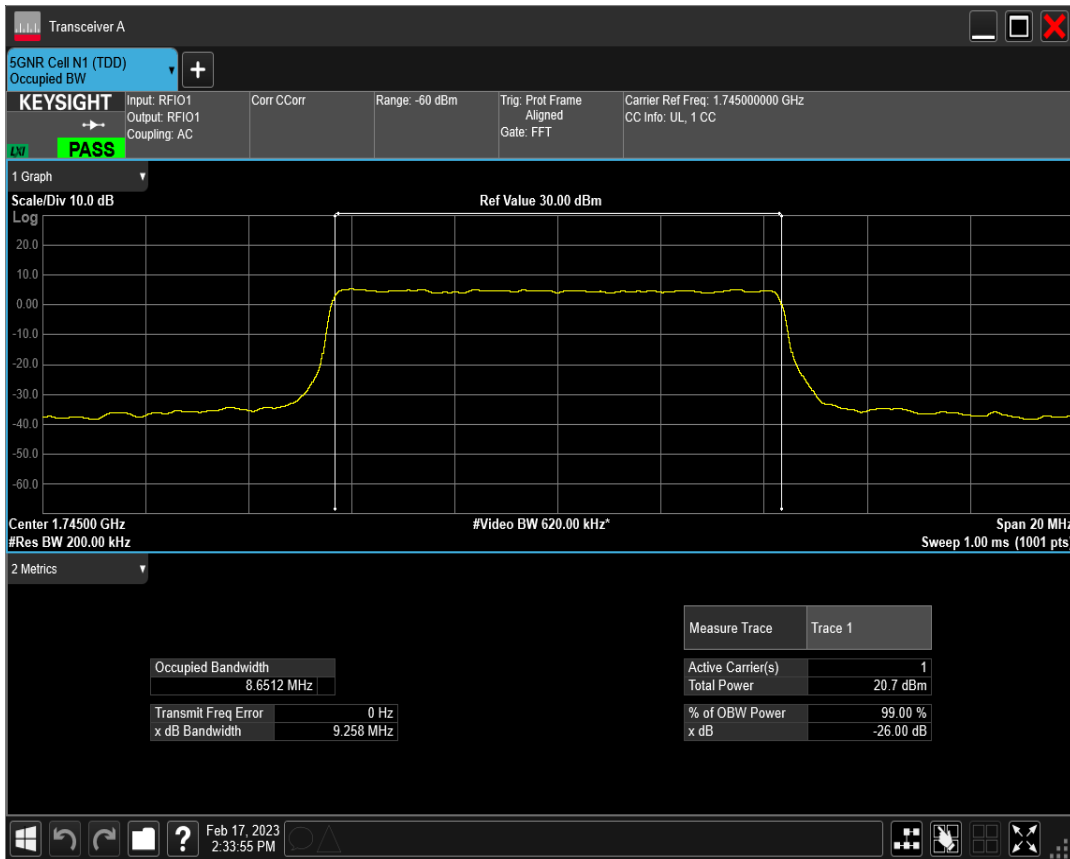


n66 SCS=30kHz DFT_QAM64 BW=10MHz Channel=349000 RB=24@0

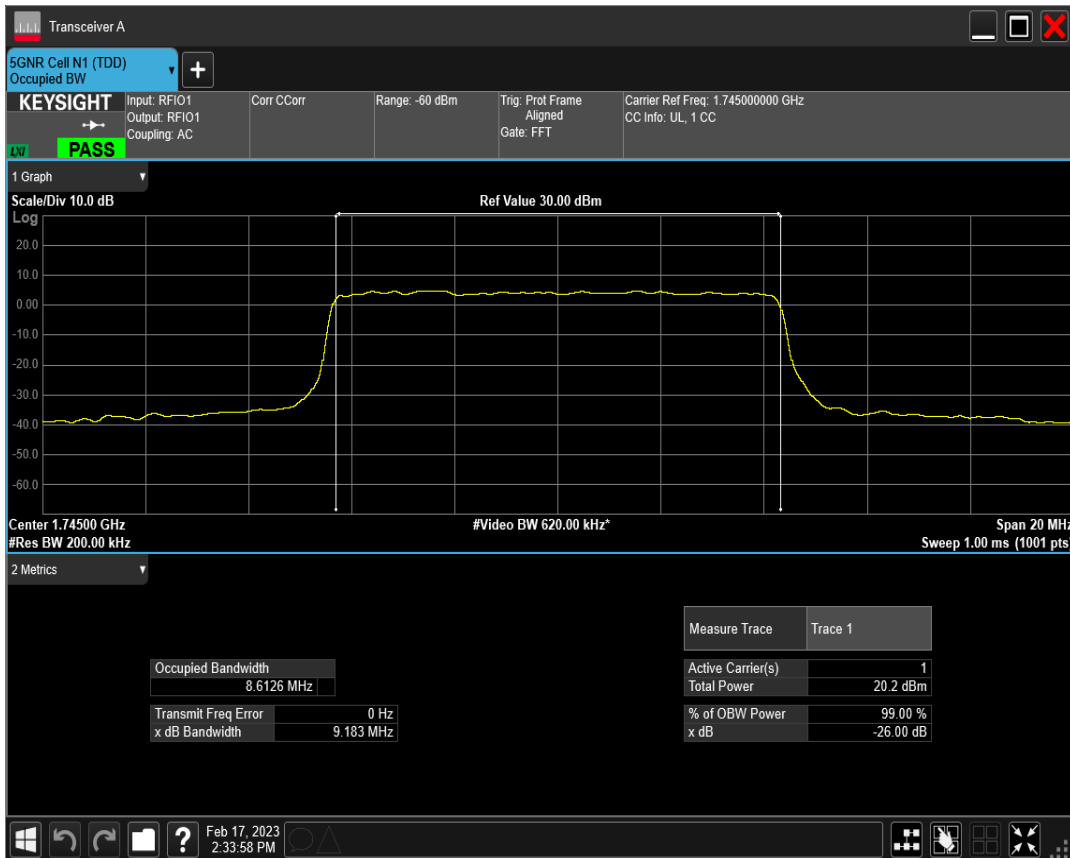


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=349000 RB=24@0

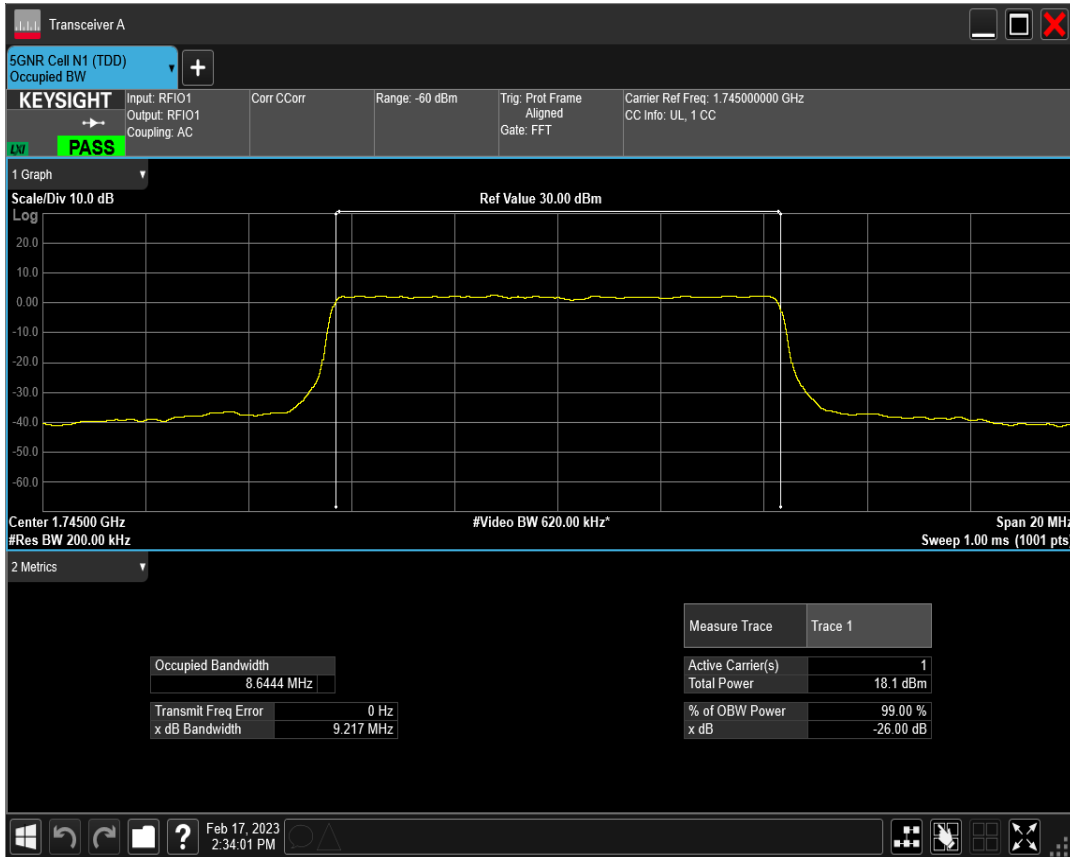

n66 SCS=30kHz CP_QPSK BW=10MHz Channel=349000 RB=24@0

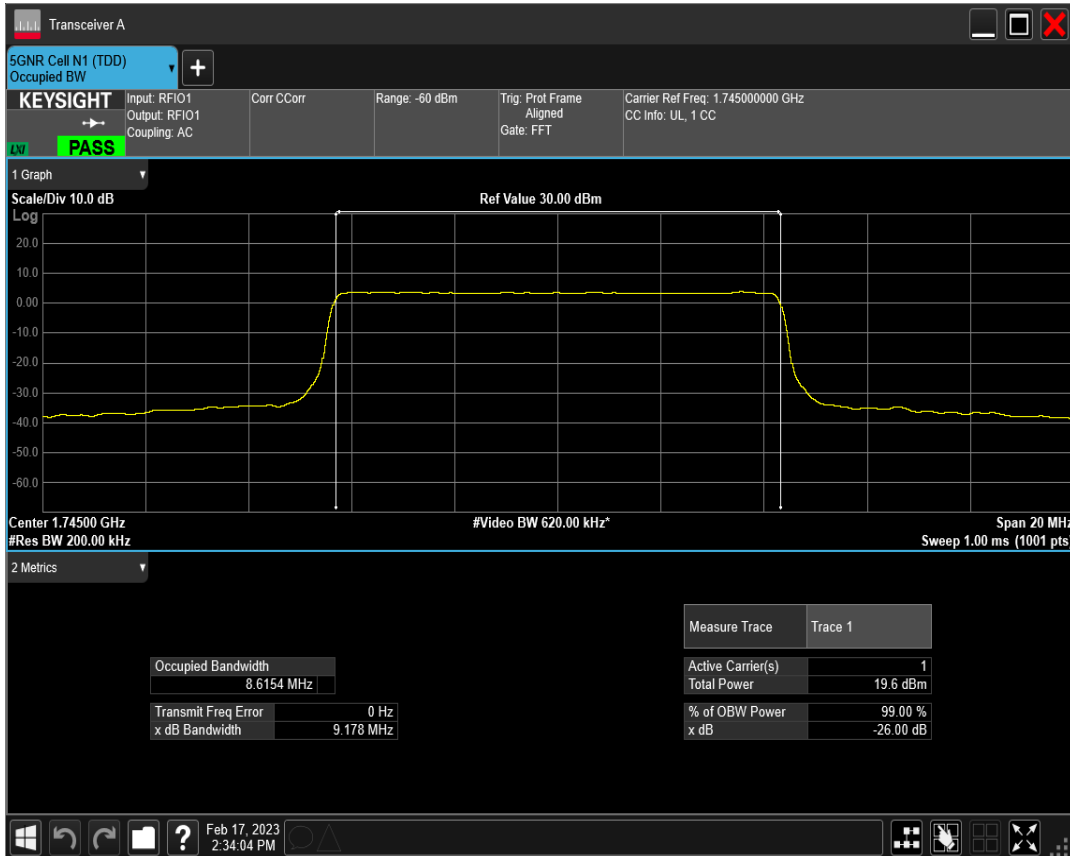


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=355000 RB=24@0

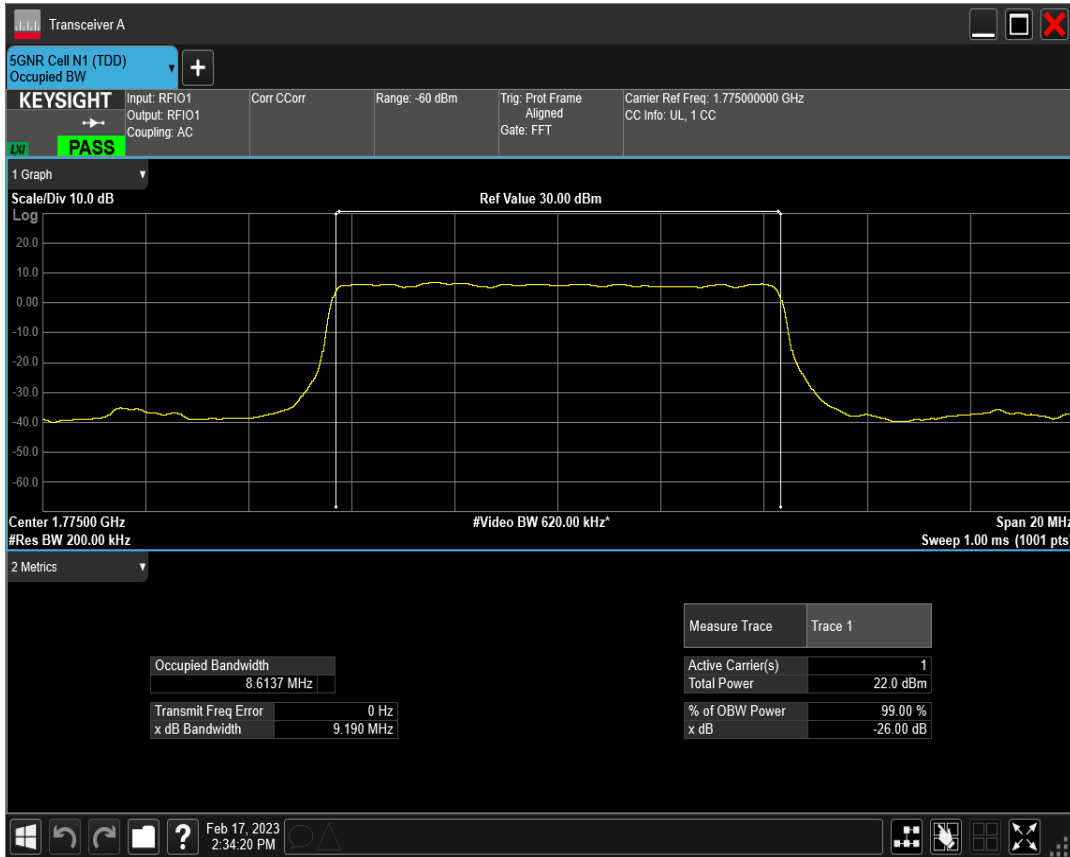


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=24@0



n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=355000 RB=24@0

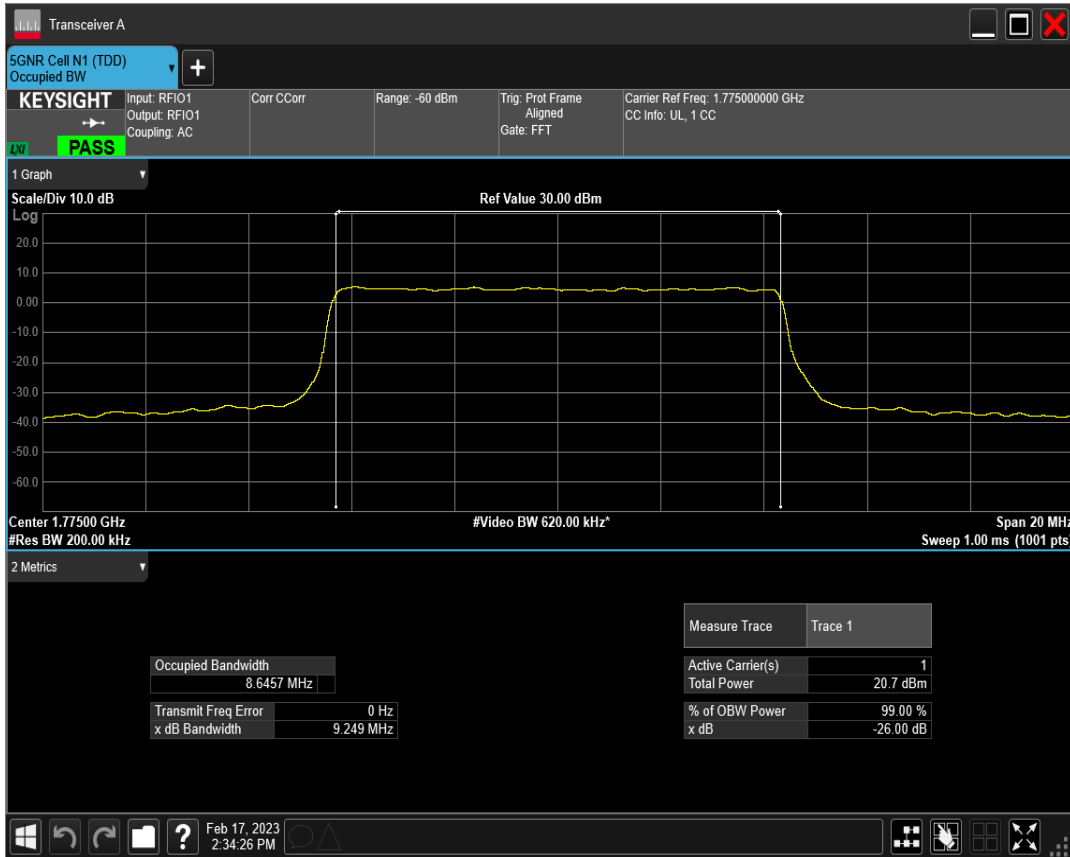


n66 SCS=30kHz DFT_QAM64 BW=10MHz Channel=355000 RB=24@0

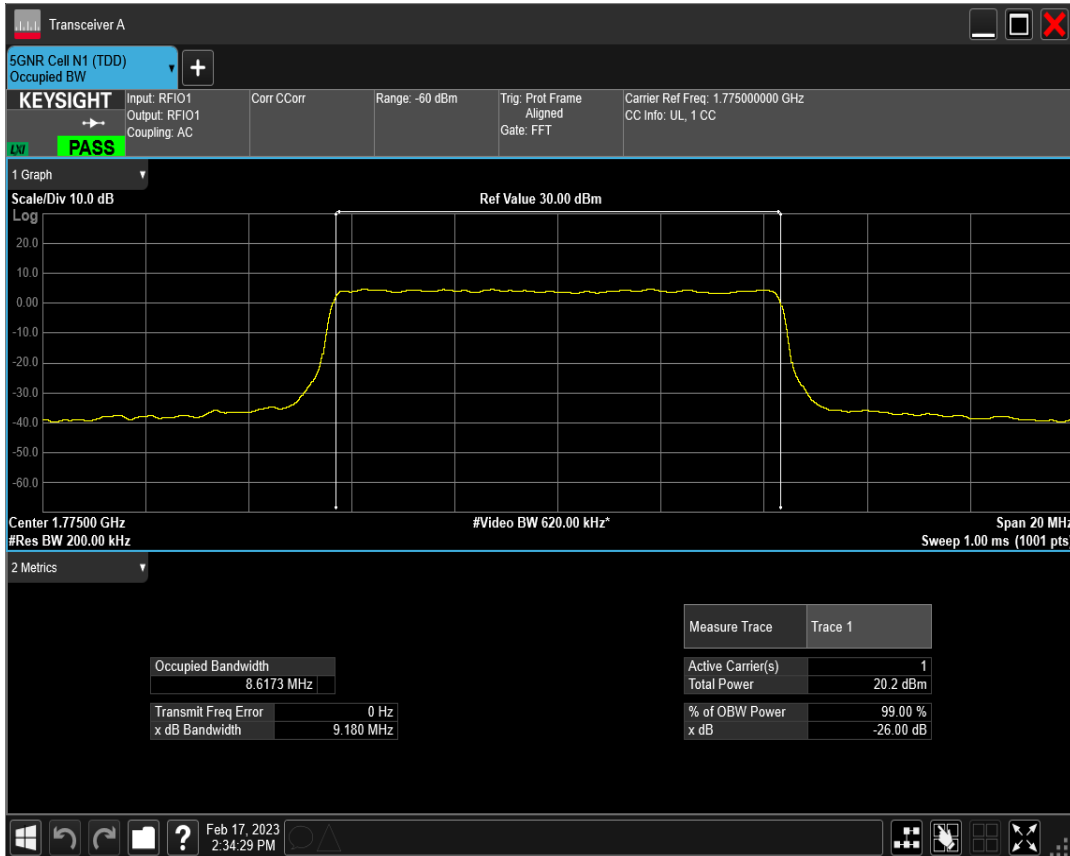


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=355000 RB=24@0




n66 SCS=30kHz CP_QPSK BW=10MHz Channel=355000 RB=24@0

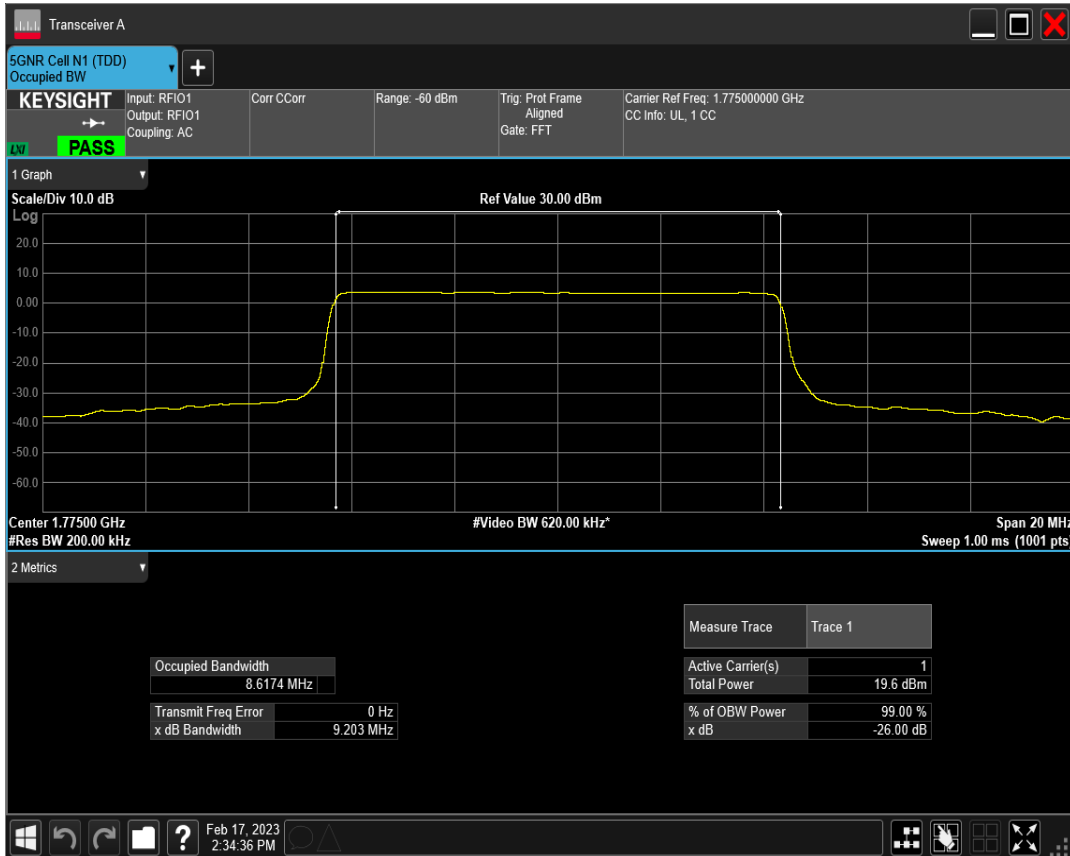


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=343500 RB=36@0

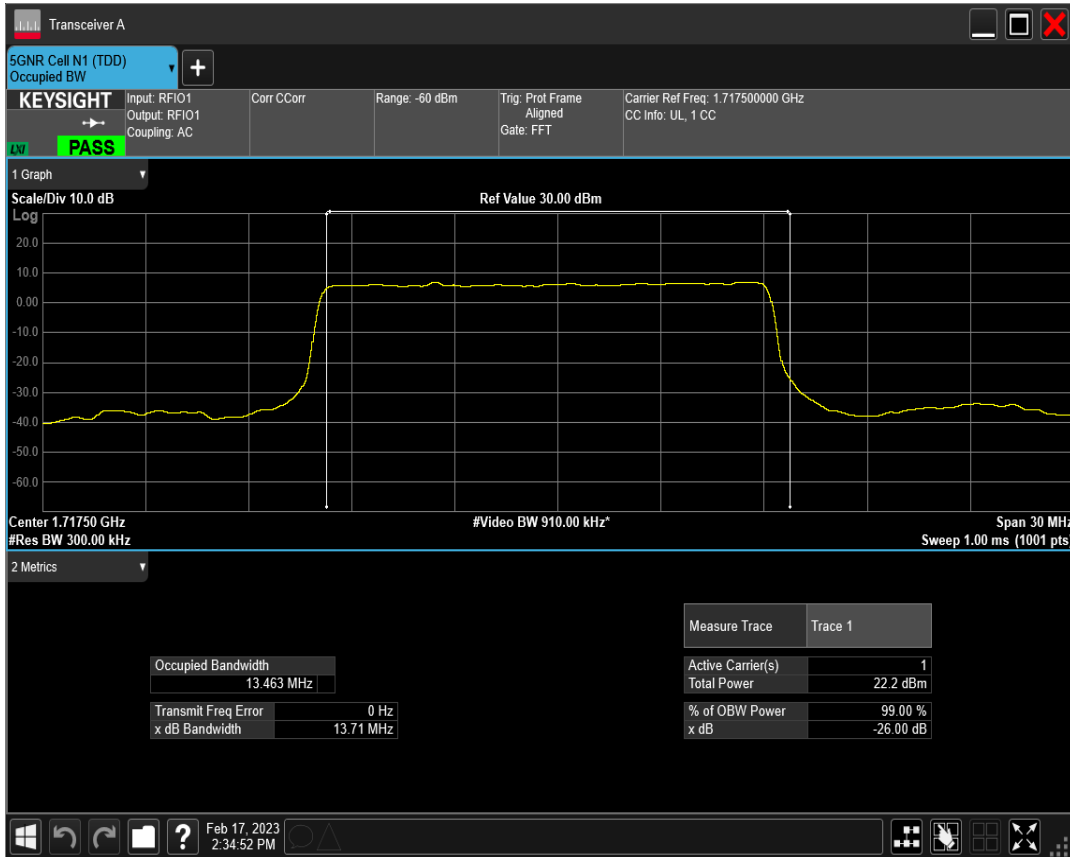


n66 SCS=30kHz DFT_QPSK BW=15MHz Channel=343500 RB=36@0

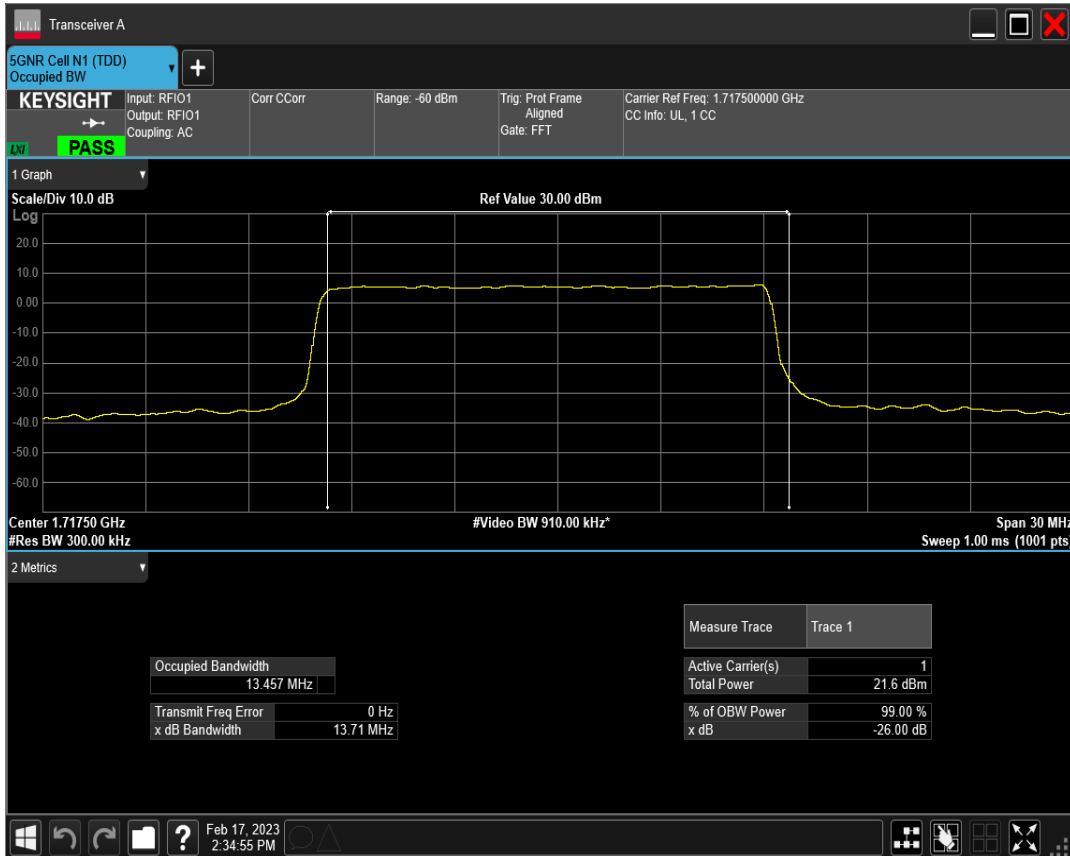


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=343500 RB=36@0

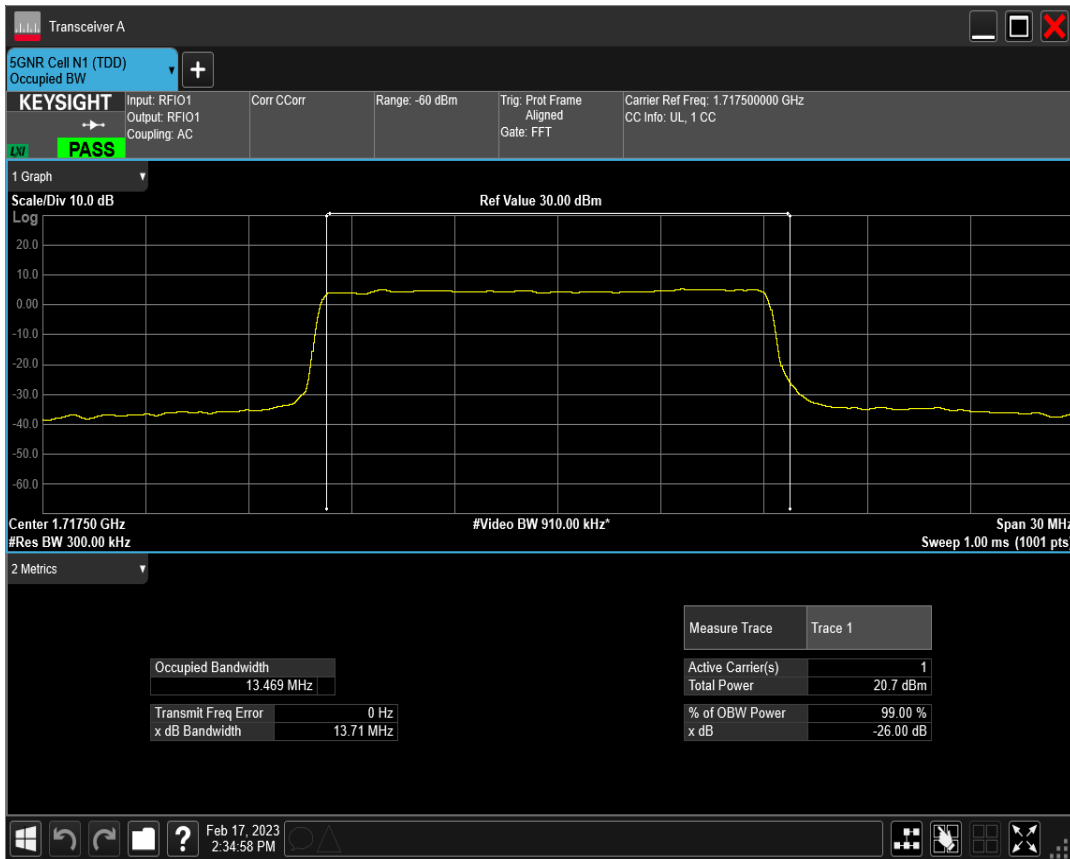


n66 SCS=30kHz DFT_QAM64 BW=15MHz Channel=343500 RB=36@0

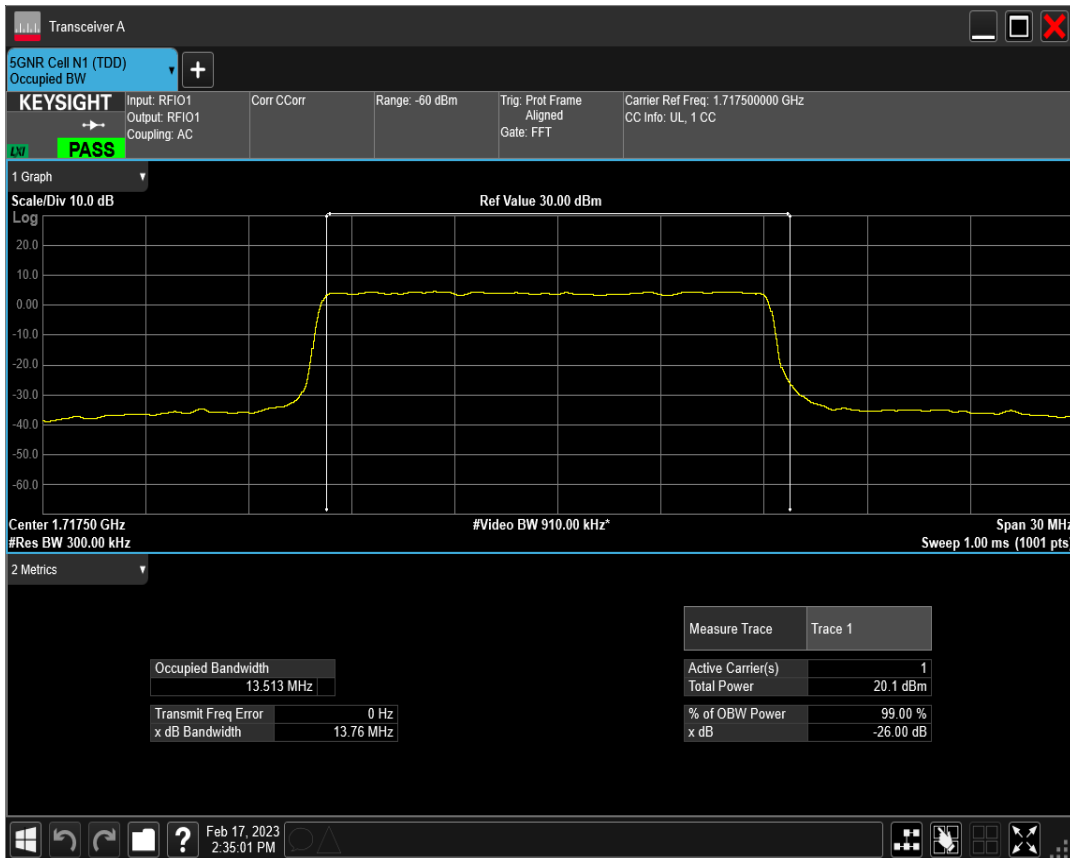


n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=343500 RB=36@0

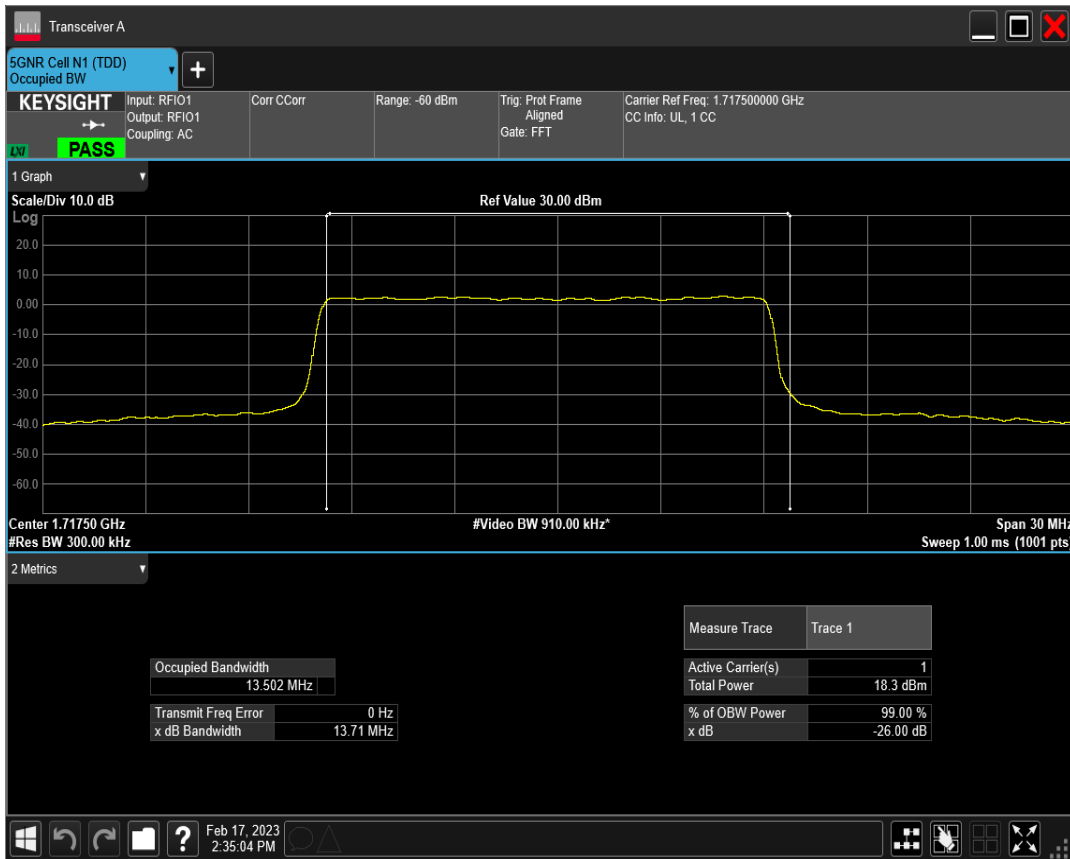


n66 SCS=30kHz CP_QPSK BW=15MHz Channel=343500 RB=38@0

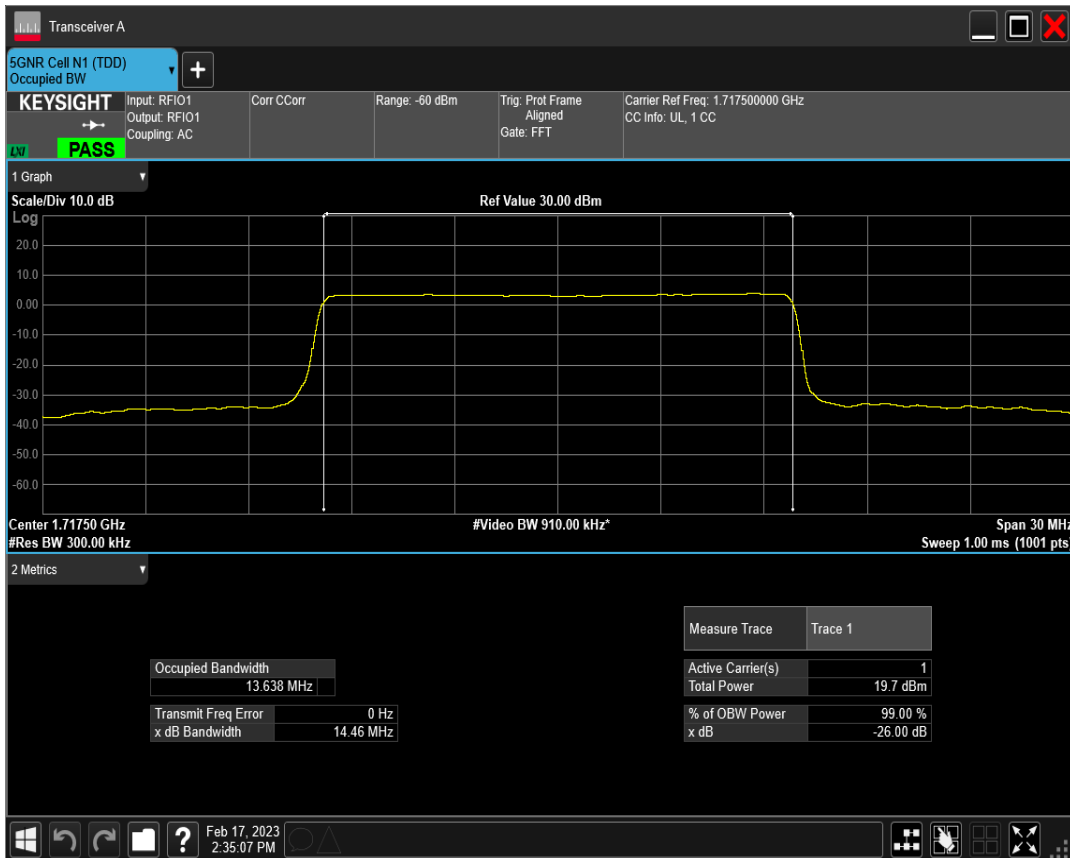


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=349000 RB=36@0

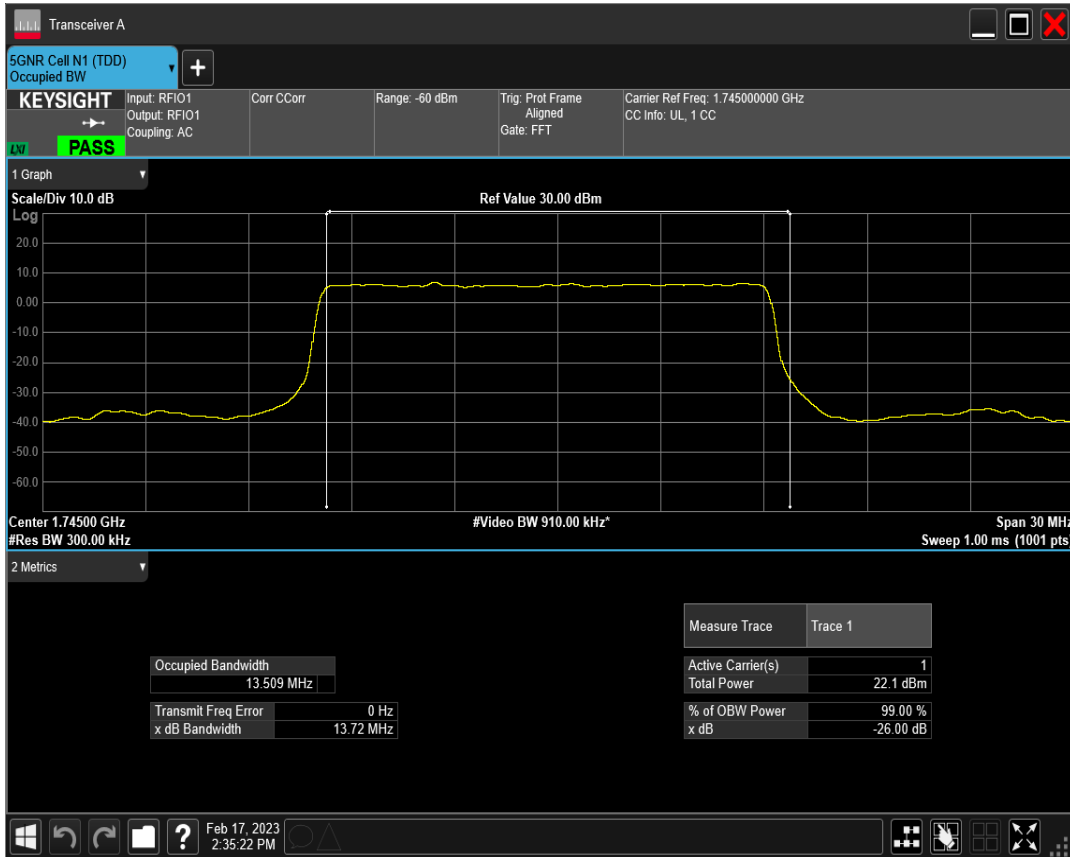


n66 SCS=30kHz DFT_QPSK BW=15MHz Channel=349000 RB=36@0

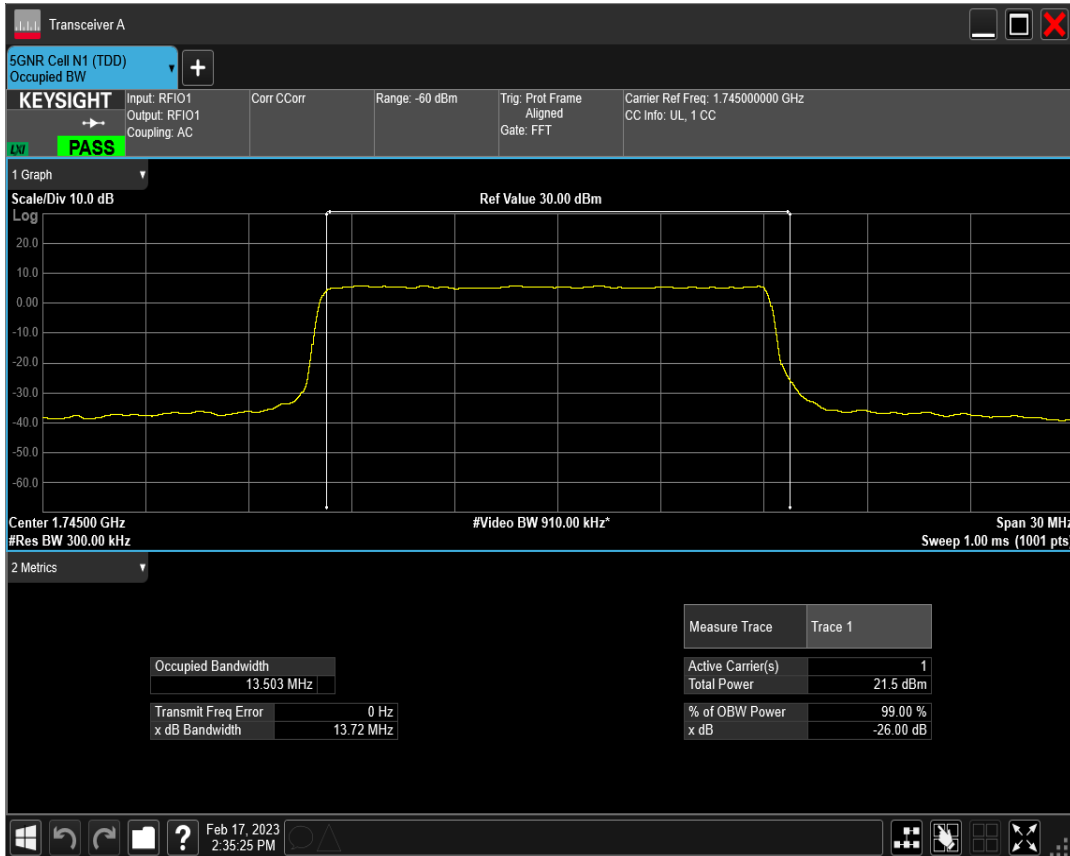

n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=349000 RB=36@0

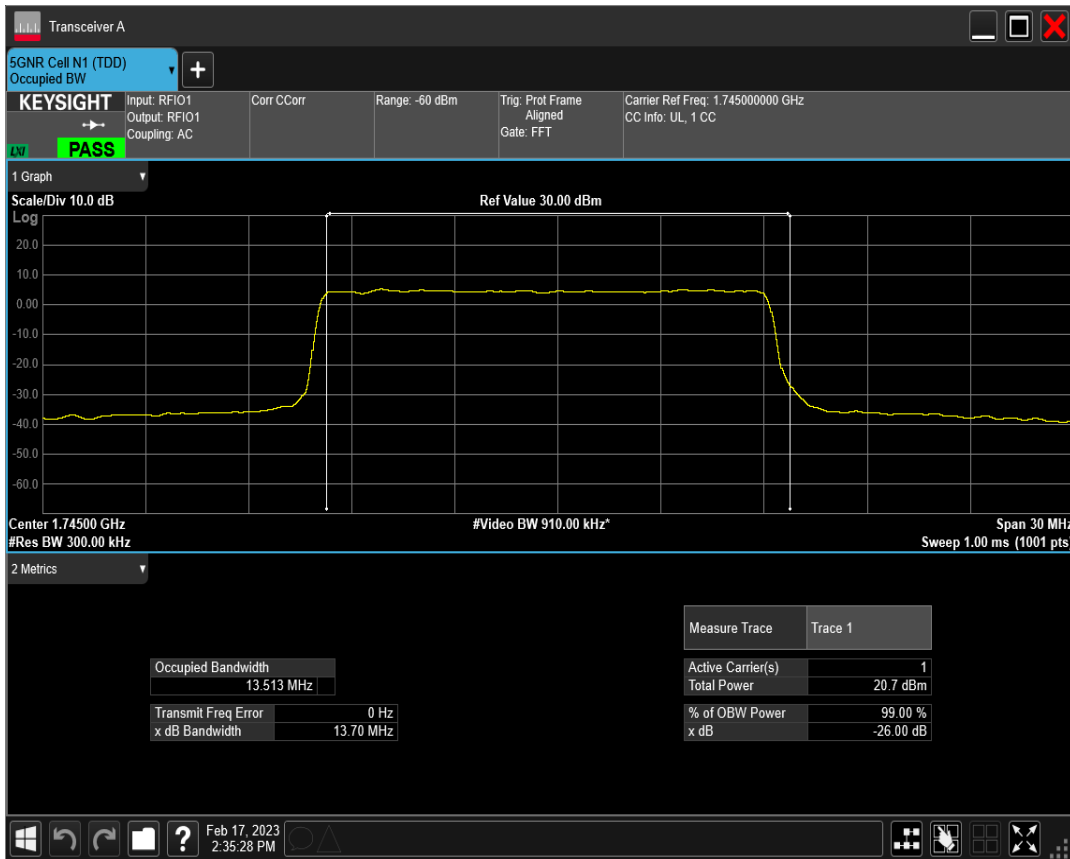


n66 SCS=30kHz DFT_QAM64 BW=15MHz Channel=349000 RB=36@0

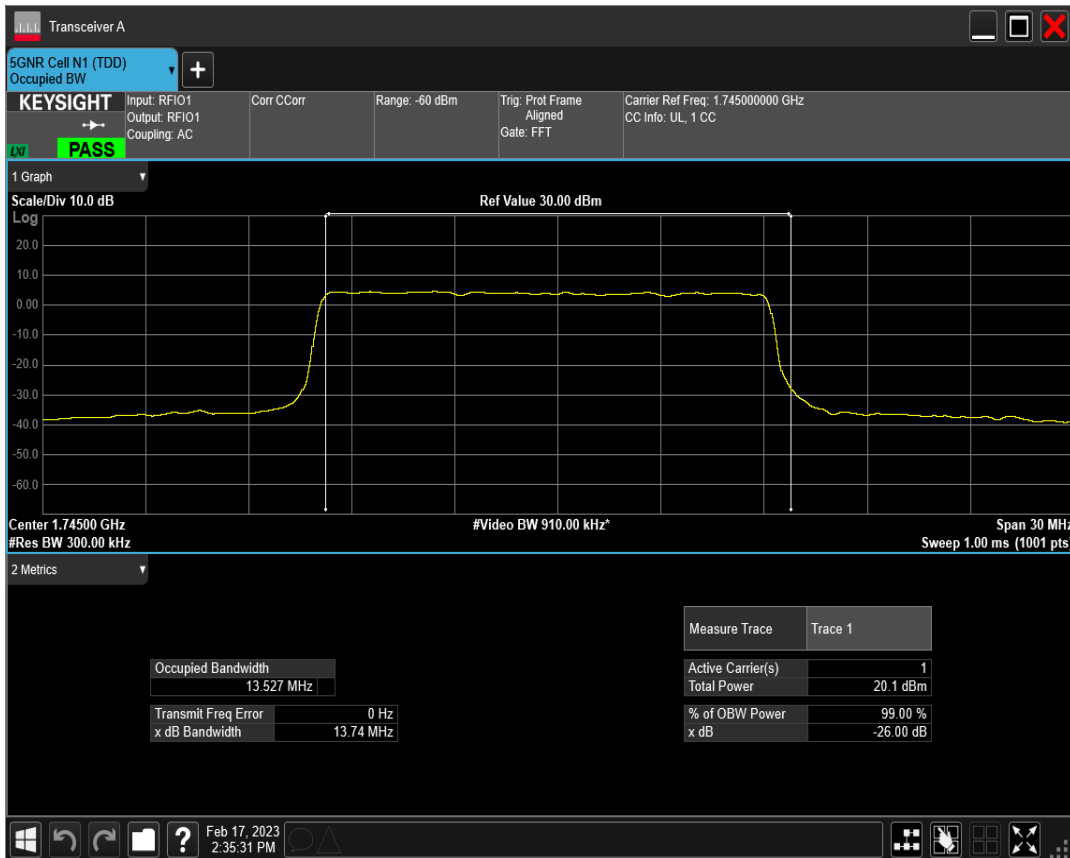

n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=349000 RB=36@0




n66 SCS=30kHz CP_QPSK BW=15MHz Channel=349000 RB=38@0

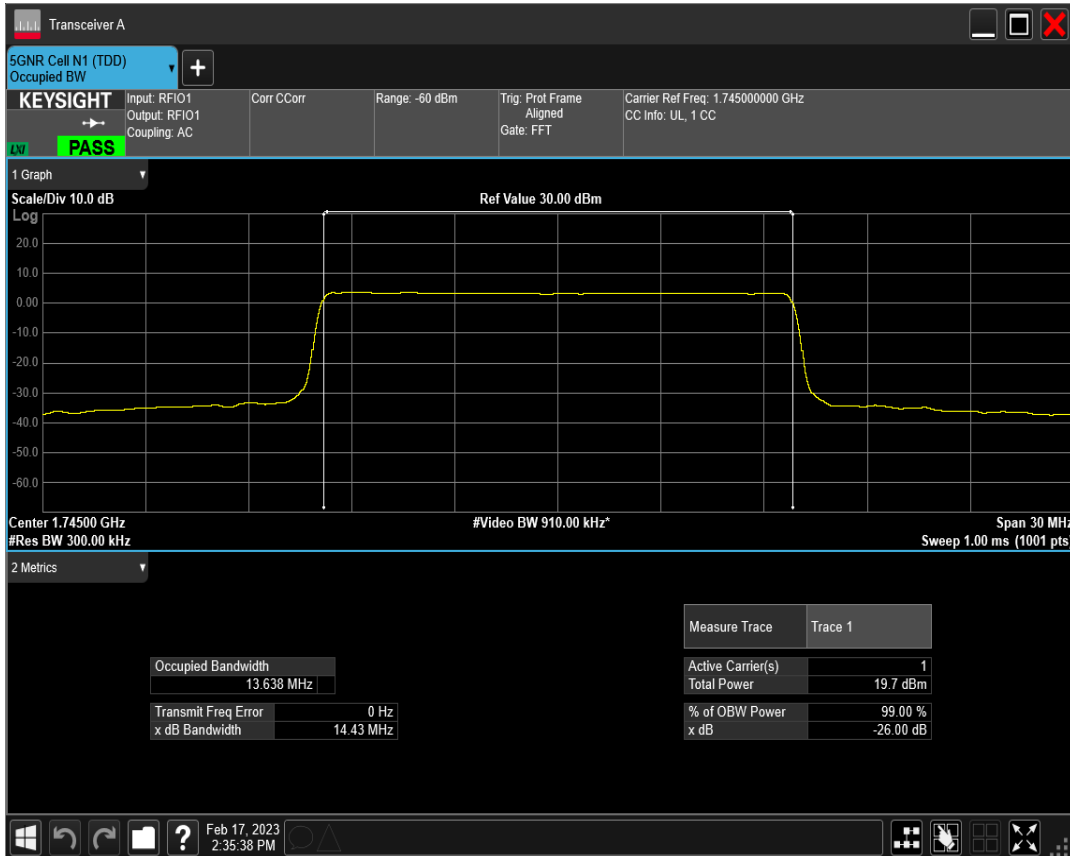


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=354500 RB=36@0




n66 SCS=30kHz DFT_QPSK BW=15MHz Channel=354500 RB=36@0

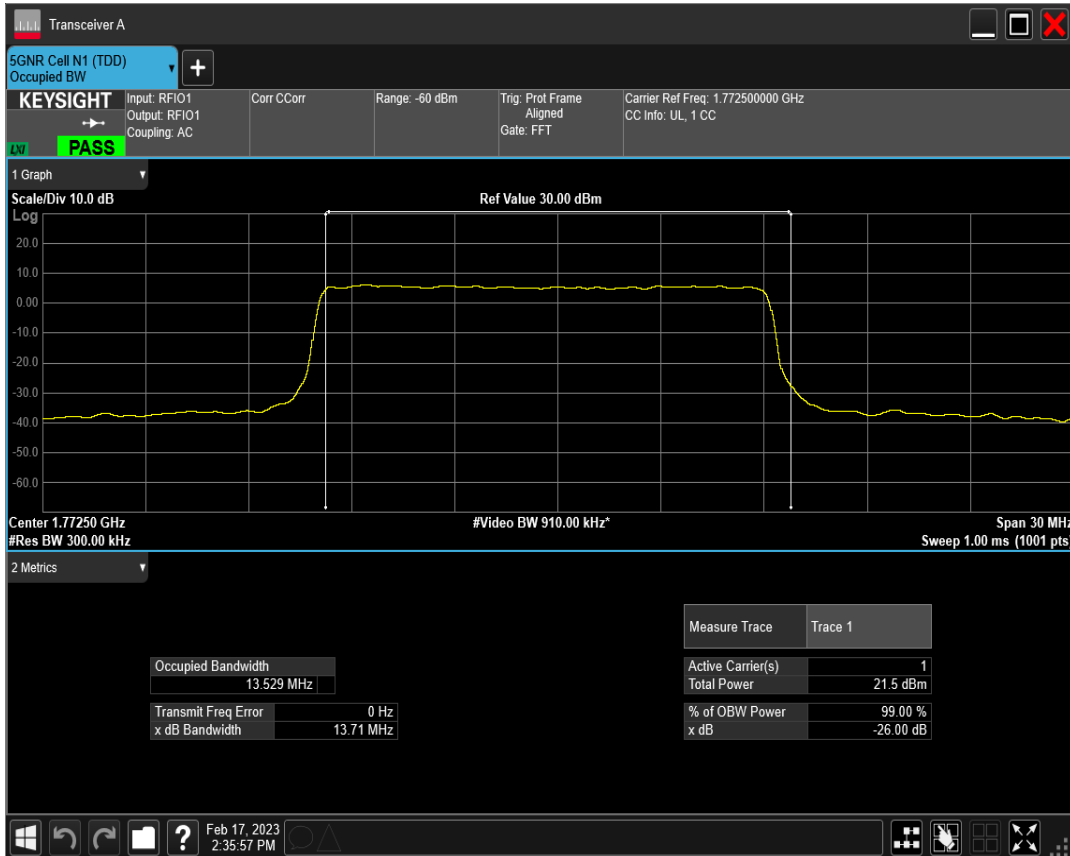


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=354500 RB=36@0

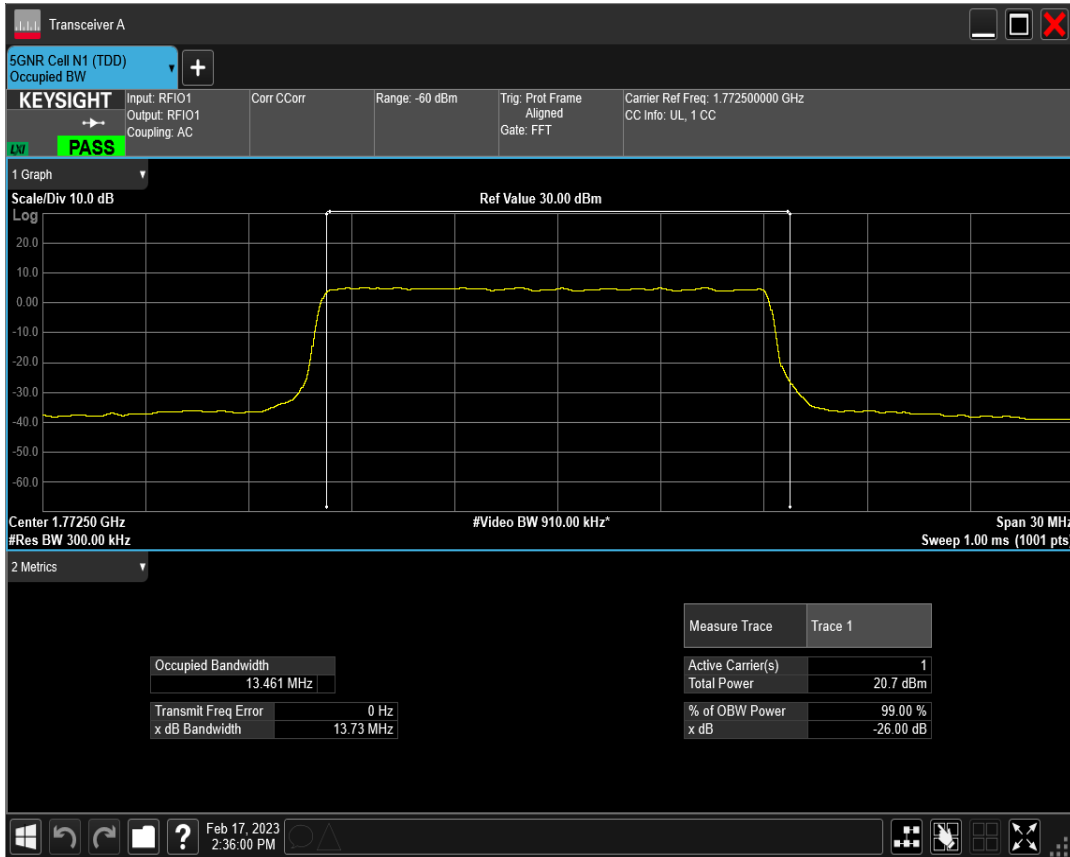


n66 SCS=30kHz DFT_QAM64 BW=15MHz Channel=354500 RB=36@0

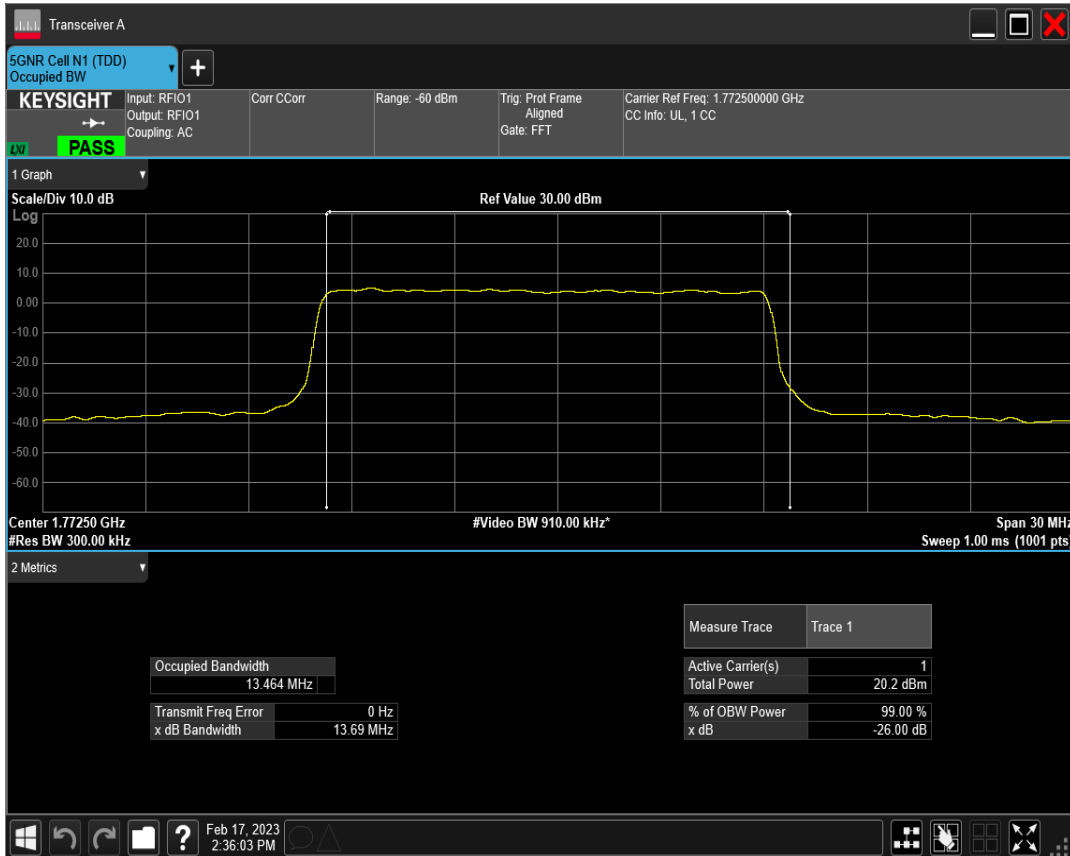

n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=354500 RB=36@0

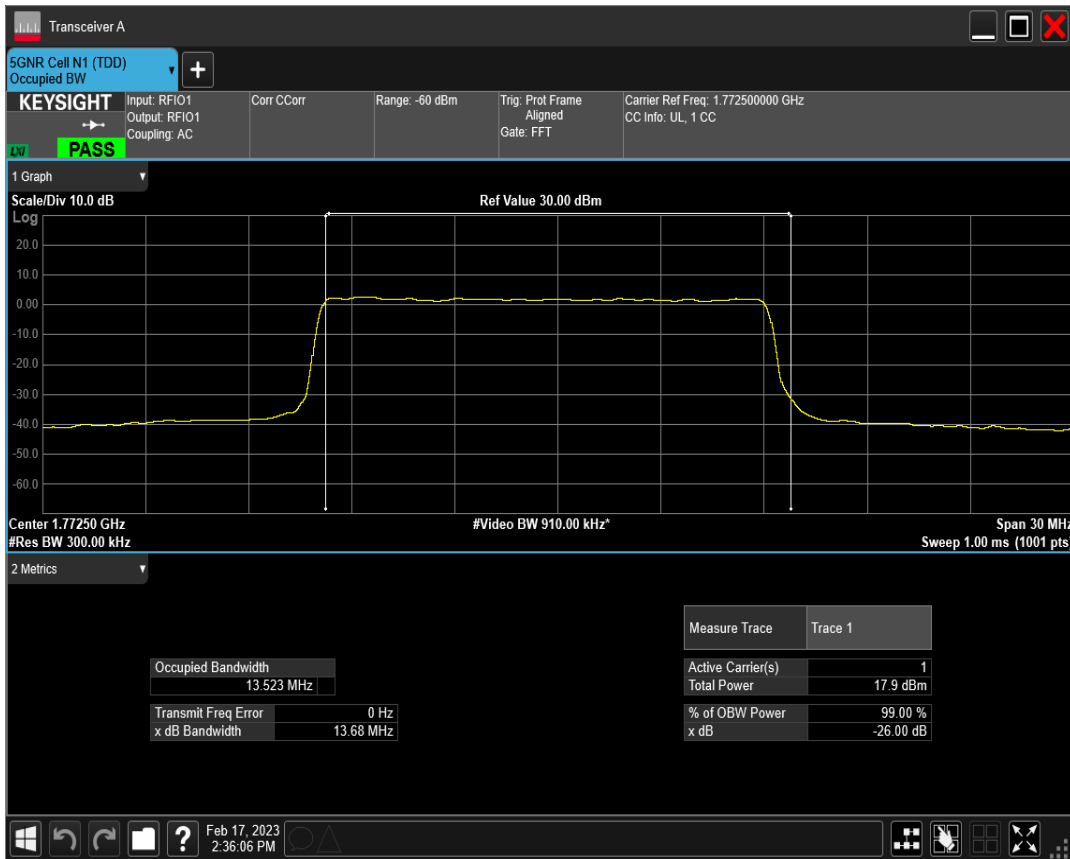


n66 SCS=30kHz CP_QPSK BW=15MHz Channel=354500 RB=38@0

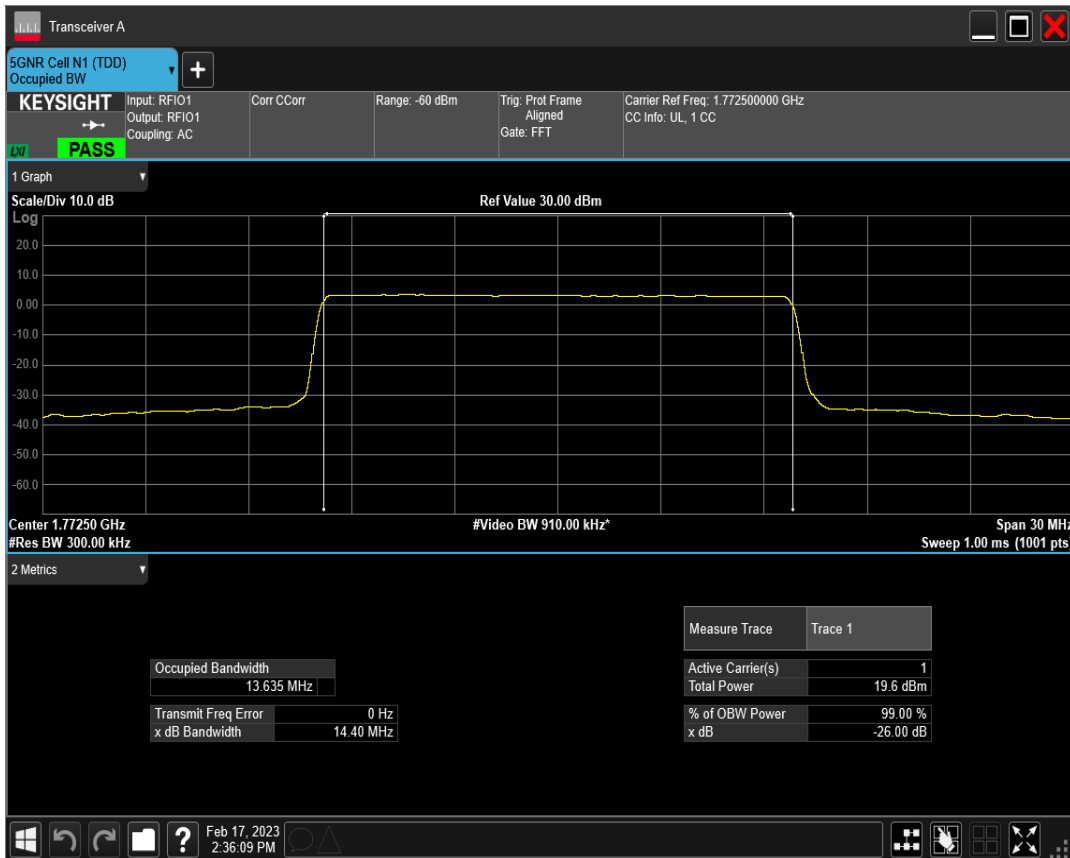


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=344000 RB=50@0




n66 SCS=30kHz DFT_QPSK BW=20MHz Channel=344000 RB=50@0

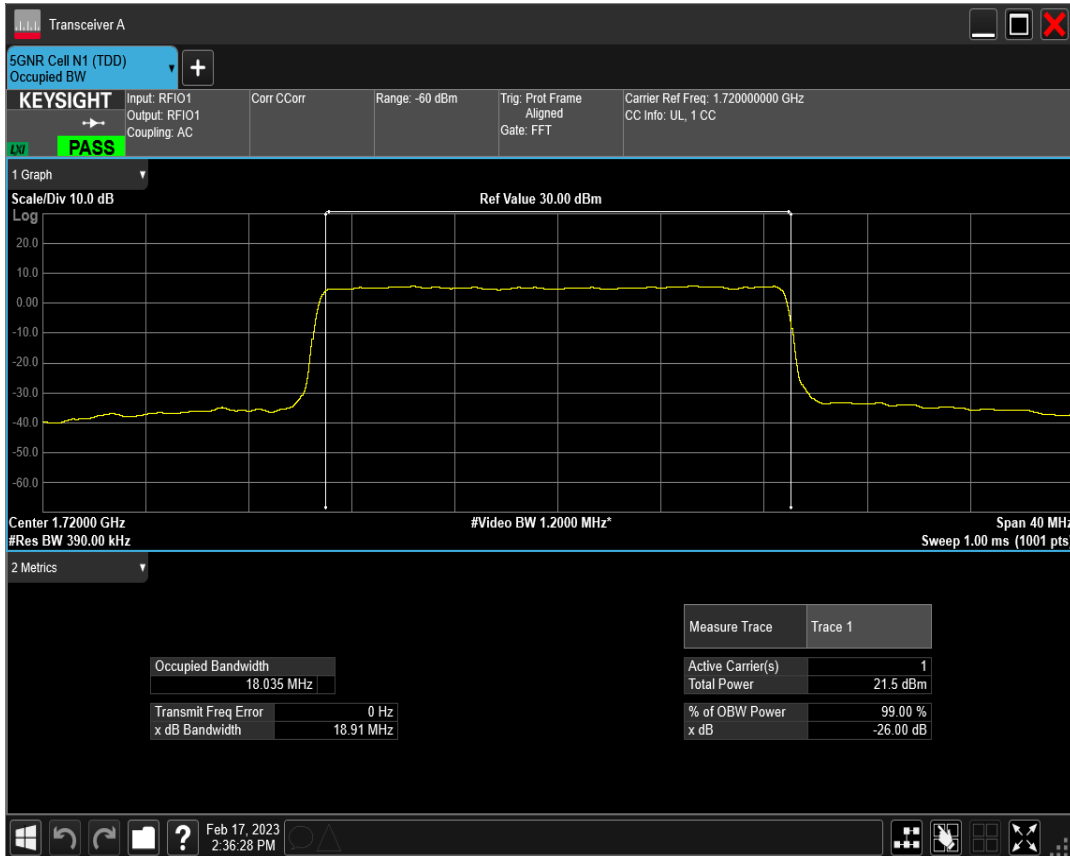


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=344000 RB=50@0

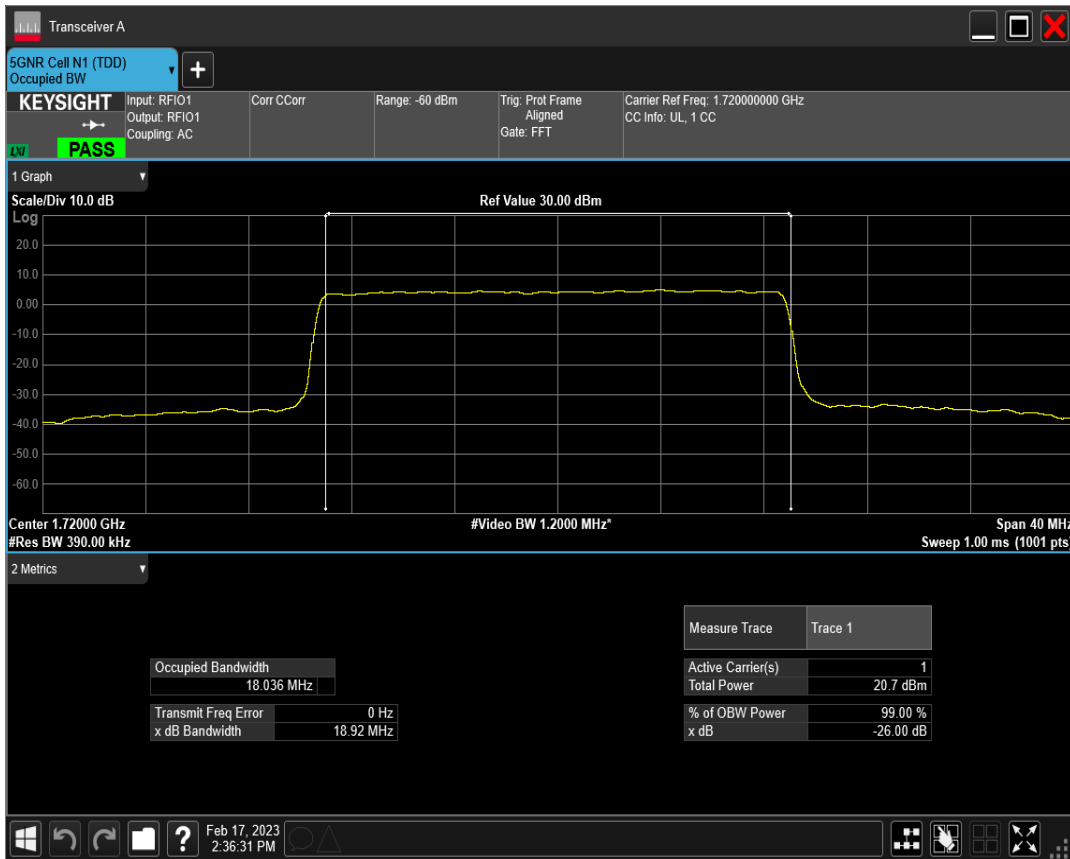


n66 SCS=30kHz DFT_QAM64 BW=20MHz Channel=344000 RB=50@0

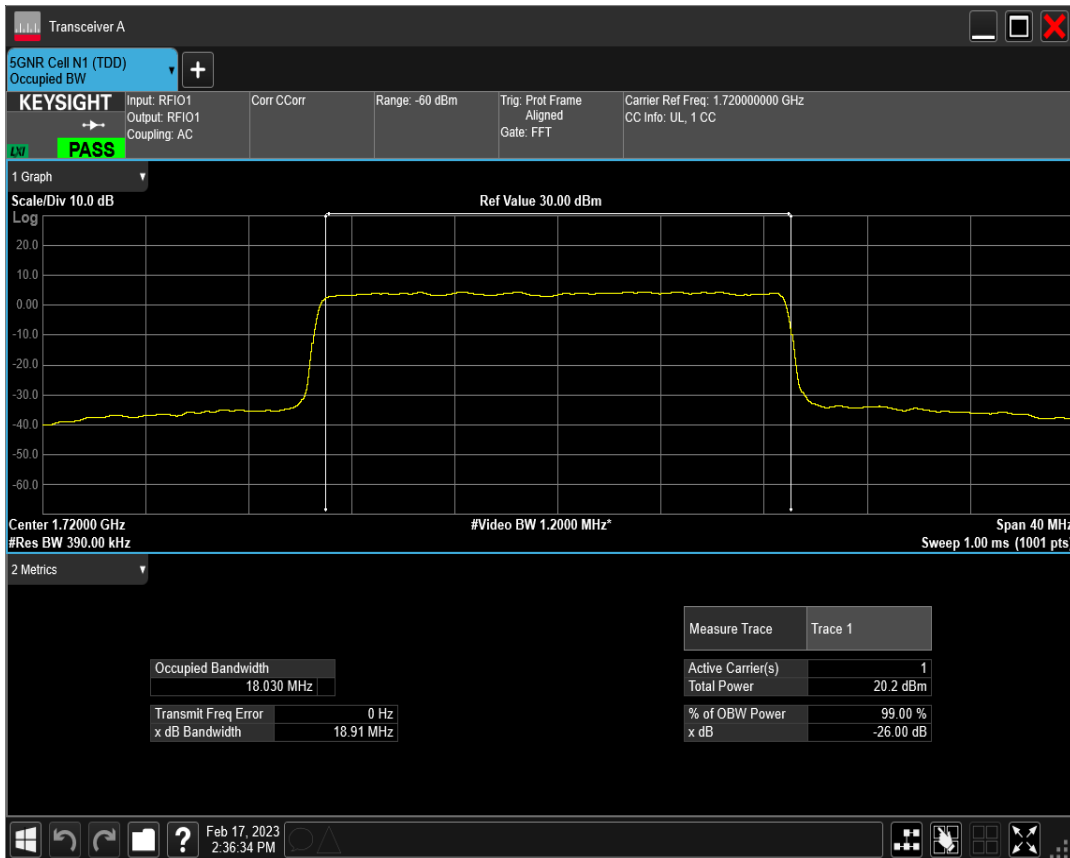


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=344000 RB=50@0

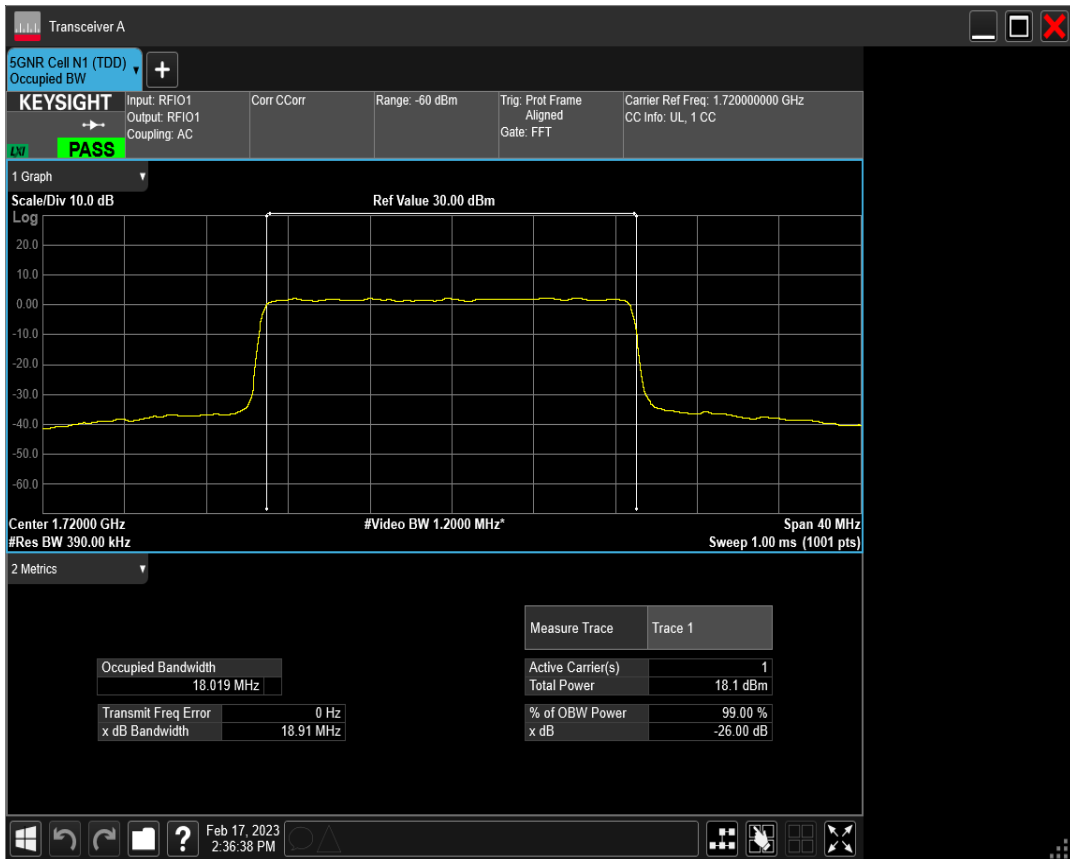


n66 SCS=30kHz CP_QPSK BW=20MHz Channel=344000 RB=51@0

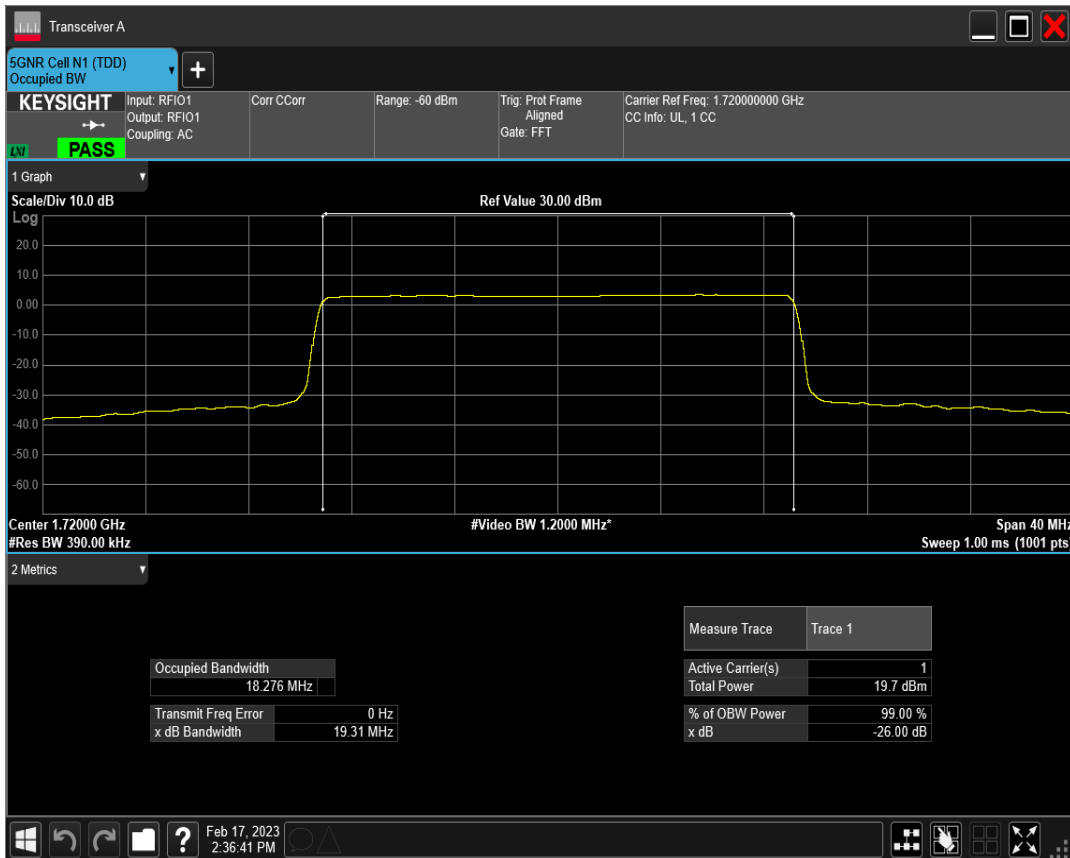


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=349000 RB=50@0

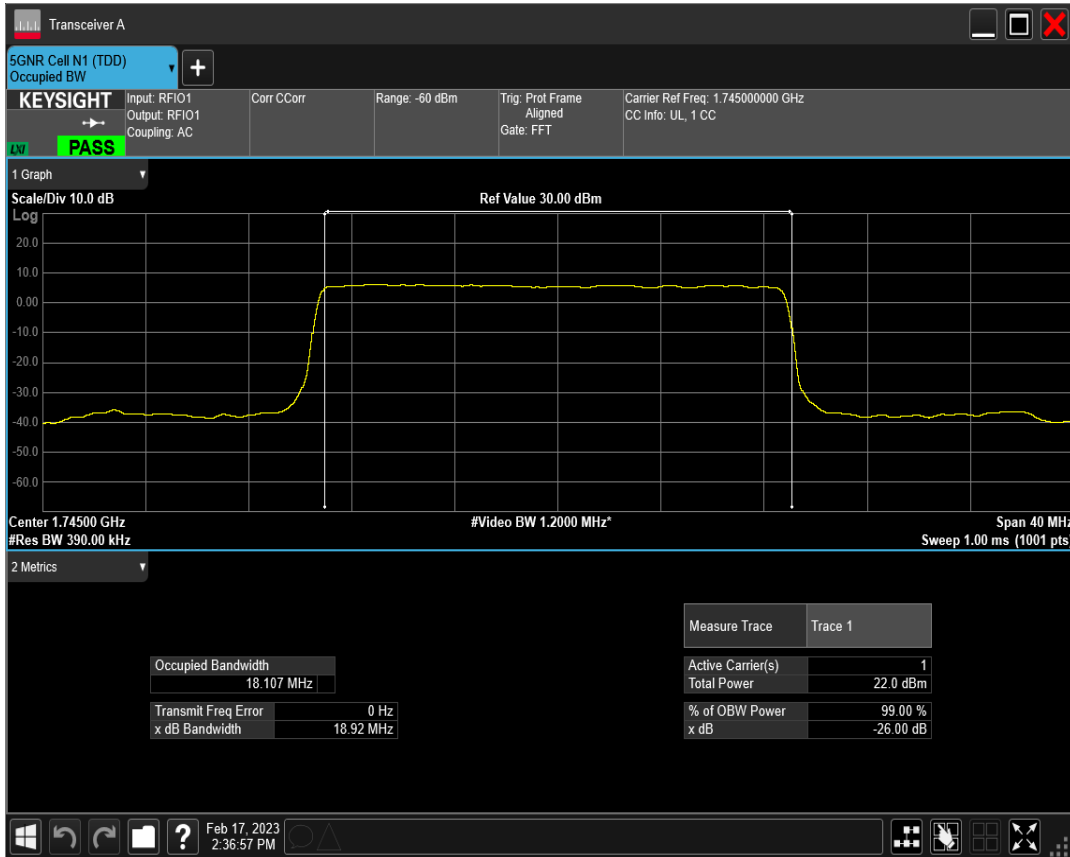


n66 SCS=30kHz DFT_QPSK BW=20MHz Channel=349000 RB=50@0

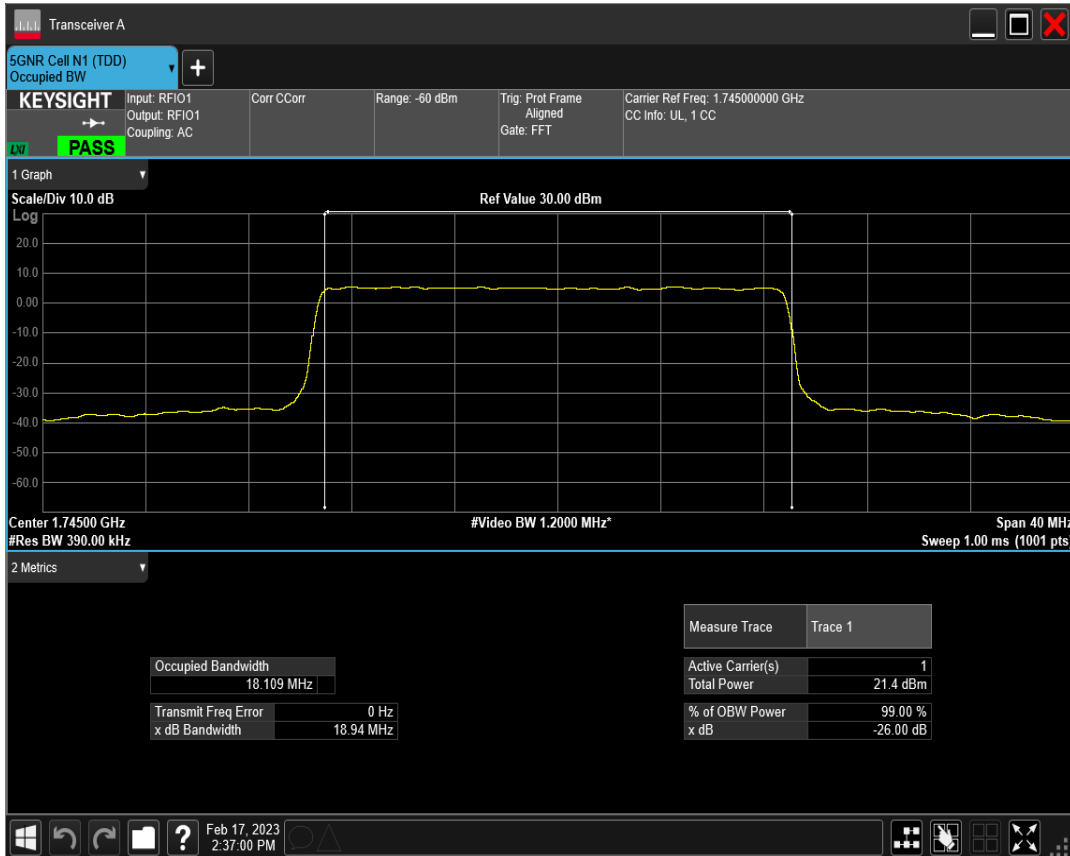


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=349000 RB=50@0

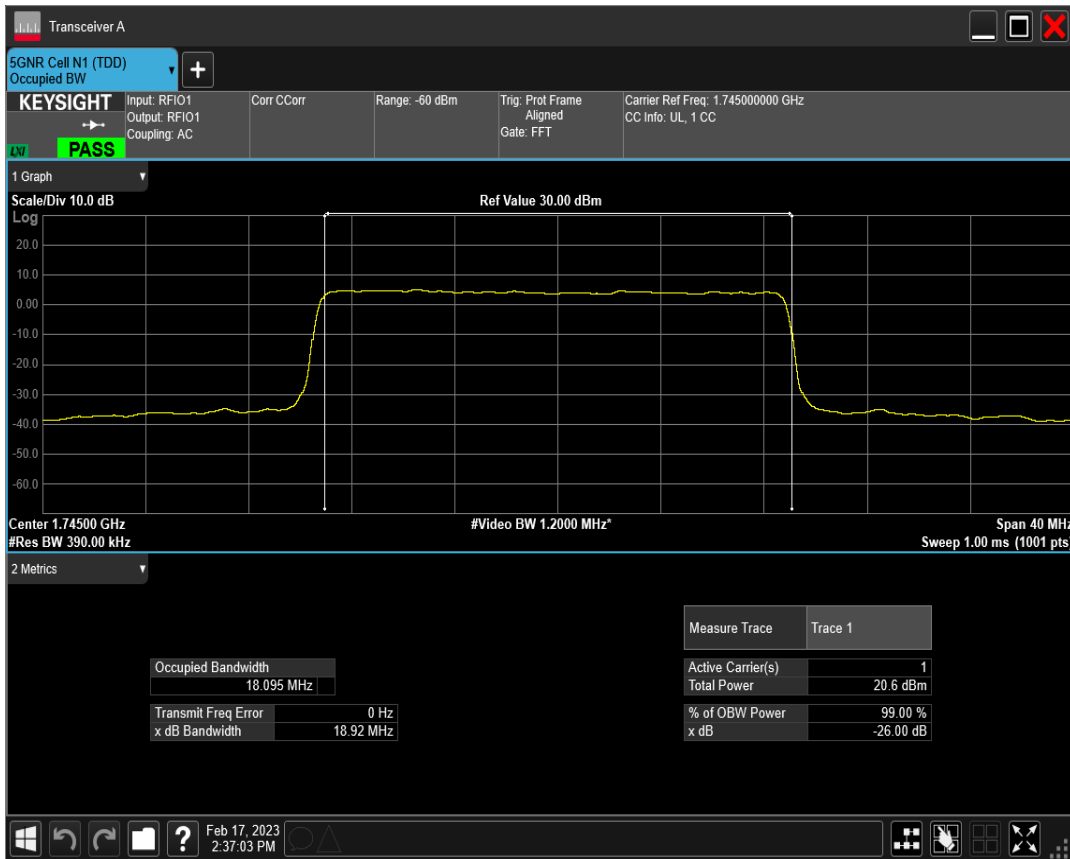


n66 SCS=30kHz DFT_QAM64 BW=20MHz Channel=349000 RB=50@0

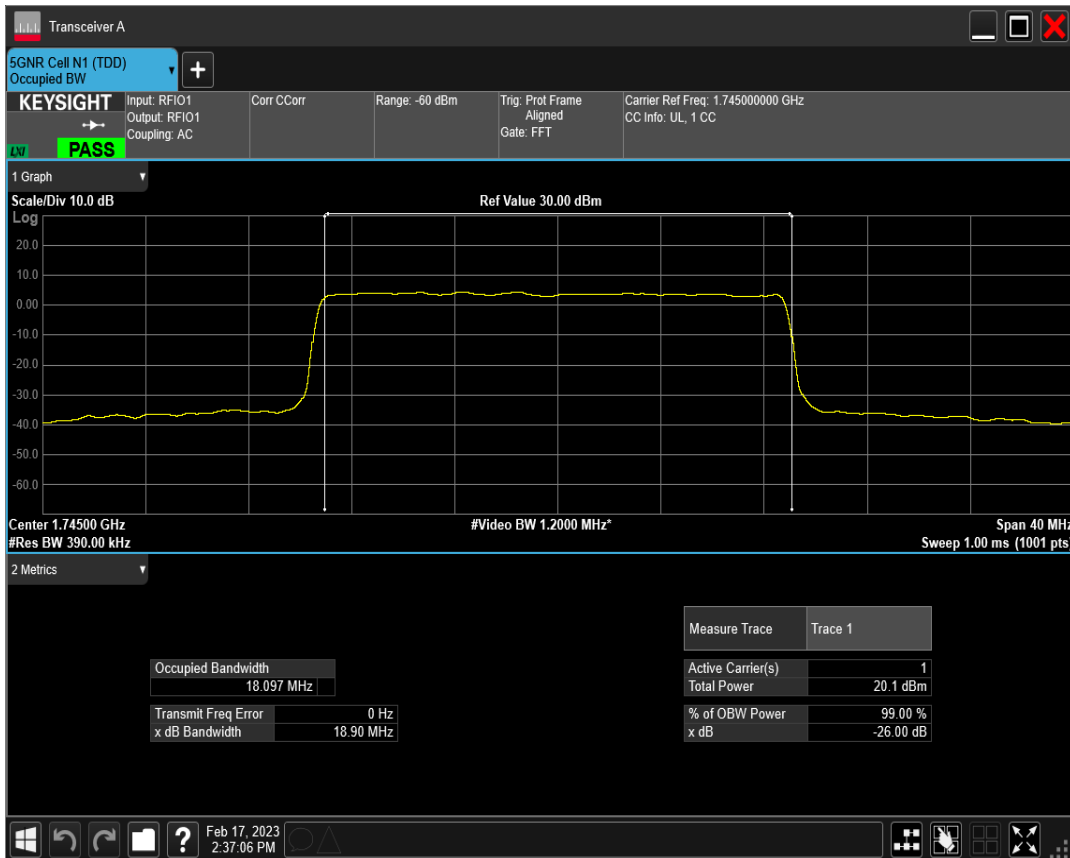

n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=349000 RB=50@0

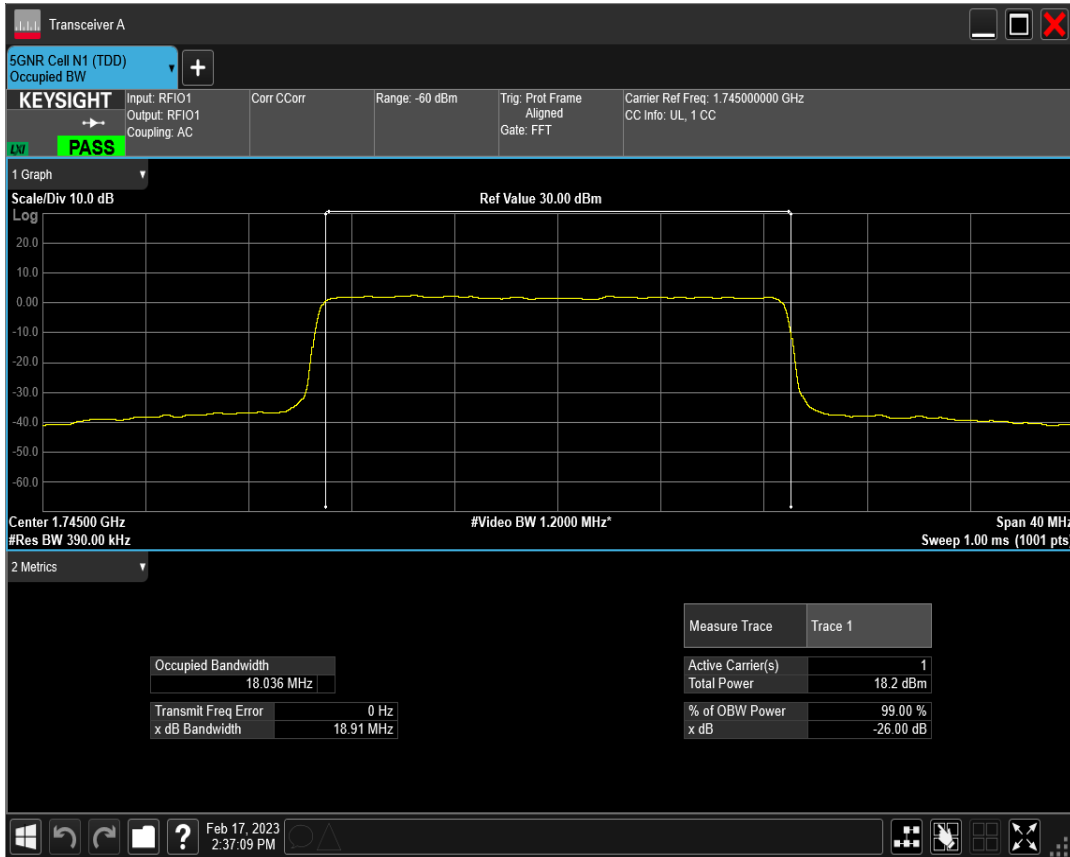


n66 SCS=30kHz CP_QPSK BW=20MHz Channel=349000 RB=51@0

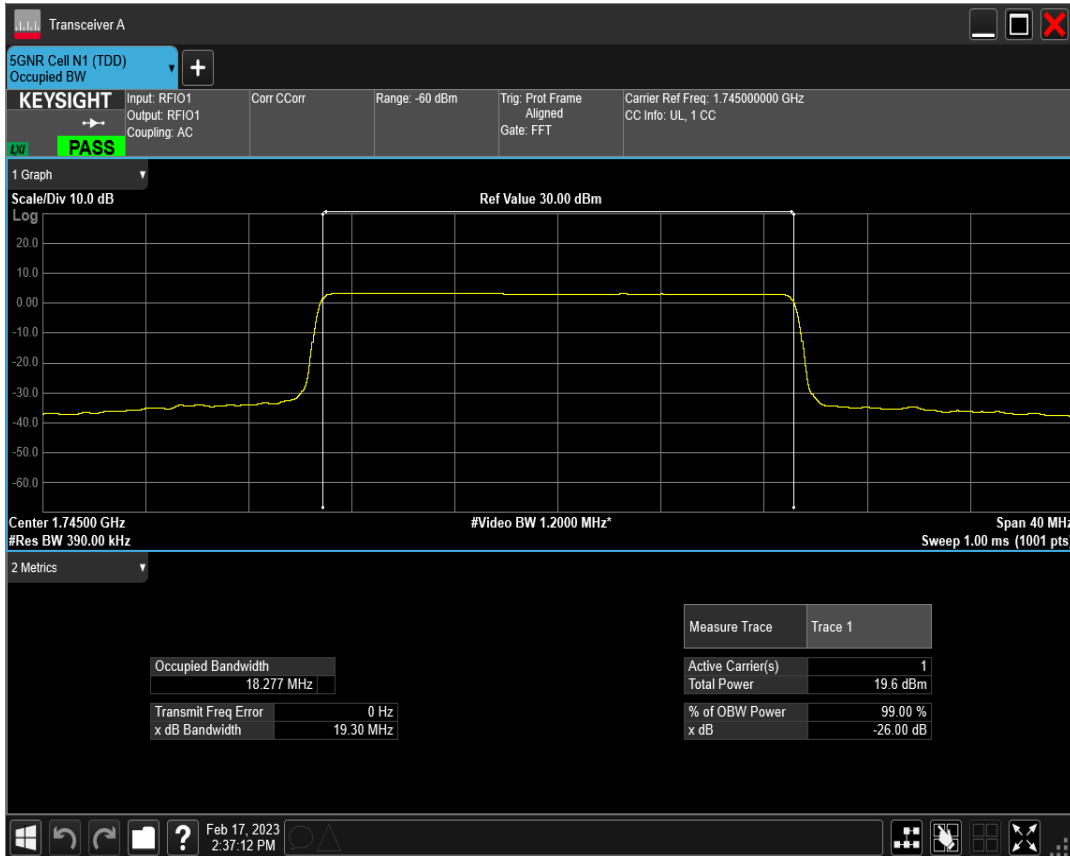


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=354000 RB=50@0




n66 SCS=30kHz DFT_QPSK BW=20MHz Channel=354000 RB=50@0

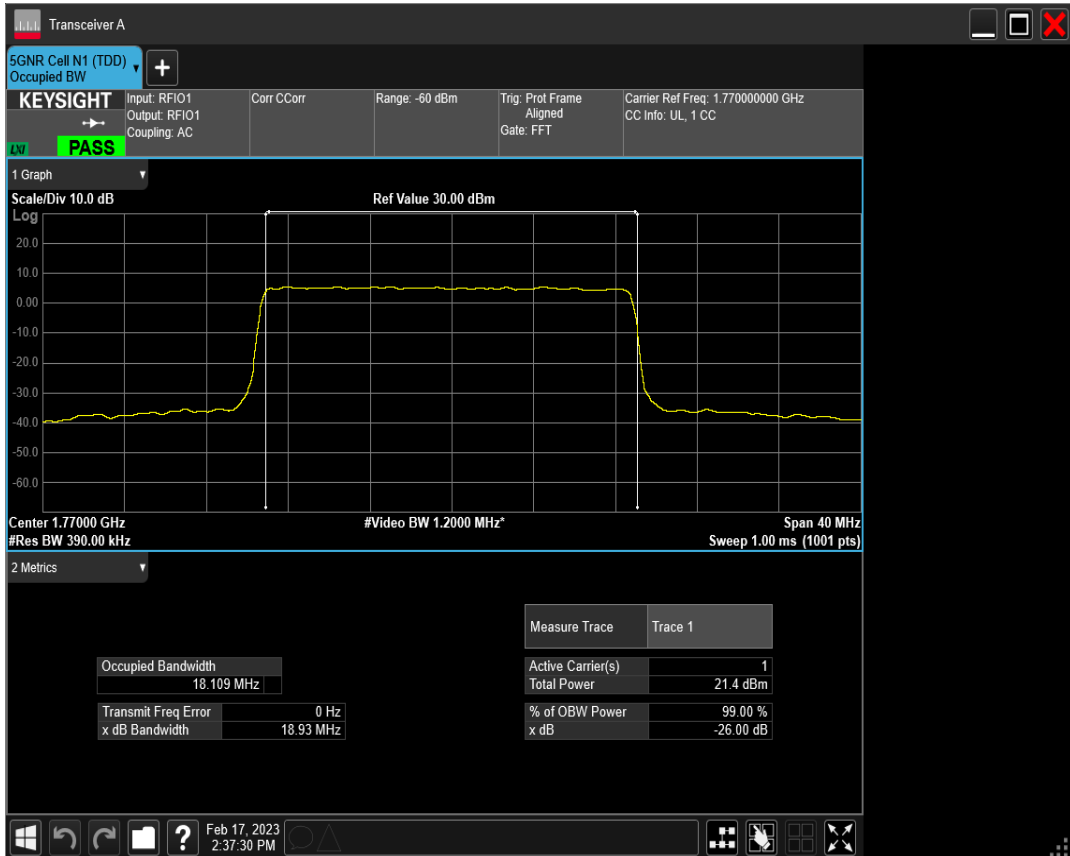

n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=354000 RB=50@0

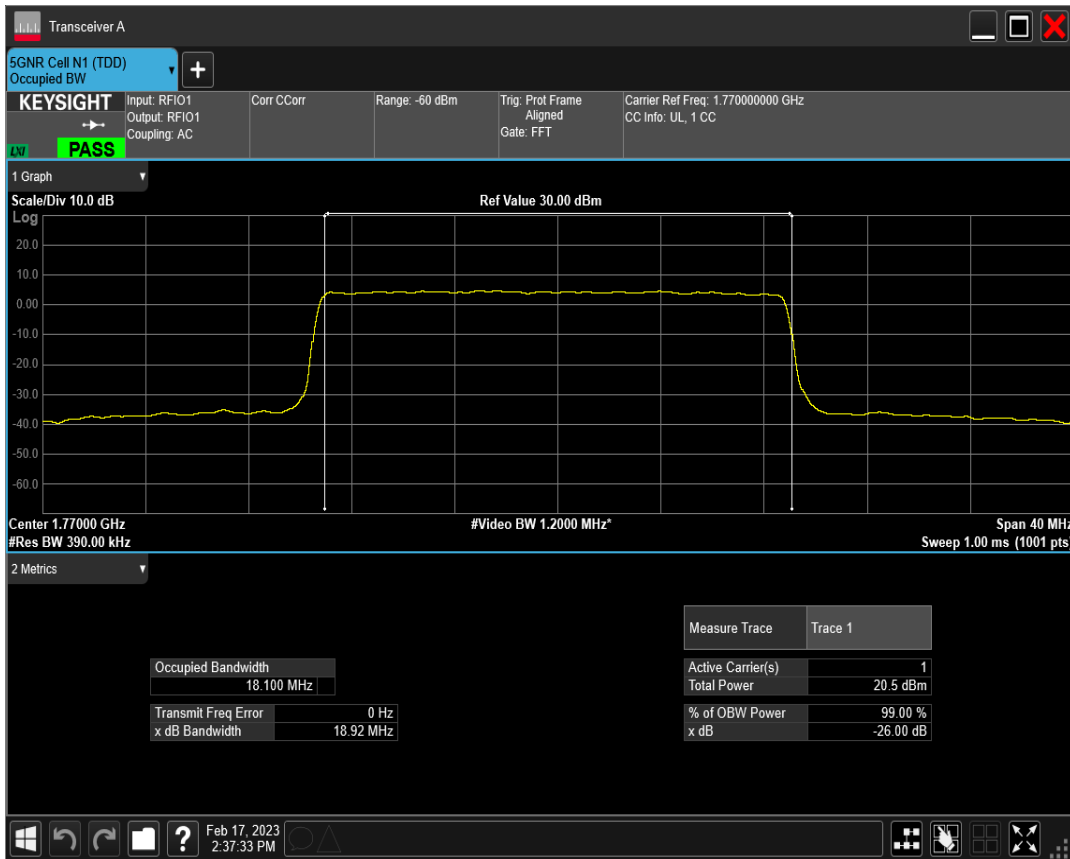


n66 SCS=30kHz DFT_QAM64 BW=20MHz Channel=354000 RB=50@0

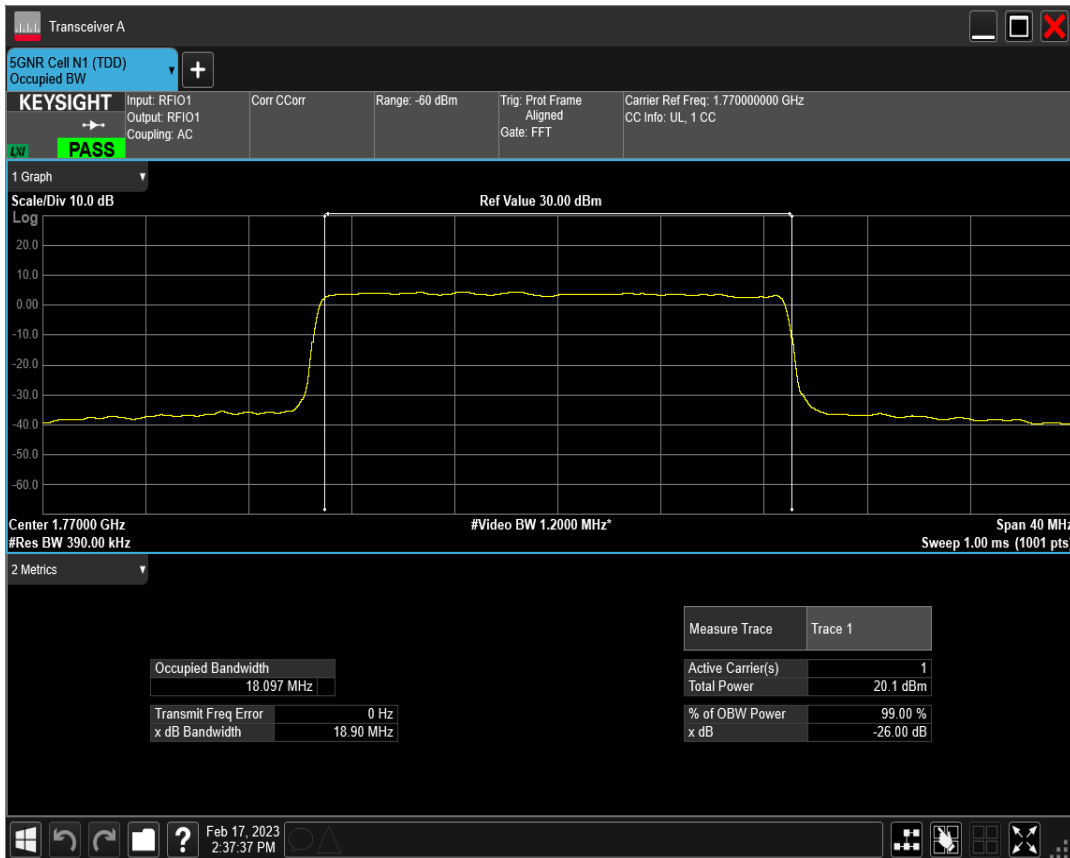


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=354000 RB=50@0




n66 SCS=30kHz CP_QPSK BW=20MHz Channel=354000 RB=51@0

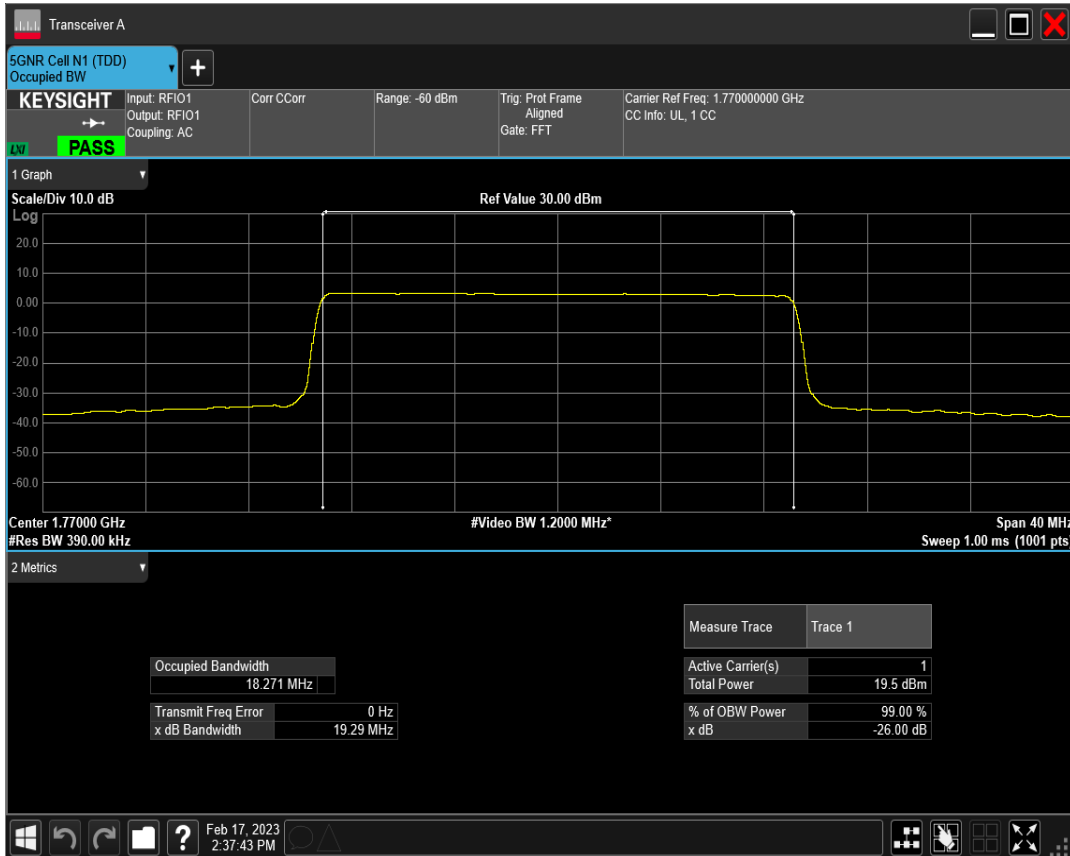


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=346000 RB=100@0

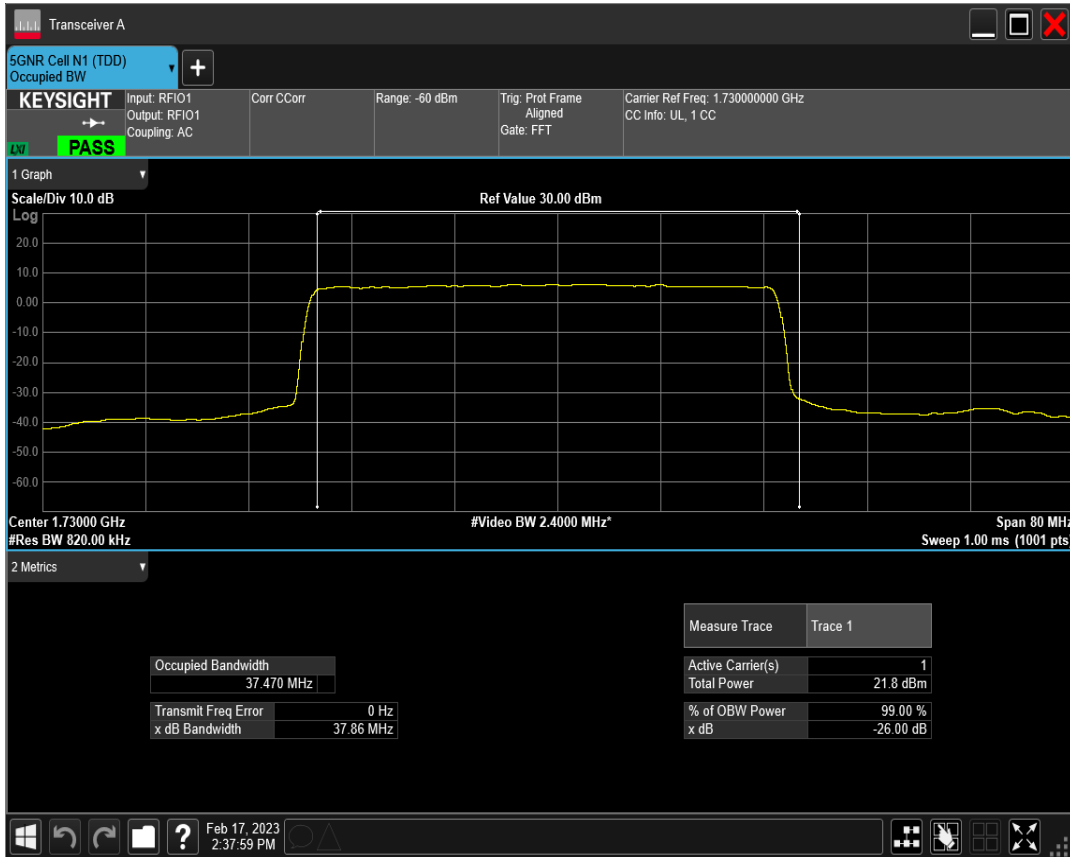


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=100@0

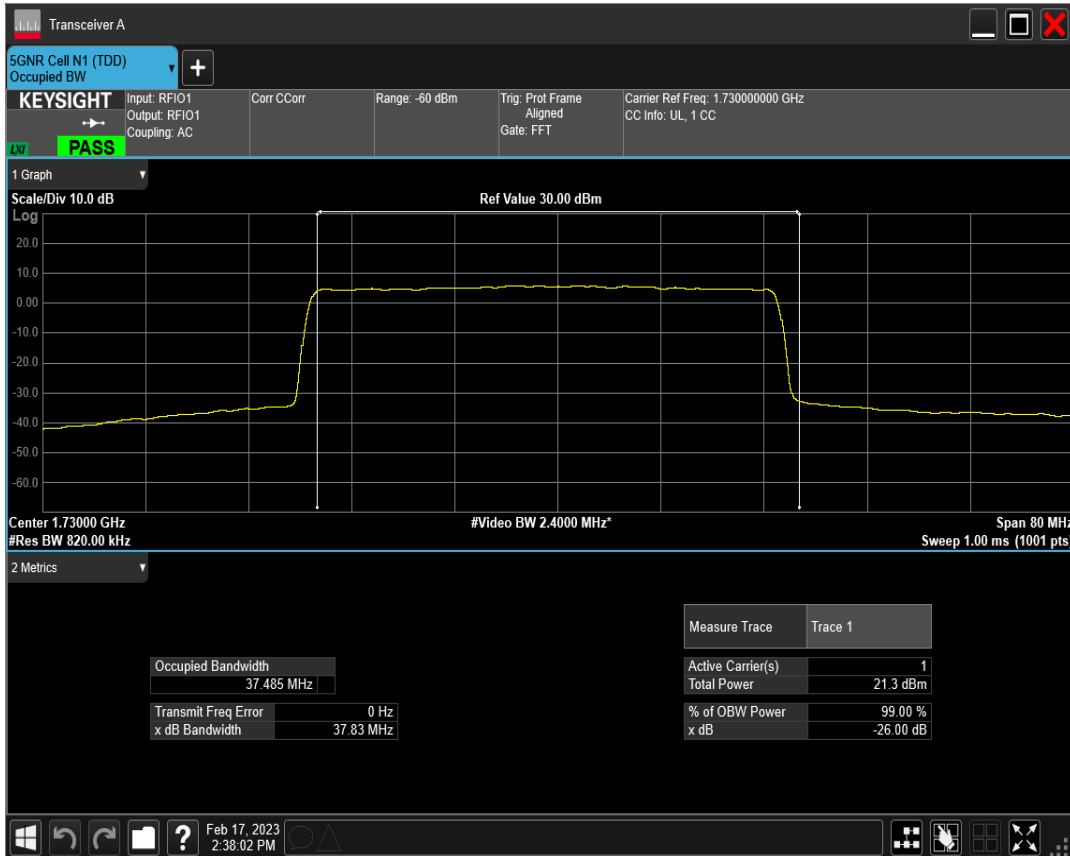


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=346000 RB=100@0

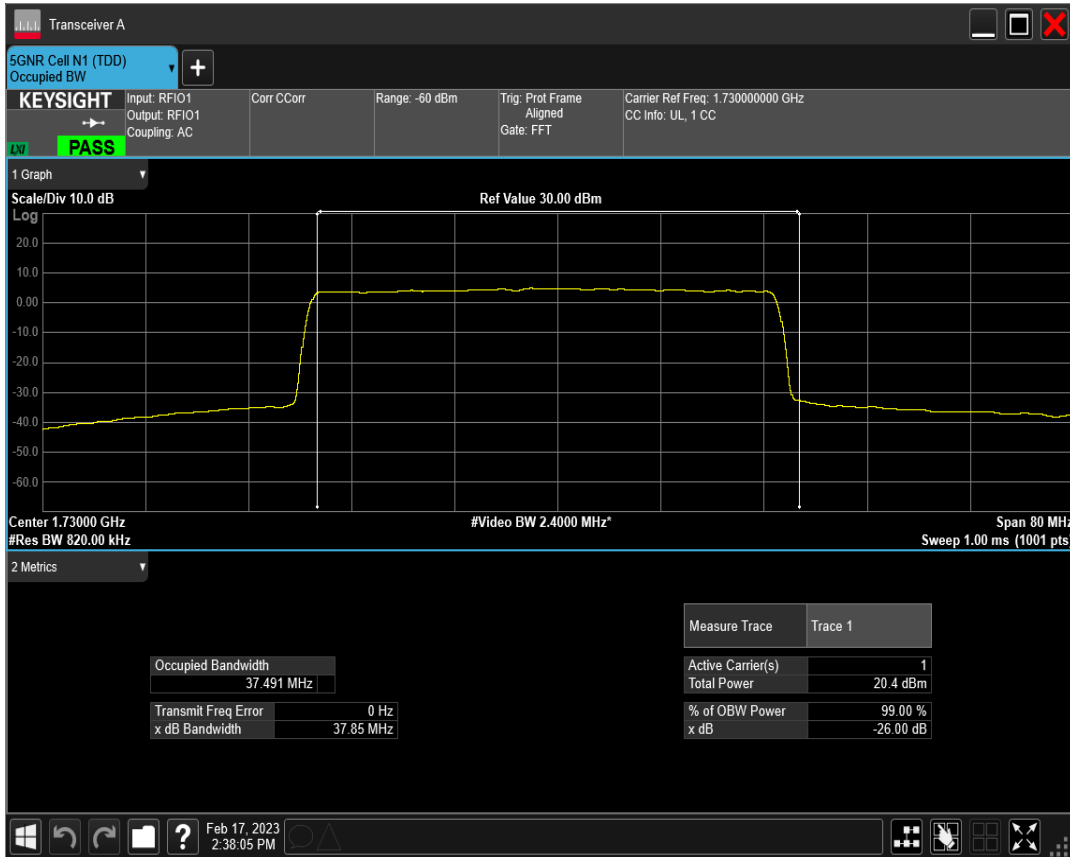


n66 SCS=30kHz DFT_QAM64 BW=40MHz Channel=346000 RB=100@0

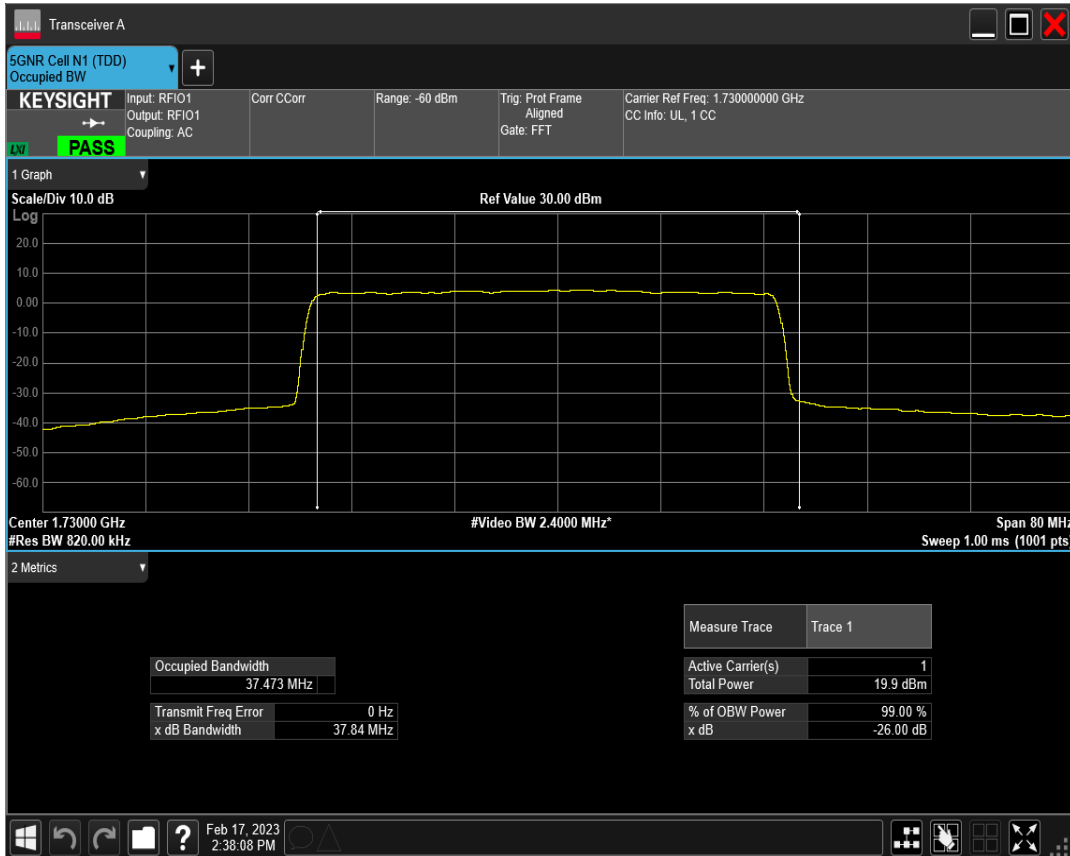


n66 SCS=30kHz DFT_QAM256 BW=40MHz Channel=346000 RB=100@0

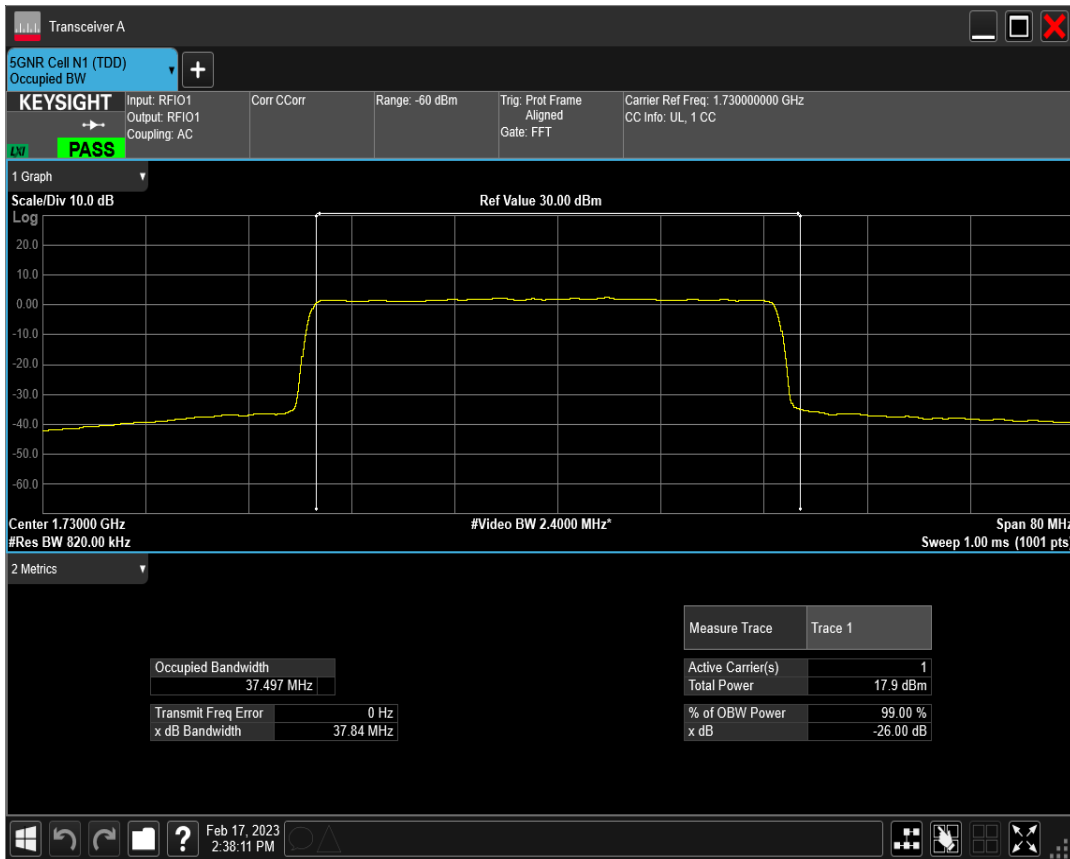


n66 SCS=30kHz CP_QPSK BW=40MHz Channel=346000 RB=106@0

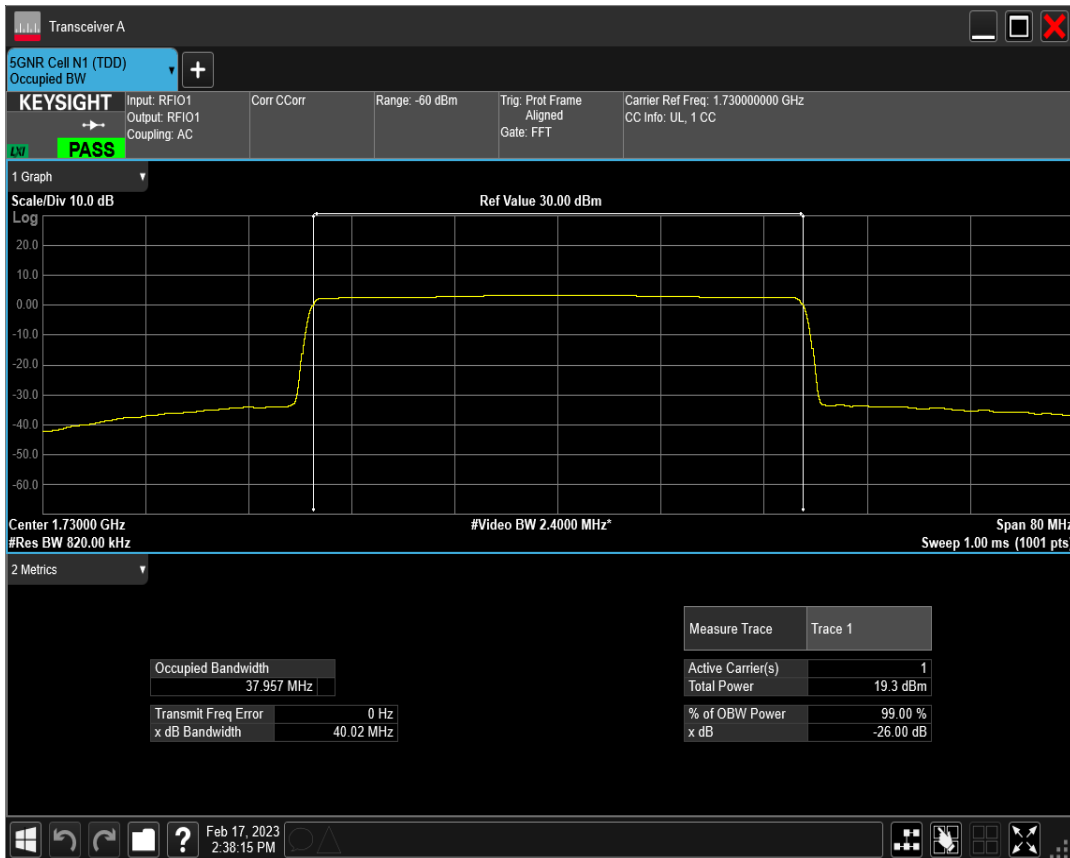


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=349000 RB=100@0

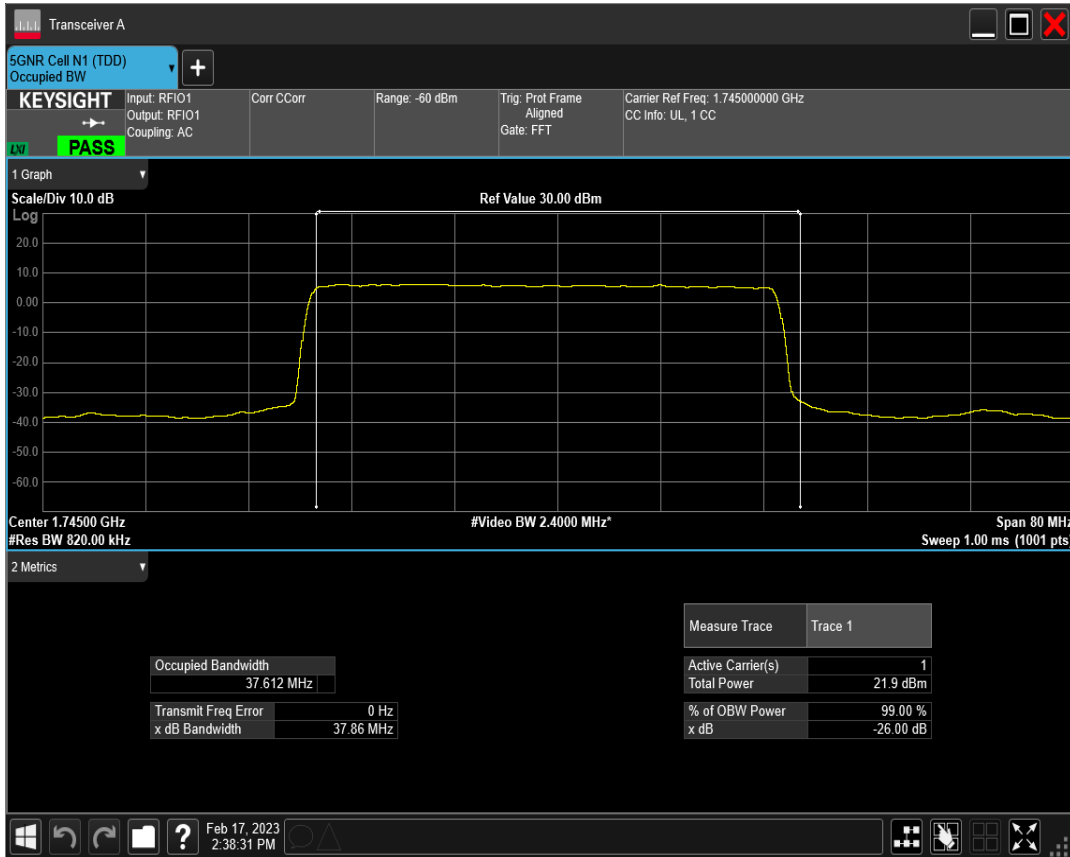


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=349000 RB=100@0

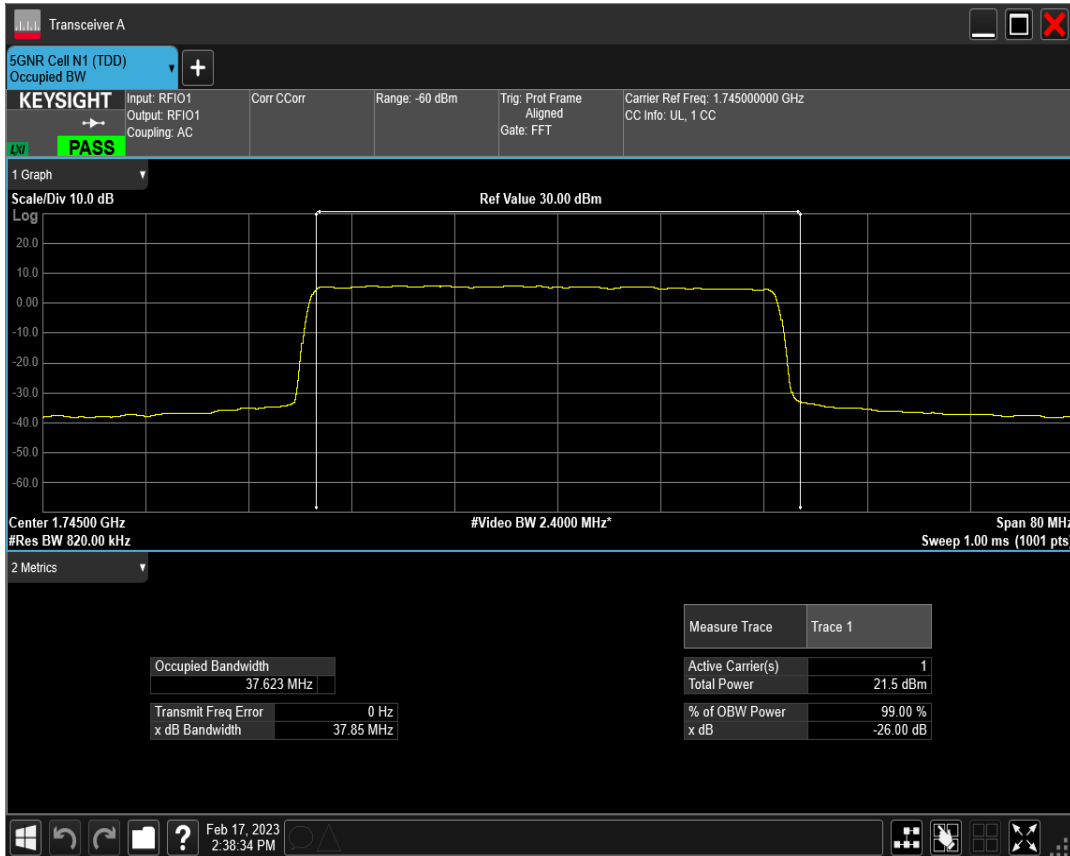


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=349000 RB=100@0

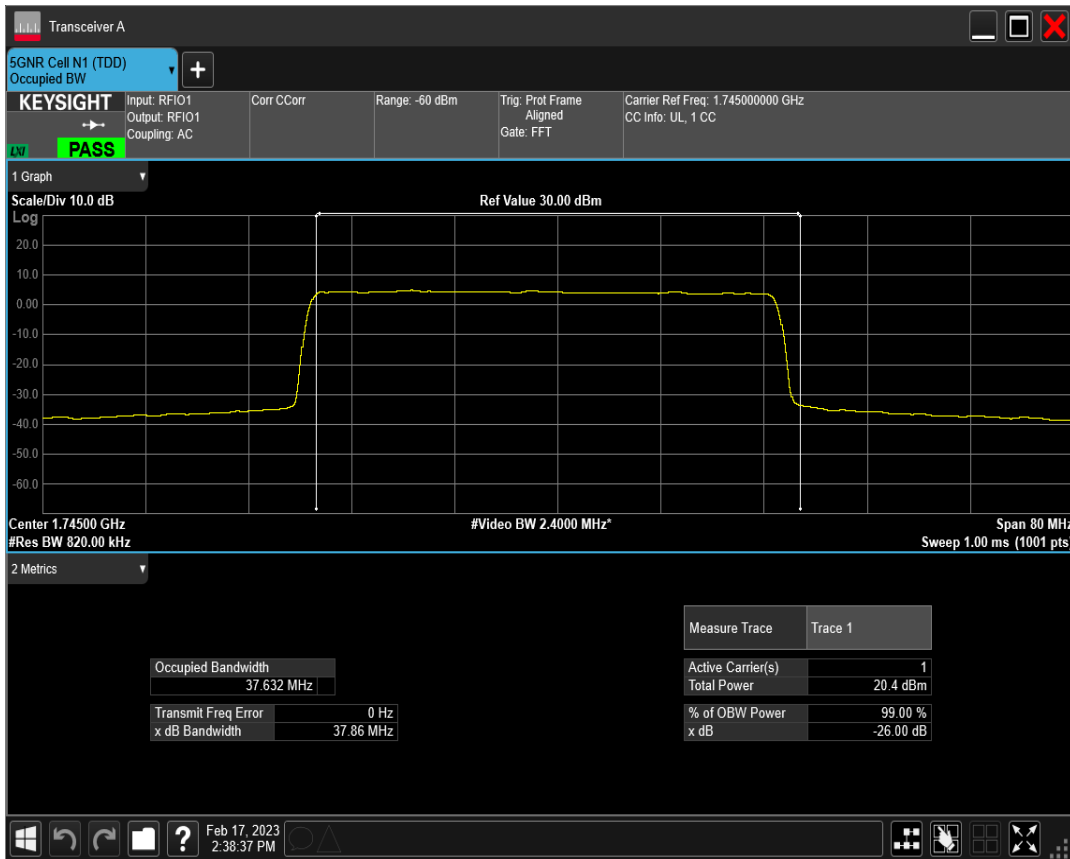


n66 SCS=30kHz DFT_QAM64 BW=40MHz Channel=349000 RB=100@0

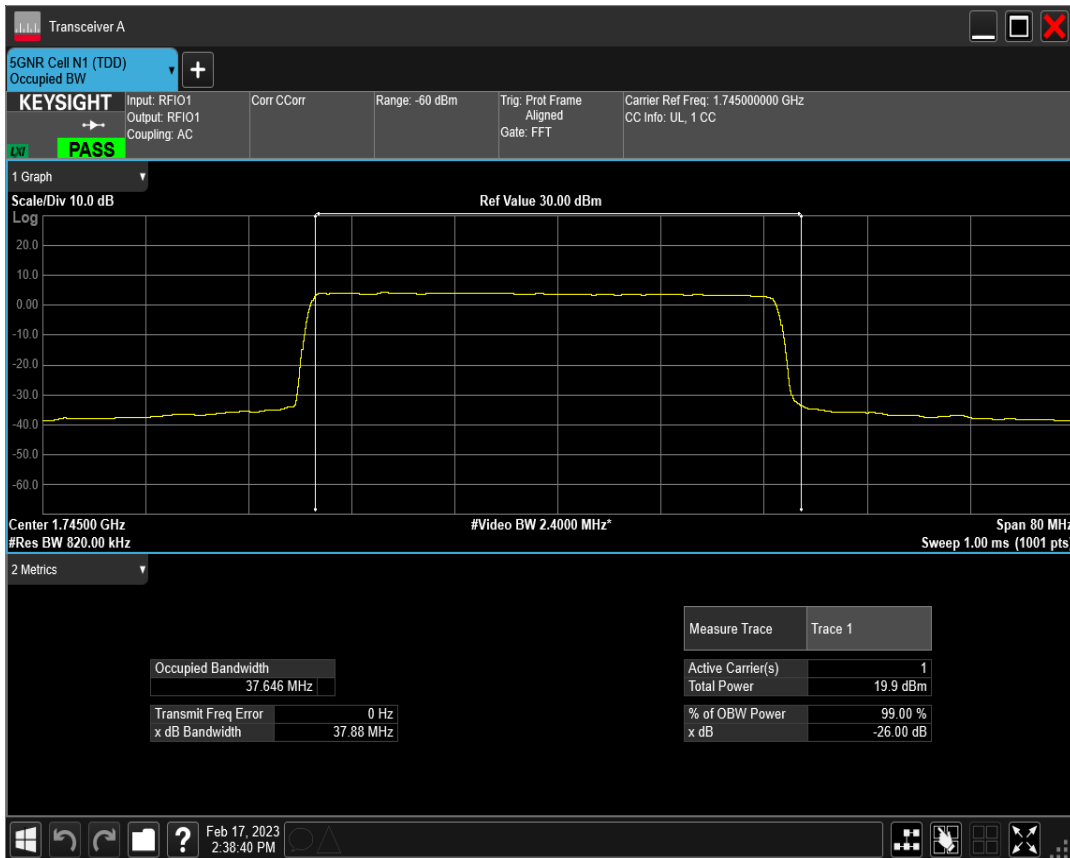


n66 SCS=30kHz DFT_QAM256 BW=40MHz Channel=349000 RB=100@0

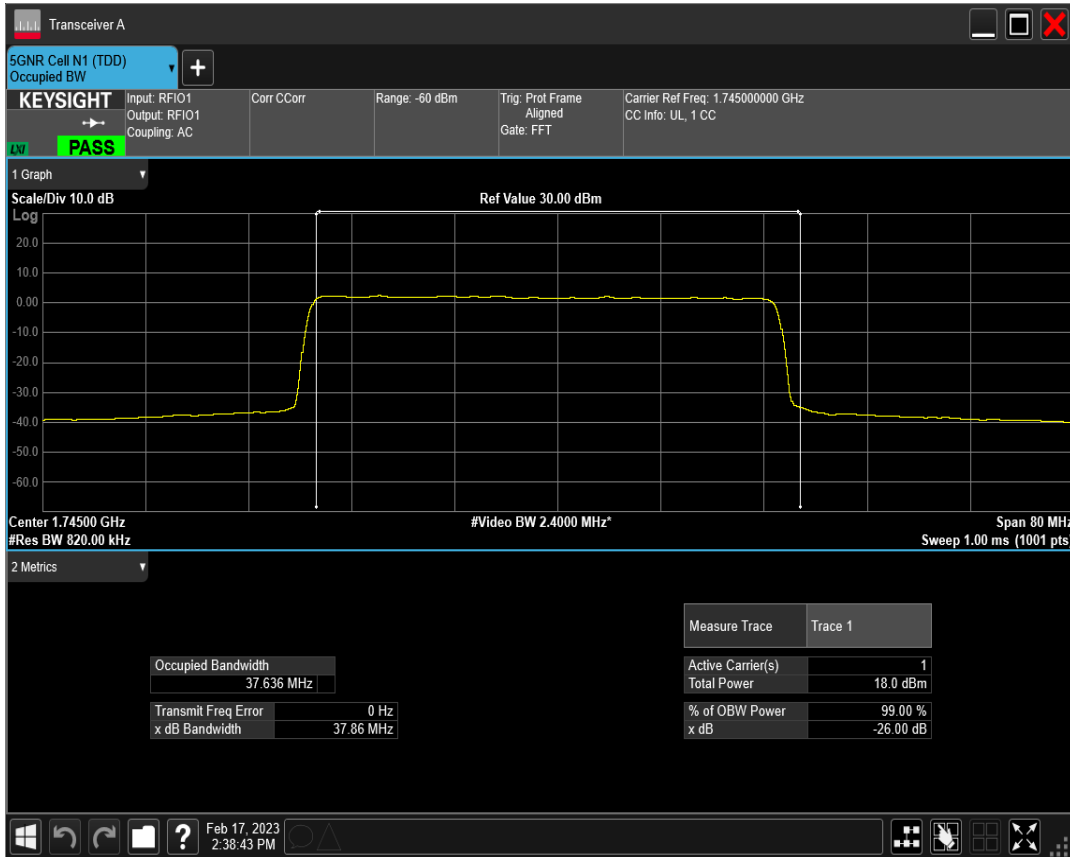


n66 SCS=30kHz CP_QPSK BW=40MHz Channel=349000 RB=106@0

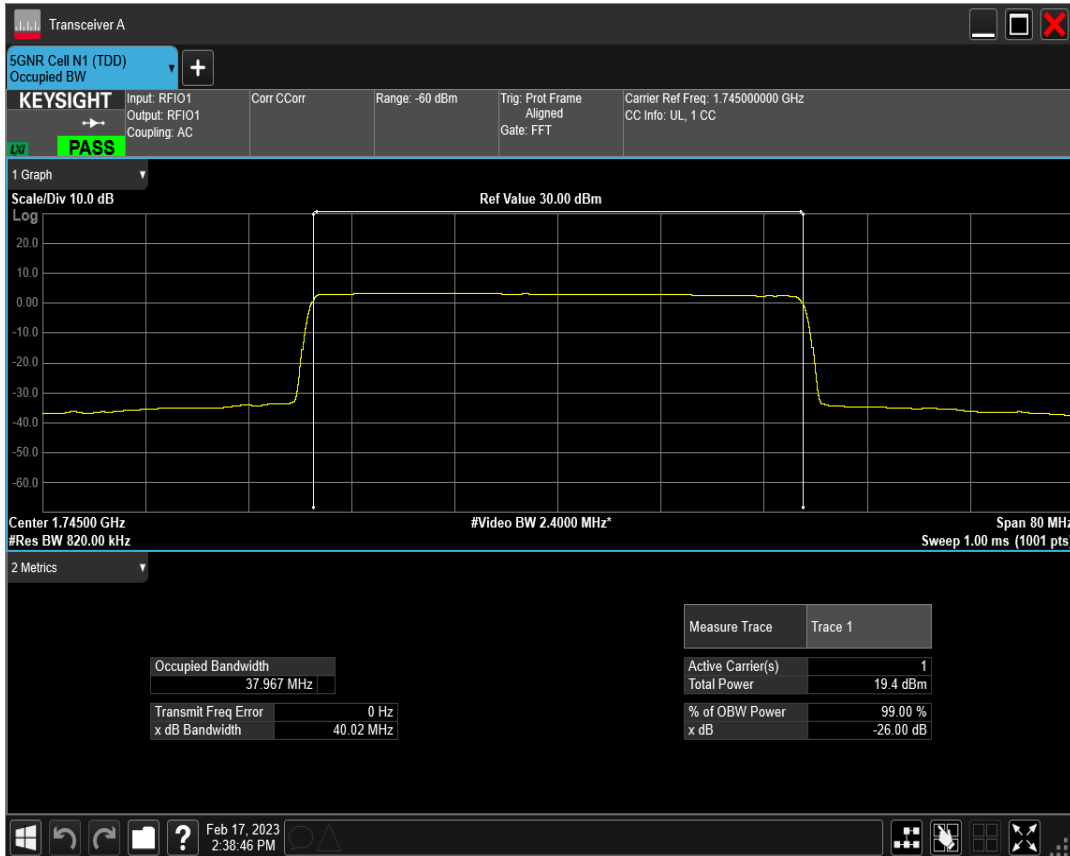


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=352000 RB=100@0

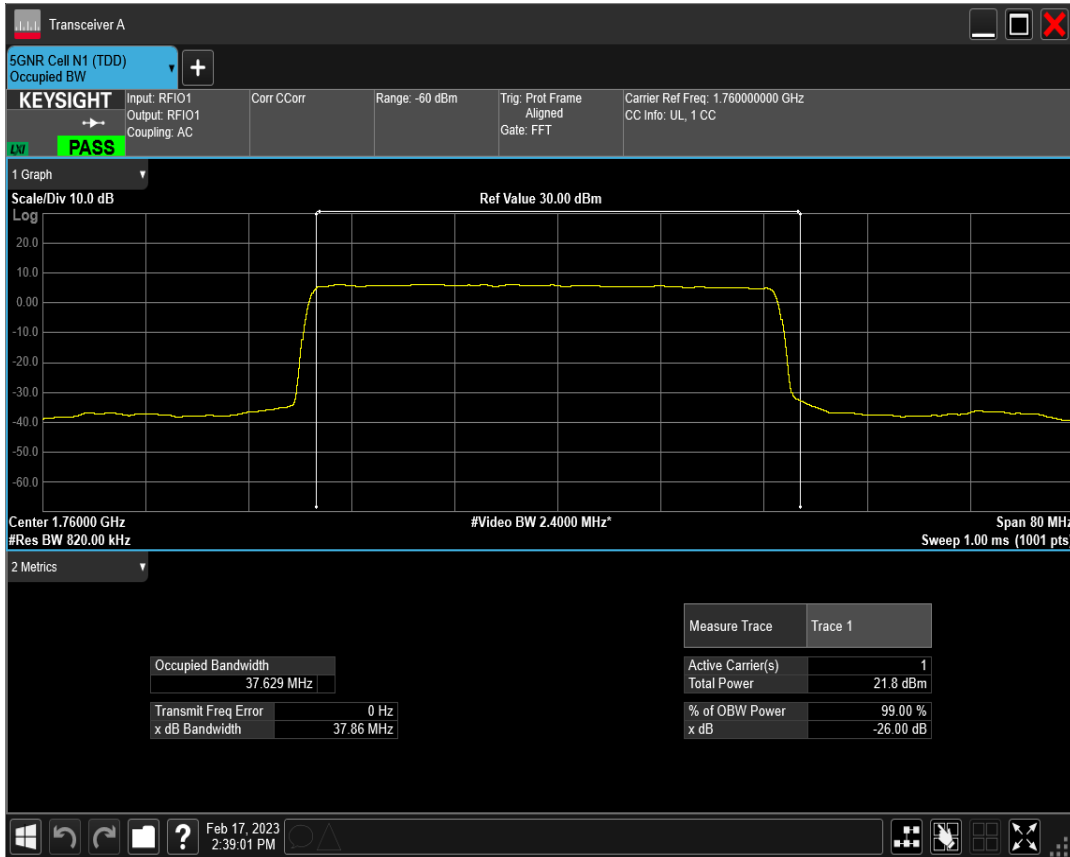


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=100@0

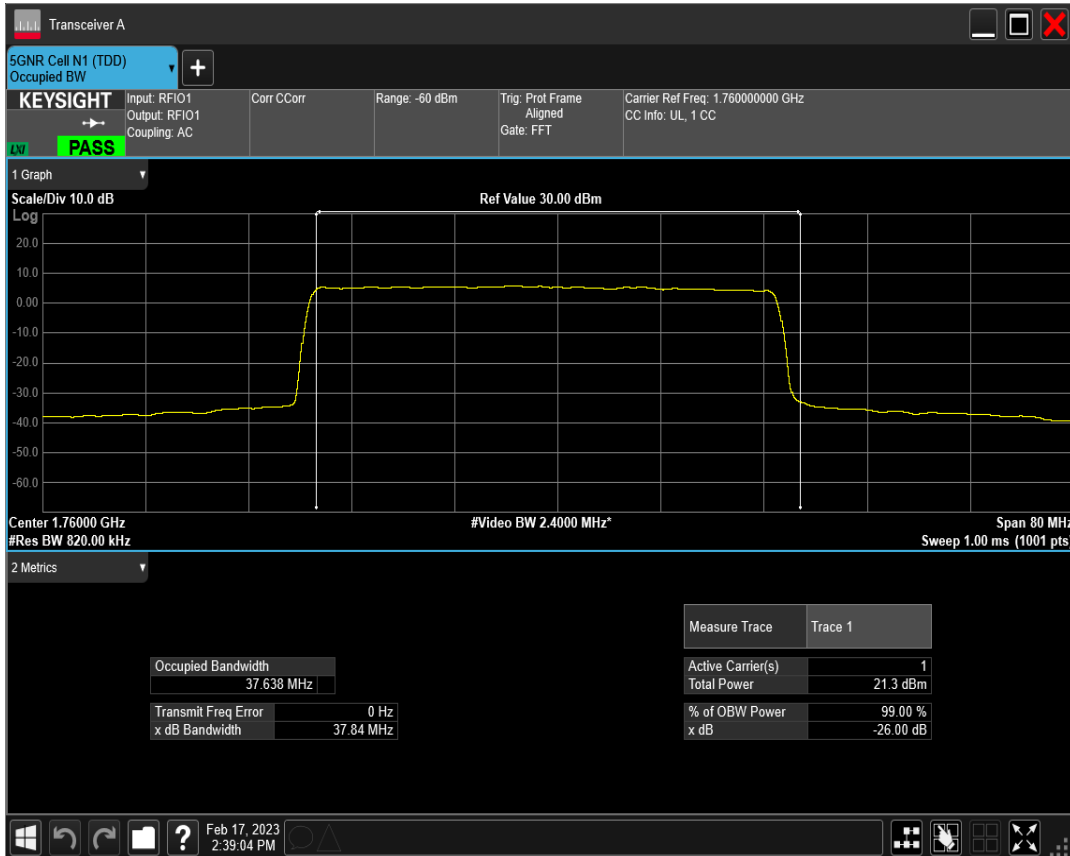


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=352000 RB=100@0

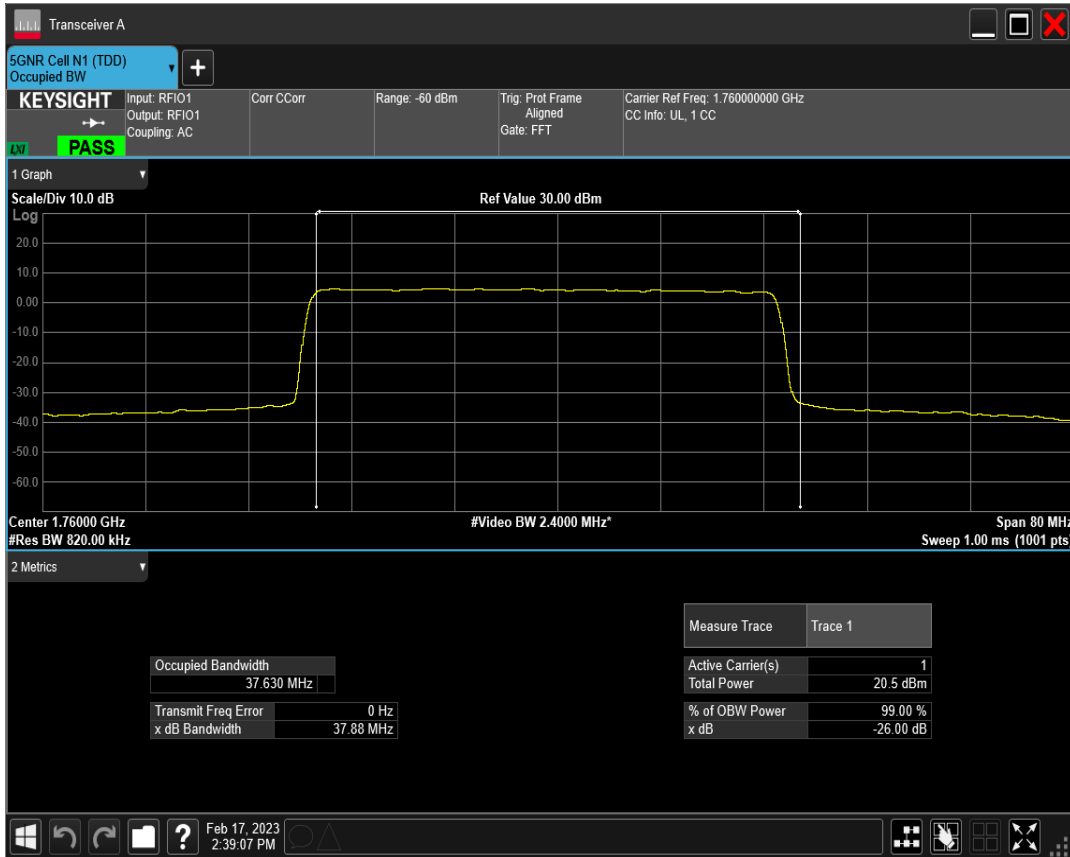


n66 SCS=30kHz DFT_QAM64 BW=40MHz Channel=352000 RB=100@0

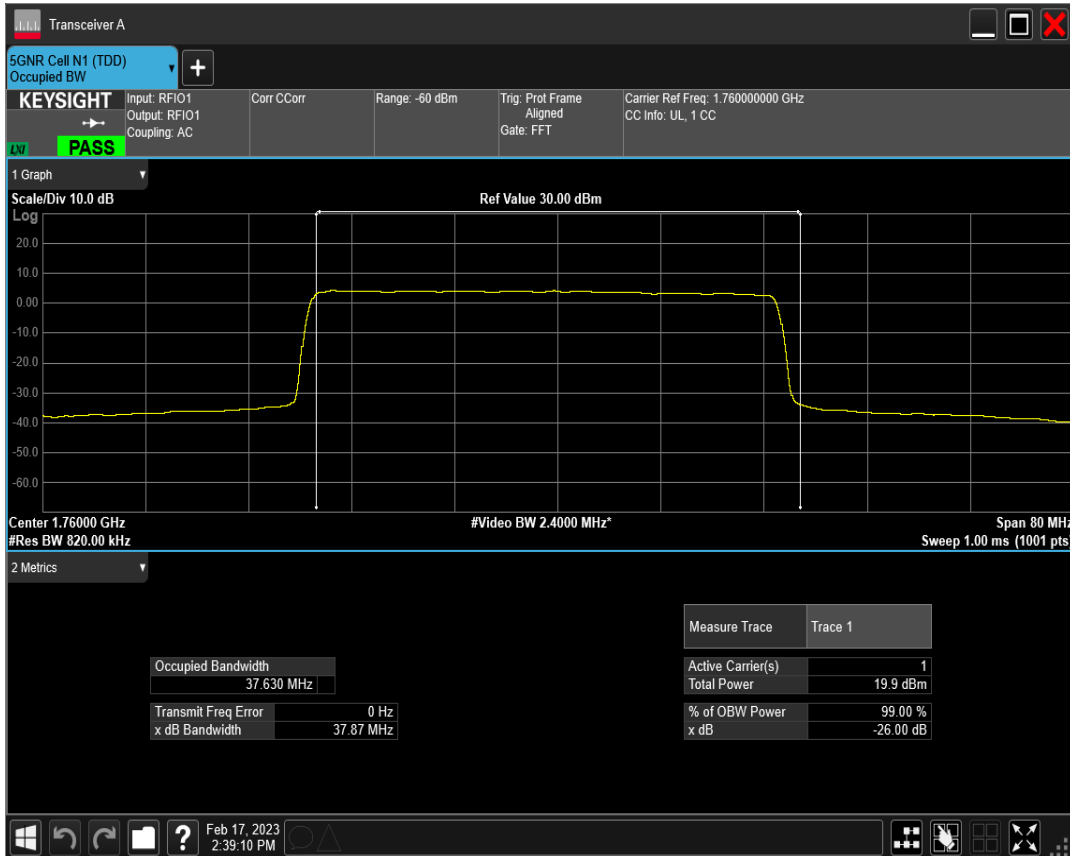

n66 SCS=30kHz DFT_QAM256 BW=40MHz Channel=352000 RB=100@0

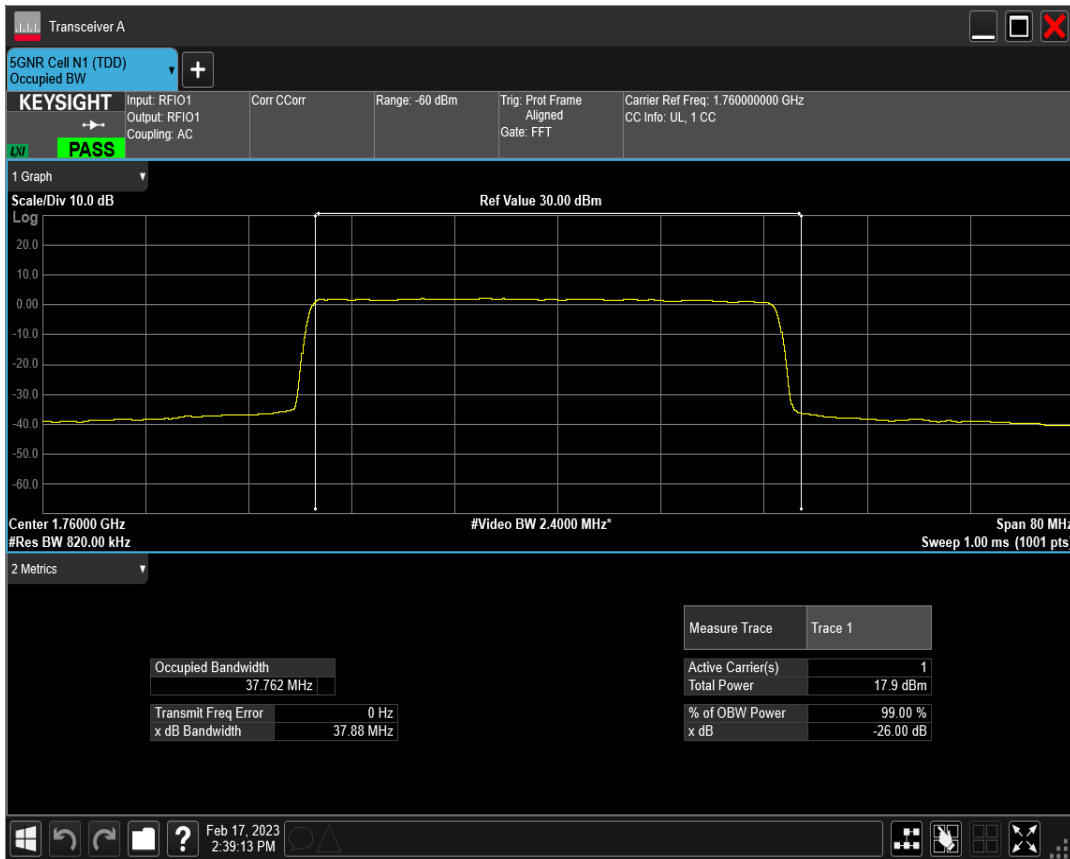


n66 SCS=30kHz CP_QPSK BW=40MHz Channel=352000 RB=106@0

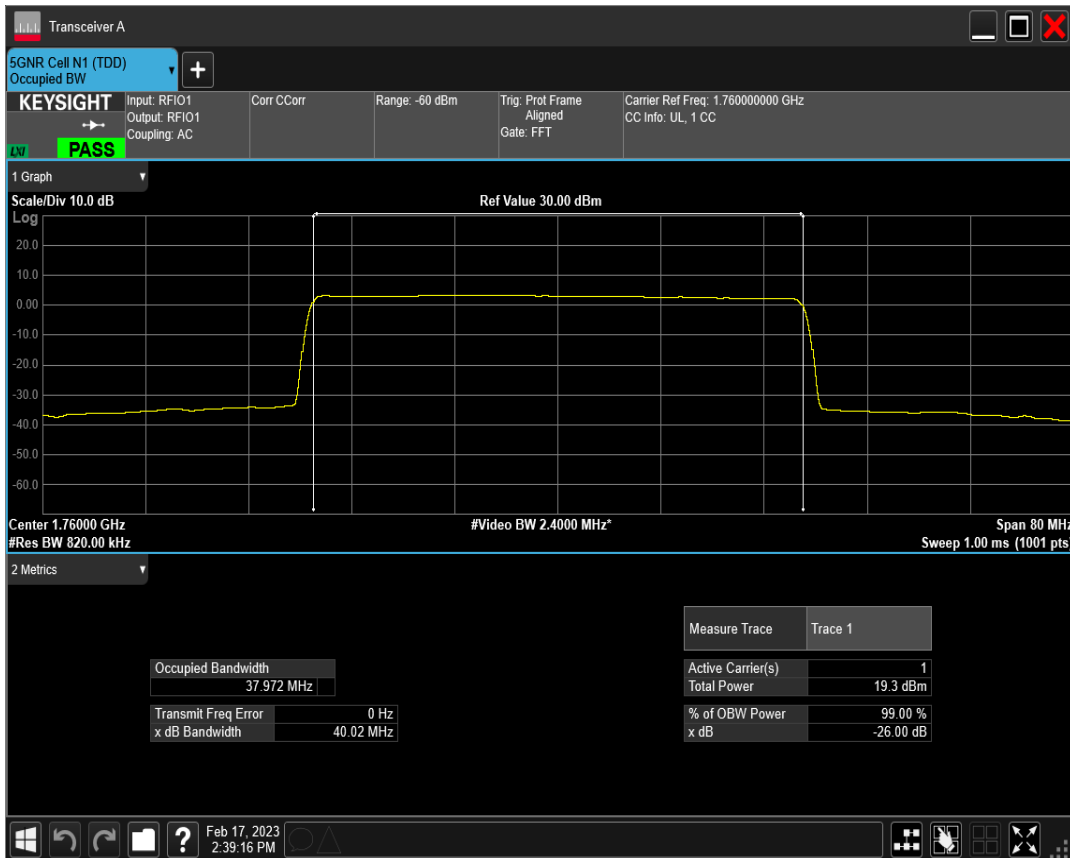


5 Band edge for NR FR1

| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|-----------------|------------------|-------------|---------|
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QPSK | 1702.62 | -47.23 | -13 | PASS |
| n66 | 30 | 10 | 343000 | 1@0 | DFT_QPSK | 1709.88 | -34.44 | -13 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QPSK | 1780.04 | -44.20 | -13 | PASS |
| n66 | 30 | 10 | 355000 | 1@23 | DFT_QPSK | 1781.18 | -33.40 | -13 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QPSK | 1707.44 | -40.07 | -13 | PASS |
| n66 | 30 | 40 | 346000 | 1@0 | DFT_QPSK | 1709.92 | -32.37 | -13 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QPSK | 1786.88 | -45.51 | -13 | PASS |
| n66 | 30 | 40 | 352000 | 1@105 | DFT_QPSK | 1780.00 | -33.00 | -13 | PASS |


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=24@0

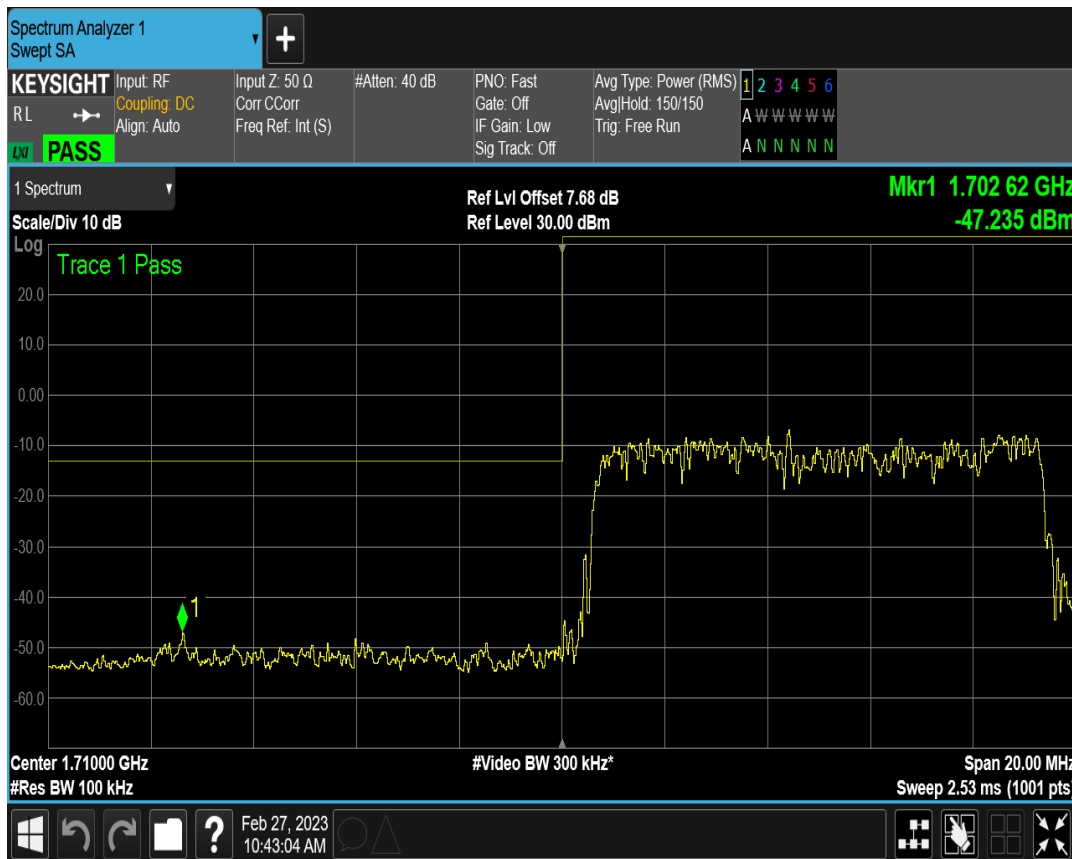


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=1@0

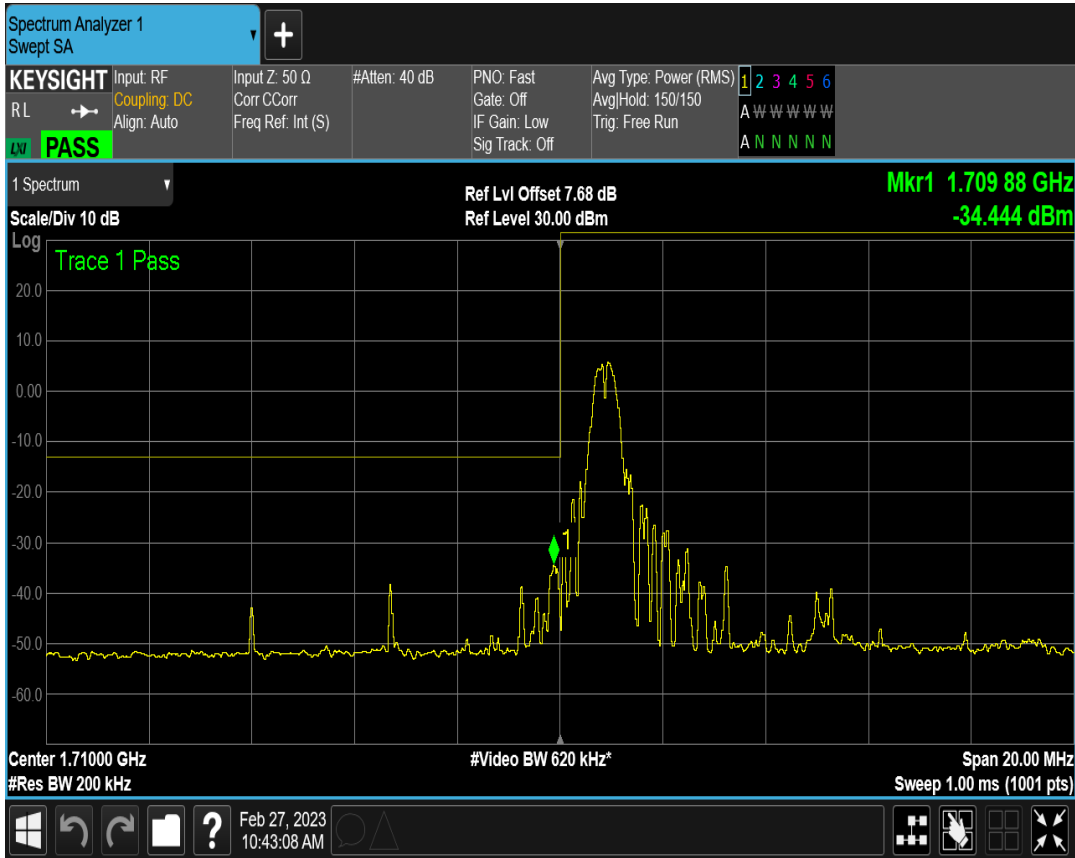


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=24@0

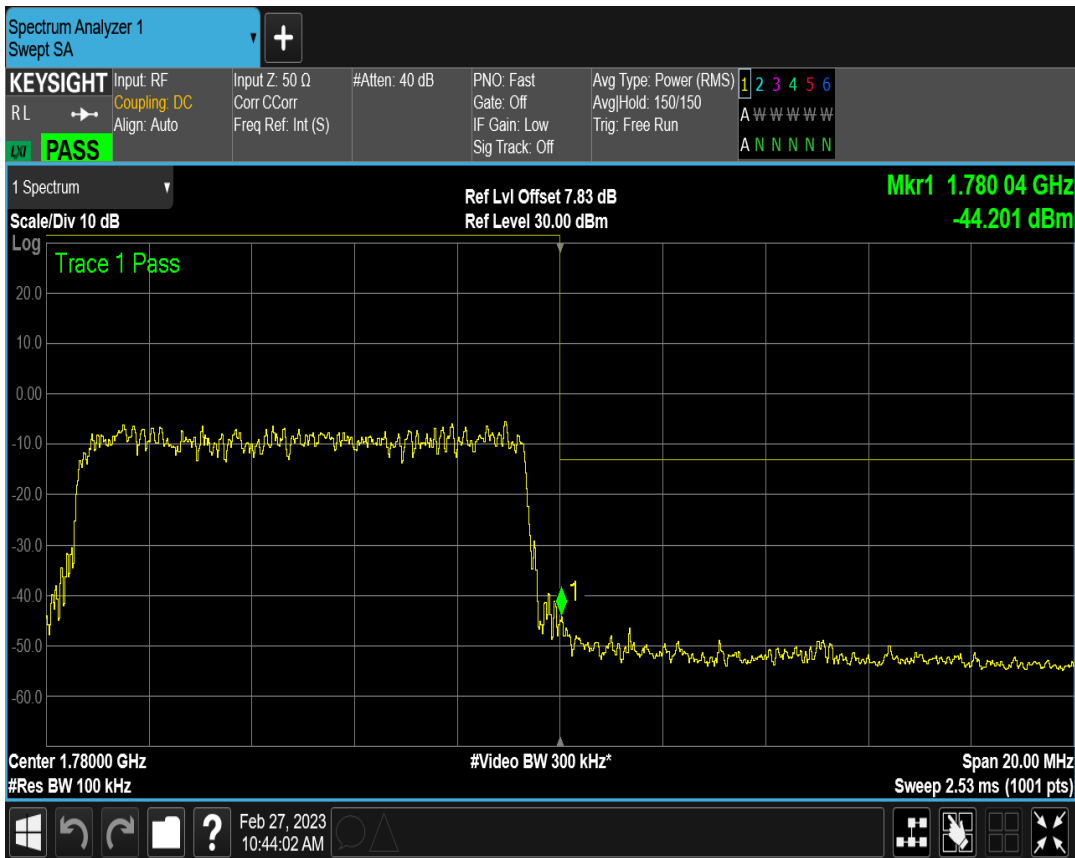


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=1@23

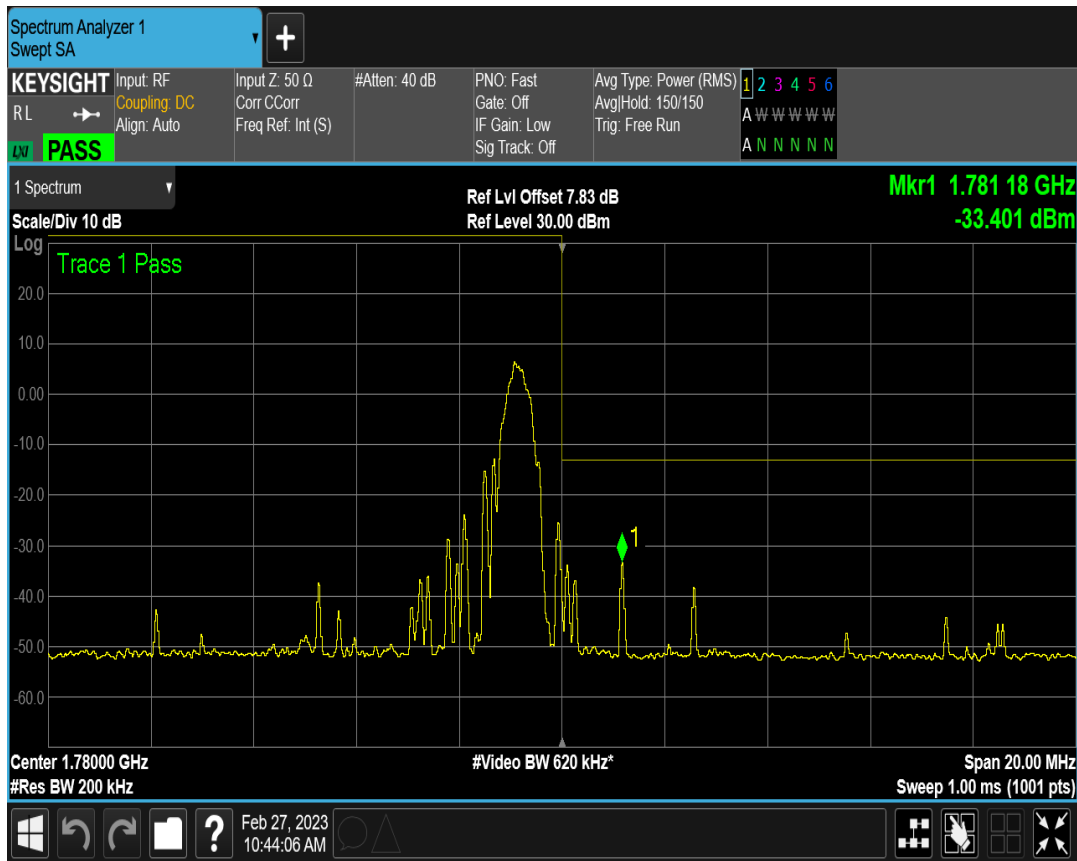


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=100@0

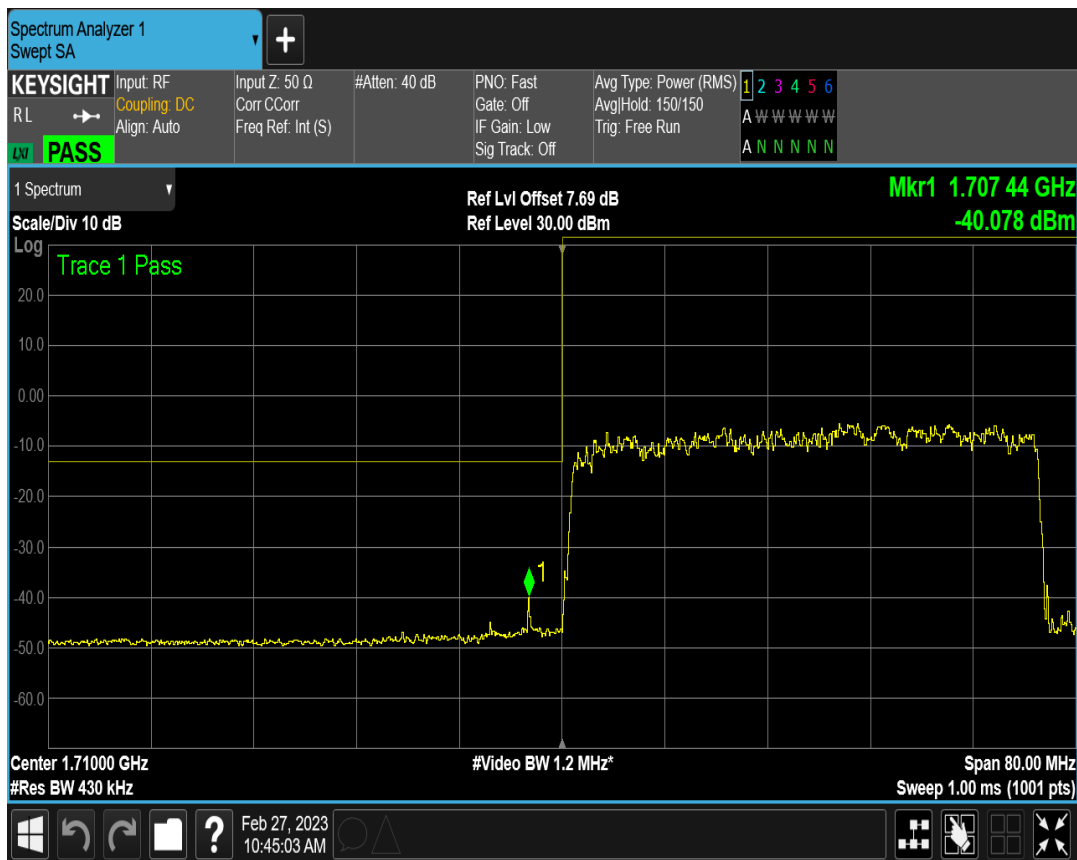


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=1@0

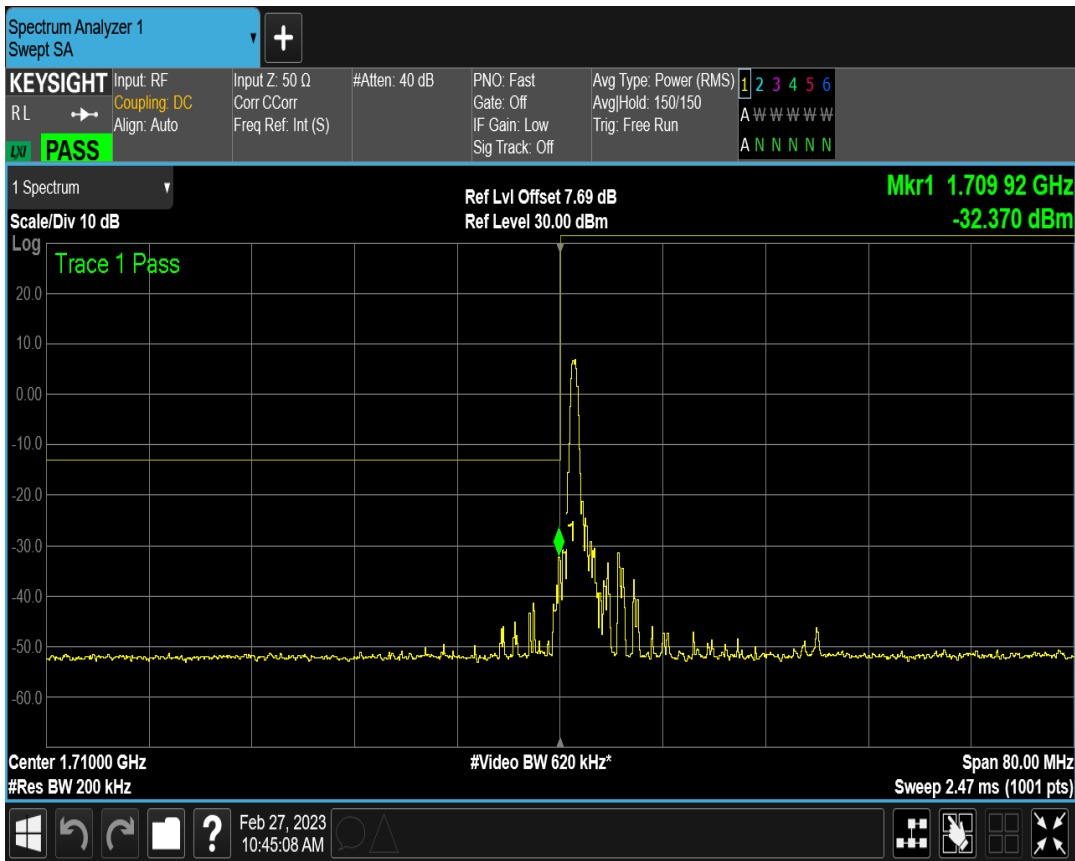

n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=100@0

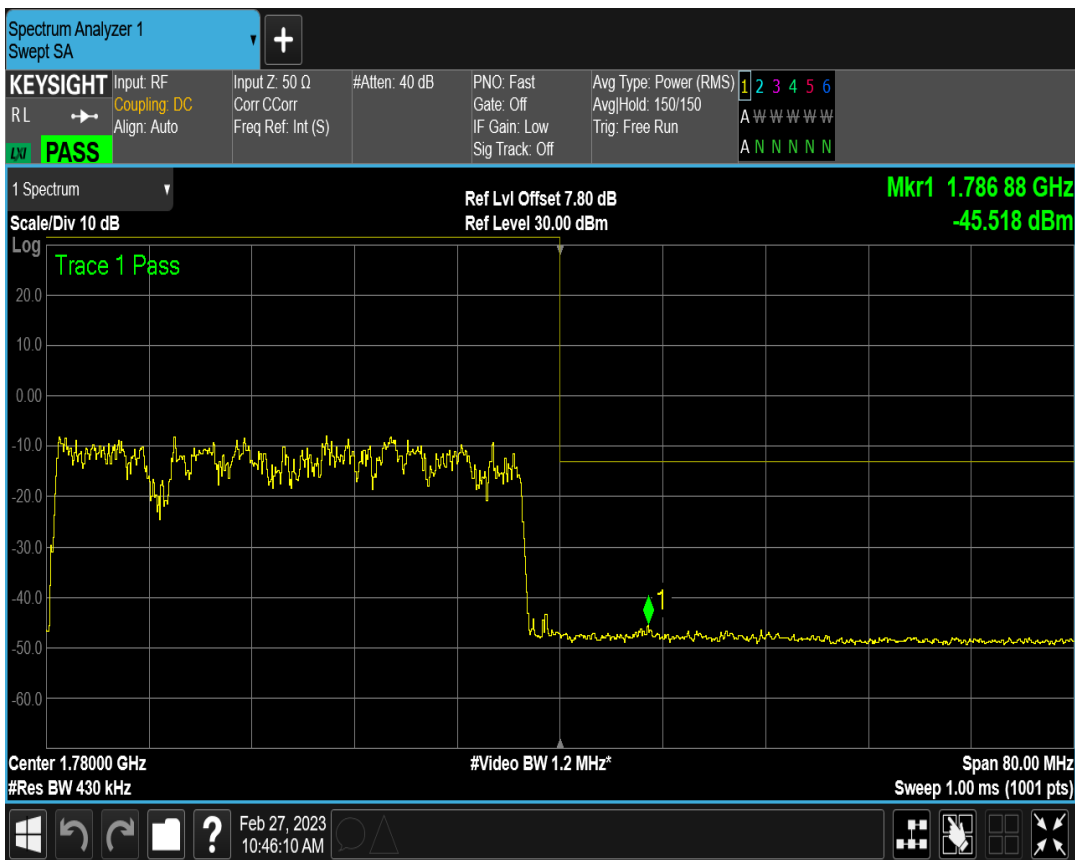


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=1@105

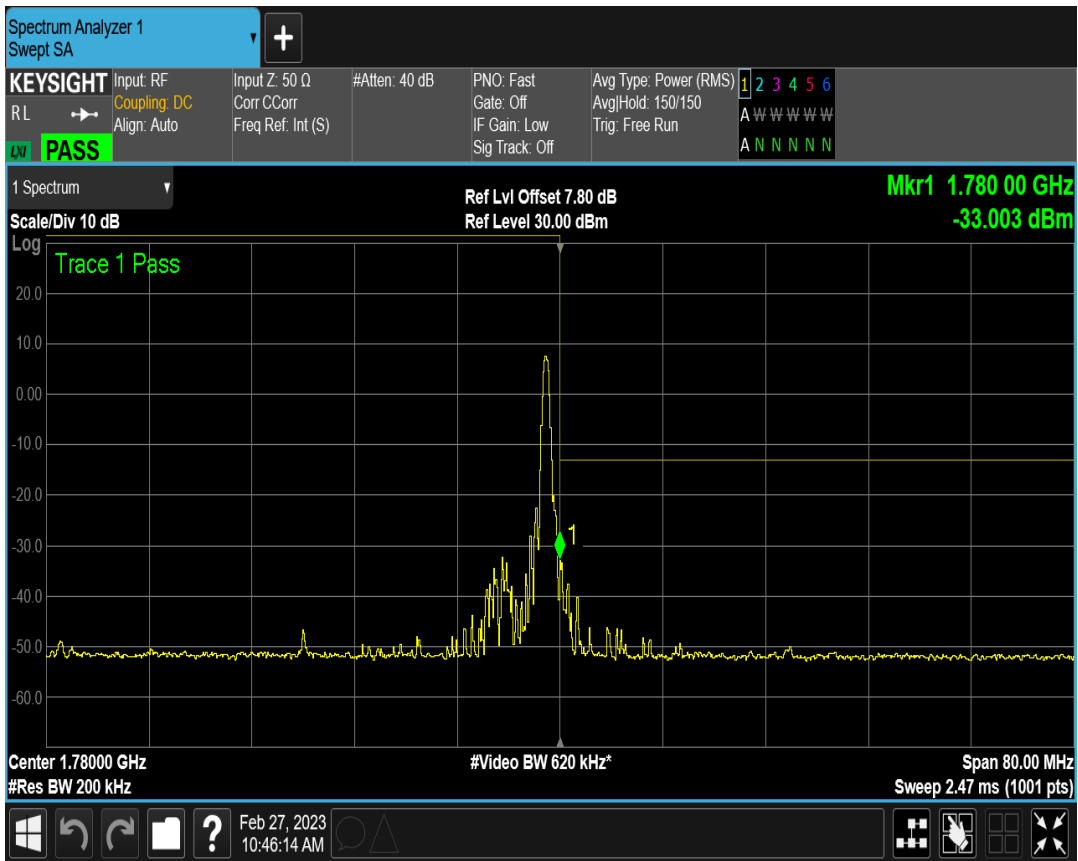


6 Out-of-band emissions for NR FR1

| Band | SCS (kHz) | Bandwidth (MHz) | UL Channel | RB Allocation | Modulation | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|------|-----------|-----------------|------------|---------------|------------|-----------------|------------------|-------------|---------|
| n66 | 30 | 10 | 343000 | 24@0 | DFT_QPSK | 5064.58 | -36.87 | -13 | PASS |
| n66 | 30 | 10 | 343000 | 1@0 | DFT_QPSK | 19317.43 | -36.68 | -13 | PASS |
| n66 | 30 | 10 | 343000 | 1@23 | DFT_QPSK | 19998.58 | -36.29 | -13 | PASS |
| n66 | 30 | 10 | 349000 | 24@0 | DFT_QPSK | 3789.20 | -36.37 | -13 | PASS |
| n66 | 30 | 10 | 349000 | 1@0 | DFT_QPSK | 19571.55 | -36.61 | -13 | PASS |
| n66 | 30 | 10 | 349000 | 1@23 | DFT_QPSK | 19879.83 | -34.87 | -13 | PASS |
| n66 | 30 | 10 | 355000 | 24@0 | DFT_QPSK | 3861.40 | -35.42 | -13 | PASS |
| n66 | 30 | 10 | 355000 | 1@0 | DFT_QPSK | 3736.48 | -36.83 | -13 | PASS |
| n66 | 30 | 10 | 355000 | 1@23 | DFT_QPSK | 3717.48 | -36.41 | -13 | PASS |
| n66 | 30 | 40 | 346000 | 100@0 | DFT_QPSK | 19336.43 | -36.72 | -13 | PASS |
| n66 | 30 | 40 | 346000 | 1@0 | DFT_QPSK | 19946.33 | -36.19 | -13 | PASS |
| n66 | 30 | 40 | 346000 | 1@105 | DFT_QPSK | 19459.93 | -36.84 | -13 | PASS |
| n66 | 30 | 40 | 349000 | 100@0 | DFT_QPSK | 3738.85 | -36.26 | -13 | PASS |
| n66 | 30 | 40 | 349000 | 1@0 | DFT_QPSK | 3800.13 | -36.29 | -13 | PASS |
| n66 | 30 | 40 | 349000 | 1@105 | DFT_QPSK | 19908.80 | -36.44 | -13 | PASS |
| n66 | 30 | 40 | 352000 | 100@0 | DFT_QPSK | 19450.90 | -36.36 | -13 | PASS |
| n66 | 30 | 40 | 352000 | 1@0 | DFT_QPSK | 19634.25 | -35.91 | -13 | PASS |
| n66 | 30 | 40 | 352000 | 1@105 | DFT_QPSK | 3750.25 | -36.22 | -13 | PASS |


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=1 @0

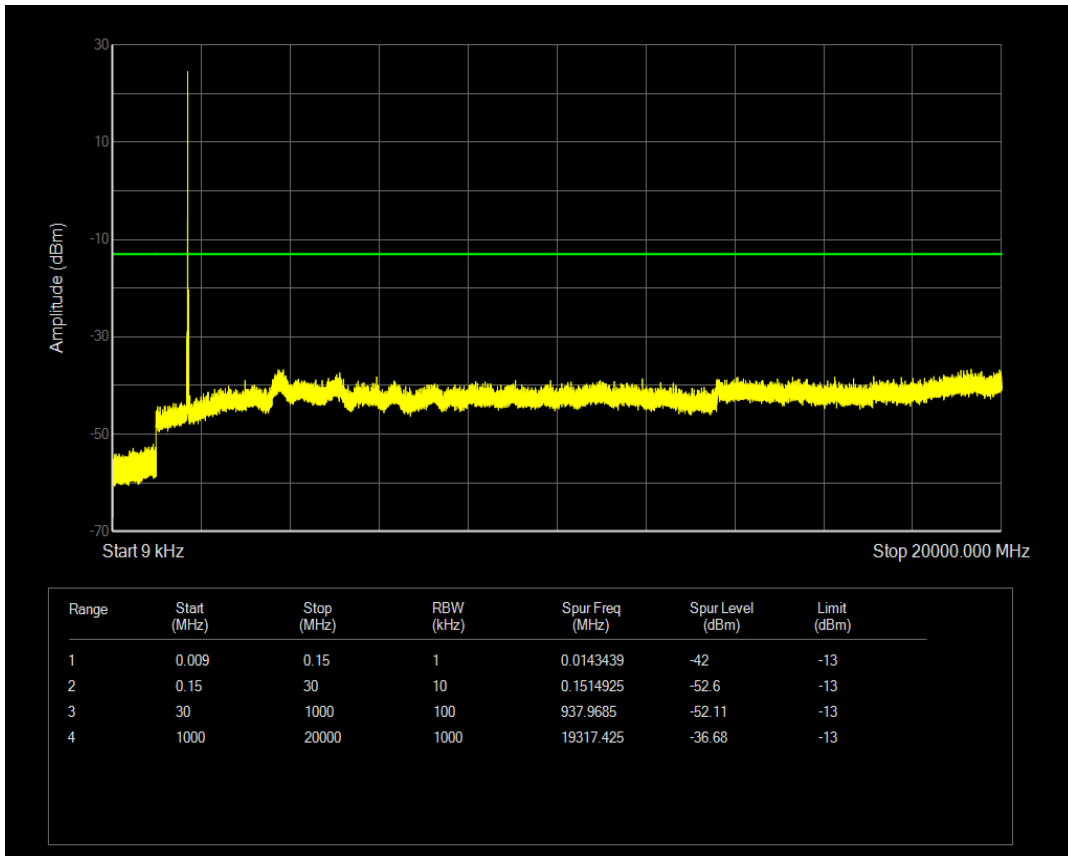


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=1 @0

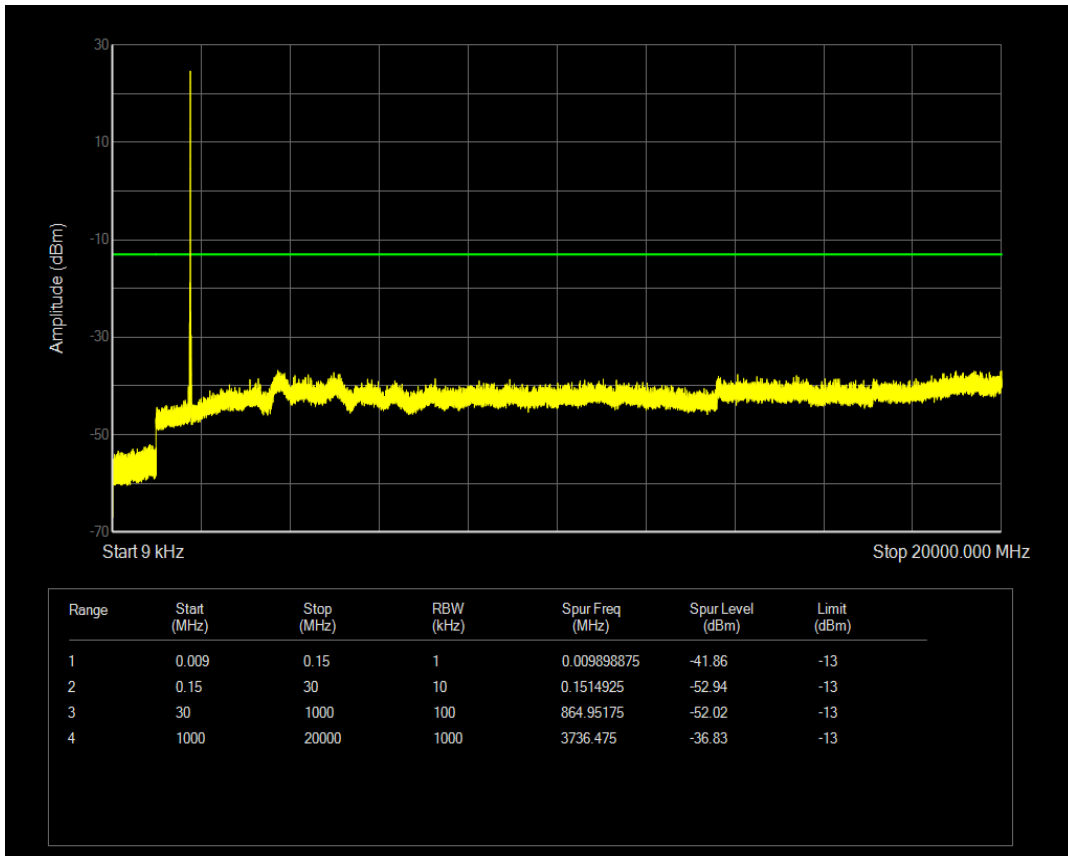


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=349000 RB=24@0

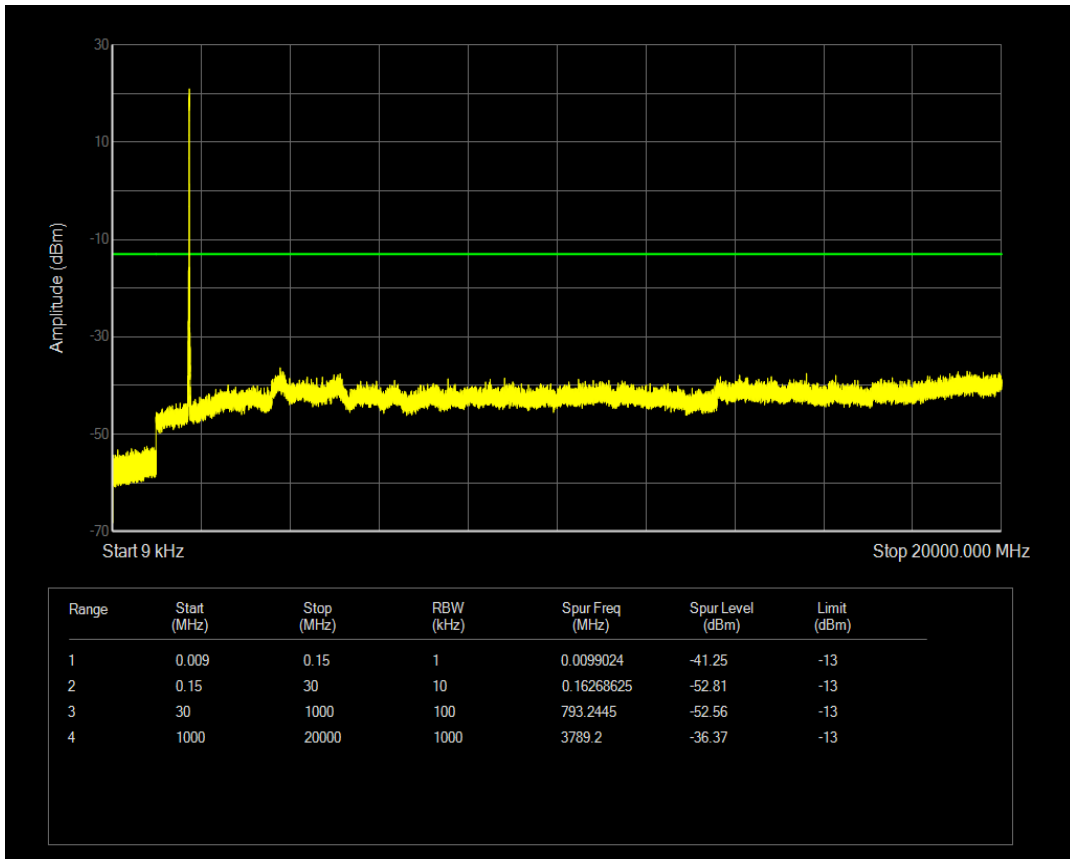


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=24@0

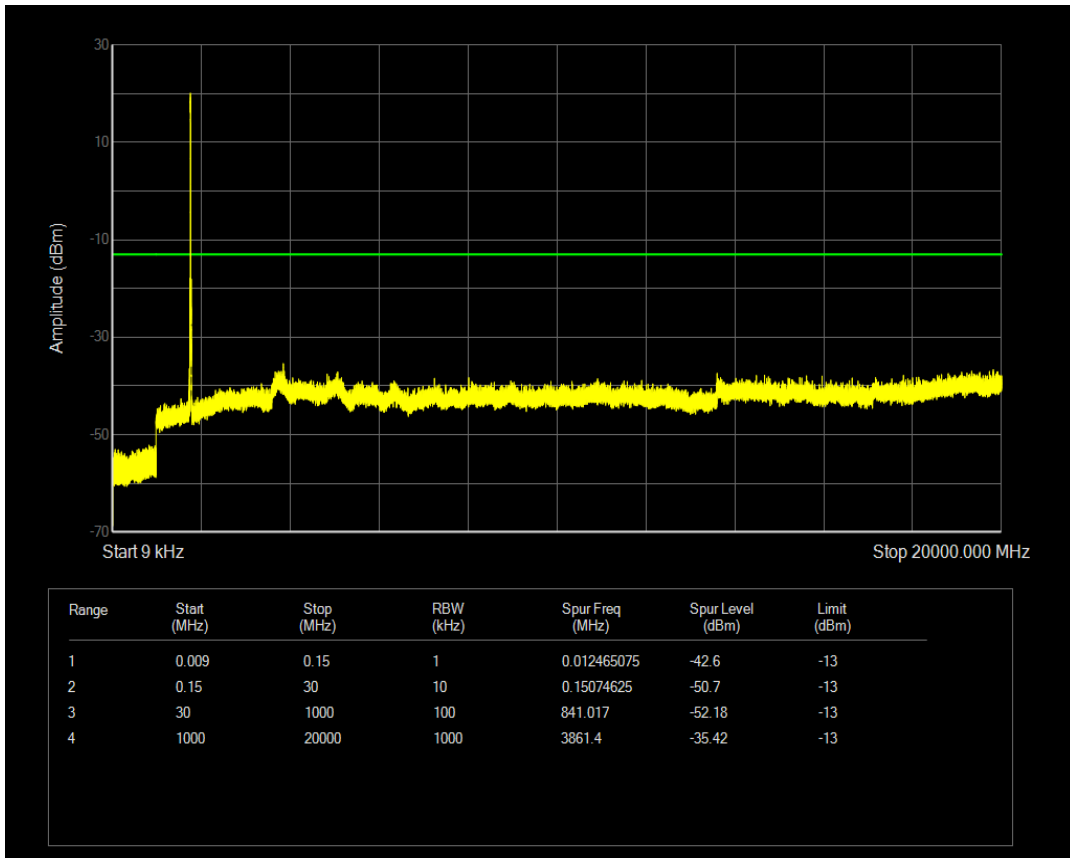


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=355000 RB=1 @23

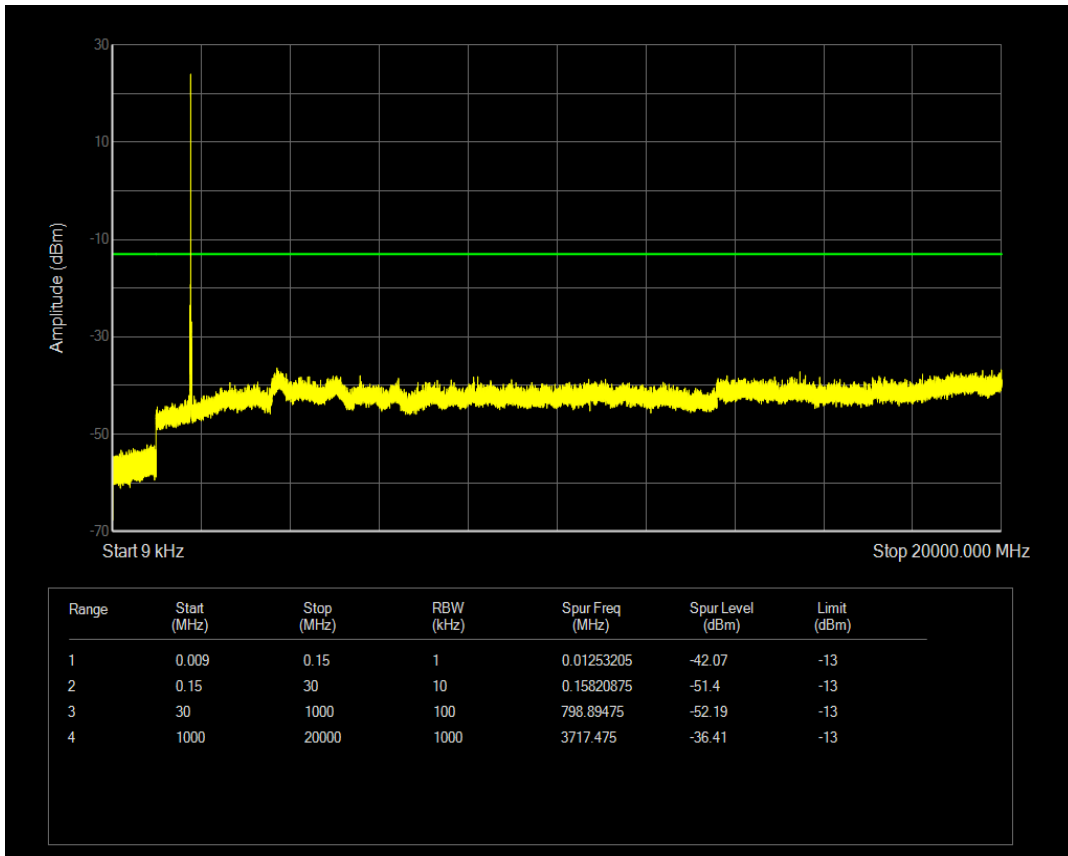


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=24 @0

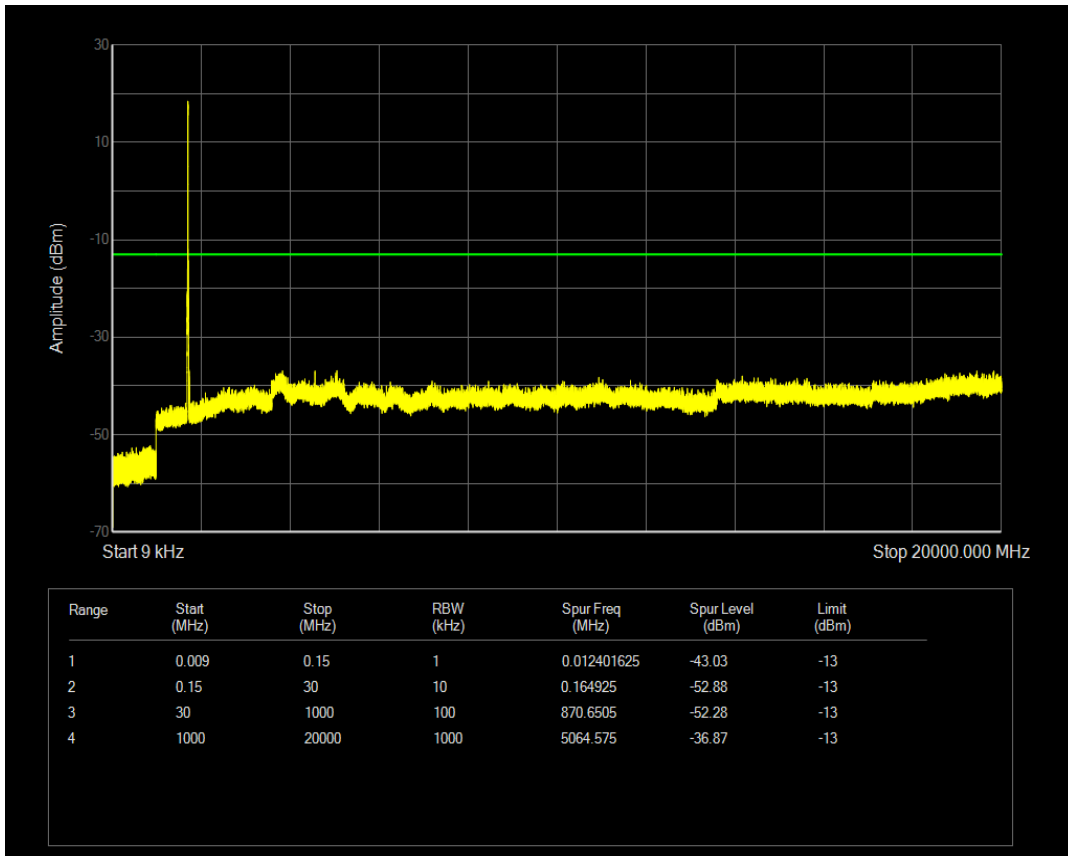


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=343000 RB=1 @23

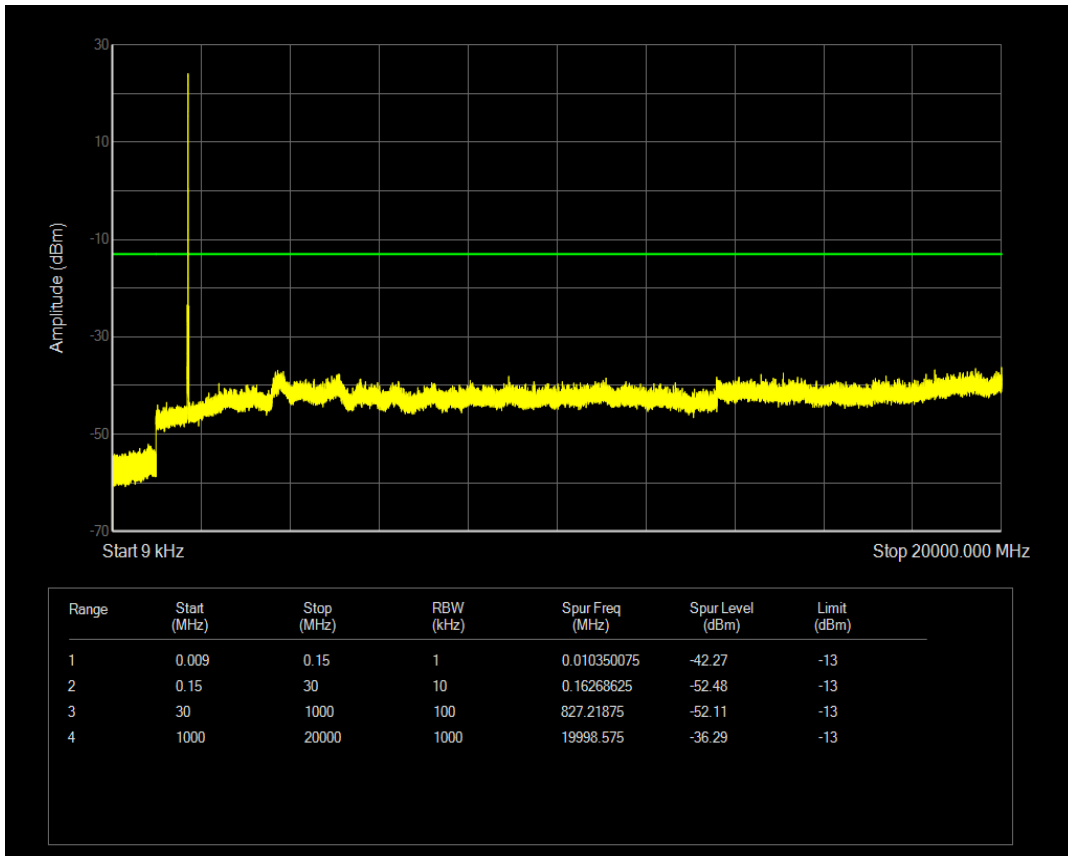


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=349000 RB=1 @23

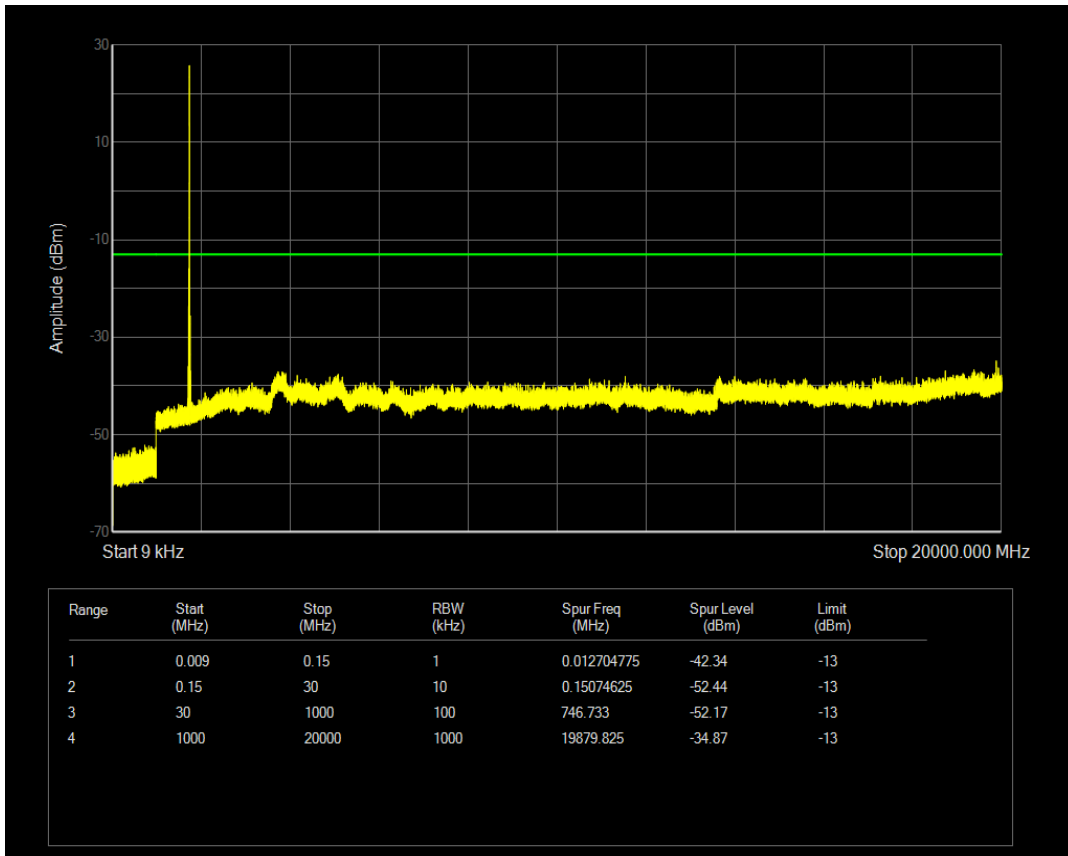


n66 SCS=30kHz DFT_QPSK BW=10MHz Channel=349000 RB=1 @0

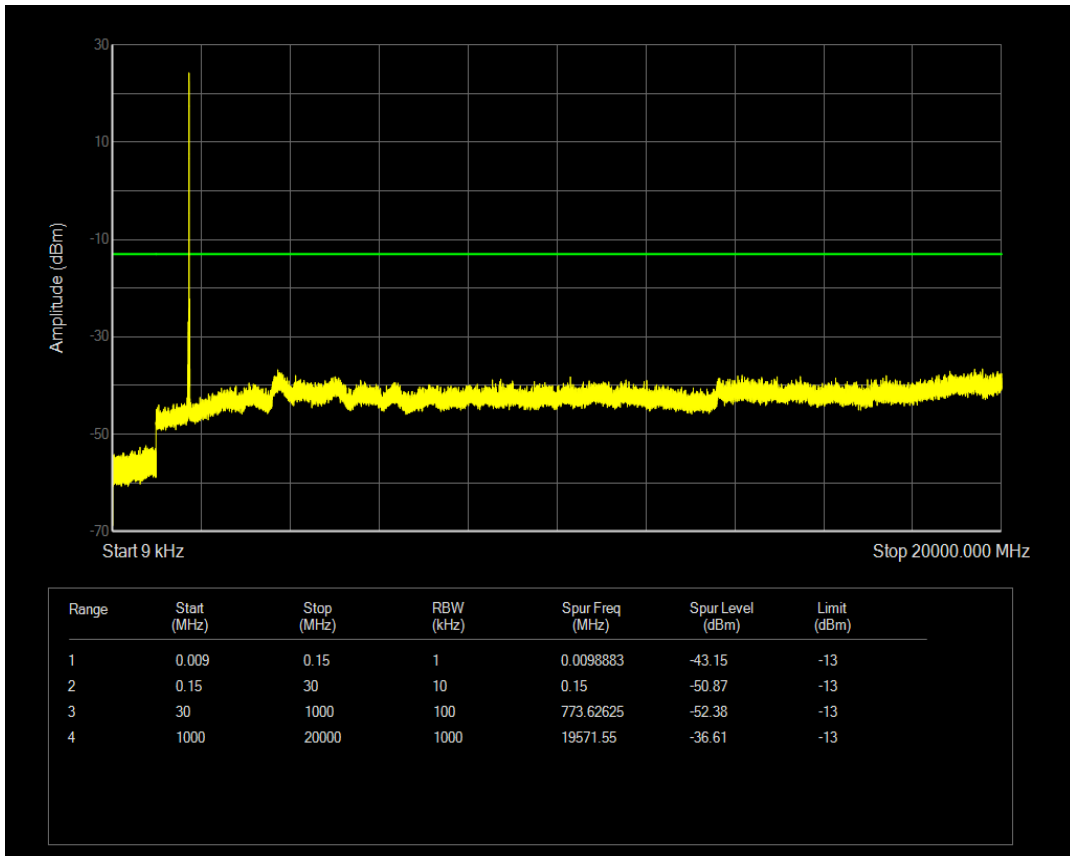


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=349000 RB=1 @0

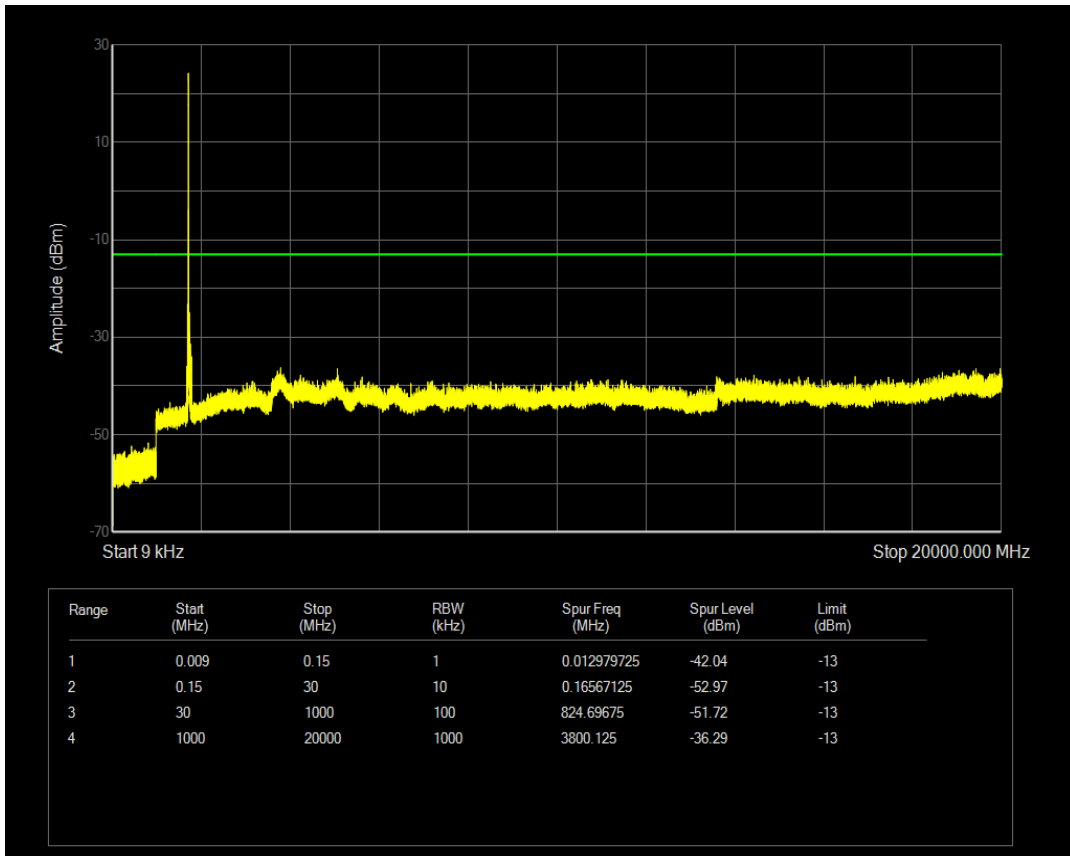


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=349000 RB=1@105

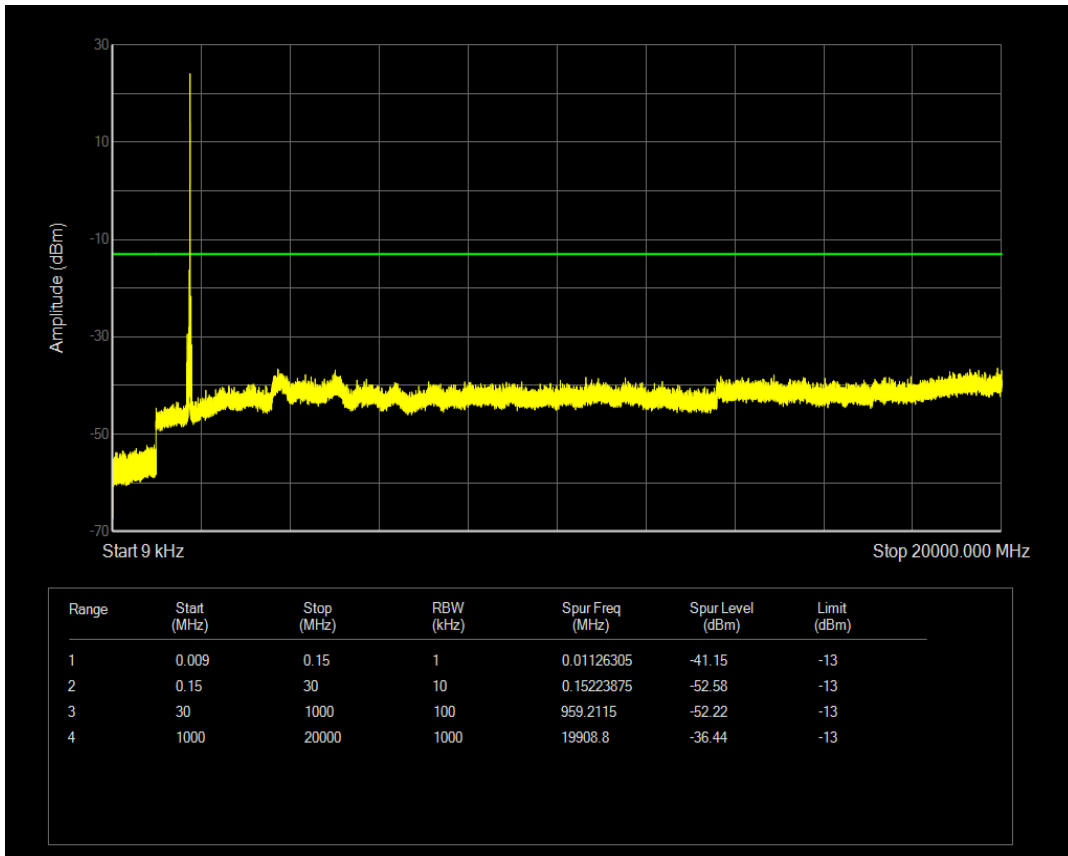


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=100@0

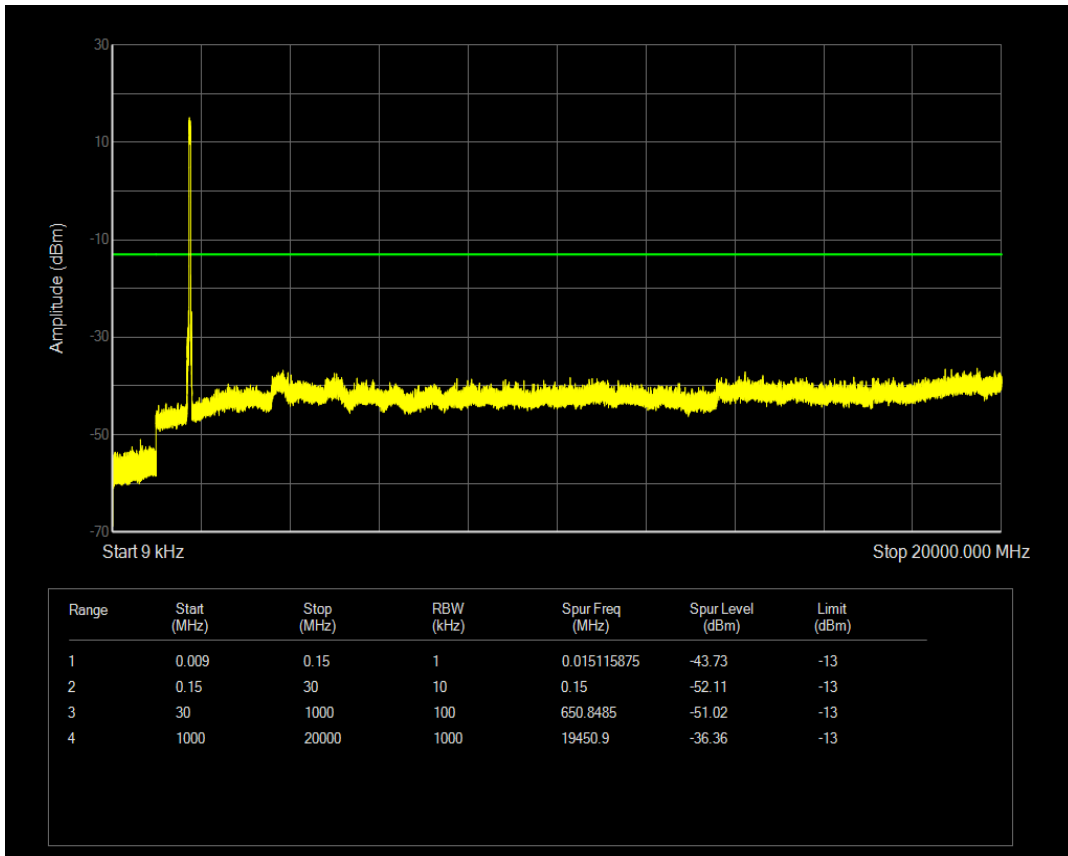


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=349000 RB=100@0

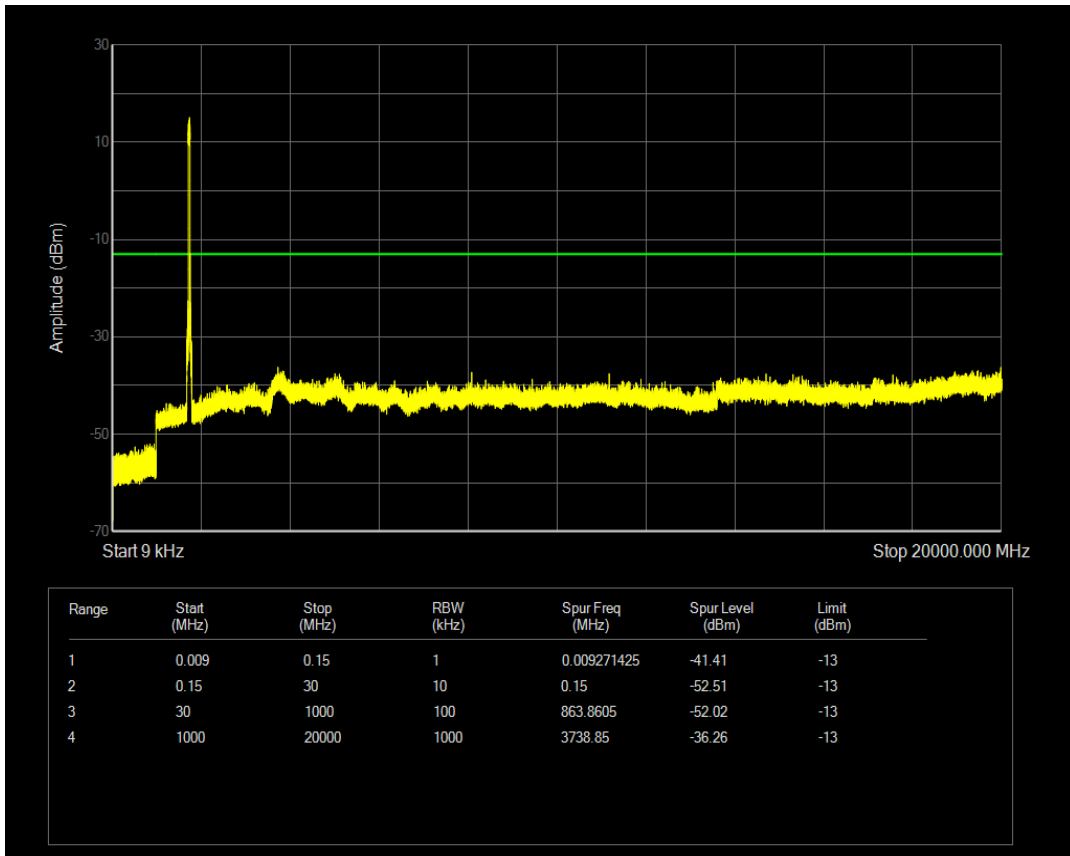


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=100@0

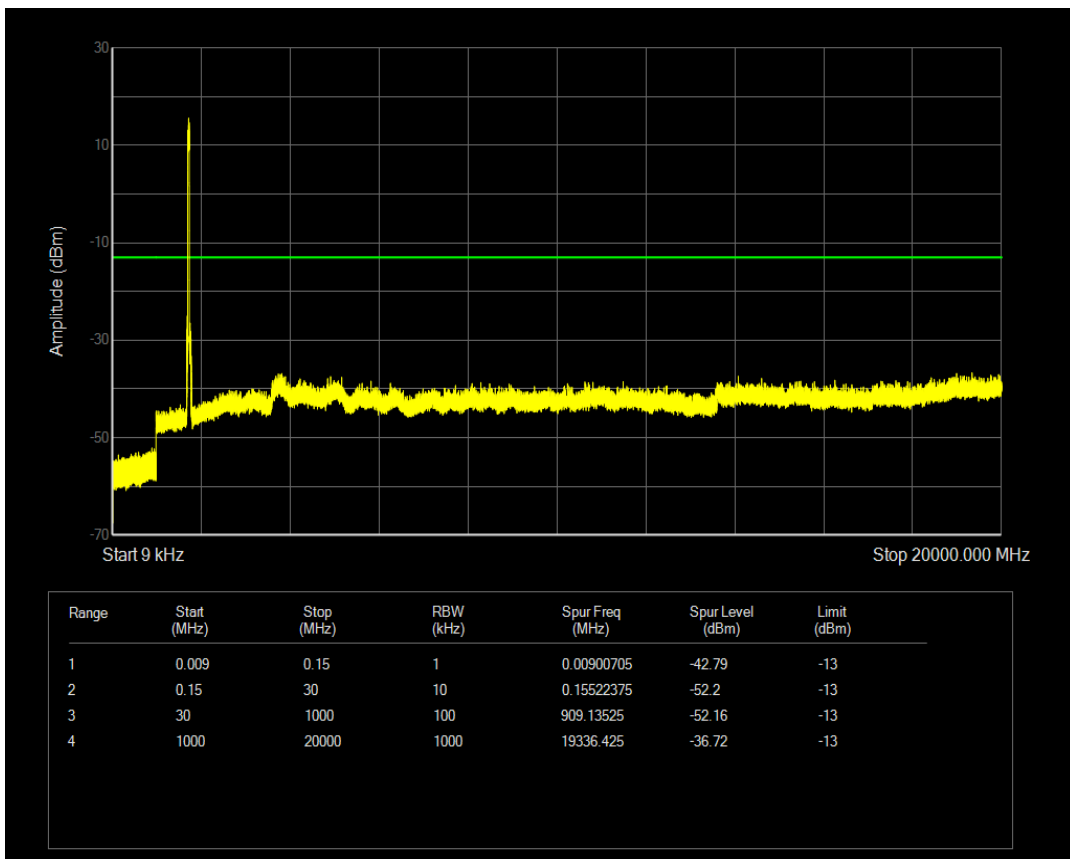


n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=1 @0

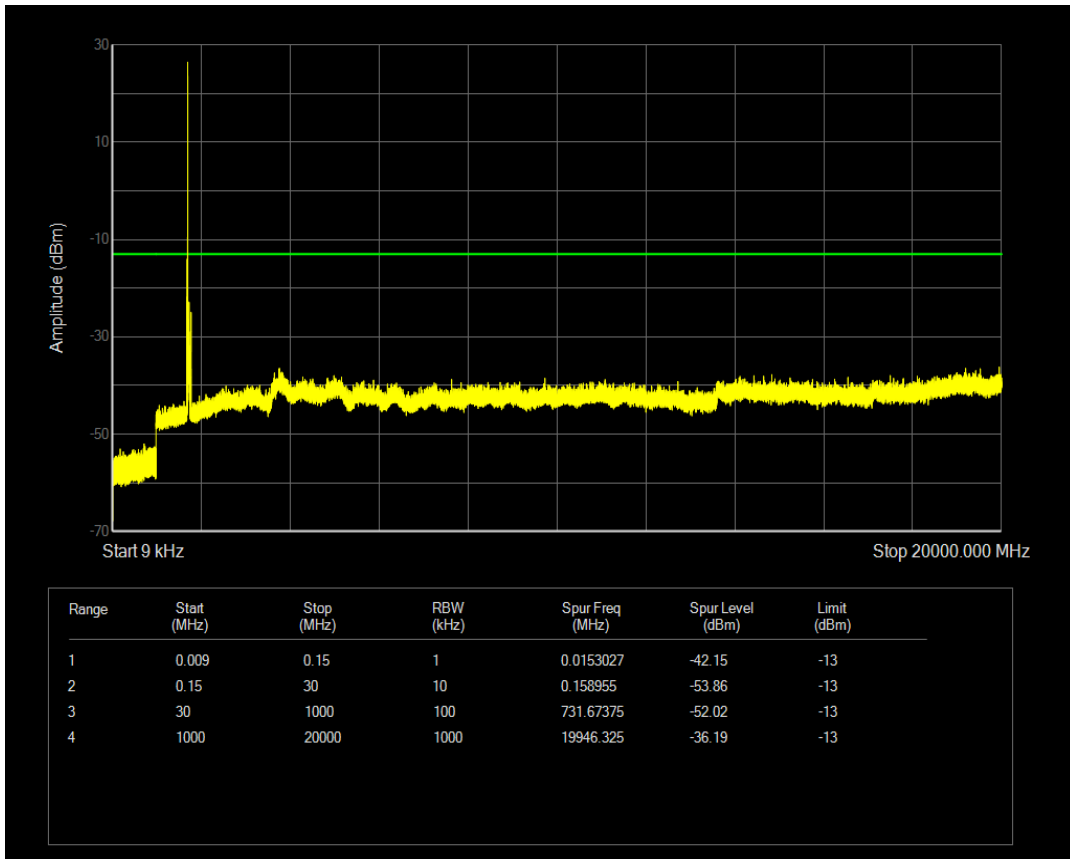

n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=346000 RB=1 @105

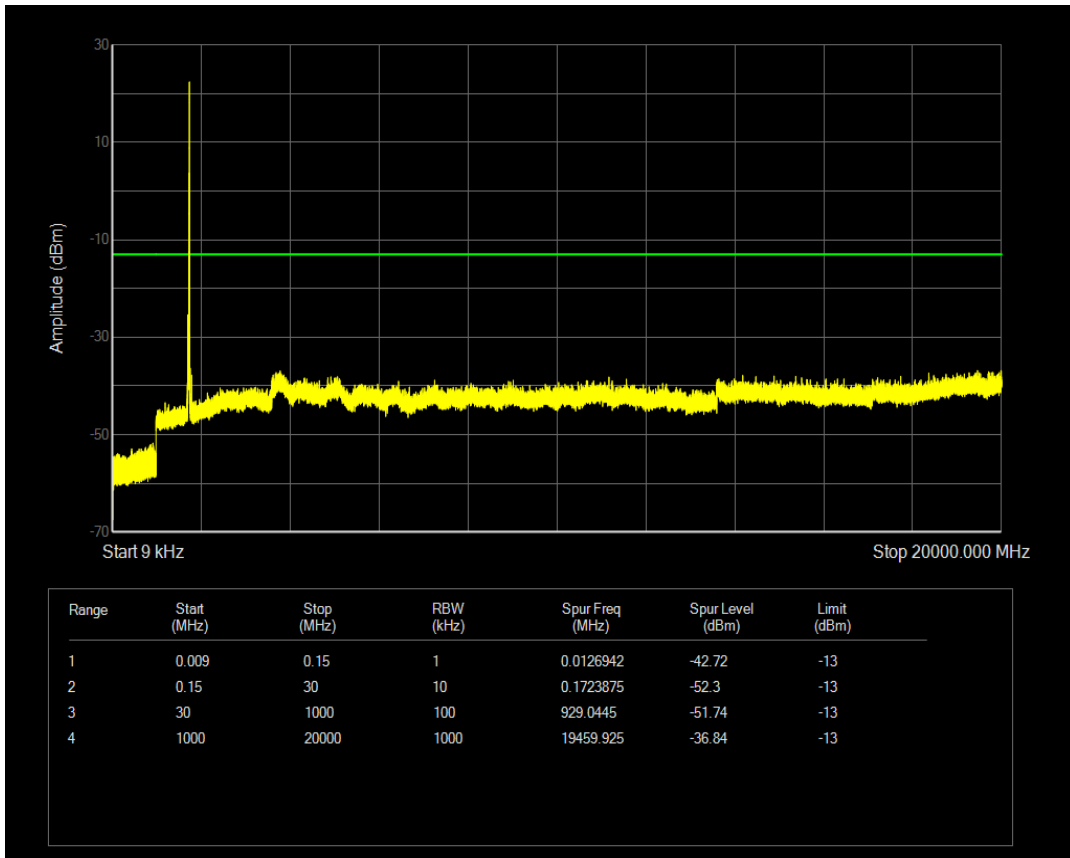

n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=1@105

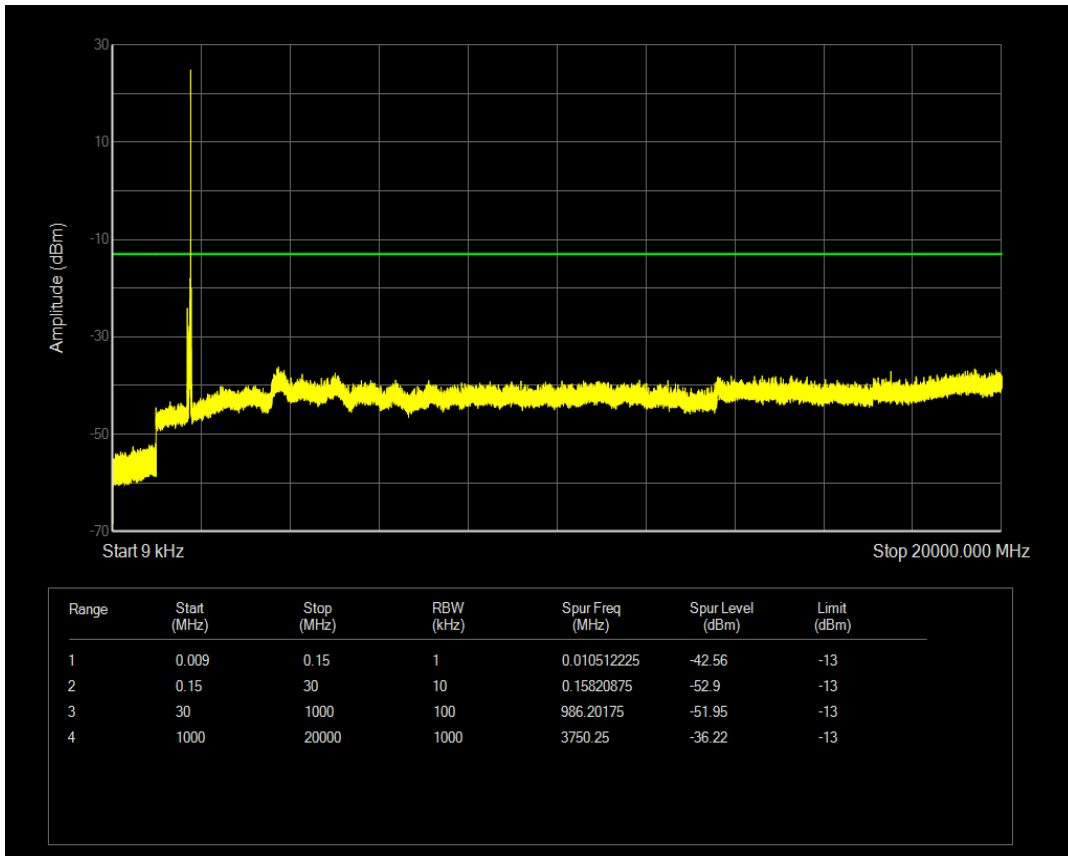

n66 SCS=30kHz DFT_QPSK BW=40MHz Channel=352000 RB=1@0

