





Plot on Channel 6705MHz

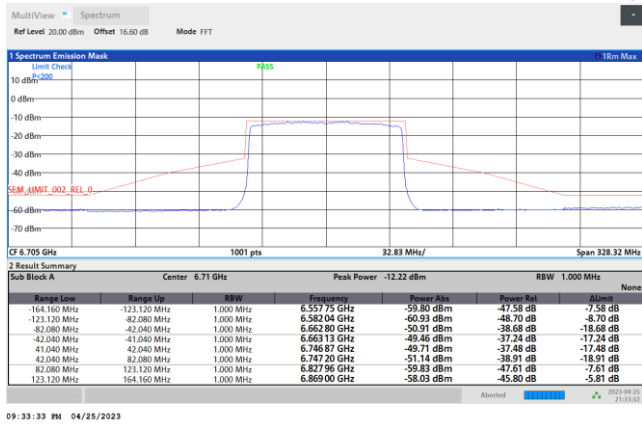


09:33:33 PM 04/25/2023

Plot on Channel 6785MHz

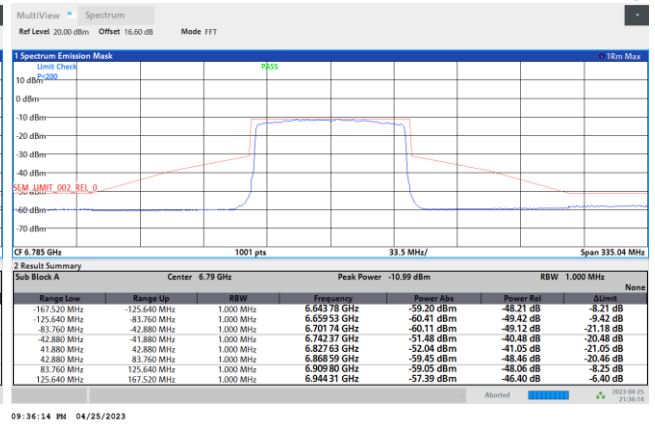


09:36:14 PM 04/25/2023

Plot on Channel 6865MHz

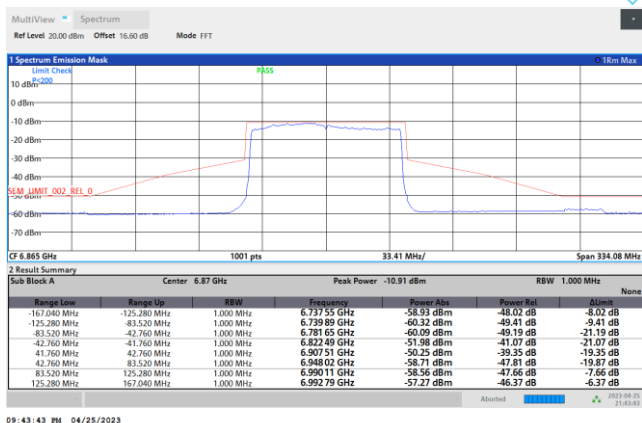


09:43:43 PM 04/25/2023

Plot on Channel 6945MHz

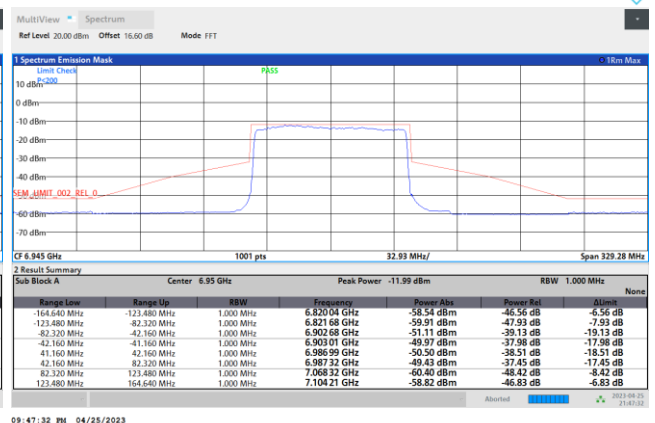

09:47:32 PM 04/25/2023

Plot on Channel 7025MHz

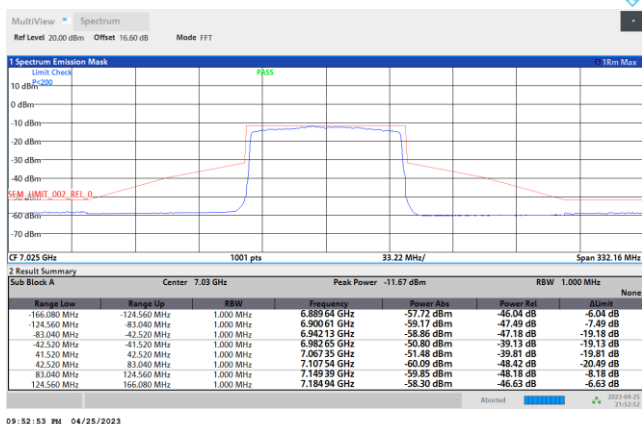


09:52:53 PM 04/25/2023




EUT Mode : 802.11ax HE160


Plot on Channel 6025MHz

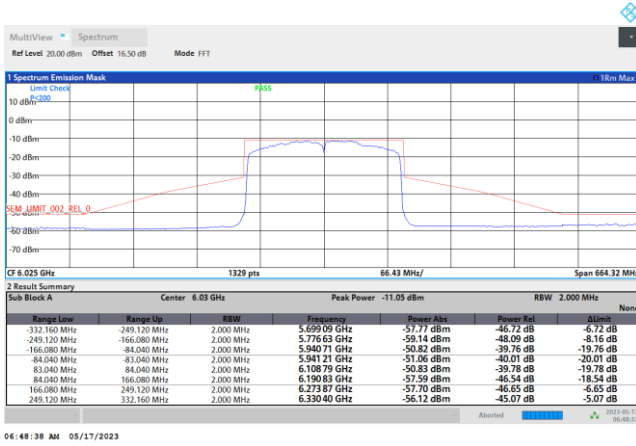


Plot on Channel 6185MHz

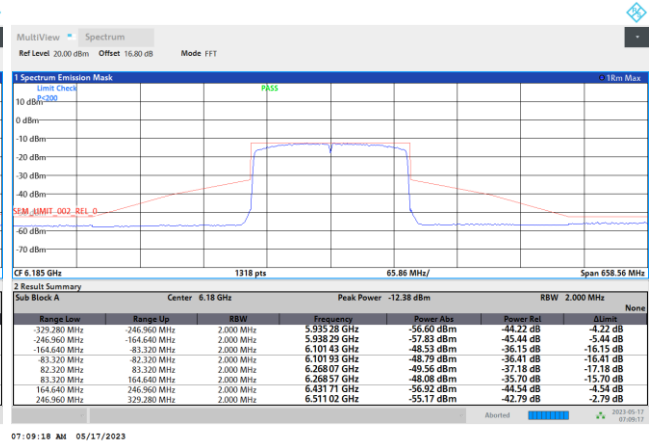


Plot on Channel 6345MHz

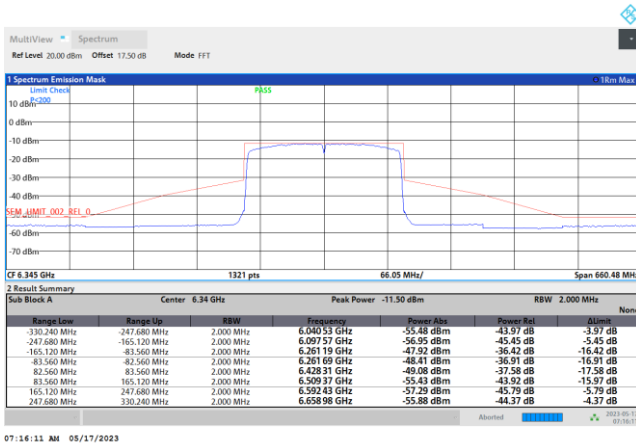


Plot on Channel 6505MHz

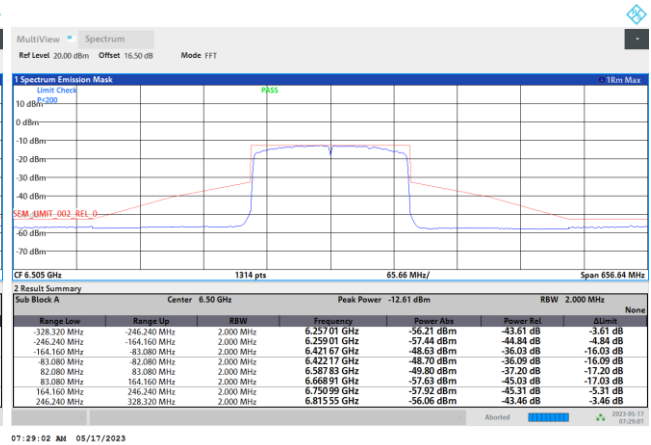

Plot on Channel 6665MHz

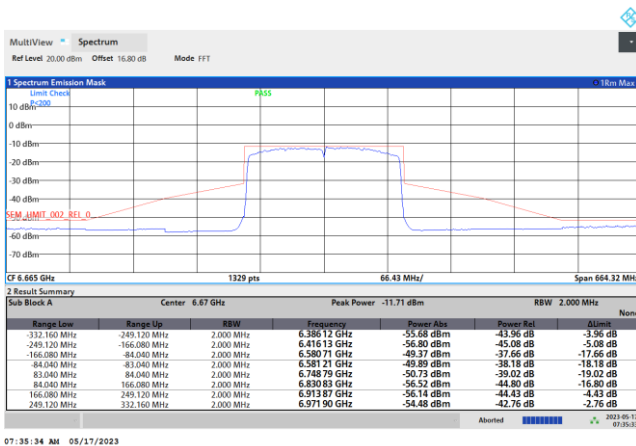


Plot on Channel 6825MHz

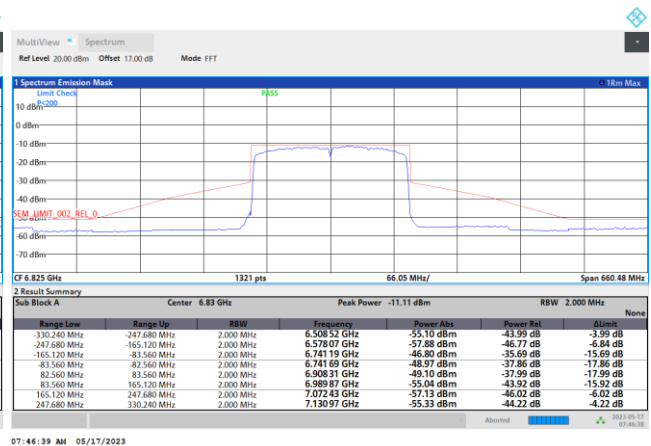



Plot on Channel 6985MHz

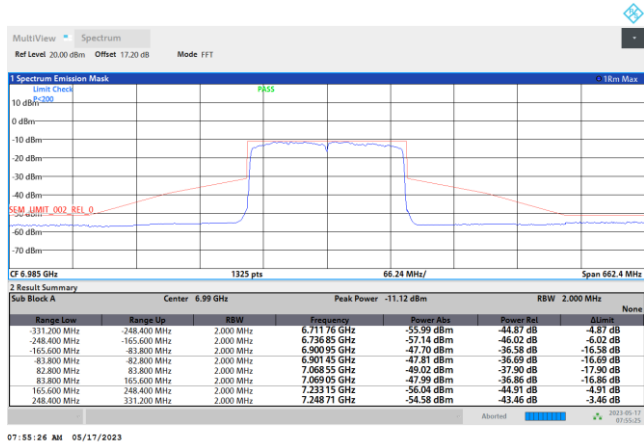





MIMO <Ant. 5+6+7+8(8)>

EUT Mode : 802.11ax HE20


Plot on Channel 5955MHz

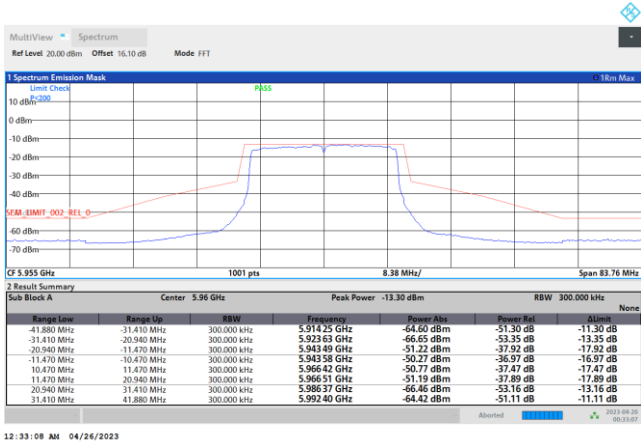


Plot on Channel 6195MHz

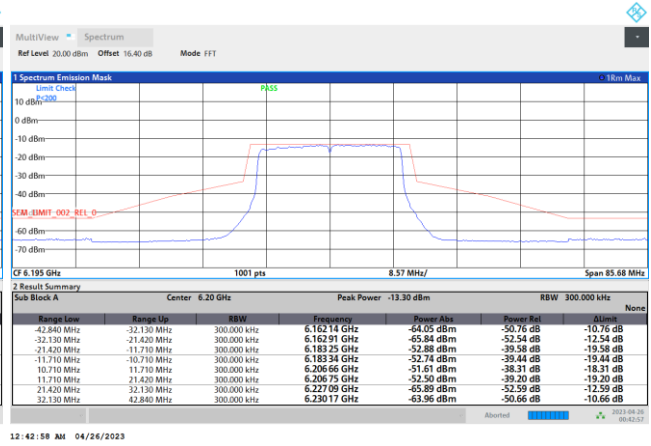


Plot on Channel 6415MHz

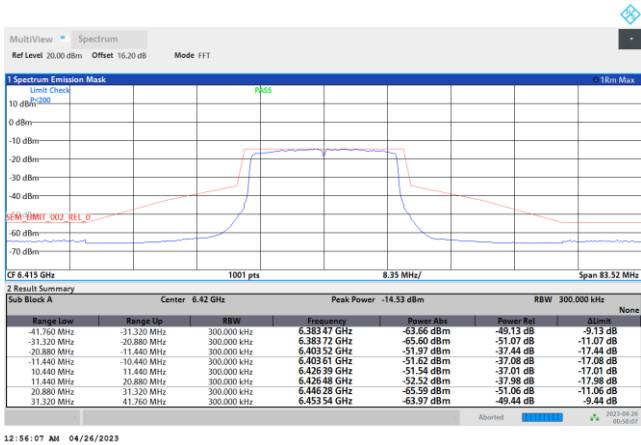


Plot on Channel 6435MHz

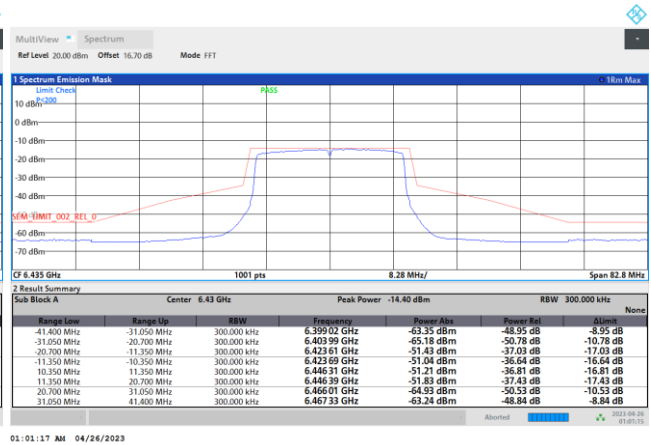

Plot on Channel 6475MHz

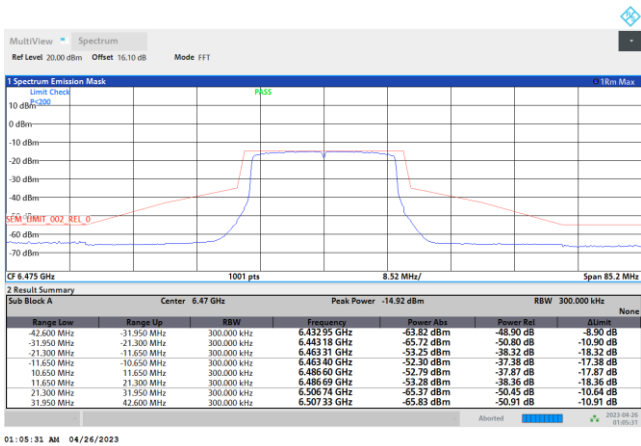


Plot on Channel 6515MHz

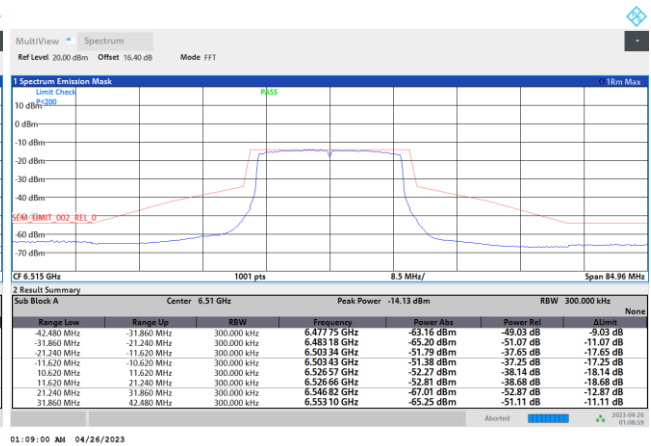





Plot on Channel 6535MHz

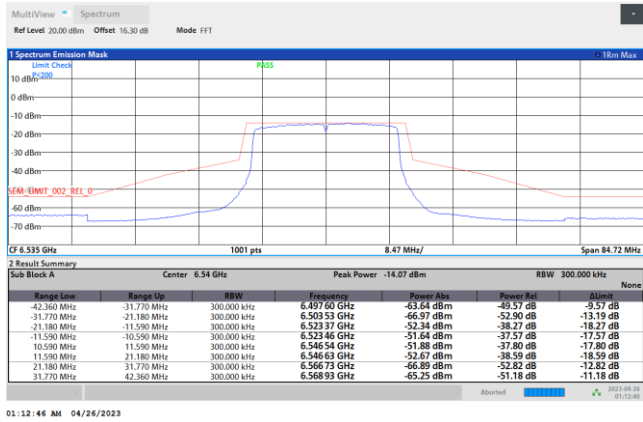


Plot on Channel 6695MHz

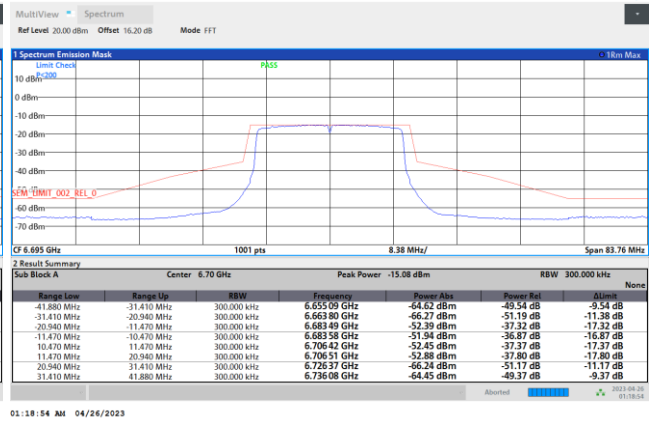


Plot on Channel 6855MHz

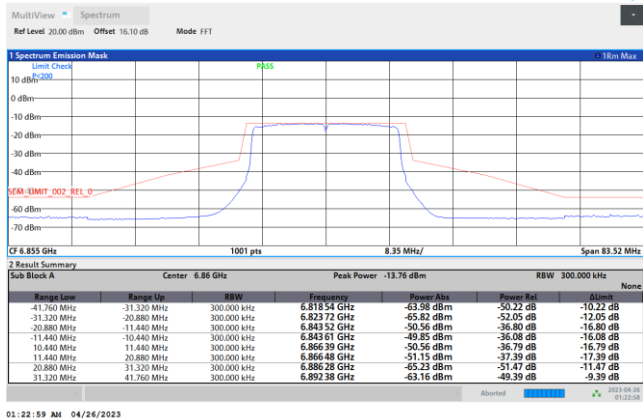


Plot on Channel 6875MHz

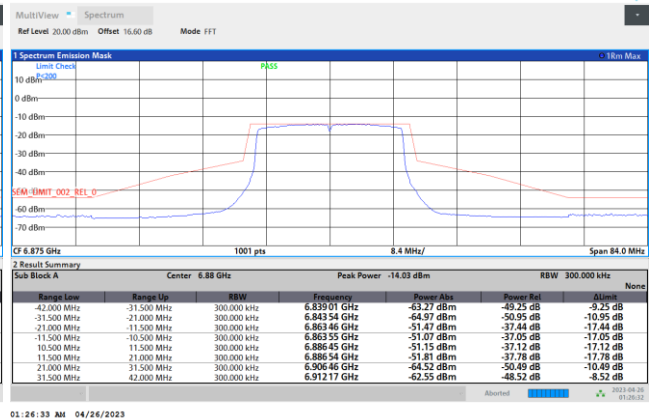

Plot on Channel 6895MHz

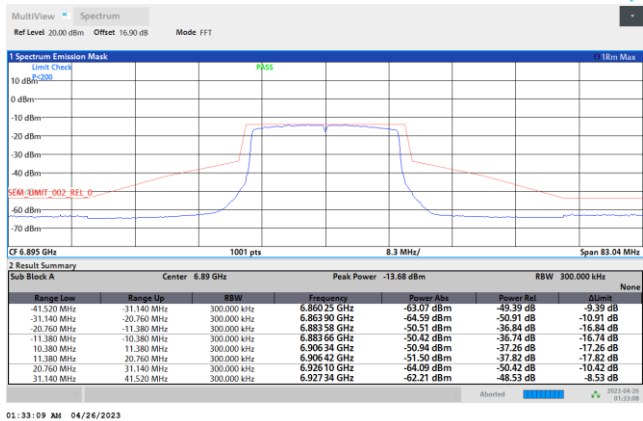


Plot on Channel 6995MHz

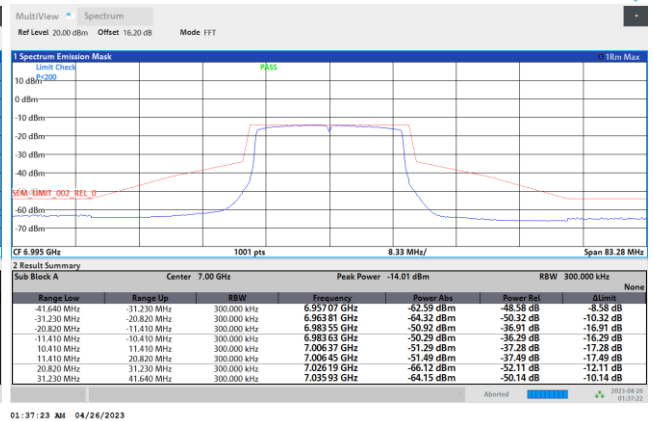




Plot on Channel 7095MHz

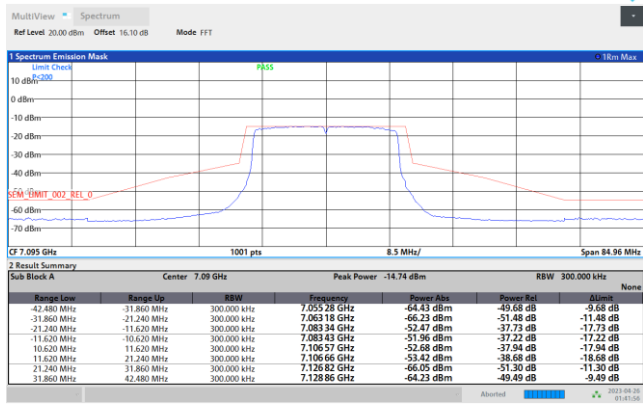


Plot on Channel 7115MHz

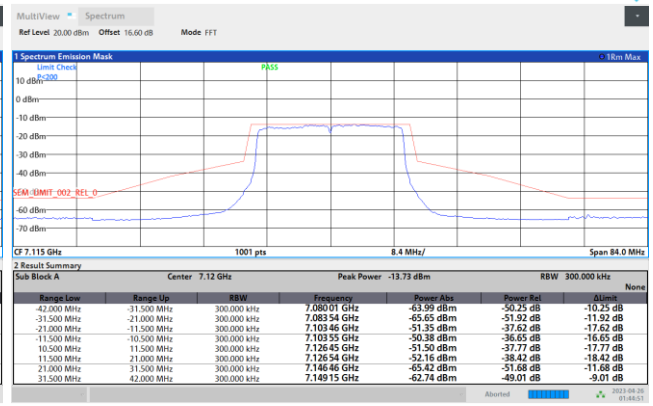




EUT Mode : 802.11ax HE40


Plot on Channel 5965MHz

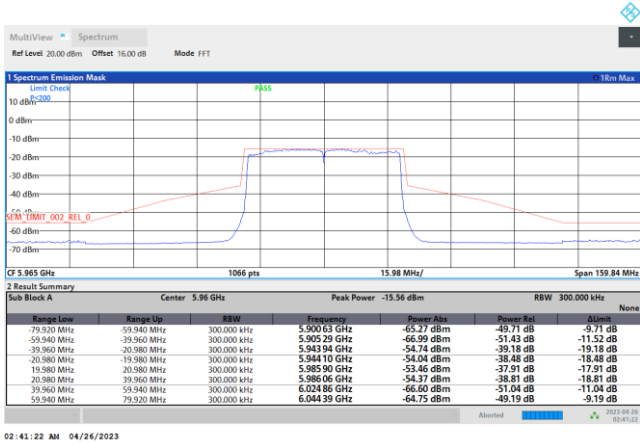


Plot on Channel 6205MHz

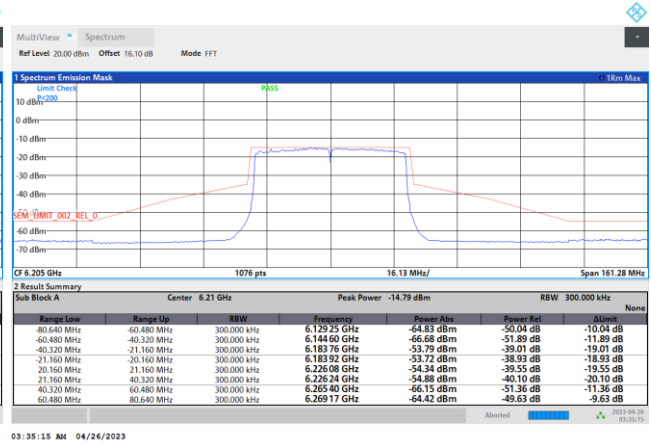


Plot on Channel 6405MHz

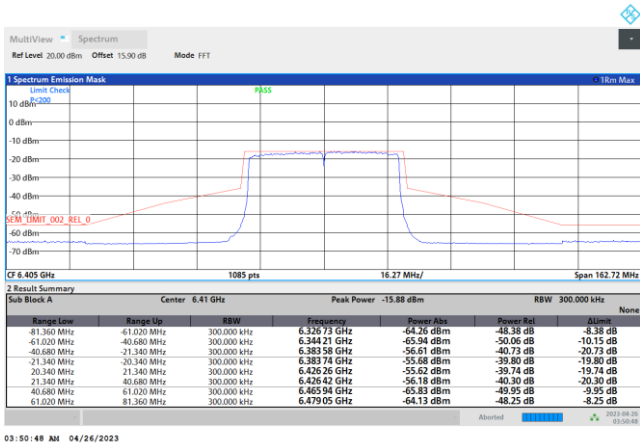


Plot on Channel 6445MHz

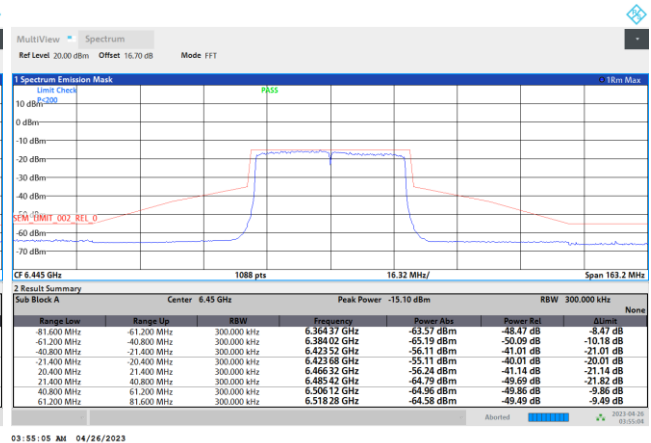

Plot on Channel 6485MHz

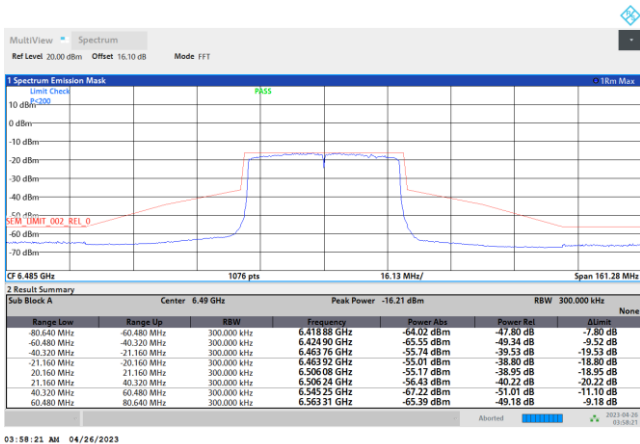


Plot on Channel 6525MHz

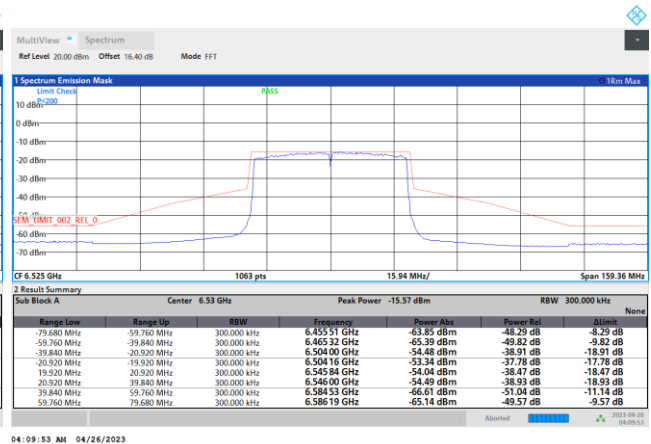




Plot on Channel 6565MHz

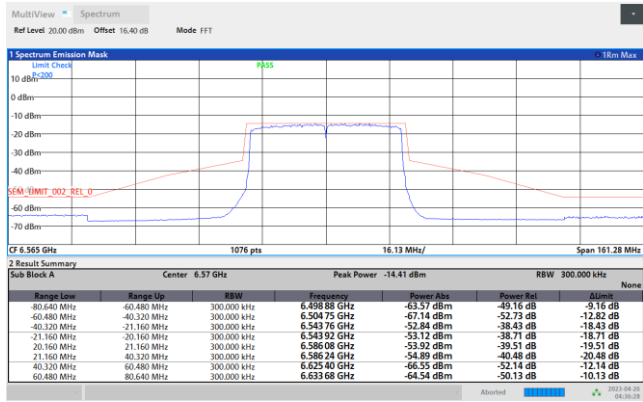


04:36:29 AM 04/26/2023

Plot on Channel 6685MHz

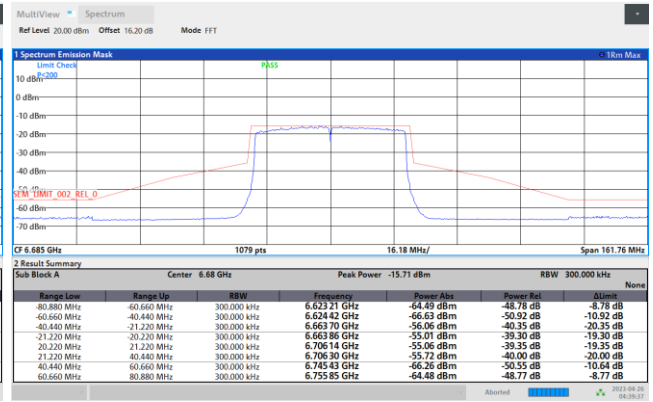


04:39:38 AM 04/26/2023

Plot on Channel 6845MHz

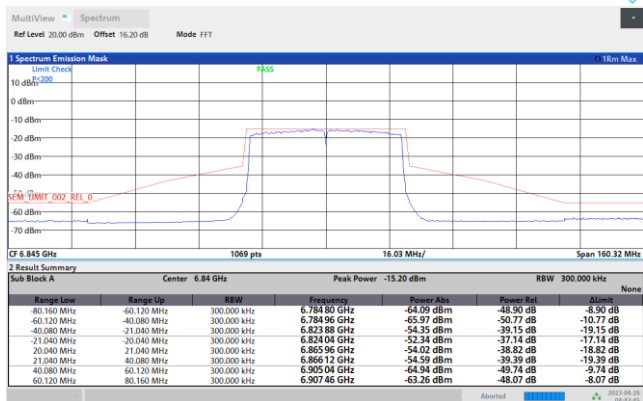


04:43:45 AM 04/26/2023

Plot on Channel 6885MHz

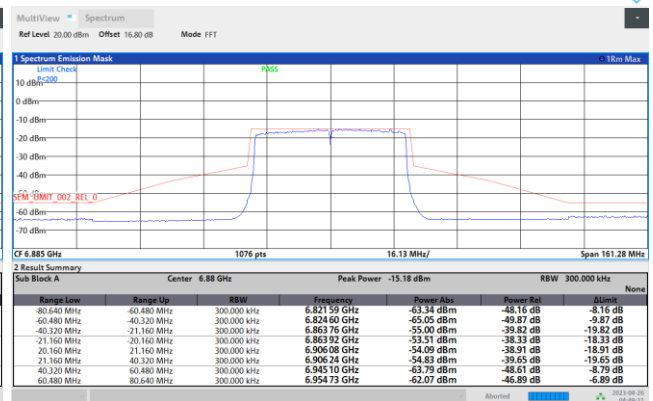


04:49:21 AM 04/26/2023

Plot on Channel 6925MHz

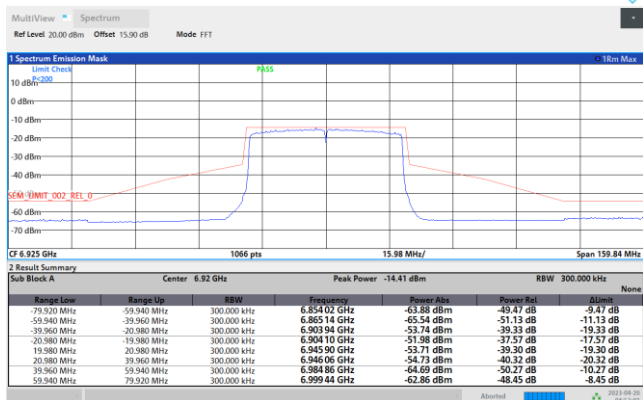

04:53:02 AM 04/26/2023


Plot on Channel 7005MHz

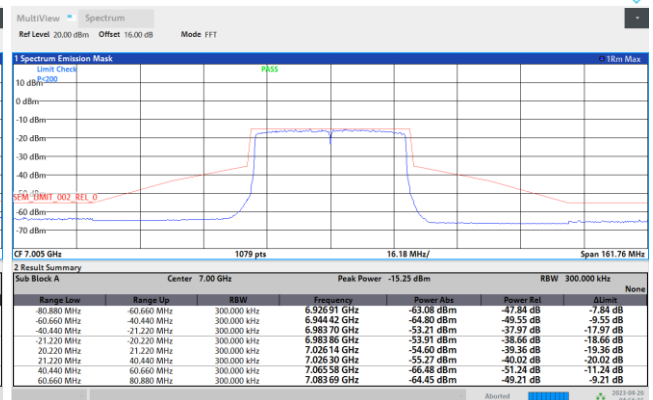

04:56:15 AM 04/26/2023




Plot on Channel 7085MHz

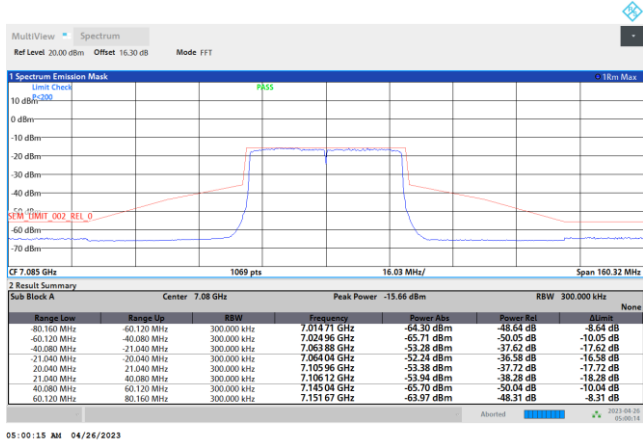




EUT Mode : 802.11ax HE80

Plot on Channel 5985MHz

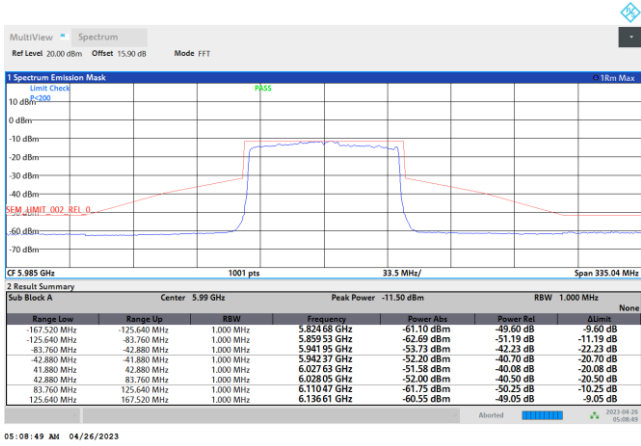


05:08:49 AM 04/26/2023

Plot on Channel 6225MHz

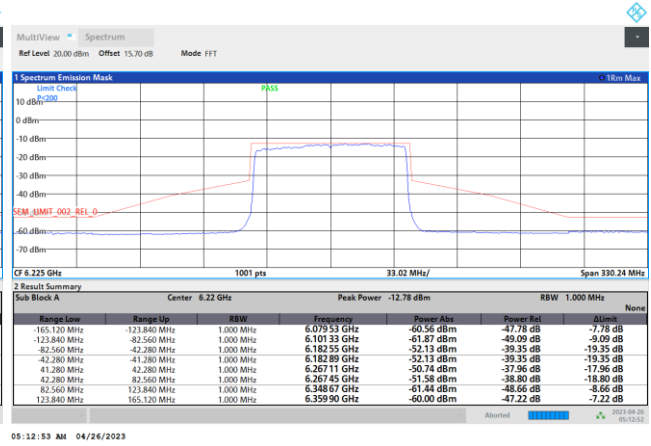


05:12:53 AM 04/26/2023

Plot on Channel 6385MHz

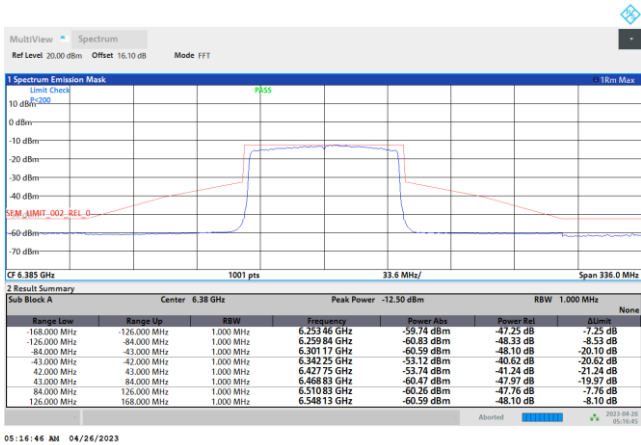


05:14:46 AM 04/26/2023

Plot on Channel 6465MHz

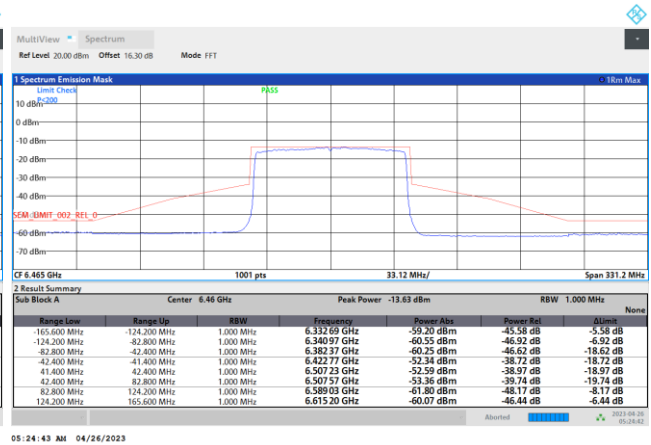


05:24:43 AM 04/26/2023

Plot on Channel 6545MHz

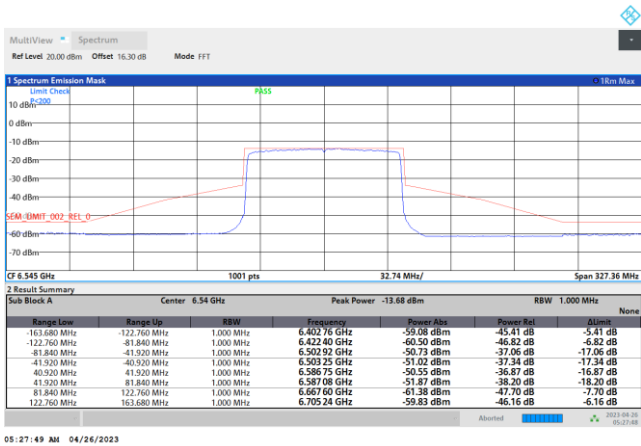

05:27:49 AM 04/26/2023


Plot on Channel 6625MHz

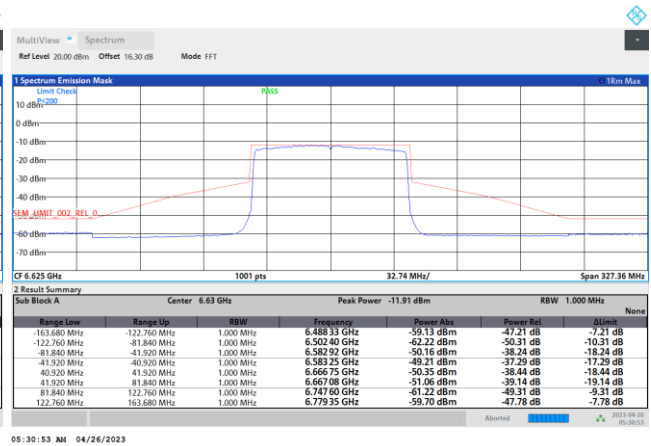


05:30:53 AM 04/26/2023




Plot on Channel 6705MHz

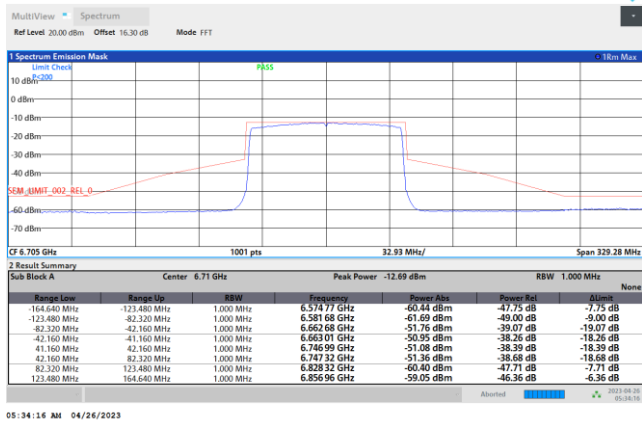


Plot on Channel 6785MHz

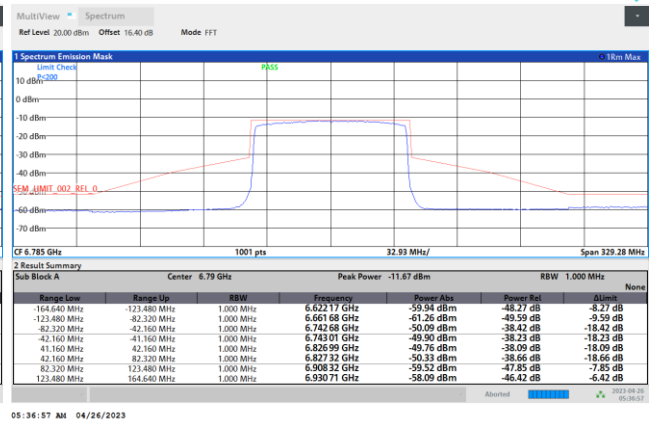


Plot on Channel 6865MHz

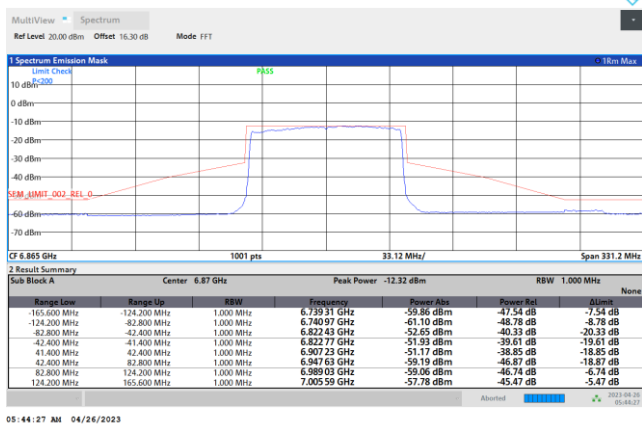

Plot on Channel 6945MHz

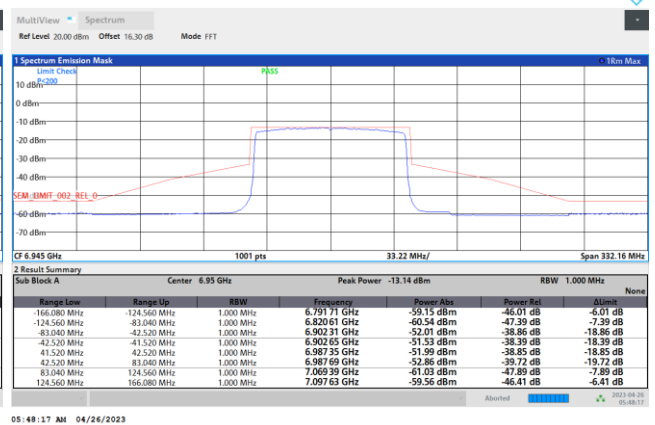


Plot on Channel 7025MHz

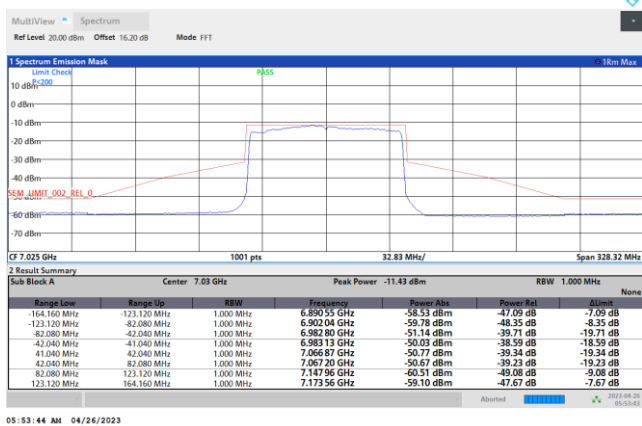




EUT Mode : 802.11ax HE160


Plot on Channel 6025MHz

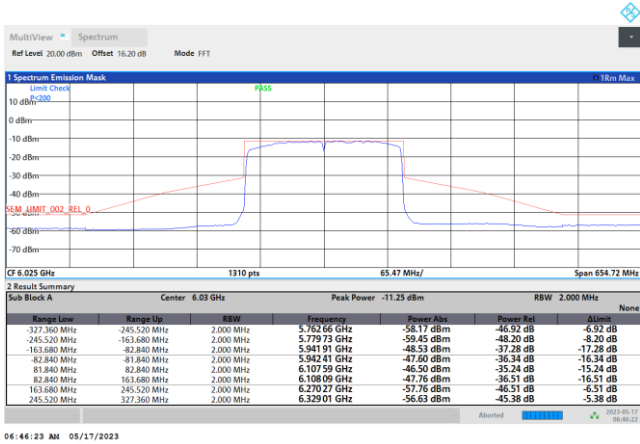


Plot on Channel 6185MHz

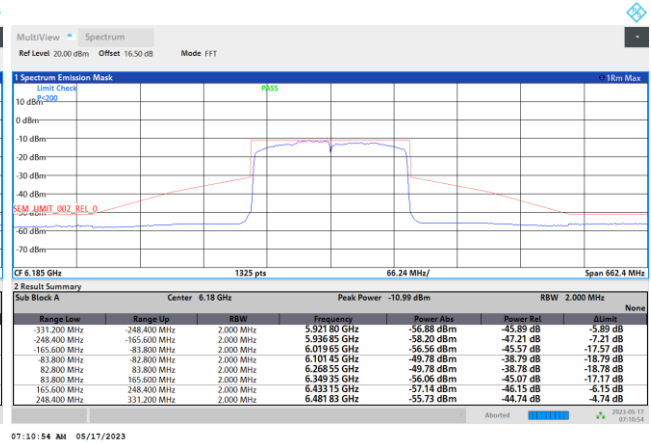


Plot on Channel 6345MHz

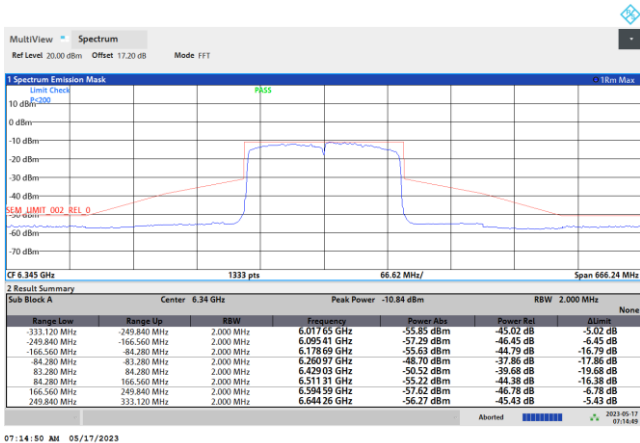


Plot on Channel 6505MHz

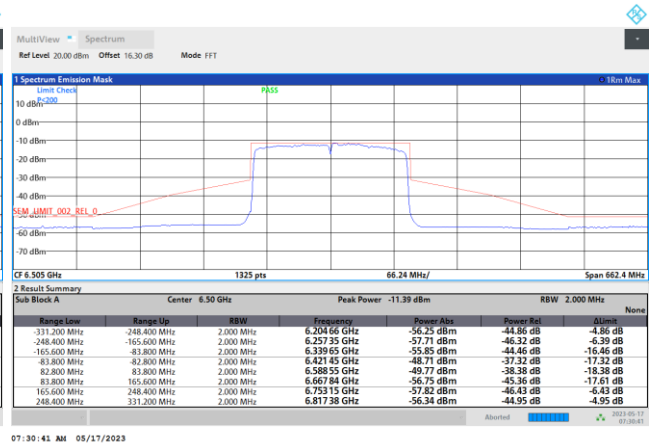

Plot on Channel 6665MHz

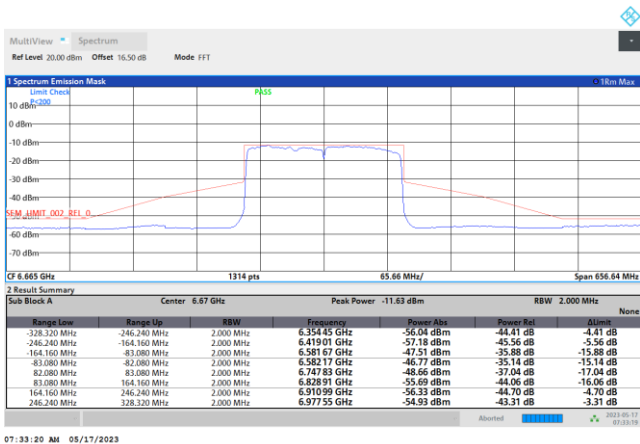


Plot on Channel 6825MHz

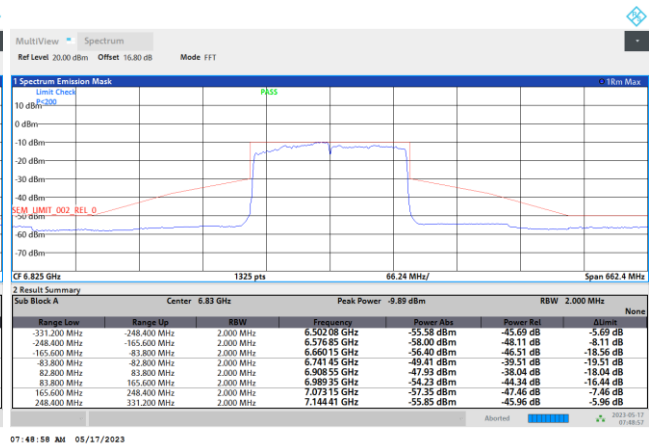



Plot on Channel 6985MHz

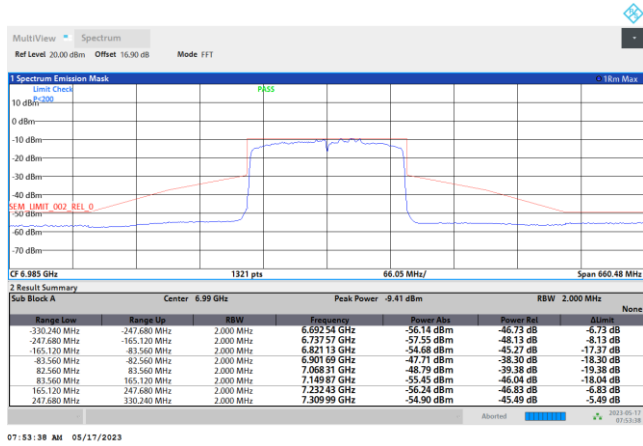



3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

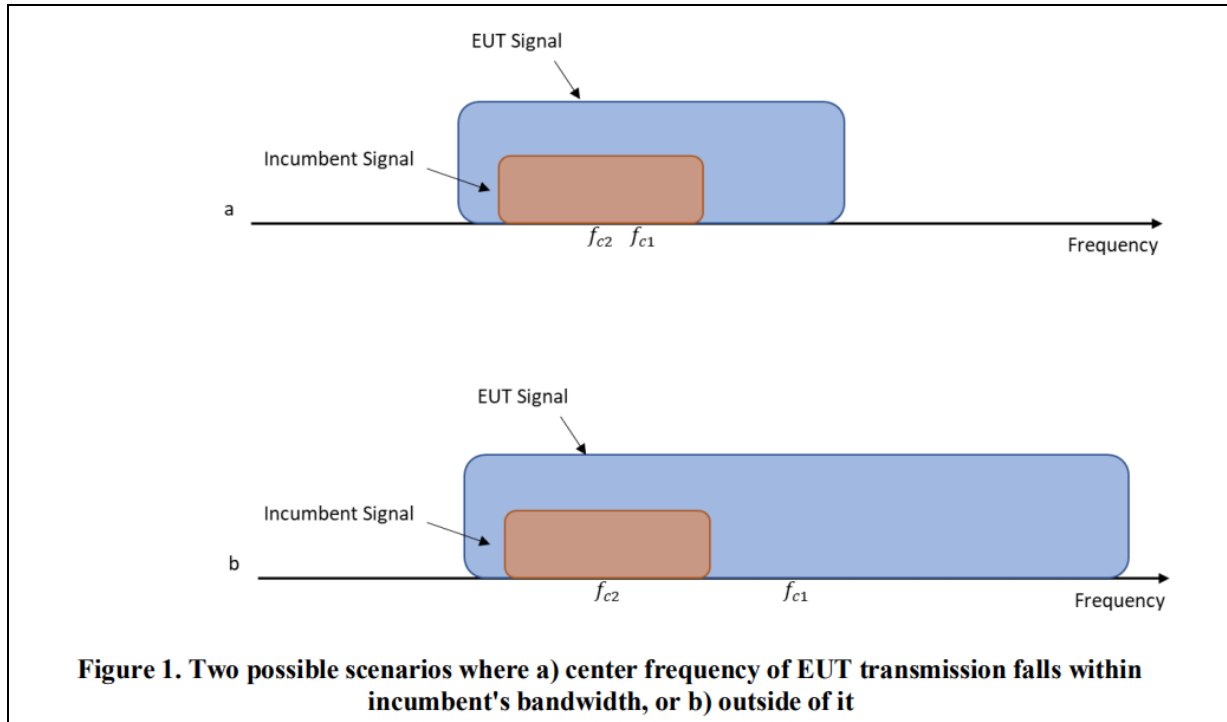

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01.


Section I) Contention Based Protocol

Conducted method Step-by-Step Procedure, Conducted Setup

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in test setup Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in test setup Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.

9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
12. For the contention-based protocol test where only one channel in each supported sub-band needs to be tested. The narrowest and widest bandwidth in each channel shall be measured EUT was driven in MIMO mode, the interferer level was injected to both chains to monitor the performance, while the interferer level is determined according the lowest antenna gain among both antennas (i.e, lower interferer level).

3.5.4 Test Setup

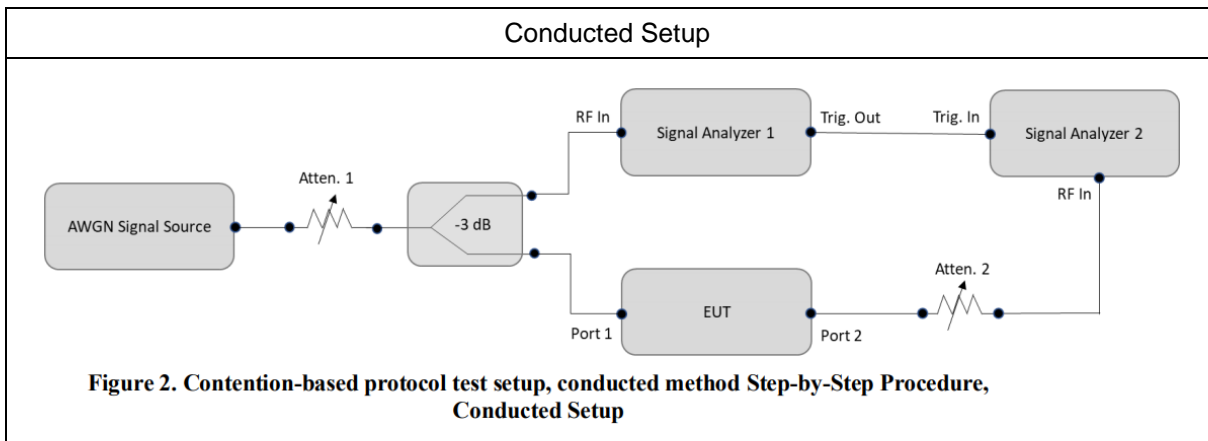

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Notebook	Acer	N15C1	LAN

3.5.6 Minimum Antenna gain for Contention Based Protocol Test

CBP Antenna Gain	<UNII-5>: 0.53 dBi
	<UNII-6>: 0.53 dBi
	<UNII-7>: 1.38 dBi
	<UNII-8>: 1.38 dBi

Note: The CBP antenna gain is considering the minimum gain from closed mode as worse case.



3.5.7 Test Summary of Contention Based Protocol Test

Test Engineer :	Rebecca Li and Kai Liao	Temperature :	21.9~23.9°C
		Relative Humidity :	45.5~55.5%

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)	
UNII Band 5	6135	20	6135	-68.86	100	-62	-69.39	7.39	
				Result: Stop Transmission					
				-73.86	< 90	-62	-74.39	12.39	
				Result: Minimal Operation					
				-74.86	0	-62	-75.39	13.39	
				Result: Normal Operation					
	6185	160	6110	-67.85	100	-62	-68.38	6.38	
				Result: Stop Transmission					
				-81.85	< 90	-62	-82.38	20.38	
				Result: Minimal Operation					
				-82.85	0	-62	-83.38	21.38	
				Result: Normal Operation					
			6260	6185	-61.85	100	-62	-62.38	0.38
					Result: Stop Transmission				
					-65.85	< 90	-62	-66.38	4.38
					Result: Minimal Operation				
					-66.85	0	-62	-67.38	5.38
					Result: Normal Operation				
6260	160	-68.03	100	-62	-68.56	6.56			
		Result: Stop Transmission							
		-73.03	< 90	-62	-73.56	-11.56			
		Result: Minimal Operation							
		-74.03	0	-62	-74.56	-12.56			
		Result: Normal Operation							

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (0.53 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 6	6455	20	6455	-67.86	100	-62	-68.39	6.39		
				Result: Stop Transmission						
				-73.86	< 90	-62	-74.39	12.39		
				Result: Minimal Operation						
				-74.86	0	-62	-75.39	13.39		
				Result: Normal Operation						
	6505	160	6430	-65.88	100	-62	-66.41	4.41		
				Result: Stop Transmission						
				-87.88	< 90	-62	-88.41	26.41		
				Result: Minimal Operation						
				-88.88	0	-62	-89.41	27.41		
				Result: Normal Operation						
			6505	160	6505	-63.23	100	-62	-63.76	1.76
						Result: Stop Transmission				
						-66.23	< 90	-62	-66.76	4.76
						Result: Minimal Operation				
						-67.23	0	-62	-67.76	5.76
						Result: Normal Operation				
6580	160	6580	-67.02	100	-62	-67.55	5.55			
			Result: Stop Transmission							
			-72.02	< 90	-62	-72.55	10.55			
			Result: Minimal Operation							
-73.02	0	-62	-73.55	11.55						
Result: Normal Operation										

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (0.53 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)	
UNII Band 7	6695	20	6695	-69.79	100	-62	-71.17	9.17	
				Result: Stop Transmission					
				-74.79	< 90	-62	-76.17	14.17	
				Result: Minimal Operation					
				-75.79	0	-62	-77.17	15.17	
				Result: Normal Operation					
	6665	160	6590	-68.93	100	-62	-70.31	8.31	
				Result: Stop Transmission					
				-83.93	< 90	-62	-85.31	23.31	
				Result: Minimal Operation					
				-84.93	0	-62	-86.31	24.31	
				Result: Normal Operation					
			6740	6665	-62.36	100	-62	-63.74	1.74
					Result: Stop Transmission				
					-67.36	< 90	-62	-68.74	6.74
					Result: Minimal Operation				
					-68.36	0	-62	-69.74	7.74
					Result: Normal Operation				
6740	6665	-64.31	100	-62	-65.69	3.69			
		Result: Stop Transmission							
		-72.31	< 90	-62	-73.69	11.69			
		Result: Minimal Operation							
6740	6665	-73.31	0	-62	-74.69	12.69			
		Result: Normal Operation							

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (1.38 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 8	7015	20	7015	-67.49	100	-62	-68.87	6.87		
				Result: Stop Transmission						
				-75.49	< 90	-62	-76.87	14.87		
				Result: Minimal Operation						
				-76.49	0	-62	-77.87	15.87		
				Result: Normal Operation						
	6985	160	6910	-66.92	100	-62	-68.30	6.30		
				Result: Stop Transmission						
				-82.92	< 90	-62	-84.30	22.30		
				Result: Minimal Operation						
				-83.92	0	-62	-85.30	23.30		
				Result: Normal Operation						
			6985	160	6985	-61.07	100	-62	-62.45	0.45
						Result: Stop Transmission				
						-67.07	< 90	-62	-68.45	6.45
						Result: Minimal Operation				
						-68.07	0	-62	-69.45	7.45
						Result: Normal Operation				
6985	160	7060	-63.00	100	-62	-64.38	2.38			
			Result: Stop Transmission							
			-73.00	< 90	-62	-74.38	12.38			
			Result: Minimal Operation							
6985	160	7060	-74.00	0	-62	-75.38	13.38			
			Result: Normal Operation							




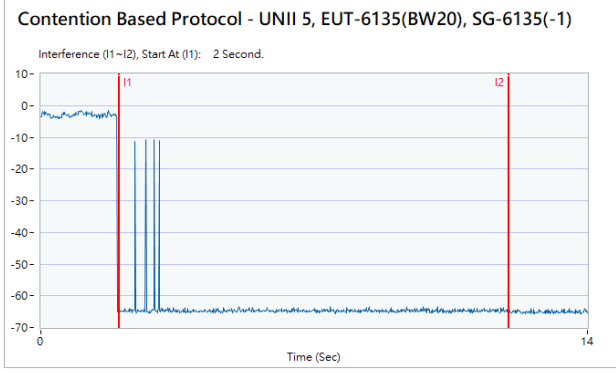
Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (1.38 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



3.5.8 Test Plots of Contention Based Protocol Test

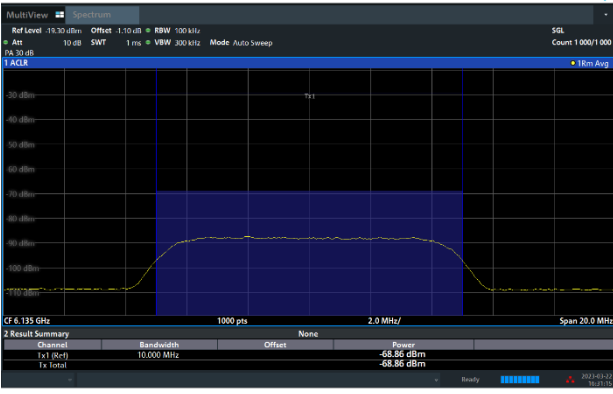
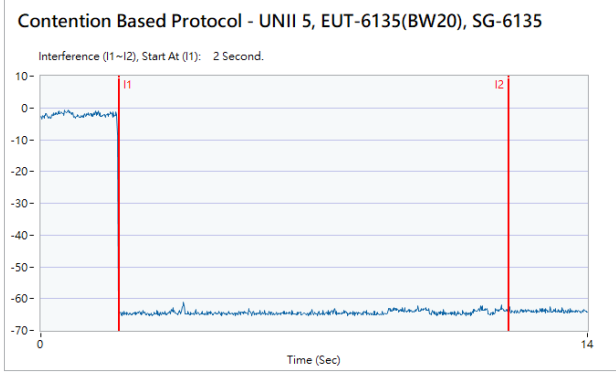
Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)	
<p>802.11ax (HE20) / 6135MHz Threshold Level (TL) = -68.86dBm</p>	<p>802.11ax (HE20) / CH37 Test result is pass due to no transmission occur.</p>
	
<p>802.11ax (HE20) / 6135MHz Threshold Level (TL) = -69.86dBm</p>	<p>802.11ax (HE20) / CH37 Transmit when the interferer is 1dB lower.</p>
	



Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)



802.11ax (HE160) / 6110MHz (Lower edge)
Threshold Level (TL) = -67.85dBm

802.11ax (HE160) / CH47 (Lower edge)
Test result is pass due to no transmission occur.

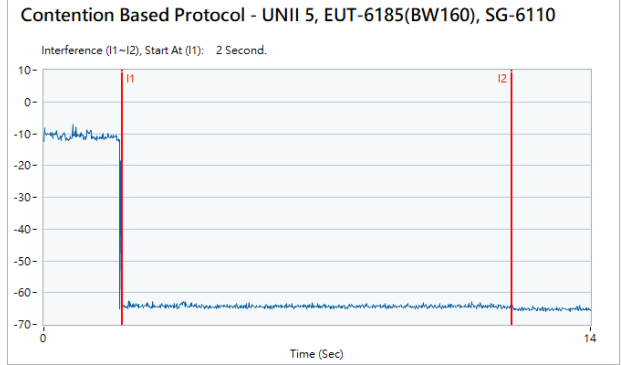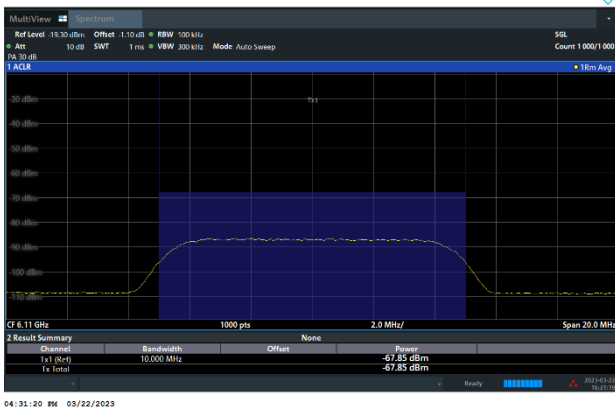

802.11ax (HE160) / 6110MHz (Lower edge)
Threshold Level (TL) = -68.85dBm

802.11ax (HE160) / CH47 (Lower edge)
Transmit when the interferer is 1dB lower.

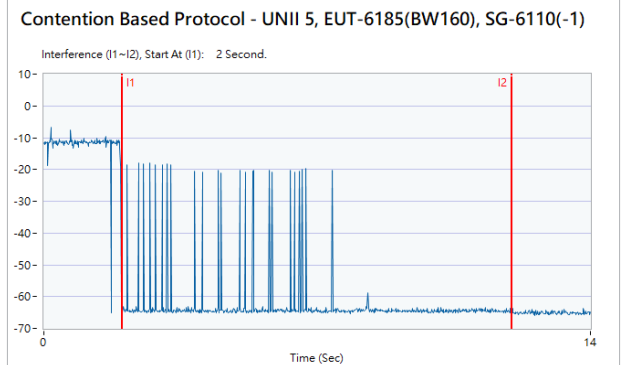




Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)


802.11ax (HE160) / 6185MHz (Middle)
Threshold Level (TL) = -61.85dBm

802.11ax (HE160) / CH47 (Middle)

Test result is pass due to no transmission occur.

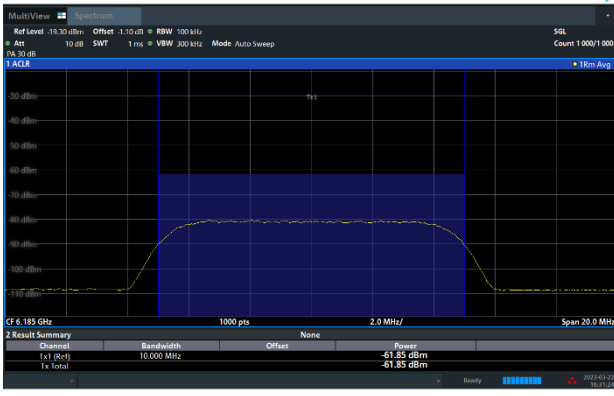


Contention Based Protocol - UNII 5, EUT-6185(BW160), SG-6185

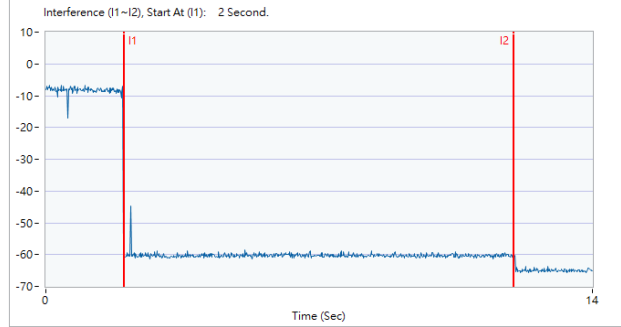


802.11ax (HE160) / 6185MHz (Middle)
Threshold Level (TL) = -62.85dBm

802.11ax (HE160) / CH47 (Middle)

Transmit when the interferer is 1dB lower.



Contention Based Protocol - UNII 5, EUT-6185(BW160), SG-6185(-1)


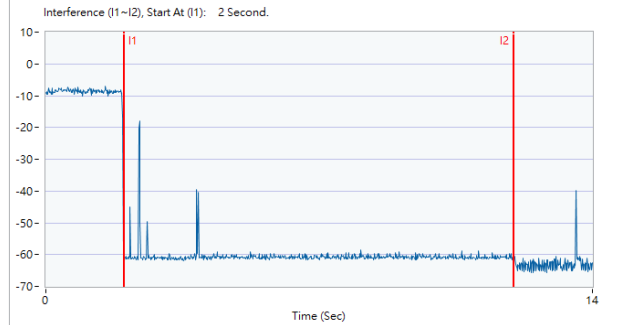




Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)



802.11ax (HE160) / 6260MHz (Upper edge)
Threshold Level (TL) = -68.03dBm

802.11ax (HE160) / CH47 (Upper edge)
Test result is pass due to no transmission occur.

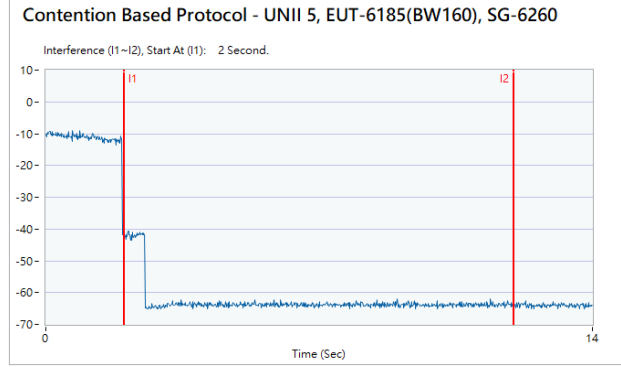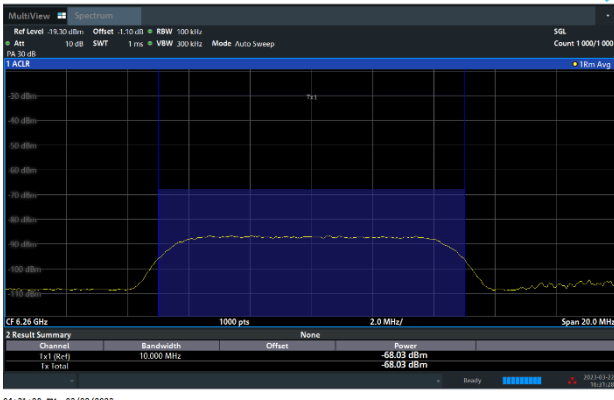

802.11ax (HE160) / 6260MHz (Upper edge)
Threshold Level (TL) = -69.03dBm

802.11ax (HE160) / CH47 (Upper edge)
Transmit when the interferer is 1dB lower.

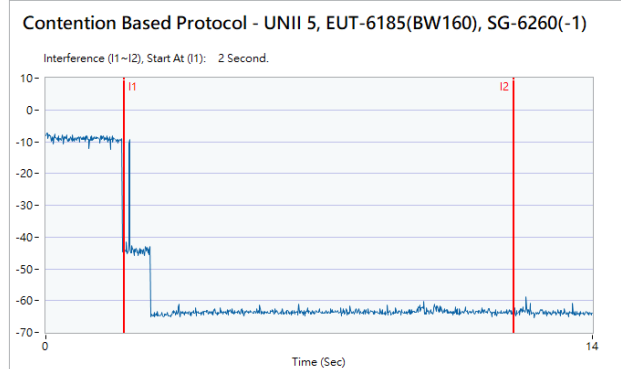





Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -67.86dBm

802.11ax (HE20) / CH101
Test result is pass due to no transmission occur.

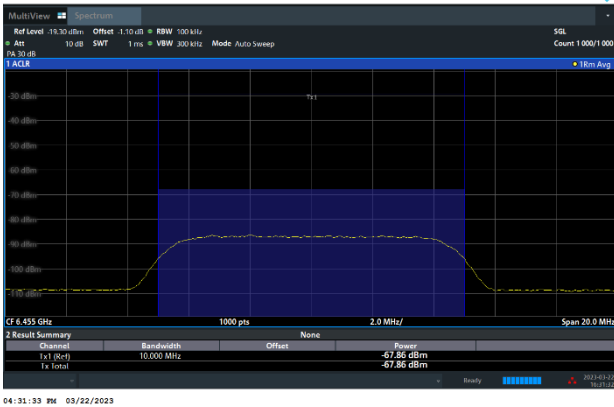


Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455

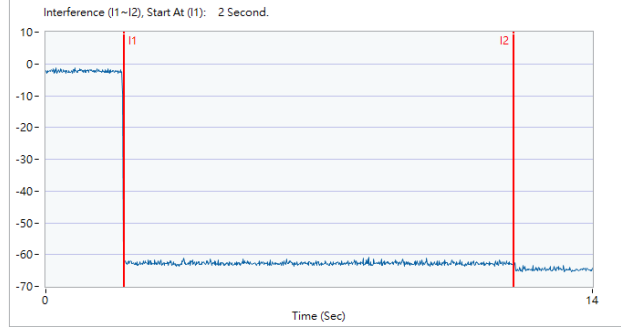

802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -68.86dBm

802.11ax (HE20) / CH101
Transmit when the interferer is 1dB lower.



Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455(-1)

