



802.11ac (VHT80) CH155

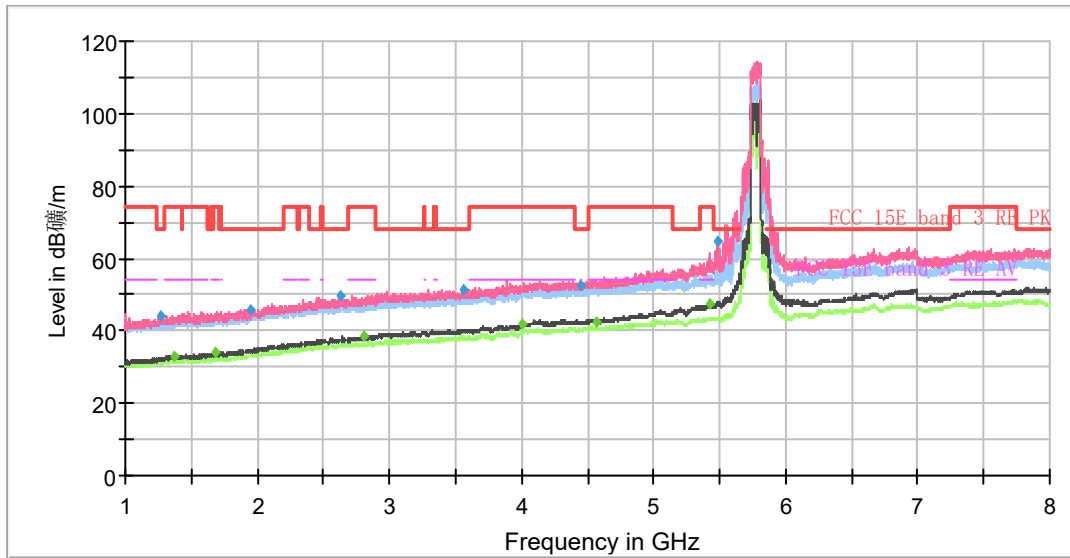

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

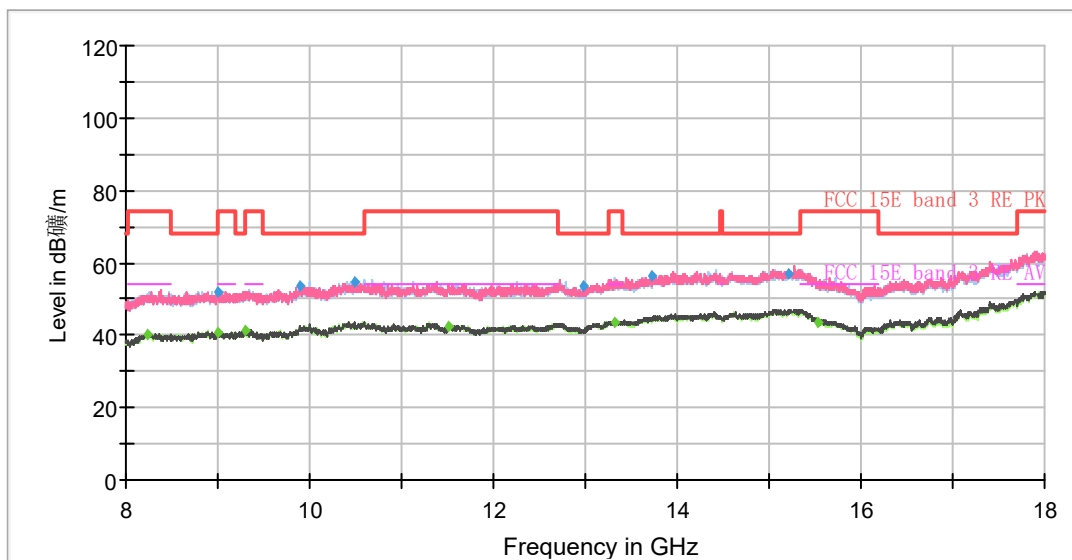


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1265.13	43.97	---	68.20	24.23	500.00	200.0	V	165.00	-2
1366.63	---	33.05	54.00	20.95	500.00	200.0	V	0.00	-1
1683.38	---	34.21	54.00	19.79	500.00	200.0	V	5.00	0
1952.00	45.65	---	68.20	22.55	500.00	200.0	V	14.00	1
2624.00	49.65	---	68.20	18.55	500.00	100.0	V	0.00	4
2807.75	---	38.40	54.00	15.60	500.00	200.0	V	236.00	4
3559.38	51.43	---	68.20	16.77	500.00	100.0	V	296.00	5
3996.88	---	41.70	54.00	12.30	500.00	100.0	V	354.00	6
4444.00	52.58	---	68.20	15.62	500.00	200.0	V	283.00	7
4570.00	---	42.28	54.00	11.72	500.00	200.0	V	227.00	7
5430.13	---	47.55	54.00	6.45	500.00	200.0	V	33.00	11
5487.00	64.87	---	68.20	3.33	500.00	200.0	V	254.00	11


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT160) CH50

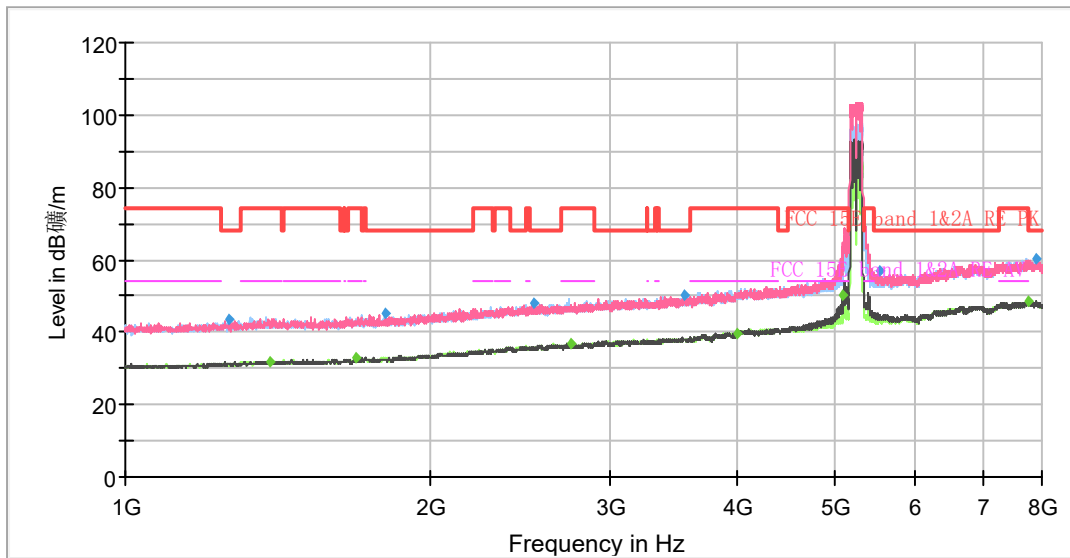

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

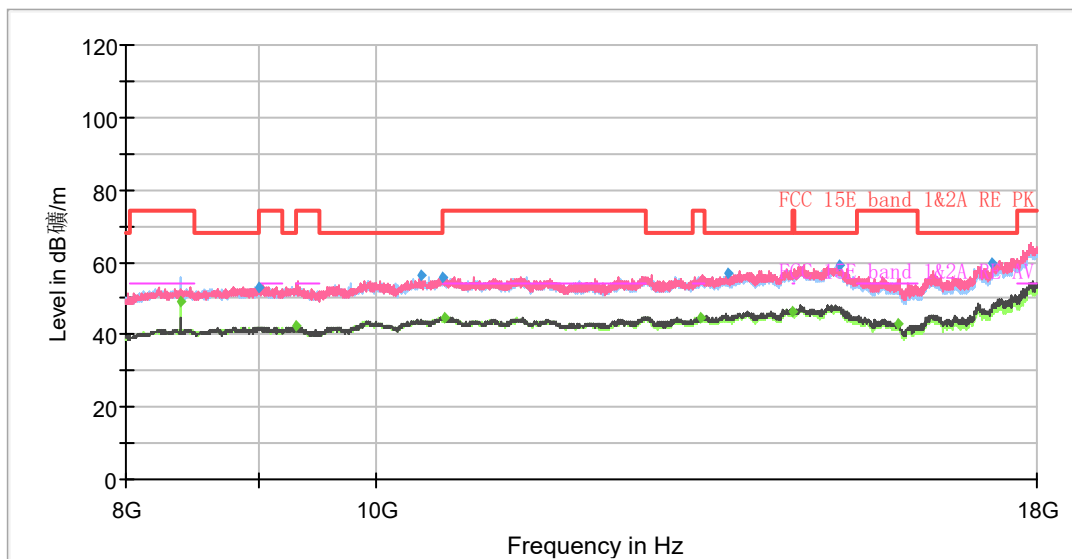


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1266.88	43.41	---	68.20	24.79	500.00	200.0	V	111.00	-2
1390.25	---	32.05	54.00	21.95	500.00	100.0	V	19.00	-1
1690.38	---	32.78	54.00	21.22	500.00	100.0	V	19.00	0
1799.75	45.05	---	68.20	23.15	500.00	100.0	H	312.00	0
2525.13	47.90	---	68.20	20.30	500.00	100.0	H	312.00	3
2750.00	---	36.81	54.00	17.19	500.00	100.0	H	0.00	4
3554.13	50.06	---	68.20	18.14	500.00	200.0	V	104.00	5
3998.63	---	39.86	54.00	14.14	500.00	200.0	V	26.00	6
5092.38	---	50.47	54.00	3.53	500.00	200.0	V	245.00	9
5528.13	56.84	---	68.20	11.36	500.00	200.0	V	285.00	11
7740.13	---	48.33	54.00	5.67	500.00	200.0	H	0.00	17
7909.00	60.16	---	68.20	8.04	500.00	100.0	H	75.00	17
8398.75	---	49.13	54.00	4.87	500.00	200.0	H	102.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT160) CH114

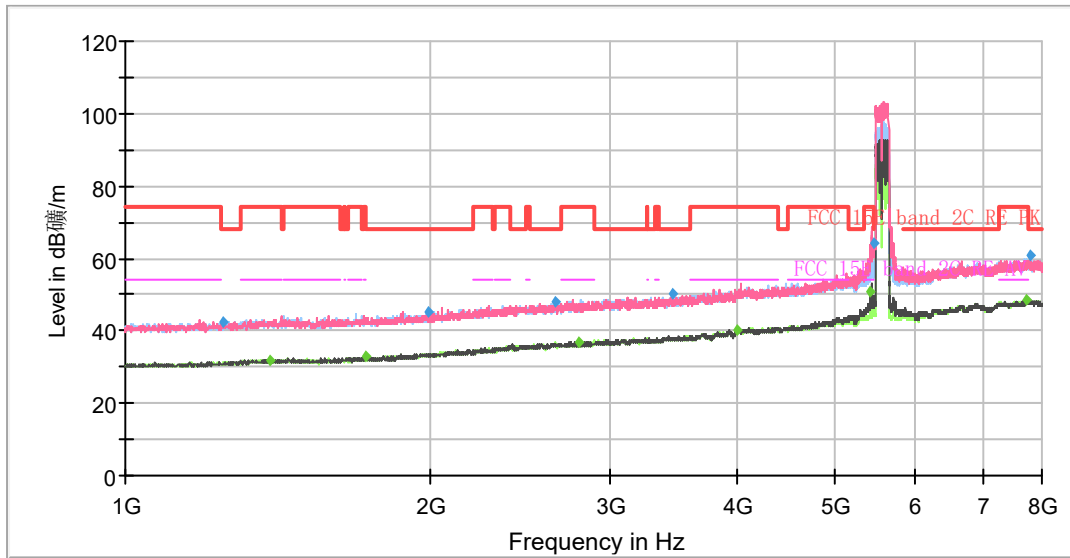

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

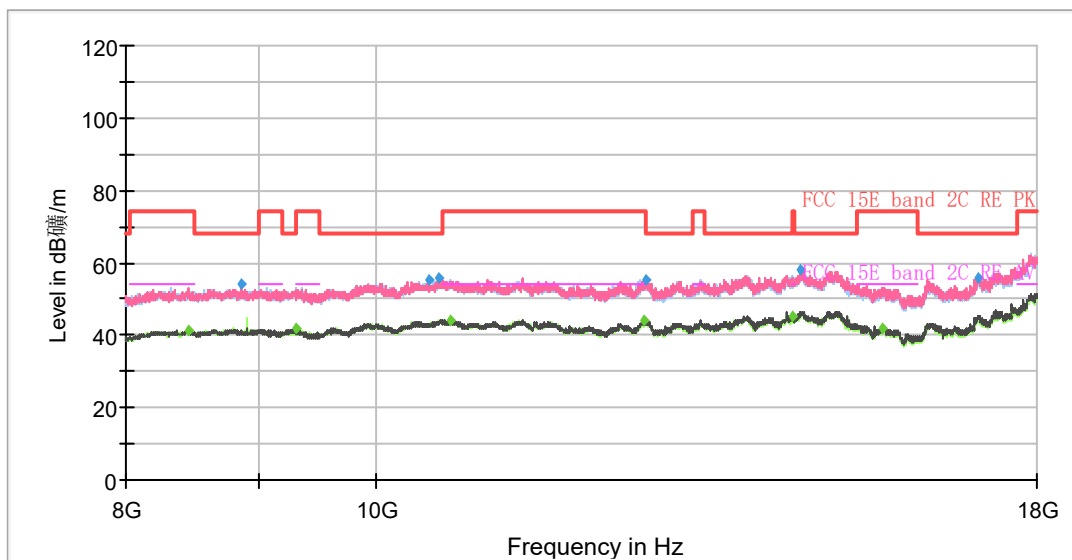


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1247.63	42.57	---	68.20	25.63	500.00	200.0	H	0.00	-2
1386.75	---	32.09	54.00	21.91	500.00	200.0	V	244.00	-1
1721.88	---	32.77	54.00	21.23	500.00	200.0	H	0.00	0
1987.88	45.10	---	68.20	23.10	500.00	200.0	V	348.00	1
2647.63	47.73	---	68.20	20.47	500.00	100.0	V	36.00	4
2795.50	---	36.77	54.00	17.23	500.00	200.0	H	57.00	4
3464.88	50.45	---	68.20	17.75	500.00	100.0	V	302.00	5
3999.50	---	40.20	54.00	13.80	500.00	100.0	V	2.00	6
5423.13	---	50.62	54.00	3.38	500.00	200.0	V	281.00	11
5463.38	64.15	---	68.20	4.05	500.00	200.0	V	281.00	11
7727.88	---	48.57	54.00	5.43	500.00	200.0	V	356.00	17
7785.63	60.97	---	68.20	7.23	500.00	100.0	H	120.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH36

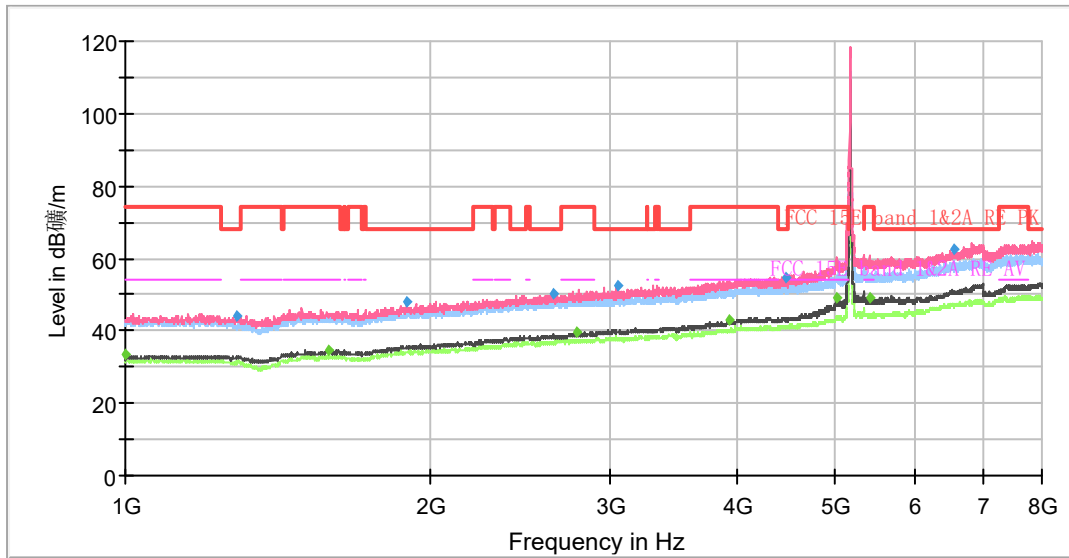

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

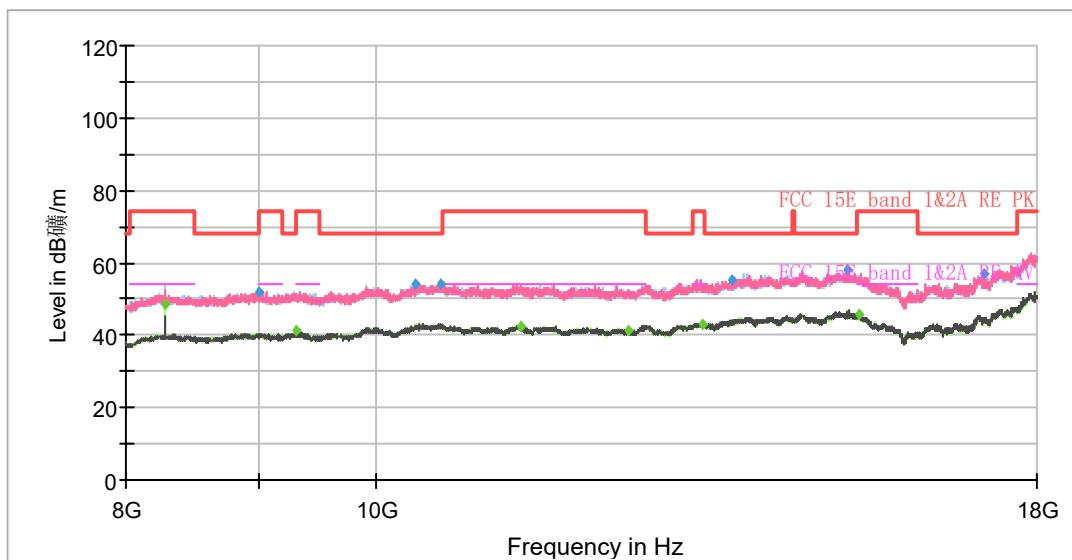


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	33.29	54.00	20.71	500.00	200.0	V	139.00	-2
1289.63	43.86	---	68.20	24.34	500.00	200.0	V	173.00	-1
1584.50	---	34.58	54.00	19.42	500.00	100.0	V	247.00	0
1891.63	47.98	---	68.20	20.22	500.00	200.0	V	214.00	1
2644.13	49.99	---	68.20	18.21	500.00	100.0	V	240.00	4
2789.38	---	39.68	54.00	14.32	500.00	100.0	V	227.00	5
3051.00	52.49	---	68.20	15.71	500.00	200.0	V	5.00	5
3929.50	---	42.89	54.00	11.11	500.00	200.0	V	146.00	7
4480.75	54.78	---	68.20	13.42	500.00	200.0	V	0.00	7
5014.50	---	48.87	54.00	5.13	500.00	200.0	V	261.00	10
5411.75	---	49.07	54.00	4.93	500.00	200.0	V	295.00	12
6565.88	62.65	---	68.20	5.55	500.00	100.0	V	160.00	13
8287.50	---	48.49	54.00	5.51	500.00	200.0	H	98.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH40

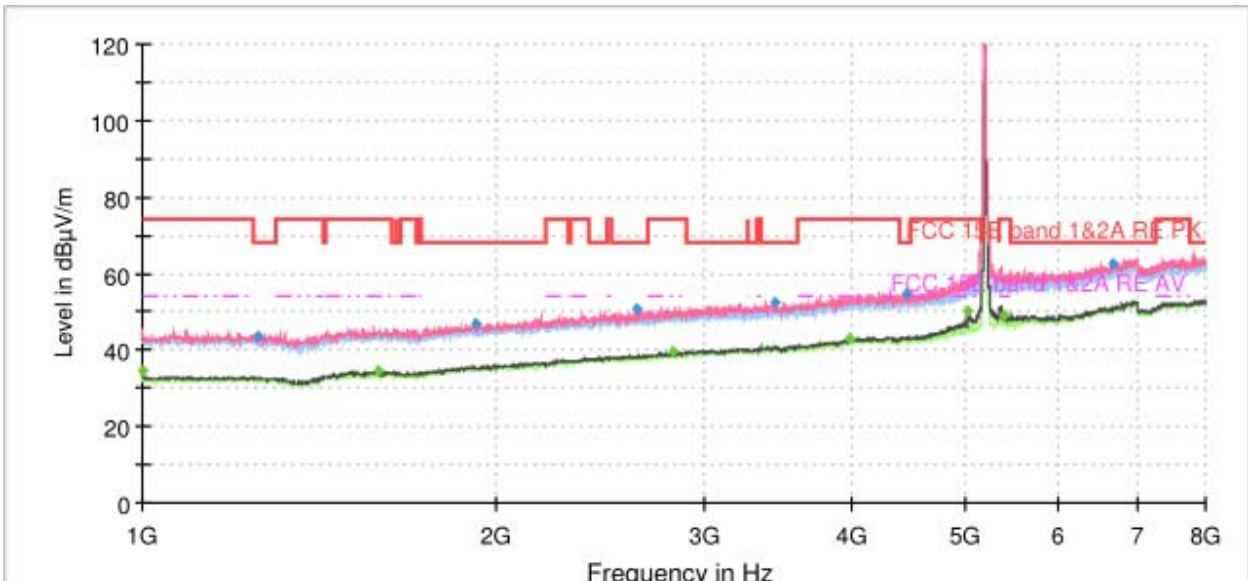

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

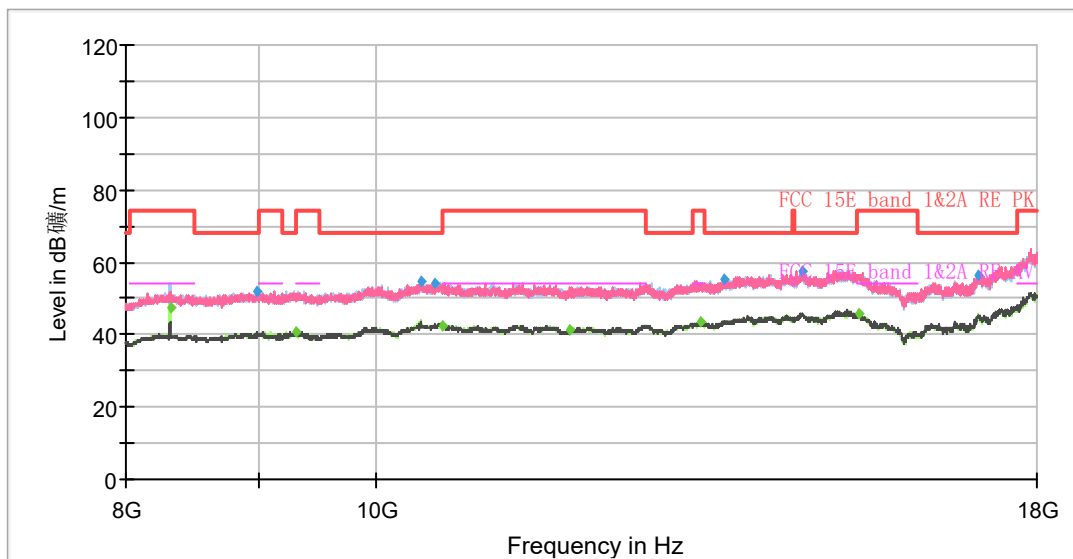


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	34.52	54.00	19.48	500.00	200.0	V	250.00	-2
1252.00	43.79	---	68.20	24.41	500.00	200.0	V	59.00	-1
1582.75	---	34.84	54.00	19.16	500.00	200.0	V	66.00	0
1923.13	46.99	---	68.20	21.21	500.00	200.0	V	66.00	1
2624.00	50.81	---	68.20	17.39	500.00	200.0	V	298.00	4
2827.88	---	39.36	54.00	14.64	500.00	100.0	V	356.00	5
3443.88	52.21	---	68.20	15.99	500.00	200.0	V	30.00	6
3994.25	---	42.72	54.00	11.28	500.00	100.0	V	349.00	7
4446.63	54.86	---	68.20	13.34	500.00	200.0	H	359.00	7
5032.00	---	50.06	54.00	3.94	500.00	200.0	V	257.00	10
5396.88	---	49.05	54.00	4.95	500.00	200.0	V	257.00	12
6656.88	62.36	---	68.20	5.84	500.00	100.0	V	165.00	13


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH48

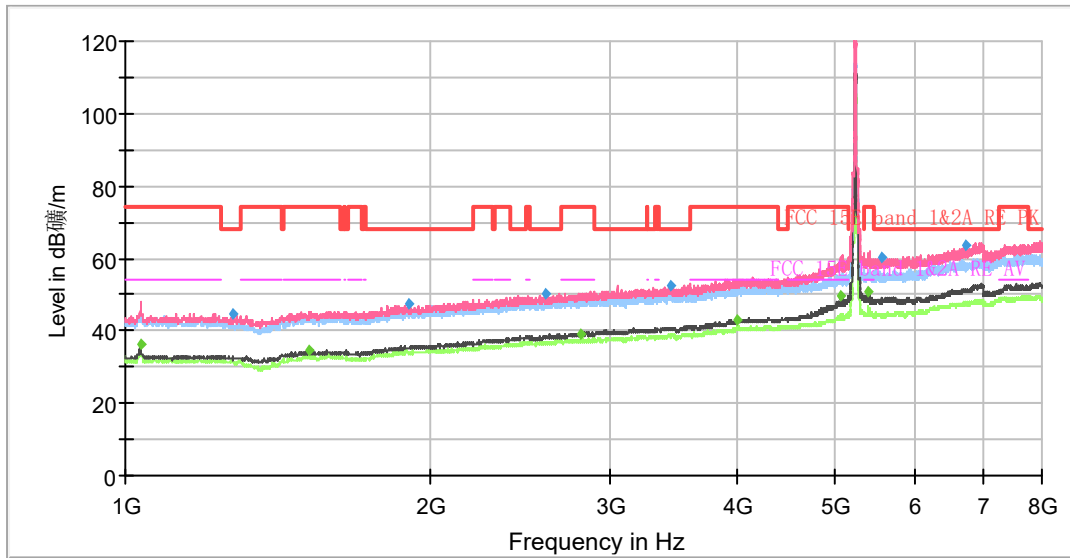

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

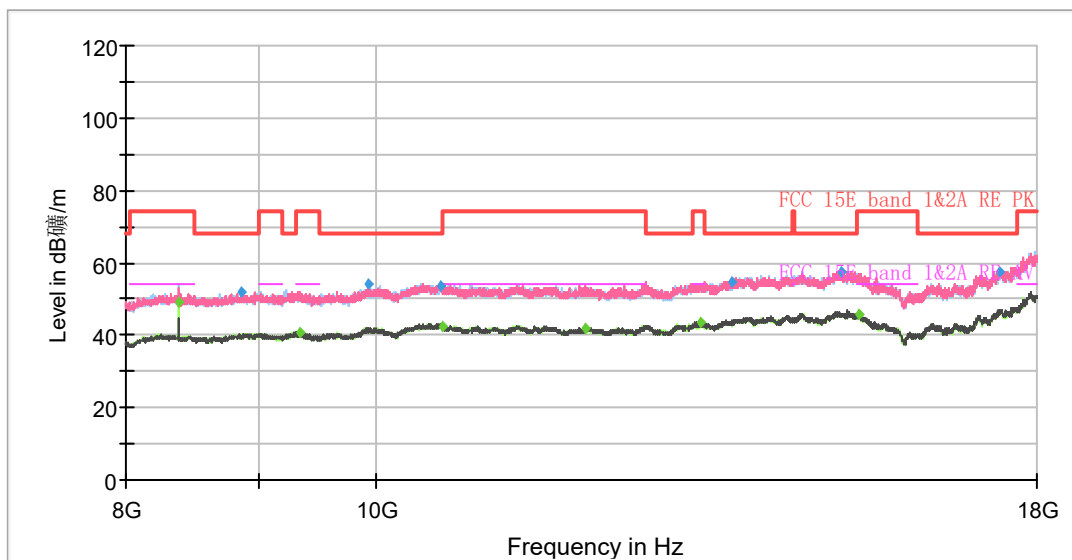


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1034.13	---	36.38	54.00	17.62	500.00	200.0	V	263.00	-2
1278.25	44.45	---	68.20	23.75	500.00	100.0	V	167.00	-1
1517.13	---	34.42	54.00	19.58	500.00	200.0	V	99.00	0
1899.50	47.39	---	68.20	20.81	500.00	200.0	V	175.00	1
2591.63	50.44	---	68.20	17.76	500.00	200.0	V	135.00	4
2811.25	---	39.15	54.00	14.85	500.00	100.0	V	227.00	5
3437.75	52.45	---	68.20	15.75	500.00	200.0	V	10.00	6
3999.50	---	42.79	54.00	11.21	500.00	100.0	V	254.00	7
5072.25	---	49.41	54.00	4.59	500.00	200.0	V	256.00	10
5396.88	---	50.79	54.00	3.21	500.00	200.0	V	263.00	12
5563.13	60.17	---	68.20	8.03	500.00	200.0	V	32.00	12
6735.63	63.78	---	68.20	4.42	500.00	100.0	V	214.00	14
8383.75	---	49.22	54.00	4.78	500.00	200.0	H	90.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11ax HE20 CH52

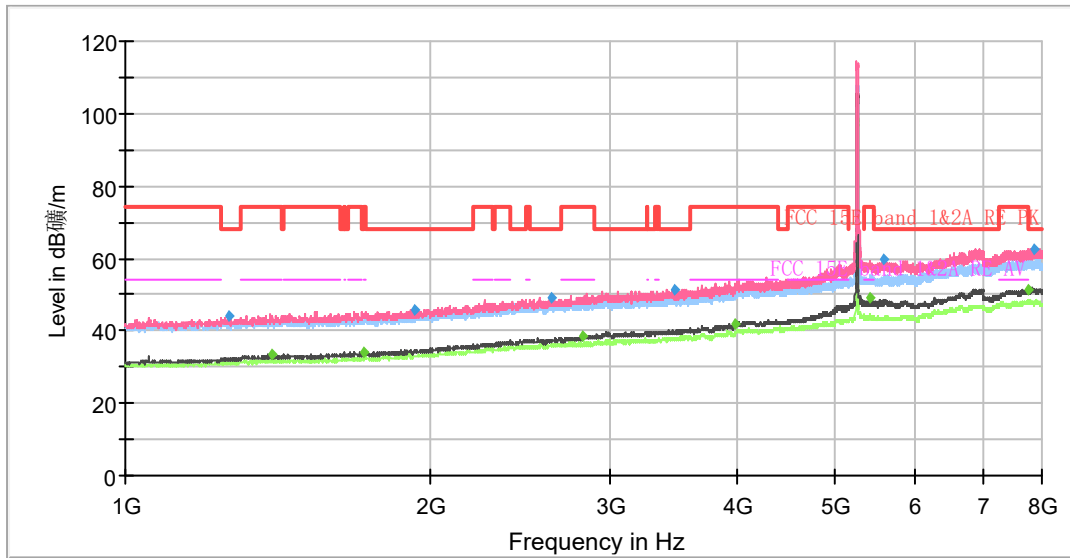

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

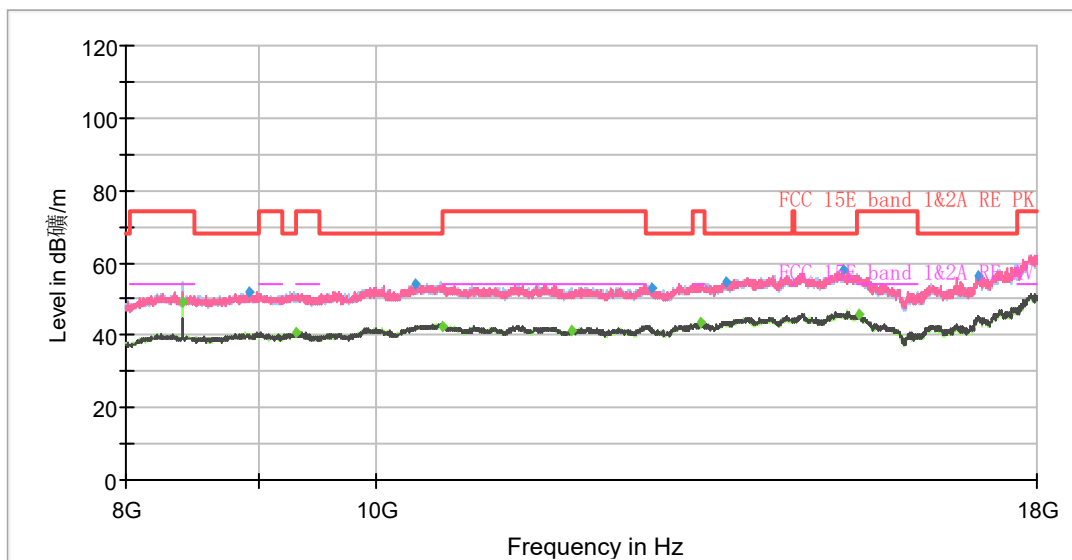


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1265.13	44.16	---	68.20	24.04	500.00	200.0	V	184.00	-2
1393.75	---	33.51	54.00	20.49	500.00	200.0	V	325.00	-1
1719.25	---	34.06	54.00	19.94	500.00	200.0	V	184.00	0
1931.00	45.79	---	68.20	22.41	500.00	100.0	V	2.00	0
2630.13	49.30	---	68.20	18.90	500.00	200.0	V	278.00	4
2820.88	---	38.47	54.00	15.53	500.00	200.0	V	343.00	4
3472.75	51.56	---	68.20	16.64	500.00	200.0	V	311.00	5
3993.38	---	41.94	54.00	12.06	500.00	200.0	V	292.00	6
5424.88	---	49.38	54.00	4.62	500.00	200.0	V	264.00	11
5588.50	59.55	---	68.20	8.65	500.00	200.0	V	292.00	11
7744.50	---	51.27	54.00	2.73	500.00	100.0	V	2.00	17
7846.88	62.70	---	68.20	5.50	500.00	200.0	V	285.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH60

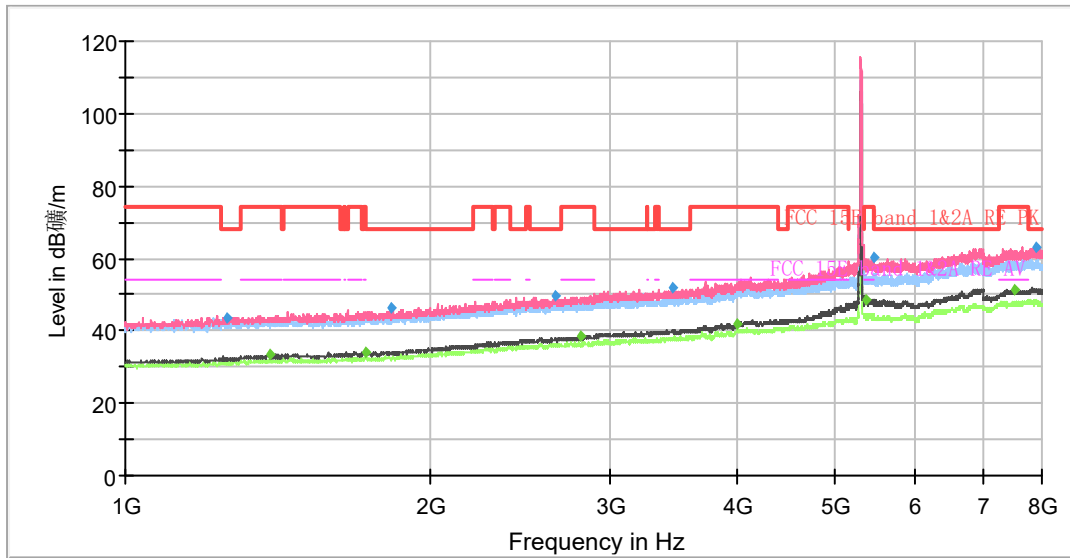

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

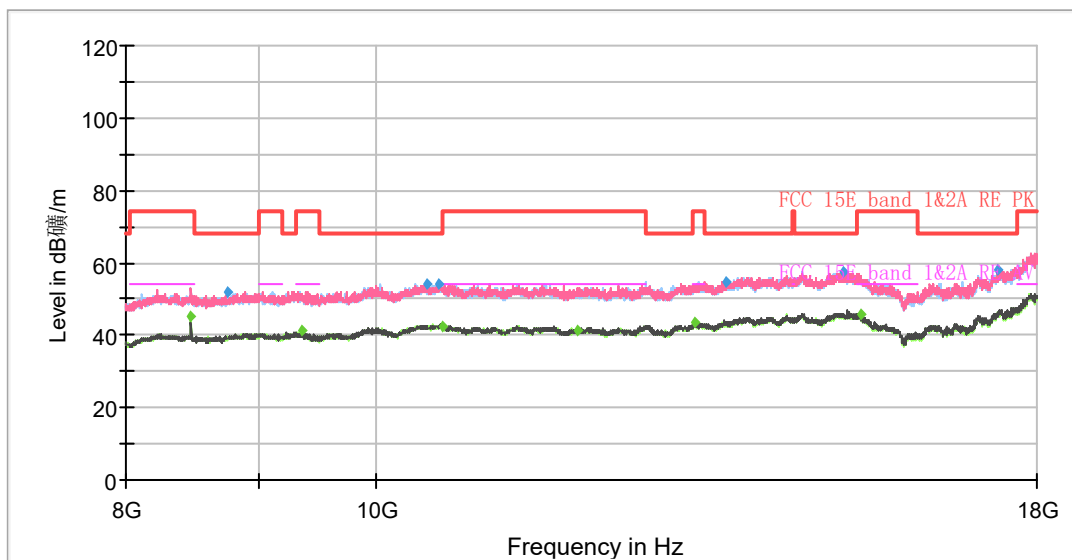


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1261.63	43.49	---	68.20	24.71	500.00	100.0	V	105.00	-2
1390.25	---	33.27	54.00	20.73	500.00	100.0	V	45.00	-1
1721.88	---	33.94	54.00	20.06	500.00	200.0	V	355.00	0
1826.88	46.09	---	68.20	22.11	500.00	200.0	V	342.00	0
2657.25	49.41	---	68.20	18.79	500.00	100.0	V	10.00	4
2806.88	---	38.27	54.00	15.73	500.00	200.0	V	208.00	4
3461.38	52.00	---	68.20	16.20	500.00	200.0	V	268.00	5
3998.63	---	41.77	54.00	12.23	500.00	200.0	V	309.00	6
5375.00	---	48.71	54.00	5.29	500.00	200.0	V	282.00	11
5463.38	60.07	---	68.20	8.13	500.00	200.0	V	242.00	11
7532.75	---	51.20	54.00	2.80	500.00	100.0	V	1.00	17
7889.75	62.88	---	68.20	5.32	500.00	200.0	V	275.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH64

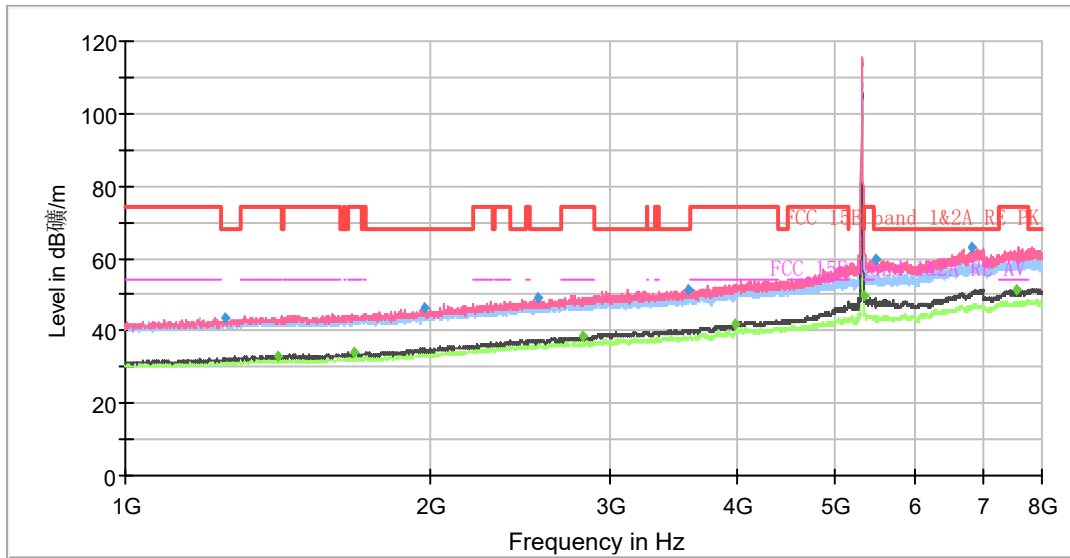

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

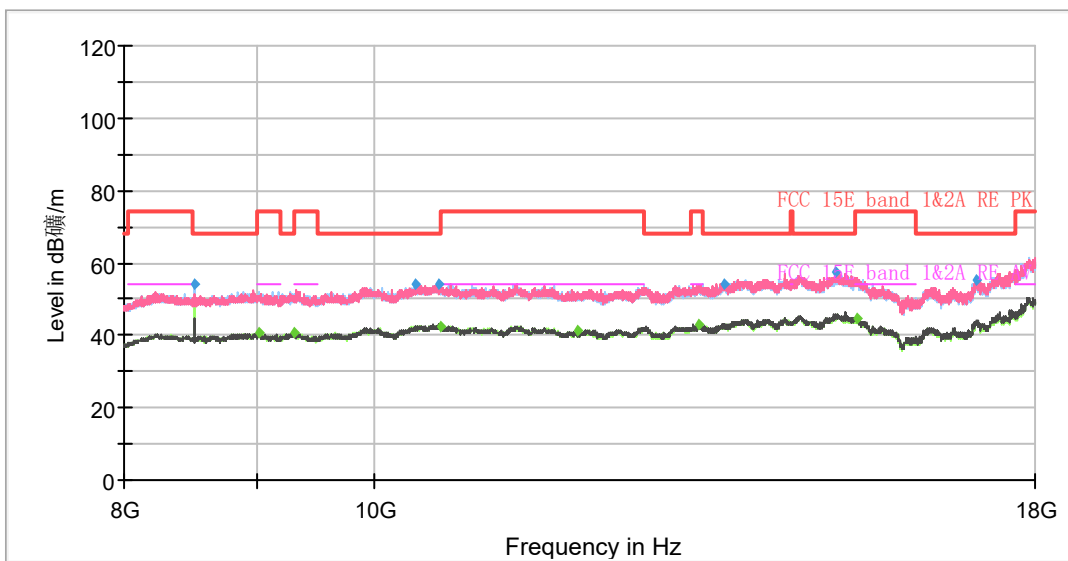


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1252.00	43.41	---	68.20	24.79	500.00	200.0	V	171.00	-2
1411.25	---	33.20	54.00	20.80	500.00	200.0	V	344.00	-1
1681.63	---	33.95	54.00	20.05	500.00	200.0	V	0.00	0
1966.88	46.17	---	68.20	22.03	500.00	200.0	V	111.00	1
2554.00	49.34	---	68.20	18.86	500.00	200.0	V	298.00	3
2821.75	---	38.31	54.00	15.69	500.00	200.0	V	298.00	4
3582.13	51.38	---	68.20	16.82	500.00	200.0	V	125.00	5
3995.13	---	42.04	54.00	11.96	500.00	200.0	V	325.00	6
5351.38	---	49.90	54.00	4.10	500.00	200.0	V	258.00	11
5482.63	59.93	---	68.20	8.27	500.00	200.0	V	258.00	11
6830.13	62.89	---	68.20	5.31	500.00	200.0	V	238.00	13
7547.63	---	51.17	54.00	2.83	500.00	200.0	V	104.00	16


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH100

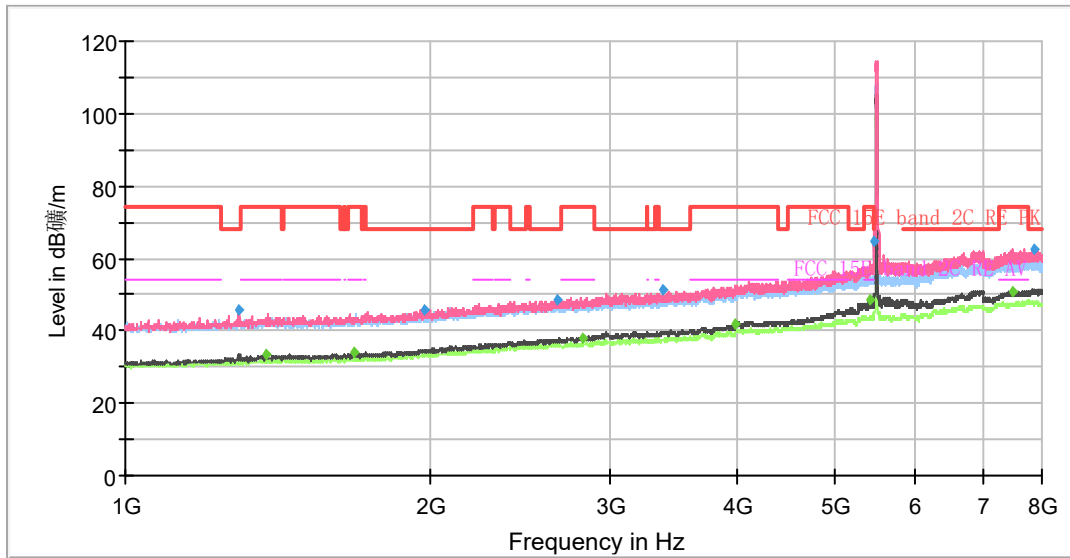

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

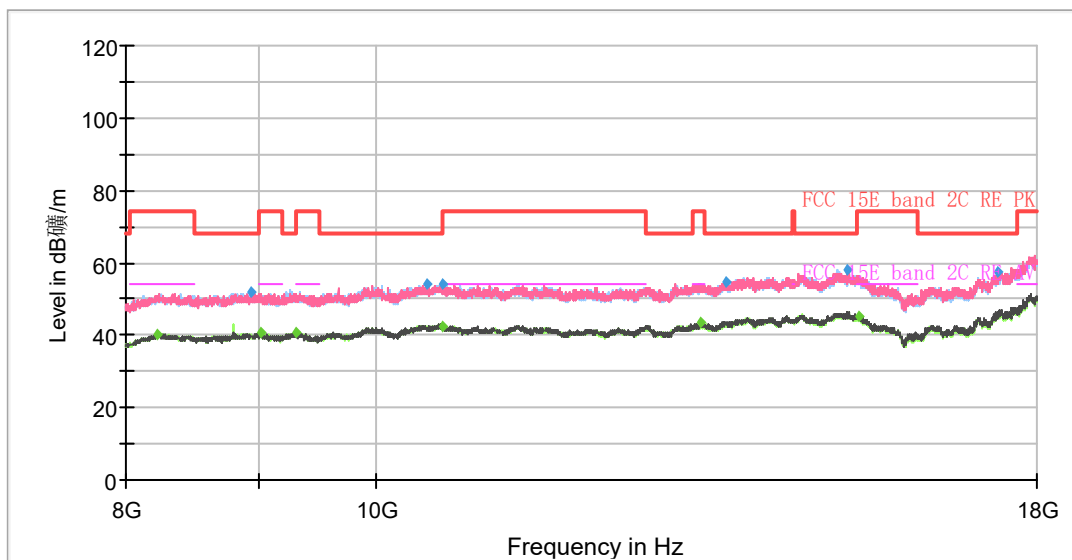


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1293.13	45.66	---	68.20	22.54	500.00	200.0	V	245.00	-2
1375.38	---	33.30	54.00	20.70	500.00	200.0	V	356.00	-1
1680.75	---	33.99	54.00	20.01	500.00	200.0	V	342.00	0
1973.88	45.73	---	68.20	22.47	500.00	200.0	V	347.00	1
2665.13	48.69	---	68.20	19.51	500.00	200.0	V	357.00	4
2823.50	---	38.18	54.00	15.82	500.00	200.0	V	347.00	4
3391.38	51.49	---	68.20	16.71	500.00	200.0	V	356.00	5
3996.00	---	41.76	54.00	12.24	500.00	200.0	V	351.00	6
5425.75	---	48.48	54.00	5.52	500.00	200.0	V	285.00	11
5468.63	64.66	---	68.20	3.54	500.00	200.0	V	270.00	11
7491.63	---	50.93	54.00	3.07	500.00	200.0	V	310.00	16
7852.13	62.28	---	68.20	5.92	500.00	200.0	V	358.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH120

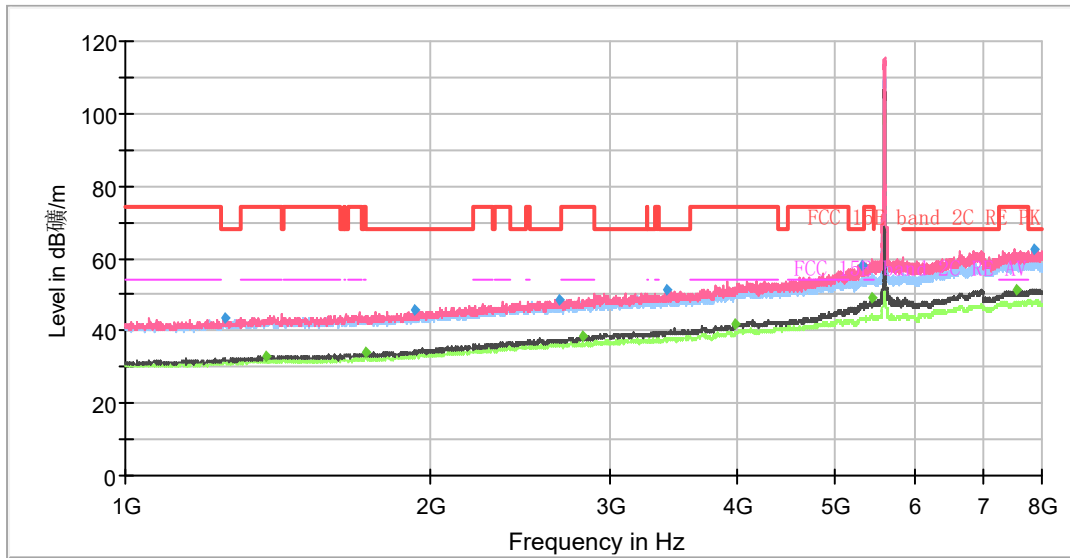

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

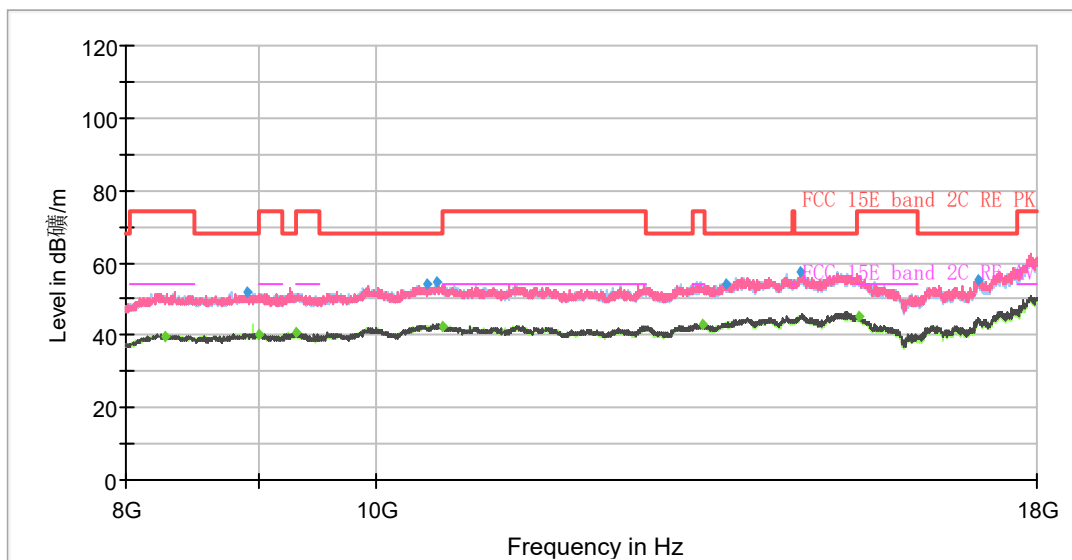


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1252.00	43.37	---	68.20	24.83	500.00	200.0	V	311.00	-2
1374.50	---	33.02	54.00	20.98	500.00	200.0	V	357.00	-1
1721.88	---	33.83	54.00	20.17	500.00	200.0	V	347.00	0
1928.38	45.68	---	68.20	22.52	500.00	200.0	V	347.00	0
2678.25	48.67	---	68.20	19.53	500.00	200.0	V	357.00	4
2824.38	---	38.49	54.00	15.51	500.00	200.0	V	0.00	4
3421.13	51.22	---	68.20	16.98	500.00	200.0	V	300.00	5
3994.25	---	41.60	54.00	12.40	500.00	200.0	V	356.00	6
5325.13	58.07	---	68.20	10.13	500.00	200.0	V	260.00	11
5441.50	---	49.03	54.00	4.97	500.00	200.0	V	287.00	11
7547.63	---	51.09	54.00	2.91	500.00	200.0	V	300.00	16
7864.38	62.37	---	68.20	5.83	500.00	200.0	V	300.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH140

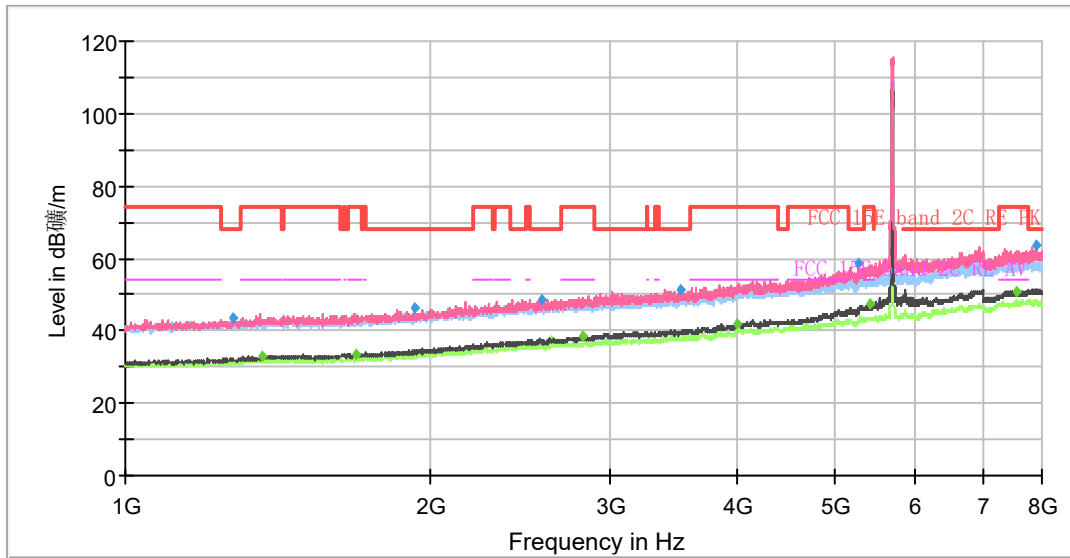

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

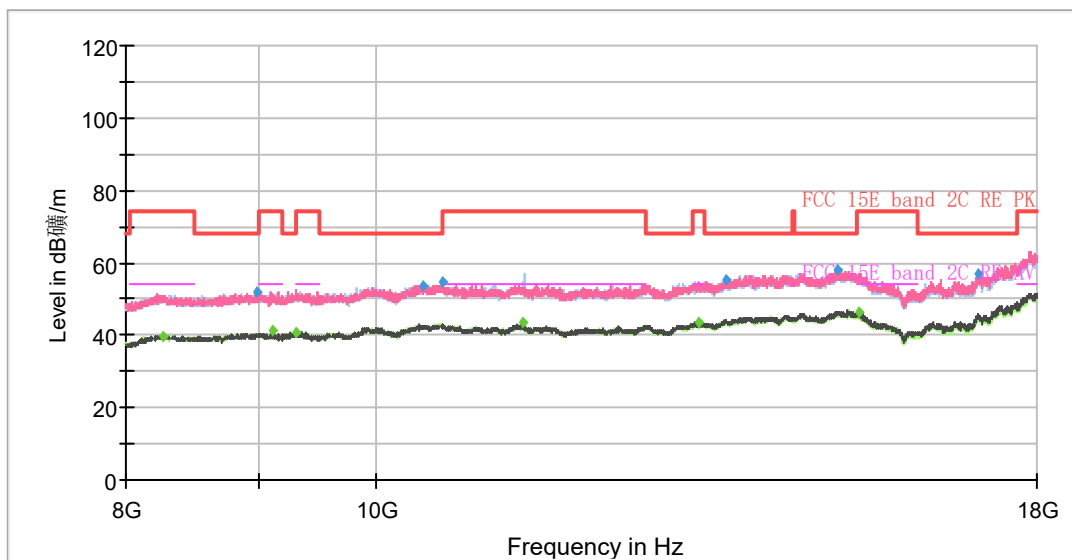


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1277.38	43.40	---	68.20	24.80	500.00	200.0	V	351.00	-2
1361.38	---	33.05	54.00	20.95	500.00	200.0	V	261.00	-1
1685.13	---	33.69	54.00	20.31	500.00	200.0	V	358.00	0
1928.38	46.10	---	68.20	22.10	500.00	200.0	V	354.00	0
2569.75	48.68	---	68.20	19.52	500.00	200.0	V	357.00	3
2825.25	---	38.29	54.00	15.71	500.00	200.0	V	347.00	4
3527.88	51.47	---	68.20	16.73	500.00	200.0	V	299.00	5
3999.50	---	41.98	54.00	12.02	500.00	200.0	V	299.00	6
5271.75	58.65	---	68.20	9.55	500.00	200.0	V	320.00	10
5422.25	---	47.58	54.00	6.42	500.00	200.0	V	329.00	11
7538.88	---	51.01	54.00	2.99	500.00	200.0	V	359.00	17
7901.13	63.59	---	68.20	4.61	500.00	200.0	V	351.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH144

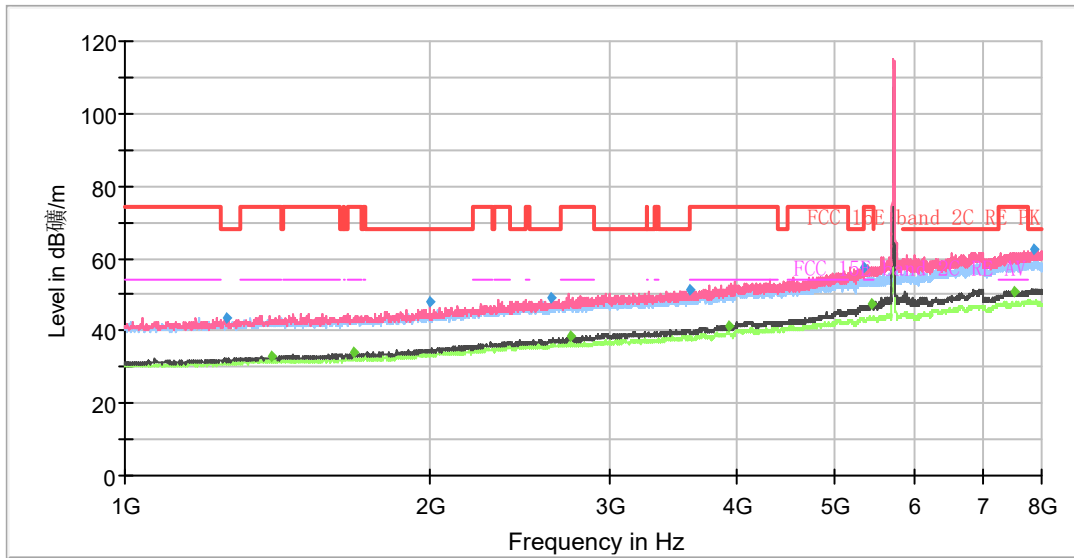

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

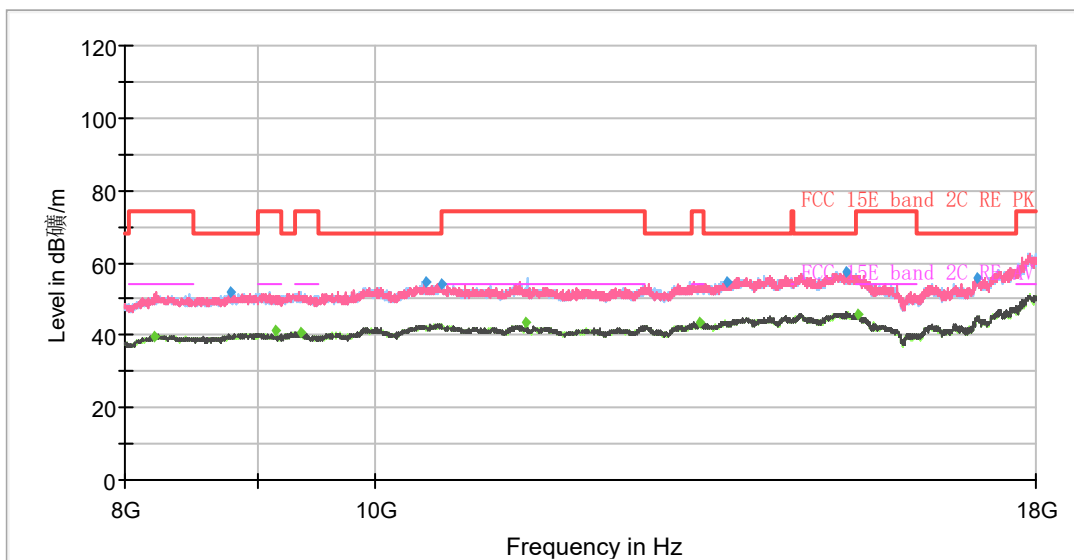


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1257.25	43.70	---	68.20	24.50	500.00	200.0	H	14.00	-2
1392.00	---	33.21	54.00	20.79	500.00	200.0	V	0.00	-1
1679.00	---	33.85	54.00	20.15	500.00	200.0	V	352.00	0
1995.75	47.89	---	68.20	20.31	500.00	200.0	V	288.00	1
2631.88	48.97	---	68.20	19.23	500.00	200.0	V	275.00	4
2749.13	---	38.28	54.00	15.72	500.00	200.0	V	355.00	4
3597.88	51.09	---	68.20	17.11	500.00	200.0	V	358.00	5
3936.50	---	41.52	54.00	12.48	500.00	200.0	V	359.00	6
5342.63	57.44	---	68.20	10.76	500.00	200.0	V	262.00	11
5448.50	---	47.69	54.00	6.31	500.00	200.0	V	288.00	11
7530.13	---	50.97	54.00	3.03	500.00	200.0	V	288.00	17
7874.88	62.77	---	68.20	5.43	500.00	200.0	V	0.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH149

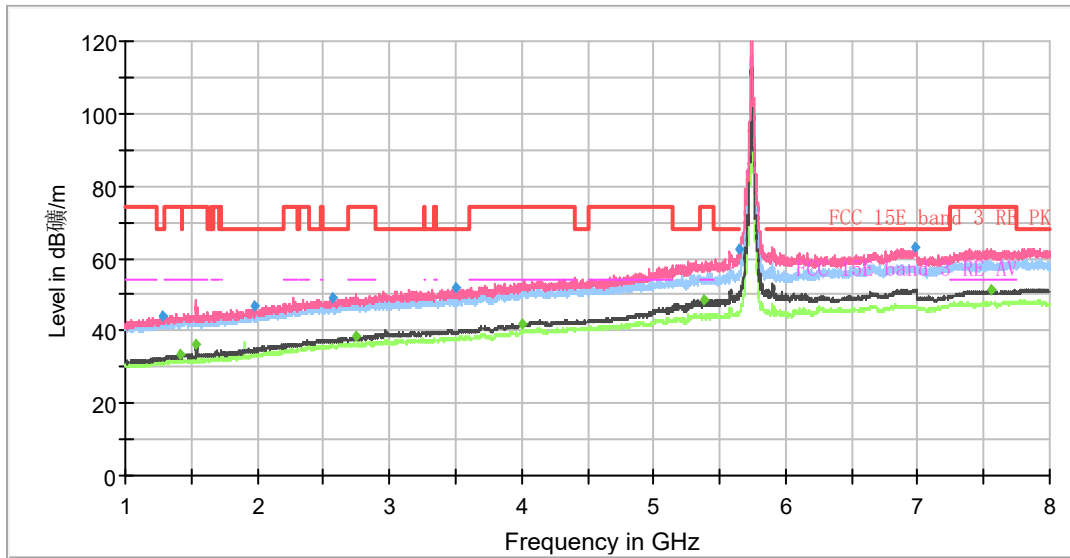

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

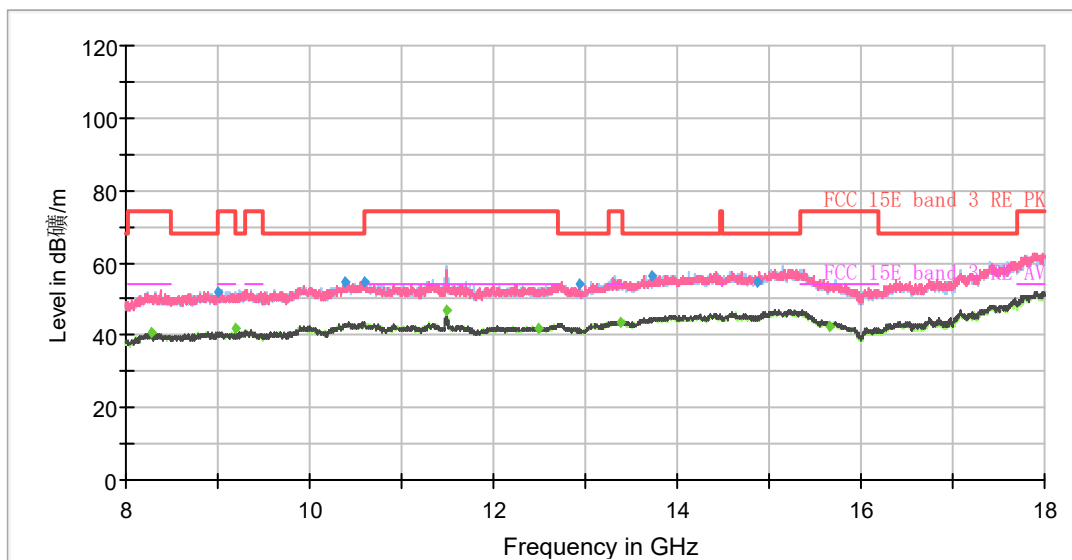


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1283.50	43.94	---	68.20	24.26	500.00	100.0	V	99.00	-2
1408.63	---	33.26	54.00	20.74	500.00	200.0	V	321.00	-1
1538.13	---	36.51	54.00	17.49	500.00	200.0	V	296.00	-1
1980.88	46.68	---	68.20	21.52	500.00	200.0	V	49.00	1
2565.38	48.86	---	68.20	19.34	500.00	200.0	V	342.00	4
2739.50	---	38.66	54.00	15.34	500.00	100.0	V	0.00	4
3498.13	51.99	---	68.20	16.21	500.00	100.0	V	108.00	5
3999.50	---	41.88	54.00	12.12	500.00	200.0	V	359.00	6
5378.50	---	48.55	54.00	5.45	500.00	200.0	V	253.00	11
5647.13	62.34	---	68.20	5.86	500.00	200.0	V	342.00	11
6972.75	62.93	---	68.20	5.27	500.00	200.0	V	123.00	13
7549.38	---	51.12	54.00	2.88	500.00	200.0	V	359.00	16


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH157

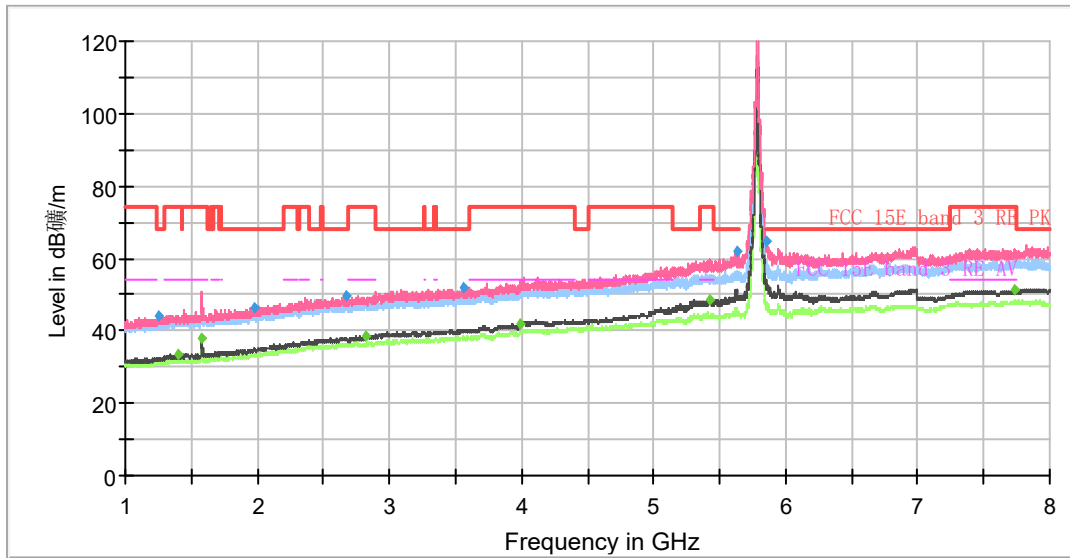

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

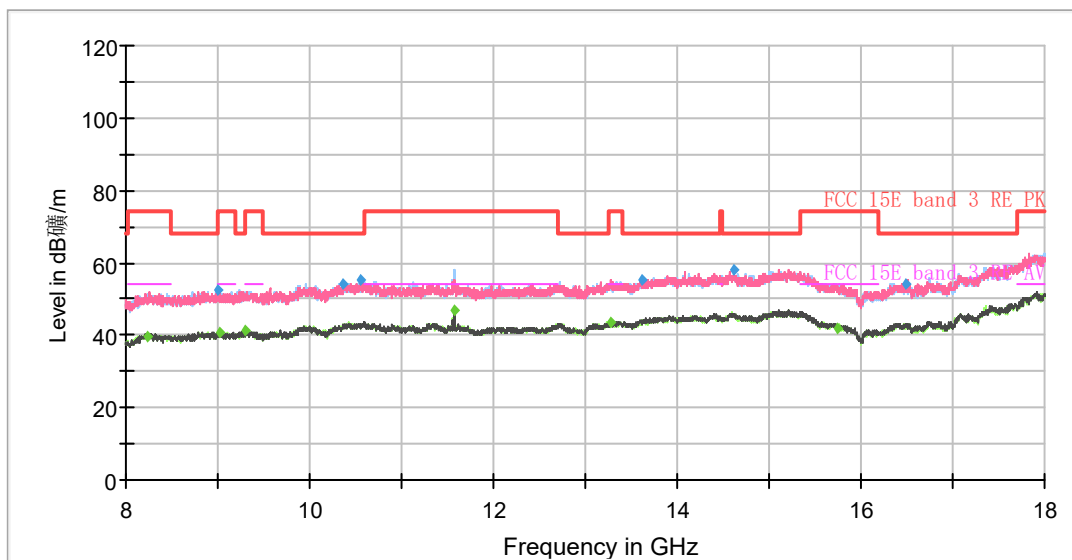


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1250.25	44.02	---	68.20	24.18	500.00	200.0	V	78.00	-2
1406.00	---	33.27	54.00	20.73	500.00	100.0	V	1.00	-1
1580.13	---	37.82	54.00	16.18	500.00	200.0	V	294.00	-1
1981.75	46.24	---	68.20	21.96	500.00	100.0	V	2.00	1
2665.13	49.48	---	68.20	18.72	500.00	200.0	V	209.00	4
2827.00	---	38.51	54.00	15.49	500.00	100.0	V	36.00	4
3561.13	51.65	---	68.20	16.55	500.00	200.0	V	269.00	5
3996.00	---	42.01	54.00	11.99	500.00	100.0	V	288.00	6
5420.50	---	48.42	54.00	5.58	500.00	200.0	V	253.00	11
5627.88	61.91	---	68.20	6.29	500.00	200.0	V	286.00	11
5851.88	64.60	---	68.20	3.60	500.00	200.0	V	277.00	11
7737.50	---	51.20	54.00	2.80	500.00	200.0	V	0.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH165

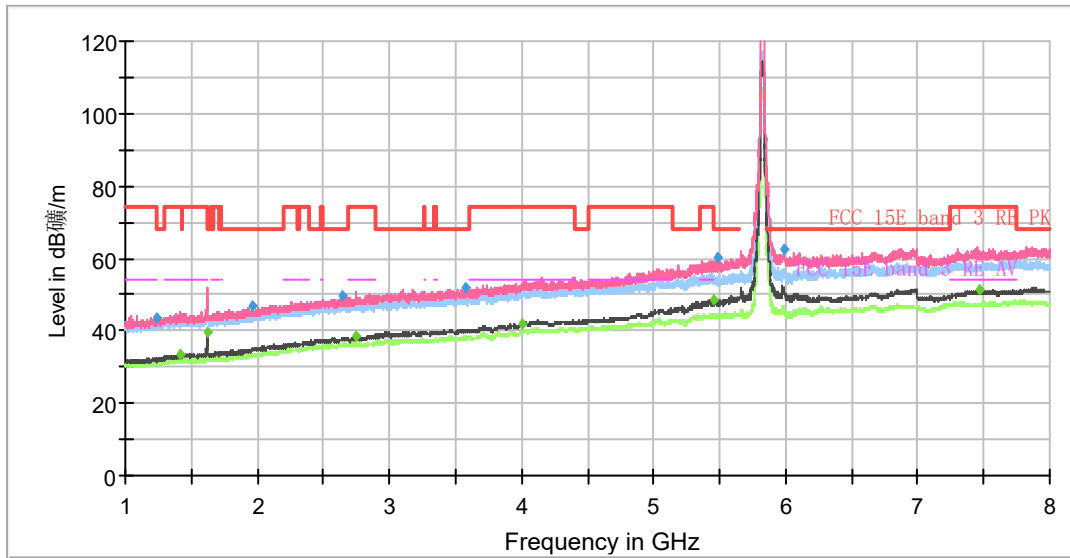

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

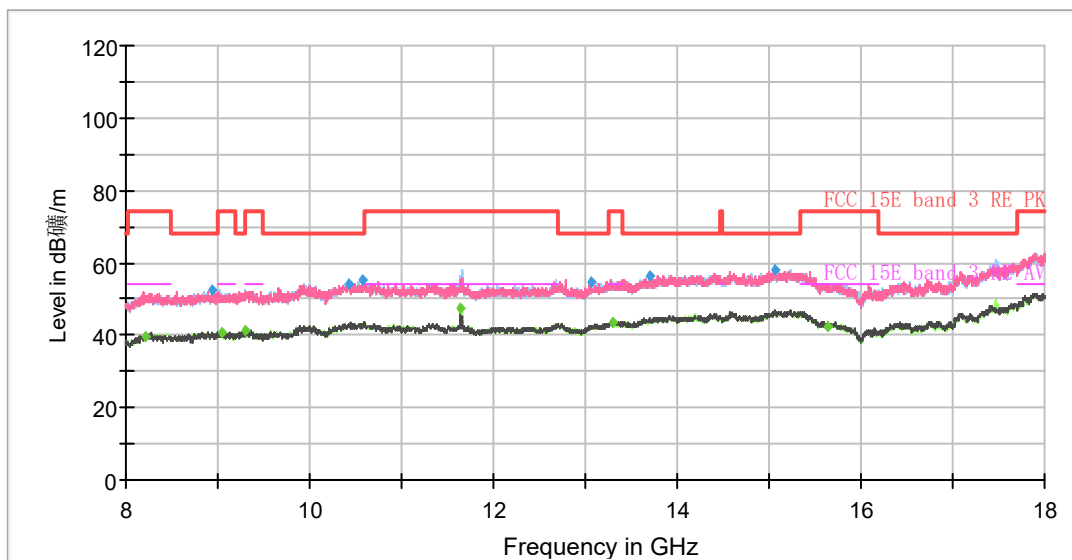


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1242.38	43.75	---	68.20	24.45	500.00	100.0	V	123.00	-2
1410.38	---	33.37	54.00	20.63	500.00	100.0	V	12.00	-1
1619.50	---	39.57	54.00	14.43	500.00	200.0	V	256.00	-1
1955.50	46.78	---	68.20	21.42	500.00	100.0	V	2.00	1
2641.50	49.47	---	68.20	18.73	500.00	100.0	V	17.00	4
2745.63	---	38.45	54.00	15.55	500.00	200.0	V	357.00	4
3571.63	51.84	---	68.20	16.36	500.00	100.0	V	17.00	5
3996.88	---	41.96	54.00	12.04	500.00	100.0	V	17.00	6
5452.00	---	48.63	54.00	5.37	500.00	200.0	V	264.00	11
5487.88	60.34	---	68.20	7.86	500.00	200.0	V	213.00	11
5983.13	62.26	---	68.20	5.94	500.00	200.0	V	290.00	11
7474.13	---	51.25	54.00	2.75	500.00	100.0	V	264.00	16


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH38

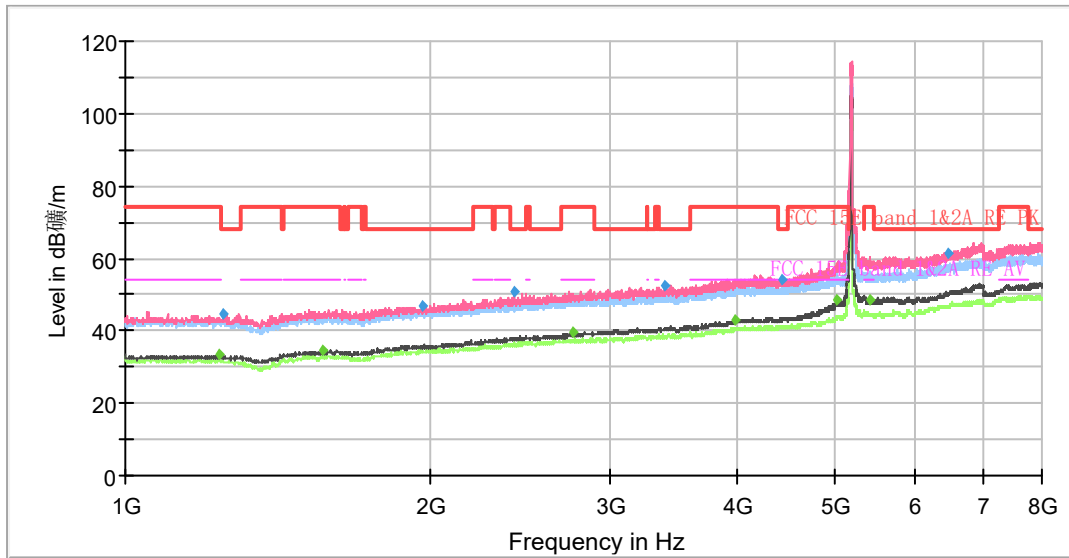

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

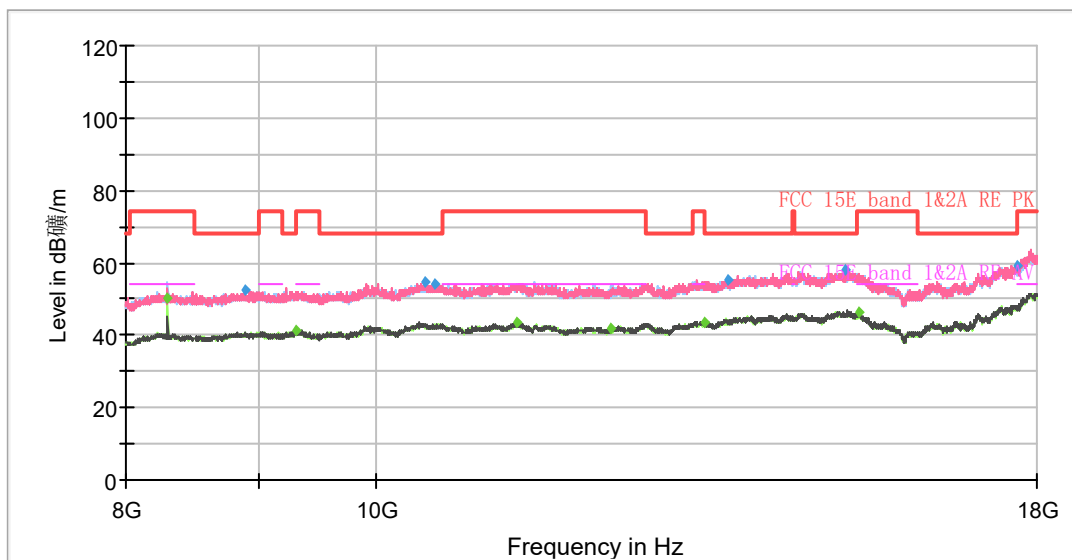


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1234.50	---	33.45	54.00	20.55	500.00	100.0	V	200.00	-1
1250.25	44.59	---	68.20	23.61	500.00	100.0	V	194.00	-1
1562.63	---	34.45	54.00	19.55	500.00	200.0	V	28.00	0
1965.13	46.91	---	68.20	21.29	500.00	100.0	V	353.00	1
2416.63	50.53	---	68.20	17.67	500.00	100.0	V	154.00	4
2757.88	---	39.41	54.00	14.59	500.00	100.0	V	335.00	5
3401.00	52.30	---	68.20	15.90	500.00	100.0	V	359.00	6
3989.00	---	42.79	54.00	11.21	500.00	200.0	V	21.00	7
4442.25	54.26	---	68.20	13.94	500.00	200.0	V	12.00	7
5032.00	---	48.68	54.00	5.32	500.00	200.0	V	228.00	10
5410.00	---	48.66	54.00	5.34	500.00	200.0	V	262.00	12
6453.00	61.55	---	68.20	6.65	500.00	100.0	V	167.00	13
8303.75	---	49.98	54.00	4.02	500.00	200.0	H	133.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11ax HE40 CH46

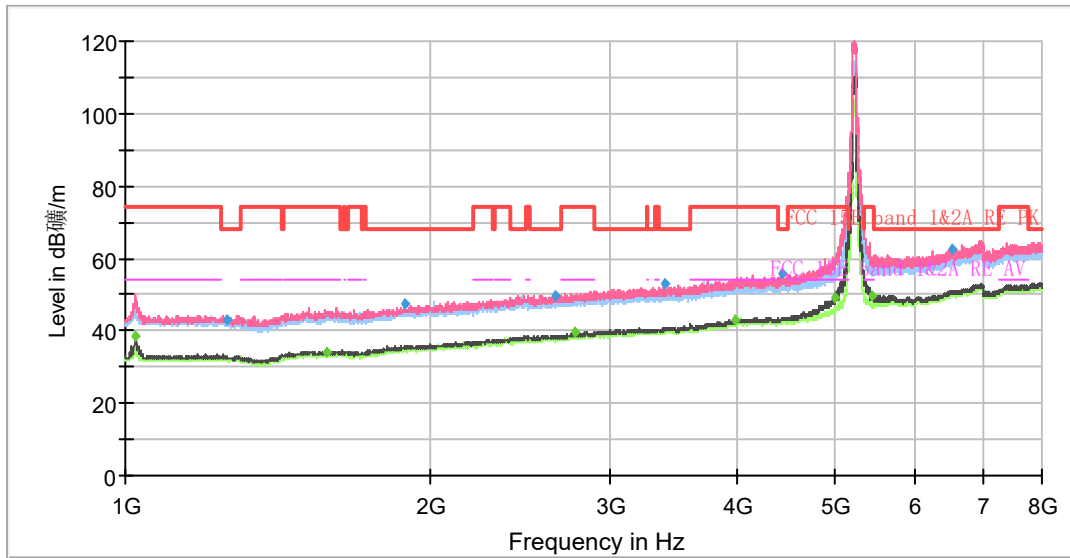

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

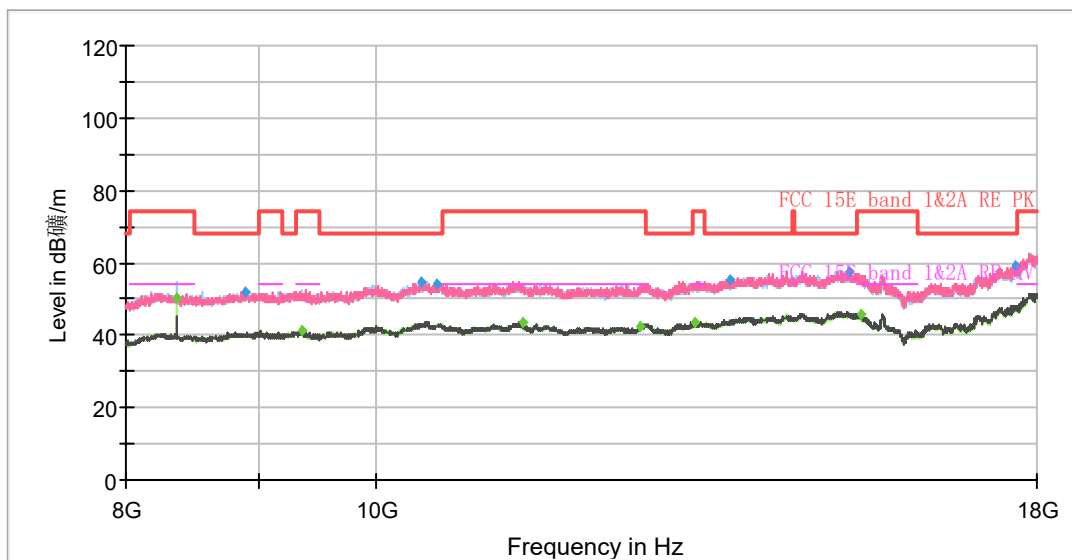


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1024.50	---	38.42	54.00	15.58	500.00	200.0	V	270.00	-2
1260.75	43.09	---	68.20	25.11	500.00	200.0	V	270.00	-2
1581.88	---	34.30	54.00	19.70	500.00	100.0	V	154.00	0
1882.00	47.23	---	68.20	20.97	500.00	200.0	V	242.00	1
2652.00	49.84	---	68.20	18.36	500.00	100.0	V	349.00	4
2774.50	---	39.36	54.00	14.64	500.00	200.0	V	312.00	5
3398.38	53.18	---	68.20	15.02	500.00	200.0	V	270.00	6
3996.00	---	42.71	54.00	11.29	500.00	100.0	V	307.00	7
4438.75	55.66	---	68.20	12.54	500.00	200.0	V	81.00	7
5005.75	---	49.28	54.00	4.72	500.00	200.0	V	270.00	10
5439.75	---	49.71	54.00	4.29	500.00	200.0	V	256.00	12
6527.38	62.74	---	68.20	5.46	500.00	200.0	H	351.00	13
8367.50	---	50.08	54.00	3.92	500.00	200.0	H	86.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH54

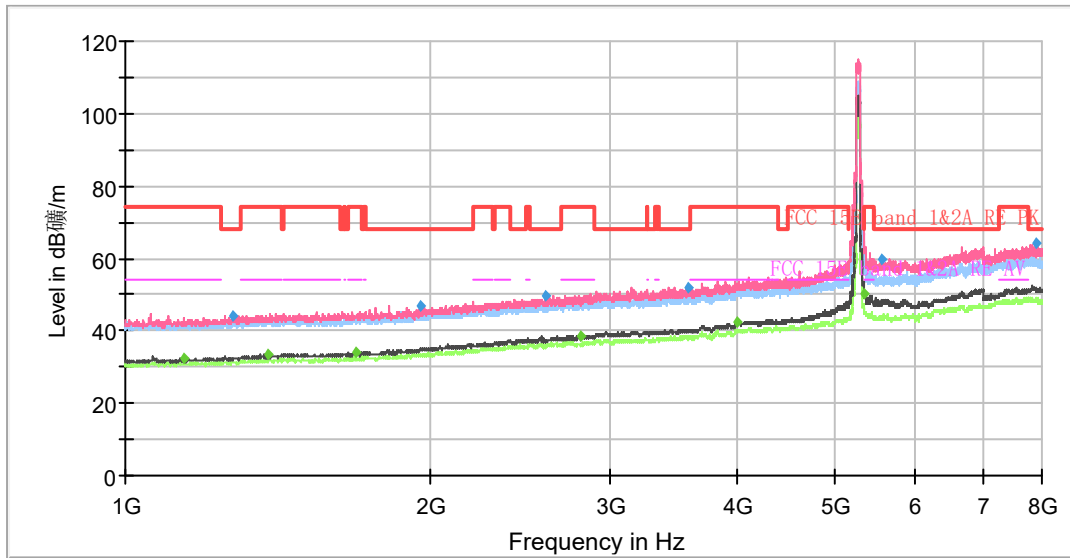

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

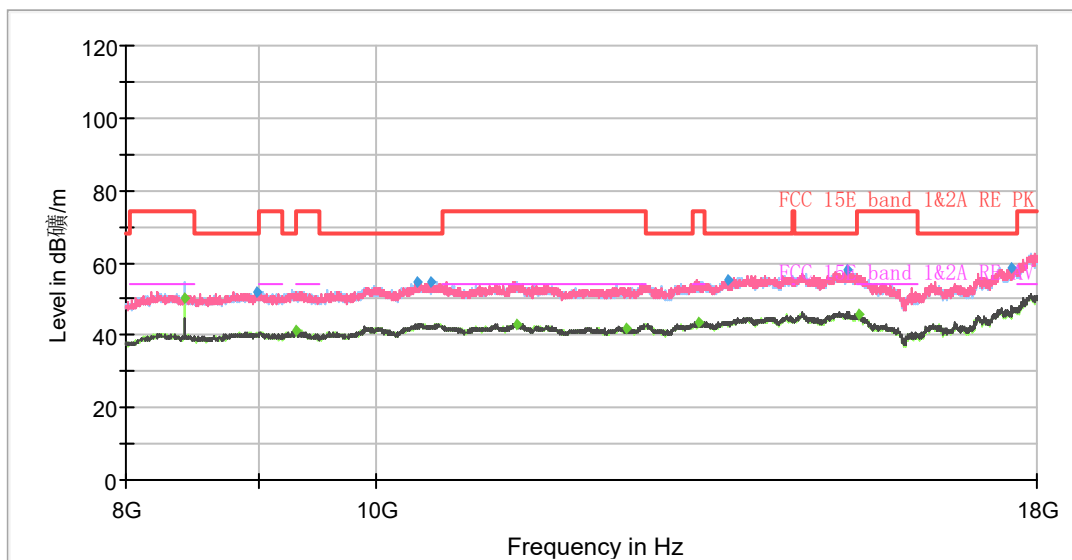


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1141.75	---	32.10	54.00	21.90	500.00	200.0	V	100.00	-2
1275.63	44.29	---	68.20	23.91	500.00	200.0	V	133.00	-2
1380.63	---	33.31	54.00	20.69	500.00	200.0	V	46.00	-1
1687.75	---	34.26	54.00	19.74	500.00	200.0	V	8.00	0
1952.00	46.75	---	68.20	21.45	500.00	100.0	V	255.00	1
2591.63	49.64	---	68.20	18.56	500.00	100.0	V	0.00	3
2804.25	---	38.57	54.00	15.43	500.00	100.0	V	0.00	4
3593.50	51.87	---	68.20	16.33	500.00	100.0	V	290.00	5
3997.75	---	42.15	54.00	11.85	500.00	200.0	V	126.00	6
5352.25	---	50.16	54.00	3.84	500.00	200.0	V	276.00	11
5564.88	59.85	---	68.20	8.35	500.00	200.0	V	256.00	11
7884.50	63.92	---	68.20	4.28	500.00	100.0	V	357.00	17
8431.25	---	50.48	54.00	3.52	500.00	200.0	H	84.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11ax HE40 CH62

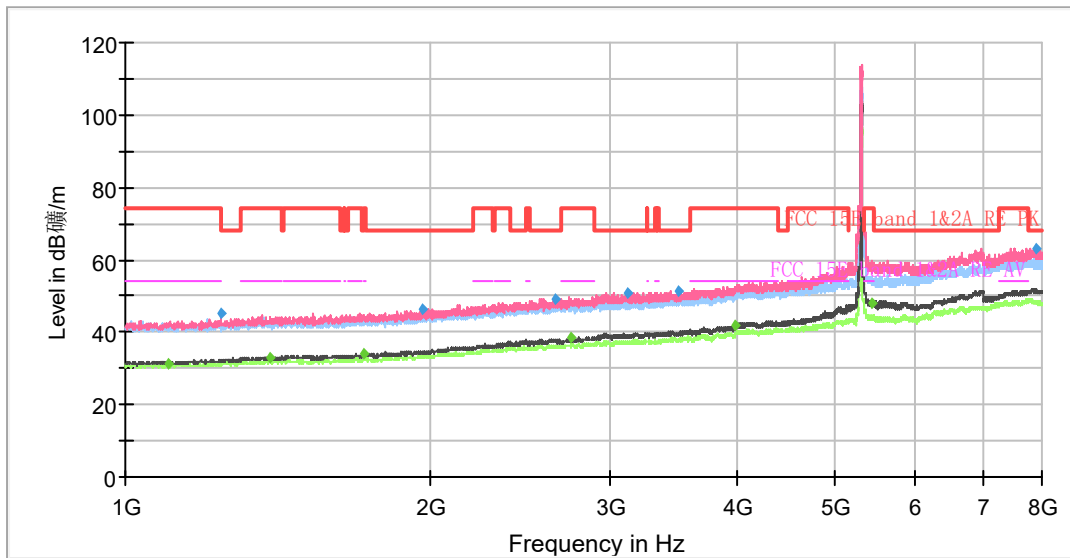

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

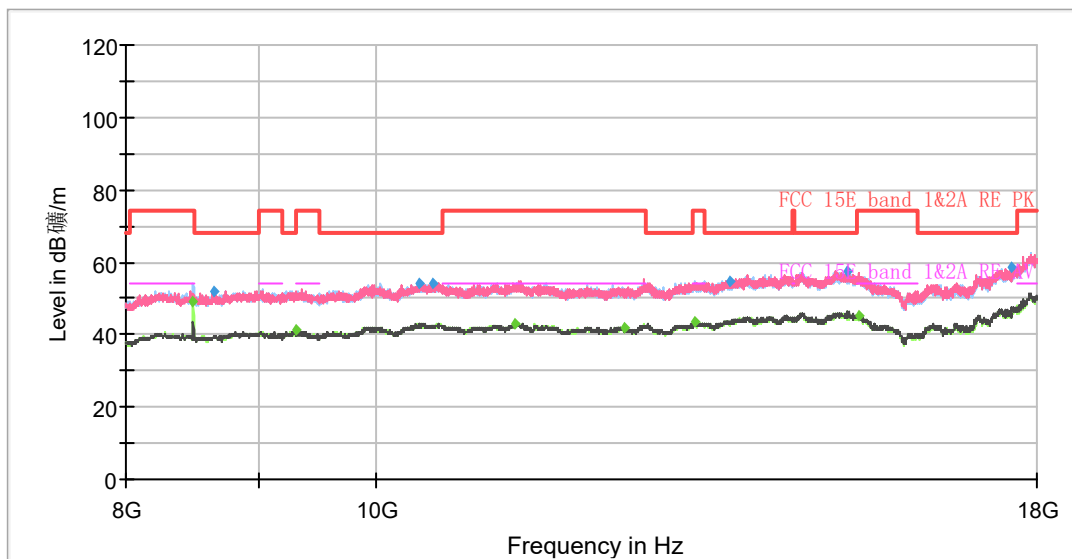


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1101.50	---	31.36	54.00	22.64	500.00	200.0	V	6.00	-2
1243.25	44.99	---	68.20	23.21	500.00	200.0	V	174.00	-2
1391.13	---	33.11	54.00	20.89	500.00	200.0	V	113.00	-1
1720.13	---	33.93	54.00	20.07	500.00	200.0	V	45.00	0
1960.75	46.34	---	68.20	21.86	500.00	200.0	V	13.00	1
2654.63	49.22	---	68.20	18.98	500.00	200.0	V	92.00	4
2743.88	---	38.66	54.00	15.34	500.00	200.0	V	167.00	4
3123.63	50.71	---	68.20	17.49	500.00	200.0	V	92.00	5
3512.13	51.53	---	68.20	16.67	500.00	200.0	V	153.00	5
3993.38	---	41.86	54.00	12.14	500.00	200.0	V	24.00	6
5445.00	---	47.89	54.00	6.11	500.00	200.0	V	297.00	11
7896.75	63.01	---	68.20	5.19	500.00	200.0	V	221.00	17
8495.00	---	48.89	54.00	5.11	500.00	200.0	H	87.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH102

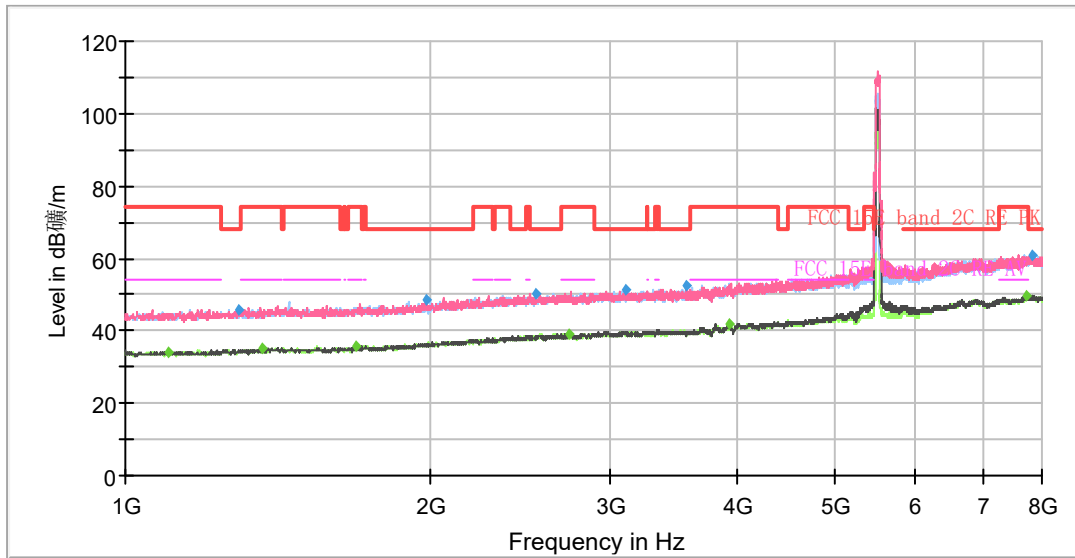

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

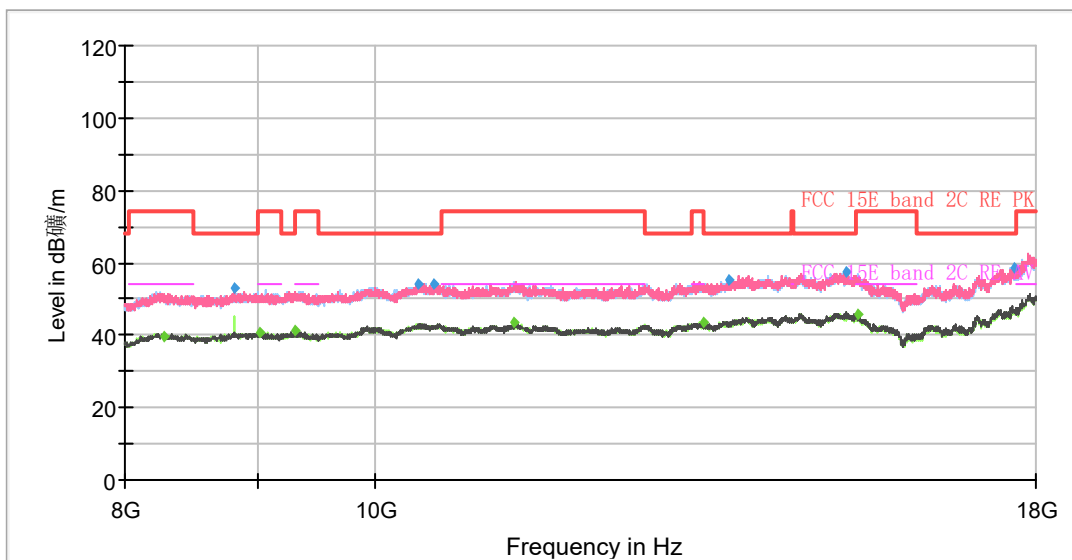


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1101.50	---	33.79	54.00	20.21	500.00	200.0	H	0.00	-11
1294.00	45.69	---	68.20	22.51	500.00	200.0	V	355.00	-10
1364.88	---	35.31	54.00	18.69	500.00	200.0	V	307.00	-10
1684.25	---	35.61	54.00	18.39	500.00	200.0	H	5.00	-9
1979.13	48.38	---	68.20	19.82	500.00	200.0	V	23.00	-8
2539.13	50.35	---	68.20	17.85	500.00	200.0	V	345.00	-6
2737.75	---	39.14	54.00	14.86	500.00	200.0	V	284.00	-5
3106.13	51.15	---	68.20	17.05	500.00	200.0	H	287.00	-4
3568.13	52.37	---	68.20	15.83	500.00	200.0	V	325.00	-4
3931.25	---	41.64	54.00	12.36	500.00	200.0	H	201.00	-2
7721.75	---	49.76	54.00	4.24	500.00	200.0	V	359.00	9
7833.75	60.64	---	68.20	7.56	500.00	100.0	V	6.00	9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH118

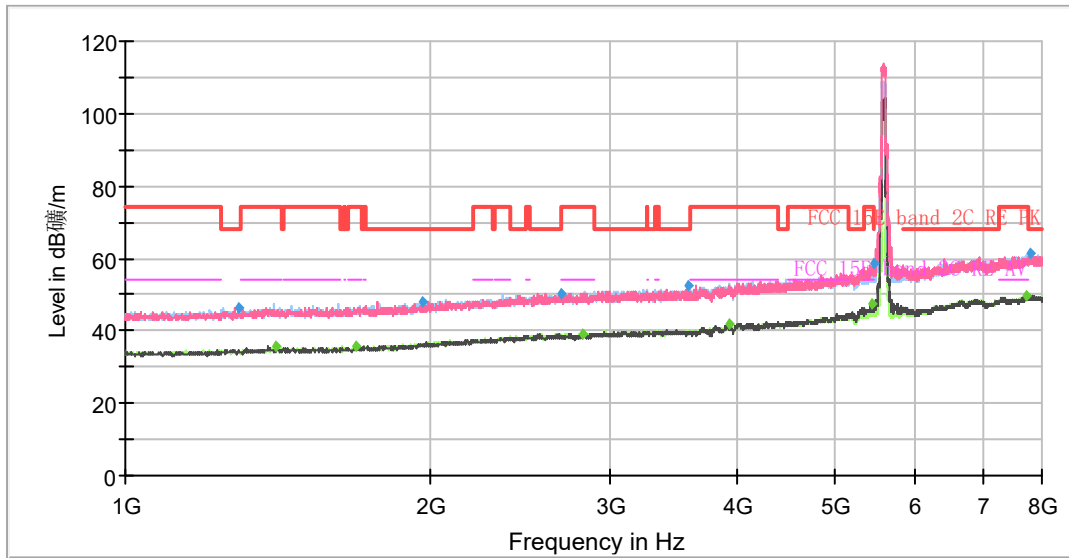

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1290.50	46.45	---	68.20	21.75	500.00	100.0	V	8.00	-10
1406.00	---	35.61	54.00	18.39	500.00	100.0	H	313.00	-9
1687.75	---	35.63	54.00	18.37	500.00	200.0	H	90.00	-8
1960.75	48.11	---	68.20	20.09	500.00	100.0	V	17.00	-8
2686.13	50.38	---	68.20	17.82	500.00	100.0	H	147.00	-5
2817.38	---	39.06	54.00	14.94	500.00	200.0	H	2.00	-5
3578.63	52.55	---	68.20	15.65	500.00	100.0	H	244.00	-4
3931.25	---	41.66	54.00	12.34	500.00	200.0	V	331.00	-2
5448.50	---	47.26	54.00	6.74	500.00	200.0	V	255.00	3
5464.25	58.61	---	68.20	9.59	500.00	200.0	V	219.00	3
7721.75	---	49.45	54.00	4.55	500.00	100.0	H	244.00	9
7801.38	61.44	---	68.20	6.77	500.00	200.0	H	1.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH134

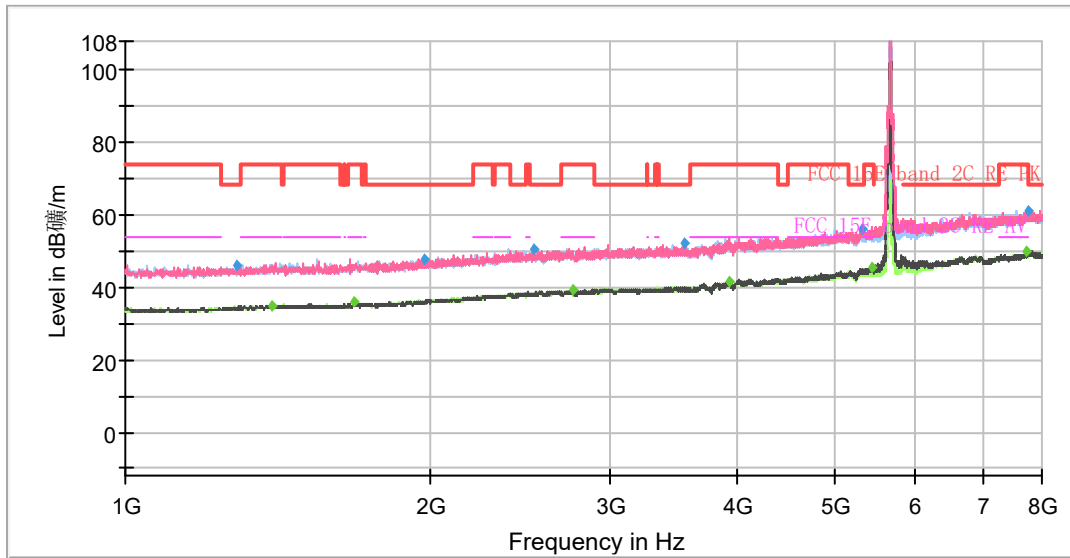

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

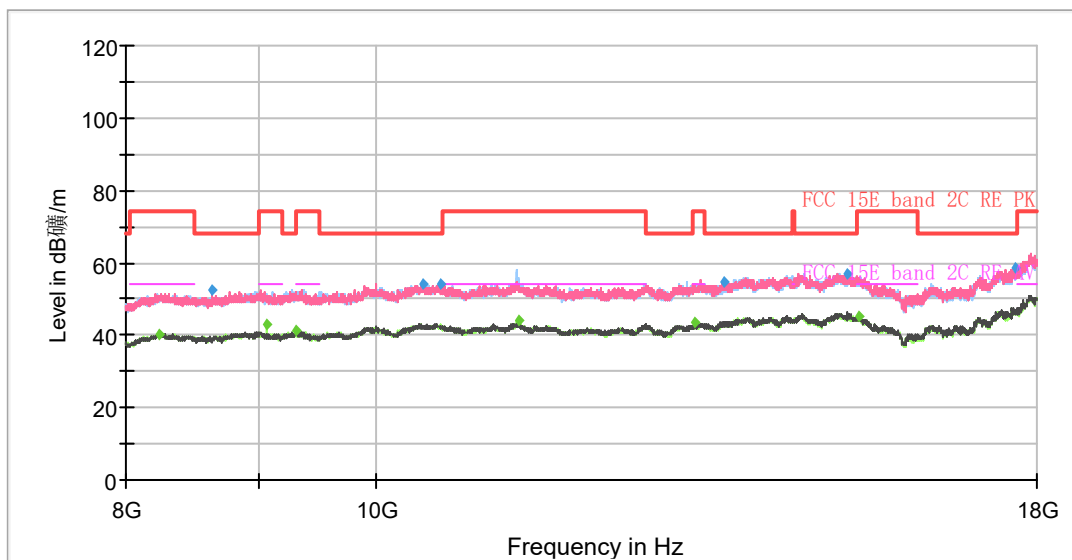


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1285.25	46.03	---	68.20	22.17	500.00	200.0	H	0.00	-10
1393.75	---	35.14	54.00	18.86	500.00	200.0	V	333.00	-9
1681.63	---	35.82	54.00	18.18	500.00	100.0	V	117.00	-9
1971.25	47.73	---	68.20	20.47	500.00	100.0	V	1.00	-8
2526.88	50.47	---	68.20	17.73	500.00	200.0	H	125.00	-6
2754.38	---	39.17	54.00	14.83	500.00	100.0	H	229.00	-5
3553.25	52.00	---	68.20	16.20	500.00	100.0	V	12.00	-4
3928.63	---	41.60	54.00	12.40	500.00	200.0	H	0.00	-2
5326.88	56.00	---	68.20	12.20	500.00	200.0	V	282.00	2
5436.25	---	45.34	54.00	8.66	500.00	200.0	V	241.00	3
7720.88	---	49.69	54.00	4.31	500.00	100.0	V	0.00	9
7754.13	61.28	---	68.20	6.92	500.00	100.0	H	265.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH142

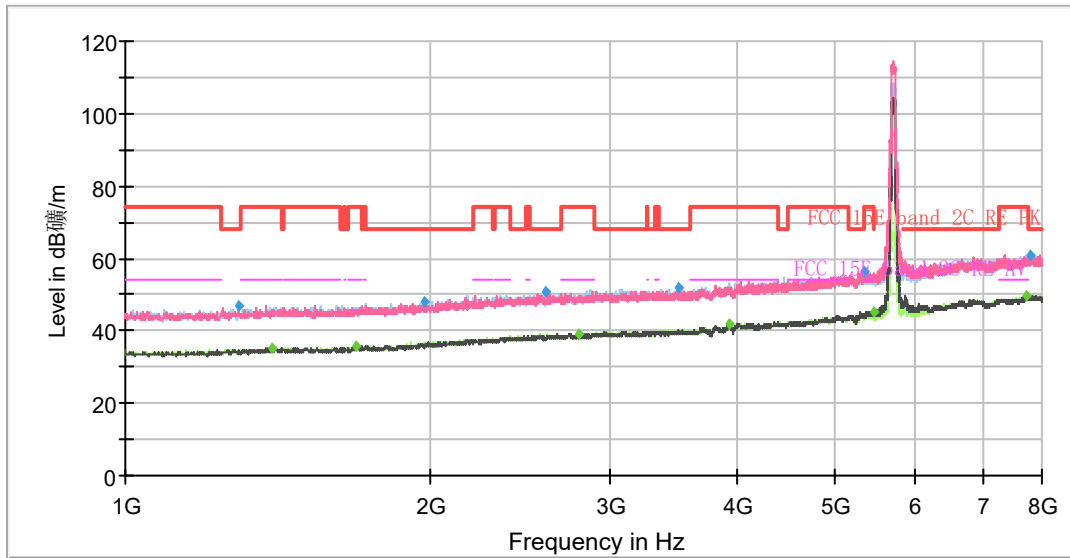

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

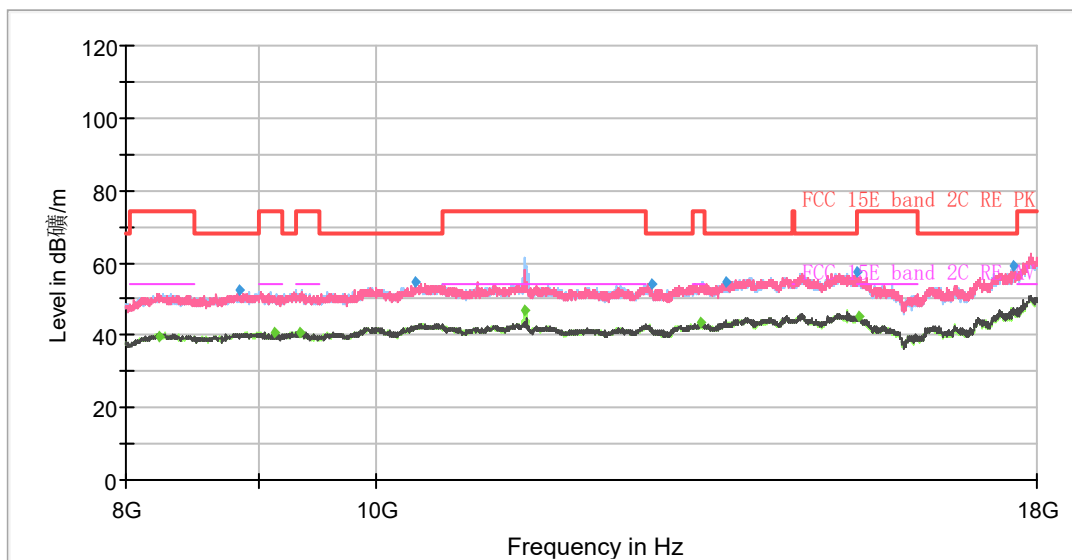


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1294.88	46.80	---	68.20	21.40	500.00	100.0	V	0.00	-10
1394.63	---	35.15	54.00	18.85	500.00	100.0	V	9.00	-9
1684.25	---	35.70	54.00	18.30	500.00	200.0	V	358.00	-9
1974.75	47.94	---	68.20	20.26	500.00	100.0	H	356.00	-8
2591.63	50.60	---	68.20	17.60	500.00	100.0	H	48.00	-6
2794.63	---	39.11	54.00	14.89	500.00	200.0	H	23.00	-5
3513.88	51.89	---	68.20	16.31	500.00	100.0	V	9.00	-4
3932.13	---	41.72	54.00	12.28	500.00	100.0	V	45.00	-2
5342.63	56.15	---	68.20	12.05	500.00	100.0	V	45.00	2
5452.88	---	45.46	54.00	8.54	500.00	200.0	V	272.00	3
7735.75	---	49.56	54.00	4.44	500.00	100.0	V	0.00	9
7777.75	60.90	---	68.20	7.30	500.00	100.0	V	0.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH151

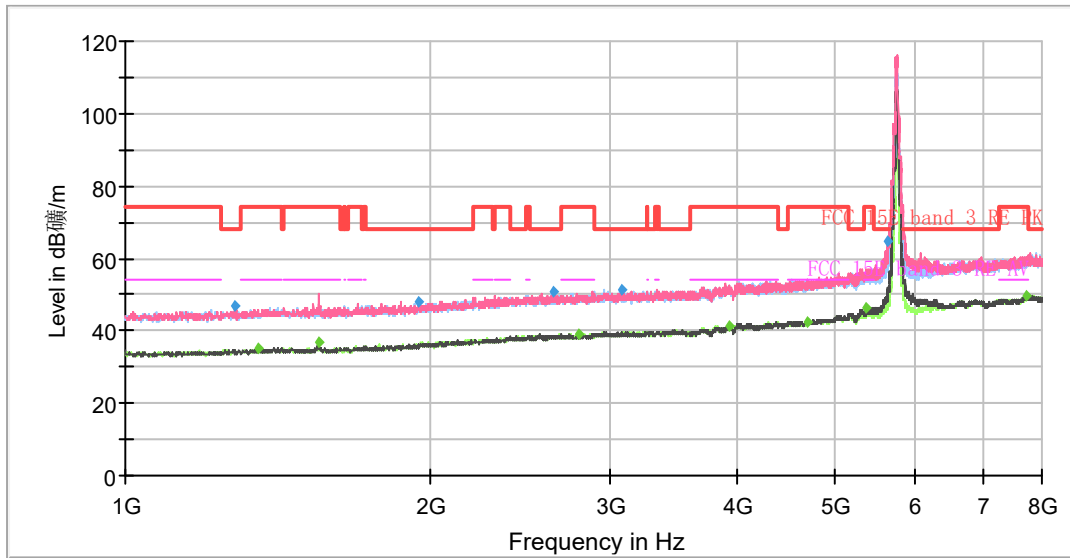

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

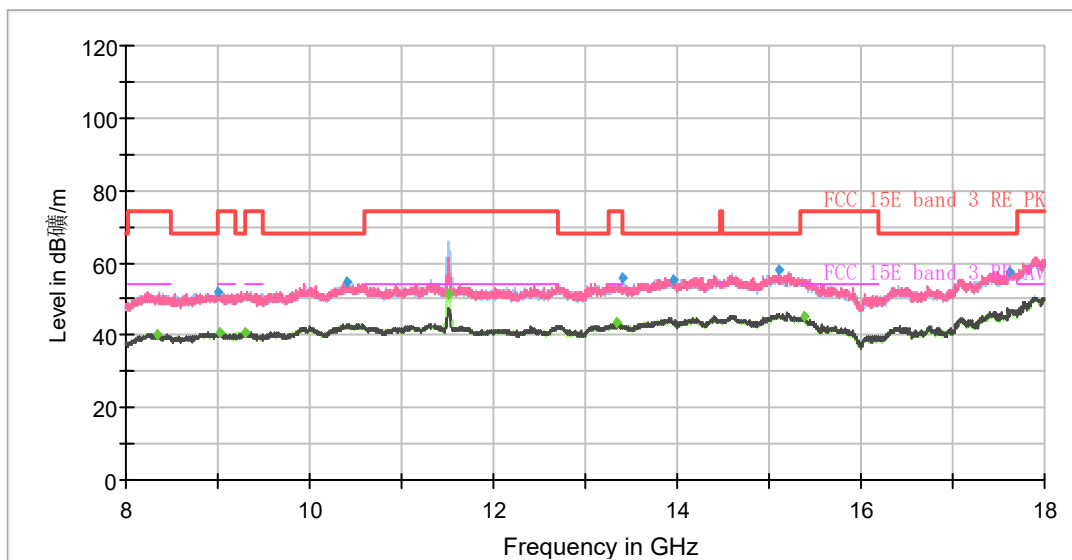


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1280.00	47.07	---	68.20	21.13	500.00	200.0	V	0.00	-10
1350.88	---	35.11	54.00	18.89	500.00	100.0	V	2.00	-10
1549.50	---	36.61	54.00	17.39	500.00	200.0	V	285.00	-9
1942.38	48.23	---	68.20	19.97	500.00	100.0	V	190.00	-8
2643.25	50.78	---	68.20	17.42	500.00	200.0	V	196.00	-5
2799.00	---	38.95	54.00	15.05	500.00	200.0	H	7.00	-5
3085.13	51.18	---	68.20	17.02	500.00	200.0	V	353.00	-4
3929.50	---	41.51	54.00	12.49	500.00	100.0	V	1.00	-2
4693.38	---	42.22	54.00	11.78	500.00	200.0	H	180.00	0
5377.63	---	46.31	54.00	7.69	500.00	200.0	V	232.00	2
5645.38	64.73	---	68.20	3.47	500.00	200.0	V	232.00	3
7725.25	---	49.59	54.00	4.41	500.00	100.0	V	122.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE40 CH159

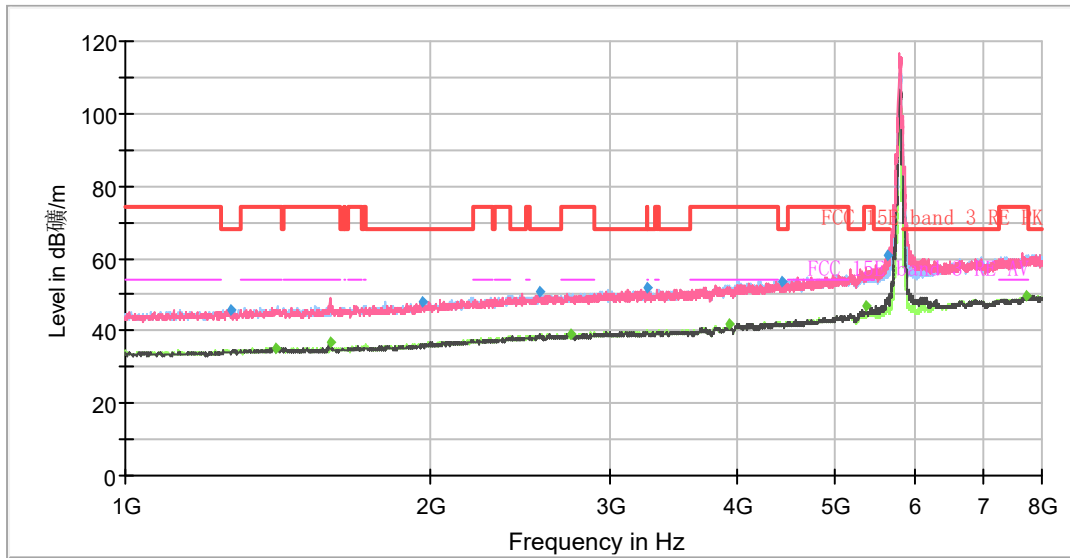

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

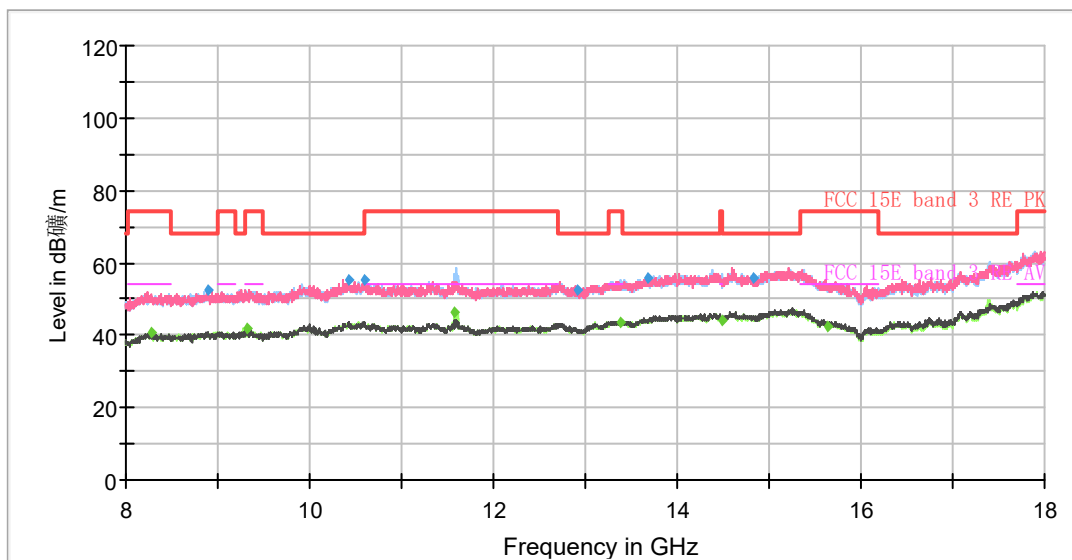


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1270.38	45.88	---	68.20	22.32	500.00	200.0	H	293.00	-10
1406.00	---	35.14	54.00	18.86	500.00	100.0	V	29.00	-9
1589.75	---	36.86	54.00	17.14	500.00	200.0	V	280.00	-9
1960.75	48.04	---	68.20	20.16	500.00	200.0	V	305.00	-8
2561.00	50.66	---	68.20	17.54	500.00	200.0	H	1.00	-5
2753.50	---	39.17	54.00	14.83	500.00	100.0	V	230.00	-5
3268.88	51.66	---	68.20	16.54	500.00	100.0	V	293.00	-4
3932.13	---	41.75	54.00	12.25	500.00	100.0	V	6.00	-2
4445.75	53.59	---	68.20	14.61	500.00	100.0	V	47.00	0
5375.88	---	46.75	54.00	7.25	500.00	200.0	V	228.00	2
5644.50	61.05	---	68.20	7.15	500.00	200.0	V	262.00	3
7736.63	---	49.55	54.00	4.45	500.00	100.0	H	0.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH42

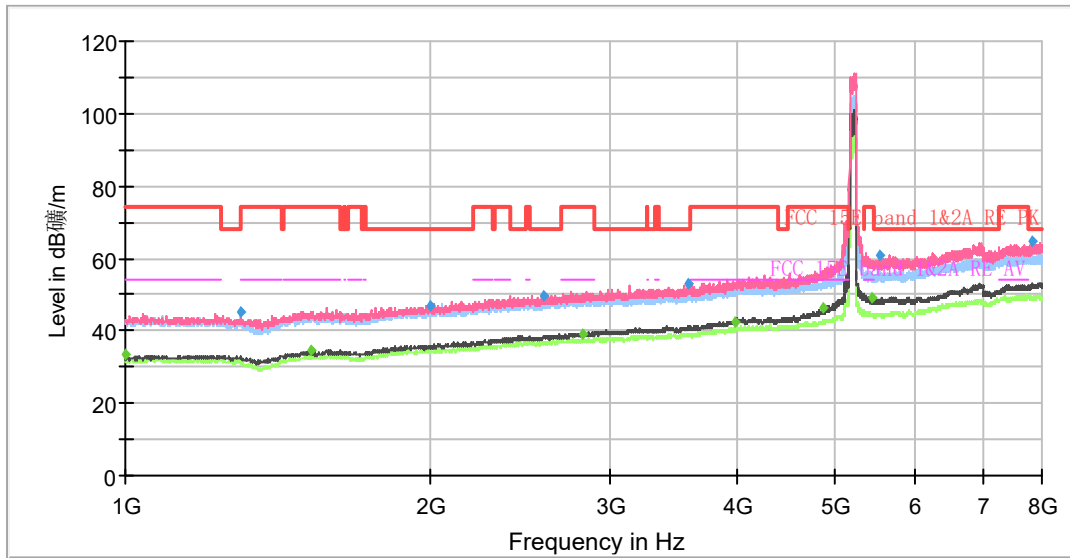

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

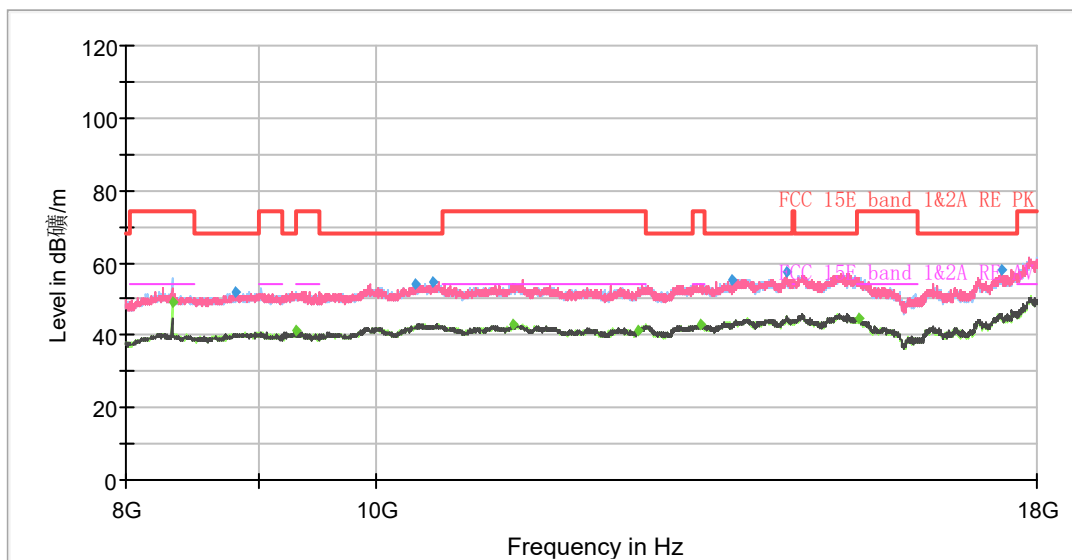


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	33.70	54.00	20.30	500.00	200.0	H	132.00	-2
1298.38	45.45	---	68.20	22.75	500.00	200.0	V	171.00	-1
1521.50	---	34.64	54.00	19.36	500.00	200.0	V	0.00	0
1993.13	47.12	---	68.20	21.08	500.00	200.0	V	3.00	1
2584.63	49.82	---	68.20	18.38	500.00	200.0	V	44.00	4
2820.00	---	39.26	54.00	14.74	500.00	200.0	V	322.00	5
3577.75	52.83	---	68.20	15.37	500.00	200.0	V	10.00	6
3994.25	---	42.64	54.00	11.36	500.00	200.0	V	38.00	7
4869.25	---	46.05	54.00	7.95	500.00	200.0	V	237.00	9
5437.13	---	48.86	54.00	5.14	500.00	200.0	V	271.00	12
5527.25	60.70	---	68.20	7.50	500.00	200.0	V	38.00	12
7828.50	64.95	---	68.20	3.25	500.00	200.0	V	0.00	18
8335.00	---	49.37	54.00	4.63	500.00	200.0	H	70.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH58

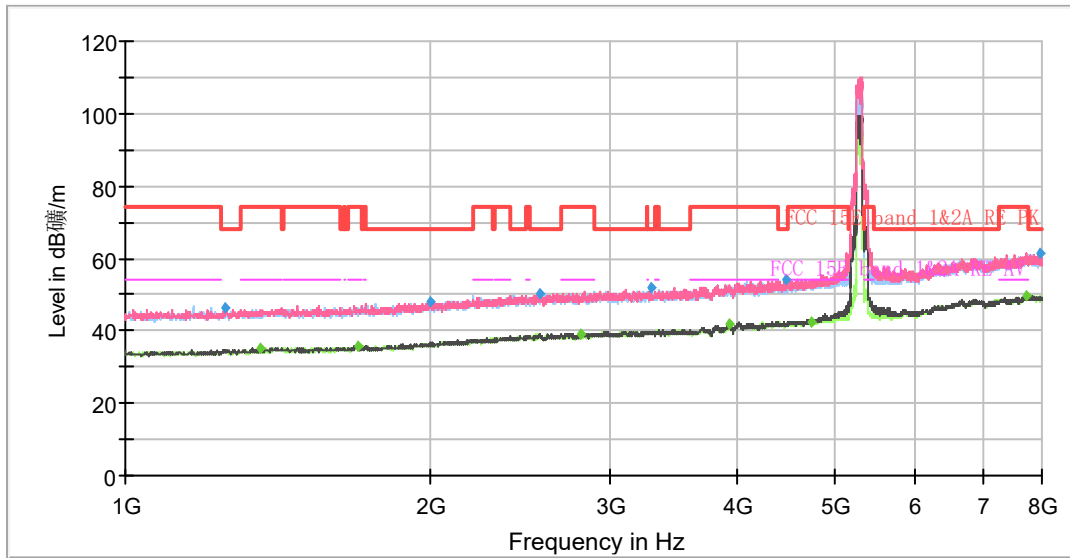

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

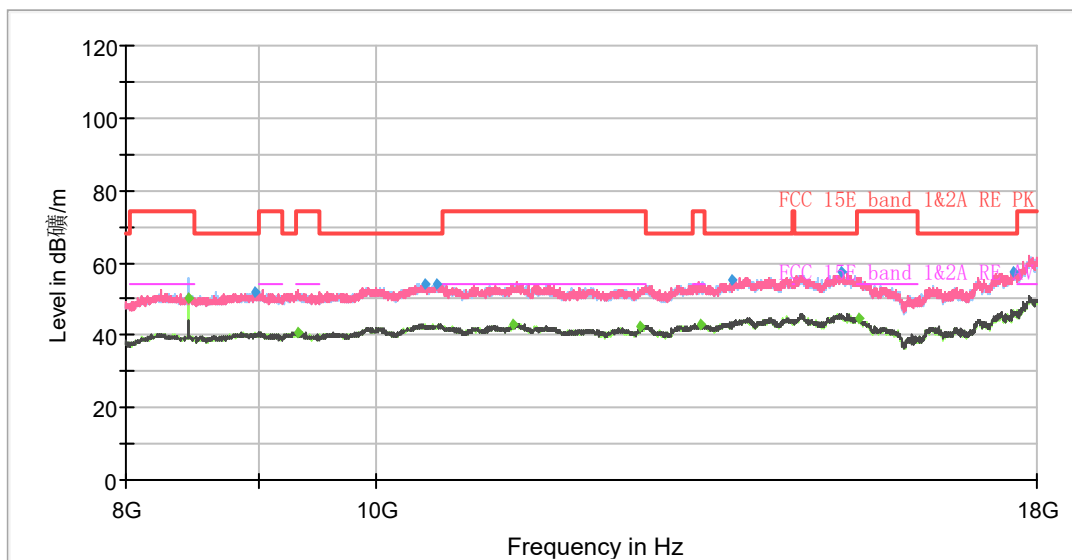


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1253.75	46.23	---	68.20	21.97	500.00	200.0	H	0.00	-10
1357.88	---	35.28	54.00	18.72	500.00	200.0	H	26.00	-10
1691.25	---	35.94	54.00	18.06	500.00	200.0	H	223.00	-8
1999.25	47.85	---	68.20	20.35	500.00	200.0	H	160.00	-8
2556.63	50.44	---	68.20	17.76	500.00	100.0	V	175.00	-6
2813.88	---	39.14	54.00	14.86	500.00	200.0	V	183.00	-5
3303.00	51.65	---	68.20	16.55	500.00	200.0	H	230.00	-4
3931.25	---	41.85	54.00	12.15	500.00	200.0	H	180.00	-2
4479.00	53.93	---	68.20	14.27	500.00	200.0	V	237.00	0
4731.00	---	42.63	54.00	11.37	500.00	200.0	V	0.00	1
7725.25	---	49.48	54.00	4.52	500.00	100.0	V	2.00	9
7961.50	61.47	---	68.20	6.73	500.00	200.0	V	62.00	9
8463.75	---	50.26	54.00	3.74	500.00	200.0	H	83.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH106

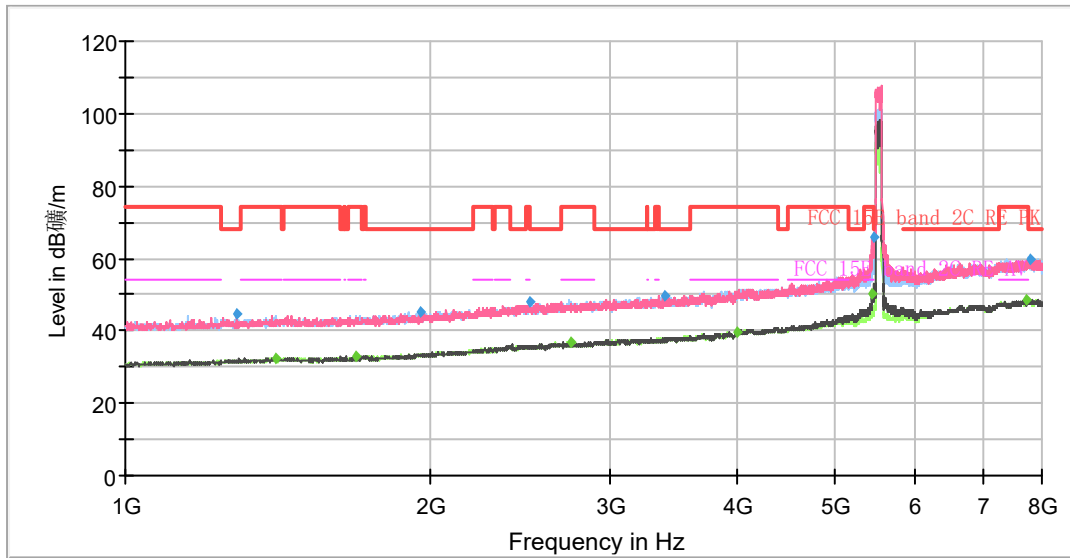

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

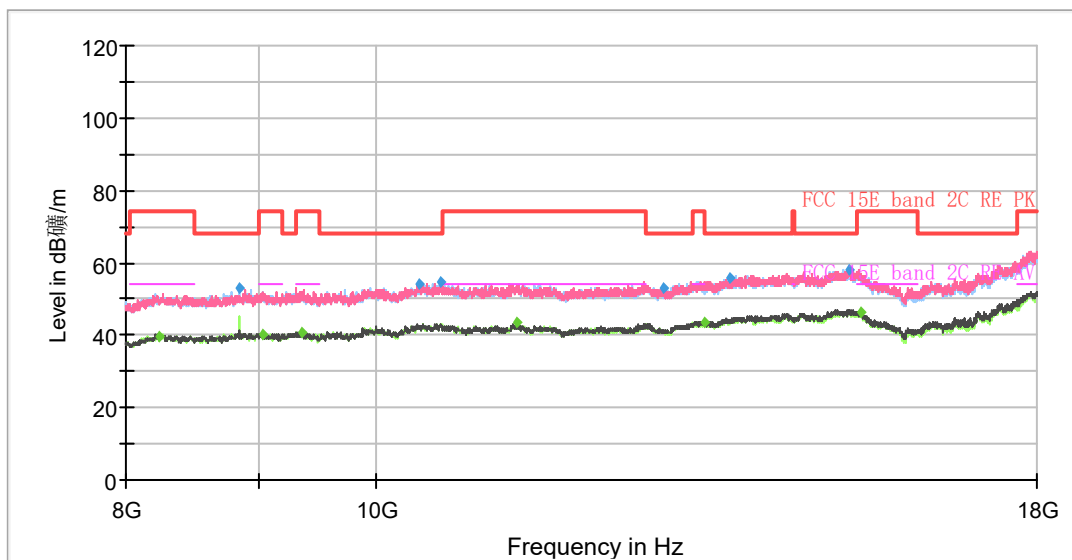


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1286.13	44.42	---	68.20	23.78	500.00	100.0	V	119.00	-2
1404.25	---	32.47	54.00	21.53	500.00	100.0	V	106.00	-1
1684.25	---	32.96	54.00	21.04	500.00	200.0	V	25.00	0
1952.88	45.44	---	68.20	22.76	500.00	100.0	H	14.00	1
2505.88	47.85	---	68.20	20.35	500.00	200.0	V	0.00	3
2751.75	---	36.96	54.00	17.04	500.00	200.0	V	288.00	4
3401.88	49.44	---	68.20	18.76	500.00	100.0	V	352.00	5
3998.63	---	39.75	54.00	14.25	500.00	200.0	H	354.00	6
5448.50	---	50.21	54.00	3.79	500.00	200.0	V	237.00	11
5466.88	65.73	---	68.20	2.47	500.00	200.0	V	288.00	11
7725.25	---	48.47	54.00	5.53	500.00	100.0	V	0.00	17
7803.13	59.77	---	68.20	8.43	500.00	100.0	H	159.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH122

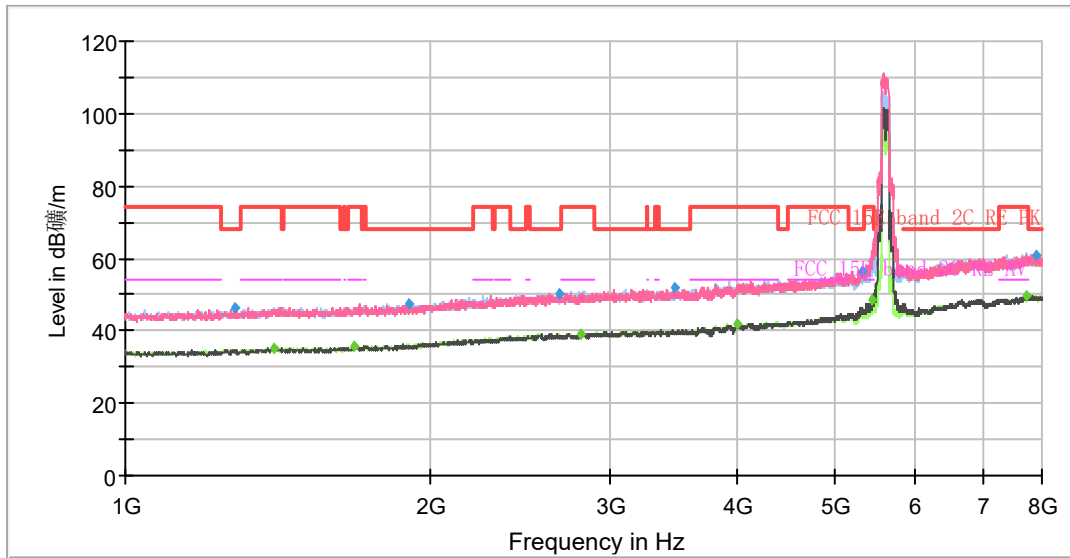

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

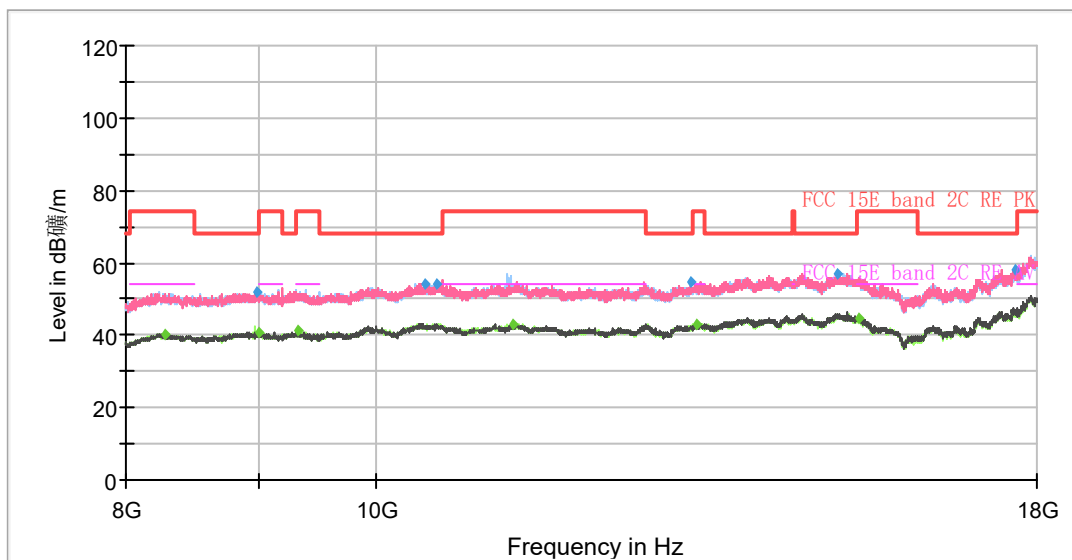


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1280.00	46.11	---	68.20	22.09	500.00	200.0	V	331.00	-10
1398.13	---	35.31	54.00	18.69	500.00	100.0	H	359.00	-9
1681.63	---	35.77	54.00	18.23	500.00	100.0	H	150.00	-9
1903.88	47.49	---	68.20	20.71	500.00	100.0	H	307.00	-8
2673.88	50.36	---	68.20	17.84	500.00	200.0	H	2.00	-5
2811.25	---	39.24	54.00	14.76	500.00	100.0	H	358.00	-5
3471.88	51.74	---	68.20	16.46	500.00	100.0	H	340.00	-4
3999.50	---	41.72	54.00	12.28	500.00	100.0	V	20.00	-2
5326.88	56.64	---	68.20	11.56	500.00	200.0	V	280.00	2
5451.13	---	48.43	54.00	5.57	500.00	200.0	V	280.00	3
7721.75	---	49.55	54.00	4.45	500.00	100.0	V	288.00	9
7893.25	60.97	---	68.20	7.23	500.00	100.0	H	356.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH138

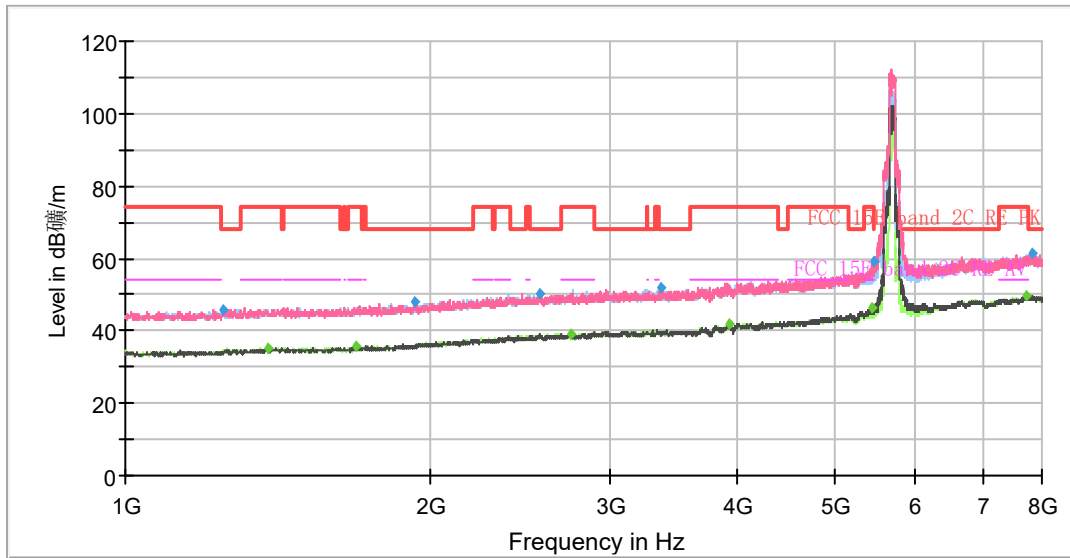

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

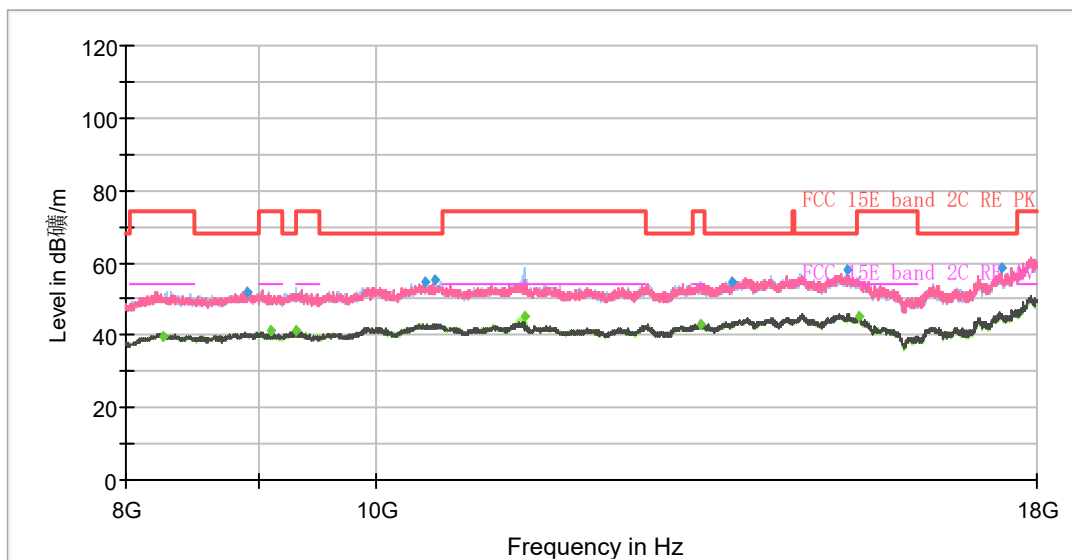


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.38	45.96	---	68.20	22.24	500.00	200.0	H	152.00	-10
1379.75	---	35.34	54.00	18.66	500.00	200.0	H	0.00	-10
1687.75	---	35.87	54.00	18.13	500.00	200.0	H	128.00	-8
1928.38	48.02	---	68.20	20.18	500.00	200.0	V	356.00	-8
2564.50	50.08	---	68.20	18.12	500.00	200.0	V	155.00	-5
2743.88	---	39.10	54.00	14.90	500.00	100.0	H	349.00	-5
3365.13	51.68	---	68.20	16.52	500.00	200.0	V	108.00	-4
3933.88	---	41.69	54.00	12.31	500.00	100.0	V	6.00	-2
5450.25	---	46.42	54.00	7.58	500.00	200.0	V	277.00	3
5460.75	58.92	---	68.20	9.28	500.00	200.0	V	253.00	3
7737.50	---	49.73	54.00	4.27	500.00	200.0	V	178.00	9
7817.13	61.39	---	68.20	6.82	500.00	200.0	H	176.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE80 CH155

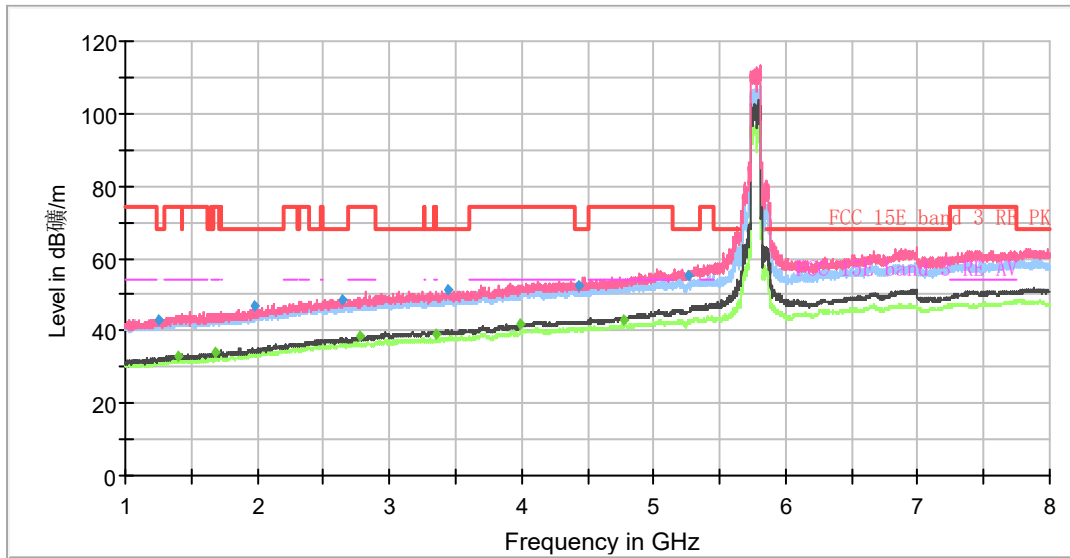

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

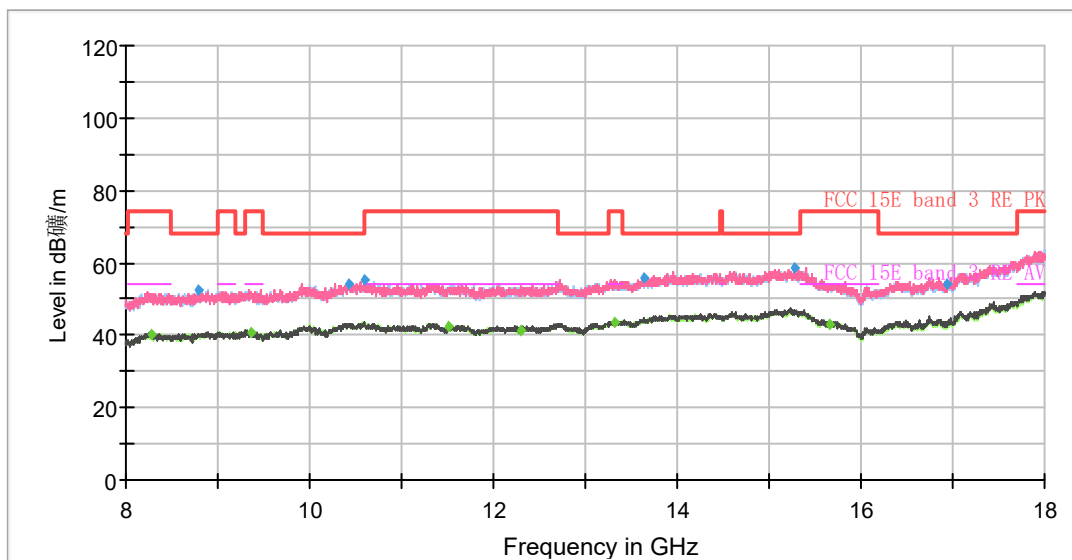


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1247.63	43.16	---	68.20	25.04	500.00	200.0	V	108.00	-2
1394.63	---	33.05	54.00	20.95	500.00	200.0	V	170.00	-1
1686.00	---	34.03	54.00	19.97	500.00	200.0	V	1.00	0
1980.88	46.88	---	68.20	21.32	500.00	200.0	V	108.00	1
2646.75	48.65	---	68.20	19.55	500.00	200.0	V	162.00	4
2771.00	---	38.33	54.00	15.67	500.00	200.0	V	84.00	4
3352.88	---	39.30	54.00	14.70	500.00	200.0	V	108.00	5
3449.13	51.22	---	68.20	16.98	500.00	200.0	V	2.00	5
3996.00	---	41.70	54.00	12.30	500.00	200.0	V	257.00	6
4434.38	52.73	---	68.20	15.47	500.00	200.0	V	41.00	7
4779.13	---	43.03	54.00	10.97	500.00	200.0	V	33.00	8
5261.25	55.50	---	68.20	12.70	500.00	200.0	V	213.00	10


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE160 CH50

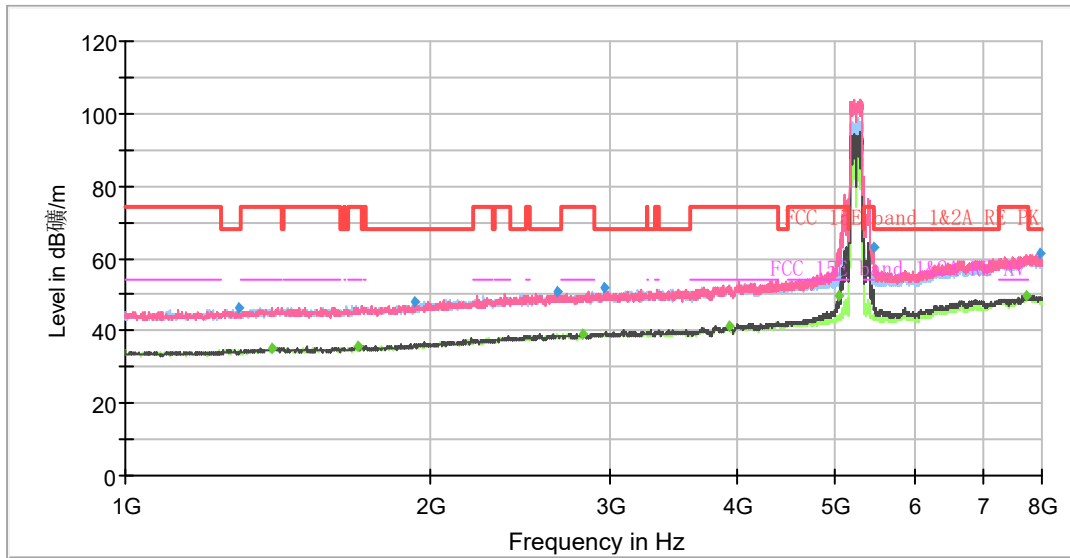

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

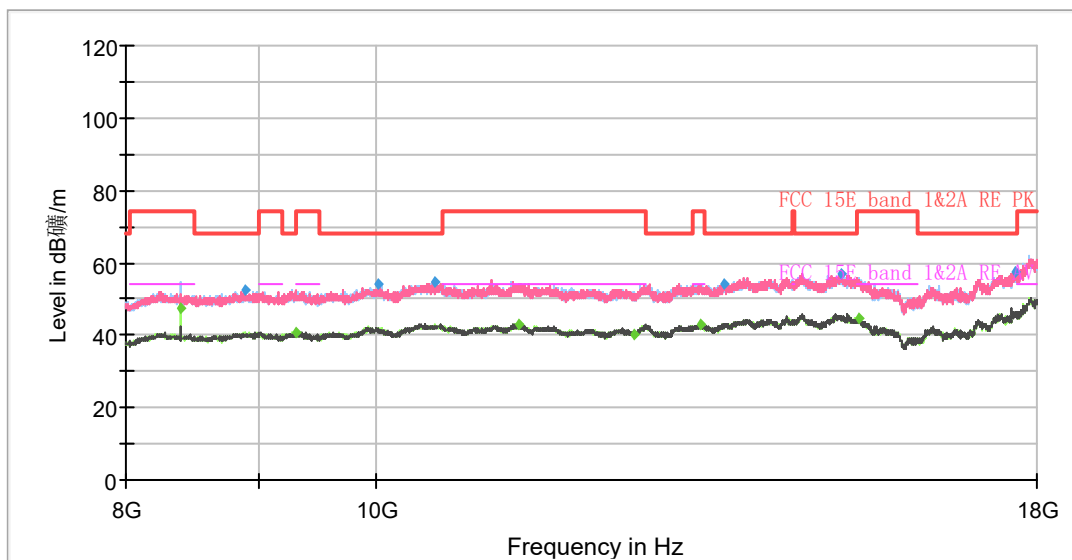


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1294.88	46.22	---	68.20	21.98	500.00	200.0	H	2.00	-10
1395.50	---	35.03	54.00	18.97	500.00	100.0	V	0.00	-9
1693.88	---	35.85	54.00	18.15	500.00	100.0	H	0.00	-9
1928.38	47.97	---	68.20	20.23	500.00	200.0	V	355.00	-8
2665.13	50.62	---	68.20	17.58	500.00	100.0	V	129.00	-5
2825.25	---	39.19	54.00	14.81	500.00	200.0	V	359.00	-5
2967.88	51.84	---	68.20	16.36	500.00	200.0	V	272.00	-5
3929.50	---	41.52	54.00	12.48	500.00	200.0	V	244.00	-2
5037.25	---	49.66	54.00	4.34	500.00	200.0	V	294.00	2
5466.00	63.12	---	68.20	5.08	500.00	200.0	V	244.00	2
7731.38	---	49.51	54.00	4.49	500.00	100.0	H	161.00	9
7974.63	61.52	---	68.20	6.68	500.00	200.0	V	90.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE160 CH114

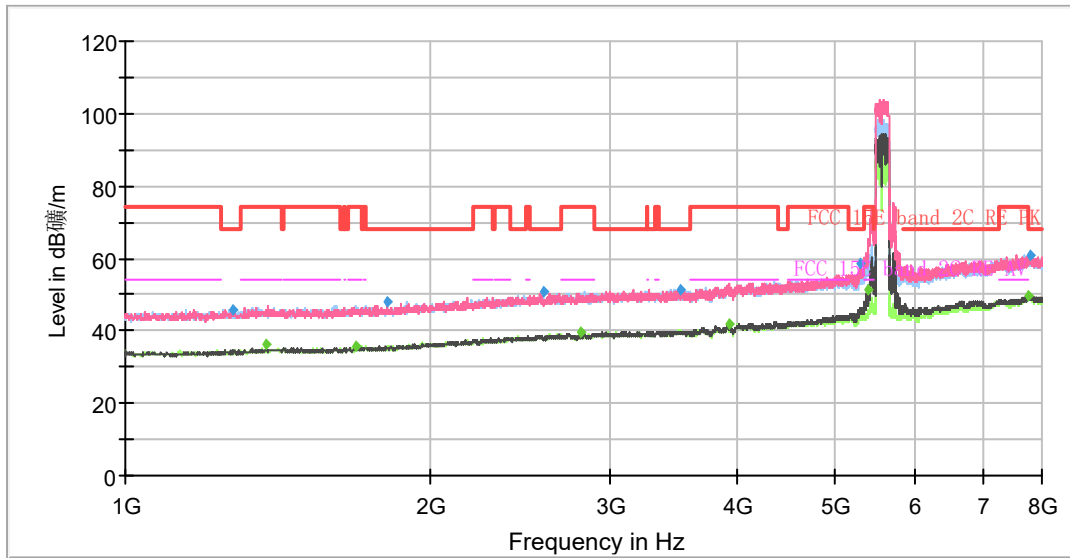

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

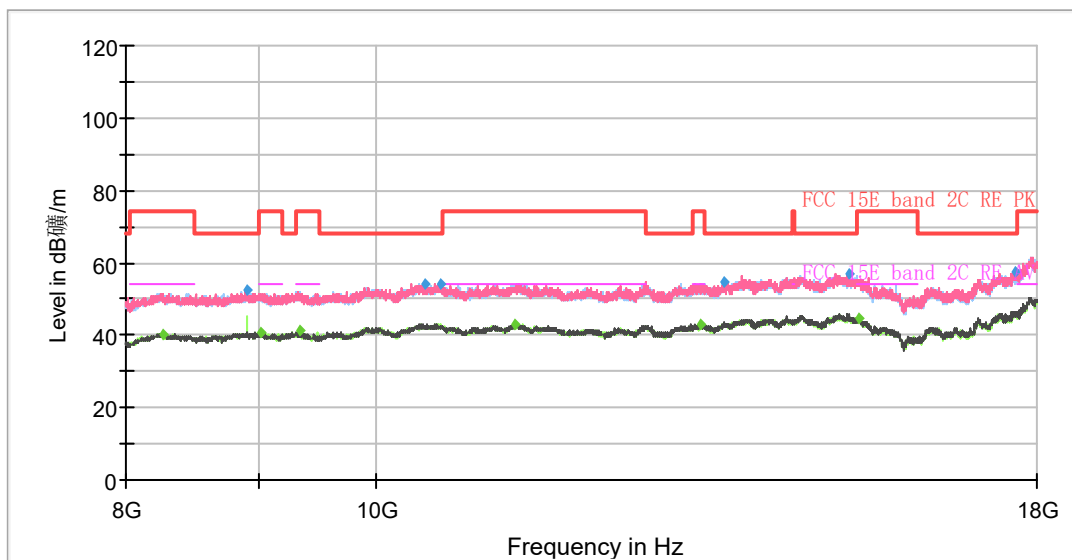


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1276.50	45.76	---	68.20	22.44	500.00	200.0	V	0.00	-10
1374.50	---	36.09	54.00	17.91	500.00	200.0	V	232.00	-10
1687.75	---	35.60	54.00	18.40	500.00	200.0	V	351.00	-8
1811.13	48.15	---	68.20	20.05	500.00	100.0	V	159.00	-9
2577.63	51.00	---	68.20	17.20	500.00	100.0	H	342.00	-6
2804.25	---	39.36	54.00	14.64	500.00	200.0	H	266.00	-5
3520.88	51.46	---	68.20	16.74	500.00	100.0	V	49.00	-4
3934.75	---	41.60	54.00	12.40	500.00	200.0	H	278.00	-2
5306.75	58.55	---	68.20	9.65	500.00	200.0	V	256.00	2
5392.50	---	51.45	54.00	2.55	500.00	200.0	V	256.00	2
7749.75	---	49.49	54.00	4.51	500.00	100.0	V	4.00	9
7800.50	60.58	---	68.20	7.62	500.00	200.0	H	128.00	9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11n (HT40), Channel 46 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

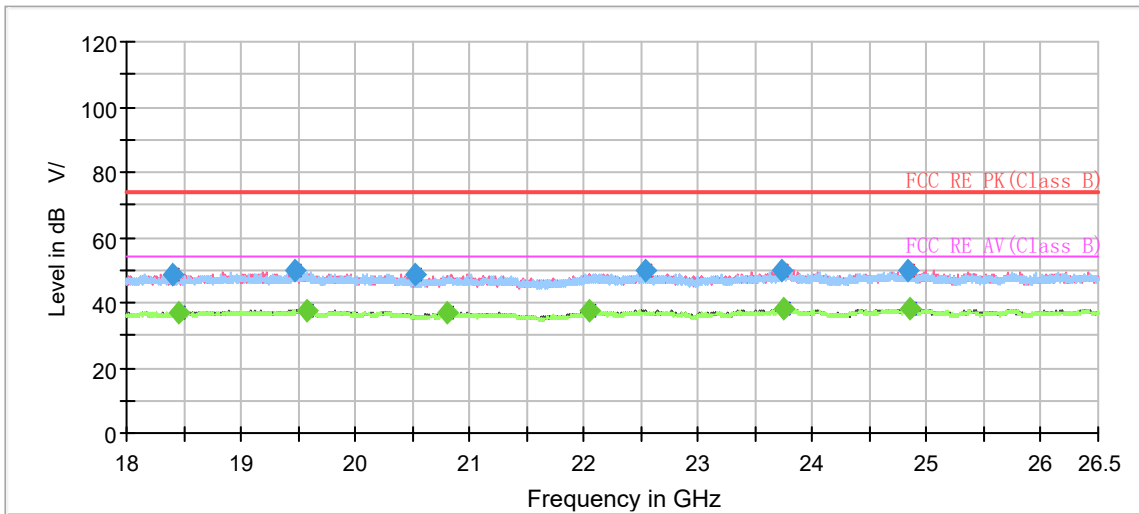

Radiates Emission from 18GHz to 26.5GHz

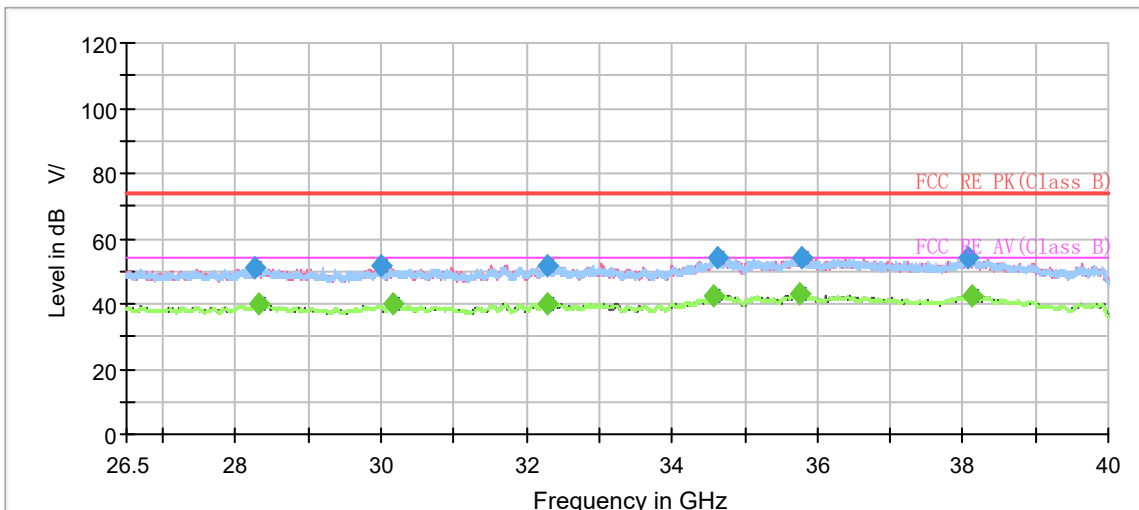

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18406.937500	48.52	---	74.00	25.48	500.0	200.0	H	178.0	-5.9
18447.312500	---	36.72	54.00	17.28	500.0	200.0	V	100.0	-5.9
19470.500000	49.73	---	74.00	24.27	500.0	100.0	H	68.0	-5.3
19573.562500	---	37.74	54.00	16.26	500.0	100.0	V	263.0	-5.3
20524.500000	48.64	---	74.00	25.36	500.0	200.0	V	315.0	-5.1
20802.875000	---	36.99	54.00	17.01	500.0	100.0	V	154.0	-5.1
22055.562500	---	37.56	54.00	16.44	500.0	200.0	H	198.0	-4.2
22536.875000	49.62	---	74.00	24.38	500.0	200.0	H	293.0	-3.9
23723.687500	49.80	---	74.00	24.20	500.0	200.0	H	237.0	-2.4
23756.625000	---	38.12	54.00	15.88	500.0	200.0	V	65.0	-2.4
24843.562500	49.93	---	74.00	24.07	500.0	200.0	H	222.0	-2.3
24859.500000	---	37.91	54.00	16.09	500.0	200.0	V	45.0	-2.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit-MAX Peak/ Average

DZZ

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a, Channel 165 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

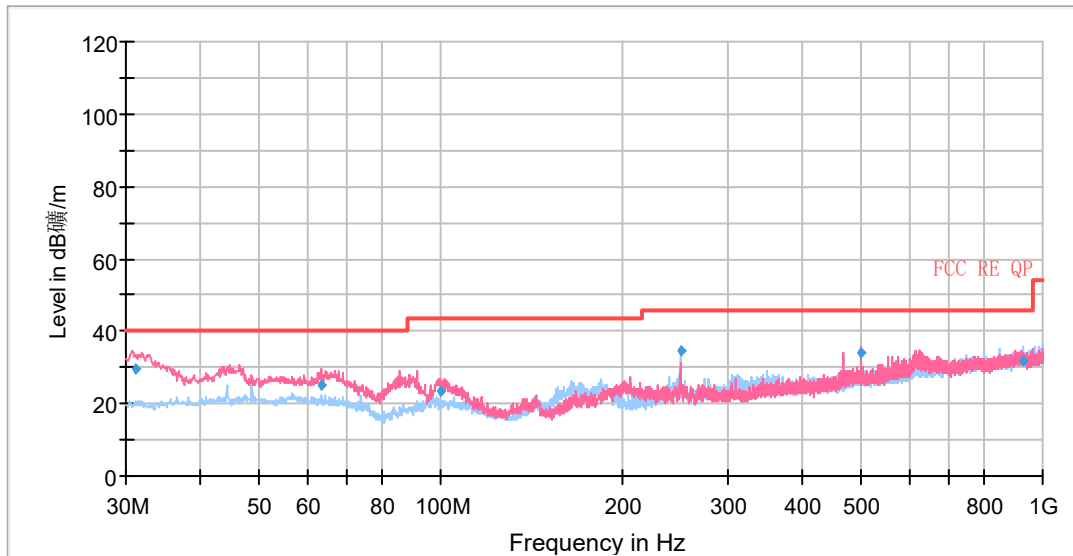


Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
31.25	29.81	40.00	10.19	100.0	V	118.00	13
63.51	25.11	40.00	14.89	102.0	V	238.00	13
99.92	23.56	43.50	19.94	112.0	V	0.00	13
249.99	34.50	46.00	11.50	100.0	H	252.00	14
500.01	33.94	46.00	12.06	104.0	V	299.00	20
927.93	31.57	46.00	14.43	193.0	H	326.00	26

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
 2. Margin = Limit – Quasi-Peak

802.11a CH36

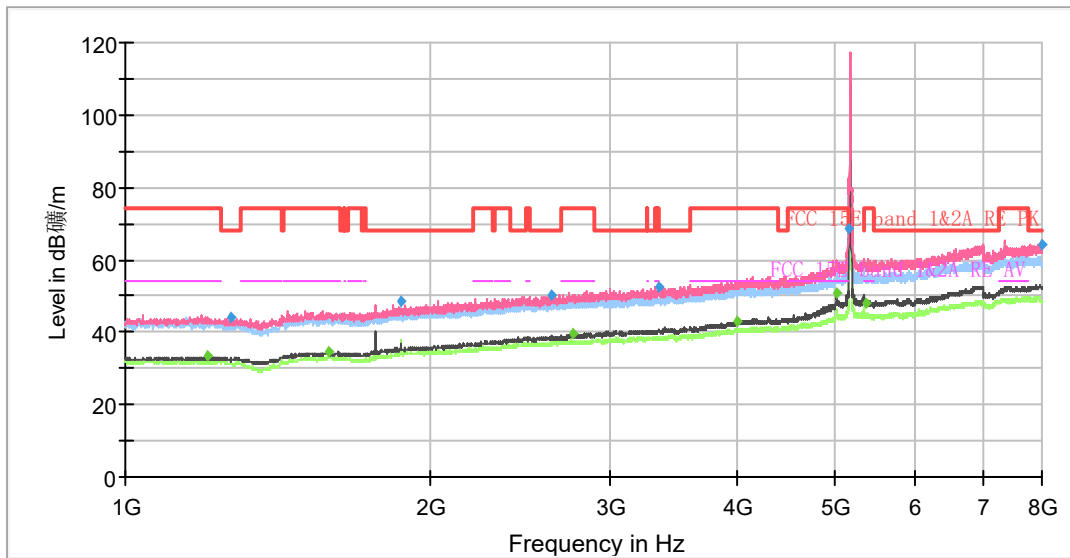

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

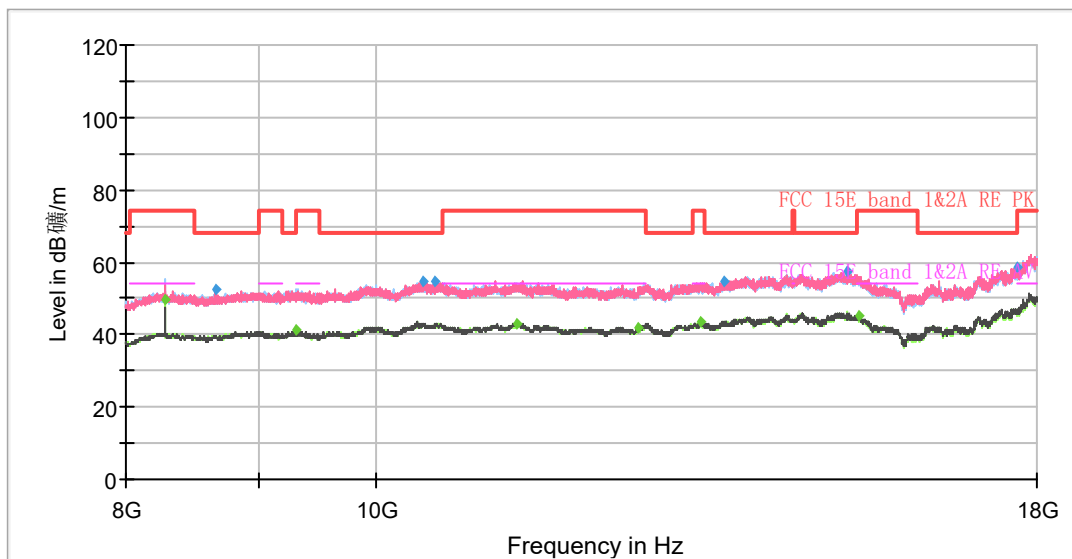


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1204.75	---	33.27	54.00	20.73	500.00	200.0	V	215.00	-2
1271.25	44.21	---	68.20	23.99	500.00	100.0	V	33.00	-1
1587.13	---	34.56	54.00	19.44	500.00	100.0	V	47.00	0
1865.38	48.63	---	68.20	19.57	500.00	100.0	H	160.00	1
2631.00	50.24	---	68.20	17.96	500.00	100.0	V	284.00	4
2755.25	---	39.43	54.00	14.57	500.00	200.0	V	338.00	5
3358.13	52.60	---	68.20	15.60	500.00	100.0	V	15.00	6
3999.50	---	42.85	54.00	11.15	500.00	100.0	V	74.00	7
5025.88	---	50.52	54.00	3.48	500.00	200.0	V	269.00	10
5148.38	68.79	---	74.00	5.21	500.00	200.0	V	304.00	11
5361.00	---	47.92	54.00	6.08	500.00	200.0	V	290.00	12
7991.25	64.32	---	68.20	3.88	500.00	200.0	V	182.00	18
8287.50	---	49.75	54.00	4.25	500.00	200.0	H	55.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH40

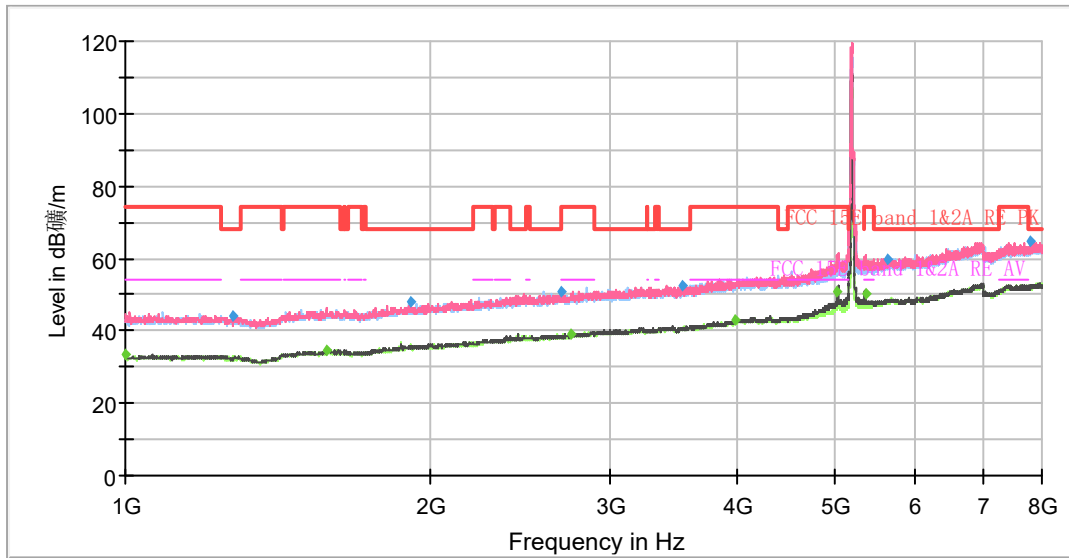

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

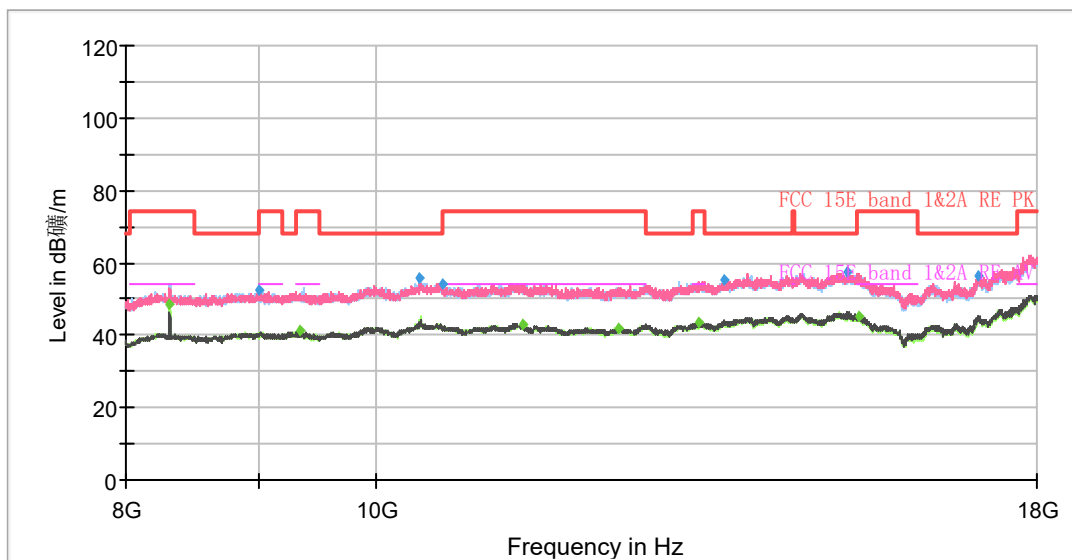


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	33.44	54.00	20.56	500.00	200.0	V	270.00	-2
1278.25	43.87	---	68.20	24.33	500.00	100.0	V	4.00	-1
1577.50	---	34.60	54.00	19.40	500.00	200.0	V	359.00	0
1912.63	48.14	---	68.20	20.06	500.00	100.0	V	4.00	1
2689.63	50.94	---	68.20	17.26	500.00	200.0	V	264.00	4
2743.00	---	39.29	54.00	14.71	500.00	200.0	H	75.00	5
3534.88	52.72	---	68.20	15.48	500.00	100.0	V	203.00	6
3989.88	---	43.14	54.00	10.86	500.00	200.0	V	291.00	7
5032.88	---	51.06	54.00	2.94	500.00	200.0	V	270.00	10
5367.13	---	50.44	54.00	3.56	500.00	200.0	V	257.00	12
5634.00	59.87	---	68.20	8.33	500.00	200.0	V	306.00	12
7806.63	64.59	---	68.20	3.61	500.00	100.0	V	42.00	18
8318.75	---	48.34	54.00	5.66	500.00	200.0	H	104.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH48

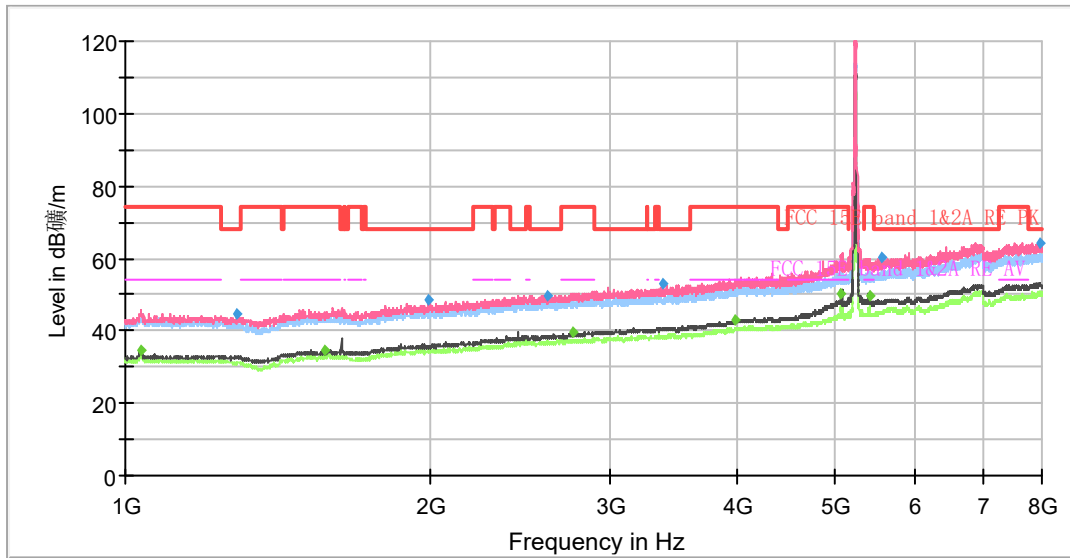

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

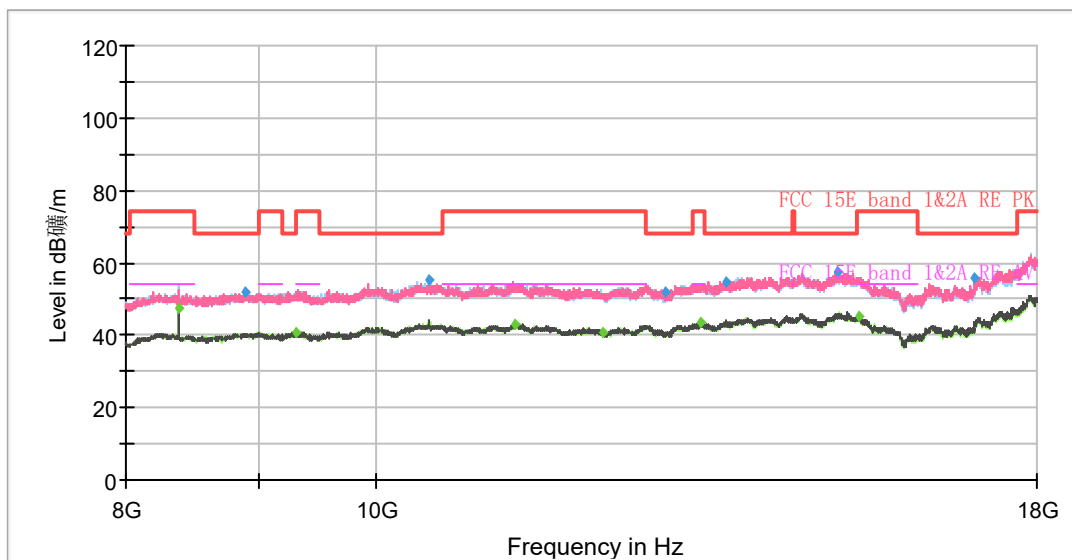


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1035.88	---	34.77	54.00	19.23	500.00	100.0	V	212.00	-2
1287.00	44.38	---	68.20	23.82	500.00	200.0	V	196.00	-1
1570.50	---	34.49	54.00	19.51	500.00	200.0	V	279.00	0
1989.63	48.51	---	68.20	19.69	500.00	200.0	V	0.00	1
2603.00	49.86	---	68.20	18.34	500.00	100.0	V	86.00	4
2757.88	---	39.37	54.00	14.63	500.00	100.0	V	86.00	5
3386.13	53.06	---	68.20	15.14	500.00	100.0	V	12.00	6
3988.13	---	42.86	54.00	11.14	500.00	200.0	V	330.00	7
5072.25	---	50.39	54.00	3.61	500.00	200.0	V	266.00	10
5406.50	---	49.82	54.00	4.18	500.00	200.0	V	285.00	12
5557.88	60.15	---	68.20	8.05	500.00	200.0	V	266.00	12
7964.13	64.13	---	68.20	4.07	500.00	100.0	V	166.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH52

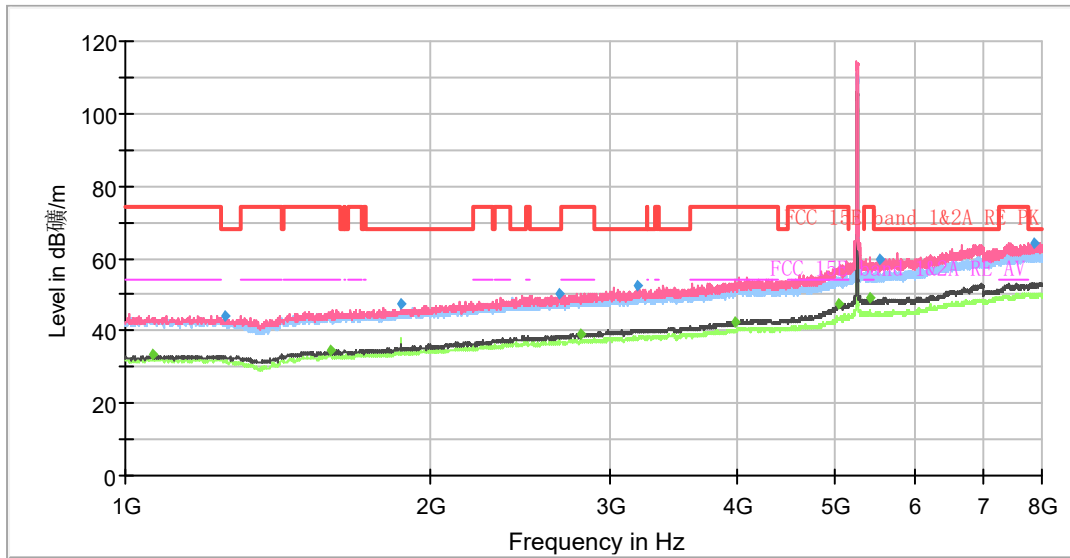

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

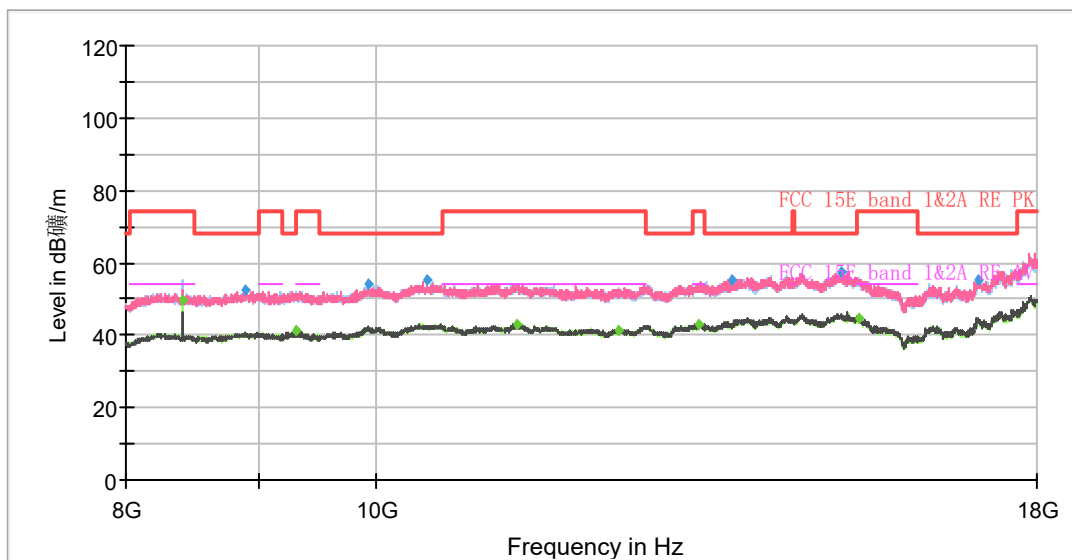


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.13	---	33.26	54.00	20.74	500.00	200.0	V	158.00	-2
1251.13	44.11	---	68.20	24.09	500.00	200.0	V	144.00	-1
1590.63	---	34.63	54.00	19.37	500.00	200.0	V	46.00	0
1865.38	47.63	---	68.20	20.57	500.00	100.0	H	177.00	1
2670.38	50.07	---	68.20	18.13	500.00	200.0	V	118.00	4
2811.25	---	38.99	54.00	15.01	500.00	200.0	V	11.00	5
3194.50	52.31	---	68.20	15.89	500.00	200.0	V	33.00	6
3990.75	---	42.62	54.00	11.38	500.00	200.0	V	5.00	7
5040.75	---	47.20	54.00	6.80	500.00	200.0	V	53.00	11
5418.75	---	49.25	54.00	4.75	500.00	200.0	V	227.00	12
5540.38	59.89	---	68.20	8.31	500.00	200.0	V	84.00	12
7857.38	64.44	---	68.20	3.76	500.00	200.0	V	60.00	18
8415.00	---	49.94	54.00	4.06	500.00	200.0	H	55.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH60

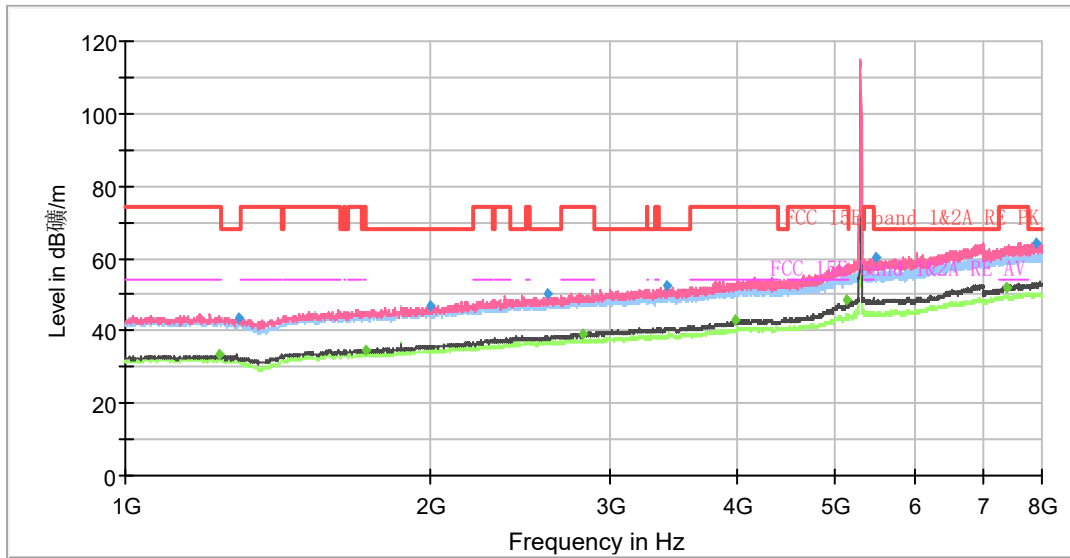

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

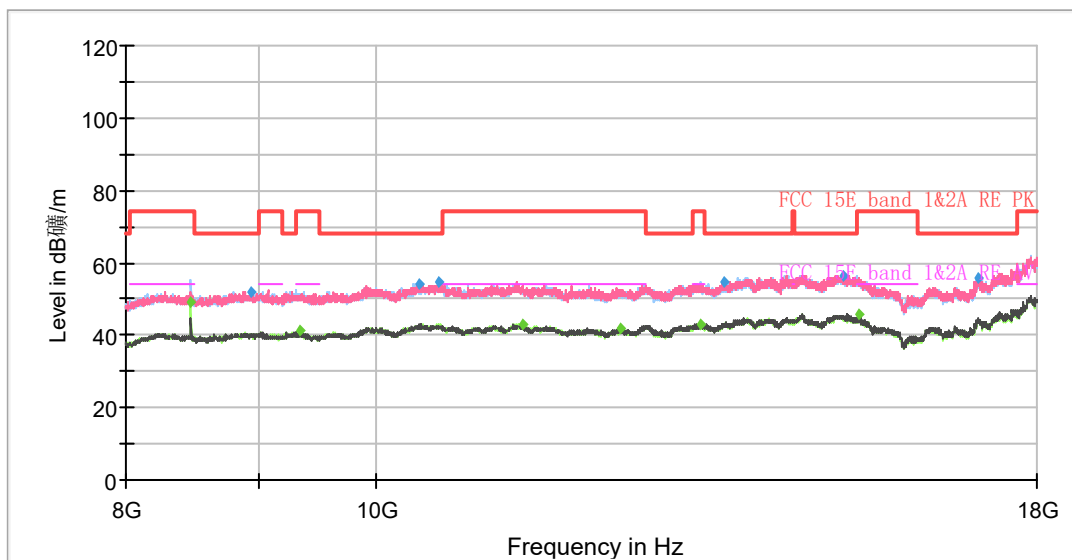


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1239.75	---	33.24	54.00	20.77	500.00	200.0	V	238.00	-1
1291.38	43.75	---	68.20	24.45	500.00	200.0	V	1.00	-1
1721.88	---	34.70	54.00	19.30	500.00	200.0	V	0.00	0
1996.63	46.90	---	68.20	21.30	500.00	200.0	V	60.00	2
2600.38	50.12	---	68.20	18.08	500.00	200.0	V	154.00	4
2823.50	---	39.23	54.00	14.77	500.00	200.0	V	46.00	5
3414.13	52.56	---	68.20	15.64	500.00	200.0	V	168.00	6
3996.00	---	42.85	54.00	11.15	500.00	200.0	V	189.00	7
5145.75	---	48.70	54.00	5.30	500.00	200.0	V	53.00	11
5498.38	60.18	---	68.20	8.02	500.00	200.0	V	80.00	12
7384.00	---	51.84	54.00	2.16	500.00	200.0	V	80.00	17
7881.88	64.46	---	68.20	3.74	500.00	200.0	V	2.00	18
8478.75	---	49.25	54.00	4.75	500.00	200.0	H	64.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH64

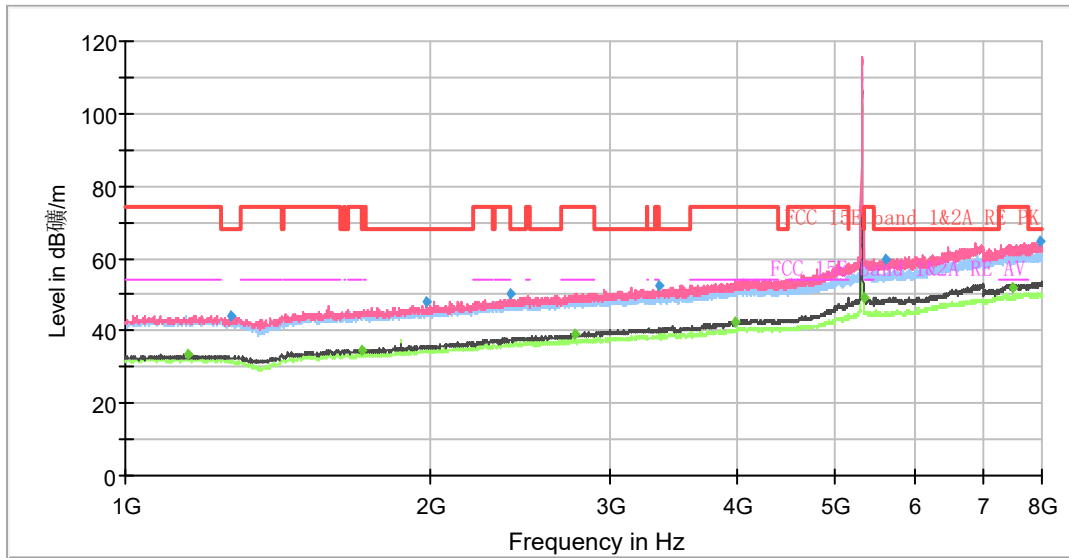

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

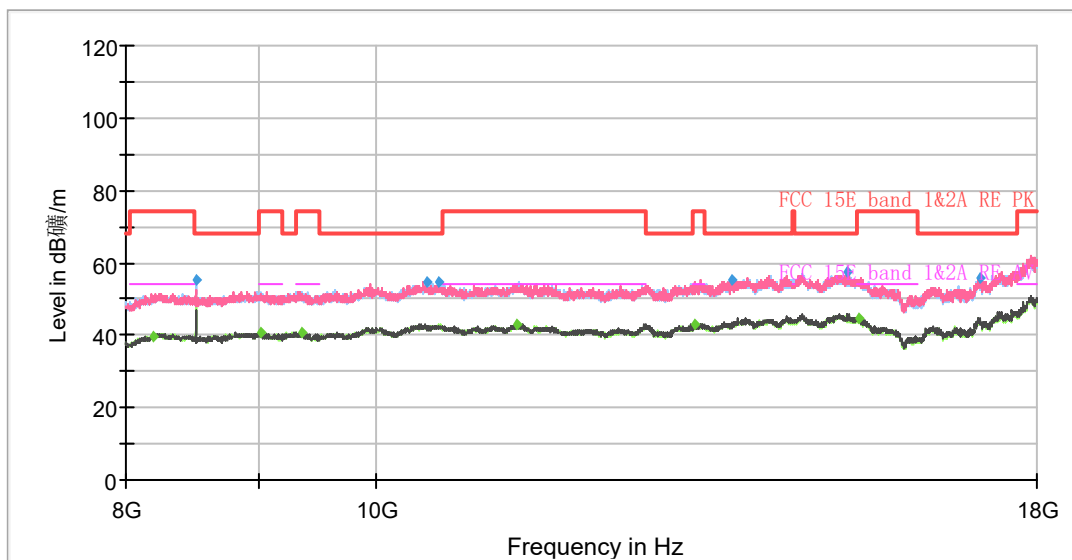


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1267.75	43.94	---	68.20	24.26	500.00	200.0	V	66.00	-1
1152.25	---	33.32	54.00	20.68	500.00	200.0	V	85.00	-2
1980.00	47.96	---	68.20	20.24	500.00	200.0	V	99.00	1
1707.88	---	34.82	54.00	19.18	500.00	200.0	V	241.00	0
2393.88	50.17	---	68.20	18.03	500.00	200.0	V	213.00	4
3358.13	52.71	---	68.20	15.49	500.00	200.0	V	85.00	6
2773.63	---	38.96	54.00	15.04	500.00	200.0	V	66.00	5
3994.25	---	42.36	54.00	11.64	500.00	200.0	V	106.00	7
5599.00	59.62	---	68.20	8.58	500.00	200.0	V	127.00	12
5353.13	---	49.14	54.00	4.86	500.00	200.0	V	92.00	12
7970.25	64.54	---	68.20	3.66	500.00	200.0	V	79.00	18
7501.25	---	51.81	54.00	2.19	500.00	200.0	V	72.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH100

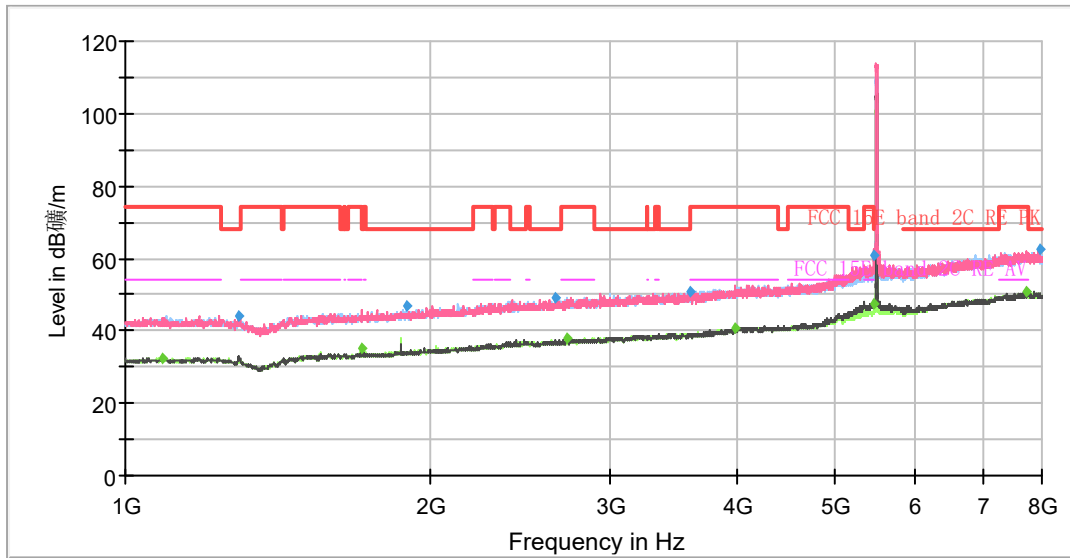

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

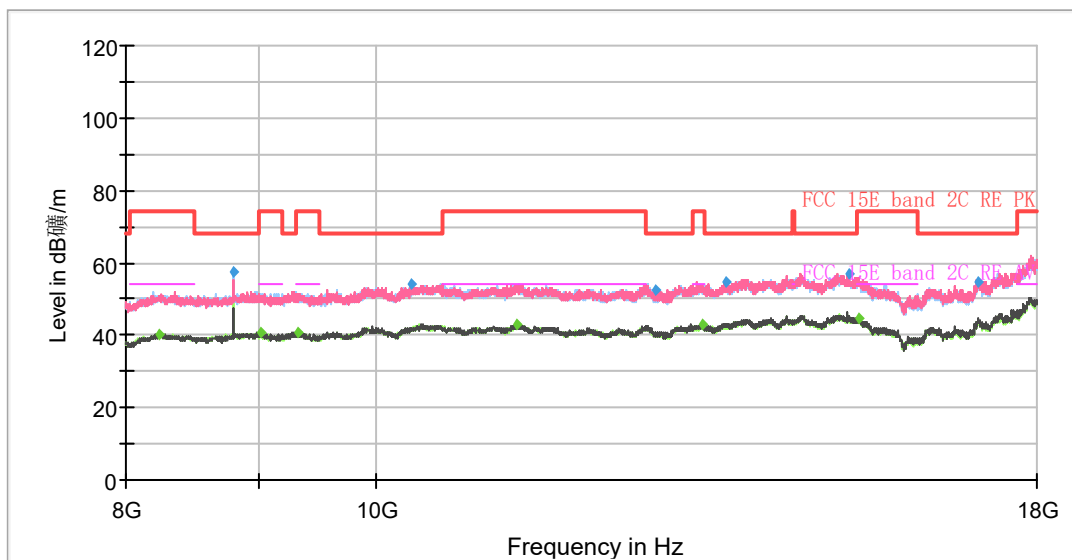


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1087.50	---	32.57	54.00	21.43	500.00	200.0	H	0.00	-2
1293.13	44.03	---	68.20	24.17	500.00	100.0	V	147.00	-1
1707.88	---	34.92	54.00	19.08	500.00	100.0	V	183.00	0
1891.63	46.74	---	68.20	21.46	500.00	200.0	H	6.00	1
2648.50	48.87	---	68.20	19.33	500.00	200.0	H	106.00	4
2729.00	---	37.69	54.00	16.31	500.00	200.0	H	156.00	4
3594.38	50.55	---	68.20	17.65	500.00	100.0	H	0.00	6
3988.13	---	40.59	54.00	13.41	500.00	200.0	H	47.00	7
5458.13	---	47.35	54.00	6.65	500.00	200.0	V	284.00	12
5468.63	60.83	---	68.20	7.37	500.00	200.0	V	271.00	12
7722.63	---	50.59	54.00	3.41	500.00	100.0	V	19.00	18
7971.13	62.48	---	68.20	5.72	500.00	100.0	V	265.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH120

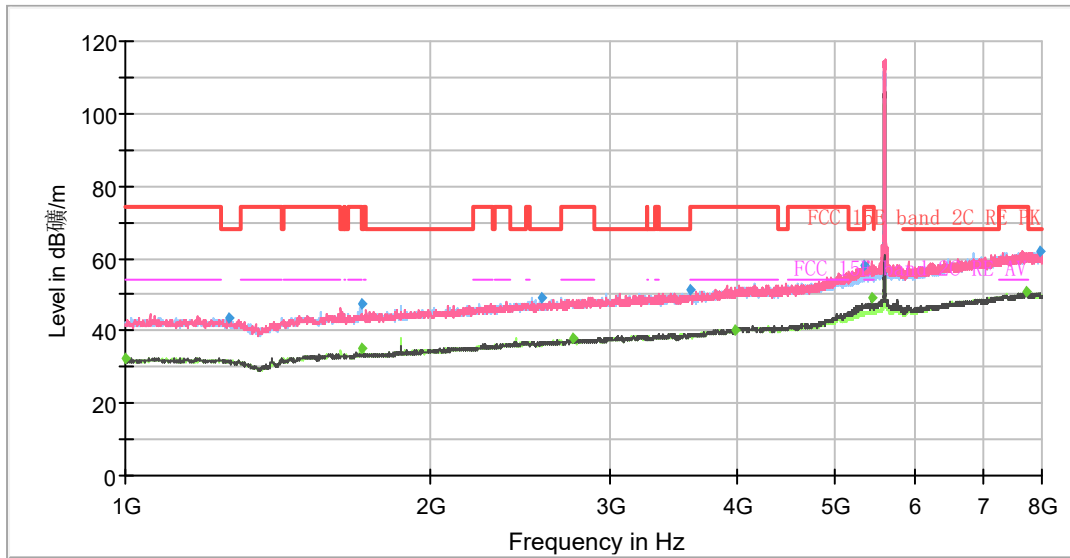

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

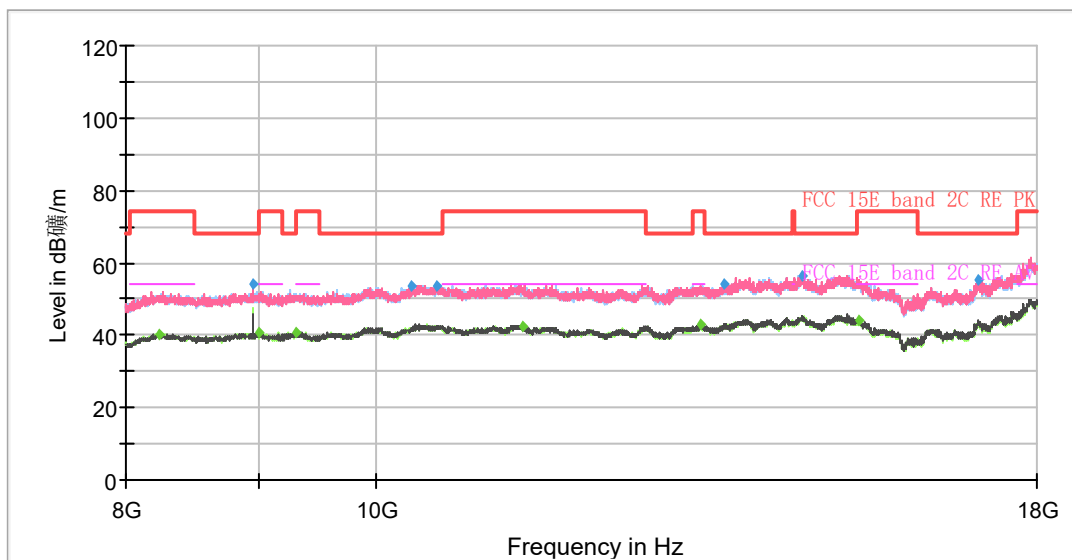


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	32.45	54.00	21.55	500.00	100.0	V	0.00	-2
1262.50	43.48	---	68.20	24.72	500.00	200.0	V	356.00	-1
1708.75	---	35.31	54.00	18.69	500.00	100.0	H	108.00	0
1712.25	47.36	---	68.20	20.84	500.00	100.0	H	108.00	0
2570.63	48.96	---	68.20	19.24	500.00	200.0	H	24.00	4
2759.63	---	37.85	54.00	16.15	500.00	100.0	V	1.00	5
3597.88	51.30	---	68.20	16.90	500.00	100.0	V	35.00	6
3996.88	---	40.35	54.00	13.65	500.00	200.0	V	169.00	7
5334.75	57.93	---	68.20	10.27	500.00	200.0	V	254.00	12
5442.38	---	49.29	54.00	4.71	500.00	200.0	V	343.00	12
7737.50	---	50.66	54.00	3.34	500.00	200.0	H	0.00	18
7972.00	61.82	---	68.20	6.38	500.00	200.0	V	193.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH140

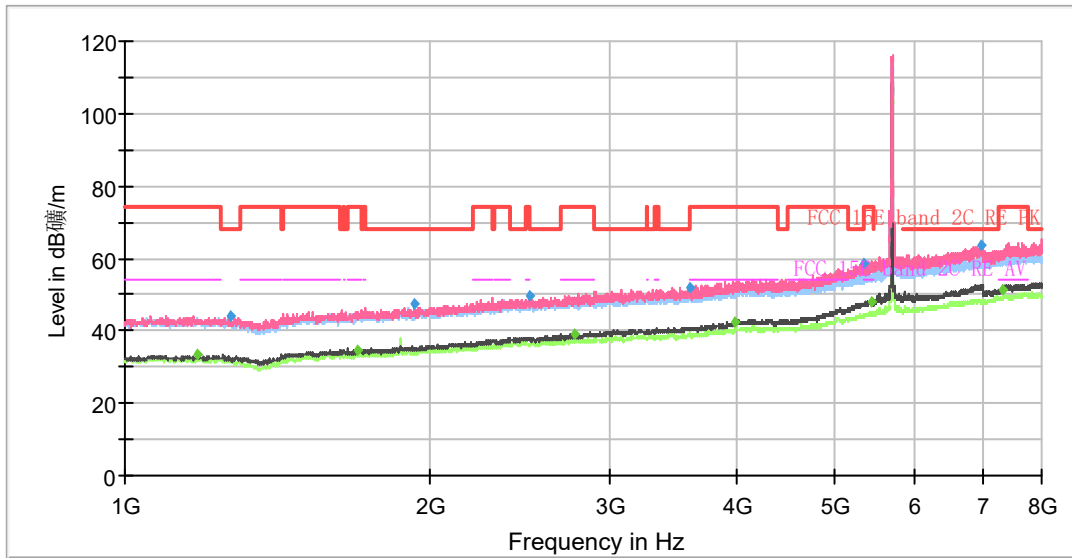

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

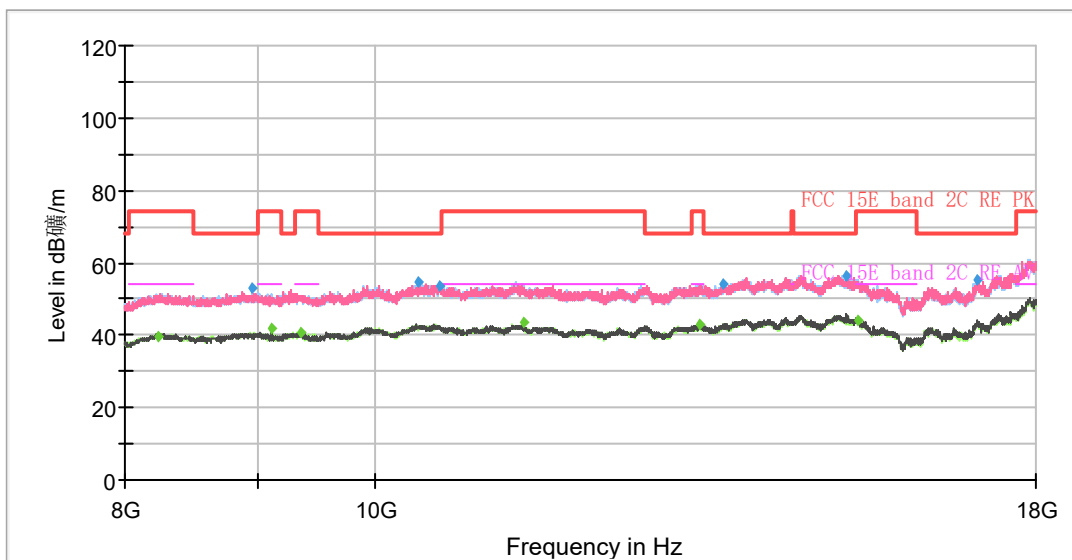


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1176.75	---	33.52	54.00	20.48	500.00	200.0	V	350.00	-2
1269.50	43.99	---	68.20	24.21	500.00	200.0	V	359.00	-1
1694.75	---	34.62	54.00	19.38	500.00	200.0	V	342.00	0
1925.75	47.22	---	68.20	20.98	500.00	200.0	V	321.00	1
2507.63	49.51	---	68.20	18.69	500.00	200.0	V	359.00	4
2767.50	---	39.26	54.00	14.74	500.00	200.0	V	0.00	5
3598.75	52.05	---	68.20	16.15	500.00	200.0	V	272.00	6
3996.00	---	42.51	54.00	11.49	500.00	200.0	V	346.00	7
5347.88	58.64	---	68.20	9.56	500.00	200.0	V	354.00	12
5447.63	---	48.13	54.00	5.87	500.00	200.0	V	286.00	12
6973.63	63.42	---	68.20	4.78	500.00	200.0	V	336.00	15
7306.13	---	51.42	54.00	2.58	500.00	200.0	V	359.00	16


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH144

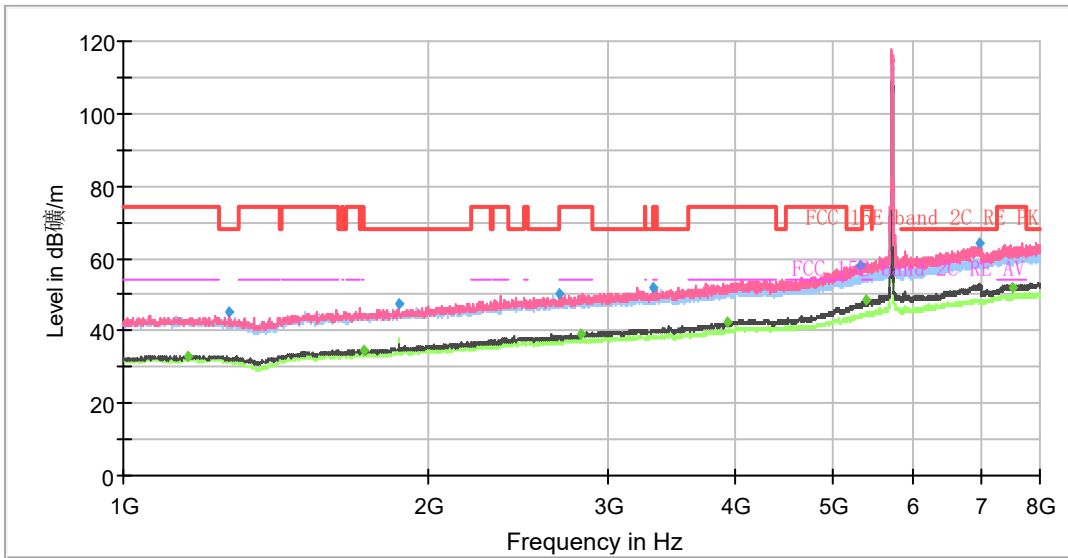

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

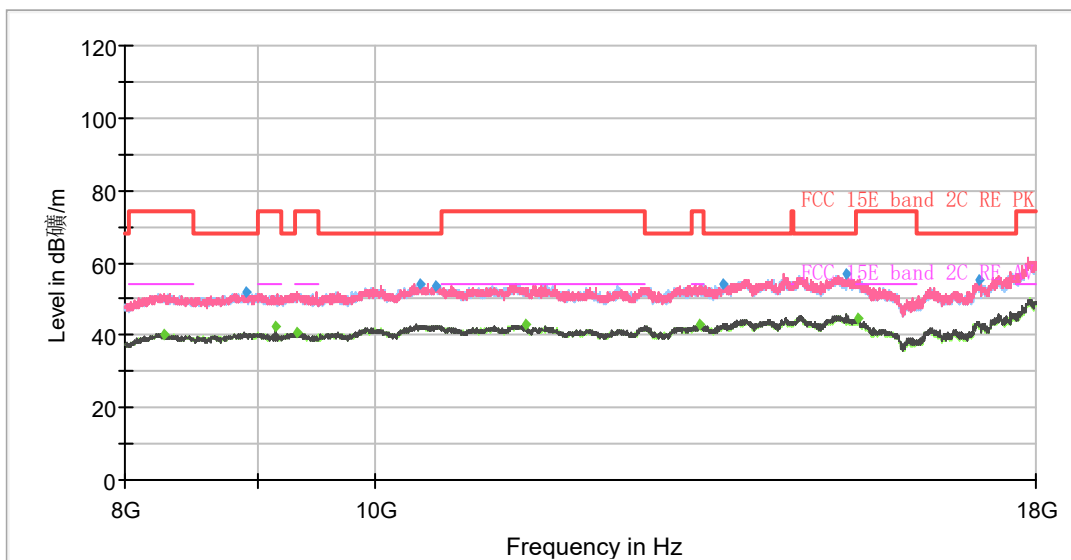


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1157.50	---	33.20	54.00	20.80	500.00	200.0	V	358.00	-2
1273.00	44.94	---	68.20	23.26	500.00	200.0	V	321.00	-1
1721.88	---	34.85	54.00	19.15	500.00	200.0	V	356.00	0
1866.25	47.35	---	68.20	20.85	500.00	100.0	H	194.00	1
2685.25	50.29	---	68.20	17.91	500.00	200.0	V	358.00	4
2827.00	---	39.04	54.00	14.96	500.00	200.0	V	357.00	5
3322.25	52.10	---	68.20	16.10	500.00	200.0	V	347.00	6
3928.63	---	42.43	54.00	11.57	500.00	200.0	V	354.00	7
5322.50	58.24	---	68.20	9.96	500.00	200.0	V	274.00	12
5403.00	---	48.48	54.00	5.52	500.00	200.0	V	347.00	12
6979.75	64.21	---	68.20	3.99	500.00	200.0	V	0.00	15
7511.75	---	51.76	54.00	2.24	500.00	200.0	V	356.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH149

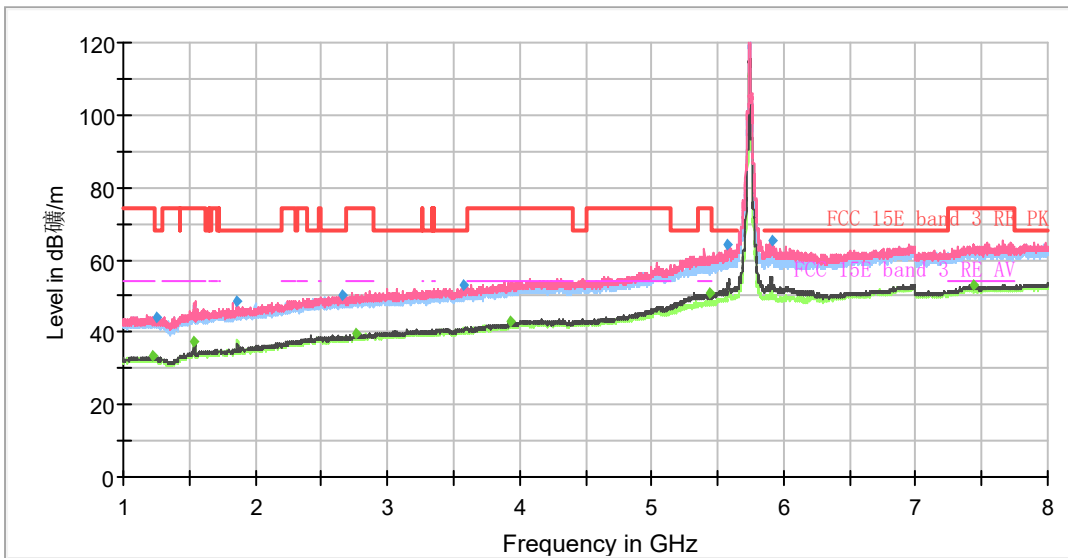

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

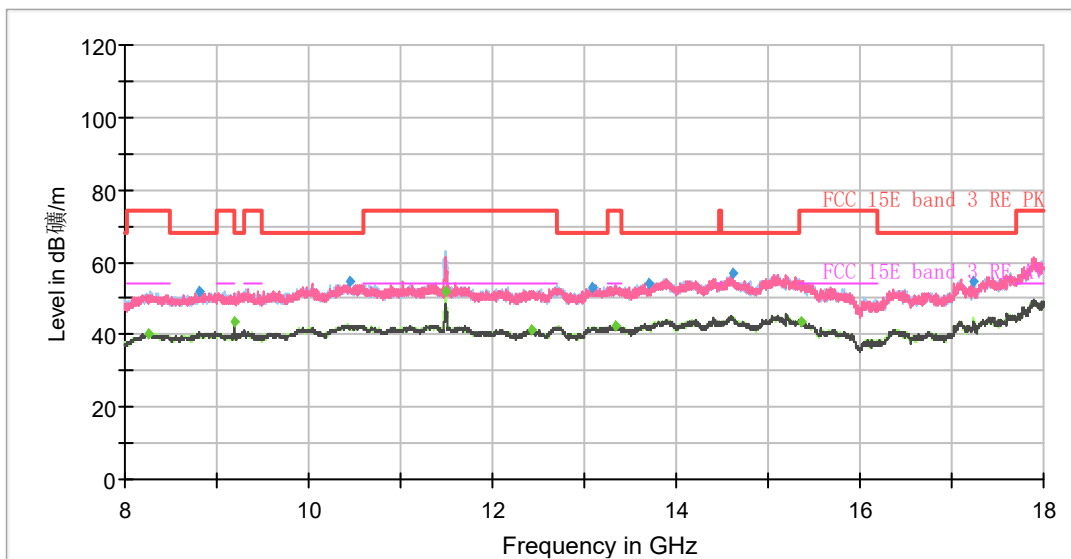


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1221.38	---	33.21	54.00	20.79	500.00	100.0	V	292.00	-1
1245.00	44.02	---	68.20	24.18	500.00	200.0	V	140.00	-1
1539.88	---	37.60	54.00	16.40	500.00	200.0	V	271.00	0
1865.38	48.45	---	68.20	19.75	500.00	100.0	H	163.00	1
2656.38	50.29	---	68.20	17.91	500.00	200.0	V	166.00	4
2762.25	---	39.49	54.00	14.51	500.00	200.0	V	0.00	5
3571.63	52.81	---	68.20	15.39	500.00	200.0	V	123.00	6
3926.88	---	42.88	54.00	11.12	500.00	200.0	V	16.00	7
5440.63	---	50.60	54.00	3.40	500.00	200.0	V	262.00	12
5579.75	64.10	---	68.20	4.10	500.00	200.0	V	235.00	12
5911.38	65.43	---	68.20	2.77	500.00	200.0	V	253.00	12
7433.00	---	52.93	54.00	1.07	500.00	100.0	V	223.00	17


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH157

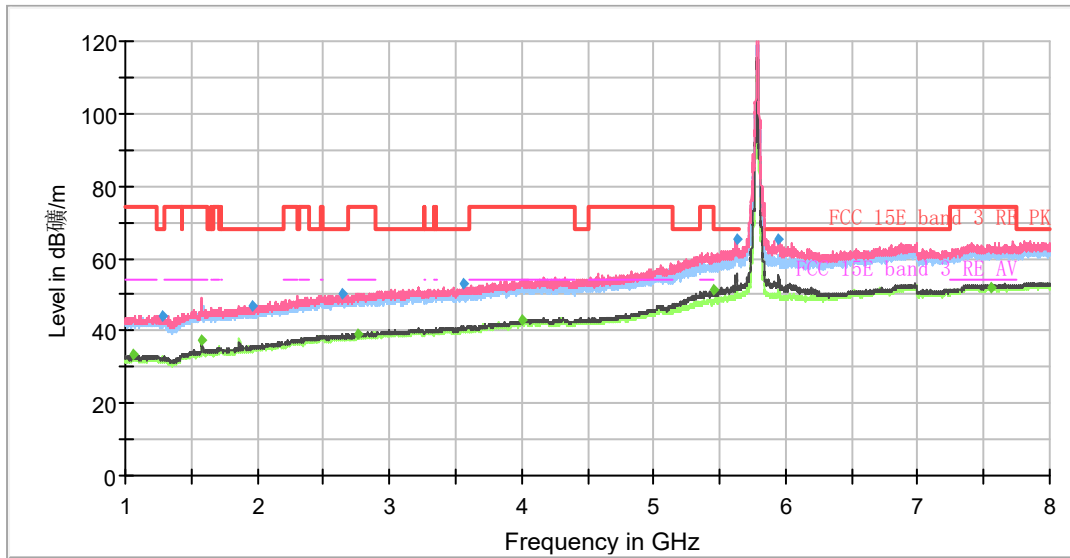

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

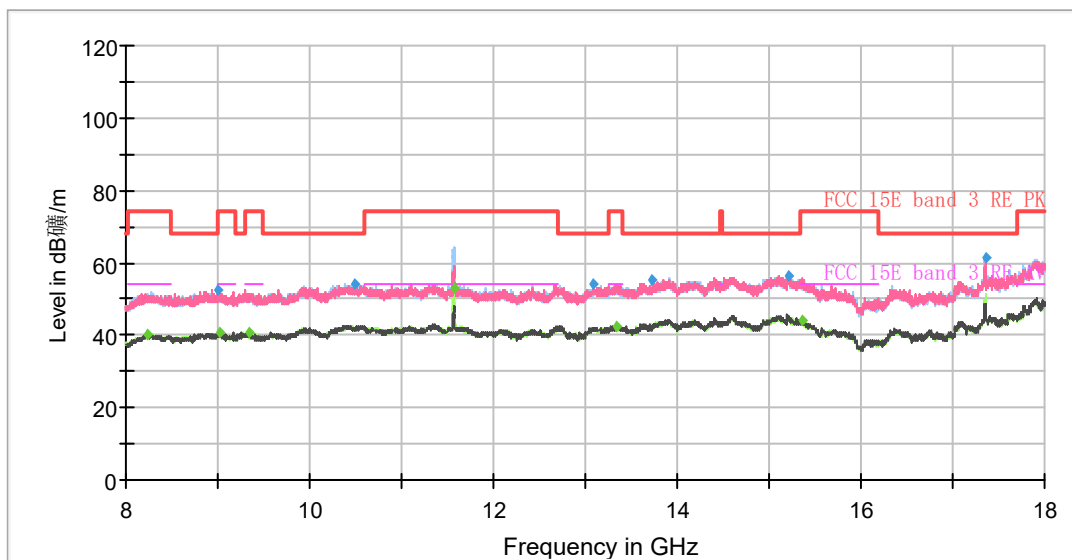


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1056.88	---	33.40	54.00	20.60	500.00	200.0	V	164.00	-2
1287.00	44.23	---	68.20	23.97	500.00	200.0	V	148.00	-1
1581.00	---	37.53	54.00	16.47	500.00	200.0	H	0.00	0
1967.75	46.94	---	68.20	21.26	500.00	100.0	V	348.00	1
2639.75	50.27	---	68.20	17.93	500.00	100.0	V	236.00	4
2763.13	---	39.33	54.00	14.67	500.00	100.0	V	356.00	5
3562.00	52.94	---	68.20	15.26	500.00	200.0	V	113.00	6
3999.50	---	42.89	54.00	11.11	500.00	100.0	V	104.00	7
5453.75	---	51.07	54.00	2.93	500.00	200.0	V	78.00	12
5627.88	65.22	---	68.20	2.98	500.00	200.0	V	272.00	12
5942.88	65.44	---	68.20	2.76	500.00	200.0	V	254.00	11
7554.63	---	51.92	54.00	2.08	500.00	200.0	V	281.00	18
11572.50	---	52.88	54.00	1.12	500.00	200.0	H	104.00	2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11a CH165

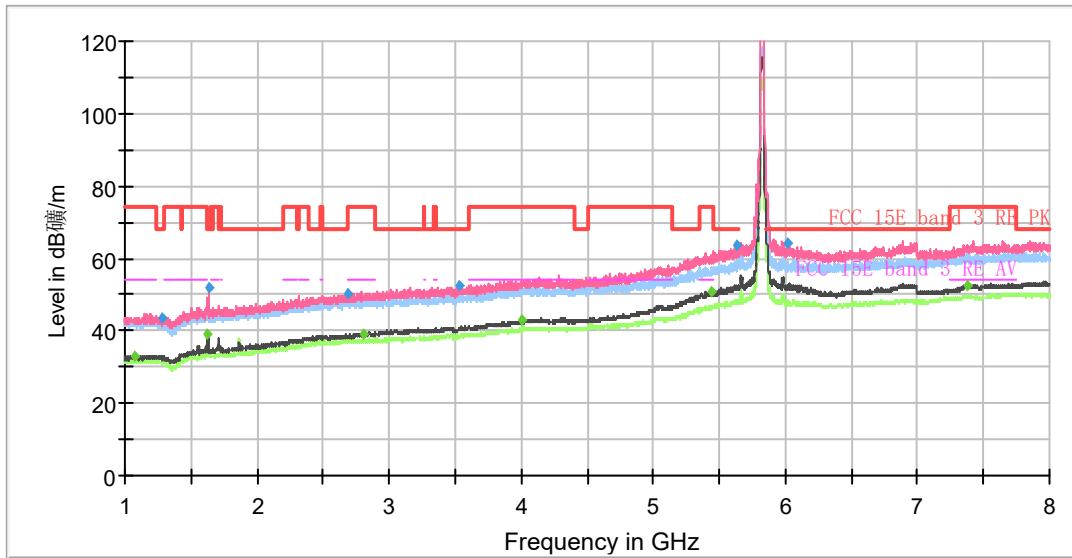

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

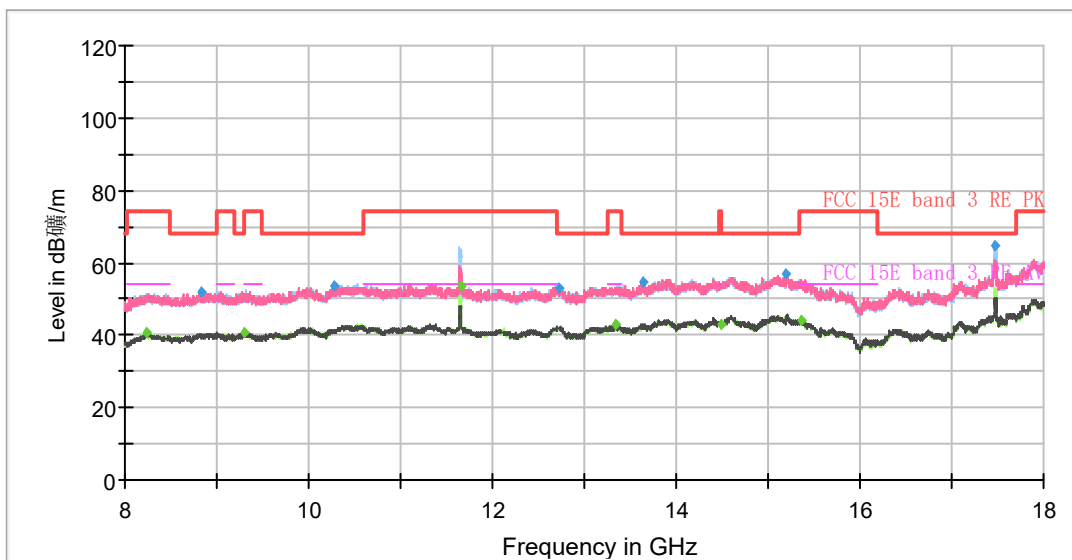


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1075.25	---	33.16	54.00	20.85	500.00	200.0	V	0.00	-2
1284.38	43.81	---	68.20	24.39	500.00	200.0	V	120.00	-1
1620.38	---	38.89	54.00	15.11	500.00	200.0	V	271.00	0
1632.63	51.78	---	68.20	16.42	500.00	200.0	V	182.00	0
2680.00	50.38	---	68.20	17.82	500.00	200.0	V	0.00	4
2806.00	---	39.26	54.00	14.74	500.00	200.0	V	76.00	5
3533.13	52.41	---	68.20	15.79	500.00	200.0	V	164.00	6
3998.63	---	42.83	54.00	11.17	500.00	200.0	V	2.00	7
5445.88	---	50.85	54.00	3.15	500.00	200.0	V	262.00	12
5627.88	63.50	---	68.20	4.70	500.00	200.0	V	271.00	12
6023.38	64.02	---	68.20	4.18	500.00	200.0	V	102.00	12
7378.75	---	52.62	54.00	1.38	500.00	100.0	V	286.00	17
11652.50	---	53.81	54.00	0.19	500.00	200.0	H	102.00	2
17477.50	64.57	---	68.20	3.63	500.00	200.0	H	92.00	7


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH36

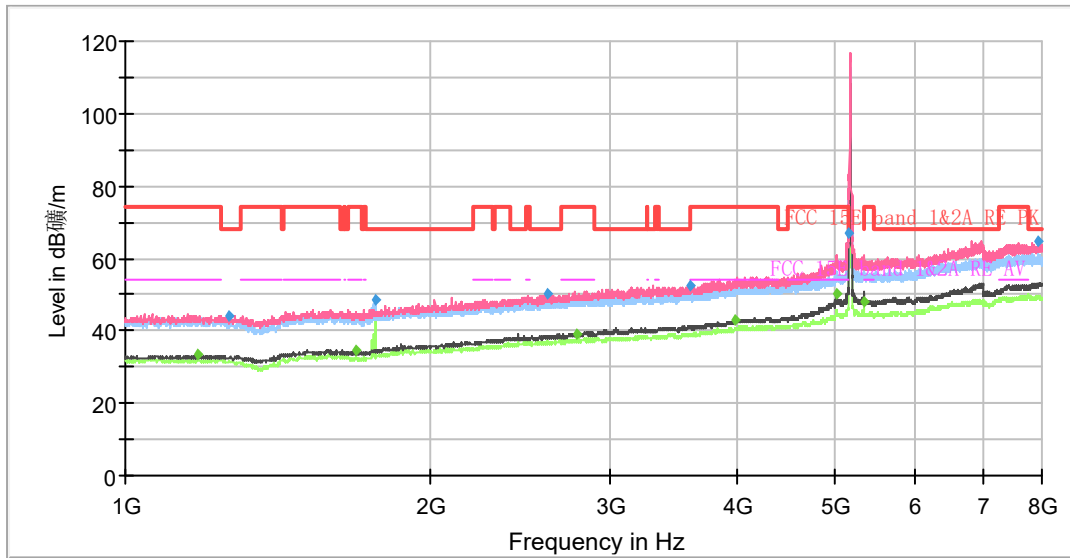

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

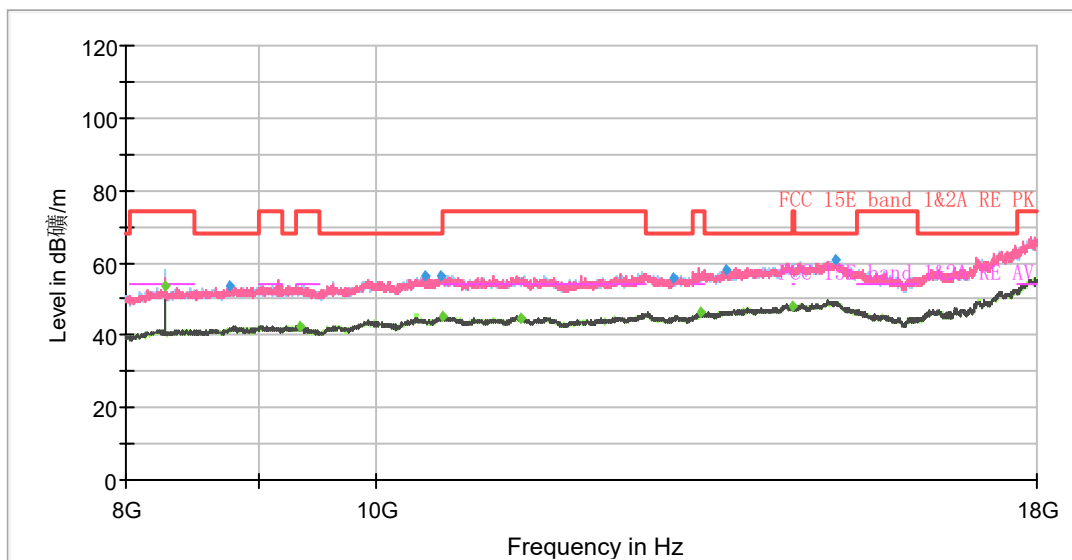


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1178.50	---	33.29	54.00	20.71	500.00	200.0	V	100.00	-2
1265.13	44.12	---	68.20	24.08	500.00	100.0	V	2.00	-1
1684.25	---	34.57	54.00	19.43	500.00	100.0	V	66.00	0
1763.00	48.43	---	68.20	19.77	500.00	200.0	H	286.00	0
2608.25	50.07	---	68.20	18.13	500.00	200.0	V	355.00	4
2784.13	---	39.23	54.00	14.77	500.00	200.0	V	359.00	5
3596.13	52.68	---	68.20	15.52	500.00	100.0	V	39.00	6
3988.13	---	42.84	54.00	11.16	500.00	100.0	V	174.00	7
5026.75	---	50.29	54.00	3.71	500.00	200.0	V	269.00	10
5149.25	66.90	---	74.00	7.10	500.00	100.0	V	52.00	11
5354.00	---	48.11	54.00	5.89	500.00	200.0	V	73.00	12
7946.63	64.69	---	68.20	3.51	500.00	100.0	V	1.00	18
8287.50	---	53.44	54.00	0.56	500.00	200.0	H	53.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

802.11n (HT20) CH40

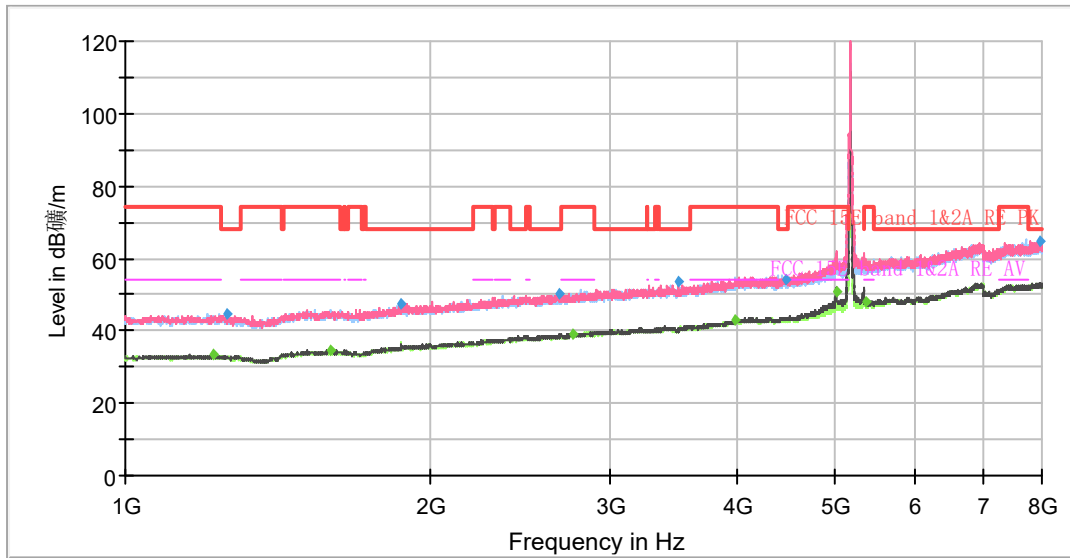

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

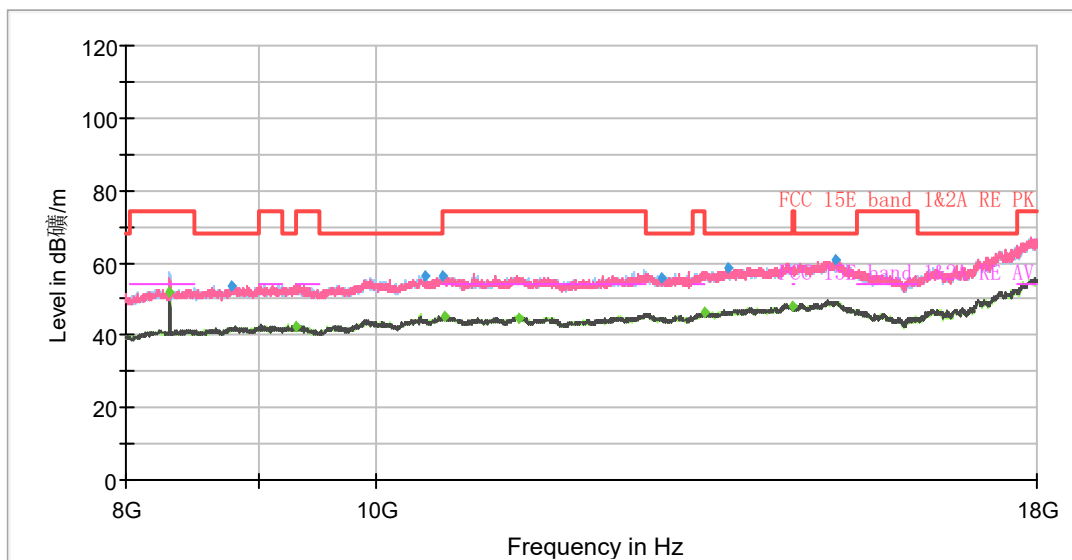


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1219.63	---	33.27	54.00	20.73	500.00	200.0	H	110.00	-1
1260.75	44.57	---	68.20	23.63	500.00	200.0	H	198.00	-1
1592.38	---	34.88	54.00	19.12	500.00	200.0	V	302.00	0
1865.38	47.58	---	68.20	20.62	500.00	100.0	V	122.00	1
2673.00	50.14	---	68.20	18.06	500.00	200.0	V	309.00	4
2765.75	---	39.27	54.00	14.73	500.00	200.0	V	341.00	5
3506.88	53.64	---	68.20	14.56	500.00	200.0	V	222.00	5
3991.63	---	42.92	54.00	11.08	500.00	200.0	H	317.00	7
4472.88	54.40	---	68.20	13.80	500.00	200.0	V	0.00	7
5011.88	---	50.58	54.00	3.42	500.00	200.0	V	282.00	10
5367.13	---	48.01	54.00	5.99	500.00	200.0	V	188.00	12
7978.13	64.71	---	68.20	3.49	500.00	200.0	V	328.00	18
8318.75	---	51.98	54.00	2.02	500.00	200.0	H	57.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11n (HT20) CH48

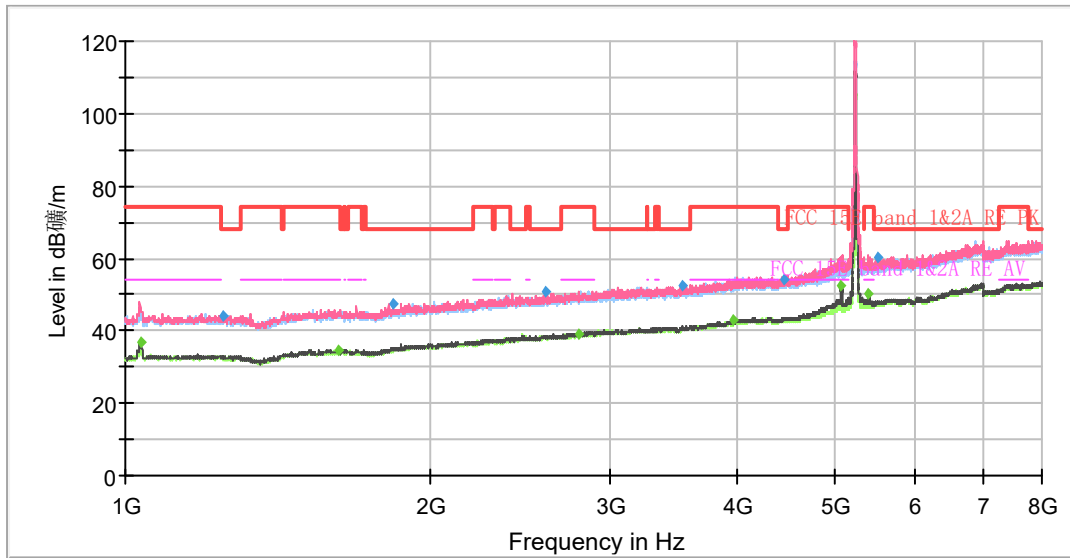

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

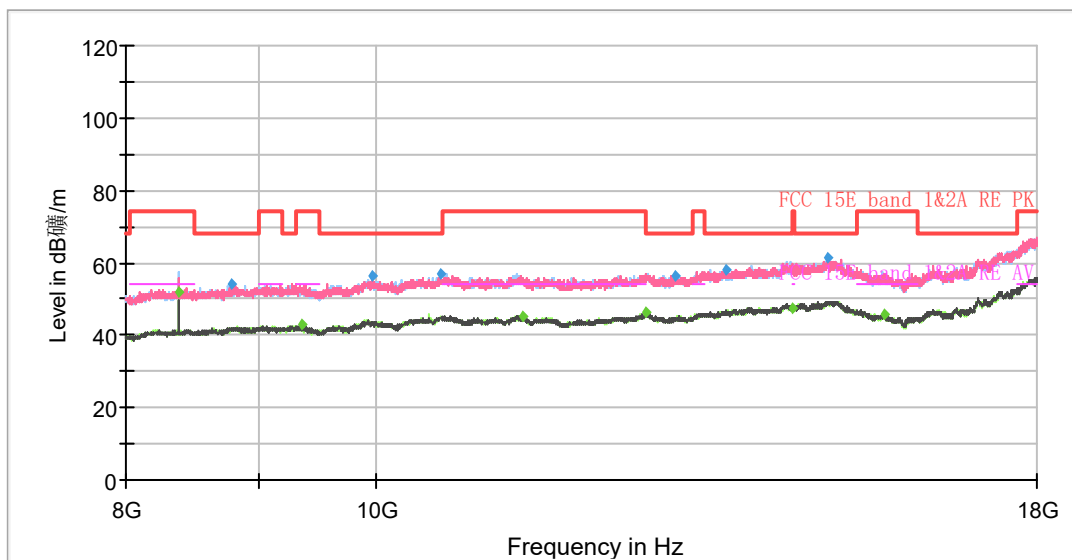


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1034.13	---	36.63	54.00	17.37	500.00	200.0	V	242.00	-2
1249.38	44.13	---	68.20	24.07	500.00	200.0	V	43.00	-1
1619.50	---	34.80	54.00	19.20	500.00	200.0	H	356.00	0
1834.75	47.72	---	68.20	20.48	500.00	200.0	V	4.00	1
2592.50	50.78	---	68.20	17.42	500.00	200.0	V	1.00	4
2803.38	---	39.26	54.00	14.74	500.00	100.0	V	349.00	5
3531.38	52.53	---	68.20	15.67	500.00	200.0	V	29.00	6
3976.75	---	42.70	54.00	11.30	500.00	200.0	V	63.00	7
4457.13	54.33	---	68.20	13.87	500.00	200.0	V	49.00	7
5077.50	---	52.28	54.00	1.72	500.00	200.0	V	263.00	10
5397.75	---	50.34	54.00	3.66	500.00	200.0	V	77.00	12
5523.75	60.32	---	68.20	7.88	500.00	200.0	V	49.00	12
8383.75	---	51.68	54.00	2.32	500.00	200.0	H	58.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH52

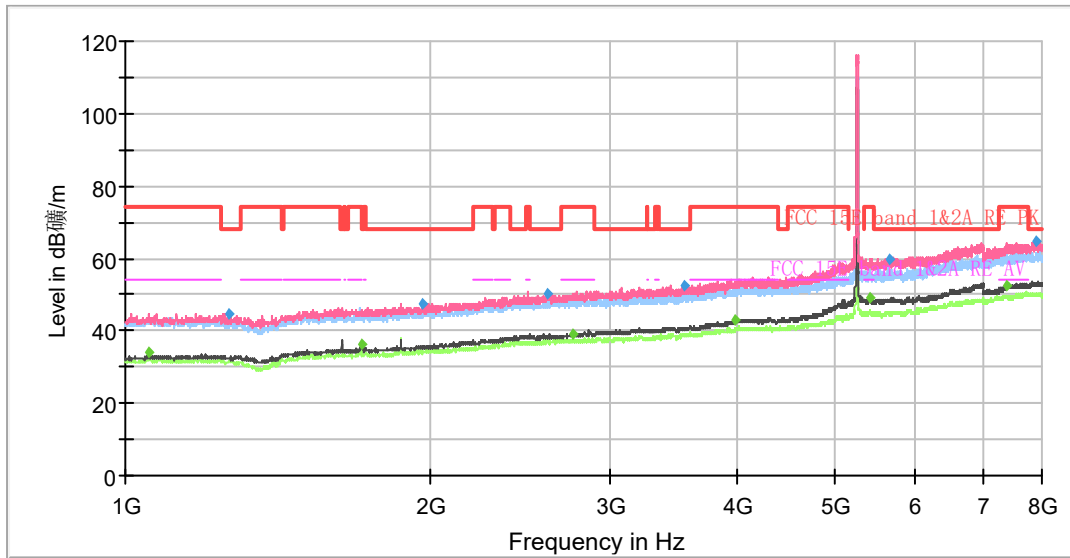

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

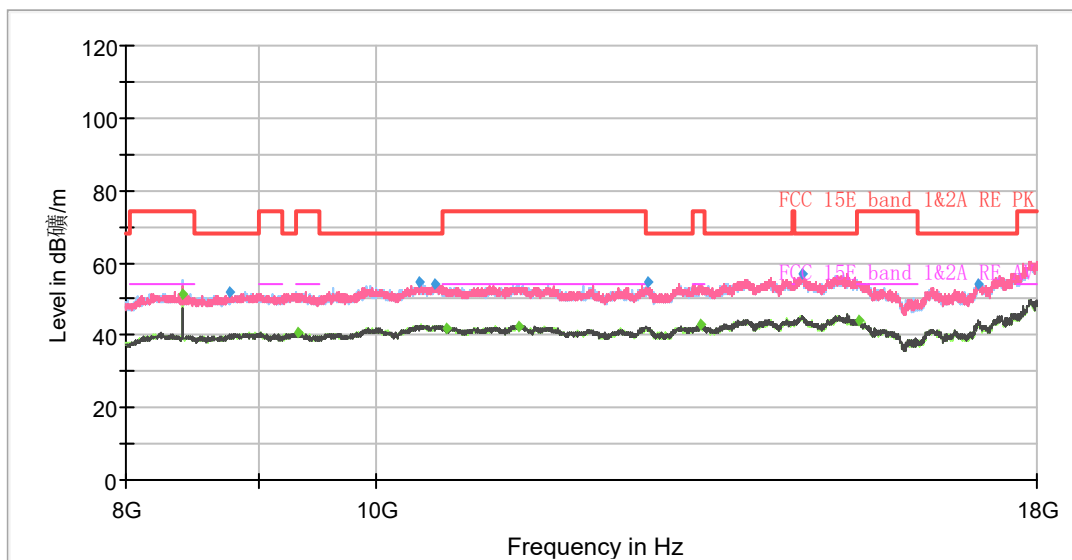


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1053.38	---	33.96	54.00	20.04	500.00	200.0	V	146.00	-2
1264.25	44.73	---	68.20	23.47	500.00	100.0	V	245.00	-1
1707.00	---	36.38	54.00	17.62	500.00	200.0	V	213.00	0
1962.50	47.47	---	68.20	20.73	500.00	100.0	V	353.00	1
2609.13	50.44	---	68.20	17.76	500.00	100.0	V	64.00	4
2764.88	---	39.31	54.00	14.69	500.00	200.0	V	106.00	5
3548.88	52.42	---	68.20	15.78	500.00	200.0	V	125.00	6
3989.88	---	42.77	54.00	11.23	500.00	100.0	V	349.00	7
5413.50	---	49.35	54.00	4.65	500.00	200.0	V	296.00	12
5655.00	59.87	---	68.20	8.33	500.00	100.0	V	204.00	12
7384.00	---	52.74	54.00	1.26	500.00	200.0	V	4.00	17
7888.88	64.56	---	68.20	3.64	500.00	100.0	V	136.00	18
8415.00	---	51.52	54.00	2.48	500.00	200.0	H	56.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH60

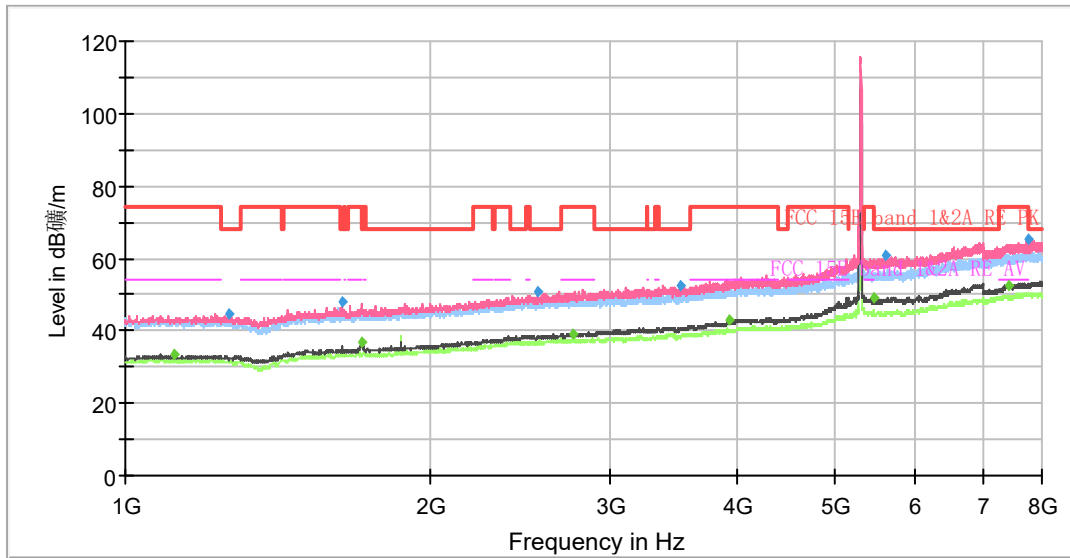

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

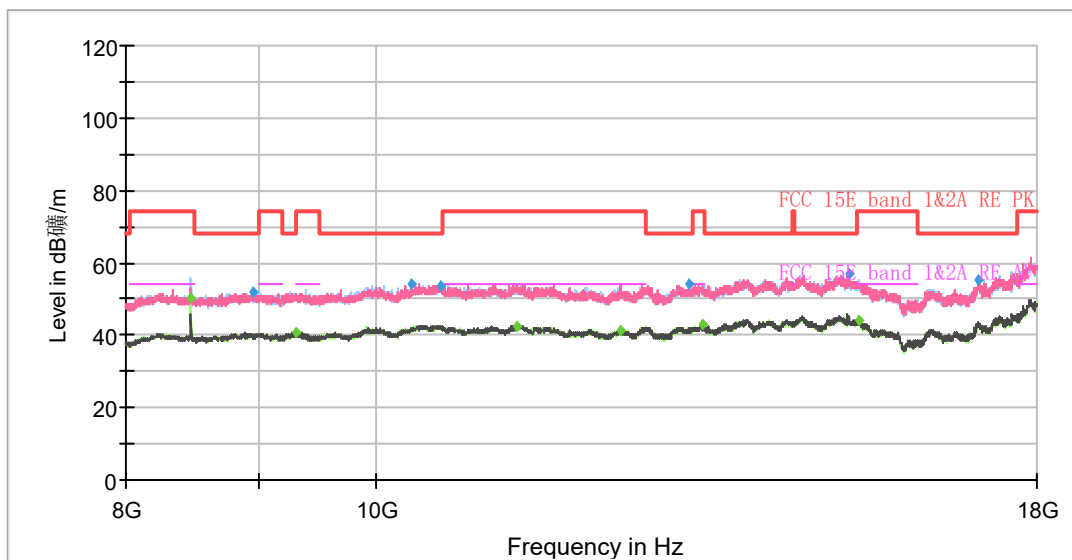


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.13	---	33.41	54.00	20.59	500.00	200.0	V	171.00	-2
1265.13	44.48	---	68.20	23.72	500.00	100.0	V	312.00	-1
1633.50	47.99	---	68.20	20.21	500.00	200.0	V	164.00	0
1707.88	---	36.71	54.00	17.29	500.00	200.0	V	164.00	0
2545.25	50.62	---	68.20	17.58	500.00	100.0	V	130.00	4
2763.13	---	39.27	54.00	14.73	500.00	100.0	V	197.00	5
3520.00	52.48	---	68.20	15.72	500.00	100.0	V	358.00	6
3928.63	---	42.91	54.00	11.09	500.00	100.0	V	324.00	7
5452.00	---	49.06	54.00	4.94	500.00	200.0	V	252.00	12
5620.00	60.76	---	68.20	7.44	500.00	200.0	V	17.00	12
7427.75	---	52.40	54.00	1.60	500.00	200.0	V	225.00	17
7768.13	65.28	---	68.20	2.92	500.00	100.0	V	224.00	18
8478.75	---	50.43	54.00	3.57	500.00	200.0	H	57.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11n (HT20) CH64

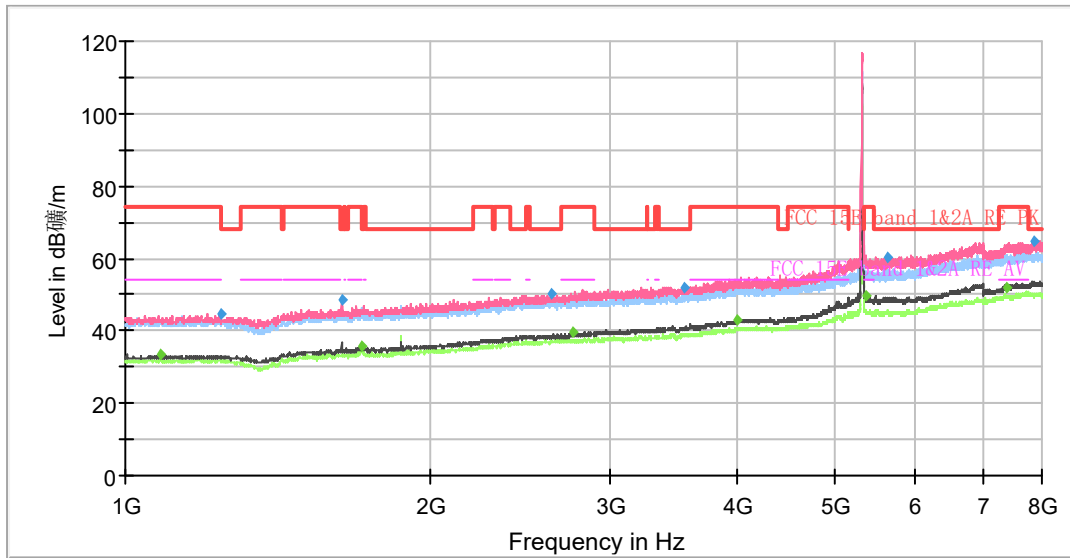

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

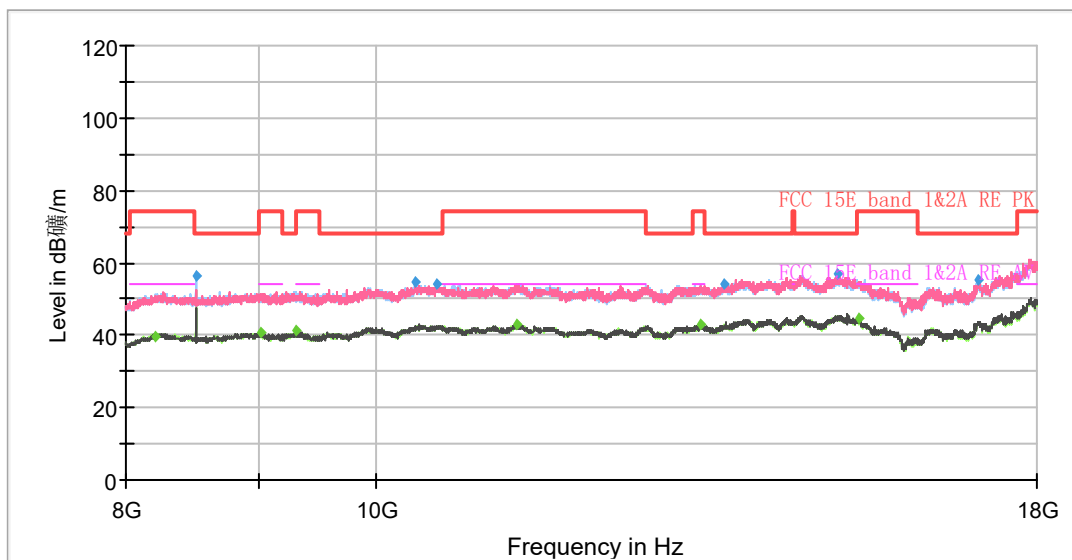


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1081.38	---	33.40	54.00	20.60	500.00	100.0	V	144.00	-2
1242.38	44.85	---	68.20	23.35	500.00	200.0	V	201.00	-1
1632.63	48.33	---	68.20	19.87	500.00	100.0	V	345.00	0
1709.63	---	35.97	54.00	18.03	500.00	100.0	H	148.00	0
2632.75	50.05	---	68.20	18.15	500.00	100.0	V	349.00	4
2757.88	---	39.38	54.00	14.62	500.00	200.0	V	248.00	5
3552.38	52.17	---	68.20	16.03	500.00	200.0	V	103.00	6
3997.75	---	42.82	54.00	11.18	500.00	200.0	V	4.00	7
5356.63	---	49.92	54.00	4.08	500.00	200.0	V	269.00	12
5626.13	60.13	---	68.20	8.07	500.00	100.0	V	259.00	12
7398.00	---	52.11	54.00	1.89	500.00	200.0	V	76.00	17
7852.13	64.75	---	68.20	3.45	500.00	200.0	V	6.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH100

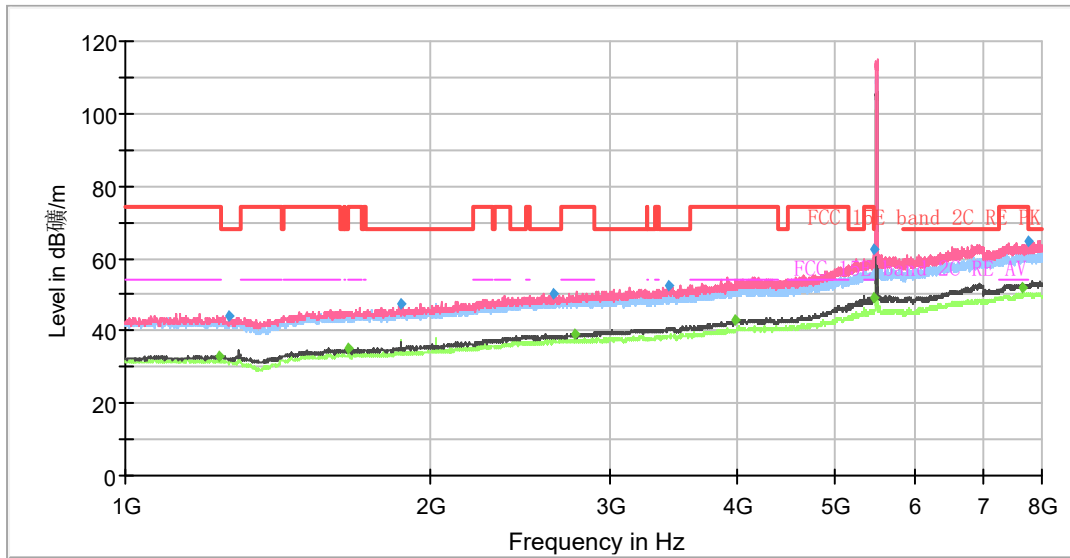

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

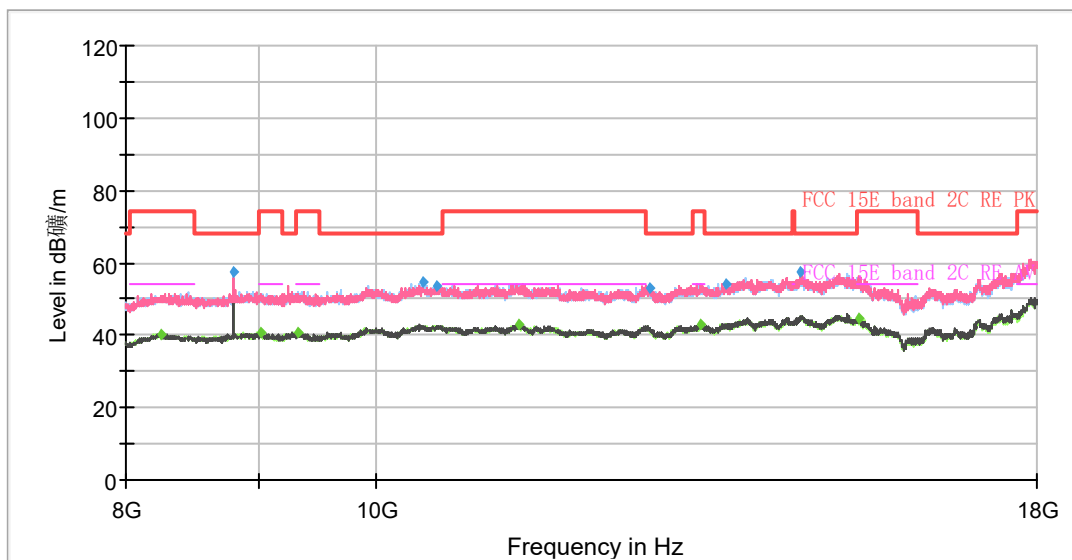


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1238.88	---	33.11	54.00	20.89	500.00	100.0	V	154.00	-1
1263.38	44.04	---	68.20	24.16	500.00	200.0	V	4.00	-1
1660.63	---	35.02	54.00	18.98	500.00	200.0	V	49.00	0
1865.38	47.20	---	68.20	21.00	500.00	200.0	V	18.00	1
2637.13	50.00	---	68.20	18.20	500.00	200.0	V	0.00	4
2774.50	---	39.28	54.00	14.72	500.00	200.0	V	181.00	5
3429.88	52.69	---	68.20	15.51	500.00	200.0	V	194.00	6
3983.75	---	42.97	54.00	11.04	500.00	100.0	V	344.00	7
5457.25	---	49.16	54.00	4.84	500.00	200.0	V	84.00	12
5469.50	62.67	---	68.20	5.53	500.00	200.0	V	84.00	12
7651.75	---	51.94	54.00	2.06	500.00	200.0	V	3.00	18
7767.25	64.73	---	68.20	3.47	500.00	200.0	V	3.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH120

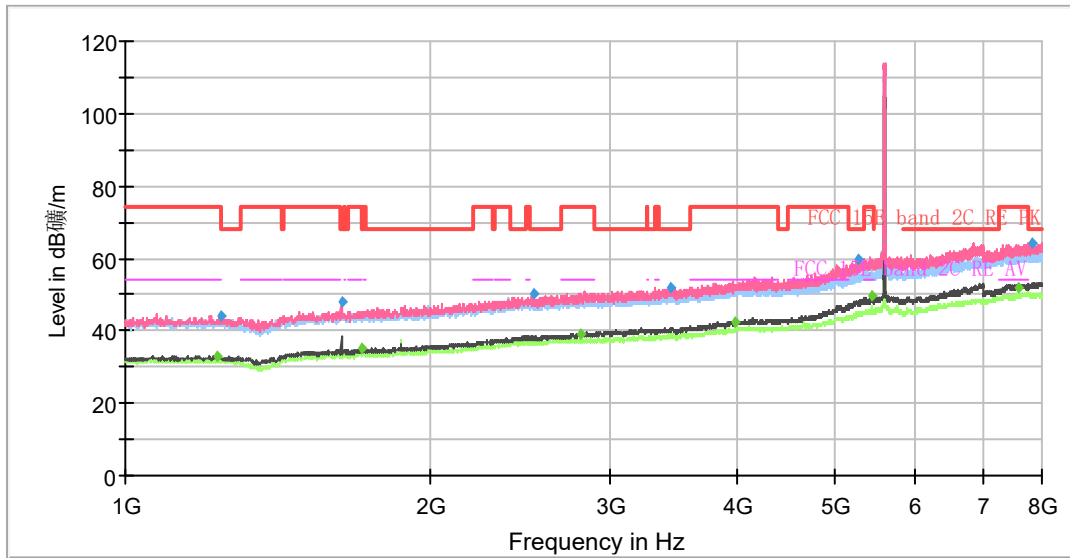

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

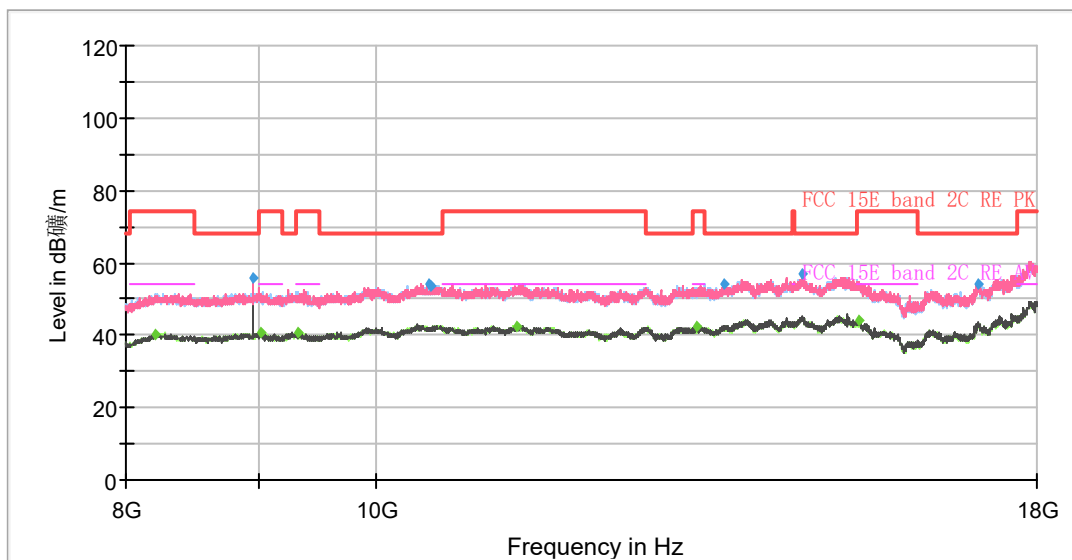


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1233.63	---	33.17	54.00	20.83	500.00	200.0	V	79.00	-1
1245.00	44.25	---	68.20	23.95	500.00	200.0	V	91.00	-1
1632.63	48.26	---	68.20	19.94	500.00	100.0	V	0.00	0
1707.00	---	35.27	54.00	18.73	500.00	200.0	H	143.00	0
2528.63	50.43	---	68.20	17.77	500.00	200.0	V	0.00	4
2813.00	---	39.19	54.00	14.81	500.00	200.0	V	117.00	5
3450.00	52.13	---	68.20	16.07	500.00	200.0	V	0.00	6
3996.00	---	42.66	54.00	11.34	500.00	200.0	V	5.00	7
5267.38	59.67	---	68.20	8.53	500.00	200.0	V	0.00	11
5435.38	---	49.41	54.00	4.59	500.00	200.0	V	181.00	12
7586.13	---	51.73	54.00	2.27	500.00	200.0	V	156.00	18
7817.13	64.15	---	68.20	4.05	500.00	200.0	V	1.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH140

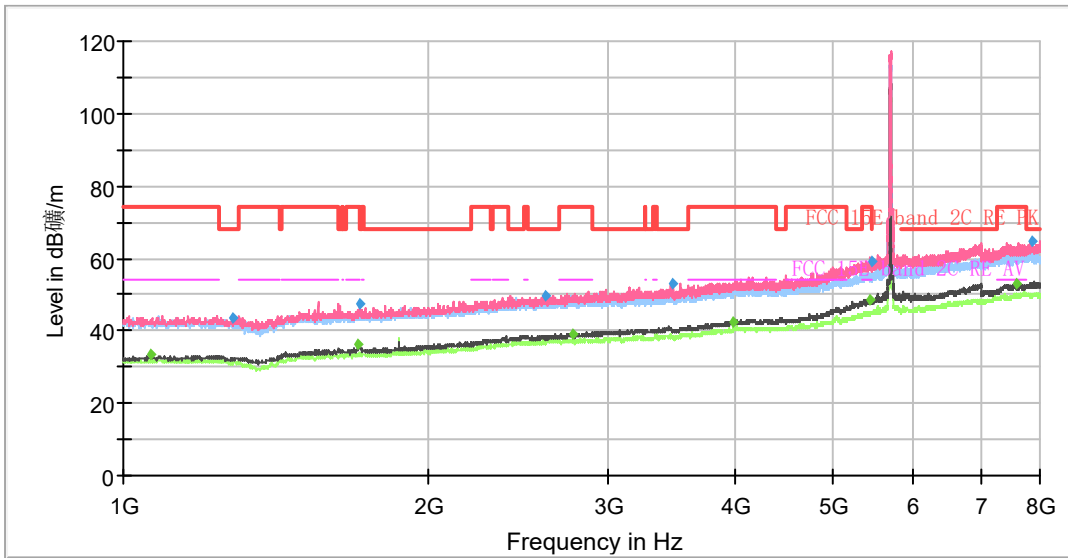

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

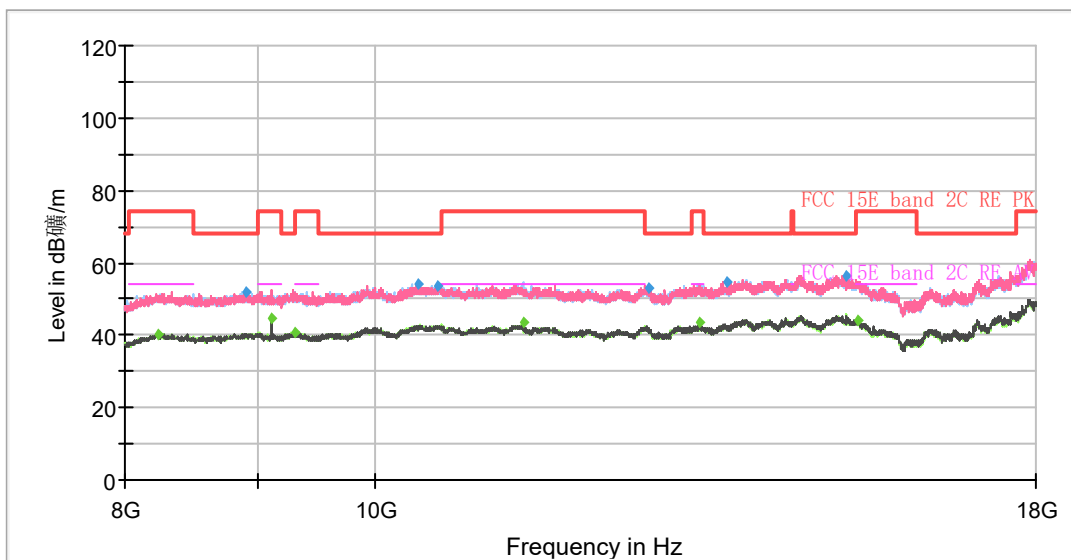


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.13	---	33.31	54.00	20.69	500.00	200.0	V	1.00	-2
1279.13	43.56	---	68.20	24.64	500.00	200.0	V	2.00	-1
1704.38	---	36.22	54.00	17.78	500.00	200.0	V	195.00	0
1710.50	47.33	---	68.20	20.87	500.00	200.0	V	195.00	0
2603.88	49.90	---	68.20	18.30	500.00	200.0	V	1.00	4
2771.00	---	39.06	54.00	14.94	500.00	200.0	V	3.00	5
3483.25	53.00	---	68.20	15.20	500.00	200.0	V	98.00	6
3994.25	---	42.67	54.00	11.33	500.00	200.0	V	182.00	7
5444.13	---	48.47	54.00	5.53	500.00	200.0	V	247.00	12
5469.50	59.34	---	68.20	8.86	500.00	200.0	V	208.00	12
7576.50	---	52.92	54.00	1.08	500.00	200.0	V	135.00	18
7865.25	64.82	---	68.20	3.38	500.00	200.0	V	9.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH144

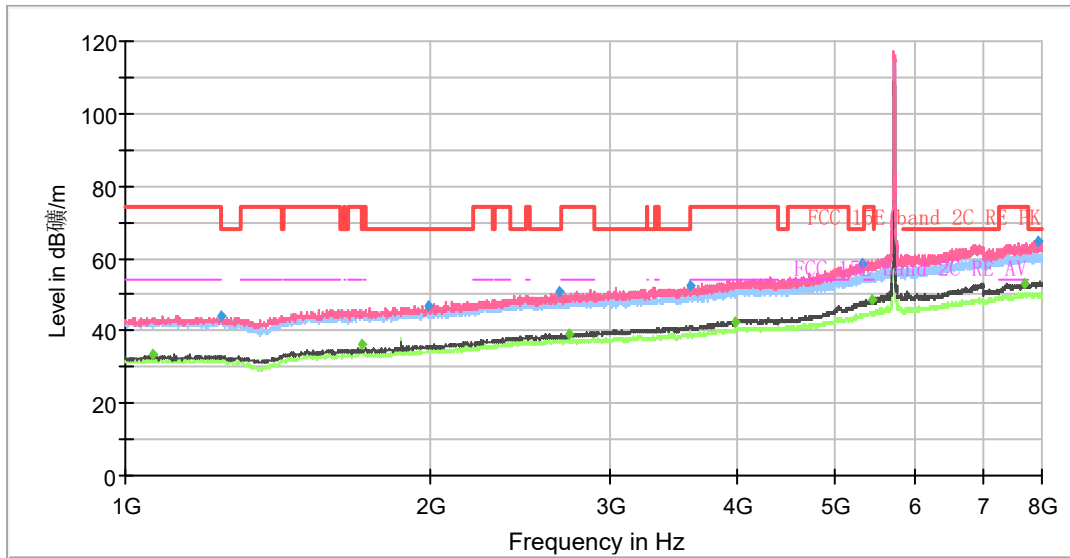

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

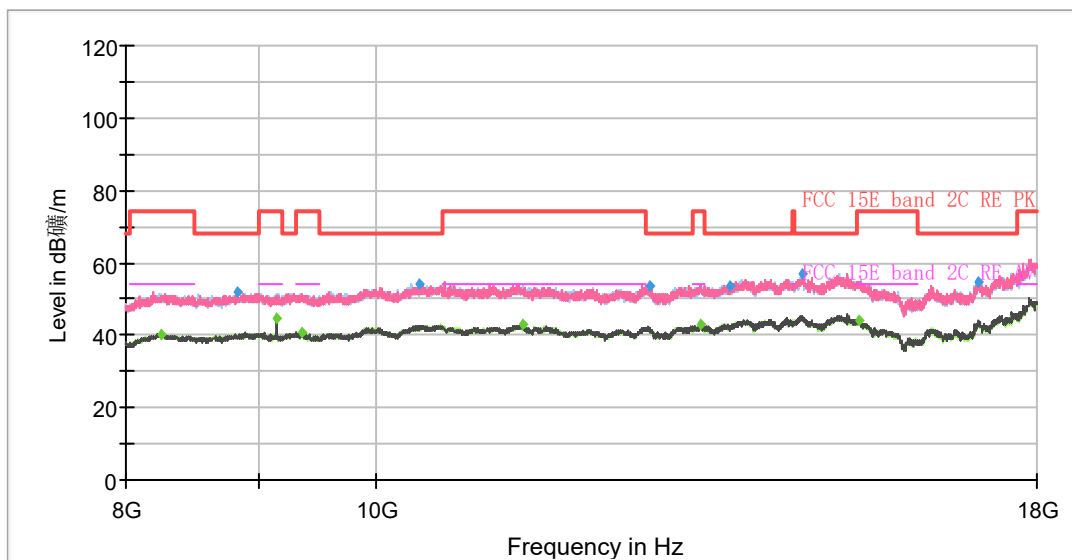


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.13	---	33.30	54.00	20.70	500.00	100.0	V	309.00	-2
1244.13	44.37	---	68.20	23.83	500.00	200.0	V	69.00	-1
1709.63	---	36.29	54.00	17.71	500.00	200.0	H	137.00	0
1988.75	46.91	---	68.20	21.29	500.00	200.0	V	2.00	1
2671.25	50.79	---	68.20	17.41	500.00	100.0	V	357.00	4
2730.75	---	39.23	54.00	14.77	500.00	100.0	V	242.00	4
3596.13	52.38	---	68.20	15.82	500.00	100.0	V	355.00	6
3995.13	---	42.64	54.00	11.36	500.00	200.0	V	69.00	7
5321.63	58.82	---	68.20	9.38	500.00	200.0	V	193.00	12
5445.00	---	48.67	54.00	5.33	500.00	200.0	V	259.00	12
7682.38	---	51.87	54.00	2.13	500.00	200.0	V	36.00	18
7925.63	64.73	---	68.20	3.47	500.00	100.0	V	346.00	18


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH149

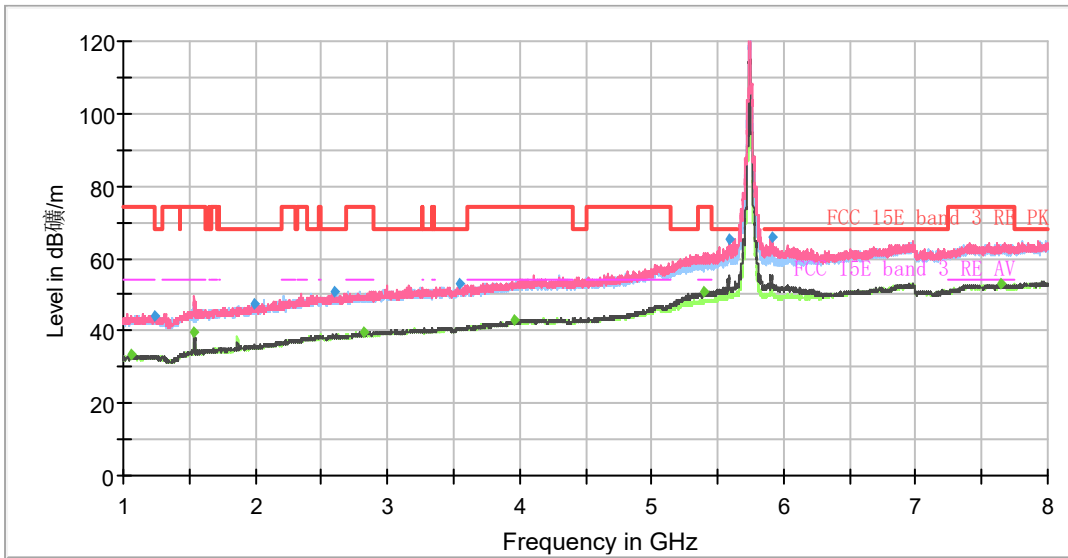

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

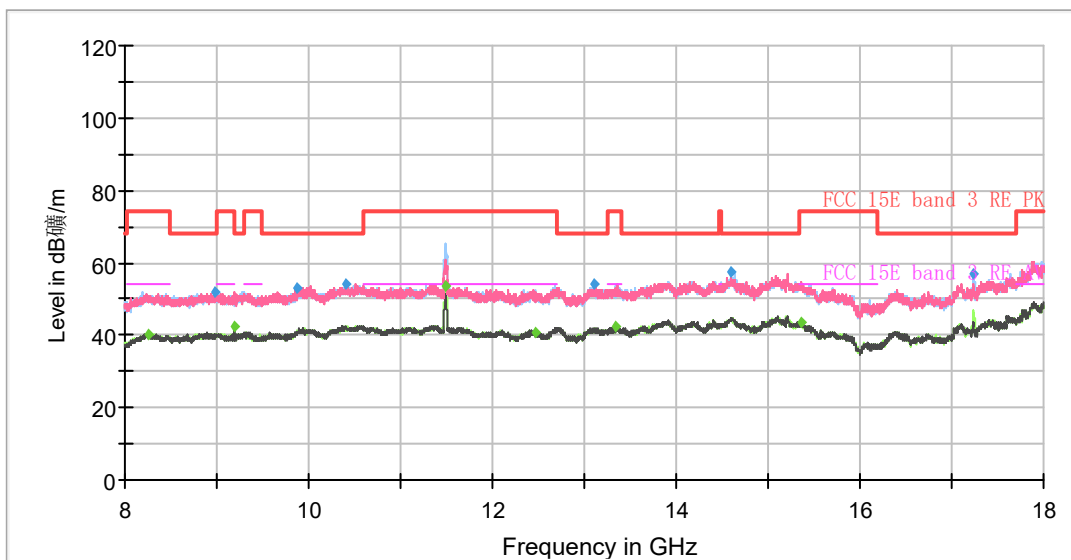


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.13	---	33.23	54.00	20.77	500.00	100.0	V	186.00	-2
1241.50	44.12	---	68.20	24.08	500.00	200.0	V	19.00	-1
1539.00	---	39.53	54.00	14.47	500.00	200.0	V	262.00	0
1991.38	47.37	---	68.20	20.83	500.00	100.0	V	344.00	1
2600.38	50.78	---	68.20	17.42	500.00	200.0	H	294.00	4
2825.25	---	39.71	54.00	14.29	500.00	200.0	H	226.00	5
3549.75	53.18	---	68.20	15.02	500.00	200.0	H	341.00	6
3965.38	---	42.79	54.00	11.21	500.00	100.0	V	211.00	7
5400.38	---	50.64	54.00	3.37	500.00	200.0	V	262.00	12
5582.38	65.43	---	68.20	2.77	500.00	200.0	V	271.00	12
5913.13	65.62	---	68.20	2.58	500.00	200.0	V	299.00	12
7650.88	---	51.79	54.00	2.21	500.00	200.0	H	356.00	18
11491.25	---	53.44	54.00	0.56	500.00	200.0	H	37.00	2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH157

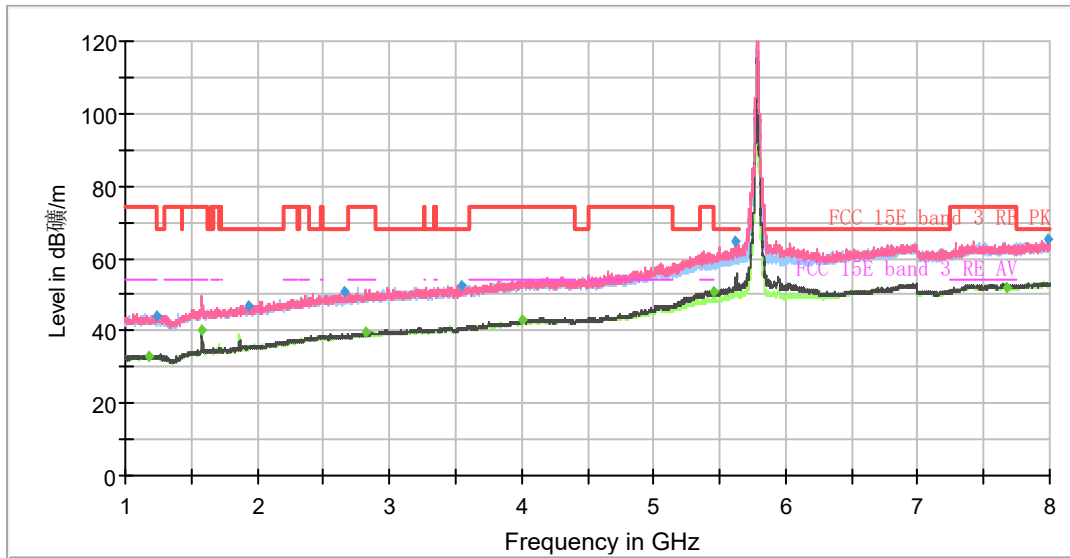

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

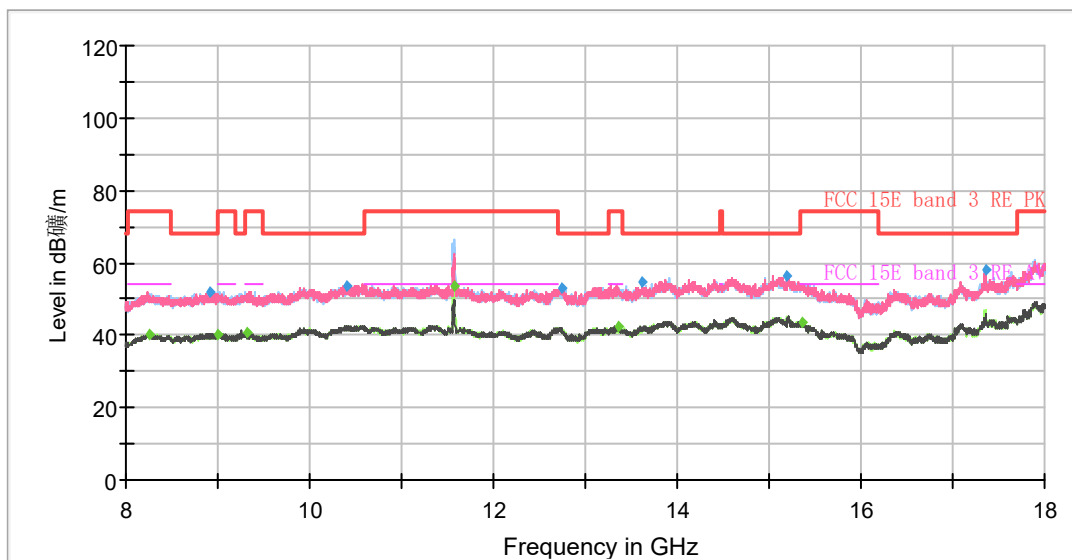


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1177.63	---	33.19	54.00	20.81	500.00	200.0	H	353.00	-2
1241.50	44.16	---	68.20	24.04	500.00	100.0	V	359.00	-1
1578.38	---	40.23	54.00	13.77	500.00	200.0	V	262.00	0
1927.50	47.14	---	68.20	21.06	500.00	200.0	V	65.00	1
2663.38	50.55	---	68.20	17.65	500.00	200.0	H	358.00	4
2813.00	---	39.41	54.00	14.59	500.00	100.0	V	0.00	5
3538.38	52.37	---	68.20	15.83	500.00	200.0	H	350.00	6
3999.50	---	42.78	54.00	11.22	500.00	200.0	V	198.00	7
5459.88	---	50.93	54.00	3.07	500.00	200.0	V	270.00	12
5620.88	64.76	---	68.20	3.44	500.00	200.0	V	270.00	12
7674.50	---	51.92	54.00	2.08	500.00	100.0	V	349.00	18
7985.13	65.16	---	68.20	3.04	500.00	200.0	H	311.00	18
11570.00	---	53.72	54.00	0.28	500.00	200.0	H	112.00	2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

802.11n (HT20) CH165

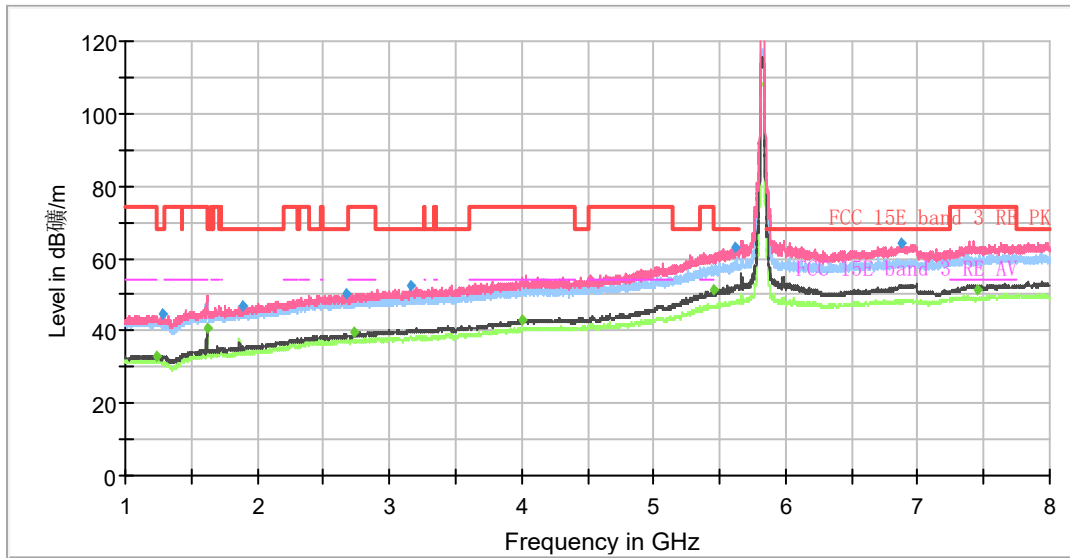

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

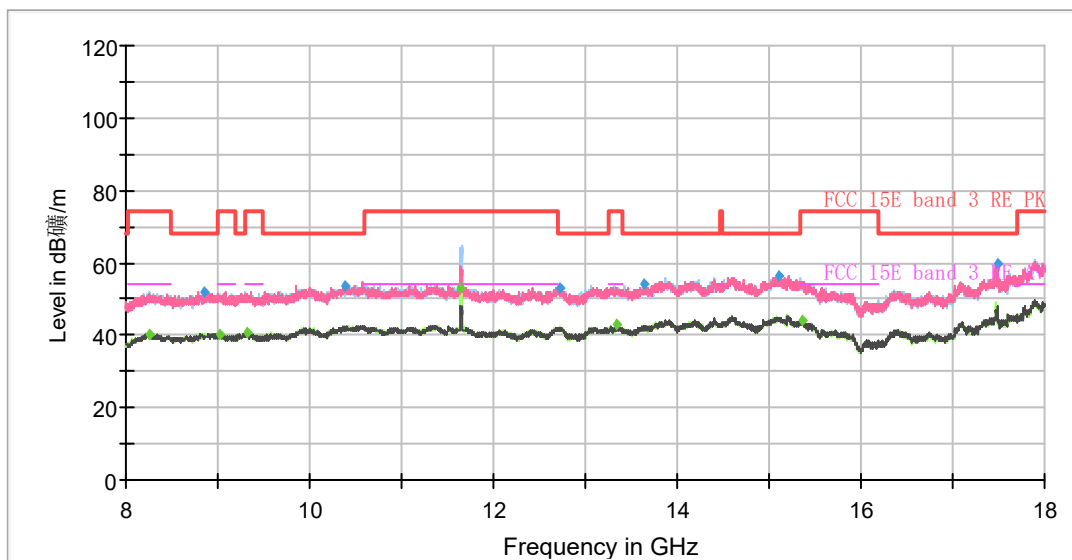


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1231.00	---	33.13	54.00	20.87	500.00	200.0	V	0.00	-1
1282.63	44.41	---	68.20	23.79	500.00	200.0	V	1.00	-1
1618.63	---	40.64	54.00	13.36	500.00	200.0	V	270.00	0
1885.50	47.07	---	68.20	21.13	500.00	100.0	V	238.00	1
2672.13	50.15	---	68.20	18.05	500.00	200.0	H	359.00	4
2730.75	---	39.46	54.00	14.54	500.00	200.0	V	39.00	4
3158.63	52.50	---	68.20	15.70	500.00	100.0	V	89.00	6
3997.75	---	43.04	54.00	10.96	500.00	200.0	V	154.00	7
5447.63	---	51.12	54.00	2.88	500.00	200.0	V	74.00	12
5613.00	63.34	---	68.20	4.86	500.00	100.0	V	70.00	12
6877.38	64.21	---	68.20	3.99	500.00	200.0	V	66.00	14
7448.75	---	51.40	54.00	2.60	500.00	200.0	V	118.00	17
11648.75	---	53.20	54.00	0.80	500.00	200.0	H	77.00	2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11n (HT40) CH38

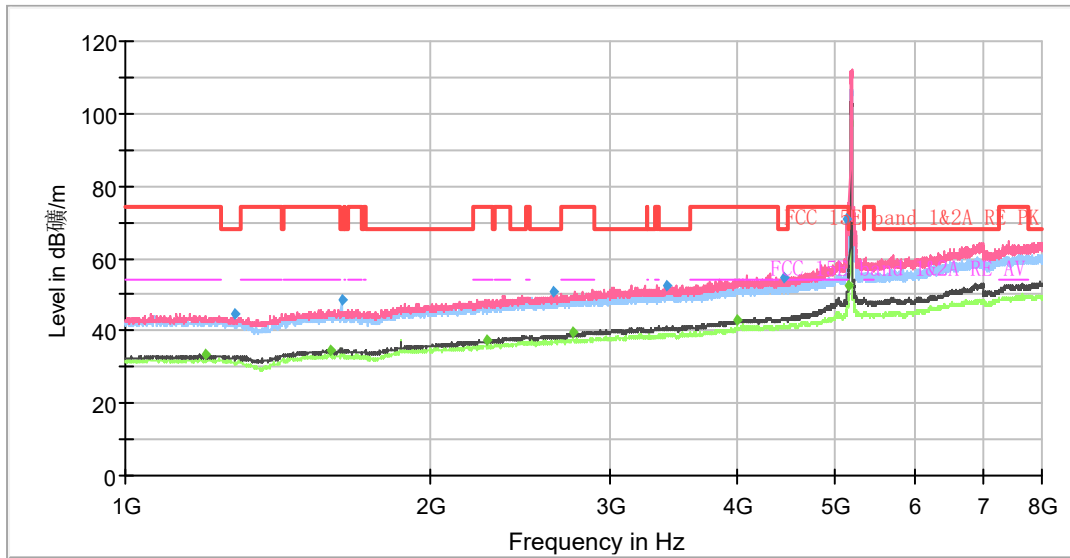

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

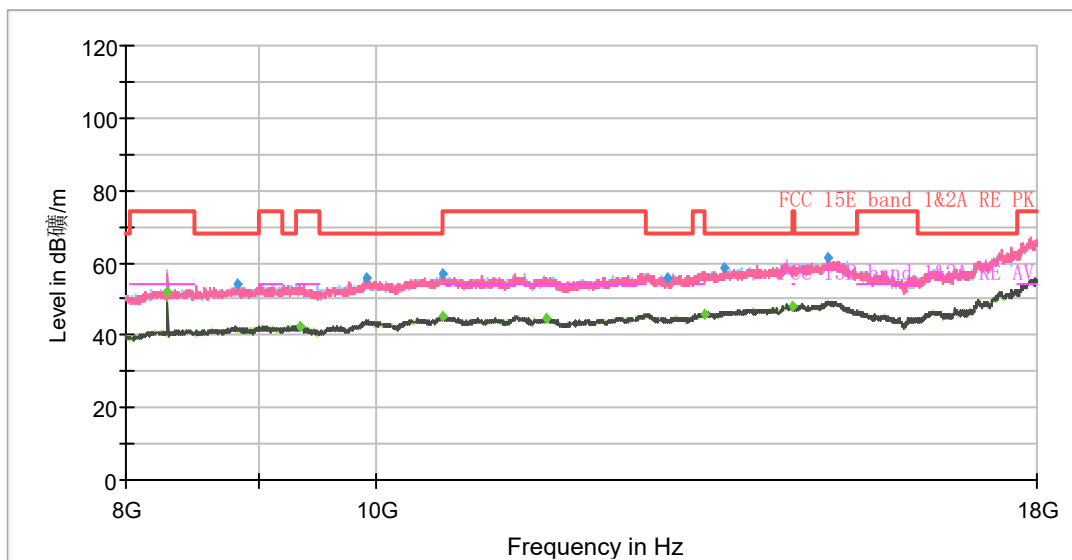


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.88	---	33.24	54.00	20.76	500.00	100.0	V	211.00	-2
1282.63	44.48	---	68.20	23.72	500.00	200.0	V	100.00	-1
1593.25	---	34.73	54.00	19.27	500.00	100.0	V	338.00	0
1632.63	48.81	---	68.20	19.39	500.00	200.0	H	86.00	0
2268.75	---	37.22	54.00	16.78	500.00	200.0	V	140.00	3
2639.75	50.87	---	68.20	17.33	500.00	200.0	V	179.00	4
2764.88	---	39.39	54.00	14.61	500.00	100.0	V	110.00	5
3408.88	52.62	---	68.20	15.58	500.00	100.0	V	158.00	6
3998.63	---	42.99	54.00	11.01	500.00	100.0	V	305.00	7
4450.13	54.96	---	68.20	13.24	500.00	100.0	V	232.00	7
5145.75	70.82	---	74.00	3.18	500.00	200.0	V	53.00	11
5149.25	---	52.70	54.00	1.30	500.00	200.0	V	32.00	11
8303.75	---	52.03	54.00	1.97	500.00	200.0	H	59.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

802.11n (HT40) CH46

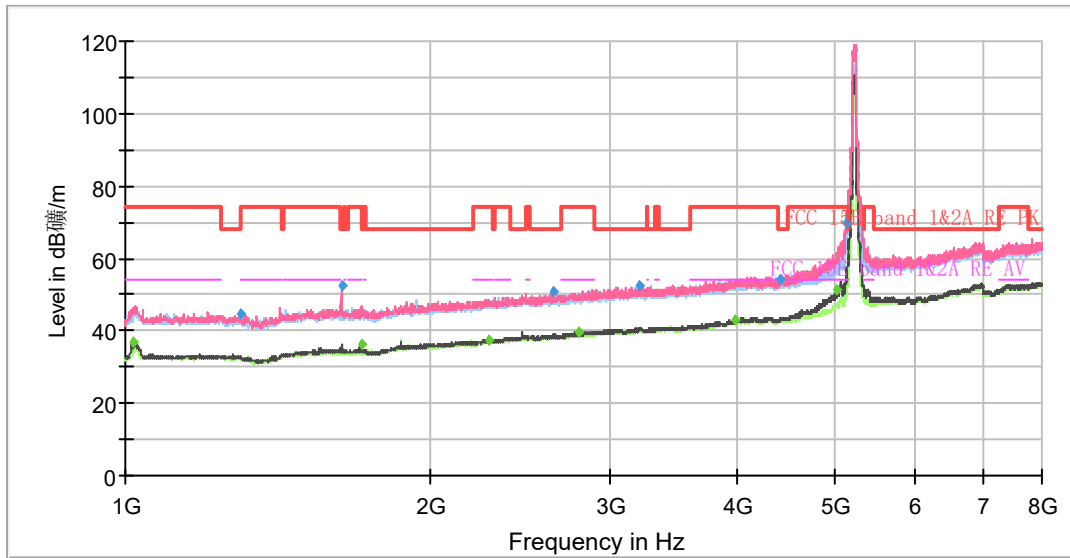

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

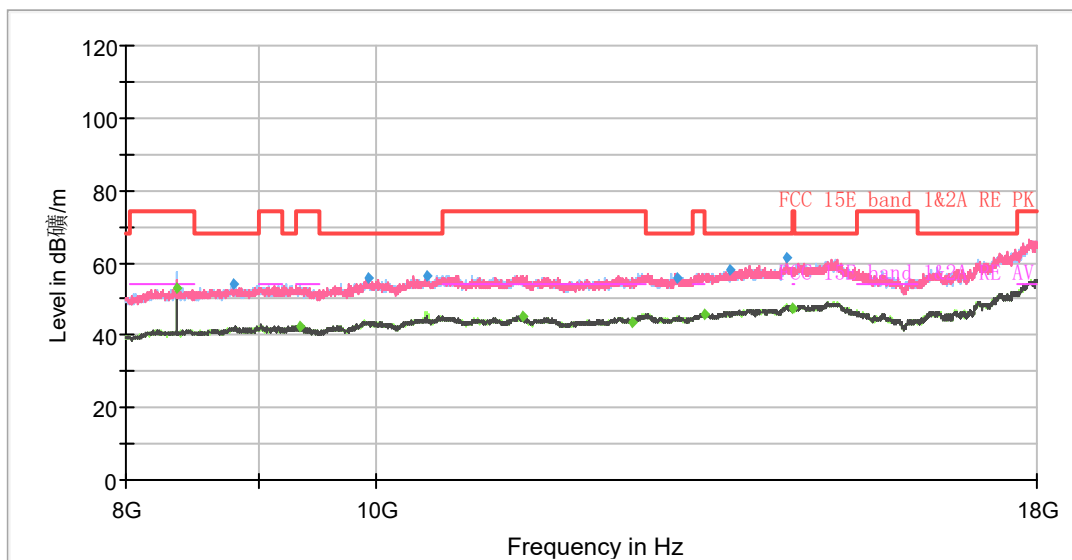


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1017.50	---	36.79	54.00	17.21	500.00	200.0	V	243.00	-2
1298.38	44.65	---	68.20	23.55	500.00	200.0	V	42.00	-1
1632.63	52.37	---	68.20	15.83	500.00	200.0	V	163.00	0
1709.63	---	36.46	54.00	17.54	500.00	200.0	V	68.00	0
2279.25	---	37.25	54.00	16.75	500.00	200.0	H	0.00	3
2640.63	50.63	---	68.20	17.57	500.00	100.0	V	208.00	4
2794.63	---	39.80	54.00	14.20	500.00	100.0	V	346.00	5
3207.63	52.47	---	68.20	15.73	500.00	100.0	V	359.00	6
3996.88	---	43.15	54.00	10.85	500.00	200.0	V	143.00	7
4425.63	53.96	---	68.20	14.24	500.00	200.0	H	182.00	7
5023.25	---	51.49	54.00	2.51	500.00	200.0	V	270.00	10
5124.75	69.86	---	74.00	4.14	500.00	200.0	V	264.00	10
8367.50	---	53.02	54.00	0.98	500.00	200.0	H	60.00	0


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11n (HT40) CH54

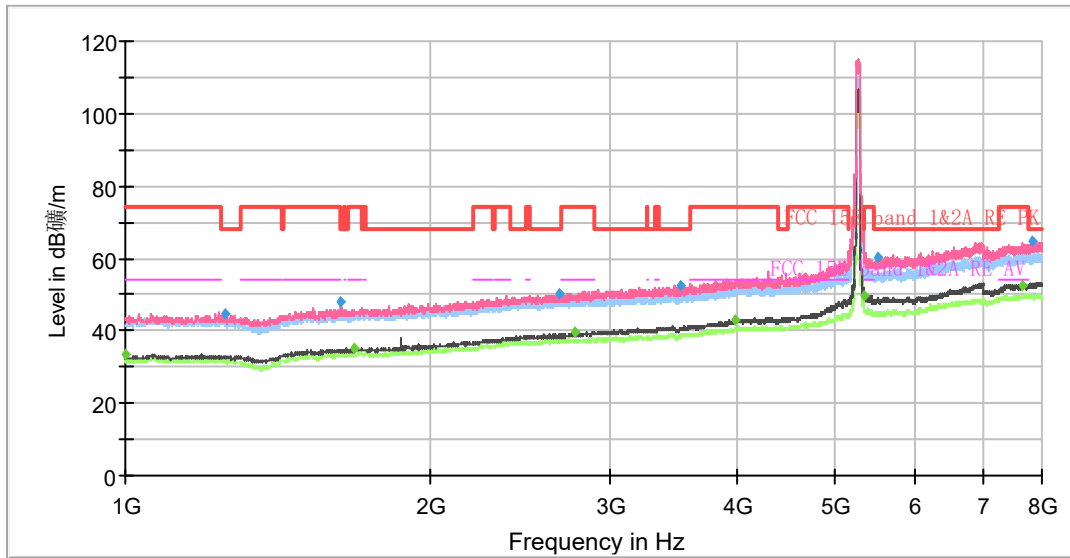

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

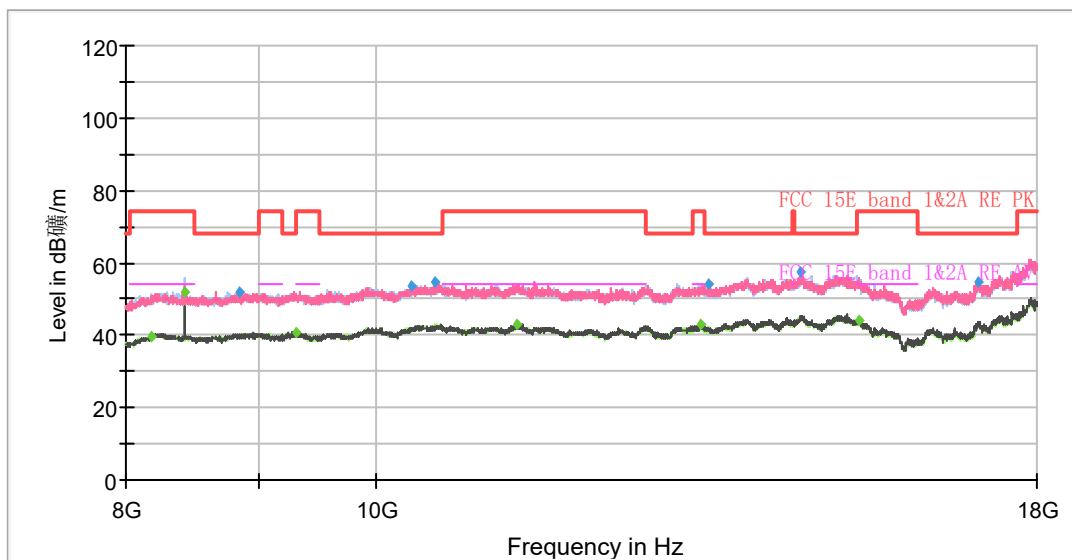


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.00	---	33.44	54.00	20.56	500.00	100.0	V	178.00	-2
1251.13	44.44	---	68.20	23.76	500.00	100.0	V	357.00	-1
1631.75	48.20	---	68.20	20.00	500.00	100.0	V	0.00	0
1682.50	---	35.06	54.00	18.94	500.00	100.0	V	300.00	0
2670.38	50.22	---	68.20	17.98	500.00	100.0	V	253.00	4
2771.88	---	39.50	54.00	14.50	500.00	100.0	V	353.00	5
3526.13	52.50	---	68.20	15.70	500.00	100.0	V	198.00	6
3988.13	---	42.77	54.00	11.23	500.00	200.0	V	0.00	7
5355.75	---	49.75	54.00	4.25	500.00	200.0	V	273.00	12
5505.38	60.20	---	68.20	8.00	500.00	200.0	V	54.00	12
7653.50	---	51.72	54.00	2.28	500.00	200.0	V	183.00	18
7826.75	64.55	---	68.20	3.65	500.00	200.0	V	0.00	18
8431.25	---	51.95	54.00	2.05	500.00	200.0	H	60.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH62

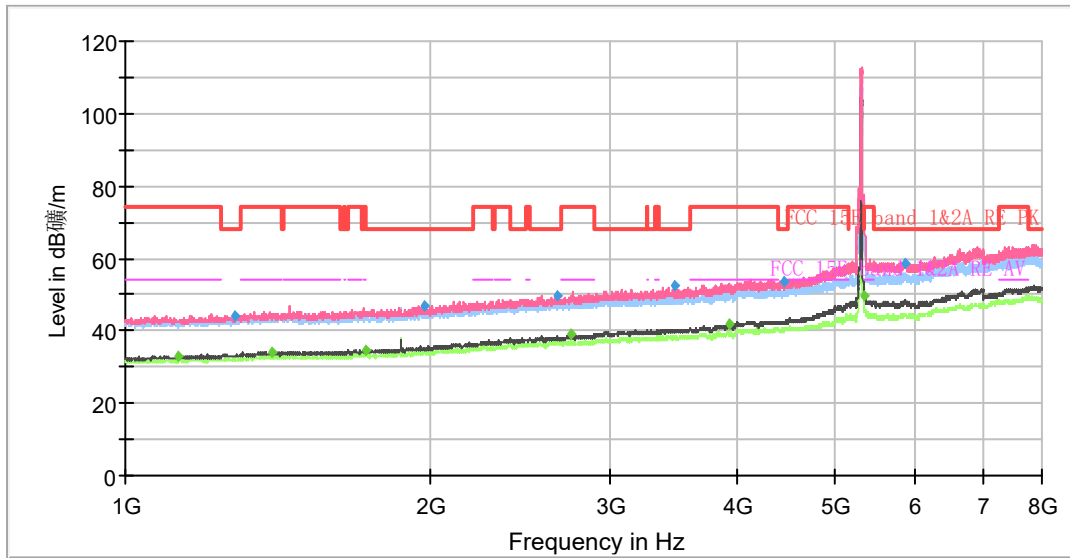

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

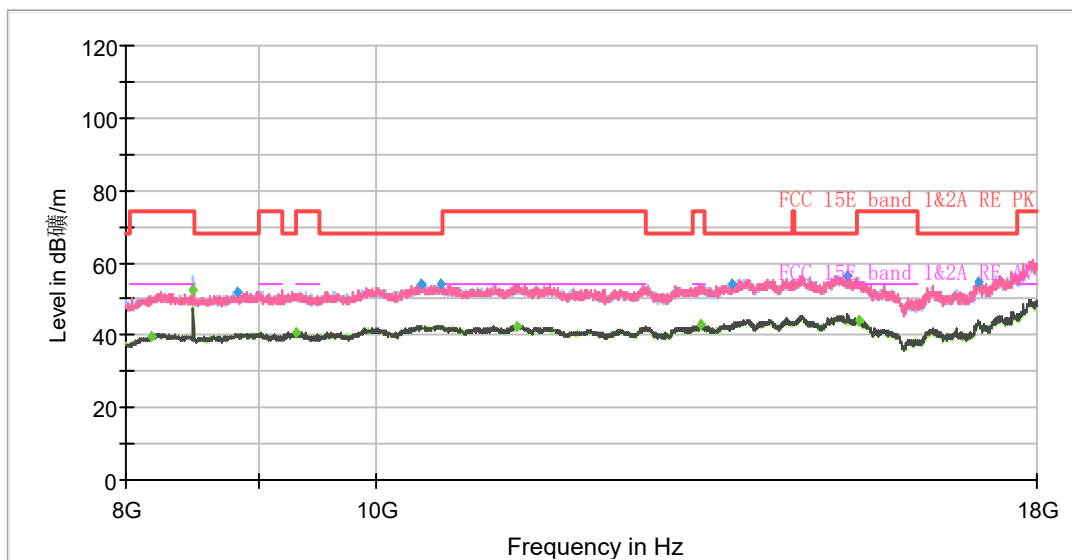


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.13	---	32.81	54.00	21.19	500.00	200.0	V	359.00	-2
1281.75	44.25	---	68.20	23.95	500.00	200.0	V	359.00	-2
1394.63	---	34.04	54.00	19.96	500.00	200.0	V	299.00	-1
1721.88	---	34.60	54.00	19.40	500.00	200.0	V	319.00	0
1971.25	46.82	---	68.20	21.38	500.00	200.0	V	105.00	1
2661.63	49.48	---	68.20	18.72	500.00	100.0	V	1.00	4
2748.25	---	38.91	54.00	15.09	500.00	200.0	V	124.00	4
3472.75	52.23	---	68.20	15.97	500.00	200.0	V	259.00	5
3940.00	---	41.77	54.00	12.23	500.00	100.0	V	206.00	6
4447.50	53.34	---	68.20	14.86	500.00	100.0	V	126.00	7
5355.75	---	49.55	54.00	4.45	500.00	200.0	V	272.00	11
5870.25	58.79	---	68.20	9.41	500.00	100.0	V	5.00	11
8495.00	---	52.28	54.00	1.72	500.00	200.0	H	57.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average

802.11n (HT40) CH102

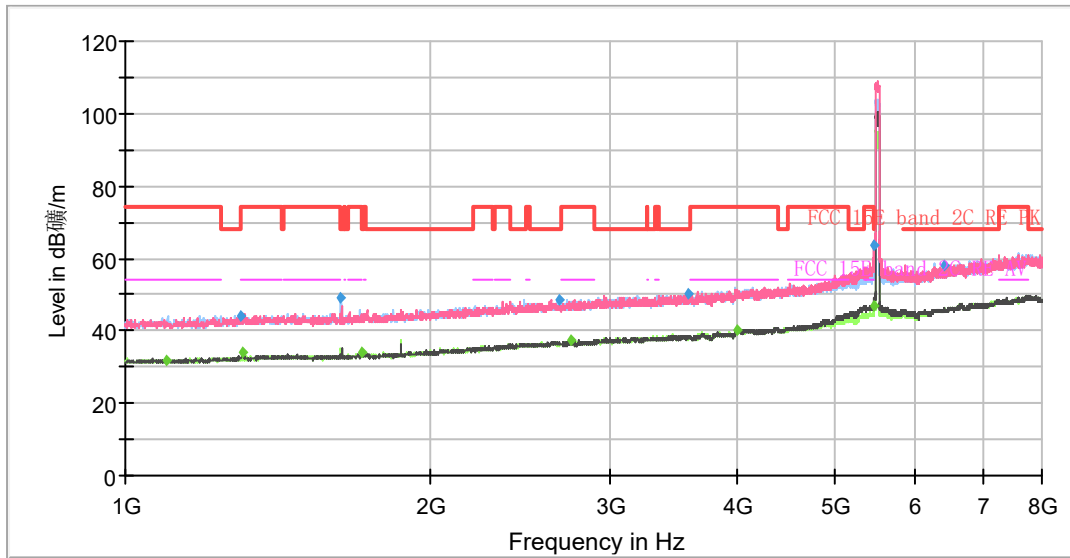

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

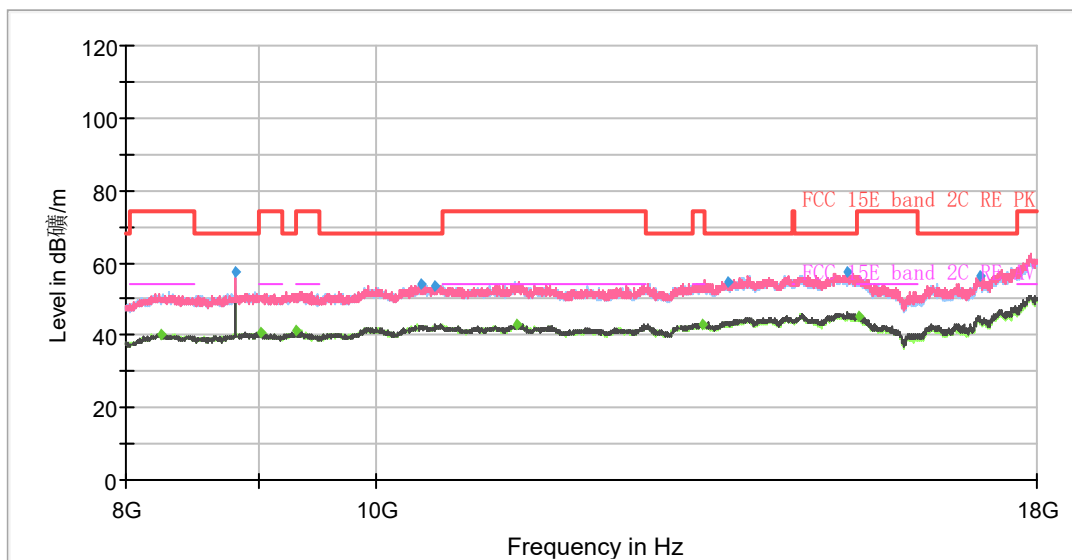


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1098.00	---	32.03	54.00	21.97	500.00	200.0	H	173.00	-2
1298.38	44.15	---	68.20	24.05	500.00	200.0	V	80.00	-2
1306.25	---	33.92	54.00	20.08	500.00	200.0	V	259.00	-1
1631.75	48.92	---	68.20	19.28	500.00	200.0	H	161.00	-1
1708.75	---	34.18	54.00	19.82	500.00	200.0	H	11.00	0
2677.38	48.62	---	68.20	19.58	500.00	100.0	H	305.00	4
2748.25	---	37.14	54.00	16.86	500.00	200.0	H	8.00	4
3584.75	50.11	---	68.20	18.09	500.00	200.0	H	27.00	5
3999.50	---	39.97	54.00	14.03	500.00	100.0	H	0.00	6
5457.25	---	47.02	54.00	6.98	500.00	200.0	V	284.00	11
5469.50	63.65	---	68.20	4.55	500.00	200.0	V	259.00	11
6418.00	57.90	---	68.20	10.30	500.00	100.0	H	348.00	11


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH118

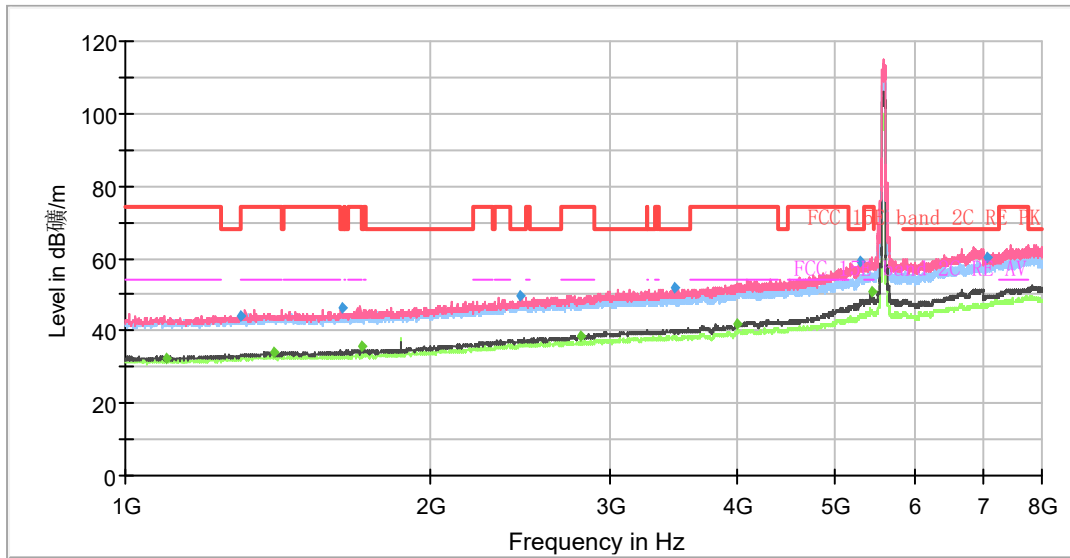

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

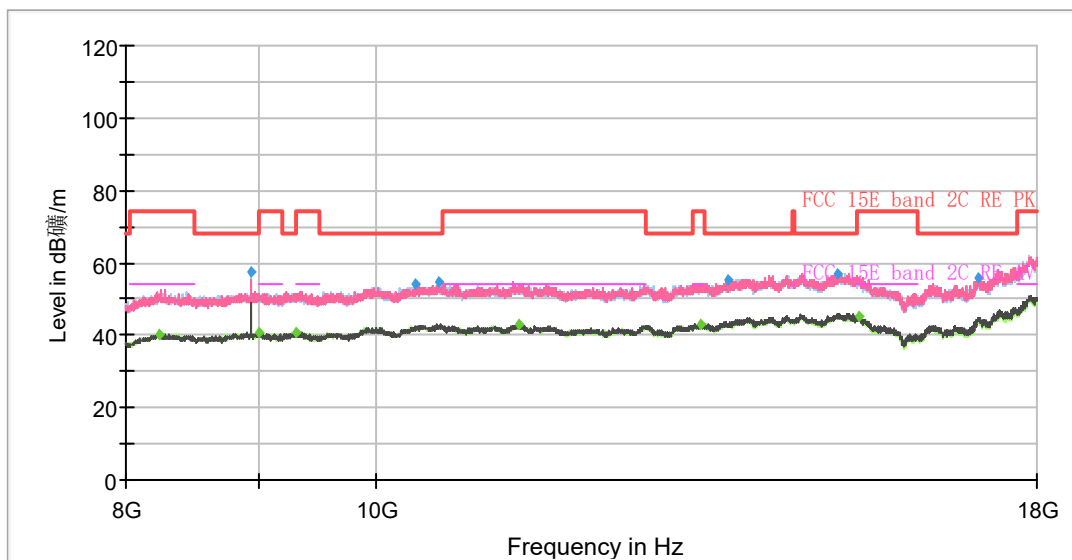


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1098.88	---	32.42	54.00	21.58	500.00	200.0	V	0.00	-2
1297.50	44.12	---	68.20	24.08	500.00	100.0	V	150.00	-2
1403.38	---	34.12	54.00	19.88	500.00	100.0	V	42.00	-1
1633.50	46.59	---	68.20	21.61	500.00	100.0	V	200.00	-1
1707.88	---	35.52	54.00	18.48	500.00	100.0	V	200.00	0
2447.25	49.45	---	68.20	18.75	500.00	100.0	V	138.00	3
2806.00	---	38.75	54.00	15.25	500.00	100.0	V	22.00	4
3473.63	51.73	---	68.20	16.47	500.00	200.0	V	332.00	5
3999.50	---	41.65	54.00	12.35	500.00	200.0	V	232.00	6
5285.75	58.99	---	68.20	9.21	500.00	200.0	V	293.00	10
5428.38	---	50.94	54.00	3.06	500.00	200.0	V	256.00	11
7063.75	60.45	---	68.20	7.75	500.00	200.0	V	359.00	14


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH134

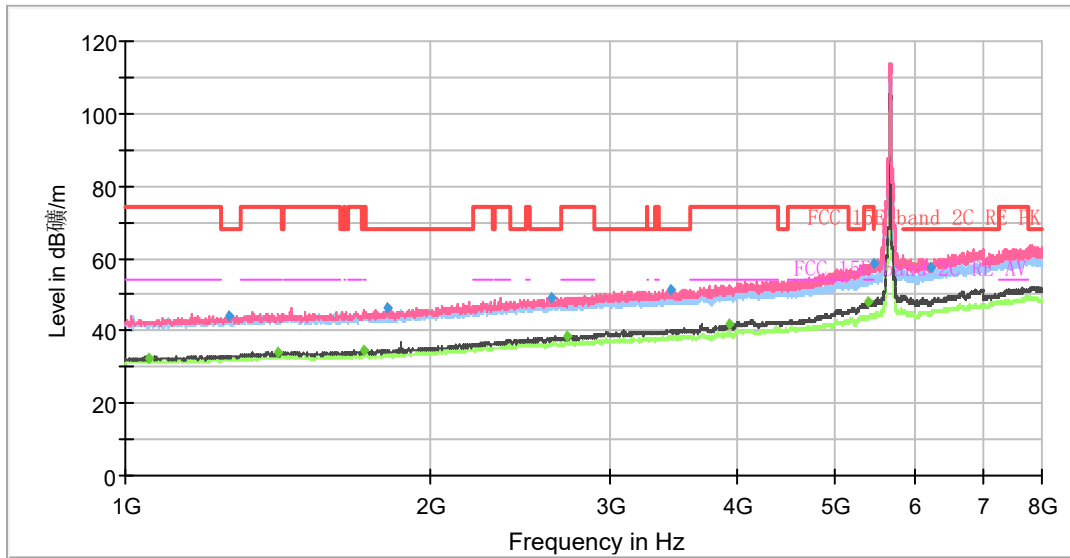

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

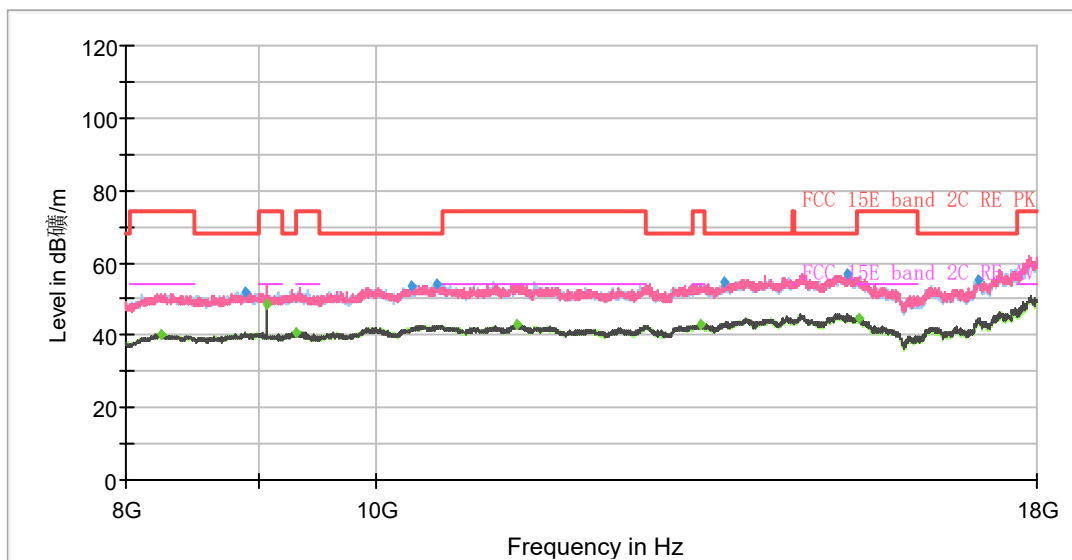


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1054.25	---	32.57	54.00	21.43	500.00	200.0	V	0.00	-3
1266.88	44.36	---	68.20	23.84	500.00	200.0	V	0.00	-2
1412.13	---	33.92	54.00	20.08	500.00	200.0	V	218.00	-1
1720.13	---	34.45	54.00	19.55	500.00	200.0	V	0.00	0
1808.50	46.42	---	68.20	21.78	500.00	200.0	V	358.00	0
2631.88	49.18	---	68.20	19.02	500.00	100.0	V	6.00	4
2727.25	---	38.66	54.00	15.34	500.00	100.0	V	0.00	4
3446.50	51.61	---	68.20	16.59	500.00	200.0	V	243.00	5
3928.63	---	41.95	54.00	12.05	500.00	200.0	V	353.00	6
5400.38	---	47.97	54.00	6.03	500.00	200.0	V	231.00	11
5465.13	58.69	---	68.20	9.51	500.00	200.0	V	270.00	11
6220.25	57.53	---	68.20	10.67	500.00	200.0	V	119.00	10
9071.25	---	48.56	54.00	5.44	500.00	200.0	V	86.00	-1


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH142

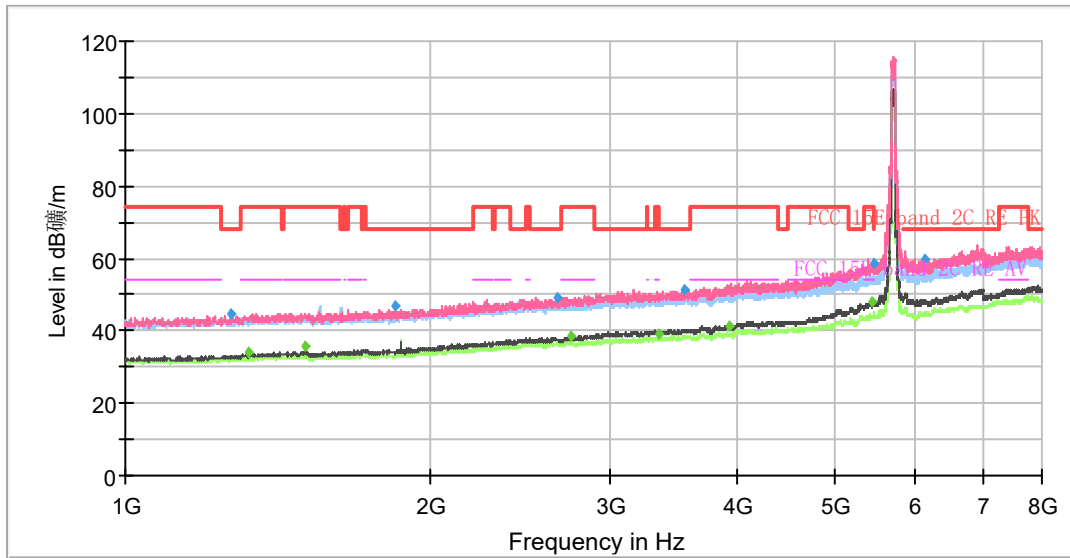

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

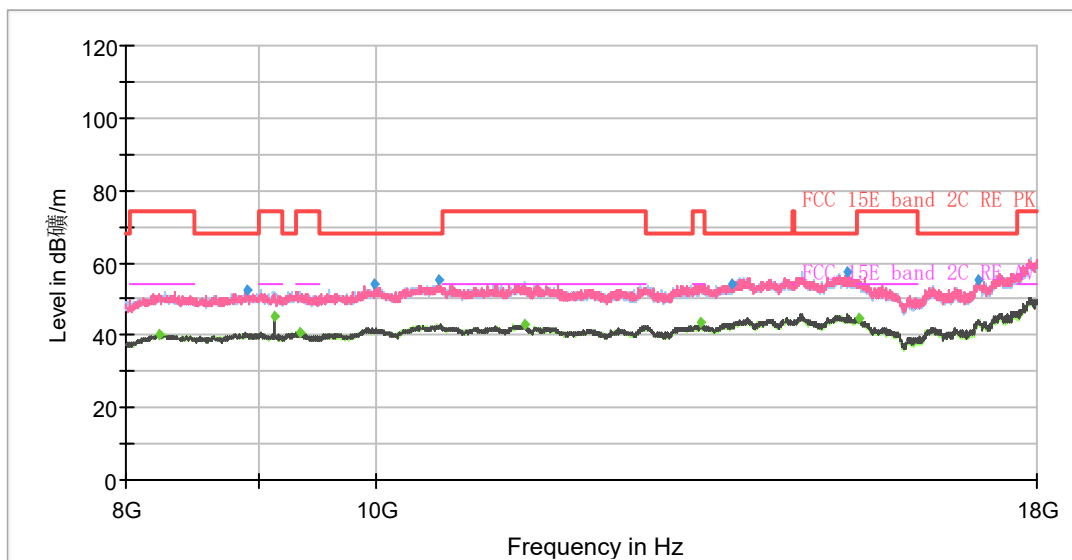


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1273.00	44.93	---	68.20	23.27	500.00	200.0	H	6.00	-2
1324.63	---	33.86	54.00	20.14	500.00	100.0	V	5.00	-1
1504.00	---	35.62	54.00	18.38	500.00	200.0	V	82.00	-1
1841.75	46.68	---	68.20	21.52	500.00	200.0	V	0.00	0
2662.50	48.91	---	68.20	19.29	500.00	200.0	H	0.00	4
2748.25	---	38.52	54.00	15.48	500.00	100.0	V	22.00	4
3352.00	---	39.32	54.00	14.68	500.00	200.0	V	358.00	5
3557.63	51.56	---	68.20	16.64	500.00	200.0	V	0.00	5
3928.63	---	41.56	54.00	12.44	500.00	100.0	V	0.00	6
5445.88	---	47.90	54.00	6.10	500.00	200.0	V	343.00	11
5460.75	58.83	---	68.20	9.37	500.00	200.0	V	248.00	11
6124.88	59.87	---	68.20	8.33	500.00	200.0	V	312.00	10


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT40) CH151

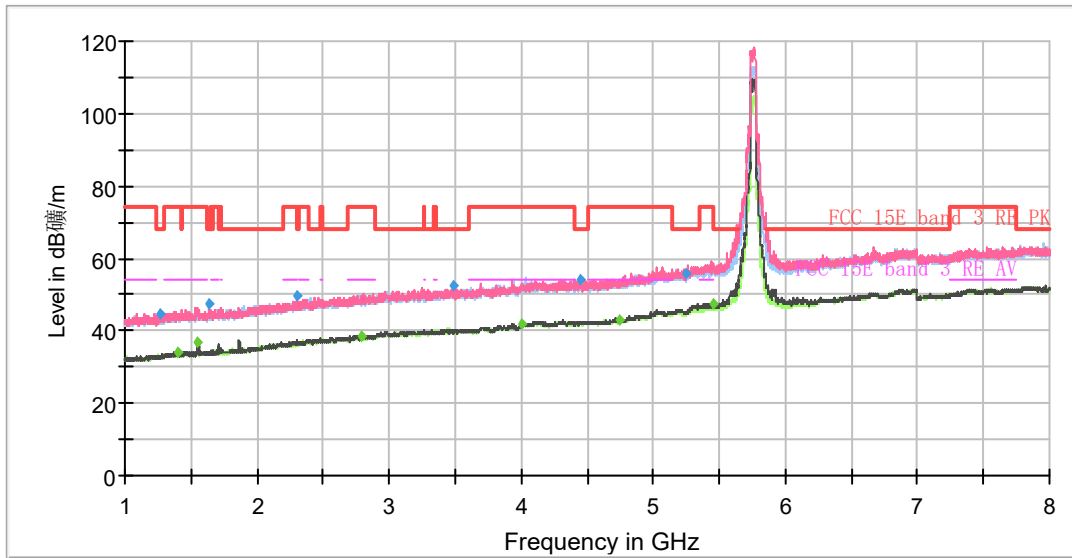

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

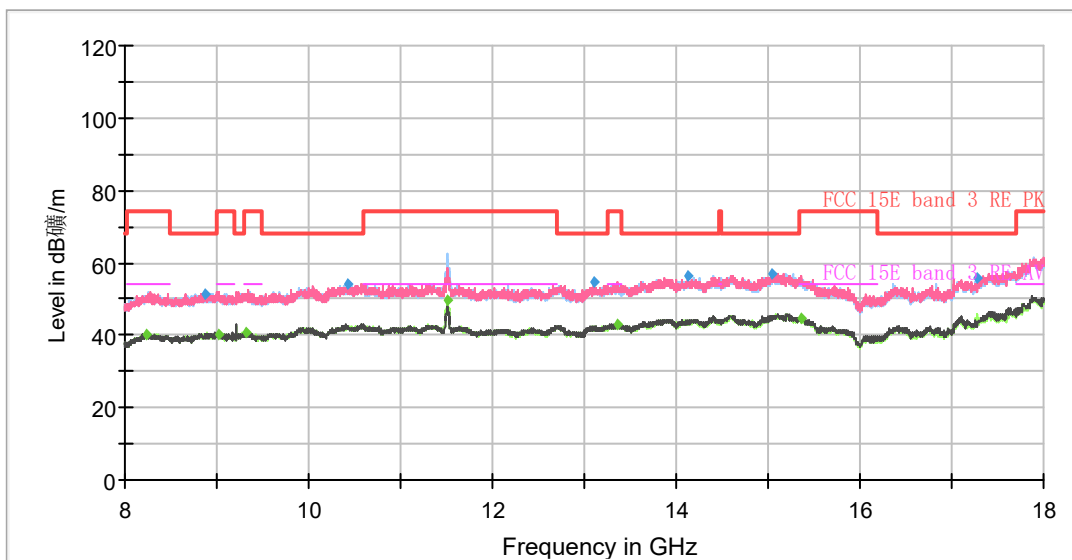

Radiates Emission from 8GHz to 18GHz