

Overview

PSF-B85 is an ultra low-power Wi-Fi module designed by ITEAD. The module adopts the highly integrated Wi-Fi chip ESP8285. It features industry's highly competitive compact packaging size and ultra-low power technology. Specially designed for mobile devices and the Internet of Things application, it connects physical devices to Wi-Fi wireless network to make Internet or LAN communications. PSF-B85 has completed self-contained wireless network, with built-in 32-bit kernel processor, on-chip SRAM, it can be used as the main control chip, but also as a WiFi adapter. Simply apply it to other microcontroller-based designs by SPI/SDIO or I2C/UART interface communication.

PSF-B85 supports multiple packaging form. Supports antenna of IPEX connector and stamp hole interface.

PSF-B85 is widely applied to smart power grid, smart transportation, smart home, handheld devices, industrial control, etc.

Features

802.11 b/g/n/d/e/i/k/r

Support STA/AP/STA+AP mode

WPA/WPA2 PSK and WP

Built-in TCP/IP protocol stack, support multi-way TCP Client connection

Support rich Socket AT commands

Support UART/GPIO data communication interface

Built-in 32 bit MCU, also work as application processor

3.3V single supply

Wi-Fi Direct (P2P) support

Support MIMO 1x1 and 2x1, STBC, A- MPDU and A-MSDU aggregation and 0.4 μ s guard interval

WMM power save U-APSD

Multiple queue management to fully utilize traffic prioritization defined by 802.11e standard.

Adaptive rate fallback algorithm sets the optimum transmission rate and Tx power based on actual SNR and packet loss information.

Functions

Main functions

The main function of PSF-B85 includes serial transparent transmission, PWM control, GPIO control.

Serial transparent transmission good transmission performance, the maximum transmission rate is 460800bps.

PWM control adjust lighting, adjust led color, adjust motor speed and much more.

GPIO control control switch, relay and more.

Operating Mode

PSF-B85 supports three operating mode:STA/AP/STA+AP.

STA mode: the module connects to Internet via a router, thus mobile phone or computer can remote control devices via Internet.

AP mode: PSF-B85 module worked as a hotspot, which realizes directly communication between the module and phone/ computer, enables wireless LAN control.

STA+AP mode: this is coexistence mode, which can realize seamlessly switch via the Internet control, easy operation.

Applications

Serial to Wi-Fi;

Industrial transparent transmission DTU;

Wi-Fi remote monitoring/control;

Intelligent Toy;

Color LED control;


Firefighting and security integrated intelligence management;

Intelligent card terminals, wireless POS machines, Wi-Fi cameras, hand-held devices, etc.

Main Technical Specifications

Module	Type	PSF-B85
	Chip	ESP8285
Wi-Fi	Wireless Standard	IEEE 802.11b/g/n/d/e/i/k/r
	Frequency Range	2.412GHz-2.462GHz
	Tx Power	802.11b: +13 +/-2dBm (@11Mbps)
		802.11g: +12 +/-2dBm (@54Mbps)
		802.11n: +10 +/-2dBm (@HT20, MCS7)
	Rx Sensitivity	802.11b: -91 dBm (@11Mbps ,CCK)
802.11g: -75 dBm (@54Mbps, OFDM)		
802.11n: -72 dBm (MCS7)		

Pin Definitions



PIN	Function	Description
1	ANT	WiFi Antenna
2	ADC	ADC, input range: 0V-1V;
3	EN	Chip enable terminal. Active high: chip works normally; Active low: chip close, very small current.
4	GPIO16	GPIO16
5	GPIO14	GPIO14; HSPI_CLK
6	GPIO12	GPIO12; HSPI_MISO
7	GPIO13	GPIO13; HSPI_MOSI; UART0_CTS
8	GPIO15	GPIO15; HSPI_CS; UART0_RTS
9	GPIO2	Also used as a programming flash UART1_TX; GPIO2
10	GPIO0	GPIO0; SPI_CS2
11	GPIO4	GPIO4
12	GND	GND
13	GPIO9	PIHD; HSPIHD; GPIO9
14	GPIO10	SPIWP; HSPIWP; GPIO10
15	GPIO11	SPI_CS0; GPIO11
16	GPIO6	SPI_CLK; GPIO6
17	GPIO7	SPI_MSIO; GPIO7
18	GPIO8	SPI_MOSI; GPIO8
19	GPIO5	GPIO5
20	GND	GND
21	RX	Also used as a programming flash UART Rx; GPIO3
22	TX	Also used as a programming flash UART Tx ; GPIO1; SPI_CS1
23	3V3	Power supply
24	RESET	External reset (low active)

Power Consumption

The following data are conducted at 25°temperature with 3.3V power supply.

1. All measurements were performed at the antenna interface.
2. All transmitted data are conducted based on a 90% duty cycle, continuous transmission mode.

Mode	Typical	Unit
Transmit 802.11b, CCK 1Mbps, Pout=+14.5dBm	215	mA
Transmit 802.11b, CCK 11Mbps, Pout=+15.5dBm	197	mA
Transmit 802.11g, OFDM54 Mbps, Pout=+14dBm	145	mA
Transmit 802.11n, MCS7, Pout=+13dBm	135	mA
Transmit 802.11b, 1024-byte packet length, -80dBm	100	mA
Transmit 802.11g, 1024-byte packet length, -70dBm	100	mA
Transmit 802.11n, 1024-byte packet length, -65dBm	102	mA
System Standby mode	70	mA
Power off	0.5	μA

Wi-Fi Radio Characteristics

The following data are from tests conducted at room temperature with 3.3V power supply. Note:

1. 72.2Mbps is measured under 802.11n mode, MCS = 7, GI = 200uS;
2. Maximum output power can be + 16.5dBm in 802.11b mode;


Parameters	Min	Typical	Max	Unit
Input frequency	2412	-	2484	MHz
Input impedance	-	50		Ω
Input reflection	-	-	-10	dB
Output power of PA for 72.2 Mbp	14	15	16	dBm
Output power of PA for 802.11b	13.5	15.5	16.5	dBm
Sensitivity				
CCK 1Mbps	-	-98	-	dBm
CCK 11Mbps	-	-91	-	dBm
6Mbps(1/2BPSK)	-	-93	-	dBm
54Mbps(3/4 64-QAM)	-	-75	-	dBm
HT20 , MCS7 (65Mbps , 72.2Mbps)	-	-71	-	dBm
Adjacent Channel Rejection				
OFDM , 6Mbps	-	37	-	dB
OFDM , 54Mbps	-	21	-	dB
HT20 , MCS0	-	37	-	dB
HT20 , MCS7	-	20	-	dB

WiFi Antenna

PSF-B85 has onboard ceramic antenna, users can directly use, no need to design again. Please do not rub copper or connect wire below the antenna.

Recommended Temperature Graph

Refer to IPCJEDEC standard; Peak Temperature 250°C ; Number of Times ≤ 2 times;

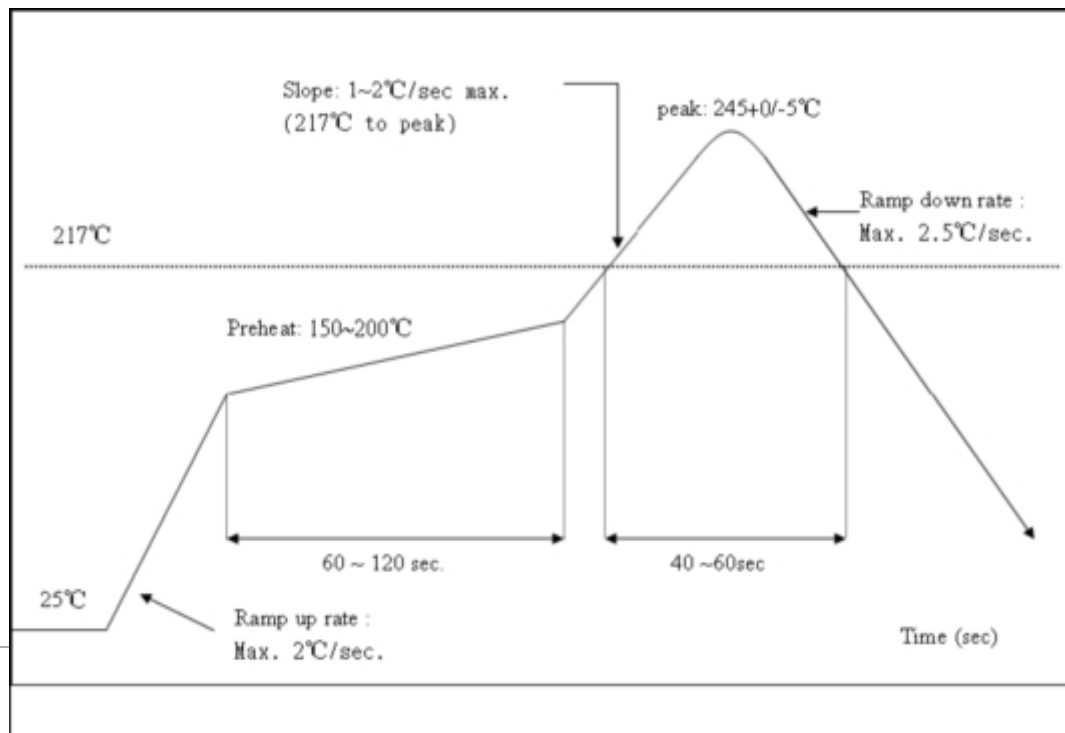

Related Terminologies

Abbreviation	Description
WiFi	Wireless Fidelity
UART	Universal Asynchronous Receiver & Transmitter
DTIM	Delivery Traffic Indication Message
SOC	System On a Chip
P2P	Point to Point
TCP	Transmission Control Protocol
IP	Internet Protocol
STBC	Space-Time Block Coding
MIMO	Multiple Input Multiple Output
MPDU	MAC Protocol Data Unit
MSDU	MAC Server Data Unit
IEEE	Institute Of Electrical And Electronics Engineers
bps	Bits Per Second
CCK	Corporate Control Key
DQPSK	Differential Quadrature Phase Shift Keying
DBPSK	Differential Binary Phase Shift Keying
QAM	Quadrature Amplitude Modulation
OFDM	Orthogonal Frequency Division Multiplexing
WPA	Wi-Fi Protected Access
WPS	Wi-Fi Protected Setup
TKIP	Temporal Key Integrity Protocol
WAPI	Wlan Authentication And Privacy Infrastructure
WEP	Wired Equivalent Privacy
CRC	Cyclic Redundancy Check

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:

“Contains Transmitter Module ESP8266”