




TEST REPORT

Report No. : **CHTEW18120406** Report verification : 

Project No. : **SHT1812004801EW**

FCC ID : **2AE67-2106-2907**

Applicant's name : **Bulk Unlimited Corp**

Address : 199 Lee Ave. Suite 464 BROOKLYN, NY NEW YORK, NY11211

Manufacturer..... : Dynamic Scientific Ltd

Address..... : Room 04&05, 21/F, Canny Industrial Building, 33 Tai Yau Street, San Po Kong, Kowloon, Hong Kong.

Test item description : **Digital Walkie Talkies**

Trade Mark..... : -

Model/Type reference : KL-2106

Listed Model(s)..... : AG-2907

Standard..... : **FCC CFR Title 47 Part 2**
FCC CFR Title 47 Part 95B

Date of receipt of test sample..... : Dec.12, 2018

Date of testing..... : Dec.12, 2018- Dec.20, 2018

Date of issue..... : Dec.21, 2018

Result : **PASS**

Compiled by
 (position+printed name+signature) . : File administrators Fanghui Zhu 

Supervised by
 (position+printed name+signature) . : Project Engineer Edward Pan 

Approved by
 (position+printed name+signature) . : RF Manager Hans Hu 

Testing Laboratory Name..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report revised information	3
<u>2</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3</u>	<u>SUMMARY</u>	<u>5</u>
3.1	Client Information	5
3.2	Product Description	5
3.3	Test frequency list	6
3.4	Operation mode	7
3.5	EUT configuration	7
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Test Facility	8
4.3	Environmental conditions	9
4.4	Statement of the measurement uncertainty	9
4.5	Equipments Used during the Test	10
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1	Effective Radiated Power(ERP)	11
5.2	99% Occupied Bandwidth & 26dB Bandwidth	13
5.3	Emission Mask	14
5.4	Modulation Limit	15
5.5	Audio Frequency Response	16
5.6	Audio Low Pass Filter Response	18
5.7	Frequency stability VS Temperature	19
5.8	Frequency stability VS Voltage	20
5.9	Transmitter Radiated Spurious Emission	21
<u>6</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>25</u>
<u>7</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>27</u>
<u>8</u>	<u>APPENDIX REPORT</u>	<u>31</u>

1 TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations

[FCC Rules Part 95B](#): PERSONAL RADIO SERVICES-Family Radio Service (FRS)

[ANSI/TIA-603-E\(2016\)](#): Land Mobile FM or PM Communications Equipment and Performance Standards

[ANSI C63.4-2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

1.2. Report revised information

Revised No.	Date of issued	Description
N/A	2018-12-21	Original

2 TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Carrier Output Power(ERP)	Part 95.567 Part 2.1046(a)	Pass	Gaosheng Pan
99% Occupied Bandwidth & 26dB bandwidth	Part 95.573 Part 2.1049	Pass	Gaosheng Pan
Emission Mask	Part 95.579(a)(1)(2)(3) Part 2.1049	Pass	Gaosheng Pan
Modulation Limit	Part 95.575 Part 2.1047(b)	Pass	Gaosheng Pan
Audio Frequency Response	Part 95.575 Part 2.1047(a)	Pass	Gaosheng Pan
Audio Low Pass Filter Response	Part 95.575 Part 2.1047(a)	Pass	Gaosheng Pan
Frequency Stability V.S. Temperature	Part 95.565 Part 2.1055	Pass	Gaosheng Pan
Frequency Stability V.S. Voltage	Part 95.565 Part 2.1055	Pass	Gaosheng Pan
Transmit Radiated Spurious Emission	Part 95.579(a)(3) Part 2.1053	Pass	Baojin Ling

3 SUMMARY

3.1 Client Information

Applicant:	Bulk Unlimited Corp
Address:	199 Lee Ave. Suite 464 BROOKLYN, NY NEW YORK, NY11211
Manufacturer:	Dynamic Scientific Ltd
Address:	Room 04&05, 21/F, Canny Industrial Building, 33 Tai Yau Street, San Po Kong, Kowloon, Hong Kong.

3.2 Product Description

Name of EUT:	Digital Walkie Talkies
Trade mark:	-
Model/Type reference:	KL-2106
Listed model(s):	AG-2907
Power supply:	DC 4.50V 3*AAA Size Battery
RF Specification	
Support Frequency Range:	462.5625MHz~ 462.7125MHz
	467.5625MHz~ 467.6375MHz
Rated Output Power:	0.5W(27dBm)
Modulation Type:	FM(Analog)
Emission Designator: * ¹	11K0F3E
Antenna Type:	Integral

Note:

- (1) *¹ According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:
 - For FM Voice Modulation
 Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz
 $B_n = 2M + 2DK = 2*3 + 2*2.5*1 = 11 \text{ KHz}$
 Emission designation: 11K0F3E
- (2) The device only supports voice communication.
- (3) The device has no gain and vertically polarized antenna.

3.3 Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Frequency Bands (MHz)	Test Channel	Test Frequency (MHz)
462.5625~462.7125	CH _{M1}	462.6125(CH2)
467.5625~467.6375	CH _{M2}	467.6125(CH7)

Operational channel frequency table:

Channel No.	Center frequency (MHz)	Channel No.	Center frequency (MHz)
1	462.5625	5	467.5625
2	462.6125	6	467.5875
3	462.6875	7	467.6125
4	462.7125	8	467.6375

3.4 Operation mode

Test mode	Transmitting	Receiving	FRS
TX-FRS	■		■
RX-FRS		■	■

Note: ■ is operation mode.

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.

Test item	Modulation Type	Test mode
Output Power(ERP)	UM	TX-FRS
99% Occupied Bandwidth & 26dB bandwidth	AM6	TX-FRS
Emission Mask	AM5	TX-FRS
Modulation Limit	AM6	TX-FRS
Audio Frequency Response	AM2	TX-FRS
Audio Low Pass Filter Response	AM2	TX-FRS
Frequency Stability VS Temperature	UM	TX-FRS
Frequency Stability VS Voltage	UM	TX-FRS
Transmit Radiated Spurious Emission	AM5	TX-FRS

3.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

●	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3 Environmental conditions

Atmospheric Contions	
Temperature:	21°C to 25°C
Relative Humidity:	20 % to 75 %.
Atmospheric Pressure:	860 mbar to 1060 mbar
Norminal Test Voltage:	$V_N = DC 4.50V$
Extrem Test Voltage @115% V_N :	$V_H = DC 5.18V$
Extrem Test Voltage @85% V_N :	$V_L = DC 3.83V$

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability & Occupied Bandwidth	18Hz for <1GHz 69Hz for >1GHz	(1)
Conducted Output Power	0.63dB	(1)
ERP / EIRP / RSE	2.38dB for <1GHz 3.45dB for >1GHz	(1)
Conducted Emission 9KHz-30MHz	3.35 dB	(1)
Radiated Emission 30~1000MHz	4.80 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
FM deviation	25 Hz	(1)
Audio level	0.62 dB	(1)
Low Pass Filter Response	0.76 dB	(1)
Modulation Limiting	0.42 %	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5 Equipments Used during the Test

● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
○	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2018/04/28	2019/04/27
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● TS8613 Test system						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
○	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
●	Signal & Spectrum Analyzer	R&S	FSW26	103440	2018/10/28	2019/10/27
●	RF Communication Test Set	HP	8920A	3813A10206	2018/10/28	2019/10/27
○	Digital intercom communication tester	Aeroflex	3920B	1001682041	2018/10/28	2019/10/27
○	Signal Generator	R&S	SML02	100507	2018/10/27	2019/10/26
○	Signal Generator	IFR	2032	203002\100	2018/11/11	2019/11/10
●	RF Control Unit	Tonscend	JS0806-2	N/A	N/A	N/A
○	Fliter-VHF	Microwave	N26460M1	498702	2018/03/19	2019/03/18
○	Fliter-UHF	Microwave	N25155M2	498704	2018/03/19	2019/03/18
○	Power Divider	Microwave	OPD1040-N-4	N/A	2018/11/15	2019/11/14
○	Attenuator	JFW	50FH-030-100	N/A	2018/11/15	2019/11/14
○	Attenuator	JFW	50-A-MFN-20	0322	2018/11/15	2019/11/14
●	Test software	HTW	Radio ATE	N/A	N/A	N/A

● Auxiliary Equipment						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	GPL-2	N/A	2018/11/08	2019/11/07
○	DC Power Supply	Gwinstek	SPS-2415	GER835793	2018/10/28	2019/10/27

5 TEST CONDITIONS AND RESULTS


5.1 Effective Radiated Power(ERP)

LIMIT

FCC Part FCC Part 95.567, FCC Part 2.1046

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts. The radio shall be equipped with an integral antenna.

TEST CONFIGURATION

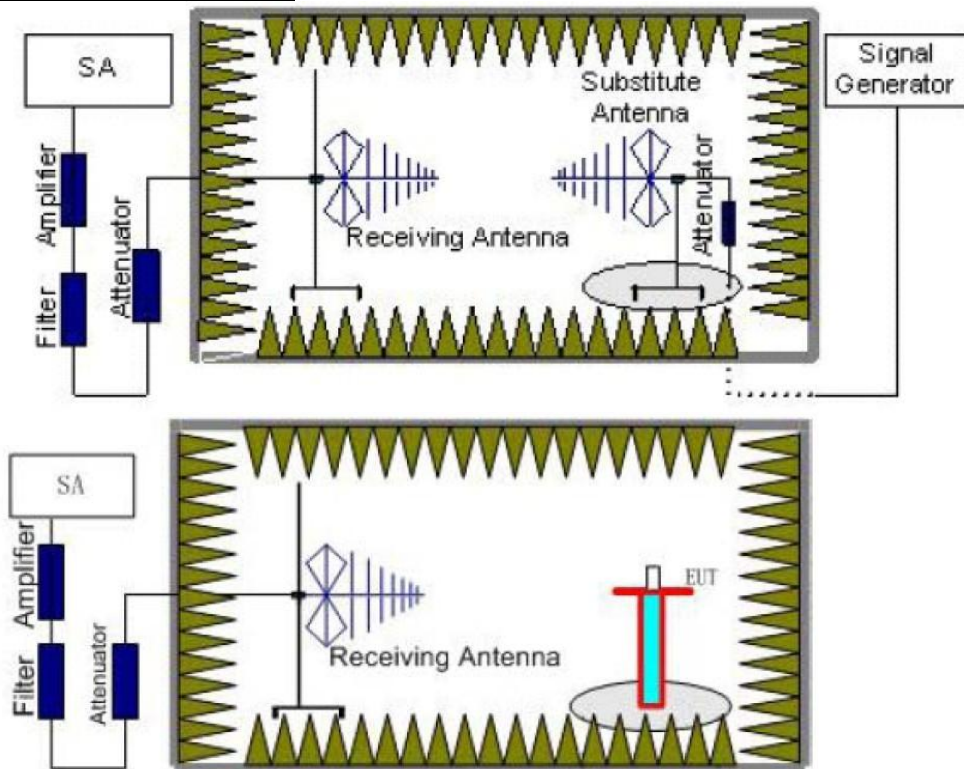

TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
The measurement results are obtained as described below:
 $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$
We used SMF100A microwave signal generator which signal level can go up to 33dBm, so we did not use a power amplifier for substitution test; The measurement results are amended as described below:
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST MODE

Please refer to section 3.4

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix A on the section 8 appendix report

5.2 99% Occupied Bandwidth & 26dB Bandwidth


LIMIT

FCC Part 95.573, FCC Part 2.1049

Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

TEST CONFIGURATION

Test setup for Analog:

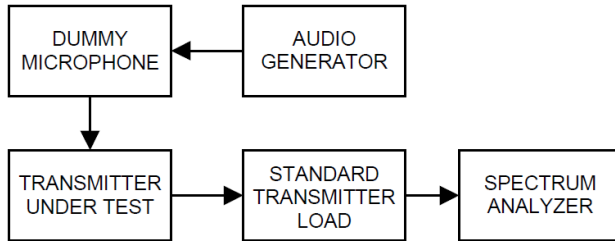

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Spectrum set as follow:
Centre frequency = the nominal EUT channel center frequency,
The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient)
RBW = 1% to 5% of the anticipated OBW, VBW $\geq 3 \times \text{RBW}$, Sweep = auto,
Detector function = peak, Trace = max hold
- (3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- (4) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix B on the section 8 appendix report

5.3 Emission Mask

LIMIT

FCC Part 95.579(a)(1)(2)(3), FCC Part 2.1049


Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

TEST CONFIGURATION

Test setup for Analog:

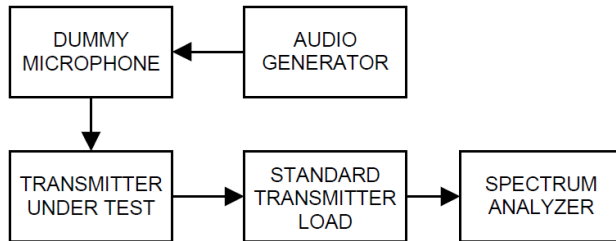

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:
Centre frequency = fundamental frequency, span=120kHz for 12.5kHz channel spacing,
RBW=100Hz, VBW=1000Hz, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4
- 5) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix C on the section 8 appendix report


5.4 Modulation Limit

LIMIT

FCC Part 95.575, FCC Part 2.1047(b)

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

TEST CONFIGURATION

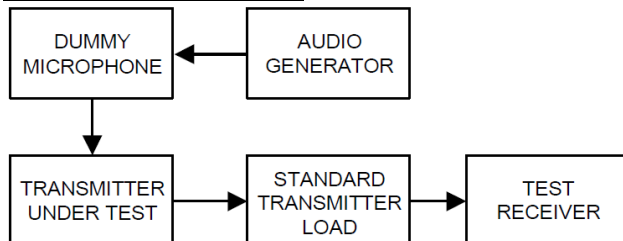

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4 and vary the input level from -20 to $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix D on the section 8 appendix report


5.5 Audio Frequency Response

LIMIT

FCC Part 95.575), FCC Part 2.1047(a):


Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

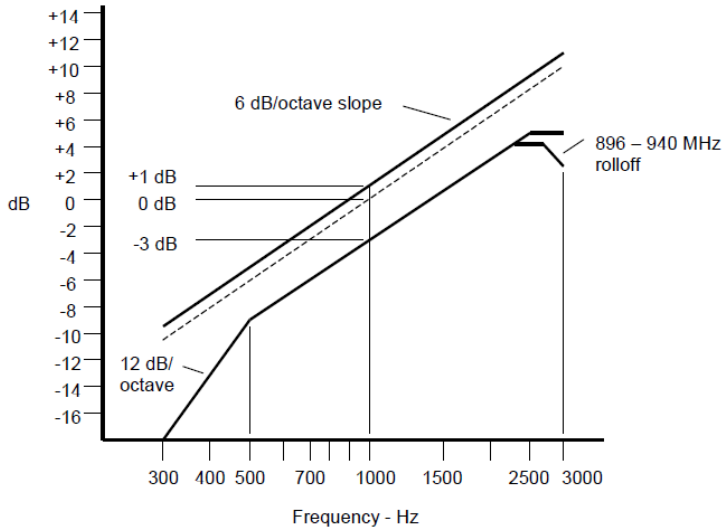

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

TEST CONFIGURATION

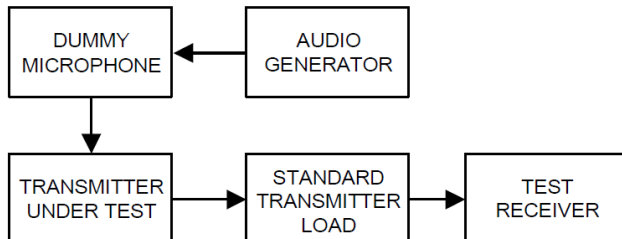

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 3.4
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ}
- 11) Calculate the audio frequency response at the present frequency as:
audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed **Not Applicable**


Please refer to appendix E on the section 8 appendix report

5.6 Audio Low Pass Filter Response


LIMIT

FCC Part 95.575),FCC Part 2.1047(a):

The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least $60 \log_{10}(f/3)$ dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

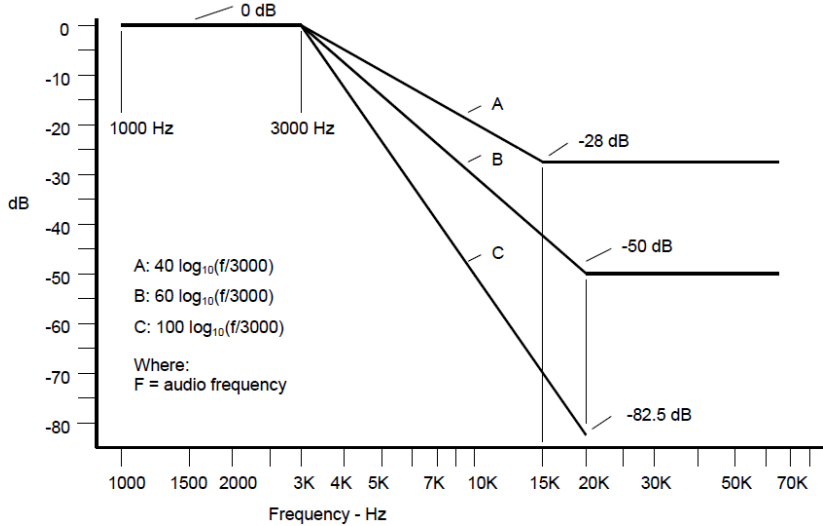

TEST CONFIGURATION

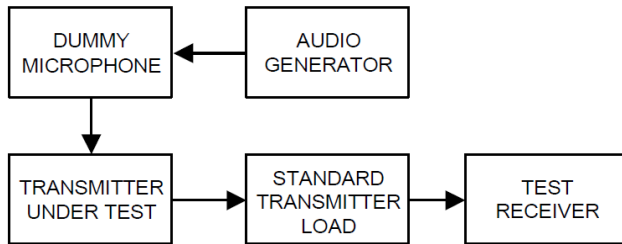

TEST PROCEDURE

- 1) Configure the EUT as shown in figure .
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer’s specifications. Record the dB level of the 1000 Hz tone as LEV_{REF} .
- 3) Set the audio signal generator to the desired test frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as LEV_{FREQ} .
- 4) Calculate the audio frequency response at the test frequency as:
 low pass filter response = $LEV_{FREQ} - LEV_{REF}$

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix F on the section 8 appendix report


5.7 Frequency stability VS Temperature

LIMIT

FCC Part 95.565:

Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

TEST CONFIGURATION

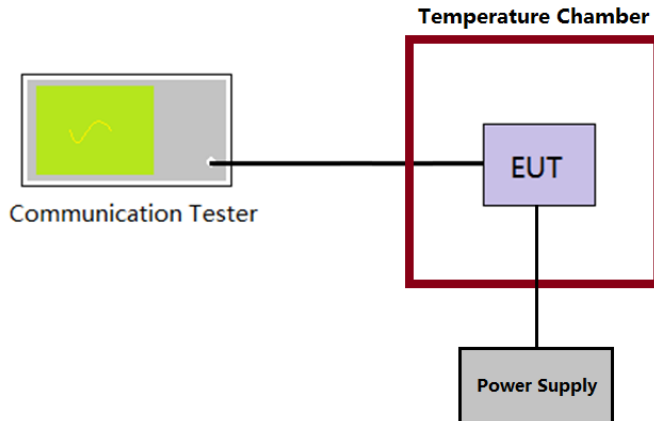

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency as MCF_{MHz} .
- 4) Calculate the ppm frequency error by the following:

$$\text{ppm error} = (MCF_{\text{MHz}} / ACF_{\text{MHz}} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix G on the section 8 appendix report


5.8 Frequency stability VS Voltage

LIMIT

FCC Part 95.565:

Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

TEST CONFIGURATION

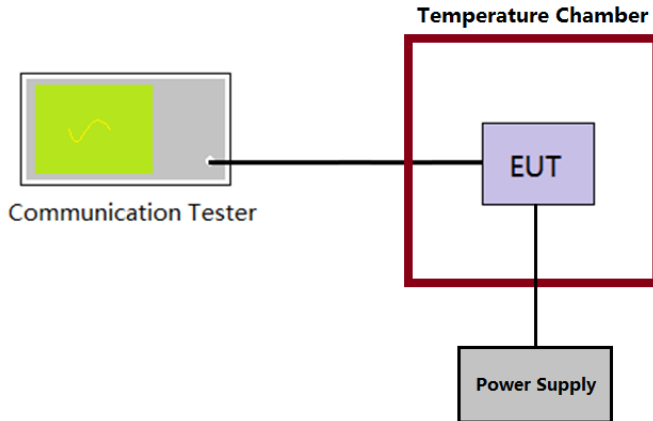

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as MCF_{MHz}
- 4) Calculate the ppm frequency error by the following:

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied $\pm 15\%$ of the nominal value measured at the input to the EUT

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix H on the section 8 appendix report

5.9 Transmitter Radiated Spurious Emission

LIMIT

FCC Part 95.579(a)(3):

$43 + 10 \log (P_{\text{watts}})$


Calculation: Limit (dBm) = EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is P(dBm).


Limit (dBm) = P(dBm)-43-10 log (Pwatts) = -13 dBm

TEST CONFIGURATION

Below 1GHz:

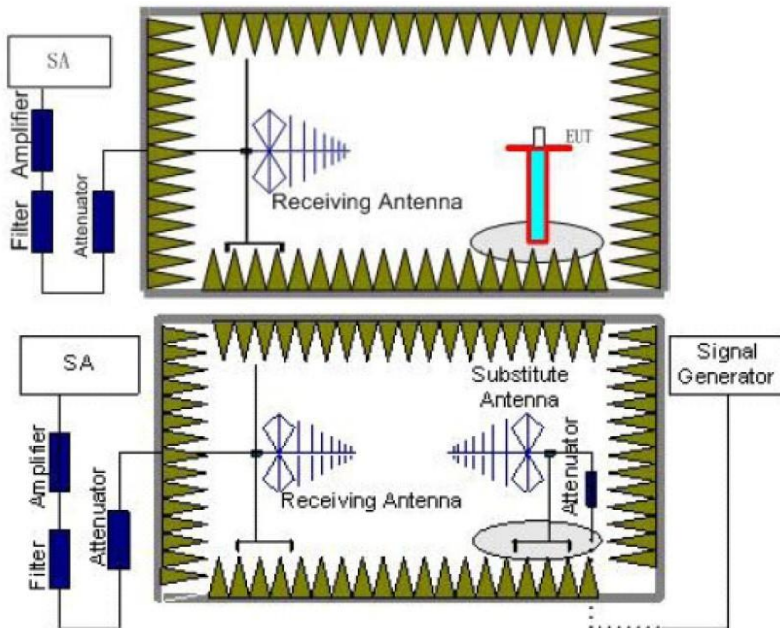

Above 1GHz:

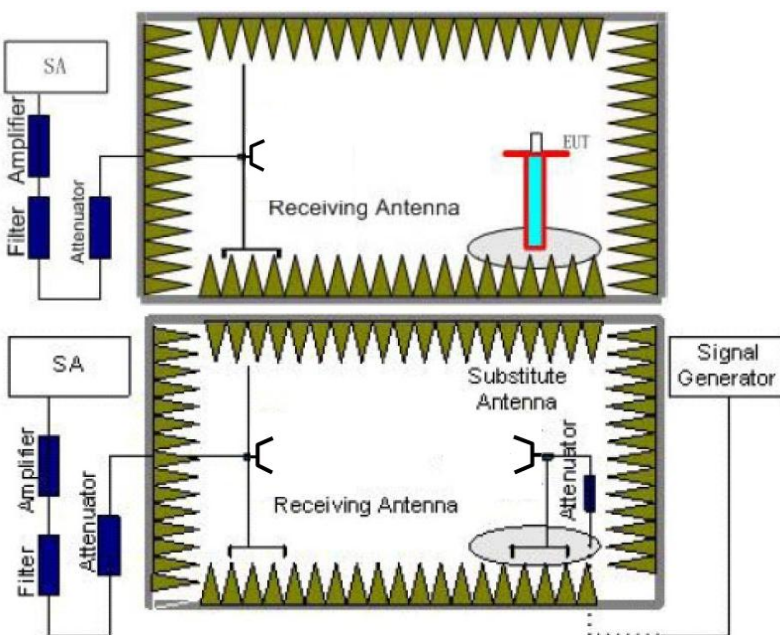

TEST PROCEDURE

8. Standard Transmitter Load with a 50Ω input impedance and an output impedance matched to the test equipment.
9. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
10. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
11. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
12. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
13. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl - Ga
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl - Ga
14. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
15. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.


TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable


TEST MODE	TX-FRS	Test Channel:	CH _{M1}	Polarity:	Horizontal
-----------	--------	---------------	------------------	-----------	------------

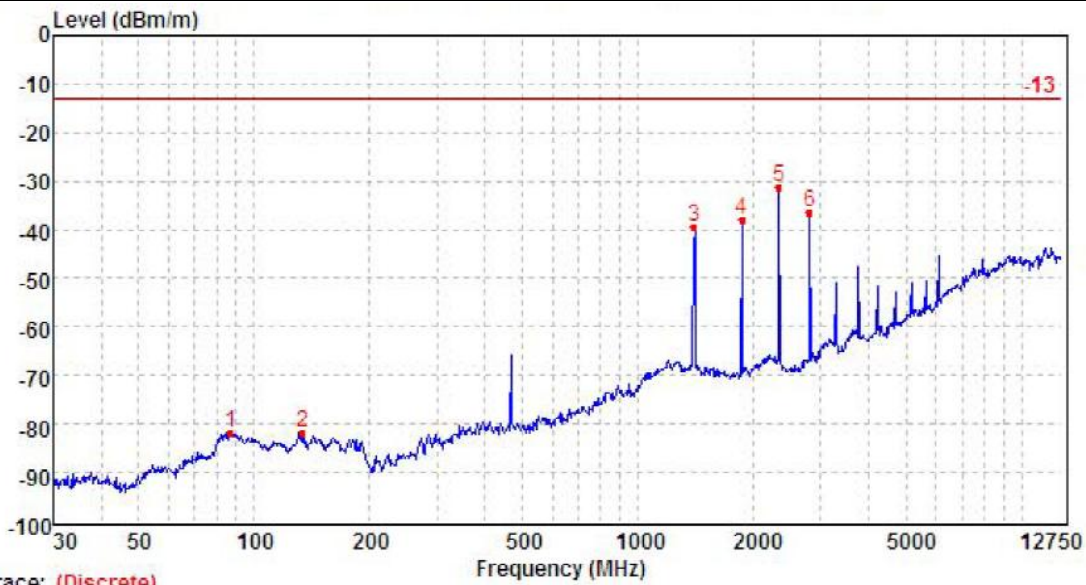

Trace: (Discrete)

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	87.07	-78.94	26.85	1.07	30.68	-81.70	-13.00	-68.70	Peak
2	134.19	-78.43	25.71	1.32	30.47	-81.87	-13.00	-68.87	Peak
3	1402.92	-45.03	37.73	5.01	37.12	-39.41	-13.00	-26.41	Peak
4	1870.49	-43.63	37.14	6.07	37.48	-37.90	-13.00	-24.90	Peak
5	2334.18	-40.47	40.09	6.66	37.59	-31.31	-13.00	-18.31	Peak
6	2803.70	-46.85	40.69	7.37	37.58	-36.37	-13.00	-23.37	Peak


TEST MODE	TX-FRS	Test Channel:	CH _{M1}	Polarity:	Vertical
-----------	--------	---------------	------------------	-----------	----------

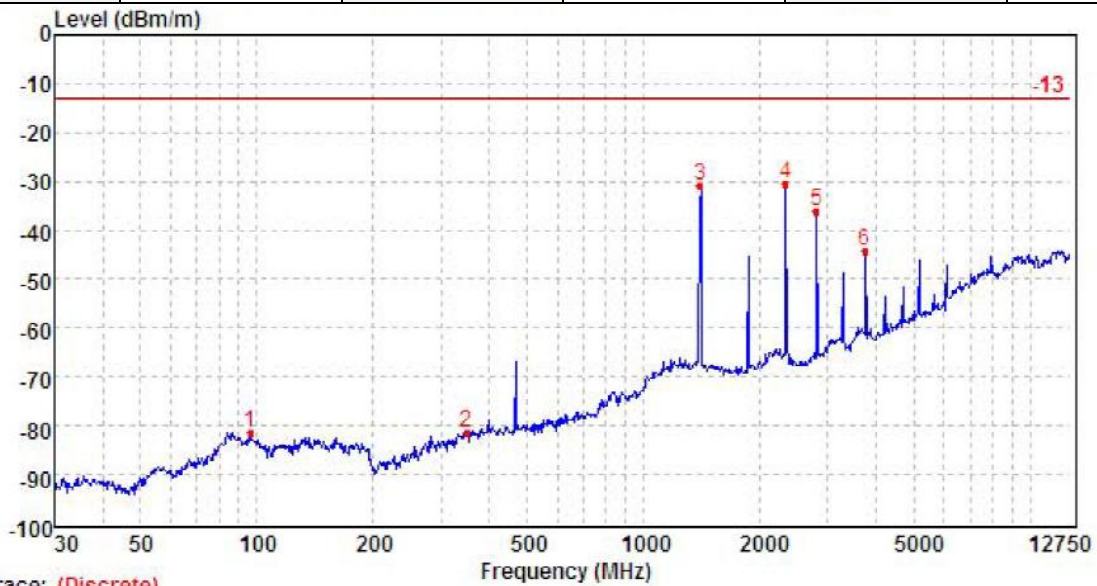

Trace: (Discrete)

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	96.42	-77.82	26.04	1.13	30.69	-81.34	-13.00	-68.34	Peak
2	349.23	-79.42	26.01	2.15	30.13	-81.39	-13.00	-68.39	Peak
3	1402.92	-36.50	37.73	5.01	37.12	-30.88	-13.00	-17.88	Peak
4	2334.18	-39.61	40.09	6.66	37.59	-30.45	-13.00	-17.45	Peak
5	2803.70	-46.58	40.69	7.37	37.58	-36.10	-13.00	-23.10	Peak
6	3738.13	-58.00	42.20	8.43	36.95	-44.32	-13.00	-31.32	Peak


TEST MODE	TX-FRS	Test Channel:	CH _{M2}	Polarity:	Horizontal
-----------	--------	---------------	------------------	-----------	------------

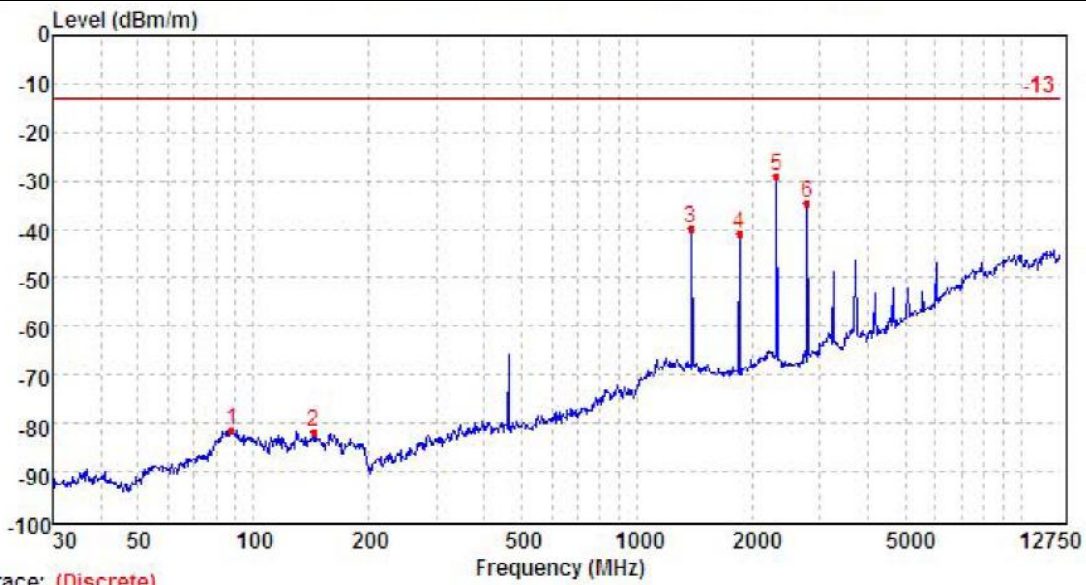

Trace: (Discrete)

Mark	Frequency MHZ	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	87.99	-78.71	27.04	1.07	30.68	-81.28	-13.00	-68.28	Peak
2	143.46	-78.55	25.77	1.37	30.38	-81.79	-13.00	-68.79	Peak
3	1385.18	-45.36	37.70	4.97	37.12	-39.81	-13.00	-26.81	Peak
4	1851.54	-46.26	36.96	6.04	37.46	-40.72	-13.00	-27.72	Peak
5	2310.54	-38.30	40.37	6.62	37.59	-28.90	-13.00	-15.90	Peak
6	2775.30	-44.63	40.50	7.31	37.58	-34.40	-13.00	-21.40	Peak

TEST MODE	TX-FRS	Test Channel:	CH _{M2}	Polarity:	Vertical
-----------	--------	---------------	------------------	-----------	----------


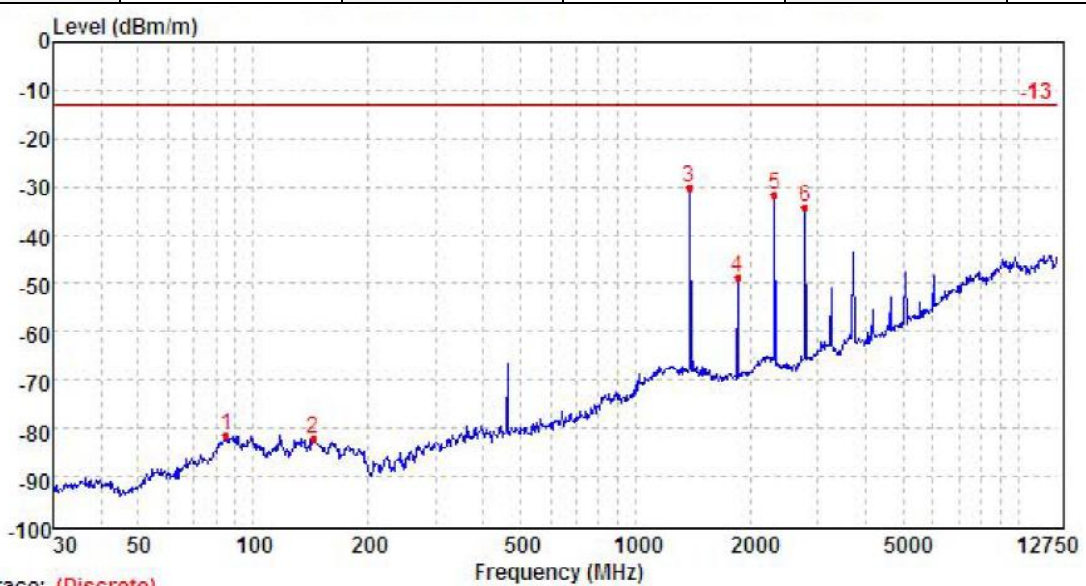


Trace: (Discrete)

Mark	Frequency MHZ	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	84.95	-78.24	26.41	1.05	30.69	-81.47	-13.00	-68.47	Peak
2	143.96	-78.76	25.70	1.37	30.37	-82.06	-13.00	-69.06	Peak
3	1385.18	-35.57	37.70	4.97	37.12	-30.02	-13.00	-17.02	Peak
4	1851.54	-54.19	36.96	6.04	37.46	-48.65	-13.00	-35.65	Peak
5	2310.54	-40.82	40.37	6.62	37.59	-31.42	-13.00	-18.42	Peak
6	2775.30	-44.58	40.50	7.31	37.58	-34.35	-13.00	-21.35	Peak

6 TEST SETUP PHOTOS OF THE EUT

Transmitter Radiated Spurious Emission:

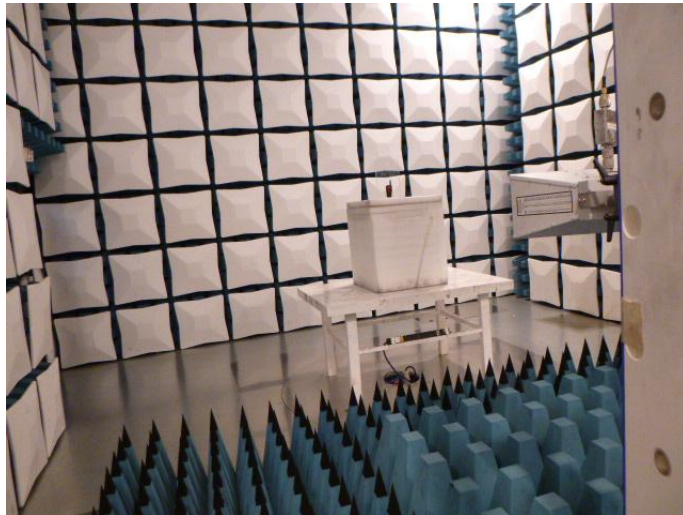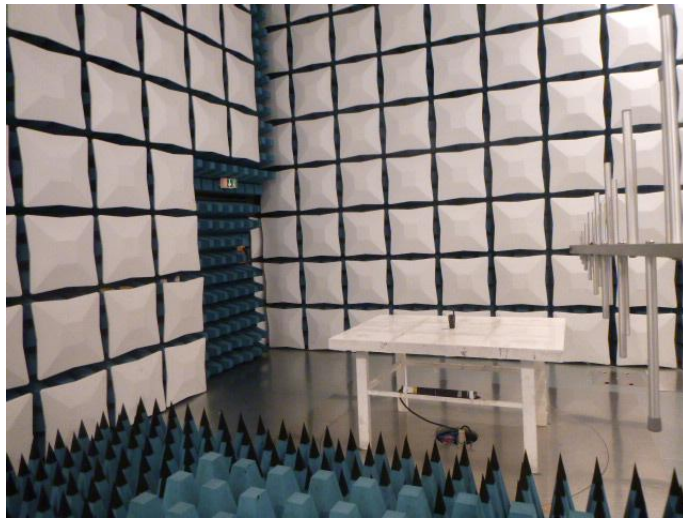

Bandwidth and Emission Mask:







Frequency Stability:




7 EXTERNAL AND INTERNAL PHOTOS OF THE EUT




External Photos of the EUT


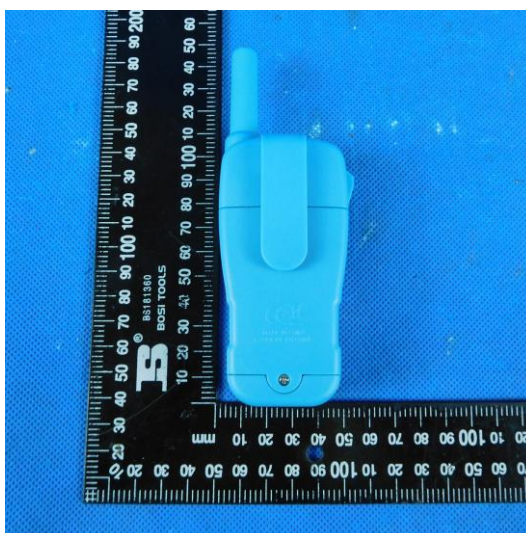


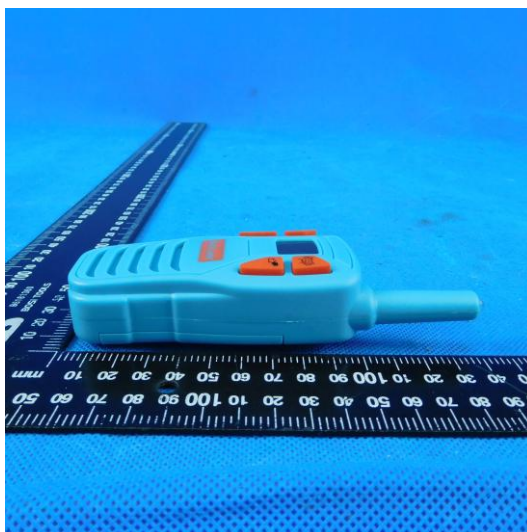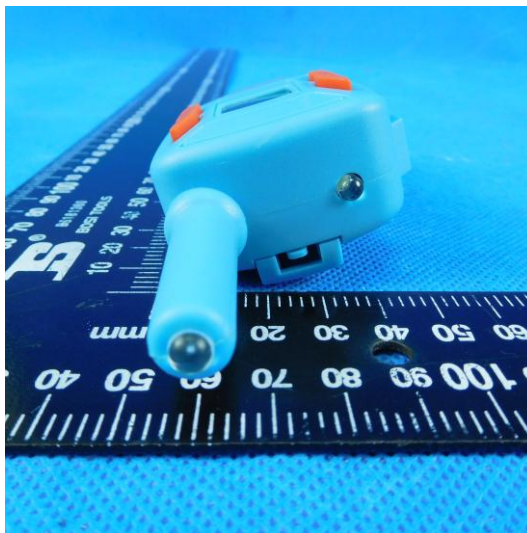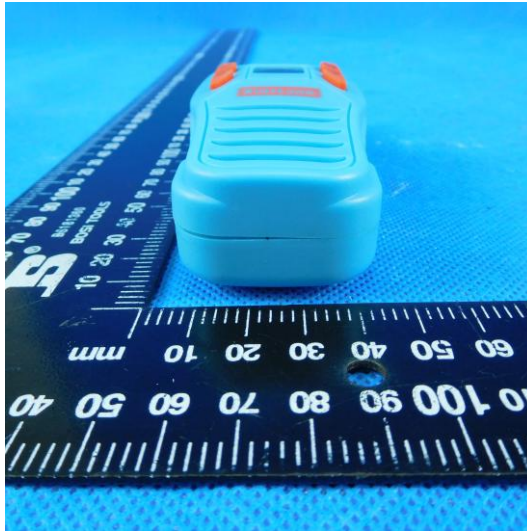

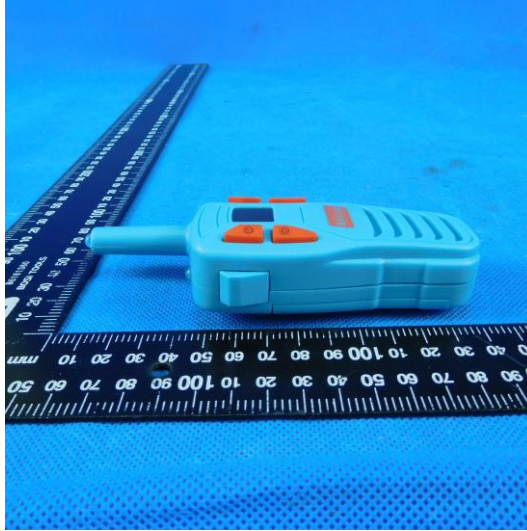

Internal Photos of the EUT

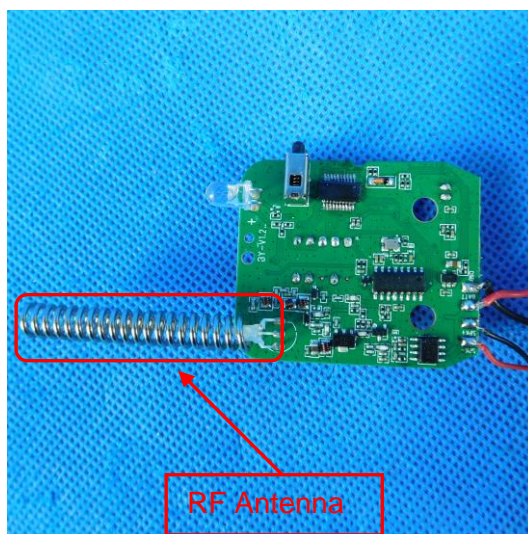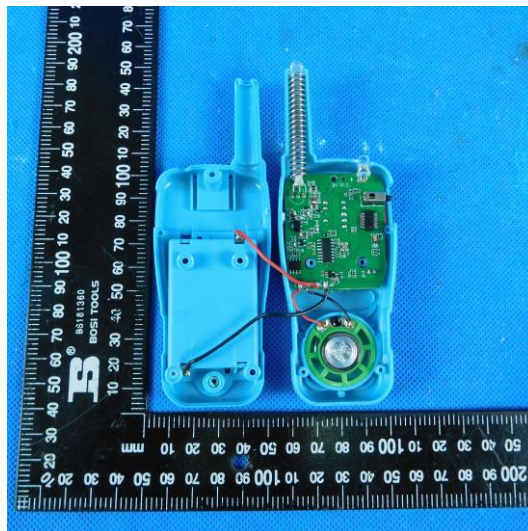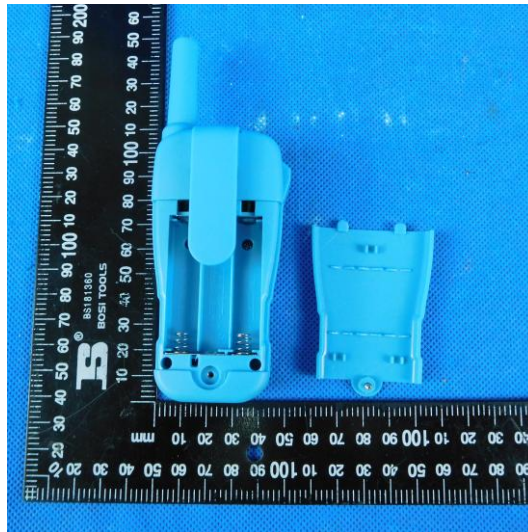

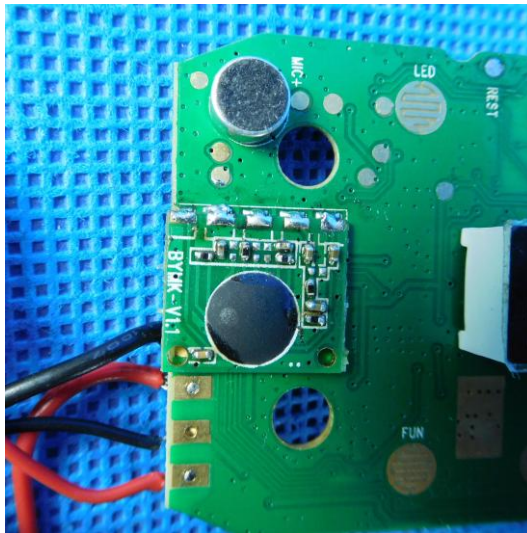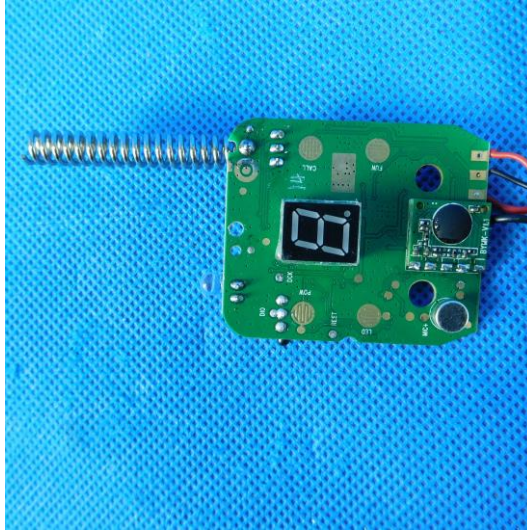

8 APPENDIX REPORT



Appendix A: Carrier Output Power(ERP)

Test Mode	Modulation Type	Test Channel	Measured power (dBm)	Measured power (W)	Limit(W)	Result
TX-FRS	FM	CH _{M1}	25.62	0.36	≤2	PASS
TX-FRS	FM	CH _{M2}	25.70	0.37	≤0.5	PASS



Appendix B: 99% Occupied Bandwidth & 26dB Bandwidth

Test Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-FRS	FM	CH _{M1}	<u>5.894</u>	10.094	≤12.5	PASS
TX-FRS	FM	CH _{M2}	<u>5.894</u>	10.214	≤12.5	PASS



Appendix B: 99% Occupied Bandwidth & 26dB Bandwidth

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																			
TX-FRS	FM	CH _{M1}	<p>MultiView Spectrum Ref Level 27.00 dBm Att 37 dB SWT 41.9 ms (~55 ms) RBW 100 Hz VBW 300 Hz Mode Auto FFT</p> <p>1 Occupied Bandwidth H1 24.020 dBm H2 -1.980 dBm D1[1] -3.69 dB M1[1] 10.094 kHz -2.55 dBm 462.6073770 MHz</p> <p>CF 462.6125 MHz 1001 pts 5.0 kHz/ Span 50.0 kHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>462.607377 MHz</td> <td>-2.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td>462.609503 MHz</td> <td>-11.53 dBm</td> <td>Occ Bw</td> <td>5.894105894 kHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td>462.6153971 MHz</td> <td>-12.34 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>10.094 kHz</td> <td>3.69 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 18.DEC.2018 18:12:59</p>	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		462.607377 MHz	-2.55 dBm			T1	1		462.609503 MHz	-11.53 dBm	Occ Bw	5.894105894 kHz	T2	1		462.6153971 MHz	-12.34 dBm			D1	M1	1	10.094 kHz	3.69 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																
M1	1		462.607377 MHz	-2.55 dBm																																		
T1	1		462.609503 MHz	-11.53 dBm	Occ Bw	5.894105894 kHz																																
T2	1		462.6153971 MHz	-12.34 dBm																																		
D1	M1	1	10.094 kHz	3.69 dB																																		
TX-FRS	FM	CH _{M2}	<p>MultiView Spectrum Ref Level 27.00 dBm Att 37 dB SWT 41.9 ms (~55 ms) RBW 100 Hz VBW 300 Hz Mode Auto FFT</p> <p>1 Occupied Bandwidth H1 23.970 dBm H2 -2.030 dBm D1[1] 0.60 dB M1[1] 10.2140 kHz -4.17 dBm 467.6073500 MHz</p> <p>CF 467.6125 MHz 1001 pts 5.0 kHz/ Span 50.0 kHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>467.60735 MHz</td> <td>-4.17 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td>467.609503 MHz</td> <td>-12.45 dBm</td> <td>Occ Bw</td> <td>5.894105894 kHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td>467.6153971 MHz</td> <td>-11.49 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>10.214 kHz</td> <td>0.60 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 18.DEC.2018 18:15:04</p>	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		467.60735 MHz	-4.17 dBm			T1	1		467.609503 MHz	-12.45 dBm	Occ Bw	5.894105894 kHz	T2	1		467.6153971 MHz	-11.49 dBm			D1	M1	1	10.214 kHz	0.60 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																
M1	1		467.60735 MHz	-4.17 dBm																																		
T1	1		467.609503 MHz	-12.45 dBm	Occ Bw	5.894105894 kHz																																
T2	1		467.6153971 MHz	-11.49 dBm																																		
D1	M1	1	10.214 kHz	0.60 dB																																		



Appendix C:Emission Mask

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	<p>MultiView Spectrum Ref Level 27.00 dBm Att 37 dB SWI 14 ms (~22 ms) RBW 300 Hz VBW 1 kHz Mode Auto FFT 1 Frequency Sweep 1PK View 25K Max M1[1] 25.42 dBm 462.6124300 MHz MASK-FRS CF 462.6125 MHz 1001 pts 7.0 kHz/ Span 70.0 kHz Measuring... 18.12.2018 18:24:33 Date: 18.DEC.2018 18:24:33</p>
TX-FRS	FM	CH _{M2}	<p>MultiView Spectrum Ref Level 27.00 dBm Att 37 dB SWI 14 ms (~22 ms) RBW 300 Hz VBW 1 kHz Mode Auto FFT 1 Frequency Sweep 1PK View 25K Max M1[1] 25.30 dBm 467.6124300 MHz MASK-FRS CF 467.6125 MHz 1001 pts 7.0 kHz/ Span 70.0 kHz Measuring... 18.12.2018 18:22:41 Date: 18.DEC.2018 18:22:41</p>

**Appendix D:Modulation Limit**

Test Mode	Modulation Type	Test Channel	Modulation Level (dB)	Peak Frequency Deviation (Hz)				Limit (kHz)	Result
				300	1004	1500	2500		
TX-FRS	FM	CH _{M1}	-20	0.073	0.182	0.261	0.39	2.5	PASS
TX-FRS	FM	CH _{M1}	-15	0.096	0.299	0.432	0.671	2.5	PASS
TX-FRS	FM	CH _{M1}	-10	0.138	0.505	0.736	1.179	2.5	PASS
TX-FRS	FM	CH _{M1}	-5	0.221	0.87	1.295	1.786	2.5	PASS
TX-FRS	FM	CH _{M1}	0	0.363	1.522	1.84	1.923	2.5	PASS
TX-FRS	FM	CH _{M1}	5	0.623	1.855	1.967	1.969	2.5	PASS
TX-FRS	FM	CH _{M1}	10	1.081	1.927	1.977	1.968	2.5	PASS
TX-FRS	FM	CH _{M1}	15	1.773	1.852	1.974	1.98	2.5	PASS
TX-FRS	FM	CH _{M1}	20	2.032	1.8	1.974	1.993	2.5	PASS
TX-FRS	FM	CH _{M2}	-20	0.072	0.189	0.263	0.393	2.5	PASS
TX-FRS	FM	CH _{M2}	-15	0.107	0.303	0.43	0.669	2.5	PASS
TX-FRS	FM	CH _{M2}	-10	0.143	0.496	0.72	1.149	2.5	PASS
TX-FRS	FM	CH _{M2}	-5	0.217	0.853	1.264	1.77	2.5	PASS
TX-FRS	FM	CH _{M2}	0	0.36	1.5	1.833	1.916	2.5	PASS
TX-FRS	FM	CH _{M2}	5	0.625	1.858	1.968	1.969	2.5	PASS
TX-FRS	FM	CH _{M2}	10	1.062	1.923	1.982	1.973	2.5	PASS
TX-FRS	FM	CH _{M2}	15	1.764	1.85	1.972	1.975	2.5	PASS
TX-FRS	FM	CH _{M2}	20	2.022	1.802	1.974	2.009	2.5	PASS



Appendix D:Modulation Limit

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																												
TX-FRS	FM	CH _{M1}	<p>The graph for CH_{M1} shows Peak Deviation (kHz) on the y-axis (0 to 3) and Modulation Level (dB) on the x-axis (-20 to 20). A horizontal orange line with red dots represents the Limit at 2.5 kHz. Four curves represent different frequencies: 300 kHz (pink), 1004 kHz (blue), 1500 kHz (purple), and 2500 kHz (green). All curves start at 0 kHz deviation at -20 dB and increase as modulation level increases, approaching the 2.5 kHz limit.</p> <table border="1"><caption>Approximate Peak Deviation (kHz) for CH_{M1}</caption><thead><tr><th>Modulation Level (dB)</th><th>300 kHz</th><th>1004 kHz</th><th>1500 kHz</th><th>2500 kHz</th><th>Limit (kHz)</th></tr></thead><tbody><tr><td>-20</td><td>0.05</td><td>0.2</td><td>0.3</td><td>0.4</td><td>2.5</td></tr><tr><td>-15</td><td>0.1</td><td>0.3</td><td>0.4</td><td>0.6</td><td>2.5</td></tr><tr><td>-10</td><td>0.15</td><td>0.5</td><td>0.7</td><td>1.1</td><td>2.5</td></tr><tr><td>-5</td><td>0.2</td><td>0.8</td><td>1.2</td><td>1.7</td><td>2.5</td></tr><tr><td>0</td><td>0.3</td><td>1.5</td><td>1.8</td><td>1.9</td><td>2.5</td></tr><tr><td>5</td><td>0.6</td><td>1.8</td><td>1.9</td><td>1.9</td><td>2.5</td></tr><tr><td>10</td><td>1.1</td><td>1.9</td><td>1.9</td><td>1.9</td><td>2.5</td></tr><tr><td>15</td><td>1.8</td><td>1.8</td><td>1.8</td><td>1.9</td><td>2.5</td></tr><tr><td>20</td><td>2.0</td><td>1.8</td><td>1.8</td><td>1.9</td><td>2.5</td></tr></tbody></table>	Modulation Level (dB)	300 kHz	1004 kHz	1500 kHz	2500 kHz	Limit (kHz)	-20	0.05	0.2	0.3	0.4	2.5	-15	0.1	0.3	0.4	0.6	2.5	-10	0.15	0.5	0.7	1.1	2.5	-5	0.2	0.8	1.2	1.7	2.5	0	0.3	1.5	1.8	1.9	2.5	5	0.6	1.8	1.9	1.9	2.5	10	1.1	1.9	1.9	1.9	2.5	15	1.8	1.8	1.8	1.9	2.5	20	2.0	1.8	1.8	1.9	2.5
Modulation Level (dB)	300 kHz	1004 kHz	1500 kHz	2500 kHz	Limit (kHz)																																																										
-20	0.05	0.2	0.3	0.4	2.5																																																										
-15	0.1	0.3	0.4	0.6	2.5																																																										
-10	0.15	0.5	0.7	1.1	2.5																																																										
-5	0.2	0.8	1.2	1.7	2.5																																																										
0	0.3	1.5	1.8	1.9	2.5																																																										
5	0.6	1.8	1.9	1.9	2.5																																																										
10	1.1	1.9	1.9	1.9	2.5																																																										
15	1.8	1.8	1.8	1.9	2.5																																																										
20	2.0	1.8	1.8	1.9	2.5																																																										
TX-FRS	FM	CH _{M2}	<p>The graph for CH_{M2} shows Peak Deviation (kHz) on the y-axis (0 to 3) and Modulation Level (dB) on the x-axis (-20 to 20). A horizontal orange line with red dots represents the Limit at 2.5 kHz. Four curves represent different frequencies: 300 kHz (pink), 1004 kHz (blue), 1500 kHz (purple), and 2500 kHz (green). All curves start at 0 kHz deviation at -20 dB and increase as modulation level increases, approaching the 2.5 kHz limit.</p> <table border="1"><caption>Approximate Peak Deviation (kHz) for CH_{M2}</caption><thead><tr><th>Modulation Level (dB)</th><th>300 kHz</th><th>1004 kHz</th><th>1500 kHz</th><th>2500 kHz</th><th>Limit (kHz)</th></tr></thead><tbody><tr><td>-20</td><td>0.05</td><td>0.2</td><td>0.3</td><td>0.4</td><td>2.5</td></tr><tr><td>-15</td><td>0.1</td><td>0.3</td><td>0.4</td><td>0.6</td><td>2.5</td></tr><tr><td>-10</td><td>0.15</td><td>0.5</td><td>0.7</td><td>1.1</td><td>2.5</td></tr><tr><td>-5</td><td>0.2</td><td>0.8</td><td>1.2</td><td>1.7</td><td>2.5</td></tr><tr><td>0</td><td>0.3</td><td>1.5</td><td>1.8</td><td>1.9</td><td>2.5</td></tr><tr><td>5</td><td>0.6</td><td>1.8</td><td>1.9</td><td>1.9</td><td>2.5</td></tr><tr><td>10</td><td>1.1</td><td>1.9</td><td>1.9</td><td>1.9</td><td>2.5</td></tr><tr><td>15</td><td>1.8</td><td>1.8</td><td>1.8</td><td>1.9</td><td>2.5</td></tr><tr><td>20</td><td>2.0</td><td>1.8</td><td>1.8</td><td>1.9</td><td>2.5</td></tr></tbody></table>	Modulation Level (dB)	300 kHz	1004 kHz	1500 kHz	2500 kHz	Limit (kHz)	-20	0.05	0.2	0.3	0.4	2.5	-15	0.1	0.3	0.4	0.6	2.5	-10	0.15	0.5	0.7	1.1	2.5	-5	0.2	0.8	1.2	1.7	2.5	0	0.3	1.5	1.8	1.9	2.5	5	0.6	1.8	1.9	1.9	2.5	10	1.1	1.9	1.9	1.9	2.5	15	1.8	1.8	1.8	1.9	2.5	20	2.0	1.8	1.8	1.9	2.5
Modulation Level (dB)	300 kHz	1004 kHz	1500 kHz	2500 kHz	Limit (kHz)																																																										
-20	0.05	0.2	0.3	0.4	2.5																																																										
-15	0.1	0.3	0.4	0.6	2.5																																																										
-10	0.15	0.5	0.7	1.1	2.5																																																										
-5	0.2	0.8	1.2	1.7	2.5																																																										
0	0.3	1.5	1.8	1.9	2.5																																																										
5	0.6	1.8	1.9	1.9	2.5																																																										
10	1.1	1.9	1.9	1.9	2.5																																																										
15	1.8	1.8	1.8	1.9	2.5																																																										
20	2.0	1.8	1.8	1.9	2.5																																																										

**Appendix E:Aduio Frequency Response**

Test Mode	Modulation Type	Test Channel	Frequency (Hz)	Audio Frequency Response (dB)	Lower Limit	Upper Limit	Result
TX-FRS	FM	CH _{M1}	100	-32.75			PASS
TX-FRS	FM	CH _{M1}	200	-32.58			PASS
TX-FRS	FM	CH _{M1}	300	-12.87	-17.84	-9.42	PASS
TX-FRS	FM	CH _{M1}	400	-9.37	-12.86	-6.93	PASS
TX-FRS	FM	CH _{M1}	500	-6.92	-9.00	-5.00	PASS
TX-FRS	FM	CH _{M1}	600	-4.94	-7.42	-3.42	PASS
TX-FRS	FM	CH _{M1}	700	-3.35	-6.09	-2.09	PASS
TX-FRS	FM	CH _{M1}	800	-2.05	-4.93	-0.93	PASS
TX-FRS	FM	CH _{M1}	900	-0.95	-3.91	0.09	PASS
TX-FRS	FM	CH _{M1}	1000	0.00	-3.00	1.00	PASS
TX-FRS	FM	CH _{M1}	1200	1.60	-1.42	2.58	PASS
TX-FRS	FM	CH _{M1}	1400	2.90	-0.09	3.91	PASS
TX-FRS	FM	CH _{M1}	1600	4.07	1.07	5.07	PASS
TX-FRS	FM	CH _{M1}	1800	5.04	2.09	6.09	PASS
TX-FRS	FM	CH _{M1}	2000	5.92	3.00	7.00	PASS
TX-FRS	FM	CH _{M1}	2100	6.32	3.42	7.42	PASS
TX-FRS	FM	CH _{M1}	2200	6.69	3.83	7.83	PASS
TX-FRS	FM	CH _{M1}	2300	6.94	4.21	8.21	PASS
TX-FRS	FM	CH _{M1}	2400	7.10	4.58	8.58	PASS
TX-FRS	FM	CH _{M1}	2500	7.20	4.93	8.93	PASS
TX-FRS	FM	CH _{M1}	2600	7.26	4.59	9.27	PASS
TX-FRS	FM	CH _{M1}	2700	7.26	4.27	9.60	PASS
TX-FRS	FM	CH _{M1}	2800	7.22	3.95	9.91	PASS
TX-FRS	FM	CH _{M1}	2900	7.13	3.65	10.22	PASS
TX-FRS	FM	CH _{M1}	3000	6.97	3.35	10.51	PASS
TX-FRS	FM	CH _{M1}	3500	5.14			PASS
TX-FRS	FM	CH _{M1}	4000	1.40			PASS
TX-FRS	FM	CH _{M1}	4500	-3.84			PASS
TX-FRS	FM	CH _{M1}	5000	-9.98			PASS
TX-FRS	FM	CH _{M2}	100	-32.79	-	-	PASS
TX-FRS	FM	CH _{M2}	200	-32.59	-	-	PASS
TX-FRS	FM	CH _{M2}	300	-12.81	-17.84	-9.42	PASS
TX-FRS	FM	CH _{M2}	400	-9.44	-12.86	-6.93	PASS
TX-FRS	FM	CH _{M2}	500	-6.98	-9.00	-5.00	PASS
TX-FRS	FM	CH _{M2}	600	-5.00	-7.42	-3.42	PASS
TX-FRS	FM	CH _{M2}	700	-3.38	-6.09	-2.09	PASS
TX-FRS	FM	CH _{M2}	800	-2.06	-4.93	-0.93	PASS
TX-FRS	FM	CH _{M2}	900	-0.98	-3.91	0.09	PASS
TX-FRS	FM	CH _{M2}	1000	-0.03	-3.00	1.00	PASS
TX-FRS	FM	CH _{M2}	1200	1.60	-1.42	2.58	PASS
TX-FRS	FM	CH _{M2}	1400	2.89	-0.09	3.91	PASS
TX-FRS	FM	CH _{M2}	1600	4.06	1.07	5.07	PASS

**Appendix E:Audio Frequency Response**

Test Mode	Modulation Type	Test Channel	Frequency (Hz)	Audio Frequency Response (dB)	Lower Limit	Upper Limit	Result
TX-FRS	FM	CH _{M2}	1800	5.04	2.09	6.09	PASS
TX-FRS	FM	CH _{M2}	2000	5.91	3.00	7.00	PASS
TX-FRS	FM	CH _{M2}	2100	6.30	3.42	7.42	PASS
TX-FRS	FM	CH _{M2}	2200	6.68	3.83	7.83	PASS
TX-FRS	FM	CH _{M2}	2300	6.96	4.21	8.21	PASS
TX-FRS	FM	CH _{M2}	2400	7.14	4.58	8.58	PASS
TX-FRS	FM	CH _{M2}	2500	7.26	4.93	8.93	PASS
TX-FRS	FM	CH _{M2}	2600	7.32	4.59	9.27	PASS
TX-FRS	FM	CH _{M2}	2700	7.33	4.27	9.60	PASS
TX-FRS	FM	CH _{M2}	2800	7.29	3.95	9.91	PASS
TX-FRS	FM	CH _{M2}	2900	7.20	3.65	10.22	PASS
TX-FRS	FM	CH _{M2}	3000	7.05	3.35	10.51	PASS
TX-FRS	FM	CH _{M2}	3500	5.22	-	-	PASS
TX-FRS	FM	CH _{M2}	4000	1.48	-	-	PASS
TX-FRS	FM	CH _{M2}	4500	-3.76	-	-	PASS
TX-FRS	FM	CH _{M2}	5000	-9.88	-	-	PASS



Appendix E:Audio Frequency Response

Test Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-FRS	FM	CH _{M1}	<p>The graph for CH_{M1} shows the audio frequency response. The y-axis is labeled 'RESPONSE ATTENUATION (dB)' and ranges from -25.00 to 15.00. The x-axis is labeled 'FREQUENCY (Hz)' and is logarithmic, ranging from 100 to 10000. A red line represents the 'Audio Frequency Response (dB)', which starts at approximately -25 dB at 100 Hz, rises to about -10 dB at 1 kHz, peaks at approximately 7 dB at 3.125 kHz, and then drops sharply to -10 dB at 10 kHz. A yellow line represents the 'Upper Limit', which starts at -10 dB at 100 Hz, rises to about 10 dB at 1 kHz, peaks at approximately 10 dB at 3.125 kHz, and then drops to about 5 dB at 10 kHz. The red line remains below the yellow line throughout the measured range.</p>
TX-FRS	FM	CH _{M2}	<p>The graph for CH_{M2} shows the audio frequency response. The y-axis is labeled 'RESPONSE ATTENUATION (dB)' and ranges from -25.00 to 15.00. The x-axis is labeled 'FREQUENCY (Hz)' and is logarithmic, ranging from 100 to 10000. A red line represents the 'Audio Frequency Response (dB)', which starts at approximately -25 dB at 100 Hz, rises to about -10 dB at 1 kHz, peaks at approximately 7 dB at 3.125 kHz, and then drops sharply to -10 dB at 10 kHz. A yellow line represents the 'Upper Limit', which starts at -10 dB at 100 Hz, rises to about 10 dB at 1 kHz, peaks at approximately 10 dB at 3.125 kHz, and then drops to about 5 dB at 10 kHz. The red line remains below the yellow line throughout the measured range.</p>

Note: The highest audio frequency response at 3kHz<3.125kHz, so meet the requirement.

**Appendix F:Frequency Stability Test & Temperature**

Test Mode	Modulation Type	Test Conditions		Frequency error (ppm)		Limit (ppm)	Result
		Voltage	Temperature	CH _{M1}	CH _{M2}		
TX-FRS	FM	V _N	-30	<u>0.062</u>	0.055	±2.5	PASS
TX-FRS	FM	V _N	-20	0.051	0.042	±2.5	PASS
TX-FRS	FM	V _N	-10	0.043	0.033	±2.5	PASS
TX-FRS	FM	V _N	0	0.035	0.021	±2.5	PASS
TX-FRS	FM	V _N	10	0.022	0.013	±2.5	PASS
TX-FRS	FM	V _N	20	0.011	0.009	±2.5	PASS
TX-FRS	FM	V _N	30	0.022	0.020	±2.5	PASS
TX-FRS	FM	V _N	40	0.030	0.026	±2.5	PASS
TX-FRS	FM	V _N	55	0.044	0.035	±2.5	PASS



Appendix G:Frequency Stability Test & Voltage

Test Mode	Modulation Type	Test Conditions		Frequency error (ppm)		Limit (ppm)	Result
		Voltage	Temperature	CH _{M1}	CH _{M2}		
TX-FRS	FM	V _N	T _N	0.011	0.009	±2.5	PASS
TX-FRS	FM	V _L	T _N	0.035	0.031	±2.5	PASS
TX-FRS	FM	V _H	T _N	0.023	0.019	±2.5	PASS

----End of Report----