





TEST REPORT

Report No. : **CHTEW22010123R1** Report verification: 
Project No. : **SHT2201062401EW**
FCC ID : **2AE6C-EP8100U1**
Applicant's name : **Shenzhen Excera Technology Co., Ltd.**
 Address..... : Room 201C, Block C, HUAHAN Innovation Park, No.16
 Langshan Road, Nanshan District, Shenzhen, P.R.C.
Test item description : **Digital Portable Radio**
 Trade Mark : EXCERA
 Model/Type reference : EP8000 U1
 Listed Model(s)..... : -
Standard..... : **FCC CFR Title 47 Part 90**
 Date of receipt of test sample..... : Jan.18, 2022
 Date of testing..... : Jan.19, 2022- Jan.22, 2022
 Date of issue..... : Jan.24, 2022
Result : **PASS**

Compiled by
 (position+printed name+signature) . : File administrators: Fanghui Zhu 

Supervised by
 (Position-Printed name-Signature) : Project Engineer Cheng Xiao 

Approved by
 (Position-Printed name-Signature) : RF Manager Hans Hu 

Testing Laboratory Name..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**
 Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
 Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test standard	3
1.2.	Report revised information	3
2	<u>TEST DESCRIPTION</u>	4
3	<u>SUMMARY</u>	5
3.1	Client information	5
3.2	Product description	5
3.3	Radio Specification Description *1	6
3.4	Testing laboratory information	7
4	<u>TEST CONFIGURATION</u>	8
4.1	Test frequency list	8
4.2	Operation mode	8
4.3	Support unit used in test configuration and system	9
4.4	Testing environmental condition	10
4.5	Measurement uncertainty	10
4.6	Equipment used during the testing	11
5	<u>TEST CONDITIONS AND RESULTS</u>	13
5.1	Conducted carrier output power	13
5.2	99% occupied bandwidth & 26dB bandwidth	14
5.3	Emission mask	16
5.4	Modulation limit	18
5.5	Audio frequency response	19
5.6	Frequency stability VS temperature	21
5.7	Frequency stability VS voltage	22
5.8	Transmitter frequency behavior	23
5.9	Transmit conducted spurious emission	25
5.10	Transmitter radiated spurious emission	26
6	<u>TEST SETUP PHOTOS</u>	39
7	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	40
7.1	External photos	40
7.2	Internal photos	43
8	<u>APPENDIX REPORT</u>	48

1 TEST STANDARDS AND REPORT VERSION

1.1. Test standard

The tests were performed according to following standards:

[FCC Rules Part 90](#): Private land mobile radio services.

[FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[ANSI/TIA-603-E \(2016\)](#): Land Mobile FM or PM Communications Equipment and Performance Standards

1.2. Report revised information

Revised No.	Date of issued	Description
N/A	2021-10-29	Original
R1	2022-01-24	Change the product name and test model, Removed buttons and screen,make difference test(Transmit radiated spurious emission) based on the report CHTEW21100217(2021-10-29)

2 TEST DESCRIPTION

Section	Test Item	Section	Result	Test Engineer
5.1	Conducted carrier output power	Part 90.205 Part 2.1046(a)	Pass	Casper Chen
5.2	99% occupied bandwidth & 26dB bandwidth	Part 90.209 & 210 Part 2.1049	Pass	Casper Chen
5.3	Emission mask	Part 90.209 & 210 Part 2.1049	Pass	Casper Chen
5.4	Modulation limit	Part 2.1047(b)	Pass	Casper Chen
5.5	Audio frequency response	Part 2.1047(a)	Pass	Casper Chen
5.6	Frequency stability VS temperature	Part 90.213 Part 2.1055	Pass	Casper Chen
5.7	Frequency stability VS voltage	Part 90.213 Part 2.1055	Pass	Casper Chen
5.8	Transient frequency behavior	Part 90.214	Pass	Casper Chen
5.9	Transmit conducted spurious emission	Part 90.210 Part 2.1051	Pass	Casper Chen
5.10	Transmit radiated spurious emission	Part 90.210 Part 2.1053	Pass	Quanhai Deng

3 **SUMMARY**

3.1 Client information

Applicant:	Shenzhen Excera Technology Co., Ltd.
Address:	Room 201C, Block C, HUAHAN Innovation Park, No.16 Langshan Road, Nanshan District, Shenzhen, P.R.C.
Manufacturer:	Shenzhen Excera Technology Co., Ltd.
Address:	Room 201C, Block C, HUAHAN Innovation Park, No.16 Langshan Road, Nanshan District, Shenzhen, P.R.C.
Factory:	Shenzhen Excera Technology Co., Ltd.
Address:	3 rd Floor , Building B, Guancheng Low-carbon Industrial Park, Gongming Shang, Guangming New District, Shenzhen,P.R.C.

3.2 Product description

Name of EUT:	Digital Portable Radio
Trade mark:	EXCERA
Model/Type reference:	EP8000 U1
Listed model(s):	-
Power supply:	DC7.4V for battery
Adapter information:	Model: HKA01212010-XQ Input: 100-240Vd.c., 50/60Hz 0.5A Output: 12.0V a.c., 1.0A Manufacture: Shenzhen Huntkey Electric Co.,Ltd.
Hardware version:	EP8100-J
Software version:	EXCERA OneKeyUpdate 1.4.01.15D

3.3 Radio Specification Description ^{*1}

Device type:	<input checked="" type="checkbox"/> Portable	<input type="checkbox"/> Mobile
Support Frequency Range:	400MHz~470MHz	
Permitted frequency range: ^{*2}	400MHz~406MHz, 406.1MHz~470MHz	
Support type:	<input checked="" type="checkbox"/> Analog	<input checked="" type="checkbox"/> Digital
Support digital protocol: ^{*3}	DMR	
Support data rate for DMR:	9.6kbps	
Modulation type:	Analog: FM	
	Digital: 4FSK	
Channel Separation:	Analog:	<input checked="" type="checkbox"/> 12.5kHz <input type="checkbox"/> 25kHz
	Digital :	<input type="checkbox"/> 6.25kHz <input checked="" type="checkbox"/> 12.5kHz
Emission Designator: ^{*4}	Analog:	11K0F3E
	Digital:	7K60FXW, 7K60FXD
Rated power class:	<input checked="" type="checkbox"/> High Power: 4.2W	<input checked="" type="checkbox"/> Low Power: 1.2W
Antenna Type:	Helical antenna	
Antenna Gain:	0dBi	

Note:

- (1) ^{*1} This information is provided by this applicant.
- (2) ^{*2} Listed frequency range 400MHz~406MHz for Federal use Only.
- (3) ^{*3} The DMR standard specifies two-slot Time Division Multiplexing Technology to split the 12.5 kHz channel into two virtual 6.25kHz communication paths. This equates to an efficiency of one voice channel per 6.25 kHz of bandwidth even though it operates in channels of 12.5 kHz
- (4) ^{*4} According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:
- For FM Voice Modulation
Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz
 $B_n = 2M + 2DK = 2*3 + 2*2.5*1 = \mathbf{11\ KHz}$
Emission designation: 11K0F3E
 - For FM Data Modulation
Channel Spacing = 12.5 KHz, R = 9600 bps, D = 2160 Hz, S = 4, K = 0.518
 $B_n = (R/\log_2 S) + 2DK = 7037 \approx \mathbf{7.1\ KHz}$
Emission designation: 7K10FXE, 7K10FXD

3.4 Testing laboratory information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Test Firm Registration Number	762235
	FCC Designation Number	CN1181

4 TEST CONFIGURATION

4.1 Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

So test frequency as follow:

Frequency Bands (MHz)	Test Channel	Test Frequency (MHz)
400MHz ~ 406MHz	CH _L	400.0125
	CH _{M1}	405.9875
406.1MHz ~480MHz	CH _{M2}	406.1125
	CH _{M3}	438.0125
	CH _H	469.9875

4.2 Operation mode

Test Mode	Transmitting	Receiving	Digital		Analog		Power Level	
			12.5kHz		12.5kHz		High	Low
TX-DNH	■		■				■	
TX-DNL	■		■					■
TX-ANH	■				■		■	
TX-ANL	■				■			■
RX-DN		■	■					
RX-AN		■			■			

Note: ■: is operation mode.

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.
DM	A 511 bit binary pseudo-random bit sequence based on ITU-T Rec. O.153

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report.

Section	Test Item	Modulation Type	Test mode (Worse case mode)
5.1	Conducted carrier output power	UM	TX-DNH, TX-DNL, TX-ANH, TX-ANL
5.2	99% occupied bandwidth & 26dB bandwidth	AM6, DM	TX-DNH, TX-DNL, TX-ANH, TX-AN
5.3	Emission mask	AM5, DM	TX-DNH, TX-DNL, TX-ANH, TX-ANL
5.4	Modulation limit	AM6	TX-ANH
5.5	Audio frequency response	AM2	TX-ANH
5.6	Frequency stability VS temperature	UM	TX-DNH, TX-ANH
5.7	Frequency stability VS voltage	UM	TX-DNH, TX-ANH
5.8	Transient frequency behavior	UM	TX-DNH, TX-ANH
5.9	Transmit conducted spurious emission	AM5, DM	TX-DNH, TX-ANH
5.10	Transmit radiated spurious emission	AM5, DM	TX-DNH, TX-ANH

4.3 Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipement	Trade Name	Model No.
1			
2			

4.4 Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar
Test voltage:	Normal voltage:	DC 7.4V
	Extreme lower voltage:	DC 6.29V
	Extreme upper voltage:	DC 8.14V

4.5 Measurement uncertainty

Test Items	Measurement Uncertainty
Frequency stability & Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz
Conducted Output Power	0.51dB
ERP / EIRP / RSE	2.66dB for <1GHz 3.44dB for >1GHz
Conducted Emission 9KHz-30MHz	3.02dB
Radiated Emission 30~1000MHz	4.90dB
Radiated Emission 1~18GHz	4.96dB
FM deviation	25 Hz
Audio level	0.62 dB
Low Pass Filter Response	0.76 dB
Modulation limiting	0.42 %
Transient frequency behavior	6.8 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.6 Equipment used during the testing

Test item		Conducted Carrier Output Power Modulation Limit Audio Frequency Response					
No.	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Calibration Date (YY-MM-DD)	
						Last	Next
1	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2021/9/13	2022/9/12
2	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2021/9/13	2022/9/12
Test item		99% Occupied Bandwidth & 26dB Bandwidth Emission Mask Transmitter Frequency Behavior Transmit Conducted Spurious Emission					
No.	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Calibration Date (YY-MM-DD)	
						Last	Next
1	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2021/9/13	2022/9/12
1	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2021/9/13	2022/9/12
2	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2021/9/13	2022/9/12
3	Attenuator	JFW	HTWE0292	50FH-030-100	N/A	2021/05/17	2022/05/16
4	Attenuator	JFW	HTWE0293	50-A-MFN-20	0322	2021/05/17	2022/05/16
5	Filter-VHF	Microwave	HTWE0309	N26460M1	498702	2021/05/14	2022/05/13
6	Filter-UHF	Microwave	HTWE0311	N25155M2	498704	2021/05/14	2022/05/13
Test item		Frequency stability					
No.	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Calibration Date (YY-MM-DD)	
						Last	Next
1	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2021/9/13	2022/9/12
2	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2021/9/13	2022/9/12
3	Climate chamber	ESPEC	HTWE0254	GPL-2	N/A	2021/9/14	2022/9/13
4	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

Test item		Radiated Spurious Emission					
No.	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Calibration Date (YY-MM-DD)	
						Last	Next
1	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2022/09/26
2	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2021/9/13	2022/9/12
3	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2022/04/05
4	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/4/27	2023/4/27
5	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2022/04/05
6	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
7	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2021/11/5	2022/11/4
8	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
9	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
10	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
11	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
12	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
13	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
14	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A
15	Filter-VHF	Microwave	HTWE0309	N26460M1	498702	2021/05/14	2022/05/13
16	Filter-UHF	Microwave	HTWE0311	N25155M2	498704	2021/05/14	2022/05/13
17	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2021/05/14	2022/05/13

5 TEST CONDITIONS AND RESULTS


5.1 Conducted carrier output power

LIMIT

FCC Part 90.205, FCC Part 2.1046

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation.

TEST CONFIGURATION

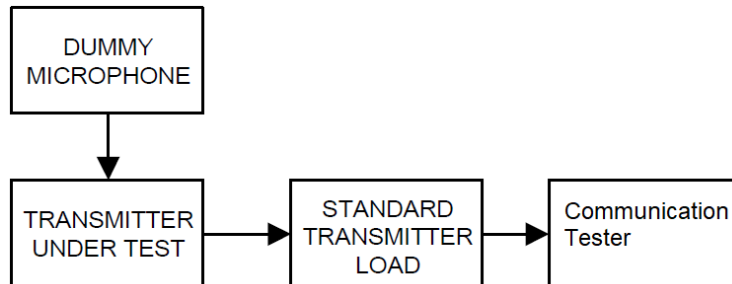

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Correct for all losses in the RF path
- (3) Measure the transmitter output power with RMS detector
- (4) If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix A on the section 8 appendix report

5.2 99% occupied bandwidth & 26dB bandwidth


LIMIT

FCC Part 90.209, FCC Part 2.1049


Frequency band (MHz)	Channel spacing (kHz)	Authorized bandwidth (kHz)
Below 25 ²		
25-50	20	20
72-76	20	20
150-174	17.5	¹ 320/11.25/6
216-220 ⁵	6.25	20/11.25/6
220-222	5	4
406-512 ²	¹ 6.25	¹³⁶ 20/11.25/6
806-809/851-854	12.5	20
809-824/854-869	25	⁶ 20
896-901/935-940	12.5	13.6
902-928 ⁴		
929-930	25	20
1427-1432 ⁵	12.5	12.5
³ 2450-2483.5 ²		
Above 2500 ²		

TEST CONFIGURATION

Test setup for Analog:

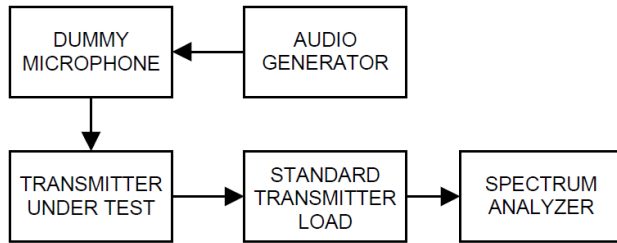

Test setup for Digital:

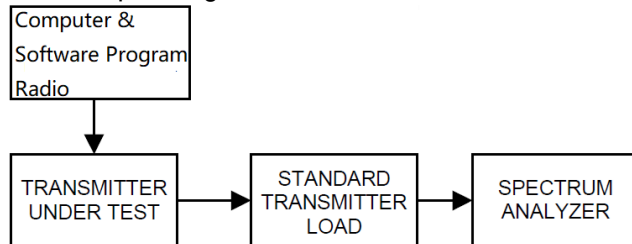

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Spectrum set as follow:
 - Centre frequency = the nominal EUT channel center frequency,
 - Span shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient)
 - RBW = 1% to 5% of the anticipated OBW, VBW ≥ 3 × RBW, Sweep = auto,
 - Detector function = peak, Trace = max hold
- (3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- (4) Measure and record the results in the test report.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix B on the section 8 appendix report

5.3 Emission mask

LIMIT

FCC Part 90.210, FCC Part 2.1049

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2 5}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁶	B	H
809-824/854-869 ^{3 5}	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 ⁴		
All other bands	B	C


Emission Mask D — 12.5 kHz channel bandwidth equipment

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the centre of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : 0dB
- (2) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

TEST CONFIGURATION

Test setup for Analog:

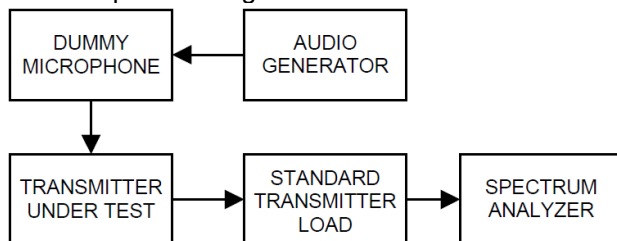

Test setup for Digital:

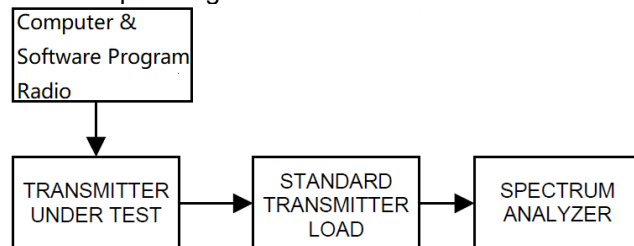

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:
Centre frequency = fundamental frequency, span=120kHz for 12.5kHz channel spacing,
RBW=100Hz, VBW=1000Hz, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 4.2
- 5) Measure and record the results in the test report.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix C on the section 8 appendix report


5.4 Modulation limit

LIMIT

FCC Part 2.1047(b)

2.5kHz for 12.5 KHz Channel Spacing System.

TEST CONFIGURATION

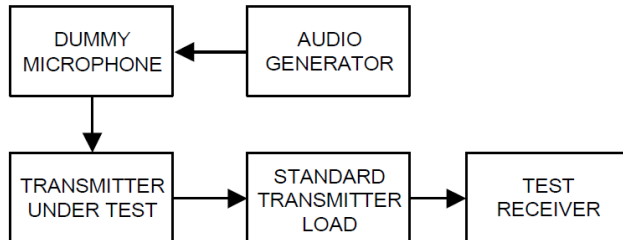

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 4.2 and vary the input level from -20 to $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed Not Applicable


Please refer to appendix D on the section 8 appendix report

5.5 Audio frequency response

LIMIT


FCC Part2.1047(a):

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

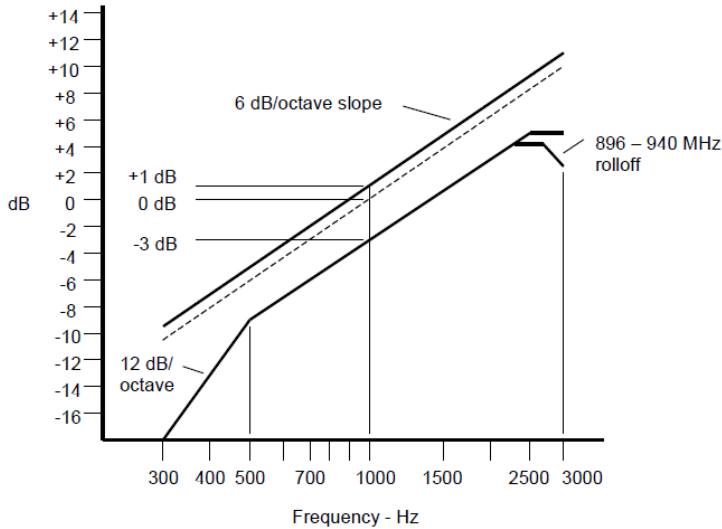

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

TEST CONFIGURATION

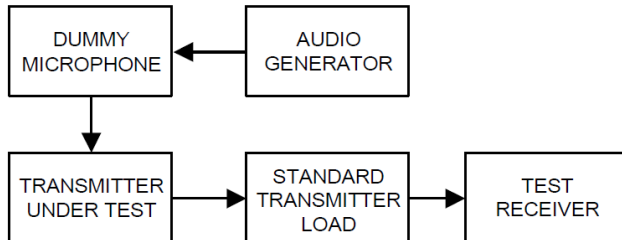

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 4.2
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ}
- 11) Calculate the audio frequency response at the present frequency as:
audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix E on the section 8 appendix report


5.6 Frequency stability VS temperature

LIMIT

FCC Part 90.213, FCC Part 2.1055

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 2 3 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 11 5	6 5	4 6 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7 11 14 2,5	8 5	8 5
806-809	1 4 1,0	1.5	1.5
809-824	1 4 1,5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	1 4 0,1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 300	300	300
Above 2450 ¹⁰			

TEST CONFIGURATION

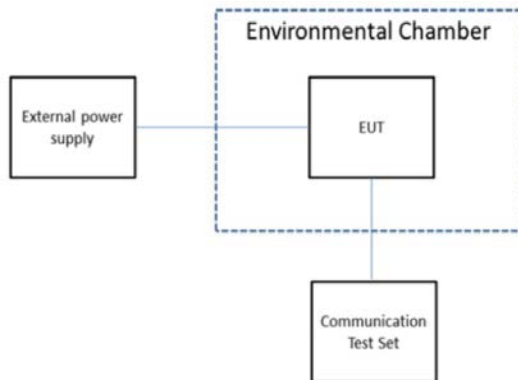

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency as MCF_{MHz} .
- 4) Calculate the ppm frequency error by the following:

$$\text{ppm error} = (MCF_{\text{MHz}} / ACF_{\text{MHz}} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed Not Applicable

Please refer to appendix F on the section 8 appendix report


5.7 Frequency stability VS voltage

LIMIT

FCC Part 90.213, FCC Part 2.1055

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 ² 3 ¹ 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 ¹ 11 ⁵	6 ⁵	4 ⁶ 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7 ¹ 11 ¹⁴ 2,5	8 ⁵	8 ⁵
806-809	1 ⁴ 1,0	1.5	1.5
809-824	1 ⁴ 1,5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	1 ⁴ 0,1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 ³ 00	300	300
Above 2450 ¹⁰			

TEST CONFIGURATION

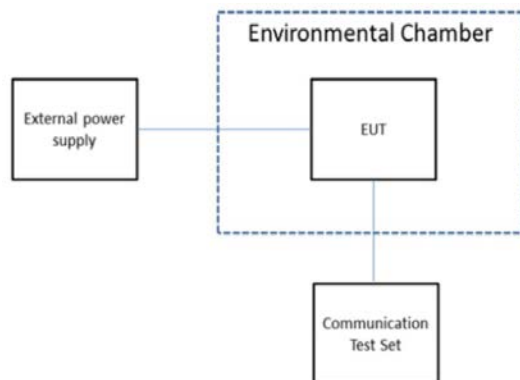

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as MCF_{MHz}
- 4) Calculate the ppm frequency error by the following:

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied $\pm 15\%$ of the nominal value measured at the input to the EUT

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed Not Applicable

Please refer to appendix G on the section 8 appendix report

5.8 Transmitter frequency behavior

LIMIT

FCC part 90.214


Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1 ⁴	±25.0 kHz	5.0 ms	10.0 ms
t_2	±12.5 kHz	20.0 ms	25.0 ms
t_3 ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1 ⁴	±12.5 kHz	5.0 ms	10.0 ms
t_2	±6.25 kHz	20.0 ms	25.0 ms
t_3 ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1 ⁴	±6.25 kHz	5.0 ms	10.0 ms
t_2	±3.125 kHz	20.0 ms	25.0 ms
t_3 ⁴	±6.25 kHz	5.0 ms	10.0 ms

Note:

- On is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 - t_1 is the time period immediately following ton.
 - t_2 is the time period immediately following t_1 .
 - t_3 is the time period from the instant when the transmitter is turned off until toff.
 - t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

TEST CONFIGURATION

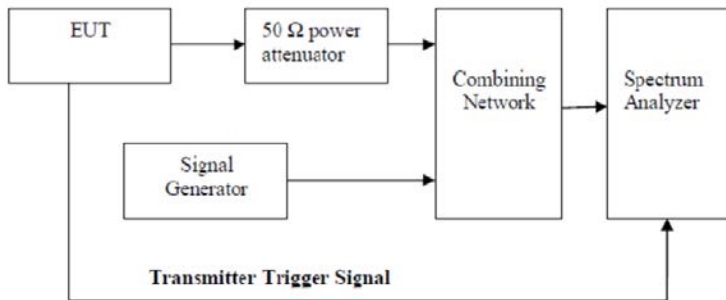

TEST PROCEDURE

- Connect test equipment as shown in above figure
- Verify RF attenuator power rating for EUT providing adequate protection to the combining network and measurement equipment.
- Tune spectrum analyzer center frequency to EUT frequency and span to at least 100 kHz. Set amplitude according to EUT RF power.
- Switch transmitter on and adjust settings in accordance with step c); switch transmitter to the off position.
- Set analyzer to FM mode; re-tune analyzer to EUT frequency and span according to step c), while in FM demodulation mode.
- An RF test signal of the same frequency as the EUT from the signal generator shall be modulated by a frequency of 1 kHz with a deviation equal to plus or minus the value of the channel spacing (separation). The RF signal strength shall be adjusted allowing the analyzer to demodulate the signal in FM mode.
- Adjust analyzer x axis to capture at least 100 ms of demodulated signal.
- Adjust analyzer y axis for the correct deviation amplitude.
- The analyzer display should show a continuous 1 kHz signal and the channel spacing deviation amplitude.

- j) Change analyzer settings to single sweep and external trigger. For newer analyzers, the channel bandwidth might have to be adjusted for the correct sample rate and sweep speed.
- k) Turn on EUT and adjust analyzer to display desired signal by adjusting trigger settings and considerations in step j). Turn off EUT.
- l) Repeat step k) until optimum set-up is achieved.
- m) Start measurement by turning on EUT. Observe measurements results in analyzer display, EUT_{ON} starts at the moment the 1 kHz signal is suppressed (t₂). See Figure 11 for transient frequency behavior with switch on.
- n) Record values observed in step m) as frequency difference versus time.
- o) Turn off EUT. EUT_{OFF} is considered at the start of the 1 kHz signal defined as t₃. See Figure 12 for transient frequency behavior with switch off.
- p) Record the values observed in step o) as frequency difference versus time.

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix H on the section 8 appendix report

5.9 Transmit conducted spurious emission

LIMIT

FCC Part 90.210, FCC Part 2.1051

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.


In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL-50-10log (P)

EL is the emission level of the Output Power expressed in dBm,

Limit (dBm) = P(dBm)-50-10 log (Pwatts) = -20dBm

TEST CONFIGURATION

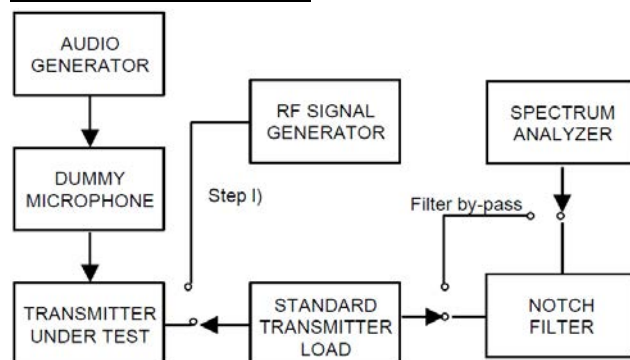

TEST PROCEDURE

1. Connect the equipment as illustrated, with the notch filter by-passed.
2. Apply Input Modulation Signal to EUT according to Section 4.2
3. Adjust the spectrum analyzer for the following settings:
Below 1GHz: RBW=100kHz, VBW=300kHz
Above 1GHz: RBW=1MHz, VBW=3MHz
Detector=Peak, Sweep time=Auto, Trace=Max hold
4. Scan frequency range up to 10th harmonic.
5. Record the frequencies and levels of spurious emissions

TEST MODE

Please refer to the section 4.2

TEST RESULTS

Passed Not Applicable

Please refer to appendix I on the section 8 appendix report

5.10 Transmitter radiated spurious emission

LIMIT

FCC Part 90.210, FCC Part 2.1051

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

In general, the worse case attenuation requirement shown above was applied.


Calculation: Limit (dBm) = EL - 50 - 10 log (P)

EL is the emission level of the Output Power expressed in dBm,


Limit (dBm) = P(dBm) - 50 - 10 log (Pwatts) = -20dBm


TEST CONFIGURATION

Below 1GHz:

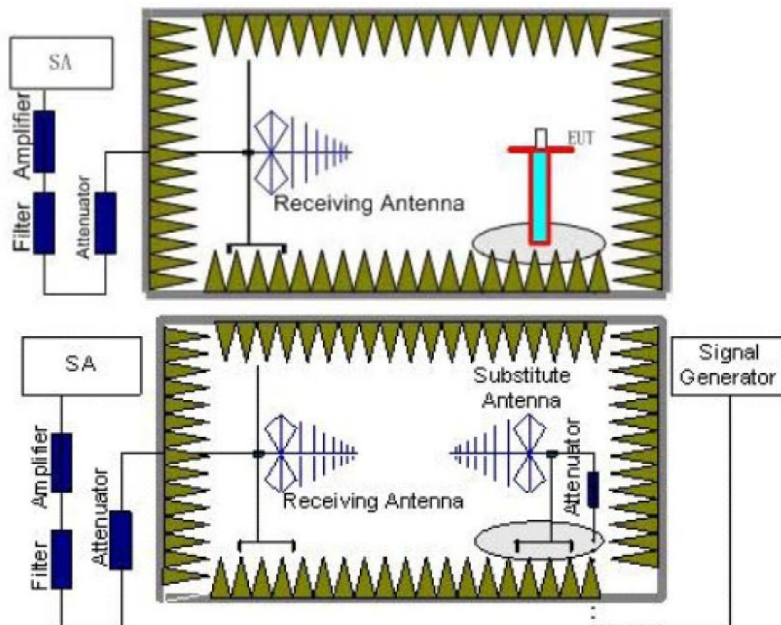

Above 1GHz:

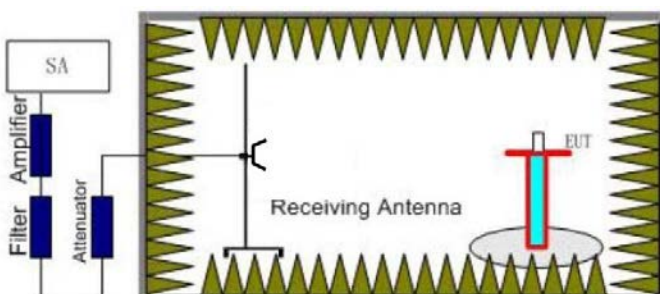

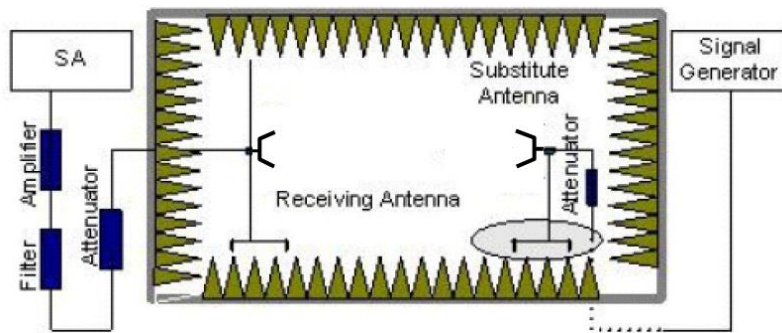

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$
 If necessary, the antenna gain can be calculated from calibrated antenna factor information



14. Provide the complete measurement results as a part of the test report.



TEST MODE

Please refer to the section 4.2


TEST RESULTS

Passed **Not Applicable**

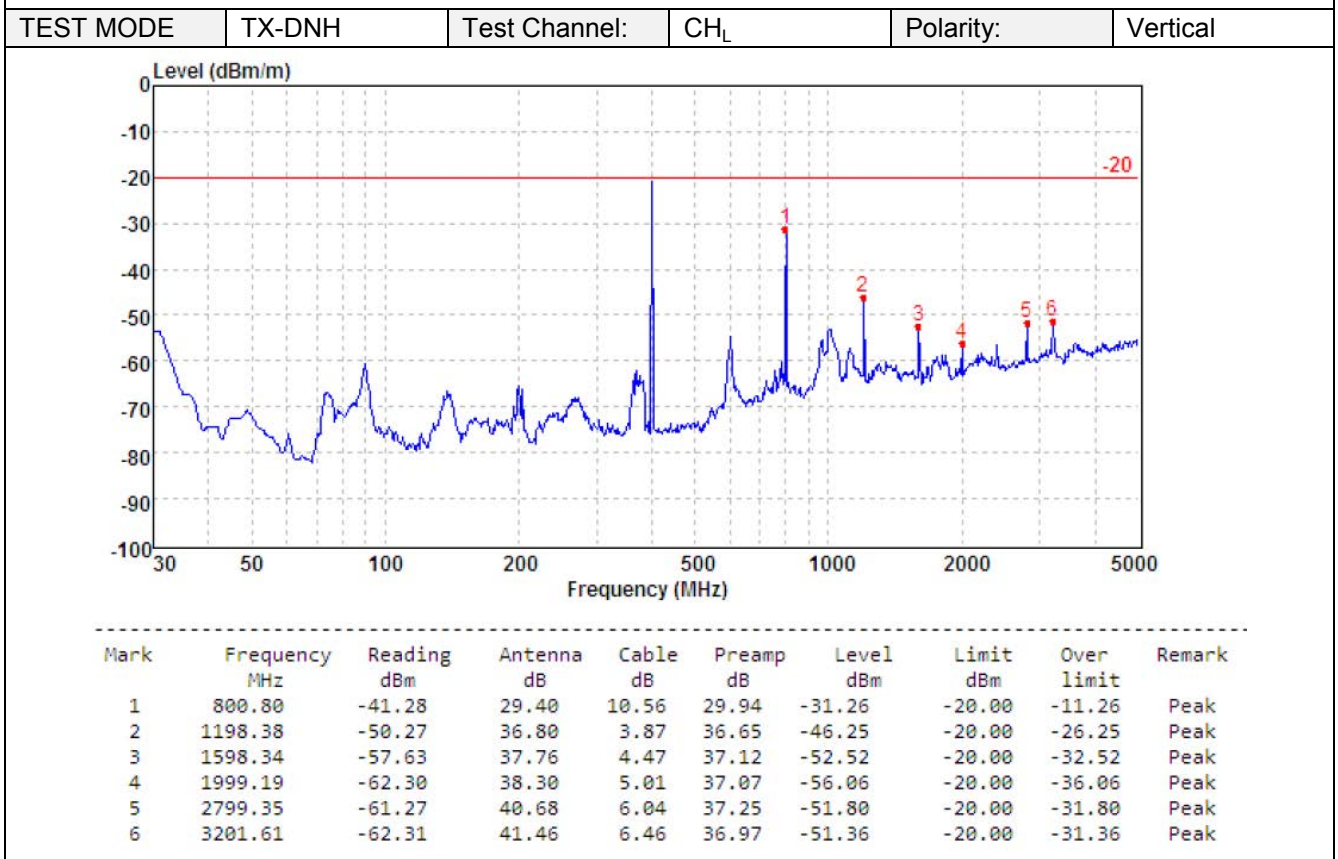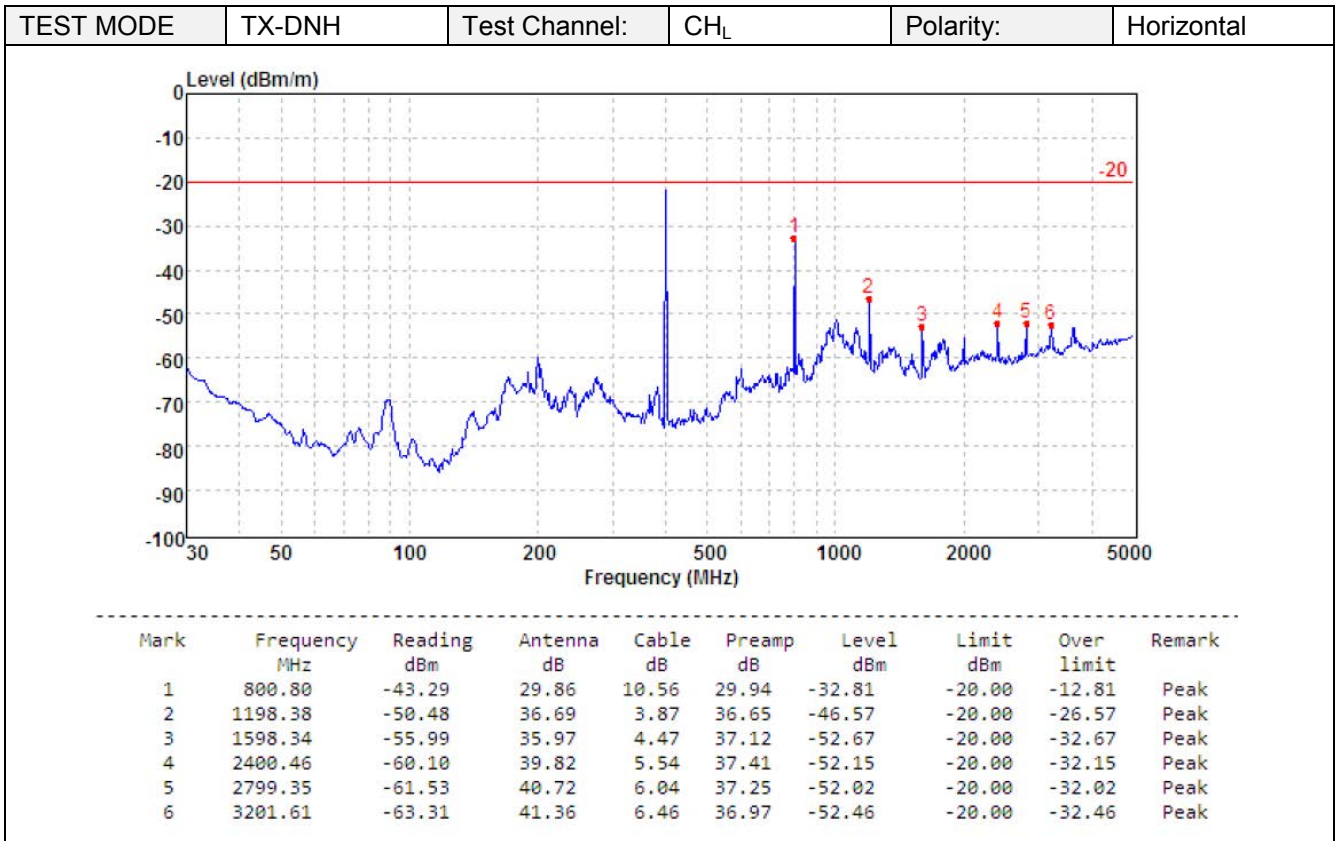

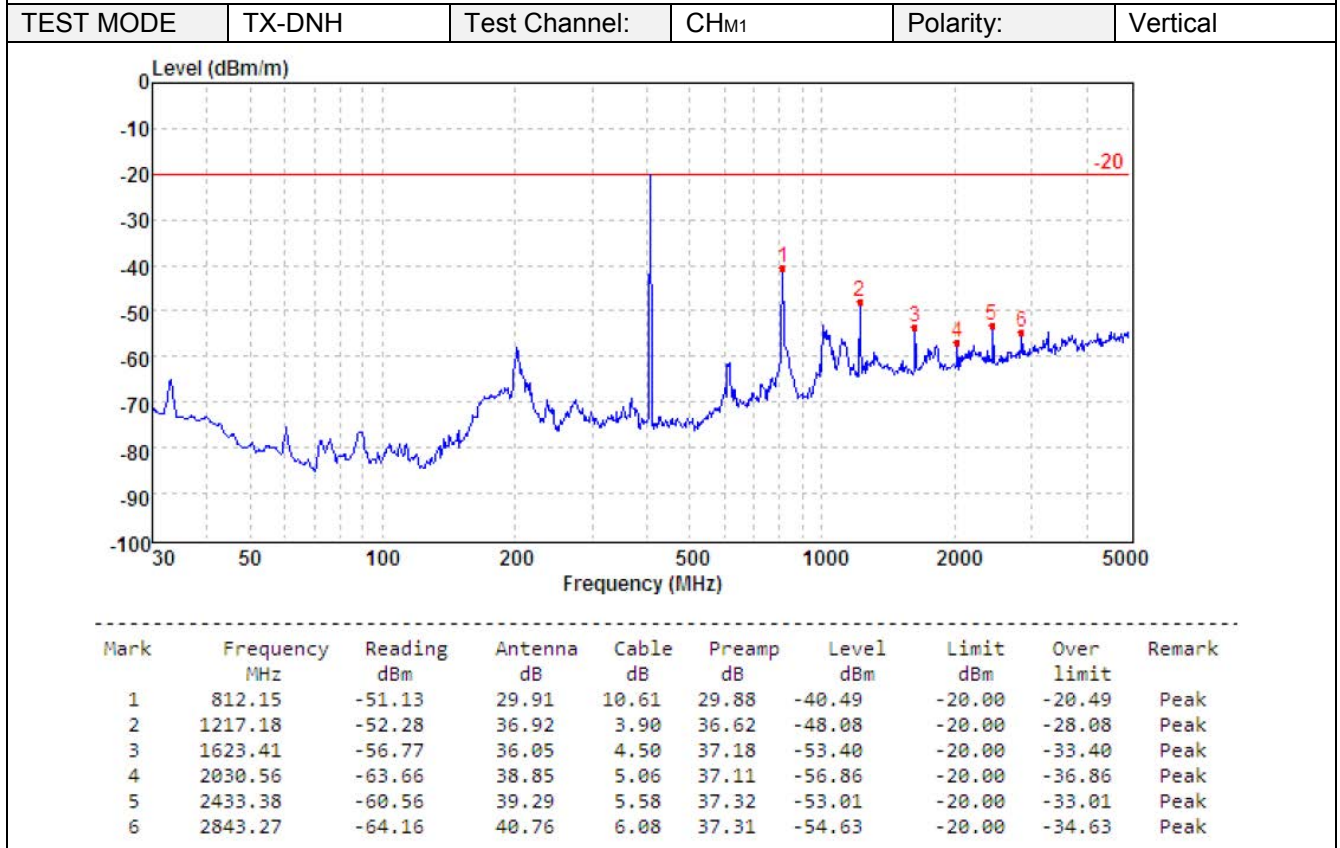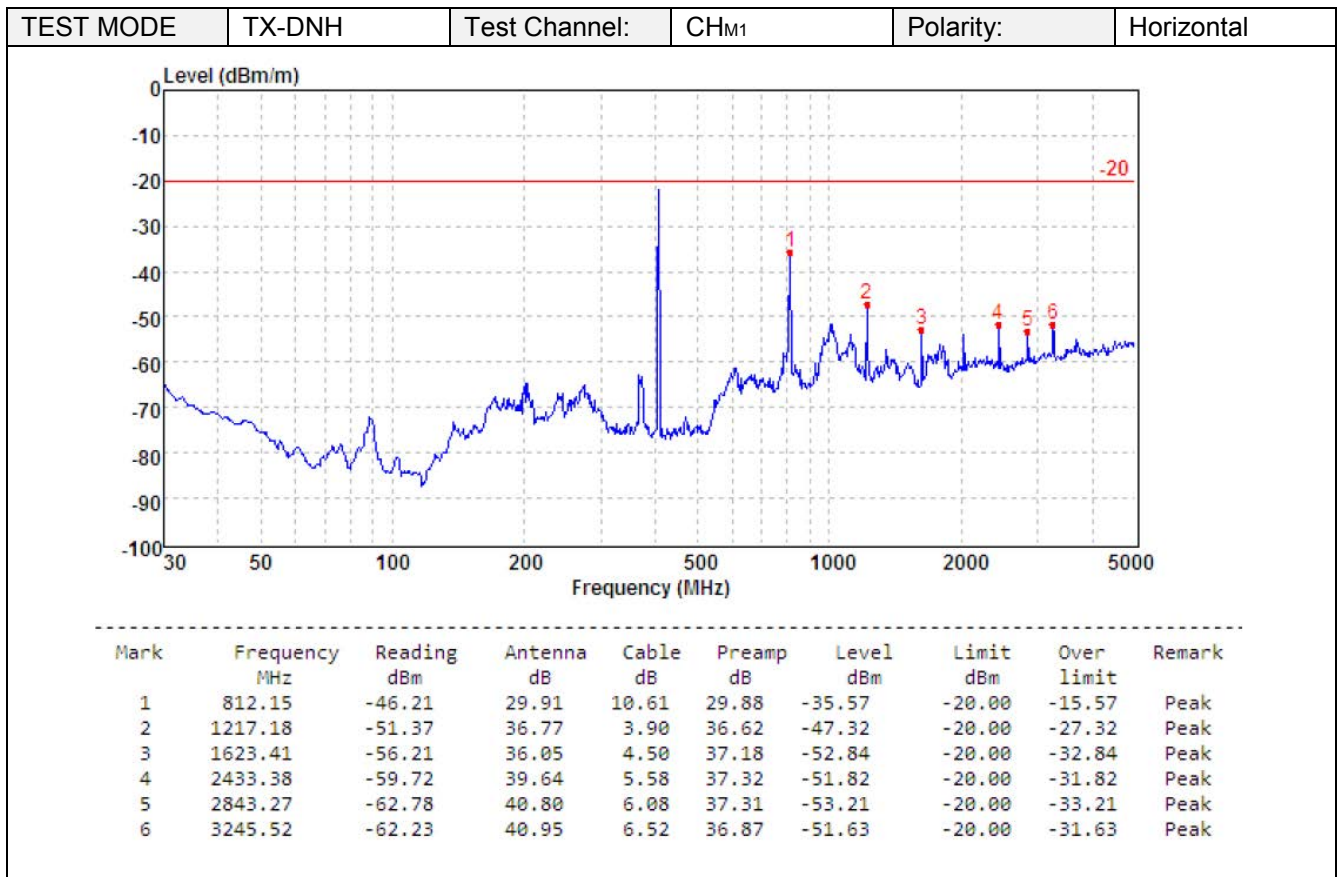


TEST MODE	TX-DNH	Test Channel:	CH _{M2}	Polarity:	Horizontal
-----------	--------	---------------	------------------	-----------	------------


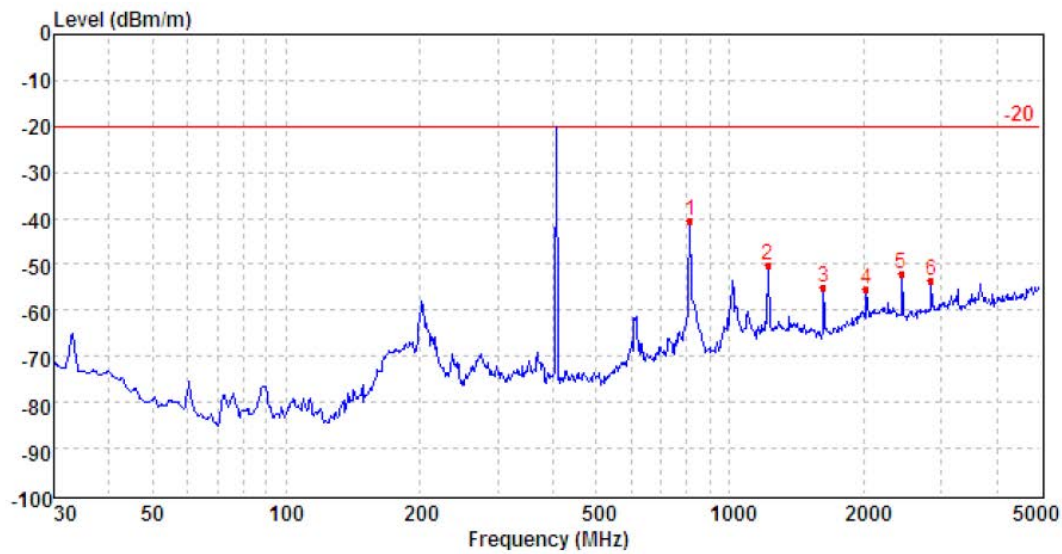




Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	812.15	-51.13	29.91	10.61	29.88	-40.49	-20.00	-20.49	Peak
2	1217.18	-54.05	36.77	3.90	36.62	-50.00	-20.00	-30.00	Peak
3	1623.41	-58.51	36.05	4.50	37.18	-55.14	-20.00	-35.14	Peak
4	2030.56	-62.92	39.41	5.06	37.11	-55.56	-20.00	-35.56	Peak
5	2438.12	-60.01	39.61	5.59	37.31	-52.12	-20.00	-32.12	Peak
6	2843.27	-63.06	40.80	6.08	37.31	-53.49	-20.00	-33.49	Peak

TEST MODE	TX-DNH	Test Channel:	CH _{M2}	Polarity:	Vertical
-----------	--------	---------------	------------------	-----------	----------

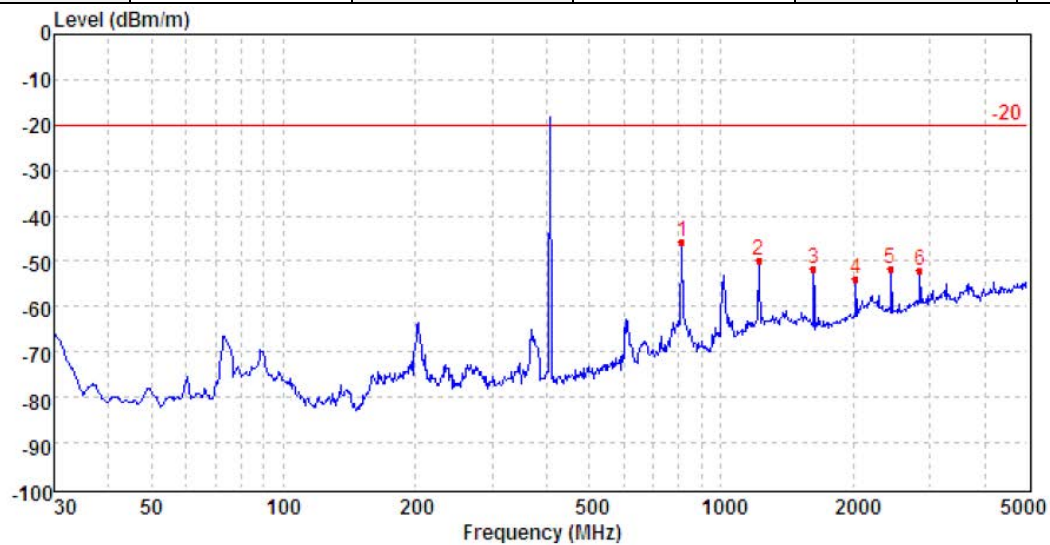


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	812.15	-56.02	29.64	10.61	29.88	-45.65	-20.00	-25.65	Peak
2	1217.18	-54.04	36.92	3.90	36.62	-49.84	-20.00	-29.84	Peak
3	1623.41	-54.86	36.05	4.50	37.18	-51.49	-20.00	-31.49	Peak
4	2030.56	-60.88	38.85	5.06	37.11	-54.08	-20.00	-34.08	Peak
5	2438.12	-59.07	39.29	5.59	37.31	-51.50	-20.00	-31.50	Peak
6	2843.27	-61.73	40.76	6.08	37.31	-52.20	-20.00	-32.20	Peak

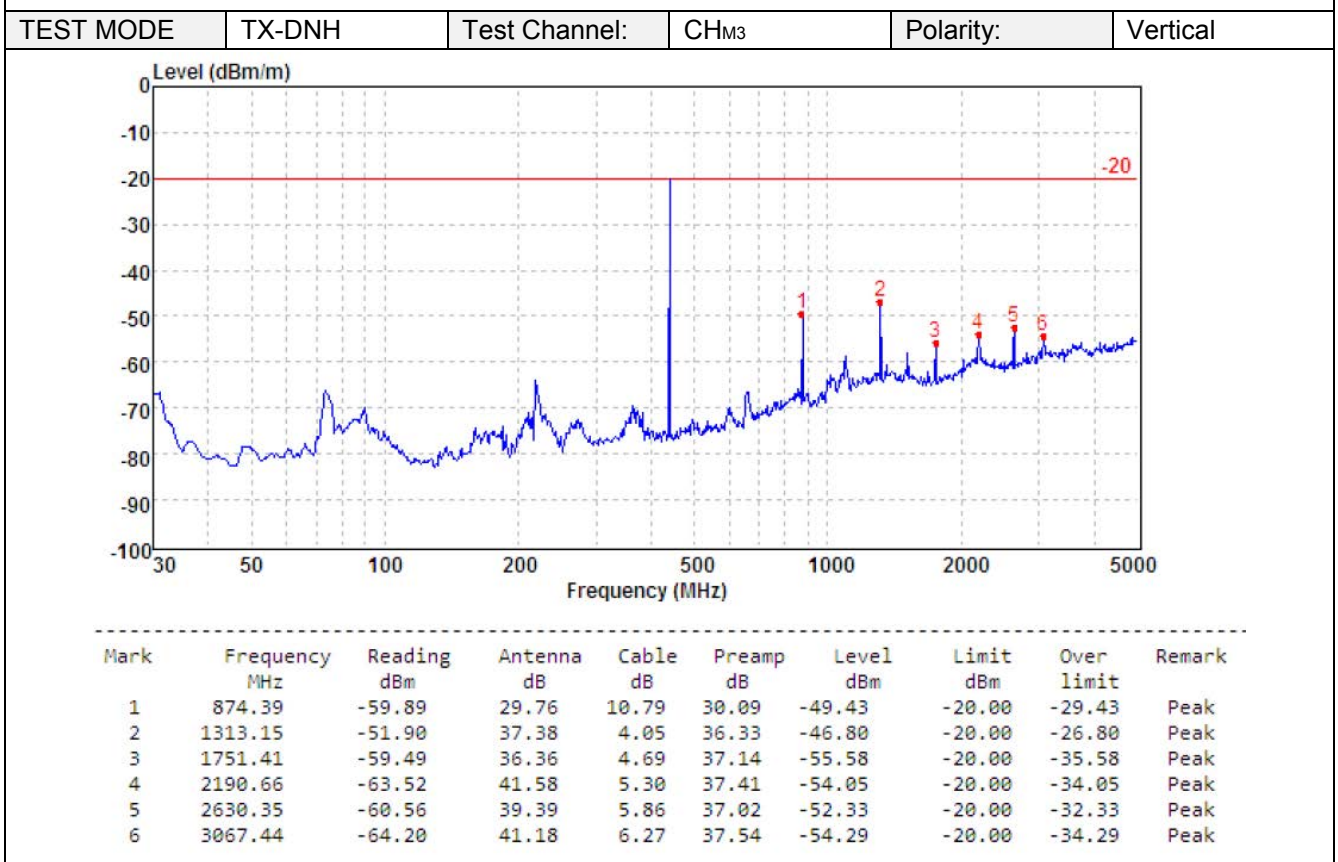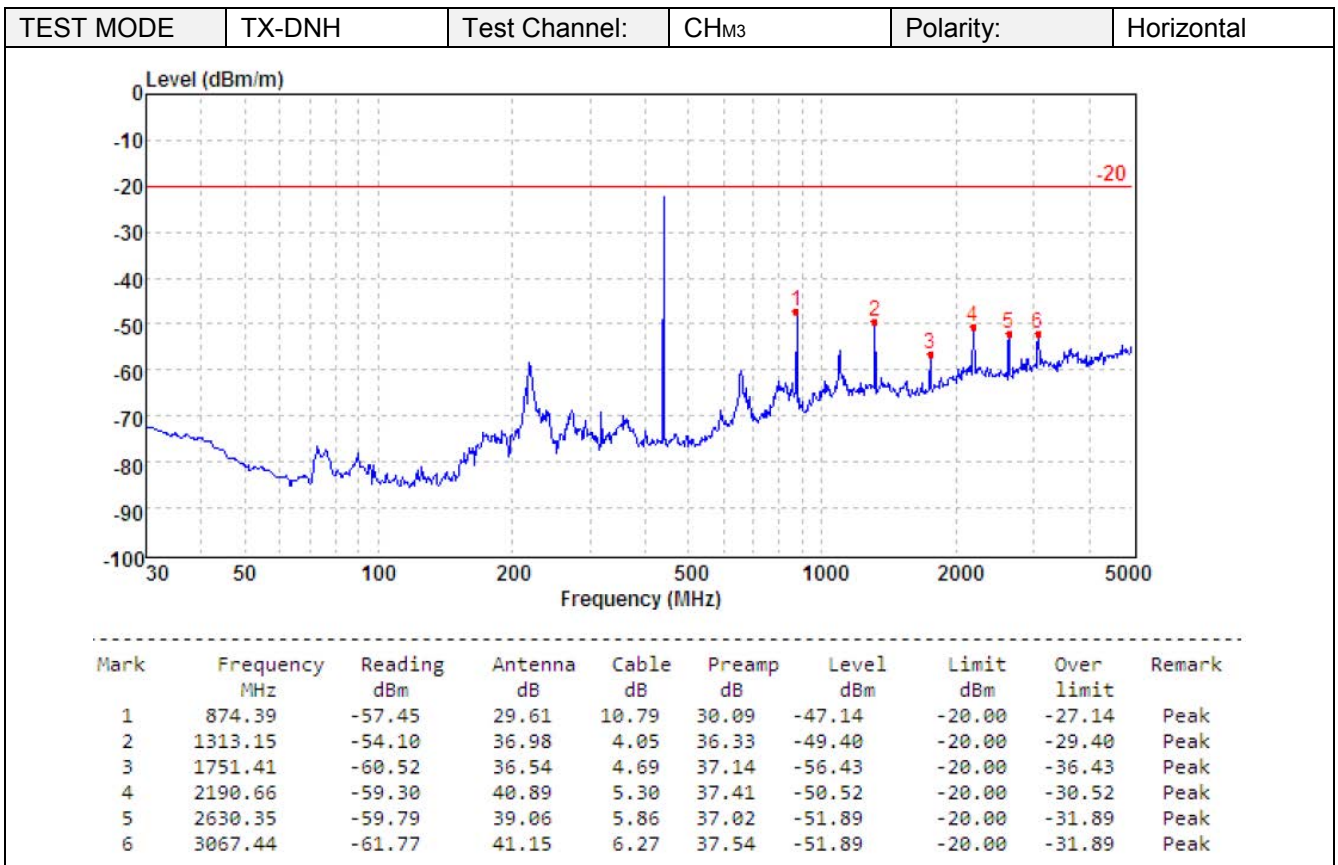

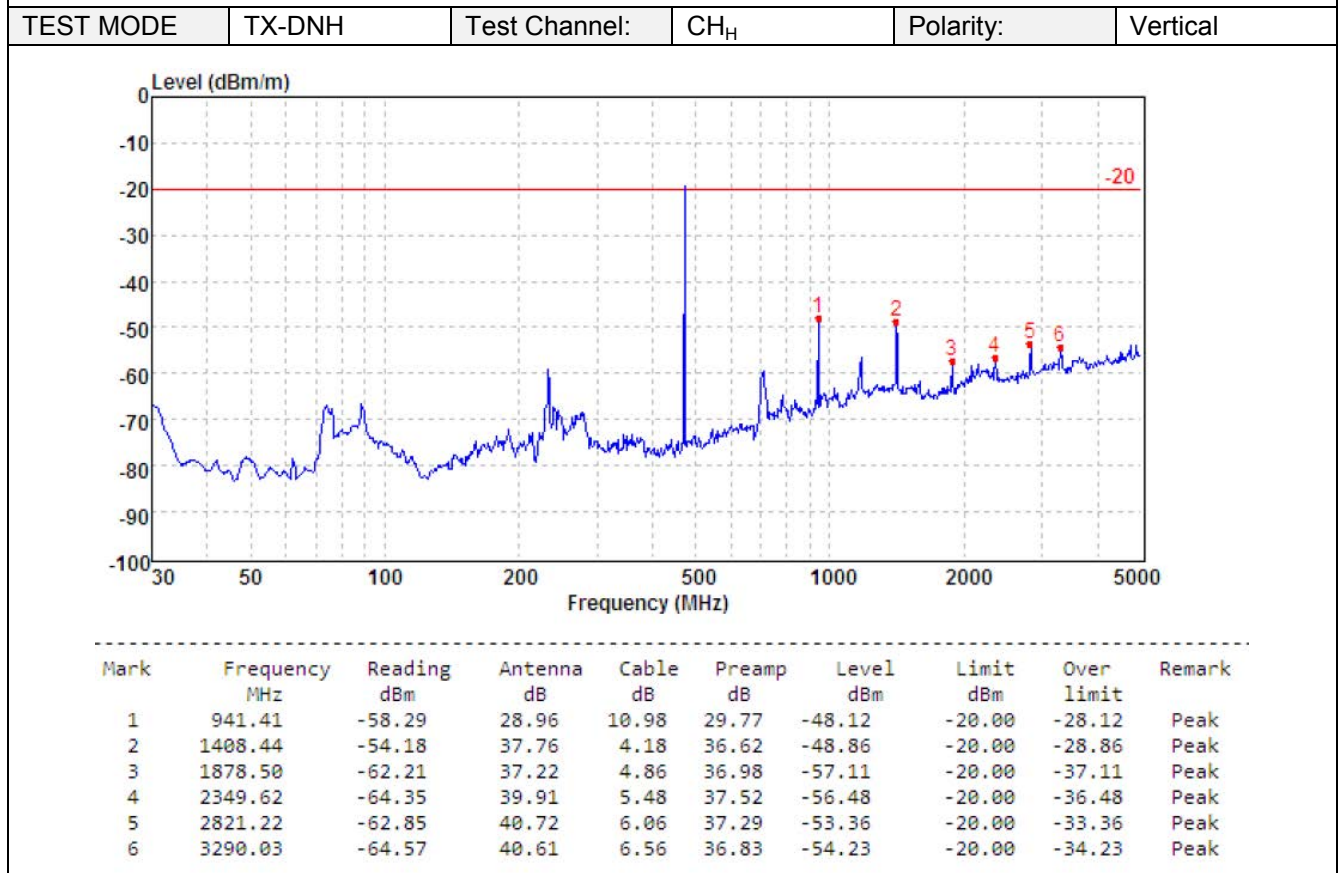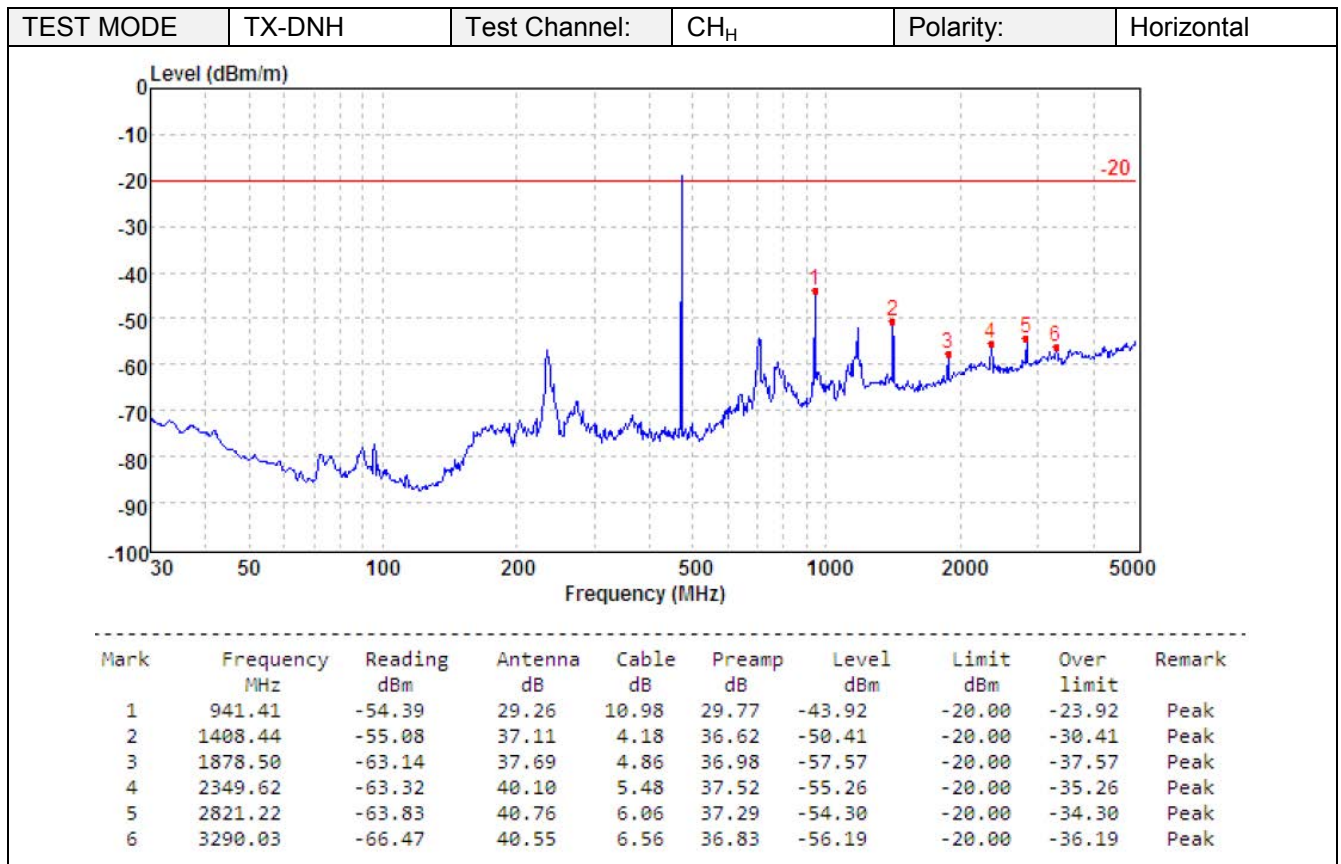


TEST MODE	TX-ANH	Test Channel:	CH _L	Polarity:	Horizontal
-----------	--------	---------------	-----------------	-----------	------------


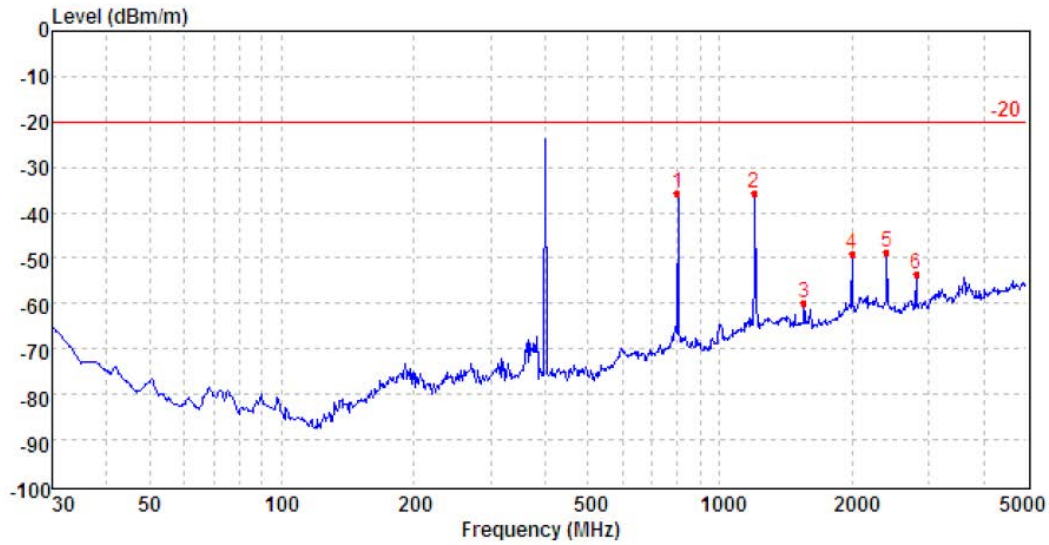


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	800.80	-46.25	29.86	10.56	29.94	-35.77	-20.00	-15.77	Peak
2	1198.38	-39.45	36.69	3.87	36.65	-35.54	-20.00	-15.54	Peak
3	1552.36	-63.40	36.23	4.40	37.01	-59.78	-20.00	-39.78	Peak
4	1999.19	-56.20	39.10	5.01	37.07	-49.16	-20.00	-29.16	Peak
5	2400.46	-56.71	39.82	5.54	37.41	-48.76	-20.00	-28.76	Peak
6	2799.35	-63.20	40.72	6.04	37.25	-53.69	-20.00	-33.69	Peak


TEST MODE	TX-ANH	Test Channel:	CH _L	Polarity:	Vertical
-----------	--------	---------------	-----------------	-----------	----------

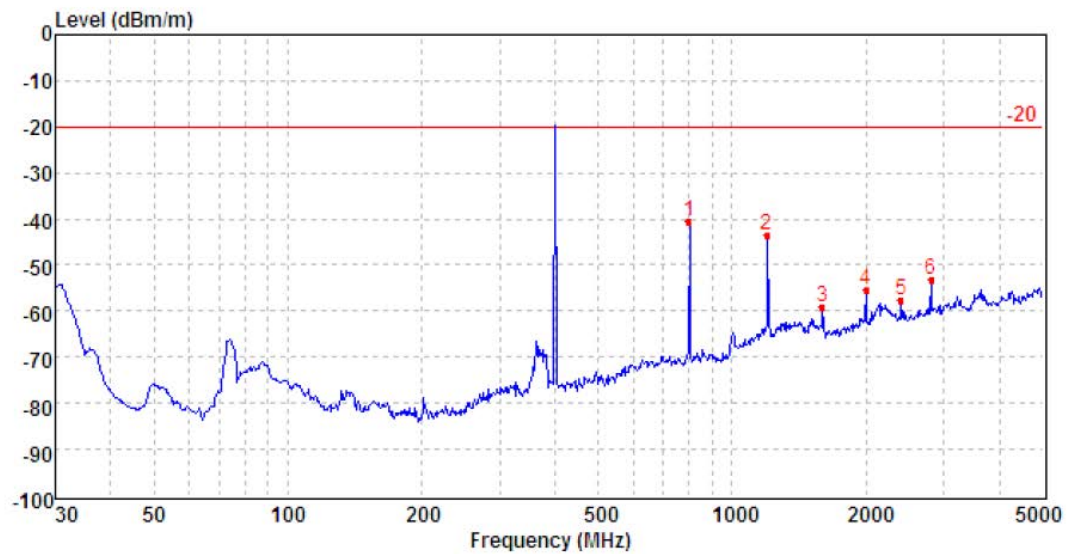

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	800.80	-50.37	29.40	10.56	29.94	-40.35	-20.00	-20.35	Peak
2	1198.38	-47.37	36.80	3.87	36.65	-43.35	-20.00	-23.35	Peak
3	1598.34	-64.29	37.76	4.47	37.12	-59.18	-20.00	-39.18	Peak
4	1999.19	-61.69	38.30	5.01	37.07	-55.45	-20.00	-35.45	Peak
5	2400.46	-64.97	39.32	5.54	37.41	-57.52	-20.00	-37.52	Peak
6	2799.35	-62.74	40.68	6.04	37.25	-53.27	-20.00	-33.27	Peak

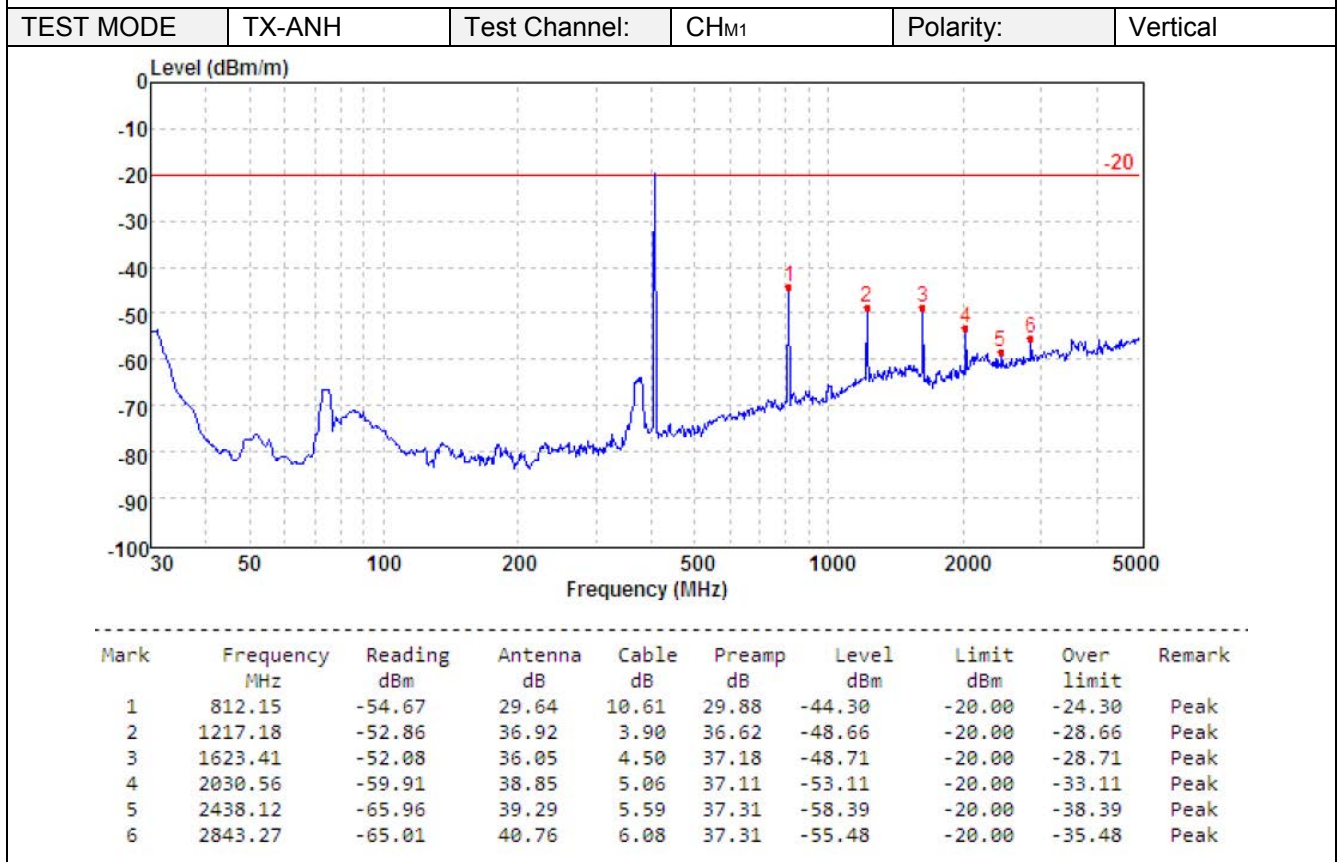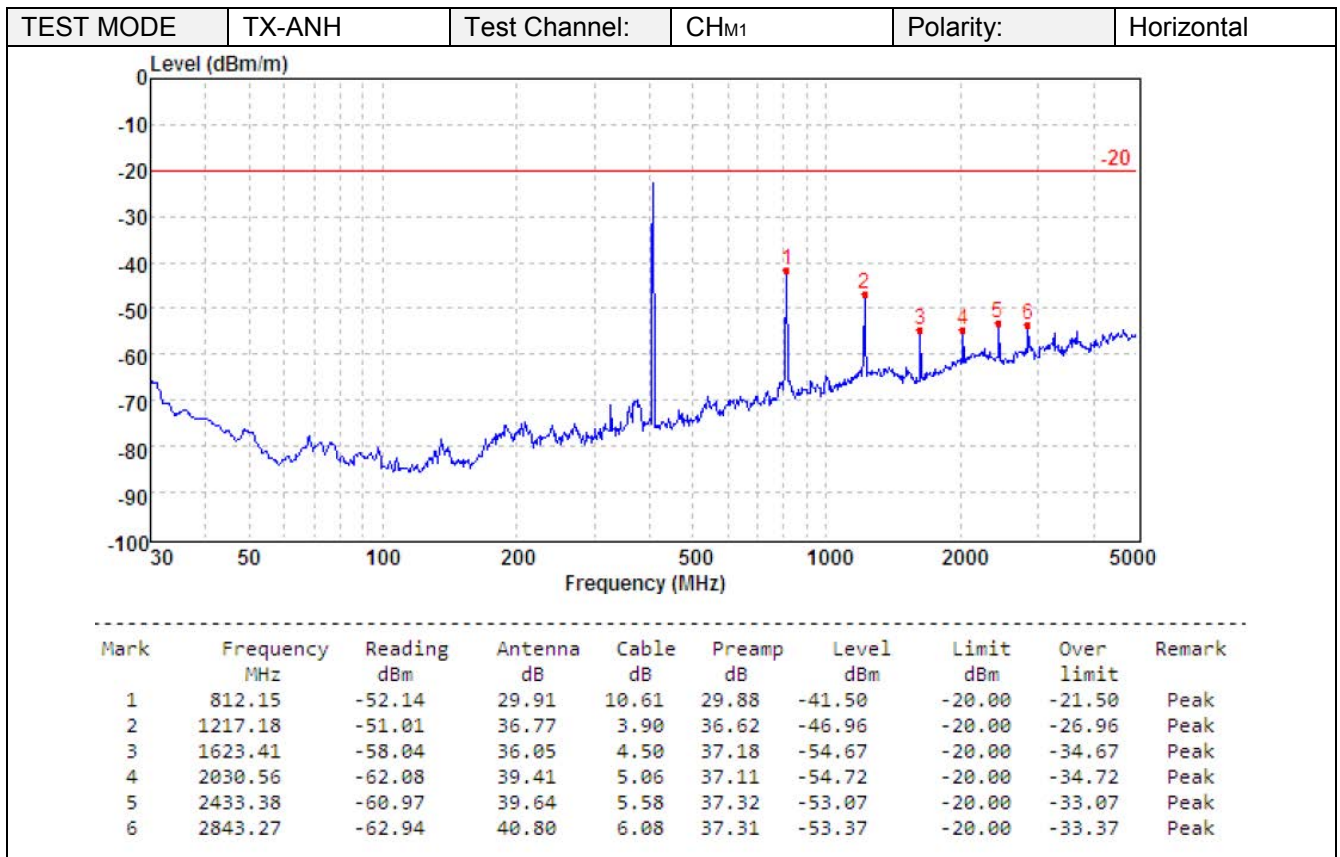


TEST MODE	TX-ANH	Test Channel:	CH _{M2}	Polarity:	Horizontal
-----------	--------	---------------	------------------	-----------	------------


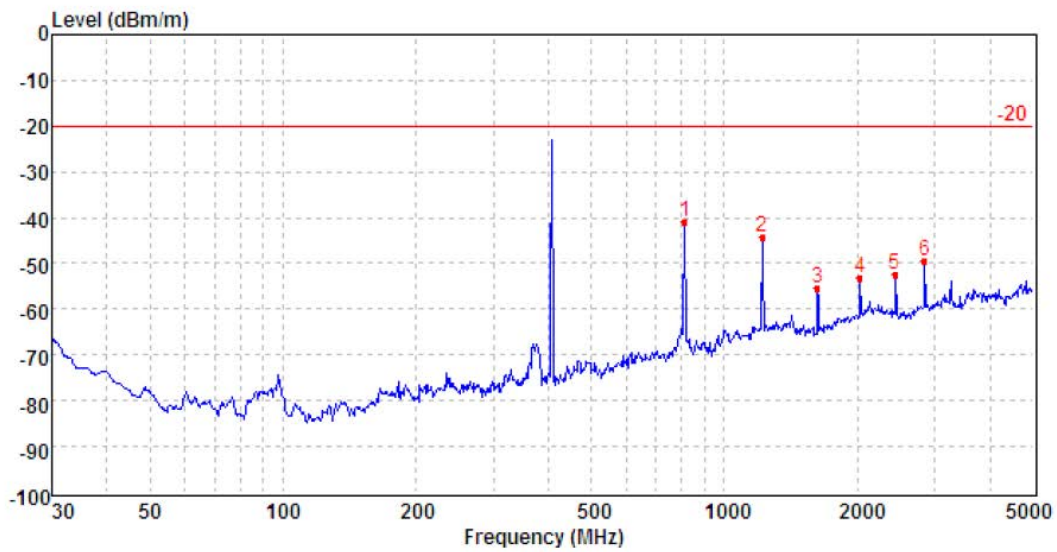




Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	812.15	-51.71	29.91	10.61	29.88	-41.07	-20.00	-21.07	Peak
2	1217.18	-48.28	36.77	3.90	36.62	-44.23	-20.00	-24.23	Peak
3	1623.41	-58.67	36.05	4.50	37.18	-55.30	-20.00	-35.30	Peak
4	2030.56	-60.50	39.41	5.06	37.11	-53.14	-20.00	-33.14	Peak
5	2438.12	-60.44	39.61	5.59	37.31	-52.55	-20.00	-32.55	Peak
6	2843.27	-59.07	40.80	6.08	37.31	-49.50	-20.00	-29.50	Peak

TEST MODE	TX-ANH	Test Channel:	CH _{M2}	Polarity:	Vertical
-----------	--------	---------------	------------------	-----------	----------


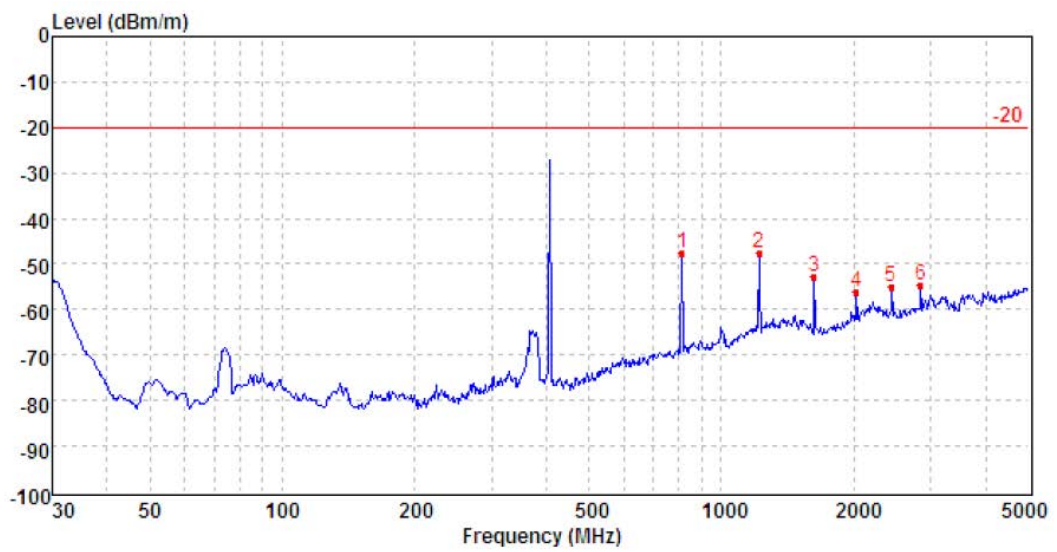


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	812.15	-57.89	29.64	10.61	29.88	-47.52	-20.00	-27.52	Peak
2	1217.18	-51.91	36.92	3.90	36.62	-47.71	-20.00	-27.71	Peak
3	1623.41	-56.07	36.05	4.50	37.18	-52.70	-20.00	-32.70	Peak
4	2030.56	-62.88	38.85	5.06	37.11	-56.08	-20.00	-36.08	Peak
5	2438.12	-62.63	39.29	5.59	37.31	-55.06	-20.00	-35.06	Peak
6	2843.27	-64.05	40.76	6.08	37.31	-54.52	-20.00	-34.52	Peak

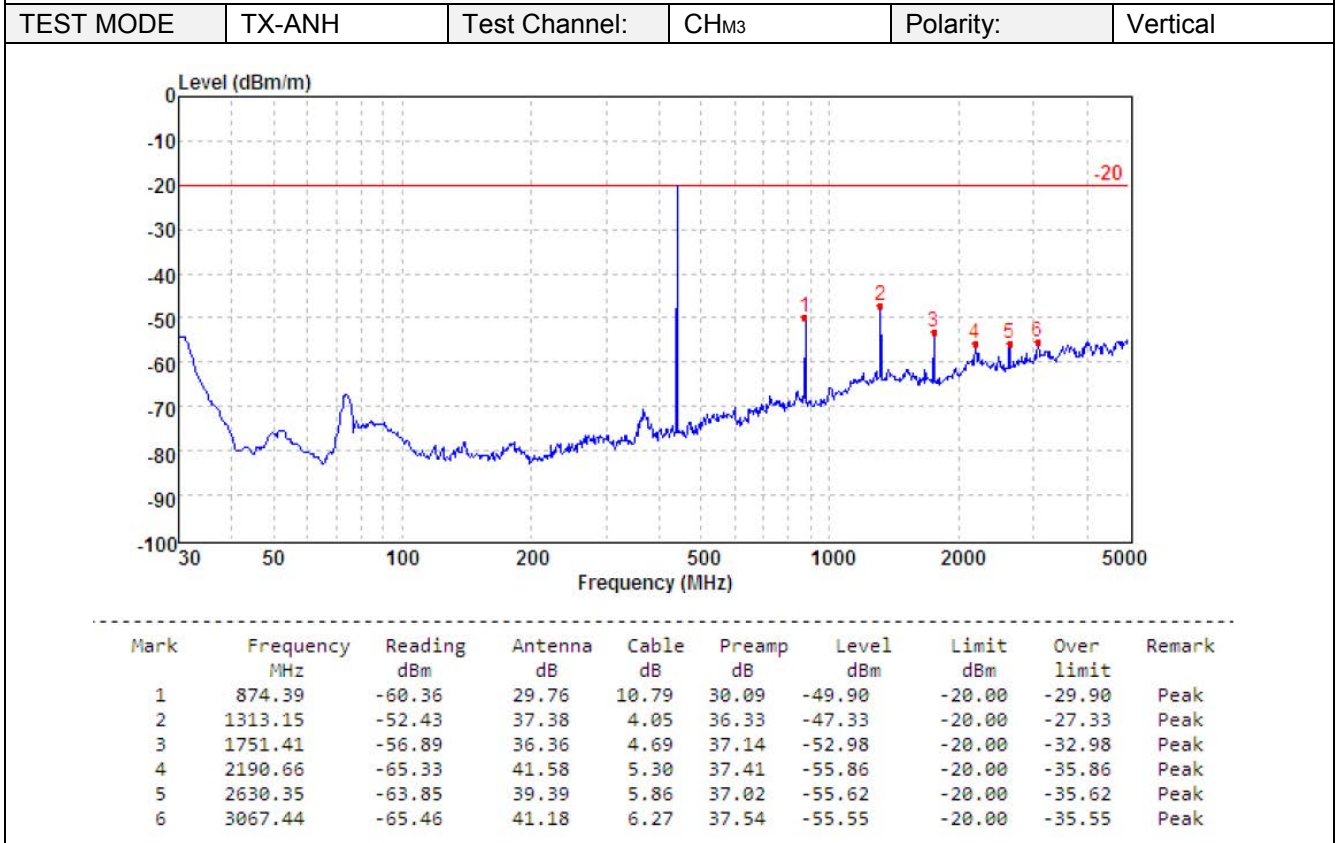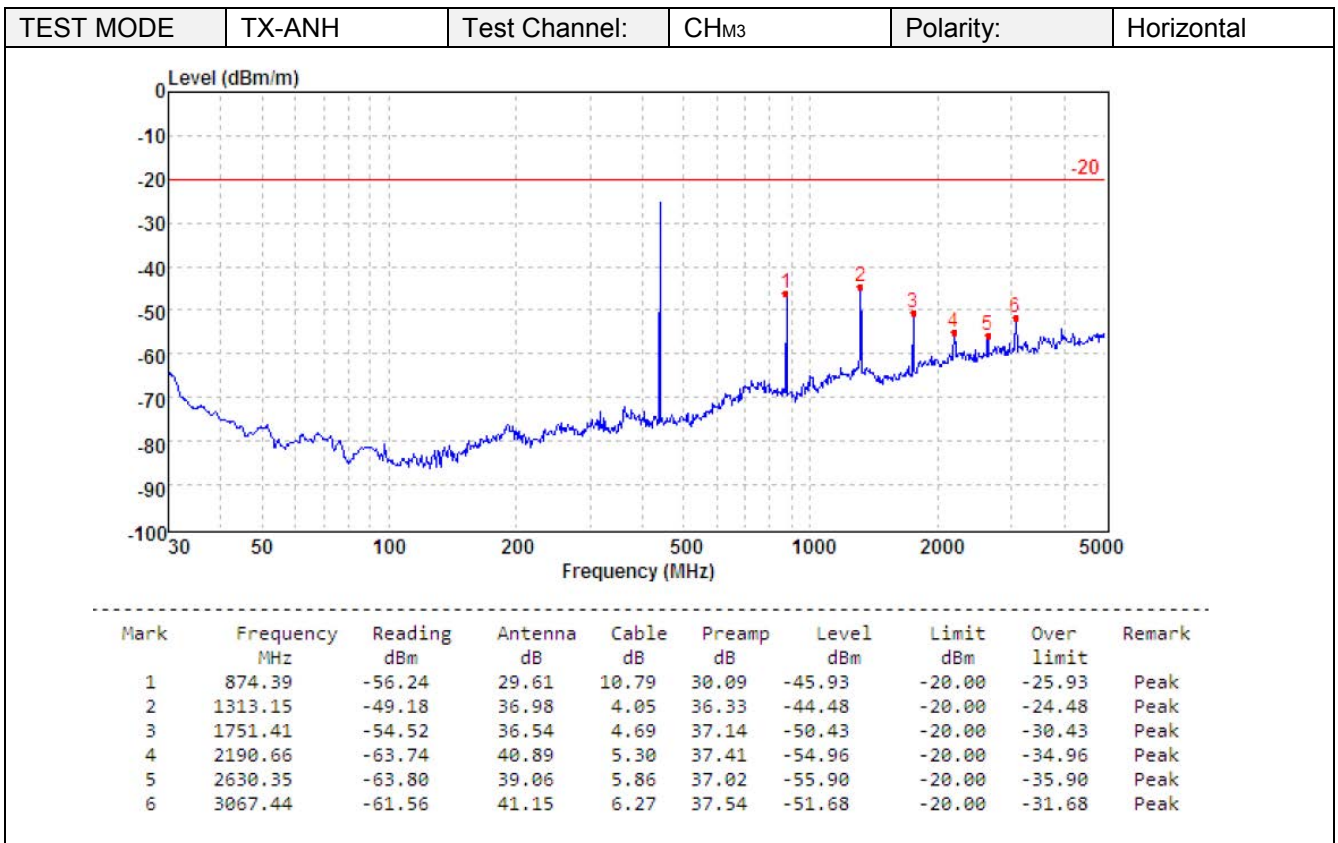

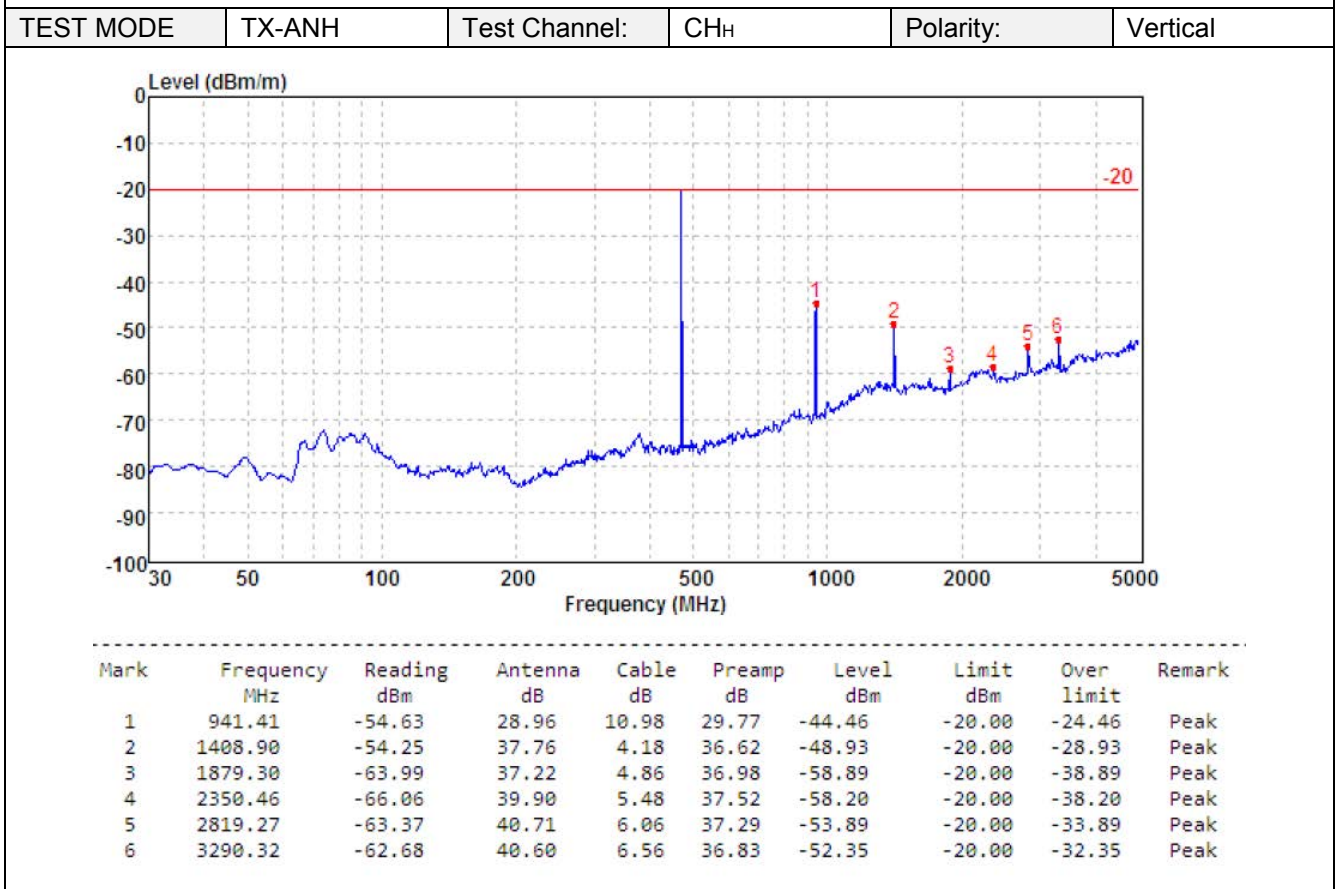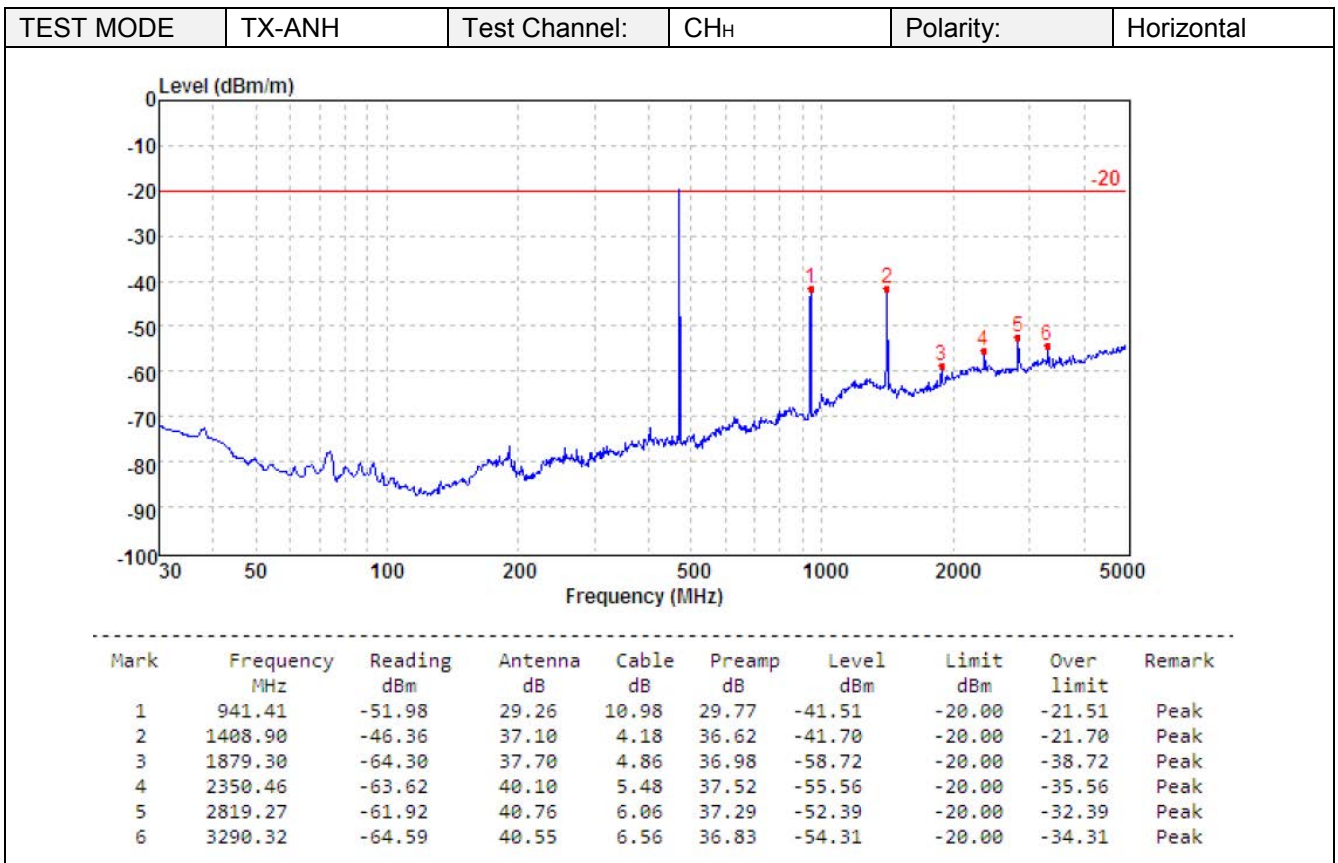




6 TEST SETUP PHOTOS

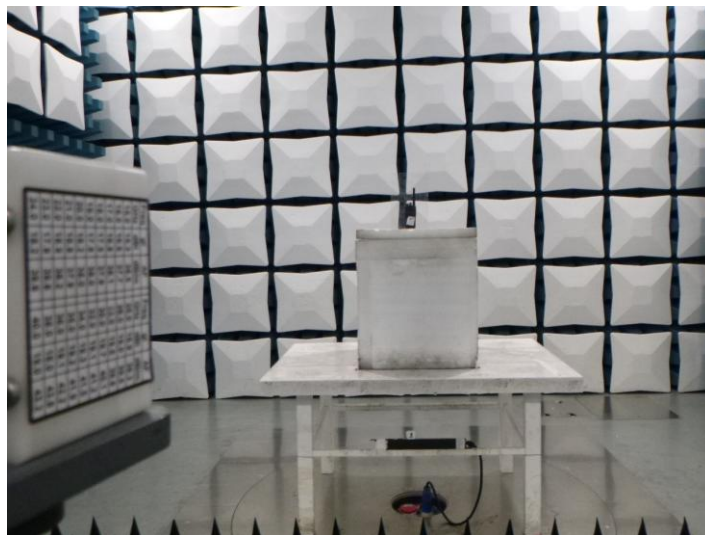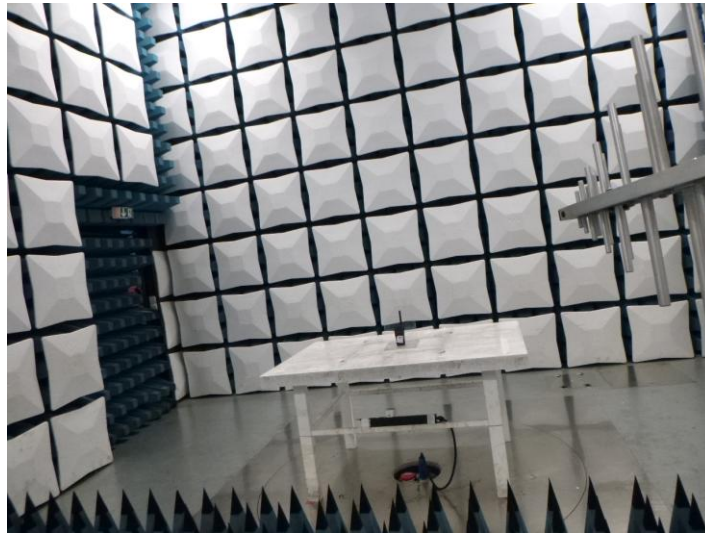


7 EXTERNAL AND INTERNAL PHOTOS OF THE EUT

7.1 External photos



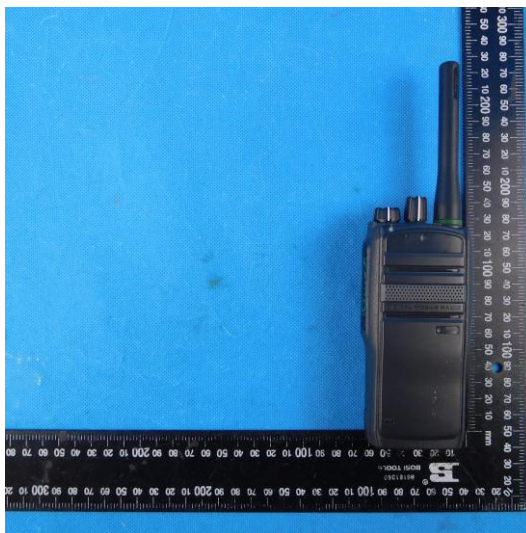


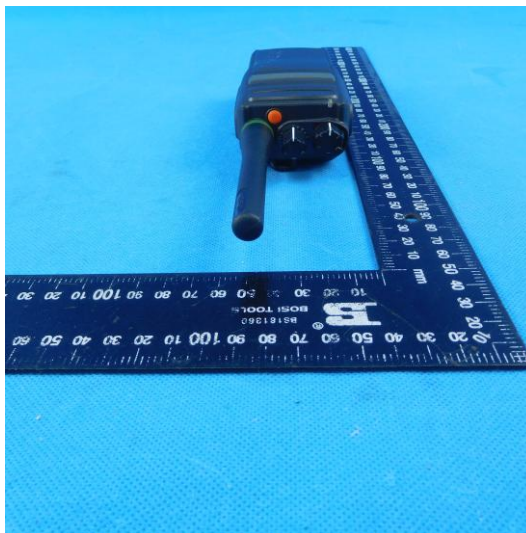
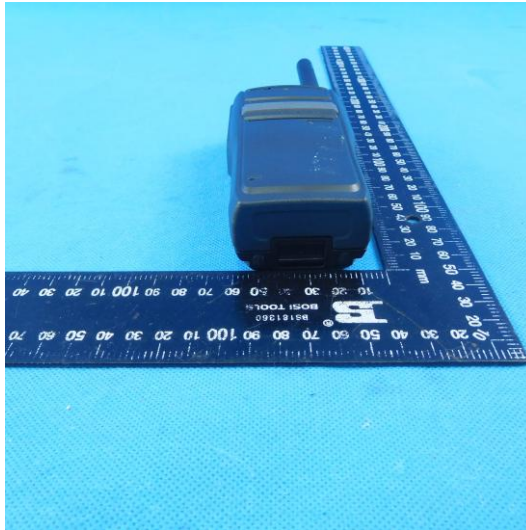


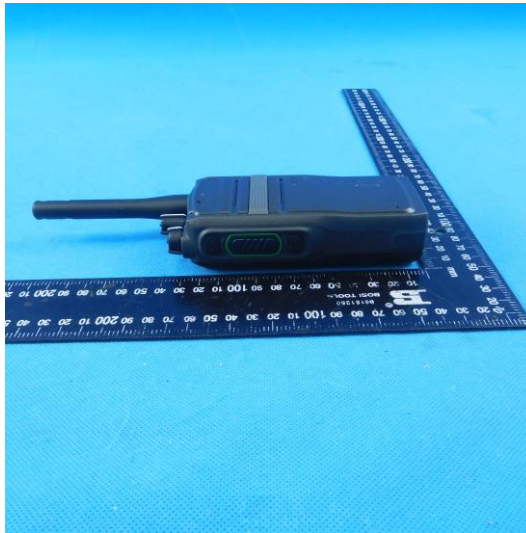




7.2 Internal photos





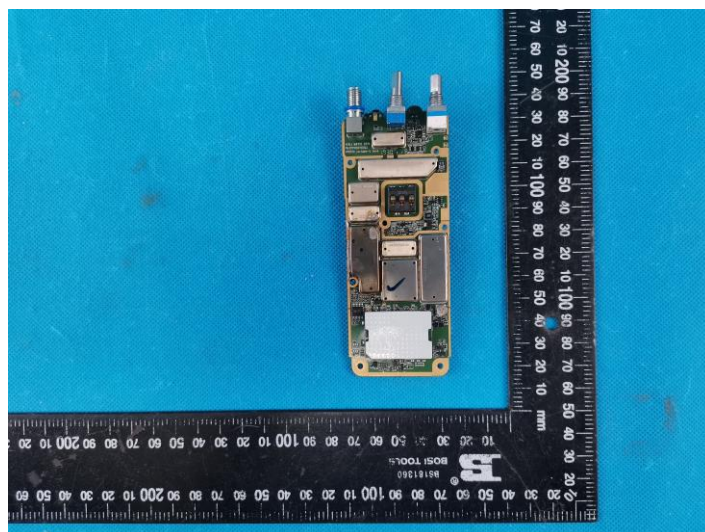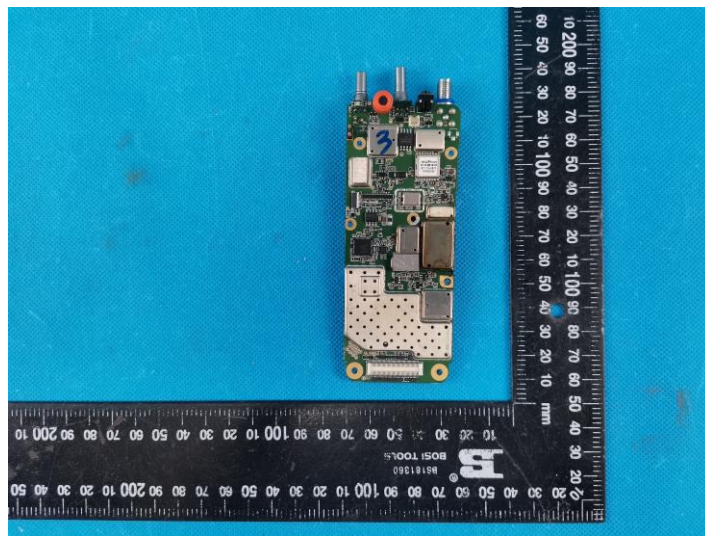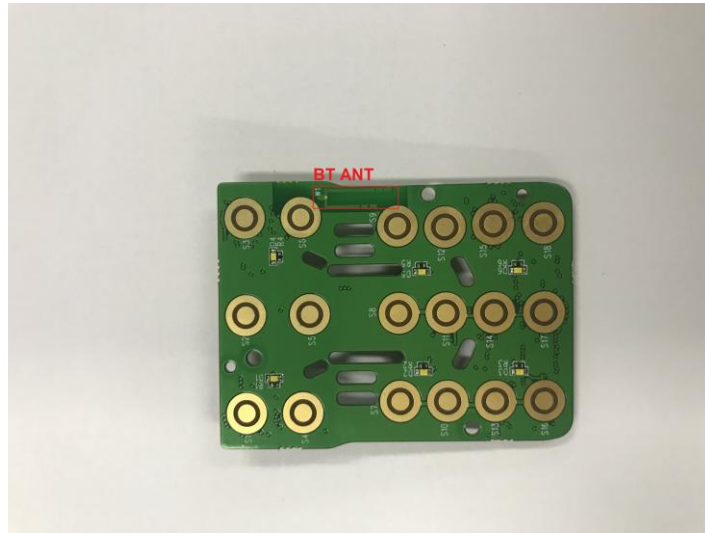

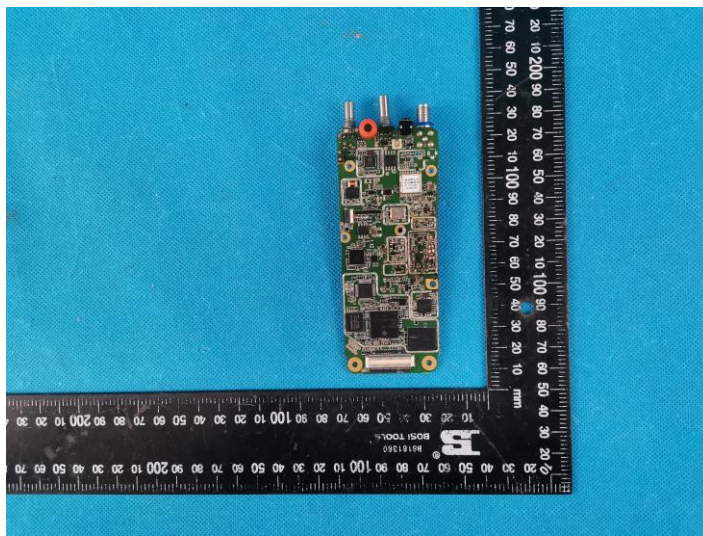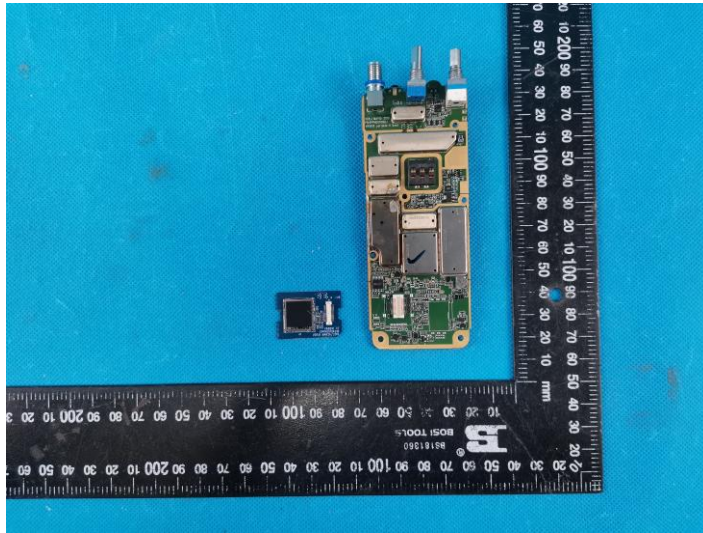

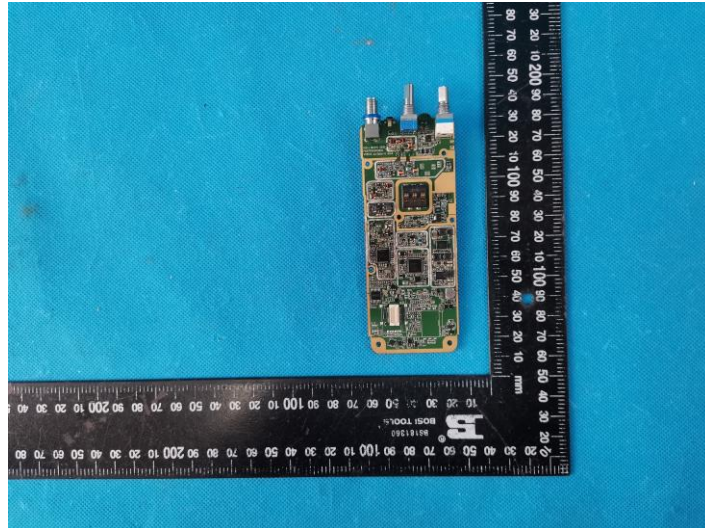

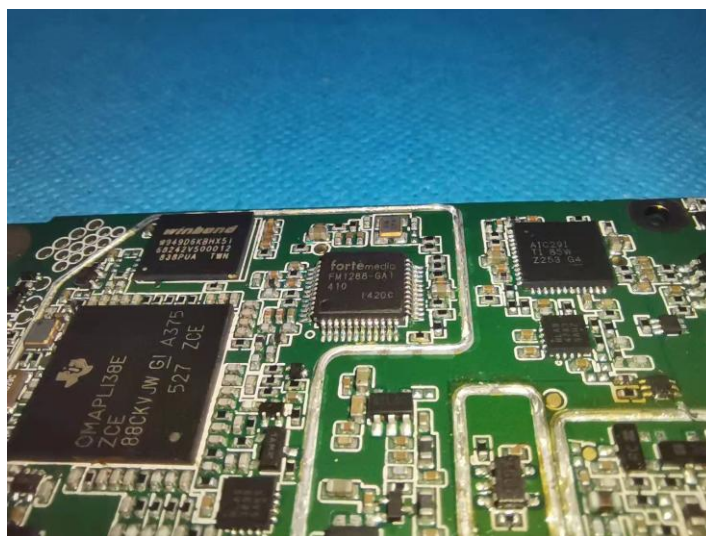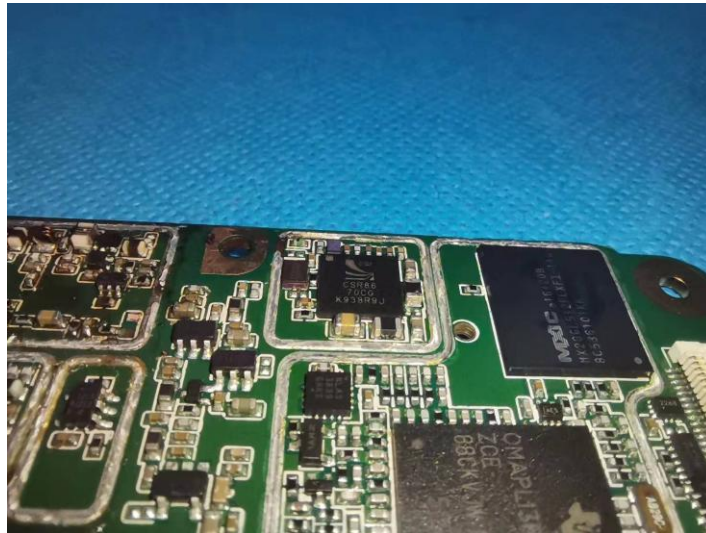

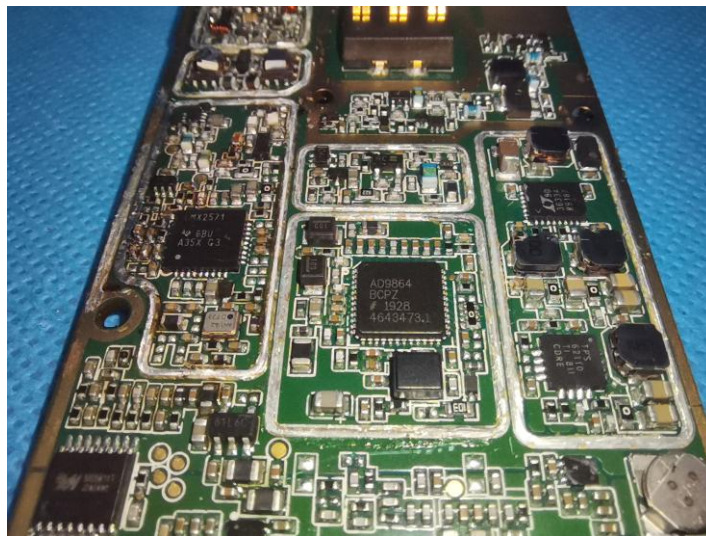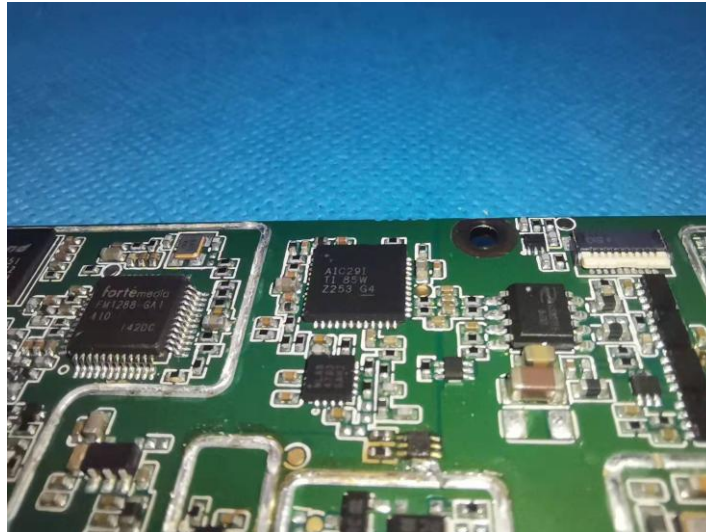

8 APPENDIX REPORT

Project No.	SHT2201062401EW		
Test sample No.	YPHT21081097004	Model No.	EP8000 U1
Start test date	2021/9/22	Finish date	2021/9/28
Temperature	23.9°C	Humidity	50%
Test Engineer	<i>Casper Chen</i>	Auditor	<i>Xiaolong Zhu</i>

Appendix clause	Test Item	Test date (M/D)	Test Result (PASS/FAIL)
A	Maximum Transmitter Power	9/26	PASS
B	Occupied Bandwidth	9/26	PASS
C	Emission Mask	9/26	PASS
D	Modulation Limit	9/26	PASS
E	Audio Frequency Response	9/26	PASS
F	Frequency Stability Test & Temperature	9/26	PASS
G	Frequency Stability Test & Voltage	9/26	PASS
H	Transmitter Frequency Behavior	9/28	PASS
I	Spurious Emission On Antenna Port	9/28	PASS




Appendix A:Maximum Transmitter Power

Operation Mode	Modulation Type	Test Channel	Measured Power(dBm)	Measured Power(W)	Rated Power(W)	Percentage(%)	Limit (%)	Result
TX-DNH	4FSK	CH _L	37.0	5.01	4.20	19.3	±20	PASS
TX-DNH	4FSK	CH _{M1}	36.6	4.52	4.20	7.6	±20	PASS
TX-DNH	4FSK	CH _{M2}	36.9	4.90	4.20	16.7	±20	PASS
TX-DNH	4FSK	CH _{M3}	37.0	4.98	4.20	18.6	±20	PASS
TX-DNH	4FSK	CH _H	36.8	4.82	4.20	14.8	±20	PASS
TX-DNL	4FSK	CH _L	30.2	1.06	1.20	-11.7	±20	PASS
TX-DNL	4FSK	CH _{M1}	30.0	1.00	1.20	-16.7	±20	PASS
TX-DNL	4FSK	CH _{M2}	30.0	1.01	1.20	-15.8	±20	PASS
TX-DNL	4FSK	CH _{M3}	31.4	1.37	1.20	14.2	±20	PASS
TX-DNL	4FSK	CH _H	30.2	1.04	1.20	-13.3	±20	PASS
TX-ANH	FM	CH _L	36.8	4.78	4.20	13.8	±20	PASS
TX-ANH	FM	CH _{M1}	37.0	5.00	4.20	19.0	±20	PASS
TX-ANH	FM	CH _{M2}	36.9	4.93	4.20	17.4	±20	PASS
TX-ANH	FM	CH _{M3}	36.9	4.85	4.20	15.5	±20	PASS
TX-ANH	FM	CH _H	36.7	4.70	4.20	11.9	±20	PASS
TX-ANL	FM	CH _L	30.6	1.15	1.20	-4.2	±20	PASS
TX-ANL	FM	CH _{M1}	30.4	1.09	1.20	-9.2	±20	PASS
TX-ANL	FM	CH _{M2}	30.4	1.09	1.20	-9.2	±20	PASS
TX-ANL	FM	CH _{M3}	31.2	1.32	1.20	10.0	±20	PASS
TX-ANL	FM	CH _H	30.7	1.17	1.20	-2.5	±20	PASS

Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-DNH	4FSK	CH _L	7.542	9.391	≤ 11.25	PASS
TX-DNH	4FSK	CH _{M1}	7.753	9.728	≤ 11.25	PASS
TX-DNH	4FSK	CH _{M2}	7.596	9.660	≤ 11.25	PASS
TX-DNH	4FSK	CH _{M3}	7.726	9.695	≤ 11.25	PASS
TX-DNH	4FSK	CH _H	7.660	9.827	≤ 11.25	PASS
TX-DNL	4FSK	CH _L	7.686	9.471	≤ 11.25	PASS
TX-DNL	4FSK	CH _{M1}	7.752	10.130	≤ 11.25	PASS
TX-DNL	4FSK	CH _{M2}	7.771	9.654	≤ 11.25	PASS
TX-DNL	4FSK	CH _{M3}	7.728	9.823	≤ 11.25	PASS
TX-DNL	4FSK	CH _H	7.934	9.987	≤ 11.25	PASS
TX-ANH	FM	CH _L	9.980	10.170	≤ 11.25	PASS
TX-ANH	FM	CH _{M1}	9.980	10.170	≤ 11.25	PASS
TX-ANH	FM	CH _{M2}	9.980	10.170	≤ 11.25	PASS
TX-ANH	FM	CH _{M3}	9.979	10.160	≤ 11.25	PASS
TX-ANH	FM	CH _H	9.978	10.160	≤ 11.25	PASS
TX-ANL	FM	CH _L	9.980	10.160	≤ 11.25	PASS
TX-ANL	FM	CH _{M1}	9.980	10.170	≤ 11.25	PASS
TX-ANL	FM	CH _{M2}	9.980	10.170	≤ 11.25	PASS
TX-ANL	FM	CH _{M3}	9.979	10.160	≤ 11.25	PASS
TX-ANL	FM	CH _H	9.978	10.160	≤ 11.25	PASS

Appendix B:Occupied Bandwidth

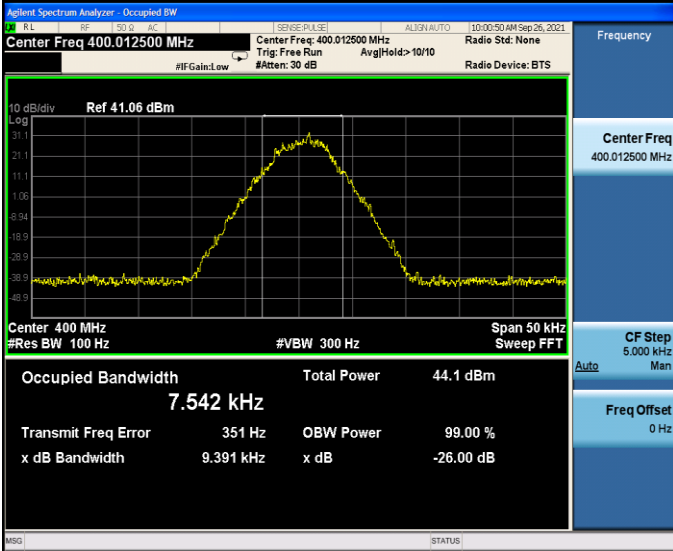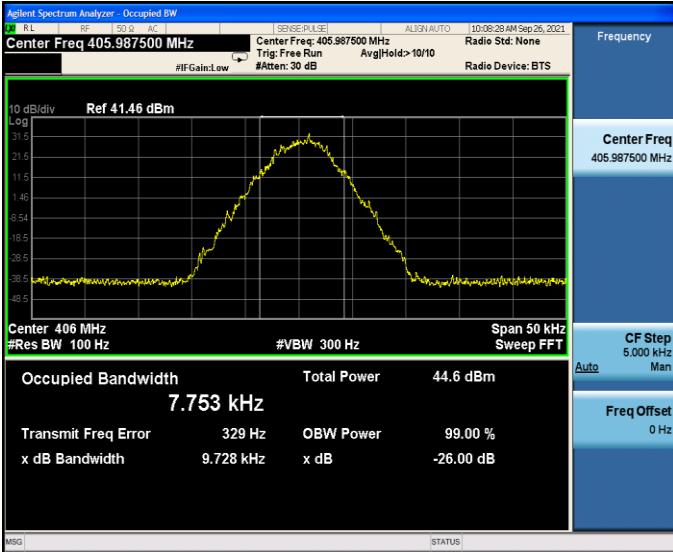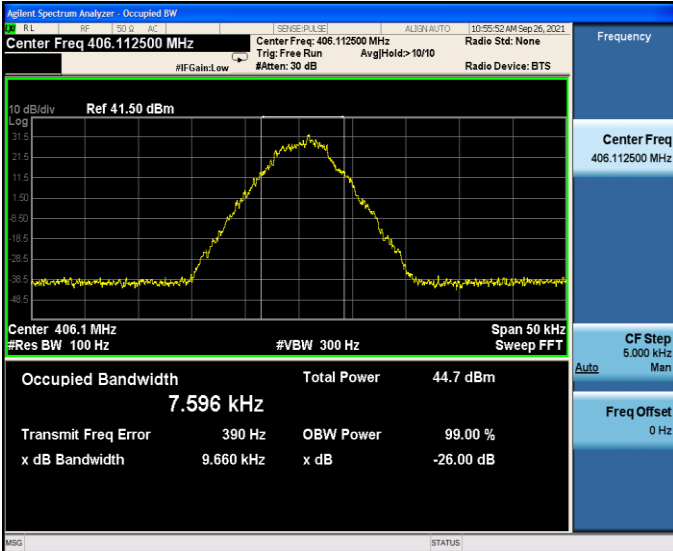Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _L	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 400.012500 MHz</p> <p>Occupied Bandwidth 7.542 kHz</p> <p>Total Power 44.1 dBm</p> <p>Transmit Freq Error 351 Hz</p> <p>x dB Bandwidth 9.391 kHz</p>
TX-DNH	4FSK	CH _{M1}	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 405.987500 MHz</p> <p>Occupied Bandwidth 7.753 kHz</p> <p>Total Power 44.6 dBm</p> <p>Transmit Freq Error 329 Hz</p> <p>x dB Bandwidth 9.728 kHz</p>
TX-DNH	4FSK	CH _{M2}	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 406.112500 MHz</p> <p>Occupied Bandwidth 7.596 kHz</p> <p>Total Power 44.7 dBm</p> <p>Transmit Freq Error 390 Hz</p> <p>x dB Bandwidth 9.660 kHz</p>

Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _{M3}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 438.012500 MHz #IF Gain: Low #Atten: 30 dB Ref 41.45 dBm Occupied Bandwidth: 7.726 kHz Total Power: 44.8 dBm Transmit Freq Error: 353 Hz x dB Bandwidth: 9.695 kHz OBW Power: 99.00 % x dB: -26.00 dB</p>
TX-DNH	4FSK	CH _H	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 469.987500 MHz #IF Gain: Low #Atten: 30 dB Ref 41.19 dBm Occupied Bandwidth: 7.660 kHz Total Power: 44.7 dBm Transmit Freq Error: 374 Hz x dB Bandwidth: 9.827 kHz OBW Power: 99.00 % x dB: -26.00 dB</p>
TX-DNL	4FSK	CH _L	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 400.012500 MHz #IF Gain: Low #Atten: 24 dB Ref 34.31 dBm Occupied Bandwidth: 7.686 kHz Total Power: 37.4 dBm Transmit Freq Error: 342 Hz x dB Bandwidth: 9.471 kHz OBW Power: 99.00 % x dB: -26.00 dB</p>

Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _{M1}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 405.987500 MHz Center Freq: 405.987500 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 34.07 dBm Log 24.1 14.1 4.07 -5.93 -15.9 -25.9 -35.9 -45.9 -55.9</p> <p>Center 406 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT</p> <p>Occupied Bandwidth 7.752 kHz Total Power 37.0 dBm Transmit Freq Error 369 Hz OBW Power 99.00 % x dB Bandwidth 10.13 kHz x dB -26.00 dB</p> <p>Frequency Center Freq 405.987500 MHz CF Step 5.000 kHz Freq Offset 0 Hz</p>
TX-DNL	4FSK	CH _{M2}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 406.112500 MHz Center Freq: 406.112500 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 34.04 dBm Log 24.1 14.1 4.04 -5.96 -16.0 -26.0 -36.0 -46.0 -56.0</p> <p>Center 406.1 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT</p> <p>Occupied Bandwidth 7.771 kHz Total Power 37.0 dBm Transmit Freq Error 304 Hz OBW Power 99.00 % x dB Bandwidth 9.654 kHz x dB -26.00 dB</p> <p>Frequency Center Freq 406.112500 MHz CF Step 5.000 kHz Freq Offset 0 Hz</p>
TX-DNL	4FSK	CH _{M3}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 438.012500 MHz Center Freq: 438.012500 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 35.04 dBm Log 25.0 15.0 5.04 -4.96 -15.0 -25.0 -35.0 -45.0 -55.0</p> <p>Center 438 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT</p> <p>Occupied Bandwidth 7.728 kHz Total Power 38.1 dBm Transmit Freq Error 320 Hz OBW Power 99.00 % x dB Bandwidth 9.823 kHz x dB -26.00 dB</p> <p>Frequency Center Freq 438.012500 MHz CF Step 5.000 kHz Freq Offset 0 Hz</p>

Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _H	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 469.987500 MHz Ref 34.04 dBm Occupied Bandwidth: 7.934 kHz Total Power: 37.1 dBm Transmit Freq Error: 288 Hz x dB Bandwidth: 9.987 kHz</p>
TX-ANH	FM	CH _L	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 400.012500 MHz Ref 41.01 dBm Occupied Bandwidth: 9.980 kHz Total Power: 37.0 dBm Transmit Freq Error: 248 Hz x dB Bandwidth: 10.17 kHz</p>
TX-ANH	FM	CH _{M1}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 405.987500 MHz Ref 41.30 dBm Occupied Bandwidth: 9.980 kHz Total Power: 37.3 dBm Transmit Freq Error: 248 Hz x dB Bandwidth: 10.17 kHz</p>