



TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1905-0187(1)
2. Customer
 - Name : Amotech Corp.
 - Address : 5BL-1LOT, 380, Namdongseo-ro, Namdong-gu, Incheon, South Korea
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : ACCESS & CONNECTED CAR MODULE / ACCM200-US4G-1A
FCC ID : 2AE6H-ACCM
5. Test Method Used : ANSI C63.10-2013
Test Specification : FCC Part 15.231
6. Date of Test : 2019.05.07 ~ 2019.05.16
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by Name : InHee Bae 	Reviewed by Name : Geunki Son  (Signature)
-------------	---	--

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 05 . 23 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1905-0187	May. 17, 2019	Initial issue
DRTFCC1905-0187(1)	May. 23, 2019	Update applicant information

CONTENTS

1. General Information	4
1.1 Testing Laboratory.....	4
1.2 Testing Environment.....	4
1.3 Measurement Uncertainty	4
1.4 Details of Applicant.....	5
1.5 Description of EUT	5
2. Information about test items	6
2.1 Operating mode	6
2.2 Tested frequency	6
2.3 Auxiliary equipment	6
2.4 EMI Suppression Device(s)/Modifications	6
3. Test Report	7
3.1 Summary of tests	7
3.2 Transmitter requirements.....	8
3.2.1 20dB & Occupied bandwidth	8
3.2.2 Automatically deactivate.....	9
3.2.3 Field strength of fundamental and spurious emissions.....	10
3.2.4 AC power line conducted emission.....	36
3.2.5 Antenna requirement.....	37
APPENDIX I	38
APPENDIX II	39

1. General Information

1.1 Testing Laboratory

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.		
- FCC MRA Accredited Test Firm No. : KR0034		
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2 Testing Environment

Ambient Condition	
▪ Temperature	+20 °C ~ +23 °C
▪ Relative Humidity	38 % ~ 40 %

1.3 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
AC conducted emission	2.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, $k = 2$)

1.4 Details of Applicant

Applicant : Amotech Corp.
Address : 5BL-1LOT, 380, Namdongseo-ro, Namdong-gu, Incheon, South Korea
Contact person : Jinyoung You

1.5 Description of EUT

FCC Equipment Class	DSC-Part 15 Security / Remote Control Transmitter
EUT	ACCESS & CONNECTED CAR MODULE
Model Name	ACCM200-US4G-1A
Power Supply	DC 12 V
Frequency Band	312 ~ 318 MHz 431.9 ~ 435.9 MHz 868.1 ~ 868.5 MHz 902.375 ~ 927.625 MHz
Modulation Type	ASK, FSK
Antenna type	Pattern Antenna

2. Information about test items

2.1 Operating mode

This product is programmed to emulate existing RF keyfobs by selecting vehicle make, model, year, and host chassis information from the Continental secure APK linked to the Continental Remote Cloud Key database. After selecting vehicle make, model, and year the transmission protocol used by that vehicle (including frequency, modulation, and encoding sequence) is then downloaded into the RCKF module for use. As such, the EUT is designed to emulate a wide range of RKE (Remote Keyless Entry) devices. It transmits finite length ASK and FSK frames in the 315, 434,868, and 915 MHz UHF frequency bands as a Security/Remote Control Transmitter. The RCK is not a learning or trained device and does not perform power level vs duty cycle calculations internally. The product is simply a programmable transmitter that can be programmed with only those power settings, modulations, and duty cycles (encoding - protocol) stored in the secure Continental Remote Cloud Key database in order to emulate existing Keyfob transmitters. In each operating band the protocols employed by this product may employ ASK or FSK modulation at data rates up to 9600 kbps. The EUT is capable of manual activation via a mechanical SMT switch (button) or automatic activation by serial i/o commands, or from detection of encoded LF (125 kHz) used in vehicle passive entry systems. For testing, this product was exercised at the lowest, middle, and highest operating frequencies in the 315, 434, 868 and 915 MHz bands.

2.2 Tested frequency

Mode	Frequency(MHz)
Transmitting mode 1 (TM1)	312 ~ 318
Transmitting mode 2 (TM2)	431.9 ~ 435.9
Transmitting mode 3 (TM3)	868.1 ~ 868.5
Transmitting mode 4 (TM4)	902.375 ~ 927.625

2.3 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-

2.4 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
 → None

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	RSS section(s)	Parameter	Test Condition	Status Note 1
15.231(b)	RSS-210[A1.2]	Field strength of fundamental and spurious emissions	Radiated	C Note 3
15.205 15.209	RSS-GEN [8.9] RSS-GEN [8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		C Note 3
15.231(a)	RSS-210[A1.1]	Deactivation	Conducted	NT Note 4
15.231(c)	-	20dB bandwidth		NT Note 4
-	RSS-210[A1.3]	Occupied bandwidth		NA
15.207	RSS-Gen[8.8]	AC Power Line Conducted Emission	AC Line Conducted	NA Note 5
15.203	-	Antenna Requirements	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test item was performed in each axis and the worst case data was reported.

Note 4: These test items were not performed because this device uses the granted module.(FCC ID: M3N-RCKF)
Please refer to module test report.

Note 5: This device is used Battery for power supplying only. Therefore this test item was not performed.

The sample was tested according to the following specification:
ANSI C-63.10-2013

3.2 Transmitter requirements

3.2.1 20dB & Occupied bandwidth

- Procedure:

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **ANIS 63.10-2013**.

RBW: 1% to 5% of the OBW

VBW: Approximately three times the RBW

Detector: Peak

Trace: Max hold

Sweep: Auto couple

- Measurement Data: NT

- Limit: § 15.209(c)

<p>The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.</p>

3.2.2 Automatically deactivate


- Measurement Data: **NT**

- Limit: § 15.231(a)

- (a) The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:
- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.**
 - (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
 - (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
 - (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
 - (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

3.2.3 Field strength of fundamental and spurious emissions

- Test set up diagrams:

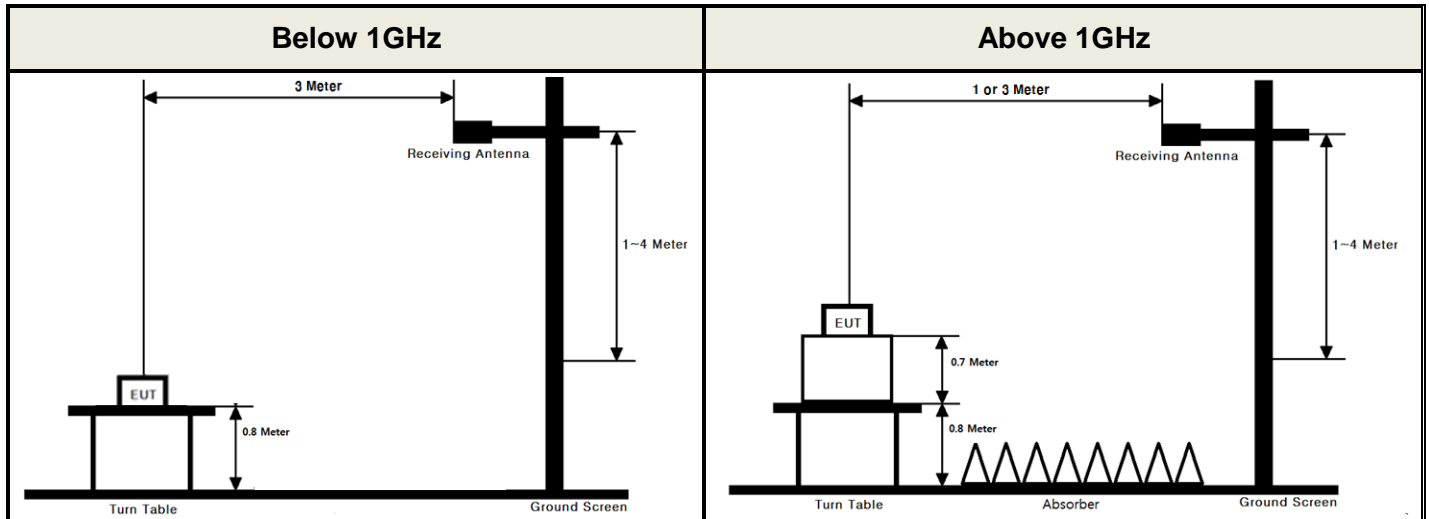

- Procedure:

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The table was rotated 360 degrees to determine the position of the highest radiation.
3. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
4. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
5. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
6. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
7. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Measurement Instrument Setting

1. Frequency Range Below 1GHz
 RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak
2. Frequency Range > 1 GHz
 Peak Measurement
 RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes
 Average Measurement > 1GHz
 RBW = 1MHz, VBW $\geq 1/T$, Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold until the trace stabilizes
3. For pulse operation, the result of Average measurement is calculated using Peak result and duty cycle reduction factor.
 Note: Refer to the actual duty cycle correction factor.

- Limit:

§ 15.231(b), In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Frequency [MHz]	Field Strength of Fundamental Frequency [uV/m]	Field Strength of Spurious Emissions [uV/m]
40.66 ~ 40.70	2,250	225
70 ~ 130	1,250	125
130 ~ 174	¹ 1,250 to 3,750	¹ 125 to 375
174 ~ 260	3,750	375
260 ~ 470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations

- (1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.
- (2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.
- (3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

§ 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 ~ 0.110	16.42 ~ 16.423	399.90 ~ 410	4.5 ~ 5.15
0.495 ~ 0.505	16.69475 ~ 16.69525	608 ~ 614	5.35 ~ 5.46
2.1735 ~ 2.1905	16.80425 ~ 16.80475	960 ~ 1240	7.25 ~ 7.75
4.125 ~ 4.128	25.5 ~ 25.67	1300 ~ 1427	8.025 ~ 8.5
4.17725 ~ 4.17775	37.5 ~ 38.25	1435 ~ 1626.5	9.0 ~ 9.2
4.20725 ~ 4.20775	73 ~ 74.6	1645.5 ~ 1646.5	9.3 ~ 9.5
6.215 ~ 6.218	74.8 ~ 75.2	1660 ~ 1710	10.6 ~ 12.7
6.26775 ~ 6.26825	108 ~ 121.94	1718.8 ~ 1722.2	13.25 ~ 13.4
6.31175 ~ 6.31225	123 ~ 138	2200 ~ 2300	14.47 ~ 14.5
8.291 ~ 8.294	149.9 ~ 150.05	2310 ~ 2390	15.35 ~ 16.2
8.362 ~ 8.366	156.52475 ~ 156.52525	2483.5 ~ 2500	17.7 ~ 21.4
8.37625 ~ 8.38675	156.7 ~ 156.9	2690 ~ 2900	22.01 ~ 23.12
8.41425 ~ 8.41475	162.0125 ~ 167.17	3260 ~ 3267	23.6 ~ 24.0
12.29 ~ 12.293	167.72 ~ 173.2	3332 ~ 3339	31.2 ~ 31.8
12.51975 ~ 12.52025	240 ~ 285	3345.8 ~ 3358	36.43 ~ 36.5
12.57675 ~ 12.57725	322 ~ 335.4	3600 ~ 4400	Above 38.6
13.36 ~ 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

§ 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency [MHz]	Field Strength of Fundamental Frequency [uV/m]	Measurement Distance [m]
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

- Measurement Data: **Comply**

<TM 1: ASK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*312.00	H	X	PK	87.00	-4.89	N/A	N/A	82.11	95.40	13.29
*312.00	H	X	AV	87.00	-4.89	-15.92	N/A	66.19	75.40	9.21
624.04	H	Z	PK	36.23	1.57	N/A	N/A	37.80	75.40	37.60
624.04	H	Z	AV	36.23	1.57	-15.92	N/A	21.88	55.40	33.52
936.02	H	X	PK	32.66	7.13	N/A	N/A	39.79	75.40	35.61
936.02	H	X	AV	32.66	7.13	-15.92	N/A	23.87	55.40	31.53
1248.24	V	Y	PK	45.85	-2.25	N/A	N/A	43.60	74.00	30.40
1248.24	V	Y	AV	45.85	-2.25	-15.92	N/A	27.68	54.00	26.32
1559.88	V	Y	PK	44.70	-1.75	N/A	N/A	42.95	74.00	31.05
1559.88	V	Y	AV	44.70	-1.75	-15.92	N/A	27.03	54.00	26.97
1871.80	H	Z	PK	44.93	0.14	N/A	N/A	45.07	74.00	28.93
1871.80	H	Z	AV	44.93	0.14	-15.92	N/A	29.15	54.00	24.85
2184.14	H	Y	PK	45.24	1.31	N/A	N/A	46.55	74.00	27.45
2184.14	H	Y	AV	45.24	1.31	-15.92	N/A	30.63	54.00	23.37
2496.16	V	Z	PK	44.78	2.08	N/A	N/A	46.86	74.00	27.14
2496.16	V	Z	AV	44.78	2.08	-15.92	N/A	30.94	54.00	23.06
2808.25	V	Z	PK	45.62	2.11	N/A	N/A	47.73	74.00	26.27
2808.25	V	Z	AV	45.62	2.11	-15.92	N/A	31.81	54.00	22.19
3120.10	V	Z	PK	45.14	2.35	N/A	N/A	47.49	74.00	26.51
3120.10	V	Z	AV	45.14	2.35	-15.92	N/A	31.57	54.00	22.43

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 0.105 / 0.210 (50 %)

Computed Duty Cycle = 16 % (32 ms x 1.105/0.210 ms)

DCCF = $20 \log(16/100) = -15.92 \text{ dB}$

<TM 1: ASK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*315.00	H	X	PK	87.04	-4.81	N/A	N/A	82.23	95.60	13.37
*315.00	H	X	AV	87.04	-4.81	-15.92	N/A	66.31	75.60	9.29
630.02	H	Z	PK	36.92	1.71	N/A	N/A	38.63	75.60	36.97
630.02	H	Z	AV	36.92	1.71	-15.92	N/A	22.71	55.60	32.89
945.00	H	X	PK	32.53	7.32	N/A	N/A	39.85	75.40	35.55
945.00	H	X	AV	32.53	7.32	-15.92	N/A	23.93	55.40	31.47
1259.86	V	Y	PK	46.21	-2.25	N/A	N/A	43.96	74.00	30.04
1259.86	V	Y	AV	46.21	-2.25	-15.92	N/A	28.04	54.00	25.96
1574.94	V	Y	PK	45.10	-1.66	N/A	N/A	43.44	74.00	30.56
1574.94	V	Y	AV	45.10	-1.66	-15.92	N/A	27.52	54.00	26.48
1889.89	H	Z	PK	45.40	0.24	N/A	N/A	45.64	74.00	28.36
1889.89	H	Z	AV	45.40	0.24	-15.92	N/A	29.72	54.00	24.28
2204.91	H	Y	PK	44.76	1.37	N/A	N/A	46.13	74.00	27.87
2204.91	H	Y	AV	44.76	1.37	-15.92	N/A	30.21	54.00	23.79
2519.96	V	Z	PK	44.94	2.10	N/A	N/A	47.04	74.00	26.96
2519.96	V	Z	AV	44.94	2.10	-15.92	N/A	31.12	54.00	22.88
2834.92	V	Z	PK	45.52	2.14	N/A	N/A	47.66	74.00	26.34
2834.92	V	Z	AV	45.52	2.14	-15.92	N/A	31.74	54.00	22.26
3150.22	V	Z	PK	45.06	2.36	N/A	N/A	47.42	74.00	26.58
3150.22	V	Z	AV	45.06	2.36	-15.92	N/A	31.50	54.00	22.50

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 0.105 / 0.210 (50 %)

Computed Duty Cycle = 16 % (32 ms x 1.105/0.210 ms)

DCCF = $20 \log(16/100) = -15.92 \text{ dB}$

<TM 1: ASK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*318.00	H	X	PK	87.08	-4.73	N/A	N/A	82.35	95.80	13.45
*318.00	H	X	AV	87.08	-4.73	-15.92	N/A	66.43	75.80	9.37
636.00	H	Z	PK	37.38	1.74	N/A	N/A	39.12	75.80	36.68
636.00	H	Z	AV	37.38	1.74	-15.92	N/A	23.20	55.80	32.60
954.00	H	X	PK	31.43	7.47	N/A	N/A	38.90	75.40	36.50
954.00	H	X	AV	31.43	7.47	-15.92	N/A	22.98	55.40	32.42
1271.88	V	Y	PK	45.86	-2.24	N/A	N/A	43.62	74.00	30.38
1271.88	V	Y	AV	45.86	-2.24	-15.92	N/A	27.70	54.00	26.30
1589.92	V	Y	PK	46.02	-1.58	N/A	N/A	44.44	74.00	29.56
1589.92	V	Y	AV	46.02	-1.58	-15.92	N/A	28.52	54.00	25.48
1907.90	H	Z	PK	44.02	0.34	N/A	N/A	44.36	74.00	29.64
1907.90	H	Z	AV	44.02	0.34	-15.92	N/A	28.44	54.00	25.56
2226.07	H	Y	PK	45.31	1.42	N/A	N/A	46.73	74.00	27.27
2226.07	H	Y	AV	45.31	1.42	-15.92	N/A	30.81	54.00	23.19
2543.88	V	Z	PK	45.23	2.11	N/A	N/A	47.34	74.00	26.66
2543.88	V	Z	AV	45.23	2.11	-15.92	N/A	31.42	54.00	22.58
2861.94	V	Z	PK	45.18	2.16	N/A	N/A	47.34	74.00	26.66
2861.94	V	Z	AV	45.18	2.16	-15.92	N/A	31.42	54.00	22.58
3179.94	V	Z	PK	45.31	2.37	N/A	N/A	47.68	74.00	26.32
3179.94	V	Z	AV	45.31	2.37	-15.92	N/A	31.76	54.00	22.24

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 0.105 / 0.210 (50 %)

Computed Duty Cycle = 16 % (32 ms x 1.105/0.210 ms)

DCCF = $20 \log(16/100) = -15.92 \text{ dB}$

<TM 1: FSK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*312.00	H	X	PK	86.97	-4.89	N/A	N/A	82.08	95.40	13.32
*312.00	H	X	AV	86.97	-4.89	-9.90	N/A	72.18	75.40	3.22
624.09	H	Z	PK	36.52	1.57	N/A	N/A	38.09	75.40	37.31
624.09	H	Z	AV	36.52	1.57	-9.90	N/A	28.19	55.40	27.21
936.14	H	X	PK	32.22	7.13	N/A	N/A	39.35	75.40	36.05
936.14	H	X	AV	32.22	7.13	-9.90	N/A	29.45	55.40	25.95
1248.06	V	Y	PK	46.30	-2.25	N/A	N/A	44.05	74.00	29.95
1248.06	V	Y	AV	46.30	-2.25	-9.90	N/A	34.15	54.00	19.85
1559.98	V	Y	PK	45.33	-1.75	N/A	N/A	43.58	74.00	30.42
1559.98	V	Y	AV	45.33	-1.75	-9.90	N/A	33.68	54.00	20.32
1871.68	H	Z	PK	44.38	0.14	N/A	N/A	44.52	74.00	29.48
1871.68	H	Z	AV	44.38	0.14	-9.90	N/A	34.62	54.00	19.38
2183.99	H	Y	PK	44.59	1.31	N/A	N/A	45.90	74.00	28.10
2183.99	H	Y	AV	44.59	1.31	-9.90	N/A	36.00	54.00	18.00
2495.96	V	Z	PK	45.26	2.08	N/A	N/A	47.34	74.00	26.66
2495.96	V	Z	AV	45.26	2.08	-9.90	N/A	37.44	54.00	16.56
2807.92	V	Z	PK	44.61	2.11	N/A	N/A	46.72	74.00	27.28
2807.92	V	Z	AV	44.61	2.11	-9.90	N/A	36.82	54.00	17.18
3119.81	V	Z	PK	45.43	2.35	N/A	N/A	47.78	74.00	26.22
3119.81	V	Z	AV	45.43	2.35	-9.90	N/A	37.88	54.00	16.12

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 32 % (32 ms)

DCCF = $20 \log(32/100) = -9.90 \text{ dB}$

<TM 1: FSK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*315.00	H	X	PK	87.05	-4.81	N/A	N/A	82.24	95.60	13.36
*315.00	H	X	AV	87.05	-4.81	-9.90	N/A	72.34	75.60	3.26
630.08	H	Z	PK	36.97	1.71	N/A	N/A	38.68	75.60	36.92
630.08	H	Z	AV	36.97	1.71	-9.90	N/A	28.78	55.60	26.82
944.93	H	X	PK	31.88	7.32	N/A	N/A	39.20	75.60	36.40
944.93	H	X	AV	31.88	7.32	-9.90	N/A	29.30	55.60	26.30
1260.06	V	Y	PK	45.83	-2.25	N/A	N/A	43.58	74.00	30.42
1260.06	V	Y	AV	45.83	-2.25	-9.90	N/A	33.68	54.00	20.32
1575.00	V	Y	PK	45.13	-1.66	N/A	N/A	43.47	74.00	30.53
1575.00	V	Y	AV	45.13	-1.66	-9.90	N/A	33.57	54.00	20.43
1889.96	H	Z	PK	45.40	0.24	N/A	N/A	45.64	74.00	28.36
1889.96	H	Z	AV	45.40	0.24	-9.90	N/A	35.74	54.00	18.26
2205.23	H	Y	PK	45.04	1.37	N/A	N/A	46.41	74.00	27.59
2205.23	H	Y	AV	45.04	1.37	-9.90	N/A	36.51	54.00	17.49
2520.16	V	Z	PK	44.52	2.10	N/A	N/A	46.62	74.00	27.38
2520.16	V	Z	AV	44.52	2.10	-9.90	N/A	36.72	54.00	17.28
2834.86	V	Z	PK	45.88	2.14	N/A	N/A	48.02	74.00	25.98
2834.86	V	Z	AV	45.88	2.14	-9.90	N/A	38.12	54.00	15.88
3150.14	V	Z	PK	45.07	2.36	N/A	N/A	47.43	74.00	26.57
3150.14	V	Z	AV	45.07	2.36	-9.90	N/A	37.53	54.00	16.47

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 32 % (32 ms)

DCCF = $20 \log(32/100) = -9.90 \text{ dB}$

<TM 1: FSK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*318.00	H	X	PK	87.09	-4.73	N/A	N/A	82.36	95.80	13.44
*318.00	H	X	AV	87.09	-4.73	-9.90	N/A	72.46	75.80	3.34
636.10	H	Z	PK	37.63	1.74	N/A	N/A	39.37	75.80	36.43
636.10	H	Z	AV	37.63	1.74	-9.90	N/A	29.47	55.80	26.33
953.87	H	X	PK	31.72	7.47	N/A	N/A	39.19	75.80	36.61
953.87	H	X	AV	31.72	7.47	-9.90	N/A	29.29	55.80	26.51
1272.01	V	Y	PK	45.73	-2.24	N/A	N/A	43.49	74.00	30.51
1272.01	V	Y	AV	45.73	-2.24	-9.90	N/A	33.59	54.00	20.41
1589.98	V	Y	PK	45.33	-1.58	N/A	N/A	43.75	74.00	30.25
1589.98	V	Y	AV	45.33	-1.58	-9.90	N/A	33.85	54.00	20.15
1908.20	H	Z	PK	44.23	0.34	N/A	N/A	44.57	74.00	29.43
1908.20	H	Z	AV	44.23	0.34	-9.90	N/A	34.67	54.00	19.33
2225.89	H	Y	PK	45.51	1.42	N/A	N/A	46.93	74.00	27.07
2225.89	H	Y	AV	45.51	1.42	-9.90	N/A	37.03	54.00	16.97
2544.10	V	Z	PK	45.18	2.11	N/A	N/A	47.29	74.00	26.71
2544.10	V	Z	AV	45.18	2.11	-9.90	N/A	37.39	54.00	16.61
2861.96	V	Z	PK	45.73	2.16	N/A	N/A	47.89	74.00	26.11
2861.96	V	Z	AV	45.73	2.16	-9.90	N/A	37.99	54.00	16.01
3179.73	V	Z	PK	45.65	2.37	N/A	N/A	48.02	74.00	25.98
3179.73	V	Z	AV	45.65	2.37	-9.90	N/A	38.12	54.00	15.88

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 32 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 32 % (32 ms)

DCCF = $20 \log(32/100) = -9.90 \text{ dB}$

<TM 2: ASK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*431.90	H	X	PK	83.16	-2.23	N/A	N/A	80.93	100.80	19.87
*431.90	H	X	AV	83.16	-2.23	-13.98	N/A	66.95	80.80	13.85
863.81	H	X	PK	58.13	5.72	N/A	N/A	63.85	80.80	16.95
863.81	H	X	AV	58.13	5.72	-13.98	N/A	49.87	60.80	10.93
1295.73	H	Y	PK	57.47	-2.22	N/A	N/A	55.25	74.00	18.75
1295.73	H	Y	AV	57.47	-2.22	-13.98	N/A	41.27	54.00	12.73
1727.65	V	Z	PK	52.92	-0.77	N/A	N/A	52.15	74.00	21.85
1727.65	V	Z	AV	52.92	-0.77	-13.98	N/A	38.17	54.00	15.83
2159.68	V	Y	PK	47.50	1.27	N/A	N/A	48.77	74.00	25.23
2159.68	V	Y	AV	47.50	1.27	-13.98	N/A	34.79	54.00	19.21
2591.66	H	Z	PK	48.49	2.14	N/A	N/A	50.63	74.00	23.37
2591.66	H	Z	AV	48.49	2.14	-13.98	N/A	36.65	54.00	17.35
3023.14	H	Z	PK	49.65	2.31	N/A	N/A	51.96	74.00	22.04
3023.14	H	Z	AV	49.65	2.31	-13.98	N/A	37.98	54.00	16.02
3455.28	V	Z	PK	49.58	2.51	N/A	N/A	52.09	74.00	21.91
3455.28	V	Z	AV	49.58	2.51	-13.98	N/A	38.11	54.00	15.89
3887.14	V	Y	PK	47.18	3.08	N/A	N/A	50.26	74.00	23.74
3887.14	V	Y	AV	47.18	3.08	-13.98	N/A	36.28	54.00	17.72
4319.12	V	Z	PK	46.54	4.15	N/A	N/A	50.69	74.00	23.31
4319.12	V	Z	AV	46.54	4.15	-13.98	N/A	36.71	54.00	17.29

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 20 % (39.9 ms x 0.110/0.220 ms)

DCCF = $20 \log(20/100) = -13.98 \text{ dB}$

<TM 2: ASK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*433.92	H	X	PK	82.49	-2.17	N/A	N/A	80.32	100.80	20.48
*433.92	H	X	AV	82.49	-2.17	-13.98	N/A	66.34	80.80	14.46
867.85	H	Z	PK	56.81	5.72	N/A	N/A	62.53	80.80	18.27
867.85	H	Z	AV	56.81	5.72	-13.98	N/A	48.55	60.80	12.25
1301.80	H	Y	PK	56.92	-2.22	N/A	N/A	54.70	74.00	19.30
1301.80	H	Y	AV	56.92	-2.22	-13.98	N/A	40.72	54.00	13.28
1735.62	V	Z	PK	52.42	-0.75	N/A	N/A	51.67	74.00	22.33
1735.62	V	Z	AV	52.42	-0.75	-13.98	N/A	37.69	54.00	16.31
2169.31	V	Y	PK	48.80	1.28	N/A	N/A	50.08	74.00	23.92
2169.31	V	Y	AV	48.80	1.28	-13.98	N/A	36.10	54.00	17.90
2603.30	H	Z	PK	49.20	2.14	N/A	N/A	51.34	74.00	22.66
2603.30	H	Z	AV	49.20	2.14	-13.98	N/A	37.36	54.00	16.64
3037.63	H	Z	PK	49.01	2.31	N/A	N/A	51.32	74.00	22.68
3037.63	H	Z	AV	49.01	2.31	-13.98	N/A	37.34	54.00	16.66
3471.49	V	Z	PK	49.64	2.51	N/A	N/A	52.15	74.00	21.85
3471.49	V	Z	AV	49.64	2.51	-13.98	N/A	38.17	54.00	15.83
390.21	V	Y	PK	47.20	3.09	N/A	N/A	50.29	74.00	23.71
390.21	V	Y	AV	47.20	3.09	-13.98	N/A	36.31	54.00	17.69
4339.70	V	Z	PK	47.34	4.17	N/A	N/A	51.51	74.00	22.49
4339.70	V	Z	AV	47.34	4.17	-13.98	N/A	37.53	54.00	16.47

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 20 % (39.9 ms x 0.110/0.220 ms)

DCCF = $20 \log(20/100) = -13.98 \text{ dB}$

<TM 2: ASK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*435.90	H	X	PK	81.98	-2.11	N/A	N/A	79.87	100.90	21.03
*435.90	H	X	AV	81.98	-2.11	-13.98	N/A	65.89	80.90	15.01
871.81	H	Z	PK	55.27	5.73	N/A	N/A	61.00	80.90	19.90
871.81	H	Z	AV	55.27	5.73	-13.98	N/A	47.02	60.90	13.88
1307.78	H	Y	PK	55.87	-2.22	N/A	N/A	53.65	74.00	20.35
1307.78	H	Y	AV	55.87	-2.22	-13.98	N/A	39.67	54.00	14.33
1743.71	V	Z	PK	46.33	-0.74	N/A	N/A	45.59	74.00	28.41
1743.71	V	Z	AV	46.33	-0.74	-13.98	N/A	31.61	54.00	22.39
2179.84	V	Y	PK	45.87	1.28	N/A	N/A	47.15	74.00	26.85
2179.84	V	Y	AV	45.87	1.28	-13.98	N/A	33.17	54.00	20.83
2615.69	H	Z	PK	45.23	2.14	N/A	N/A	47.37	74.00	26.63
2615.69	H	Z	AV	45.23	2.14	-13.98	N/A	33.39	54.00	20.61
3051.47	H	Z	PK	44.16	2.31	N/A	N/A	46.47	74.00	27.53
3051.47	H	Z	AV	44.16	2.31	-13.98	N/A	32.49	54.00	21.51
3487.14	V	Z	PK	43.83	2.51	N/A	N/A	46.34	74.00	27.66
3487.14	V	Z	AV	43.83	2.51	-13.98	N/A	32.36	54.00	21.64
3923.15	V	Y	PK	43.94	3.09	N/A	N/A	47.03	74.00	26.97
3923.15	V	Y	AV	43.94	3.09	-13.98	N/A	33.05	54.00	20.95
4359.13	V	Z	PK	43.52	4.17	N/A	N/A	47.69	74.00	26.31
4359.13	H	Z	AV	43.52	4.17	-13.98	N/A	33.71	54.00	20.29

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 20 % (39.9 ms x 0.110/0.220 ms)

DCCF = $20 \log(20/100) = -13.98 \text{ dB}$

<TM 2: FSK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*431.90	H	X	PK	83.17	-2.23	N/A	N/A	80.94	100.80	19.86
*431.90	H	X	AV	83.17	-2.23	-7.98	N/A	72.96	80.80	7.84
863.88	H	X	PK	58.14	5.72	N/A	N/A	63.86	80.80	16.94
863.88	H	X	AV	58.14	5.72	-7.98	N/A	55.88	60.80	4.92
1295.59	H	Y	PK	57.36	-2.22	N/A	N/A	55.14	74.00	18.86
1295.59	H	Y	AV	57.36	-2.22	-7.98	N/A	47.16	54.00	6.84
1727.55	V	Z	PK	53.37	-0.77	N/A	N/A	52.60	74.00	21.40
1727.55	V	Z	AV	53.37	-0.77	-7.98	N/A	44.62	54.00	9.38
2159.74	V	Y	PK	47.85	1.27	N/A	N/A	49.12	74.00	24.88
2159.74	V	Y	AV	47.85	1.27	-7.98	N/A	41.14	54.00	12.86
2591.47	H	Z	PK	48.43	2.14	N/A	N/A	50.57	74.00	23.43
2591.47	H	Z	AV	48.43	2.14	-7.98	N/A	42.59	54.00	11.41
3023.18	H	Z	PK	49.01	2.31	N/A	N/A	51.32	74.00	22.68
3023.18	H	Z	AV	49.01	2.31	-7.98	N/A	43.34	54.00	10.66
3023.19	V	Z	PK	49.17	2.51	N/A	N/A	51.68	74.00	22.32
3023.19	V	Z	AV	49.17	2.51	-7.98	N/A	43.70	54.00	10.30
3887.44	V	Y	PK	46.90	3.08	N/A	N/A	49.98	74.00	24.02
3887.44	V	Y	AV	46.90	3.08	-7.98	N/A	42.00	54.00	12.00
4318.45	V	Z	PK	47.31	4.15	N/A	N/A	51.46	74.00	22.54
4318.45	V	Z	AV	47.31	4.15	-7.98	N/A	43.48	54.00	10.52

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 39.9 % (39.9 ms)

DCCF = $20 \log(39.9/100) = -7.98 \text{ dB}$

<TM 2:FSK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*433.92	H	X	PK	82.53	-2.17	N/A	N/A	80.36	100.80	20.44
*433.92	H	X	AV	82.53	-2.17	-7.98	N/A	72.38	80.80	8.42
867.77	H	Z	PK	56.93	5.72	N/A	N/A	62.65	80.80	18.15
867.77	H	Z	AV	56.93	5.72	-7.98	N/A	54.67	60.80	6.13
1301.69	H	Y	PK	56.55	-2.22	N/A	N/A	54.33	74.00	19.67
1301.69	H	Y	AV	56.55	-2.22	-7.98	N/A	46.35	54.00	7.65
1735.64	V	Z	PK	52.90	-0.75	N/A	N/A	52.15	74.00	21.85
1735.64	V	Z	AV	52.90	-0.75	-7.98	N/A	44.17	54.00	9.83
2169.80	V	Y	PK	49.10	1.28	N/A	N/A	50.38	74.00	23.62
2169.80	V	Y	AV	49.10	1.28	-7.98	N/A	42.40	54.00	11.60
2603.19	H	Z	PK	48.72	2.14	N/A	N/A	50.86	74.00	23.14
2603.19	H	Z	AV	48.72	2.14	-7.98	N/A	42.88	54.00	11.12
3037.83	H	Z	PK	49.27	2.31	N/A	N/A	51.58	74.00	22.42
3037.83	H	Z	AV	49.27	2.31	-7.98	N/A	43.60	54.00	10.40
3470.92	V	Z	PK	49.24	2.51	N/A	N/A	51.75	74.00	22.25
3470.92	V	Z	AV	49.24	2.51	-7.98	N/A	43.77	54.00	10.23
3905.10	V	Y	PK	47.23	3.09	N/A	N/A	50.32	74.00	23.68
3905.10	V	Y	AV	47.23	3.09	-7.98	N/A	42.34	54.00	11.66
4339.67	V	Z	PK	47.01	4.17	N/A	N/A	51.18	74.00	22.82
4339.67	V	Z	AV	47.01	4.17	-7.98	N/A	43.20	54.00	10.80

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 39.9 % (39.9 ms)

DCCF = $20 \log(39.9/100) = -7.98 \text{ dB}$

<TM 2: FSK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*435.90	H	X	PK	81.99	-2.11	N/A	N/A	79.88	100.90	21.02
*435.90	H	X	AV	81.99	-2.11	-7.98	N/A	71.90	80.90	9.00
871.73	H	Z	PK	55.32	5.73	N/A	N/A	61.05	80.90	19.85
871.73	H	Z	AV	55.32	5.73	-7.98	N/A	53.07	60.90	7.83
1307.78	H	Y	PK	55.74	-2.22	N/A	N/A	53.52	74.00	20.48
1307.78	H	Y	AV	55.74	-2.22	-7.98	N/A	45.54	54.00	8.46
1743.89	V	Z	PK	51.73	-0.74	N/A	N/A	50.99	74.00	23.01
1743.89	V	Z	AV	51.73	-0.74	-7.98	N/A	43.01	54.00	10.99
2179.64	V	Y	PK	49.15	1.28	N/A	N/A	50.43	74.00	23.57
2179.64	V	Y	AV	49.15	1.28	-7.98	N/A	42.45	54.00	11.55
215.29	H	Z	PK	48.75	2.14	N/A	N/A	50.89	74.00	23.11
215.29	H	Z	AV	48.75	2.14	-7.98	N/A	42.91	54.00	11.09
2615.29	H	Z	PK	48.92	2.31	N/A	N/A	51.23	74.00	22.77
2615.29	H	Z	AV	48.92	2.31	-7.98	N/A	43.25	54.00	10.75
3051.50	V	Z	PK	49.06	2.51	N/A	N/A	51.57	74.00	22.43
3051.50	V	Z	AV	49.06	2.51	-7.98	N/A	43.59	54.00	10.41
3487.15	V	Y	PK	47.62	3.09	N/A	N/A	50.71	74.00	23.29
3487.15	V	Y	AV	47.62	3.09	-7.98	N/A	42.73	54.00	11.27
3922.59	V	Z	PK	47.52	4.17	N/A	N/A	51.69	74.00	22.31
3922.59	V	Z	AV	47.52	4.17	-7.98	N/A	43.71	54.00	10.29

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 39.9 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 39.9 % (39.9 ms)

DCCF = $20 \log(39.9/100) = -7.98 \text{ dB}$

<TM 3: ASK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.10	H	X	PK	73.54	5.72	N/A	N/A	79.26	101.94	22.68
*868.10	H	X	AV	73.54	5.72	-7.94	N/A	71.32	81.94	10.62
1736.11	H	Z	PK	52.26	-0.74	N/A	N/A	51.52	81.94	30.42
1736.11	H	Z	AV	52.26	-0.74	-7.94	N/A	43.58	61.94	18.36
2604.29	H	Z	PK	45.87	2.14	N/A	N/A	48.01	81.94	33.93
2604.29	H	Z	AV	45.87	2.14	-7.94	N/A	40.07	61.94	21.87
3472.59	V	Z	PK	46.33	2.51	N/A	N/A	48.84	81.94	33.10
3472.59	V	Z	AV	46.33	2.51	-7.94	N/A	40.90	61.94	21.04
4340.64	V	Z	PK	45.87	4.17	N/A	N/A	50.04	74.00	23.96
4340.64	V	Z	AV	45.87	4.17	-7.94	N/A	42.10	54.00	11.90
5208.91	H	Z	PK	45.23	5.54	N/A	N/A	50.77	81.94	31.17
5208.91	H	Z	AV	45.23	5.54	-7.94	N/A	42.83	61.94	19.11
6076.63	H	X	PK	44.16	7.01	N/A	N/A	51.17	81.94	30.77
6076.63	H	X	AV	44.16	7.01	-7.94	N/A	43.23	61.94	18.71
6944.77	V	X	PK	43.83	7.59	N/A	N/A	51.42	81.94	30.52
6944.77	V	X	AV	43.83	7.59	-7.94	N/A	43.48	61.94	18.46
7812.70	V	X	PK	43.94	7.98	N/A	N/A	51.92	81.94	30.02
7812.70	V	X	AV	43.94	7.98	-7.94	N/A	43.98	61.94	17.96
8681.32	V	X	PK	43.52	8.63	N/A	N/A	52.15	81.94	29.79
8681.32	V	X	AV	43.52	8.63	-7.94	N/A	44.21	61.94	17.73

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 40.1 % (80.1 ms x 0.110/0.220 ms)

DCCF = $20 \log(40.1/100) = -7.94 \text{ dB}$

<TM 3: ASK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.30	H	X	PK	73.51	5.73	N/A	N/A	79.24	101.94	22.70
*868.30	H	X	AV	73.51	5.73	-7.94	N/A	71.30	81.94	10.64
1736.62	H	Z	PK	52.35	-0.74	N/A	N/A	51.61	81.94	30.33
1736.62	H	Z	AV	52.35	-0.74	-7.94	N/A	43.67	61.94	18.27
2604.79	V	Z	PK	47.13	2.14	N/A	N/A	49.27	81.94	32.67
2604.79	V	Z	AV	47.13	2.14	-7.94	N/A	41.33	61.94	20.61
3473.45	V	Z	PK	45.85	2.51	N/A	N/A	48.36	81.94	33.58
3473.45	V	Z	AV	45.85	2.51	-7.94	N/A	40.42	61.94	21.52
4341.45	H	Z	PK	45.06	4.17	N/A	N/A	49.23	74.00	24.77
4341.45	H	Z	AV	45.06	4.17	-7.94	N/A	41.29	54.00	12.71
5210.05	V	Z	PK	44.37	5.54	N/A	N/A	49.91	81.94	32.03
5210.05	V	Z	AV	44.37	5.54	-7.94	N/A	41.97	61.94	19.97
6078.41	V	X	PK	43.98	7.01	N/A	N/A	50.99	81.94	30.95
6078.41	V	X	AV	43.98	7.01	-7.94	N/A	43.05	61.94	18.89
6946.44	V	X	PK	44.29	7.59	N/A	N/A	51.88	81.94	30.06
6946.44	V	X	AV	44.29	7.59	-7.94	N/A	43.94	61.94	18.00
7814.79	V	X	PK	44.61	7.98	N/A	N/A	52.59	81.94	29.35
7814.79	V	X	AV	44.61	7.98	-7.94	N/A	44.65	61.94	17.29
8682.66	V	X	PK	44.18	8.63	N/A	N/A	52.81	81.94	29.13
8682.66	V	X	AV	44.18	8.63	-7.94	N/A	44.87	61.94	17.07

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 40.1 % (80.1 ms x 0.110/0.220 ms)

DCCF = $20 \log(40.1/100) = -7.94 \text{ dB}$

<TM 3: ASK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.50	H	X	PK	73.55	5.72	N/A	N/A	79.27	101.94	22.67
*868.50	H	X	AV	73.55	5.72	-7.94	N/A	71.33	81.94	10.61
1736.86	H	Z	PK	52.41	-0.74	N/A	N/A	51.67	81.94	30.27
1736.86	H	Z	AV	52.41	-0.74	-7.94	N/A	43.73	61.94	18.21
2605.28	H	Z	PK	46.66	2.14	N/A	N/A	48.80	81.94	33.14
2605.28	H	Z	AV	46.66	2.14	-7.94	N/A	40.86	61.94	21.08
3474.30	V	Z	PK	46.01	2.51	N/A	N/A	48.52	81.94	33.42
3474.30	V	Z	AV	46.01	2.51	-7.94	N/A	40.58	61.94	21.36
4342.46	V	Z	PK	45.53	4.17	N/A	N/A	49.70	74.00	24.30
4342.46	V	Z	AV	45.53	4.17	-7.94	N/A	41.76	54.00	12.24
5210.81	H	Z	PK	44.40	5.54	N/A	N/A	49.94	81.94	32.00
5210.81	H	Z	AV	44.40	5.54	-7.94	N/A	42.00	61.94	19.94
6079.83	H	X	PK	44.50	7.01	N/A	N/A	51.51	81.94	30.43
6079.83	H	X	AV	44.50	7.01	-7.94	N/A	43.57	61.94	18.37
6948.27	V	X	PK	44.24	7.59	N/A	N/A	51.83	81.94	30.11
6948.27	V	X	AV	44.24	7.59	-7.94	N/A	43.89	61.94	18.05
7816.68	V	X	PK	43.73	7.98	N/A	N/A	51.71	81.94	30.23
7816.68	V	X	AV	43.73	7.98	-7.94	N/A	43.77	61.94	18.17
8685.13	V	X	PK	43.67	8.63	N/A	N/A	52.30	81.94	29.64
8685.13	V	X	AV	43.67	8.63	-7.94	N/A	44.36	61.94	17.58

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 0.110 / 0.220 (50 %)

Computed Duty Cycle = 40.1 % (80.1 ms x 0.110/0.220 ms)

DCCF = $20 \log(40.1/100) = -7.94 \text{ dB}$

<TM 3: FSK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.10	H	X	PK	73.56	5.72	N/A	N/A	79.28	101.94	22.66
*868.10	H	X	AV	73.56	5.72	-1.93	N/A	77.35	81.94	4.59
1736.13	H	Z	PK	52.61	-0.74	N/A	N/A	51.87	81.94	30.07
1736.13	H	Z	AV	52.61	-0.74	-1.93	N/A	49.94	61.94	12.00
2604.82	H	Z	PK	46.41	2.14	N/A	N/A	48.55	81.94	33.39
2604.82	H	Z	AV	46.41	2.14	-1.93	N/A	46.62	61.94	15.32
3472.66	V	Z	PK	46.34	2.51	N/A	N/A	48.85	81.94	33.09
3472.66	V	Z	AV	46.34	2.51	-1.93	N/A	46.92	61.94	15.02
4340.60	V	Z	PK	45.16	4.17	N/A	N/A	49.33	74.00	24.67
4340.60	V	Z	AV	45.16	4.17	-1.93	N/A	47.40	54.00	6.60
5208.29	H	Z	PK	44.38	5.54	N/A	N/A	49.92	81.94	32.02
5208.29	H	Z	AV	44.38	5.54	-1.93	N/A	47.99	61.94	13.95
6076.50	H	X	PK	44.58	7.01	N/A	N/A	51.59	81.94	30.35
6076.50	H	X	AV	44.58	7.01	-1.93	N/A	49.66	61.94	12.28
6944.52	V	X	PK	44.01	7.59	N/A	N/A	51.60	81.94	30.34
6944.52	V	X	AV	44.01	7.59	-1.93	N/A	49.67	61.94	12.27
7812.67	V	X	PK	44.17	7.98	N/A	N/A	52.15	81.94	29.79
7812.67	V	X	AV	44.17	7.98	-1.93	N/A	50.22	61.94	11.72
8680.85	V	X	PK	43.39	8.63	N/A	N/A	52.02	81.94	29.92
8680.85	V	X	AV	43.39	8.63	-1.93	N/A	50.09	61.94	11.85

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 80.1 % (80.1 ms)

DCCF = $20 \log(80.1/100) = -1.93 \text{ dB}$

<TM 3: FSK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.30	H	X	PK	73.53	5.73	N/A	N/A	79.26	101.94	22.68
*868.30	H	X	AV	73.53	5.73	-1.93	N/A	77.33	81.94	4.61
1736.54	H	Z	PK	52.64	-0.74	N/A	N/A	51.90	81.94	30.04
1736.54	H	Z	AV	52.64	-0.74	-1.93	N/A	49.97	61.94	11.97
2604.90	V	Z	PK	46.48	2.14	N/A	N/A	48.62	81.94	33.32
2604.90	V	Z	AV	46.48	2.14	-1.93	N/A	46.69	61.94	15.25
3473.17	V	Z	PK	46.98	2.51	N/A	N/A	49.49	81.94	32.45
3473.17	V	Z	AV	46.98	2.51	-1.93	N/A	47.56	61.94	14.38
4341.46	H	Z	PK	45.38	4.17	N/A	N/A	49.55	74.00	24.45
4341.46	H	Z	AV	45.38	4.17	-1.93	N/A	47.62	54.00	6.38
5209.65	V	Z	PK	44.49	5.54	N/A	N/A	50.03	81.94	31.91
5209.65	V	Z	AV	44.49	5.54	-1.93	N/A	48.10	61.94	13.84
6078.11	V	X	PK	44.06	7.01	N/A	N/A	51.07	81.94	30.87
6078.11	V	X	AV	44.06	7.01	-1.93	N/A	49.14	61.94	12.80
6946.01	V	X	PK	43.48	7.59	N/A	N/A	51.07	81.94	30.87
6946.01	V	X	AV	43.48	7.59	-1.93	N/A	49.14	61.94	12.80
7815.03	V	X	PK	43.79	7.98	N/A	N/A	51.77	81.94	30.17
7815.03	V	X	AV	43.79	7.98	-1.93	N/A	49.84	61.94	12.10
8683.10	V	X	PK	43.52	8.63	N/A	N/A	52.15	81.94	29.79
8683.10	V	X	AV	43.52	8.63	-1.93	N/A	50.22	61.94	11.72

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 80.1 % (80.1 ms)

DCCF = $20 \log(80.1/100) = -1.93 \text{ dB}$

<TM 3: FSK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*868.50	H	X	PK	73.56	5.72	N/A	N/A	79.28	101.94	22.66
*868.50	H	X	AV	73.56	5.72	-1.93	N/A	77.35	81.94	4.59
1737.20	H	Z	PK	52.35	-0.74	N/A	N/A	51.61	81.94	30.33
1737.20	H	Z	AV	52.35	-0.74	-1.93	N/A	49.68	61.94	12.26
2605.42	H	Z	PK	46.46	2.14	N/A	N/A	48.60	81.94	33.34
2605.42	H	Z	AV	46.46	2.14	-1.93	N/A	46.67	61.94	15.27
3473.93	V	Z	PK	46.08	2.51	N/A	N/A	48.59	81.94	33.35
3473.93	V	Z	AV	46.08	2.51	-1.93	N/A	46.66	61.94	15.28
4342.55	V	Z	PK	45.48	4.17	N/A	N/A	49.65	74.00	24.35
4342.55	V	Z	AV	45.48	4.17	-1.93	N/A	47.72	54.00	6.28
5211.05	H	Z	PK	45.07	5.54	N/A	N/A	50.61	81.94	31.33
5211.05	H	Z	AV	45.07	5.54	-1.93	N/A	48.68	61.94	13.26
6079.64	H	X	PK	44.45	7.01	N/A	N/A	51.46	81.94	30.48
6079.64	H	X	AV	44.45	7.01	-1.93	N/A	49.53	61.94	12.41
6947.61	V	X	PK	43.64	7.59	N/A	N/A	51.23	81.94	30.71
6947.61	V	X	AV	43.64	7.59	-1.93	N/A	49.30	61.94	12.64
7816.19	V	X	PK	43.51	7.98	N/A	N/A	51.49	81.94	30.45
7816.19	V	X	AV	43.51	7.98	-1.93	N/A	49.56	61.94	12.38
8684.66	V	X	PK	43.41	8.63	N/A	N/A	52.04	81.94	29.90
8684.66	V	X	AV	43.41	8.63	-1.93	N/A	50.11	61.94	11.83

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 80.1 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 80.1 % (80.1 ms)

DCCF = $20 \log(80.1/100) = -1.93 \text{ dB}$

<TM 4: ASK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*902.38	H	X	PK	82.13	6.27	N/A	N/A	88.40	101.94	13.54
*902.38	H	X	AV	82.13	6.27	-18.06	N/A	70.34	81.94	11.60
1804.90	H	Z	PK	55.86	-0.36	N/A	N/A	55.50	74.00	18.50
1804.90	H	Z	AV	55.86	-0.36	-18.06	N/A	37.44	54.00	16.56
2707.12	H	Z	PK	51.98	2.19	N/A	N/A	54.17	74.00	19.83
2707.12	H	Z	AV	51.98	2.19	-18.06	N/A	36.11	54.00	17.89
3609.58	V	Y	PK	50.21	2.71	N/A	N/A	52.92	74.00	21.08
3609.58	V	Y	AV	50.21	2.71	-18.06	N/A	34.86	54.00	19.14
4511.81	V	Z	PK	47.07	4.62	N/A	N/A	51.69	74.00	22.31
4511.81	V	Z	AV	47.07	4.62	-18.06	N/A	33.63	54.00	20.37
5414.16	H	Z	PK	46.11	5.70	N/A	N/A	51.81	74.00	22.19
5414.16	H	Z	AV	46.11	5.70	-18.06	N/A	33.75	54.00	20.25
6316.93	H	X	PK	46.02	7.17	N/A	N/A	53.19	74.00	20.81
6316.93	H	X	AV	46.02	7.17	-18.06	N/A	35.13	54.00	18.87
7218.37	V	X	PK	44.80	7.72	N/A	N/A	52.52	74.00	21.48
7218.37	V	X	AV	44.80	7.72	-18.06	N/A	34.46	54.00	19.54
8122.18	V	X	PK	44.72	8.16	N/A	N/A	52.88	74.00	21.12
8122.18	V	X	AV	44.72	8.16	-18.06	N/A	34.82	54.00	19.18
9024.35	V	X	PK	44.73	8.91	N/A	N/A	53.64	74.00	20.36
9024.35	V	X	AV	44.73	8.91	-18.06	N/A	35.58	54.00	18.42

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$\text{T.F} = \text{AF} + \text{CL} - \text{AG}$ / $\text{Field Strength} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF}$

$\text{Margin} = \text{Limit} - \text{Field Strength}$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

$\text{Max. Frame Length} = 25 \text{ ms}$ / $\text{Pulse duty} = 0.105 / 0.210 (50 \%)$

$\text{Computed Duty Cycle} = 12.5 \%$ (25 ms x 0.105/0.210 ms)

$\text{DCCF} = 20 \log(12.5/100) = -18.06 \text{ dB}$

<TM 4: ASK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*915.00	H	X	PK	83.60	6.67	N/A	N/A	90.27	101.94	11.67
*915.00	H	X	AV	83.60	6.67	-18.06	N/A	72.21	81.94	9.73
1830.06	H	Z	PK	55.14	-0.14	N/A	N/A	55.00	74.00	19.00
1830.06	H	Z	AV	55.14	-0.14	-18.06	N/A	36.94	54.00	17.06
2745.08	V	Z	PK	55.34	2.20	N/A	N/A	57.54	74.00	16.46
2745.08	V	Z	AV	55.34	2.20	-18.06	N/A	39.48	54.00	14.52
3660.05	H	Y	PK	50.30	2.69	N/A	N/A	52.99	74.00	21.01
3660.05	H	Y	AV	50.30	2.69	-18.06	N/A	34.93	54.00	19.07
4575.20	H	Z	PK	48.94	4.89	N/A	N/A	53.83	74.00	20.17
4575.20	H	Z	AV	48.94	4.89	-18.06	N/A	35.77	54.00	18.23
5490.11	V	Z	PK	48.14	5.76	N/A	N/A	53.90	74.00	20.10
5490.11	V	Z	AV	48.14	5.76	-18.06	N/A	35.84	54.00	18.16
6405.05	V	X	PK	45.95	7.23	N/A	N/A	53.18	74.00	20.82
6405.05	V	X	AV	45.95	7.23	-18.06	N/A	35.12	54.00	18.88
7319.77	V	X	PK	44.71	7.77	N/A	N/A	52.48	74.00	21.52
7319.77	V	X	AV	44.71	7.77	-18.06	N/A	34.42	54.00	19.58
8234.80	V	X	PK	45.32	8.26	N/A	N/A	53.58	74.00	20.42
8234.80	V	X	AV	45.32	8.26	-18.06	N/A	35.52	54.00	18.48
9149.88	V	X	PK	45.42	9.04	N/A	N/A	54.46	74.00	19.54
9149.88	V	X	AV	45.42	9.04	-18.06	N/A	36.40	54.00	17.60

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 25 ms / Pulse duty = 0.105 / 0.210 (50 %)

Computed Duty Cycle = 12.5 % (25 ms x 0.105/0.210 ms)

DCCF = $20 \log(12.5/100) = -18.06 \text{ dB}$

<TM 4: ASK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*927.63	H	X	PK	81.00	6.98	N/A	N/A	87.98	101.94	13.96
*927.63	H	X	AV	81.00	6.98	-18.06	N/A	69.92	81.94	12.02
1855.12	H	Z	PK	54.38	0.04	N/A	N/A	54.42	74.00	19.58
1855.12	H	Z	AV	54.38	0.04	-18.06	N/A	36.36	54.00	17.64
2782.86	H	Z	PK	53.94	2.16	N/A	N/A	56.10	74.00	17.90
2782.86	H	Z	AV	53.94	2.16	-18.06	N/A	38.04	54.00	15.96
3710.72	V	Y	PK	50.52	2.69	N/A	N/A	53.21	74.00	20.79
3710.72	V	Y	AV	50.52	2.69	-18.06	N/A	35.15	54.00	18.85
4638.26	V	Z	PK	47.10	4.83	N/A	N/A	51.93	74.00	22.07
4638.26	V	Z	AV	47.10	4.83	-18.06	N/A	33.87	54.00	20.13
5566.10	H	Z	PK	46.66	5.74	N/A	N/A	52.40	74.00	21.60
5566.10	H	Z	AV	46.66	5.74	-18.06	N/A	34.34	54.00	19.66
6493.15	H	X	PK	46.84	7.21	N/A	N/A	54.05	74.00	19.95
6493.15	H	X	AV	46.84	7.21	-18.06	N/A	35.99	54.00	18.01
7420.63	V	X	PK	45.85	7.75	N/A	N/A	53.60	74.00	20.40
7420.63	V	X	AV	45.85	7.75	-18.06	N/A	35.54	54.00	18.46
8349.00	V	X	PK	44.36	8.20	N/A	N/A	52.56	74.00	21.44
8349.00	V	X	AV	44.36	8.20	-18.06	N/A	34.50	54.00	19.50
9276.23	V	X	PK	45.36	8.96	N/A	N/A	54.32	74.00	19.68
9276.23	V	X	AV	45.36	8.96	-18.06	N/A	36.26	54.00	17.74

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 25 ms / Pulse duty = 0.105 / 0.210 (50 %)

Computed Duty Cycle = 12.5 % (25 ms x 0.105/0.210 ms)

DCCF = $20 \log(12.5/100) = -18.06 \text{ dB}$

<TM 4: FSK & Lowest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*902.38	H	X	PK	82.14	6.27	N/A	N/A	88.41	101.94	13.53
*902.38	H	X	AV	82.14	6.27	-12.04	N/A	76.37	81.94	5.57
1804.77	H	Z	PK	55.52	-0.36	N/A	N/A	55.16	74.00	18.84
1804.77	H	Z	AV	55.52	-0.36	-12.04	N/A	43.12	54.00	10.88
2707.06	H	Z	PK	52.05	2.19	N/A	N/A	54.24	74.00	19.76
2707.06	H	Z	AV	52.05	2.19	-12.04	N/A	42.20	54.00	11.80
3609.49	V	Y	PK	50.53	2.71	N/A	N/A	53.24	74.00	20.76
3609.49	V	Y	AV	50.53	2.71	-12.04	N/A	41.20	54.00	12.80
4511.94	V	Z	PK	46.62	4.62	N/A	N/A	51.24	74.00	22.76
4511.94	V	Z	AV	46.62	4.62	-12.04	N/A	39.20	54.00	14.80
5414.07	H	Z	PK	46.20	5.70	N/A	N/A	51.90	74.00	22.10
5414.07	H	Z	AV	46.20	5.70	-12.04	N/A	39.86	54.00	14.14
6317.01	H	X	PK	45.38	7.17	N/A	N/A	52.55	74.00	21.45
6317.01	H	X	AV	45.38	7.17	-12.04	N/A	40.51	54.00	13.49
7219.66	V	X	PK	44.33	7.72	N/A	N/A	52.05	74.00	21.95
7219.66	V	X	AV	44.33	7.72	-12.04	N/A	40.01	54.00	13.99
8121.75	V	X	PK	44.66	8.16	N/A	N/A	52.82	74.00	21.18
8121.75	V	X	AV	44.66	8.16	-12.04	N/A	40.78	54.00	13.22
9023.64	V	X	PK	44.31	8.91	N/A	N/A	53.22	74.00	20.78
9023.64	V	X	AV	44.31	8.91	-12.04	N/A	41.18	54.00	12.82

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 25 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 25 % (25 ms)

DCCF = $20 \log(25/100) = -12.04 \text{ dB}$

<TM 4: FSK & Middle channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*915.00	H	X	PK	83.62	6.67	N/A	N/A	90.29	101.94	11.65
*915.00	H	X	AV	83.62	6.67	-12.04	N/A	78.25	81.94	3.69
1829.95	H	Z	PK	55.35	-0.14	N/A	N/A	55.21	74.00	18.79
1829.95	H	Z	AV	55.35	-0.14	-12.04	N/A	43.17	54.00	10.83
2745.10	V	Z	PK	55.33	2.20	N/A	N/A	57.53	74.00	16.47
2745.10	V	Z	AV	55.33	2.20	-12.04	N/A	45.49	54.00	8.51
3660.40	H	Y	PK	50.61	2.69	N/A	N/A	53.30	74.00	20.70
3660.40	H	Y	AV	50.61	2.69	-12.04	N/A	41.26	54.00	12.74
4574.60	H	Z	PK	48.70	4.89	N/A	N/A	53.59	74.00	20.41
4574.60	H	Z	AV	48.70	4.89	-12.04	N/A	41.55	54.00	12.45
5490.30	V	Z	PK	48.00	5.76	N/A	N/A	53.76	74.00	20.24
5490.30	V	Z	AV	48.00	5.76	-12.04	N/A	41.72	54.00	12.28
6405.51	V	X	PK	46.09	7.23	N/A	N/A	53.32	74.00	20.68
6405.51	V	X	AV	46.09	7.23	-12.04	N/A	41.28	54.00	12.72
7320.65	V	X	PK	44.97	7.77	N/A	N/A	52.74	74.00	21.26
7320.65	V	X	AV	44.97	7.77	-12.04	N/A	40.70	54.00	13.30
8234.68	V	X	PK	45.16	8.26	N/A	N/A	53.42	74.00	20.58
8234.68	V	X	AV	45.16	8.26	-12.04	N/A	41.38	54.00	12.62
9149.69	V	X	PK	45.36	9.04	N/A	N/A	54.40	74.00	19.60
9149.69	V	X	AV	45.36	9.04	-12.04	N/A	42.36	54.00	11.64

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 25 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 25 % (25 ms)

DCCF = $20 \log(25/100) = -12.04 \text{ dB}$

<TM 4: FSK & Highest channel>

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*927.63	H	X	PK	80.95	6.98	N/A	N/A	87.93	101.94	14.01
*927.63	H	X	AV	80.95	6.98	-12.04	N/A	75.89	81.94	6.05
1855.05	H	Z	PK	54.67	0.04	N/A	N/A	54.71	74.00	19.29
1855.05	H	Z	AV	54.67	0.04	-12.04	N/A	42.67	54.00	11.33
2782.77	H	Z	PK	54.16	2.16	N/A	N/A	56.32	74.00	17.68
2782.77	H	Z	AV	54.16	2.16	-12.04	N/A	44.28	54.00	9.72
3710.41	V	Z	PK	50.84	2.69	N/A	N/A	53.53	74.00	20.47
3710.41	V	Z	AV	50.84	2.69	-12.04	N/A	41.49	54.00	12.51
4638.30	V	Z	PK	46.92	4.83	N/A	N/A	51.75	74.00	22.25
4638.30	V	Z	AV	46.92	4.83	-12.04	N/A	39.71	54.00	14.29
5565.65	H	Z	PK	46.97	5.74	N/A	N/A	52.71	74.00	21.29
5565.65	H	Z	AV	46.97	5.74	-12.04	N/A	40.67	54.00	13.33
6493.12	H	X	PK	45.49	7.21	N/A	N/A	52.70	74.00	21.30
6493.12	H	X	AV	45.49	7.21	-12.04	N/A	40.66	54.00	13.34
7421.14	V	X	PK	45.62	7.75	N/A	N/A	53.37	74.00	20.63
7421.14	V	X	AV	45.62	7.75	-12.04	N/A	41.33	54.00	12.67
8348.64	V	X	PK	44.63	8.20	N/A	N/A	52.83	74.00	21.17
8348.64	V	X	AV	44.63	8.20	-12.04	N/A	40.79	54.00	13.21
9275.91	V	X	PK	44.76	8.96	N/A	N/A	53.72	74.00	20.28
9275.91	V	X	AV	44.76	8.96	-12.04	N/A	41.68	54.00	12.32

Note 1. The radiated emissions were investigated 9 kHz to 10th harmonic of highest fundamental frequency.

Note 2. * is fundamental frequency.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m.

In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Note 5. Sample calculation

$T.F = AF + CL - AG$ / Field Strength = Reading + T.F + DCCF + DCF

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Note 6. DCCF Calculation

Max. Frame Length = 25 ms / Pulse duty = 1 (100 %)

Computed Duty Cycle = 25 % (25 ms)

DCCF = $20 \log(25/100) = -12.04 \text{ dB}$

3.2.4 AC power line conducted emission

- Procedure:

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

- Measurement Data: NA

- Limit:

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

3.2.5 Antenna requirement

- According to FCC 47 CFR §15.203:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna is permanently attached on PCB.

Therefore this E.U.T Complies with the requirement of §15.203.

APPENDIX I

TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/07/09	19/07/09	MY46471251
DC Power Supply	SMtechno	SDP30-5D	18/07/03	19/07/03	305DNF079
Multimeter	FLUKE	17B	18/12/18	19/12/18	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Signal Generator	ANRITSU	SMF100A	18/06/07	19/06/07	102341
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	18/07/05	19/07/05	7
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-2
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
Bilog Antenna	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
HORN ANT	ETS	3117	18/05/10	20/05/10	00140394
PreAmplifier	H.P	8447D	18/12/18	19/12/18	2944A07774
PreAmplifier	Agilent Technologies	8449B	18/07/05	19/07/05	3008A02108
Cable	DTNC	Cable	18/07/06	19/07/06	M-01
Cable	DTNC	Cable	18/07/06	19/07/06	M-03
Cable	Junkosha	MWX315	18/11/19	19/11/19	M-05
Cable	Junkosha	MWX221	18/11/19	19/11/19	M-06

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX II


Worst data plot of radiated test

Note: The offset was not include in test plot(Reading value). The results refer to the section 3.2.3.

Field strength of fundamental

TM 1_ASK_X axis & Hor


Detector Mode : PK

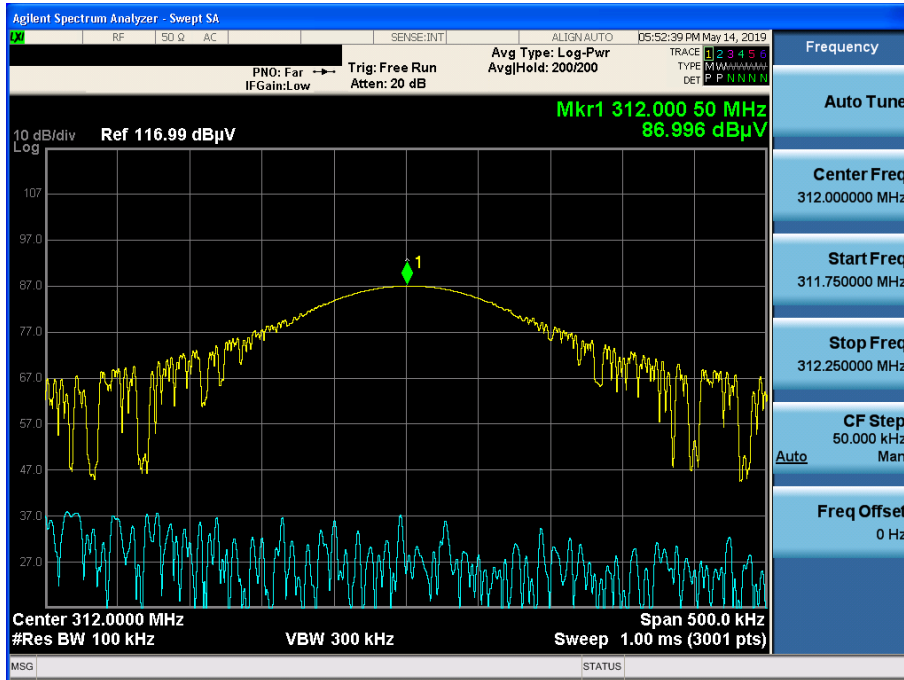

Spurious emission

TM 1_ASK_Z axis & Ver


Detector Mode : PK

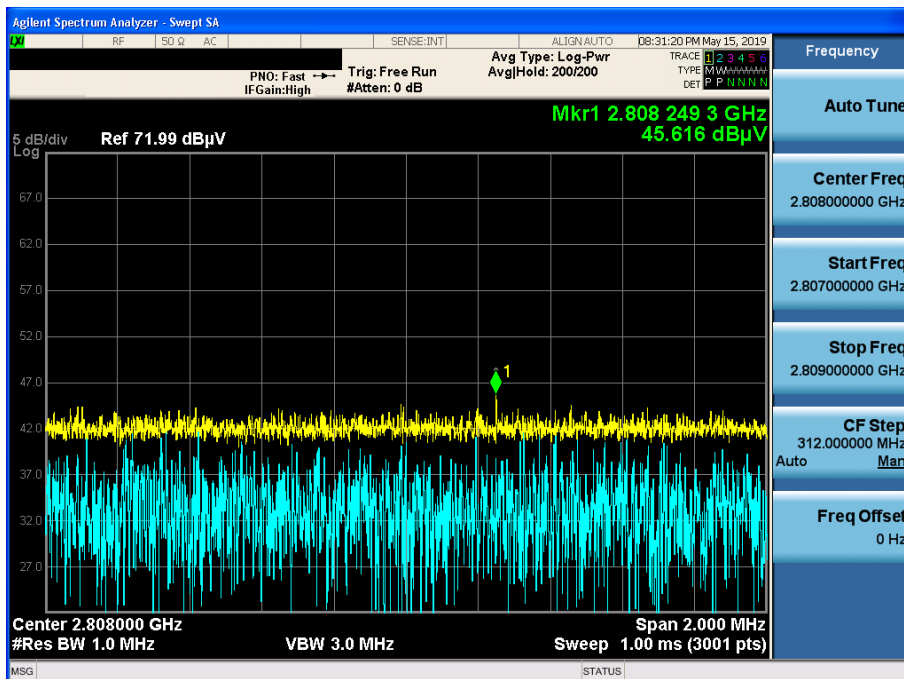

Field strength of fundamental

TM 1_FSK_X axis & Hor


Detector Mode : PK

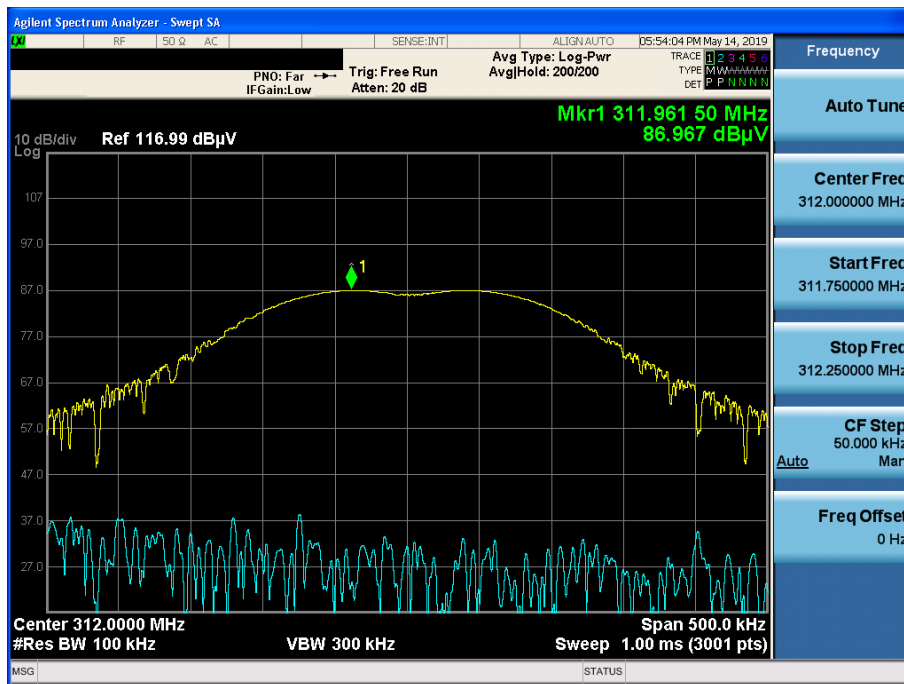

Spurious emission

TM 1_FSK_Z axis & Ver


Detector Mode : PK

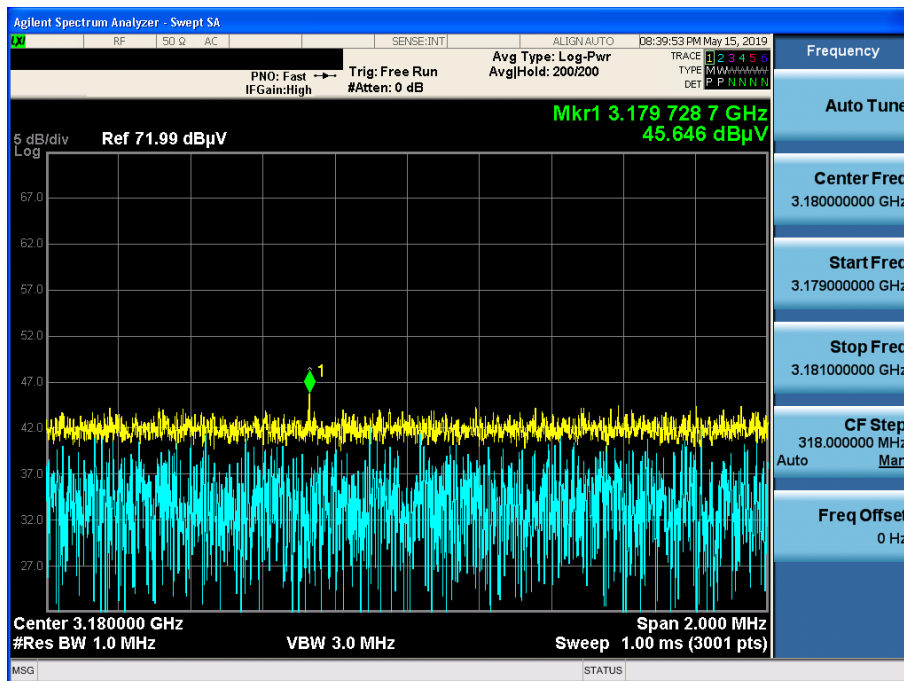

Field strength of fundamental

TM 2_ASK_X axis & Hor


Detector Mode : PK

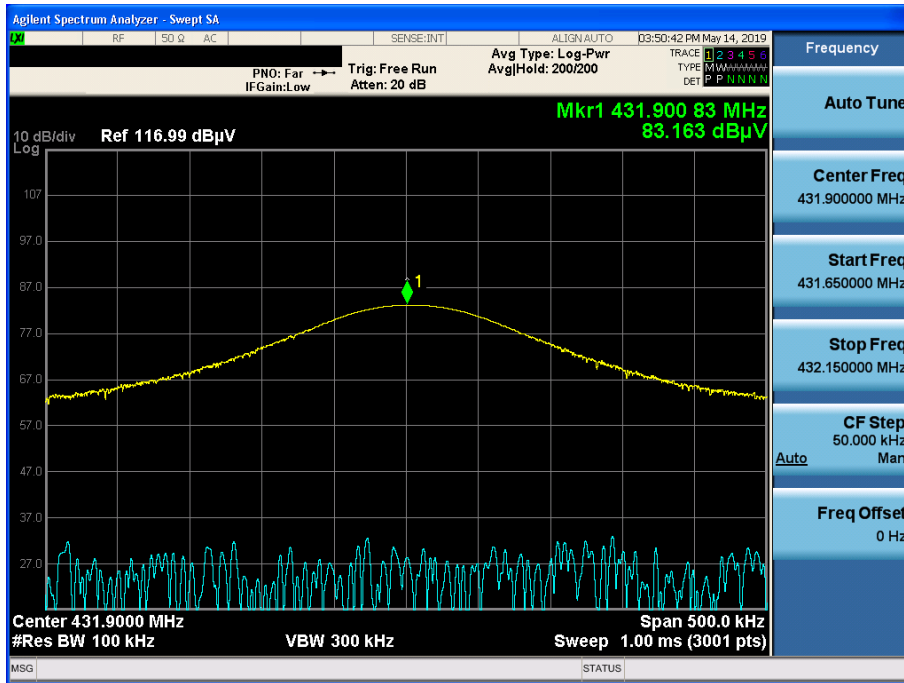

Spurious emission

TM 2_ASK_X axis & Hor


Detector Mode : PK

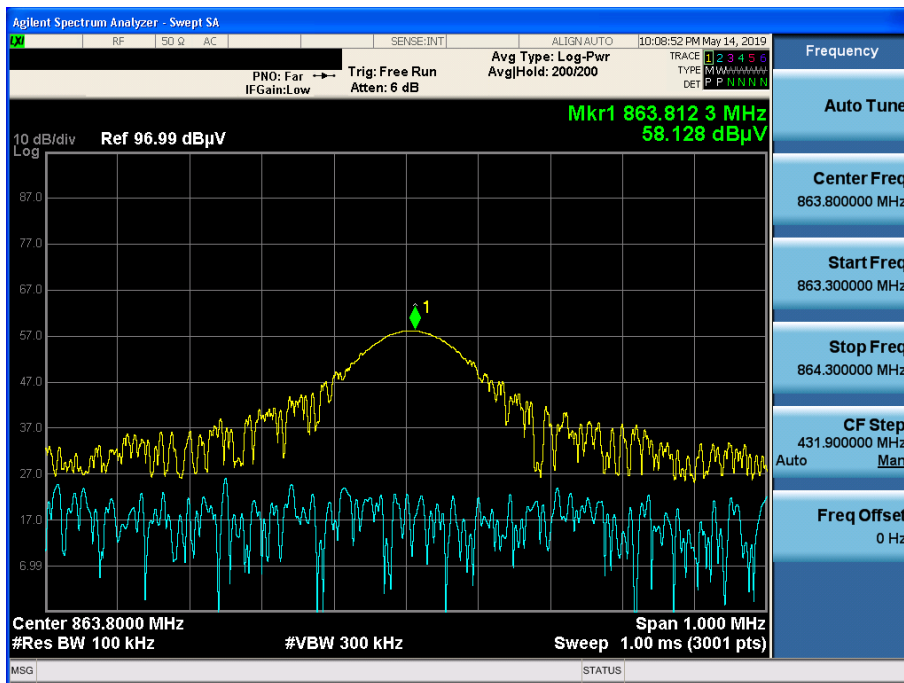

Field strength of fundamental

TM 2_FSK_X axis & Hor


Detector Mode : PK

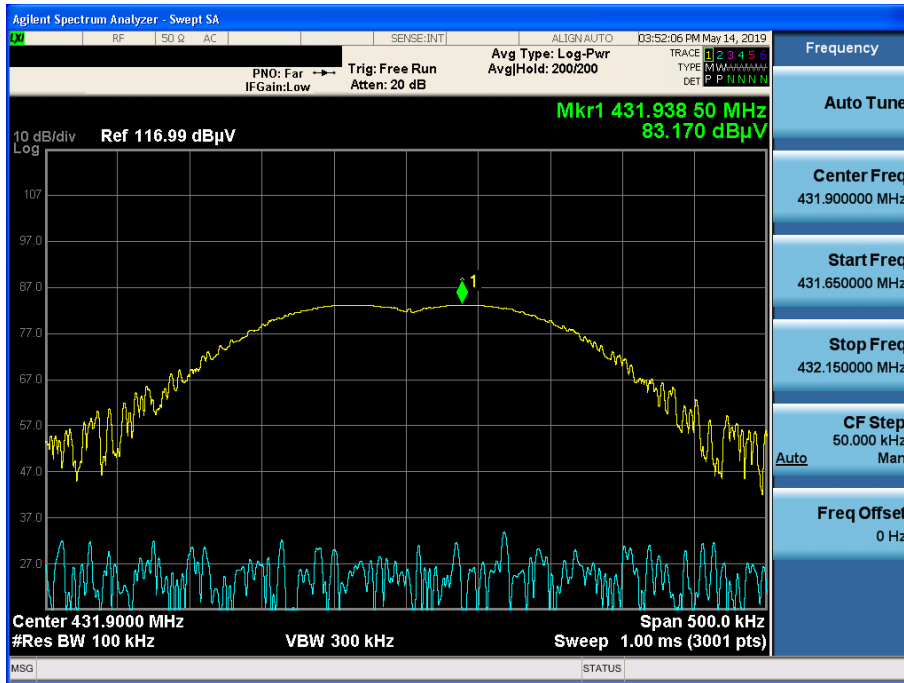

Spurious emission

TM 2_FSK_X axis & Hor


Detector Mode : PK

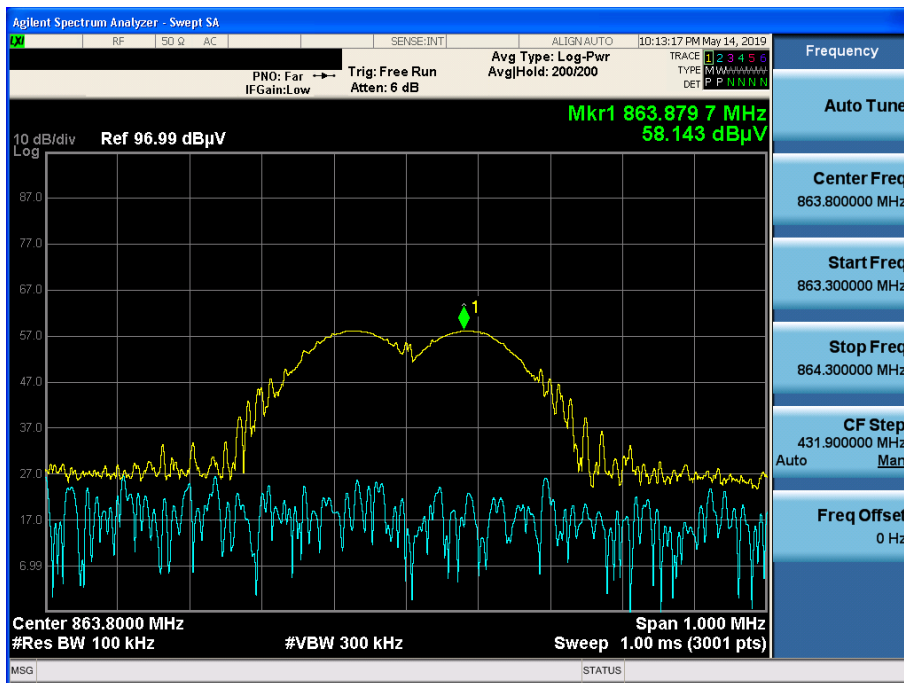

Field strength of fundamental

TM 3_ASK_X axis & Hor


Detector Mode : PK

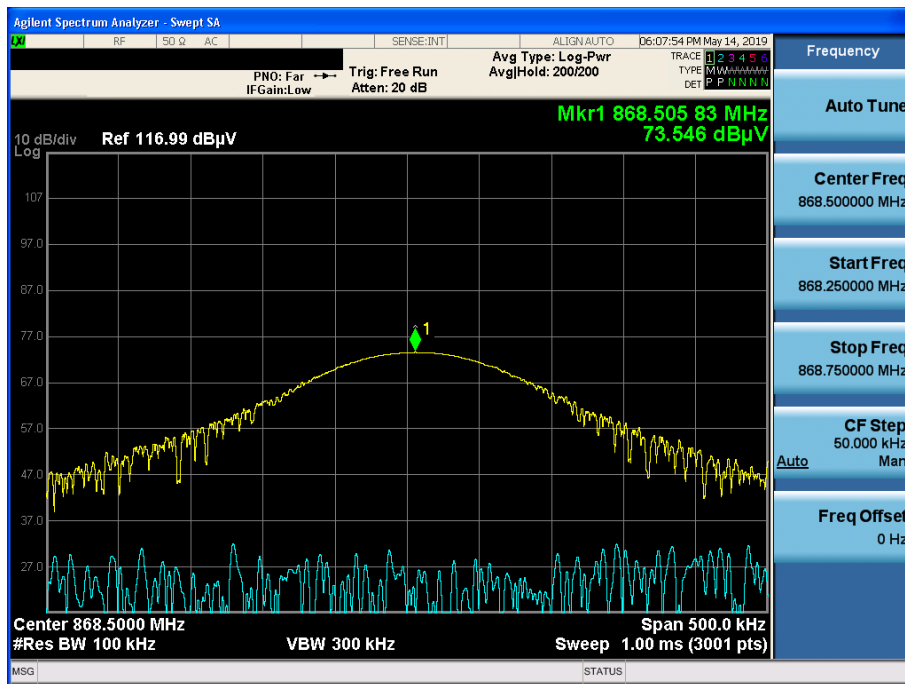

Spurious emission

TM 3_ASK_Z axis & Ver

Detector Mode : PK

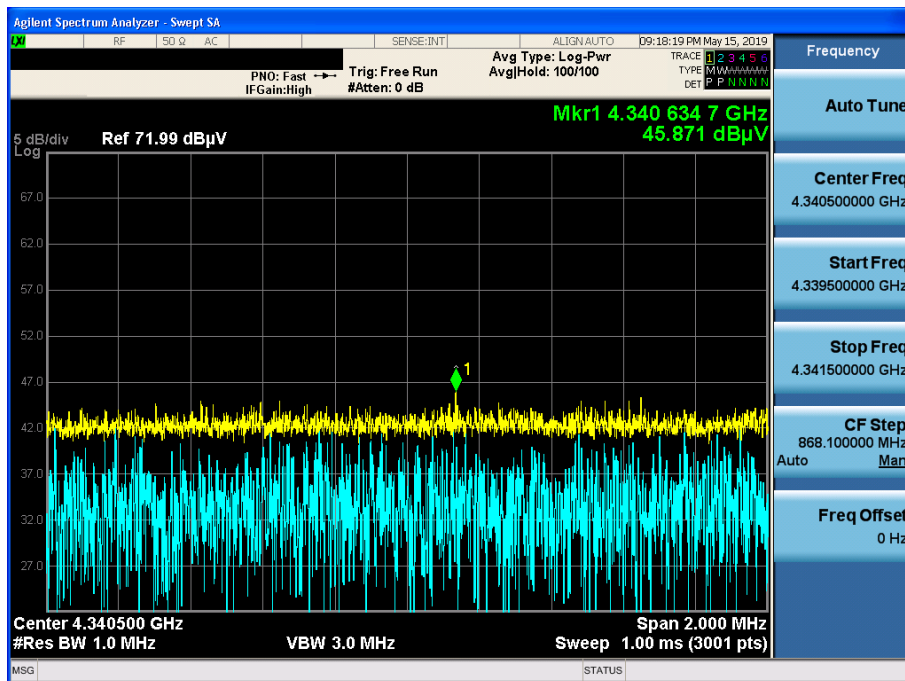

Field strength of fundamental

TM 3_FSK_X axis & Hor (RDS=73.546)


Detector Mode : PK



Spurious emission

TM 3_FSK_Z axis & Hor


Detector Mode : PK

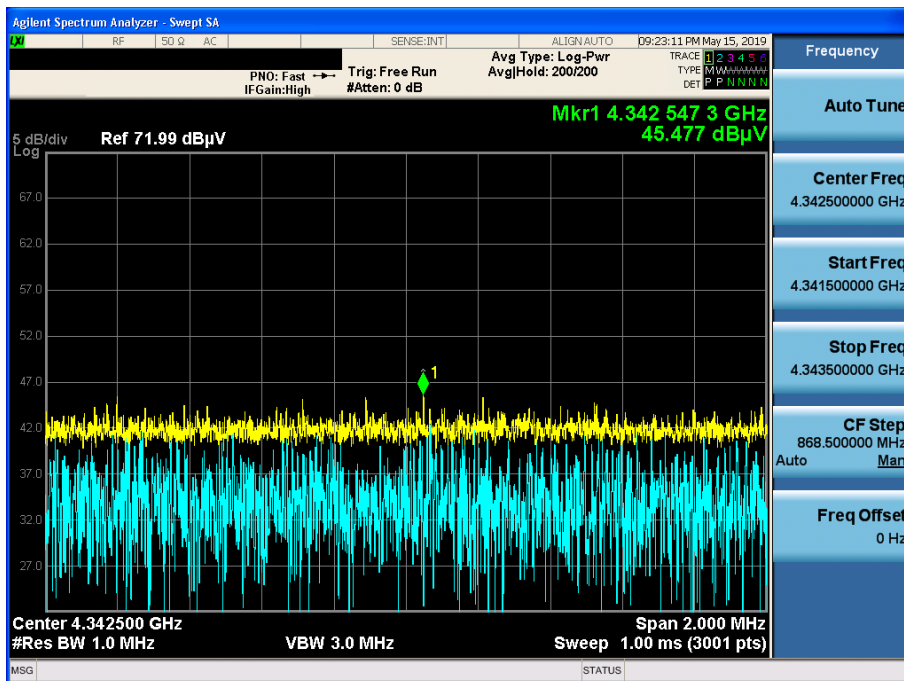

Field strength of fundamental

TM 4_ASK_X axis & Hor

Detector Mode : PK

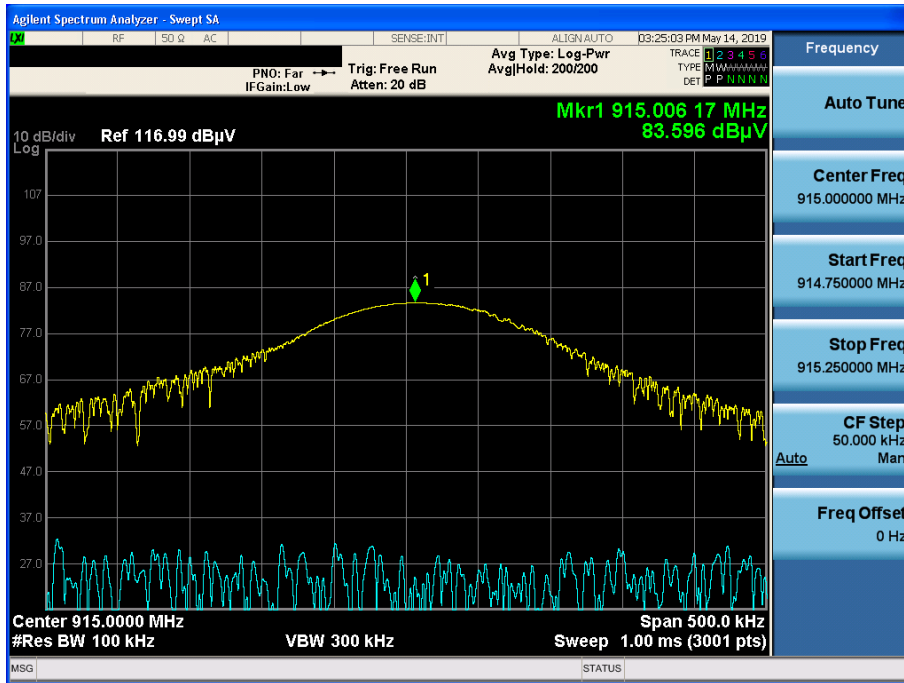

Spurious emission

TM 4_ASK_Z axis & Ver

Detector Mode : PK

