

CYGNETT PTY LTD

TEST REPORT

SCOPE OF WORK

FCC TESTING—
CY4058PPWIR,CY4059PPWIR,CY4060PPWIR,
CY4061PPWIR

REPORT NUMBER

220415036SZN-001

ISSUE DATE

17 May 2022

[REVISED DATE]

[-----]

PAGES

20

DOCUMENT CONTROL NUMBER

FCC ID 209_b
© 2017 INTERTEK



Intertek Report No.: 220415036SZN-001

CYGNETT PTY LTDApplication
For
Certification**FCC ID: 2AEDZCY40XXPPWIR****PowerBaseIII 15W Wireless Charger****Model: CY4058PPWIR, CY4059PPWIR, CY4060PPWIR, CY4061PPWIR****Transmitter**

Report No.: 220415036SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-20]

Prepared and Checked by:**Approved by:****Karot Huang**
Assistant Engineer

Peter Kang
Sr. Technical Supervisor
Date: 17 May 2022

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DCD - Part 15 Low Power Transmitter Below 1705 kHz

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until : _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-20] Edition] provision.

Report prepared by:

Karot Huang
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, ShenZhen.
Tel: (86 755) 8614 0743 Fax: (86 755) 8601 6751

Table of Contents

1.0	Summary of Test Results	4
2.0	General Description	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
3.0	System Test Configuration	6
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	6
3.4	Equipment Modification	6
3.5	Measurement Uncertainty	7
3.6	Support Equipment List and Description	7
4.0	Measurement Results	8
4.1	Field Strength Calculation	8
4.2	Radiated Emission Configuration Photograph	9
4.3	Radiated Spurious Emission	9
4.4	Conducted Emission Configuration Photograph	13
4.5	Conducted Emission	13
5.0	Equipment Photographs	16
6.0	Product Labelling	16
7.0	Technical Specifications	16
8.0	Instruction Manual	16
9.0	Miscellaneous Information	17
9.1	20dB Bandwidth	17
9.2	Emissions Test Procedures	18
9.2	Emissions Test Procedures (cont'd)	19
10.0	Test Equipment List	20

1.0 Summary of Test Results

Applicant: CYGNETT PTY LTD

Applicant Address: Level 1, 858 Lorimer Street, Port Melbourne VIC 3207 Australia

Manufacturer: Shenzhen Reflying Electronic Co.,Limited

Manufacturer Address: 6 Bldg,GaoXinJian Industrial Zone,HePing Village

Model: CY4058PPWIR,CY4059PPWIR,CY4060PPWIR,CY4061PPWIR

FCC ID: 2AEDZCY40XXPPWIR

TEST ITEM	REFERENCE	RESULTS
Power Line Conducted Emissions	15.207	Pass
Transmitter Radiated Emissions	15.209	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a PowerBaselll 15W Wireless Charger operating at 112-205 kHz. The EUT is powered by AC 120V/60Hz from Adapter,the output of the wireless charger is 5W, 7.5W, 10W, 15W. The EUT is equipped with one coil antenna. For more detailed features description, please refer to the user's manual.

The model CY4059PPWIR,CY4060PPWIR,CY4061PPWIR are the same as the model CY4058PPWIR in hardware aspect. The difference in model number and colour of enclosure serves as marketing strategy. Details as follows:

Production name	Brand name	Model no.	Description
PowerBaselll 15W Wireless Charger	CYGNETT	CY4058PPWIR	Black
		CY4059PPWIR	Grey
		CY4060PPWIR	White
		CY4061PPWIR	Pink

Antenna Type: Integral Antenna(embedded coil antenna)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of the PowerBaselll 15W Wireless Charger portion.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek **Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by an adapter with 120V/60Hz input during the test. The test system was pre-scanning tested based on the consideration of following EUT operation mode. and 129.9kHz was the worst case frequency. The EUT is equipped with one coil antenna. All cases (5W, 7.5W, 10W, 15W) have been tested, only the worst-case data was shown in this report.

Pertest mode	Description
Mode 1	Standby mode
Mode 2	Mobile phone is charging at 1% battery power
Mode 3	Mobile phone is charging at 50% battery power
Mode 4	Mobile phone is charging at 99% battery power

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the bottom of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Section 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

N/A

3.3 Special Accessories

There are no special accessories necessary for compliance of this product.

3.4 Equipment Modification

Any modifications installed previous to testing by CYGNETT PTY LTD will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
Channel Bandwidth	±3.46%
Radiated emission (Up to 1GHz)	±4.8dB
AC Conducted emission	±3.6 dB
Temperature	±1°C
Humidity	±5%

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Description	Manufacturer	Detail
ZMI USB-C Power Adapter	Nanjing Cuk Electronics Technology Co., Ltd. (Provided by Client)	Model: TY0500200A1mn Input: 100-240Vac 50/60Hz 0.4A Output: 5Vdc 3A, 9Vdc 3A, 12Vdc 3A, 15Vdc 3A, 20Vdc 3.25A
Adjustable Load	NIL (Provided by Client)	N/A
Power Adapter	NIL (Provided by Client)	Model: ZX-4U07T Input: 100-240V 50-60Hz Power: 78W Output PD1: 5Vdc 3A, 9Vdc 2A, 12dc 1.5A Output QC1: 5Vdc 2.4A, 9Vdc 2A, 12dc 1.5A Output QC2: 5Vdc 3A, 9Vdc 2A, 12Vdc 1.5A Output PD2: 5Vdc 3A, 9Vdc 3A, 12Vdc 3A, 15Vdc 3A, 20Vdc 3A Output PD1+QC2: 5Vdc 3A

4.0 Measurement Results

4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0dB μ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{ dB/m}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$PD = 0\text{dB}$$

$$AV = -10\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$

4.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

4.3 Radiated Spurious Emission

Worst Case Radiated Spurious Emission
at
60.134667MHz

Judgement: Passed by 6.2dB margin

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: CYGNETT PTY LTD


Date of Test: 20 April 2022

Model: CY4058PPWIR

Worst Case Operating Mode: Mode 2

Radiated Emissions (30MHz – 1000MHz)

ANT Polarity: Horizontal

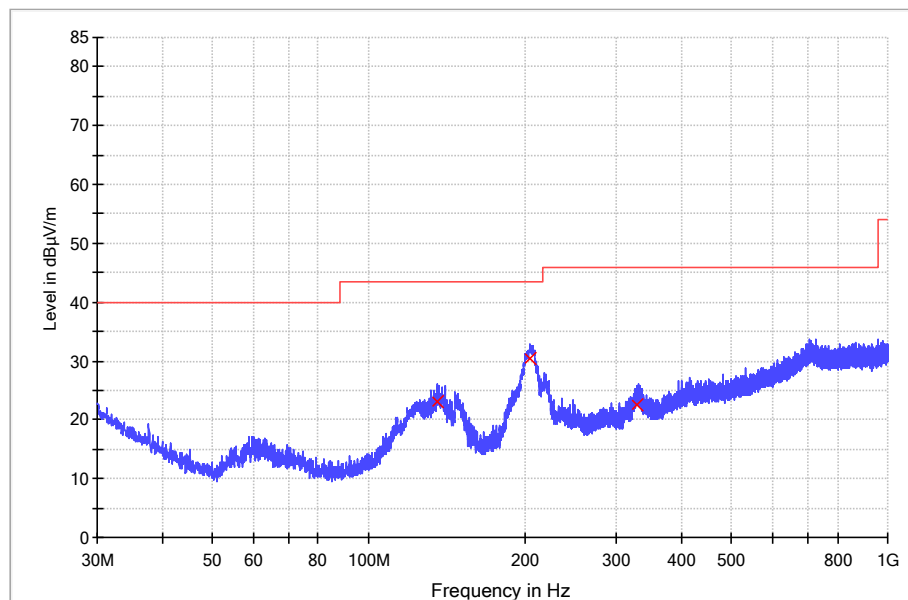

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. Factor (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
135.277333	23.1	1000.0	120.000	H	14.9	20.4	43.5
204.664667	30.3	1000.0	120.000	H	19.6	13.2	43.5
328.695333	22.5	1000.0	120.000	H	21.7	23.5	46.0

Notes:

- Quasi-Peak detector is used for frequency below 1GHz.
- All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- All emissions are below the QP limit.
- Corr. Factor(dB/m)= Antenna Factor (dB/m) + Cable Loss (dB)
- Quasi Peak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
- Margin (dB) = Limit Line(dBμV/m) – Level (dBμV/m)

Applicant: CYGNETT PTY LTD


Date of Test: 20 April 2022

Model: CY4058PPWIR

Worst Case Operating Mode: Mode 2

Radiated Emissions (30MHz – 1000MHz)

ANT Polarity: Vertical

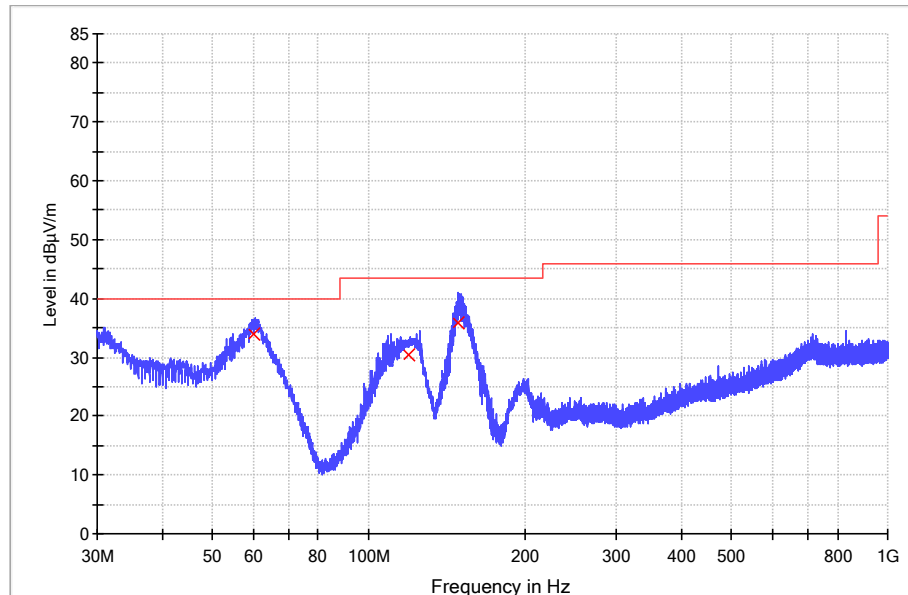

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. Factor (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
60.134667	33.8	1000.0	120.000	V	13.5	6.2	40.0
119.725000	30.3	1000.0	120.000	V	14.3	13.2	43.5
148.825000	35.8	1000.0	120.000	V	16.3	7.7	43.5

Notes:

1. Quasi-Peak detector is used for frequency below 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. All emissions are below the QP limit.
4. $\text{Corr. Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)}$
5. $\text{Quasi Peak (dB}\mu\text{V/m)} = \text{Corr. (dB/m)} + \text{Read Level (dB}\mu\text{V)}$
6. $\text{Margin (dB)} = \text{Limit Line (dB}\mu\text{V/m)} - \text{Level (dB}\mu\text{V/m)}$

Applicant: CYGNETT PTY LTD

Date of Test: 20 April 2022

Model: CY4058PPWIR

Worst Case Operating Mode: Mode 2

Fundamental & Spurious Emission Below 30MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Distance Factor (-dB)	Calculated at 300m (dBμV/m)	Limit at 300m (dBμV/m)	Margin (dB)
Horizontal	0.129856	62.9	0.0	16.9	79.8	80	-0.2	25.3	-25.5
Horizontal	0.259450	42.8	0.0	16.9	59.7	80	-20.3	19.3	-39.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Distance Factor (-dB)	Calculated at 30m (dBμV/m)	Limit at 30m (dBμV/m)	Margin (dB)
Horizontal	0.525110	33.8	0.0	16.4	50.2	40	10.2	33.2	-23.0

- Notes:
1. The specified limits of frequency band 9~90 KHz, 110~490 KHz are in average and measurements are made with peak detectors. Quasi-Peak detector is used for other frequency band.
 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Loop antenna is used for the emission under 30MHz.
 5. Horizontal and Vertical polarization were tested and Only the worst Case data is shown.

4.4 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

4.5 Conducted Emission

Worst Case Conducted Configuration
at
3.238000MHz

Judgement: Passed by 4.6dB margin

Applicant: CYGNETT PTY LTD

Date of Test: 20 April 2022

Worst Case Operating Mode

Test Voltage: 120V/60Hz


Model: CY4058PPWIR

Mode 2

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

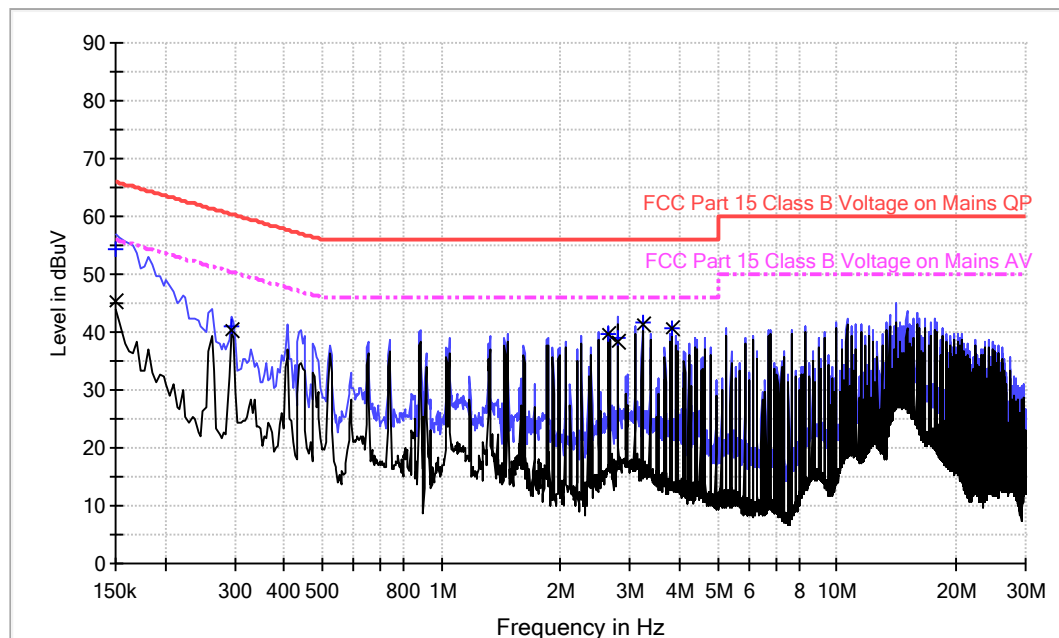

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	54.4	9.000	L1	9.6	11.6	66.0
0.294000	41.0	9.000	L1	9.6	19.4	60.4
2.650000	39.8	9.000	L1	9.7	16.2	56.0
2.802000	39.1	9.000	L1	9.7	16.9	56.0
3.238000	41.5	9.000	L1	9.7	14.5	56.0
3.826000	40.8	9.000	L1	9.7	15.2	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.2	9.000	L1	9.6	10.8	56.0
0.294000	40.2	9.000	L1	9.6	10.2	50.4
2.650000	39.6	9.000	L1	9.7	6.4	46.0
2.802000	38.4	9.000	L1	9.7	7.6	46.0
3.238000	41.4	9.000	L1	9.7	4.6	46.0
3.826000	40.5	9.000	L1	9.7	5.5	46.0

Applicant: CYGNETT PTY LTD

Date of Test: 20 April 2022

Worst Case Operating Mode

Test Voltage: 120V/60Hz


Model: CY4058PPWIR

Mode 2

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

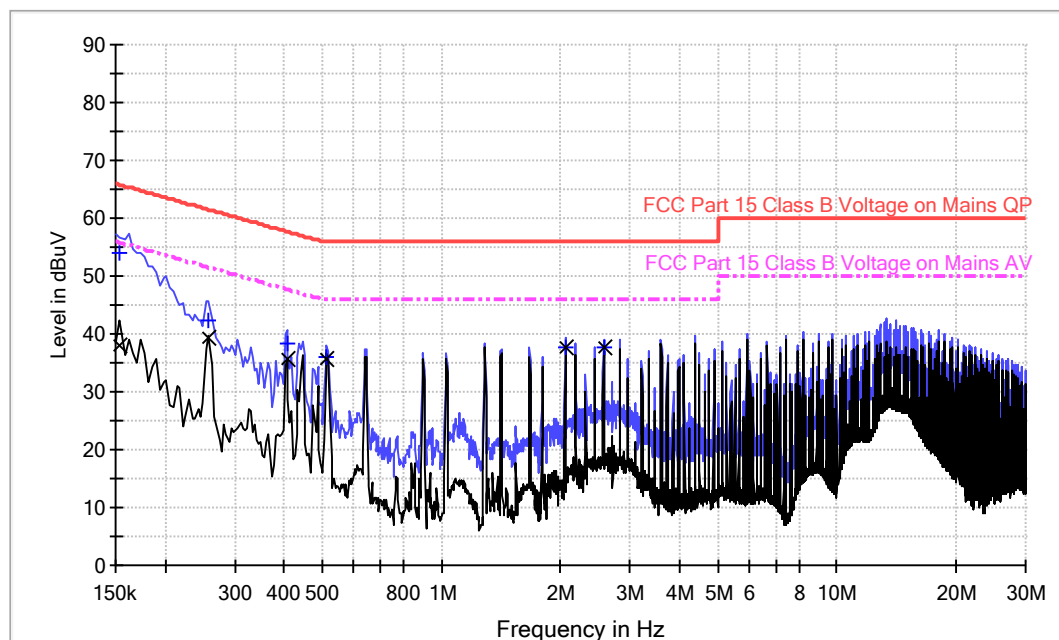

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	53.9	9.000	N	9.5	11.9	65.8
0.258000	42.5	9.000	N	9.5	19.0	61.5
0.406000	38.3	9.000	N	9.5	19.4	57.7
0.514000	36.1	9.000	N	9.5	19.9	56.0
2.058000	37.7	9.000	N	9.5	18.3	56.0
2.570000	37.8	9.000	N	9.5	18.2	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154000	38.2	9.000	N	9.5	17.6	55.8
0.258000	39.4	9.000	N	9.5	12.1	51.5
0.406000	35.8	9.000	N	9.5	11.9	47.7
0.514000	35.7	9.000	N	9.5	10.3	46.0
2.058000	37.6	9.000	N	9.5	8.4	46.0
2.570000	37.6	9.000	N	9.5	8.4	46.0

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.


This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes 20dB bandwidth and emission measuring procedure.

9.1 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

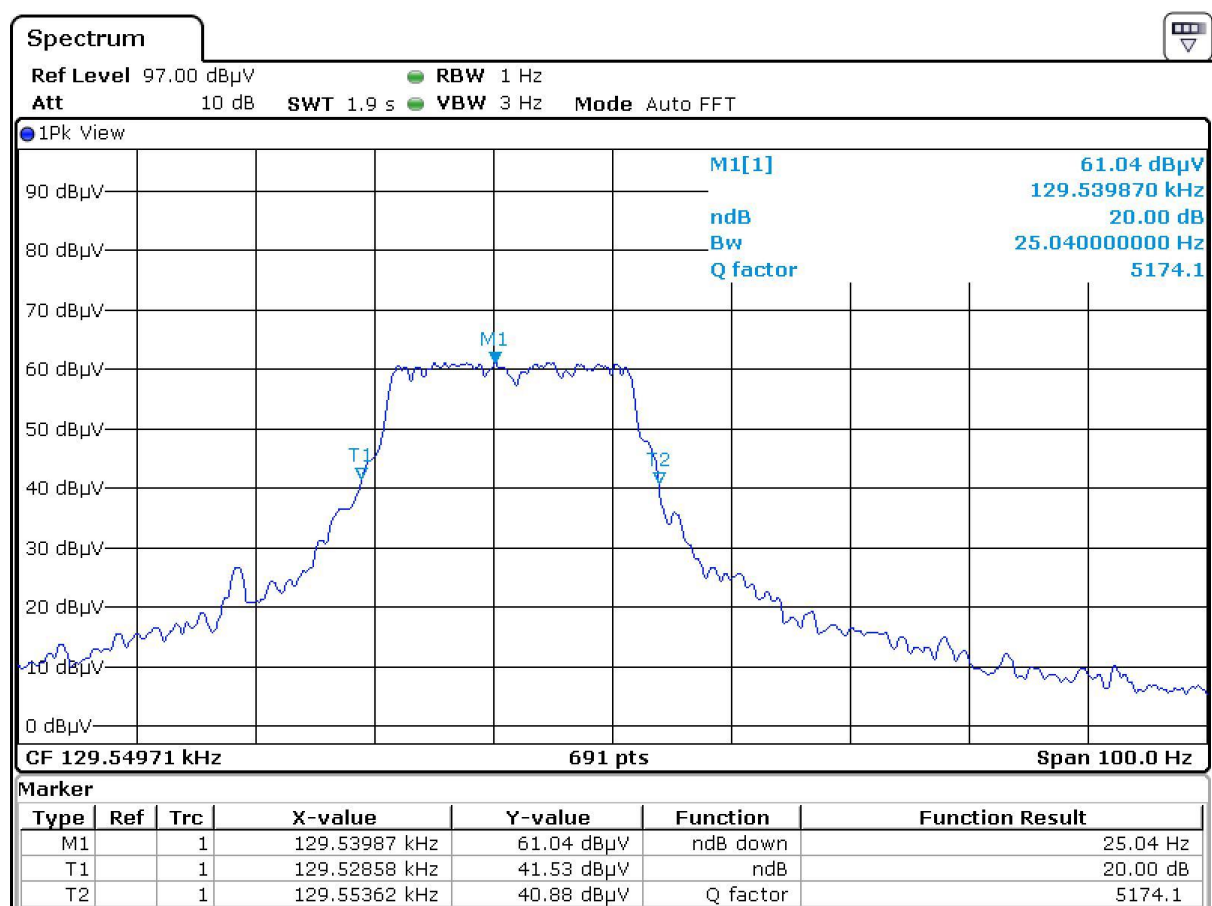

9.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Average detector is used for 9–90 KHz, 110–490 KHz and Quasi-Peak detector is used for other frequency band. The IF bandwidth used for measurement of radiated signal strength was 10 KHz for emission below 30 MHz and 120 KHz for emission from 30 MHz to 1000 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz up to the 1GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	2021-08-04	2024-08-04
SZ185-03	EMI Receiver	R&S	ESCI	100547	2021-12-20	2022-12-20
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	2021-05-10	2022-05-10
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2021-12-20	2022-12-20
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	2021-12-12	2024-12-12
SZ062-24	RF Cable	HUBER+SUHNER	SF104PE	MY4263/4PE	2021-10-26	2022-10-26
SZ062-25	RF Cable	HUBER+SUHNER	SF104PE	MY4555/4PE	2021-10-26	2022-10-26
SZ062-38	RF Cable	Talent Microwave	0.04-26.5GHz	A50-3.5M3.5M-8M	2021-06-04	2022-06-04
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2021-07-12	2022-07-12
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	2021-05-12	2022-05-12
SZ188-03	Shielding Room	ETS	RFD-100	4100	2020-01-07	2023-01-07
SZ062-37	RF Cable	/	RG58/U	/	2021-10-26	2022-10-26

*****End of Report*****