

TEST REPORT

Product Name: APEX 2 Pro
FCC ID: 2AEHH-W521
Trademark: COROS
Model Number: W521
Prepared For: Coros Wearables Inc.
Address: 3 Peters Canyon Road Suite 100, Irvine, CA 92606, USA
Manufacturer: Guangdong COROS Sports Technology Joint Stock Company
Address: Room 601, room 701, Building 2, No. 2, Science and Technology 9 Rd, Songshan Lake Hi Tech Zone, Dongguan city, Guangdong province, P.R. China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Sep. 24, 2022
Sample tested Date: Sep. 24, 2022 to Oct. 11, 2022
Issue Date: Oct. 11, 2022
Report No.: CTB221011002RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei
Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47

13. DWELL TIME	49
13.1 Block Diagram Of Test Setup	49
13.2 Limit	49
13.3 Test procedure	49
13.4 Test Result	50
14. PSEUDORANDOM FREQUENCY	54
14.1 Limit	54
14.2 Test procedure	54
14.3 Test Result	55
15. ANTENNA REQUIREMENT	56
16. EUT TEST SETUP PHOTOGRAPHS	57

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB221011002RFX	Oct. 11, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	47 CFR Part 15.203	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): W521
 Model Description: N/A
 Bluetooth Version: Bluetooth 5.0
 Hardware Version: V4
 Software Version: V2.71

Operation Frequency: Bluetooth: 2402-2480MHz
 Max. RF output power: Bluetooth: 4.013dBm
 Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
 Antenna installation: Bluetooth: Internal antenna
 Antenna Gain: Bluetooth: -7.3dBi
 Ratings: DC 5V by adapter
 DC 3.87V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	AC ADAPTER	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	/	AE

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.87V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

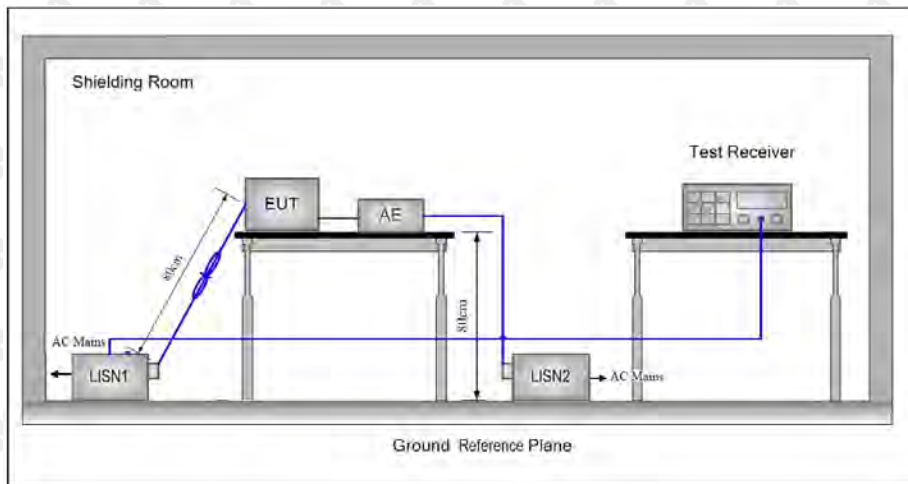

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

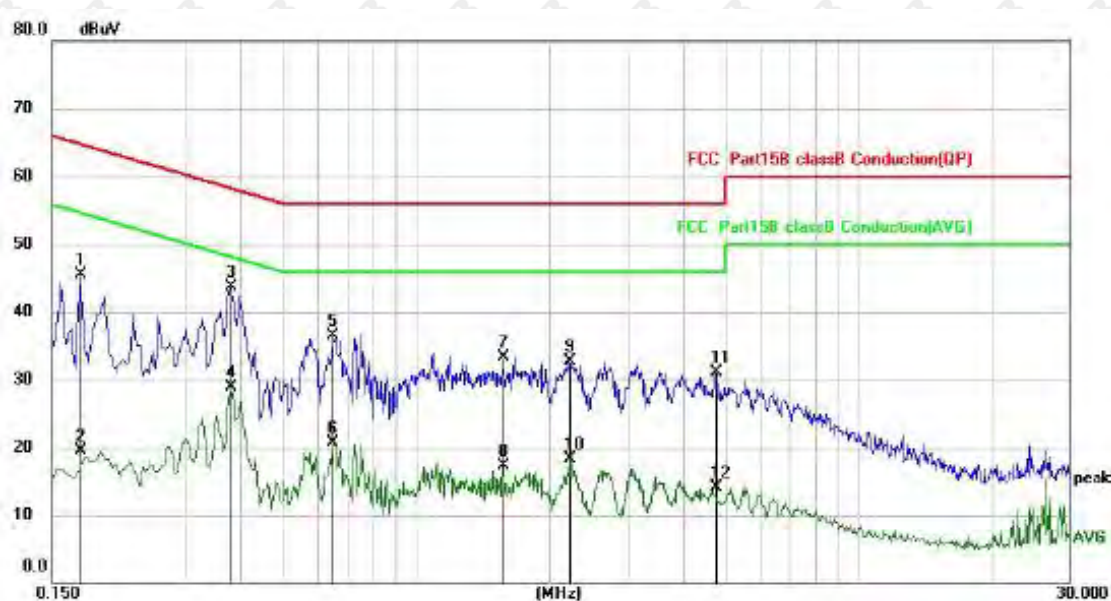


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1740	35.44	10.01	45.45	64.77	-19.32	QP
2		0.1740	9.54	10.01	19.55	54.77	-35.22	AVG
3	*	0.3820	33.69	9.98	43.67	58.24	-14.57	QP
4		0.3820	18.97	9.98	28.95	48.24	-19.29	AVG
5		0.6500	26.57	9.97	36.54	56.00	-19.46	QP
6		0.6500	10.78	9.97	20.75	46.00	-25.25	AVG
7		1.5660	23.22	10.01	33.23	56.00	-22.77	QP
8		1.5660	7.30	10.01	17.31	46.00	-28.69	AVG
9		2.2020	22.59	10.04	32.63	56.00	-23.37	QP
10		2.2020	8.19	10.04	18.23	46.00	-27.77	AVG
11		4.7300	20.88	10.16	31.04	56.00	-24.96	QP
12		4.7300	3.91	10.16	14.07	46.00	-31.93	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

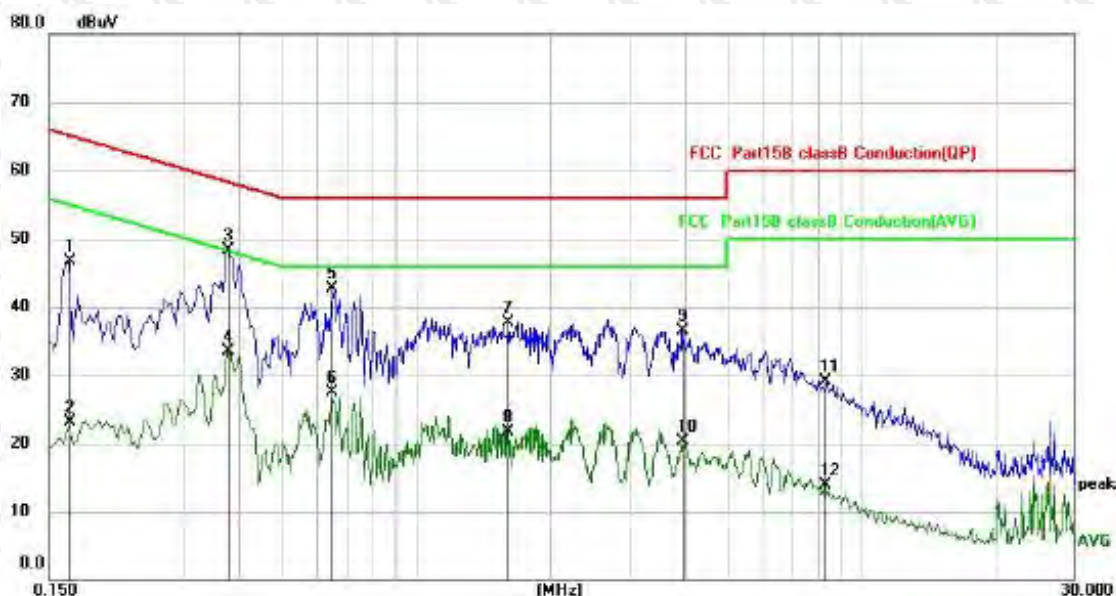

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	0.1660	36.72	10.01	46.73	65.16	-18.43	QP
2	0.1660	13.14	10.01	23.15	55.16	-32.01	AVG
3 *	0.3780	38.36	9.98	48.34	58.32	-9.98	QP
4	0.3780	23.44	9.98	33.42	48.32	-14.90	AVG
5	0.6500	32.69	9.97	42.66	56.00	-13.34	QP
6	0.6500	17.59	9.97	27.56	46.00	-18.44	AVG
7	1.5940	27.63	10.01	37.64	56.00	-18.36	QP
8	1.5940	11.68	10.01	21.69	46.00	-24.31	AVG
9	3.9500	26.46	10.12	36.58	56.00	-19.42	QP
10	3.9500	10.19	10.12	20.31	46.00	-25.69	AVG
11	8.2860	18.86	10.29	29.15	60.00	-30.85	QP
12	8.2860	3.58	10.29	13.87	50.00	-36.13	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

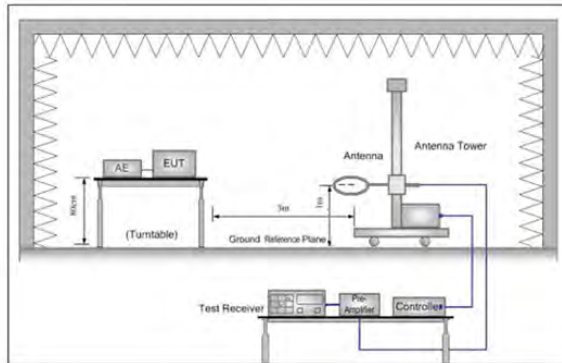


Figure 1. Below 30MHz

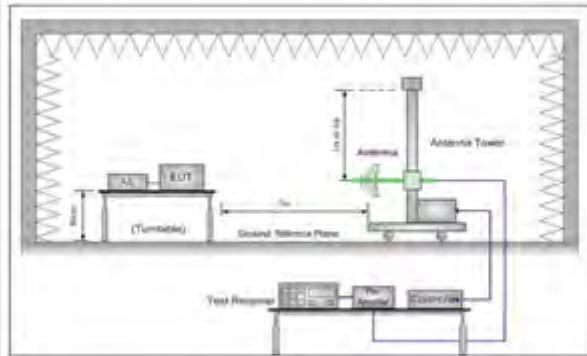


Figure 2. 30MHz to 1GHz

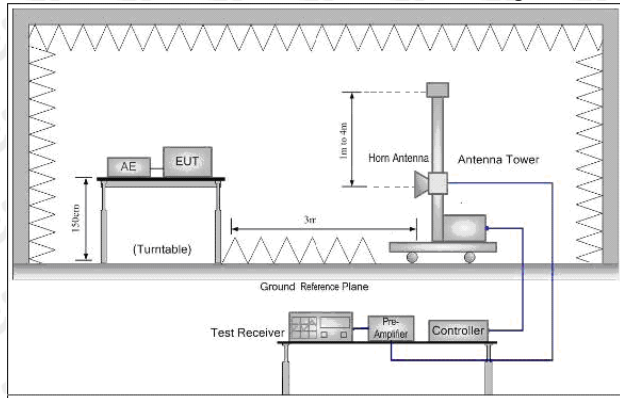


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	27.21	-6.49	20.72	40.00	-19.28	QP
2		56.8914	26.97	-7.26	19.71	40.00	-20.29	QP
3		97.9699	28.99	-9.78	19.21	43.50	-24.29	QP
4		141.5777	26.22	-5.50	20.72	43.50	-22.78	QP
5		280.5152	28.48	-6.38	22.10	46.00	-23.90	QP
6	*	698.0796	27.30	3.83	31.13	46.00	-14.87	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	38.6839	35.15	-6.51	28.64	40.00	-11.36	QP
2		80.0806	30.72	-10.50	20.22	40.00	-19.78	QP
3		97.9699	38.80	-9.78	29.02	43.50	-14.48	QP
4		160.0648	27.94	-5.48	22.46	43.50	-21.04	QP
5		358.5568	27.43	-3.81	23.62	46.00	-22.38	QP
6		762.0385	28.21	5.05	33.26	46.00	-12.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	58.15	-3.65	54.50	74.00	-19.50	peak
4804	50.58	-3.65	46.93	54.00	-7.07	AVG
7206	59.33	-0.95	58.38	74.00	-15.62	peak
7206	42.68	-0.95	41.73	54.00	-12.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	57.74	-3.65	54.09	74.00	-19.91	peak
4804	50.55	-3.65	46.90	54.00	-7.10	AVG
7206	60.87	-0.95	59.92	74.00	-14.08	peak
7206	40.53	-0.95	39.58	54.00	-14.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	58.68	-3.54	55.14	74.00	-18.86	peak
4882.00	49.44	-3.54	45.90	54.00	-8.10	AVG
7323.00	56.53	-0.81	55.72	74.00	-18.28	peak
7323.00	43.04	-0.81	42.23	54.00	-11.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	58.78	-3.54	55.24	74.00	-18.76	peak
4882.00	48.22	-3.54	44.68	54.00	-9.32	AVG
7323.00	58.01	-0.81	57.20	74.00	-16.80	peak
7323.00	41.06	-0.81	40.25	54.00	-13.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.10	-3.43	55.67	74.00	-18.33	peak
4960	49.27	-3.44	45.83	54.00	-8.17	AVG
7440	59.83	-0.77	59.06	74.00	-14.94	peak
7440	40.62	-0.77	39.85	54.00	-14.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.81	-3.43	55.38	74.00	-18.62	peak
4960	47.74	-3.44	44.30	54.00	-9.70	AVG
7440	59.16	-0.77	58.39	74.00	-15.61	peak
7440	41.67	-0.77	40.90	54.00	-13.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.65	-5.81	51.84	74.00	-22.16	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.01	-5.84	49.17	74.00	-24.83	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.76	-5.81	49.95	74.00	-24.05	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.51	-5.84	49.67	74.00	-24.33	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.07	-5.81	48.26	74.00	-25.74	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.74	-6.06	48.68	74.00	-25.32	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.52	-5.81	50.71	74.00	-23.29	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.02	-6.06	47.96	74.00	-26.04	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.67	-5.81	49.86	74.00	-24.14	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.87	-5.84	50.03	74.00	-23.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.24	-5.81	50.43	74.00	-23.57	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.34	-5.84	47.50	74.00	-26.50	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.58	-5.81	51.77	74.00	-22.23	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.96	-6.06	49.90	74.00	-24.10	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.71	-5.81	50.90	74.00	-23.10	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.46	-6.06	48.40	74.00	-25.60	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

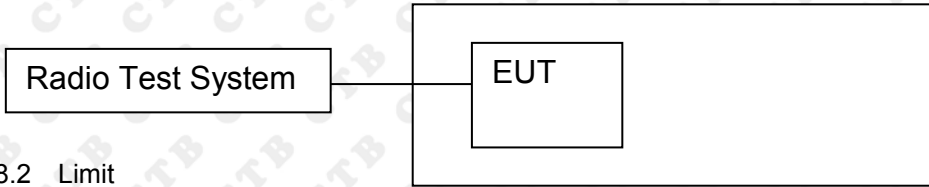


8.2 Limit




In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

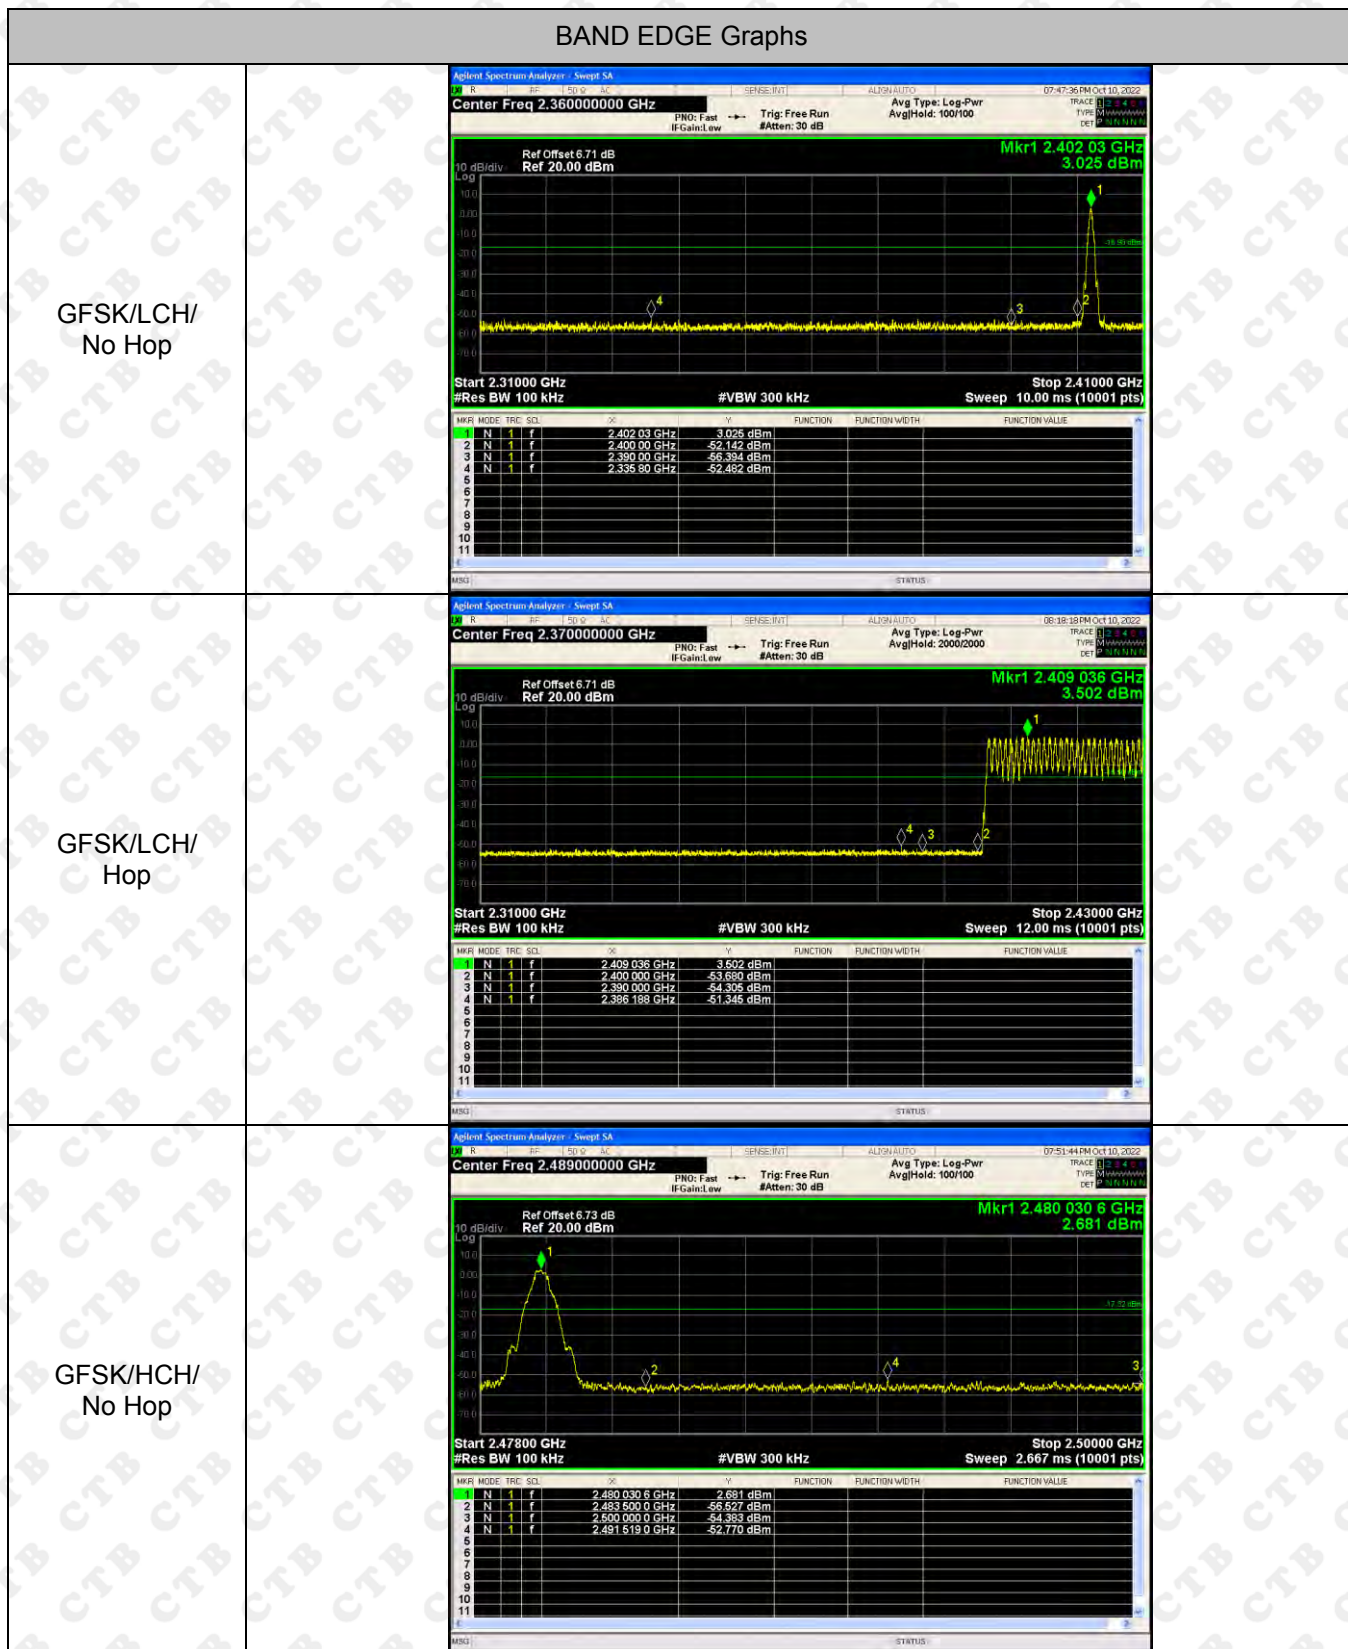

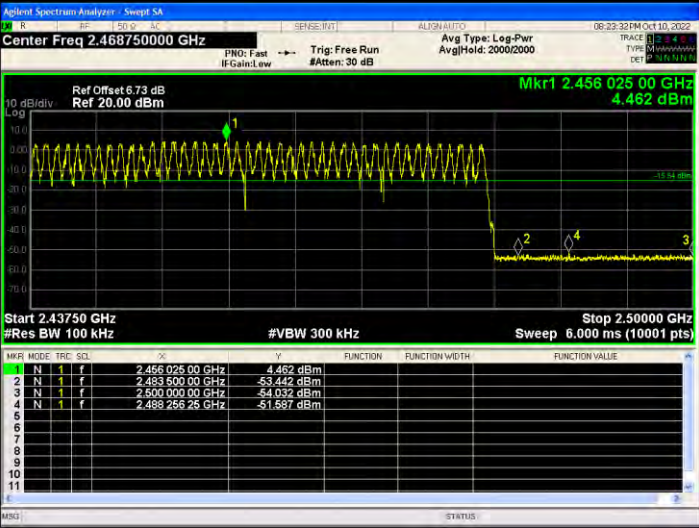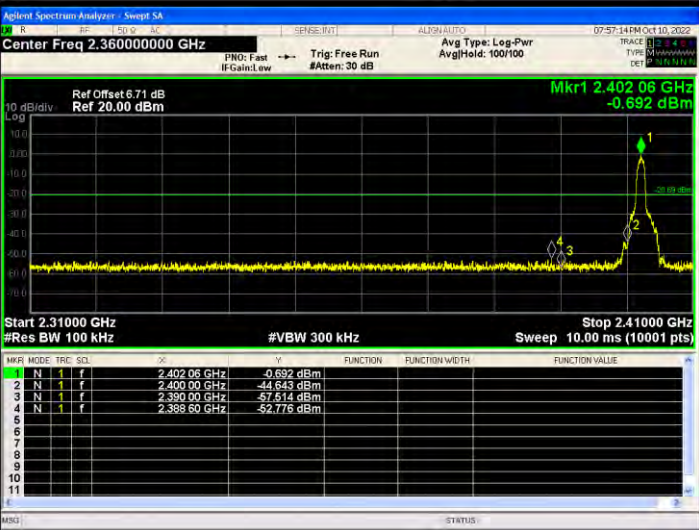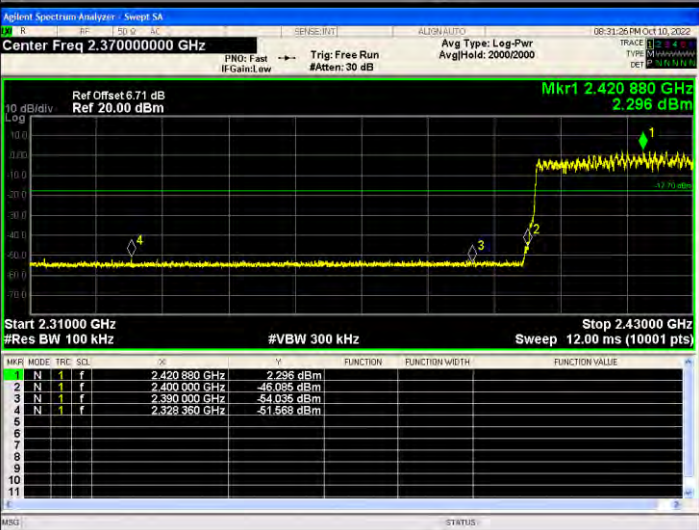
<p>GFSK/HCH/ Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.456 025 00 GHz</td> <td>4.462 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.242 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 000 00 GHz</td> <td>-54.032 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 256 25 GHz</td> <td>-51.587 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.456 025 00 GHz	4.462 dBm				2	N	1	f	2.483 500 00 GHz	-53.242 dBm				3	N	1	f	2.483 000 00 GHz	-54.032 dBm				4	N	1	f	2.488 256 25 GHz	-51.587 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.456 025 00 GHz	4.462 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.242 dBm																																									
3	N	1	f	2.483 000 00 GHz	-54.032 dBm																																									
4	N	1	f	2.488 256 25 GHz	-51.587 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 06 GHz</td> <td>-0.692 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-44.643 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-57.514 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.388 50 GHz</td> <td>-52.775 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 06 GHz	-0.692 dBm				2	N	1	f	2.400 00 GHz	-44.643 dBm				3	N	1	f	2.390 00 GHz	-57.514 dBm				4	N	1	f	2.388 50 GHz	-52.775 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 06 GHz	-0.692 dBm																																									
2	N	1	f	2.400 00 GHz	-44.643 dBm																																									
3	N	1	f	2.390 00 GHz	-57.514 dBm																																									
4	N	1	f	2.388 50 GHz	-52.775 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.420 880 GHz</td> <td>2.296 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-46.085 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-54.035 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.328 350 GHz</td> <td>-51.568 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.420 880 GHz	2.296 dBm				2	N	1	f	2.400 000 GHz	-46.085 dBm				3	N	1	f	2.390 000 GHz	-54.035 dBm				4	N	1	f	2.328 350 GHz	-51.568 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.420 880 GHz	2.296 dBm																																									
2	N	1	f	2.400 000 GHz	-46.085 dBm																																									
3	N	1	f	2.390 000 GHz	-54.035 dBm																																									
4	N	1	f	2.328 350 GHz	-51.568 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.479 874 4 GHz 0.611 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 874 4 GHz</td> <td>0.611 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.068 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-55.310 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.068 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 874 4 GHz	0.611 dBm				2	N	1	f	2.483 500 0 GHz	-52.068 dBm				3	N	1	f	2.500 000 0 GHz	-55.310 dBm				4	N	1	f	2.483 500 0 GHz	-52.068 dBm				
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.479 874 4 GHz	0.611 dBm																																										
2	N	1	f	2.483 500 0 GHz	-52.068 dBm																																										
3	N	1	f	2.500 000 0 GHz	-55.310 dBm																																										
4	N	1	f	2.483 500 0 GHz	-52.068 dBm																																										
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.467 037 50 GHz 2.959 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.467 037 50 GHz</td> <td>2.959 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.305 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-53.325 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.485 787 50 GHz</td> <td>-51.631 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.467 037 50 GHz	2.959 dBm				2	N	1	f	2.483 500 00 GHz	-53.305 dBm				3	N	1	f	2.500 000 00 GHz	-53.325 dBm				4	N	1	f	2.485 787 50 GHz	-51.631 dBm				
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.467 037 50 GHz	2.959 dBm																																										
2	N	1	f	2.483 500 00 GHz	-53.305 dBm																																										
3	N	1	f	2.500 000 00 GHz	-53.325 dBm																																										
4	N	1	f	2.485 787 50 GHz	-51.631 dBm																																										
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 03 GHz -0.744 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 03 GHz</td> <td>-0.744 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-44.820 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.340 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.369 53 GHz</td> <td>-52.064 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	-0.744 dBm				2	N	1	f	2.400 00 GHz	-44.820 dBm				3	N	1	f	2.390 00 GHz	-55.340 dBm				4	N	1	f	2.369 53 GHz	-52.064 dBm				
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402 03 GHz	-0.744 dBm																																										
2	N	1	f	2.400 00 GHz	-44.820 dBm																																										
3	N	1	f	2.390 00 GHz	-55.340 dBm																																										
4	N	1	f	2.369 53 GHz	-52.064 dBm																																										


<p>8DPSK /LCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.420 184 GHz 2.404 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.420 184 GHz</td> <td>2.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-45.845 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-51.039 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.398 716 GHz</td> <td>-51.802 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.420 184 GHz	2.404 dBm				2	N	1	f	2.400 000 GHz	-45.845 dBm				3	N	1	f	2.390 000 GHz	-51.039 dBm				4	N	1	f	2.398 716 GHz	-51.802 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.420 184 GHz	2.404 dBm																																									
2	N	1	f	2.400 000 GHz	-45.845 dBm																																									
3	N	1	f	2.390 000 GHz	-51.039 dBm																																									
4	N	1	f	2.398 716 GHz	-51.802 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.480 015 2 GHz -1.016 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 015 2 GHz</td> <td>-1.016 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.009 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-58.283 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.009 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 015 2 GHz	-1.016 dBm				2	N	1	f	2.483 500 0 GHz	-52.009 dBm				3	N	1	f	2.500 000 0 GHz	-58.283 dBm				4	N	1	f	2.483 500 0 GHz	-52.009 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 015 2 GHz	-1.016 dBm																																									
2	N	1	f	2.483 500 0 GHz	-52.009 dBm																																									
3	N	1	f	2.500 000 0 GHz	-58.283 dBm																																									
4	N	1	f	2.483 500 0 GHz	-52.009 dBm																																									
<p>8DPSK /HCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.456 187 50 GHz 3.171 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.456 187 50 GHz</td> <td>3.171 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-54.674 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-53.626 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 450 00 GHz</td> <td>-51.871 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.456 187 50 GHz	3.171 dBm				2	N	1	f	2.483 500 00 GHz	-54.674 dBm				3	N	1	f	2.500 000 00 GHz	-53.626 dBm				4	N	1	f	2.489 450 00 GHz	-51.871 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.456 187 50 GHz	3.171 dBm																																									
2	N	1	f	2.483 500 00 GHz	-54.674 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.626 dBm																																									
4	N	1	f	2.489 450 00 GHz	-51.871 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH


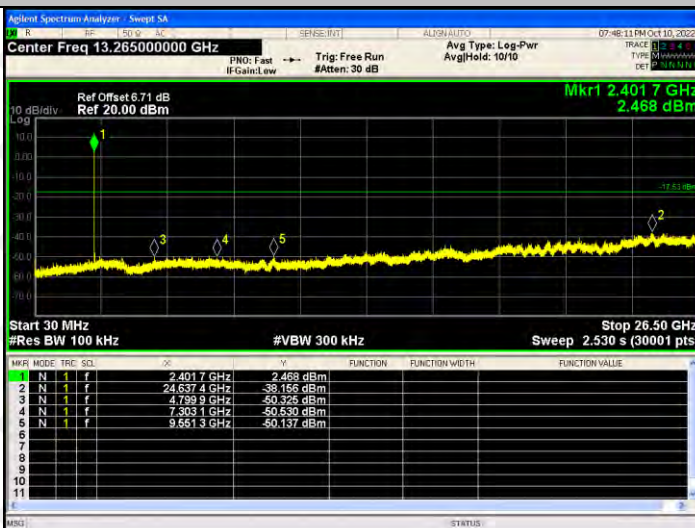



GFSK/MCH

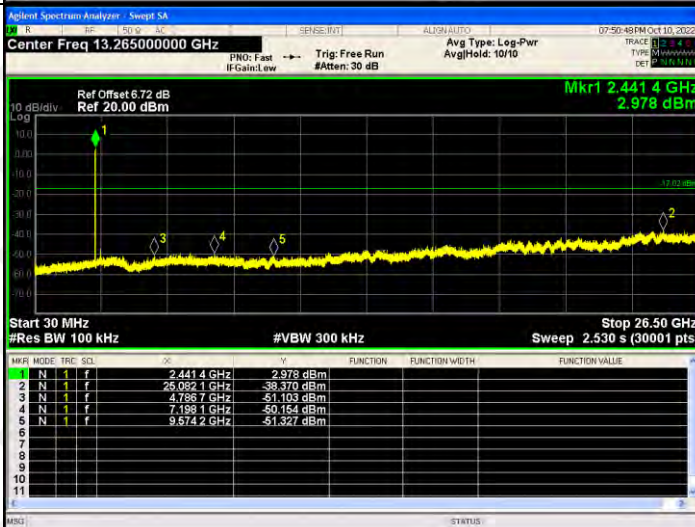

GFSK/HCH

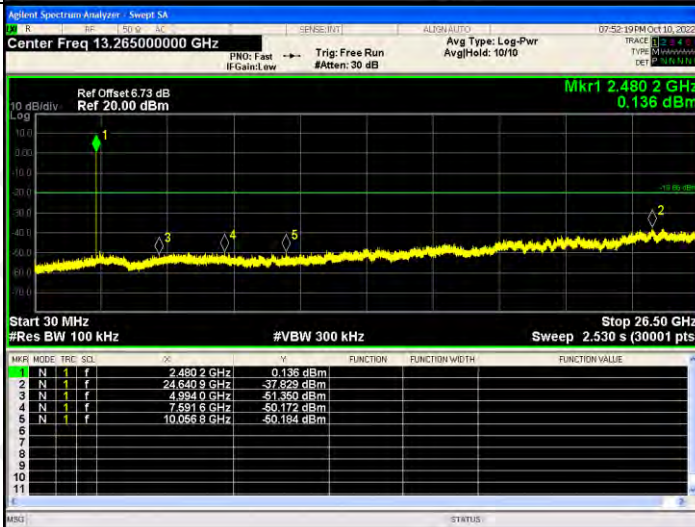

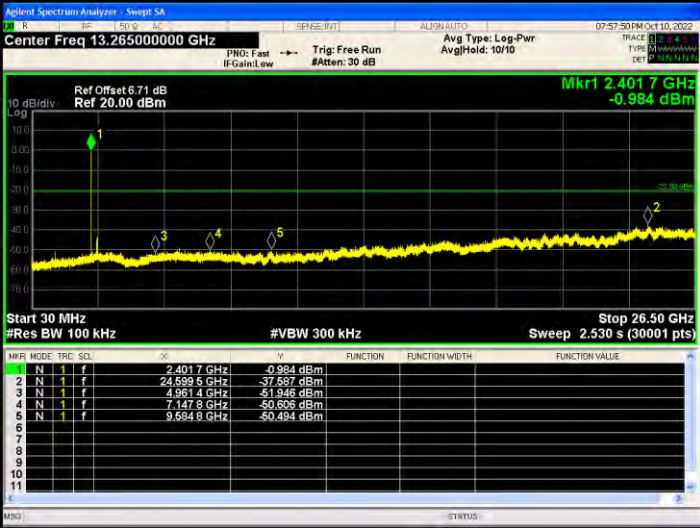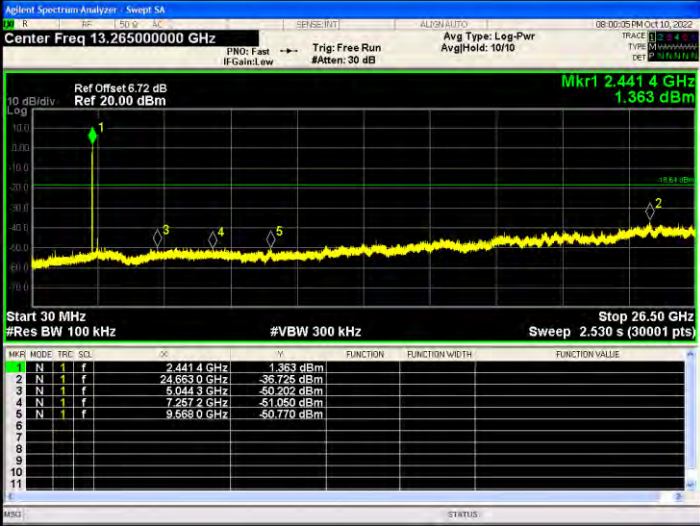
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-0.984 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6595 GHz</td> <td>-37.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9814 GHz</td> <td>-51.946 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1478 GHz</td> <td>-50.606 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6848 GHz</td> <td>-50.494 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-0.984 dBm				2	N	1	f	24.6595 GHz	-37.657 dBm				3	N	1	f	4.9814 GHz	-51.946 dBm				4	N	1	f	7.1478 GHz	-50.606 dBm				5	N	1	f	9.6848 GHz	-50.494 dBm			
MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-0.984 dBm																																																		
2	N	1	f	24.6595 GHz	-37.657 dBm																																																		
3	N	1	f	4.9814 GHz	-51.946 dBm																																																		
4	N	1	f	7.1478 GHz	-50.606 dBm																																																		
5	N	1	f	9.6848 GHz	-50.494 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>1.363 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6530 GHz</td> <td>-36.726 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0443 GHz</td> <td>-50.202 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2572 GHz</td> <td>-51.050 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6680 GHz</td> <td>-50.770 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	1.363 dBm				2	N	1	f	24.6530 GHz	-36.726 dBm				3	N	1	f	5.0443 GHz	-50.202 dBm				4	N	1	f	7.2572 GHz	-51.050 dBm				5	N	1	f	9.6680 GHz	-50.770 dBm			
MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	1.363 dBm																																																		
2	N	1	f	24.6530 GHz	-36.726 dBm																																																		
3	N	1	f	5.0443 GHz	-50.202 dBm																																																		
4	N	1	f	7.2572 GHz	-51.050 dBm																																																		
5	N	1	f	9.6680 GHz	-50.770 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-1.533 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6595 GHz</td> <td>-37.112 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8952 GHz</td> <td>-50.934 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3728 GHz</td> <td>-51.236 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8398 GHz</td> <td>-51.744 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-1.533 dBm				2	N	1	f	24.6595 GHz	-37.112 dBm				3	N	1	f	4.8952 GHz	-50.934 dBm				4	N	1	f	7.3728 GHz	-51.236 dBm				5	N	1	f	9.8398 GHz	-51.744 dBm			
MNR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-1.533 dBm																																																		
2	N	1	f	24.6595 GHz	-37.112 dBm																																																		
3	N	1	f	4.8952 GHz	-50.934 dBm																																																		
4	N	1	f	7.3728 GHz	-51.236 dBm																																																		
5	N	1	f	9.8398 GHz	-51.744 dBm																																																		
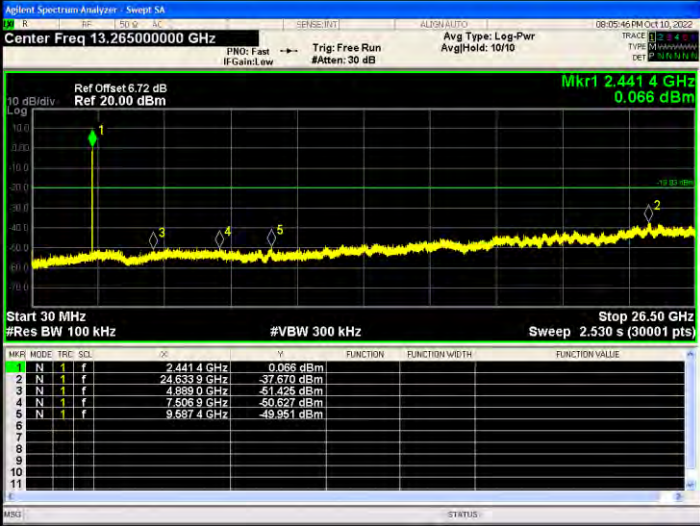
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-1.615 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6339 GHz</td> <td>-37.328 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9075 GHz</td> <td>-51.911 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0516 GHz</td> <td>-50.252 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6080 GHz</td> <td>-50.747 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-1.615 dBm				2	N	1	f	24.6339 GHz	-37.328 dBm				3	N	1	f	4.9075 GHz	-51.911 dBm				4	N	1	f	7.0516 GHz	-50.252 dBm				5	N	1	f	9.6080 GHz	-50.747 dBm			
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-1.615 dBm																																																		
2	N	1	f	24.6339 GHz	-37.328 dBm																																																		
3	N	1	f	4.9075 GHz	-51.911 dBm																																																		
4	N	1	f	7.0516 GHz	-50.252 dBm																																																		
5	N	1	f	9.6080 GHz	-50.747 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>0.086 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6339 GHz</td> <td>-37.670 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8889 GHz</td> <td>-51.426 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5069 GHz</td> <td>-50.627 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6874 GHz</td> <td>-49.951 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	0.086 dBm				2	N	1	f	24.6339 GHz	-37.670 dBm				3	N	1	f	4.8889 GHz	-51.426 dBm				4	N	1	f	7.5069 GHz	-50.627 dBm				5	N	1	f	9.6874 GHz	-49.951 dBm			
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	0.086 dBm																																																		
2	N	1	f	24.6339 GHz	-37.670 dBm																																																		
3	N	1	f	4.8889 GHz	-51.426 dBm																																																		
4	N	1	f	7.5069 GHz	-50.627 dBm																																																		
5	N	1	f	9.6874 GHz	-49.951 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-0.778 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6639 GHz</td> <td>-37.630 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0831 GHz</td> <td>-51.333 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4837 GHz</td> <td>-50.693 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9827 GHz</td> <td>-50.730 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-0.778 dBm				2	N	1	f	24.6639 GHz	-37.630 dBm				3	N	1	f	5.0831 GHz	-51.333 dBm				4	N	1	f	7.4837 GHz	-50.693 dBm				5	N	1	f	9.9827 GHz	-50.730 dBm			
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-0.778 dBm																																																		
2	N	1	f	24.6639 GHz	-37.630 dBm																																																		
3	N	1	f	5.0831 GHz	-51.333 dBm																																																		
4	N	1	f	7.4837 GHz	-50.693 dBm																																																		
5	N	1	f	9.9827 GHz	-50.730 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

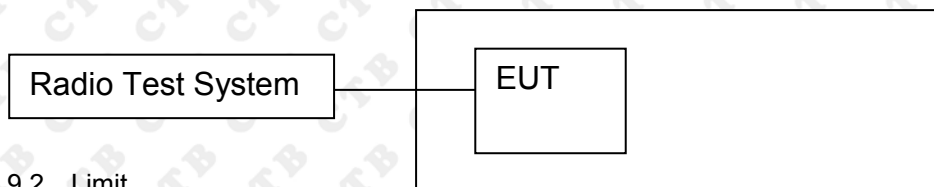

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	2.964	20.97	PASS
	MCH	3.082	20.97	PASS
	HCH	2.69	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.985	20.97	PASS
	MCH	3.78	20.97	PASS
	HCH	2.531	20.97	PASS
EDR mode (8DPSK)	LCH	2.262	20.97	PASS
	MCH	4.013	20.97	PASS
	HCH	2.697	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.402 02 GHz 2.964 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.441 01 GHz 3.082 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.479 92 GHz 2.690 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.402 06 GHz 1.985 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.441 14 GHz 3.780 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.480 11 GHz 2.531 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 6.71 dB, Ref: 20.00 dBm Mkr1 2.40213 GHz, 2.262 dBm #Res BW: 6.0 MHz, #VBW: 6.0 MHz, Span: 10.00 MHz, Sweep: 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 6.72 dB, Ref: 20.00 dBm Mkr1 2.44082 GHz, 4.013 dBm #Res BW: 2.0 MHz, #VBW: 6.0 MHz, Span: 10.00 MHz, Sweep: 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 6.73 dB, Ref: 20.00 dBm Mkr1 2.48016 GHz, 2.697 dBm #Res BW: 2.0 MHz, #VBW: 6.0 MHz, Span: 10.00 MHz, Sweep: 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

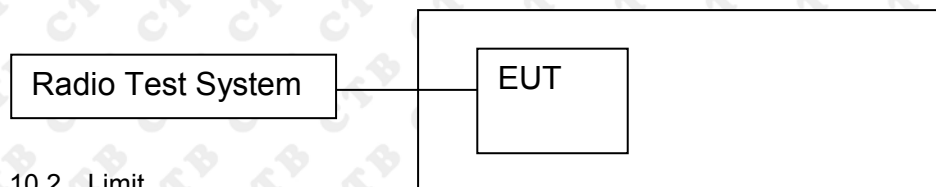

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.021	PASS
	Mid channel	1.018	PASS
	High channel	1.014	PASS
$\pi/4$ DQPSK	Low channel	1.348	PASS
	Mid channel	1.359	PASS
	High channel	1.384	PASS
8DPSK	Low channel	1.35	PASS
	Mid channel	1.364	PASS
	High channel	1.35	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio St: None Radio Device: BTS</p> <p>Ref Offset 6.71 dB Ref 26.71 dBm Mkr3 2.40254 GHz -21.616 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 939.38 kHz Total Power 9.87 dBm Transmit Freq Error 29.826 kHz OBW Power 99.00 % x dB Bandwidth 1.021 MHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio St: None Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.441537 GHz -17.286 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 949.94 kHz Total Power 9.76 dBm Transmit Freq Error 27.908 kHz OBW Power 99.00 % x dB Bandwidth 1.018 MHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio St: None Radio Device: BTS</p> <p>Ref Offset 6.73 dB Ref 26.73 dBm Mkr3 2.480523 GHz -19.872 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 937.29 kHz Total Power 9.51 dBm Transmit Freq Error 16.187 kHz OBW Power 99.00 % x dB Bandwidth 1.014 MHz x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.71 dB</p> <p>Ref: 26.71 dBm</p> <p>Mkr3: 2.402692 GHz</p> <p>-21.210 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2739 MHz</p> <p>Total Power: 7.38 dBm</p> <p>Transmit Freq Error: 18.438 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.348 MHz</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.441659 GHz</p> <p>-16.877 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.4008 MHz</p> <p>Total Power: 9.16 dBm</p> <p>Transmit Freq Error: -20.283 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.359 MHz</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.73 dB</p> <p>Ref: 26.73 dBm</p> <p>Mkr3: 2.480628 GHz</p> <p>-17.744 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.4900 MHz</p> <p>Total Power: 8.35 dBm</p> <p>Transmit Freq Error: -65.626 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.384 MHz</p> <p>x dB: -20.00 dB</p>

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.71 dB</p> <p>Ref 26.71 dBm</p> <p>Mkr3 2.40269 GHz</p> <p>-21.690 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.2660 MHz</p> <p>Total Power 7.32 dBm</p> <p>Transmit Freq Error 14.850 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.350 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.72 dB</p> <p>Ref 26.72 dBm</p> <p>Mkr3 2.441671 GHz</p> <p>-18.379 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.3420 MHz</p> <p>Total Power 9.64 dBm</p> <p>Transmit Freq Error -11.204 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.364 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.73 dB</p> <p>Ref 26.73 dBm</p> <p>Mkr3 2.480605 GHz</p> <p>-15.806 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.4845 MHz</p> <p>Total Power 8.23 dBm</p> <p>Transmit Freq Error -69.871 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.350 MHz</p> <p>x dB -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

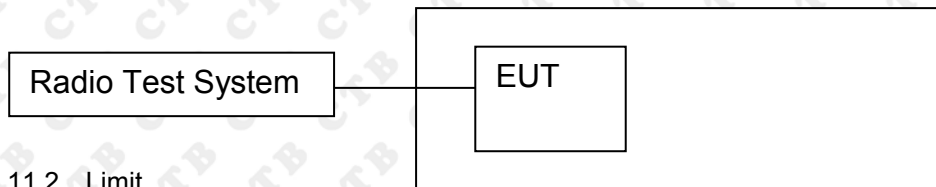

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.681	PASS
GFSK	MCH	1.000	0.679	PASS
GFSK	HCH	1.000	0.676	PASS
$\pi/4$ DQPSK	LCH	1.002	0.899	PASS
$\pi/4$ DQPSK	MCH	1.000	0.906	PASS
$\pi/4$ DQPSK	HCH	1.002	0.923	PASS
8DPSK	LCH	1.000	0.900	PASS
8DPSK	MCH	1.000	0.909	PASS
8DPSK	HCH	1.002	0.900	PASS

Test Graph


Graphs																												
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset: 6.71 dB, Ref: 20.00 dBm</p> <p>ΔMkr1 1.002 MHz, 0.104 dB</p> <p>Center 2.402500 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 2.000 MHz, Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>0.104 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 018 GHz</td> <td></td> <td>2.844 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)	0.104 dB		2	F	1	f		2.402 018 GHz		2.844 dBm	
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)	0.104 dB																					
2	F	1	f		2.402 018 GHz		2.844 dBm																					
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset: 6.72 dB, Ref: 20.00 dBm</p> <p>ΔMkr1 1.000 MHz, 0.087 dB</p> <p>Center 2.441500 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 2.000 MHz, Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>0.087 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 036 GHz</td> <td></td> <td>2.915 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)	0.087 dB		2	F	1	f		2.441 036 GHz		2.915 dBm	
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)	0.087 dB																					
2	F	1	f		2.441 036 GHz		2.915 dBm																					
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset: 6.73 dB, Ref: 20.00 dBm</p> <p>ΔMkr1 1.000 MHz, -0.046 dB</p> <p>Center 2.479500 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 2.000 MHz, Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>-0.046 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 022 GHz</td> <td></td> <td>2.773 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)	-0.046 dB		2	F	1	f		2.479 022 GHz		2.773 dBm	
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)	-0.046 dB																					
2	F	1	f		2.479 022 GHz		2.773 dBm																					
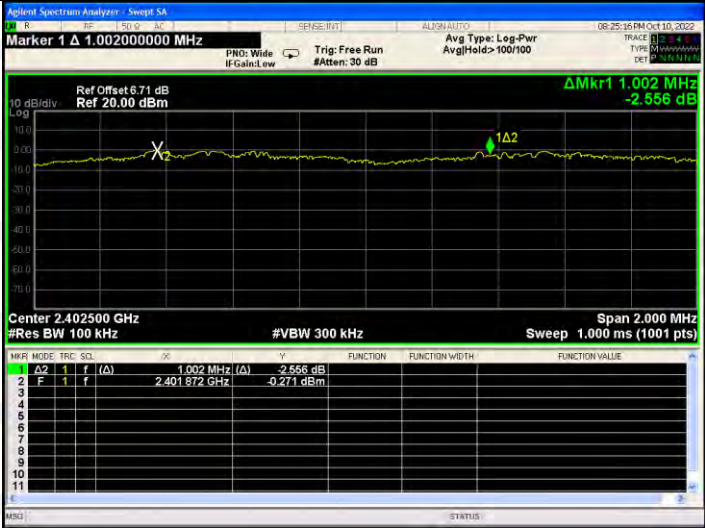
<p>$\pi/4$DQPSK/LCH</p>	 <table border="1" data-bbox="592 607 1299 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>-2.556 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.401872 GHz</td> <td></td> <td>-0.271 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	-2.556 dB			2	F	1	f	2.401872 GHz		-0.271 dBm			
MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	-2.556 dB																							
2	F	1	f	2.401872 GHz		-0.271 dBm																							
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1" data-bbox="592 1144 1299 1301"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>-1.010 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.441022 GHz</td> <td></td> <td>0.258 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.000 MHz	(Δ)	-1.010 dB			2	F	1	f	2.441022 GHz		0.258 dBm			
MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.000 MHz	(Δ)	-1.010 dB																							
2	F	1	f	2.441022 GHz		0.258 dBm																							
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1" data-bbox="592 1659 1299 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>0.968 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.479030 GHz</td> <td></td> <td>-1.185 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	0.968 dB			2	F	1	f	2.479030 GHz		-1.185 dBm			
MNR	MODE	TRC	SCL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	0.968 dB																							
2	F	1	f	2.479030 GHz		-1.185 dBm																							

<p>8DPSK/LCH</p>	 <table border="1" data-bbox="592 607 1299 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-1.596 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401 974 GHz</td> <td></td> <td></td> <td>-1.144 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)		-1.596 dB	2	F	1	f		2.401 974 GHz			-1.144 dBm	
MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)		-1.596 dB																					
2	F	1	f		2.401 974 GHz			-1.144 dBm																					
<p>8DPSK /MCH</p>	 <table border="1" data-bbox="592 1133 1299 1290"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>0.061 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 020 GHz</td> <td></td> <td></td> <td>1.623 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)		0.061 dB	2	F	1	f		2.441 020 GHz			1.623 dBm	
MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)		0.061 dB																					
2	F	1	f		2.441 020 GHz			1.623 dBm																					
<p>8DPSK /HCH</p>	 <table border="1" data-bbox="592 1659 1299 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>-0.082 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 112 GHz</td> <td></td> <td></td> <td>-0.773 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		-0.082 dB	2	F	1	f		2.479 112 GHz			-0.773 dBm	
MNR	MODE	TRC	SQL	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		-0.082 dB																					
2	F	1	f		2.479 112 GHz			-0.773 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

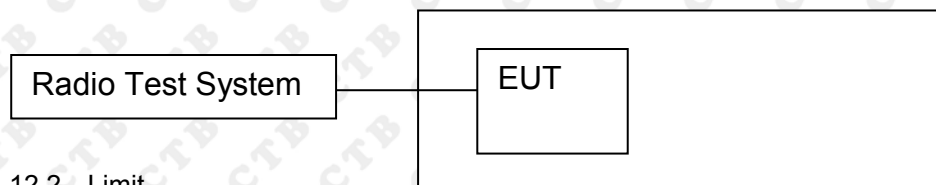

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph



13. DWELL TIME

13.1 Block Diagram Of Test Setup

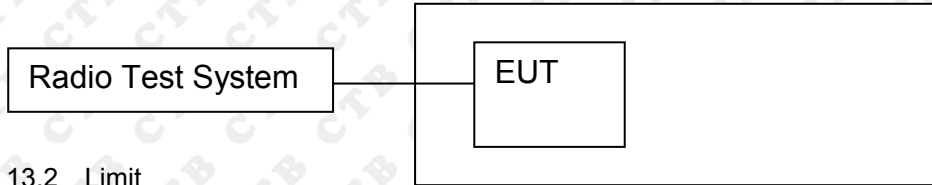

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.437	139.84	400	PASS
	DH1	MCH	0.438	140.16	400	PASS
	DH1	HCH	0.438	140.16	400	PASS
	DH3	LCH	1.641	262.56	400	PASS
	DH3	MCH	1.641	262.56	400	PASS
	DH3	HCH	1.641	262.56	400	PASS
	DH5	LCH	2.891	308.373	400	PASS
	DH5	MCH	2.892	308.48	400	PASS
	DH5	HCH	2.892	308.48	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

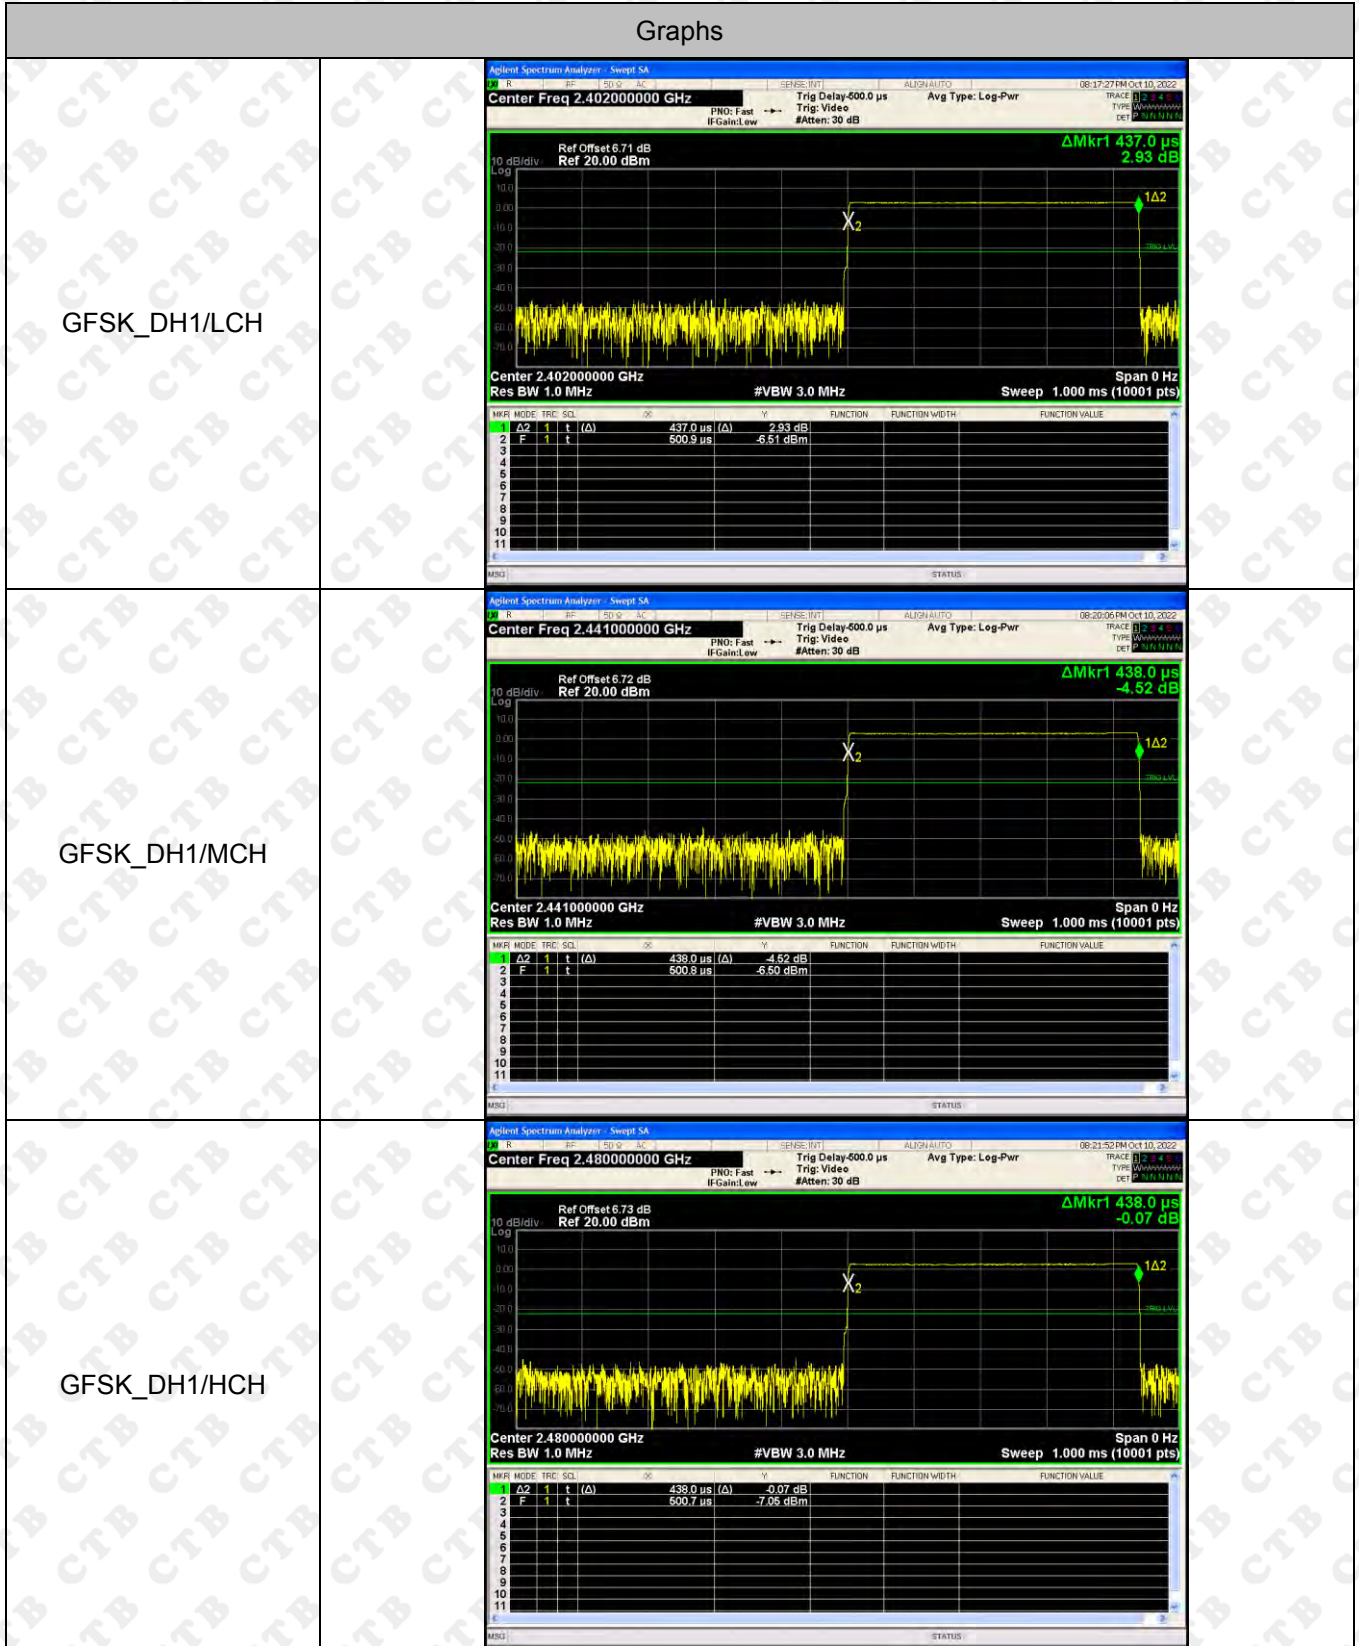


GFSK_DH3/LCH

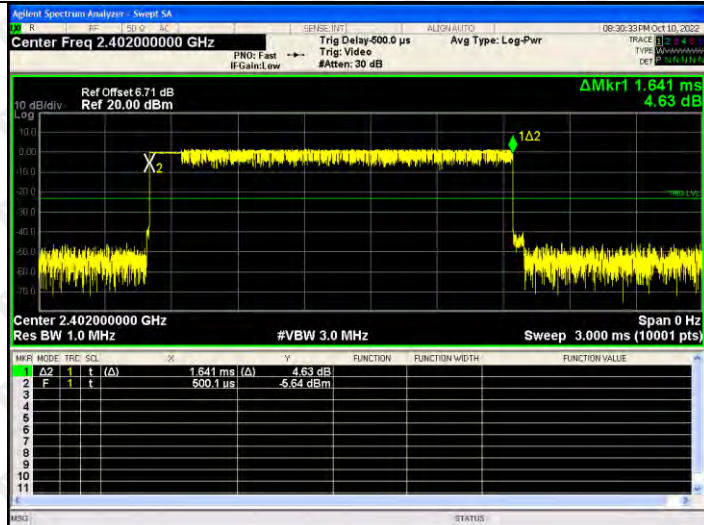


GFSK_DH3/MCH

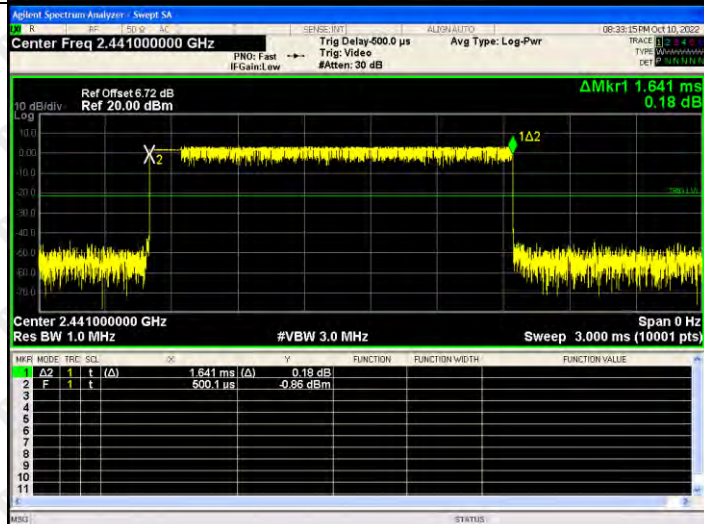


GFSK_DH3/HCH

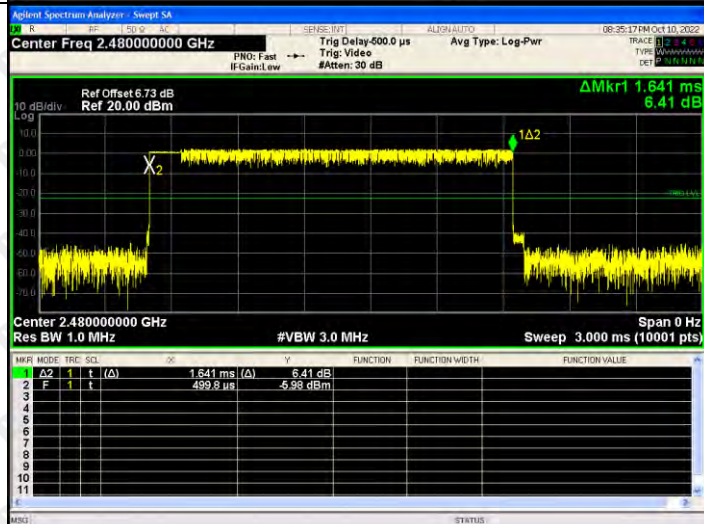


GFSK_DH5/LCH

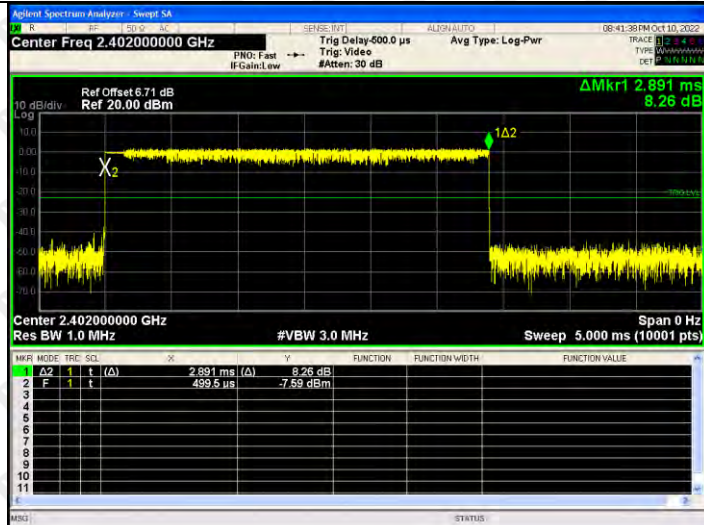

GFSK_DH5/MCH

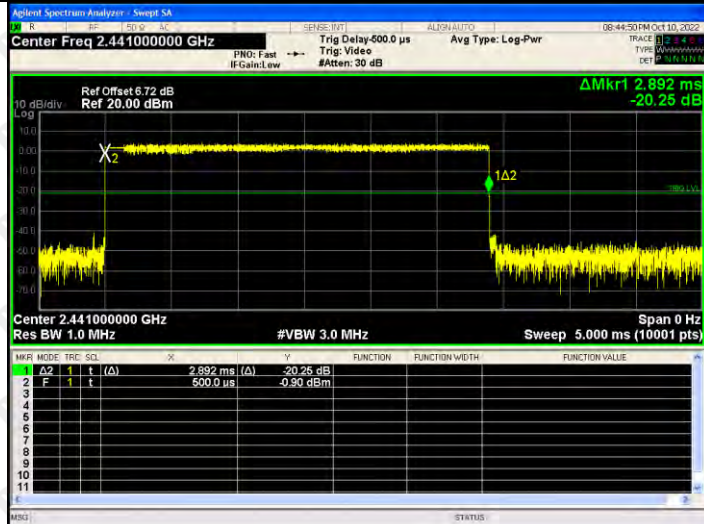

GFSK_DH5/HCH

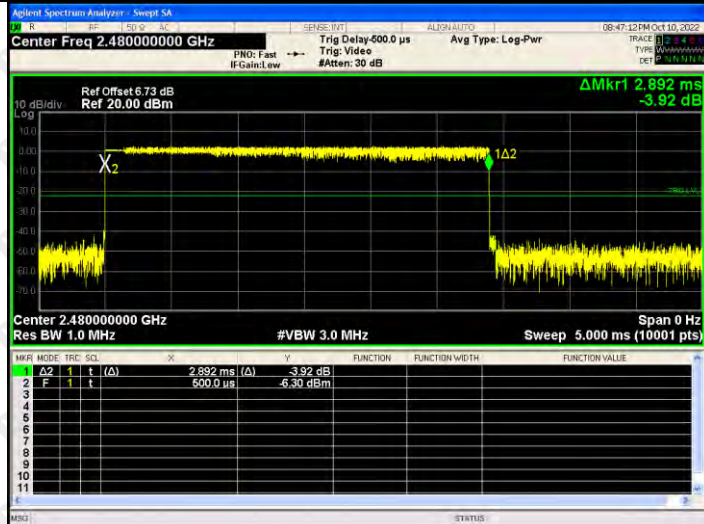

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

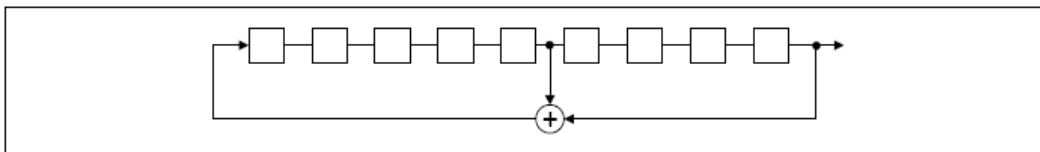

An example of Pseudorandom Frequency Hopping Sequence as follow:

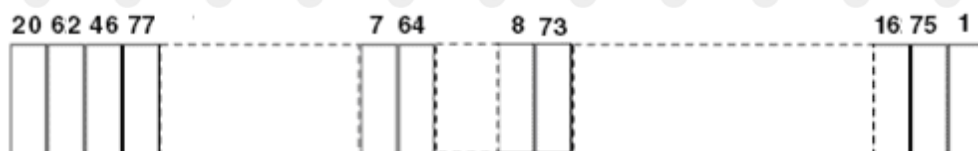

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Internal antenna. The best case gain of the antenna is -7.3dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

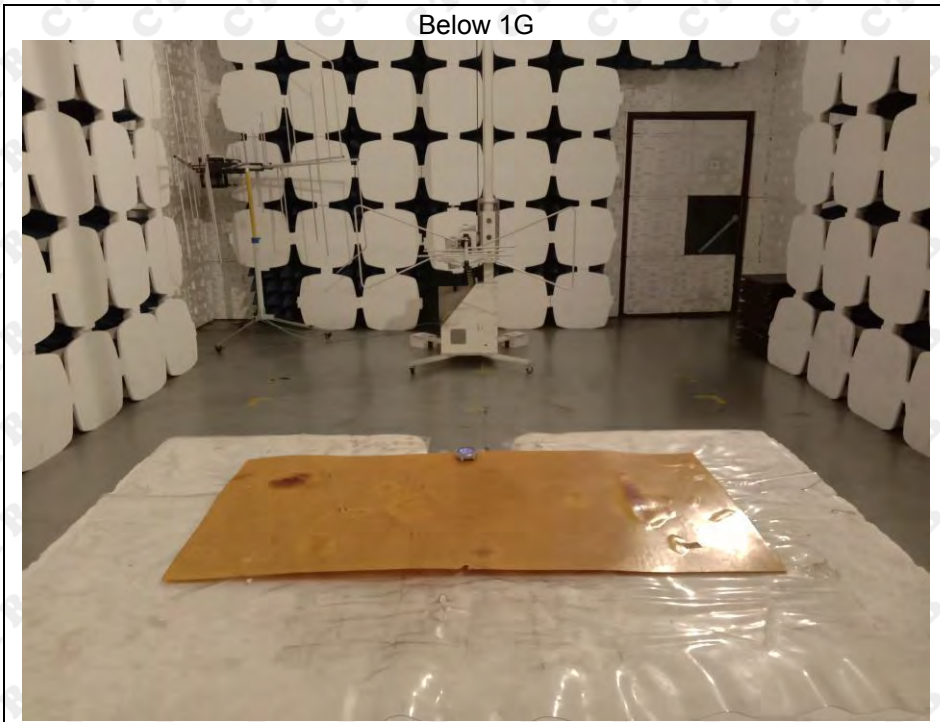

Above 1G



Conducted emissions



***** END OF REPORT *****