



## Appendix A

### RF Test Data for BT (Conducted Measurement)

Product Name: Urbanista Phoenix

Test Model: Urbanista Phoenix Midnight Black

#### Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Li Huan





### A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.954	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.96	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.953	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.29	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.357	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.265	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.296	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.312	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.293	N/A	Pass





Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

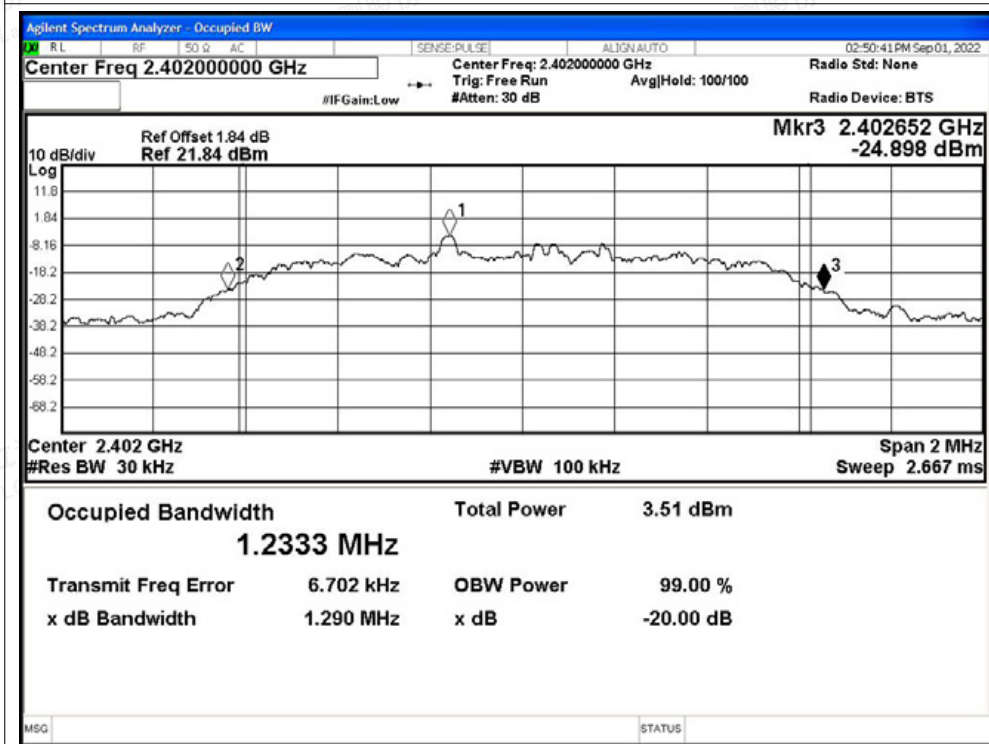




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

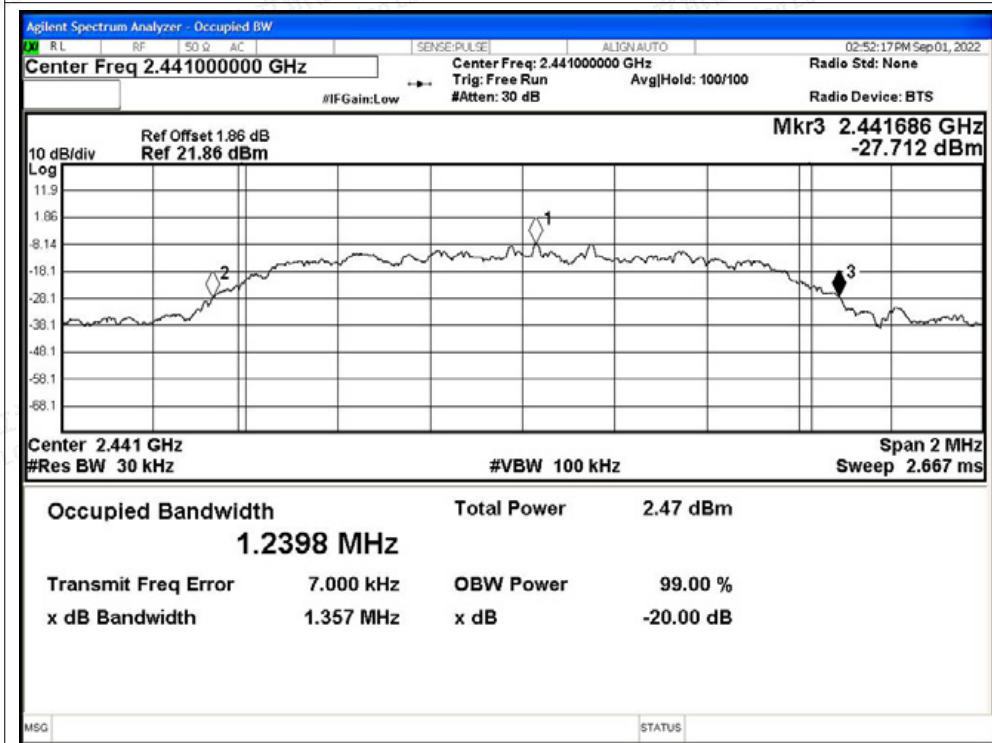


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

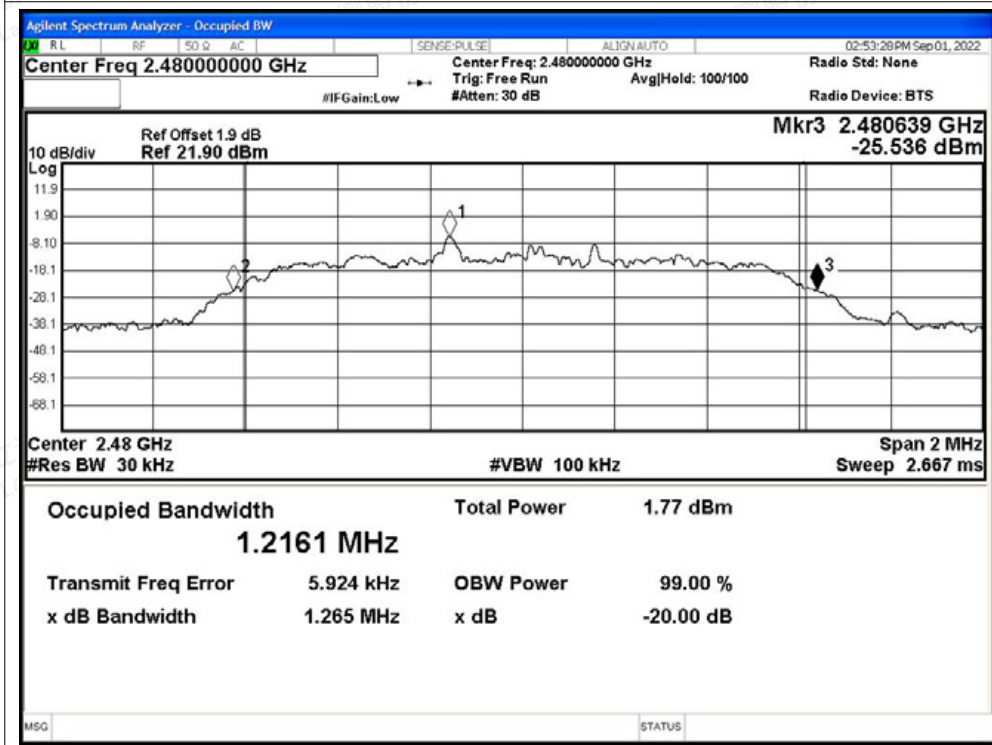




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

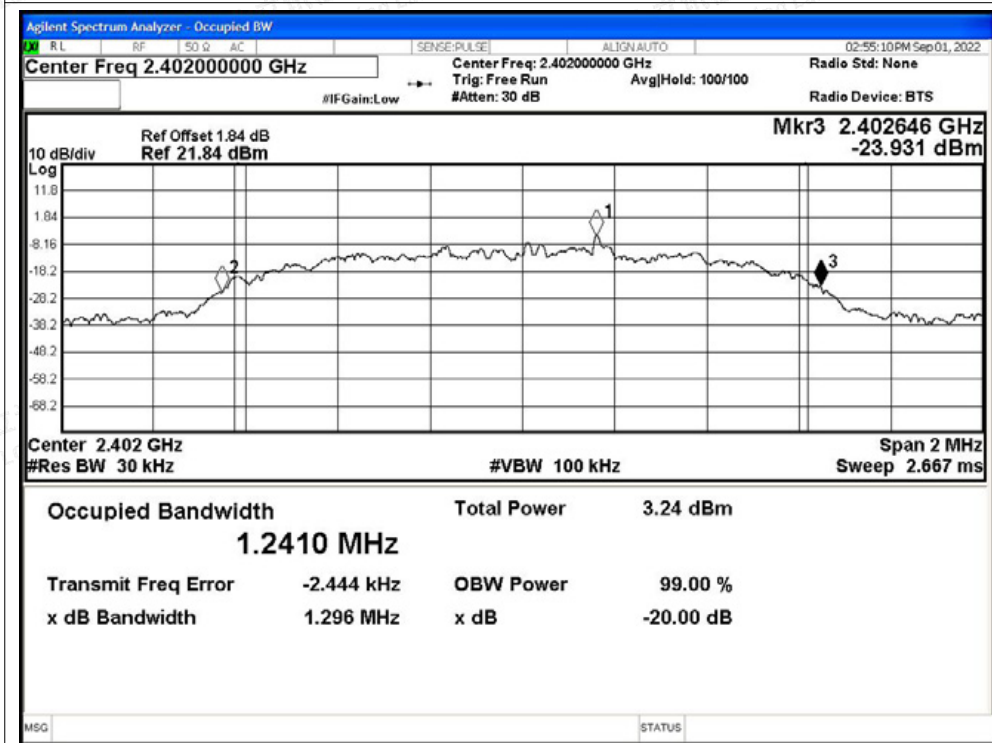


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

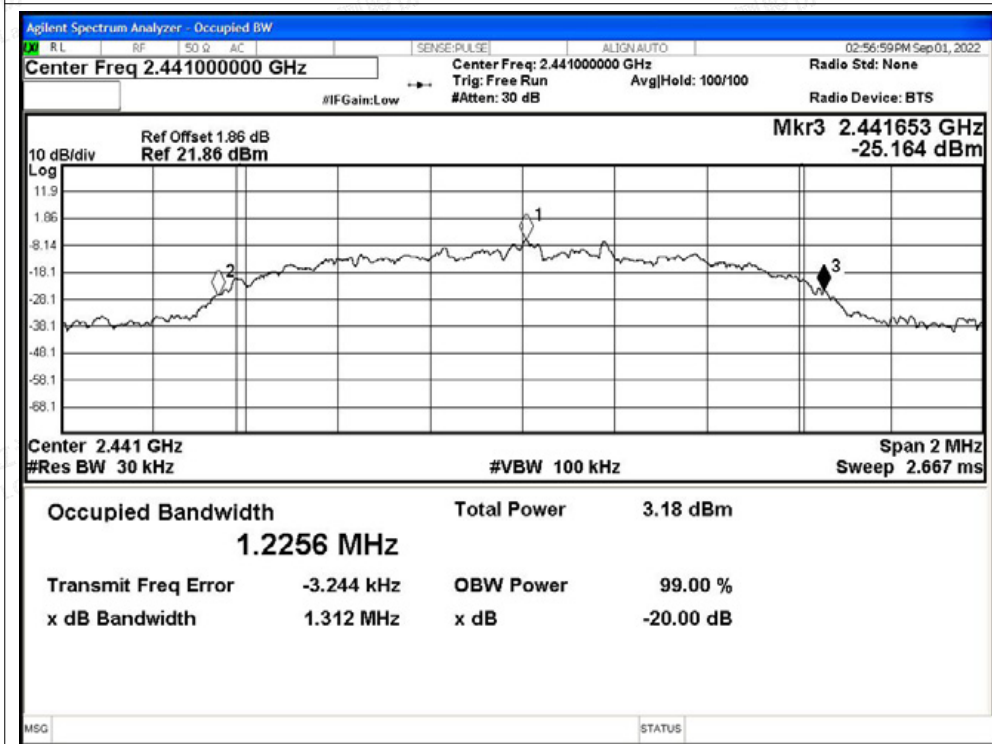



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

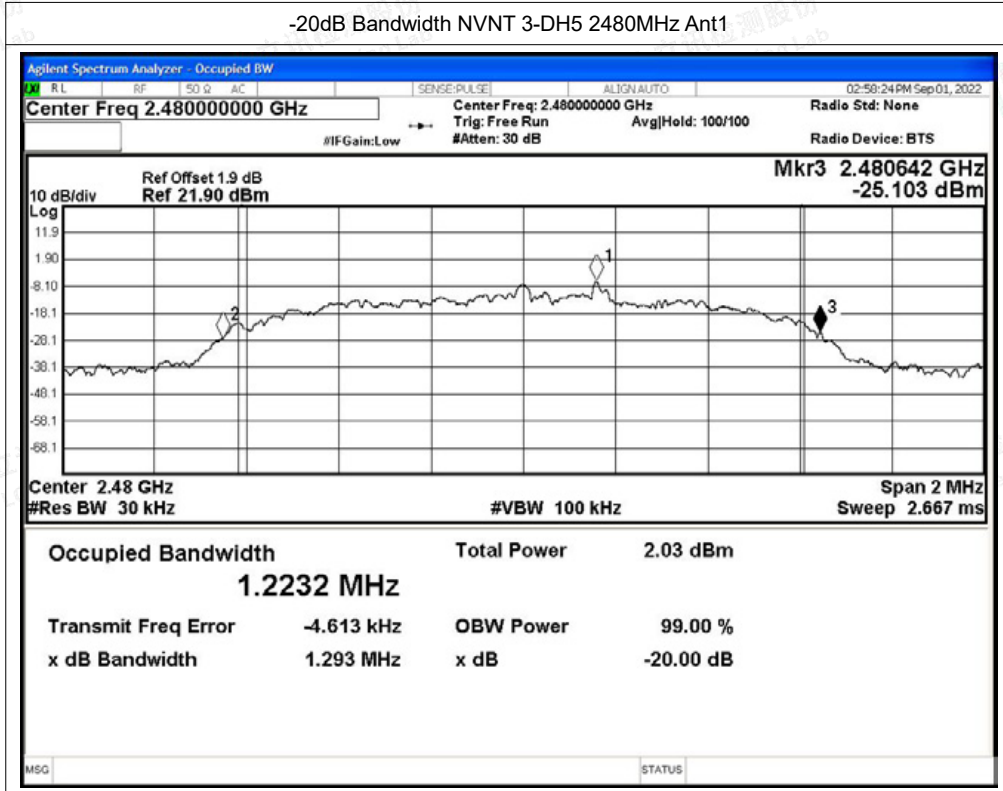



## A.2 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.892
NVNT	1-DH5	2441	Ant1	0.892
NVNT	1-DH5	2480	Ant1	0.896
NVNT	2-DH5	2402	Ant1	1.302
NVNT	2-DH5	2441	Ant1	1.276
NVNT	2-DH5	2480	Ant1	1.25
NVNT	3-DH5	2402	Ant1	1.287
NVNT	3-DH5	2441	Ant1	1.268
NVNT	3-DH5	2480	Ant1	1.249









Test Graphs

OBW NVNT 1-DH5 2402MHz Ant1

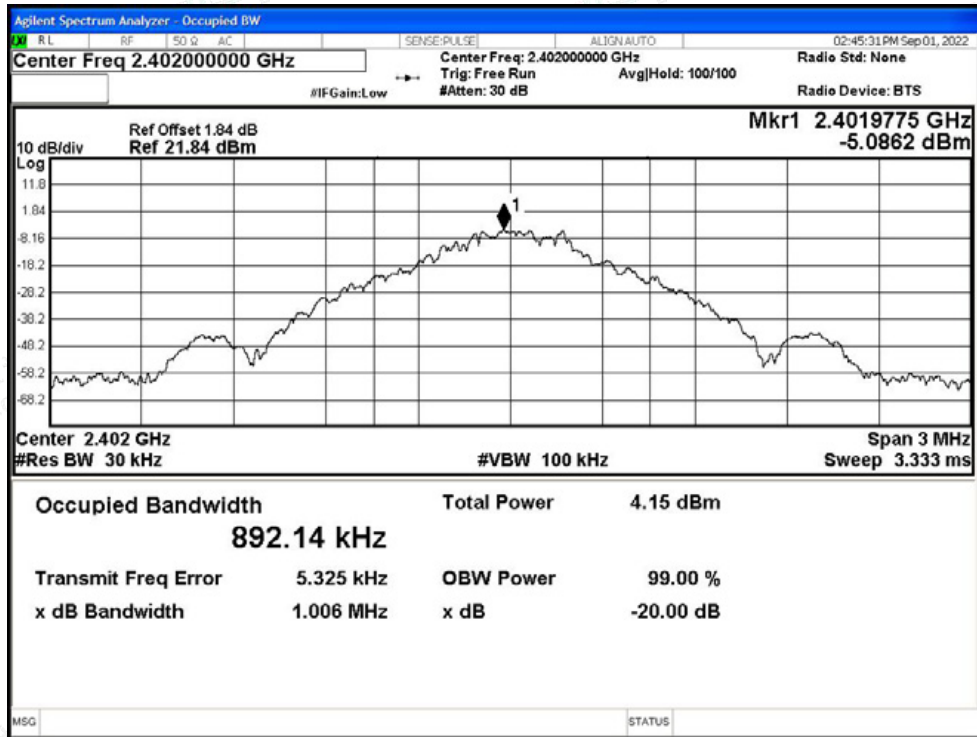


OBW NVNT 1-DH5 2441MHz Ant1

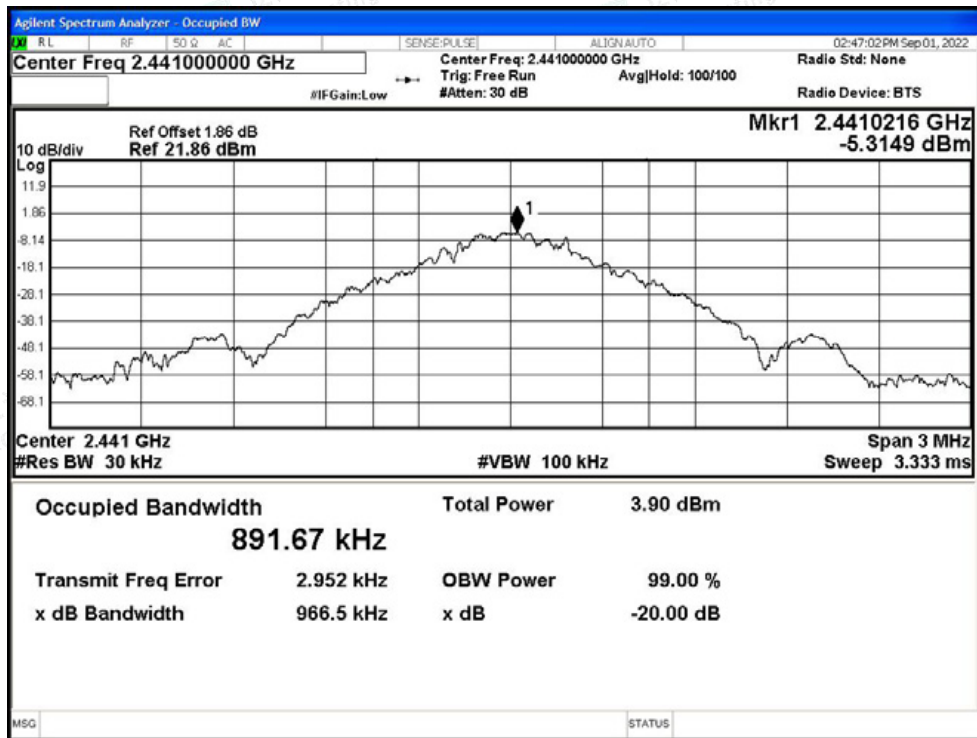




OBW NVNT 1-DH5 2480MHz Ant1

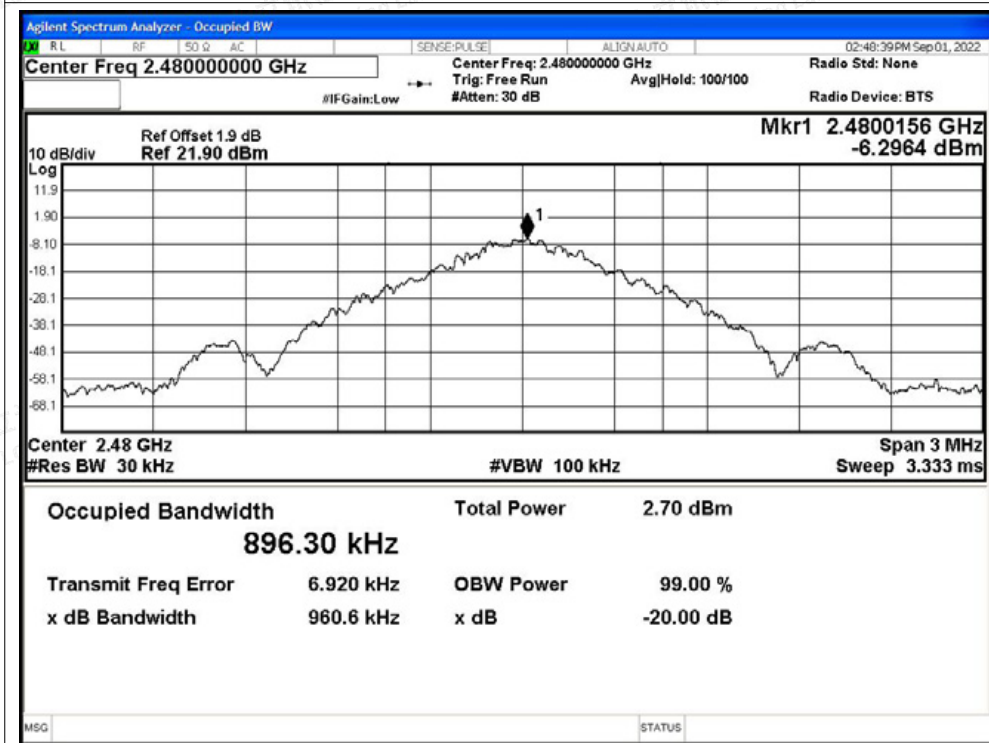


OBW NVNT 2-DH5 2402MHz Ant1

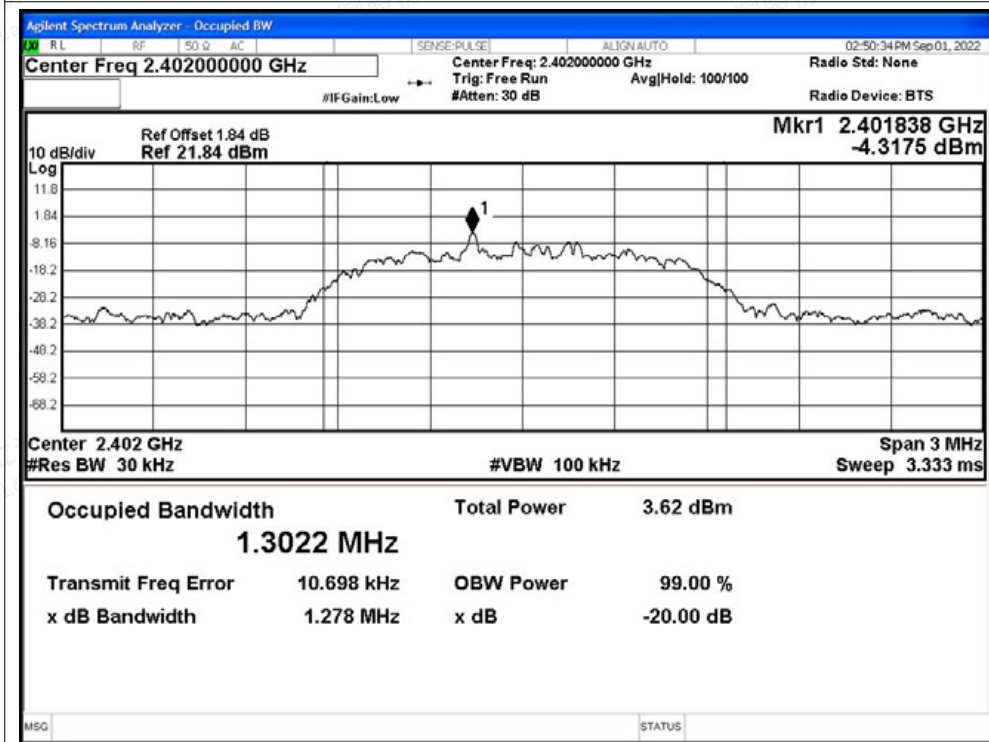




OBW NVNT 2-DH5 2441MHz Ant1

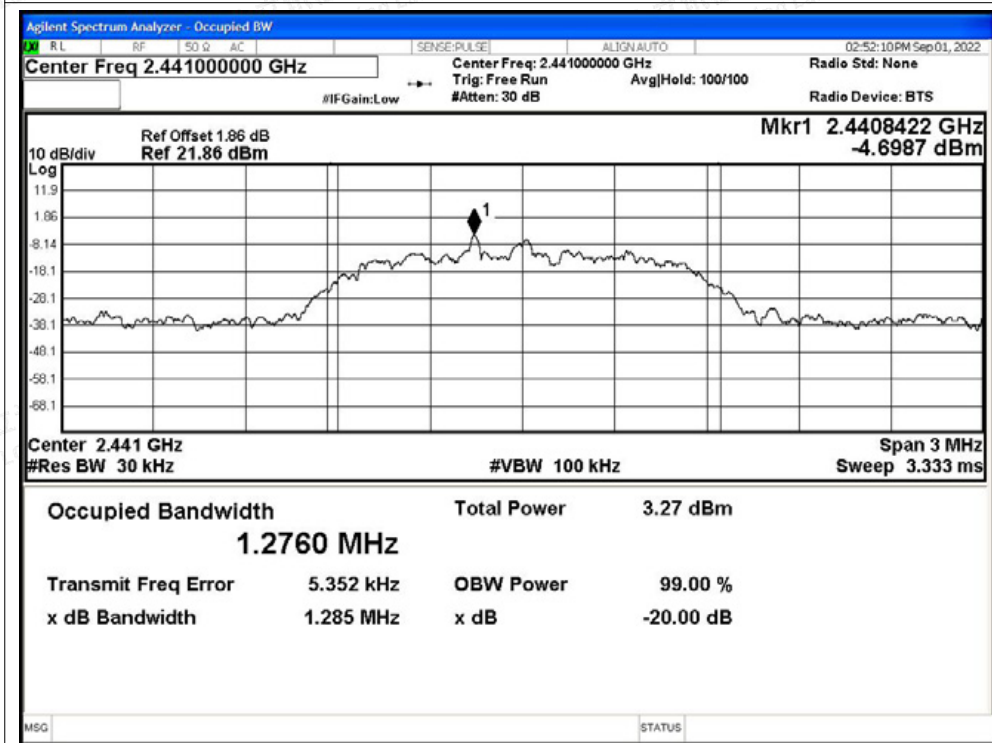


OBW NVNT 2-DH5 2480MHz Ant1

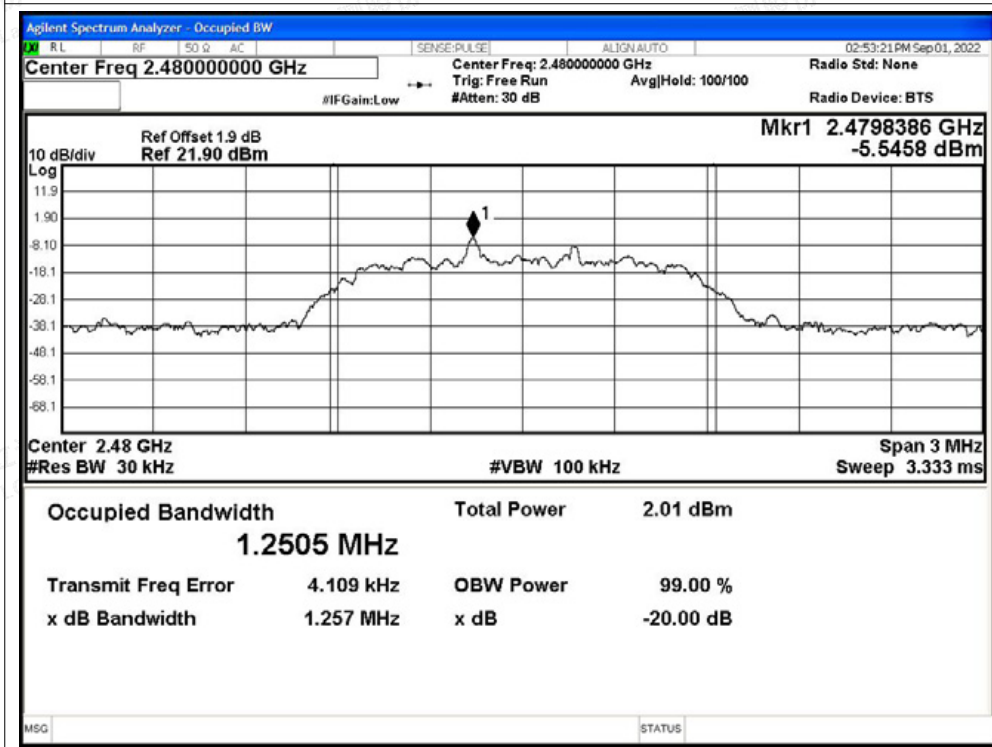



OBW NVNT 3-DH5 2402MHz Ant1

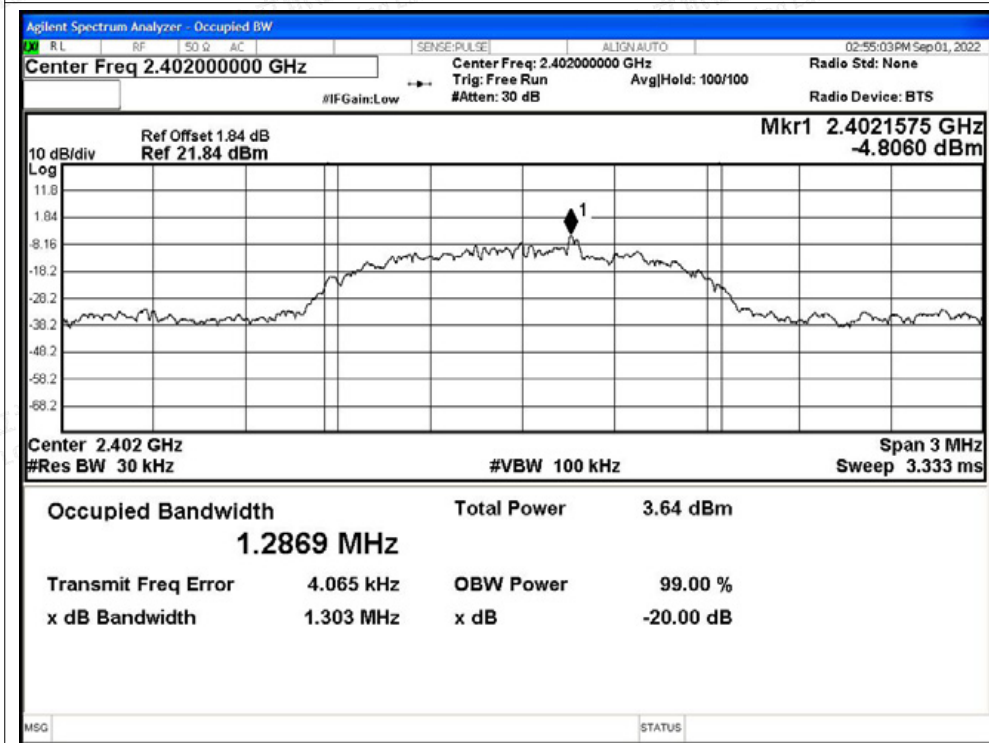


OBW NVNT 3-DH5 2441MHz Ant1





OBW NVNT 3-DH5 2480MHz Ant1

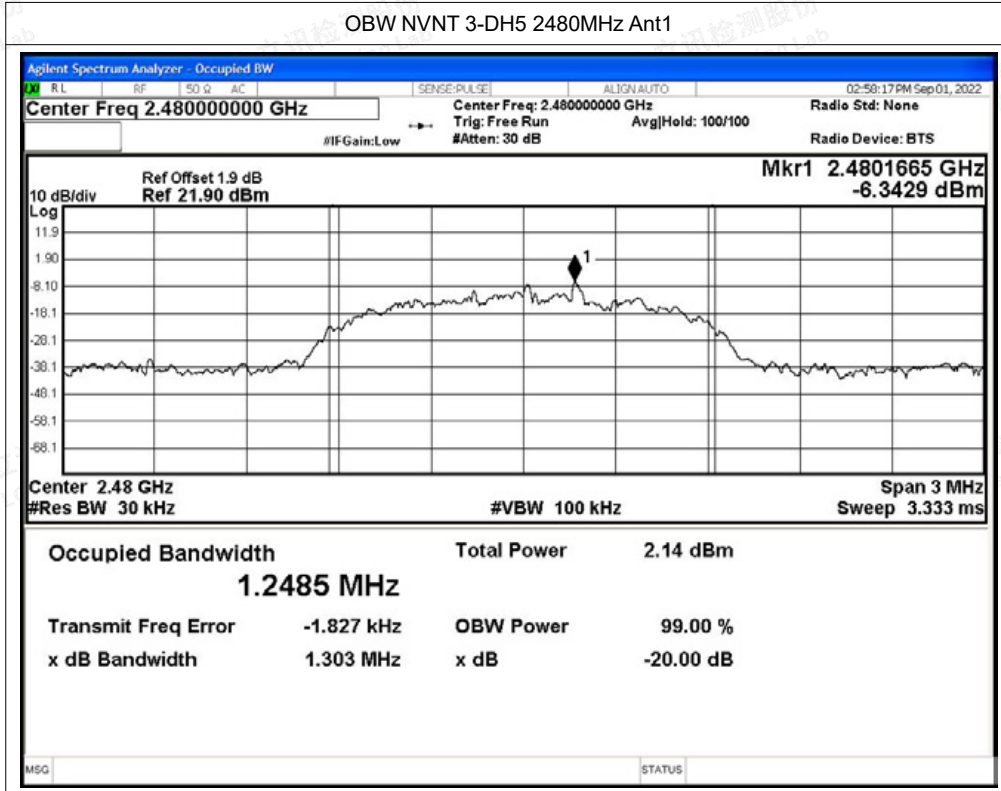



### A.3 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-2.49	0	-2.49	21	Pass
NVNT	1-DH5	2441	Ant1	-2.66	0	-2.66	21	Pass
NVNT	1-DH5	2480	Ant1	-3.74	0	-3.74	21	Pass
NVNT	2-DH5	2402	Ant1	-2.54	0	-2.54	21	Pass
NVNT	2-DH5	2441	Ant1	-2.73	0	-2.73	21	Pass
NVNT	2-DH5	2480	Ant1	-3.74	0	-3.74	21	Pass
NVNT	3-DH5	2402	Ant1	-2.53	0	-2.53	21	Pass
NVNT	3-DH5	2441	Ant1	-2.66	0	-2.66	21	Pass
NVNT	3-DH5	2480	Ant1	-3.79	0	-3.79	21	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

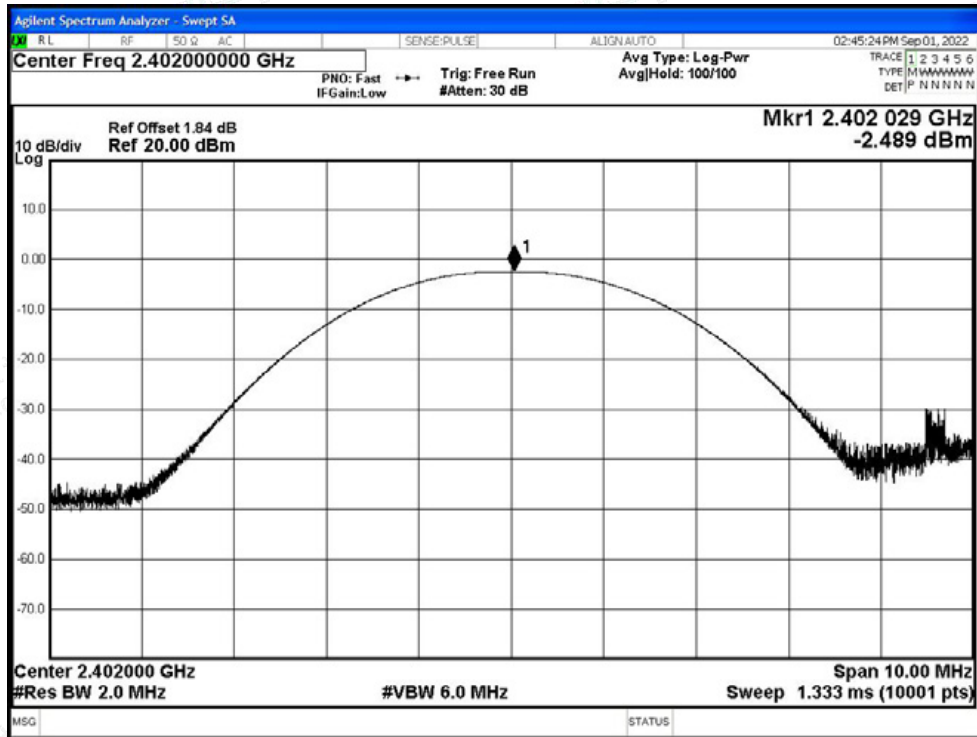


Power NVNT 1-DH5 2441MHz Ant1

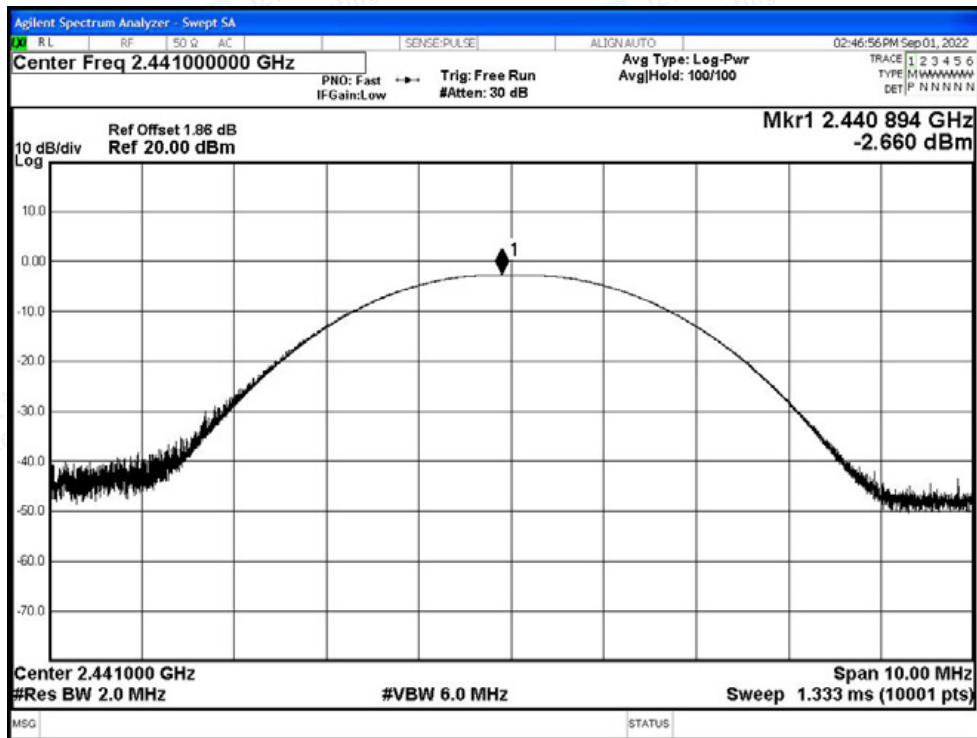




Power NVNT 1-DH5 2480MHz Ant1

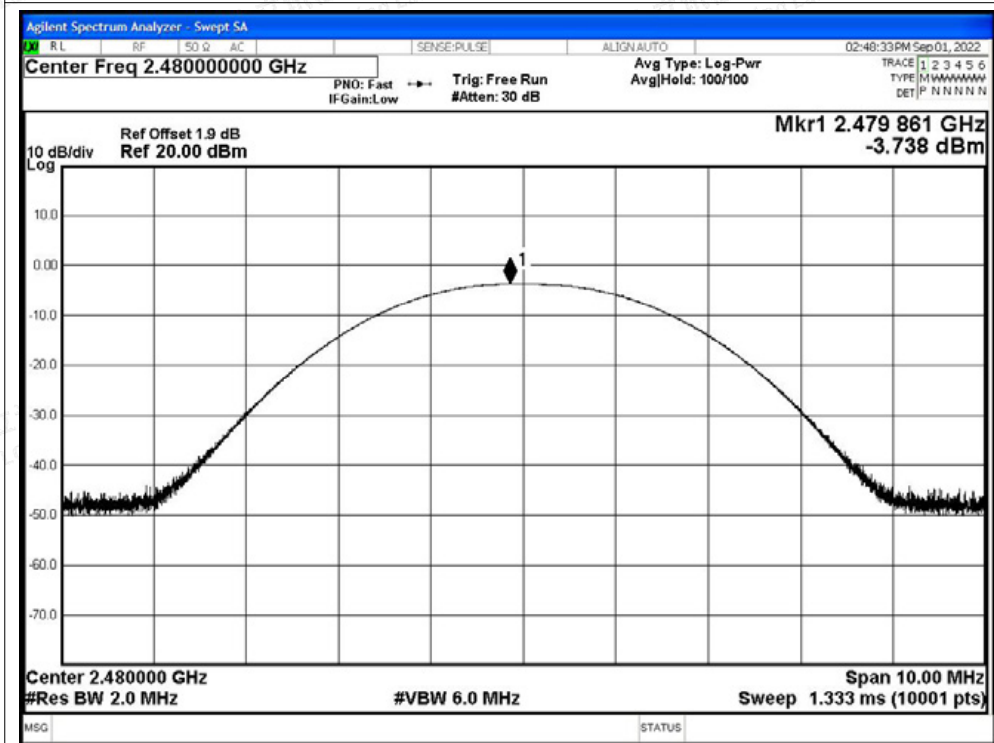


Power NVNT 2-DH5 2402MHz Ant1

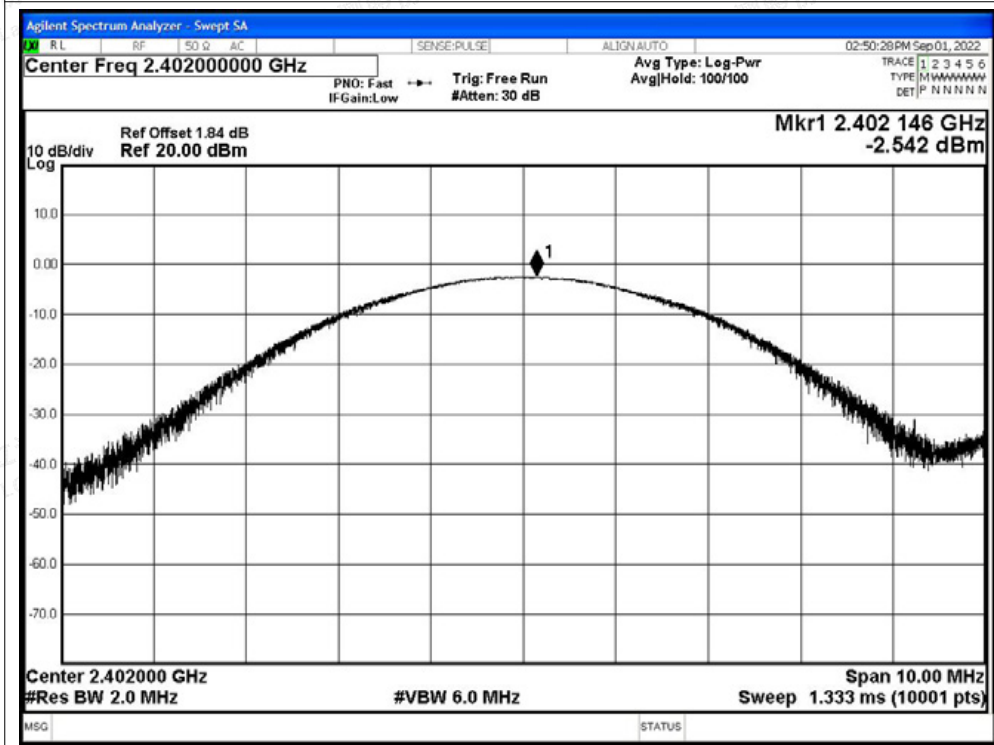






Power NVNT 2-DH5 2441MHz Ant1

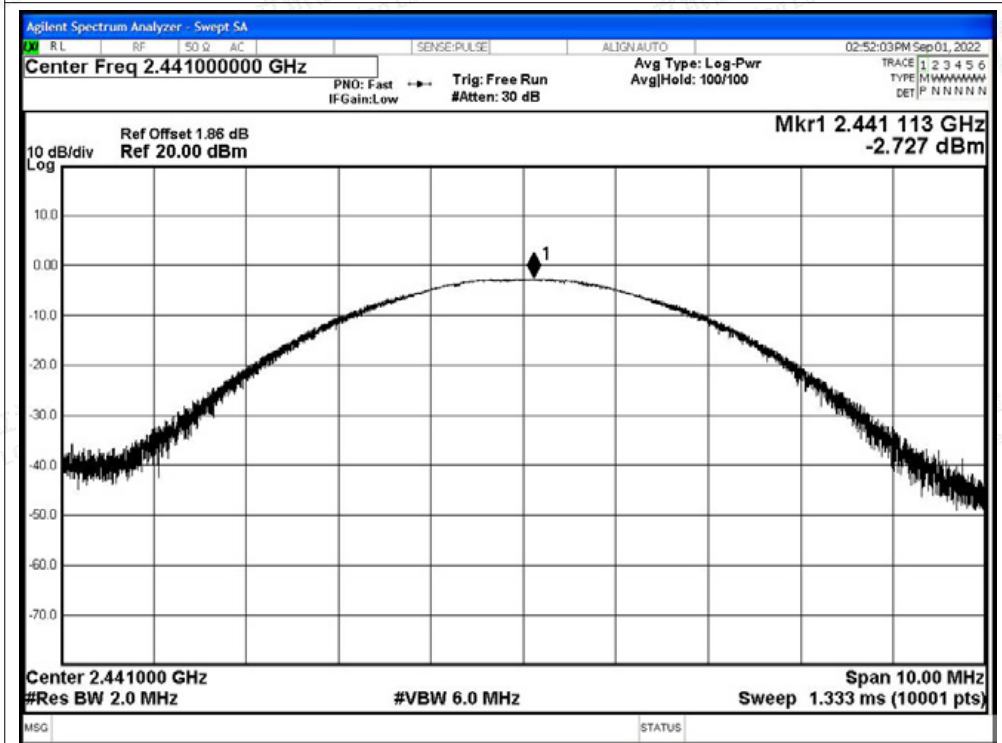


Power NVNT 2-DH5 2480MHz Ant1

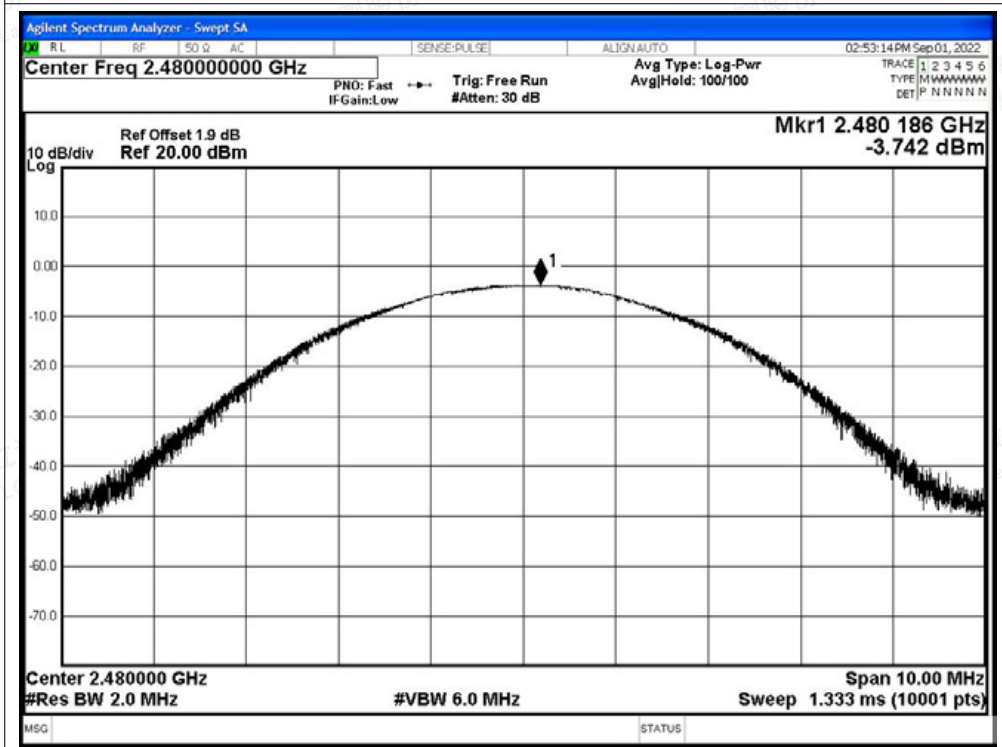




Power NVNT 3-DH5 2402MHz Ant1

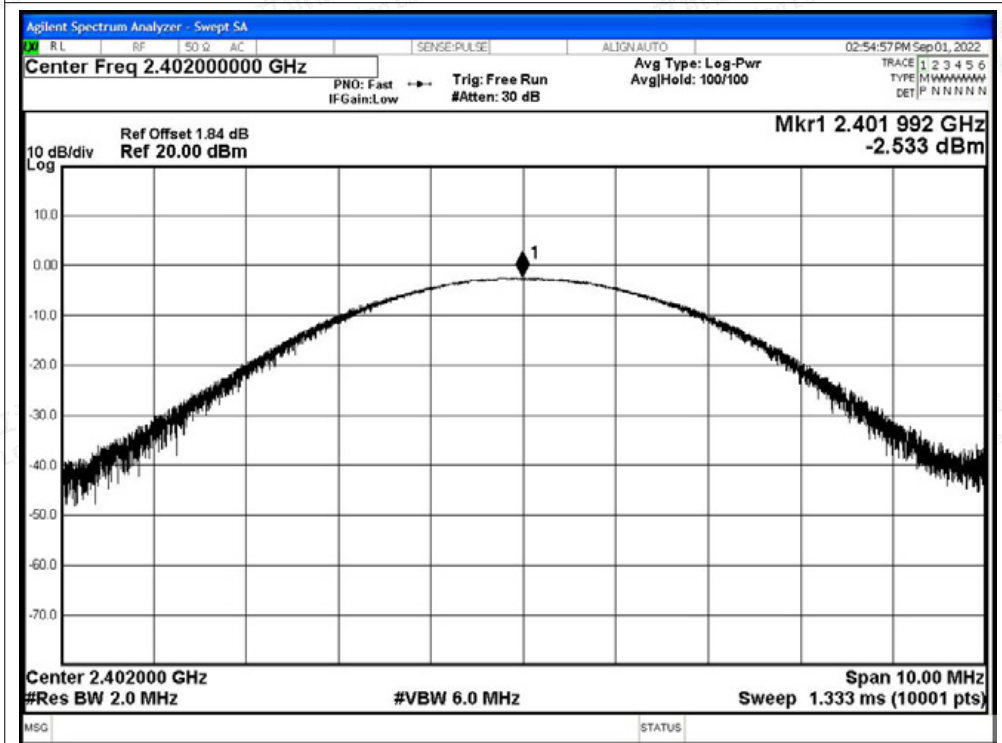


Power NVNT 3-DH5 2441MHz Ant1

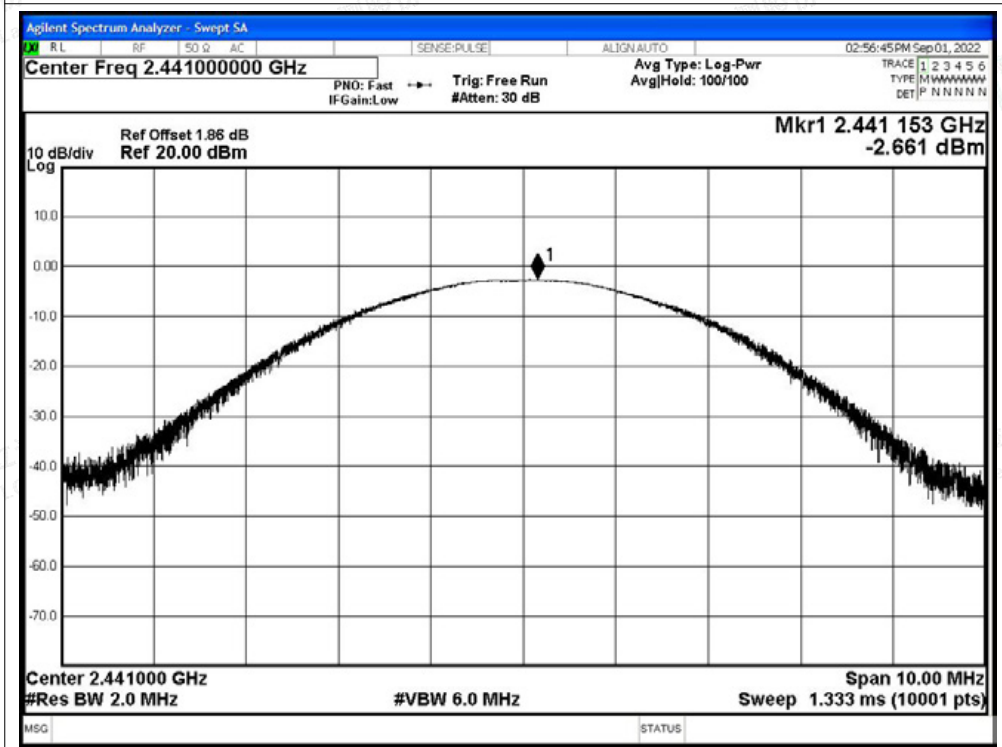



Power NVNT 3-DH5 2480MHz Ant1

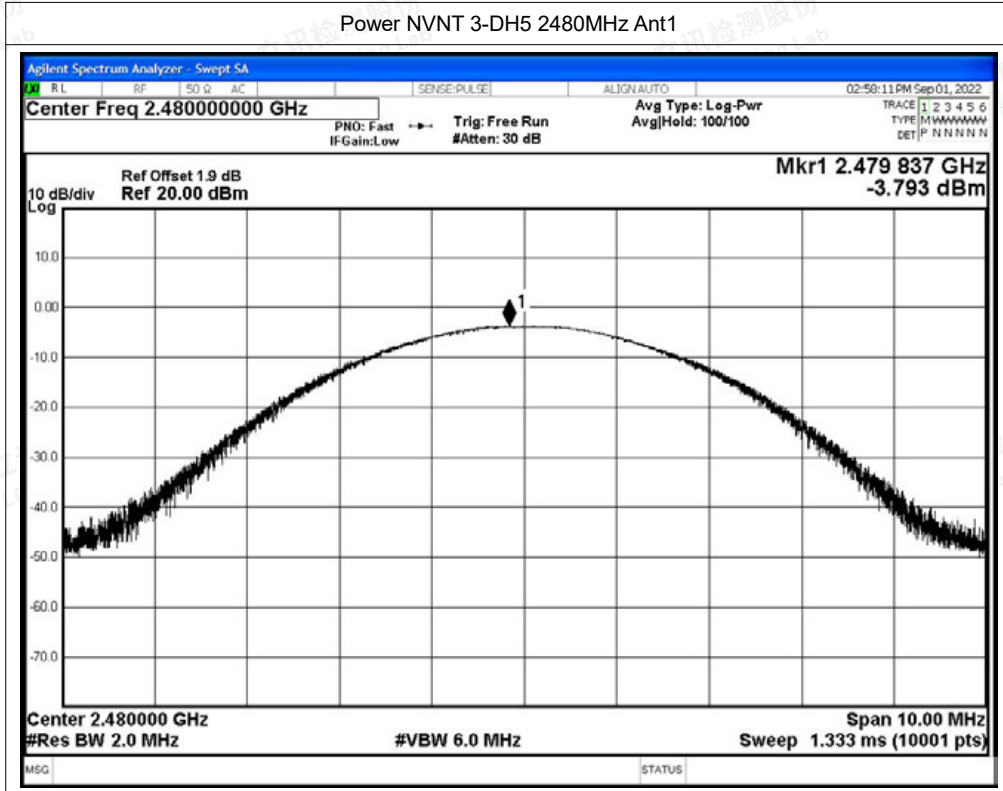



### A.4 Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.02	2403.06	1.04	0.636	Pass
NVNT	2-DH5	Ant1	2401.834	2403.178	1.344	0.86	Pass
NVNT	3-DH5	Ant1	2402.154	2403.176	1.022	0.864	Pass






Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

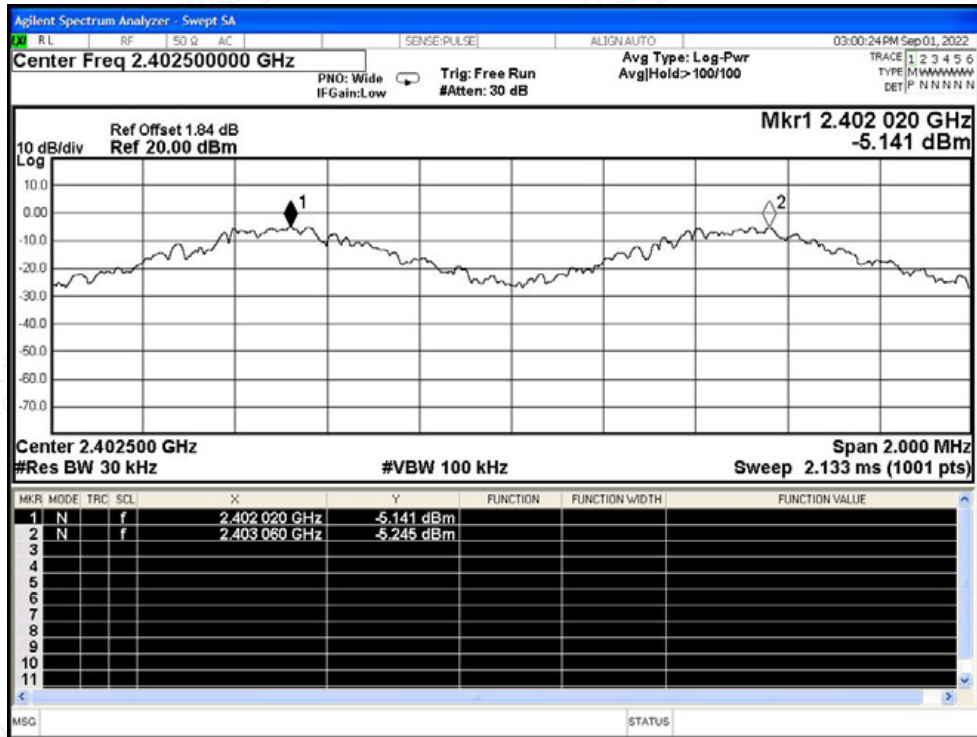


CFS NVNT 2-DH5 2402MHz Ant1

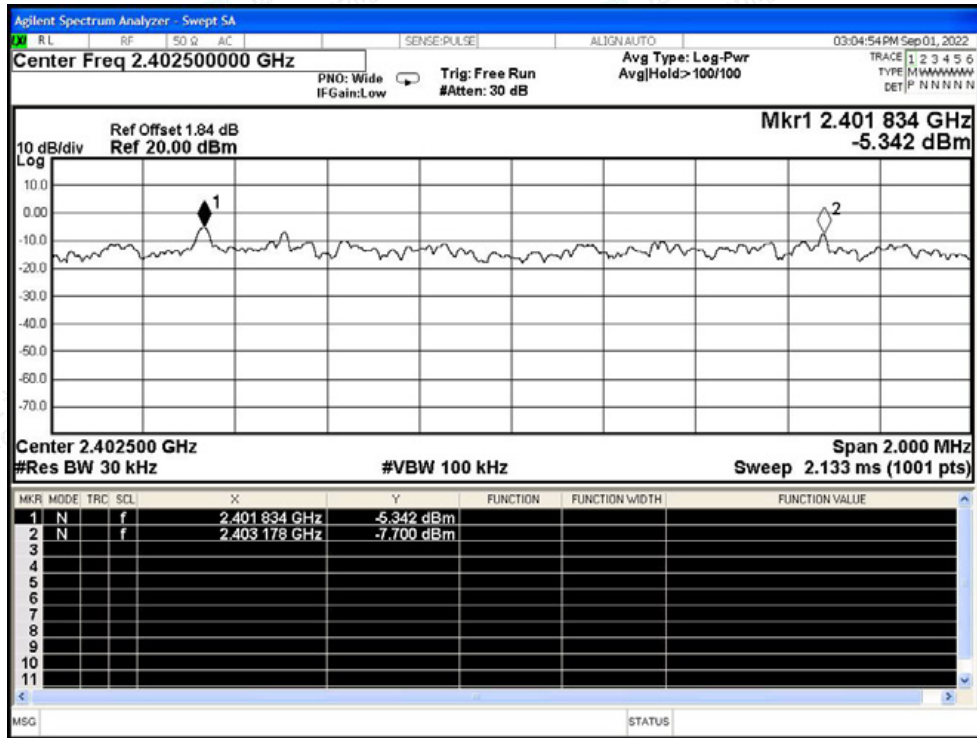



CFS NVNT 3-DH5 2402MHz Ant1

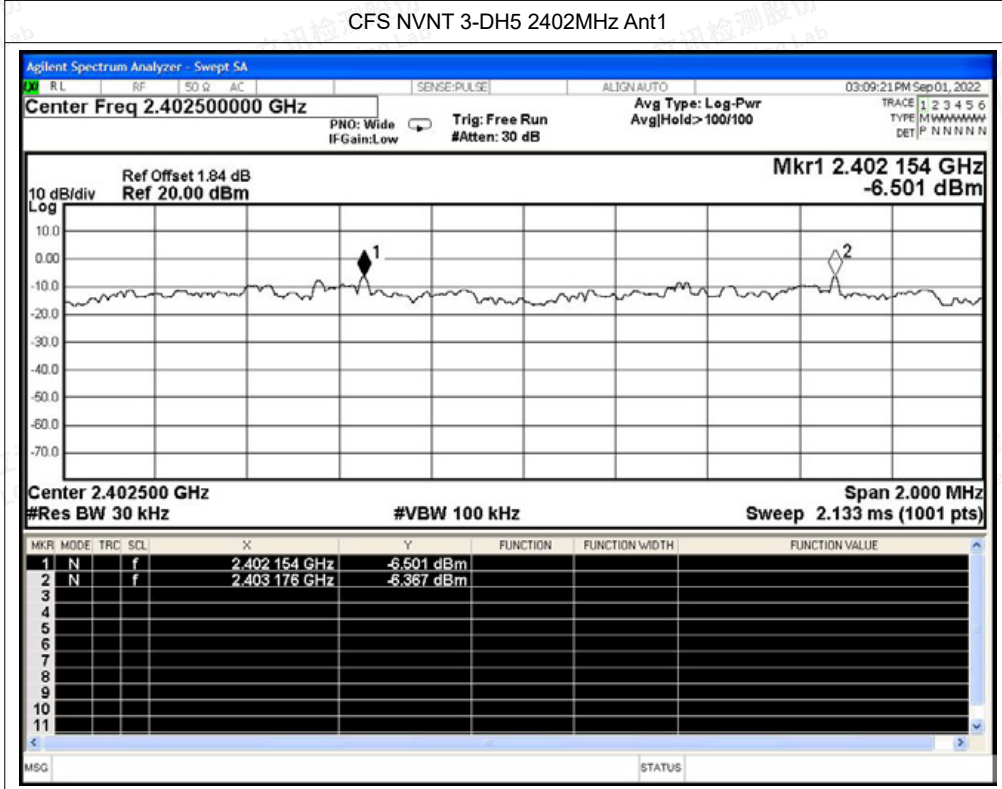



## A.6 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

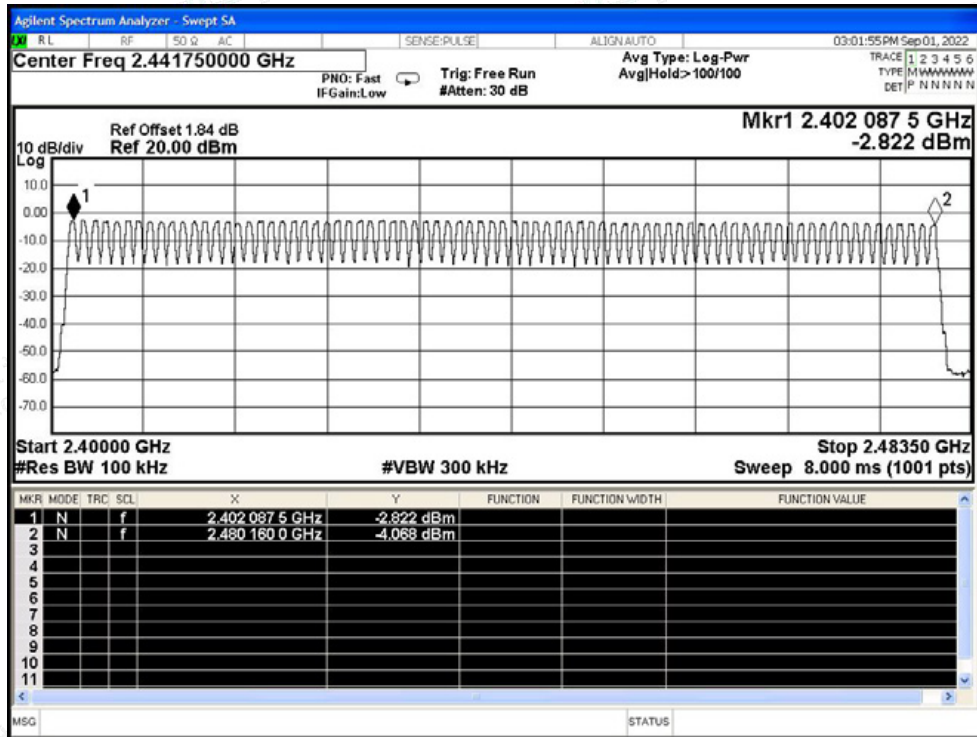


Hopping No. NVNT 2-DH5 2402MHz Ant1

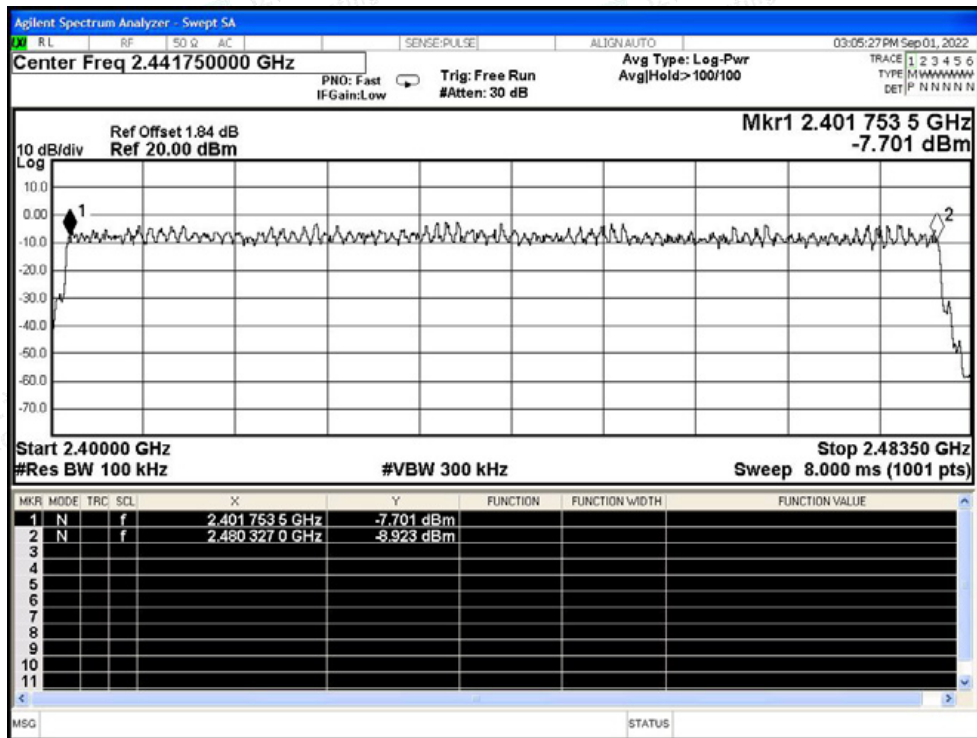





Hopping No. NVNT 3-DH5 2402MHz Ant1

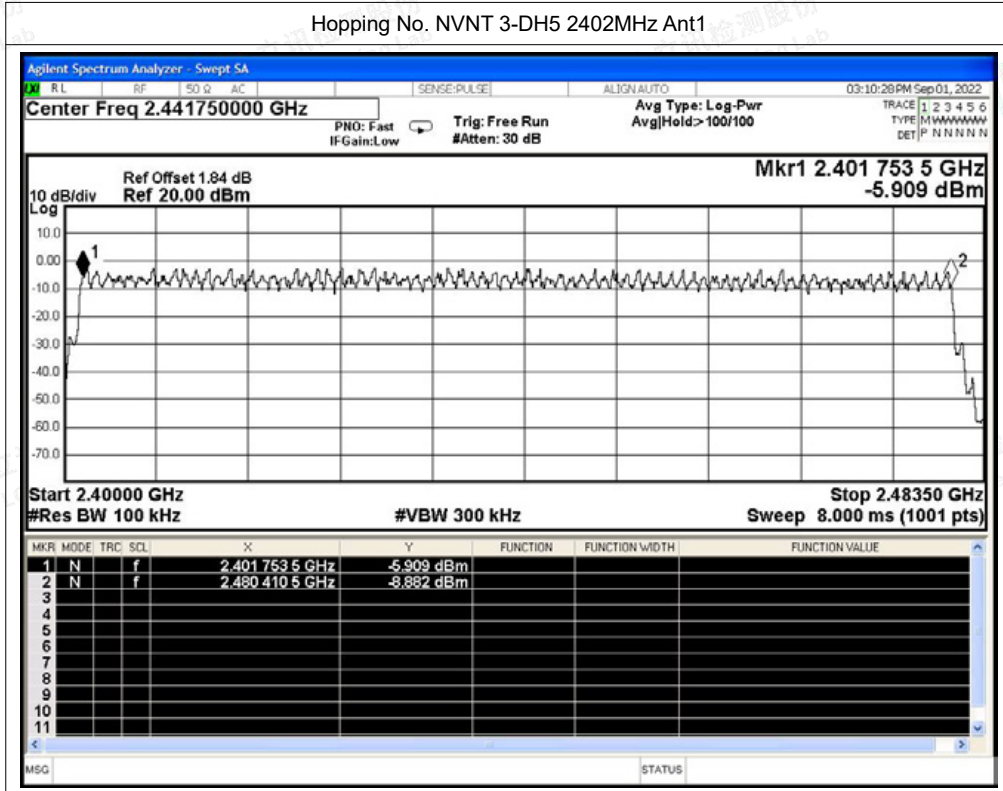



### A.5 Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.88	308.16	107	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.882	308.374	107	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.883	308.481	107	31600	400	Pass






Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

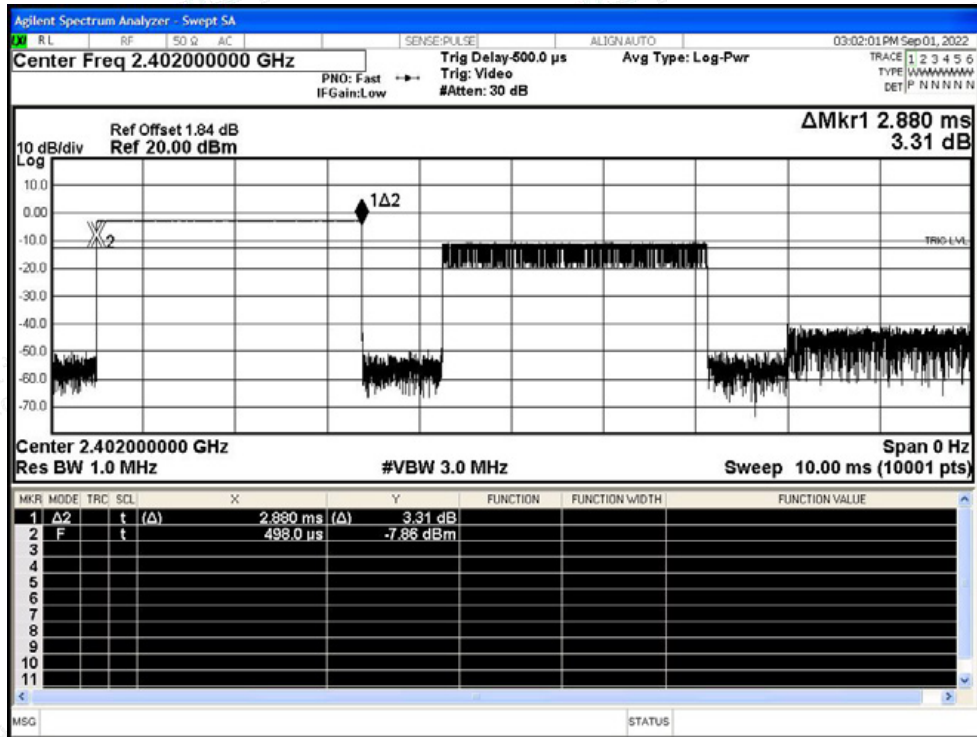


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

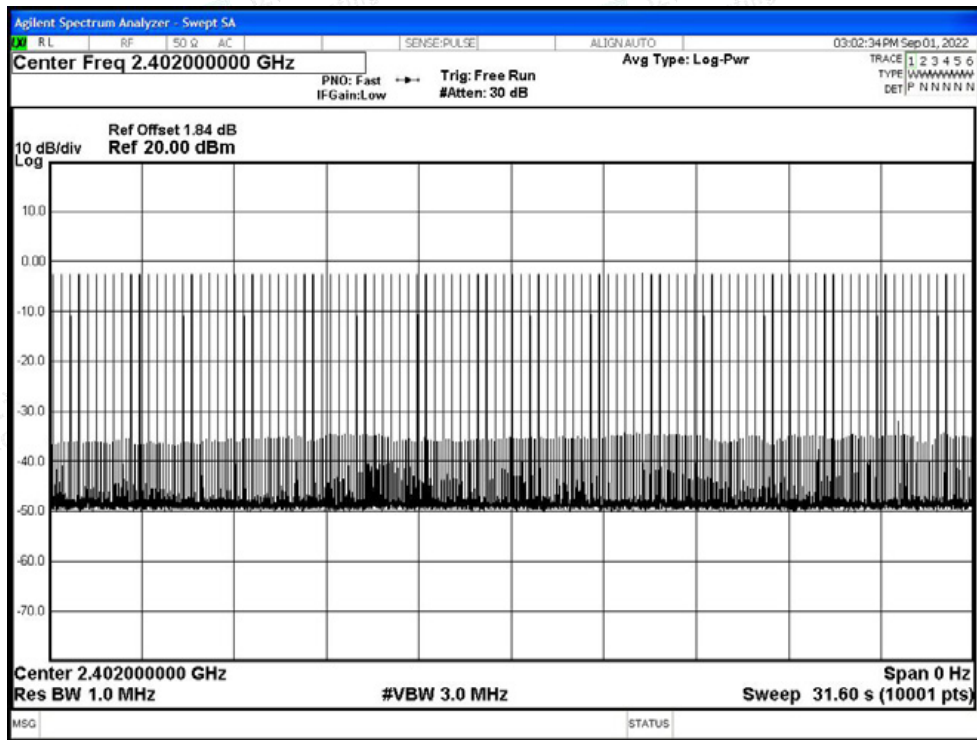




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

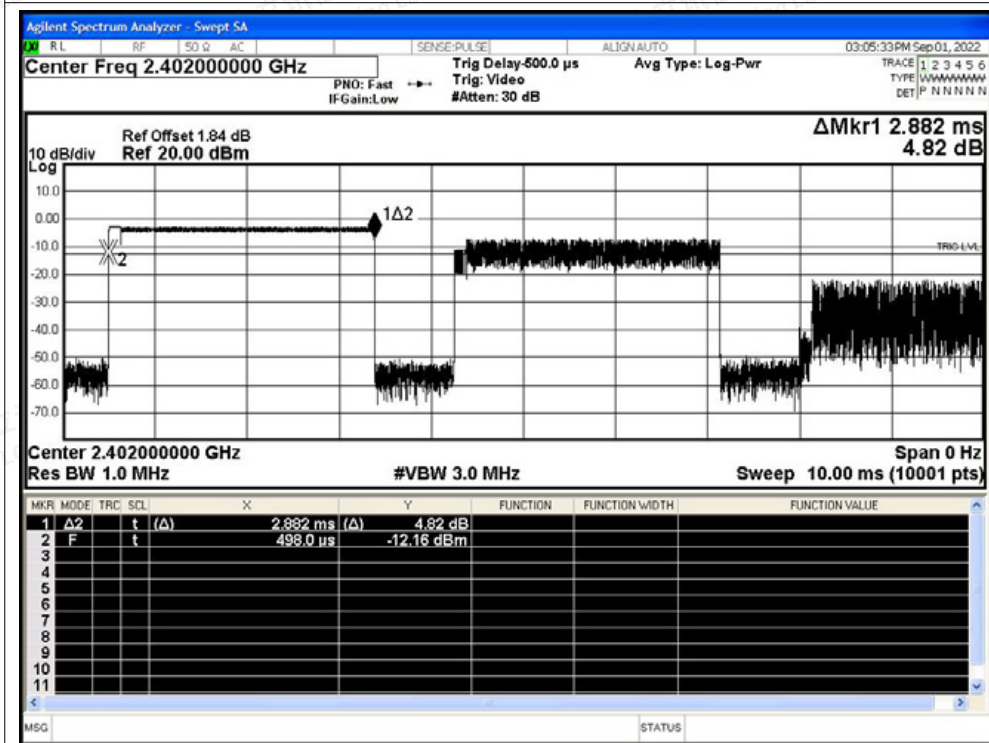


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

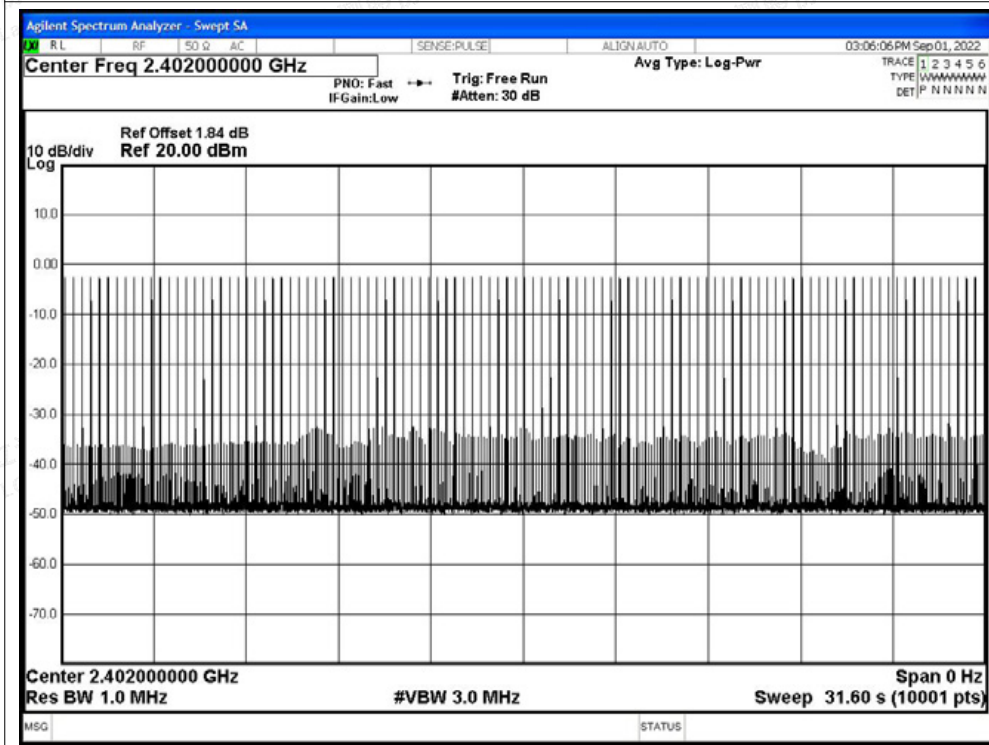




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

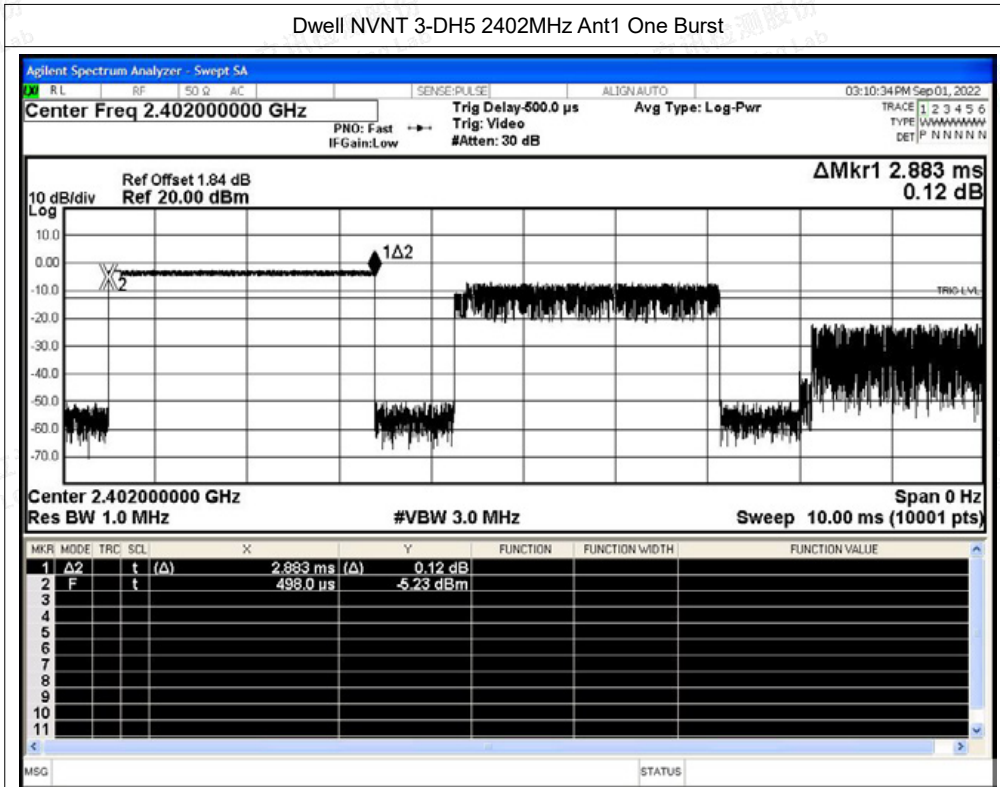

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

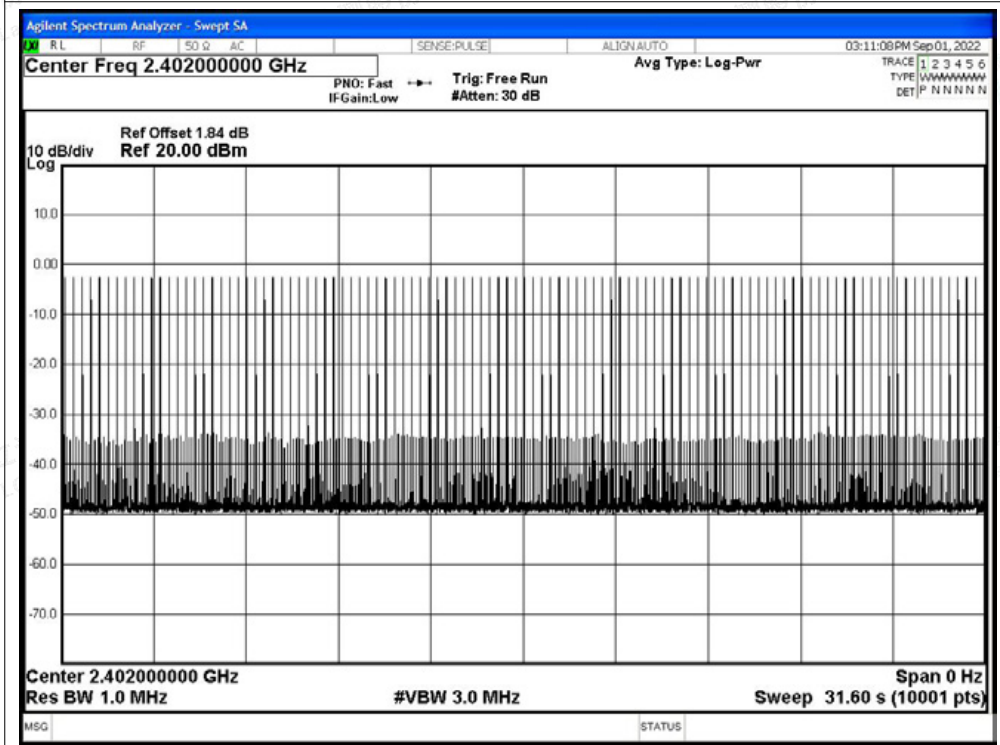



## A.7 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-54.22	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-52.87	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-37.14	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-51.67	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-35.45	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-51.89	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

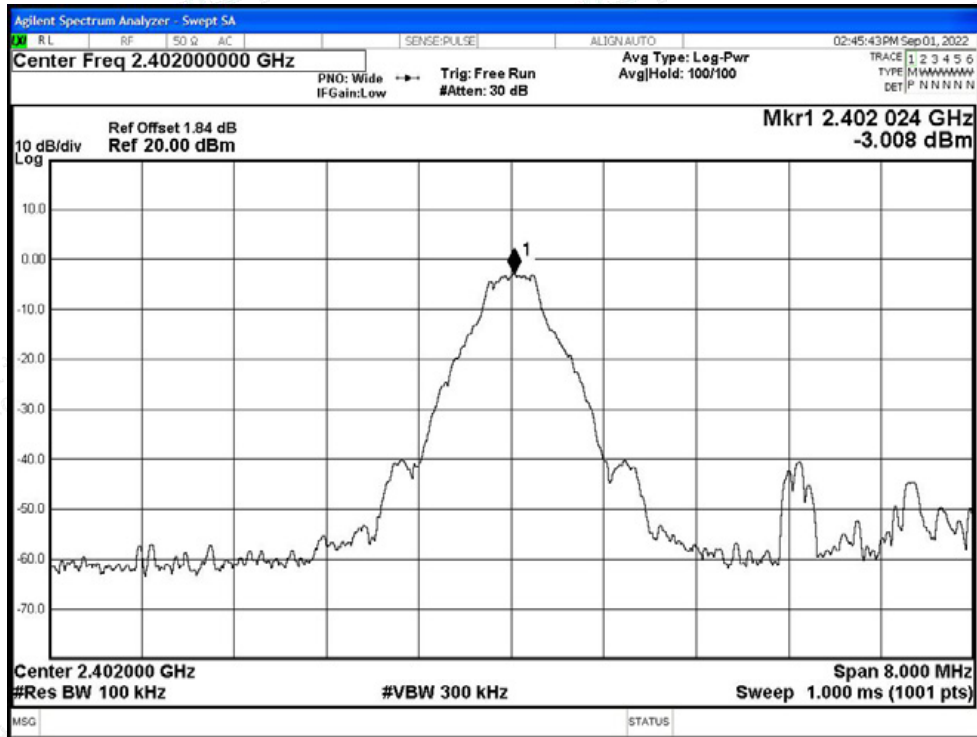


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

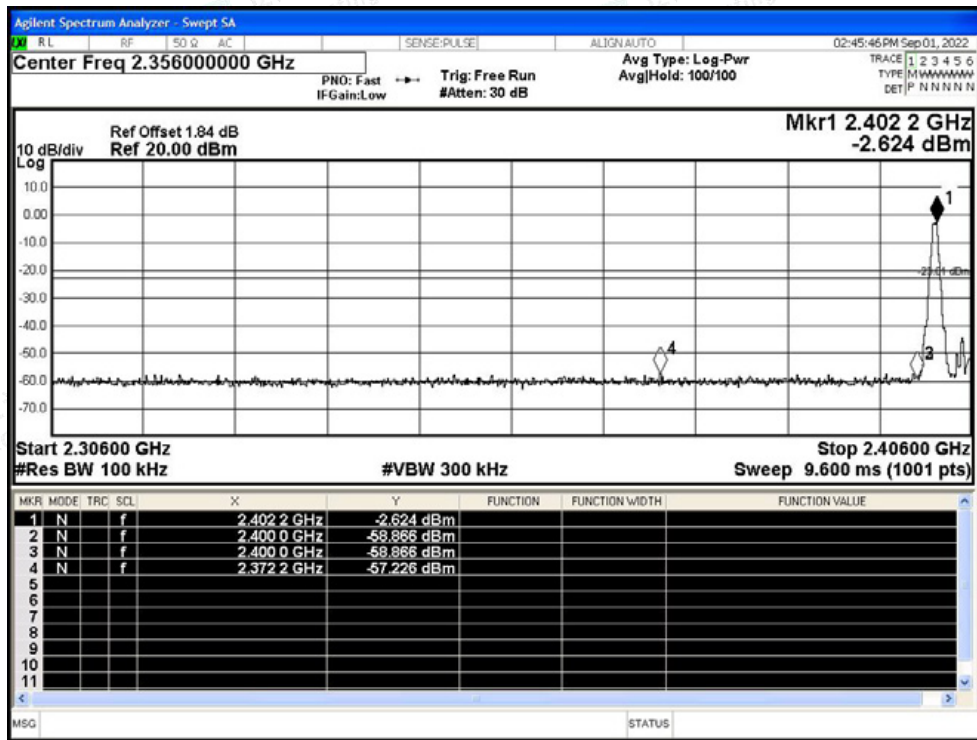




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

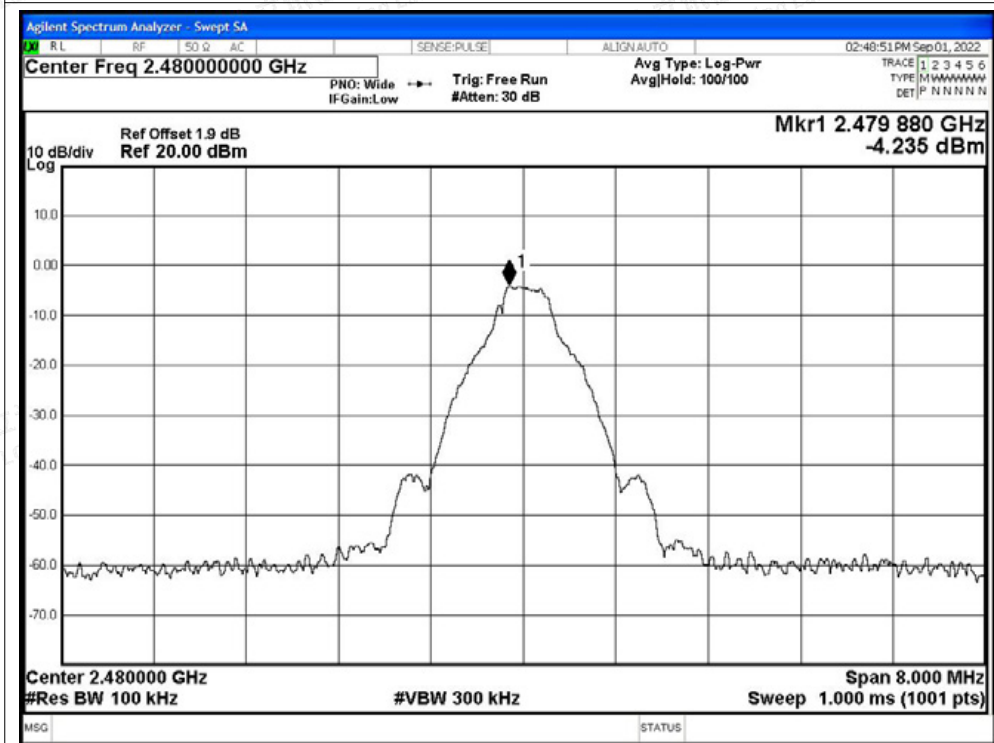


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

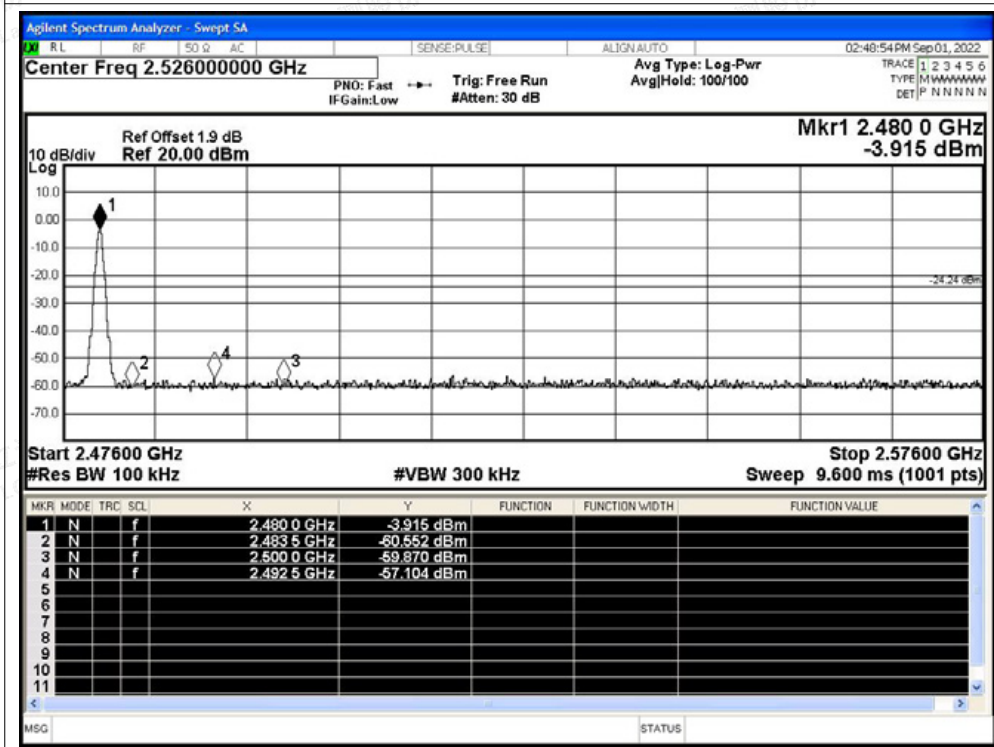






Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

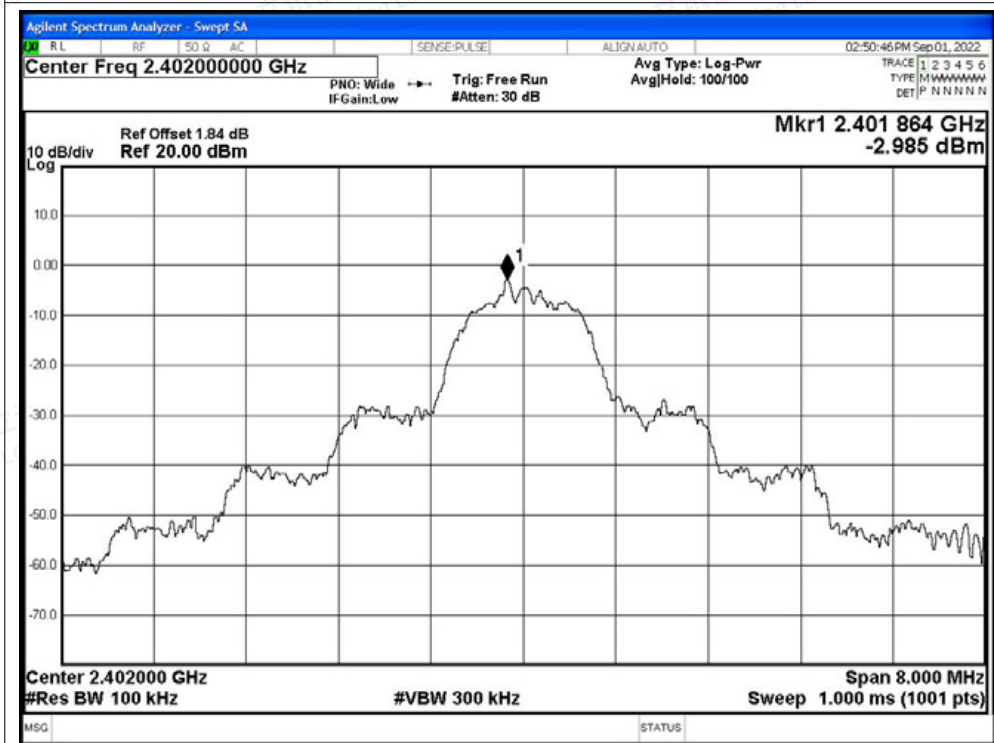


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

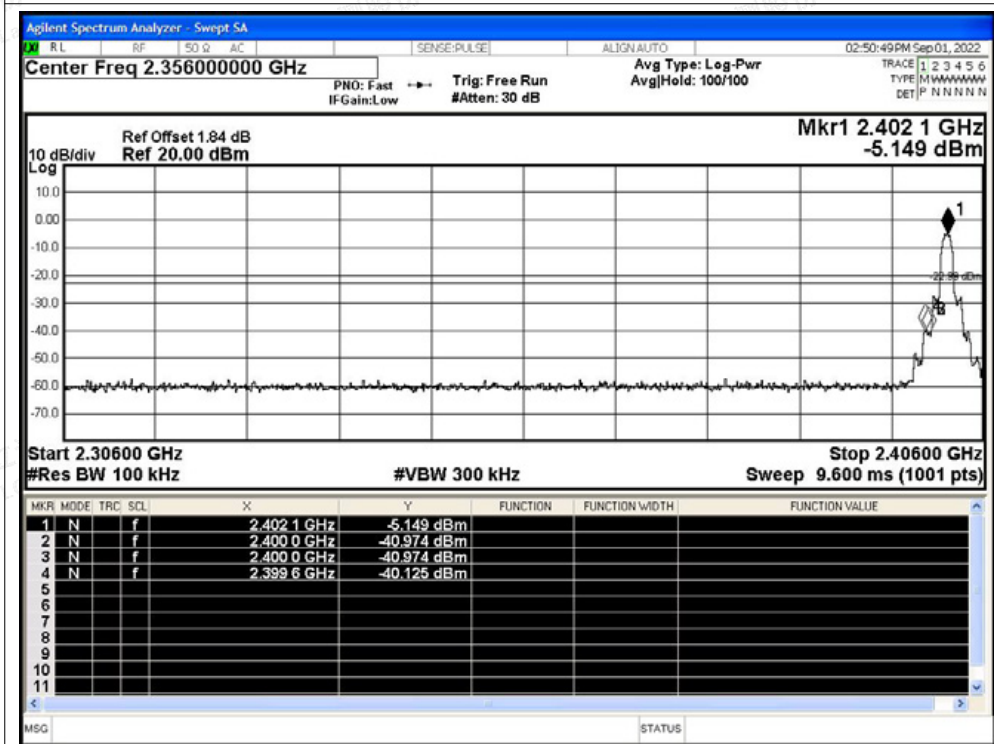




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

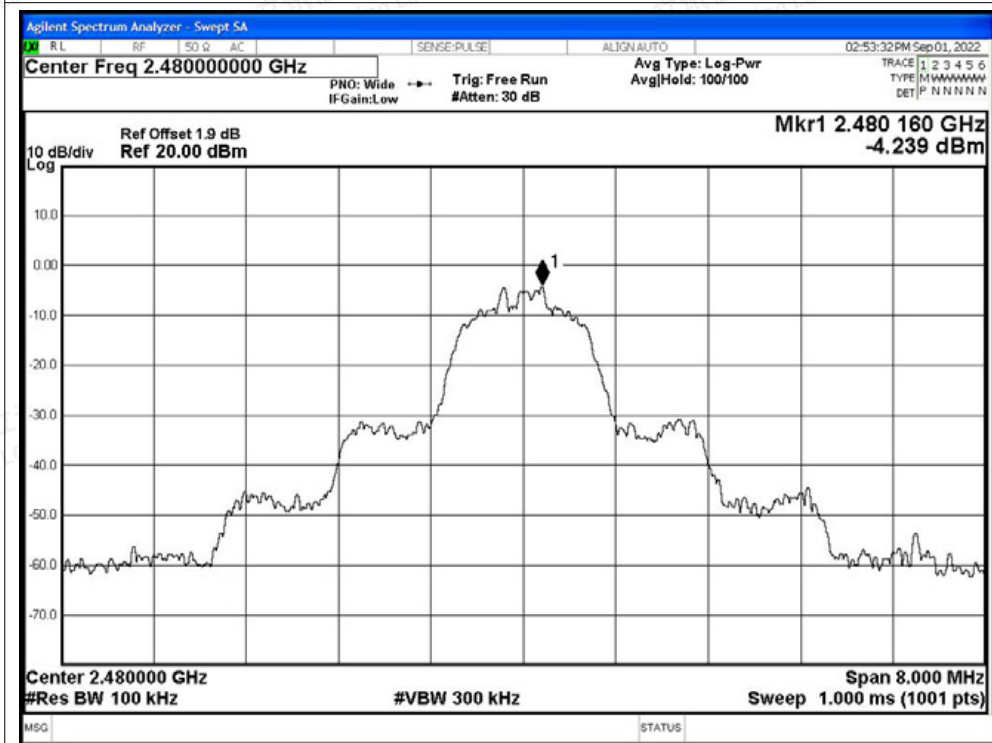


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

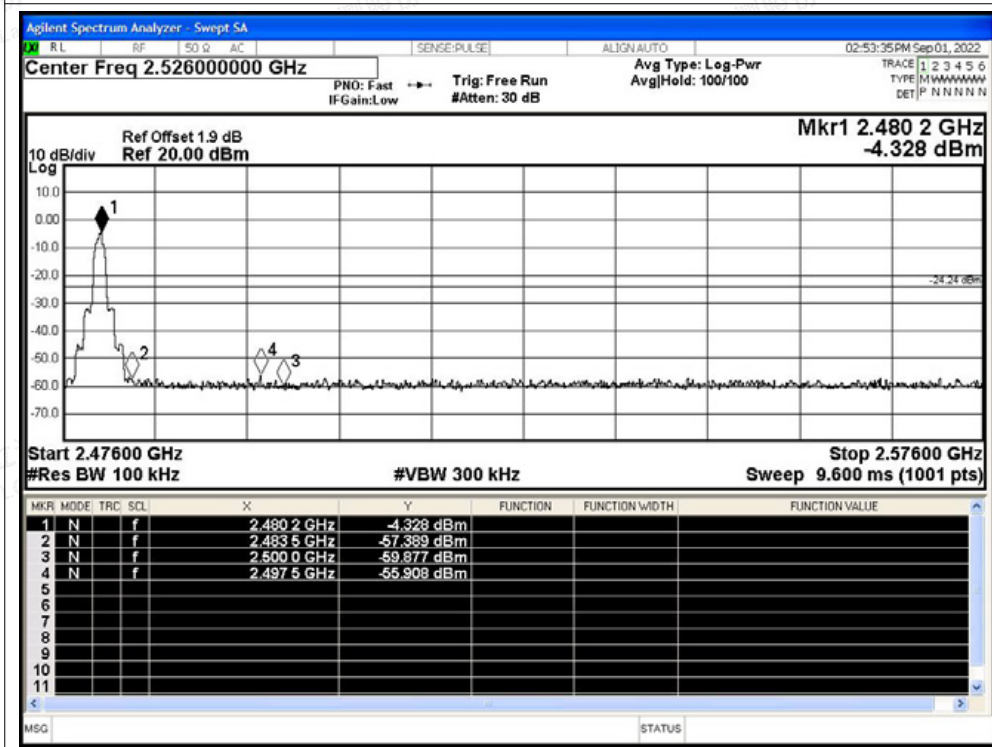



Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

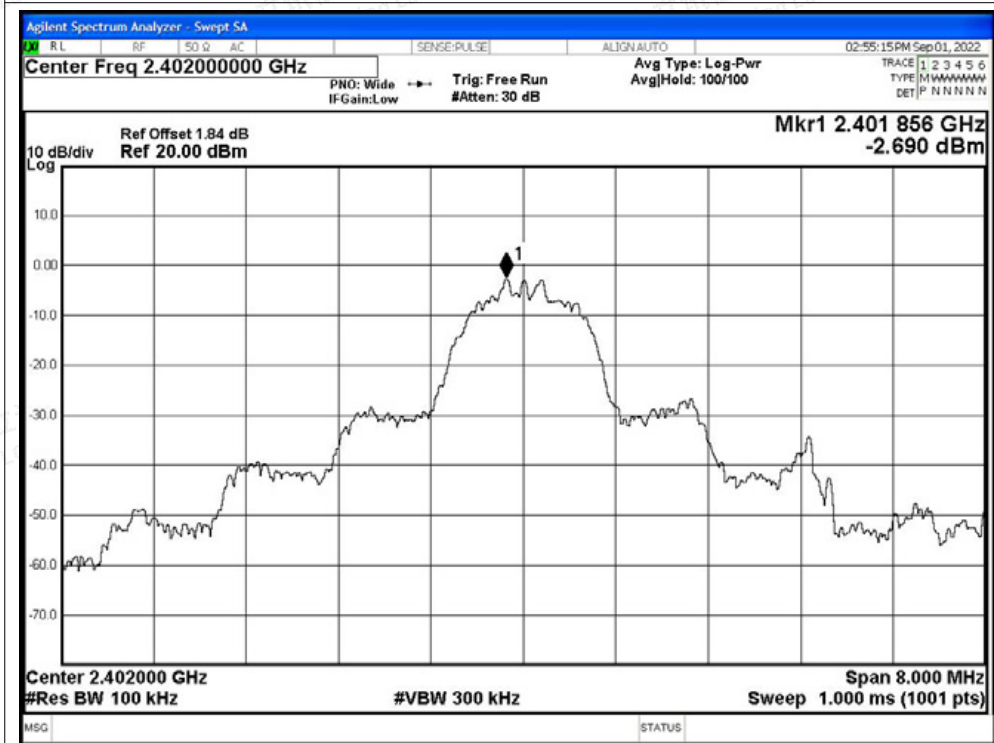

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

