



Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Urbanista Phoenix

Test Model: Urbanista Phoenix Midnight Black

Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Li Huan





B.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.689	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.695	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.704	≥ 0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.233	≥ 0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.251	≥ 0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.237	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

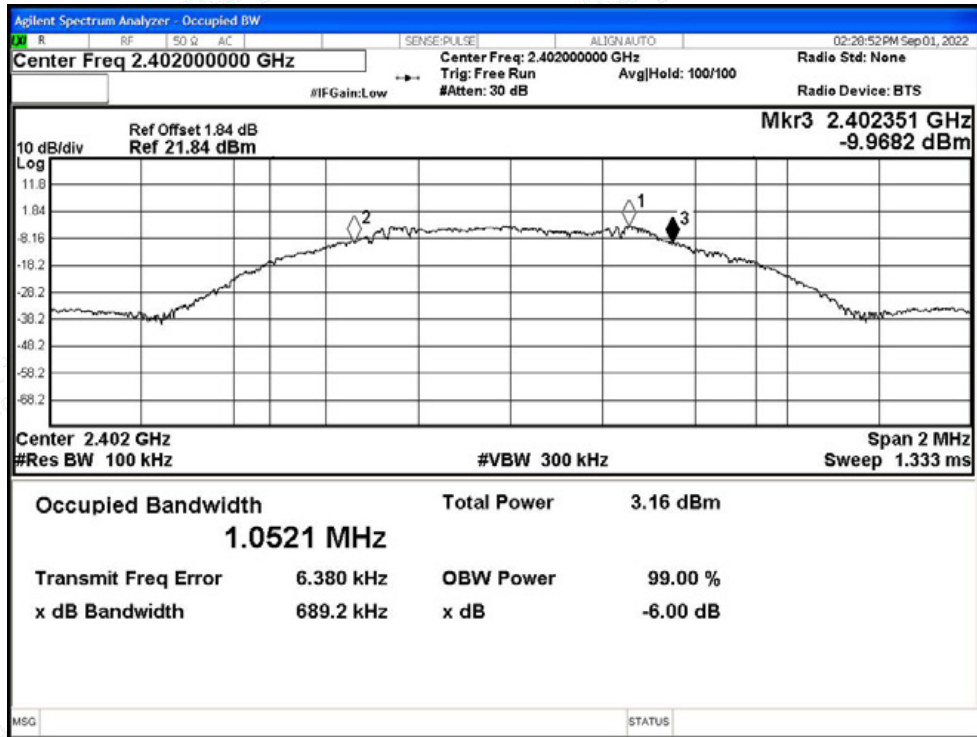


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

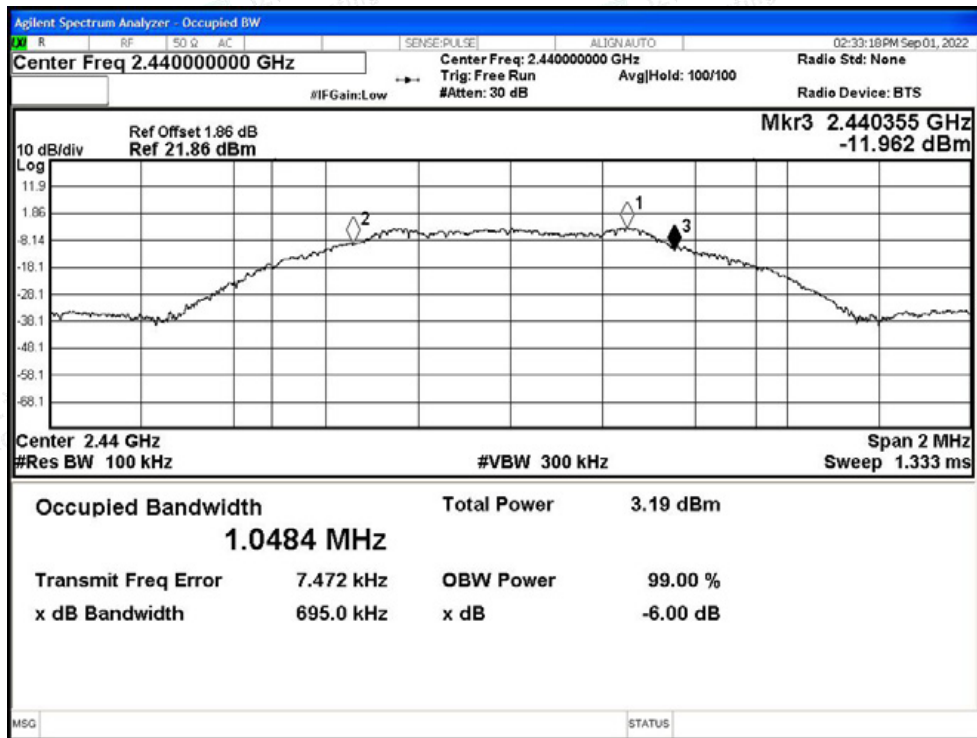




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

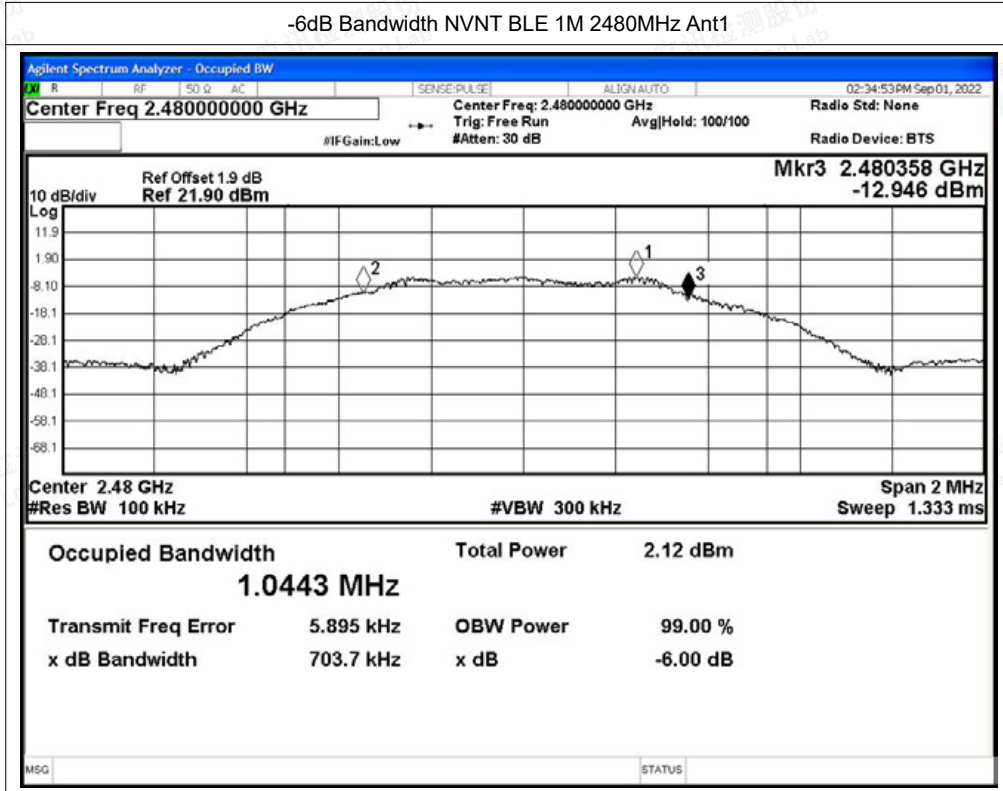




Test Graphs

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

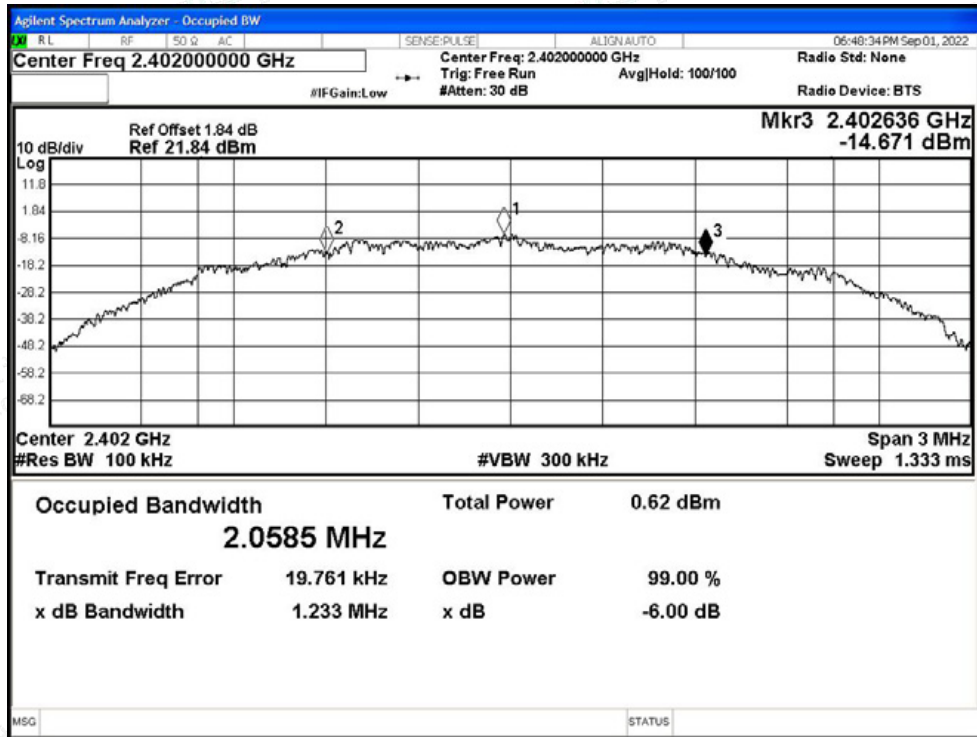


-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

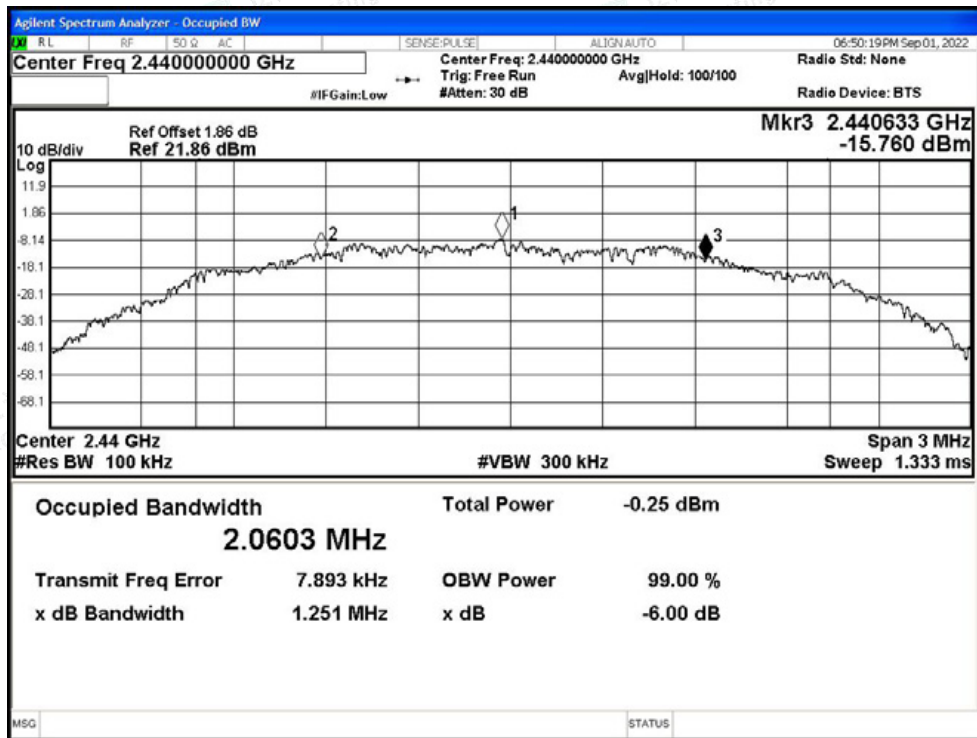



-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

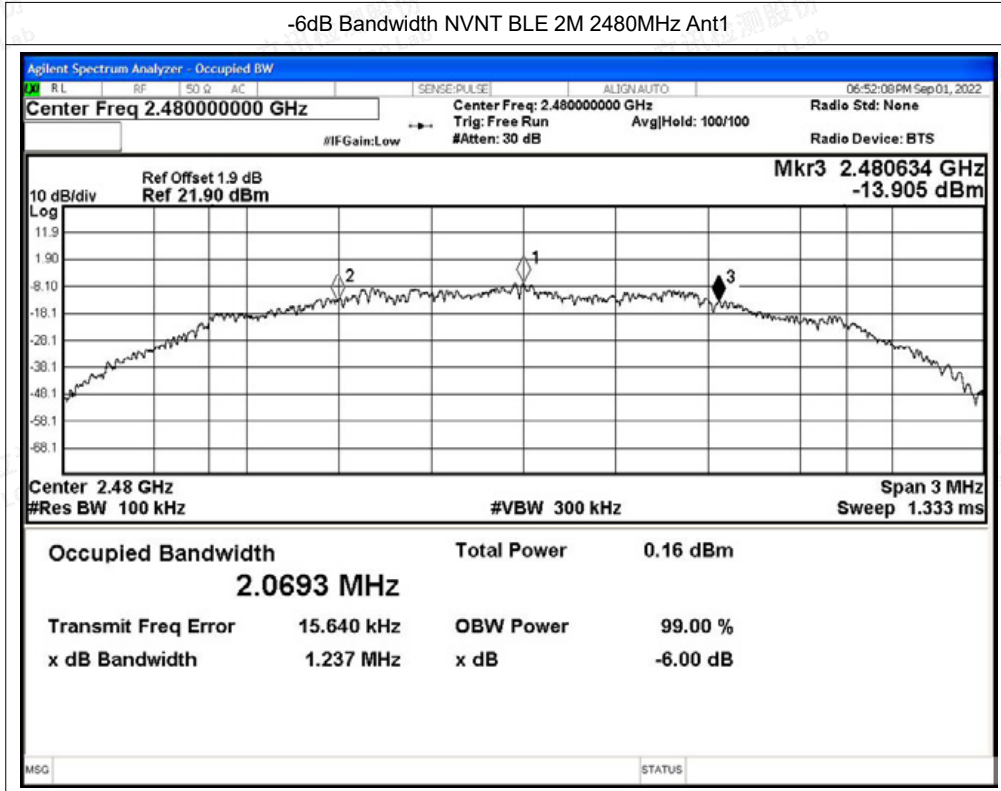



B.2 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.045
NVNT	BLE 1M	2440	Ant1	1.044
NVNT	BLE 1M	2480	Ant1	1.04
NVNT	BLE 2M	2402	Ant1	2.059
NVNT	BLE 2M	2440	Ant1	2.057
NVNT	BLE 2M	2480	Ant1	2.063






Test Graphs

OBW NVNT BLE 1M 2402MHz Ant1

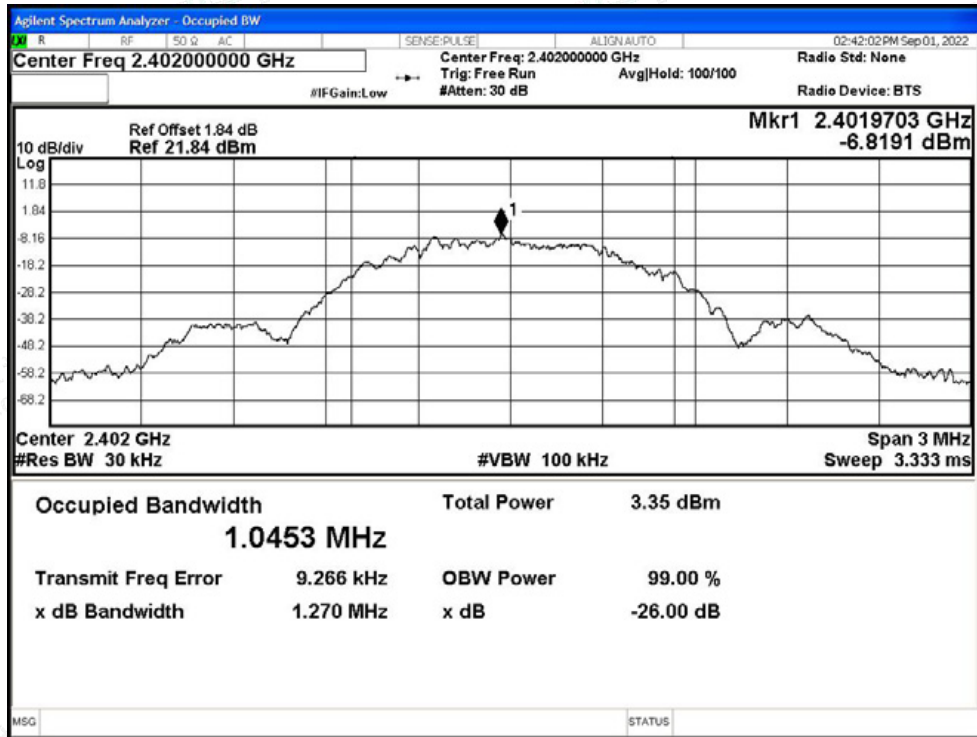

OBW NVNT BLE 1M 2440MHz Ant1

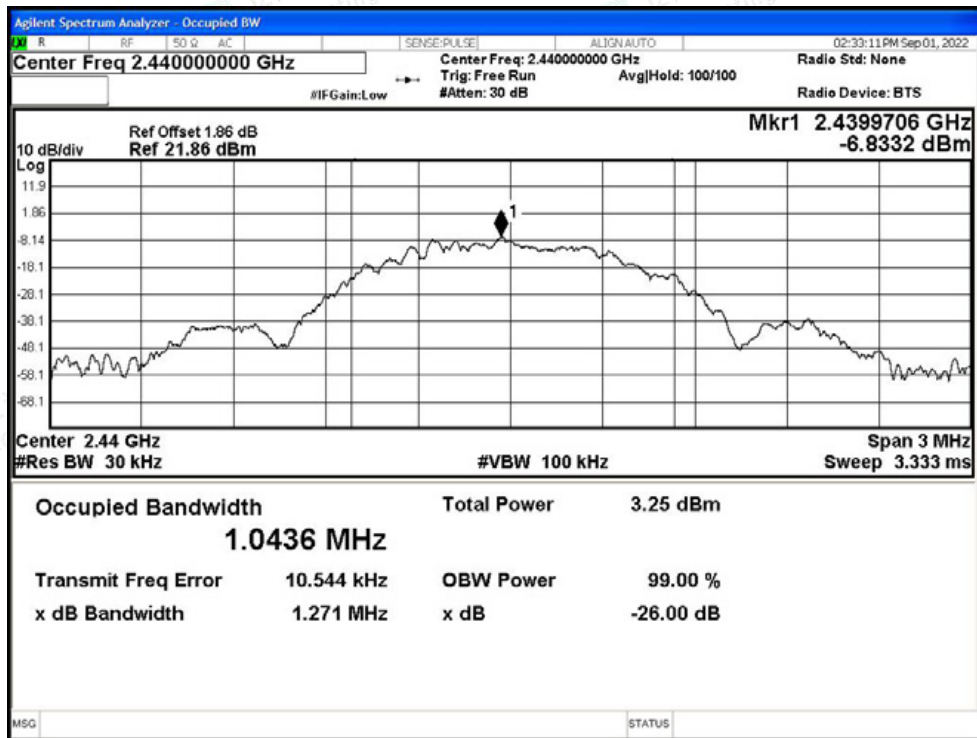




OBW NVNT BLE 1M 2480MHz Ant1




Test Graphs

OBW NVNT BLE 2M 2402MHz Ant1

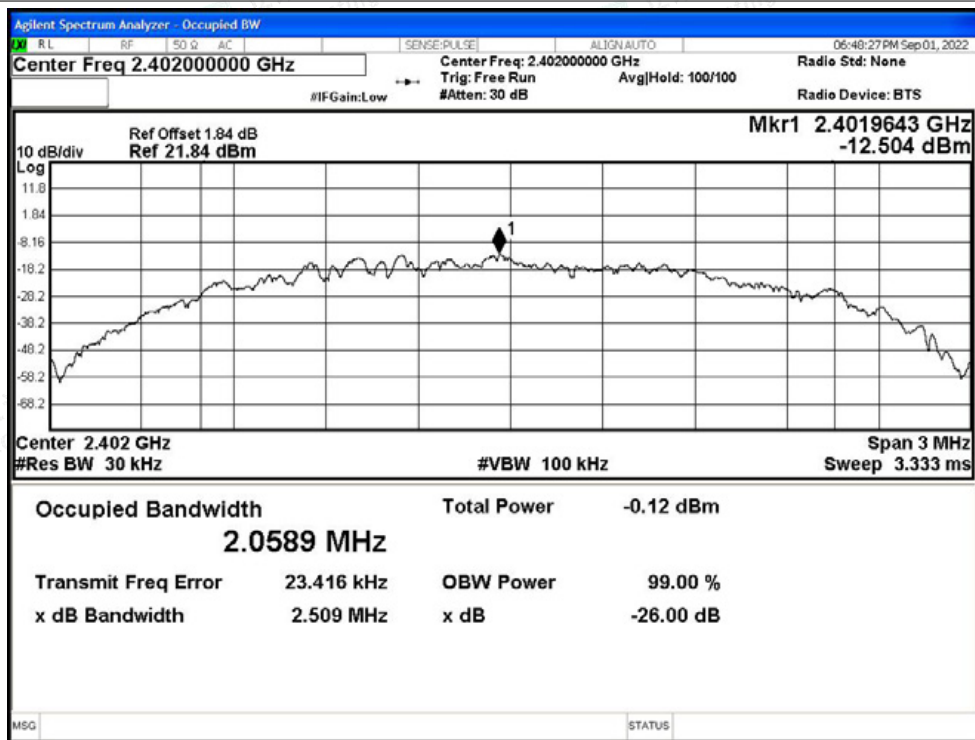


OBW NVNT BLE 2M 2440MHz Ant1



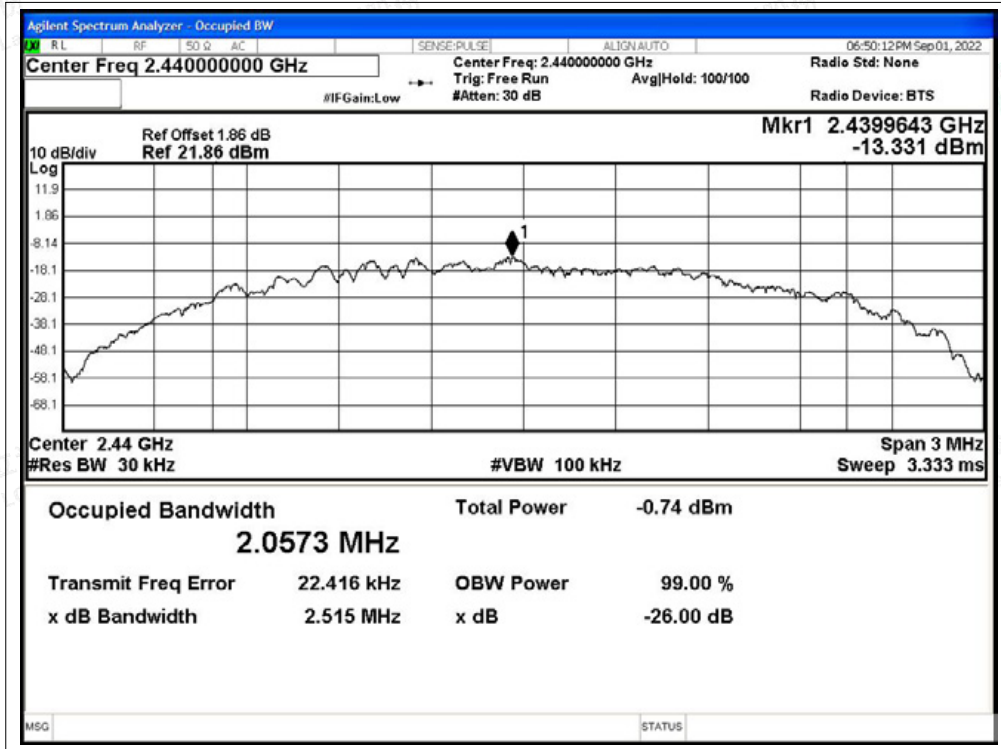



OBW NVNT BLE 2M 2480MHz Ant1

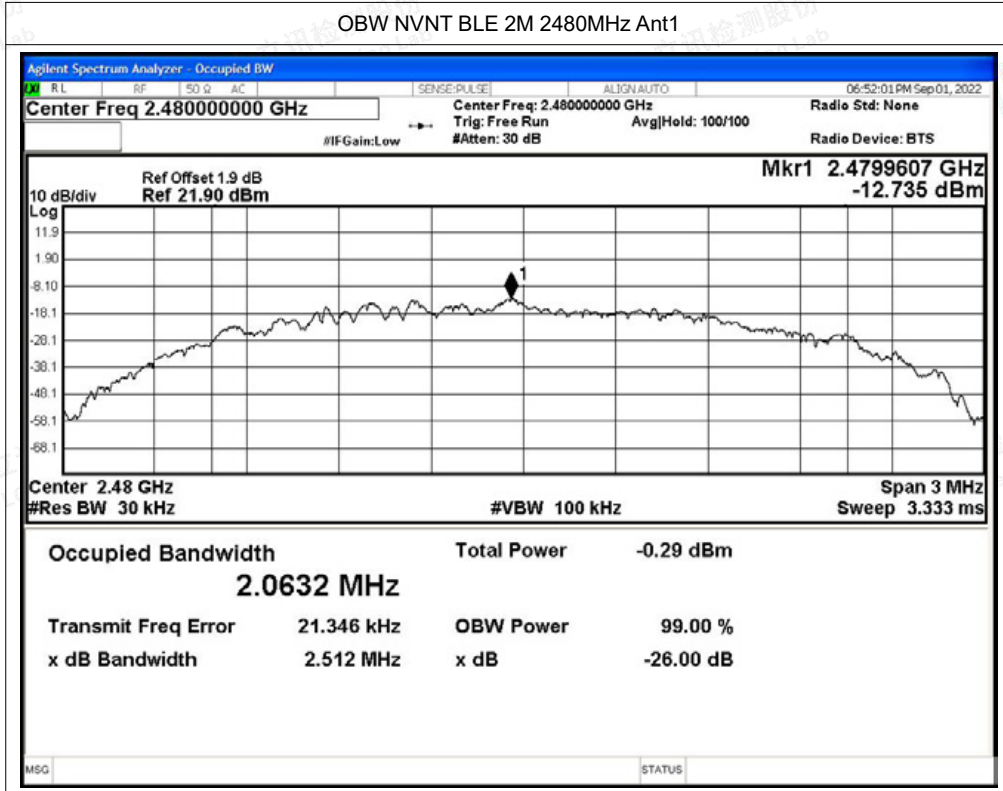



B.3 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-2.62	0	-2.62	30	Pass
NVNT	BLE 1M	2440	Ant1	-2.6	0	-2.6	30	Pass
NVNT	BLE 1M	2480	Ant1	-3.61	0	-3.61	30	Pass
NVNT	BLE 2M	2402	Ant1	-3.60	0	-3.60	30	Pass
NVNT	BLE 2M	2440	Ant1	-5.86	0	-5.86	30	Pass
NVNT	BLE 2M	2480	Ant1	-5.4	0	-5.4	30	Pass





Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

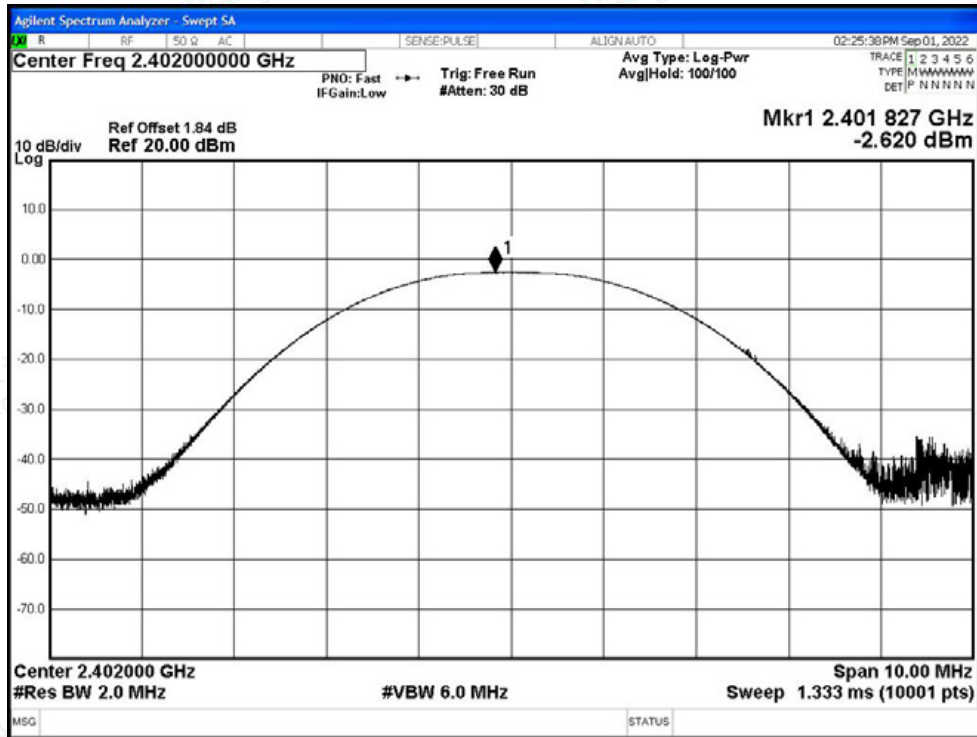


Power NVNT BLE 1M 2440MHz Ant1






Power NVNT BLE 1M 2480MHz Ant1

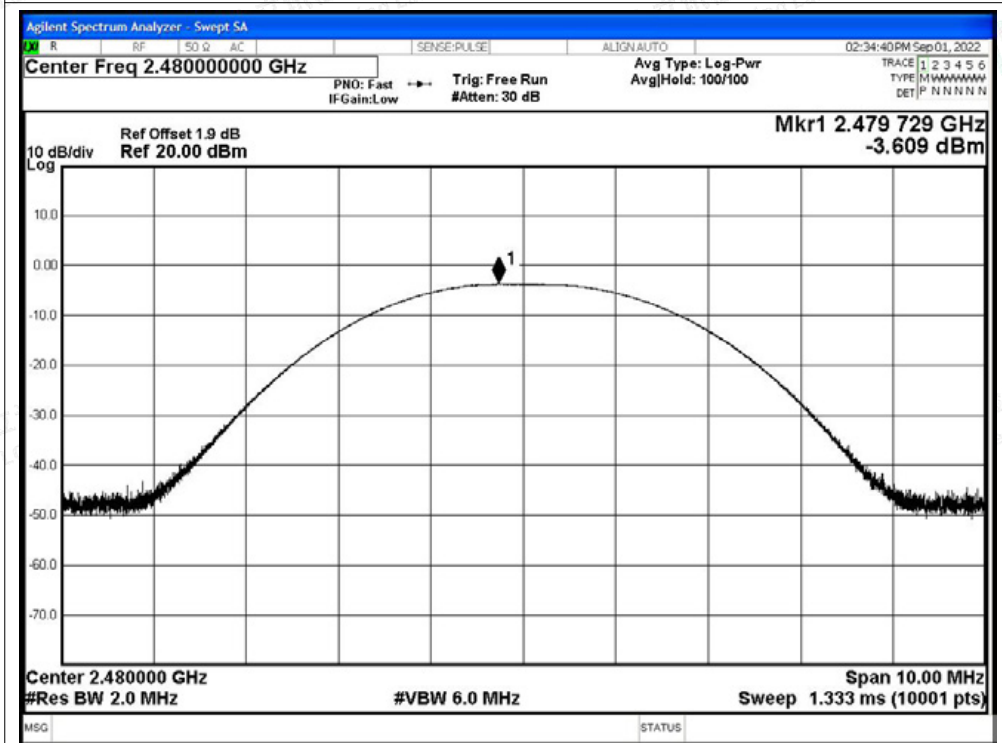


Test Graphs


Power NVNT BLE 2M 2402MHz Ant1

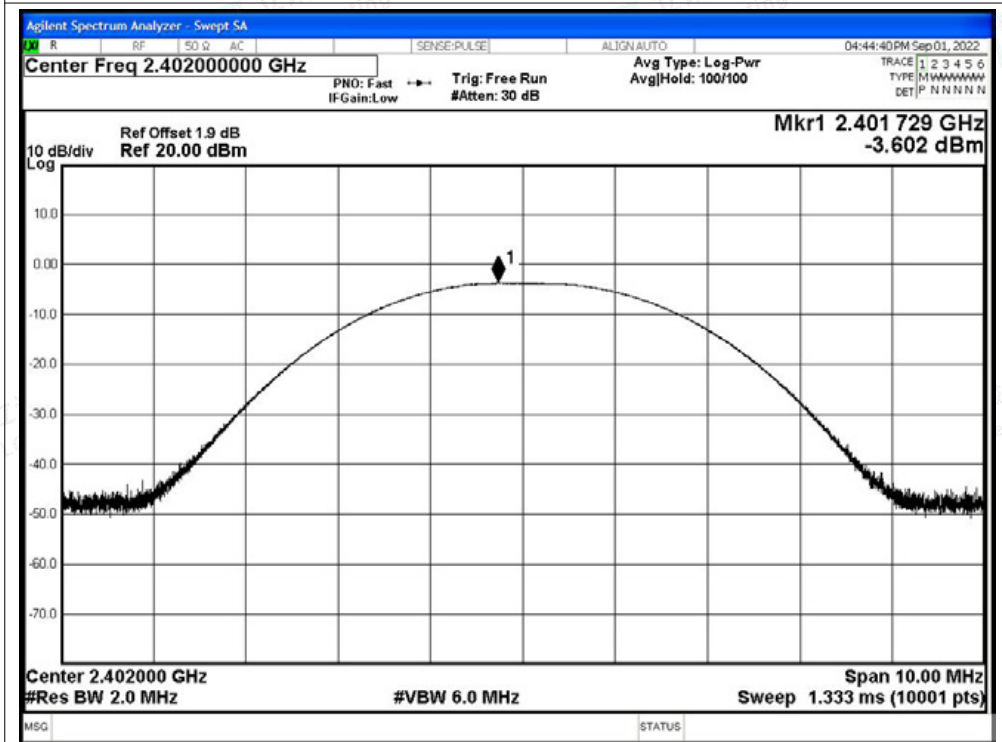

Power NVNT BLE 2M 2440MHz Ant1



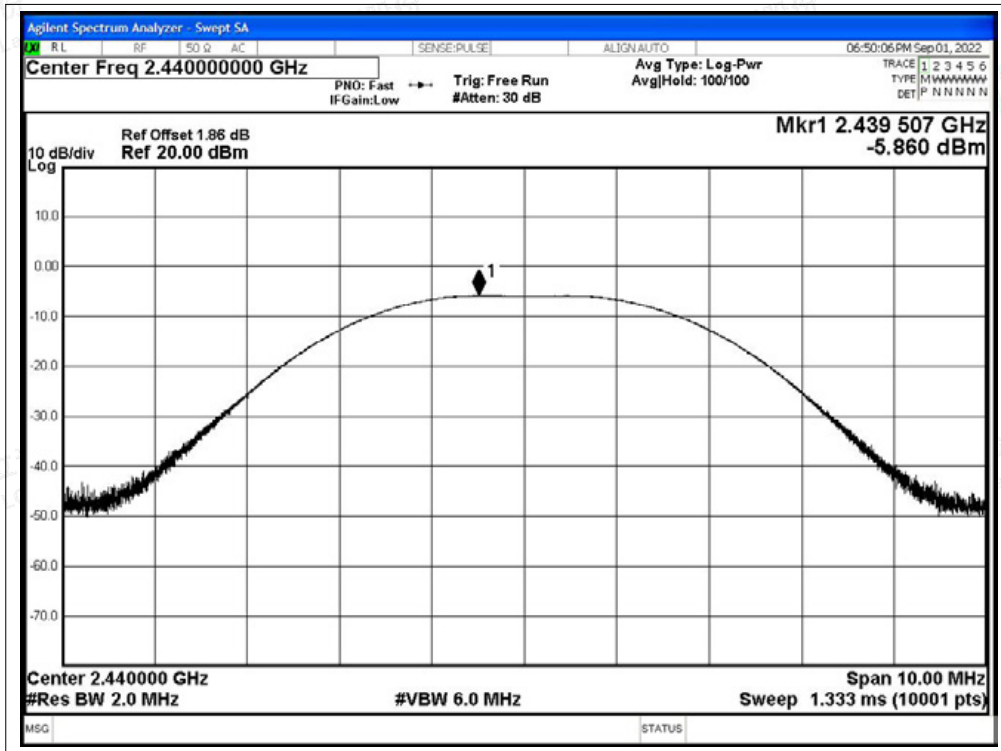

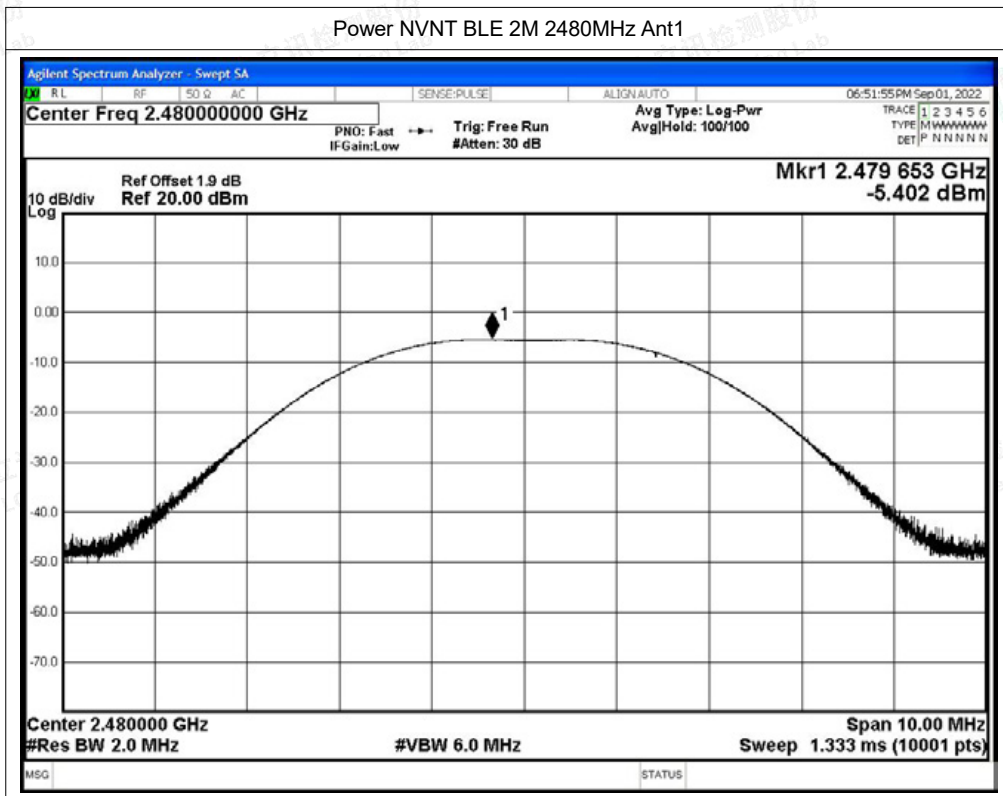



B.4 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-18.62	0	-18.62	8	Pass
NVNT	BLE 1M	2440	Ant1	-18.27	0	-18.27	8	Pass
NVNT	BLE 1M	2480	Ant1	-19.25	0	-19.25	8	Pass
NVNT	BLE 2M	2402	Ant1	-16.31	0	-16.31	8	Pass
NVNT	BLE 2M	2440	Ant1	-16.66	0	-16.66	8	Pass
NVNT	BLE 2M	2480	Ant1	-16.97	0	-16.97	8	Pass






Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

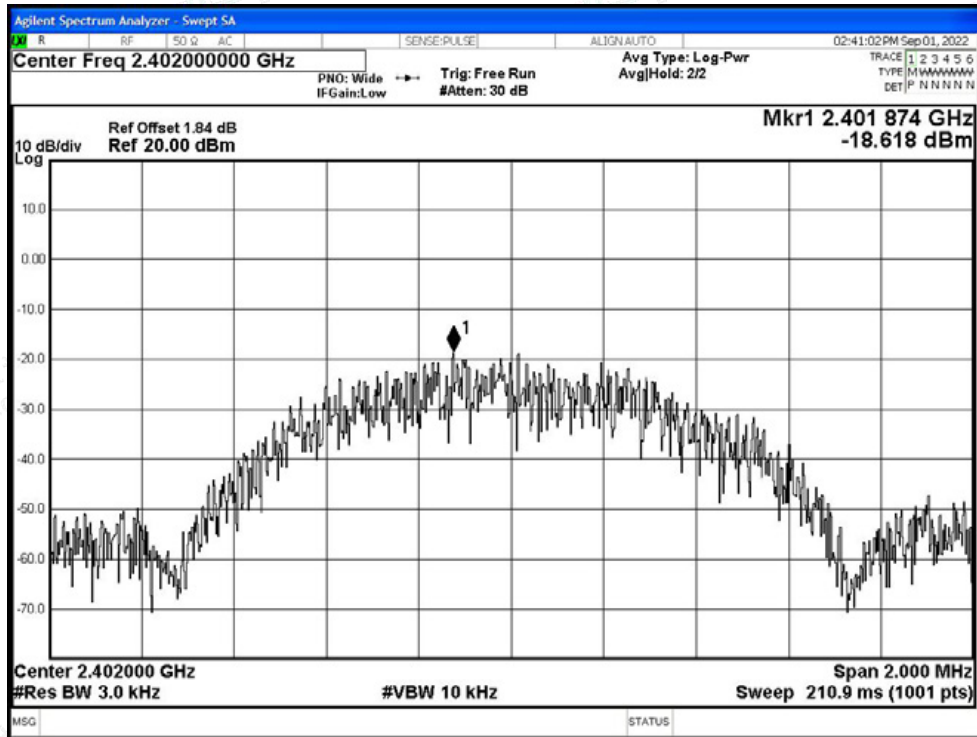


PSD NVNT BLE 1M 2440MHz Ant1

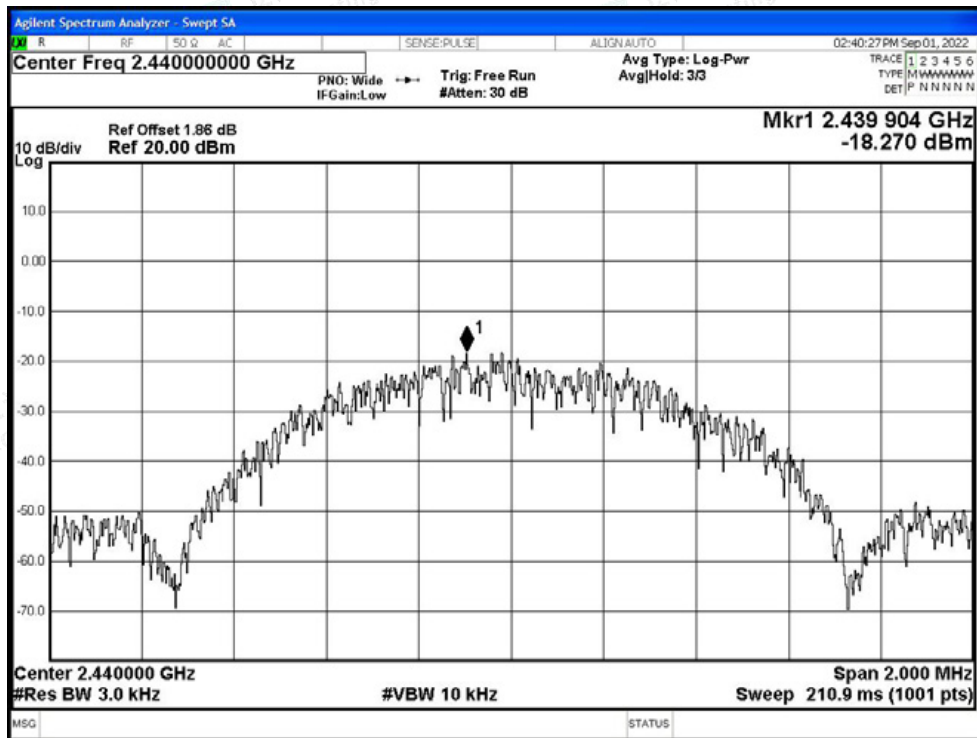




PSD NVNT BLE 1M 2480MHz Ant1

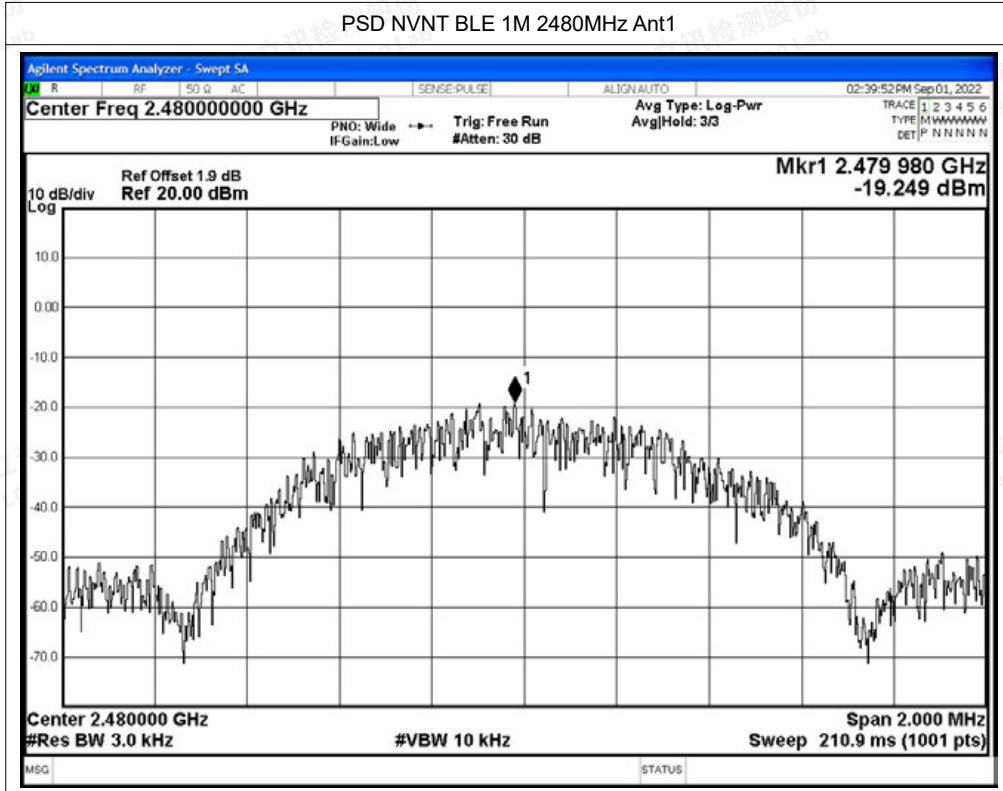




Test Graphs

PSD NVNT BLE 2M 2402MHz Ant1

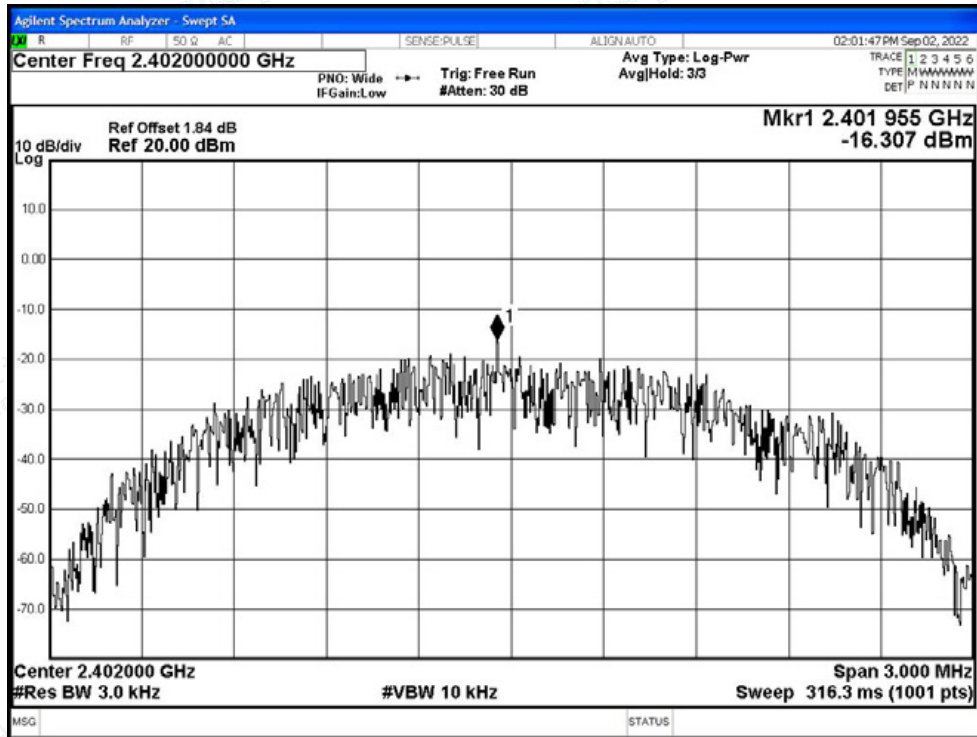


PSD NVNT BLE 2M 2440MHz Ant1

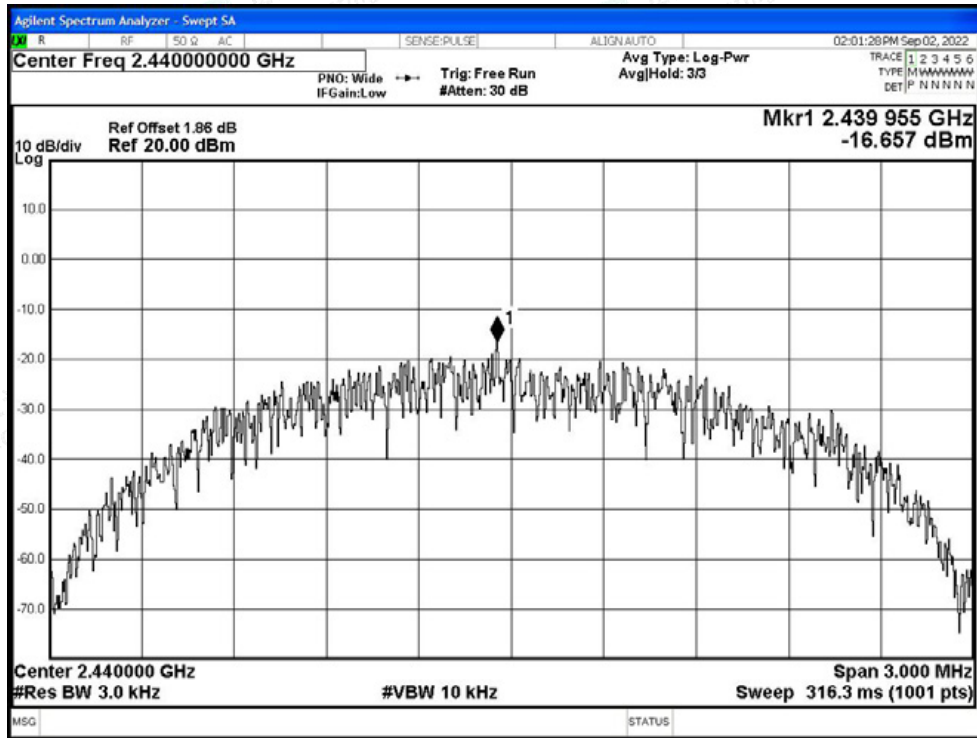



PSD NVNT BLE 2M 2480MHz Ant1

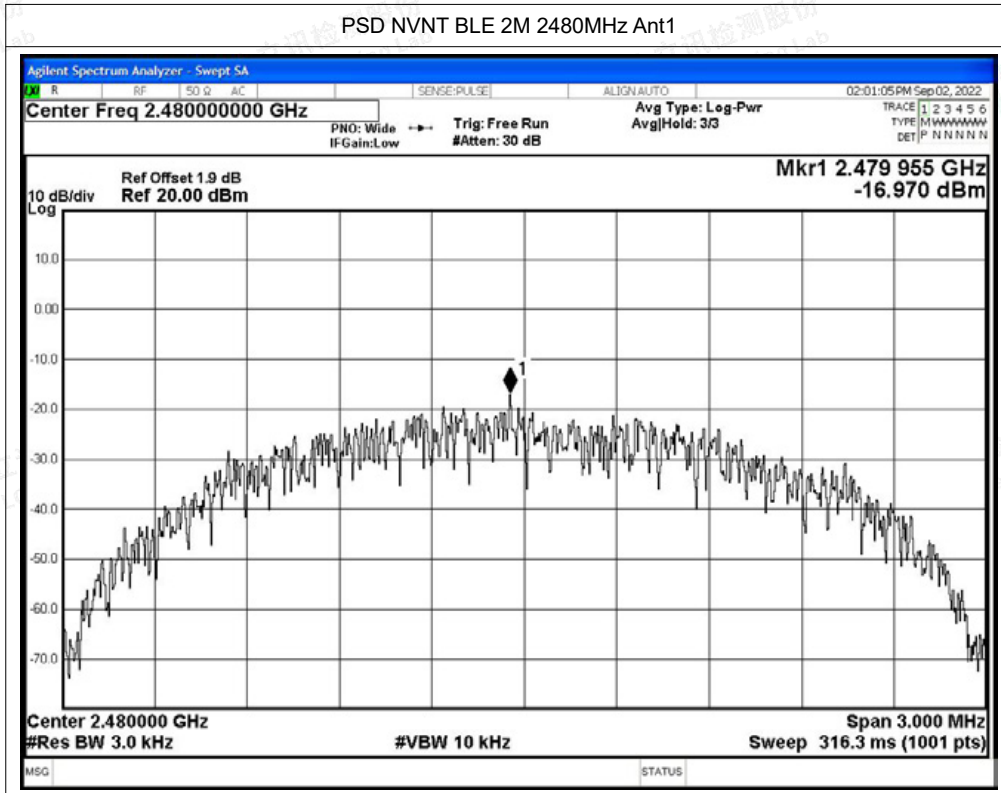



B.5 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-53.66	-20	Pass
NVNT	BLE 1M	2480	Ant1	-51.57	-20	Pass
NVNT	BLE 2M	2402	Ant1	-33.96	-20	Pass
NVNT	BLE 2M	2480	Ant1	-49.63	-20	Pass






Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

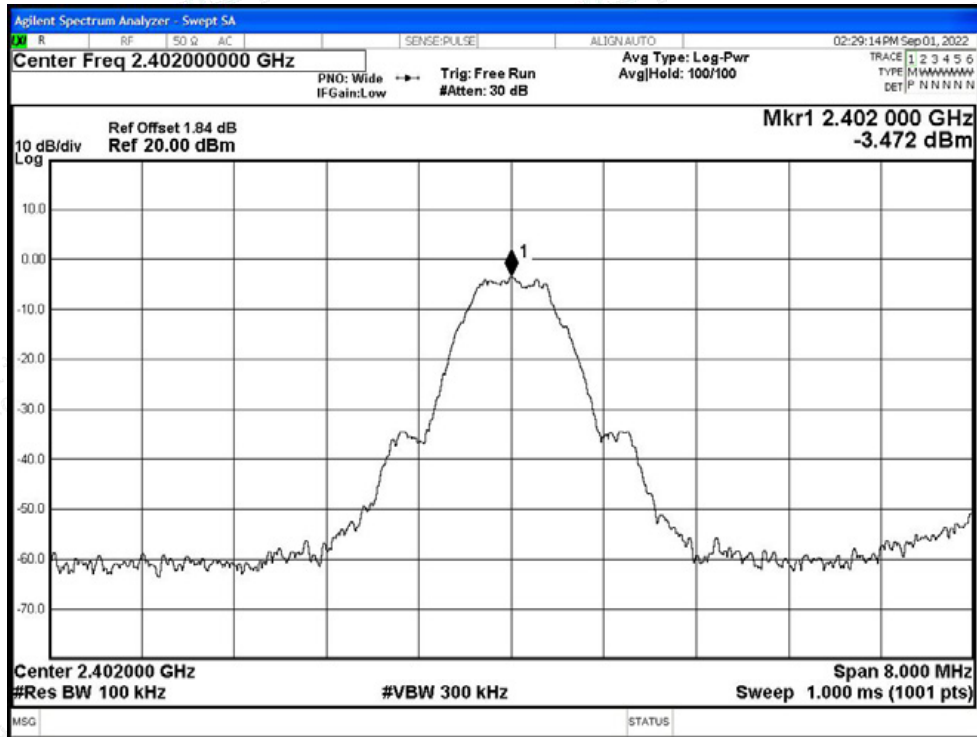


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

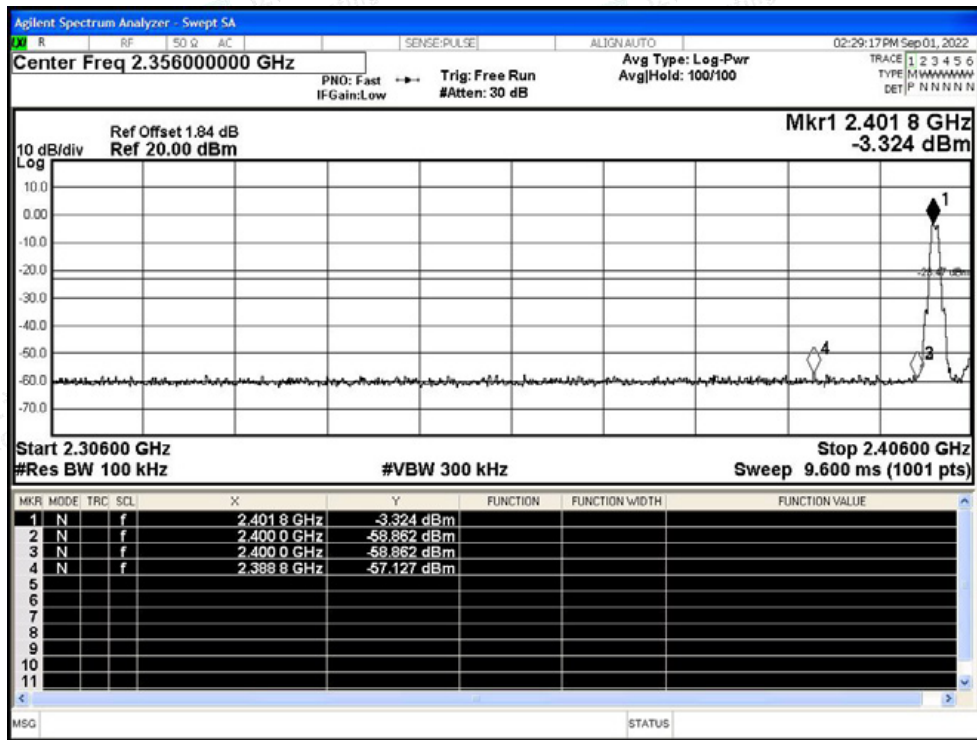




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

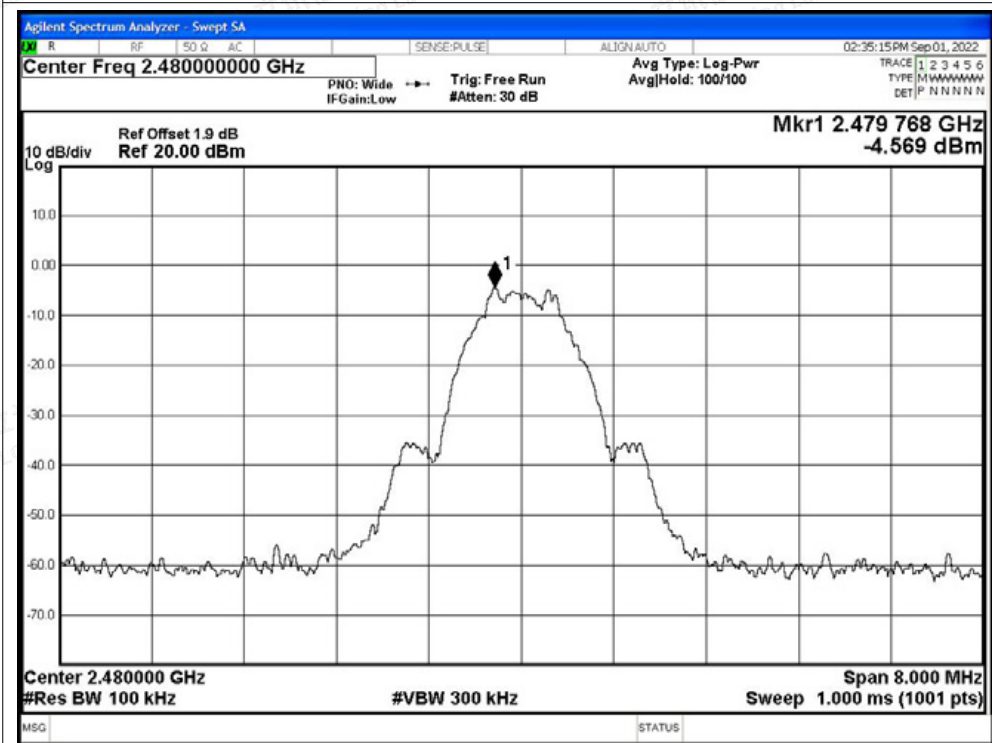

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

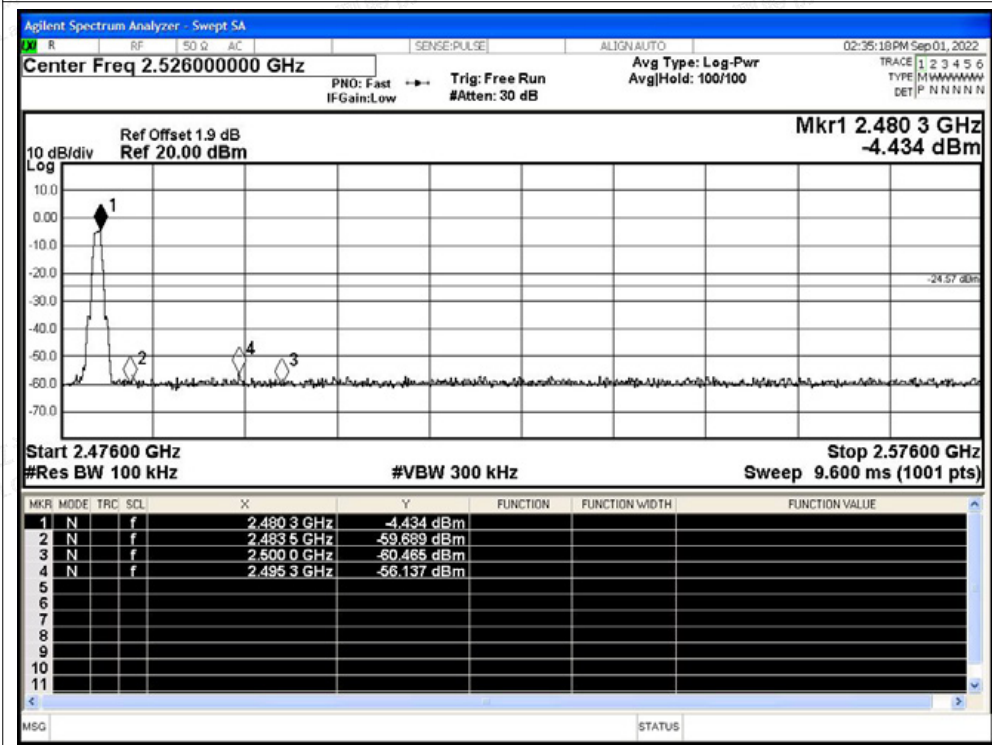




Test Graphs

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

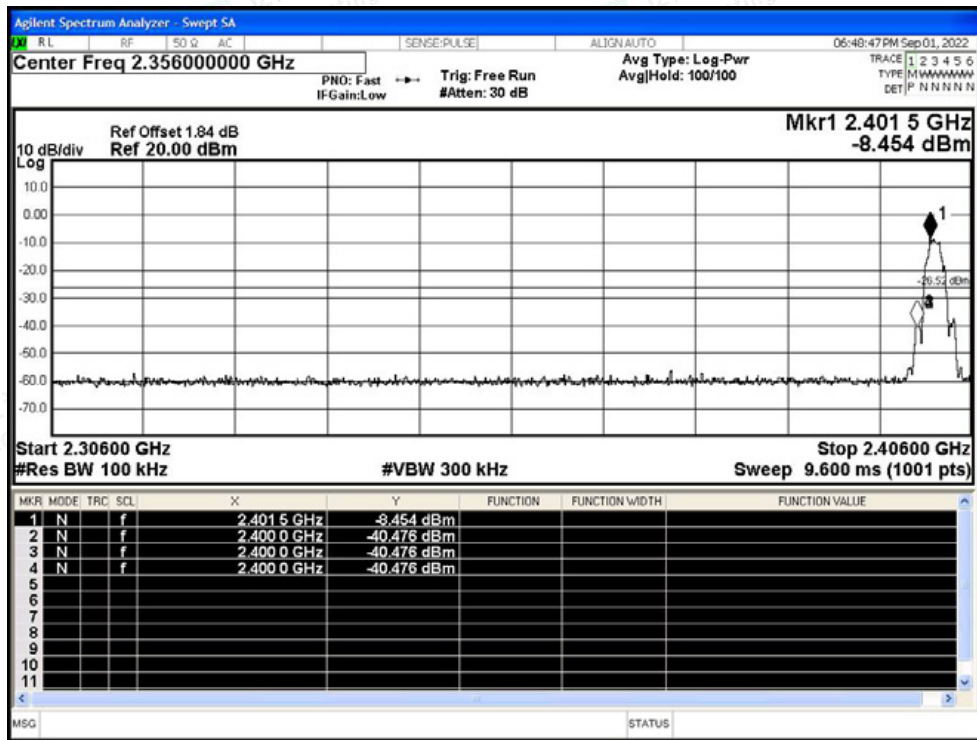




Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

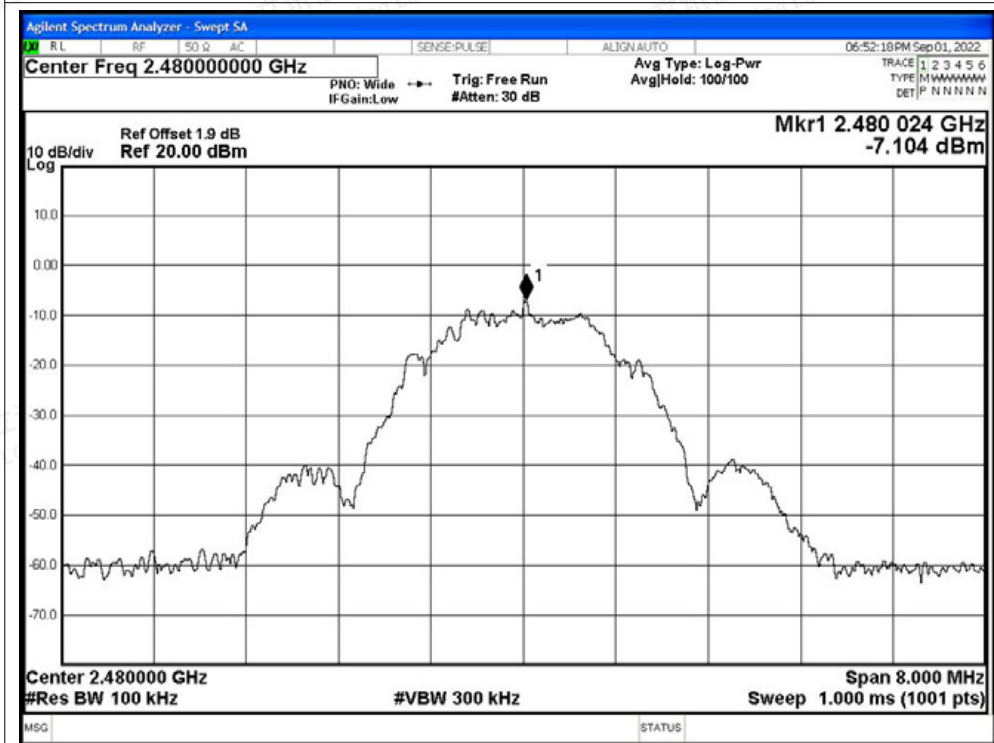

Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

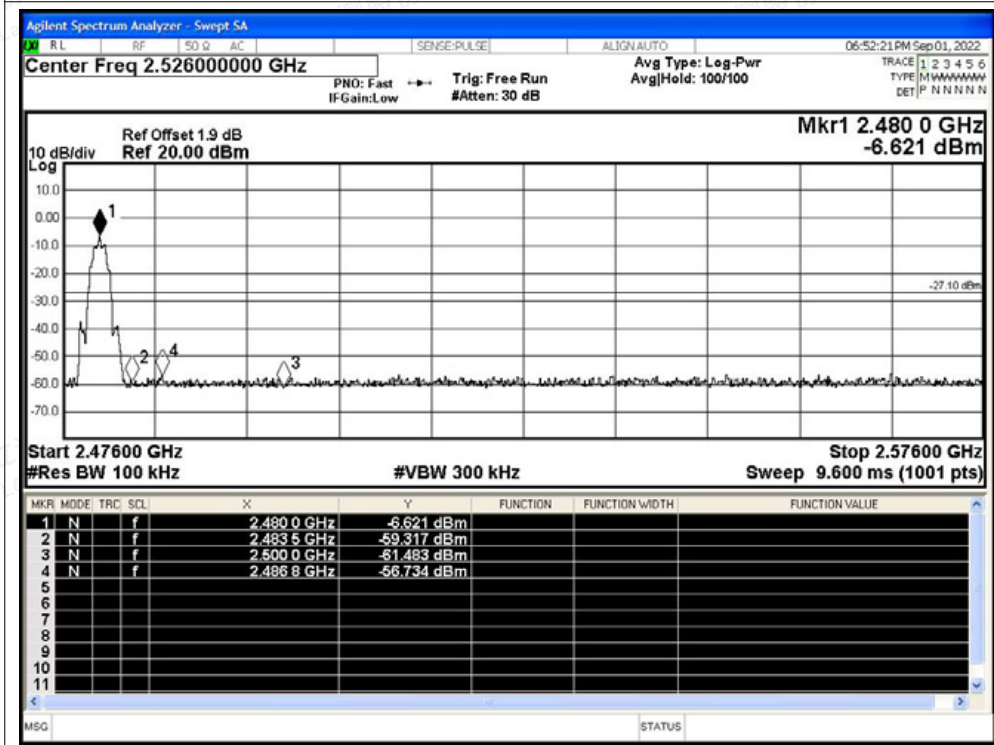



B.6 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.64	-20	Pass
NVNT	BLE 1M	2440	Ant1	-51.84	-20	Pass
NVNT	BLE 1M	2480	Ant1	-51.18	-20	Pass
NVNT	BLE 2M	2402	Ant1	-28.13	-20	Pass
NVNT	BLE 2M	2440	Ant1	-48.67	-20	Pass
NVNT	BLE 2M	2480	Ant1	-49.16	-20	Pass






Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

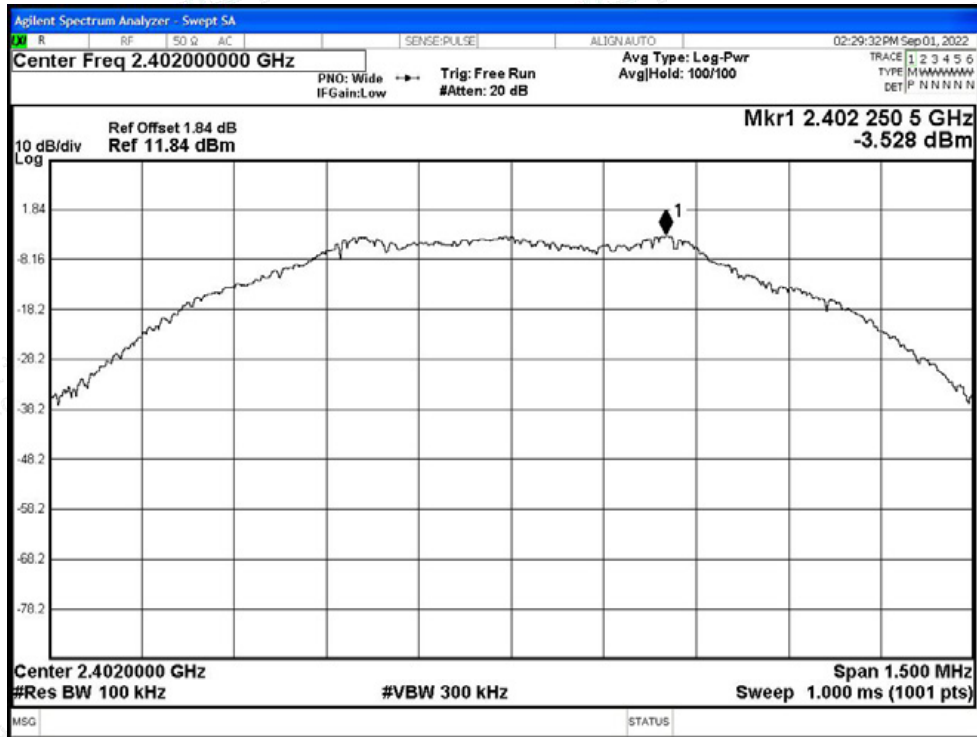


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

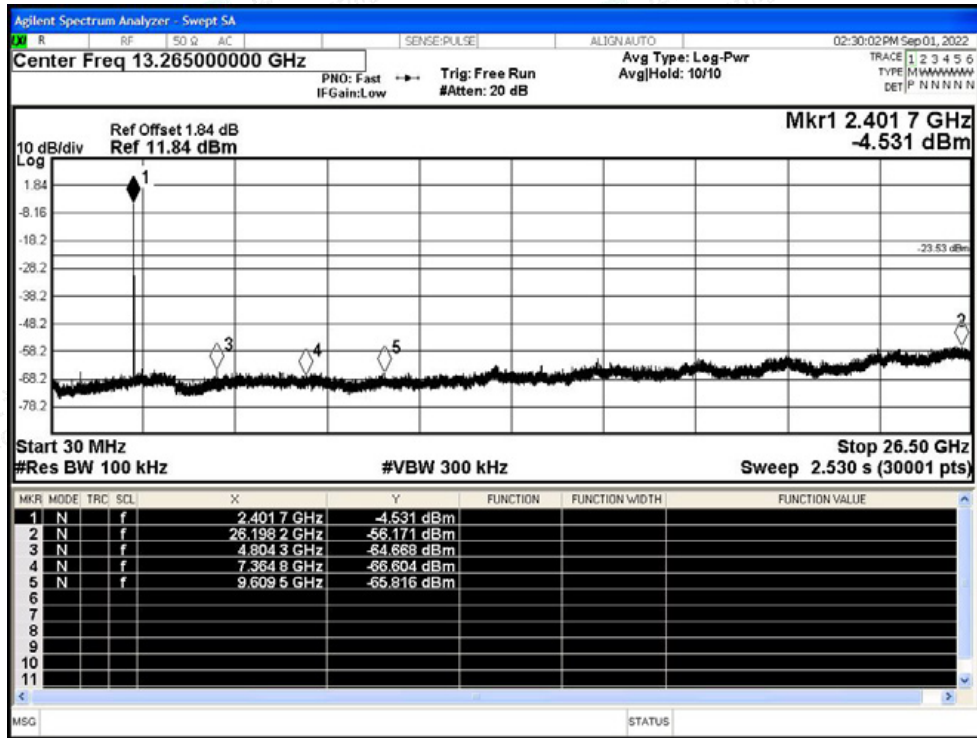




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

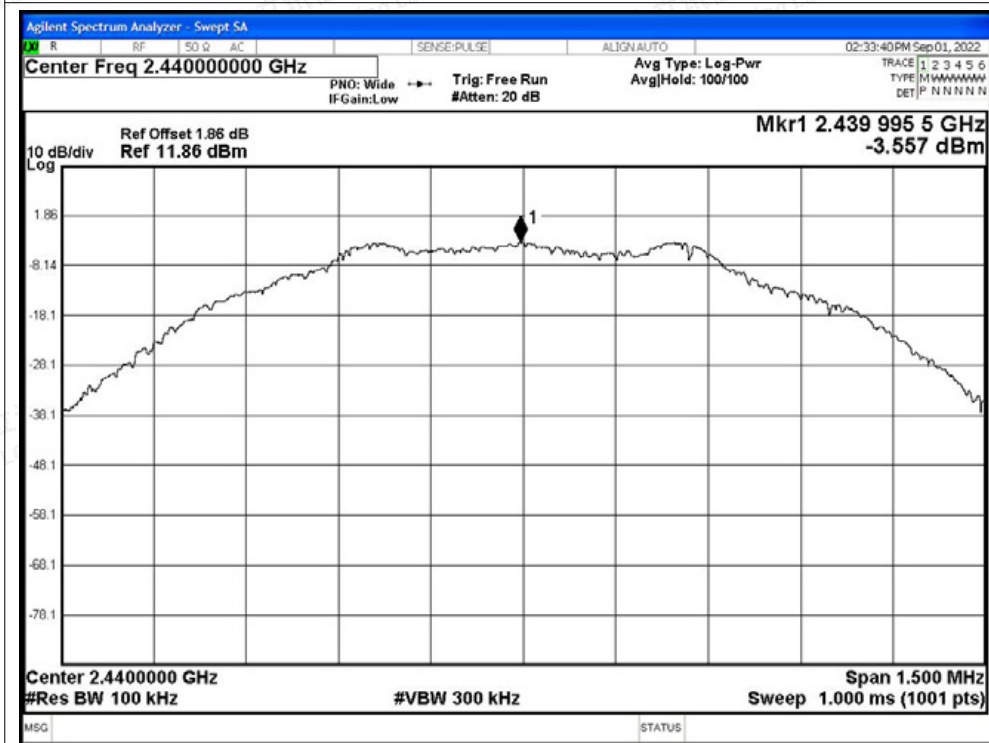


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

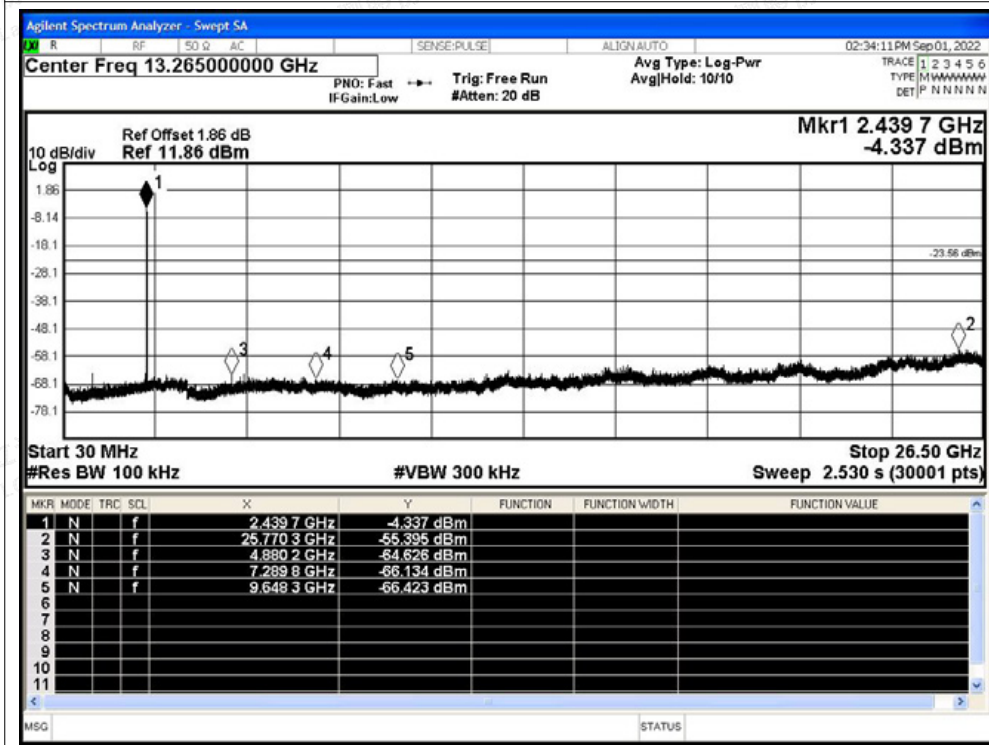




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

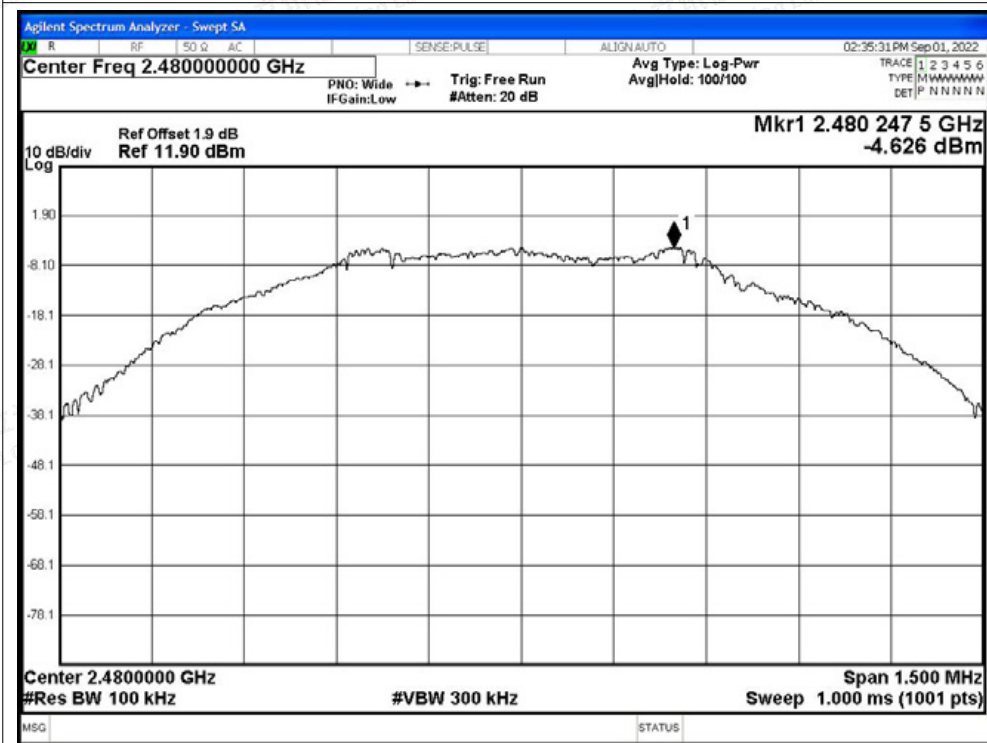

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

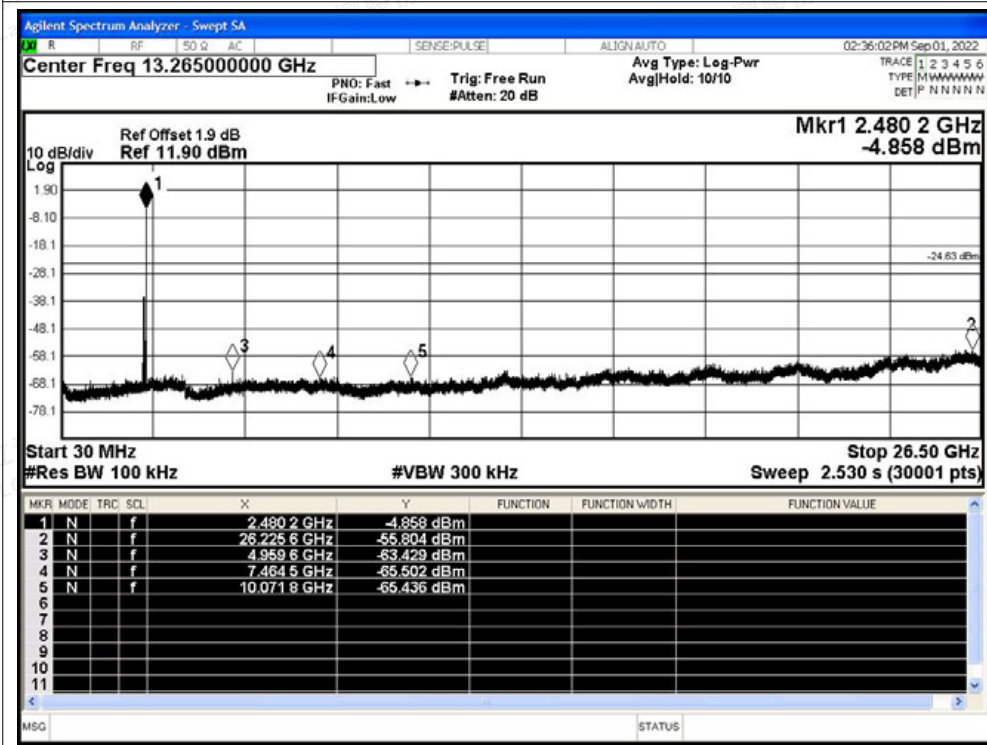




Test Graphs

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

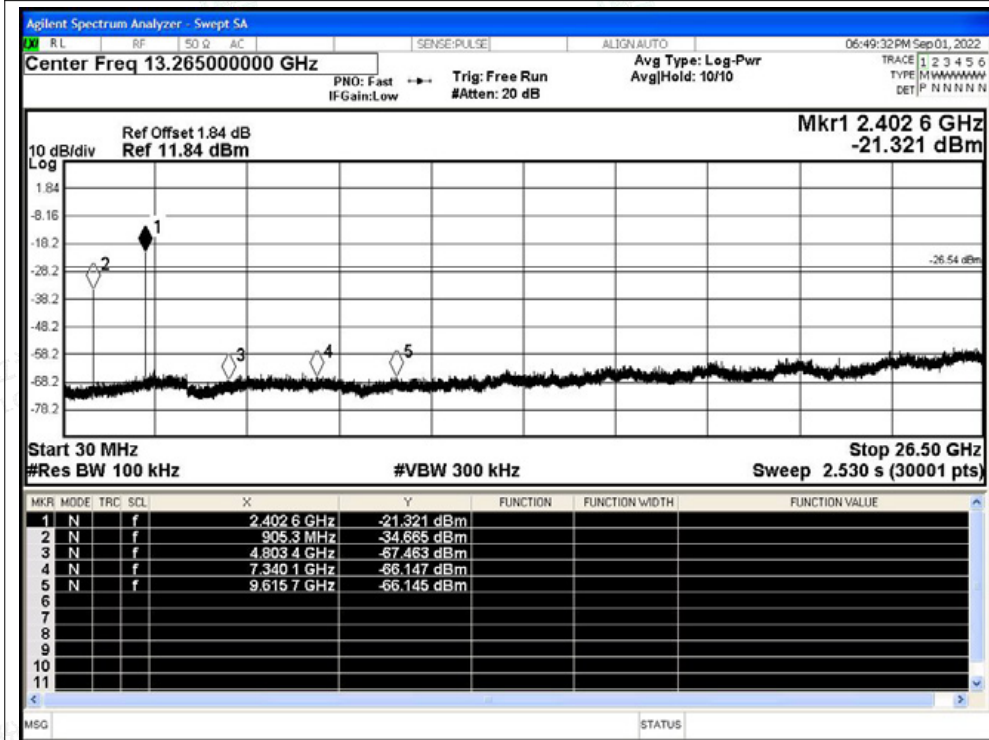




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

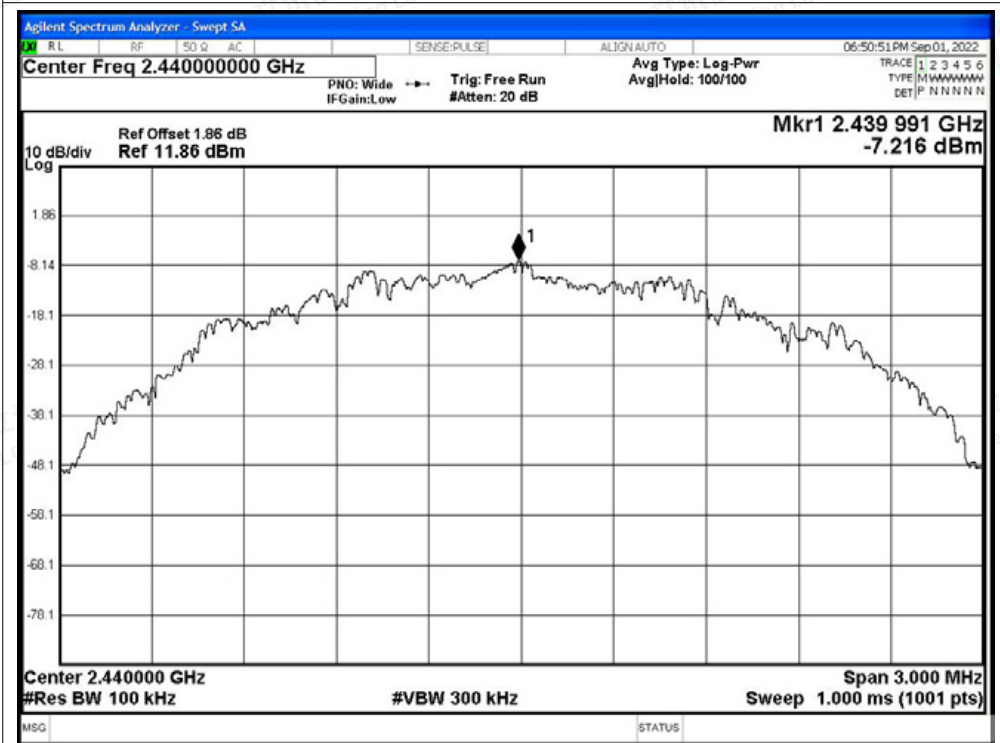


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

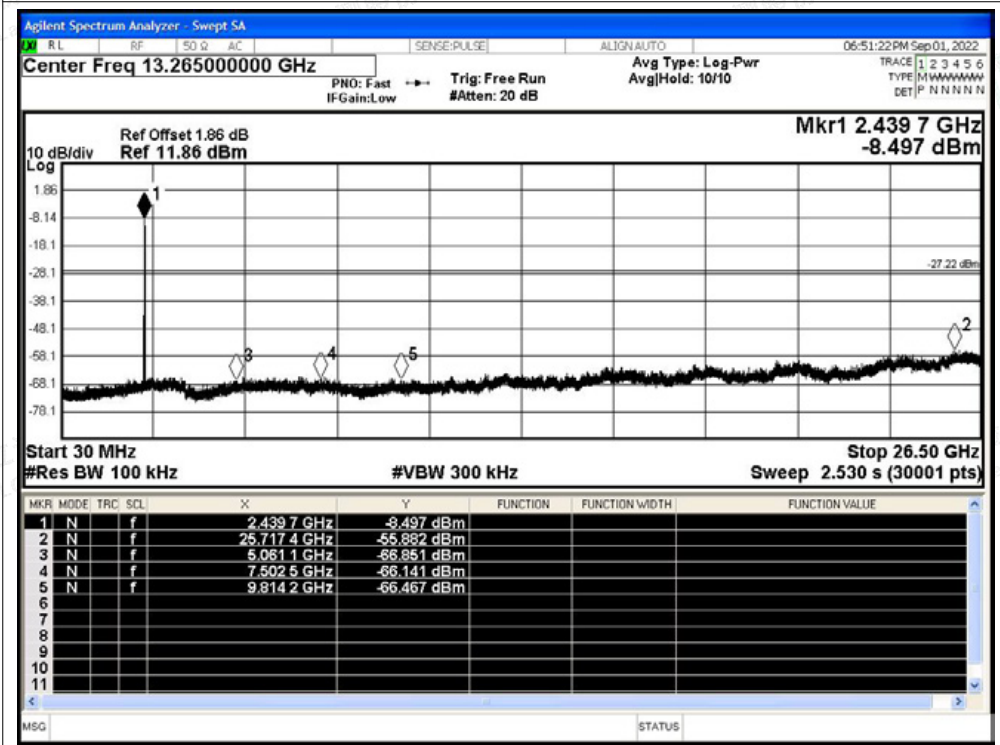




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

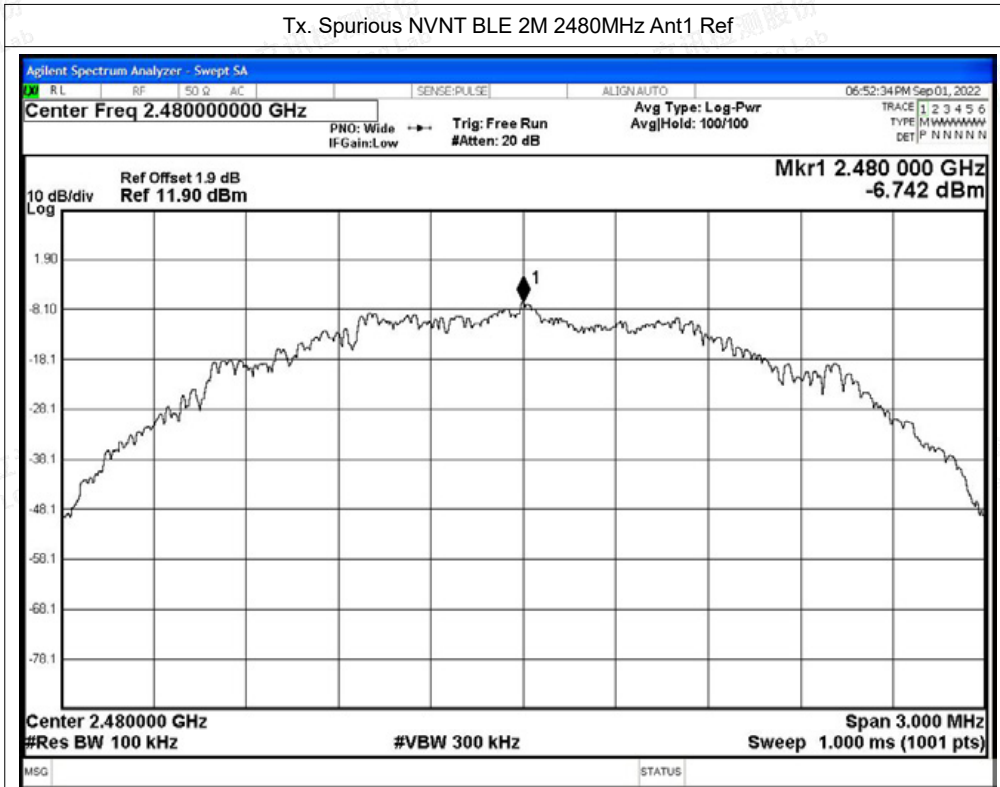

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

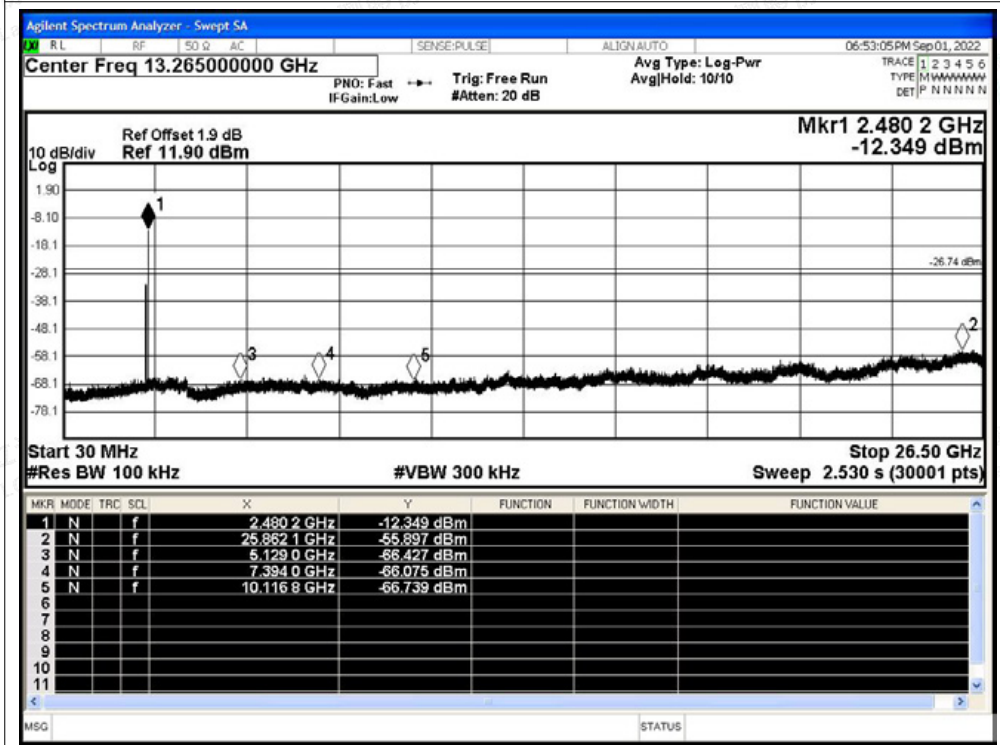



B.7 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	60.83	2.16	2.63
NVNT	BLE 1M	2440	Ant1	60.8	2.16	2.63
NVNT	BLE 1M	2480	Ant1	60.8	2.16	2.63
NVNT	BLE 2M	2402	Ant1	31.33	5.04	5.1
NVNT	BLE 2M	2440	Ant1	31.28	5.05	5.12
NVNT	BLE 2M	2480	Ant1	31.36	5.04	5.1






Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

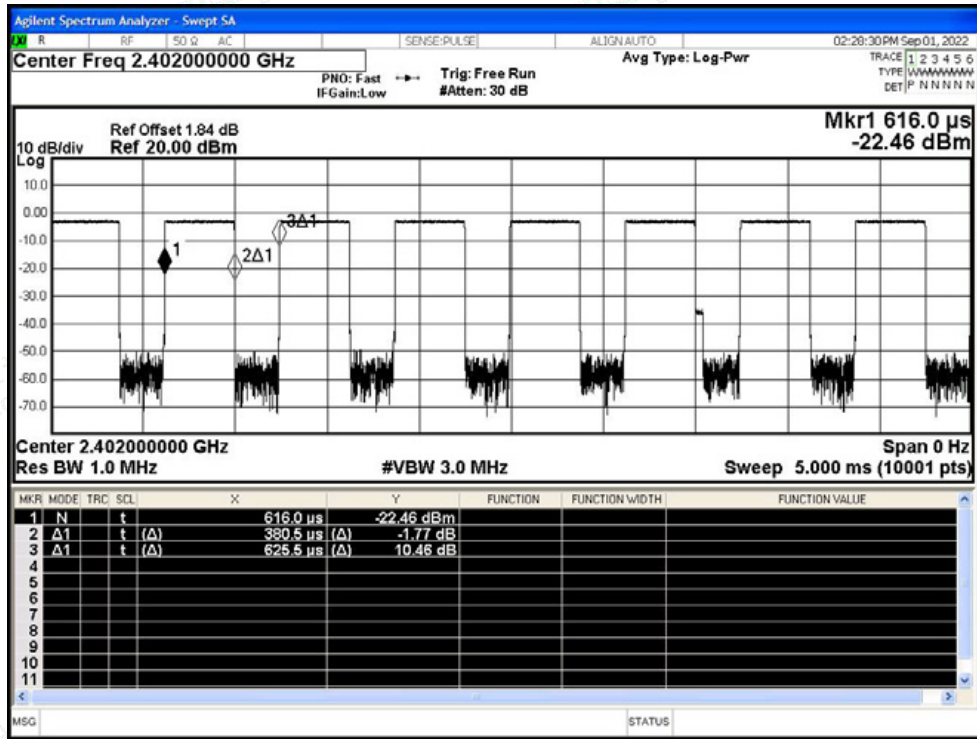


Duty Cycle NVNT BLE 1M 2440MHz Ant1

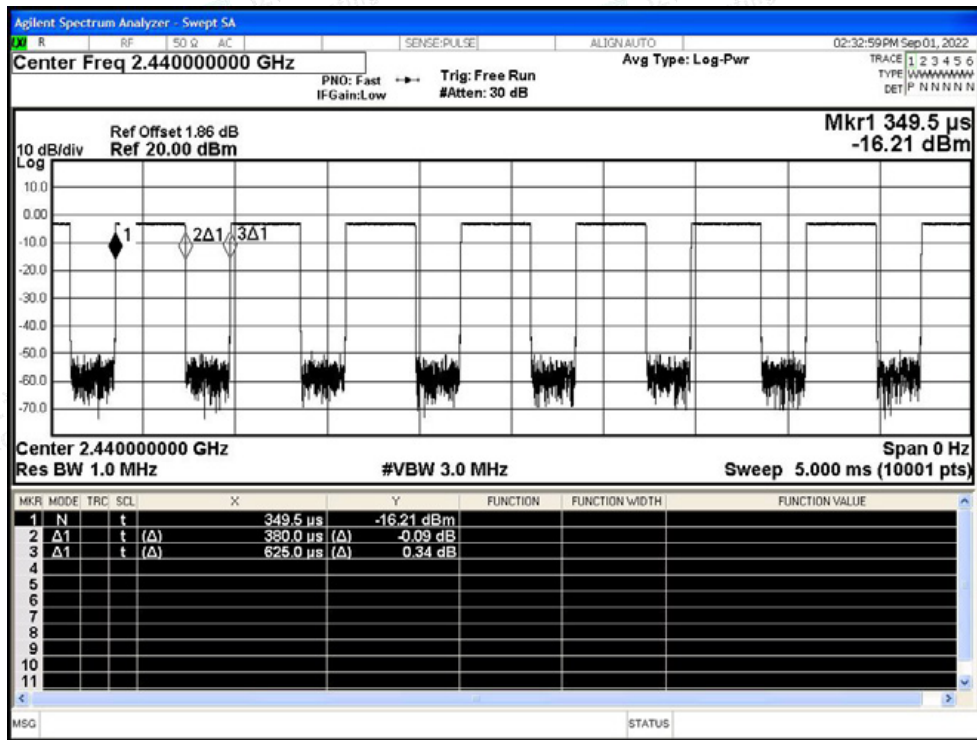




Duty Cycle NVNT BLE 1M 2480MHz Ant1

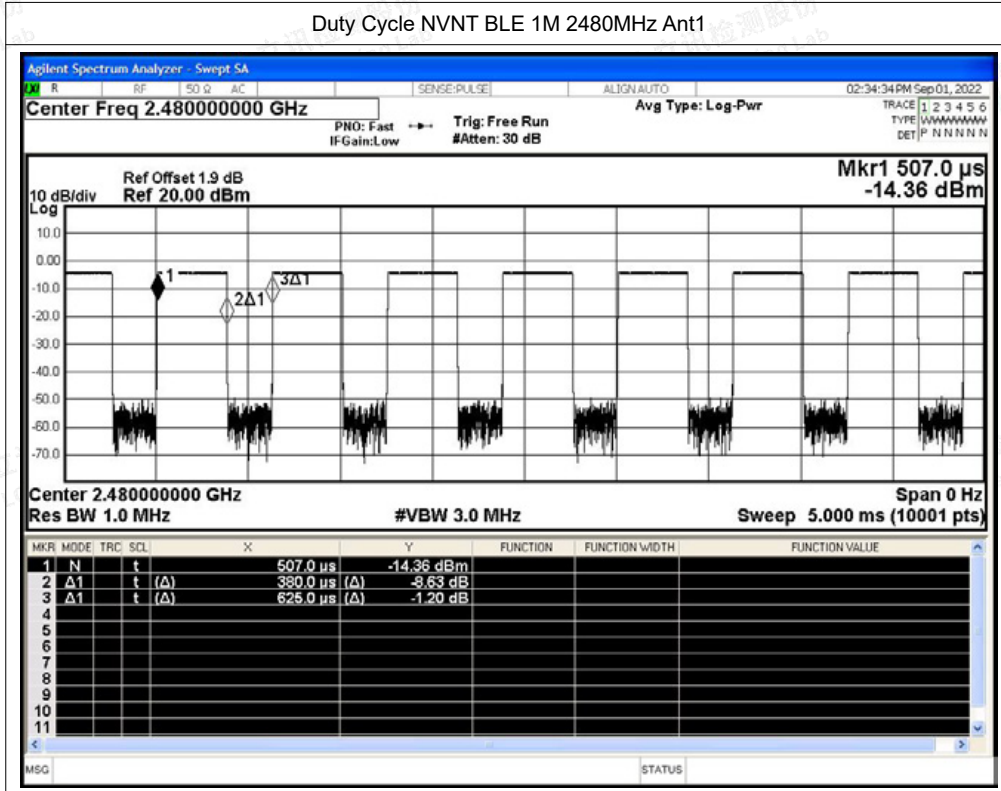




Test Graphs

Duty Cycle NVNT BLE 2M 2402MHz Ant1

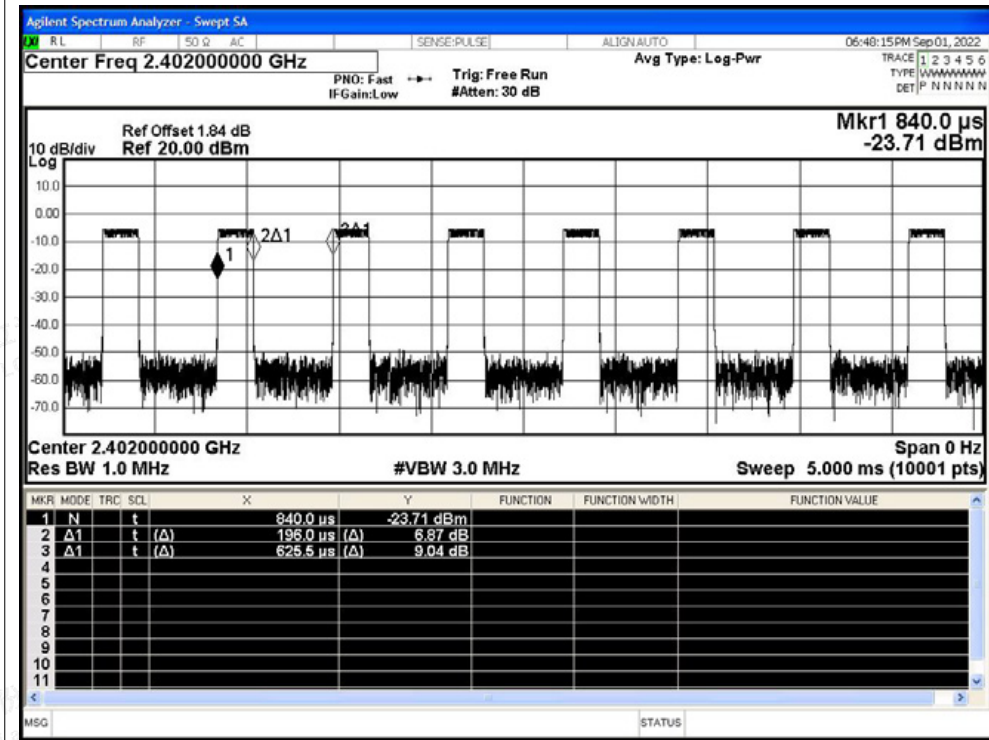


Duty Cycle NVNT BLE 2M 2440MHz Ant1

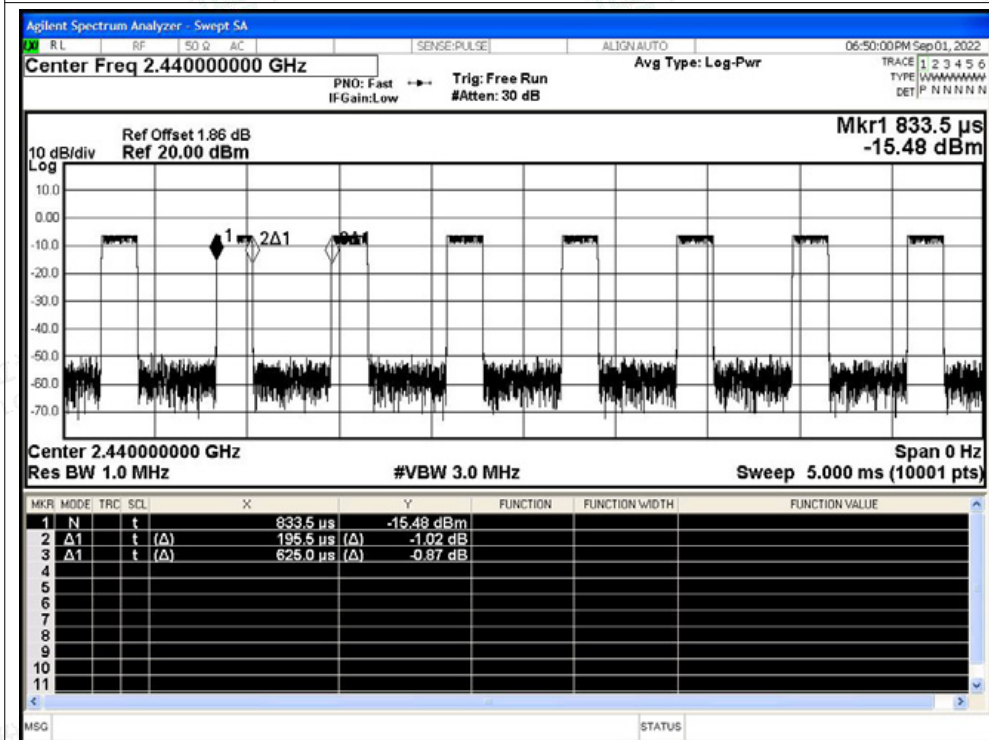



Duty Cycle NVNT BLE 2M 2480MHz Ant1

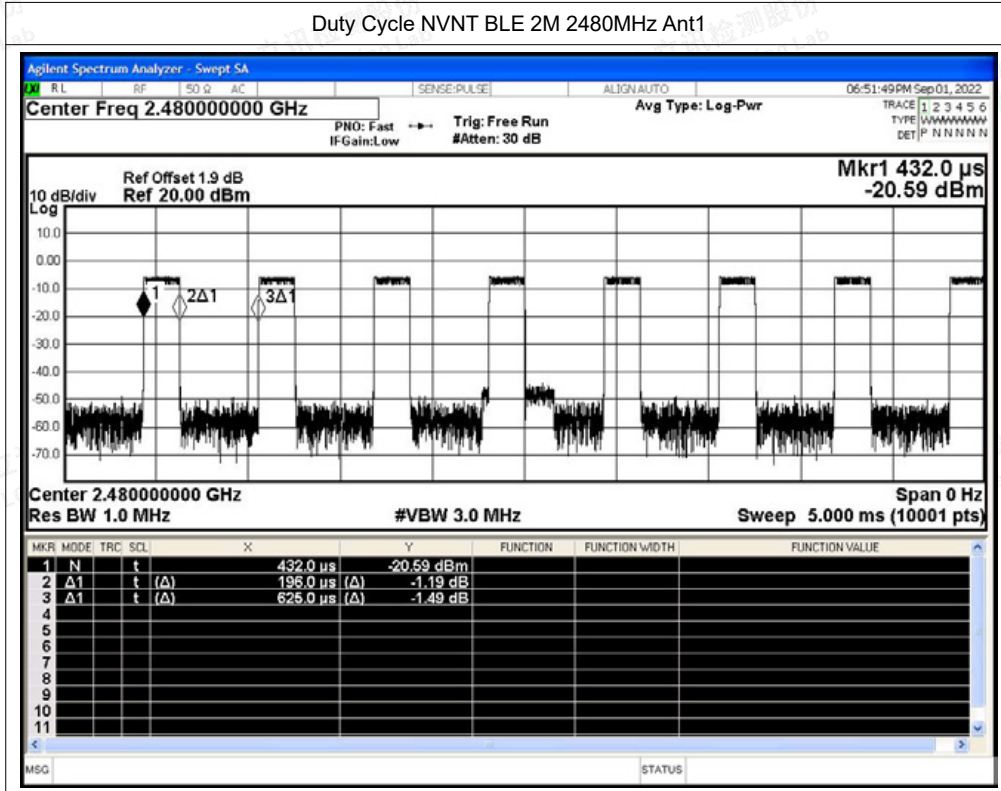



B.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.14	2	46.12	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-59.99	2	37.27	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2351.568	-47.77	2	49.49	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2389.584	-58.6	2	38.66	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.05	2	46.21	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.92	2	38.34	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-48.73	2	48.53	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-59.21	2	38.05	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2488.936	-47.31	2	49.95	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2485.72	-58.8	2	38.46	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-50.14	2	47.12	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-59.36	2	37.9	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-50.32	2	46.94	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-59.49	2	37.77	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2389.872	-47.19	2	50.07	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2383.728	-58.48	2	38.78	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-49.25	2	48.01	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-59.34	2	37.92	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-49.11	2	48.15	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-58.12	2	39.14	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2496.328	-46.9	2	50.36	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.512	-58.12	2	39.14	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-51.1	2	46.16	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-59.01	2	38.25	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

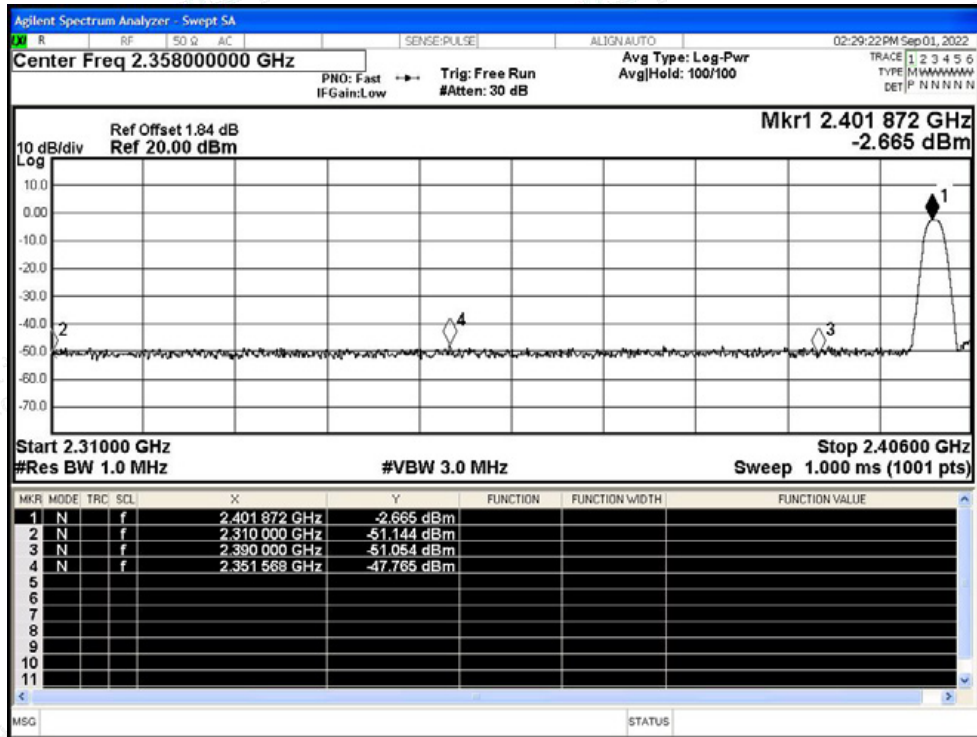


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

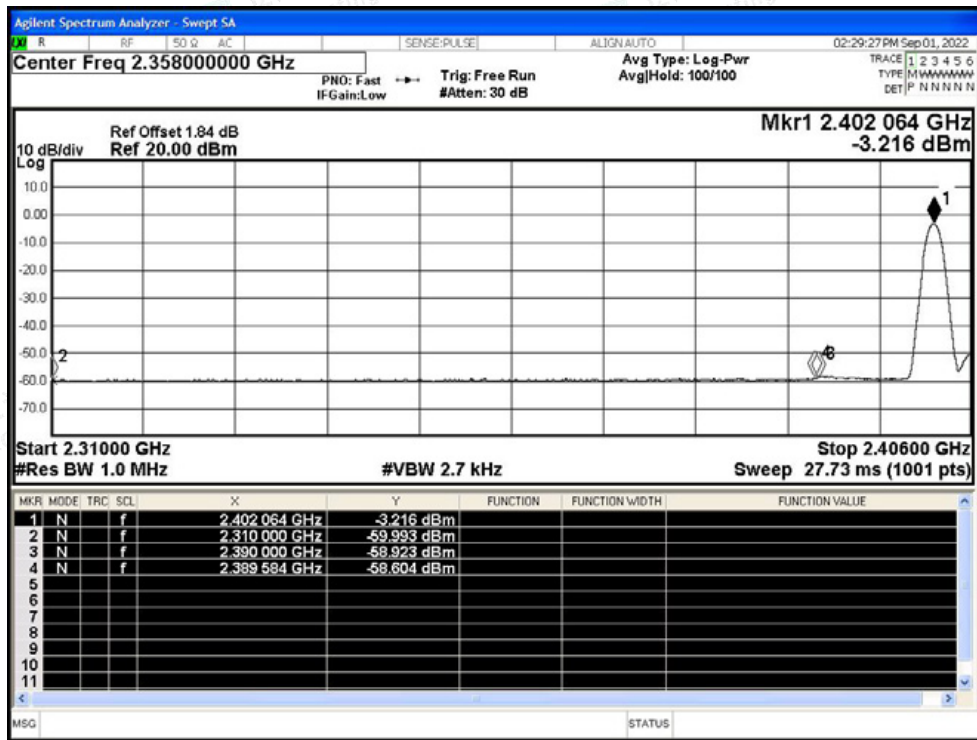




Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

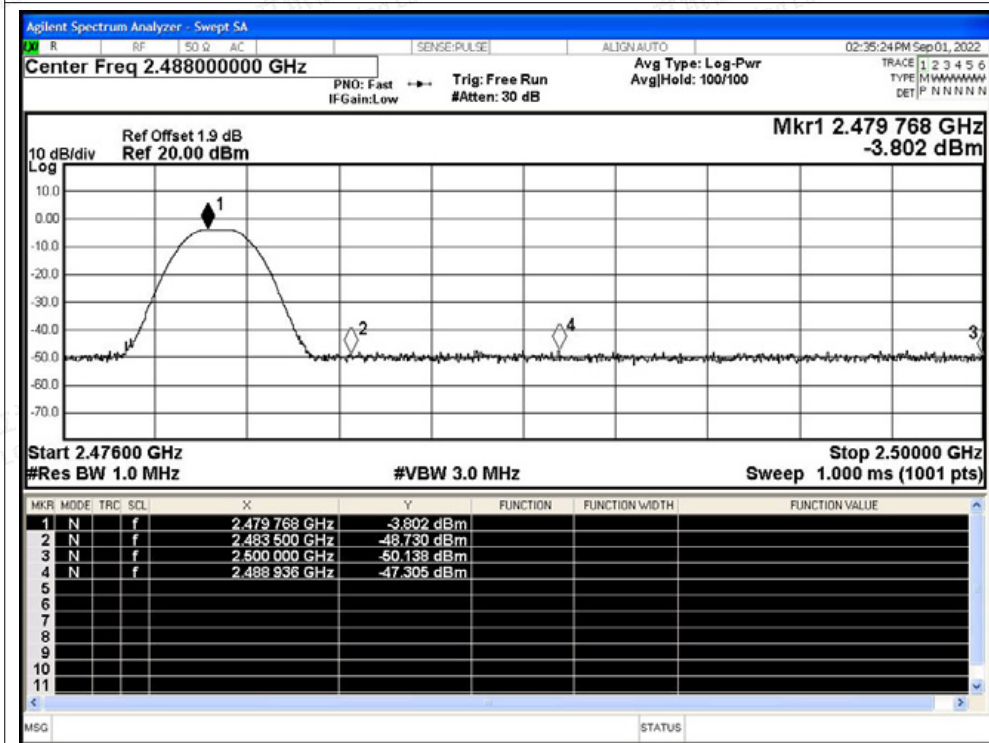


Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

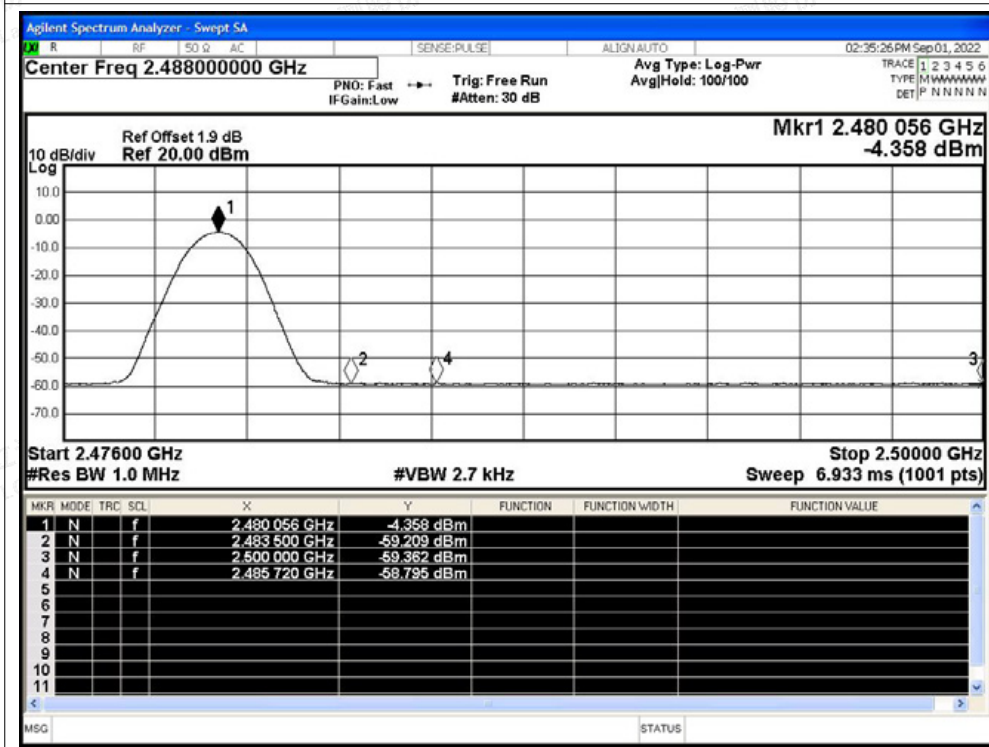




Test Graphs

Restrict Band NVNT BLE 2M 2402MHz Ant1 Peak

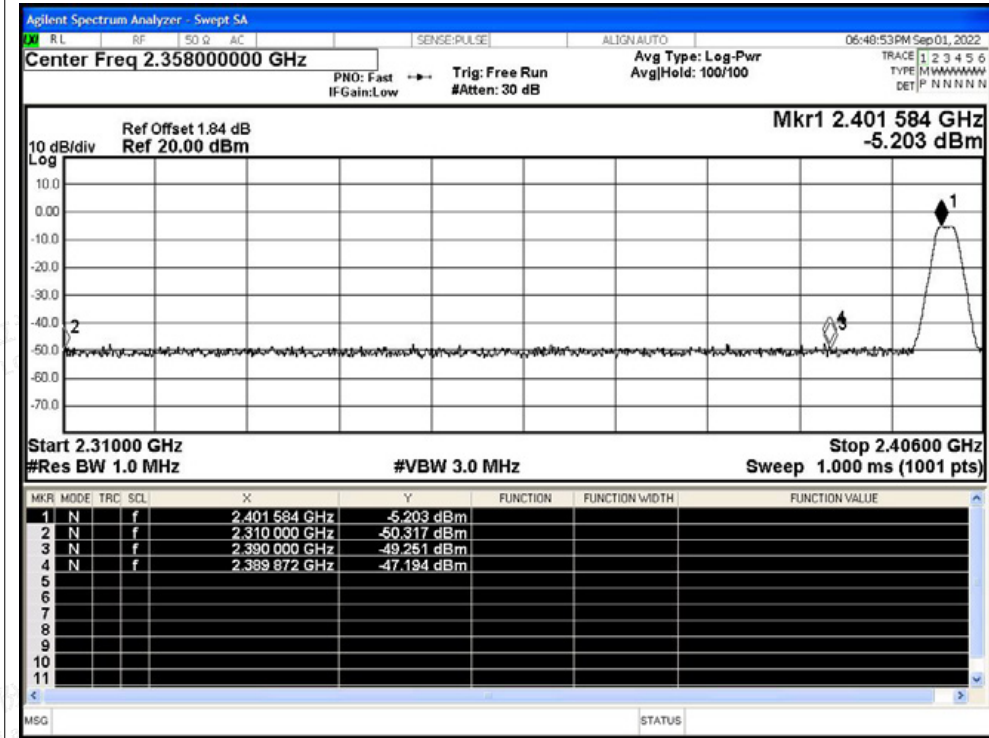


Restrict Band NVNT BLE 2M 2402MHz Ant1 Average

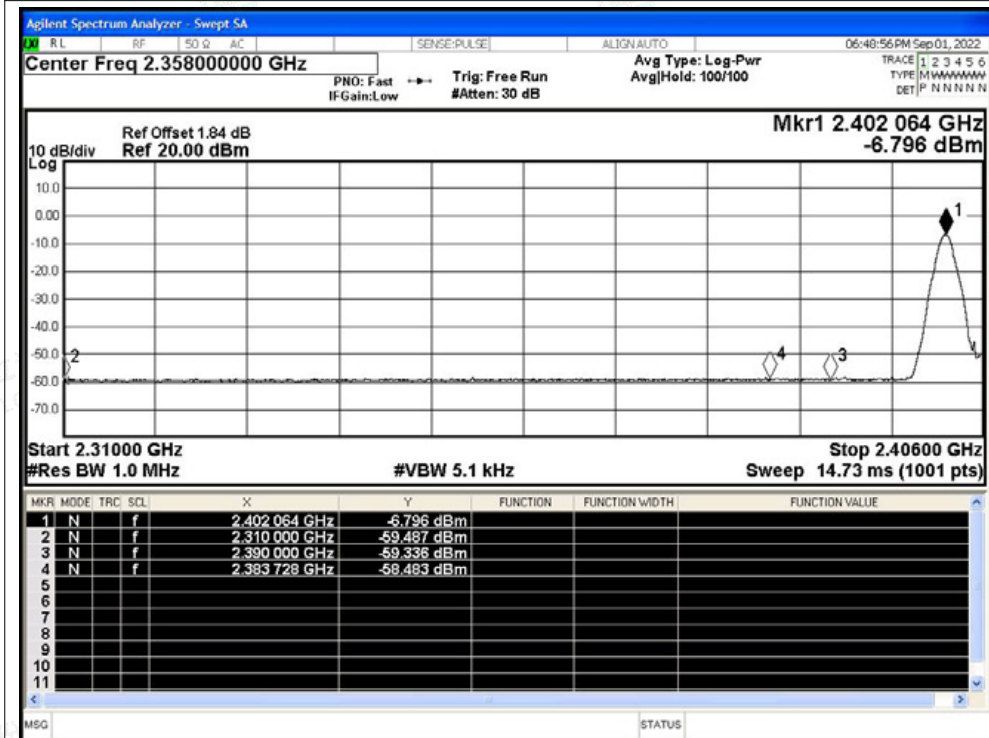



Restrict Band NVNT BLE 2M 2480MHz Ant1 Peak

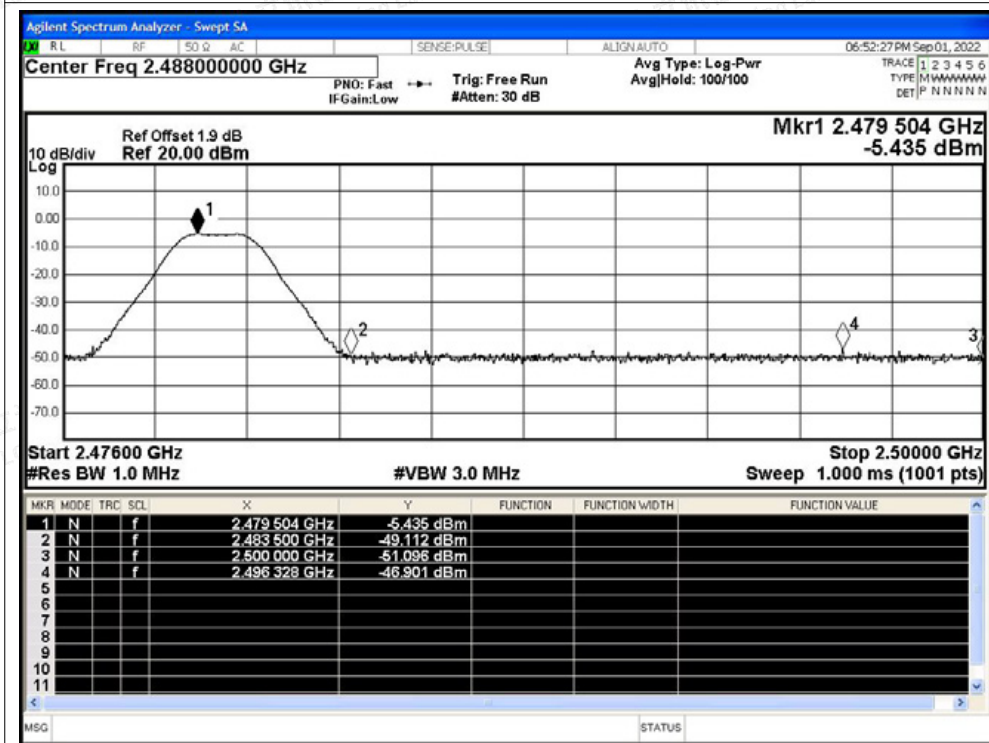

Restrict Band NVNT BLE 2M 2480MHz Ant1 Average

