

FCC - TEST REPORT

Report Number : **68.950.21.0419.01** Date of Issue: **2021-10-13**

Model : **AM001**

Product Type : **Z CAM IPMAN AMBR**

Applicant : **Shenzhen ImagineVision Technology Limited**

Address : **1A, F5, TCL International E City, 1001 Zhong Shan Park Road, Nan Shan, 518055 Shenzhen, PEOPLE'S REPUBLIC OF CHINA**

Manufacturer : **Shenzhen ImagineVision Technology Limited**

Address : **1A, F5, TCL International E City, 1001 Zhong Shan Park Road, Nan Shan, 518055 Shenzhen, PEOPLE'S REPUBLIC OF CHINA**

Test Result : **Positive** **Negative**

Total pages including Appendices : **85**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission	10
9.2	Conducted peak output power	13
9.3	6dB bandwidth and 99% Occupied Bandwidth	15
9.4	Power spectral density	30
9.5	Spurious RF conducted emissions	36
9.6	Band edge testing	56
9.7	Spurious radiated emissions for transmitter	62
10	Test Equipment List.....	84
11	System Measurement Uncertainty	85

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint
Road 2, Nanshan District
Shenzhen 518052
P.R. China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CA5009

3 Description of the Equipment Under Test

Product:	Z CAM IPMAN AMBR
Model no.:	AM001
FCC ID:	2AENNZCAMAMBR2107
Options and accessories:	HDMI Cable and Type-C Cable
Rating:	6.2V-18VDC, 1.5A
RF Transmission Frequency:	2412MHz-2462MHz
No. of Operated Channel:	11
Modulation:	DSSS, OFDM
Antenna Type:	Integrated antenna
Antenna Gain:	Ant 0 2.4G 4.43 dBi, 5G 4.59 dBi Ant 1 2.4G 4.22 dBi, 5G 5.33 dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Z CAM IPMAN AMBR which support Bluetooth function and Wi-Fi. The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHz Wi-Fi, 5180MHz – 5240MHz, 5745MHz – 5825MHz for 5GHz Wi-Fi. Only 2.4GWiFi included in this report.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2020 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to
 KDB 558074 D01 15.247 Meas Guidance v05r02,
 KDB 662911 D01 Multiple Transmitter Output v02r01,
 ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	10	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	13	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	15	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	30	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	36	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	56	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious radiated emissions for transmitter	62	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 2		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an internal antenna, which gain is 4.43dBi for Ant 0, 4.59dBi for Ant 1. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AENNZCAMAMBR2107, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: 2021-06-03

Testing Start Date: 2021-06-04

Testing End Date: 2021-07-23

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

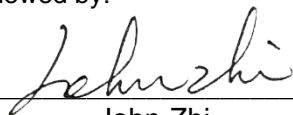


John Zhi
Project Manager

Prepared by:



Warlen Song
Project Engineer


Tested by:




Carry Cai
Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

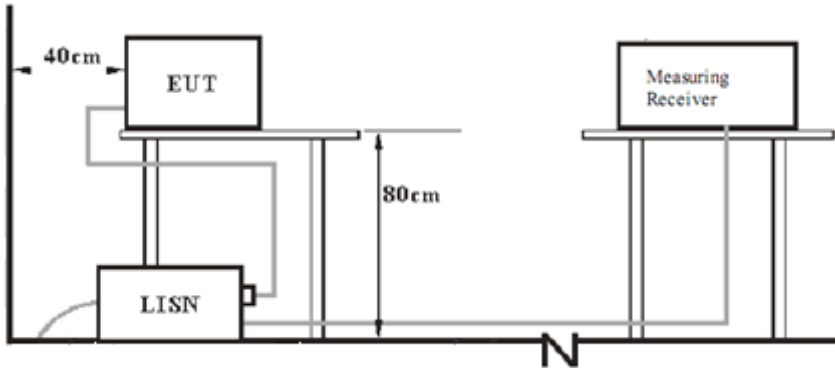


7.2 Radiated test setups Below 1GHz

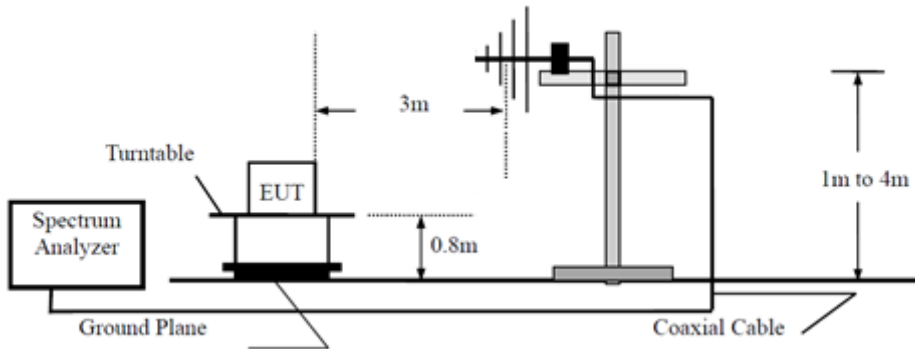

Above 1GHz

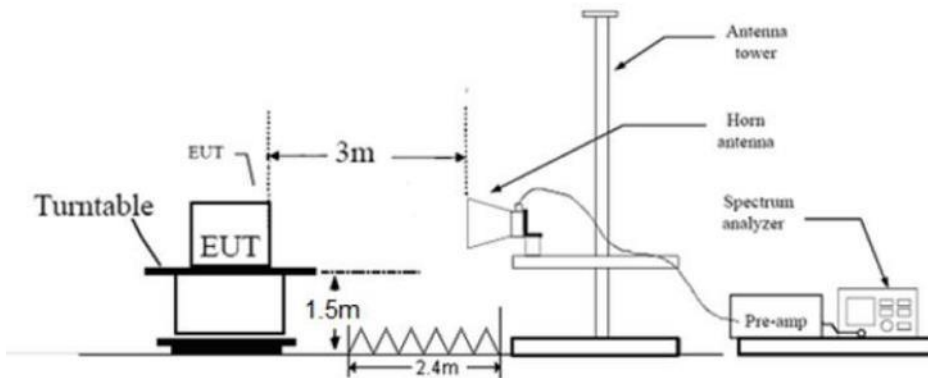

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
PC	Lenovo	X240	---

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

Through pre-scan all kind of modulation and all kind of rates, find the 1Mbps of rate is the worst case of 802.11b; the 6Mbps of rate is the worst case of 802.11g; the 6.5Mbps of rate is the worst case of 802.11n20; only the worst case transmitter rate data mode is recorded in the report.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Z CAM IPMAN AMBR
 M/N : AM001
 Operating Condition : Charging + Transmit
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz (External adapter)

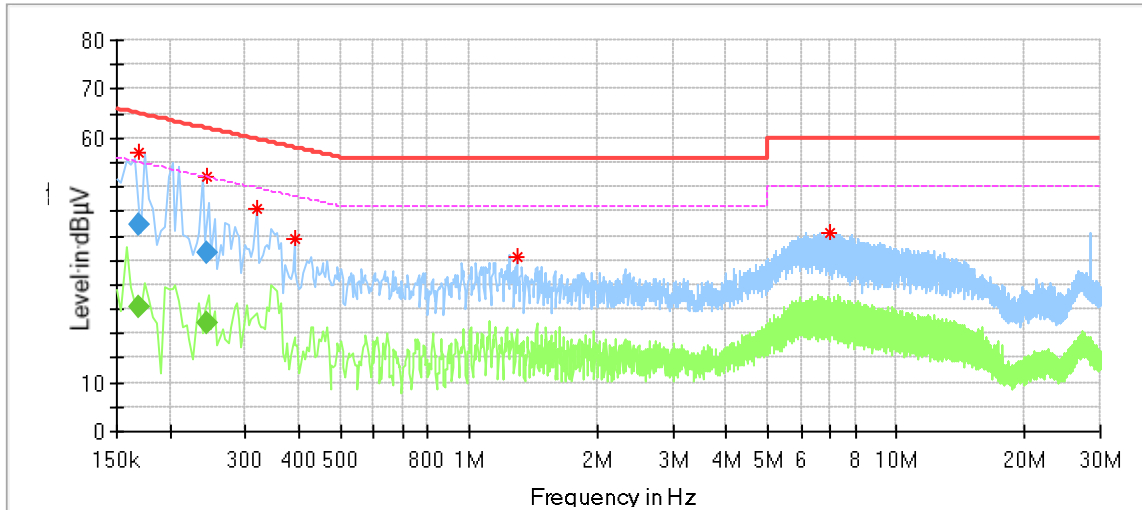

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.169500	56.86	---	64.77	7.91	L1	9.64
0.242500	52.24	---	62.17	9.93	L1	9.64
0.318000	45.46	---	59.76	14.29	L1	9.64
0.390000	39.41	---	58.06	18.66	L1	9.64
1.294000	35.83	---	56.00	20.17	L1	9.67
6.966000	40.77	---	60.00	19.23	L1	9.83

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.169500	---	25.30	54.99	29.68	L1	9.64
0.169500	42.43	---	64.99	22.55	L1	9.64
0.242500	---	22.06	52.01	29.95	L1	9.64
0.242500	36.61	---	62.01	25.40	L1	9.64

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Z CAM IPMAN AMBR
 M/N : AM001
 Operating Condition : Charging + Transmit
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz (External adapter)

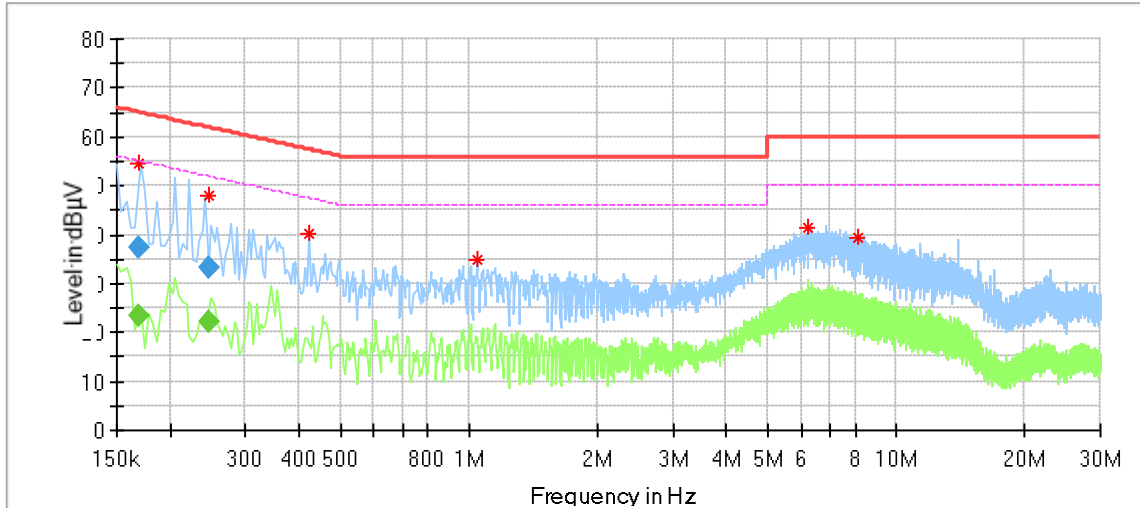

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.169500	54.68	---	64.96	10.28	N	9.62
0.245500	47.85	---	62.03	14.18	N	9.63
0.422000	40.30	---	57.41	17.10	N	9.63
1.046000	34.73	---	56.00	21.27	N	9.65
6.206000	41.32	---	60.00	18.68	N	9.80
8.170000	39.28	---	60.00	20.72	N	9.85

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.169500	---	23.58	54.99	31.40	N	9.62
0.169500	37.39	---	64.99	27.59	N	9.62
0.245500	---	22.21	51.91	29.70	N	9.63
0.245500	33.18	---	61.91	28.73	N	9.63

Remark :

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted peak output power

Test Method

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.
2. Setting the highest output power level of the EUT
3. Record the power value.

Limits

According to §15.247 (b) (3), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b_SISO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)		Result
	Ant 0	Ant 1	
Low channel 2412MHz	12.8	11.8	Pass
Middle channel 2437MHz	14.2	13.7	Pass
High channel 2462MHz	14.5	13.4	Pass

802.11g_SISO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)		Result
	Ant 0	Ant 1	
Low channel 2412MHz	14.2	14.3	Pass
Middle channel 2437MHz	14.2	13.5	Pass
High channel 2462MHz	13.5	13.2	Pass

802.11n20_MIMO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)			Result
	Ant0	Ant0	SUM	
Low channel 2412MHz	14.3	15.4	18.3	Pass
Middle channel 2437MHz	14.6	14.9	17.9	Pass
High channel 2462MHz	14.6	14.2	17.6	Pass

9.3 6dB bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. Use the following spectrum analyzer settings:
RBW=100K, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Test Method for 99 % Bandwidth

1. Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.


Limit

Limit [kHz]


\geq 500

6dB Bandwidth

TestMode	Antenna	Channel [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
11B_SISO	Ant0	2412	7.160	2408.440	2415.600	0.5	PASS
	Ant0	2412	7.160	2408.440	2415.600	0.5	PASS
	Ant0	2437	7.120	2433.440	2440.560	0.5	PASS
	Ant0	2437	7.160	2433.440	2440.600	0.5	PASS
	Ant0	2462	7.120	2458.440	2465.560	0.5	PASS
	Ant0	2462	7.160	2458.440	2465.600	0.5	PASS
11G_SISO	Ant0	2412	16.400	2403.800	2420.200	0.5	PASS
	Ant0	2412	16.400	2403.800	2420.200	0.5	PASS
	Ant0	2437	16.400	2428.800	2445.200	0.5	PASS
	Ant0	2437	16.400	2428.800	2445.200	0.5	PASS
	Ant0	2462	16.400	2453.800	2470.200	0.5	PASS
	Ant0	2462	16.400	2453.800	2470.200	0.5	PASS
11N20SISO	Ant0	2412	17.600	2403.200	2420.800	0.5	PASS
	Ant1	2412	17.680	2403.160	2420.840	0.5	PASS
	Ant0	2437	17.600	2428.200	2445.800	0.5	PASS
	Ant1	2437	17.680	2428.160	2445.840	0.5	PASS
	Ant0	2462	17.600	2453.200	2470.800	0.5	PASS
	Ant1	2462	17.680	2453.160	2470.840	0.5	PASS

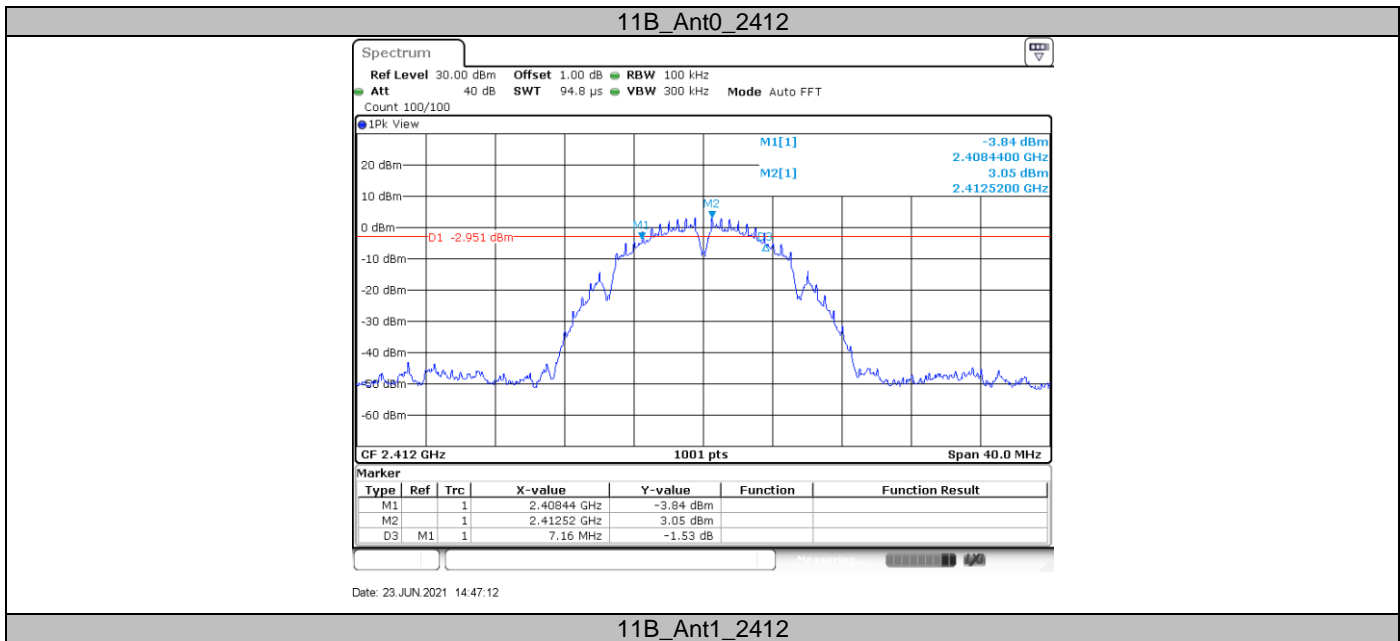


11B_Ant1_2412

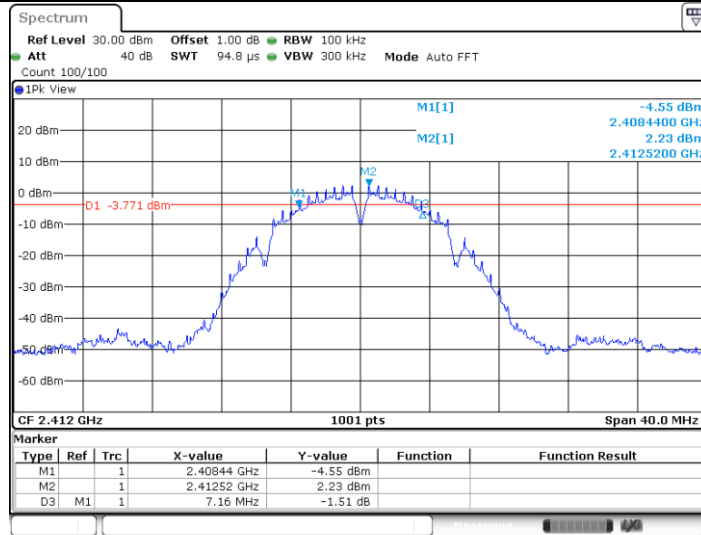


Date: 23 JUN 2021 15:24:00

11B_Ant0_2437

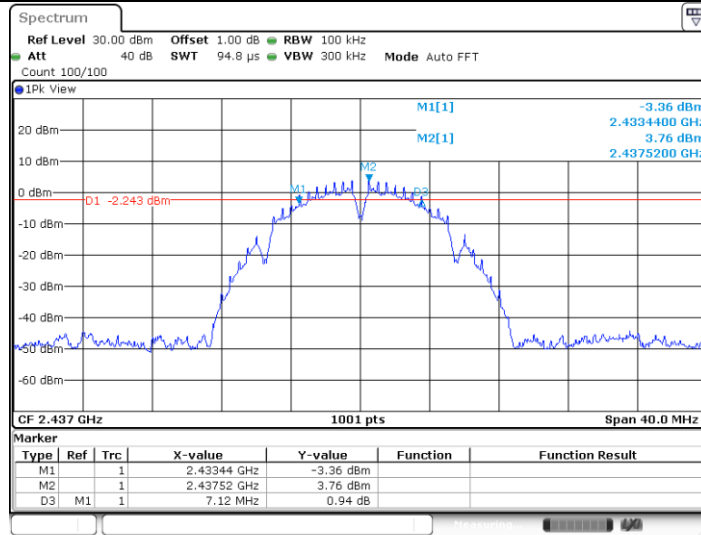


Date: 23 JUN 2021 14:49:00

11B_Ant1_2437

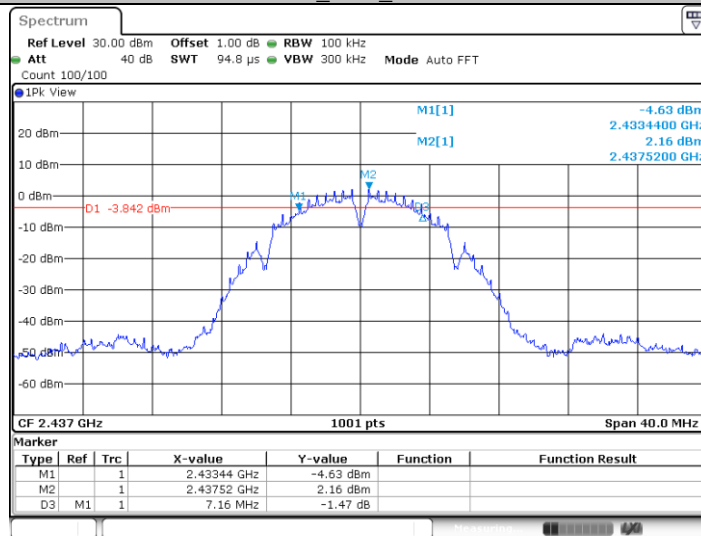


Date: 23 JUN 2021 15:25:55

11B_Ant0_2462

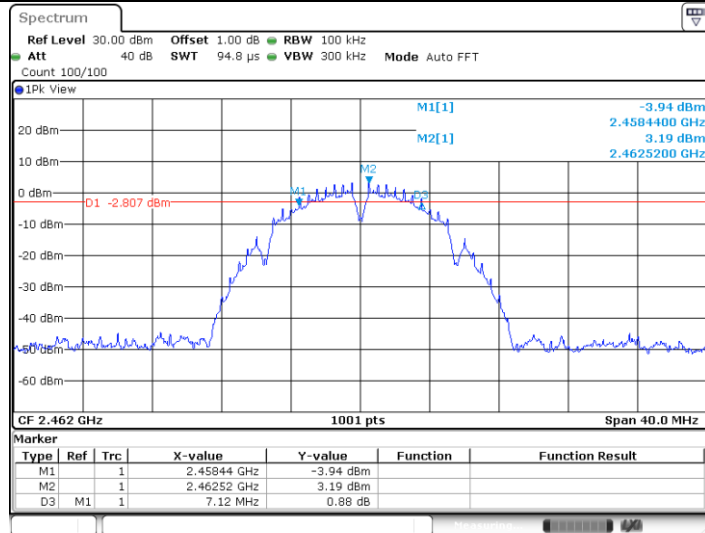


Date: 23 JUN 2021 14:50:44

11B_Ant1_2462

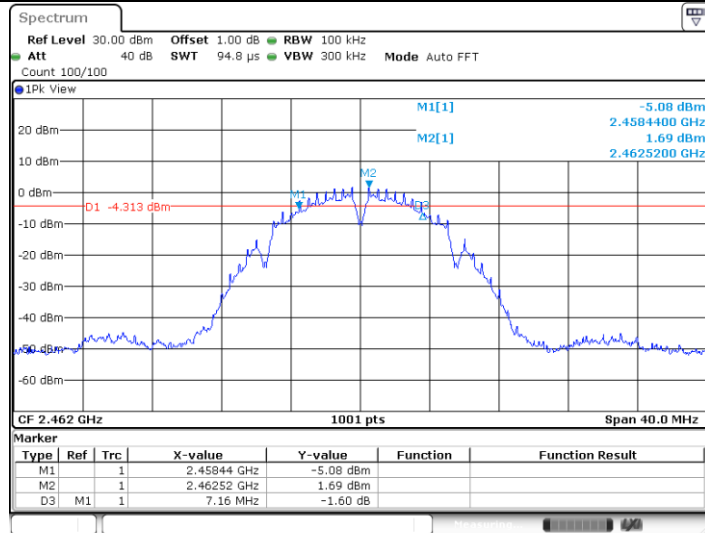


Date: 23 JUN 2021 15:27:37

11G_Ant0_2412

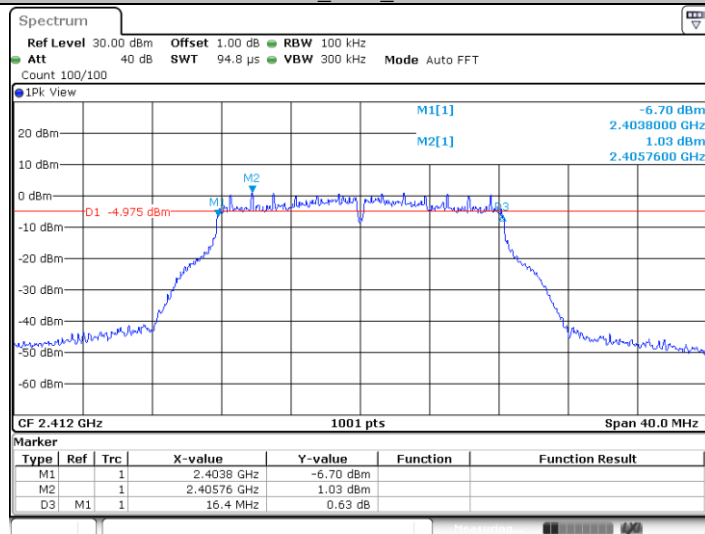


Date: 23 JUN 2021 14:53:28

11G_Ant1_2412

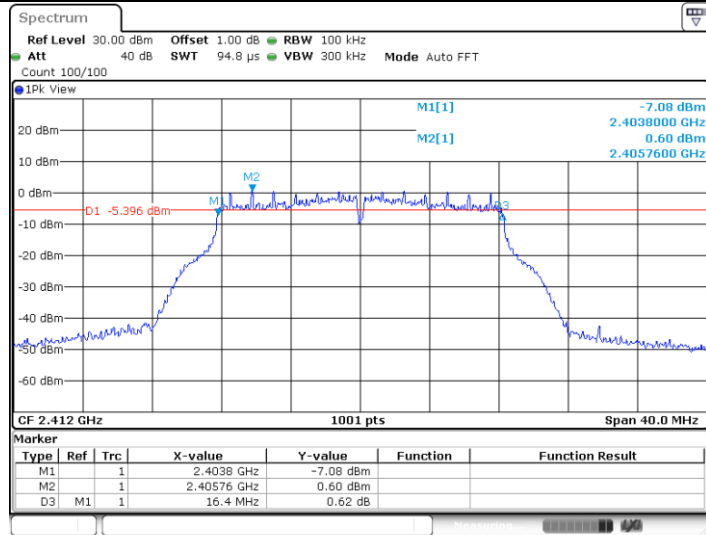


Date: 23 JUN 2021 15:07:51

11G_Ant0_2437

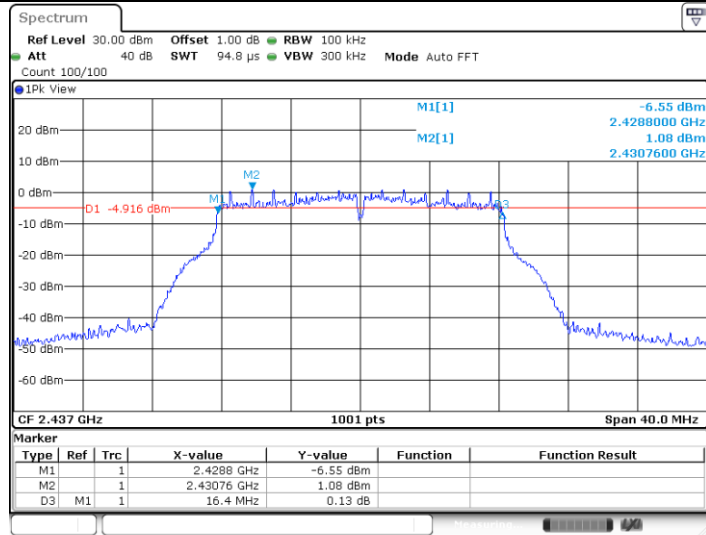


Date: 23 JUN 2021 14:55:31

11G_Ant1_2437

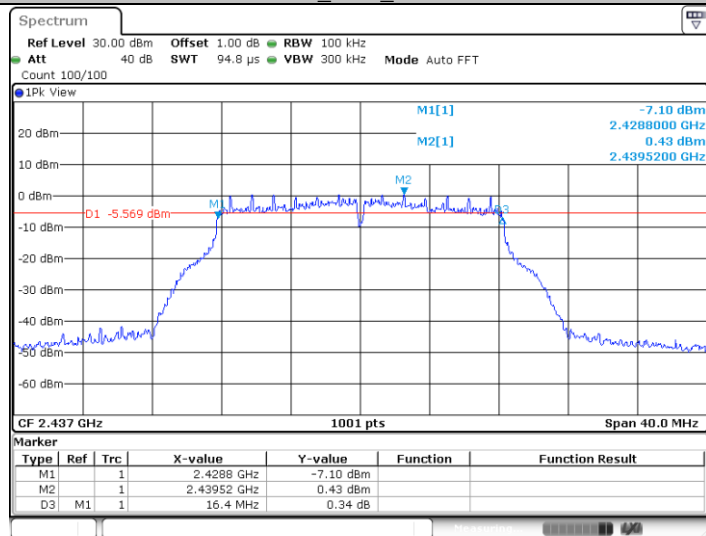


Date: 23 JUN 2021 15:09:50

11G_Ant0_2462

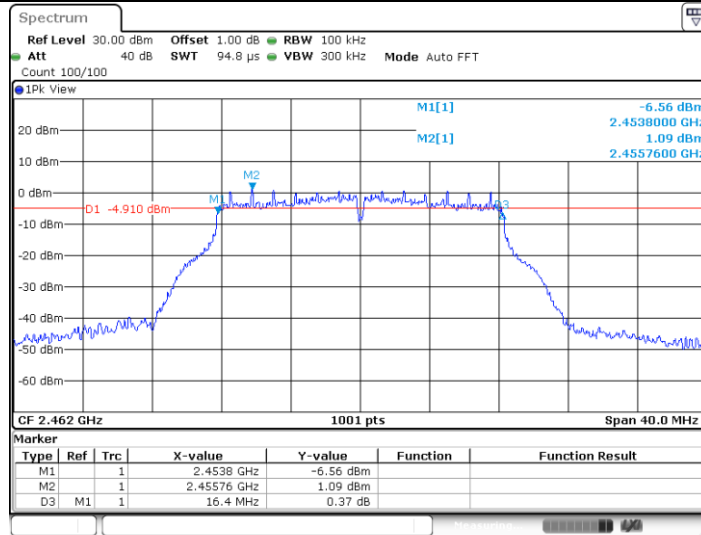


Date: 23 JUN 2021 14:58:08

11G Ant1_2462

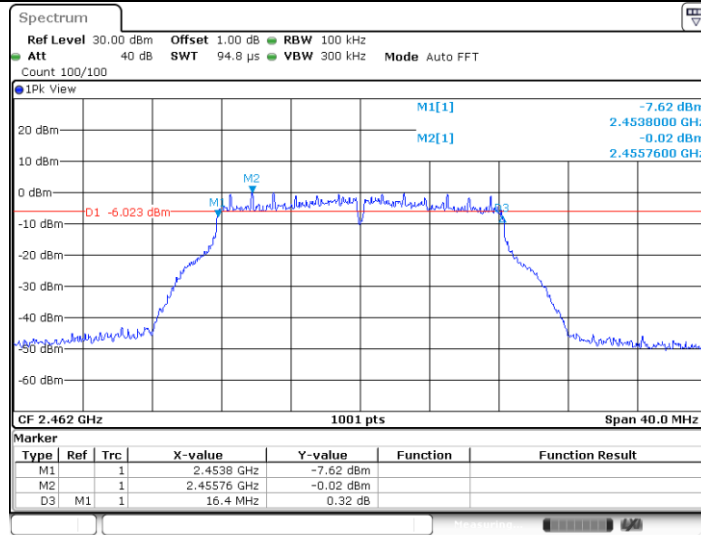


Date: 23 JUN 2021 15:11:45

11N20SISO_Ant0_2412

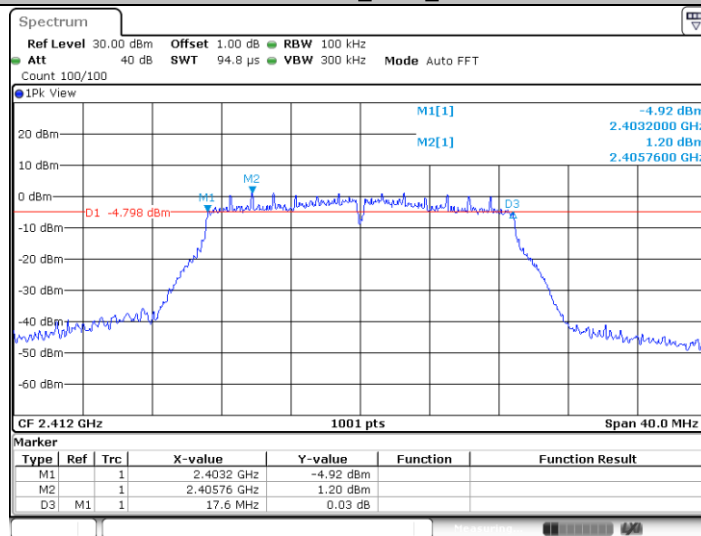


Date: 25 JUN 2021 11:51:26

11N20SISO_Ant1_2412

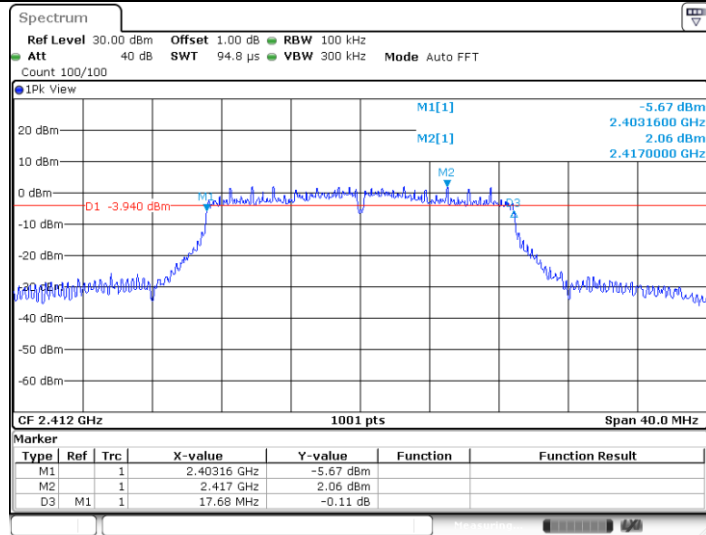


Date: 25 JUN 2021 12:05:30

11N20SISO_Ant0_2437

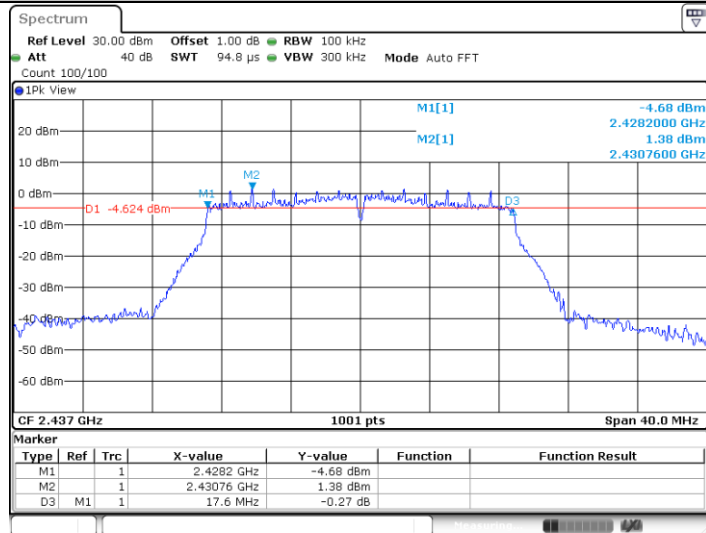


Date: 25 JUN 2021 11:58:17

11N20SISO_Ant1_2437

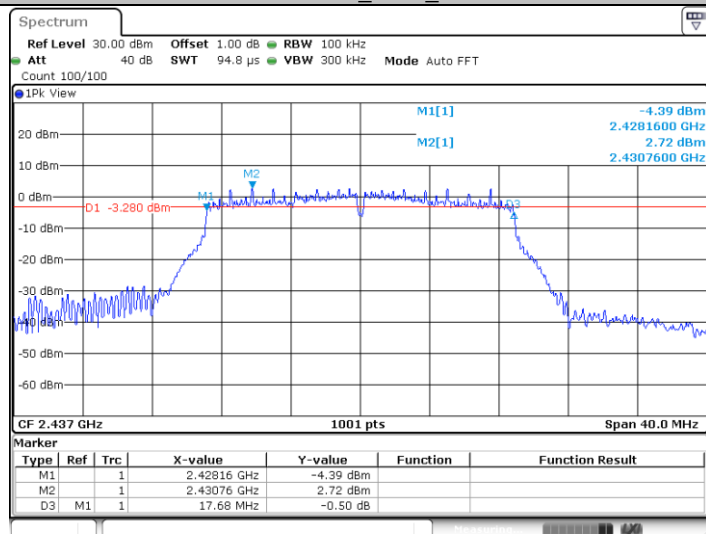


Date: 25 JUN 2021 12:08:10

11N20SISO_Ant0_2462

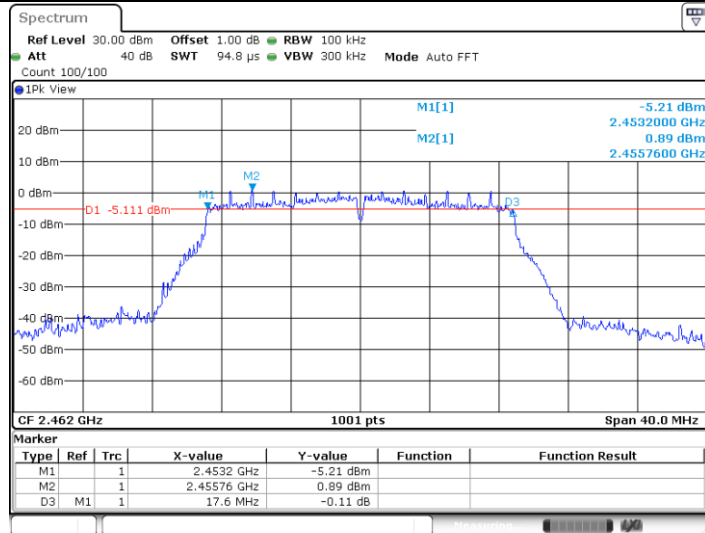


Date: 25 JUN 2021 12:03:02

11N20SISO_Ant1_2462

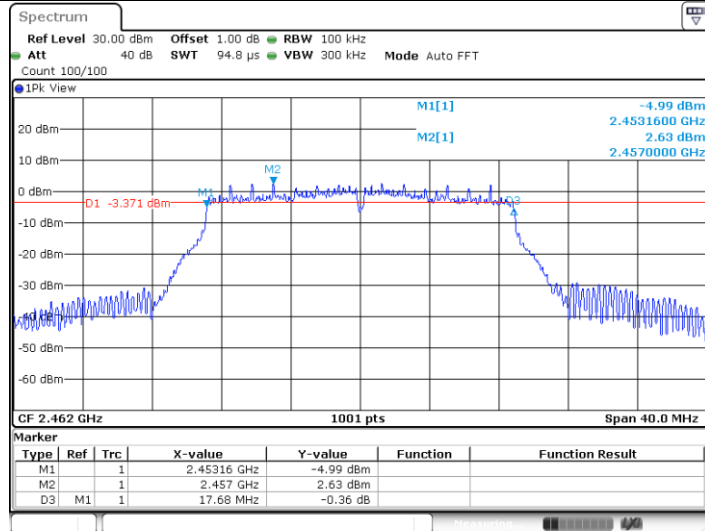


Date: 25 JUN 2021 12:10:16

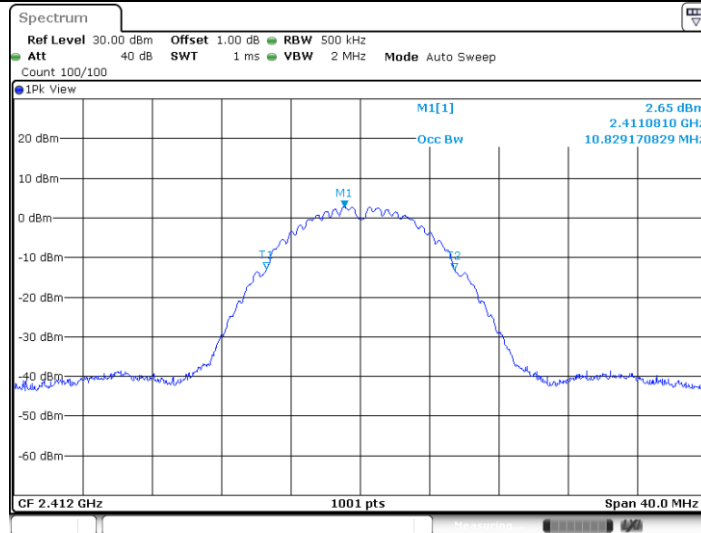


Date: 23 JUN 2021 15:24:10

11B_Ant1_2437

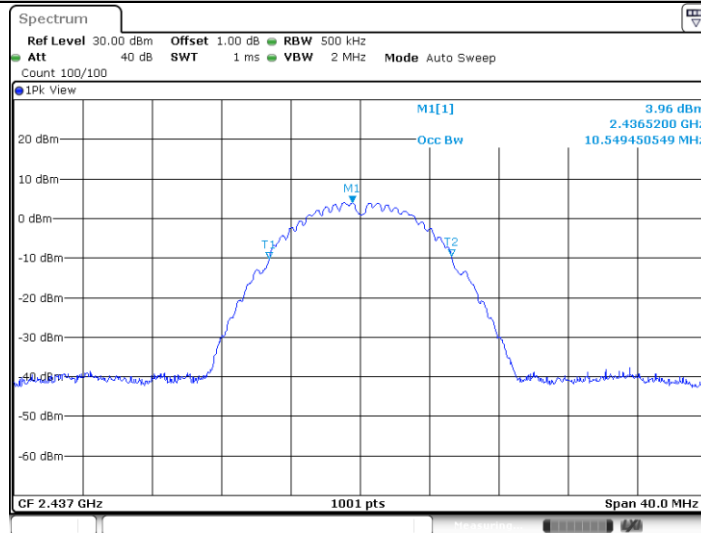


Date: 23 JUN 2021 14:49:11

11B_Ant2_2437

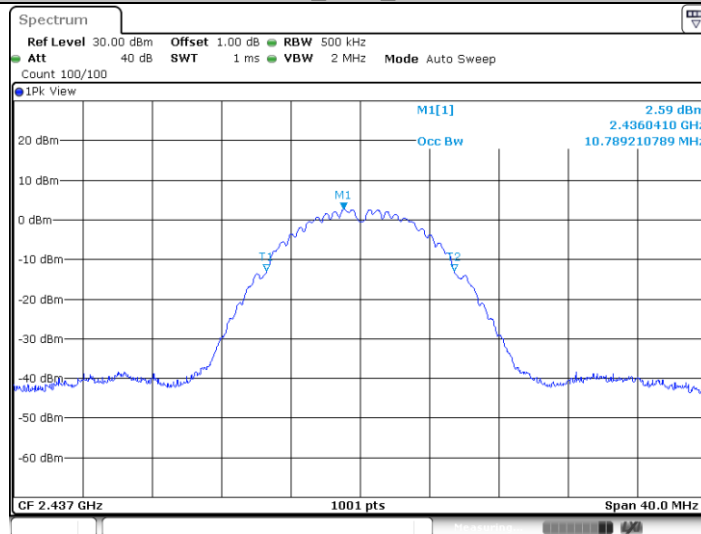


Date: 23 JUN 2021 15:26:06

11B_Ant1_2462

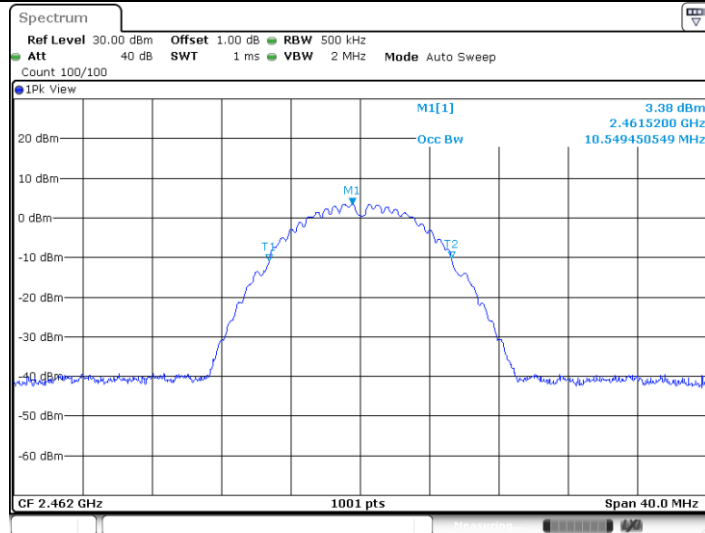


Date: 23 JUN 2021 14:50:55

11B_Ant2_2462

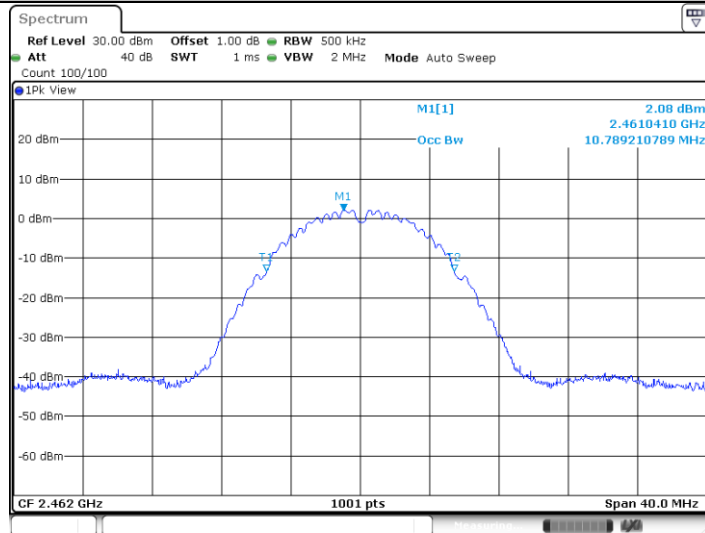


Date: 23 JUN 2021 15:27:48

11G_Ant1_2412

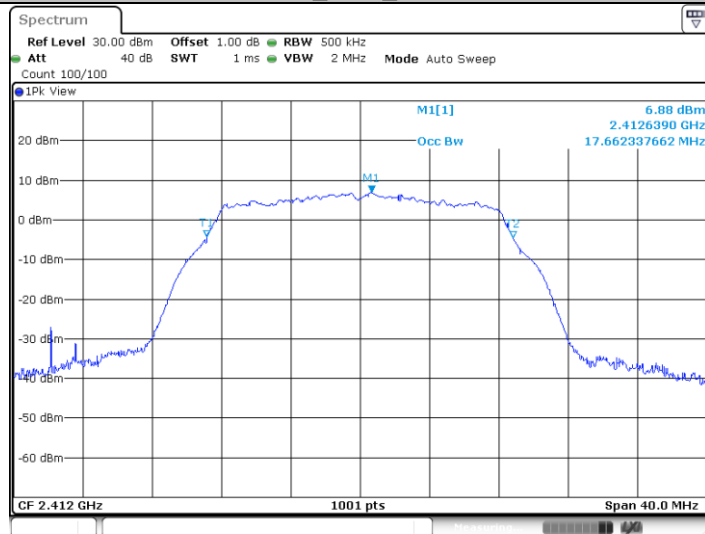


Date: 23 JUN 2021 14:53:39

11G_Ant2_2412

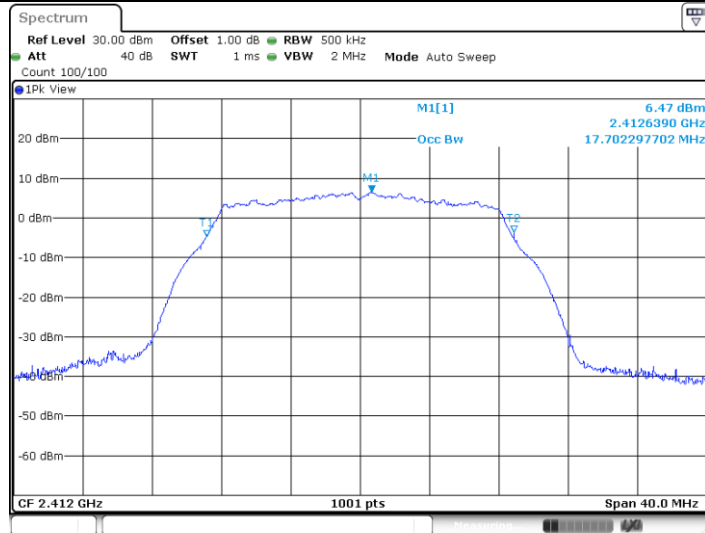


Date: 23 JUN 2021 15:08:02

11G_Ant1_2437

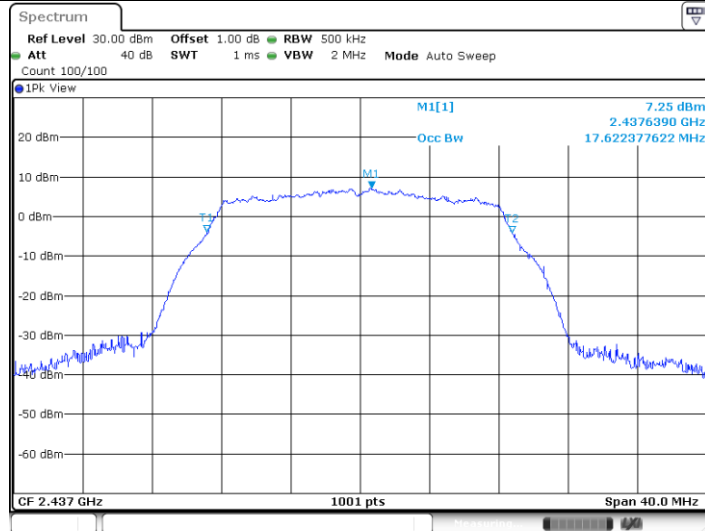


Date: 23 JUN 2021 14:55:42

11G_Ant2_2437

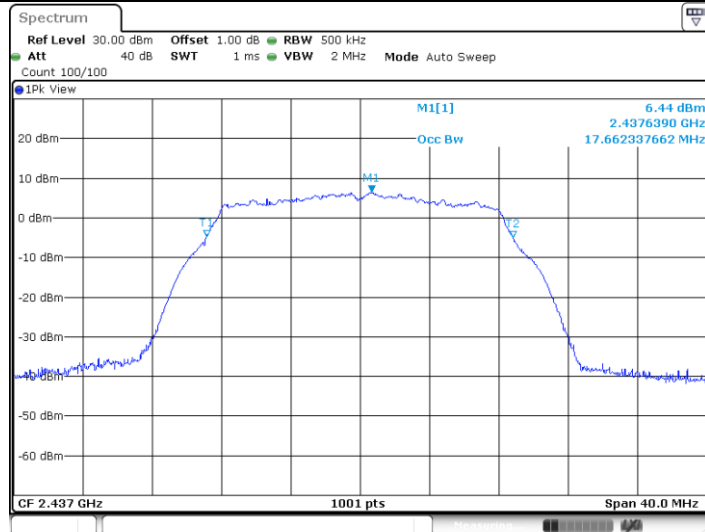


Date: 23 JUN 2021 15:10:00

11G_Ant1_2462

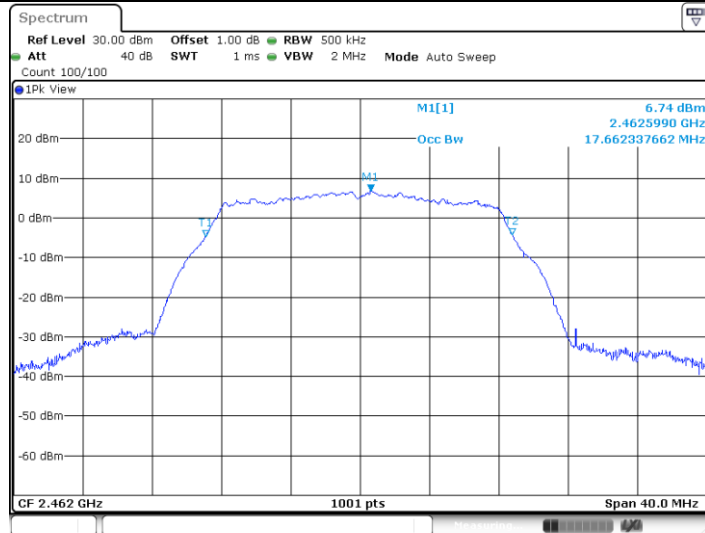


Date: 23 JUN 2021 14:58:19

11G_Ant2_2462

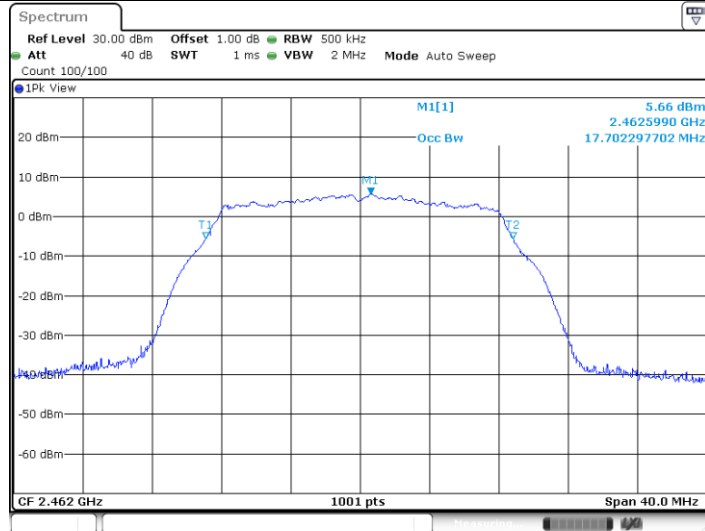


Date: 23 JUN 2021 15:11:56

11N20SISO_Ant1_2412

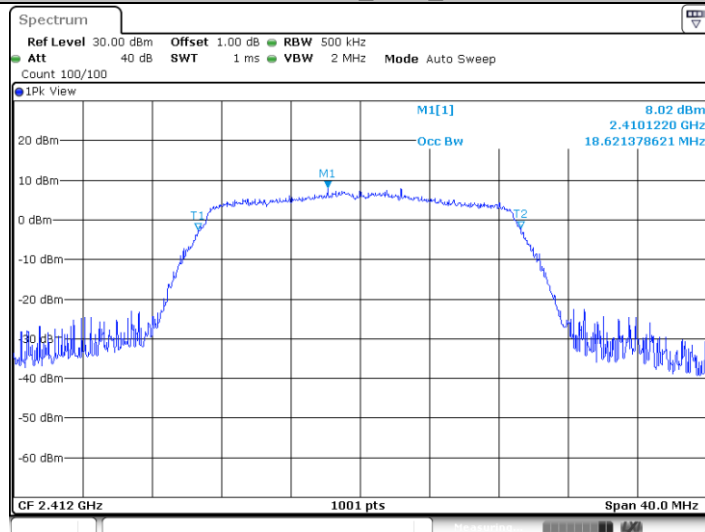


Date: 25 JUN 2021 11:51:37

11N20SISO_Ant2_2412

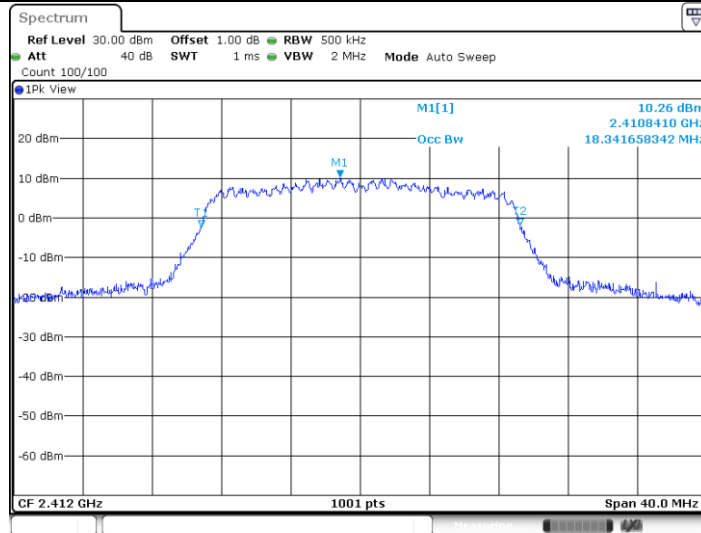


Date: 25 JUN 2021 12:05:41

11N20SISO_Ant1_2437

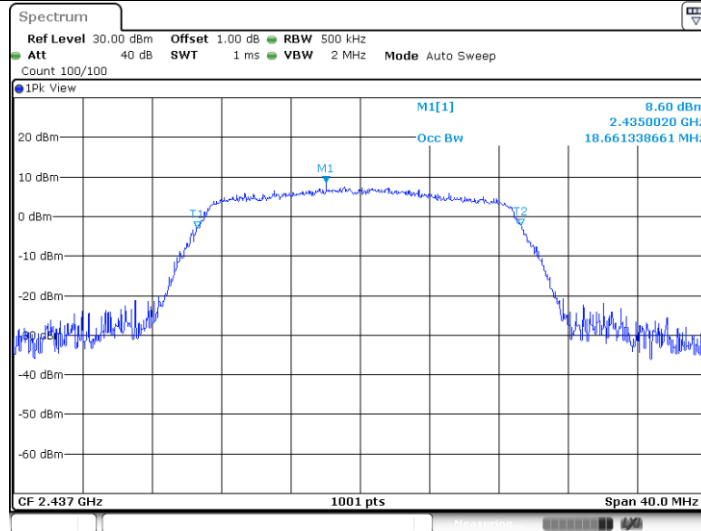


Date: 25 JUN 2021 11:58:28

11N20SISO_Ant2_2437

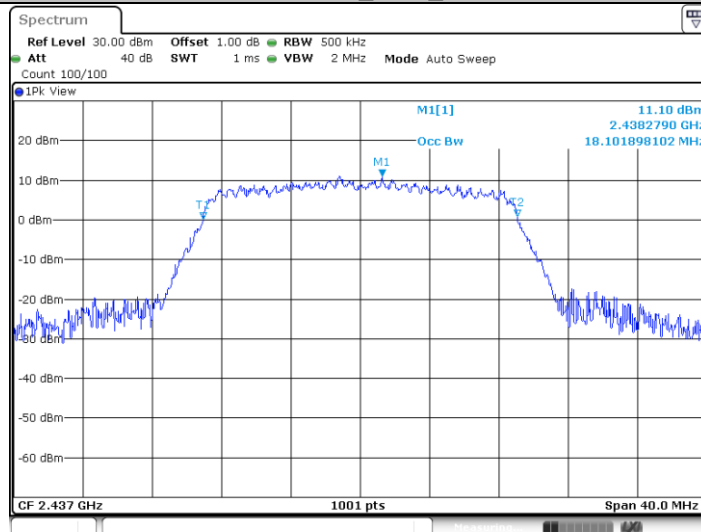


Date: 25 JUN 2021 12:08:21

11N20SISO_Ant1_2462

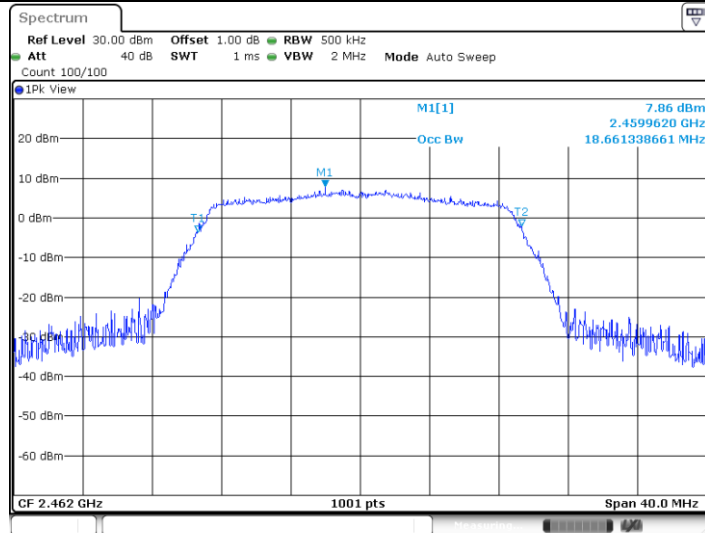

Date: 25 JUN 2021 12:03:13

11N20SISO_Ant2_2462

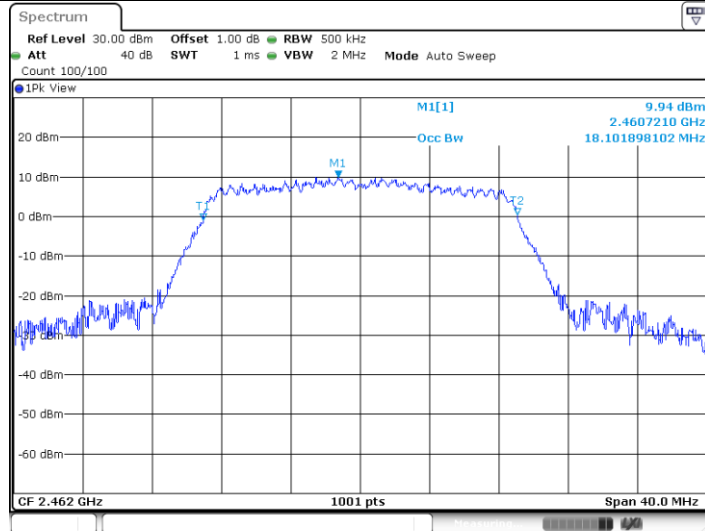

Date: 25 JUN 2021 12:10:27

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3KHz

≤8

802.11b_SISO modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)		Limit (dBm)	Result
	Ant 0	Ant 1		
Low channel 2412MHz	-9.08	-11.20	8	Pass
Middle channel 2437MHz	-8.50	-10.98	8	Pass
High channel 2462MHz	-9.04	-12.04	8	Pass


802.11g_SISO modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)		Limit (dBm)	Result
	Ant 0	Ant 1		
Low channel 2412MHz	-11.29	-11.76	8	Pass
Middle channel 2437MHz	-11.31	-11.96	8	Pass
High channel 2462MHz	-11.60	-12.67	8	Pass

802.11n_HT20_SISO modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)		Limit (dBm)	Result
	Ant 0	Ant 1		
Low channel 2412MHz	-10.82	-10.65	8	Pass
Middle channel 2437MHz	-10.72	-8.85	8	Pass
High channel 2462MHz	-11.89	-9.48	8	Pass

11B_Ant1_2412

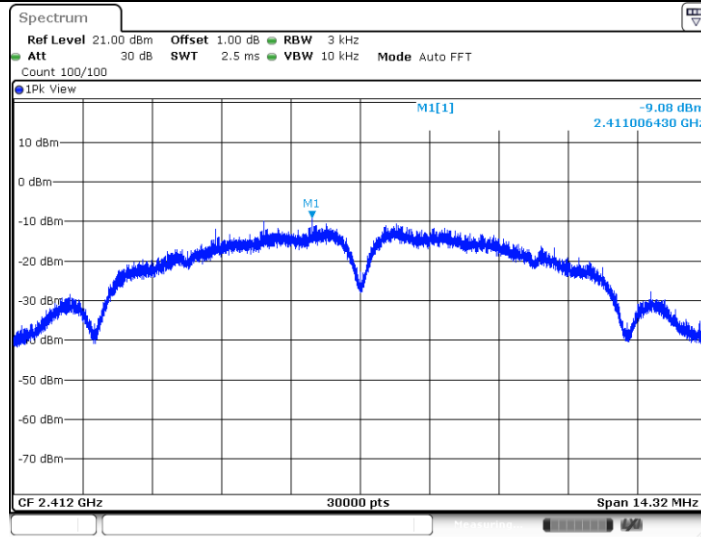


Date: 23 JUN 2021 14:47:36

11B_Ant2_2412

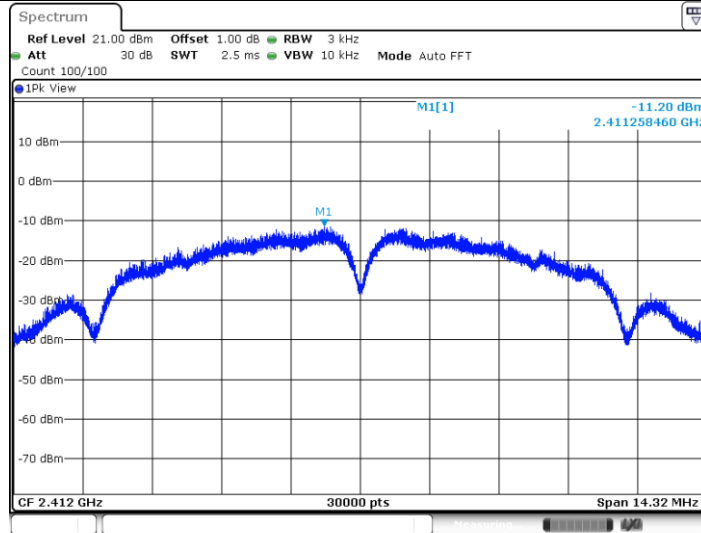


Date: 23 JUN 2021 15:24:22

11B_Ant1_2437

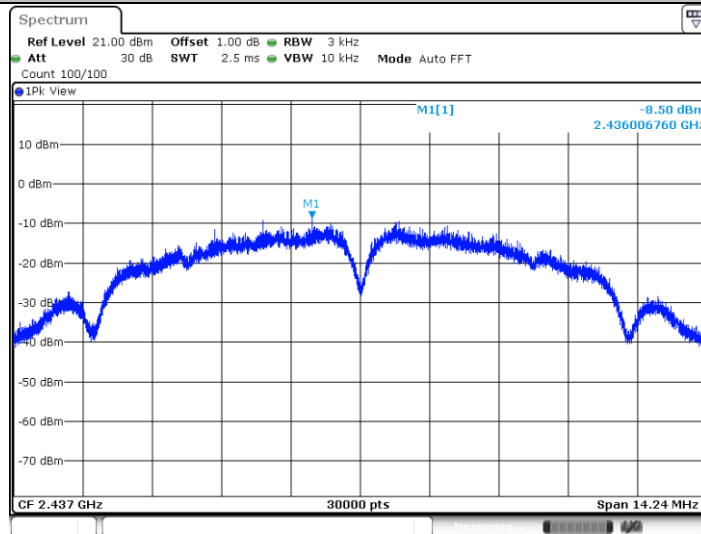


Date: 23 JUN 2021 14:49:23

11B_Ant2_2437

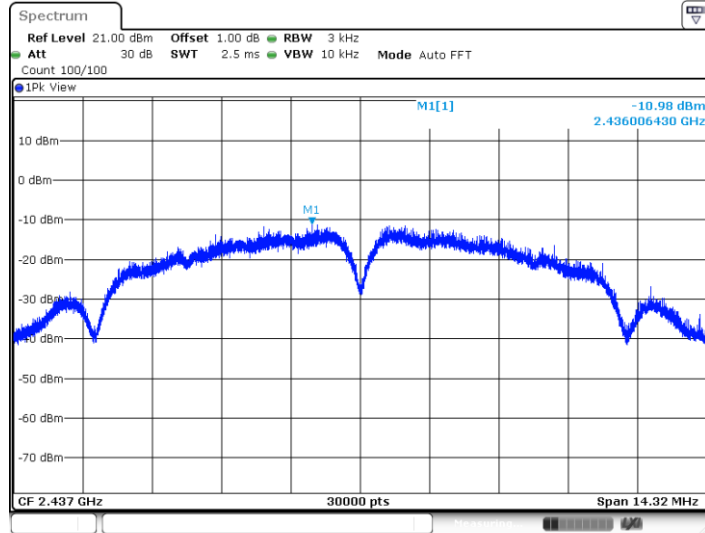


Date: 23 JUN 2021 15:26:17

11B_Ant1_2462

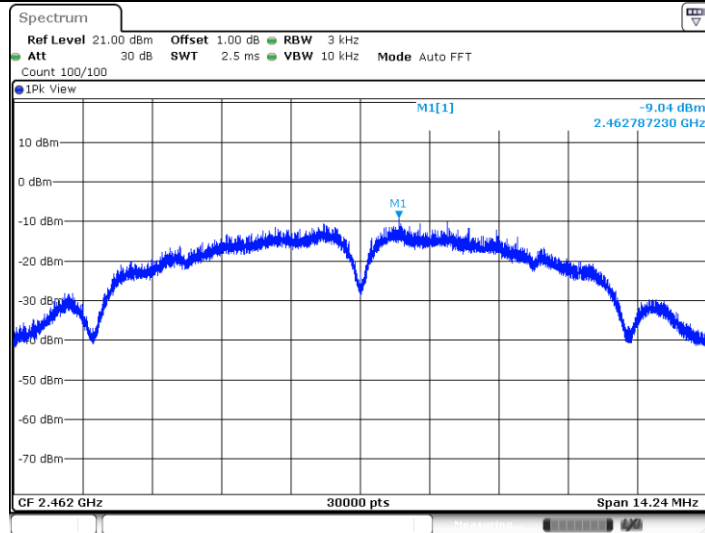


Date: 23 JUN 2021 14:51:06

11B_Ant2_2462

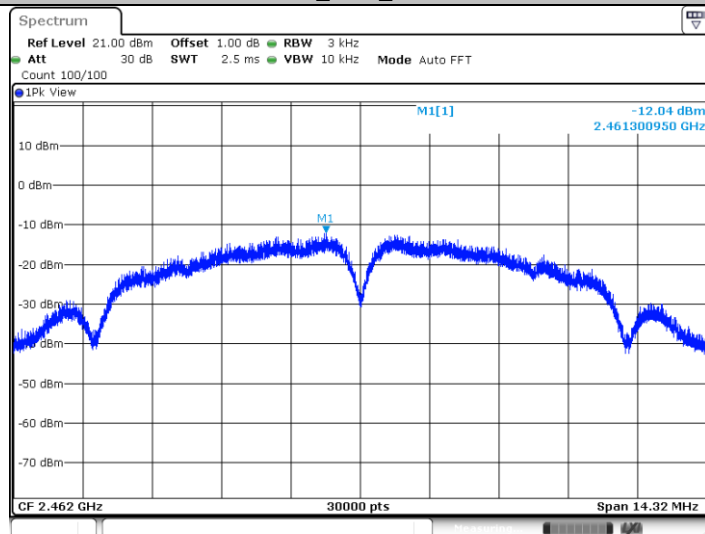


Date: 23 JUN 2021 15:27:59

11G_Ant1_2412

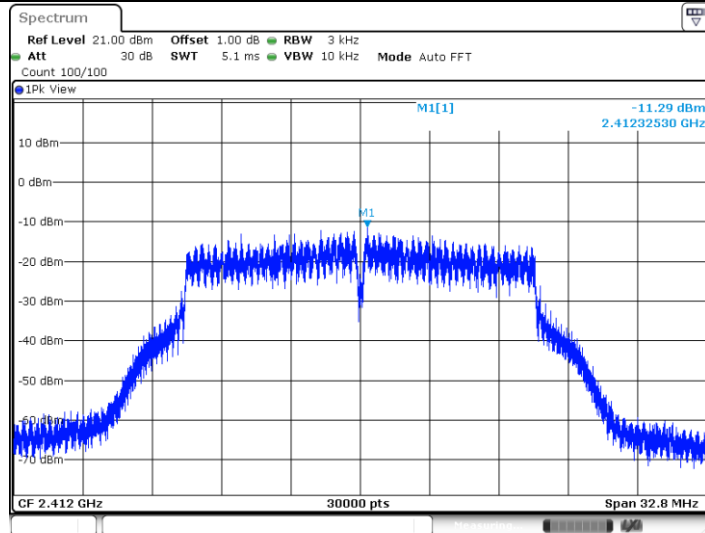


Date: 23 JUN 2021 14:53:50

11G_Ant2_2412

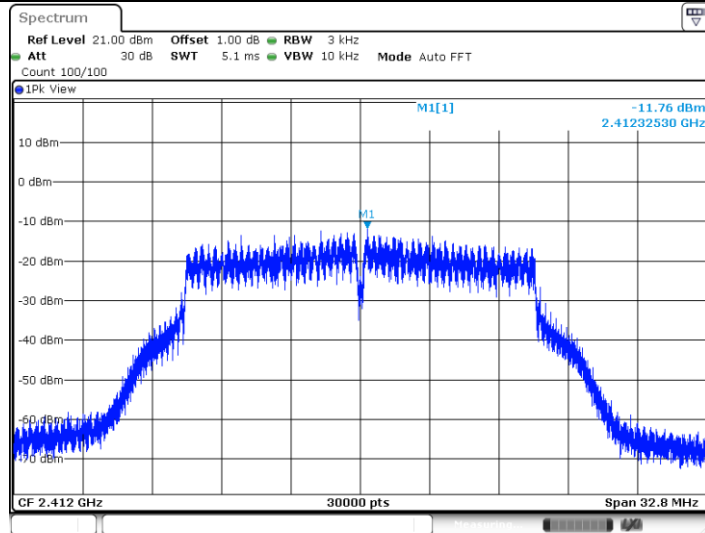


Date: 23 JUN 2021 15:08:14

11G_Ant1_2437

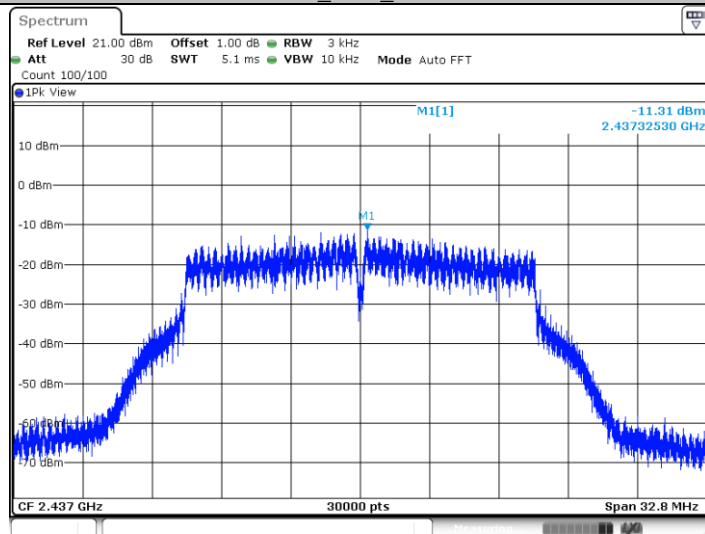


Date: 23 JUN 2021 14:55:54

11G_Ant2_2437

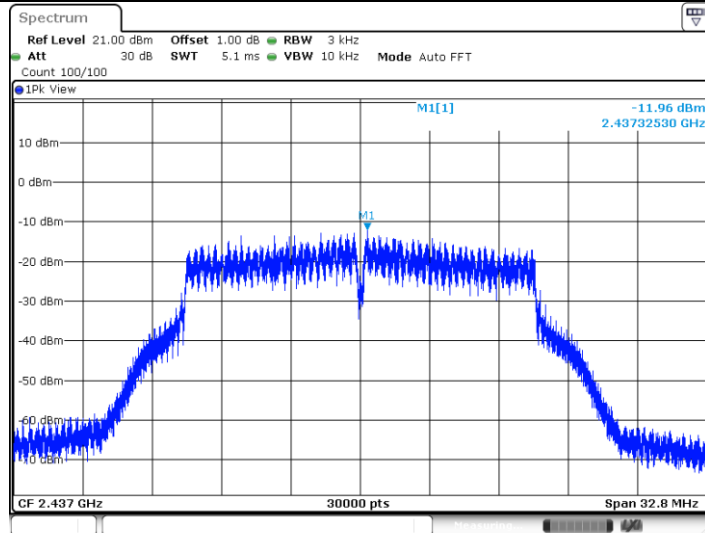


Date: 23 JUN 2021 15:10:12

11G_Ant1_2462

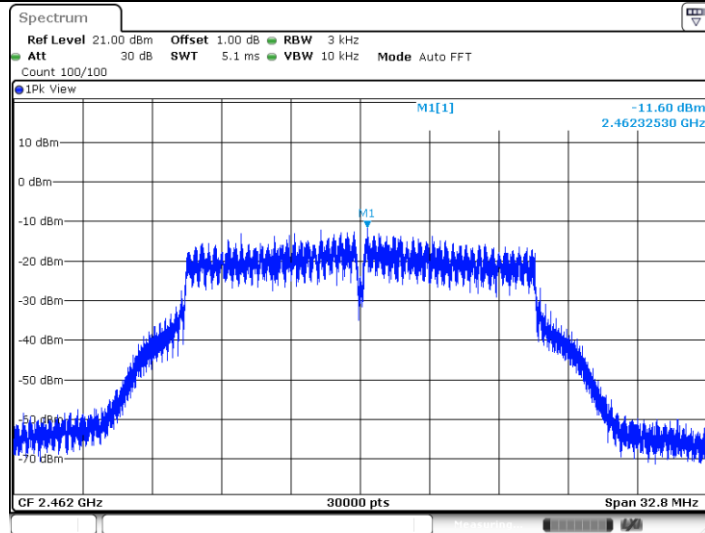


Date: 23 JUN 2021 14:58:31

11G_Ant2_2462

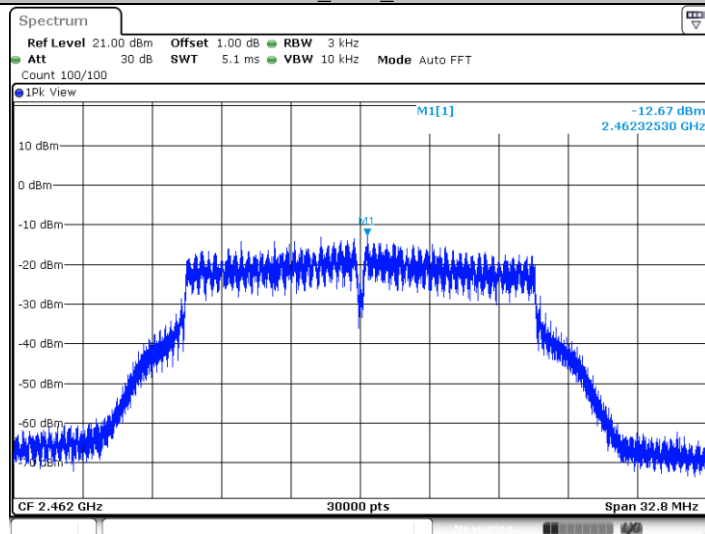


Date: 23 JUN 2021 15:12:07

11B_Ant1_2412

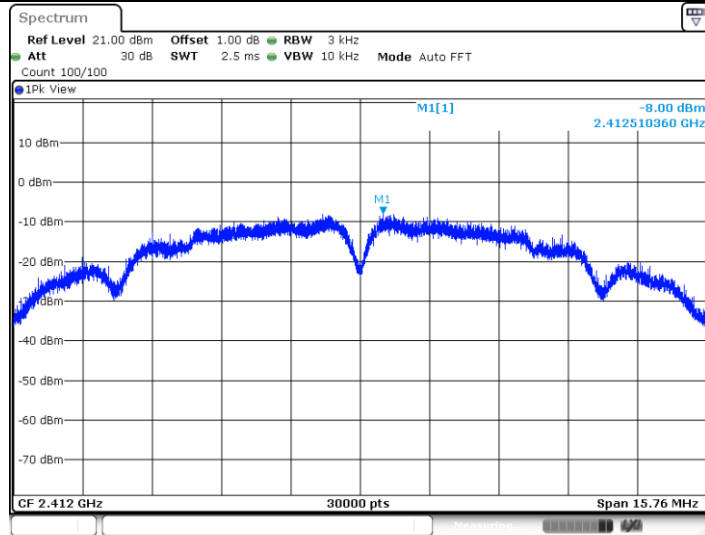

Date: 4 DEC.2020 09:49:47

11B_Ant1_2437

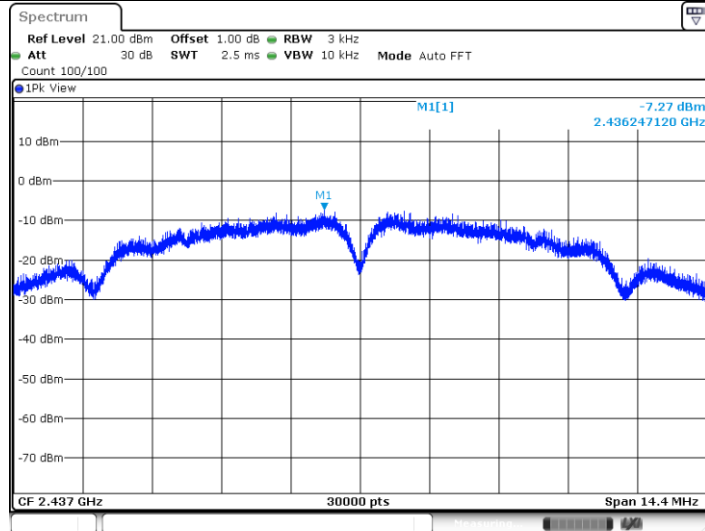

Date: 4 DEC.2020 09:53:02

9.5 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
4. The level displayed must comply with the limit specified in this Section. Submit these plots.
5. Repeat above procedures until all frequencies measured were complete.




Limit


Frequency Range MHz	Limit (dBm)
30-25000	-20




Spurious RF conducted emissions

TestMode	Antenna	Channel(dBm)	FreqRange(MHz)	RefLevel	Result(dBm)	Limit(dBm)	Verdict	
11B	Ant1	2412	Reference	3.08 dBm	3.08	---	PASS	
			30~1000	30~1000 MHz	-68.05	<=-16.92	PASS	
			1000~26500	1000~26500 MHz	-48.18	<=-16.92	PASS	
	Ant2	2412	Reference	2.34 dBm	2.34	---	PASS	
			30~1000	30~1000 MHz	-67.94	<=-17.66	PASS	
			1000~26500	1000~26500 MHz	-49.46	<=-17.66	PASS	
	Ant1	2437	Reference	3.01 dBm	3.01	---	PASS	
			30~1000	30~1000 MHz	-67.86	<=-16.99	PASS	
			1000~26500	1000~26500 MHz	-51.9	<=-16.99	PASS	
	Ant2	2437	Reference	2.23 dBm	2.23	---	PASS	
			30~1000	30~1000 MHz	-67.98	<=-17.77	PASS	
			1000~26500	1000~26500 MHz	-52.15	<=-17.77	PASS	
	Ant1	2462	Reference	2.90 dBm	2.90	---	PASS	
			30~1000	30~1000 MHz	-68.03	<=-17.1	PASS	
			1000~26500	1000~26500 MHz	-51.89	<=-17.1	PASS	
	Ant2	2462	Reference	1.00 dBm	1.00	---	PASS	
			30~1000	30~1000 MHz	-68	<=-19	PASS	
			1000~26500	1000~26500 MHz	-52.6	<=-19	PASS	
	11G	Ant1	2412	Reference	0.65 dBm	0.65	---	PASS
				30~1000	30~1000 MHz	-67.51	<=-19.35	PASS
				1000~26500	1000~26500 MHz	-40.21	<=-19.35	PASS
		Ant2	2412	Reference	0.21 dBm	0.21	---	PASS
				30~1000	30~1000 MHz	-67.93	<=-19.79	PASS
				1000~26500	1000~26500 MHz	-38.54	<=-19.79	PASS
Ant1		2437	Reference	1.21 dBm	1.21	---	PASS	
			30~1000	30~1000 MHz	-68.42	<=-18.79	PASS	
			1000~26500	1000~26500 MHz	-52.41	<=-18.79	PASS	
Ant2		2437	Reference	0.21 dBm	0.21	---	PASS	
			30~1000	30~1000 MHz	-67.86	<=-19.79	PASS	
			1000~26500	1000~26500 MHz	-52.69	<=-19.79	PASS	
Ant1		2462	Reference	0.77 dBm	0.77	---	PASS	
			30~1000	30~1000 MHz	-67.87	<=-19.23	PASS	
			1000~26500	1000~26500 MHz	-52.39	<=-19.23	PASS	
Ant2		2462	Reference	-0.75 dBm	-0.75	---	PASS	
			30~1000	30~1000 MHz	-67.07	<=-20.75	PASS	
			1000~26500	1000~26500 MHz	-52.43	<=-20.75	PASS	
11N20SISO		Ant1	2412	Reference	0.89 dBm	0.89	---	PASS
				30~1000	30~1000 MHz	-67.61	<=-19.11	PASS
				1000~26500	1000~26500 MHz	-41.11	<=-19.11	PASS
		Ant2	2412	Reference	1.84 dBm	1.84	---	PASS
				30~1000	30~1000 MHz	-68.14	<=-18.16	PASS
				1000~26500	1000~26500 MHz	-33.3	<=-18.16	PASS
	Ant1	2437	Reference	1.51 dBm	1.51	---	PASS	
			30~1000	30~1000 MHz	-68.24	<=-18.49	PASS	
			1000~26500	1000~26500 MHz	-51.78	<=-18.49	PASS	
	Ant2	2437	Reference	2.46 dBm	2.46	---	PASS	
			30~1000	30~1000 MHz	-67.99	<=-17.54	PASS	
			1000~26500	1000~26500 MHz	-51.65	<=-17.54	PASS	
	Ant1	2462	Reference	0.83 dBm	0.83	---	PASS	
			30~1000	30~1000 MHz	-67.35	<=-19.17	PASS	
			1000~26500	1000~26500 MHz	-52.03	<=-19.17	PASS	
	Ant2	2462	Reference	2.02 dBm	2.02	---	PASS	
			30~1000	30~1000 MHz	-68.45	<=-17.98	PASS	
			1000~26500	1000~26500 MHz	-51.02	<=-17.98	PASS	

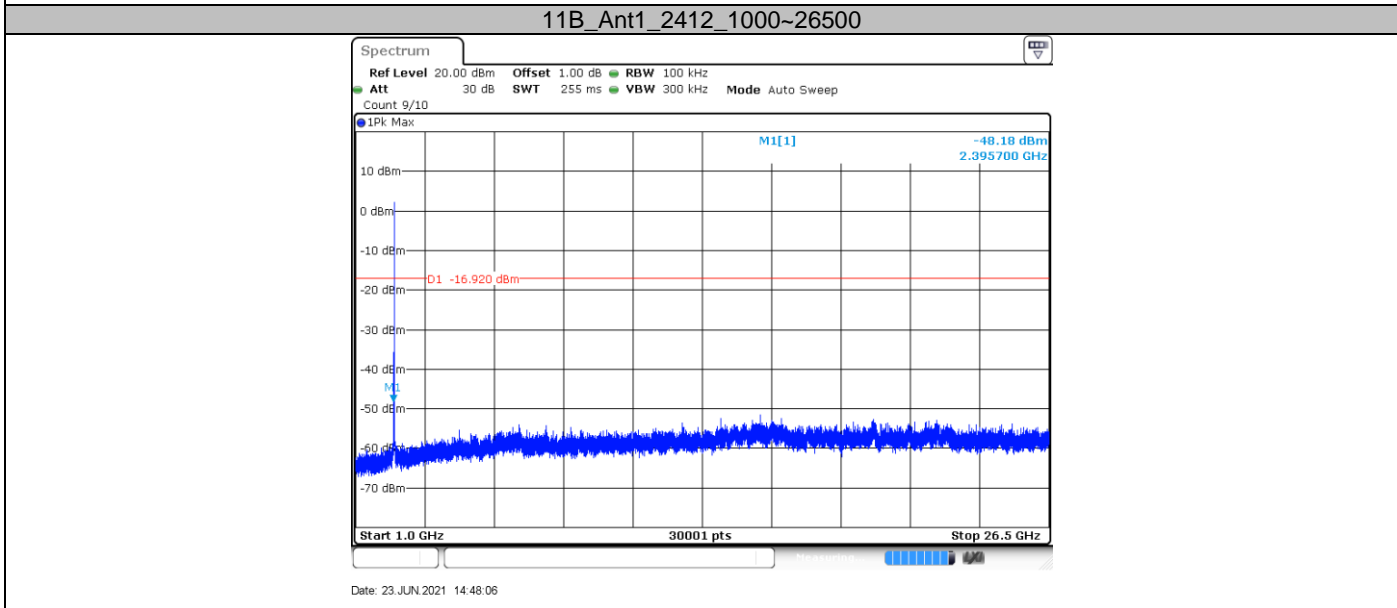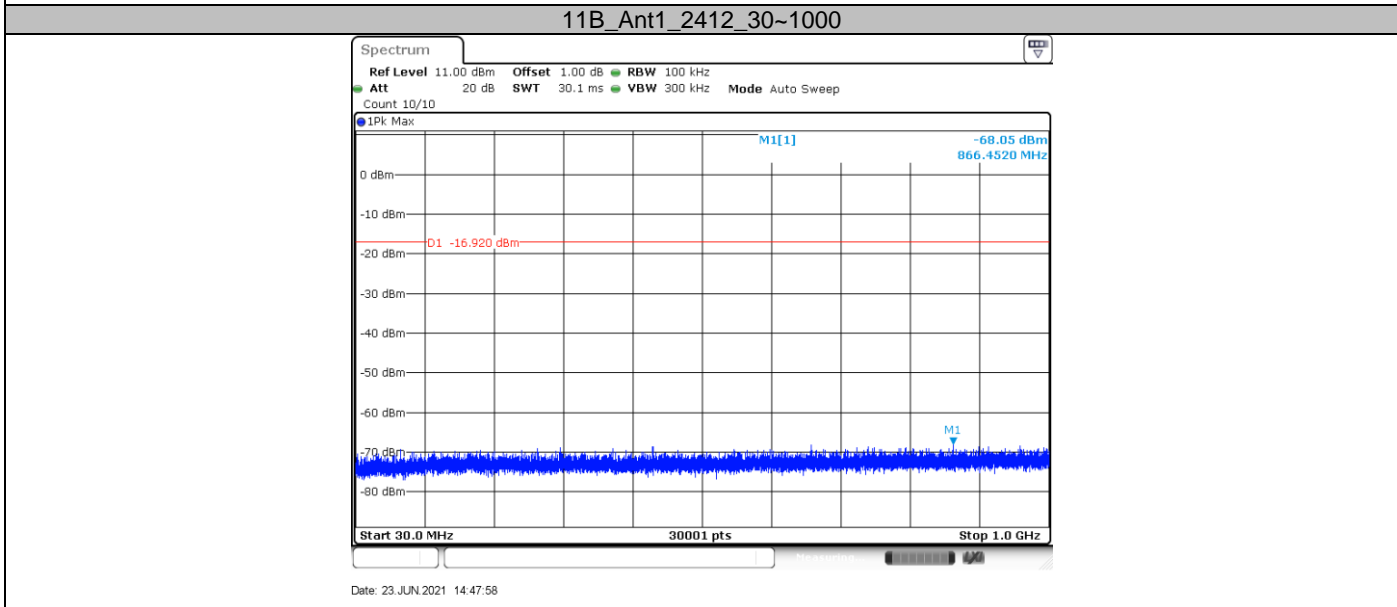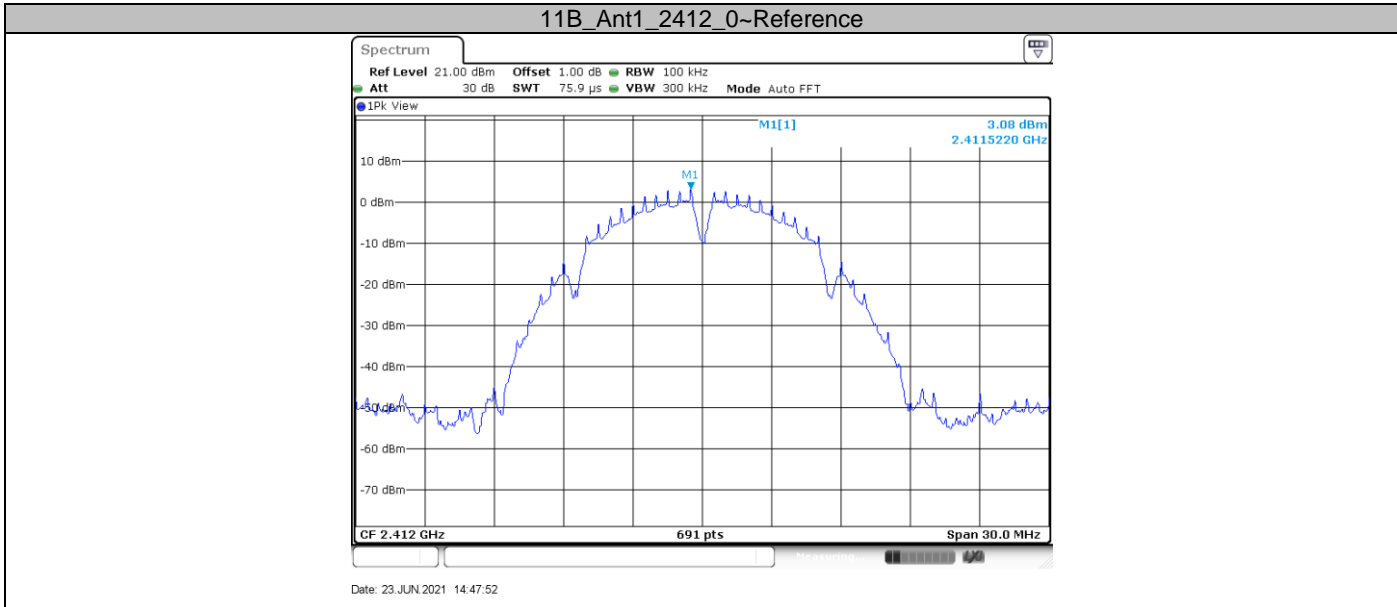


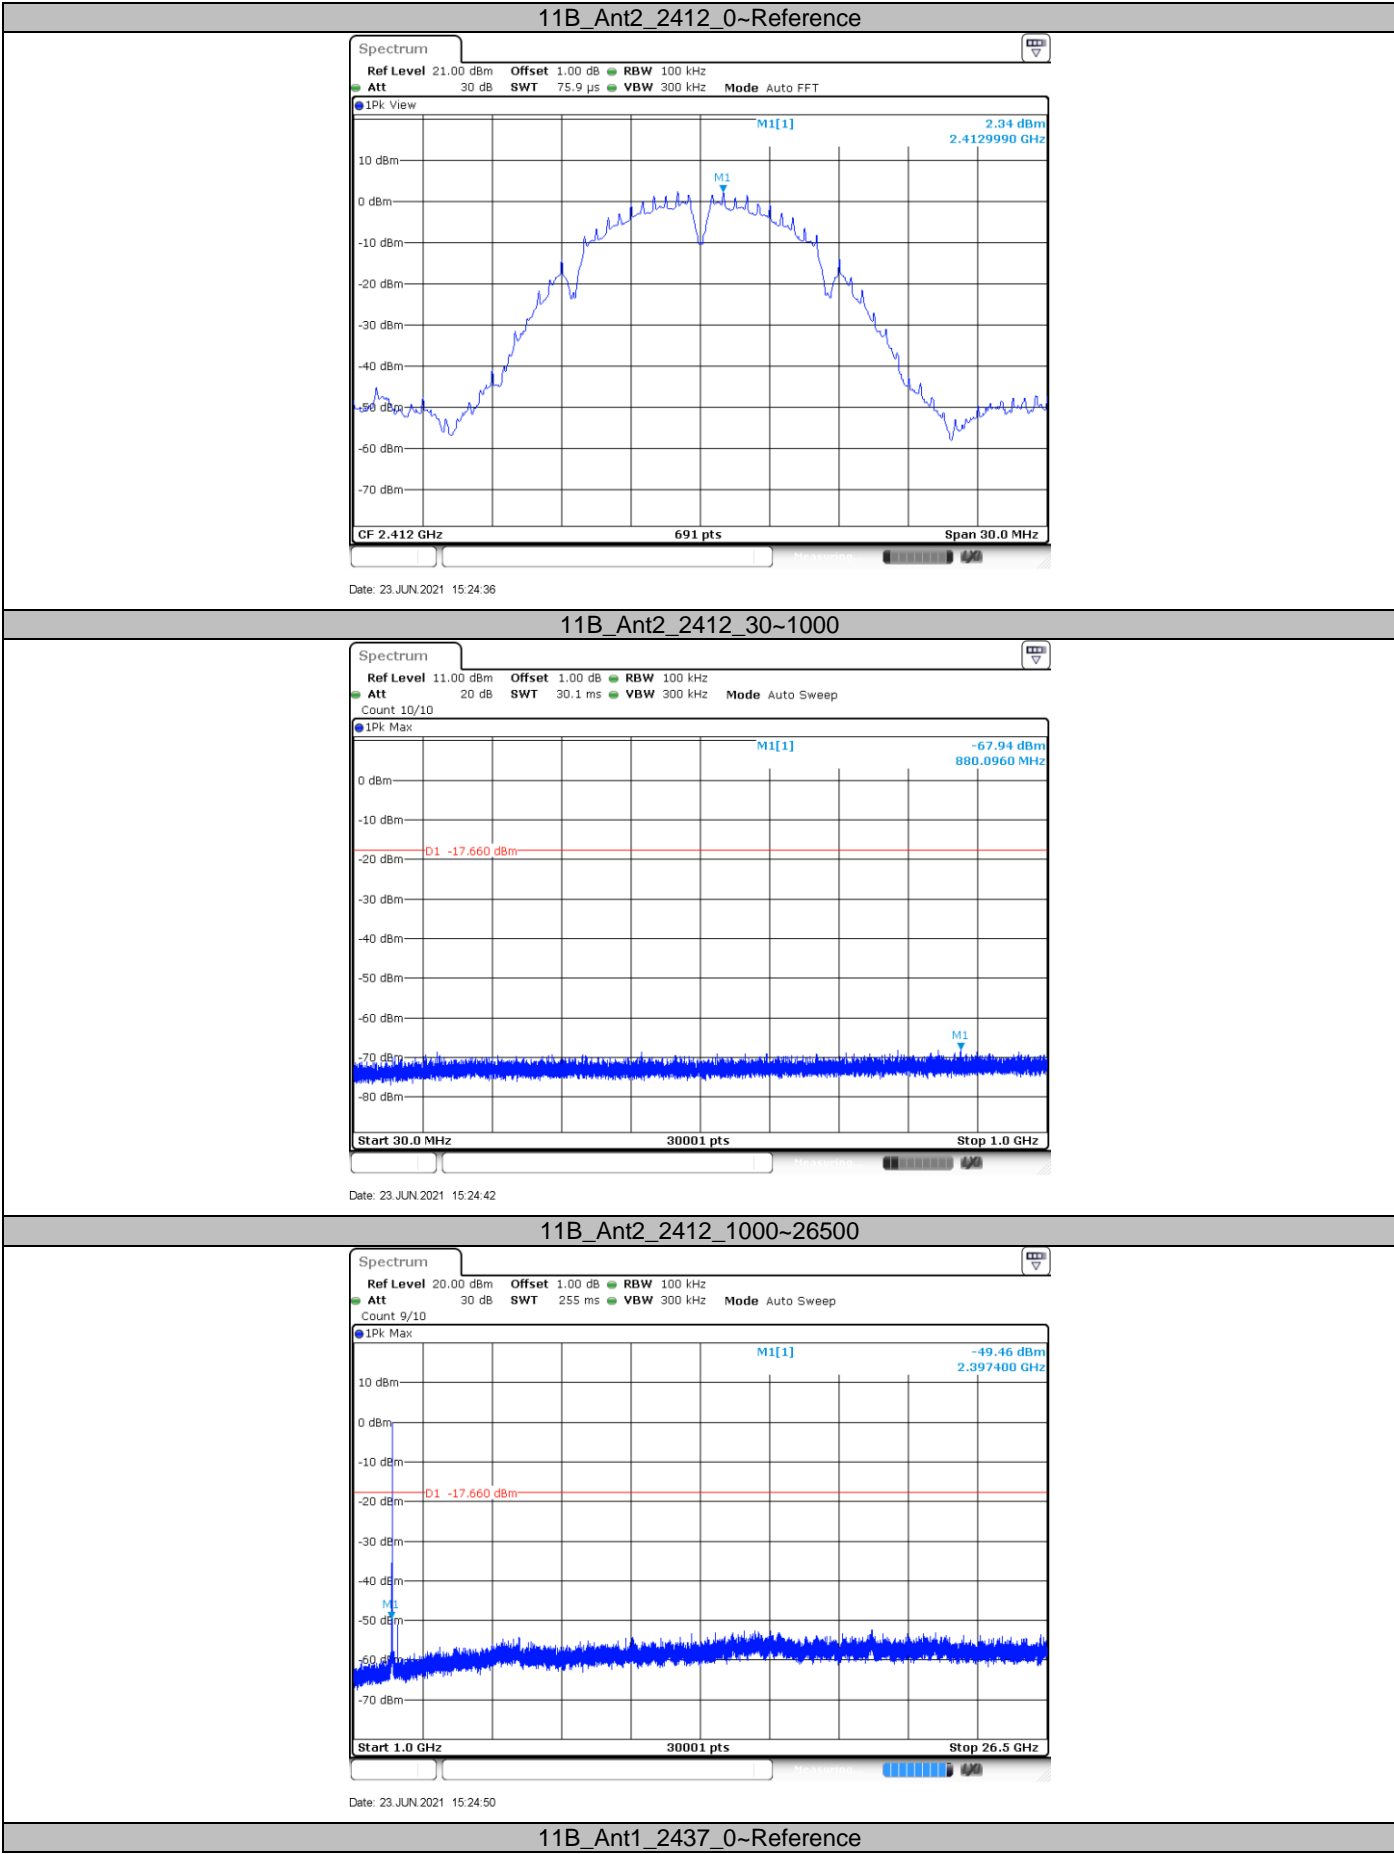

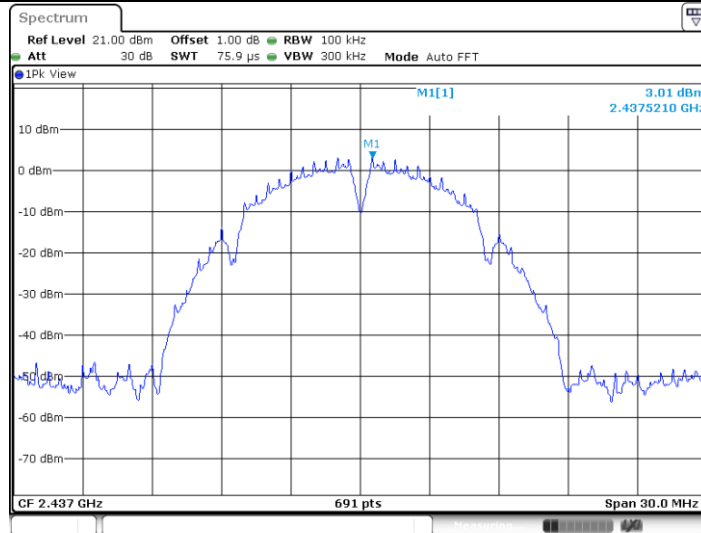


Date: 23 JUN 2021 14:49:28

11B_Ant1_2437_30~1000

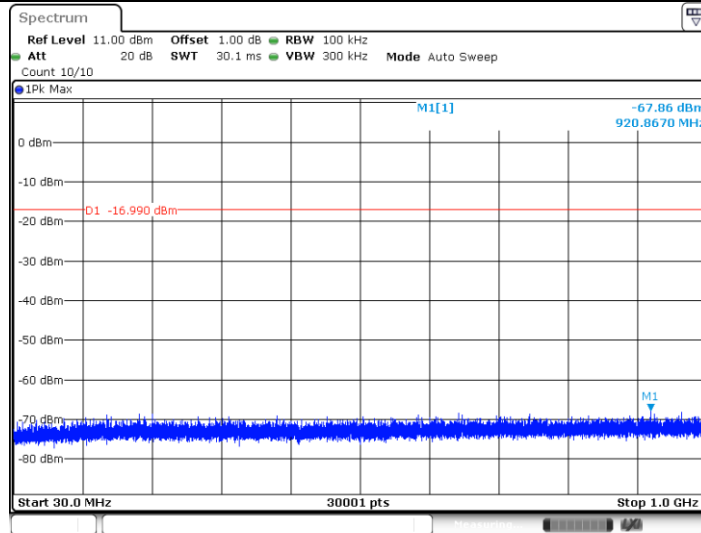


Date: 23 JUN 2021 14:49:34

11B_Ant2_2437_0~Reference

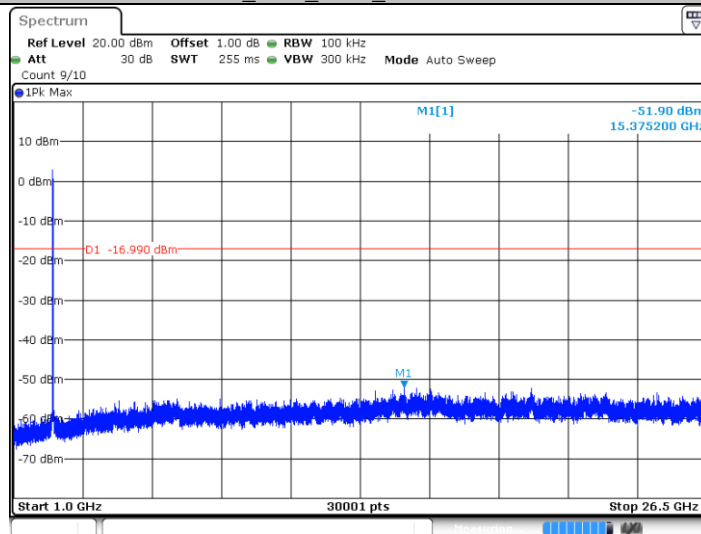


Date: 23 JUN 2021 14:49:42

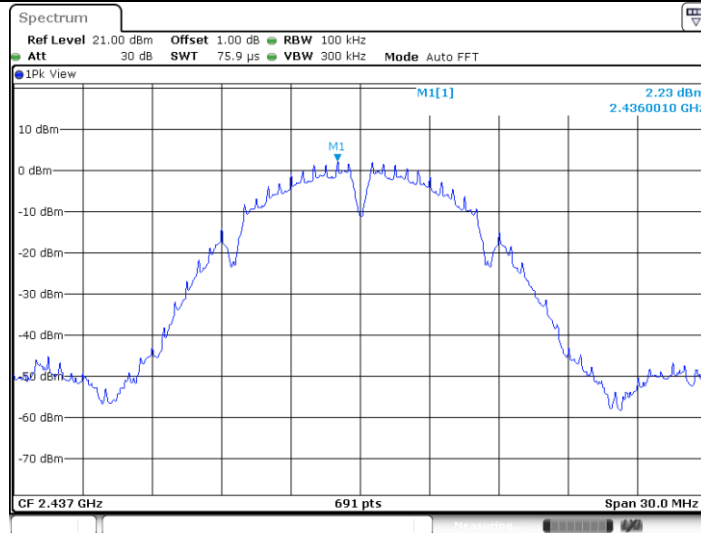


Date: 23 JUN 2021 15:26:22

11B_Ant2_2437_30~1000

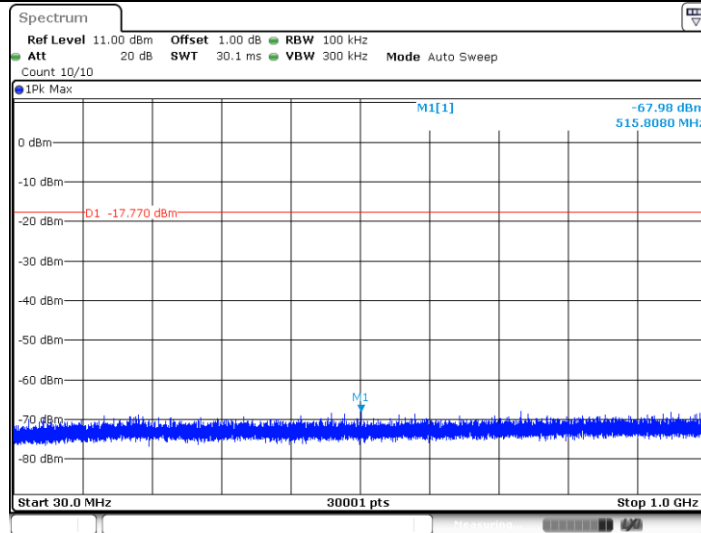


Date: 23 JUN 2021 15:26:28

11B_Ant2_2437_1000~26500

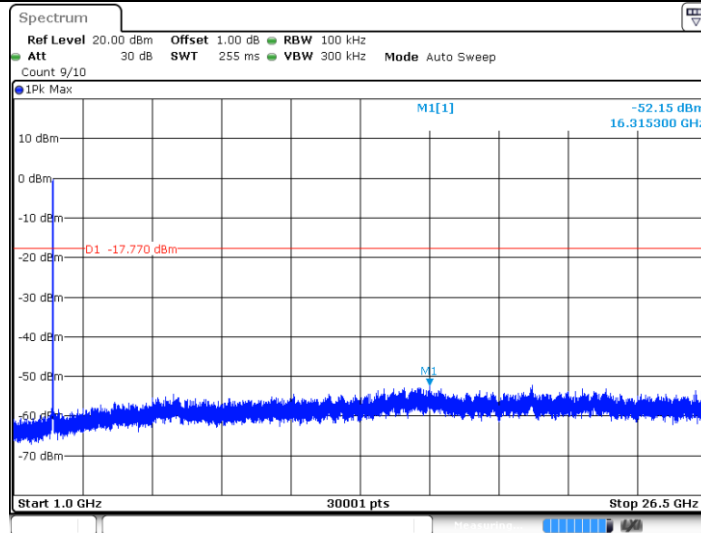


Date: 23 JUN 2021 15:26:36

11B_Ant1_2462_0~Reference

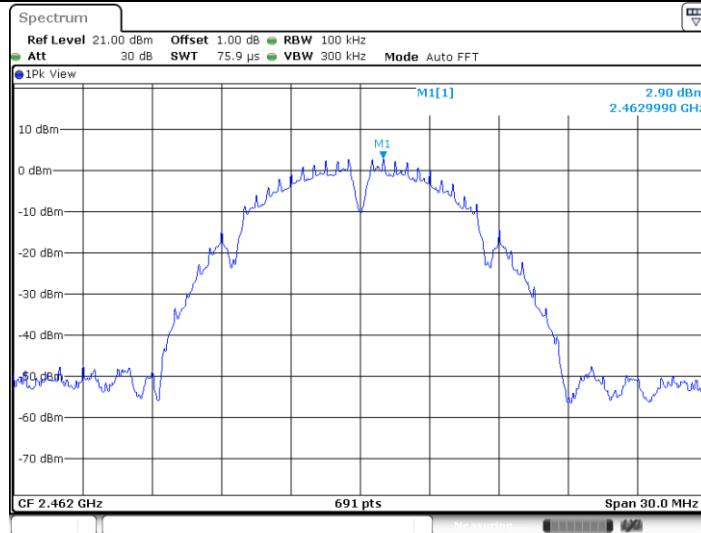


Date: 23 JUN 2021 14:51:21

11B_Ant1_2462_30~1000

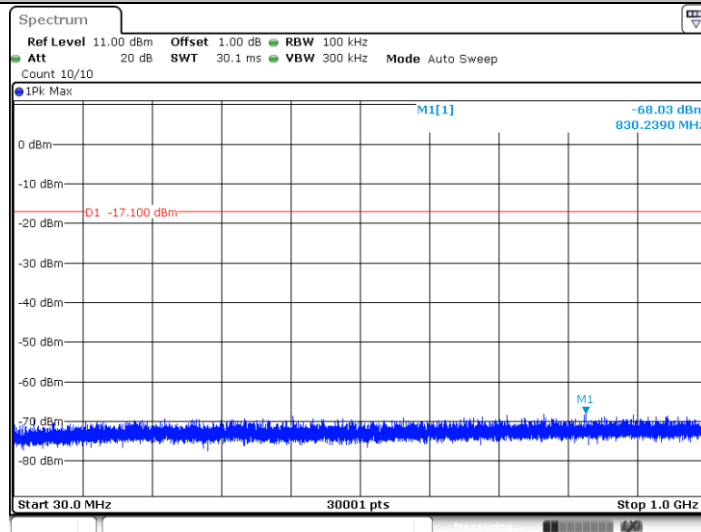


Date: 23 JUN 2021 14:51:27

11B_Ant2_2462_0~Reference

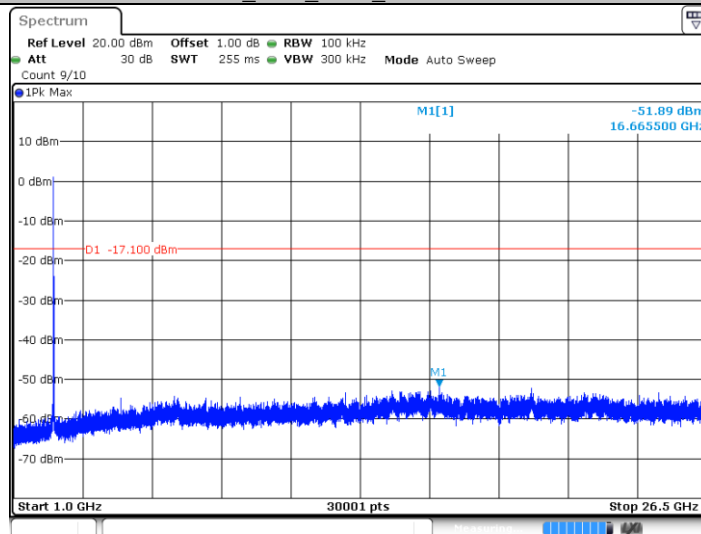


Date: 23 JUN 2021 14:51:35

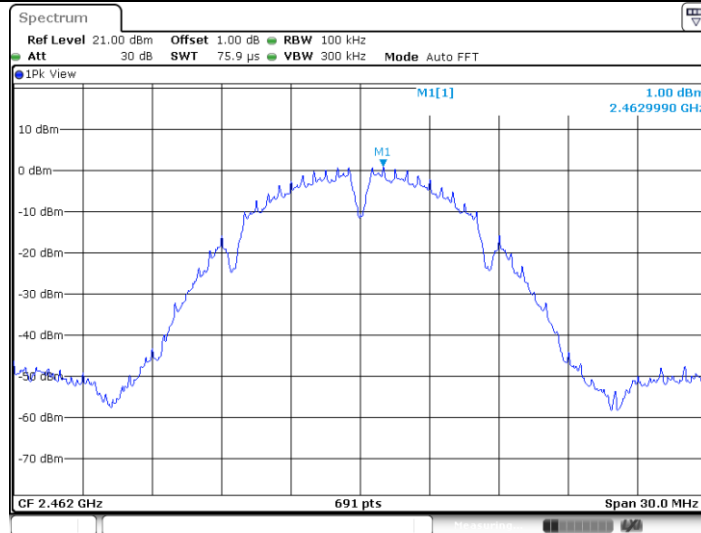


Date: 23 JUN 2021 15:28:14

11B_Ant2_2462_30~1000

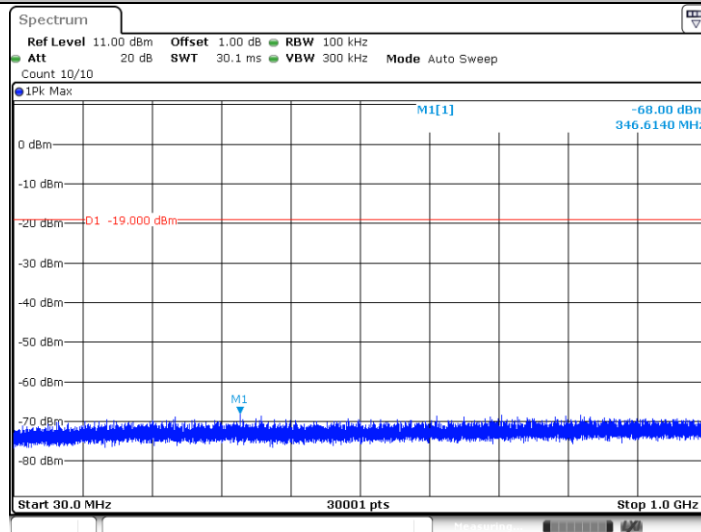


Date: 23 JUN 2021 15:28:20

11B_Ant2_2462_1000~26500

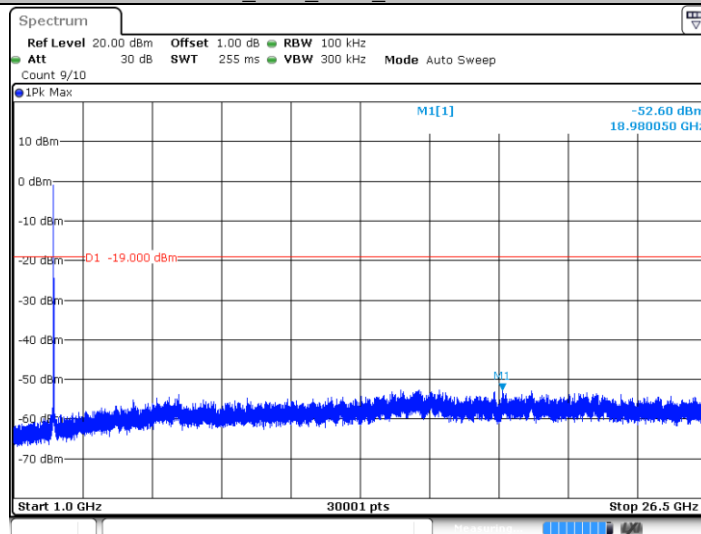


Date: 23 JUN 2021 15:28:27

11G_Ant1_2412_0~Reference

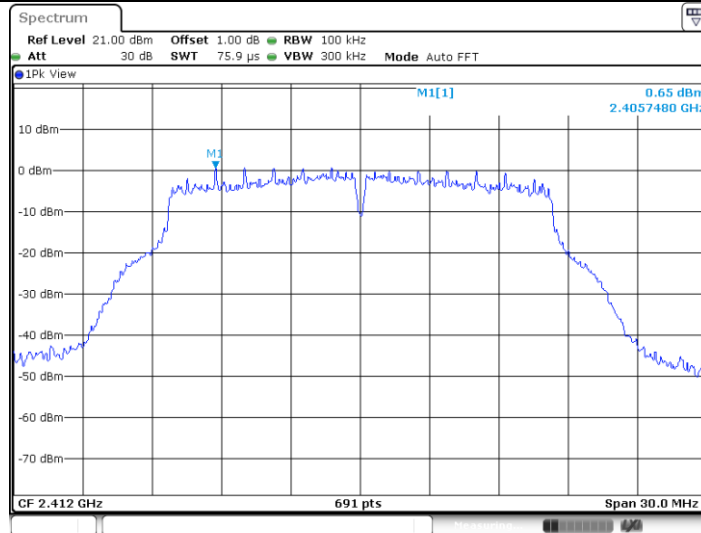


Date: 23 JUN 2021 14:54:05

11G_Ant1_2412_30~1000

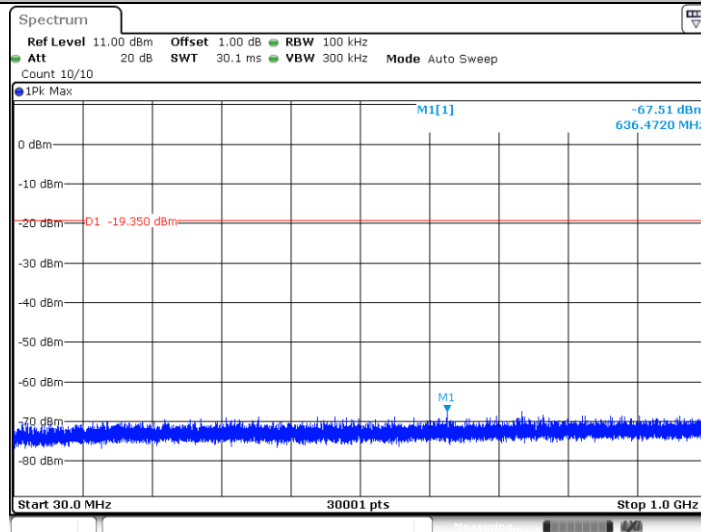


Date: 23 JUN 2021 14:54:11

11G_Ant1_2412_1000~26500

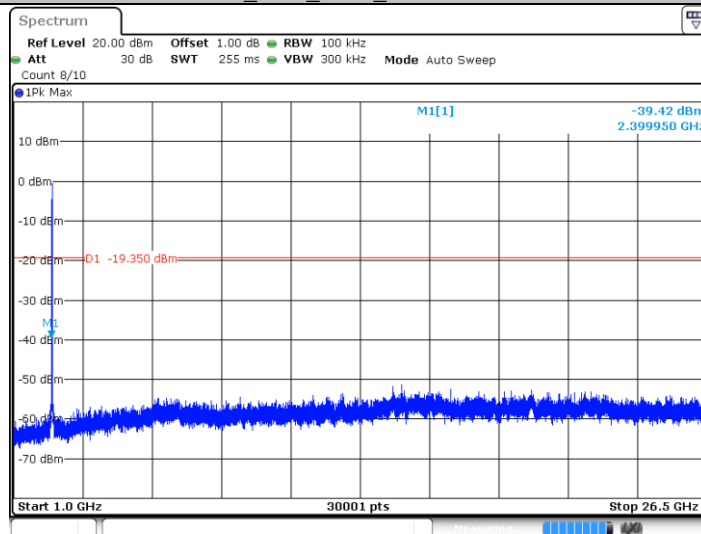


Date: 23 JUN 2021 14:54:19

11G_Ant2_2412_0~Reference

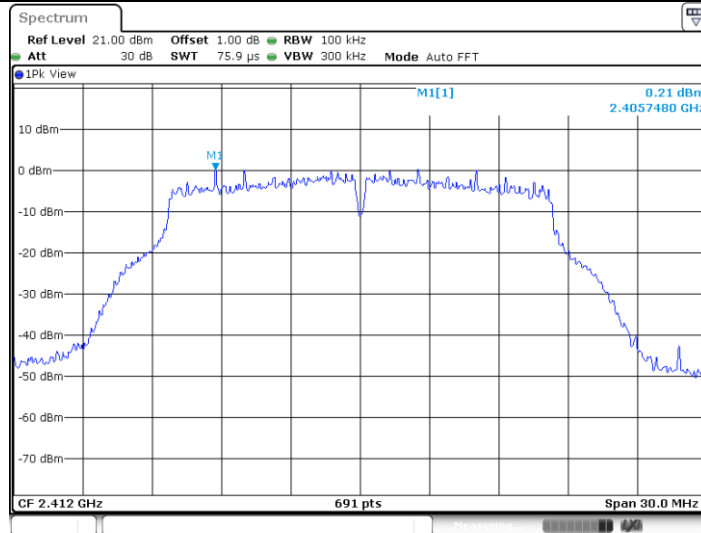


Date: 23 JUN 2021 15:08:29

11G_Ant2_2412_30~1000

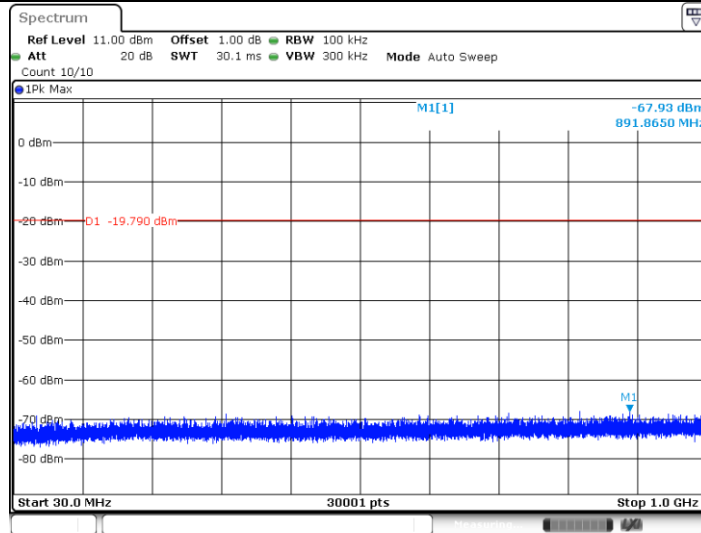


Date: 23 JUN 2021 15:08:35

11G_Ant2_2412_1000~26500

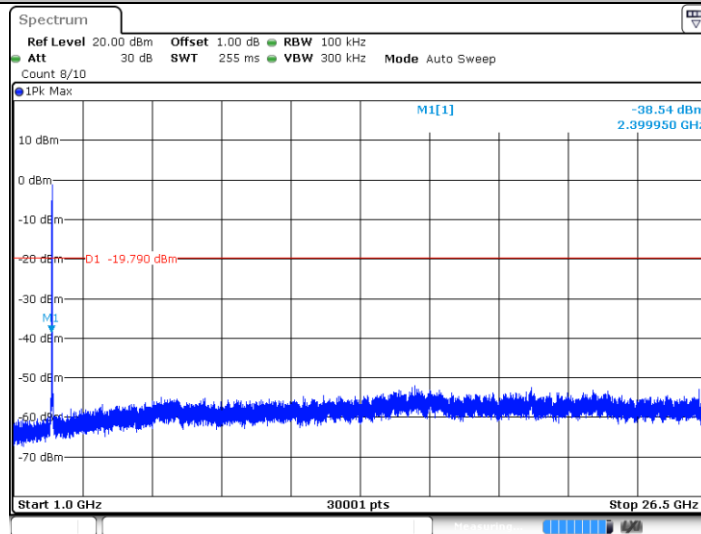


Date: 23 JUN 2021 15:08:42

11G_Ant1_2437_0~Reference

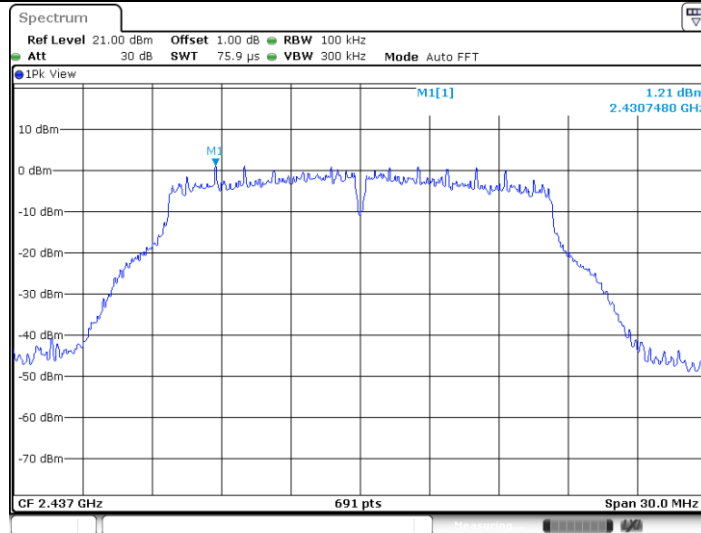


Date: 23 JUN 2021 14:55:59

11G_Ant1_2437_30~1000

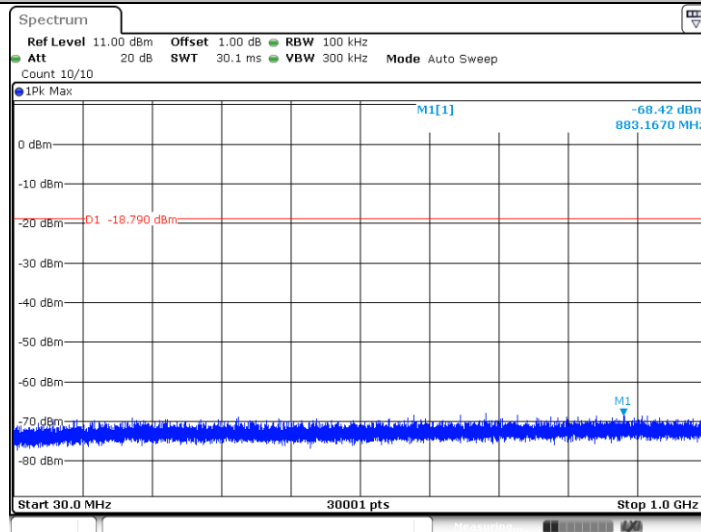


Date: 23 JUN 2021 14:56:05

11G_Ant1_2437_1000~26500

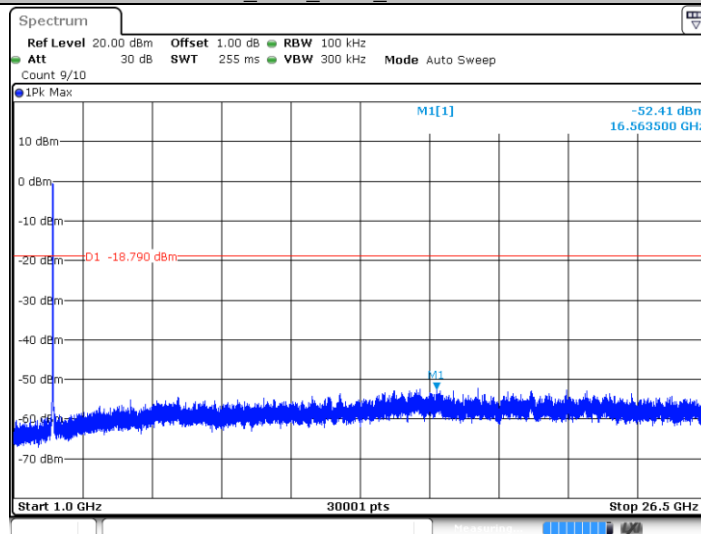


Date: 23 JUN 2021 14:56:13

11G_Ant2_2437_0~Reference

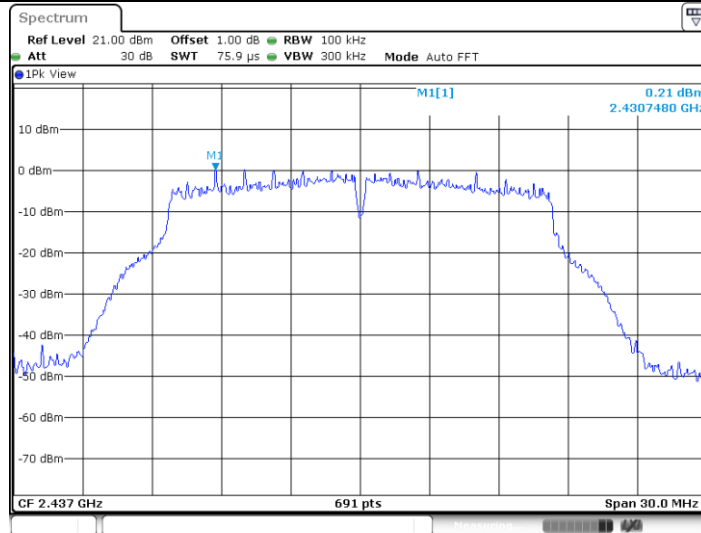


Date: 23 JUN 2021 15:10:18

11G_Ant2_2437_30~1000

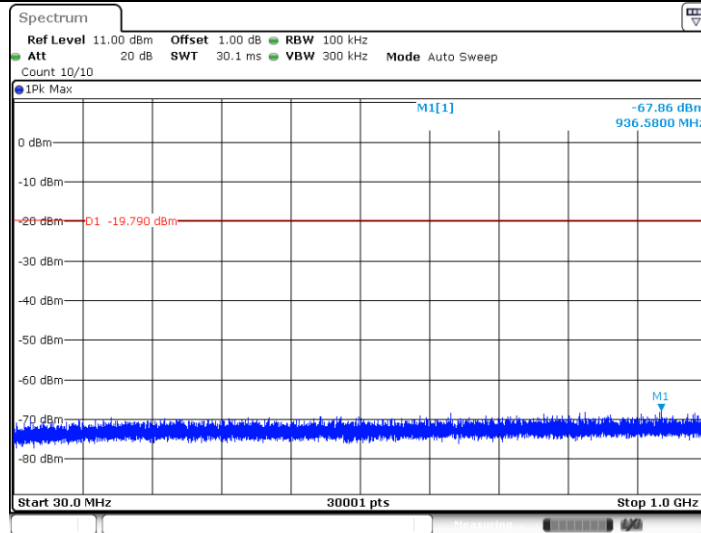


Date: 23 JUN 2021 15:10:24

11G_Ant2_2437_1000~26500

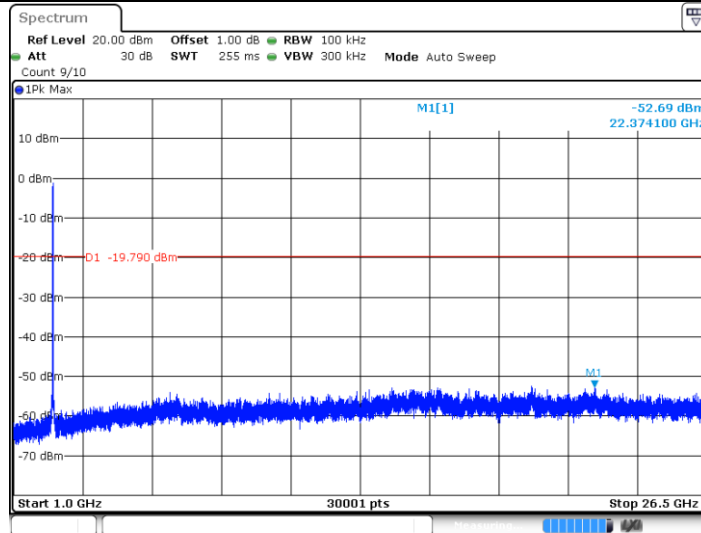


Date: 23 JUN 2021 15:10:32

11G_Ant1_2462_0~Reference

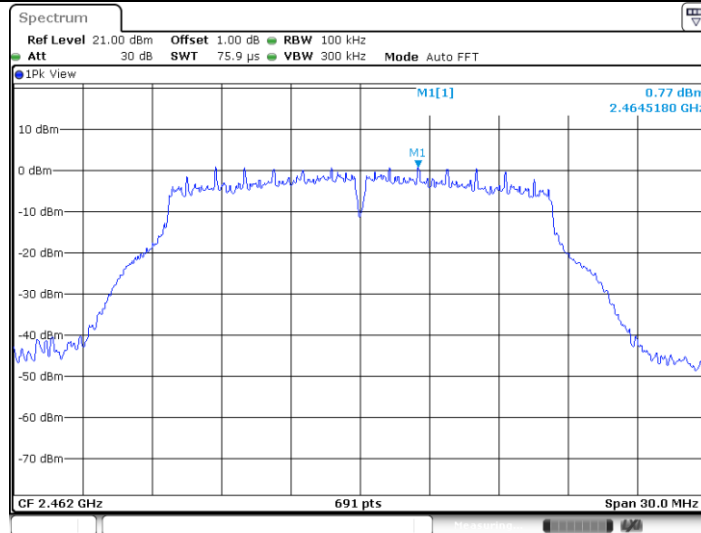


Date: 23 JUN 2021 14:58:46

11G_Ant1_2462_30~1000

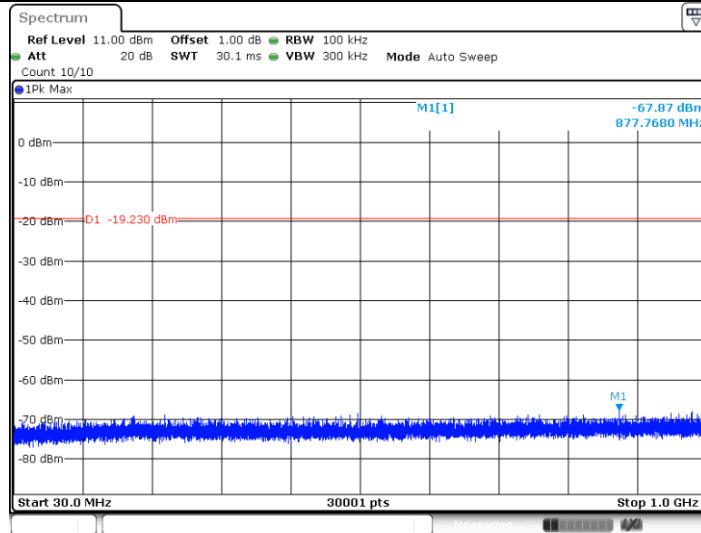


Date: 23 JUN 2021 14:58:52

11G_Ant1_2462_1000~26500

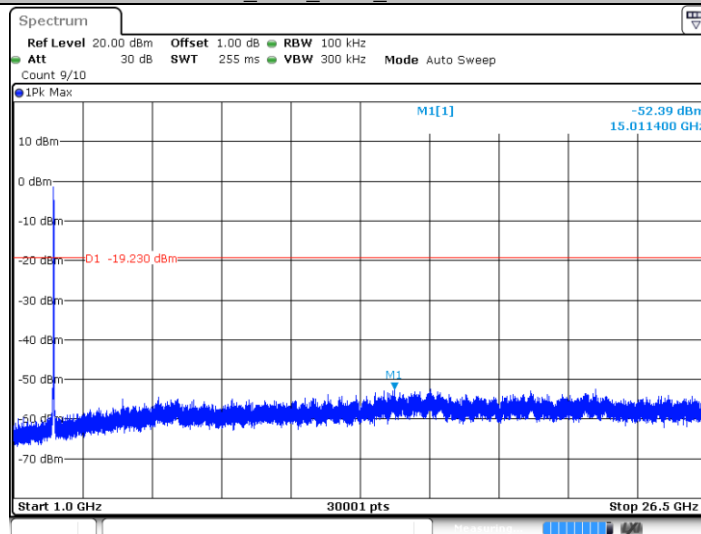


Date: 23 JUN 2021 14:58:59

11G_Ant2_2462_0~Reference

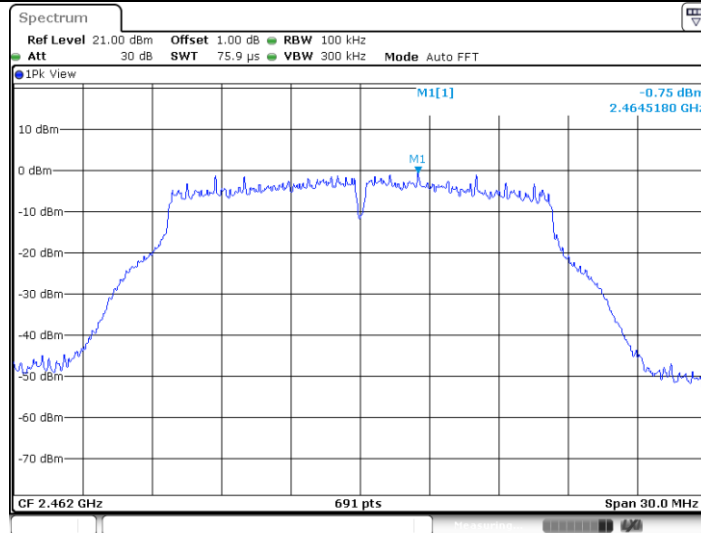


Date: 23 JUN 2021 15:12:22

11G_Ant2_2462_30~1000

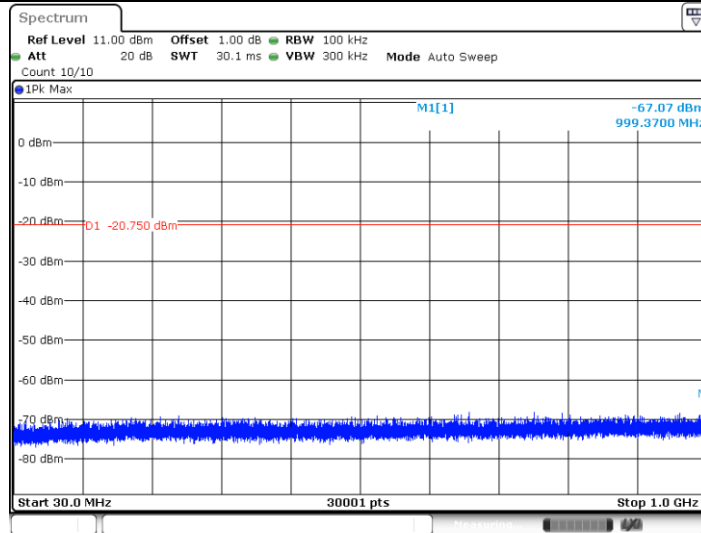

Date: 23 JUN 2021 15:12:28

11G_Ant2_2462_1000~26500

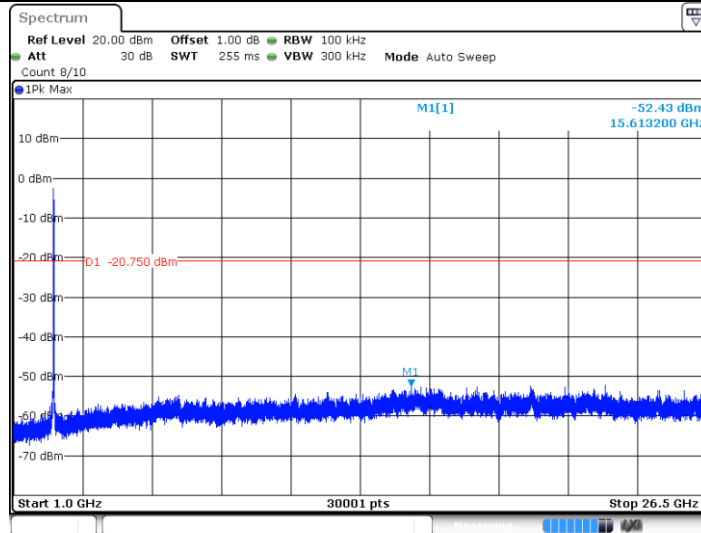

Date: 23 JUN 2021 15:12:36

11N20SISO_Ant1_2412_0~Reference