



FCC RF Test Report

APPLICANT : Ring LLC
EQUIPMENT : Battery Doorbell Pro
BRAND NAME : ring
MODEL NAME : 5F79E9
FCC ID : 2AEUPBHARG091
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Mar. 28, 2023 ~ Aug. 28, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant5

 1.2 Product Feature of Equipment Under Test.....5

 1.3 Product Specification of Equipment Under Test.....6

 1.4 Modification of EUT6

 1.5 Testing Location7

 1.6 Test Software.....7

 1.7 Applicable Standards.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8

 2.1 Carrier Frequency and Channel8

 2.2 Test Mode.....8

 2.3 Connection Diagram of Test System.....9

 2.4 Support Unit used in test configuration and system10

 2.5 EUT Operation Test Setup10

 2.6 Measurement Results Explanation Example.....10

3 TEST RESULT.....11

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement11

 3.2 Maximum Conducted Output Power Measurement14

 3.3 Power Spectral Density Measurement15

 3.4 Unwanted Emissions Measurement.....17

 3.5 AC Conducted Emission Measurement.....22

 3.6 Antenna Requirements.....24

4 LIST OF MEASURING EQUIPMENT25

5 MEASUREMENT UNCERTAINTY26

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330811-01D	Rev. 01	Initial issue of report	Nov. 15, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 11.95 dB at 45.520 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 20.86 dB at 0.151 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Ring LLC
12515 Cerise Ave, Hawthorne, CA 90250 USA

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Battery Doorbell Pro
Brand Name	ring
Model Name	5F79E9
FCC ID	2AEUPBHARG091
SN	Conducted: G9D2G90633150264 Conduction: G9D2G90431520124 Radiation: G9D2G90431460003 G9D2G90633050019
HW Version	DVT 4
SW Version	1.2.118
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<SISO Ant. 1/2> : 802.11a : 17.74 dBm / 0.0594 W 802.11n HT20 : 17.64 dBm / 0.0581 W 802.11ac VHT20 : 17.70 dBm / 0.0589 W 802.11ax HE20 : 17.81 dBm / 0.0604 W
99% Occupied Bandwidth	<SISO Ant. 1/2> : 802.11a : 17.93 MHz 802.11n HT20 : 18.08 MHz 802.11ac VHT20 : 17.98 MHz 802.11ax HE20 : 18.98 MHz
Antenna Type / Gain	<Ant. 1> : IFA Antenna with gain 3.9 dBi <Ant. 2> : IFA Antenna with gain 3.3 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM/1024QAM)

Note:

1. 5G WLAN supports for SISO mode only.
2. 802.11ax HE20 support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD, the full RU power > partial RU, therefore the full RU perform full test and Partial RU verified spurious and band edge.
3. The device does not support 802.11ax channel puncture mode.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH05-KS	AUDIX	E3	6.2009-8-24
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	161	5805
	153	5765	165	5825
	157	5785	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Ant.1/ Ant.2:


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20	MCS0
802.11ax HE20	MCS0

AC Conducted Emission	Mode 1 : Bluetooth TX + WLAN Link(5G) + Battery 1 + Adapter 1
------------------------------	---


Ch. #	U-NII-3 : 5745-5825 MHz			
	802.11a	802.11n HT20	802.11ac VHT20	802.11ax HE20
L Low	149	149	149	149
M Middle	157	157	157	157
H High	165	165	165	165

2.3 Connection Diagram of Test System

For AC Conducted Emission:

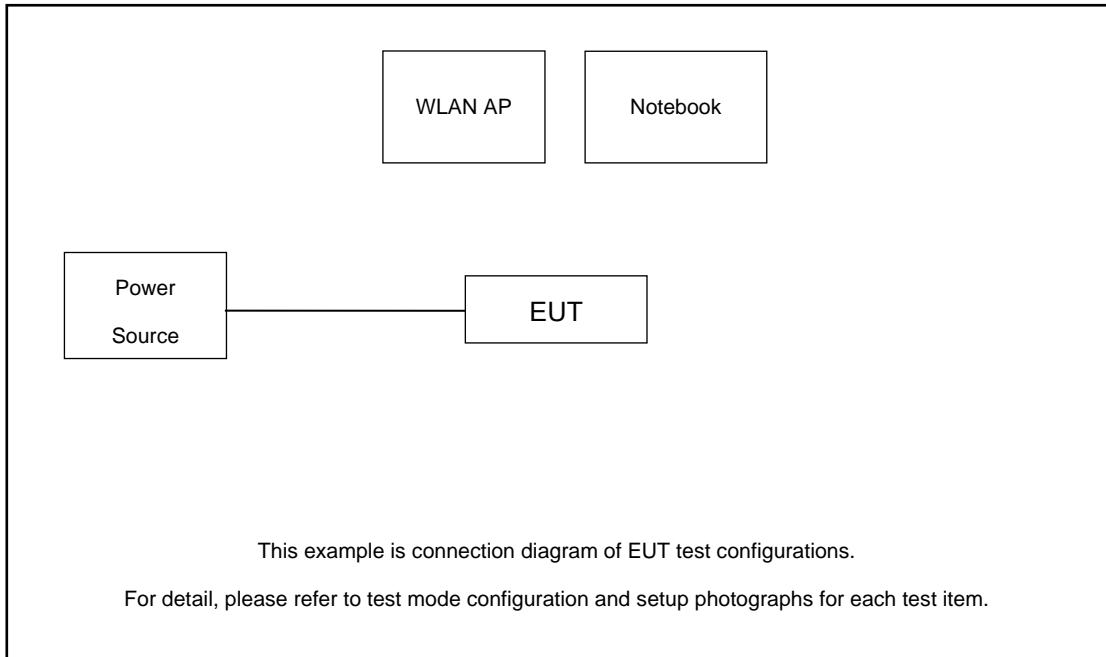

For Radiated Emission:

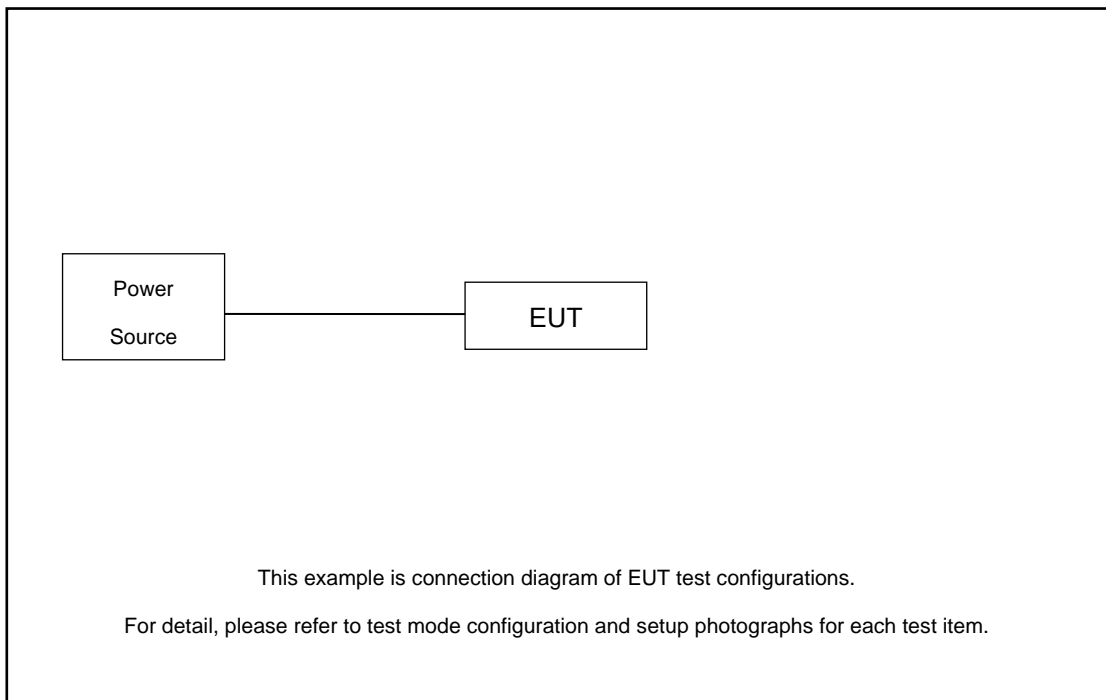



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	LINKSYS	WRT 1900 ACS	N/A	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	AC/DC Adapter 1 (US)	DEE VAN ENTERPRISE CO., LTE	DSA-12PF16-24 FUS 240050	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.2 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 7.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.
For 6dB BW & 99% OBW, Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

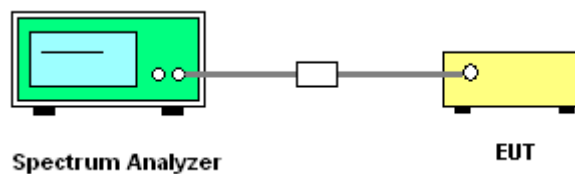

3.1.5 Test Result of 6dB and 26dB and 99% Bandwidth

Please refer to Appendix A.

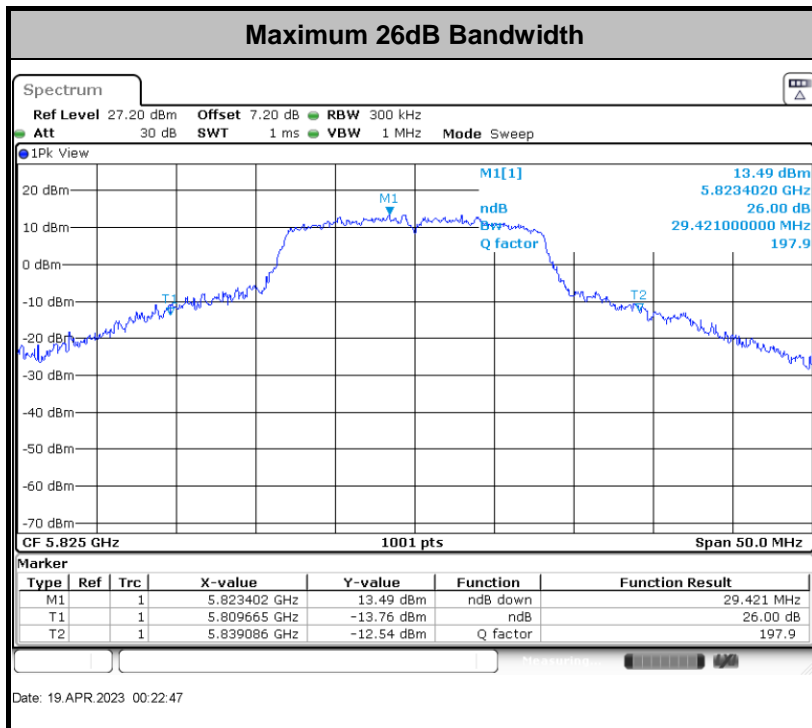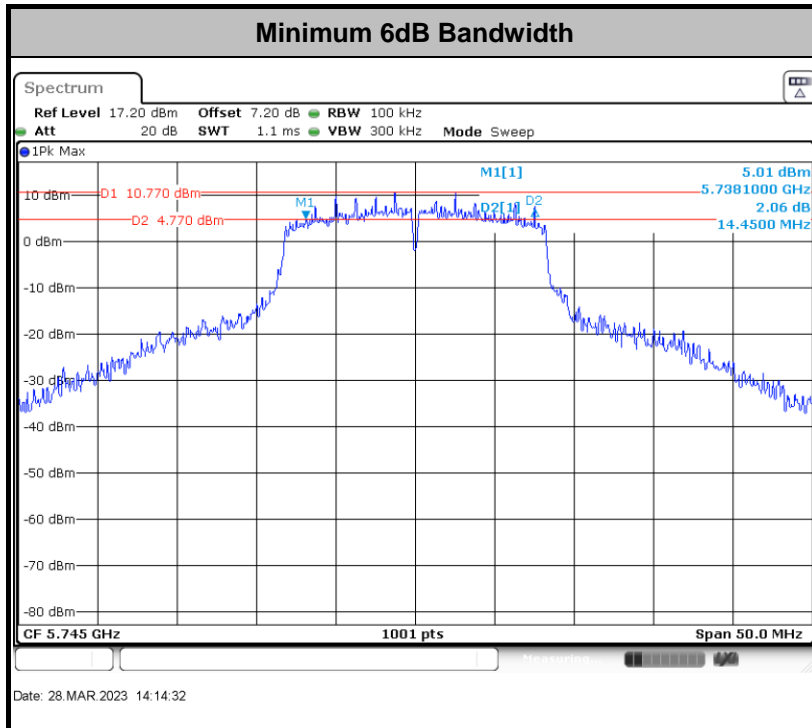

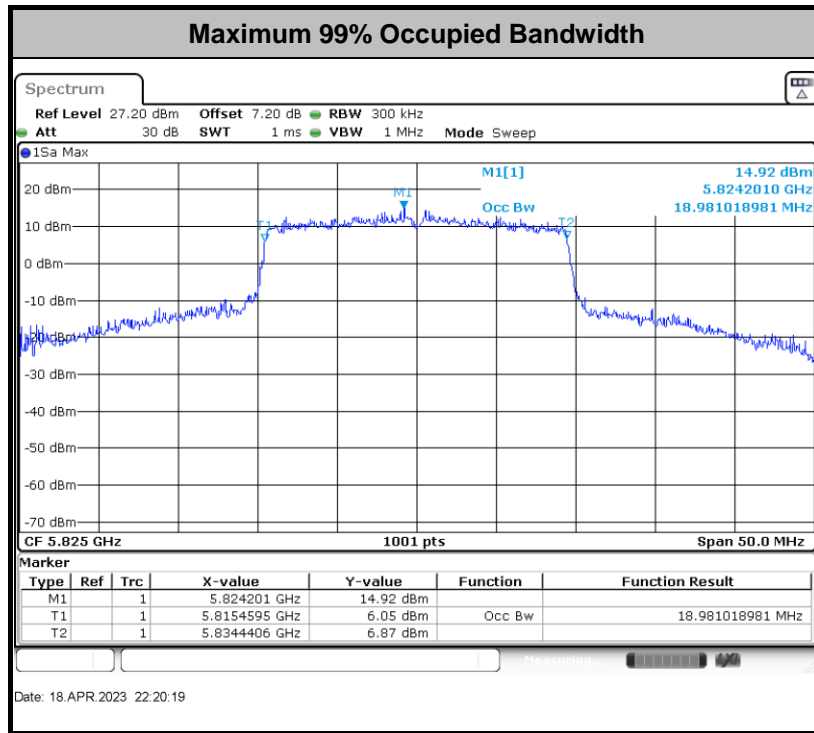

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

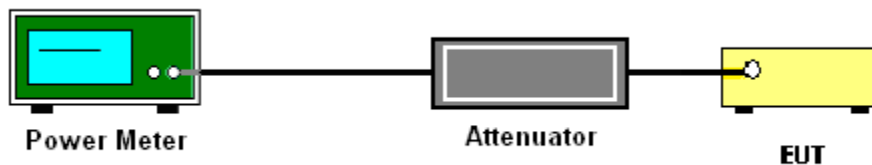

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

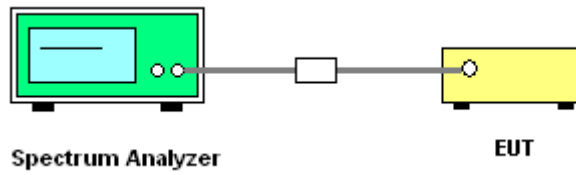

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

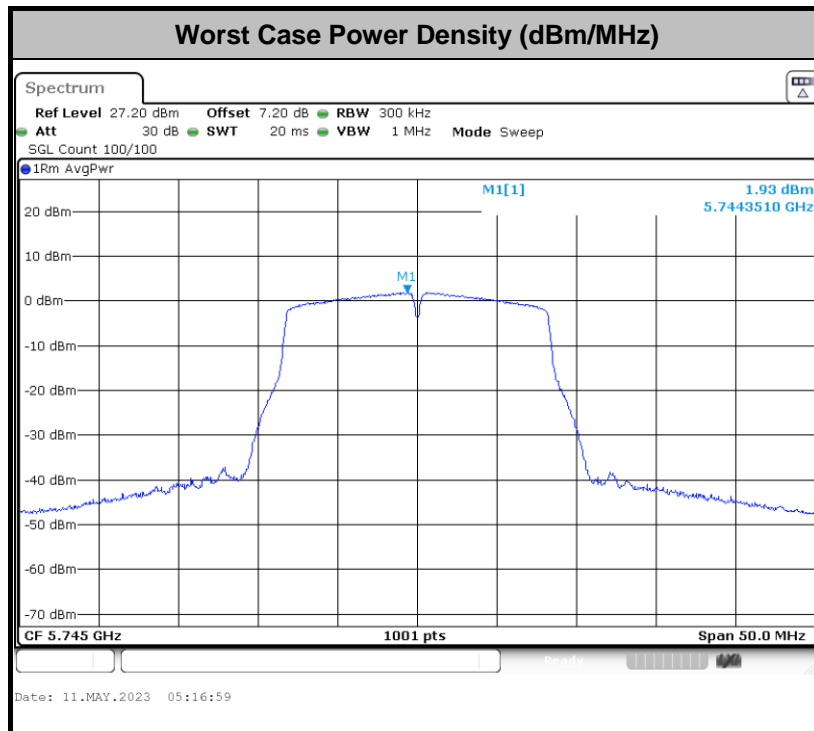

Note: Average Power Density (dB) = Measured value + Duty Factor + RBW offset



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

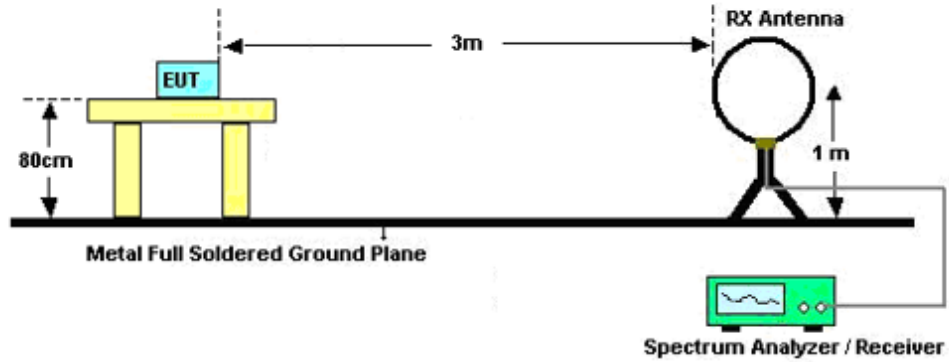

For radiated emissions from 30MHz to 1GHz

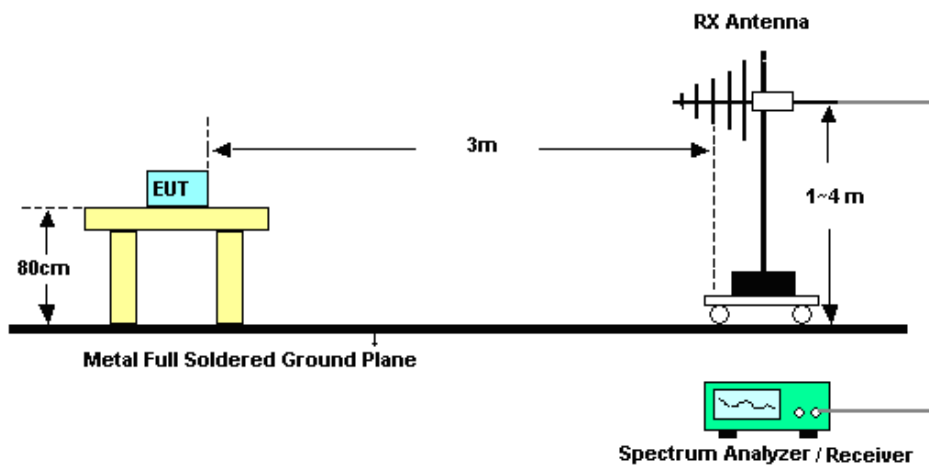

For radiated emissions above 1GHz

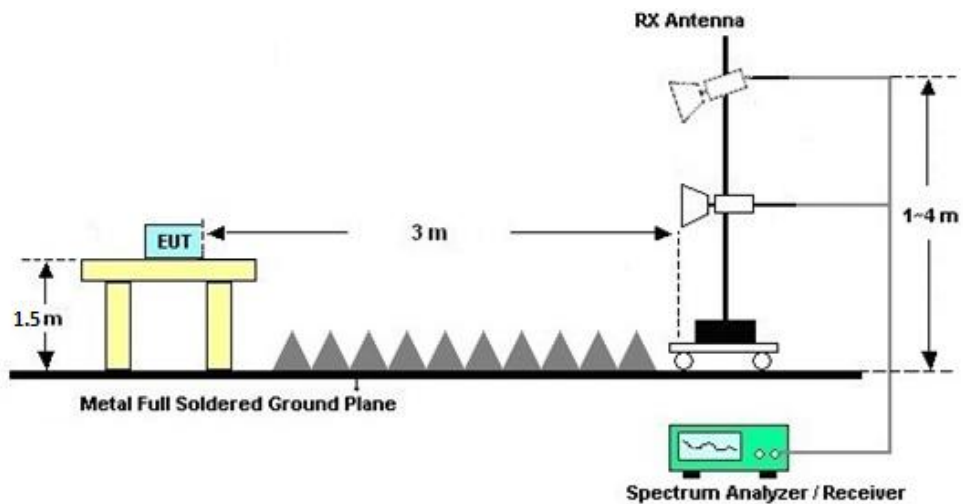



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

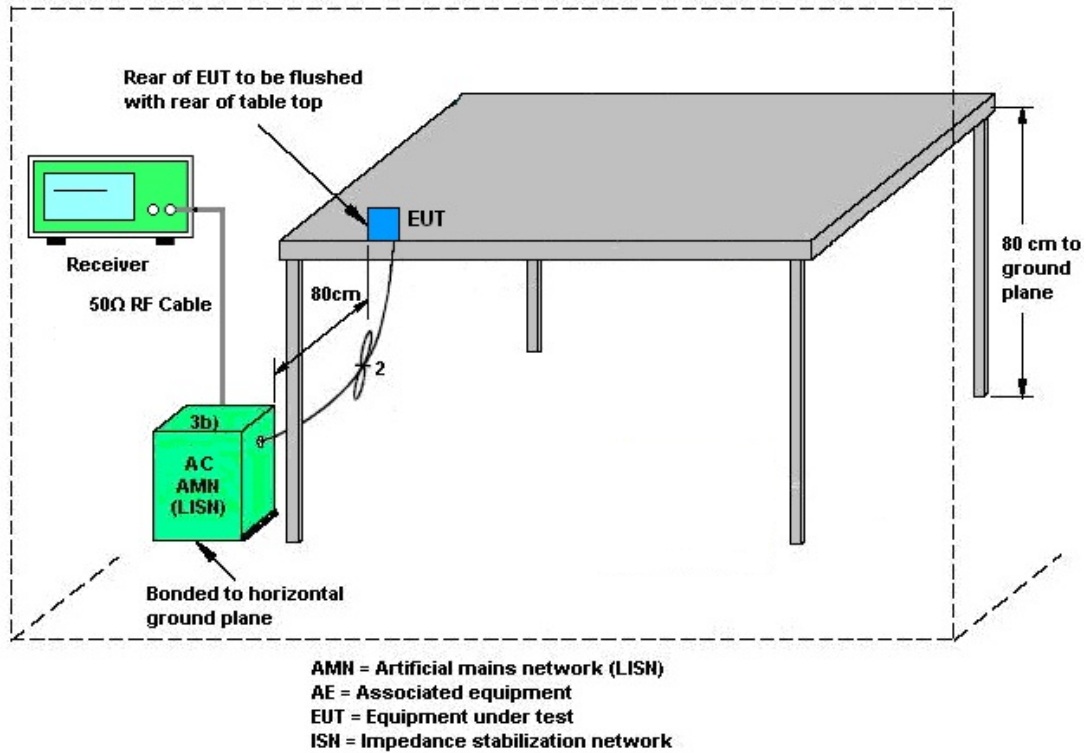

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Mar. 28, 2023~ May 11, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Mar. 28, 2023~ May 11, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Mar. 28, 2023~ May 11, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Aug. 28, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G,MAX 30dB	Mar. 24, 2023	Aug. 28, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Aug. 28, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Aug. 28, 2023	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Aug. 28, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Aug. 28, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 06, 2023	Aug. 28, 2023	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Aug. 28, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz-18Ghz	Oct. 12, 2022	Aug. 28, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz-18Ghz	Jan. 05, 2023	Aug. 28, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 28, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 28, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 28, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	May 08, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	May 08, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	May 08, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	May 08, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.88 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2023/3/28~2023/5/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	17.33	17.38	25.52	26.32	14.45	15.10	0.5	Pass
11a	6Mbps	1	157	5785	17.53	17.58	28.82	26.42	15.10	15.10	0.5	Pass
11a	6Mbps	1	165	5825	17.63	17.93	28.37	29.42	15.10	15.30	0.5	Pass
HT20	MCS0	1	149	5745	17.88	17.98	24.23	23.68	15.10	15.10	0.5	Pass
HT20	MCS0	1	157	5785	18.03	17.93	24.18	23.28	14.70	15.05	0.5	Pass
HT20	MCS0	1	165	5825	18.08	18.03	24.08	22.58	15.15	15.10	0.5	Pass
VHT20	MCS0	1	149	5745	17.83	17.88	21.93	21.68	15.10	15.15	0.5	Pass
VHT20	MCS0	1	157	5785	17.98	17.93	21.88	22.43	15.05	15.05	0.5	Pass
VHT20	MCS0	1	165	5825	17.98	17.98	22.88	21.93	15.10	15.10	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		Ant 1	Ant 2
11a	6Mbps	1	149	5745	0.11	0.11	17.74	17.70		30.00	30.00	3.90	3.30	Pass	18	18
11a	6Mbps	1	157	5785	0.11	0.11	17.60	17.55		30.00	30.00	3.90	3.30	Pass	18	18
11a	6Mbps	1	165	5825	0.11	0.11	17.58	17.59		30.00	30.00	3.90	3.30	Pass	18	18
HT20	MCS0	1	149	5745	0.12	0.12	17.59	17.64		30.00	30.00	3.90	3.30	Pass	18	18
HT20	MCS0	1	157	5785	0.12	0.12	17.51	17.48		30.00	30.00	3.90	3.30	Pass	18	18
HT20	MCS0	1	165	5825	0.12	0.12	17.45	17.41		30.00	30.00	3.90	3.30	Pass	18	18
VHT20	MCS0	1	149	5745	0.12	0.12	17.61	17.70		30.00	30.00	3.90	3.30	Pass	18	18
VHT20	MCS0	1	157	5785	0.12	0.12	17.48	17.49		30.00	30.00	3.90	3.30	Pass	18	18
VHT20	MCS0	1	165	5825	0.12	0.12	17.41	17.43		30.00	30.00	3.90	3.30	Pass	18	18

TEST RESULTS DATA
Power Spectral Density

U-NII-3 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.11	0.11	2.22	2.22	4.10	4.26		30.00	30.00	3.90	3.30	Pass
11a	6Mbps	1	157	5785	0.11	0.11	2.22	2.22	4.03	4.11		30.00	30.00	3.90	3.30	Pass
11a	6Mbps	1	165	5825	0.11	0.11	2.22	2.22	4.21	4.16		30.00	30.00	3.90	3.30	Pass
HT20	MCS0	1	149	5745	0.12	0.12	2.22	2.22	3.89	3.88		30.00	30.00	3.90	3.30	Pass
HT20	MCS0	1	157	5785	0.12	0.12	2.22	2.22	3.74	3.81		30.00	30.00	3.90	3.30	Pass
HT20	MCS0	1	165	5825	0.12	0.12	2.22	2.22	3.84	3.79		30.00	30.00	3.90	3.30	Pass
VHT20	MCS0	1	149	5745	0.12	0.12	2.22	2.22	3.92	3.96		30.00	30.00	3.90	3.30	Pass
VHT20	MCS0	1	157	5785	0.12	0.12	2.22	2.22	3.85	3.91		30.00	30.00	3.90	3.30	Pass
VHT20	MCS0	1	165	5825	0.12	0.12	2.22	2.22	3.94	3.95		30.00	30.00	3.90	3.30	Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	149	5745	Full	18.83	18.93	20.73	20.88	18.00	18.20	0.5	Pass
HE20	MCS0	1	157	5785	Full	18.93	18.93	20.88	20.93	18.20	18.35	0.5	Pass
HE20	MCS0	1	165	5825	Full	18.93	18.98	21.13	21.13	18.45	18.05	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		Ant 1	Ant 2
HE20	MCS0	1	149	5745	Full	0.15	0.15	17.81	17.78		30.00	30.00	3.90	3.30	Pass	18	18
HE20	MCS0	1	149	5745	26/0	0.25	0.24	9.28	9.13		30.00	30.00	3.90	3.30	Pass	9.5	9.5
HE20	MCS0	1	149	5745	52/37	0.43	0.42	11.65	11.44		30.00	30.00	3.90	3.30	Pass	12	12
HE20	MCS0	1	149	5745	106/53	0.71	0.68	14.72	14.07		30.00	30.00	3.90	3.30	Pass	14.5	14.5
HE20	MCS0	1	157	5785	Full	0.15	0.15	17.63	17.68		30.00	30.00	3.90	3.30	Pass	18	18
HE20	MCS0	1	157	5785	26/0	0.25	0.24	8.92	8.79		30.00	30.00	3.90	3.30	Pass	9	9
HE20	MCS0	1	157	5785	52/37	0.43	0.42	11.78	11.56		30.00	30.00	3.90	3.30	Pass	12	12
HE20	MCS0	1	157	5785	106/53	0.71	0.68	14.16	13.51		30.00	30.00	3.90	3.30	Pass	14	14
HE20	MCS0	1	165	5825	Full	0.15	0.15	17.66	17.59		30.00	30.00	3.90	3.30	Pass	18	18
HE20	MCS0	1	165	5825	26/8	0.25	0.24	9.04	9.09		30.00	30.00	3.90	3.30	Pass	10	10
HE20	MCS0	1	165	5825	52/40	0.43	0.42	11.64	11.42		30.00	30.00	3.90	3.30	Pass	12.5	12.5
HE20	MCS0	1	165	5825	106/54	0.71	0.68	14.56	14.06		30.00	30.00	3.90	3.30	Pass	15	15


TEST RESULTS DATA
Power Spectral Density

U-NII-3 single antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	149	5745	Full	0.15	0.15	2.22	2.22	3.70	3.45		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	149	5745	26/0	0.25	0.25	2.22	2.22	3.22	3.31		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	149	5745	52/37	0.43	0.43	2.22	2.22	3.27	2.99		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	149	5745	106/53	0.71	0.71	2.22	2.22	3.66	3.27		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	157	5785	Full	0.15	0.15	2.22	2.22	3.39	3.35		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	157	5785	26/0	0.25	0.25	2.22	2.22	2.94	3.05		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	157	5785	52/37	0.43	0.43	2.22	2.22	3.10	2.83		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	157	5785	106/53	0.71	0.71	2.22	2.22	3.33	2.70		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	165	5825	Full	0.15	0.15	2.22	2.22	3.44	3.59		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	165	5825	26/8	0.25	0.25	2.22	2.22	3.25	3.22		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	165	5825	52/40	0.43	0.43	2.22	2.22	3.27	2.92		30.00	30.00	3.90	3.30	Pass
HE20	MCS0	1	165	5825	106/54	0.71	0.71	2.22	2.22	3.30	3.35		30.00	30.00	3.90	3.30	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

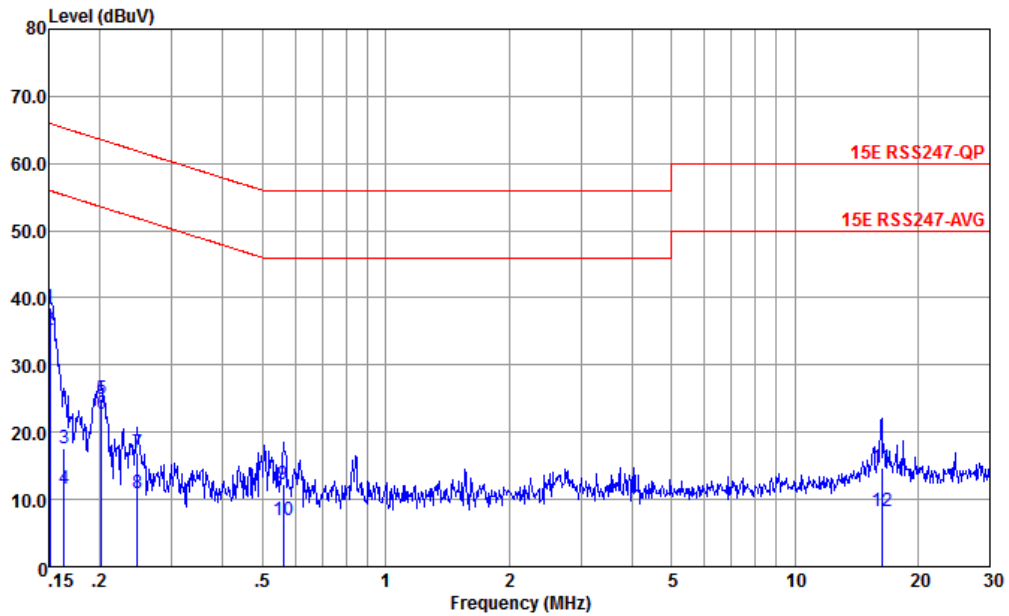


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	38.60	-27.36	65.96	28.10	0.07	10.43	QP
2 *	0.151	35.10	-20.86	55.96	24.60	0.07	10.43	Average
3	0.163	17.68	-47.62	65.30	7.19	0.06	10.43	QP
4	0.163	11.68	-43.62	55.30	1.19	0.06	10.43	Average
5	0.202	24.94	-38.60	63.54	14.50	0.02	10.42	QP
6	0.202	22.64	-30.90	53.54	12.20	0.02	10.42	Average
7	0.247	17.02	-44.84	61.86	6.60	0.04	10.38	QP
8	0.247	11.02	-40.84	51.86	0.60	0.04	10.38	Average
9	0.561	12.34	-43.66	56.00	2.20	-0.05	10.19	QP
10	0.561	6.94	-39.06	46.00	-3.20	-0.05	10.19	Average
11	16.312	14.62	-45.38	60.00	3.60	-0.24	11.26	QP
12	16.312	8.22	-41.78	50.00	-2.80	-0.24	11.26	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

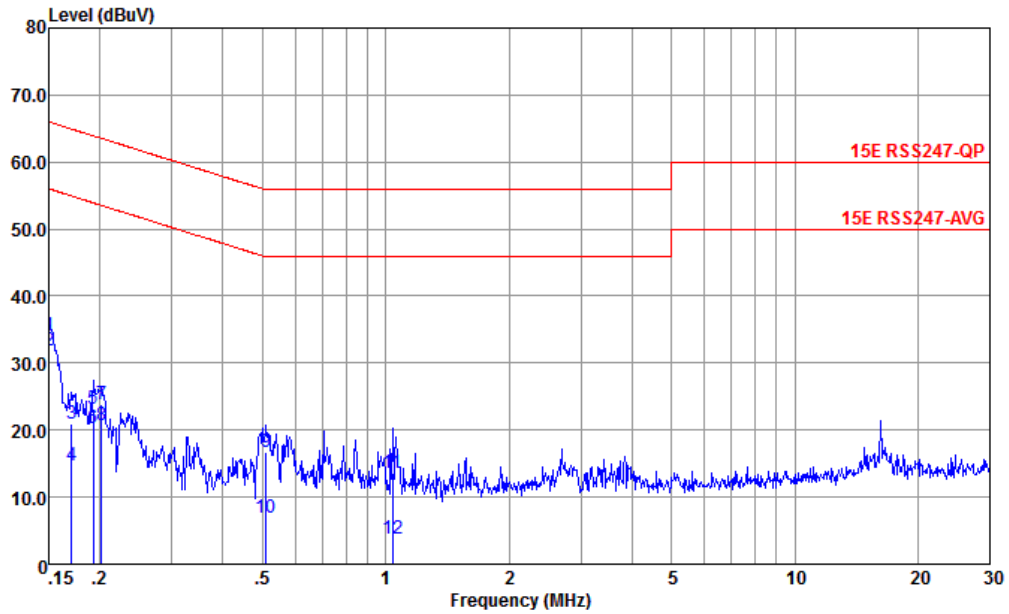

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.150	34.06	-31.94	66.00	23.60	0.03	10.43	QP
2 *	0.150	31.96	-24.04	56.00	21.50	0.03	10.43	Average
3	0.170	20.96	-43.98	64.94	10.49	0.04	10.43	QP
4	0.170	14.66	-40.28	54.94	4.19	0.04	10.43	Average
5	0.192	23.07	-40.86	63.93	12.60	0.05	10.42	QP
6	0.192	20.27	-33.66	53.93	9.80	0.05	10.42	Average
7	0.202	23.77	-39.77	63.54	13.30	0.05	10.42	QP
8	0.202	20.77	-32.77	53.54	10.30	0.05	10.42	Average
9	0.510	16.73	-39.27	56.00	6.60	-0.08	10.21	QP
10	0.510	6.83	-39.17	46.00	-3.30	-0.08	10.21	Average
11	1.037	13.89	-42.41	56.00	3.59	-0.11	10.11	QP
12	1.037	3.79	-42.21	46.00	-6.21	-0.11	10.11	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Ant	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 56	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 57	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 58	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 59	U-NII-3	5.725-5.85	1	802.11n HT20	149	5745	MCS0	-	-
Mode 60	U-NII-3	5.725-5.85	1	802.11n HT20	157	5785	MCS0	-	-
Mode 61	U-NII-3	5.725-5.85	1	802.11n HT20	165	5825	MCS0	-	-
Mode 62	U-NII-3	5.725-5.85	1	802.11ac VHT20	149	5745	MCS0	-	-
Mode 63	U-NII-3	5.725-5.85	1	802.11ac VHT20	157	5785	MCS0	-	-
Mode 64	U-NII-3	5.725-5.85	1	802.11ac VHT20	165	5825	MCS0	-	-
Mode 65	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 66	U-NII-3	5.725-5.85	1	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 67	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 68	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial RU26/0	-
Mode 69	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial RU26/8	-
Mode 70	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial RU52/37	-
Mode 71	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial RU52/40	-
Mode 72	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial RU106/53	-
Mode 73	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial RU106/54	-
Mode135	U-NII-3	5.725-5.85	2	802.11a	149	5745	6Mbps	-	-
Mode136	U-NII-3	5.725-5.85	2	802.11a	157	5785	6Mbps	-	-
Mode137	U-NII-3	5.725-5.85	2	802.11a	165	5825	6Mbps	-	-
Mode 138	U-NII-3	5.725-5.85	2	802.11n HT20	149	5745	MCS0	-	-
Mode 139	U-NII-3	5.725-5.85	2	802.11n HT20	157	5785	MCS0	-	-
Mode 140	U-NII-3	5.725-5.85	2	802.11n HT20	165	5825	MCS0	-	-
Mode 141	U-NII-3	5.725-5.85	2	802.11ac VHT20	149	5745	MCS0	-	-
Mode 142	U-NII-3	5.725-5.85	2	802.11ac VHT20	157	5785	MCS0	-	-
Mode 143	U-NII-3	5.725-5.85	2	802.11ac VHT20	165	5825	MCS0	-	-
Mode 144	U-NII-3	5.725-5.85	2	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 145	U-NII-3	5.725-5.85	2	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 146	U-NII-3	5.725-5.85	2	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 147	U-NII-3	5.725-5.85	2	802.11ax HE20	149	5745	MCS0	Partial RU26/0	-
Mode 148	U-NII-3	5.725-5.85	2	802.11ax HE20	165	5825	MCS0	Partial RU26/8	-
Mode 149	U-NII-3	5.725-5.85	2	802.11ax HE20	149	5745	MCS0	Partial RU52/37	-
Mode 150	U-NII-3	5.725-5.85	2	802.11ax HE20	165	5825	MCS0	Partial RU52/40	-
Mode 151	U-NII-3	5.725-5.85	2	802.11ax HE20	149	5745	MCS0	Partial RU106/53	-
Mode 152	U-NII-3	5.725-5.85	2	802.11ax HE20	165	5825	MCS0	Partial RU106/54	-
Mode 144	U-NII-3	5.725-5.85	2	802.11ax HE20	149	5745	MCS0	Full RU	LF



Summary of each worse mode

Table with 11 columns: Mode, Modulation, Ch., Freq. (MHz), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Pol., Peak Avg., Result, Remark. It contains 138 rows of test data for various modes and frequencies.



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
139	802.11n HT20	149	17235.00	52.11	68.20	-16.09	H	PEAK	Pass	Harmonic
	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	157	17355.00	51.77	68.20	-16.43	V	PEAK	Pass	Harmonic
140	802.11n HT20	165	5928.40	48.72	68.20	-19.48	V	PEAK	Pass	Band Edge
	802.11n HT20	165	17475.00	52.93	68.20	-15.27	V	PEAK	Pass	Harmonic
141	802.11ac VHT20	149	5627.20	50.92	68.20	-17.28	H	PEAK	Pass	Band Edge
	802.11ac VHT20	149	17235.00	52.41	68.20	-15.79	V	PEAK	Pass	Harmonic
142	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	157	17355.00	52.32	68.20	-15.88	V	PEAK	Pass	Harmonic
143	802.11ac VHT20	165	5928.00	47.56	68.20	-20.64	V	PEAK	Pass	Band Edge
	802.11ac VHT20	165	11650.00	47.66	74.00	-26.34	H	PEAK	Pass	Harmonic
144	802.11ax HE20	149	5646.40	55.37	68.20	-12.83	H	PEAK	Pass	Band Edge
	802.11ax HE20	149	17235.00	52.41	68.20	-15.79	V	PEAK	Pass	Harmonic
145	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	157	17355.00	51.62	68.20	-16.58	H	PEAK	Pass	Harmonic
146	802.11ax HE20	165	5930.80	48.71	68.20	-19.49	H	PEAK	Pass	Band Edge
	802.11ax HE20	165	11650.00	47.65	74.00	-26.35	H	PEAK	Pass	Harmonic
147	802.11ax HE20	149	5627.60	49.50	68.20	-18.70	H	PEAK	Pass	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
148	802.11ax HE20	165	5960.80	46.91	68.20	-21.29	H	PEAK	Pass	Band Edge
	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
149	802.11ax HE20	149	5643.20	49.91	68.20	-18.29	V	PEAK	Pass	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
150	802.11ax HE20	165	5936.40	47.22	68.20	-20.98	H	PEAK	Pass	Band Edge
	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
151	802.11ax HE20	149	5631.60	50.74	68.20	-17.46	V	PEAK	Pass	Band Edge
	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
152	802.11ax HE20	165	5962.40	47.48	68.20	-20.72	H	PEAK	Pass	Band Edge
	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
144	802.11ax HE20	149	45.52	28.05	40.00	-11.95	V	PEAK	Pass	LF



		56																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5633.20</td> <td>50.72</td> <td>68.20</td> <td>-17.48</td> <td>41.30</td> <td>34.50</td> <td>11.05</td> <td>36.13</td> <td>0.00</td> <td>100</td> <td>170 PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>48.68</td> <td>68.50</td> <td>-19.82</td> <td>39.40</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>100</td> <td>170 PEAK</td> </tr> <tr> <td>3</td> <td>5711.60</td> <td>72.45</td> <td>108.55</td> <td>-36.10</td> <td>64.15</td> <td>34.52</td> <td>11.16</td> <td>37.38</td> <td>0.00</td> <td>100</td> <td>170 PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>75.93</td> <td>112.72</td> <td>-36.79</td> <td>67.76</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>100</td> <td>170 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5633.20	50.72	68.20	-17.48	41.30	34.50	11.05	36.13	0.00	100	170 PEAK	2	5650.40	48.68	68.50	-19.82	39.40	34.50	11.07	36.29	0.00	100	170 PEAK	3	5711.60	72.45	108.55	-36.10	64.15	34.52	11.16	37.38	0.00	100	170 PEAK	4	5728.80	75.93	112.72	-36.79	67.76	34.54	11.17	37.54	0.00	100	170 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>113.09</td> <td>-----</td> <td>-----</td> <td>105.27</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>170 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	113.09	-----	-----	105.27	34.59	11.20	37.97	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5633.20	50.72	68.20	-17.48	41.30	34.50	11.05	36.13	0.00	100	170 PEAK																																																																																																																	
2	5650.40	48.68	68.50	-19.82	39.40	34.50	11.07	36.29	0.00	100	170 PEAK																																																																																																																	
3	5711.60	72.45	108.55	-36.10	64.15	34.52	11.16	37.38	0.00	100	170 PEAK																																																																																																																	
4	5728.80	75.93	112.72	-36.79	67.76	34.54	11.17	37.54	0.00	100	170 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	113.09	-----	-----	105.27	34.59	11.20	37.97	0.00	100	170 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.76</td> <td>-----</td> <td>-----</td> <td>95.94</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>170 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	103.76	-----	-----	95.94	34.59	11.20	37.97	0.00	100	170 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	103.76	-----	-----	95.94	34.59	11.20	37.97	0.00	100	170 AVERAGE																																																																																																																	



		56																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.00</td> <td>50.23</td> <td>68.20</td> <td>-17.97</td> <td>40.81</td> <td>34.50</td> <td>11.05</td> <td>36.13</td> <td>0.00</td> <td>300</td> <td>82 PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>48.90</td> <td>68.50</td> <td>-19.60</td> <td>39.62</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>300</td> <td>82 PEAK</td> </tr> <tr> <td>3</td> <td>5785.20</td> <td>68.60</td> <td>106.76</td> <td>-38.16</td> <td>60.20</td> <td>34.51</td> <td>11.15</td> <td>37.26</td> <td>0.00</td> <td>300</td> <td>82 PEAK</td> </tr> <tr> <td>4</td> <td>5724.00</td> <td>80.49</td> <td>120.02</td> <td>-39.53</td> <td>72.37</td> <td>34.55</td> <td>11.17</td> <td>37.60</td> <td>0.00</td> <td>300</td> <td>82 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5634.00	50.23	68.20	-17.97	40.81	34.50	11.05	36.13	0.00	300	82 PEAK	2	5650.40	48.90	68.50	-19.60	39.62	34.50	11.07	36.29	0.00	300	82 PEAK	3	5785.20	68.60	106.76	-38.16	60.20	34.51	11.15	37.26	0.00	300	82 PEAK	4	5724.00	80.49	120.02	-39.53	72.37	34.55	11.17	37.60	0.00	300	82 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.03</td> <td>-----</td> <td>-----</td> <td>103.21</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>82 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	111.03	-----	-----	103.21	34.59	11.20	37.97	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5634.00	50.23	68.20	-17.97	40.81	34.50	11.05	36.13	0.00	300	82 PEAK																																																																																																																	
2	5650.40	48.90	68.50	-19.60	39.62	34.50	11.07	36.29	0.00	300	82 PEAK																																																																																																																	
3	5785.20	68.60	106.76	-38.16	60.20	34.51	11.15	37.26	0.00	300	82 PEAK																																																																																																																	
4	5724.00	80.49	120.02	-39.53	72.37	34.55	11.17	37.60	0.00	300	82 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	111.03	-----	-----	103.21	34.59	11.20	37.97	0.00	300	82 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.17</td> <td>-----</td> <td>-----</td> <td>95.35</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>82 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	103.17	-----	-----	95.35	34.59	11.20	37.97	0.00	300	82 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	103.17	-----	-----	95.35	34.59	11.20	37.97	0.00	300	82 AVERAGE																																																																																																																	



Mode	56																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>43.85</td> <td>74.00</td> <td>-30.15</td> <td>55.94</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17228.53</td> <td>52.12</td> <td>68.20</td> <td>-16.08</td> <td>54.04</td> <td>42.49</td> <td>20.15</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	43.85	74.00	-30.15	55.94	38.29	16.36	66.74	0.00	---	---	PEAK	2	17228.53	52.12	68.20	-16.08	54.04	42.49	20.15	64.56	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>43.65</td> <td>74.00</td> <td>-30.35</td> <td>55.74</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17239.53</td> <td>52.99</td> <td>68.20</td> <td>-15.21</td> <td>54.87</td> <td>42.52</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	43.65	74.00	-30.35	55.74	38.29	16.36	66.74	0.00	---	---	PEAK	2	17239.53	52.99	68.20	-15.21	54.87	42.52	20.16	64.56	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11490.00	43.85	74.00	-30.15	55.94	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																																
2	17228.53	52.12	68.20	-16.08	54.04	42.49	20.15	64.56	0.00	---	---	Peak																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11490.00	43.65	74.00	-30.35	55.74	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																																
2	17239.53	52.99	68.20	-15.21	54.87	42.52	20.16	64.56	0.00	---	---	Peak																																																																																																






Mode	57																																																																																					
	Harmonic																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>57.76</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	45.89	74.00	-28.11	57.76	38.37	16.41	66.65	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>44.05</td> <td>74.00</td> <td>-29.95</td> <td>55.92</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> <tr> <td>2 17357.60</td> <td>53.45</td> <td>68.20</td> <td>-14.75</td> <td>55.38</td> <td>42.41</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	44.05	74.00	-29.95	55.92	38.37	16.41	66.65	0.00	--- PEAK	2 17357.60	53.45	68.20	-14.75	55.38	42.41	20.24	64.58	0.00	--- Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	45.89	74.00	-28.11	57.76	38.37	16.41	66.65	0.00	--- PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	44.05	74.00	-29.95	55.92	38.37	16.41	66.65	0.00	--- PEAK																																																																													
2 17357.60	53.45	68.20	-14.75	55.38	42.41	20.24	64.58	0.00	--- Peak																																																																													



		58																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>70.34</td> <td>111.36</td> <td>-41.02</td> <td>64.11</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>106</td> <td>169 PEAK</td> </tr> <tr> <td>2</td> <td>5858.80</td> <td>67.23</td> <td>109.83</td> <td>-42.60</td> <td>61.06</td> <td>34.82</td> <td>11.34</td> <td>39.99</td> <td>0.00</td> <td>106</td> <td>169 PEAK</td> </tr> <tr> <td>3</td> <td>5923.20</td> <td>46.94</td> <td>69.53</td> <td>-22.59</td> <td>40.44</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>106</td> <td>169 PEAK</td> </tr> <tr> <td>4</td> <td>5962.00</td> <td>47.81</td> <td>68.20</td> <td>-20.39</td> <td>41.04</td> <td>35.12</td> <td>11.44</td> <td>39.79</td> <td>0.00</td> <td>106</td> <td>169 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	70.34	111.36	-41.02	64.11	34.81	11.34	39.92	0.00	106	169 PEAK	2	5858.80	67.23	109.83	-42.60	61.06	34.82	11.34	39.99	0.00	106	169 PEAK	3	5923.20	46.94	69.53	-22.59	40.44	34.99	11.40	39.89	0.00	106	169 PEAK	4	5962.00	47.81	68.20	-20.39	41.04	35.12	11.44	39.79	0.00	106	169 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.51</td> <td>-----</td> <td>-----</td> <td>103.84</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>106</td> <td>169 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	110.51	-----	-----	103.84	34.75	11.31	39.39	0.00	106
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5854.80	70.34	111.36	-41.02	64.11	34.81	11.34	39.92	0.00	106	169 PEAK																																																																																																																	
2	5858.80	67.23	109.83	-42.60	61.06	34.82	11.34	39.99	0.00	106	169 PEAK																																																																																																																	
3	5923.20	46.94	69.53	-22.59	40.44	34.99	11.40	39.89	0.00	106	169 PEAK																																																																																																																	
4	5962.00	47.81	68.20	-20.39	41.04	35.12	11.44	39.79	0.00	106	169 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	110.51	-----	-----	103.84	34.75	11.31	39.39	0.00	106	169 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.56</td> <td>-----</td> <td>-----</td> <td>94.89</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>106</td> <td>169 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.56	-----	-----	94.89	34.75	11.31	39.39	0.00	106	169 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	101.56	-----	-----	94.89	34.75	11.31	39.39	0.00	106	169 AVERAGE																																																																																																																	

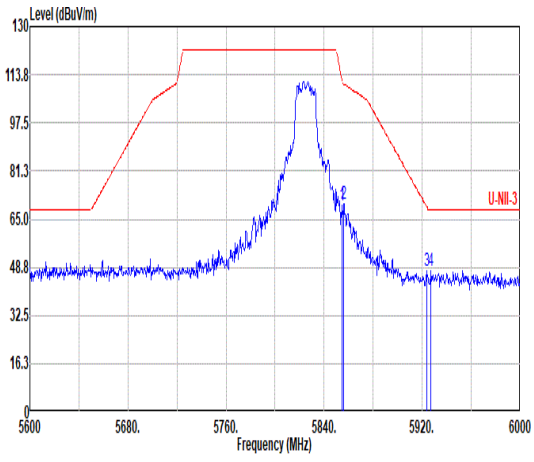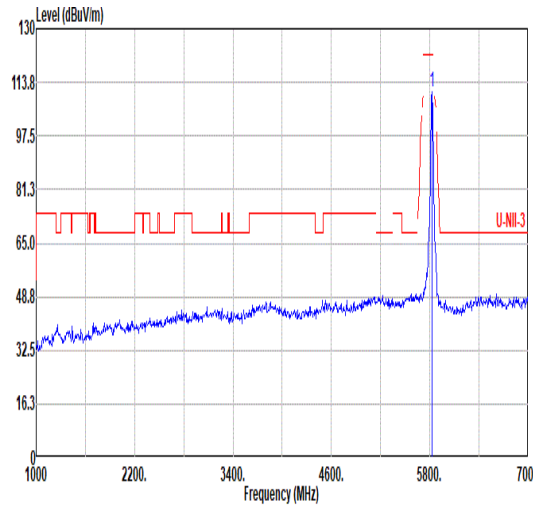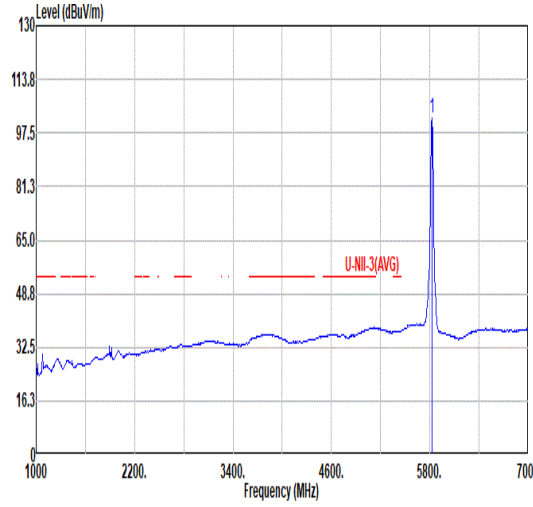

	58																																																																																																																											
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1052 798 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>69.67</td> <td>111.36</td> <td>-41.69</td> <td>63.44</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>303</td> <td>85 PEAK</td> </tr> <tr> <td>2</td> <td>5856.00</td> <td>70.18</td> <td>110.62</td> <td>-40.44</td> <td>63.97</td> <td>34.81</td> <td>11.34</td> <td>39.94</td> <td>0.00</td> <td>303</td> <td>85 PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>47.61</td> <td>68.94</td> <td>-21.33</td> <td>41.10</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>303</td> <td>85 PEAK</td> </tr> <tr> <td>4</td> <td>5927.20</td> <td>47.64</td> <td>68.20</td> <td>-20.56</td> <td>41.11</td> <td>35.01</td> <td>11.40</td> <td>39.88</td> <td>0.00</td> <td>303</td> <td>85 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	69.67	111.36	-41.69	63.44	34.81	11.34	39.92	0.00	303	85 PEAK	2	5856.00	70.18	110.62	-40.44	63.97	34.81	11.34	39.94	0.00	303	85 PEAK	3	5924.00	47.61	68.94	-21.33	41.10	35.00	11.40	39.89	0.00	303	85 PEAK	4	5927.20	47.64	68.20	-20.56	41.11	35.01	11.40	39.88	0.00	303	85 PEAK	 <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.74</td> <td>-----</td> <td>-----</td> <td>104.07</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>303</td> <td>85 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	110.74	-----	-----	104.07	34.75	11.31	39.39	0.00	303	85 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5854.00	69.67	111.36	-41.69	63.44	34.81	11.34	39.92	0.00	303	85 PEAK																																																																																																																	
2	5856.00	70.18	110.62	-40.44	63.97	34.81	11.34	39.94	0.00	303	85 PEAK																																																																																																																	
3	5924.00	47.61	68.94	-21.33	41.10	35.00	11.40	39.89	0.00	303	85 PEAK																																																																																																																	
4	5927.20	47.64	68.20	-20.56	41.11	35.01	11.40	39.88	0.00	303	85 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5825.00	110.74	-----	-----	104.07	34.75	11.31	39.39	0.00	303	85 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.00</td> <td>-----</td> <td>-----</td> <td>95.33</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>303</td> <td>85 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	102.00	-----	-----	95.33	34.75	11.31	39.39	0.00	303	85 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5825.00	102.00	-----	-----	95.33	34.75	11.31	39.39	0.00	303	85 AVERAGE																																																																																																																	



Mode	58																																																																											
	Harmonic																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.67</td> <td>74.00</td> <td>-26.33</td> <td>59.32</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	47.67	74.00	-26.33	59.32	38.45	16.46	66.56	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.04</td> <td>74.00</td> <td>-27.96</td> <td>57.69</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	46.04	74.00	-27.96	57.69	38.45	16.46	66.56	0.00	--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	47.67	74.00	-26.33	59.32	38.45	16.46	66.56	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	46.04	74.00	-27.96	57.69	38.45	16.46	66.56	0.00	--- PEAK																																																																			



		59																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																									
ANT		1																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.20</td> <td>50.84</td> <td>68.20</td> <td>-17.36</td> <td>41.50</td> <td>34.50</td> <td>11.07</td> <td>36.23</td> <td>0.00</td> <td>110</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>49.02</td> <td>68.20</td> <td>-19.18</td> <td>39.73</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>110</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.20</td> <td>76.13</td> <td>110.12</td> <td>-33.99</td> <td>67.91</td> <td>34.53</td> <td>11.17</td> <td>37.48</td> <td>0.00</td> <td>110</td> <td>169</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.00</td> <td>73.60</td> <td>115.46</td> <td>-41.86</td> <td>65.45</td> <td>34.54</td> <td>11.17</td> <td>37.56</td> <td>0.00</td> <td>110</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5647.20	50.84	68.20	-17.36	41.50	34.50	11.07	36.23	0.00	110	169	PEAK	2	5650.00	49.02	68.20	-19.18	39.73	34.50	11.07	36.28	0.00	110	169	PEAK	3	5717.20	76.13	110.12	-33.99	67.91	34.53	11.17	37.48	0.00	110	169	PEAK	4	5722.00	73.60	115.46	-41.86	65.45	34.54	11.17	37.56	0.00	110	169	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.57</td> <td>-----</td> <td>-----</td> <td>103.75</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>110</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	111.57	-----	-----	103.75	34.59	11.20	37.97	0.00	110	169	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5647.20	50.84	68.20	-17.36	41.50	34.50	11.07	36.23	0.00	110	169	PEAK																																																																																															
2	5650.00	49.02	68.20	-19.18	39.73	34.50	11.07	36.28	0.00	110	169	PEAK																																																																																															
3	5717.20	76.13	110.12	-33.99	67.91	34.53	11.17	37.48	0.00	110	169	PEAK																																																																																															
4	5722.00	73.60	115.46	-41.86	65.45	34.54	11.17	37.56	0.00	110	169	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	111.57	-----	-----	103.75	34.59	11.20	37.97	0.00	110	169	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.45</td> <td>-----</td> <td>-----</td> <td>94.63</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>110</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	102.45	-----	-----	94.63	34.59	11.20	37.97	0.00	110	169	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	102.45	-----	-----	94.63	34.59	11.20	37.97	0.00	110	169	AVERAGE																																																																																															



		59																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.20</td> <td>52.03</td> <td>68.20</td> <td>-16.17</td> <td>42.61</td> <td>34.50</td> <td>11.05</td> <td>36.13</td> <td>0.00</td> <td>296</td> <td>84 PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>47.98</td> <td>68.20</td> <td>-20.22</td> <td>38.69</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>296</td> <td>84 PEAK</td> </tr> <tr> <td>3</td> <td>5716.40</td> <td>68.58</td> <td>109.89</td> <td>-41.31</td> <td>60.35</td> <td>34.53</td> <td>11.16</td> <td>37.46</td> <td>0.00</td> <td>296</td> <td>84 PEAK</td> </tr> <tr> <td>4</td> <td>5721.20</td> <td>73.42</td> <td>113.64</td> <td>-40.22</td> <td>65.26</td> <td>34.54</td> <td>11.17</td> <td>37.55</td> <td>0.00</td> <td>296</td> <td>84 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.20	52.03	68.20	-16.17	42.61	34.50	11.05	36.13	0.00	296	84 PEAK	2	5650.00	47.98	68.20	-20.22	38.69	34.50	11.07	36.28	0.00	296	84 PEAK	3	5716.40	68.58	109.89	-41.31	60.35	34.53	11.16	37.46	0.00	296	84 PEAK	4	5721.20	73.42	113.64	-40.22	65.26	34.54	11.17	37.55	0.00	296	84 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.71</td> <td>-----</td> <td>-----</td> <td>103.89</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>296</td> <td>84 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	111.71	-----	-----	103.89	34.59	11.20	37.97	0.00	296
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5637.20	52.03	68.20	-16.17	42.61	34.50	11.05	36.13	0.00	296	84 PEAK																																																																																																																	
2	5650.00	47.98	68.20	-20.22	38.69	34.50	11.07	36.28	0.00	296	84 PEAK																																																																																																																	
3	5716.40	68.58	109.89	-41.31	60.35	34.53	11.16	37.46	0.00	296	84 PEAK																																																																																																																	
4	5721.20	73.42	113.64	-40.22	65.26	34.54	11.17	37.55	0.00	296	84 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	111.71	-----	-----	103.89	34.59	11.20	37.97	0.00	296	84 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.28</td> <td>-----</td> <td>-----</td> <td>94.46</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>296</td> <td>84 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.28	-----	-----	94.46	34.59	11.20	37.97	0.00	296	84 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	102.28	-----	-----	94.46	34.59	11.20	37.97	0.00	296	84 AVERAGE																																																																																																																	






Mode	59																																																																																														
	Harmonic																																																																																														
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.06</td> <td>74.00</td> <td>-29.94</td> <td>56.15</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	44.06	74.00	-29.94	56.15	38.29	16.36	66.74	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>43.07</td> <td>74.00</td> <td>-30.93</td> <td>55.16</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.13</td> <td>53.13</td> <td>68.20</td> <td>-15.07</td> <td>55.02</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	43.07	74.00	-30.93	55.16	38.29	16.36	66.74	0.00	---	---	PEAK	2	17235.13	53.13	68.20	-15.07	55.02	42.51	20.16	64.56	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	11490.00	44.06	74.00	-29.94	56.15	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																							
1	11490.00	43.07	74.00	-30.93	55.16	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																			
2	17235.13	53.13	68.20	-15.07	55.02	42.51	20.16	64.56	0.00	---	---	Peak																																																																																			






Mode	60																																																																																					
	Harmonic																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>45.01</td> <td>74.00</td> <td>-28.99</td> <td>56.88</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	45.01	74.00	-28.99	56.88	38.37	16.41	66.65	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>44.14</td> <td>74.00</td> <td>-29.86</td> <td>56.01</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> <tr> <td>2 17359.00</td> <td>52.56</td> <td>68.20</td> <td>-15.64</td> <td>54.50</td> <td>42.40</td> <td>28.24</td> <td>64.58</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	44.14	74.00	-29.86	56.01	38.37	16.41	66.65	0.00	--- PEAK	2 17359.00	52.56	68.20	-15.64	54.50	42.40	28.24	64.58	0.00	--- Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	45.01	74.00	-28.99	56.88	38.37	16.41	66.65	0.00	--- PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	44.14	74.00	-29.86	56.01	38.37	16.41	66.65	0.00	--- PEAK																																																																													
2 17359.00	52.56	68.20	-15.64	54.50	42.40	28.24	64.58	0.00	--- Peak																																																																													

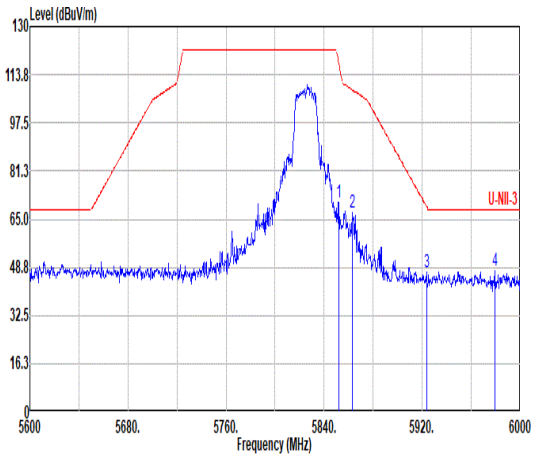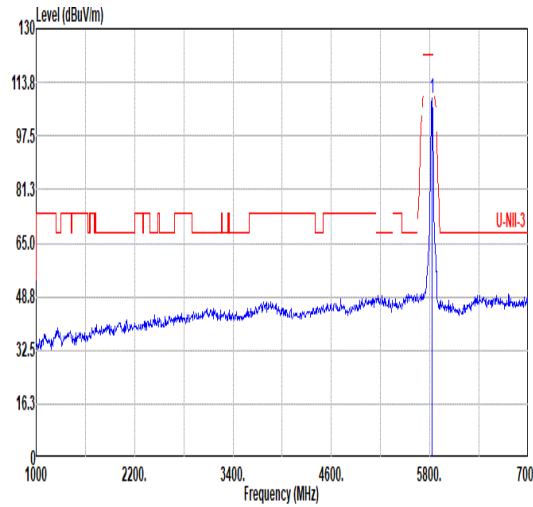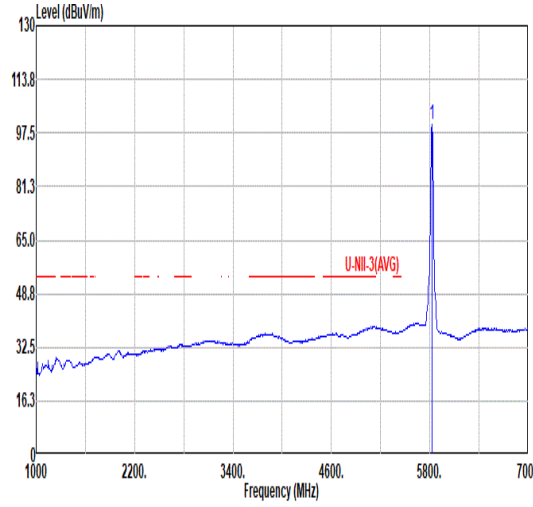

	61																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.00</td> <td>70.72</td> <td>117.74</td> <td>-47.02</td> <td>64.46</td> <td>34.80</td> <td>11.33</td> <td>39.87</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5862.80</td> <td>67.13</td> <td>108.71</td> <td>-41.58</td> <td>61.01</td> <td>34.83</td> <td>11.34</td> <td>40.05</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>46.89</td> <td>69.23</td> <td>-22.34</td> <td>40.39</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5979.20</td> <td>47.60</td> <td>68.20</td> <td>-20.60</td> <td>40.74</td> <td>35.16</td> <td>11.45</td> <td>39.75</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5852.00	70.72	117.74	-47.02	64.46	34.80	11.33	39.87	0.00	100	168	PEAK	2	5862.80	67.13	108.71	-41.58	61.01	34.83	11.34	40.05	0.00	100	168	PEAK	3	5923.60	46.89	69.23	-22.34	40.39	34.99	11.40	39.89	0.00	100	168	PEAK	4	5979.20	47.60	68.20	-20.60	40.74	35.16	11.45	39.75	0.00	100	168	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.07</td> <td>-----</td> <td>-----</td> <td>102.40</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	109.07	-----	-----	102.40	34.75	11.31	39.39	0.00	100	168	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5852.00	70.72	117.74	-47.02	64.46	34.80	11.33	39.87	0.00	100	168	PEAK																																																																																																																					
2	5862.80	67.13	108.71	-41.58	61.01	34.83	11.34	40.05	0.00	100	168	PEAK																																																																																																																					
3	5923.60	46.89	69.23	-22.34	40.39	34.99	11.40	39.89	0.00	100	168	PEAK																																																																																																																					
4	5979.20	47.60	68.20	-20.60	40.74	35.16	11.45	39.75	0.00	100	168	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	109.07	-----	-----	102.40	34.75	11.31	39.39	0.00	100	168	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.89</td> <td>-----</td> <td>-----</td> <td>93.22</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.89	-----	-----	93.22	34.75	11.31	39.39	0.00	100	168	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	99.89	-----	-----	93.22	34.75	11.31	39.39	0.00	100	168	AVERAGE																																																																																																																					

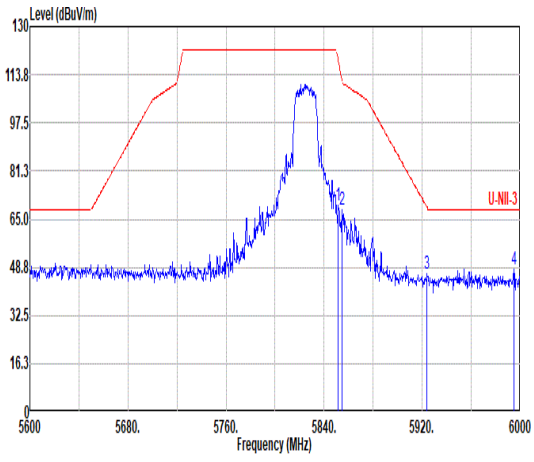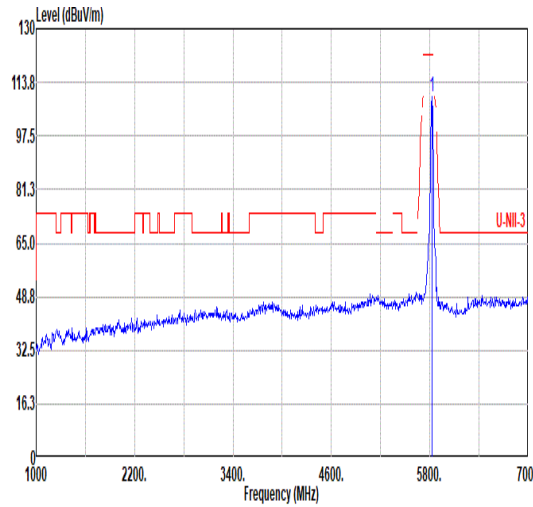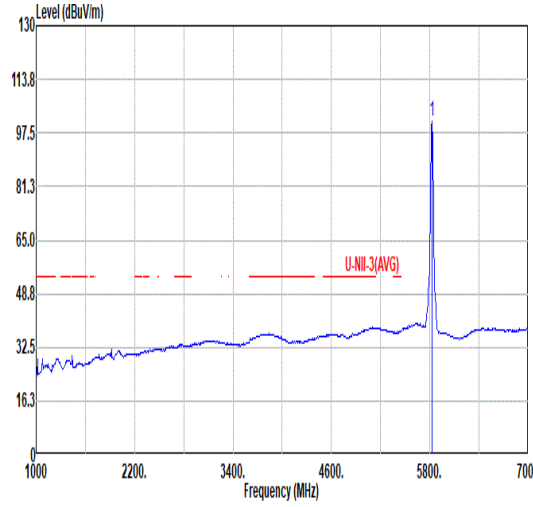

		61																																																																																																																										
Mode		Band Edge																																																																																																																										
		U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																										
ANT		1																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.60</td> <td>69.57</td> <td>118.65</td> <td>-49.08</td> <td>63.31</td> <td>34.80</td> <td>11.33</td> <td>39.87</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>2</td> <td>5854.40</td> <td>68.18</td> <td>112.27</td> <td>-44.09</td> <td>61.95</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>46.39</td> <td>68.94</td> <td>-22.55</td> <td>39.88</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>4</td> <td>5994.80</td> <td>48.06</td> <td>68.20</td> <td>-20.14</td> <td>41.11</td> <td>35.19</td> <td>11.47</td> <td>39.71</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5851.60	69.57	118.65	-49.08	63.31	34.80	11.33	39.87	0.00	263	83 PEAK	2	5854.40	68.18	112.27	-44.09	61.95	34.81	11.33	39.91	0.00	263	83 PEAK	3	5924.00	46.39	68.94	-22.55	39.88	35.00	11.40	39.89	0.00	263	83 PEAK	4	5994.80	48.06	68.20	-20.14	41.11	35.19	11.47	39.71	0.00	263	83 PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.18</td> <td>-----</td> <td>-----</td> <td>102.51</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.18	-----	-----	102.51	34.75	11.31	39.39	0.00	263	83 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5851.60	69.57	118.65	-49.08	63.31	34.80	11.33	39.87	0.00	263	83 PEAK																																																																																																																	
2	5854.40	68.18	112.27	-44.09	61.95	34.81	11.33	39.91	0.00	263	83 PEAK																																																																																																																	
3	5924.00	46.39	68.94	-22.55	39.88	35.00	11.40	39.89	0.00	263	83 PEAK																																																																																																																	
4	5994.80	48.06	68.20	-20.14	41.11	35.19	11.47	39.71	0.00	263	83 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	109.18	-----	-----	102.51	34.75	11.31	39.39	0.00	263	83 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.84</td> <td>-----</td> <td>-----</td> <td>94.17</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>263</td> <td>83 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.84	-----	-----	94.17	34.75	11.31	39.39	0.00	263	83 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	100.84	-----	-----	94.17	34.75	11.31	39.39	0.00	263	83 AVERAGE																																																																																																																	






Mode	61																																																																															
	Harmonic																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.99</td> <td>74.00</td> <td>-27.01</td> <td>58.64</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	46.99	74.00	-27.01	58.64	38.45	16.46	66.56	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.42</td> <td>74.00</td> <td>-28.58</td> <td>57.07</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	45.42	74.00	-28.58	57.07	38.45	16.46	66.56	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 11650.00	46.99	74.00	-27.01	58.64	38.45	16.46	66.56	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 11650.00	45.42	74.00	-28.58	57.07	38.45	16.46	66.56	0.00	---	---	PEAK																																																																					



	62																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.40</td> <td>50.39</td> <td>68.20</td> <td>-17.81</td> <td>41.00</td> <td>34.50</td> <td>11.04</td> <td>36.15</td> <td>0.00</td> <td>100</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>48.02</td> <td>68.20</td> <td>-20.18</td> <td>38.73</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>100</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.00</td> <td>68.79</td> <td>109.22</td> <td>-40.43</td> <td>60.52</td> <td>34.53</td> <td>11.16</td> <td>37.42</td> <td>0.00</td> <td>100</td> <td>173</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.60</td> <td>76.05</td> <td>114.55</td> <td>-38.50</td> <td>67.89</td> <td>34.54</td> <td>11.17</td> <td>37.55</td> <td>0.00</td> <td>100</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5626.40	50.39	68.20	-17.81	41.00	34.50	11.04	36.15	0.00	100	173	PEAK	2	5650.00	48.02	68.20	-20.18	38.73	34.50	11.07	36.28	0.00	100	173	PEAK	3	5714.00	68.79	109.22	-40.43	60.52	34.53	11.16	37.42	0.00	100	173	PEAK	4	5721.60	76.05	114.55	-38.50	67.89	34.54	11.17	37.55	0.00	100	173	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.24</td> <td>-----</td> <td>-----</td> <td>102.42</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>173</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5745.00	110.24	-----	-----	102.42	34.59	11.20	37.97	0.00	100	173	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5626.40	50.39	68.20	-17.81	41.00	34.50	11.04	36.15	0.00	100	173	PEAK																																																																																															
2	5650.00	48.02	68.20	-20.18	38.73	34.50	11.07	36.28	0.00	100	173	PEAK																																																																																															
3	5714.00	68.79	109.22	-40.43	60.52	34.53	11.16	37.42	0.00	100	173	PEAK																																																																																															
4	5721.60	76.05	114.55	-38.50	67.89	34.54	11.17	37.55	0.00	100	173	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	110.24	-----	-----	102.42	34.59	11.20	37.97	0.00	100	173	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.81</td> <td>-----</td> <td>-----</td> <td>93.99</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>173</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5745.00	101.81	-----	-----	93.99	34.59	11.20	37.97	0.00	100	173	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	101.81	-----	-----	93.99	34.59	11.20	37.97	0.00	100	173	AVERAGE																																																																																															

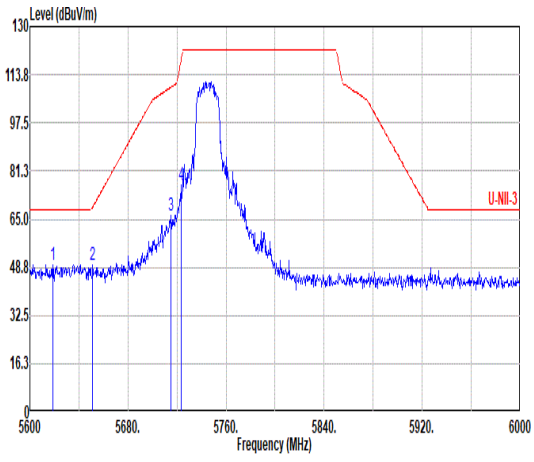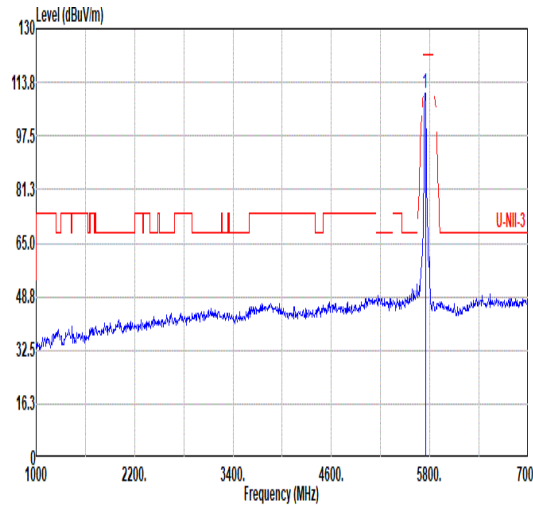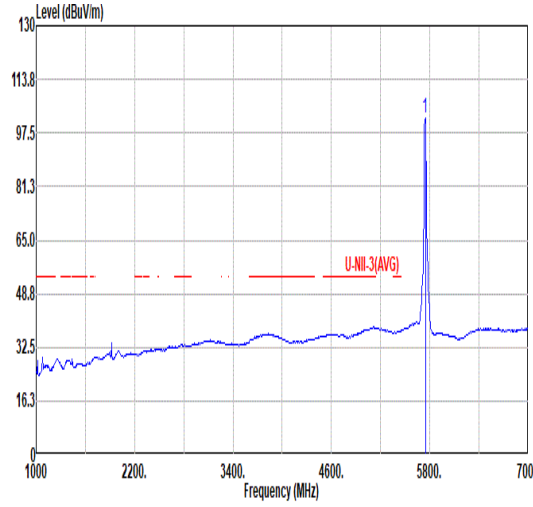

		62																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																															
ANT		1																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a peak at 5745 MHz. A red limit line is shown at approximately 113.8 dBuV/m. Three peaks are marked with blue vertical lines and numbered 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5618.80</td> <td>49.75</td> <td>68.20</td> <td>-18.45</td> <td>40.38</td> <td>34.50</td> <td>11.03</td> <td>36.16</td> <td>0.00</td> <td>283</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.20</td> <td>49.64</td> <td>69.09</td> <td>-19.45</td> <td>40.37</td> <td>34.50</td> <td>11.07</td> <td>36.30</td> <td>0.00</td> <td>283</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.80</td> <td>66.43</td> <td>109.45</td> <td>-43.02</td> <td>58.17</td> <td>34.53</td> <td>11.16</td> <td>37.43</td> <td>0.00</td> <td>283</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5723.20</td> <td>76.40</td> <td>118.20</td> <td>-41.80</td> <td>68.26</td> <td>34.55</td> <td>11.17</td> <td>37.58</td> <td>0.00</td> <td>283</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5618.80	49.75	68.20	-18.45	40.38	34.50	11.03	36.16	0.00	283	82	PEAK	2	5651.20	49.64	69.09	-19.45	40.37	34.50	11.07	36.30	0.00	283	82	PEAK	3	5714.80	66.43	109.45	-43.02	58.17	34.53	11.16	37.43	0.00	283	82	PEAK	4	5723.20	76.40	118.20	-41.80	68.26	34.55	11.17	37.58	0.00	283	82	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a sharp peak at 5745 MHz. A red limit line is shown at approximately 113.8 dBuV/m. The plot is labeled 'U-NII-3'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.34</td> <td>-----</td> <td>-----</td> <td>102.52</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>283</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	110.34	-----	-----	102.52	34.59	11.20	37.97	0.00	283	82	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5618.80	49.75	68.20	-18.45	40.38	34.50	11.03	36.16	0.00	283	82	PEAK																																																																																																																					
2	5651.20	49.64	69.09	-19.45	40.37	34.50	11.07	36.30	0.00	283	82	PEAK																																																																																																																					
3	5714.80	66.43	109.45	-43.02	58.17	34.53	11.16	37.43	0.00	283	82	PEAK																																																																																																																					
4	5723.20	76.40	118.20	-41.80	68.26	34.55	11.17	37.58	0.00	283	82	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	110.34	-----	-----	102.52	34.59	11.20	37.97	0.00	283	82	PEAK																																																																																																																					
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization, Average. The plot shows a sharp peak at 5745 MHz. A red limit line is shown at approximately 113.8 dBuV/m. The plot is labeled 'U-NII-3(AVG)'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.83</td> <td>-----</td> <td>-----</td> <td>94.01</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>283</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	101.83	-----	-----	94.01	34.59	11.20	37.97	0.00	283	82	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.83	-----	-----	94.01	34.59	11.20	37.97	0.00	283	82	AVERAGE																																																																																																																					



Mode	62																																																																																										
	Harmonic																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>44.09</td> <td>74.00</td> <td>-29.91</td> <td>56.18</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11490.00	44.09	74.00	-29.91	56.18	38.29	16.36	66.74	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>43.50</td> <td>74.00</td> <td>-30.50</td> <td>55.59</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 17235.00</td> <td>50.34</td> <td>68.20</td> <td>-17.86</td> <td>52.23</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11490.00	43.50	74.00	-30.50	55.59	38.29	16.36	66.74	0.00	---	---	PEAK	2 17235.00	50.34	68.20	-17.86	52.23	42.51	20.16	64.56	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																			
1 11490.00	44.09	74.00	-29.91	56.18	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																			
1 11490.00	43.50	74.00	-30.50	55.59	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																
2 17235.00	50.34	68.20	-17.86	52.23	42.51	20.16	64.56	0.00	---	---	PEAK																																																																																






Mode	63																																																																																					
	Harmonic																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>43.93</td> <td>74.00</td> <td>-30.07</td> <td>55.80</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	43.93	74.00	-30.07	55.80	38.37	16.41	66.65	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>43.89</td> <td>74.00</td> <td>-30.11</td> <td>55.76</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--- PEAK</td> </tr> <tr> <td>2 17344.40</td> <td>52.01</td> <td>68.20</td> <td>-16.19</td> <td>53.88</td> <td>42.48</td> <td>20.23</td> <td>64.58</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	43.89	74.00	-30.11	55.76	38.37	16.41	66.65	0.00	--- PEAK	2 17344.40	52.01	68.20	-16.19	53.88	42.48	20.23	64.58	0.00	--- Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	43.93	74.00	-30.07	55.80	38.37	16.41	66.65	0.00	--- PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 11570.00	43.89	74.00	-30.11	55.76	38.37	16.41	66.65	0.00	--- PEAK																																																																													
2 17344.40	52.01	68.20	-16.19	53.88	42.48	20.23	64.58	0.00	--- Peak																																																																													



	64																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>61.93</td> <td>112.27</td> <td>-50.34</td> <td>55.70</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>128</td> <td>167</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5860.40</td> <td>67.24</td> <td>109.39</td> <td>-42.15</td> <td>61.10</td> <td>34.62</td> <td>11.34</td> <td>40.02</td> <td>0.00</td> <td>128</td> <td>167</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>45.73</td> <td>68.64</td> <td>-22.91</td> <td>39.22</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>128</td> <td>167</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.20</td> <td>47.70</td> <td>68.20</td> <td>-20.50</td> <td>41.17</td> <td>35.01</td> <td>11.40</td> <td>39.88</td> <td>0.00</td> <td>128</td> <td>167</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5854.40	61.93	112.27	-50.34	55.70	34.81	11.33	39.91	0.00	128	167	PEAK	2	5860.40	67.24	109.39	-42.15	61.10	34.62	11.34	40.02	0.00	128	167	PEAK	3	5924.40	45.73	68.64	-22.91	39.22	35.00	11.40	39.89	0.00	128	167	PEAK	4	5927.20	47.70	68.20	-20.50	41.17	35.01	11.40	39.88	0.00	128	167	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.27</td> <td>-----</td> <td>-----</td> <td>102.60</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>128</td> <td>167</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5825.00	109.27	-----	-----	102.60	34.75	11.31	39.39	0.00	128	167	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																																																		
1	5854.40	61.93	112.27	-50.34	55.70	34.81	11.33	39.91	0.00	128	167	PEAK																																																																																															
2	5860.40	67.24	109.39	-42.15	61.10	34.62	11.34	40.02	0.00	128	167	PEAK																																																																																															
3	5924.40	45.73	68.64	-22.91	39.22	35.00	11.40	39.89	0.00	128	167	PEAK																																																																																															
4	5927.20	47.70	68.20	-20.50	41.17	35.01	11.40	39.88	0.00	128	167	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																																																		
1	5825.00	109.27	-----	-----	102.60	34.75	11.31	39.39	0.00	128	167	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.23</td> <td>-----</td> <td>-----</td> <td>93.56</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>128</td> <td>167</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5825.00	100.23	-----	-----	93.56	34.75	11.31	39.39	0.00	128	167	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																																																		
1	5825.00	100.23	-----	-----	93.56	34.75	11.31	39.39	0.00	128	167	AVERAGE																																																																																															

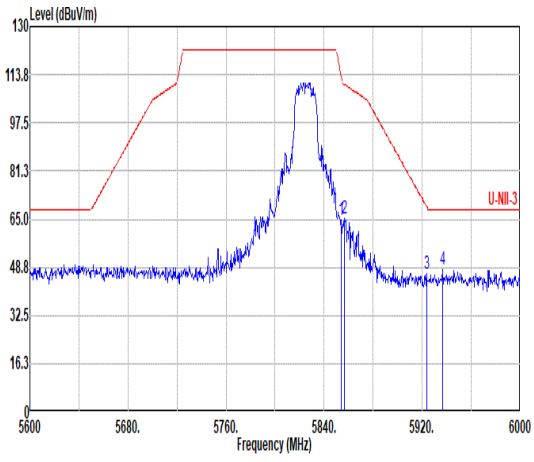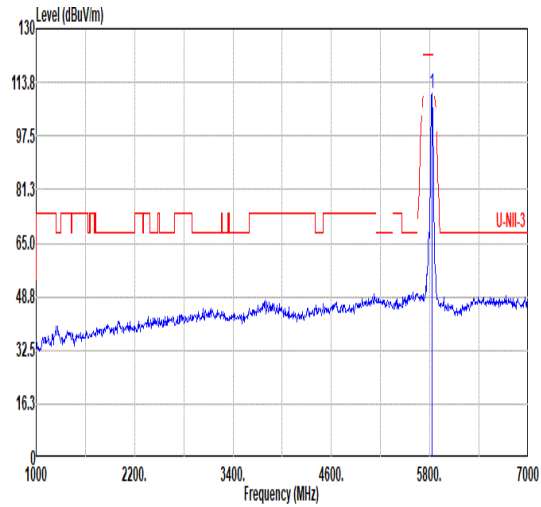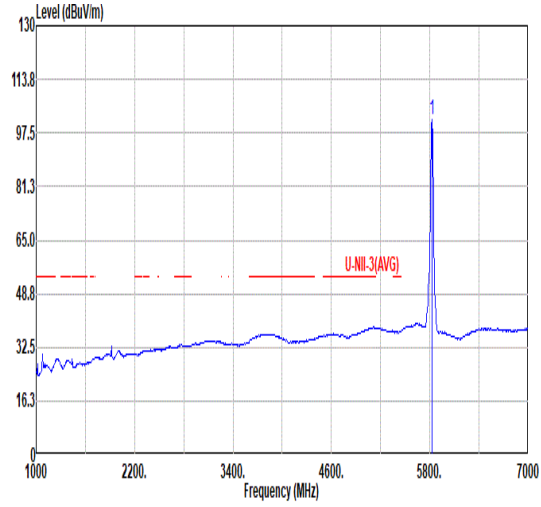

		64																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>64.77</td> <td>113.18</td> <td>-48.41</td> <td>58.54</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>306</td> <td>85 PEAK</td> </tr> <tr> <td>2</td> <td>5856.80</td> <td>65.23</td> <td>110.40</td> <td>-45.17</td> <td>59.04</td> <td>34.81</td> <td>11.34</td> <td>39.96</td> <td>0.00</td> <td>306</td> <td>85 PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>46.48</td> <td>69.23</td> <td>-22.75</td> <td>39.98</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>306</td> <td>85 PEAK</td> </tr> <tr> <td>4</td> <td>5936.80</td> <td>47.94</td> <td>68.20</td> <td>-20.26</td> <td>41.34</td> <td>35.05</td> <td>11.41</td> <td>39.86</td> <td>0.00</td> <td>306</td> <td>85 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	64.77	113.18	-48.41	58.54	34.81	11.33	39.91	0.00	306	85 PEAK	2	5856.80	65.23	110.40	-45.17	59.04	34.81	11.34	39.96	0.00	306	85 PEAK	3	5923.60	46.48	69.23	-22.75	39.98	34.99	11.40	39.89	0.00	306	85 PEAK	4	5936.80	47.94	68.20	-20.26	41.34	35.05	11.41	39.86	0.00	306	85 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.14</td> <td>-----</td> <td>-----</td> <td>103.47</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>306</td> <td>85 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	110.14	-----	-----	103.47	34.75	11.31	39.39	0.00	306
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5854.00	64.77	113.18	-48.41	58.54	34.81	11.33	39.91	0.00	306	85 PEAK																																																																																																																	
2	5856.80	65.23	110.40	-45.17	59.04	34.81	11.34	39.96	0.00	306	85 PEAK																																																																																																																	
3	5923.60	46.48	69.23	-22.75	39.98	34.99	11.40	39.89	0.00	306	85 PEAK																																																																																																																	
4	5936.80	47.94	68.20	-20.26	41.34	35.05	11.41	39.86	0.00	306	85 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5825.00	110.14	-----	-----	103.47	34.75	11.31	39.39	0.00	306	85 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.39</td> <td>-----</td> <td>-----</td> <td>94.72</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>306</td> <td>85 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	101.39	-----	-----	94.72	34.75	11.31	39.39	0.00	306	85 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5825.00	101.39	-----	-----	94.72	34.75	11.31	39.39	0.00	306	85 AVERAGE																																																																																																																	



Mode	64																																																																														
	Harmonic																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																														
ANT	1																																																																														
Pol.	Horizontal	Vertical																																																																													
Peak Avg																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.63</td> <td>74.00</td> <td>-26.37</td> <td>59.28</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	47.63	74.00	-26.37	59.28	38.45	16.46	66.56	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.75</td> <td>74.00</td> <td>-28.25</td> <td>57.40</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	45.75	74.00	-28.25	57.40	38.45	16.46	66.56	0.00	--
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	47.63	74.00	-26.37	59.28	38.45	16.46	66.56	0.00	--	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	45.75	74.00	-28.25	57.40	38.45	16.46	66.56	0.00	--	PEAK																																																																					



	65																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.40</td> <td>50.03</td> <td>68.20</td> <td>-18.17</td> <td>40.65</td> <td>34.50</td> <td>11.06</td> <td>36.18</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.60</td> <td>51.02</td> <td>69.39</td> <td>-18.37</td> <td>41.76</td> <td>34.50</td> <td>11.07</td> <td>36.31</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>73.02</td> <td>110.79</td> <td>-37.77</td> <td>64.83</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>74.12</td> <td>112.72</td> <td>-38.60</td> <td>65.95</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5644.40	50.03	68.20	-18.17	40.65	34.50	11.06	36.18	0.00	100	168	PEAK	2	5651.60	51.02	69.39	-18.37	41.76	34.50	11.07	36.31	0.00	100	168	PEAK	3	5719.60	73.02	110.79	-37.77	64.83	34.54	11.17	37.52	0.00	100	168	PEAK	4	5728.80	74.12	112.72	-38.60	65.95	34.54	11.17	37.54	0.00	100	168	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.68</td> <td>-----</td> <td>-----</td> <td>103.86</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	111.68	-----	-----	103.86	34.59	11.20	37.97	0.00	100	168	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5644.40	50.03	68.20	-18.17	40.65	34.50	11.06	36.18	0.00	100	168	PEAK																																																																																															
2	5651.60	51.02	69.39	-18.37	41.76	34.50	11.07	36.31	0.00	100	168	PEAK																																																																																															
3	5719.60	73.02	110.79	-37.77	64.83	34.54	11.17	37.52	0.00	100	168	PEAK																																																																																															
4	5728.80	74.12	112.72	-38.60	65.95	34.54	11.17	37.54	0.00	100	168	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	111.68	-----	-----	103.86	34.59	11.20	37.97	0.00	100	168	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.93</td> <td>-----</td> <td>-----</td> <td>94.11</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	101.93	-----	-----	94.11	34.59	11.20	37.97	0.00	100	168	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	101.93	-----	-----	94.11	34.59	11.20	37.97	0.00	100	168	AVERAGE																																																																																															



		65																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5605.60</td> <td>49.63</td> <td>68.20</td> <td>-18.57</td> <td>40.31</td> <td>34.50</td> <td>11.01</td> <td>36.19</td> <td>0.00</td> <td>300</td> <td>84 PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>47.54</td> <td>68.50</td> <td>-20.96</td> <td>38.26</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>300</td> <td>84 PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>72.80</td> <td>110.79</td> <td>-37.99</td> <td>64.61</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>300</td> <td>84 PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>77.58</td> <td>112.72</td> <td>-35.14</td> <td>69.41</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>300</td> <td>84 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5605.60	49.63	68.20	-18.57	40.31	34.50	11.01	36.19	0.00	300	84 PEAK	2	5650.40	47.54	68.50	-20.96	38.26	34.50	11.07	36.29	0.00	300	84 PEAK	3	5719.60	72.80	110.79	-37.99	64.61	34.54	11.17	37.52	0.00	300	84 PEAK	4	5728.80	77.58	112.72	-35.14	69.41	34.54	11.17	37.54	0.00	300	84 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.55</td> <td>-----</td> <td>-----</td> <td>103.73</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>84 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	111.55	-----	-----	103.73	34.59	11.20	37.97	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5605.60	49.63	68.20	-18.57	40.31	34.50	11.01	36.19	0.00	300	84 PEAK																																																																																																																	
2	5650.40	47.54	68.50	-20.96	38.26	34.50	11.07	36.29	0.00	300	84 PEAK																																																																																																																	
3	5719.60	72.80	110.79	-37.99	64.61	34.54	11.17	37.52	0.00	300	84 PEAK																																																																																																																	
4	5728.80	77.58	112.72	-35.14	69.41	34.54	11.17	37.54	0.00	300	84 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	111.55	-----	-----	103.73	34.59	11.20	37.97	0.00	300	84 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.22</td> <td>-----</td> <td>-----</td> <td>94.40</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>84 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.22	-----	-----	94.40	34.59	11.20	37.97	0.00	300	84 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	102.22	-----	-----	94.40	34.59	11.20	37.97	0.00	300	84 AVERAGE																																																																																																																	



Mode	65																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.05</td> <td>74.00</td> <td>-29.95</td> <td>56.14</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>51.00</td> <td>68.20</td> <td>-17.20</td> <td>52.89</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	44.05	74.00	-29.95	56.14	38.29	16.36	66.74	0.00	---	---	PEAK	2	17235.00	51.00	68.20	-17.20	52.89	42.51	20.16	64.56	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.06</td> <td>74.00</td> <td>-29.94</td> <td>56.15</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.26</td> <td>68.20</td> <td>-19.94</td> <td>50.15</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11490.00	44.06	74.00	-29.94	56.15	38.29	16.36	66.74	0.00	---	---	PEAK	2	17235.00	48.26	68.20	-19.94	50.15	42.51	20.16	64.56	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11490.00	44.05	74.00	-29.95	56.14	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																																
2	17235.00	51.00	68.20	-17.20	52.89	42.51	20.16	64.56	0.00	---	---	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11490.00	44.06	74.00	-29.94	56.15	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																																
2	17235.00	48.26	68.20	-19.94	50.15	42.51	20.16	64.56	0.00	---	---	PEAK																																																																																																






Mode	66																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>56.29</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>49.78</td> <td>68.20</td> <td>-18.42</td> <td>51.70</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	44.42	74.00	-29.58	56.29	38.37	16.41	66.65	0.00	---	---	PEAK	2	17355.00	49.78	68.20	-18.42	51.70	42.42	20.24	64.58	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.28</td> <td>74.00</td> <td>-29.72</td> <td>56.15</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.84</td> <td>68.20</td> <td>-17.36</td> <td>52.76</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	44.28	74.00	-29.72	56.15	38.37	16.41	66.65	0.00	---	---	PEAK	2	17355.00	50.84	68.20	-17.36	52.76	42.42	20.24	64.58	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11570.00	44.42	74.00	-29.58	56.29	38.37	16.41	66.65	0.00	---	---	PEAK																																																																																																
2	17355.00	49.78	68.20	-18.42	51.70	42.42	20.24	64.58	0.00	---	---	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11570.00	44.28	74.00	-29.72	56.15	38.37	16.41	66.65	0.00	---	---	PEAK																																																																																																
2	17355.00	50.84	68.20	-17.36	52.76	42.42	20.24	64.58	0.00	---	---	PEAK																																																																																																



67																																																																																
Mode	Band Edge																																																																															
U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																
ANT	1																																																																															
Pol.	Horizontal																																																																															
Peak	Fundamental																																																																															
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>65.58</td> <td>111.36</td> <td>-45.78</td> <td>59.35</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>100</td> <td>167 PEAK</td> </tr> <tr> <td>2</td> <td>5870.40</td> <td>63.00</td> <td>106.59</td> <td>-43.59</td> <td>56.84</td> <td>34.84</td> <td>11.35</td> <td>40.03</td> <td>0.00</td> <td>100</td> <td>167 PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>45.30</td> <td>68.35</td> <td>-23.05</td> <td>38.79</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>100</td> <td>167 PEAK</td> </tr> <tr> <td>4</td> <td>5965.60</td> <td>47.68</td> <td>68.20</td> <td>-20.52</td> <td>40.89</td> <td>35.13</td> <td>11.44</td> <td>39.78</td> <td>0.00</td> <td>100</td> <td>167 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.80	65.58	111.36	-45.78	59.35	34.81	11.34	39.92	0.00	100	167 PEAK	2	5870.40	63.00	106.59	-43.59	56.84	34.84	11.35	40.03	0.00	100	167 PEAK	3	5924.80	45.30	68.35	-23.05	38.79	35.00	11.40	39.89	0.00	100	167 PEAK	4	5965.60	47.68	68.20	-20.52	40.89	35.13	11.44	39.78	0.00	100	167 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5854.80	65.58	111.36	-45.78	59.35	34.81	11.34	39.92	0.00	100	167 PEAK																																																																					
2	5870.40	63.00	106.59	-43.59	56.84	34.84	11.35	40.03	0.00	100	167 PEAK																																																																					
3	5924.80	45.30	68.35	-23.05	38.79	35.00	11.40	39.89	0.00	100	167 PEAK																																																																					
4	5965.60	47.68	68.20	-20.52	40.89	35.13	11.44	39.78	0.00	100	167 PEAK																																																																					
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.59</td> <td>-----</td> <td>-----</td> <td>101.92</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>167 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	108.59	-----	-----	101.92	34.75	11.31	39.39	0.00	100	167 PEAK																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5825.00	108.59	-----	-----	101.92	34.75	11.31	39.39	0.00	100	167 PEAK																																																																					
Avg	Blank																																																																															
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.86</td> <td>-----</td> <td>-----</td> <td>93.19</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>167 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.86	-----	-----	93.19	34.75	11.31	39.39	0.00	100	167 AVERAGE																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5825.00	99.86	-----	-----	93.19	34.75	11.31	39.39	0.00	100	167 AVERAGE																																																																					

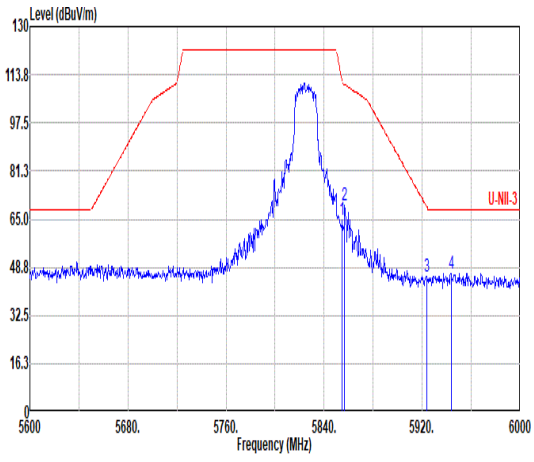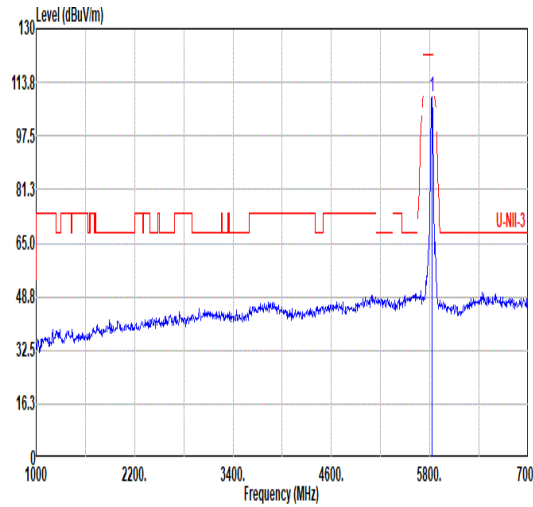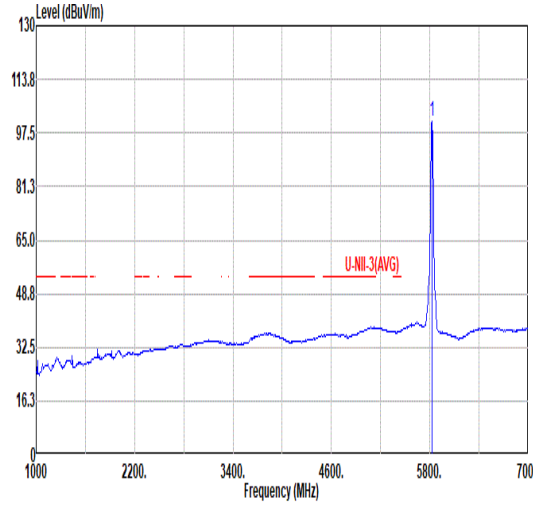

		67																																																																																																																										
Mode		Band Edge																																																																																																																										
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																										
ANT		1																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1052 798 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>64.54</td> <td>111.36</td> <td>-46.82</td> <td>58.31</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>2</td> <td>5856.80</td> <td>69.56</td> <td>110.40</td> <td>-40.84</td> <td>63.37</td> <td>34.81</td> <td>11.34</td> <td>39.96</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>45.61</td> <td>69.23</td> <td>-23.62</td> <td>39.11</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> <tr> <td>4</td> <td>5943.60</td> <td>46.75</td> <td>68.20</td> <td>-21.45</td> <td>40.10</td> <td>35.07</td> <td>11.42</td> <td>39.84</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	64.54	111.36	-46.82	58.31	34.81	11.34	39.92	0.00	263	83 PEAK	2	5856.80	69.56	110.40	-40.84	63.37	34.81	11.34	39.96	0.00	263	83 PEAK	3	5923.60	45.61	69.23	-23.62	39.11	34.99	11.40	39.89	0.00	263	83 PEAK	4	5943.60	46.75	68.20	-21.45	40.10	35.07	11.42	39.84	0.00	263	83 PEAK	 <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.20</td> <td>-----</td> <td>-----</td> <td>102.53</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>263</td> <td>83 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.20	-----	-----	102.53	34.75	11.31	39.39	0.00	263	83 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5854.80	64.54	111.36	-46.82	58.31	34.81	11.34	39.92	0.00	263	83 PEAK																																																																																																																	
2	5856.80	69.56	110.40	-40.84	63.37	34.81	11.34	39.96	0.00	263	83 PEAK																																																																																																																	
3	5923.60	45.61	69.23	-23.62	39.11	34.99	11.40	39.89	0.00	263	83 PEAK																																																																																																																	
4	5943.60	46.75	68.20	-21.45	40.10	35.07	11.42	39.84	0.00	263	83 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	109.20	-----	-----	102.53	34.75	11.31	39.39	0.00	263	83 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>94.20</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>263</td> <td>83 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.87	-----	-----	94.20	34.75	11.31	39.39	0.00	263	83 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	100.87	-----	-----	94.20	34.75	11.31	39.39	0.00	263	83 AVERAGE																																																																																																																	



Mode	67																																																																											
	Harmonic																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.23</td> <td>74.00</td> <td>-26.77</td> <td>58.88</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	47.23	74.00	-26.77	58.88	38.45	16.46	66.56	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.21</td> <td>74.00</td> <td>-28.79</td> <td>56.86</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	45.21	74.00	-28.79	56.86	38.45	16.46	66.56	0.00	--- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	47.23	74.00	-26.77	58.88	38.45	16.46	66.56	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	45.21	74.00	-28.79	56.86	38.45	16.46	66.56	0.00	--- PEAK																																																																			






		68																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU26/0_5745MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.20</td> <td>48.77</td> <td>68.20</td> <td>-19.43</td> <td>39.36</td> <td>34.50</td> <td>11.05</td> <td>36.14</td> <td>0.00</td> <td>363</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>46.38</td> <td>68.20</td> <td>-21.82</td> <td>37.09</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>363</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>59.79</td> <td>110.79</td> <td>-51.00</td> <td>51.60</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>363</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>60.93</td> <td>111.81</td> <td>-50.88</td> <td>52.75</td> <td>34.54</td> <td>11.17</td> <td>37.53</td> <td>0.00</td> <td>363</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5631.20	48.77	68.20	-19.43	39.36	34.50	11.05	36.14	0.00	363	110	PEAK	2	5650.00	46.38	68.20	-21.82	37.09	34.50	11.07	36.28	0.00	363	110	PEAK	3	5719.60	59.79	110.79	-51.00	51.60	34.54	11.17	37.52	0.00	363	110	PEAK	4	5720.40	60.93	111.81	-50.88	52.75	34.54	11.17	37.53	0.00	363	110	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.26</td> <td>-----</td> <td>-----</td> <td>102.44</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>363</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	110.26	-----	-----	102.44	34.59	11.20	37.97	0.00	363	110	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5631.20	48.77	68.20	-19.43	39.36	34.50	11.05	36.14	0.00	363	110	PEAK																																																																																																																					
2	5650.00	46.38	68.20	-21.82	37.09	34.50	11.07	36.28	0.00	363	110	PEAK																																																																																																																					
3	5719.60	59.79	110.79	-51.00	51.60	34.54	11.17	37.52	0.00	363	110	PEAK																																																																																																																					
4	5720.40	60.93	111.81	-50.88	52.75	34.54	11.17	37.53	0.00	363	110	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	110.26	-----	-----	102.44	34.59	11.20	37.97	0.00	363	110	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.01</td> <td>-----</td> <td>-----</td> <td>94.19</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>363</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	102.01	-----	-----	94.19	34.59	11.20	37.97	0.00	363	110	AVERAGE																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	102.01	-----	-----	94.19	34.59	11.20	37.97	0.00	363	110	AVERAGE																																																																																																																					






		68																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU26/0_5745MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5601.20</td> <td>48.51</td> <td>68.20</td> <td>-19.69</td> <td>39.21</td> <td>34.50</td> <td>11.00</td> <td>36.20</td> <td>0.00</td> <td>271</td> <td>86</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5653.20</td> <td>48.97</td> <td>70.58</td> <td>-21.61</td> <td>39.73</td> <td>34.50</td> <td>11.08</td> <td>36.34</td> <td>0.00</td> <td>271</td> <td>86</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>57.76</td> <td>110.79</td> <td>-53.03</td> <td>49.57</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>271</td> <td>86</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>56.01</td> <td>111.81</td> <td>-55.80</td> <td>47.83</td> <td>34.54</td> <td>11.17</td> <td>37.53</td> <td>0.00</td> <td>271</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5601.20	48.51	68.20	-19.69	39.21	34.50	11.00	36.20	0.00	271	86	PEAK	2	5653.20	48.97	70.58	-21.61	39.73	34.50	11.08	36.34	0.00	271	86	PEAK	3	5719.60	57.76	110.79	-53.03	49.57	34.54	11.17	37.52	0.00	271	86	PEAK	4	5720.40	56.01	111.81	-55.80	47.83	34.54	11.17	37.53	0.00	271	86	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.64</td> <td>-----</td> <td>-----</td> <td>101.82</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>271</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	109.64	-----	-----	101.82	34.59	11.20	37.97	0.00	271	86	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5601.20	48.51	68.20	-19.69	39.21	34.50	11.00	36.20	0.00	271	86	PEAK																																																																																																																					
2	5653.20	48.97	70.58	-21.61	39.73	34.50	11.08	36.34	0.00	271	86	PEAK																																																																																																																					
3	5719.60	57.76	110.79	-53.03	49.57	34.54	11.17	37.52	0.00	271	86	PEAK																																																																																																																					
4	5720.40	56.01	111.81	-55.80	47.83	34.54	11.17	37.53	0.00	271	86	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	109.64	-----	-----	101.82	34.59	11.20	37.97	0.00	271	86	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.81</td> <td>-----</td> <td>-----</td> <td>93.99</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>271</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	101.81	-----	-----	93.99	34.59	11.20	37.97	0.00	271	86	AVERAGE																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.81	-----	-----	93.99	34.59	11.20	37.97	0.00	271	86	AVERAGE																																																																																																																					

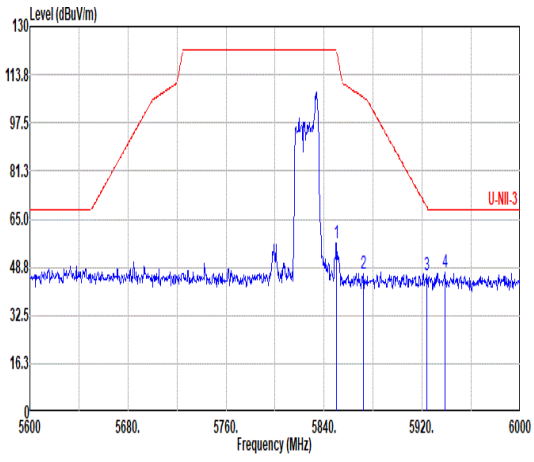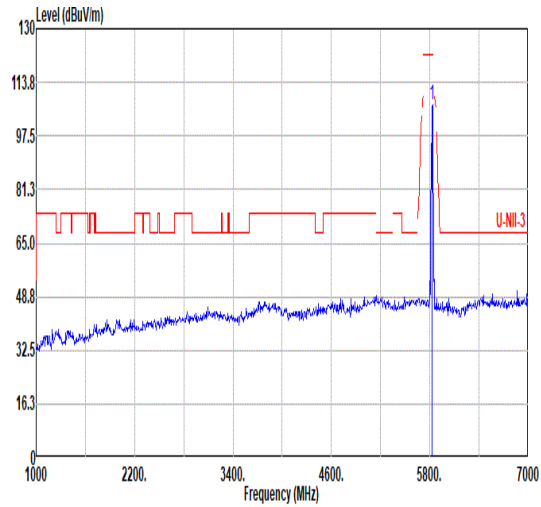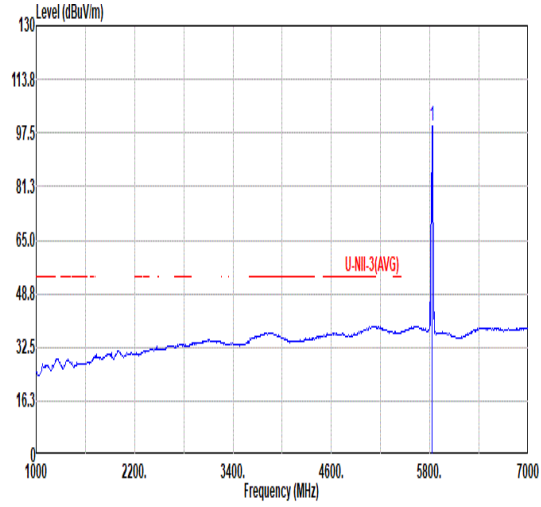

		69																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU26/8_5825MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.40</td> <td>56.76</td> <td>121.39</td> <td>-64.63</td> <td>50.47</td> <td>34.80</td> <td>11.33</td> <td>39.84</td> <td>0.00</td> <td>288</td> <td>178 PEAK</td> </tr> <tr> <td>2</td> <td>5872.00</td> <td>46.57</td> <td>106.14</td> <td>-59.57</td> <td>40.40</td> <td>34.84</td> <td>11.35</td> <td>40.02</td> <td>0.00</td> <td>288</td> <td>178 PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>46.14</td> <td>68.94</td> <td>-22.80</td> <td>39.63</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>288</td> <td>178 PEAK</td> </tr> <tr> <td>4</td> <td>5938.40</td> <td>46.87</td> <td>68.20</td> <td>-21.33</td> <td>40.26</td> <td>35.05</td> <td>11.41</td> <td>39.85</td> <td>0.00</td> <td>288</td> <td>178 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.40	56.76	121.39	-64.63	50.47	34.80	11.33	39.84	0.00	288	178 PEAK	2	5872.00	46.57	106.14	-59.57	40.40	34.84	11.35	40.02	0.00	288	178 PEAK	3	5924.00	46.14	68.94	-22.80	39.63	35.00	11.40	39.89	0.00	288	178 PEAK	4	5938.40	46.87	68.20	-21.33	40.26	35.05	11.41	39.85	0.00	288	178 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.80</td> <td>-----</td> <td>-----</td> <td>100.13</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>288</td> <td>178 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.80	-----	-----	100.13	34.75	11.31	39.39	0.00	288
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5850.40	56.76	121.39	-64.63	50.47	34.80	11.33	39.84	0.00	288	178 PEAK																																																																																																																	
2	5872.00	46.57	106.14	-59.57	40.40	34.84	11.35	40.02	0.00	288	178 PEAK																																																																																																																	
3	5924.00	46.14	68.94	-22.80	39.63	35.00	11.40	39.89	0.00	288	178 PEAK																																																																																																																	
4	5938.40	46.87	68.20	-21.33	40.26	35.05	11.41	39.85	0.00	288	178 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	106.80	-----	-----	100.13	34.75	11.31	39.39	0.00	288	178 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.39</td> <td>-----</td> <td>-----</td> <td>92.72</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>288</td> <td>178 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.39	-----	-----	92.72	34.75	11.31	39.39	0.00	288	178 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	99.39	-----	-----	92.72	34.75	11.31	39.39	0.00	288	178 AVERAGE																																																																																																																	

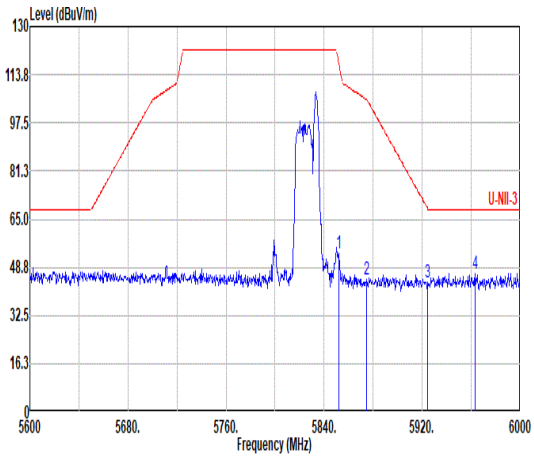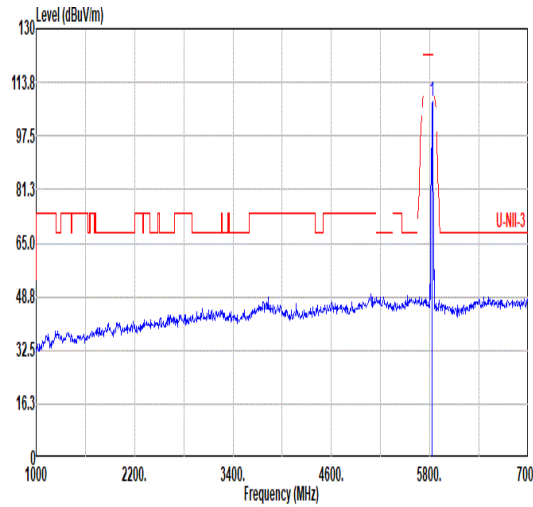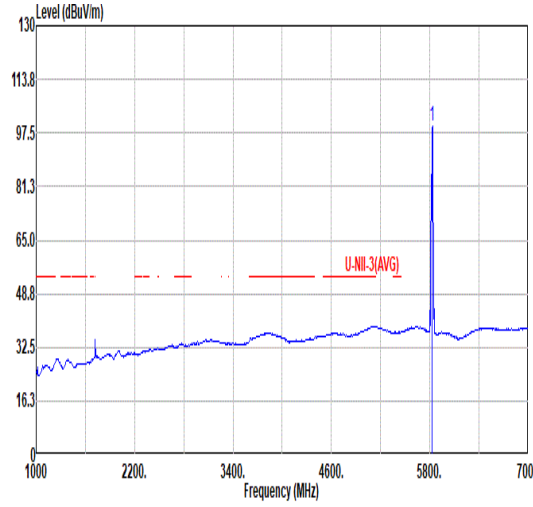

69																																																																									
Mode	Band Edge																																																																								
U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU26/8_5825MHz																																																																									
ANT	1																																																																								
Pol.	Vertical																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a red limit line and a blue signal line. A significant peak is visible at approximately 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.00</td> <td>53.33</td> <td>117.74</td> <td>-64.41</td> <td>47.07</td> <td>34.00</td> <td>11.33</td> <td>39.87</td> <td>0.00</td> <td>353</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.80</td> <td>44.57</td> <td>105.36</td> <td>-60.79</td> <td>38.39</td> <td>34.85</td> <td>11.35</td> <td>40.02</td> <td>0.00</td> <td>353</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>43.60</td> <td>68.64</td> <td>-25.04</td> <td>37.09</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>353</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5963.20</td> <td>46.48</td> <td>68.20</td> <td>-21.72</td> <td>39.70</td> <td>35.13</td> <td>11.44</td> <td>39.79</td> <td>0.00</td> <td>353</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5852.00	53.33	117.74	-64.41	47.07	34.00	11.33	39.87	0.00	353	87	PEAK	2	5874.80	44.57	105.36	-60.79	38.39	34.85	11.35	40.02	0.00	353	87	PEAK	3	5924.40	43.60	68.64	-25.04	37.09	35.00	11.40	39.89	0.00	353	87	PEAK	4	5963.20	46.48	68.20	-21.72	39.70	35.13	11.44	39.79	0.00	353	87	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																
1	5852.00	53.33	117.74	-64.41	47.07	34.00	11.33	39.87	0.00	353	87	PEAK																																																													
2	5874.80	44.57	105.36	-60.79	38.39	34.85	11.35	40.02	0.00	353	87	PEAK																																																													
3	5924.40	43.60	68.64	-25.04	37.09	35.00	11.40	39.89	0.00	353	87	PEAK																																																													
4	5963.20	46.48	68.20	-21.72	39.70	35.13	11.44	39.79	0.00	353	87	PEAK																																																													
Peak	 <p>Vertical Fundamental Spectrum Plot. Shows a red limit line and a blue signal line. A sharp peak is observed at 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.69</td> <td>-----</td> <td>-----</td> <td>101.02</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5825.00	107.69	-----	-----	101.02	34.75	11.31	39.39	0.00	353	87	PEAK																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																
1	5825.00	107.69	-----	-----	101.02	34.75	11.31	39.39	0.00	353	87	PEAK																																																													
Avg	Blank																																																																								
Avg	 <p>Vertical Average Spectrum Plot. Shows a red limit line and a blue signal line. A peak is visible at 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.42</td> <td>-----</td> <td>-----</td> <td>92.75</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg	1	5825.00	99.42	-----	-----	92.75	34.75	11.31	39.39	0.00	353	87	AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																
1	5825.00	99.42	-----	-----	92.75	34.75	11.31	39.39	0.00	353	87	AVERAGE																																																													



	70																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU52/37_5745MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.80</td> <td>50.96</td> <td>68.20</td> <td>-17.24</td> <td>41.56</td> <td>34.50</td> <td>11.04</td> <td>36.14</td> <td>0.00</td> <td>298</td> <td>101</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>48.31</td> <td>68.20</td> <td>-19.89</td> <td>39.02</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>298</td> <td>101</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>58.77</td> <td>110.90</td> <td>-52.13</td> <td>50.58</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>298</td> <td>101</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.80</td> <td>68.57</td> <td>117.28</td> <td>-48.71</td> <td>60.42</td> <td>34.55</td> <td>11.17</td> <td>37.57</td> <td>0.00</td> <td>298</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5628.80	50.96	68.20	-17.24	41.56	34.50	11.04	36.14	0.00	298	101	PEAK	2	5650.00	48.31	68.20	-19.89	39.02	34.50	11.07	36.28	0.00	298	101	PEAK	3	5720.00	58.77	110.90	-52.13	50.58	34.54	11.17	37.52	0.00	298	101	PEAK	4	5722.80	68.57	117.28	-48.71	60.42	34.55	11.17	37.57	0.00	298	101	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.63</td> <td>-----</td> <td>-----</td> <td>102.81</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>298</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	110.63	-----	-----	102.81	34.59	11.20	37.97	0.00	298	101	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5628.80	50.96	68.20	-17.24	41.56	34.50	11.04	36.14	0.00	298	101	PEAK																																																																																															
2	5650.00	48.31	68.20	-19.89	39.02	34.50	11.07	36.28	0.00	298	101	PEAK																																																																																															
3	5720.00	58.77	110.90	-52.13	50.58	34.54	11.17	37.52	0.00	298	101	PEAK																																																																																															
4	5722.80	68.57	117.28	-48.71	60.42	34.55	11.17	37.57	0.00	298	101	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	110.63	-----	-----	102.81	34.59	11.20	37.97	0.00	298	101	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.15</td> <td>-----</td> <td>-----</td> <td>94.33</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>298</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	102.15	-----	-----	94.33	34.59	11.20	37.97	0.00	298	101	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	102.15	-----	-----	94.33	34.59	11.20	37.97	0.00	298	101	AVERAGE																																																																																															






		70																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU52/37_5745MHz																																																																																																									
ANT		1																																																																																																									
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5643.20</td> <td>49.89</td> <td>68.20</td> <td>-18.31</td> <td>40.49</td> <td>34.50</td> <td>11.06</td> <td>36.16</td> <td>0.00</td> <td>300</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>46.54</td> <td>68.50</td> <td>-21.96</td> <td>37.26</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>300</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>63.04</td> <td>110.79</td> <td>-47.75</td> <td>54.85</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>300</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.20</td> <td>63.61</td> <td>113.64</td> <td>-50.03</td> <td>55.45</td> <td>34.54</td> <td>11.17</td> <td>37.55</td> <td>0.00</td> <td>300</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5643.20	49.89	68.20	-18.31	40.49	34.50	11.06	36.16	0.00	300	87	PEAK	2	5650.40	46.54	68.50	-21.96	37.26	34.50	11.07	36.29	0.00	300	87	PEAK	3	5719.60	63.04	110.79	-47.75	54.85	34.54	11.17	37.52	0.00	300	87	PEAK	4	5721.20	63.61	113.64	-50.03	55.45	34.54	11.17	37.55	0.00	300	87	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.41</td> <td>-----</td> <td>-----</td> <td>101.59</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	109.41	-----	-----	101.59	34.59	11.20	37.97	0.00	300	87	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5643.20	49.89	68.20	-18.31	40.49	34.50	11.06	36.16	0.00	300	87	PEAK																																																																																															
2	5650.40	46.54	68.50	-21.96	37.26	34.50	11.07	36.29	0.00	300	87	PEAK																																																																																															
3	5719.60	63.04	110.79	-47.75	54.85	34.54	11.17	37.52	0.00	300	87	PEAK																																																																																															
4	5721.20	63.61	113.64	-50.03	55.45	34.54	11.17	37.55	0.00	300	87	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	109.41	-----	-----	101.59	34.59	11.20	37.97	0.00	300	87	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.28</td> <td>-----</td> <td>-----</td> <td>93.46</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>300</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	101.28	-----	-----	93.46	34.59	11.20	37.97	0.00	300	87	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	101.28	-----	-----	93.46	34.59	11.20	37.97	0.00	300	87	AVERAGE																																																																																															



		71																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU52/40_5825MHz																																																																																																									
ANT		1																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>47.55</td> <td>111.36</td> <td>-63.81</td> <td>41.32</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>100</td> <td>171</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.80</td> <td>45.78</td> <td>105.36</td> <td>-59.58</td> <td>39.60</td> <td>34.85</td> <td>11.35</td> <td>40.02</td> <td>0.00</td> <td>100</td> <td>171</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>46.67</td> <td>68.35</td> <td>-21.68</td> <td>40.16</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>100</td> <td>171</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5973.60</td> <td>47.21</td> <td>68.20</td> <td>-20.99</td> <td>40.37</td> <td>35.15</td> <td>11.45</td> <td>39.76</td> <td>0.00</td> <td>100</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5854.80	47.55	111.36	-63.81	41.32	34.81	11.34	39.92	0.00	100	171	PEAK	2	5874.80	45.78	105.36	-59.58	39.60	34.85	11.35	40.02	0.00	100	171	PEAK	3	5924.80	46.67	68.35	-21.68	40.16	35.00	11.40	39.89	0.00	100	171	PEAK	4	5973.60	47.21	68.20	-20.99	40.37	35.15	11.45	39.76	0.00	100	171	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.46</td> <td>-----</td> <td>-----</td> <td>99.79</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5825.00	106.46	-----	-----	99.79	34.75	11.31	39.39	0.00	100	171	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5854.80	47.55	111.36	-63.81	41.32	34.81	11.34	39.92	0.00	100	171	PEAK																																																																																															
2	5874.80	45.78	105.36	-59.58	39.60	34.85	11.35	40.02	0.00	100	171	PEAK																																																																																															
3	5924.80	46.67	68.35	-21.68	40.16	35.00	11.40	39.89	0.00	100	171	PEAK																																																																																															
4	5973.60	47.21	68.20	-20.99	40.37	35.15	11.45	39.76	0.00	100	171	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5825.00	106.46	-----	-----	99.79	34.75	11.31	39.39	0.00	100	171	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.02</td> <td>-----</td> <td>-----</td> <td>91.35</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	1	5825.00	98.02	-----	-----	91.35	34.75	11.31	39.39	0.00	100	171	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																																		
1	5825.00	98.02	-----	-----	91.35	34.75	11.31	39.39	0.00	100	171	AVERAGE																																																																																															

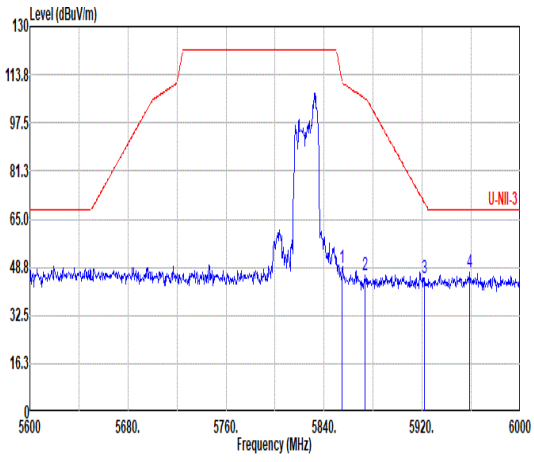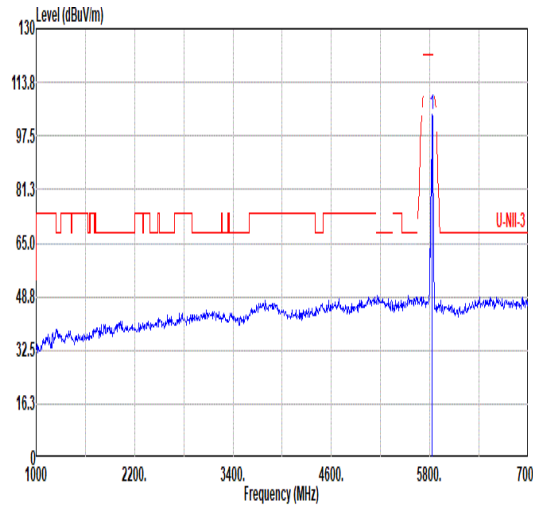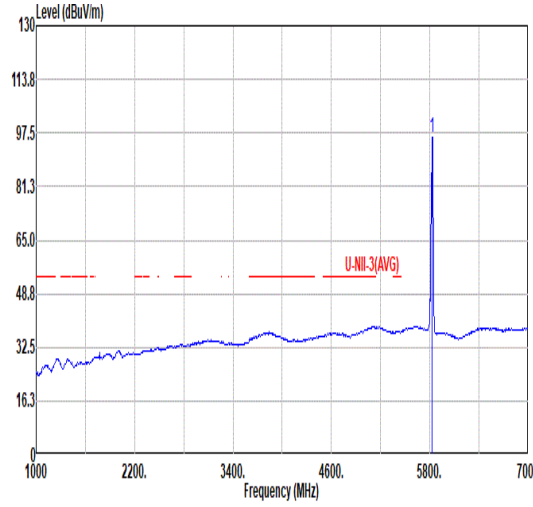

	71																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU52/40_5825MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 798 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>48.67</td> <td>111.36</td> <td>-62.69</td> <td>42.44</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.20</td> <td>46.02</td> <td>105.80</td> <td>-59.78</td> <td>39.84</td> <td>34.85</td> <td>11.35</td> <td>40.02</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.00</td> <td>45.12</td> <td>70.42</td> <td>-25.30</td> <td>38.63</td> <td>34.99</td> <td>11.40</td> <td>39.90</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5958.80</td> <td>47.18</td> <td>68.20</td> <td>-21.02</td> <td>40.43</td> <td>35.12</td> <td>11.43</td> <td>39.80</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	48.67	111.36	-62.69	42.44	34.81	11.34	39.92	0.00	100	267	PEAK	2	5873.20	46.02	105.80	-59.78	39.84	34.85	11.35	40.02	0.00	100	267	PEAK	3	5922.00	45.12	70.42	-25.30	38.63	34.99	11.40	39.90	0.00	100	267	PEAK	4	5958.80	47.18	68.20	-21.02	40.43	35.12	11.43	39.80	0.00	100	267	PEAK	 <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.99</td> <td>-----</td> <td>-----</td> <td>97.32</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	103.99	-----	-----	97.32	34.75	11.31	39.39	0.00	100	267	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	48.67	111.36	-62.69	42.44	34.81	11.34	39.92	0.00	100	267	PEAK																																																																																																																					
2	5873.20	46.02	105.80	-59.78	39.84	34.85	11.35	40.02	0.00	100	267	PEAK																																																																																																																					
3	5922.00	45.12	70.42	-25.30	38.63	34.99	11.40	39.90	0.00	100	267	PEAK																																																																																																																					
4	5958.80	47.18	68.20	-21.02	40.43	35.12	11.43	39.80	0.00	100	267	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	103.99	-----	-----	97.32	34.75	11.31	39.39	0.00	100	267	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.39</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>267</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	96.39	-----	-----	89.72	34.75	11.31	39.39	0.00	100	267	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	96.39	-----	-----	89.72	34.75	11.31	39.39	0.00	100	267	AVERAGE																																																																																																																					



	72																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU106/53_5745MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5619.60</td> <td>50.49</td> <td>68.20</td> <td>-17.71</td> <td>41.12</td> <td>34.50</td> <td>11.03</td> <td>36.16</td> <td>0.00</td> <td>365</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.20</td> <td>48.98</td> <td>69.09</td> <td>-20.11</td> <td>39.71</td> <td>34.50</td> <td>11.07</td> <td>36.30</td> <td>0.00</td> <td>365</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.20</td> <td>59.50</td> <td>109.56</td> <td>-50.06</td> <td>51.25</td> <td>34.53</td> <td>11.16</td> <td>37.44</td> <td>0.00</td> <td>365</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5723.20</td> <td>68.25</td> <td>118.20</td> <td>-49.95</td> <td>60.11</td> <td>34.55</td> <td>11.17</td> <td>37.58</td> <td>0.00</td> <td>365</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5619.60	50.49	68.20	-17.71	41.12	34.50	11.03	36.16	0.00	365	111	PEAK	2	5651.20	48.98	69.09	-20.11	39.71	34.50	11.07	36.30	0.00	365	111	PEAK	3	5715.20	59.50	109.56	-50.06	51.25	34.53	11.16	37.44	0.00	365	111	PEAK	4	5723.20	68.25	118.20	-49.95	60.11	34.55	11.17	37.58	0.00	365	111	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.67</td> <td>-----</td> <td>-----</td> <td>103.85</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>365</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	111.67	-----	-----	103.85	34.59	11.20	37.97	0.00	365	111	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5619.60	50.49	68.20	-17.71	41.12	34.50	11.03	36.16	0.00	365	111	PEAK																																																																																																																					
2	5651.20	48.98	69.09	-20.11	39.71	34.50	11.07	36.30	0.00	365	111	PEAK																																																																																																																					
3	5715.20	59.50	109.56	-50.06	51.25	34.53	11.16	37.44	0.00	365	111	PEAK																																																																																																																					
4	5723.20	68.25	118.20	-49.95	60.11	34.55	11.17	37.58	0.00	365	111	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	111.67	-----	-----	103.85	34.59	11.20	37.97	0.00	365	111	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.56</td> <td>-----</td> <td>-----</td> <td>94.74</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>365</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	102.56	-----	-----	94.74	34.59	11.20	37.97	0.00	365	111	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	102.56	-----	-----	94.74	34.59	11.20	37.97	0.00	365	111	AVERAGE																																																																																																																					






		72																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU106/53_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.60</td> <td>50.20</td> <td>68.20</td> <td>-18.00</td> <td>40.83</td> <td>34.50</td> <td>11.07</td> <td>36.20</td> <td>0.00</td> <td>299</td> <td>84 PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>47.10</td> <td>68.20</td> <td>-21.10</td> <td>37.81</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>299</td> <td>84 PEAK</td> </tr> <tr> <td>3</td> <td>5715.60</td> <td>58.91</td> <td>109.67</td> <td>-50.76</td> <td>50.67</td> <td>34.53</td> <td>11.16</td> <td>37.45</td> <td>0.00</td> <td>299</td> <td>84 PEAK</td> </tr> <tr> <td>4</td> <td>5722.40</td> <td>66.13</td> <td>116.37</td> <td>-50.24</td> <td>57.99</td> <td>34.54</td> <td>11.17</td> <td>37.57</td> <td>0.00</td> <td>299</td> <td>84 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.60	50.20	68.20	-18.00	40.83	34.50	11.07	36.20	0.00	299	84 PEAK	2	5650.00	47.10	68.20	-21.10	37.81	34.50	11.07	36.28	0.00	299	84 PEAK	3	5715.60	58.91	109.67	-50.76	50.67	34.53	11.16	37.45	0.00	299	84 PEAK	4	5722.40	66.13	116.37	-50.24	57.99	34.54	11.17	37.57	0.00	299	84 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.56</td> <td>-----</td> <td>-----</td> <td>102.74</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>299</td> <td>84 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	110.56	-----	-----	102.74	34.59	11.20	37.97	0.00	299
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5645.60	50.20	68.20	-18.00	40.83	34.50	11.07	36.20	0.00	299	84 PEAK																																																																																																																	
2	5650.00	47.10	68.20	-21.10	37.81	34.50	11.07	36.28	0.00	299	84 PEAK																																																																																																																	
3	5715.60	58.91	109.67	-50.76	50.67	34.53	11.16	37.45	0.00	299	84 PEAK																																																																																																																	
4	5722.40	66.13	116.37	-50.24	57.99	34.54	11.17	37.57	0.00	299	84 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	110.56	-----	-----	102.74	34.59	11.20	37.97	0.00	299	84 PEAK																																																																																																																	
Avg	Blank																																																																																																																											
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.21</td> <td>-----</td> <td>-----</td> <td>93.39</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>299</td> <td>84 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.21	-----	-----	93.39	34.59	11.20	37.97	0.00	299	84 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	101.21	-----	-----	93.39	34.59	11.20	37.97	0.00	299	84 AVERAGE																																																																																																																	



		73																																																																																																																											
Mode	Band Edge																																																																																																																												
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU106/54_5825MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																																											
Peak																																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>52.63</td> <td>112.27</td> <td>-59.64</td> <td>46.40</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>100</td> <td>171 PEAK</td> </tr> <tr> <td>2</td> <td>5862.00</td> <td>52.30</td> <td>108.94</td> <td>-56.64</td> <td>46.19</td> <td>34.62</td> <td>11.34</td> <td>40.05</td> <td>0.00</td> <td>100</td> <td>171 PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>46.39</td> <td>69.23</td> <td>-22.84</td> <td>39.89</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>100</td> <td>171 PEAK</td> </tr> <tr> <td>4</td> <td>5937.20</td> <td>46.76</td> <td>68.20</td> <td>-21.44</td> <td>40.16</td> <td>35.05</td> <td>11.41</td> <td>39.86</td> <td>0.00</td> <td>100</td> <td>171 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.40	52.63	112.27	-59.64	46.40	34.81	11.33	39.91	0.00	100	171 PEAK	2	5862.00	52.30	108.94	-56.64	46.19	34.62	11.34	40.05	0.00	100	171 PEAK	3	5923.60	46.39	69.23	-22.84	39.89	34.99	11.40	39.89	0.00	100	171 PEAK	4	5937.20	46.76	68.20	-21.44	40.16	35.05	11.41	39.86	0.00	100	171 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>99.34</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>171 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.01	-----	-----	99.34	34.75	11.31	39.39	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5854.40	52.63	112.27	-59.64	46.40	34.81	11.33	39.91	0.00	100	171 PEAK																																																																																																																		
2	5862.00	52.30	108.94	-56.64	46.19	34.62	11.34	40.05	0.00	100	171 PEAK																																																																																																																		
3	5923.60	46.39	69.23	-22.84	39.89	34.99	11.40	39.89	0.00	100	171 PEAK																																																																																																																		
4	5937.20	46.76	68.20	-21.44	40.16	35.05	11.41	39.86	0.00	100	171 PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	106.01	-----	-----	99.34	34.75	11.31	39.39	0.00	100	171 PEAK																																																																																																																		
Avg	Blank																																																																																																																												
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.00</td> <td>-----</td> <td>-----</td> <td>90.13</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>100</td> <td>171 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	96.00	-----	-----	90.13	34.75	11.31	39.39	0.00	100	171 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	96.00	-----	-----	90.13	34.75	11.31	39.39	0.00	100	171 AVERAGE																																																																																																																		

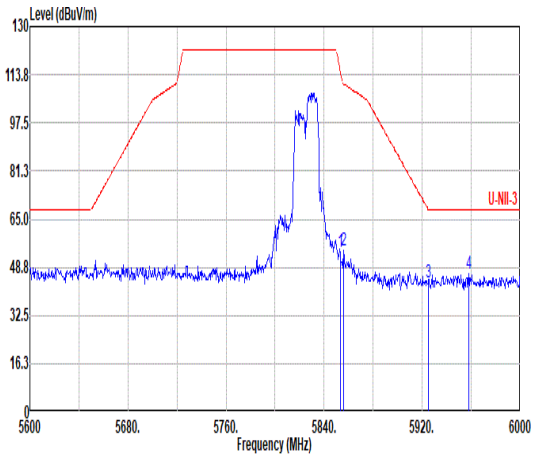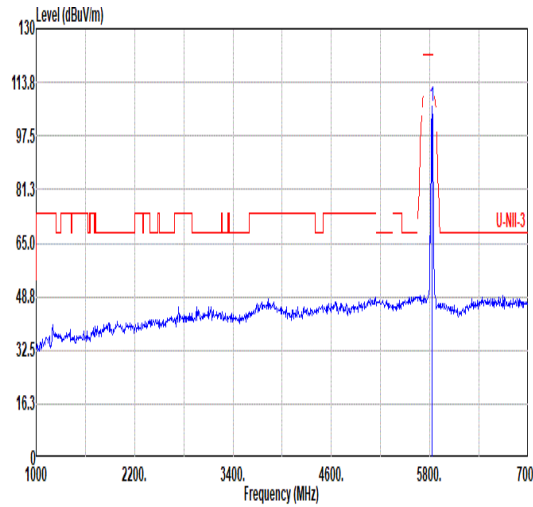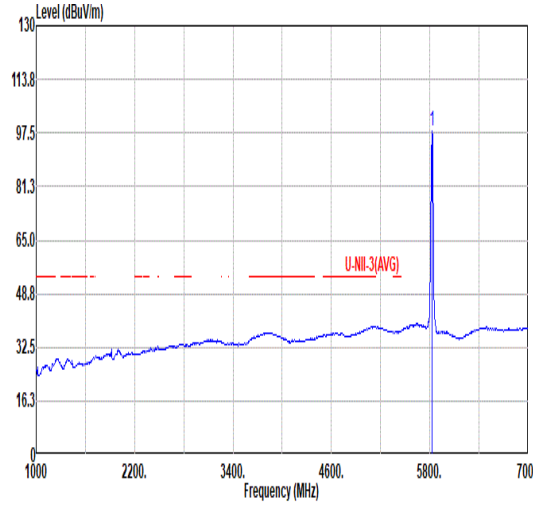

	73																																																																																																																											
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU106/54_5825MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.20</td> <td>54.06</td> <td>115.00</td> <td>-60.94</td> <td>47.81</td> <td>34.81</td> <td>11.33</td> <td>39.89</td> <td>0.00</td> <td>251</td> <td>82 PEAK</td> </tr> <tr> <td>2</td> <td>5856.00</td> <td>54.53</td> <td>110.62</td> <td>-56.09</td> <td>48.32</td> <td>34.81</td> <td>11.34</td> <td>39.94</td> <td>0.00</td> <td>251</td> <td>82 PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>43.90</td> <td>68.35</td> <td>-24.45</td> <td>37.39</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>251</td> <td>82 PEAK</td> </tr> <tr> <td>4</td> <td>5958.00</td> <td>46.58</td> <td>68.20</td> <td>-21.62</td> <td>39.83</td> <td>35.12</td> <td>11.43</td> <td>39.80</td> <td>0.00</td> <td>251</td> <td>82 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.20	54.06	115.00	-60.94	47.81	34.81	11.33	39.89	0.00	251	82 PEAK	2	5856.00	54.53	110.62	-56.09	48.32	34.81	11.34	39.94	0.00	251	82 PEAK	3	5924.80	43.90	68.35	-24.45	37.39	35.00	11.40	39.89	0.00	251	82 PEAK	4	5958.00	46.58	68.20	-21.62	39.83	35.12	11.43	39.80	0.00	251	82 PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.67</td> <td>-----</td> <td>-----</td> <td>100.00</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>251</td> <td>82 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.67	-----	-----	100.00	34.75	11.31	39.39	0.00	251	82 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5853.20	54.06	115.00	-60.94	47.81	34.81	11.33	39.89	0.00	251	82 PEAK																																																																																																																	
2	5856.00	54.53	110.62	-56.09	48.32	34.81	11.34	39.94	0.00	251	82 PEAK																																																																																																																	
3	5924.80	43.90	68.35	-24.45	37.39	35.00	11.40	39.89	0.00	251	82 PEAK																																																																																																																	
4	5958.00	46.58	68.20	-21.62	39.83	35.12	11.43	39.80	0.00	251	82 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	106.67	-----	-----	100.00	34.75	11.31	39.39	0.00	251	82 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.16</td> <td>-----</td> <td>-----</td> <td>91.49</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>251</td> <td>82 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.16	-----	-----	91.49	34.75	11.31	39.39	0.00	251	82 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	98.16	-----	-----	91.49	34.75	11.31	39.39	0.00	251	82 AVERAGE																																																																																																																	



		135																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																									
ANT		2																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5650.00</td> <td>53.27</td> <td>68.20</td> <td>-14.93</td> <td>43.98</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>53.69</td> <td>68.50</td> <td>-14.81</td> <td>44.41</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.80</td> <td>75.40</td> <td>109.45</td> <td>-34.05</td> <td>67.14</td> <td>34.53</td> <td>11.16</td> <td>37.43</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.40</td> <td>87.03</td> <td>120.93</td> <td>-33.90</td> <td>78.90</td> <td>34.55</td> <td>11.18</td> <td>37.60</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5650.00	53.27	68.20	-14.93	43.98	34.50	11.07	36.28	0.00	364	360	PEAK	2	5650.40	53.69	68.50	-14.81	44.41	34.50	11.07	36.29	0.00	364	360	PEAK	3	5714.80	75.40	109.45	-34.05	67.14	34.53	11.16	37.43	0.00	364	360	PEAK	4	5724.40	87.03	120.93	-33.90	78.90	34.55	11.18	37.60	0.00	364	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.32</td> <td>-----</td> <td>-----</td> <td>104.50</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	112.32	-----	-----	104.50	34.59	11.20	37.97	0.00	364	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5650.00	53.27	68.20	-14.93	43.98	34.50	11.07	36.28	0.00	364	360	PEAK																																																																																															
2	5650.40	53.69	68.50	-14.81	44.41	34.50	11.07	36.29	0.00	364	360	PEAK																																																																																															
3	5714.80	75.40	109.45	-34.05	67.14	34.53	11.16	37.43	0.00	364	360	PEAK																																																																																															
4	5724.40	87.03	120.93	-33.90	78.90	34.55	11.18	37.60	0.00	364	360	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	112.32	-----	-----	104.50	34.59	11.20	37.97	0.00	364	360	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.47</td> <td>-----</td> <td>-----</td> <td>96.65</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>364</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	104.47	-----	-----	96.65	34.59	11.20	37.97	0.00	364	360	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	104.47	-----	-----	96.65	34.59	11.20	37.97	0.00	364	360	AVERAGE																																																																																															



	135																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.40</td> <td>50.25</td> <td>68.20</td> <td>-17.95</td> <td>40.93</td> <td>34.50</td> <td>11.07</td> <td>36.25</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.20</td> <td>50.30</td> <td>69.09</td> <td>-18.79</td> <td>41.03</td> <td>34.50</td> <td>11.07</td> <td>36.30</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.40</td> <td>72.08</td> <td>108.77</td> <td>-36.69</td> <td>63.79</td> <td>34.52</td> <td>11.16</td> <td>37.39</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.00</td> <td>73.06</td> <td>110.90</td> <td>-37.84</td> <td>64.87</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.40	50.25	68.20	-17.95	40.93	34.50	11.07	36.25	0.00	333	140	PEAK	2	5651.20	50.30	69.09	-18.79	41.03	34.50	11.07	36.30	0.00	333	140	PEAK	3	5712.40	72.08	108.77	-36.69	63.79	34.52	11.16	37.39	0.00	333	140	PEAK	4	5728.00	73.06	110.90	-37.84	64.87	34.54	11.17	37.52	0.00	333	140	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.23</td> <td>-----</td> <td>-----</td> <td>104.41</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	112.23	-----	-----	104.41	34.59	11.20	37.97	0.00	333	140	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5648.40	50.25	68.20	-17.95	40.93	34.50	11.07	36.25	0.00	333	140	PEAK																																																																																																																					
2	5651.20	50.30	69.09	-18.79	41.03	34.50	11.07	36.30	0.00	333	140	PEAK																																																																																																																					
3	5712.40	72.08	108.77	-36.69	63.79	34.52	11.16	37.39	0.00	333	140	PEAK																																																																																																																					
4	5728.00	73.06	110.90	-37.84	64.87	34.54	11.17	37.52	0.00	333	140	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	112.23	-----	-----	104.41	34.59	11.20	37.97	0.00	333	140	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.99</td> <td>-----</td> <td>-----</td> <td>95.17</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.99	-----	-----	95.17	34.59	11.20	37.97	0.00	333	140	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	102.99	-----	-----	95.17	34.59	11.20	37.97	0.00	333	140	AVERAGE																																																																																																																					



Mode	135																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.07</td> <td>74.00</td> <td>-28.93</td> <td>57.16</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17223.40</td> <td>53.49</td> <td>68.20</td> <td>-14.71</td> <td>55.43</td> <td>42.47</td> <td>20.15</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.07	74.00	-28.93	57.16	38.29	16.36	66.74	0.00	--	--	PEAK	2	17223.40	53.49	68.20	-14.71	55.43	42.47	20.15	64.56	0.00	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>57.09</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17237.70</td> <td>55.11</td> <td>68.20</td> <td>-13.09</td> <td>57.00</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.00	74.00	-29.00	57.09	38.29	16.36	66.74	0.00	--	--	PEAK	2	17237.70	55.11	68.20	-13.09	57.00	42.51	20.16	64.56	0.00	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11490.00	45.07	74.00	-28.93	57.16	38.29	16.36	66.74	0.00	--	--	PEAK																																																																																																		
2	17223.40	53.49	68.20	-14.71	55.43	42.47	20.15	64.56	0.00	--	--	Peak																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11490.00	45.00	74.00	-29.00	57.09	38.29	16.36	66.74	0.00	--	--	PEAK																																																																																																		
2	17237.70	55.11	68.20	-13.09	57.00	42.51	20.16	64.56	0.00	--	--	Peak																																																																																																		






Mode	136																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																	
ANT	2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>47.19</td> <td>74.00</td> <td>-26.81</td> <td>59.06</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17349.90</td> <td>53.41</td> <td>68.20</td> <td>-14.79</td> <td>55.31</td> <td>42.45</td> <td>20.23</td> <td>64.58</td> <td>0.00</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	47.19	74.00	-26.81	59.06	38.37	16.41	66.65	0.00	-- -- PEAK	2 17349.90	53.41	68.20	-14.79	55.31	42.45	20.23	64.58	0.00	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>44.33</td> <td>74.00</td> <td>-29.67</td> <td>56.20</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17360.90</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>55.37</td> <td>42.40</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	44.33	74.00	-29.67	56.20	38.37	16.41	66.65	0.00	-- -- PEAK	2 17360.90	53.43	68.20	-14.77	55.37	42.40	20.24	64.58	0.00	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11570.00	47.19	74.00	-26.81	59.06	38.37	16.41	66.65	0.00	-- -- PEAK																																																																																									
2 17349.90	53.41	68.20	-14.79	55.31	42.45	20.23	64.58	0.00	-- -- Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11570.00	44.33	74.00	-29.67	56.20	38.37	16.41	66.65	0.00	-- -- PEAK																																																																																									
2 17360.90	53.43	68.20	-14.77	55.37	42.40	20.24	64.58	0.00	-- -- Peak																																																																																									



		137																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>71.56</td> <td>111.36</td> <td>-39.80</td> <td>65.33</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5861.60</td> <td>71.74</td> <td>109.05</td> <td>-37.31</td> <td>65.62</td> <td>34.62</td> <td>11.34</td> <td>40.04</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>48.15</td> <td>68.64</td> <td>-20.49</td> <td>41.64</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5964.80</td> <td>47.49</td> <td>68.20</td> <td>-20.71</td> <td>40.71</td> <td>35.13</td> <td>11.44</td> <td>39.79</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	71.56	111.36	-39.80	65.33	34.81	11.34	39.92	0.00	353	360	PEAK	2	5861.60	71.74	109.05	-37.31	65.62	34.62	11.34	40.04	0.00	353	360	PEAK	3	5924.40	48.15	68.64	-20.49	41.64	35.00	11.40	39.89	0.00	353	360	PEAK	4	5964.80	47.49	68.20	-20.71	40.71	35.13	11.44	39.79	0.00	353	360	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>112.12</td> <td>-----</td> <td>-----</td> <td>105.45</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	112.12	-----	-----	105.45	34.75	11.31	39.39	0.00	353	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	71.56	111.36	-39.80	65.33	34.81	11.34	39.92	0.00	353	360	PEAK																																																																																																																					
2	5861.60	71.74	109.05	-37.31	65.62	34.62	11.34	40.04	0.00	353	360	PEAK																																																																																																																					
3	5924.40	48.15	68.64	-20.49	41.64	35.00	11.40	39.89	0.00	353	360	PEAK																																																																																																																					
4	5964.80	47.49	68.20	-20.71	40.71	35.13	11.44	39.79	0.00	353	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	112.12	-----	-----	105.45	34.75	11.31	39.39	0.00	353	360	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.88</td> <td>-----</td> <td>-----</td> <td>96.21</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	102.88	-----	-----	96.21	34.75	11.31	39.39	0.00	353	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	102.88	-----	-----	96.21	34.75	11.31	39.39	0.00	353	360	AVERAGE																																																																																																																					

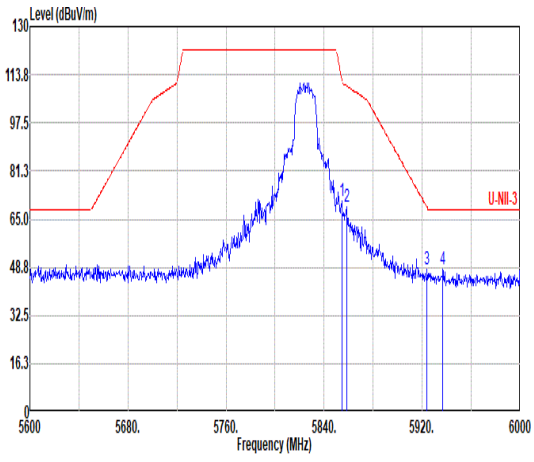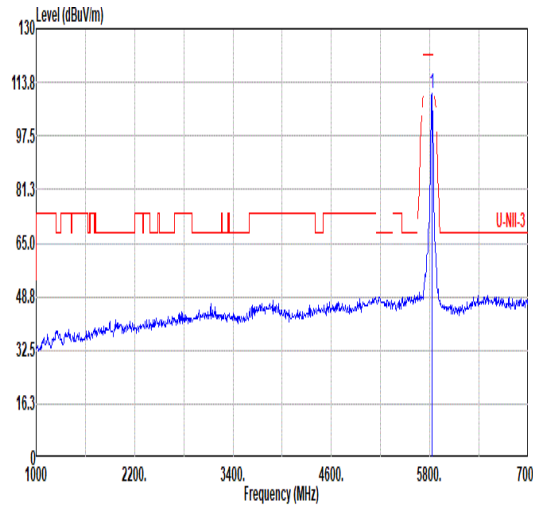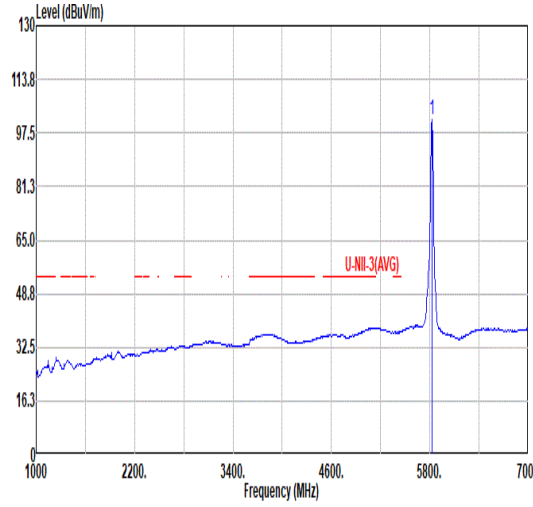

		137																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>71.17</td> <td>112.27</td> <td>-41.10</td> <td>64.94</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>324</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5858.40</td> <td>69.23</td> <td>109.95</td> <td>-40.72</td> <td>63.06</td> <td>34.62</td> <td>11.34</td> <td>39.99</td> <td>0.00</td> <td>324</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>47.83</td> <td>68.94</td> <td>-21.11</td> <td>41.32</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>324</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.80</td> <td>48.05</td> <td>68.20</td> <td>-20.15</td> <td>41.45</td> <td>35.05</td> <td>11.41</td> <td>39.86</td> <td>0.00</td> <td>324</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.40	71.17	112.27	-41.10	64.94	34.81	11.33	39.91	0.00	324	140	PEAK	2	5858.40	69.23	109.95	-40.72	63.06	34.62	11.34	39.99	0.00	324	140	PEAK	3	5924.00	47.83	68.94	-21.11	41.32	35.00	11.40	39.89	0.00	324	140	PEAK	4	5936.80	48.05	68.20	-20.15	41.45	35.05	11.41	39.86	0.00	324	140	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.47</td> <td>-----</td> <td>-----</td> <td>103.80</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>324</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	110.47	-----	-----	103.80	34.75	11.31	39.39	0.00	324	140	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.40	71.17	112.27	-41.10	64.94	34.81	11.33	39.91	0.00	324	140	PEAK																																																																																																																					
2	5858.40	69.23	109.95	-40.72	63.06	34.62	11.34	39.99	0.00	324	140	PEAK																																																																																																																					
3	5924.00	47.83	68.94	-21.11	41.32	35.00	11.40	39.89	0.00	324	140	PEAK																																																																																																																					
4	5936.80	48.05	68.20	-20.15	41.45	35.05	11.41	39.86	0.00	324	140	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	110.47	-----	-----	103.80	34.75	11.31	39.39	0.00	324	140	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.34</td> <td>-----</td> <td>-----</td> <td>94.67</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>324</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.34	-----	-----	94.67	34.75	11.31	39.39	0.00	324	140	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	101.34	-----	-----	94.67	34.75	11.31	39.39	0.00	324	140	AVERAGE																																																																																																																					



Mode	137																																																																																																														
	Harmonic																																																																																																														
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																														
ANT	2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.31</td> <td>74.00</td> <td>-24.69</td> <td>60.96</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>51.37</td> <td>68.20</td> <td>-16.83</td> <td>53.60</td> <td>42.05</td> <td>20.32</td> <td>64.60</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	49.31	74.00	-24.69	60.96	38.45	16.46	66.56	0.00	--	PEAK	2	17475.00	51.37	68.20	-16.83	53.60	42.05	20.32	64.60	0.00	--	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>44.70</td> <td>74.00</td> <td>-29.30</td> <td>56.35</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>52.37</td> <td>68.20</td> <td>-15.83</td> <td>54.60</td> <td>42.05</td> <td>20.32</td> <td>64.60</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	44.70	74.00	-29.30	56.35	38.45	16.46	66.56	0.00	--	PEAK	2	17475.00	52.37	68.20	-15.83	54.60	42.05	20.32	64.60	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11650.00	49.31	74.00	-24.69	60.96	38.45	16.46	66.56	0.00	--	PEAK																																																																																																				
2	17475.00	51.37	68.20	-16.83	53.60	42.05	20.32	64.60	0.00	--	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11650.00	44.70	74.00	-29.30	56.35	38.45	16.46	66.56	0.00	--	PEAK																																																																																																				
2	17475.00	52.37	68.20	-15.83	54.60	42.05	20.32	64.60	0.00	--	PEAK																																																																																																				



		138																																																																																																																										
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																											
ANT	2																																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																																										
Peak																																																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.00</td> <td>50.18</td> <td>68.20</td> <td>-18.02</td> <td>40.82</td> <td>34.50</td> <td>11.07</td> <td>36.21</td> <td>0.00</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>49.20</td> <td>68.50</td> <td>-19.30</td> <td>39.92</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>366</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.00</td> <td>75.33</td> <td>109.78</td> <td>-34.45</td> <td>67.09</td> <td>34.53</td> <td>11.16</td> <td>37.45</td> <td>0.00</td> <td>366</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>82.41</td> <td>112.72</td> <td>-30.31</td> <td>74.24</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>366</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.00	50.18	68.20	-18.02	40.82	34.50	11.07	36.21	0.00	360	PEAK	2	5650.40	49.20	68.50	-19.30	39.92	34.50	11.07	36.29	0.00	366	PEAK	3	5716.00	75.33	109.78	-34.45	67.09	34.53	11.16	37.45	0.00	366	PEAK	4	5728.80	82.41	112.72	-30.31	74.24	34.54	11.17	37.54	0.00	366	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.07</td> <td>-----</td> <td>-----</td> <td>104.25</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>366</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	112.07	-----	-----	104.25	34.59	11.20	37.97	0.00	366
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5646.00	50.18	68.20	-18.02	40.82	34.50	11.07	36.21	0.00	360	PEAK																																																																																																																	
2	5650.40	49.20	68.50	-19.30	39.92	34.50	11.07	36.29	0.00	366	PEAK																																																																																																																	
3	5716.00	75.33	109.78	-34.45	67.09	34.53	11.16	37.45	0.00	366	PEAK																																																																																																																	
4	5728.80	82.41	112.72	-30.31	74.24	34.54	11.17	37.54	0.00	366	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	112.07	-----	-----	104.25	34.59	11.20	37.97	0.00	366	PEAK																																																																																																																	
Avg	Blank																																																																																																																											
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.27</td> <td>-----</td> <td>-----</td> <td>95.45</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>366</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	103.27	-----	-----	95.45	34.59	11.20	37.97	0.00	366	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	103.27	-----	-----	95.45	34.59	11.20	37.97	0.00	366	AVERAGE																																																																																																																	



		138																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak																																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.00</td> <td>50.88</td> <td>68.20</td> <td>-17.32</td> <td>41.52</td> <td>34.50</td> <td>11.07</td> <td>36.21</td> <td>0.00</td> <td>333</td> <td>141</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5653.20</td> <td>50.62</td> <td>70.58</td> <td>-19.96</td> <td>41.38</td> <td>34.50</td> <td>11.08</td> <td>36.34</td> <td>0.00</td> <td>333</td> <td>141</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>79.44</td> <td>110.68</td> <td>-31.24</td> <td>71.24</td> <td>34.54</td> <td>11.17</td> <td>37.51</td> <td>0.00</td> <td>333</td> <td>141</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>81.03</td> <td>112.72</td> <td>-31.69</td> <td>72.86</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>333</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.00	50.88	68.20	-17.32	41.52	34.50	11.07	36.21	0.00	333	141	PEAK	2	5653.20	50.62	70.58	-19.96	41.38	34.50	11.08	36.34	0.00	333	141	PEAK	3	5719.20	79.44	110.68	-31.24	71.24	34.54	11.17	37.51	0.00	333	141	PEAK	4	5728.80	81.03	112.72	-31.69	72.86	34.54	11.17	37.54	0.00	333	141	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.55</td> <td>-----</td> <td>-----</td> <td>102.73</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>141</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	110.55	-----	-----	102.73	34.59	11.20	37.97	0.00	333	141
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5646.00	50.88	68.20	-17.32	41.52	34.50	11.07	36.21	0.00	333	141	PEAK																																																																																																																					
2	5653.20	50.62	70.58	-19.96	41.38	34.50	11.08	36.34	0.00	333	141	PEAK																																																																																																																					
3	5719.20	79.44	110.68	-31.24	71.24	34.54	11.17	37.51	0.00	333	141	PEAK																																																																																																																					
4	5728.80	81.03	112.72	-31.69	72.86	34.54	11.17	37.54	0.00	333	141	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	110.55	-----	-----	102.73	34.59	11.20	37.97	0.00	333	141	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.06</td> <td>-----</td> <td>-----</td> <td>94.24</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>141</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.06	-----	-----	94.24	34.59	11.20	37.97	0.00	333	141	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	102.06	-----	-----	94.24	34.59	11.20	37.97	0.00	333	141	AVERAGE																																																																																																																					






Mode	138																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																	
ANT	2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.32</td> <td>74.00</td> <td>-28.68</td> <td>57.41</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>52.11</td> <td>68.20</td> <td>-16.09</td> <td>54.00</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.32	74.00	-28.68	57.41	38.29	16.36	66.74	0.00	--	PEAK	2	17235.00	52.11	68.20	-16.09	54.00	42.51	20.16	64.56	0.00	--	PEAK	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.22</td> <td>74.00</td> <td>-29.78</td> <td>56.31</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>51.62</td> <td>68.20</td> <td>-16.58</td> <td>53.51</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	44.22	74.00	-29.78	56.31	38.29	16.36	66.74	0.00	--	PEAK	2	17235.00	51.62	68.20	-16.58	53.51	42.51	20.16	64.56	0.00	--	PEAK
	Limit		Read									Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq		Level	Line Margin																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11490.00	45.32	74.00	-28.68	57.41	38.29	16.36	66.74	0.00	--	PEAK																																																																																							
2	17235.00	52.11	68.20	-16.09	54.00	42.51	20.16	64.56	0.00	--	PEAK																																																																																							
Limit	Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
	Freq	Level								Line Margin																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11490.00	44.22	74.00	-29.78	56.31	38.29	16.36	66.74	0.00	--	PEAK																																																																																							
2	17235.00	51.62	68.20	-16.58	53.51	42.51	20.16	64.56	0.00	--	PEAK																																																																																							






Mode	139																																																																																																												
	Harmonic																																																																																																												
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																												
ANT	2																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>46.76</td> <td>74.00</td> <td>-27.24</td> <td>58.63</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.63</td> <td>68.20</td> <td>-16.57</td> <td>53.55</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.76	74.00	-27.24	58.63	38.37	16.41	66.65	0.00	--	PEAK	2	17355.00	51.63	68.20	-16.57	53.55	42.42	20.24	64.58	0.00	--	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>43.96</td> <td>74.00</td> <td>-30.04</td> <td>55.83</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.77</td> <td>68.20</td> <td>-16.43</td> <td>53.69</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	43.96	74.00	-30.04	55.83	38.37	16.41	66.65	0.00	--	PEAK	2	17355.00	51.77	68.20	-16.43	53.69	42.42	20.24	64.58	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	11570.00	46.76	74.00	-27.24	58.63	38.37	16.41	66.65	0.00	--	PEAK																																																																																																		
2	17355.00	51.63	68.20	-16.57	53.55	42.42	20.24	64.58	0.00	--	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	11570.00	43.96	74.00	-30.04	55.83	38.37	16.41	66.65	0.00	--	PEAK																																																																																																		
2	17355.00	51.77	68.20	-16.43	53.69	42.42	20.24	64.58	0.00	--	PEAK																																																																																																		

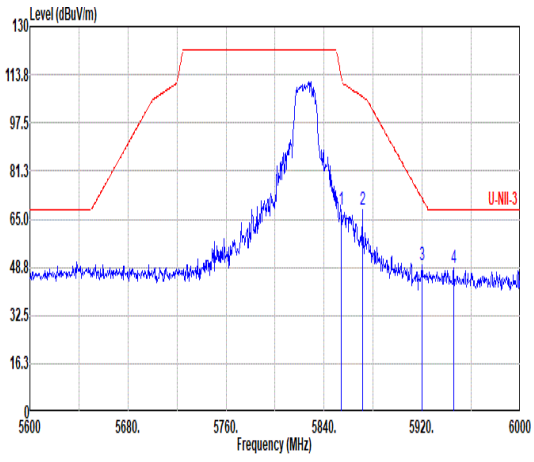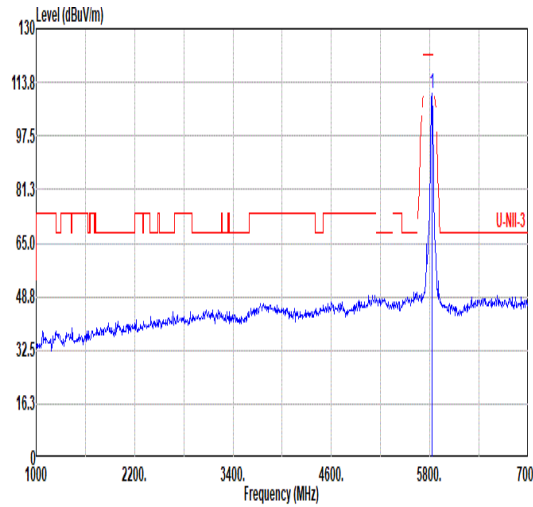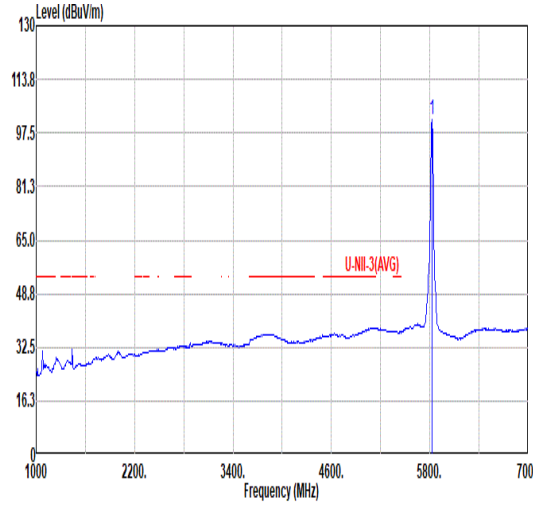

	140																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>67.99</td> <td>113.18</td> <td>-45.19</td> <td>61.76</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>356</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.20</td> <td>67.99</td> <td>106.36</td> <td>-38.37</td> <td>61.83</td> <td>34.84</td> <td>11.35</td> <td>40.03</td> <td>0.00</td> <td>356</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5919.60</td> <td>49.77</td> <td>72.19</td> <td>-22.42</td> <td>43.29</td> <td>34.98</td> <td>11.40</td> <td>39.90</td> <td>0.00</td> <td>356</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5945.60</td> <td>48.52</td> <td>68.20</td> <td>-19.68</td> <td>41.86</td> <td>35.08</td> <td>11.42</td> <td>39.84</td> <td>0.00</td> <td>356</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.00	67.99	113.18	-45.19	61.76	34.81	11.33	39.91	0.00	356	360	PEAK	2	5871.20	67.99	106.36	-38.37	61.83	34.84	11.35	40.03	0.00	356	360	PEAK	3	5919.60	49.77	72.19	-22.42	43.29	34.98	11.40	39.90	0.00	356	360	PEAK	4	5945.60	48.52	68.20	-19.68	41.86	35.08	11.42	39.84	0.00	356	360	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.24</td> <td>-----</td> <td>-----</td> <td>103.57</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>356</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	110.24	-----	-----	103.57	34.75	11.31	39.39	0.00	356	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.00	67.99	113.18	-45.19	61.76	34.81	11.33	39.91	0.00	356	360	PEAK																																																																																																																					
2	5871.20	67.99	106.36	-38.37	61.83	34.84	11.35	40.03	0.00	356	360	PEAK																																																																																																																					
3	5919.60	49.77	72.19	-22.42	43.29	34.98	11.40	39.90	0.00	356	360	PEAK																																																																																																																					
4	5945.60	48.52	68.20	-19.68	41.86	35.08	11.42	39.84	0.00	356	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	110.24	-----	-----	103.57	34.75	11.31	39.39	0.00	356	360	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.38</td> <td>-----</td> <td>-----</td> <td>94.71</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>356</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.38	-----	-----	94.71	34.75	11.31	39.39	0.00	356	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	101.38	-----	-----	94.71	34.75	11.31	39.39	0.00	356	360	AVERAGE																																																																																																																					

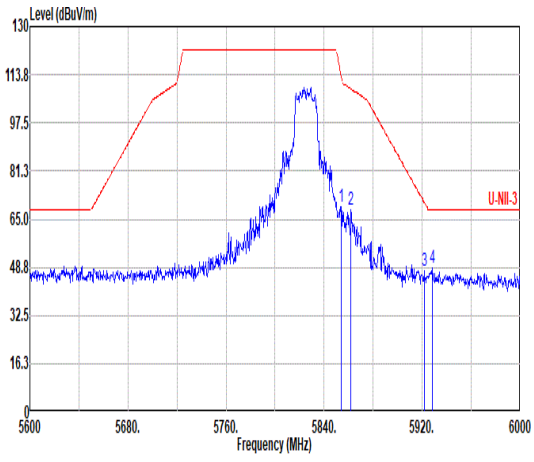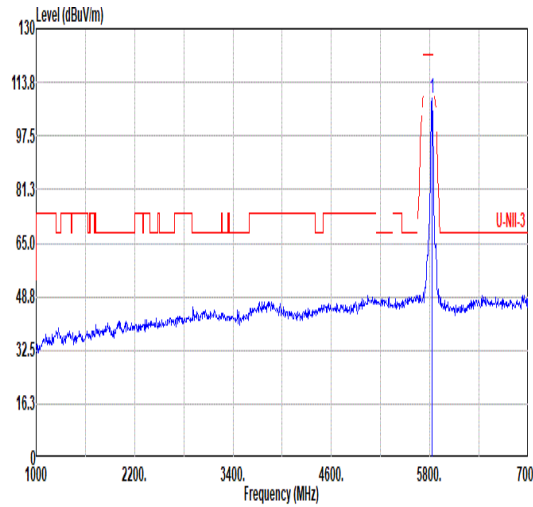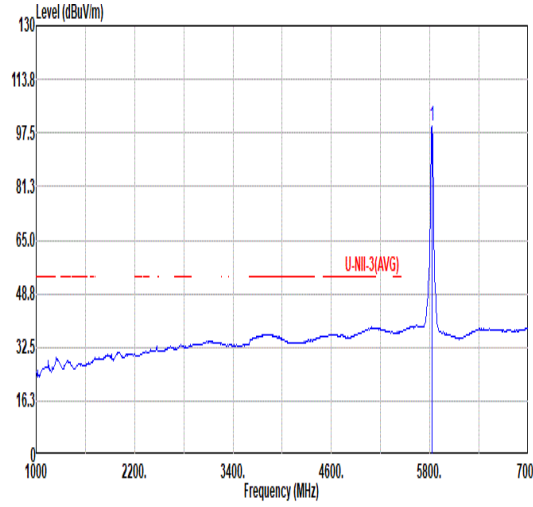

	140																																																																																						
Mode	Band Edge																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																						
ANT	2																																																																																						
Pol.	Vertical	Fundamental																																																																																					
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5854.00</th> <th>69.22</th> <th>113.18</th> <th>-43.96</th> <th>62.99</th> <th>34.81</th> <th>11.33</th> <th>39.91</th> <th>0.00</th> <th>322</th> <th>139</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>5862.00</td> <td>68.09</td> <td>108.94</td> <td>-40.85</td> <td>61.98</td> <td>34.62</td> <td>11.34</td> <td>40.05</td> <td>0.00</td> <td>322</td> <td>139</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5921.60</td> <td>47.73</td> <td>70.71</td> <td>-22.98</td> <td>41.24</td> <td>34.99</td> <td>11.40</td> <td>39.90</td> <td>0.00</td> <td>322</td> <td>139</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.40</td> <td>48.72</td> <td>68.20</td> <td>-19.48</td> <td>42.18</td> <td>35.01</td> <td>11.41</td> <td>39.88</td> <td>0.00</td> <td>322</td> <td>139</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5854.00	69.22	113.18	-43.96	62.99	34.81	11.33	39.91	0.00	322	139	PEAK	2	5862.00	68.09	108.94	-40.85	61.98	34.62	11.34	40.05	0.00	322	139	PEAK	3	5921.60	47.73	70.71	-22.98	41.24	34.99	11.40	39.90	0.00	322	139	PEAK	4	5928.40	48.72	68.20	-19.48	42.18	35.01	11.41	39.88	0.00	322	139	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5825.00</th> <th>108.99</th> <th>-----</th> <th>-----</th> <th>102.32</th> <th>34.75</th> <th>11.31</th> <th>39.39</th> <th>0.00</th> <th>322</th> <th>139</th> <th>PEAK</th> </tr> </thead> <tbody> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5825.00	108.99	-----	-----	102.32	34.75	11.31	39.39	0.00	322	139	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
1	5854.00	69.22	113.18	-43.96	62.99	34.81	11.33	39.91	0.00	322	139	PEAK																																																																											
2	5862.00	68.09	108.94	-40.85	61.98	34.62	11.34	40.05	0.00	322	139	PEAK																																																																											
3	5921.60	47.73	70.71	-22.98	41.24	34.99	11.40	39.90	0.00	322	139	PEAK																																																																											
4	5928.40	48.72	68.20	-19.48	42.18	35.01	11.41	39.88	0.00	322	139	PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
1	5825.00	108.99	-----	-----	102.32	34.75	11.31	39.39	0.00	322	139	PEAK																																																																											
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>1</th> <th>5825.00</th> <th>99.77</th> <th>-----</th> <th>-----</th> <th>93.10</th> <th>34.75</th> <th>11.31</th> <th>39.39</th> <th>0.00</th> <th>322</th> <th>139</th> <th>AVERAGE</th> </tr> </thead> <tbody> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		1	5825.00	99.77	-----	-----	93.10	34.75	11.31	39.39	0.00	322	139	AVERAGE																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
1	5825.00	99.77	-----	-----	93.10	34.75	11.31	39.39	0.00	322	139	AVERAGE																																																																											






Mode	140																																																																																																														
	Harmonic																																																																																																														
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																														
ANT	2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.28</td> <td>74.00</td> <td>-26.72</td> <td>58.93</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>51.48</td> <td>68.20</td> <td>-16.72</td> <td>53.71</td> <td>42.05</td> <td>20.32</td> <td>64.60</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	47.28	74.00	-26.72	58.93	38.45	16.46	66.56	0.00	--	PEAK	2	17475.00	51.48	68.20	-16.72	53.71	42.05	20.32	64.60	0.00	--	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>45.01</td> <td>74.00</td> <td>-28.99</td> <td>56.66</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>52.93</td> <td>68.20</td> <td>-15.27</td> <td>55.16</td> <td>42.05</td> <td>20.32</td> <td>64.60</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	45.01	74.00	-28.99	56.66	38.45	16.46	66.56	0.00	--	PEAK	2	17475.00	52.93	68.20	-15.27	55.16	42.05	20.32	64.60	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11650.00	47.28	74.00	-26.72	58.93	38.45	16.46	66.56	0.00	--	PEAK																																																																																																				
2	17475.00	51.48	68.20	-16.72	53.71	42.05	20.32	64.60	0.00	--	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11650.00	45.01	74.00	-28.99	56.66	38.45	16.46	66.56	0.00	--	PEAK																																																																																																				
2	17475.00	52.93	68.20	-15.27	55.16	42.05	20.32	64.60	0.00	--	PEAK																																																																																																				



		141																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5627.20</td> <td>50.92</td> <td>68.20</td> <td>-17.28</td> <td>41.53</td> <td>34.50</td> <td>11.04</td> <td>36.15</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.40</td> <td>50.25</td> <td>69.99</td> <td>-19.74</td> <td>40.99</td> <td>34.50</td> <td>11.08</td> <td>36.32</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>80.97</td> <td>-----</td> <td>-----</td> <td>72.78</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>80.97</td> <td>110.90</td> <td>-29.93</td> <td>72.78</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5627.20	50.92	68.20	-17.28	41.53	34.50	11.04	36.15	0.00	364	360	PEAK	2	5652.40	50.25	69.99	-19.74	40.99	34.50	11.08	36.32	0.00	364	360	PEAK	3	5720.00	80.97	-----	-----	72.78	34.54	11.17	37.52	0.00	364	360	PEAK	4	5720.00	80.97	110.90	-29.93	72.78	34.54	11.17	37.52	0.00	364	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.83</td> <td>-----</td> <td>-----</td> <td>105.01</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>364</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	112.83	-----	-----	105.01	34.59	11.20	37.97	0.00	364	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5627.20	50.92	68.20	-17.28	41.53	34.50	11.04	36.15	0.00	364	360	PEAK																																																																																																																					
2	5652.40	50.25	69.99	-19.74	40.99	34.50	11.08	36.32	0.00	364	360	PEAK																																																																																																																					
3	5720.00	80.97	-----	-----	72.78	34.54	11.17	37.52	0.00	364	360	PEAK																																																																																																																					
4	5720.00	80.97	110.90	-29.93	72.78	34.54	11.17	37.52	0.00	364	360	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	112.83	-----	-----	105.01	34.59	11.20	37.97	0.00	364	360	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.16</td> <td>-----</td> <td>-----</td> <td>95.34</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>364</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	103.16	-----	-----	95.34	34.59	11.20	37.97	0.00	364	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	103.16	-----	-----	95.34	34.59	11.20	37.97	0.00	364	360	AVERAGE																																																																																																																					

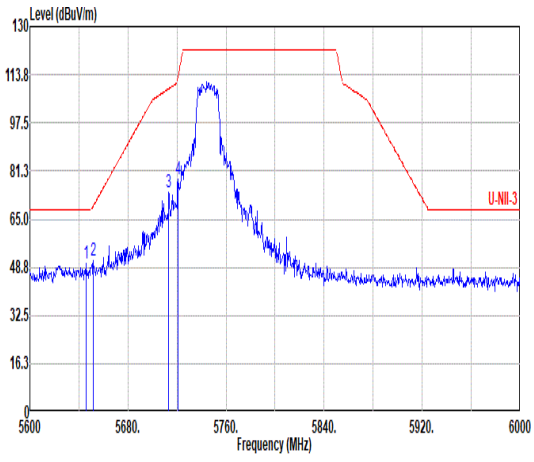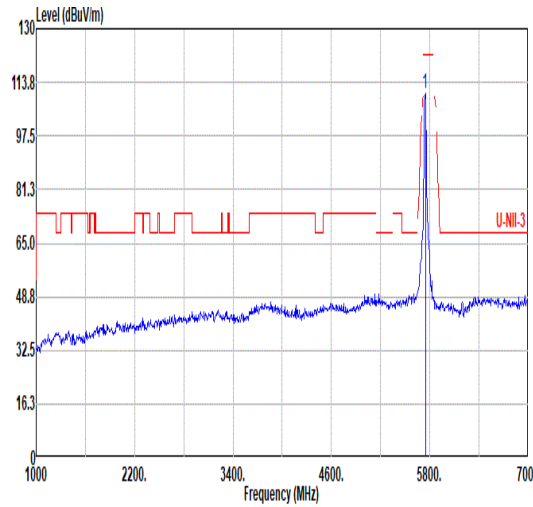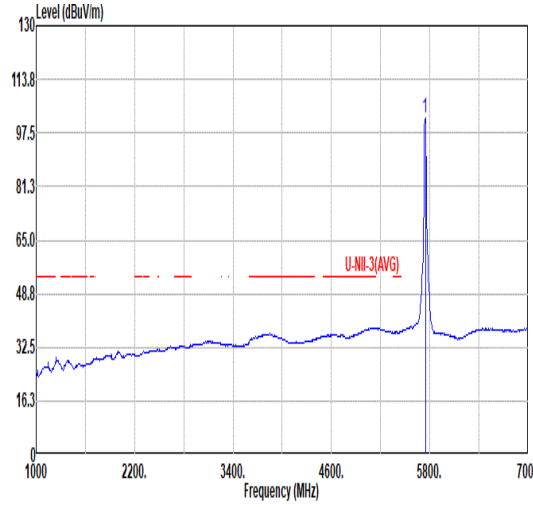

		141																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.60</td> <td>50.08</td> <td>68.20</td> <td>-18.12</td> <td>40.71</td> <td>34.50</td> <td>11.07</td> <td>36.20</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.60</td> <td>50.82</td> <td>69.39</td> <td>-18.57</td> <td>41.56</td> <td>34.50</td> <td>11.07</td> <td>36.31</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.20</td> <td>73.91</td> <td>109.00</td> <td>-35.09</td> <td>65.62</td> <td>34.53</td> <td>11.16</td> <td>37.40</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>78.52</td> <td>112.72</td> <td>-34.20</td> <td>70.35</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.60	50.08	68.20	-18.12	40.71	34.50	11.07	36.20	0.00	333	140	PEAK	2	5651.60	50.82	69.39	-18.57	41.56	34.50	11.07	36.31	0.00	333	140	PEAK	3	5713.20	73.91	109.00	-35.09	65.62	34.53	11.16	37.40	0.00	333	140	PEAK	4	5728.80	78.52	112.72	-34.20	70.35	34.54	11.17	37.54	0.00	333	140	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.55</td> <td>-----</td> <td>-----</td> <td>102.73</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	110.55	-----	-----	102.73	34.59	11.20	37.97	0.00	333	140	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5645.60	50.08	68.20	-18.12	40.71	34.50	11.07	36.20	0.00	333	140	PEAK																																																																																																																					
2	5651.60	50.82	69.39	-18.57	41.56	34.50	11.07	36.31	0.00	333	140	PEAK																																																																																																																					
3	5713.20	73.91	109.00	-35.09	65.62	34.53	11.16	37.40	0.00	333	140	PEAK																																																																																																																					
4	5728.80	78.52	112.72	-34.20	70.35	34.54	11.17	37.54	0.00	333	140	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	110.55	-----	-----	102.73	34.59	11.20	37.97	0.00	333	140	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.88</td> <td>-----</td> <td>-----</td> <td>94.06</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>333</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.88	-----	-----	94.06	34.59	11.20	37.97	0.00	333	140	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.88	-----	-----	94.06	34.59	11.20	37.97	0.00	333	140	AVERAGE																																																																																																																					



Mode	141																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>45.58</td> <td>74.00</td> <td>-28.42</td> <td>57.67</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>51.75</td> <td>68.20</td> <td>-16.45</td> <td>53.64</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.58	74.00	-28.42	57.67	38.29	16.36	66.74	0.00	--	--	PEAK	2	17235.00	51.75	68.20	-16.45	53.64	42.51	20.16	64.56	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>44.14</td> <td>74.00</td> <td>-29.86</td> <td>56.23</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>52.41</td> <td>68.20</td> <td>-15.79</td> <td>54.30</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	44.14	74.00	-29.86	56.23	38.29	16.36	66.74	0.00	--	--	PEAK	2	17235.00	52.41	68.20	-15.79	54.30	42.51	20.16	64.56	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11490.00	45.58	74.00	-28.42	57.67	38.29	16.36	66.74	0.00	--	--	PEAK																																																																																																		
2	17235.00	51.75	68.20	-16.45	53.64	42.51	20.16	64.56	0.00	--	--	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11490.00	44.14	74.00	-29.86	56.23	38.29	16.36	66.74	0.00	--	--	PEAK																																																																																																		
2	17235.00	52.41	68.20	-15.79	54.30	42.51	20.16	64.56	0.00	--	--	PEAK																																																																																																		






Mode	142																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>46.53</td> <td>74.00</td> <td>-27.47</td> <td>58.40</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.48</td> <td>68.20</td> <td>-16.72</td> <td>53.40</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.53	74.00	-27.47	58.40	38.37	16.41	66.65	0.00	--	--	PEAK	2	17355.00	51.48	68.20	-16.72	53.40	42.42	20.24	64.58	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.77</td> <td>74.00</td> <td>-29.23</td> <td>56.64</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>52.32</td> <td>68.20</td> <td>-15.88</td> <td>54.24</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	44.77	74.00	-29.23	56.64	38.37	16.41	66.65	0.00	--	--	PEAK	2	17355.00	52.32	68.20	-15.88	54.24	42.42	20.24	64.58	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11570.00	46.53	74.00	-27.47	58.40	38.37	16.41	66.65	0.00	--	--	PEAK																																																																																																		
2	17355.00	51.48	68.20	-16.72	53.40	42.42	20.24	64.58	0.00	--	--	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11570.00	44.77	74.00	-29.23	56.64	38.37	16.41	66.65	0.00	--	--	PEAK																																																																																																		
2	17355.00	52.32	68.20	-15.88	54.24	42.42	20.24	64.58	0.00	--	--	PEAK																																																																																																		



		143																																																																																																				
Mode	Band Edge																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHZ																																																																																																					
ANT	2																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak																																																																																																						
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>71.19</td> <td>114.09</td> <td>-42.90</td> <td>64.95</td> <td>34.81</td> <td>11.33</td> <td>39.90</td> <td>0.00</td> <td>353</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5860.80</td> <td>67.63</td> <td>109.27</td> <td>-41.64</td> <td>61.50</td> <td>34.62</td> <td>11.34</td> <td>40.03</td> <td>0.00</td> <td>353</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5922.80</td> <td>48.62</td> <td>69.83</td> <td>-21.21</td> <td>42.12</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>353</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5946.40</td> <td>47.31</td> <td>68.20</td> <td>-20.89</td> <td>40.63</td> <td>35.09</td> <td>11.42</td> <td>39.83</td> <td>0.00</td> <td>353</td> <td>0 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	1	5853.60	71.19	114.09	-42.90	64.95	34.81	11.33	39.90	0.00	353	0 PEAK	2	5860.80	67.63	109.27	-41.64	61.50	34.62	11.34	40.03	0.00	353	0 PEAK	3	5922.80	48.62	69.83	-21.21	42.12	34.99	11.40	39.89	0.00	353	0 PEAK	4	5946.40	47.31	68.20	-20.89	40.63	35.09	11.42	39.83	0.00	353	0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.28</td> <td>-----</td> <td>-----</td> <td>103.61</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	1	5825.00	110.28	-----	-----	103.61	34.75	11.31	39.39	0.00	353
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																													
1	5853.60	71.19	114.09	-42.90	64.95	34.81	11.33	39.90	0.00	353	0 PEAK																																																																																											
2	5860.80	67.63	109.27	-41.64	61.50	34.62	11.34	40.03	0.00	353	0 PEAK																																																																																											
3	5922.80	48.62	69.83	-21.21	42.12	34.99	11.40	39.89	0.00	353	0 PEAK																																																																																											
4	5946.40	47.31	68.20	-20.89	40.63	35.09	11.42	39.83	0.00	353	0 PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																													
1	5825.00	110.28	-----	-----	103.61	34.75	11.31	39.39	0.00	353	0 PEAK																																																																																											
Avg	Blank																																																																																																					
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.50</td> <td>-----</td> <td>-----</td> <td>94.83</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	1	5825.00	101.50	-----	-----	94.83	34.75	11.31	39.39	0.00	353	0 AVERAGE																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																													
1	5825.00	101.50	-----	-----	94.83	34.75	11.31	39.39	0.00	353	0 AVERAGE																																																																																											

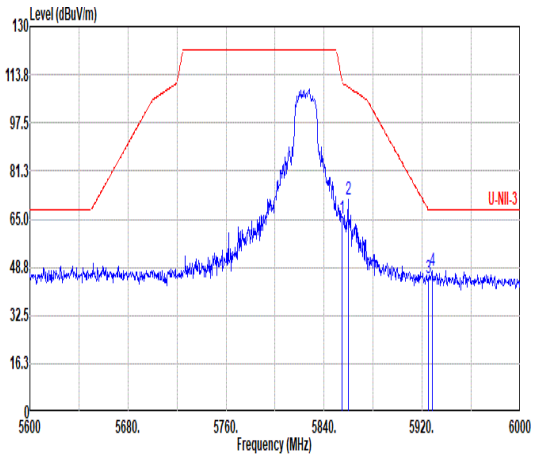
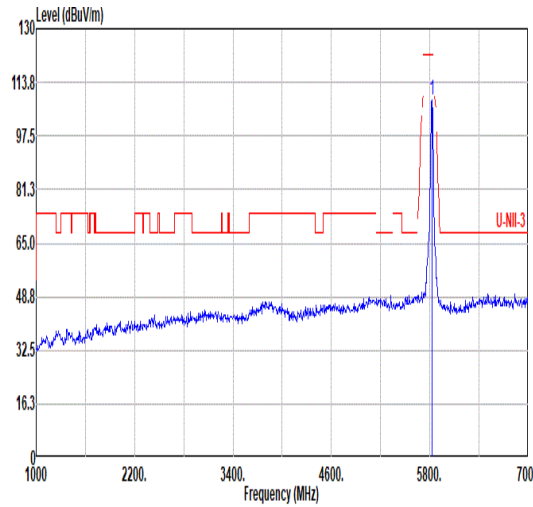
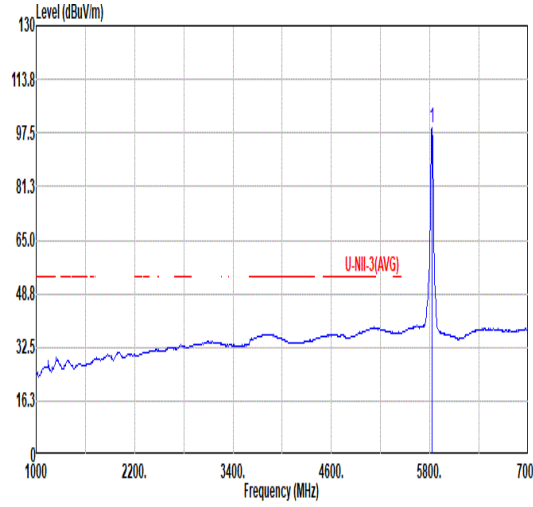


	143																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>65.10</td> <td>111.36</td> <td>-46.26</td> <td>58.87</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>322</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5859.60</td> <td>71.71</td> <td>109.61</td> <td>-37.90</td> <td>65.56</td> <td>34.62</td> <td>11.34</td> <td>40.01</td> <td>0.00</td> <td>322</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>45.02</td> <td>68.35</td> <td>-23.33</td> <td>38.51</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>322</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.00</td> <td>47.56</td> <td>68.20</td> <td>-20.64</td> <td>41.03</td> <td>35.01</td> <td>11.40</td> <td>39.88</td> <td>0.00</td> <td>322</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	65.10	111.36	-46.26	58.87	34.81	11.34	39.92	0.00	322	143	PEAK	2	5859.60	71.71	109.61	-37.90	65.56	34.62	11.34	40.01	0.00	322	143	PEAK	3	5924.80	45.02	68.35	-23.33	38.51	35.00	11.40	39.89	0.00	322	143	PEAK	4	5928.00	47.56	68.20	-20.64	41.03	35.01	11.40	39.88	0.00	322	143	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.54</td> <td>-----</td> <td>-----</td> <td>101.87</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>322</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.54	-----	-----	101.87	34.75	11.31	39.39	0.00	322	143	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	65.10	111.36	-46.26	58.87	34.81	11.34	39.92	0.00	322	143	PEAK																																																																																																																					
2	5859.60	71.71	109.61	-37.90	65.56	34.62	11.34	40.01	0.00	322	143	PEAK																																																																																																																					
3	5924.80	45.02	68.35	-23.33	38.51	35.00	11.40	39.89	0.00	322	143	PEAK																																																																																																																					
4	5928.00	47.56	68.20	-20.64	41.03	35.01	11.40	39.88	0.00	322	143	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	100.54	-----	-----	101.87	34.75	11.31	39.39	0.00	322	143	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.13</td> <td>-----</td> <td>-----</td> <td>92.46</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>322</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.13	-----	-----	92.46	34.75	11.31	39.39	0.00	322	143	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	99.13	-----	-----	92.46	34.75	11.31	39.39	0.00	322	143	AVERAGE																																																																																																																					






Mode	143																																																																											
	Harmonic																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																											
ANT	2																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.66</td> <td>74.00</td> <td>-26.34</td> <td>59.31</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	47.66	74.00	-26.34	59.31	38.45	16.46	66.56	0.00	-- -- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>56.21</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	44.56	74.00	-29.44	56.21	38.45	16.46	66.56	0.00	-- -- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	47.66	74.00	-26.34	59.31	38.45	16.46	66.56	0.00	-- -- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 11650.00	44.56	74.00	-29.44	56.21	38.45	16.46	66.56	0.00	-- -- PEAK																																																																			

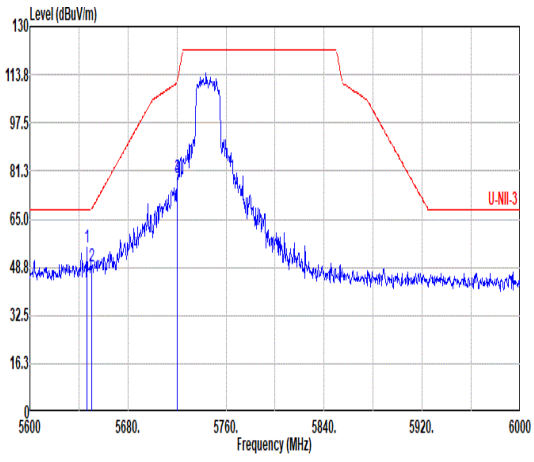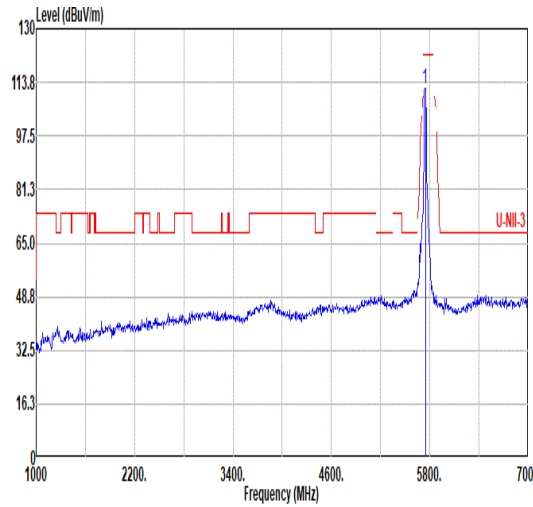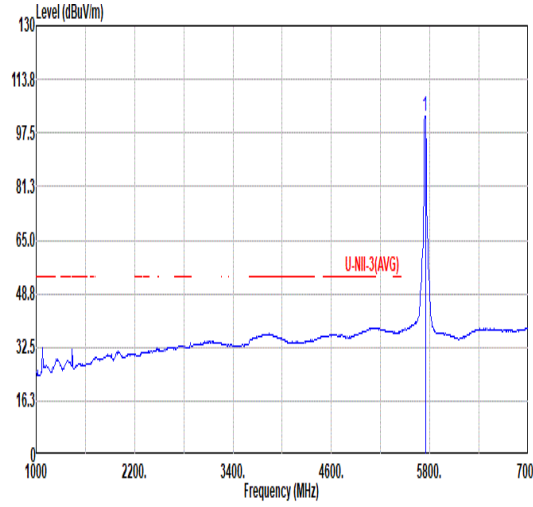

		144																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.40</td> <td>55.37</td> <td>68.20</td> <td>-12.83</td> <td>46.02</td> <td>34.50</td> <td>11.07</td> <td>36.22</td> <td>0.00</td> <td>363</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>49.00</td> <td>68.50</td> <td>-19.50</td> <td>39.72</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>363</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>78.82</td> <td>110.90</td> <td>-32.08</td> <td>70.63</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>363</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>78.82</td> <td>110.90</td> <td>-32.08</td> <td>70.63</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>363</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.40	55.37	68.20	-12.83	46.02	34.50	11.07	36.22	0.00	363	360	PEAK	2	5650.40	49.00	68.50	-19.50	39.72	34.50	11.07	36.29	0.00	363	360	PEAK	3	5720.00	78.82	110.90	-32.08	70.63	34.54	11.17	37.52	0.00	363	360	PEAK	4	5720.00	78.82	110.90	-32.08	70.63	34.54	11.17	37.52	0.00	363	360	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.06</td> <td>-----</td> <td>-----</td> <td>104.24</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>363</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	112.06	-----	-----	104.24	34.59	11.20	37.97	0.00	363	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5646.40	55.37	68.20	-12.83	46.02	34.50	11.07	36.22	0.00	363	360	PEAK																																																																																																																					
2	5650.40	49.00	68.50	-19.50	39.72	34.50	11.07	36.29	0.00	363	360	PEAK																																																																																																																					
3	5720.00	78.82	110.90	-32.08	70.63	34.54	11.17	37.52	0.00	363	360	PEAK																																																																																																																					
4	5720.00	78.82	110.90	-32.08	70.63	34.54	11.17	37.52	0.00	363	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	112.06	-----	-----	104.24	34.59	11.20	37.97	0.00	363	360	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.53</td> <td>-----</td> <td>-----</td> <td>94.71</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>363</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.53	-----	-----	94.71	34.59	11.20	37.97	0.00	363	360	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	102.53	-----	-----	94.71	34.59	11.20	37.97	0.00	363	360	AVERAGE																																																																																																																					

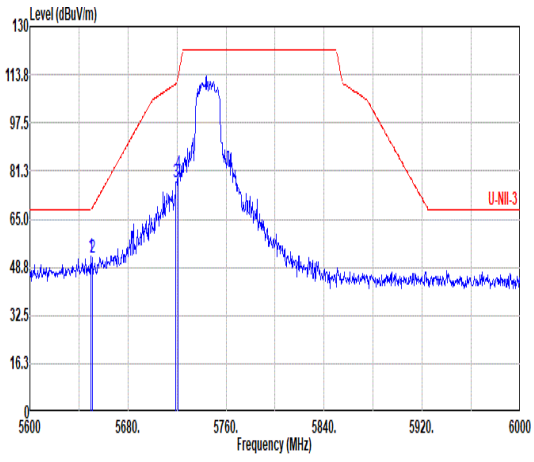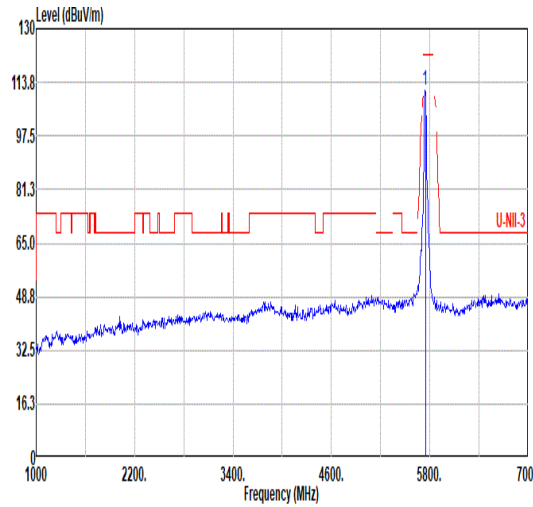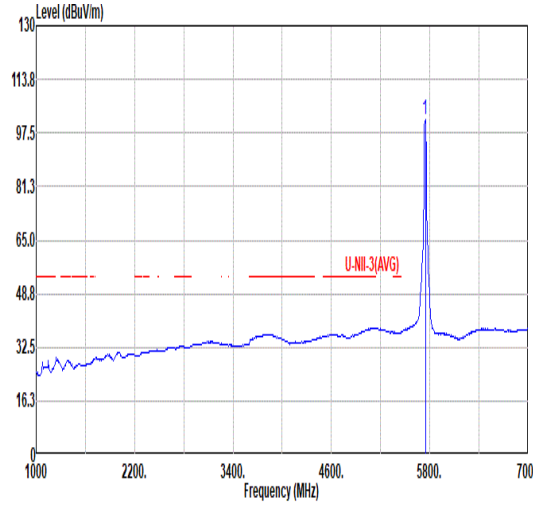

		144																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																									
ANT		2																																																																																																									
Pol.	Vertical	Fundamental																																																																																																									
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal peak at approximately 5745 MHz. A red limit line is shown at 65.0 dBuV/m. The signal level at the peak is approximately 111.16 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.60</td> <td>52.37</td> <td>68.20</td> <td>-15.83</td> <td>43.07</td> <td>34.50</td> <td>11.07</td> <td>36.27</td> <td>0.00</td> <td>388</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.80</td> <td>51.92</td> <td>68.80</td> <td>-16.88</td> <td>42.64</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>388</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>77.31</td> <td>110.68</td> <td>-33.37</td> <td>69.11</td> <td>34.54</td> <td>11.17</td> <td>37.51</td> <td>0.00</td> <td>388</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>80.52</td> <td>112.72</td> <td>-32.20</td> <td>72.35</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>388</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5649.60	52.37	68.20	-15.83	43.07	34.50	11.07	36.27	0.00	388	140	PEAK	2	5650.80	51.92	68.80	-16.88	42.64	34.50	11.07	36.29	0.00	388	140	PEAK	3	5719.20	77.31	110.68	-33.37	69.11	34.54	11.17	37.51	0.00	388	140	PEAK	4	5728.80	80.52	112.72	-32.20	72.35	34.54	11.17	37.54	0.00	388	140	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal peak at 5745.00 MHz. A red limit line is shown at 65.0 dBuV/m. The signal level at the peak is 111.16 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.16</td> <td>-----</td> <td>-----</td> <td>103.34</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>388</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	111.16	-----	-----	103.34	34.59	11.20	37.97	0.00	388	140	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5649.60	52.37	68.20	-15.83	43.07	34.50	11.07	36.27	0.00	388	140	PEAK																																																																																															
2	5650.80	51.92	68.80	-16.88	42.64	34.50	11.07	36.29	0.00	388	140	PEAK																																																																																															
3	5719.20	77.31	110.68	-33.37	69.11	34.54	11.17	37.51	0.00	388	140	PEAK																																																																																															
4	5728.80	80.52	112.72	-32.20	72.35	34.54	11.17	37.54	0.00	388	140	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	111.16	-----	-----	103.34	34.59	11.20	37.97	0.00	388	140	PEAK																																																																																															
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. The plot shows a signal peak at 5745.00 MHz. A red limit line is shown at 65.0 dBuV/m. The signal level at the peak is 101.33 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.33</td> <td>-----</td> <td>-----</td> <td>93.51</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>388</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	5745.00	101.33	-----	-----	93.51	34.59	11.20	37.97	0.00	388	140	AVERAGE																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																																																																		
1	5745.00	101.33	-----	-----	93.51	34.59	11.20	37.97	0.00	388	140	AVERAGE																																																																																															



Mode	144																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz																																																																																																	
ANT	2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>45.00</td> <td>74.00</td> <td>-28.92</td> <td>57.17</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17235.00</td> <td>51.33</td> <td>68.20</td> <td>-16.87</td> <td>53.22</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	45.00	74.00	-28.92	57.17	38.29	16.36	66.74	0.00	-- -- PEAK	2 17235.00	51.33	68.20	-16.87	53.22	42.51	20.16	64.56	0.00	-- -- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>44.43</td> <td>74.00</td> <td>-29.57</td> <td>56.52</td> <td>38.29</td> <td>16.36</td> <td>66.74</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17235.00</td> <td>52.41</td> <td>68.20</td> <td>-15.79</td> <td>54.30</td> <td>42.51</td> <td>20.16</td> <td>64.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	44.43	74.00	-29.57	56.52	38.29	16.36	66.74	0.00	-- -- PEAK	2 17235.00	52.41	68.20	-15.79	54.30	42.51	20.16	64.56	0.00	-- -- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11490.00	45.00	74.00	-28.92	57.17	38.29	16.36	66.74	0.00	-- -- PEAK																																																																																									
2 17235.00	51.33	68.20	-16.87	53.22	42.51	20.16	64.56	0.00	-- -- PEAK																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 11490.00	44.43	74.00	-29.57	56.52	38.29	16.36	66.74	0.00	-- -- PEAK																																																																																									
2 17235.00	52.41	68.20	-15.79	54.30	42.51	20.16	64.56	0.00	-- -- PEAK																																																																																									






Mode	145																																																																																																													
	Harmonic																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>46.76</td> <td>74.00</td> <td>-27.24</td> <td>58.63</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.62</td> <td>68.20</td> <td>-16.58</td> <td>53.54</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	46.76	74.00	-27.24	58.63	38.37	16.41	66.65	0.00	--	--	PEAK	2	17355.00	51.62	68.20	-16.58	53.54	42.42	20.24	64.58	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>44.46</td> <td>74.00</td> <td>-29.54</td> <td>56.33</td> <td>38.37</td> <td>16.41</td> <td>66.65</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>51.42</td> <td>68.20</td> <td>-16.78</td> <td>53.34</td> <td>42.42</td> <td>20.24</td> <td>64.58</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	44.46	74.00	-29.54	56.33	38.37	16.41	66.65	0.00	--	--	PEAK	2	17355.00	51.42	68.20	-16.78	53.34	42.42	20.24	64.58	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11570.00	46.76	74.00	-27.24	58.63	38.37	16.41	66.65	0.00	--	--	PEAK																																																																																																		
2	17355.00	51.62	68.20	-16.58	53.54	42.42	20.24	64.58	0.00	--	--	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11570.00	44.46	74.00	-29.54	56.33	38.37	16.41	66.65	0.00	--	--	PEAK																																																																																																		
2	17355.00	51.42	68.20	-16.78	53.34	42.42	20.24	64.58	0.00	--	--	PEAK																																																																																																		



		146																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak																																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>74.17</td> <td>111.36</td> <td>-37.19</td> <td>67.94</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5861.60</td> <td>70.78</td> <td>109.05</td> <td>-38.27</td> <td>64.66</td> <td>34.62</td> <td>11.34</td> <td>40.04</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>47.60</td> <td>68.35</td> <td>-20.75</td> <td>41.09</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.80</td> <td>48.71</td> <td>68.20</td> <td>-19.49</td> <td>42.15</td> <td>35.02</td> <td>11.41</td> <td>39.87</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	74.17	111.36	-37.19	67.94	34.81	11.34	39.92	0.00	353	360	PEAK	2	5861.60	70.78	109.05	-38.27	64.66	34.62	11.34	40.04	0.00	353	360	PEAK	3	5924.80	47.60	68.35	-20.75	41.09	35.00	11.40	39.89	0.00	353	360	PEAK	4	5938.80	48.71	68.20	-19.49	42.15	35.02	11.41	39.87	0.00	353	360	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>111.10</td> <td>-----</td> <td>-----</td> <td>104.43</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	111.10	-----	-----	104.43	34.75	11.31	39.39	0.00	353	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	74.17	111.36	-37.19	67.94	34.81	11.34	39.92	0.00	353	360	PEAK																																																																																																																					
2	5861.60	70.78	109.05	-38.27	64.66	34.62	11.34	40.04	0.00	353	360	PEAK																																																																																																																					
3	5924.80	47.60	68.35	-20.75	41.09	35.00	11.40	39.89	0.00	353	360	PEAK																																																																																																																					
4	5938.80	48.71	68.20	-19.49	42.15	35.02	11.41	39.87	0.00	353	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	111.10	-----	-----	104.43	34.75	11.31	39.39	0.00	353	360	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.15</td> <td>-----</td> <td>-----</td> <td>94.48</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>353</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.15	-----	-----	94.48	34.75	11.31	39.39	0.00	353	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	101.15	-----	-----	94.48	34.75	11.31	39.39	0.00	353	360	AVERAGE																																																																																																																					

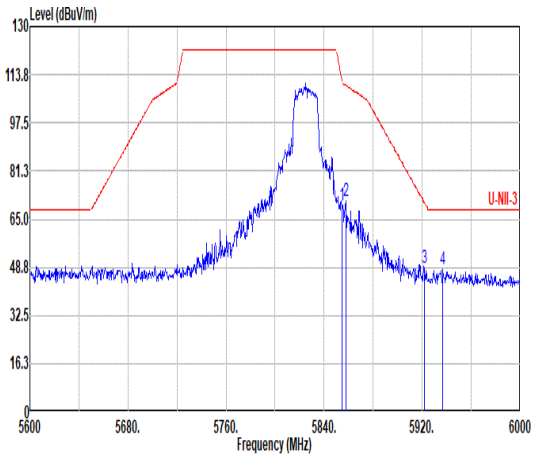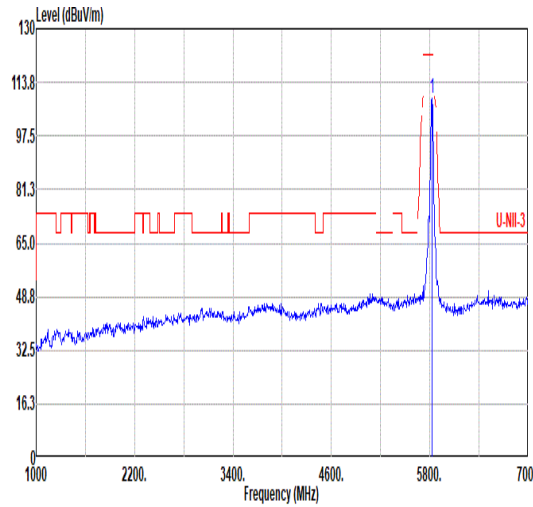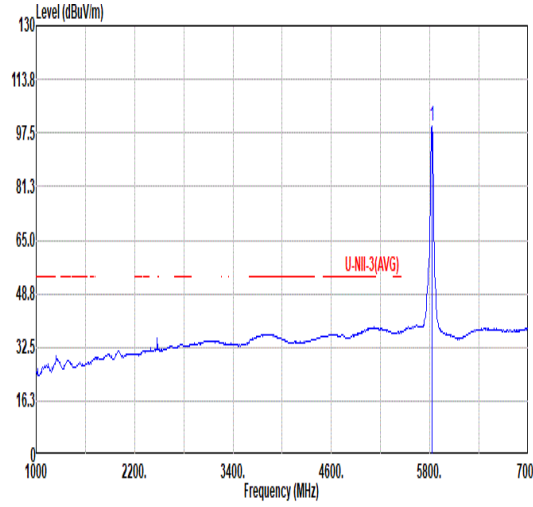

		146																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 798 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>69.50</td> <td>111.36</td> <td>-41.86</td> <td>63.27</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>310</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5857.60</td> <td>71.12</td> <td>110.17</td> <td>-39.05</td> <td>64.93</td> <td>34.62</td> <td>11.34</td> <td>39.97</td> <td>0.00</td> <td>310</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.00</td> <td>48.57</td> <td>70.42</td> <td>-21.85</td> <td>42.08</td> <td>34.99</td> <td>11.40</td> <td>39.90</td> <td>0.00</td> <td>310</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.80</td> <td>47.97</td> <td>68.20</td> <td>-20.23</td> <td>41.37</td> <td>35.05</td> <td>11.41</td> <td>39.86</td> <td>0.00</td> <td>310</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	69.50	111.36	-41.86	63.27	34.81	11.34	39.92	0.00	310	140	PEAK	2	5857.60	71.12	110.17	-39.05	64.93	34.62	11.34	39.97	0.00	310	140	PEAK	3	5922.00	48.57	70.42	-21.85	42.08	34.99	11.40	39.90	0.00	310	140	PEAK	4	5936.80	47.97	68.20	-20.23	41.37	35.05	11.41	39.86	0.00	310	140	PEAK	 <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.11</td> <td>-----</td> <td>-----</td> <td>102.44</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>310</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.11	-----	-----	102.44	34.75	11.31	39.39	0.00	310	140	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	69.50	111.36	-41.86	63.27	34.81	11.34	39.92	0.00	310	140	PEAK																																																																																																																					
2	5857.60	71.12	110.17	-39.05	64.93	34.62	11.34	39.97	0.00	310	140	PEAK																																																																																																																					
3	5922.00	48.57	70.42	-21.85	42.08	34.99	11.40	39.90	0.00	310	140	PEAK																																																																																																																					
4	5936.80	47.97	68.20	-20.23	41.37	35.05	11.41	39.86	0.00	310	140	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	109.11	-----	-----	102.44	34.75	11.31	39.39	0.00	310	140	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.54</td> <td>-----</td> <td>-----</td> <td>92.87</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>310</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.54	-----	-----	92.87	34.75	11.31	39.39	0.00	310	140	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	99.54	-----	-----	92.87	34.75	11.31	39.39	0.00	310	140	AVERAGE																																																																																																																					






Mode	146																																																																															
	Harmonic																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>47.65</td> <td>74.00</td> <td>-26.35</td> <td>59.30</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	47.65	74.00	-26.35	59.30	38.45	16.46	66.56	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>44.67</td> <td>74.00</td> <td>-29.33</td> <td>56.32</td> <td>38.45</td> <td>16.46</td> <td>66.56</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11650.00	44.67	74.00	-29.33	56.32	38.45	16.46	66.56	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 11650.00	47.65	74.00	-26.35	59.30	38.45	16.46	66.56	0.00	--	--	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 11650.00	44.67	74.00	-29.33	56.32	38.45	16.46	66.56	0.00	--	--	PEAK																																																																					






	147																																																																																																																							
Mode	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU26/0_5745MHz																																																																																																																							
ANT	2																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5627.60</td> <td>49.50</td> <td>68.20</td> <td>-18.70</td> <td>40.11</td> <td>34.50</td> <td>11.04</td> <td>36.15</td> <td>0.00</td> <td>316</td> <td>6 PEAK</td> </tr> <tr> <td>2</td> <td>5651.60</td> <td>48.49</td> <td>69.39</td> <td>-20.90</td> <td>39.23</td> <td>34.50</td> <td>11.07</td> <td>36.31</td> <td>0.00</td> <td>316</td> <td>6 PEAK</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>59.11</td> <td>110.90</td> <td>-51.79</td> <td>50.92</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>316</td> <td>6 PEAK</td> </tr> <tr> <td>4</td> <td>5728.40</td> <td>61.38</td> <td>111.81</td> <td>-50.43</td> <td>53.20</td> <td>34.54</td> <td>11.17</td> <td>37.53</td> <td>0.00</td> <td>316</td> <td>6 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5627.60	49.50	68.20	-18.70	40.11	34.50	11.04	36.15	0.00	316	6 PEAK	2	5651.60	48.49	69.39	-20.90	39.23	34.50	11.07	36.31	0.00	316	6 PEAK	3	5720.00	59.11	110.90	-51.79	50.92	34.54	11.17	37.52	0.00	316	6 PEAK	4	5728.40	61.38	111.81	-50.43	53.20	34.54	11.17	37.53	0.00	316	6 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.31</td> <td>-----</td> <td>-----</td> <td>100.49</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>316</td> <td>6 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5745.00	108.31	-----	-----	100.49	34.59	11.20	37.97	0.00	316	6 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5627.60	49.50	68.20	-18.70	40.11	34.50	11.04	36.15	0.00	316	6 PEAK																																																																																																													
2	5651.60	48.49	69.39	-20.90	39.23	34.50	11.07	36.31	0.00	316	6 PEAK																																																																																																													
3	5720.00	59.11	110.90	-51.79	50.92	34.54	11.17	37.52	0.00	316	6 PEAK																																																																																																													
4	5728.40	61.38	111.81	-50.43	53.20	34.54	11.17	37.53	0.00	316	6 PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																													
1	5745.00	108.31	-----	-----	100.49	34.59	11.20	37.97	0.00	316	6 PEAK																																																																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.69</td> <td>-----</td> <td>-----</td> <td>95.87</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>316</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	5745.00	103.69	-----	-----	95.87	34.59	11.20	37.97	0.00	316	6 AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																													
1	5745.00	103.69	-----	-----	95.87	34.59	11.20	37.97	0.00	316	6 AVERAGE																																																																																																													

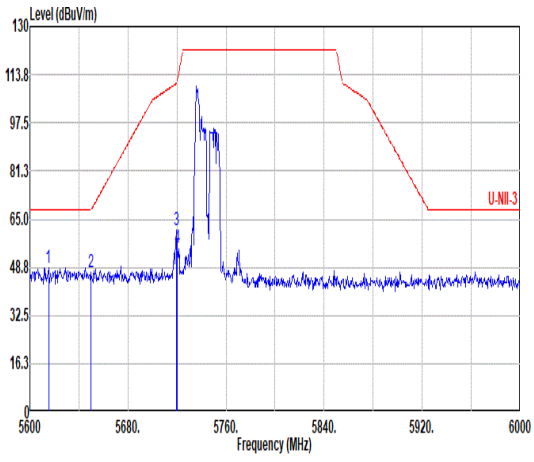
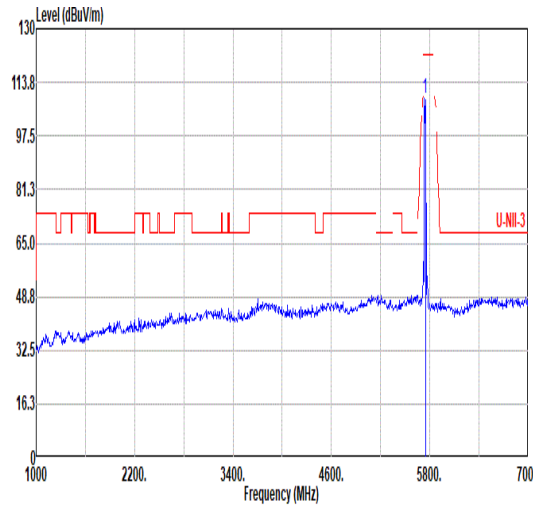
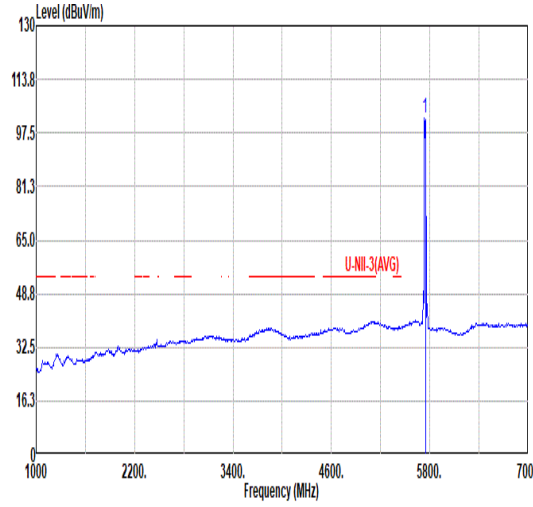


		147																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU26/0_5745MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 798 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5615.20</td> <td>48.78</td> <td>68.20</td> <td>-19.42</td> <td>39.43</td> <td>34.50</td> <td>11.02</td> <td>36.17</td> <td>0.00</td> <td>371</td> <td>148</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>47.13</td> <td>68.20</td> <td>-21.07</td> <td>37.84</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>371</td> <td>148</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>61.10</td> <td>110.79</td> <td>-49.69</td> <td>52.91</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>371</td> <td>148</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>55.28</td> <td>110.90</td> <td>-55.62</td> <td>47.09</td> <td>34.54</td> <td>11.17</td> <td>37.52</td> <td>0.00</td> <td>371</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5615.20	48.78	68.20	-19.42	39.43	34.50	11.02	36.17	0.00	371	148	PEAK	2	5650.00	47.13	68.20	-21.07	37.84	34.50	11.07	36.28	0.00	371	148	PEAK	3	5719.60	61.10	110.79	-49.69	52.91	34.54	11.17	37.52	0.00	371	148	PEAK	4	5720.00	55.28	110.90	-55.62	47.09	34.54	11.17	37.52	0.00	371	148	PEAK	 <table border="1" data-bbox="901 1108 1436 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.98</td> <td>-----</td> <td>-----</td> <td>101.16</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>371</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	108.98	-----	-----	101.16	34.59	11.20	37.97	0.00	371	148	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5615.20	48.78	68.20	-19.42	39.43	34.50	11.02	36.17	0.00	371	148	PEAK																																																																																																																					
2	5650.00	47.13	68.20	-21.07	37.84	34.50	11.07	36.28	0.00	371	148	PEAK																																																																																																																					
3	5719.60	61.10	110.79	-49.69	52.91	34.54	11.17	37.52	0.00	371	148	PEAK																																																																																																																					
4	5720.00	55.28	110.90	-55.62	47.09	34.54	11.17	37.52	0.00	371	148	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	108.98	-----	-----	101.16	34.59	11.20	37.97	0.00	371	148	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.84</td> <td>-----</td> <td>-----</td> <td>94.02</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>371</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.84	-----	-----	94.02	34.59	11.20	37.97	0.00	371	148	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.84	-----	-----	94.02	34.59	11.20	37.97	0.00	371	148	AVERAGE																																																																																																																					

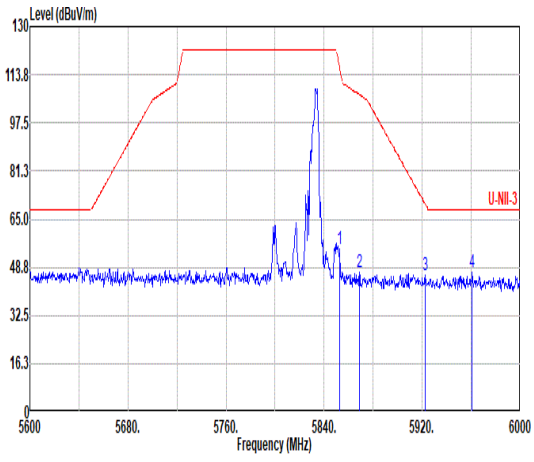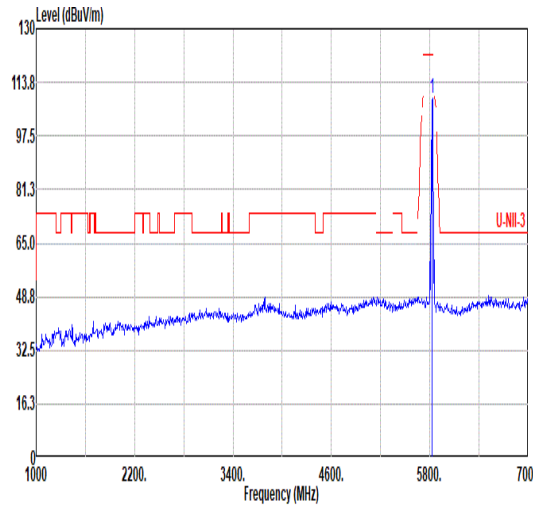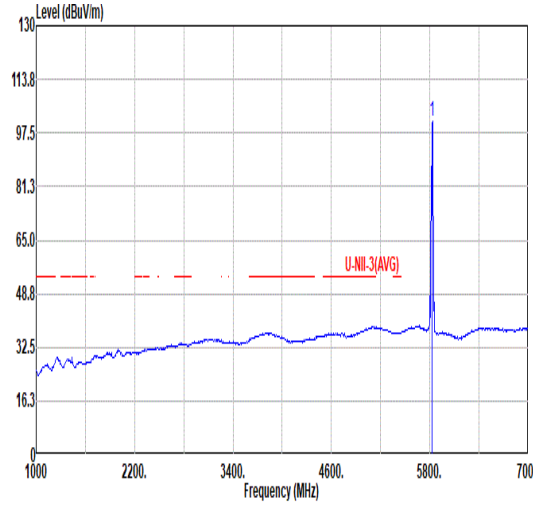

	148																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU26/8_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.80</td> <td>54.93</td> <td>115.92</td> <td>-60.99</td> <td>48.68</td> <td>34.81</td> <td>11.33</td> <td>39.89</td> <td>0.00</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.80</td> <td>46.87</td> <td>107.03</td> <td>-60.16</td> <td>40.71</td> <td>34.84</td> <td>11.35</td> <td>40.03</td> <td>0.00</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.40</td> <td>46.09</td> <td>70.12</td> <td>-24.03</td> <td>39.59</td> <td>34.99</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5968.80</td> <td>46.91</td> <td>68.20</td> <td>-21.29</td> <td>40.15</td> <td>35.12</td> <td>11.44</td> <td>39.80</td> <td>0.00</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5852.80	54.93	115.92	-60.99	48.68	34.81	11.33	39.89	0.00	358	360	PEAK	2	5868.80	46.87	107.03	-60.16	40.71	34.84	11.35	40.03	0.00	358	360	PEAK	3	5922.40	46.09	70.12	-24.03	39.59	34.99	11.40	39.89	0.00	358	360	PEAK	4	5968.80	46.91	68.20	-21.29	40.15	35.12	11.44	39.80	0.00	358	360	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.94</td> <td>-----</td> <td>-----</td> <td>102.27</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	108.94	-----	-----	102.27	34.75	11.31	39.39	0.00	358	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5852.80	54.93	115.92	-60.99	48.68	34.81	11.33	39.89	0.00	358	360	PEAK																																																																																																																					
2	5868.80	46.87	107.03	-60.16	40.71	34.84	11.35	40.03	0.00	358	360	PEAK																																																																																																																					
3	5922.40	46.09	70.12	-24.03	39.59	34.99	11.40	39.89	0.00	358	360	PEAK																																																																																																																					
4	5968.80	46.91	68.20	-21.29	40.15	35.12	11.44	39.80	0.00	358	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	108.94	-----	-----	102.27	34.75	11.31	39.39	0.00	358	360	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.96</td> <td>-----</td> <td>-----</td> <td>94.29</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>358</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.96	-----	-----	94.29	34.75	11.31	39.39	0.00	358	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	100.96	-----	-----	94.29	34.75	11.31	39.39	0.00	358	360	AVERAGE																																																																																																																					

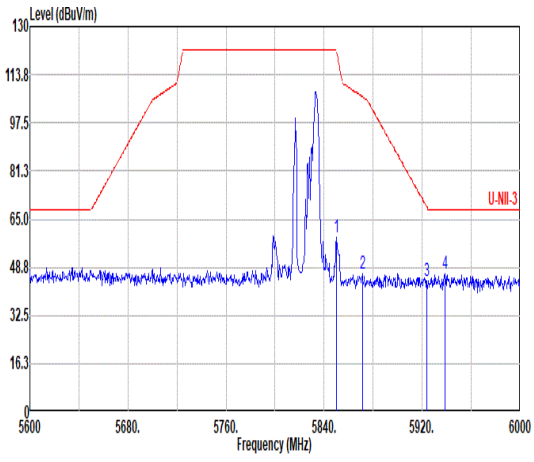
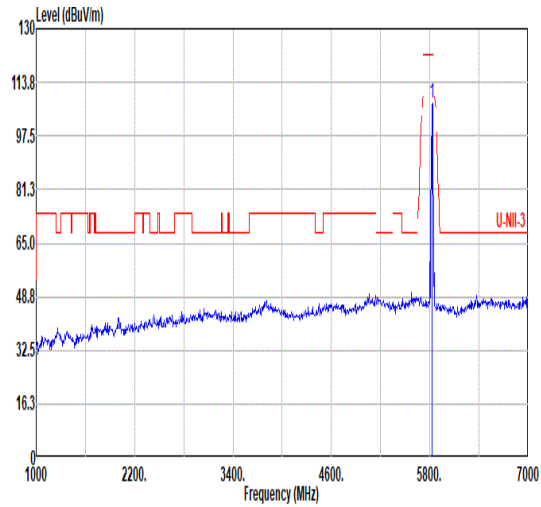
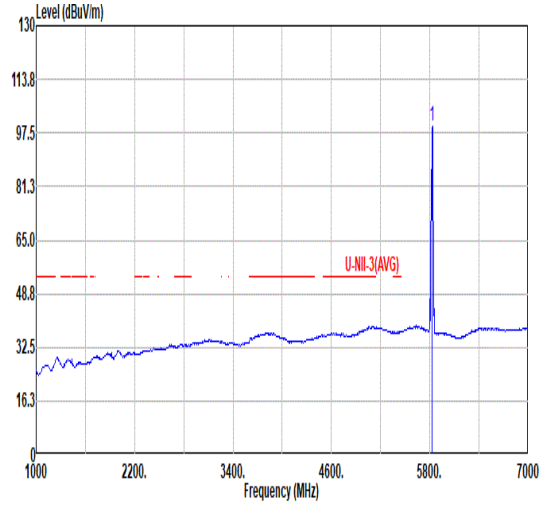


		148																																																																																																																																
Mode	Band Edge																																																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU26/8_5825MHz																																																																																																																																	
ANT	2																																																																																																																																	
Pol.	Vertical	Fundamental																																																																																																																																
Peak																																																																																																																																		
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.00</td> <td>58.88</td> <td>122.30</td> <td>-63.42</td> <td>52.59</td> <td>34.80</td> <td>11.33</td> <td>39.84</td> <td>0.00</td> <td>358</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.20</td> <td>46.47</td> <td>106.36</td> <td>-59.89</td> <td>40.31</td> <td>34.84</td> <td>11.35</td> <td>40.03</td> <td>0.00</td> <td>358</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>44.24</td> <td>68.94</td> <td>-24.70</td> <td>37.73</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>358</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.40</td> <td>46.64</td> <td>68.20</td> <td>-21.56</td> <td>40.03</td> <td>35.05</td> <td>11.41</td> <td>39.85</td> <td>0.00</td> <td>358</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5850.00	58.88	122.30	-63.42	52.59	34.80	11.33	39.84	0.00	358	143	PEAK	2	5871.20	46.47	106.36	-59.89	40.31	34.84	11.35	40.03	0.00	358	143	PEAK	3	5924.00	44.24	68.94	-24.70	37.73	35.00	11.40	39.89	0.00	358	143	PEAK	4	5938.40	46.64	68.20	-21.56	40.03	35.05	11.41	39.85	0.00	358	143	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.25</td> <td>-----</td> <td>-----</td> <td>100.58</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>358</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	107.25	-----	-----	100.58	34.75	11.31	39.39	0.00	358	143
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	5850.00	58.88	122.30	-63.42	52.59	34.80	11.33	39.84	0.00	358	143	PEAK																																																																																																																						
2	5871.20	46.47	106.36	-59.89	40.31	34.84	11.35	40.03	0.00	358	143	PEAK																																																																																																																						
3	5924.00	44.24	68.94	-24.70	37.73	35.00	11.40	39.89	0.00	358	143	PEAK																																																																																																																						
4	5938.40	46.64	68.20	-21.56	40.03	35.05	11.41	39.85	0.00	358	143	PEAK																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	5825.00	107.25	-----	-----	100.58	34.75	11.31	39.39	0.00	358	143	PEAK																																																																																																																						
Avg	Blank																																																																																																																																	
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.55</td> <td>-----</td> <td>-----</td> <td>92.88</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>358</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.55	-----	-----	92.88	34.75	11.31	39.39	0.00	358	143	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	5825.00	99.55	-----	-----	92.88	34.75	11.31	39.39	0.00	358	143	AVERAGE																																																																																																																						



		149																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU52/37_5745MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5616.80</td> <td>49.26</td> <td>68.20</td> <td>-18.94</td> <td>39.90</td> <td>34.50</td> <td>11.03</td> <td>36.17</td> <td>0.00</td> <td>274</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.20</td> <td>48.23</td> <td>69.09</td> <td>-20.86</td> <td>38.96</td> <td>34.50</td> <td>11.07</td> <td>36.30</td> <td>0.00</td> <td>274</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>60.04</td> <td>110.68</td> <td>-50.64</td> <td>51.84</td> <td>34.54</td> <td>11.17</td> <td>37.51</td> <td>0.00</td> <td>274</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.80</td> <td>65.60</td> <td>112.72</td> <td>-47.12</td> <td>57.43</td> <td>34.54</td> <td>11.17</td> <td>37.54</td> <td>0.00</td> <td>274</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5616.80	49.26	68.20	-18.94	39.90	34.50	11.03	36.17	0.00	274	360	PEAK	2	5651.20	48.23	69.09	-20.86	38.96	34.50	11.07	36.30	0.00	274	360	PEAK	3	5719.20	60.04	110.68	-50.64	51.84	34.54	11.17	37.51	0.00	274	360	PEAK	4	5728.80	65.60	112.72	-47.12	57.43	34.54	11.17	37.54	0.00	274	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.60</td> <td>-----</td> <td>-----</td> <td>103.78</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>274</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	111.60	-----	-----	103.78	34.59	11.20	37.97	0.00	274	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5616.80	49.26	68.20	-18.94	39.90	34.50	11.03	36.17	0.00	274	360	PEAK																																																																																																																					
2	5651.20	48.23	69.09	-20.86	38.96	34.50	11.07	36.30	0.00	274	360	PEAK																																																																																																																					
3	5719.20	60.04	110.68	-50.64	51.84	34.54	11.17	37.51	0.00	274	360	PEAK																																																																																																																					
4	5728.80	65.60	112.72	-47.12	57.43	34.54	11.17	37.54	0.00	274	360	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	111.60	-----	-----	103.78	34.59	11.20	37.97	0.00	274	360	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.28</td> <td>-----</td> <td>-----</td> <td>95.46</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>274</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	103.28	-----	-----	95.46	34.59	11.20	37.97	0.00	274	360	AVERAGE																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	103.28	-----	-----	95.46	34.59	11.20	37.97	0.00	274	360	AVERAGE																																																																																																																					

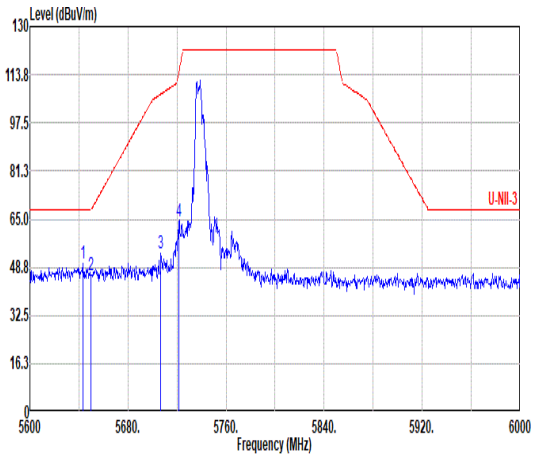
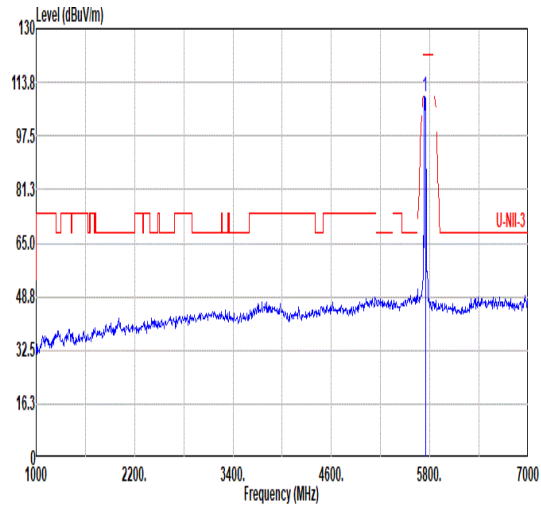
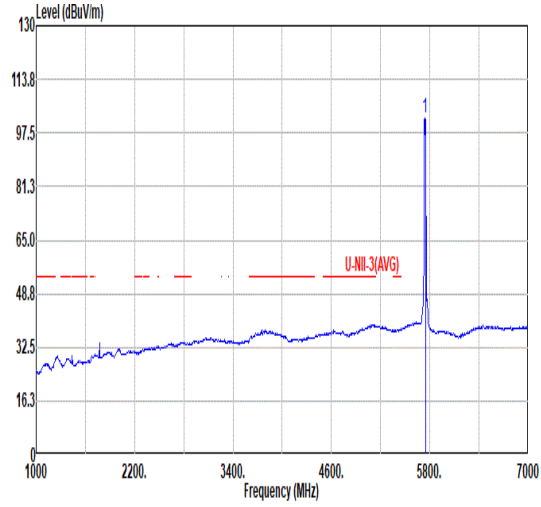


		149																																																																																																																															
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU52/37_5745MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak																																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5643.20</td> <td>49.91</td> <td>68.20</td> <td>-18.29</td> <td>40.51</td> <td>34.50</td> <td>11.06</td> <td>36.16</td> <td>0.00</td> <td>307</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>46.19</td> <td>68.20</td> <td>-22.01</td> <td>36.90</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>307</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.80</td> <td>53.68</td> <td>107.21</td> <td>-53.53</td> <td>45.31</td> <td>34.51</td> <td>11.15</td> <td>37.29</td> <td>0.00</td> <td>307</td> <td>140</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.60</td> <td>64.06</td> <td>114.55</td> <td>-50.49</td> <td>55.90</td> <td>34.54</td> <td>11.17</td> <td>37.55</td> <td>0.00</td> <td>307</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.20	49.91	68.20	-18.29	40.51	34.50	11.06	36.16	0.00	307	140	PEAK	2	5650.00	46.19	68.20	-22.01	36.90	34.50	11.07	36.28	0.00	307	140	PEAK	3	5706.80	53.68	107.21	-53.53	45.31	34.51	11.15	37.29	0.00	307	140	PEAK	4	5721.60	64.06	114.55	-50.49	55.90	34.54	11.17	37.55	0.00	307	140	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.36</td> <td>-----</td> <td>-----</td> <td>101.54</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>307</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	109.36	-----	-----	101.54	34.59	11.20	37.97	0.00	307	140
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5643.20	49.91	68.20	-18.29	40.51	34.50	11.06	36.16	0.00	307	140	PEAK																																																																																																																					
2	5650.00	46.19	68.20	-22.01	36.90	34.50	11.07	36.28	0.00	307	140	PEAK																																																																																																																					
3	5706.80	53.68	107.21	-53.53	45.31	34.51	11.15	37.29	0.00	307	140	PEAK																																																																																																																					
4	5721.60	64.06	114.55	-50.49	55.90	34.54	11.17	37.55	0.00	307	140	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	109.36	-----	-----	101.54	34.59	11.20	37.97	0.00	307	140	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.93</td> <td>-----</td> <td>-----</td> <td>94.11</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>307</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.93	-----	-----	94.11	34.59	11.20	37.97	0.00	307	140	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.93	-----	-----	94.11	34.59	11.20	37.97	0.00	307	140	AVERAGE																																																																																																																					



	150																																																																																																																										
Mode	Band Edge																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU52/40_5825MHz																																																																																																																										
ANT	2																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.40</td> <td>55.22</td> <td>112.27</td> <td>-57.05</td> <td>48.99</td> <td>34.81</td> <td>11.33</td> <td>39.91</td> <td>0.00</td> <td>359</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5862.80</td> <td>52.04</td> <td>108.71</td> <td>-56.67</td> <td>45.92</td> <td>34.83</td> <td>11.34</td> <td>40.05</td> <td>0.00</td> <td>359</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>43.17</td> <td>68.35</td> <td>-25.18</td> <td>36.66</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>359</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.40</td> <td>47.22</td> <td>68.20</td> <td>-20.98</td> <td>40.62</td> <td>35.05</td> <td>11.41</td> <td>39.86</td> <td>0.00</td> <td>359</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.40	55.22	112.27	-57.05	48.99	34.81	11.33	39.91	0.00	359	360	PEAK	2	5862.80	52.04	108.71	-56.67	45.92	34.83	11.34	40.05	0.00	359	360	PEAK	3	5924.80	43.17	68.35	-25.18	36.66	35.00	11.40	39.89	0.00	359	360	PEAK	4	5936.40	47.22	68.20	-20.98	40.62	35.05	11.41	39.86	0.00	359	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.35</td> <td>-----</td> <td>-----</td> <td>101.68</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>359</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.35	-----	-----	101.68	34.75	11.31	39.39	0.00	359	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5854.40	55.22	112.27	-57.05	48.99	34.81	11.33	39.91	0.00	359	360	PEAK																																																																																																															
2	5862.80	52.04	108.71	-56.67	45.92	34.83	11.34	40.05	0.00	359	360	PEAK																																																																																																															
3	5924.80	43.17	68.35	-25.18	36.66	35.00	11.40	39.89	0.00	359	360	PEAK																																																																																																															
4	5936.40	47.22	68.20	-20.98	40.62	35.05	11.41	39.86	0.00	359	360	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	100.35	-----	-----	101.68	34.75	11.31	39.39	0.00	359	360	PEAK																																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.81</td> <td>-----</td> <td>-----</td> <td>94.14</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>359</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.81	-----	-----	94.14	34.75	11.31	39.39	0.00	359	360	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	100.81	-----	-----	94.14	34.75	11.31	39.39	0.00	359	360	AVERAGE																																																																																																															

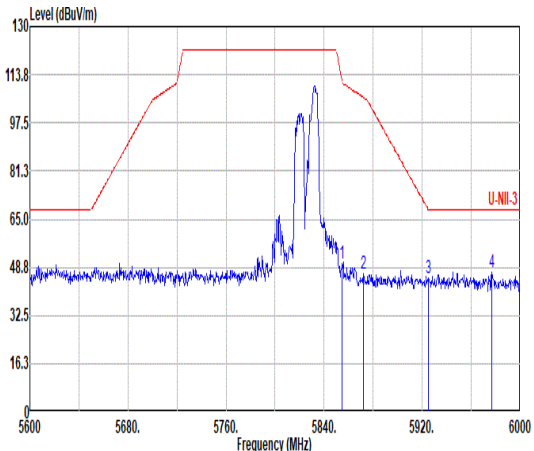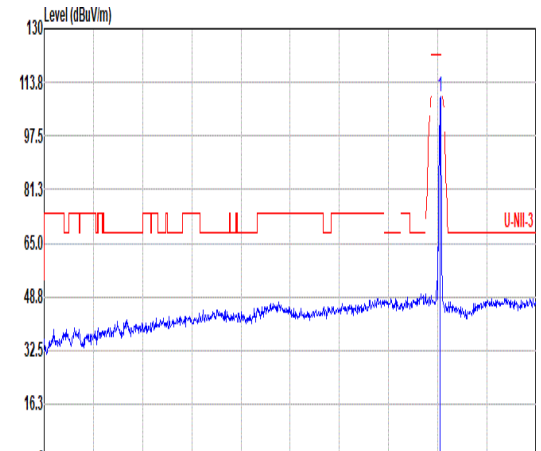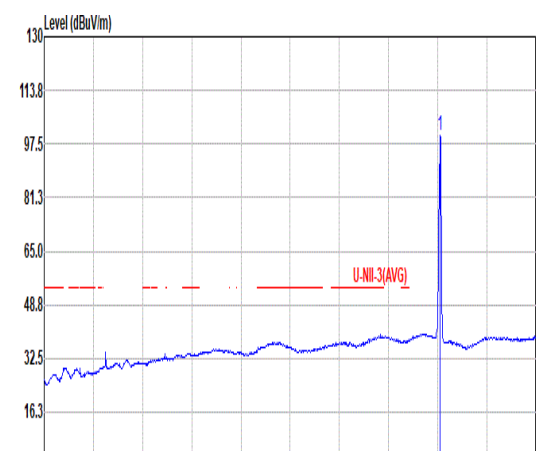

	150																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU52/40_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 766 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>50.23</td> <td>111.36</td> <td>-61.13</td> <td>44.00</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>359</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.80</td> <td>46.75</td> <td>106.14</td> <td>-59.39</td> <td>40.58</td> <td>34.84</td> <td>11.35</td> <td>40.02</td> <td>0.00</td> <td>359</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>45.00</td> <td>68.35</td> <td>-23.35</td> <td>38.49</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>359</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5976.80</td> <td>47.17</td> <td>68.20</td> <td>-21.03</td> <td>40.33</td> <td>35.15</td> <td>11.45</td> <td>39.76</td> <td>0.00</td> <td>359</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	50.23	111.36	-61.13	44.00	34.81	11.34	39.92	0.00	359	142	PEAK	2	5872.80	46.75	106.14	-59.39	40.58	34.84	11.35	40.02	0.00	359	142	PEAK	3	5924.80	45.00	68.35	-23.35	38.49	35.00	11.40	39.89	0.00	359	142	PEAK	4	5976.80	47.17	68.20	-21.03	40.33	35.15	11.45	39.76	0.00	359	142	PEAK	 <table border="1" data-bbox="893 1052 1404 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.35</td> <td>-----</td> <td>-----</td> <td>102.68</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>359</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.35	-----	-----	102.68	34.75	11.31	39.39	0.00	359	142	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	50.23	111.36	-61.13	44.00	34.81	11.34	39.92	0.00	359	142	PEAK																																																																																																																					
2	5872.80	46.75	106.14	-59.39	40.58	34.84	11.35	40.02	0.00	359	142	PEAK																																																																																																																					
3	5924.80	45.00	68.35	-23.35	38.49	35.00	11.40	39.89	0.00	359	142	PEAK																																																																																																																					
4	5976.80	47.17	68.20	-21.03	40.33	35.15	11.45	39.76	0.00	359	142	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	109.35	-----	-----	102.68	34.75	11.31	39.39	0.00	359	142	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="893 1724 1404 1904"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.00</td> <td>-----</td> <td>-----</td> <td>93.33</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>359</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.00	-----	-----	93.33	34.75	11.31	39.39	0.00	359	142	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	100.00	-----	-----	93.33	34.75	11.31	39.39	0.00	359	142	AVERAGE																																																																																																																					






		151																																																																																																									
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU106/53_5745MHz																																																																																																										
ANT	2																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.20</td> <td>49.75</td> <td>68.20</td> <td>-18.45</td> <td>40.41</td> <td>34.50</td> <td>11.02</td> <td>36.18</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>47.27</td> <td>68.20</td> <td>-20.93</td> <td>37.98</td> <td>34.50</td> <td>11.07</td> <td>36.28</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.80</td> <td>61.89</td> <td>110.56</td> <td>-48.67</td> <td>53.68</td> <td>34.54</td> <td>11.17</td> <td>37.50</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.60</td> <td>65.20</td> <td>114.55</td> <td>-49.35</td> <td>57.04</td> <td>34.54</td> <td>11.17</td> <td>37.55</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5611.20	49.75	68.20	-18.45	40.41	34.50	11.02	36.18	0.00	316	360	PEAK	2	5650.00	47.27	68.20	-20.93	37.98	34.50	11.07	36.28	0.00	316	360	PEAK	3	5718.80	61.89	110.56	-48.67	53.68	34.54	11.17	37.50	0.00	316	360	PEAK	4	5721.60	65.20	114.55	-49.35	57.04	34.54	11.17	37.55	0.00	316	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.95</td> <td>-----</td> <td>-----</td> <td>104.13</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	111.95	-----	-----	104.13	34.59	11.20	37.97	0.00	316	360
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5611.20	49.75	68.20	-18.45	40.41	34.50	11.02	36.18	0.00	316	360	PEAK																																																																																															
2	5650.00	47.27	68.20	-20.93	37.98	34.50	11.07	36.28	0.00	316	360	PEAK																																																																																															
3	5718.80	61.89	110.56	-48.67	53.68	34.54	11.17	37.50	0.00	316	360	PEAK																																																																																															
4	5721.60	65.20	114.55	-49.35	57.04	34.54	11.17	37.55	0.00	316	360	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	111.95	-----	-----	104.13	34.59	11.20	37.97	0.00	316	360	PEAK																																																																																															
Avg	Blank																																																																																																										
			<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.79</td> <td>-----</td> <td>-----</td> <td>94.97</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>316</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	102.79	-----	-----	94.97	34.59	11.20	37.97	0.00	316	360	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	102.79	-----	-----	94.97	34.59	11.20	37.97	0.00	316	360	AVERAGE																																																																																															






	151																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU106/53_5745MHz																																																																																																										
ANT	2																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.60</td> <td>50.74</td> <td>68.20</td> <td>-17.46</td> <td>41.33</td> <td>34.50</td> <td>11.05</td> <td>36.14</td> <td>0.00</td> <td>353</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.80</td> <td>47.68</td> <td>68.80</td> <td>-21.12</td> <td>38.40</td> <td>34.50</td> <td>11.07</td> <td>36.29</td> <td>0.00</td> <td>353</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>59.90</td> <td>110.68</td> <td>-50.78</td> <td>51.70</td> <td>34.54</td> <td>11.17</td> <td>37.51</td> <td>0.00</td> <td>353</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>60.60</td> <td>111.81</td> <td>-51.21</td> <td>52.42</td> <td>34.54</td> <td>11.17</td> <td>37.53</td> <td>0.00</td> <td>353</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5631.60	50.74	68.20	-17.46	41.33	34.50	11.05	36.14	0.00	353	142	PEAK	2	5650.80	47.68	68.80	-21.12	38.40	34.50	11.07	36.29	0.00	353	142	PEAK	3	5719.20	59.90	110.68	-50.78	51.70	34.54	11.17	37.51	0.00	353	142	PEAK	4	5720.40	60.60	111.81	-51.21	52.42	34.54	11.17	37.53	0.00	353	142	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>113.32</td> <td>-----</td> <td>-----</td> <td>105.50</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>353</td> <td>142</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	113.32	-----	-----	105.50	34.59	11.20	37.97	0.00	353	142	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5631.60	50.74	68.20	-17.46	41.33	34.50	11.05	36.14	0.00	353	142	PEAK																																																																																															
2	5650.80	47.68	68.80	-21.12	38.40	34.50	11.07	36.29	0.00	353	142	PEAK																																																																																															
3	5719.20	59.90	110.68	-50.78	51.70	34.54	11.17	37.51	0.00	353	142	PEAK																																																																																															
4	5720.40	60.60	111.81	-51.21	52.42	34.54	11.17	37.53	0.00	353	142	PEAK																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	113.32	-----	-----	105.50	34.59	11.20	37.97	0.00	353	142	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.15</td> <td>-----</td> <td>-----</td> <td>94.33</td> <td>34.59</td> <td>11.20</td> <td>37.97</td> <td>0.00</td> <td>353</td> <td>142</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	1	5745.00	102.15	-----	-----	94.33	34.59	11.20	37.97	0.00	353	142	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																		
1	5745.00	102.15	-----	-----	94.33	34.59	11.20	37.97	0.00	353	142	AVERAGE																																																																																															

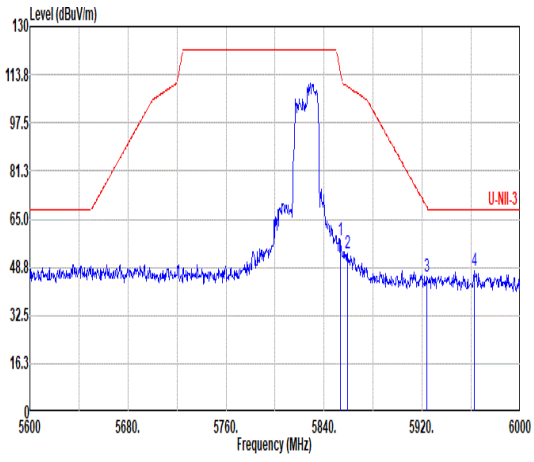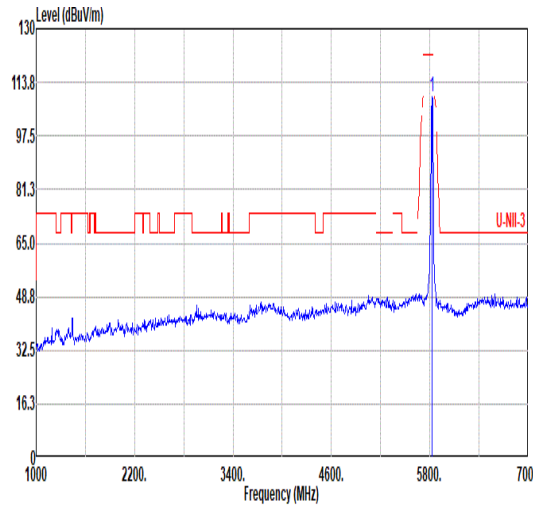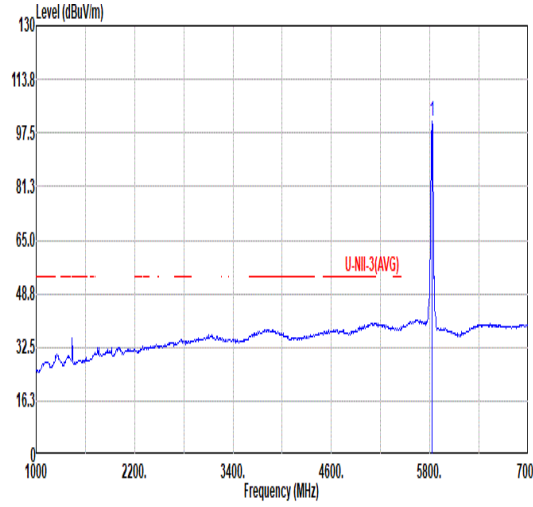

	152																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU106/54_5825MHz																																																																																																																																
ANT	2																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>57.65</td> <td>114.09</td> <td>-56.44</td> <td>51.41</td> <td>34.81</td> <td>11.33</td> <td>39.90</td> <td>0.00</td> <td>267</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5859.20</td> <td>53.44</td> <td>109.72</td> <td>-56.28</td> <td>47.28</td> <td>34.62</td> <td>11.34</td> <td>40.00</td> <td>0.00</td> <td>267</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>45.72</td> <td>68.94</td> <td>-23.22</td> <td>39.21</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>267</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5962.40</td> <td>47.48</td> <td>68.20</td> <td>-20.72</td> <td>40.71</td> <td>35.12</td> <td>11.44</td> <td>39.79</td> <td>0.00</td> <td>267</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.60	57.65	114.09	-56.44	51.41	34.81	11.33	39.90	0.00	267	360	PEAK	2	5859.20	53.44	109.72	-56.28	47.28	34.62	11.34	40.00	0.00	267	360	PEAK	3	5924.00	45.72	68.94	-23.22	39.21	35.00	11.40	39.89	0.00	267	360	PEAK	4	5962.40	47.48	68.20	-20.72	40.71	35.12	11.44	39.79	0.00	267	360	PEAK	 <table border="1" data-bbox="901 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.51</td> <td>-----</td> <td>-----</td> <td>102.84</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>267</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	109.51	-----	-----	102.84	34.75	11.31	39.39	0.00	267	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5853.60	57.65	114.09	-56.44	51.41	34.81	11.33	39.90	0.00	267	360	PEAK																																																																																																																					
2	5859.20	53.44	109.72	-56.28	47.28	34.62	11.34	40.00	0.00	267	360	PEAK																																																																																																																					
3	5924.00	45.72	68.94	-23.22	39.21	35.00	11.40	39.89	0.00	267	360	PEAK																																																																																																																					
4	5962.40	47.48	68.20	-20.72	40.71	35.12	11.44	39.79	0.00	267	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	109.51	-----	-----	102.84	34.75	11.31	39.39	0.00	267	360	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>94.38</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>267</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	101.05	-----	-----	94.38	34.75	11.31	39.39	0.00	267	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	101.05	-----	-----	94.38	34.75	11.31	39.39	0.00	267	360	AVERAGE																																																																																																																					

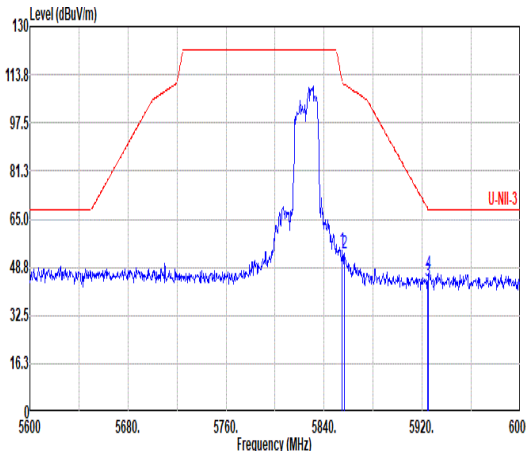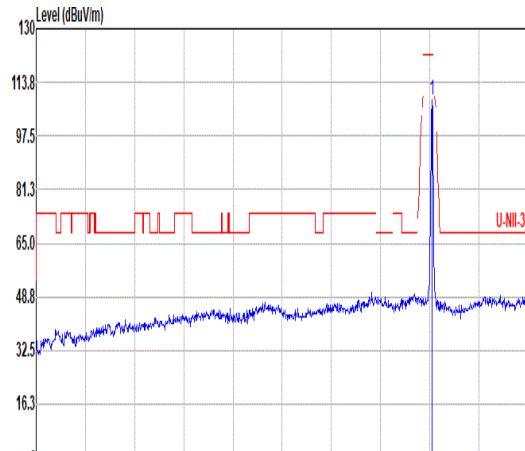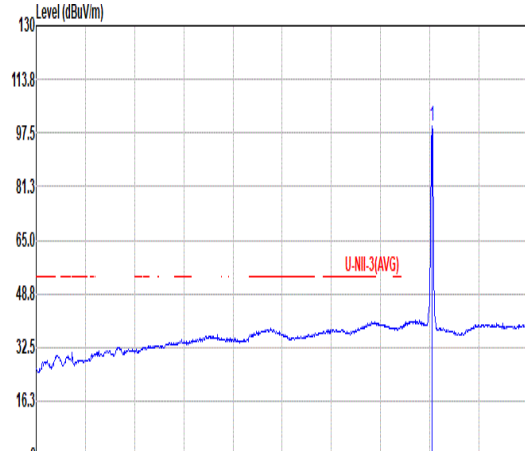

		152																																																																																																																															
Mode		Band Edge																																																																																																																															
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU106/54_5825MHz																																																																																																																															
ANT		2																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="263 1052 790 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>54.70</td> <td>111.36</td> <td>-56.66</td> <td>48.47</td> <td>34.81</td> <td>11.34</td> <td>39.92</td> <td>0.00</td> <td>357</td> <td>134</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.80</td> <td>53.41</td> <td>110.40</td> <td>-56.99</td> <td>47.22</td> <td>34.81</td> <td>11.34</td> <td>39.96</td> <td>0.00</td> <td>357</td> <td>134</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>44.24</td> <td>68.64</td> <td>-24.40</td> <td>37.73</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>357</td> <td>134</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.20</td> <td>46.54</td> <td>68.20</td> <td>-21.66</td> <td>40.03</td> <td>35.00</td> <td>11.40</td> <td>39.89</td> <td>0.00</td> <td>357</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	54.70	111.36	-56.66	48.47	34.81	11.34	39.92	0.00	357	134	PEAK	2	5856.80	53.41	110.40	-56.99	47.22	34.81	11.34	39.96	0.00	357	134	PEAK	3	5924.40	44.24	68.64	-24.40	37.73	35.00	11.40	39.89	0.00	357	134	PEAK	4	5925.20	46.54	68.20	-21.66	40.03	35.00	11.40	39.89	0.00	357	134	PEAK	 <table border="1" data-bbox="901 1052 1428 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.34</td> <td>-----</td> <td>-----</td> <td>101.67</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>357</td> <td>134</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.34	-----	-----	101.67	34.75	11.31	39.39	0.00	357	134	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.80	54.70	111.36	-56.66	48.47	34.81	11.34	39.92	0.00	357	134	PEAK																																																																																																																					
2	5856.80	53.41	110.40	-56.99	47.22	34.81	11.34	39.96	0.00	357	134	PEAK																																																																																																																					
3	5924.40	44.24	68.64	-24.40	37.73	35.00	11.40	39.89	0.00	357	134	PEAK																																																																																																																					
4	5925.20	46.54	68.20	-21.66	40.03	35.00	11.40	39.89	0.00	357	134	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	100.34	-----	-----	101.67	34.75	11.31	39.39	0.00	357	134	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="901 1736 1428 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.61</td> <td>-----</td> <td>-----</td> <td>92.94</td> <td>34.75</td> <td>11.31</td> <td>39.39</td> <td>0.00</td> <td>357</td> <td>134</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.61	-----	-----	92.94	34.75	11.31	39.39	0.00	357	134	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	99.61	-----	-----	92.94	34.75	11.31	39.39	0.00	357	134	AVERAGE																																																																																																																					